

ActQuant: Sub-4-bit Action-Guided Quantization for Vision-Language-Action Models

Arash Akbari^{1*} Arman Akbari¹ Masih Eskandar¹ Qitao Tan² Yixiao Chen⁴ Jingwu Luo¹
 Bertha Pangaribuan¹ Liyun Zhang¹ Jennifer Dy¹ Geng Yuan² Xue Lin¹ Gaowen Liu³
 Stratis Ioannidis¹ Yanzhi Wang¹

¹Northeastern University ²University of Georgia ³Cisco Systems ⁴EmbodimentX

Project page: <https://actquant.github.io>

Abstract

Vision-Language-Action (VLA) models exhibit remarkable action generation for embodied intelligence, but their heavy compute make deployment on edge platforms impractical. Aggressive, sub-4-bit weight quantization is the natural solution, yet existing post-training quantization (PTQ) methods suffer severe performance degradation in this regime. To address this, we introduce **ActQuant**, an action-guided mixed-precision PTQ framework that operates in two stages: (1) an inter-tensor bit allocator that assigns each weight matrix a single bit-width based on how much it contributes to predicting the agent’s actions; (2) an intra-tensor scale optimizer tunes per-block quantization scales using action-aware curvature, so that dynamic range is concentrated on the weights most influential for control. To deliver the on-device benefits of our aggressive quantization, we further introduce **OmniModel.cpp**, an agentic conversion pipeline that ports architectures into a native C/C++ runtime with efficient low-bit kernels. We evaluate ActQuant both in simulation and on a real-world 6-DoF UR3 arm, with all models deployed through OmniModel.cpp. On the LIBERO benchmark, ActQuant is the only method that operates at or below 3 bits-per-weight, retaining 95.0% on OpenVLA-OFT and 94.8% on $\pi_{0.5}$. Pushed further, ActQuant reaches 2.5 bpw at 90.1% on OpenVLA-OFT, compressing the backbone from 14.3 GB to 2.7 GB (**5.3×**). On the physical UR3 arm, $\pi_{0.5}$ quantized with ActQuant retains the baseline’s success rate while reducing the memory footprint by **2.5×**.

1 Introduction

Vision-Language-Action (VLA) models [44] have become the dominant approach to generalist robotic manipulation, mapping visual observations and language directly into low-level motor commands. Their effectiveness is tightly coupled to the scale of *both* the language backbone and the vision encoder. OpenVLA [16] and follow-ups [15, 18], pioneered discrete action generation by encoding action tokens directly into the LLaMA2 vocabulary[33]. A second line, the π family models [1, 14], instead attaches a flow-matching action head for continuous action generation. As VLA models scale toward general-purpose robotic foundation models, edge deployment on the robot itself becomes load-bearing: OpenVLA-OFT alone is built on a 7B LLM plus a vision encoder, occupying ~ 14 GB of weight memory in fp16, while on-board accelerators such as the NVIDIA Jetson Orin family expose only 8–16GB of unified memory shared across perception and control. Aggressive quantization is therefore the natural lever for closing the gap between model size and memory.

The sub-4-bit regime exposes an inversion of a familiar pattern in machine learning systems: algorithmic advances, such as quantization and pruning, usually outpace system support, with deployment

*Corresponding author: akbari.ara@northeastern.edu

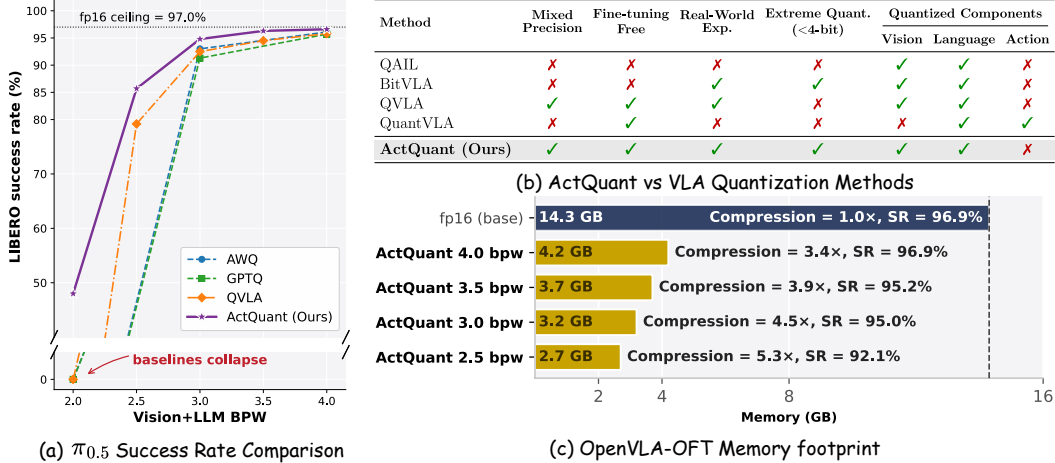


Figure 1: (a) Average success rate on LIBERO ($\pi_{0.5}$) as the backbone bit-width drops from 4.0 to 2.0 bpw. (b) Comparison of ActQuant with other VLA quantization methods. (c) Backbone memory usage across average bit-widths, with compression ratio against the baseline and success rate (SR).

efficiency lagging behind model innovation [9, 20, 25]. Intriguingly, mainstream on-device runtimes built on the GGML tensor library [10](e.g., *llama.cpp* [11]) already ship block-quantization kernels that make 2–4-bit inference practical for LLMs, potentially transferable to VLA models. However, algorithmic methods struggle to preserve model quality once pushed below the 4-bit threshold. The gap is particularly pronounced for VLA models, where even small quantization errors can cascade through actions and existing methods collapse below 3 bpw (Figure 1(a)), leaving a significant portion of the efficiency potential offered by modern inference systems underutilized in practice.

Existing post-training quantization (PTQ) methods are mainly dedicated to LLMs [9, 20, 17, 34] and do not transfer cleanly to VLA models. VLA performance depends on the quantized backbone preserving features that a downstream action head can decode into control signals. Meanwhile, layer-wise sensitivity-based quantization methods [9, 20] optimize a proxy only loosely connected to action prediction. LLM-derived quantization methods calibrate weight importance against the language-modeling signal alone. However, many VLA models are trained with a second supervisory pathway at the action head, and quantization quality depends on errors along both pathways rather than on the language signal in isolation [16, 15, 18]. Critically, quantization error does not vanish at a single output; it compounds over the closed-loop rollout, pushing the robot into states the calibration set never covered. These properties raise a question that current existing quantization methods do not resolve: *how can we quantize VLA backbones below four bits while preserving task success rate?*

Mixed-precision quantization [26, 5, 3, 13] seems to be a promising solution to extreme low-bit accuracy loss, but existing recipes sit at the wrong granularity for hardware-friendly VLA deployment. Both codebook-based schemes [7, 34] and channel-wise quantization methods [39, 5] yield irregular memory access patterns that are hardware-unfriendly for standard low-bit GPU kernels [41] (further discussed in Section 2). On the other hand, layer-wise allocation [6, 2] keeps a single bit-width across each layer and stays hardware-friendly, but is too coarse to track the sensitivity variations that dominate below four bits. This leaves a per-tensor middle ground unexplored, where bit-widths vary across matrices to match action-relevance but stay uniform within each matrix so one dense integer kernel suffices for dequantization, all while preserving accuracy in the sub-4-bit regime.

We propose ActQuant, an action-guided hardware-friendly quantization framework that allocates precision at two complementary granularities, both keyed to how much each weight contributes to predicting the VLA model’s actions. Our method has two key steps: (1) **Inter-Tensor Bit Allocation**, which assigns each weight matrix its own bit-width based on how much it contributes to action prediction, giving more bits to action-critical matrices and fewer bits to redundant ones; and (2) **Intra-Tensor Scale Optimization**, where every block within a matrix keeps the bit-width assigned in step (1), but its scale is re-optimized using an action-aware importance signal. ActQuant keeps a single bit-width within each weight matrix, letting every matmul dispatch to one dense integer kernel.

While ActQuant is a hardware-friendly quantization, without efficient low-bit kernels at inference time it cannot translate into practical edge deployment. We therefore further introduce **OmniModel.cpp**, an agentic pipeline that converts diverse VLA models into a native C/C++ inference build with no PyTorch dependency, so ActQuant-quantized models run directly and efficiently on the robot. Our contributions are as follows:

- We introduce ActQuant, an action-guided mixed-precision PTQ framework with two stages. Inter-Tensor Bit Allocation assigns each weight matrix its own bit-width based on how much that matrix contributes to action generation, and Intra-Tensor Scale Optimization refines the per-block scales within each matrix using an action-aware importance signal.
- We further introduce OmniModel.cpp, an agentic pipeline that delivers the on-device benefits of ActQuant by automatically converting a PyTorch VLA model into an equivalent native C/C++ inference implementation built on GGML’s existing low-bit kernels. We integrate ActQuant directly into OmniModel.cpp, achieving up to $1.5\times$ lower per-token latency.
- Extensive experiments on LIBERO and a 6-DoF UR3 arm show that ActQuant compresses OpenVLA-OFT by $5.3\times$ at 90.1% closed-loop success and is the only PTQ method that stays accurate at 2.5 bits-per-weight on both OpenVLA-OFT and $\pi_{0.5}$ (Figure 1(b)). On the UR3 arm, we further deploy $\pi_{0.5}$ at $2.5\times$ less memory while retaining the success rate.

2 Related Work

Vision-Language-Action Models. Vision-Language-Action (VLA) models map perception and language instructions into low-level motor commands through a single foundation-scale backbone. RT-2 [45] and OpenVLA [16] introduced the transformer-based VLA paradigm by discretizing the continuous action space and casting control as next-token prediction over a vision-language backbone. Building on this template, subsequent models such as OpenVLA-OFT [15] and CogACT [18] attach continuous action heads on top of the OpenVLA family to generate continuous control signals directly. A second line of work targets end-to-end continuous action generation by replacing the discrete action head with a flow-matching action expert; π_0 [1] and $\pi_{0.5}$ [14] are the representative members. Although these models have produced a substantial leap in generalist action generation, they carry immense computational footprint [38, 40]. Consequently, as VLA backbones continue to scale, extreme quantization has become a necessity for edge deployment on robotic platforms.

Post-Training Quantization. Quantization for VLA models is an emerging area with a small set of representative methods. BitVLA [35] trains a native 1-bit VLA from scratch with a ternary-weight backbone and a distillation-aware quantized vision encoder, while QAIL [31] applies quantization-aware training to an imitation-learning policy at uniform 4-bit weights and activations. Both rely on a full training pipeline and are therefore not training-free post-hoc methods. QuantVLA [43] is a training-free framework that targets *weight-activation* quantization (4-bit weights, 8-bit activations) for VLA models with a DiT-style action head, using attention-temperature matching and output-head balancing to recover scales after quantization. QVLA [39] allocates bit-widths at channel (per-row) granularity using a Taylor proxy of action-space sensitivity, which is too coarse to recover accuracy below four bits and is hardware-unfriendly [41]. None of these methods explores the extreme weight-only sub-4-bit regime that has been thoroughly studied for pure LLMs (e.g., Slim-LLM [13], QTIP [34], and AQLM [7]). Our work fills exactly this gap with a hardware-friendly, mixed-precision aggressive weight quantization recipe for VLA models, as summarized in Figure 1(b).

3 Preliminaries

Vision-Language-Action models. VLA models typically decompose into four modules: a vision encoder $\mathcal{E}_v$, a projector $\mathcal{P}$ into the language embedding space, a transformer-based language backbone $\mathcal{G}$, and an action head $\mathcal{H}$ that produces the deployed control signal. Since $\mathcal{E}_v$ and $\mathcal{G}$ hold the majority of the parameter mass while $\mathcal{P}$ and $\mathcal{H}$ are compact yet highly sensitive to perturbation [39], we quantize only the weights of $\mathcal{E}_v$ and $\mathcal{G}$ and keep $\mathcal{P}$ and $\mathcal{H}$ in full precision. Both $\mathcal{E}_v$ and $\mathcal{G}$ are generally stacks of L transformer blocks indexed by $\ell = 1, \dots, L$, each containing attention projections $\{W_Q^{(\ell)}, W_K^{(\ell)}, W_V^{(\ell)}, W_O^{(\ell)}\}$ and an MLP block with matrices $\{W_{\text{up}}^{(\ell)}, W_{\text{down}}^{(\ell)}, W_{\text{gate}}^{(\ell)}\}$. For brevity, we

collect the module indices in $\mathcal{J} = \{Q, K, V, O, \text{up}, \text{down}, \text{gate}\}$, denote any of these matrices as $W_j^{(\ell)}$ with $j \in \mathcal{J}$, and treat each $W_j^{(\ell)}$ as an independent quantization candidate.

Weight quantization. We adopt the block quantization format as exemplified by QLoRA [4], in which the elements of each weight matrix $W_j^{(\ell)}$ are organized into a *block / super-block* hierarchy. Every B consecutive elements form a block b with element index set $\mathcal{B}_b = \{1, \dots, B\}$, its own scale $s_b \in \mathbb{R}$, and its own zero point $z_b \in \mathbb{R}$ (the symmetric special case sets $z_b = 0$); every S consecutive blocks then form a super-block $\mathcal{S}$ with its own scale S_S and zero point Z_S that compress the per-block (s_b, z_b) themselves. For an n -bit quantizer, every element in block b is encoded with the same n bits and dequantized as

$$\hat{w}_i = s_b (q_i - z_b), \quad q_i = \arg \min_{q \in \mathcal{Q}_n} |w_i - s_b (q - z_b)|, \quad i \in \mathcal{B}_b, \quad (1)$$

where $\mathcal{Q}_n$ is a format-specific codebook of representable values which can be uniform or non-uniform. The per-block parameters (s_b, z_b) and the assignments $\{q_i\}_{i \in \mathcal{B}_b} \subset \mathcal{Q}_n$ are jointly chosen to minimize a per-block reconstruction error. We denote the quantized counterpart of any weight matrix $W_j^{(\ell)}$ as $\hat{W}_j^{(\ell)}$, with elements $\hat{w}_i$ defined in Eq. (1).

Hilbert-Schmidt Independence Criterion (HSIC). The Hilbert-Schmidt Independence Criterion (HSIC) [12] is a kernel-based measure of statistical dependence between two random variables that, unlike mutual information, is tractable to compute and requires no density estimation. Given K i.i.d. samples $\{(a_k, b_k)\}_{k=1}^K$ drawn from (A, B) and kernel functions k_A, k_B , HSIC is estimated empirically as

$$\widehat{\text{HSIC}}(A, B) = (K - 1)^{-2} \text{tr}(\mathbf{K}_A \mathbf{C} \mathbf{K}_B \mathbf{C}), \quad (2)$$

where $\mathbf{K}_A, \mathbf{K}_B \in \mathbb{R}^{K \times K}$ are kernel matrices with entries $[\mathbf{K}_A]_{ij} = k_A(a_i, a_j)$ and $[\mathbf{K}_B]_{ij} = k_B(b_i, b_j)$, and $\mathbf{C} = \mathbf{I} - \frac{1}{K} \mathbf{1}\mathbf{1}^\top$ is the centering matrix. We use the RBF kernel throughout, under which $\widehat{\text{HSIC}}(A, B) \rightarrow 0$ if and only if $A \perp B$, making HSIC a faithful dependence measure. The population form, the universal-kernel guarantee, and prior uses of HSIC as an information-bottleneck surrogate are reviewed in Appendix A.

Hessian-based sensitivity and Fisher approximation. Let $\theta \in \mathbb{R}^P$ collect all trainable parameters of the quantization-target modules $\mathcal{E}_v$ and $\mathcal{G}$, with $P = \sum_{\ell=1}^L \sum_{j \in \mathcal{J}} |W_j^{(\ell)}|$, and let $\mathcal{L}(\theta)$ be the action loss averaged over a calibration distribution drawn from the deployed task. Fine-tuned VLA backbones operate near a local minimum of $\mathcal{L}$, hence $\nabla_{\theta} \mathcal{L} \approx \mathbf{0}$, and a second-order Taylor expansion reduces the deployment objective to a Hessian-weighted reconstruction problem (full derivation in Appendix B),

$$\hat{\theta}^* = \arg \min_{\hat{\theta}} (\hat{\theta} - \theta)^\top \mathbf{H} (\hat{\theta} - \theta), \quad (3)$$

where $\mathbf{H} = \nabla_{\theta}^2 \mathcal{L}$ is the Hessian of the action loss and the diagonal entry H_{ii} measures the curvature of $\mathcal{L}$ along θ_i . Computing $\mathbf{H}$ exactly requires second derivatives at backbone scale, which is prohibitively expensive, so we follow standard practice [27, 17] and approximate it by the empirical Fisher information matrix

$$\mathcal{F}(\theta) = \frac{1}{|\mathcal{D}|} \sum_{d \in \mathcal{D}} \nabla_{\theta} \mathcal{L}_d (\nabla_{\theta} \mathcal{L}_d)^\top, \quad (4)$$

which agrees with the Hessian at a local minimum under mild regularity conditions (Appendix B). Storing the full $\mathcal{F} \in \mathbb{R}^{P \times P}$ is infeasible at this parameter scale, so in Section 4.2 we treat each weight matrix $W_j^{(\ell)}$ as an independent quantization target and use the diagonal approximation of $\mathcal{F}$ as a per-element importance score.

4 Methodology

Building on the formulation introduced in Section 3, we propose ActQuant, which decomposes weight quantization on the VLA backbone into two action-guided allocation problems, illustrated end-to-end in Figure 2. Both LLM-derived and VLA-specific quantization methods significantly hurt

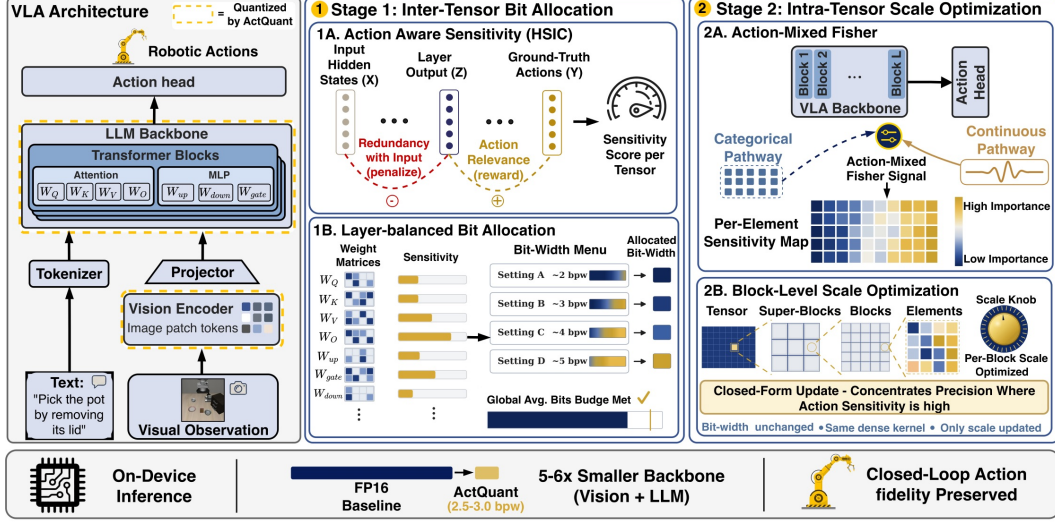


Figure 2: **Overview of ActQuant. Stage 1 (inter-tensor):** an action-aware HSIC sensitivity score assigns each matrix a single bit-width under a budget. **Stage 2 (intra-tensor):** with the bit-width fixed, the per-block scales within each matrix are optimized, weighted by per-element sensitivities from an Action-Mixed Fisher that combines the action-head loss with an optional LM loss.

closed-loop action quality on modern VLA backbones in the sub-4-bit regime (Figure 1a). Therefore, recovering accuracy at this scale requires an *action-guided*, mixed-precision compression method that remains hardware-friendly. We propose two complementary, hardware-friendly procedures that together answer two questions: **(Q1)** how can we minimize quantization error on the tensors that contribute most to action generation while keeping precision uniform within each tensor? **(Q2)** while preserving that tensor-level uniformity, how do we stay fine-grained enough to retain task success rate in the sub-4-bit regime?

Section 4.1 answers **Q1** with a novel HSIC-based sensitivity score that allocates one bit-width per tensor according to how much it contributes to predicting the ground-truth action. Section 4.2 answers **Q2** with a novel VLA-specific per-element sensitivity metric, the Action-Mixed Fisher (AMF), which is being used to further optimize the per-block scales and zero points rather than changing the bit assignment. Section 4.3 then describes how we deploy the resulting quantized models on edge hardware through OmniModel.cpp.

4.1 Inter-Tensor Bit Allocation

We need a per-tensor sensitivity score that is large for matrices whose output carries action-relevant information and small for matrices that can be quantized aggressively without hurting the action generation quality.

Action-aware sensitivity. Let $X \in \mathbb{R}^{K \times d_{in}}$ collect the input hidden states of the backbone over the calibration set $\mathcal{D}$ with $K = |\mathcal{D}|$ samples, $Z_j^{(\ell)} \in \mathbb{R}^{K \times d_j^{(\ell)}}$ the corresponding output hidden states of $W_j^{(\ell)}$, and $Y \in \mathbb{R}^{K \times d_a}$ the ground-truth action labels. We define the sensitivity of $W_j^{(\ell)}$ as

$$S(W_j^{(\ell)}) = -\alpha \widehat{\text{HSIC}}(X, Z_j^{(\ell)}) + \beta \widehat{\text{HSIC}}(Z_j^{(\ell)}, Y), \quad (5)$$

where $\widehat{\text{HSIC}}$ is the empirical estimator from Eq. (2), and $\alpha, \beta \in \mathbb{R}_+$ are balancing hyperparameters. The second term, weighted by β , is a *task-relevance* score: it grows when the layer’s output is statistically aligned with the ground-truth actions Y , marking the layer as critical for closed-loop control and therefore deserving of more bits. The first term, weighted by $-\alpha$, measures *input redundancy*: a large value indicates the layer’s output carries redundant or noisy information contained in X , so this layer can absorb more quantization error. We subtract this term so that two matrices with identical task relevance are differentiated by how much new information they actually inject into

the residual stream. The coefficients α and β rebalance the two HSIC scales, which can differ by orders of magnitude depending on the calibration set and kernel bandwidth, and let us emphasize task relevance over input redundancy (or vice versa) without re-scaling the kernels themselves.

Layer-balanced bit allocation. Turning the sensitivities $S(W_j^{(\ell)})$ into a bit-allocation requires pairing each tensor with the cost of quantizing it at a given precision. Following the classical quantization theory [23], the per-element squared error of each type $t \in \mathcal{T}$ scales as $\eta(t) = 2^{-2, b(t)}$. Therefore, the predicted reconstruction error of $W_j^{(\ell)}$ at type $t_j^{(\ell)}$ is $S(W_j^{(\ell)}) \eta(t_j^{(\ell)})$. Aggregating these errors linearly across the whole backbone would let the optimizer absorb a large error in a single sensitive tensor in exchange for many small savings elsewhere, exactly the failure mode that collapses the task success rate. We instead group the per-tensor error by transformer layer and minimize the sum of squared per-layer errors under an average bits-per-weight budget,

$$\min_{\{t_j^{(\ell)}\}_{\ell,j}} \sum_{\ell=1}^L E_\ell^2, \quad E_\ell = \sum_{j \in \mathcal{J}} S(W_j^{(\ell)}) \eta(t_j^{(\ell)}), \quad \text{s.t.} \quad \frac{\sum_{\ell,j} b(t_j^{(\ell)}) |W_j^{(\ell)}|}{\sum_{\ell,j} |W_j^{(\ell)}|} \leq \bar{b}. \quad (6)$$

The squared sum penalizes large per-layer errors disproportionately, forcing every linear layer to stay within a comparable error band rather than sacrificing one layer for two others. we revisit this choice in the ablation study in Section 5.2.

Solver. Eq. (6) is a discrete bit-allocation problem with one categorical choice per tensor and one global budget; standard greedy and Lagrangian-relaxation methods solve it with bounded suboptimality [8, 29]. We adopt a greedy procedure that starts every tensor at the cheapest type and, at each step, applies the upgrade that maximizes the gain-per-bit ratio $(E_\ell^2 - \tilde{E}_\ell^2)/\Delta \text{bits}$, where $\tilde{E}_\ell$ is the layer error after the candidate upgrade and Δbits the extra bits it costs. The loop stops once the budget is met.

4.2 Intra-Tensor Scale Optimization

With the per-tensor types $\{t_j^{(\ell)}\}$ from Section 4.1 fixed, we choose the per-block scales $\{s_b\}$ within each $W_j^{(\ell)}$. As shown in Eq. (3), this objective is Hessian-weighted; we employ the empirical Fisher information matrix of Eq. (4) as a tractable approximation to the Hessian, and, assuming that cross-weight interactions are negligible, use its diagonal elements as a per-element importance score. ActQuant tailors this Fisher signal to reflect the deployed action loss.

Action-Mixed Fisher (AMF). Many architectures, such as OpenVLA-OFT, additionally expose a second pathway through a language-modeling head W_{lm} that outputs logits over a discrete action vocabulary $\mathcal{V}$ at the sequence positions reserved for action tokens. Let $\mathcal{I}_d^{\text{cls}}$ denote those action-token positions in calibration sample d and $y_{d,p} \in \mathcal{V}$ the ground-truth action token at position p , giving the cross-entropy loss,

$$\mathcal{L}_d^{\text{cls}}(\theta) = -\frac{1}{|\mathcal{I}_d^{\text{cls}}|} \sum_{p \in \mathcal{I}_d^{\text{cls}}} \log \text{softmax}(W_{\text{lm}} \mathbf{h}_{d,p}(\theta))_{y_{d,p}}, \quad (7)$$

where $\mathbf{h}_{d,p}(\theta)$ is the backbone hidden state at position p for sample d . We define the *Action-Mixed Fisher* loss as the convex combination

$$\mathcal{L}_d^{\text{AMF}}(\theta) = \alpha \mathcal{L}_d^{\text{act}}(\theta) + (1 - \alpha) \mathcal{L}_d^{\text{cls}}(\theta), \quad \alpha \in [0, 1]. \quad (8)$$

This formulation makes AMF apply uniformly to both kinds of VLA models: for architectures with both pathways, such as OpenVLA-OFT, $\alpha \in (0, 1)$ blends the action-head and categorical signals, while for architectures with only the action-head pathway, such as $\pi_{0.5}$, we set $\alpha = 1$ so the second term drops out and AMF reduces to the Action-Only Fisher. Applying the diagonal approximation to the corresponding AMF Fisher matrix yields the per-element scores

$$\mathcal{F}_{ii}^{\text{AMF}} = \frac{1}{|\mathcal{D}|} \sum_{d \in \mathcal{D}} \left(\frac{\partial \mathcal{L}_d^{\text{AMF}}}{\partial \theta_i} \right)^2, \quad i = 1, \dots, P, \quad (9)$$

computed from one backward pass per calibration sample. The action-head signal anchors AMF to the deployed action quality, and mixing in the categorical signal, when available, additionally reflects the joint distribution over discrete action categories that the LM head exposes. Combining the two retains both views and additionally exposes a cross-pathway covariance term (Appendix C) that single-loss Fishers do not capture.

Block-Level Scale Optimization. Substituting $\mathbf{H} \approx \text{diag}(\mathcal{F}^{\text{AMF}})$ in Eq. (3) decouples the joint quadratic into independent per-block problems. Our per-element weight sensitivity $\omega_{b,i}$ multiplies the Action-Mixed-Fisher sensitivities by a local weight magnitude factor, so that quantization noise is penalized most heavily on elements that are simultaneously task-critical and large within their block. For block b with element index set $\mathcal{B}_b$ and original weights $\{w_i\}_{i \in \mathcal{B}_b}$,

$$\omega_{b,i} = \mathcal{F}_{ii}^{\text{AMF}} \sqrt{\sigma_b^2 + w_i^2}, \quad (s_b^*, \mathbf{q}_b^*) = \arg \min_{s_b \in \mathbb{R}, \mathbf{q}_i \in \mathcal{Q}_n} \sum_{i \in \mathcal{B}_b} \omega_{b,i} (w_i - s_b q_i)^2, \quad (10)$$

where $\sigma_b^2 = |\mathcal{B}_b|^{-1} \sum_{j \in \mathcal{B}_b} w_j^2$ is the mean squared weight in the block; we denote the inner sum by $\Phi_b(s_b, \mathbf{q}_b)$. The objective Φ_b is non-convex in $(s_b, \mathbf{q}_b)$ but becomes tractable when one variable is fixed: with s_b fixed, each codeword q_i is chosen independently as the codebook entry closest to the rescaled weight w_i/s_b , and the importance weight $\omega_{b,i}$ drops out because the minimization decouples across i ; with $\{q_i\}$ fixed, Φ_b becomes a weighted least-squares problem in s_b alone whose stationarity condition $\partial \Phi_b / \partial s_b = 0$ admits a closed form. We therefore alternate the two steps,

$$q_i^* = \arg \min_{q \in \mathcal{Q}_n} |w_i/s_b - q|, \quad s_b^* = \frac{\sum_{i \in \mathcal{B}_b} \omega_{b,i} w_i q_i^*}{\sum_{i \in \mathcal{B}_b} \omega_{b,i} (q_i^*)^2}, \quad (11)$$

which is the constrained analogue of Lloyd-Max scalar quantization specialized to a fixed codebook $\mathcal{Q}_n$ and a learnable scale; the iterates monotonically decrease Φ_b and converge to a local minimum in a few rounds.

4.3 Deployment with OmniModel.cpp

Aggressive quantization only translates into edge-deployment gains when the quantized model can be executed by efficient low-bit kernels. The GGML tensor library [10] together with `llama.cpp` [11] already ships hand-written low-bit kernels that make sub-4-bit inference practical, but their support is limited to a narrow set of decoder-only LLMs. To bridge this gap, we introduce **OmniModel.cpp**, an agentic pipeline that automatically rewrites a PyTorch VLA model as a native C/C++ inference program expressed in the GGML computation graph. We pair `OmniModel.cpp` with `ActQuant` so that quantized VLA architectures can be deployed and run efficiently on edge hardware. Because the converted model now lives inside this graph, its matrix multiplies dispatch directly to GGML’s existing low-bit kernels, and `ActQuant`’s per-tensor bit-widths and per-block scales translate immediately into reduced memory footprint and latency. We describe the pipeline’s planner, agent layers, and verification loop in detail in Appendix D.

5 Experiments

5.1 Experimental Setup

We use the widely adopted LIBERO benchmark [21], which provides four object-manipulation suites, and a real-world 6-DoF Universal Robots UR3 arm equipped with a wrist-mounted RGB camera and a third-person Intel RealSense D435i camera (Figure 3). We evaluate two state-of-the-art VLA policies with distinct action-prediction architectures, OpenVLA-OFT [15] and $\pi_{0.5}$ [14], and compare `ActQuant` against three weight-only PTQ baselines, AWQ [20], GPTQ [9], and the only VLA mixed-precision weight quantization method, QVLA [39]. All methods share the same calibration set of only 60 episodes drawn from the LIBERO fine-tuning split (Appendix E). We sweep average backbone bits-per-weight in 4.0, 3.5, 3.0, 2.5 for OpenVLA-OFT and additionally 2.0, bpw for $\pi_{0.5}$, with the vision encoder and the language backbone jointly held at the same target bit-width. Models quantized with `ActQuant` are fully integrated with `OmniModel.cpp` (Appendix D); hardware and runtime details are in Appendix F.

5.2 Experimental Results

Table 1: Comparison of quantization methods on VLA models. RTN, AWQ, and GPTQ use uniform integer precision, while QVLA and **Ours** support mixed-precision (avg. bpw).

Model	Method	Vision+LLM BPW	Success Rate (%)					Δ	VLA BPW	Mem. (GB)
			Spatial	Object	Goal	Long	Avg.			
OpenVLA-OFT	Baseline	16.0	97.6	98.4	96.8	95.1	96.9	0.00	16.0	14.3
	AWQ	4.0	94.6	98.6	96.8	94.4	96.1	-0.8	4.3	4.1
		3.0	86.4	98.0	90.2	91.4	91.5	-5.4	3.4	3.2
		2.0	0.0	0.0	0.0	0.0	0.0	-96.9	2.7	2.4
	GPTQ	4.0	90.8	98.8	96.4	92.6	94.6	-2.3	4.3	4.1
		3.0	82.4	98.0	88.8	87.2	89.0	-7.9	3.4	3.2
		2.0	0.0	0.0	0.0	0.0	0.0	-96.9	2.7	2.4
	QVLA	4.0	96.0	98.7	97.4	95.2	96.8	-0.1	4.8	4.5
		3.5	82.9	97.2	91.4	93.6	91.3	-5.6	4.3	4.1
		3.0	40.8	56.8	20.2	31.8	37.4	-59.5	3.9	3.7
		2.5	0.0	0.2	0.0	0.0	0.0	-96.9	3.4	3.1
	ActQuant	4.0	96.0	98.2	97.2	95.0	96.6	-0.3	4.4	4.2
		3.5	95.8	98.4	96.0	95.6	96.5	-0.4	3.8	3.4
		3.0	92.8	97.4	94.0	95.6	95.0	-1.9	3.5	3.2
		2.5	86.4	98.2	84.8	91.0	90.1	-6.8	3.0	2.7
$\pi_{0.5}$	Baseline	16.0	98.4	98.4	97.6	93.6	97.0	0.00	16.0	6.7
	AWQ	4.0	96.6	98.0	96.8	93.0	96.1	-0.9	5.6	2.4
		3.0	93.4	97.0	91.4	90.2	93.0	-4.0	5.0	2.1
		2.0	0.0	0.0	0.0	0.0	0.0	-97.0	4.1	1.7
	GPTQ	4.0	97.2	96.8	97.0	91.8	95.7	-1.3	5.6	2.4
		3.0	92.2	95.4	88.6	89.0	91.3	-5.7	5.0	2.1
		2.0	0.0	0.0	0.0	0.0	0.0	-97.0	4.1	1.7
	QVLA	4.0	98.0	97.2	96.4	91.8	95.8	-1.2	6.3	2.7
		3.5	97.8	96.2	91.4	92.6	94.5	-2.5	6.0	2.5
		3.0	97.4	97.8	87.8	86.8	92.5	-4.5	5.6	2.4
		2.5	93.0	97.6	71.0	55.0	79.2	-17.8	5.3	2.2
		2.0	0.0	0.0	0.0	0.0	0.0	-97.0	4.7	2.0
	ActQuant	4.0	98.4	99.4	96.8	91.8	96.6	-0.4	6.2	2.7
		3.5	99.0	99.6	94.0	92.4	96.3	-0.7	5.8	2.5
		3.0	98.2	98.8	95.0	87.2	94.8	-2.2	5.6	2.4
		2.5	96.6	98.4	74.0	73.6	85.7	-11.3	5.2	2.2
		2.0	61.2	80.0	25.0	25.0	48.0	-49.0	4.8	2.0

Simulation Results. Table 1 reports closed-loop success rate on LIBERO across the bit-width sweep. On OpenVLA-OFT, ActQuant retains 95.0% at 3.0 bpw and 90.1% at 2.5 bpw, against an fp16 ceiling of 96.9%. The closest baseline, QVLA, drops to 37.4% at 3.0 bpw and collapses to 0.0% at 2.5 bpw, while AWQ and GPTQ collapse one bit-width earlier, falling from above 89% at 3.0 bpw to 0.0% at 2.0 bpw on every suite. On $\pi_{0.5}$, ActQuant achieves 94.8% at 3.0 bpw and remains the only method to operate at 2.0 bpw at 48.0%, where every baseline collapses entirely. At its lowest bit-width on OpenVLA-OFT, ActQuant compresses the model from 14.3 GB to 2.7 GB, a $5.3\times$ reduction.

Real-World Robot Deployment. To verify that simulation gains transfer to physical hardware, we evaluate ActQuant on the UR3 arm described in Section 5.1. Across four manipulation tasks (Table 3), our $\pi_{0.5}$ deployment at 3.0 bpw retains 75.0% average success rate against the 77.5% fp16 baseline, while compressing the model from 6.7 GB to 2.7 GB ($2.5\times$). The success-vs-memory gains we observe in simulation therefore carry over to a real robot.

Inference Speedup. Table 2 reports per-token inference latency for OpenVLA across three hardware platforms, an NVIDIA RTX A6000 workstation, an Apple MacBook Pro M4 Pro, and an NVIDIA AGX Thor edge box. The Q4_K_M build produced by OmniModel.cpp consistently achieves the lowest latency, with up to $1.5\times$ speedup over the PyTorch reference on the RTX A6000 ($233 \rightarrow 153$ ms), $1.3\times$ on the M4 Pro ($1319 \rightarrow 999$ ms), and $1.3\times$ on the AGX Thor ($598 \rightarrow 465$ ms). Unlike PyTorch, the C/C++ build can also fall back to a 50/50 CPU/GPU split when on-board VRAM

Table 2: OpenVLA per-token latency (ms): PyTorch vs three OmniModel.cpp builds across three platforms. PyTorch lacks a CPU/GPU split (N/A).

Impl.	Mode	Latency (ms)		
		A6000	M4 Pro	AGX Thor
PyTorch	GPU	233 $\pm$ 1	1319 $\pm$ 49	598.5 $\pm$ 2
	50/50	N/A	N/A	N/A
ours F16	GPU	260 $\pm$ 2	1269 $\pm$ 57	668 $\pm$ 4
	50/50	1447 $\pm$ 7	3511 $\pm$ 1822	2602 $\pm$ 29
ours Q8_0	GPU	189	1052 $\pm$ 4	529 $\pm$ 7
	50/50	961 $\pm$ 1	1840 $\pm$ 417	2455 $\pm$ 37
Ours Q4_K_M	GPU	153 $\pm$ 1	999 $\pm$ 5	465 $\pm$ 2
	50/50	803 $\pm$ 35	1782 $\pm$ 34	1539 $\pm$ 38

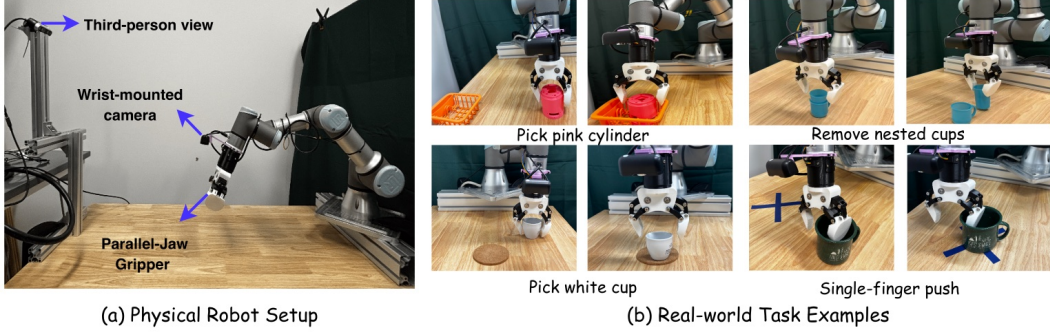


Figure 3: Physical robot setup and real-world task demonstrations. The system consists of a UR3 robot arm, wrist-mounted camera, and third-person view camera.

Table 3: Real-world success-rate and memory comparison on a 6-DoF Universal

Method	Vision+LLM BPW	Real-world Task				Average SR	Mem. (GB)
		Pick pink cylinder	Pick white cup	Remove nested cups	Single-finger push		
$\pi_{0.5}$	16.0	9/10	7/10	8/10	7/10	77.5%	6.7
ActQuant	3.0	7/10	7/10	8/10	8/10	75.0%	2.7

is the limiting resource, making the same quantized model deployable on edge boxes that cannot fit the fp16 backbone in GPU memory.

Table 4: Ablation study of proposed components on OpenVLA-OFT evaluated on LIBERO.

Method	Vision+LLM BPW	Success Rate (%)					Δ	Mem (GB)
		Spatial	Object	Goal	Long	Average		
<i>OpenVLA-OFT</i>								
fp16 (baseline)	16.0	97.6	98.4	96.8	95.1	96.9	0.00	14.3
RTN block quantization	2.6	0.0	17.8	0.0	0.0	4.5	−92.4	2.7
+ magnitude-weighted scale	2.6	69.4	89.6	19.0	52.6	57.7	−39.2	2.7
+ Action-Only Fisher	2.6	87.6	98.4	77.2	90.4	88.4	−8.5	2.7
+ Action-Mixed Fisher	2.6	88.8	98.0	81.2	91.4	89.9	−7.0	2.7
+ HSIC bit allocation	2.7	92.0	98.4	85.8	92.2	92.1	−4.8	2.7

Ablation Analysis. Table 4 isolates each ActQuant component on top of an RTN block-quantization baseline at ~ 2.6 average bits-per-weight on OpenVLA-OFT. RTN alone collapses to 4.5%, near random. Switching the per-block scale objective from unweighted MSE to a magnitude-weighted MSE recovers the bulk of the gap (57.7%), confirming that scale choice rather than codebook design dominates below four bits. Replacing weight magnitude with the Action-Only Fisher signal raises success rate to 88.4%, a 30.7% gain attributable to action-aware sensitivities, and adding the LM-head pathway to form the full Action-Mixed Fisher (Eq. (9)) lifts it further to 89.9%. Layering the HSIC-based inter-tensor bit allocation on top closes the remaining gap to 92.1%, only 4.8 points below the fp16 reference. The two proposed components contribute independently and compose additively.

6 Conclusion

We presented **ActQuant**, an action-guided mixed-precision PTQ framework that pushes VLA models below four bits with an HSIC-based inter-tensor bit allocator that scores each weight matrix by its action relevance and an intra-tensor scale optimizer weighted by an Action-Mixed Fisher signal that focuses dynamic range on weights most influential for control, paired with **OmniModel.cpp**, an agentic pipeline that runs the quantized models in a native C/C++ runtime with efficient low-bit kernels. ActQuant is the only method that operates below 3,bpw on LIBERO (95.0% on OpenVLA-OFT, 94.8% on $\pi_{0.5}$), compresses OpenVLA-OFT by $5.3\times$ at 90.1% closed-loop success, and on a 6-DoF UR3 arm compresses $\pi_{0.5}$ by $2.5\times$ with almost no drop in success rate.

Acknowledgements

The authors gratefully acknowledge support from the National Science Foundation through grant 2414652, and from EmbodyX for both financial support and providing the computational resources used in this work.

References

- [1] Kevin Black, Noah Brown, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Lachy Groom, Karol Hausman, Brian Ichter, et al. π_0 : A vision-language-action flow model for general robot control. *arXiv preprint arXiv:2410.24164*, 2024.
- [2] Weihan Chen, Peisong Wang, and Jian Cheng. Towards mixed-precision quantization of neural networks via constrained optimization. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 5350–5359, 2021.
- [3] Zihan Chen, Bike Xie, Jundong Li, and Cong Shen. Channel-wise mixed-precision quantization for large language models. *arXiv preprint arXiv:2410.13056*, 2024.
- [4] Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. Qlora: Efficient finetuning of quantized llms. *Advances in neural information processing systems*, 36:10088–10115, 2023.
- [5] Tim Dettmers, Ruslan Svirschevski, Vage Egiazarian, Denis Kuznedelev, Elias Frantar, Saleh Ashkboos, Alexander Borzunov, Torsten Hoefer, and Dan Alistarh. Spqr: A sparse-quantized representation for near-lossless llm weight compression. *arXiv preprint arXiv:2306.03078*, 2023.
- [6] Zhen Dong, Zhewei Yao, Daiyaan Arfeen, Amir Gholami, Michael W Mahoney, and Kurt Keutzer. Hawq-v2: Hessian aware trace-weighted quantization of neural networks. *Advances in neural information processing systems*, 33:18518–18529, 2020.
- [7] Vage Egiazarian, Andrei Panferov, Denis Kuznedelev, Elias Frantar, Artem Babenko, and Dan Alistarh. Extreme compression of large language models via additive quantization. *arXiv preprint arXiv:2401.06118*, 2024.
- [8] Hugh Everett III. Generalized Lagrange multiplier method for solving problems of optimum allocation of resources. *Operations Research*, 11(3):399–417, 1963.
- [9] Elias Frantar, Saleh Ashkboos, Torsten Hoefer, and Dan Alistarh. Gptq: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv:2210.17323*, 2022.
- [10] Georgi Gerganov. GGML: Tensor library for machine learning. <https://github.com/ggml-org/ggml>, 2023. Accessed 2026-05-01.
- [11] Georgi Gerganov and llama.cpp contributors. llama.cpp: LLM inference in c/C++. <https://github.com/ggerganov/llama.cpp>, 2023. Accessed 2026-05-01.
- [12] Arthur Gretton, Olivier Bousquet, Alex Smola, and Bernhard Schölkopf. Measuring statistical dependence with Hilbert-Schmidt norms. In *International Conference on Algorithmic Learning Theory (ALT)*, pages 63–77. Springer, 2005.
- [13] Wei Huang, Haotong Qin, Yangdong Liu, Yawei Li, Qinshuo Liu, Xianglong Liu, Luca Benini, Michele Magno, Shiming Zhang, and Xiaojuan Qi. Slim-llm: Saliency-driven mixed-precision quantization for large language models. *arXiv preprint arXiv:2405.14917*, 2024.
- [14] Physical Intelligence, Kevin Black, Noah Brown, James Darpinian, Karan Dhabalia, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, et al. $\pi_{0.5}$: a vision-language-action model with open-world generalization. *arXiv preprint arXiv:2504.16054*, 2025.
- [15] Moo Jin Kim, Chelsea Finn, and Percy Liang. Fine-tuning vision-language-action models: Optimizing speed and success. *arXiv preprint arXiv:2502.19645*, 2025.

- [16] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, et al. Openvla: An open-source vision-language-action model. *arXiv preprint arXiv:2406.09246*, 2024.
- [17] Sehoon Kim, Coleman Hooper, Amir Gholami, Zhen Dong, Xiuyu Li, Sheng Shen, Michael W Mahoney, and Kurt Keutzer. Squeezellm: Dense-and-sparse quantization. *arXiv preprint arXiv:2306.07629*, 2023.
- [18] Qixiu Li, Yaobo Liang, Zeyu Wang, Lin Luo, Xi Chen, Mozheng Liao, Fangyun Wei, Yu Deng, Sicheng Xu, Yizhong Zhang, et al. Cogact: A foundational vision-language-action model for synergizing cognition and action in robotic manipulation. *arXiv preprint arXiv:2411.19650*, 2024.
- [19] Yazhe Li, Roman Pogodin, Danica J Sutherland, and Arthur Gretton. Self-supervised learning with kernel dependence maximization. *Advances in Neural Information Processing Systems*, 34:15543–15556, 2021.
- [20] Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan Xiao, Xingyu Dang, Chuang Gan, and Song Han. Awq: Activation-aware weight quantization for on-device llm compression and acceleration. *Proceedings of machine learning and systems*, 6:87–100, 2024.
- [21] Bo Liu, Yifeng Zhu, Chongkai Gao, Yihao Feng, Qiang Liu, Yuke Zhu, and Peter Stone. Libero: Benchmarking knowledge transfer for lifelong robot learning. *Advances in Neural Information Processing Systems*, 36:44776–44791, 2023.
- [22] Xiao Liu, Spyridon Thermos, Pedro Sanchez, Alison Q O’Neil, and Sotirios A Tsaftaris. Hsic-infogan: learning unsupervised disentangled representations by maximising approximated mutual information. In *MICCAI Workshop on Medical Applications with Disentanglements*, pages 15–21. Springer, 2022.
- [23] Stuart P. Lloyd. Least squares quantization in PCM. *IEEE Transactions on Information Theory*, 28(2):129–137, 1982.
- [24] Wan-Duo Kurt Ma, J. P. Lewis, and W. Bastiaan Kleijn. The HSIC bottleneck: Deep learning without back-propagation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 5085–5092, 2020.
- [25] Xiaolong Ma, Sheng Lin, Shaokai Ye, Zhezhi He, Linfeng Zhang, Geng Yuan, Sia Huat Tan, Zhengang Li, Deliang Fan, Xuehai Qian, et al. Non-structured dnn weight pruning—is it beneficial in any platform? *IEEE transactions on neural networks and learning systems*, 33(9):4930–4944, 2021.
- [26] Yuexiao Ma, Taisong Jin, Xiawu Zheng, Yan Wang, Huixia Li, Yongjian Wu, Guannan Jiang, Wei Zhang, and Rongrong Ji. Ompq: Orthogonal mixed precision quantization. In *Proceedings of the AAAI conference on artificial intelligence*, volume 37, pages 9029–9037, 2023.
- [27] James Martens. New insights and perspectives on the natural gradient method. *Journal of Machine Learning Research*, 21(146):1–76, 2020.
- [28] Lukas Miklautz, Chengzhi Shi, Andrii Shkabrii, Theodoros Thirimachos Davarakis, Prudence Lam, Claudia Plant, Jennifer Dy, and Stratis Ioannidis. H-splid: Hsic-based saliency preserving latent information decomposition. *arXiv preprint arXiv:2510.20627*, 2025.
- [29] George L. Nemhauser, Laurence A. Wolsey, and Marshall L. Fisher. An analysis of approximations for maximizing submodular set functions (I). *Mathematical Programming*, 14(1):265–294, 1978.
- [30] Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, et al. DINOv2: Learning robust visual features without supervision. *Transactions on Machine Learning Research (TMLR)*, 2024.

- [31] Seongmin Park, Hyungmin Kim, Sangwoo Kim, Wonseok Jeong, Juyoung Park, and Jungwook Choi. Quantization-aware imitation-learning for resource-efficient robotic control, 2024.
- [32] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. PyTorch: An imperative style, high-performance deep learning library. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- [33] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [34] Albert Tseng, Qingyao Sun, David Hou, and Christopher De. Qtip: Quantization with trellises and incoherence processing. *Advances in Neural Information Processing Systems*, 37:59597–59620, 2024.
- [35] Hongyu Wang, Chuyan Xiong, Ruiping Wang, and Xilin Chen. Bitvla: 1-bit vision-language-action models for robotics manipulation, 2026.
- [36] Zifeng Wang, Tong Jian, Aria Masoomi, Stratis Ioannidis, and Jennifer Dy. Revisiting hilbertschmidt information bottleneck for adversarial robustness. *Advances in Neural Information Processing Systems*, 34:586–597, 2021.
- [37] Zifeng Wang, Zheng Zhan, Yifan Gong, Yucai Shao, Stratis Ioannidis, Yanzhi Wang, and Jennifer Dy. Dualhsic: Hsic-bottleneck and alignment for continual learning. In *International Conference on Machine Learning*, pages 36578–36592. PMLR, 2023.
- [38] Junjie Wen, Yichen Zhu, Jinming Li, Minjie Zhu, Kun Wu, Zhiyuan Xu, Ning Liu, Ran Cheng, Chaomin Shen, Yaxin Peng, et al. TinyVLA: Towards fast, data-efficient vision-language-action models for robotic manipulation. *arXiv preprint arXiv:2409.12514*, 2024.
- [39] Yuhao Xu, Yantai Yang, Zhenyang Fan, Yufan Liu, Yuming Li, Bing Li, and Zhipeng Zhang. Qvla: Not all channels are equal in vision-language-action model’s quantization, 2026.
- [40] Yantai Yang, Yuhao Wang, Zichen Wen, Luo Zhongwei, Chang Zou, Zhipeng Zhang, Chuan Wen, and Linfeng Zhang. Efficientvla: Training-free acceleration and compression for vision-language-action models. *Advances in Neural Information Processing Systems*, 38:40891–40914, 2026.
- [41] Zhewei Yao, Zhen Dong, Zhangcheng Zheng, Amir Gholami, Jiali Yu, Eric Tan, Leyuan Wang, Qijing Huang, Yida Wang, Michael Mahoney, et al. Hawq-v3: Dyadic neural network quantization. In *International Conference on Machine Learning*, pages 11875–11886. PMLR, 2021.
- [42] Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2023.
- [43] Jingxuan Zhang, Yunta Hsieh, Zhongwei Wan, Haokun Lin, Xin Wang, Ziqi Wang, Yingtie Lei, and Mi Zhang. Quantvla: Scale-calibrated post-training quantization for vision-language-action models, 2026.
- [44] Yifan Zhong, Fengshuo Bai, Shaofei Cai, Xuchuan Huang, Zhang Chen, Xiaowei Zhang, Yuanfei Wang, Shaoyang Guo, Tianrui Guan, Ka Nam Lui, et al. A survey on vision-language-action models: An action tokenization perspective. *arXiv preprint arXiv:2507.01925*, 2025.
- [45] Brianna Zitkovich, Tianhe Yu, Sichun Xu, Peng Xu, Ted Xiao, Fei Xia, Jialin Wu, Paul Wohlhart, Stefan Welker, Ayzaan Wahid, et al. Rt-2: Vision-language-action models transfer web knowledge to robotic control. In *Conference on Robot Learning*, pages 2165–2183. PMLR, 2023.

A Hilbert-Schmidt Independence Criterion

This appendix expands on the HSIC definition reviewed in the Background section. For two random variables A and B with associated kernel functions k_A and k_B on their respective domains, the *population-level* Hilbert-Schmidt Independence Criterion is

$$\begin{aligned} \text{HSIC}(A, B) &= \mathbb{E}_{A, B, A', B'} [k_A(A, A') k_B(B, B')] \\ &+ \mathbb{E}_{A, A'} [k_A(A, A')] \mathbb{E}_{B, B'} [k_B(B, B')] \\ &- 2 \mathbb{E}_{A, B} [\mathbb{E}_{A'} [k_A(A, A')] \mathbb{E}_{B'} [k_B(B, B')]], \end{aligned} \quad (12)$$

where A', B' are independent copies of A, B , respectively. HSIC is the squared Hilbert-Schmidt norm of the cross-covariance operator between feature maps in the two reproducing kernel Hilbert spaces, and under *universal* kernels (e.g., the Gaussian RBF kernel) $\text{HSIC}(A, B) = 0$ if and only if A and B are independent. HSIC therefore acts as a faithful dependence measure that, in contrast to mutual information, requires no density estimation.

Empirical estimator. Given K i.i.d. samples $\{(a_k, b_k)\}_{k=1}^K$, the population HSIC of Eq. (12) is estimated by the trace expression of Eq. (2) in the main text, with $\mathbf{C} = \mathbf{I} - \frac{1}{K} \mathbf{1}\mathbf{1}^\top$ centering the kernel matrices in feature space. The estimator has bias $\mathcal{O}(K^{-1})$ and converges at rate $\mathcal{O}(K^{-1/2})$ under standard regularity conditions, and its trace form lets it be computed in $\mathcal{O}(K^2)$ time per pair of variables, well within the calibration budget of an action-aware PTQ pipeline.

Use as an information-theoretic surrogate. HSIC has been used as a tractable substitute for mutual information in information-bottleneck objectives [24, 36, 37] and as a feature-selection signal in deep models [19, 22, 28]. We use this same property in Section 4.1 to build an per-tensor sensitivity score that penalizes redundancy with the model input and rewards alignment with the ground-truth actions, without ever differentiating through the action head.

B Hessian-Weighted Reconstruction and Fisher Approximation

Hessian-weighted reconstruction objective. We derive the Hessian-weighted objective referenced in Eq. (3) of the Background section. Quantizing θ to $\hat{\theta}$ introduces a perturbation $\delta = \hat{\theta} - \theta$, and the deployment objective is to minimize the resulting change in the action loss,

$$\hat{\theta}^* = \arg \min_{\hat{\theta}} \mathcal{L}(\hat{\theta}) - \mathcal{L}(\theta). \quad (13)$$

A second-order Taylor expansion of $\mathcal{L}$ around θ gives

$$\mathcal{L}(\hat{\theta}) - \mathcal{L}(\theta) \approx (\nabla_{\theta} \mathcal{L})^\top \delta + \frac{1}{2} \delta^\top \mathbf{H} \delta, \quad (14)$$

with $\mathbf{H} = \nabla_{\theta}^2 \mathcal{L}$. The calibration distribution coincides with the fine-tuning distribution, so the backbone sits near a local minimum of $\mathcal{L}$ and $\nabla_{\theta} \mathcal{L} \approx \mathbf{0}$. The first-order term is therefore negligible, and the deployment objective reduces to the Hessian-weighted reconstruction in Eq. (3). The diagonal entry H_{ii} measures the local curvature of $\mathcal{L}$ along θ_i and is used as a per-element sensitivity in both the inter-tensor allocator (Section 4.1) and the intra-tensor scale optimizer (Section 4.2).

Why we replace $\mathbf{H}$ by a surrogate. Materializing the full Hessian is intractable at backbone scale: $\mathbf{H} \in \mathbb{R}^{P \times P}$ has $\mathcal{O}(P^2)$ entries, and forming any one entry requires a Hessian-vector product. For a 7B-parameter LLM backbone, $P \approx 7 \times 10^9$, so even storing the diagonal $\{H_{ii}\}_{i=1}^P$ is feasible only via gradient-style estimators. We therefore replace $\mathbf{H}$ in Eq. (3) by a tractable surrogate that captures its diagonal at a local minimum.

Fisher information and its equivalence to the Hessian at the optimum. Treating the action loss as a negative log-likelihood, $\mathcal{L}(\theta) = -\mathbb{E}_{(x, y) \sim \mathcal{D}} [\log p_{\theta}(y | x)]$, the (true) Fisher information matrix is

$$\mathbf{F}(\theta) = \mathbb{E}_{(x, y) \sim p_{\theta}} [\nabla_{\theta} \log p_{\theta}(y | x) \nabla_{\theta} \log p_{\theta}(y | x)^\top]. \quad (15)$$

A standard result in natural-gradient theory [27] establishes that $\mathbf{F}(\theta) = \mathbf{H}(\theta)$ when the model distribution coincides with the data distribution; for a fine-tuned VLA, θ sits sufficiently close to such a fixed point that $\mathbf{F} \approx \mathbf{H}$ holds throughout calibration.

Empirical Fisher and diagonal approximation. In practice the inner expectation is replaced by samples drawn from the calibration set $\mathcal{D}$, giving the empirical Fisher matrix of Eq. (4). To make scoring tractable per element we further replace the full $\mathbf{F}$ by its diagonal,

$$\mathcal{F}_{ii} = \frac{1}{|\mathcal{D}|} \sum_{d \in \mathcal{D}} \left(\frac{\partial \mathcal{L}_d}{\partial \theta_i} \right)^2, \quad i = 1, \dots, P, \quad (16)$$

so that computing $\{\mathcal{F}_{ii}\}_{i=1}^P$ requires only first-order information: a single backward pass per calibration sample, $\mathcal{O}(P)$ memory in total, and no Hessian-vector products. We adopt the diagonal approximation $\mathbf{H} \approx \text{diag}(\mathcal{F})$ throughout, which assumes that cross-parameter interactions are negligible relative to per-parameter curvature. The methodology refines this surrogate further by replacing $\mathcal{L}_d$ with the Action-Mixed Fisher loss (Section 4.2), so that $\mathcal{F}_{ii}$ reflects gradient signal from both the action-head and (when available) the categorical pathways.

C Cross-Pathway Covariance in AMF

This appendix expands on the AMF Fisher diagonal of Eq. (9) when the architecture exposes both an action-head loss $\mathcal{L}_d^{\text{act}}$ and an LM-head categorical loss $\mathcal{L}_d^{\text{cls}}$ (e.g., OpenVLA-OFT). Architectures that lack a categorical head reduce to the $\alpha = 1$ case below and the rest of this section is moot. Let

$$\nabla_i \mathcal{L}_d^{\text{act}} \equiv \frac{\partial \mathcal{L}_d^{\text{act}}}{\partial \theta_i}, \quad \nabla_i \mathcal{L}_d^{\text{cls}} \equiv \frac{\partial \mathcal{L}_d^{\text{cls}}}{\partial \theta_i}.$$

By linearity of differentiation and the definition of $\mathcal{L}_d^{\text{AMF}}$ in Eq. (8),

$$\frac{\partial \mathcal{L}_d^{\text{AMF}}}{\partial \theta_i} = \alpha \nabla_i \mathcal{L}_d^{\text{act}} + (1 - \alpha) \nabla_i \mathcal{L}_d^{\text{cls}}.$$

Substituting into Eq. (9) and expanding the square gives the decomposition

$$\mathcal{F}_{ii}^{\text{AMF}} = \alpha^2 \mathcal{F}_{ii}^{\text{act}} + (1 - \alpha)^2 \mathcal{F}_{ii}^{\text{cls}} + 2\alpha(1 - \alpha) \mathcal{C}_{ii}, \quad (17)$$

where the per-pathway Fisher diagonals and the cross-pathway covariance are

$$\mathcal{F}_{ii}^{\text{act}} = \frac{1}{|\mathcal{D}|} \sum_d (\nabla_i \mathcal{L}_d^{\text{act}})^2, \quad \mathcal{F}_{ii}^{\text{cls}} = \frac{1}{|\mathcal{D}|} \sum_d (\nabla_i \mathcal{L}_d^{\text{cls}})^2, \quad \mathcal{C}_{ii} = \frac{1}{|\mathcal{D}|} \sum_d \nabla_i \mathcal{L}_d^{\text{act}} \nabla_i \mathcal{L}_d^{\text{cls}}.$$

The covariance term $\mathcal{C}_{ii}$ vanishes identically for either pure single-loss Fisher ($\alpha \in \{0, 1\}$) and is therefore unique to the blended formulation. Its sign at parameter θ_i encodes whether perturbations of θ_i shift the action-head and language-modeling outputs in correlated directions: positive $\mathcal{C}_{ii}$ identifies parameters jointly load-bearing for both heads (typical of weights that mediate shared task semantics) and amplifies their AMF importance, while negative $\mathcal{C}_{ii}$ down-weights parameters whose pathways pull in opposite directions, which would otherwise be assigned spuriously high importance under a single-loss Fisher.

The weighting prefactor $2\alpha(1 - \alpha)$ in Eq. (17) is maximized at $\alpha = 1/2$, where the cross-covariance contribution to $\mathcal{F}_{ii}^{\text{AMF}}$ is largest in absolute terms. This motivates our default choice of $\alpha = 1/2$ for OpenVLA-OFT in the experiments of Section 5.

D OmniModel.cpp: Agentic Pipeline for VLA Deployment

Native C/C++ inference is what actually delivers the on-device benefits of extreme quantization: it removes the Python/PyTorch [32] runtime and its dependencies, and gives the model access to hand-written kernels for packed sub-4-bit weight formats and to flexible CPU/GPU memory offloading. The de facto standard runtime for this on edge hardware is the GGML tensor library [10] together with llama.cpp [11], which stores quantized weights in an on-disk binary container called *GGUF*. A GGUF file holds, for every weight tensor, the packed integer codes together with the per-block scales, zero points, and the quantization type tag (e.g., Q4_K_M, Q3_K_S) needed to dequantize on the fly inside a hand-written GGML kernel. ActQuant’s per-block scale and per-tensor bit-width outputs map directly onto this format, so any backbone whose forward graph is expressed in GGML can be deployed end-to-end in C/C++.

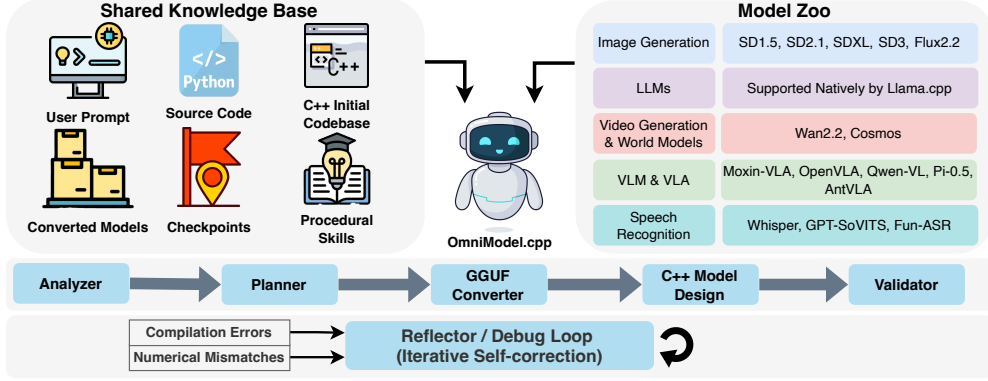


Figure 4: OmniModel.cpp pipeline for deploying ActQuant-quantized VLA backbones in native C/C++. A shared knowledge base and a library of procedural skills feed a planner-driven loop (analyze, plan, convert to GGUF, build the GGML graph, validate); a reflector iterates on compilation errors and per-tensor numerical mismatches against the PyTorch reference until parity is reached.

The catch is that `llama.cpp` natively supports only a narrow set of decoder-only LLM architectures, with no built-in support for VLA backbones such as OpenVLA-OFT (a SigLIP [42]+DINOv2 [30] vision tower over a LLaMA 2 [33] stack with an L1-regression action head) or $\pi_{0.5}$ (a vision-language stack with a flow-matching action head). Porting a new VLA backbone into the GGML computation graph traditionally requires weeks of by-hand engineering: reconstructing the forward graph module by module, serializing each parameter tensor into the GGUF container, implementing custom GGML kernels for operators without a direct equivalent, and debugging numerical drift between the PyTorch reference and the C++ implementation. To solve this issue and be able to deploy various quantized models beyond LLMs efficiently on edge, we propose **OmniModel.cpp**, an agentic conversion pipeline used to obtain every C/C++ deployment artifact in this paper.

OmniModel.cpp organizes a code-generation agent into three cooperating layers, illustrated in Figure 4. (i) A *shared knowledge base* stores the PyTorch source and checkpoints, an initial C++ skeleton, and a repository of previously converted backbones, so that a new conversion can reuse validated solutions rather than reasoning from scratch. (ii) A library of *dynamic procedural skills* encodes self-contained, reusable subtasks (serializing a particular submodule to GGUF, registering a custom GGML operator, wiring up a Python binding) and is updated whenever a new architecture-specific pattern is resolved. (iii) An *automated verification loop* runs the agent inside a sandbox with file I/O, shell-driven compilation, and semantic codebase search; the agent caches per-module intermediate tensors from the PyTorch reference, and after each module is compiled it tests cosine similarity against this cache. When similarity falls below $\beta = 0.99$, the reflector isolates the failing tensor, diagnoses the root cause, patches the implementation, and rebuilds, iterating until numerical parity is achieved. The conversion itself proceeds through a fixed sequence (analyzer, planner, GGUF converter, C++ model design, validator), with the GGUF converter serializing the ActQuant per-block scales and per-tensor bit-widths produced by our quantization algorithm.

E Additional Information on Calibration Data for LIBERO Simulation

We use the jointly fine-tuned OpenVLA-OFT checkpoint that has been fine-tuned on all four LIBERO task suites (Spatial, Object, Goal, and Long), and draw 60 episodes from the LIBERO fine-tuning split as our calibration set. Prior work such as QVLA [39] relies on 512 episodes (roughly one third of the entire fine-tuning split), which is impractical for post-training quantization. Our focus is on preserving action-generation quality after quantization with an adequate, not maximal, calibration budget. The 60 episodes are not drawn at random: each LIBERO suite contains 10 task descriptions, and we sample one episode per task description from Spatial, Object, and Goal; for LIBERO-Long, whose tasks are long-horizon and more complex, we sample three episodes per task description, yielding the minimum of 60 episodes total. The episode-level random sampling within each task description uses a fixed random seed of 42 for reproducibility.

The same 60-episode calibration set is reused to compute both the HSIC-based per-tensor sensitivity scores (Eq. (5)) and the Action-Mixed Fisher per-element importance metric (Eq. (9)), so the two ActQuant signals are derived from a single shared calibration pass.

F Hardware and Quantization Cost

All experiments in this paper are run on three NVIDIA GPU classes. The fp16 baselines and the LIBERO closed-loop simulation rollouts use NVIDIA L40S GPUs (48 GB GDDR6 VRAM each). The real-world UR3 deployment fine-tunes $\pi_{0.5}$ on NVIDIA A100 GPUs (80 GB HBM2e) and serves the quantized policy at inference time on a single NVIDIA RTX A6000 (48 GB GDDR6). One full ActQuant pass (HSIC-based inter-tensor allocation followed by Action-Mixed Fisher intra-tensor scale optimization on the 60-episode calibration set) takes approximately two hours of wall-clock time per backbone on a single L40S, with peak GPU memory below the on-card 48 GB during both stages.

G QVLA Reproduction

Our QVLA [39] numbers in Table 1 differ from those reported in the original paper because we run all baselines under the same low-data calibration protocol that ActQuant targets. The original QVLA paper calibrates on 512 episodes drawn from the LIBERO fine-tuning split (out of roughly 1.7k available episodes), which expands to over 80,000 frames; computing the channel-level sensitivity scores QVLA needs requires a separate forward pass for each of those frames, at non-trivial GPU cost. ActQuant, by contrast, is designed for the extreme-PTQ regime in which calibration data is scarce, so we cap every method in our experiments at the same 60 episodes from the LIBERO fine-tuning split (Appendix E). We re-ran QVLA from its public implementation under this 60-episode budget on both OpenVLA-OFT and $\pi_{0.5}$, with all other hyperparameters left at the defaults from the original repository; the reported numbers therefore reflect QVLA’s behavior at the same calibration budget as ActQuant and the other baselines, not the larger budget used in the original paper.

H Limitations and Future Work

ActQuant focuses on *weight-only* quantization and leaves activations at half precision; pushing further would require pairing the per-tensor allocator with an activation-quantization scheme, which is left for future work. We use the same calibration set across all bit-widths and both VLA models, and we have not characterized how performance degrades when the calibration distribution drifts from the deployment distribution; this matters in practice because real-robot tasks rarely match a benchmark suite exactly. On the systems side, OmniModel.cpp inherits the operator coverage of the underlying GGML kernels, so architectures that introduce new primitives (e.g., novel attention variants or non-standard normalizations) still trigger the agent’s reflector loop on first conversion; broadening the procedural-skill library to cover more architecture families is an obvious next step.

I Broader Impacts

ActQuant compresses Vision-Language-Action models so they can run on the on-board hardware of physical robots. The intended positive impact is to make capable robotic foundation models accessible without datacenter-scale GPUs, which lowers the cost of robotics research, supports applications in assistive and household settings, and reduces the energy footprint of inference because a quantized backbone draws substantially less power than its fp16 counterpart. By keeping the deployment self-contained on the robot, ActQuant also removes the privacy concerns associated with streaming raw camera data to a remote server. On the negative side, cheaper on-device VLA inference makes it easier to deploy autonomous manipulators in settings where operator oversight is weak, and a quantized policy can fail in ways that are subtly different from its fp16 reference, especially under inputs that drift from the calibration distribution; this matters because closed-loop robotic control can cause physical harm when the policy errs. We mitigate the second concern in two ways. First, our calibration and evaluation protocols are explicit about the distributions used (Appendix E), so deployers can match them to their target environment. Second, we never claim that the quantized

model is a drop-in replacement for the fp16 model under arbitrary distribution shift, and we report real-robot success rates side-by-side with the fp16 baseline so that any drop is visible. Standard safeguards for autonomous robots, including supervised operation, geofencing, and emergency-stop hardware, remain necessary regardless of the quantization method used.

J LLM Usage

We used large language models in two clearly scoped ways. Throughout the writing of this paper, we used a general-purpose assistant for sentence-level editing (clarity, concision, grammar) on prose we had already drafted. The assistant did not generate scientific claims, results, or citations; every empirical number, figure, and reference in this paper was produced and verified by the authors.