
User Manual
Template Based Document Generation System

1. DOCX Template Requirements



To inject data into your DOCX template, insert placeholders in the format `{Name}`, `{Year}`, etc., at the desired locations within the document.
These placeholders must **exactly match** the column headers used in your Excel file (case-sensitive).


2. Excel File Requirements

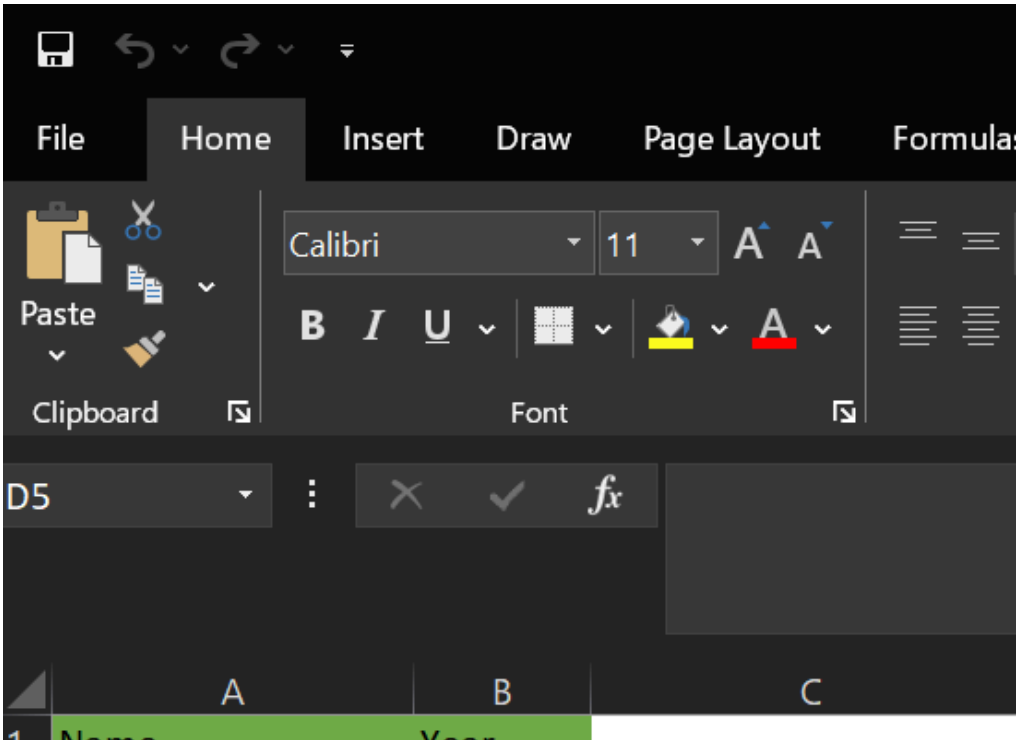


	A	B	C
1	Name	Year	
2	Phe Oudom	2022	
3	Sy Visal	2022	
4	Sok Kea	2023	
5	Sok Phearom	2023	
6	Ky Lyheang	2024	
7	Suon Panha	2025	
8	Hal Sa	2026	
9	Do Sona	2027	
10	Sal Vichet	2028	
11	Nit Heang	2029	
12	Ly Leng	2030	
13	Ben Ti	2031	
14	Ni Nut	2032	
15	Sok Khom	2033	
16	Ji Vana	2034	
17			
18			
19			
20			

- The Excel file must include a header row.
- The **first row** should contain column headers.
- Each column header must correspond to a placeholder in the DOCX template.
- Data from the subsequent rows will be used to generate documents dynamically based on the matching placeholders.

User Interface

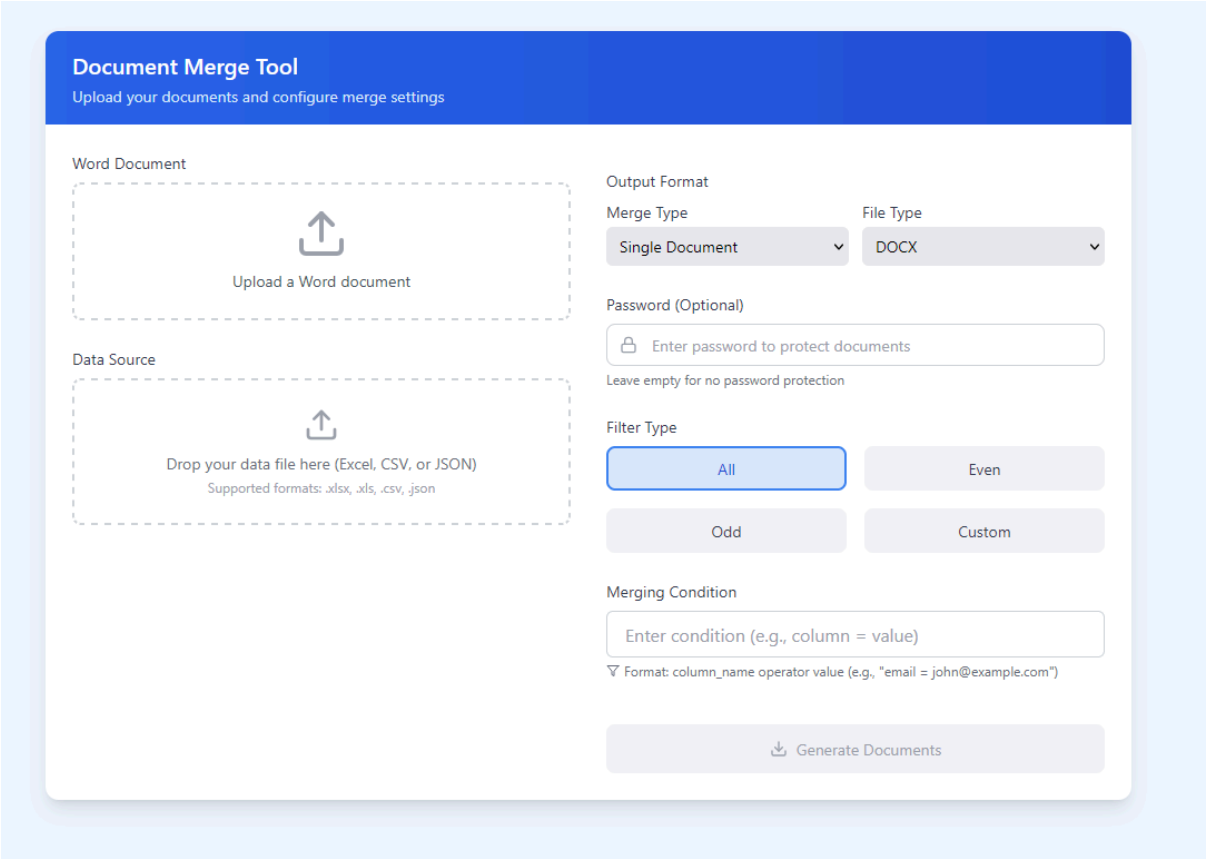


Upload File

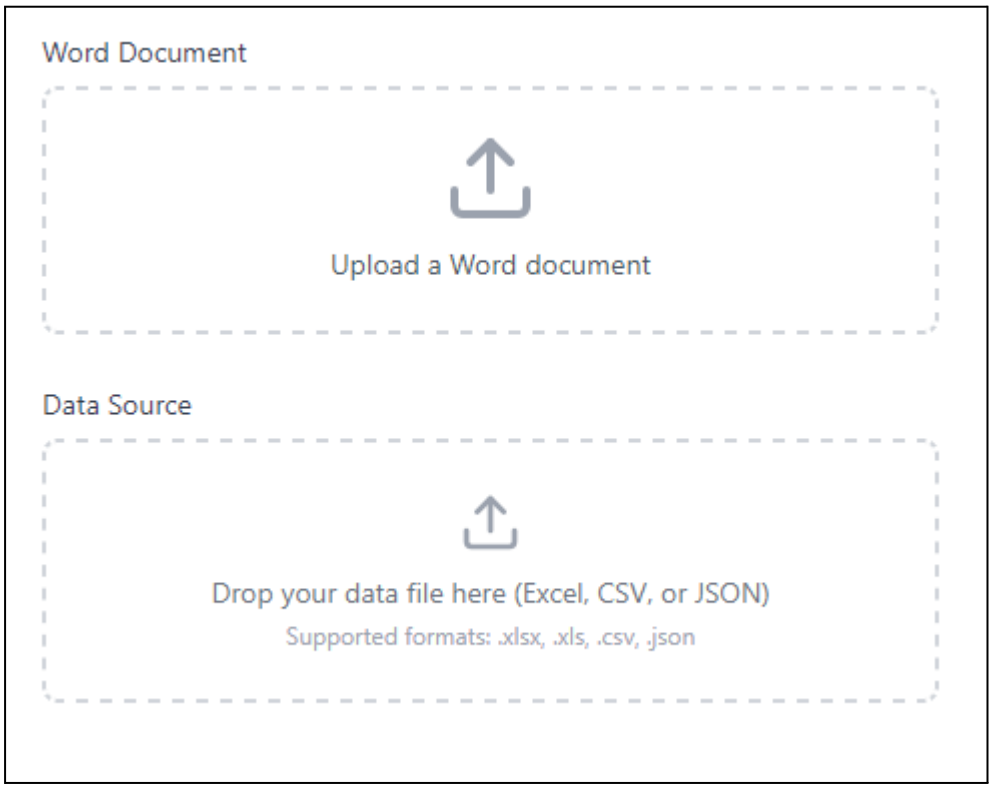

Allows users to upload a DOCX template and an Excel or CSV data source.


Validates file type and structure before processing.

Merging Type (Single or Multiple)

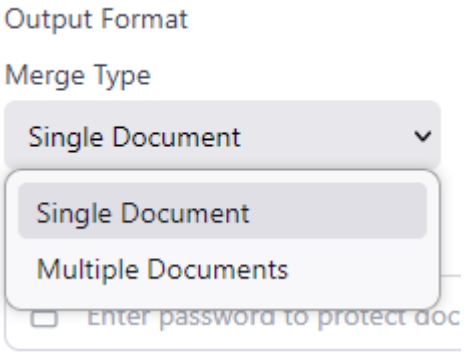

- **Single Record**: Generates one document per row of data.
- **Multiple Records**: Merges all records into a single document


Output File Type

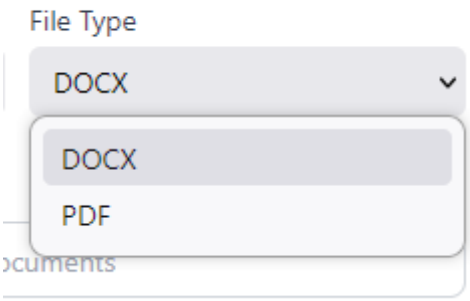

Users can choose the desired output format:


- `.docx`
- `.pdf`

Adding Password

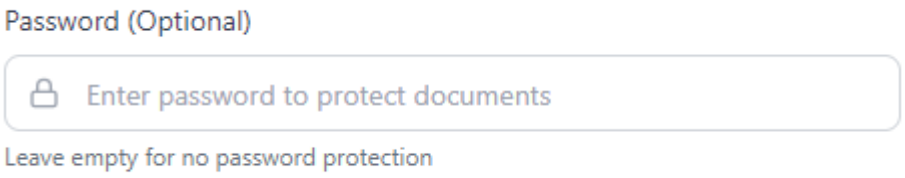


- Option to apply password protection to generated documents.
- Supports both static passwords and row-specific passwords based on Excel columns.

Row Filtering

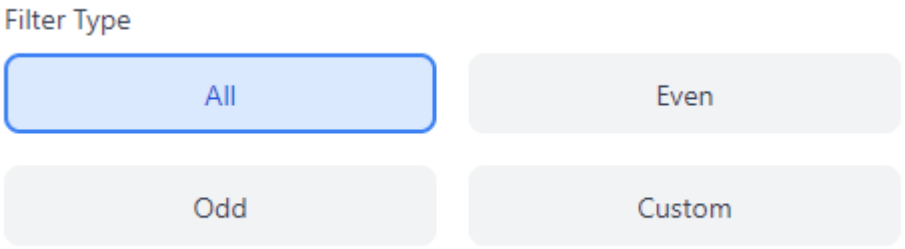

Allows users to define conditions to include or exclude specific rows from processing.

Merging Value condition

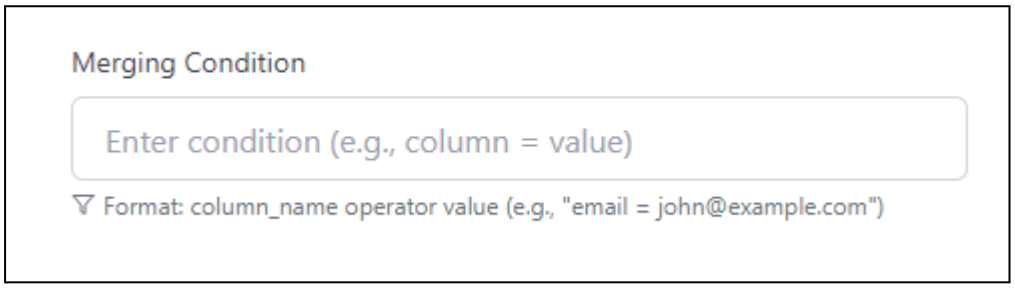

Conditional filtering provides **advanced selection capabilities** through a comprehensive set of comparison operators. The system evaluates each record against **user-defined conditions**, processing only those that meet **all specified criteria**.

This feature is ideal for complex document generation workflows where output should depend on data attributes such

as approval status, department, amount thresholds, age, or custom metadata.

Key Features:

- **Validation**: The system automatically checks filter conditions against the available columns and handles invalid conditions gracefully without interrupting the process.

- **Multiple Conditions**: Supports combining multiple conditions using logical operators.

Supported Operator

Supported Operators:

Operator	Description	Data Types	Example Usage
`=`	Equality comparison	All	`Status = "Approved"`
`!=`	Inequality comparison	All	`Department != "HR"`
`>`	Greater than	Numeric, Date	`Amount > 1000`
`<`	Less than	Numeric, Date	`Age < 11`
`>=`	Greater than or equal to	Numeric, Date	`Age >= 18`
`<=`	Less than or equal to	Numeric, Date	`Score <= 90`