

CSS = cascading style sheets

It has ONE job, and that is to make things look nice

CSS > HTML styling

- Selector
 - Targeted HTML tag
 - General
 - Class
 - ID
- Property
 - Style to be applied to HTML tag

Class Selectors

- Used to style a subset of the HTML tags used.
- Has more priority than the generic HTML tag selector.
- Start selector with a period (.) in order to use.

```
.intro {  
  background-color: yellow;  
}
```

```
p.hometown {  
  background-color: yellow;  
}
```

This only applies to p tags given the class "hometown"

ID Selectors


- Used to style a SINGLE HTML tag used.
- Has the most priority of all selectors.
- Start selector with a hashtag (#) in order to use.

```
#para1 {  
  text-align: center;  
  color: red;  
}
```

You can stack selectors by putting a comma between them

The Box Model

Every HTML Tag makes a box. This box can be styled using CSS to change the default layout of every webpage.

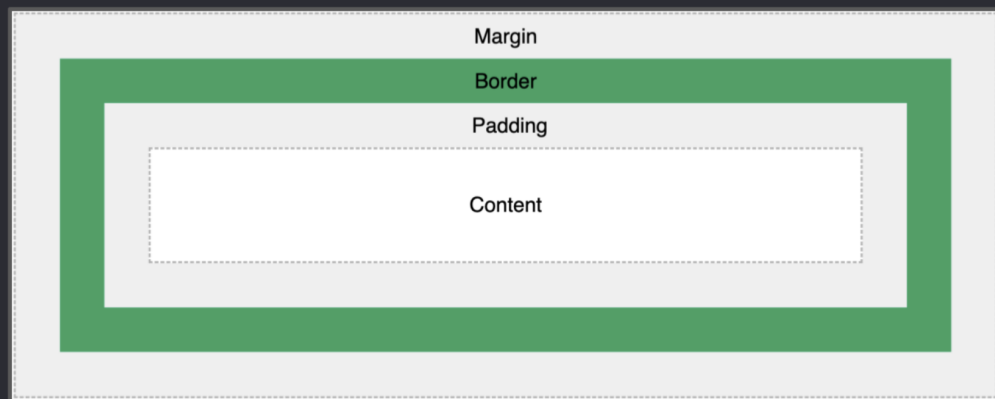

Accessibility

We want to make sure our websites are **accessible** to as many people as possible! Consider using [these practices](#).

Accessibility Considerations:

- **Font:**
 - *Color and contrast*
 - *Size*
 - *White Space*
 - *Typography*
- **Responsive Design:**
 - *Mobile devices*
 - *Smartphones*
 - *Tablets*