

Natural-Language Agent Harnesses

Linyue Pan¹ Lexiao Zou² Shuo Guo¹ Jingchen Ni¹ Hai-Tao Zheng^{1*}

¹Shenzhen International Graduate School, Tsinghua University

²Harbin Institute of Technology (Shenzhen)

ply24@mails.tsinghua.edu.cn

zheng.haitao@sz.tsinghua.edu.cn

Abstract

Agent performance increasingly depends on *harness engineering*, yet harness design is usually buried in controller code and runtime-specific conventions, making it hard to transfer, compare, and study as a scientific object. We ask whether the high-level control logic of an agent harness can instead be externalized as a portable executable artifact. We introduce **Natural-Language Agent Harnesses** (NLAHs), which express harness behavior in editable natural language, and **Intelligent Harness Runtime** (IHR), a shared runtime that executes these harnesses through explicit contracts, durable artifacts, and lightweight adapters. Across coding and computer-use benchmarks, we conduct controlled evaluations of operational viability, module ablation, and code-to-text harness migration.

1 Introduction

Modern agents increasingly succeed or fail because of the surrounding *harness*: the control stack that structures multi-step reasoning, tool use, memory, delegation, and stopping beyond any single model call. A large body of research shows that externalized control patterns can be decisive, including reason-act loops (Yao et al., 2023), retrieval-augmented generation (Lewis et al., 2021), and explicit self-feedback (Shinn et al., 2023). Recent work has expanded this space toward explicit memory and self-evolution (Zhang et al., 2026), workflow generation (Li et al., 2024; Zheng et al., 2025), multi-agent orchestration (Fourney et al., 2024; Wang et al., 2025b; Ke et al., 2026; Costa, 2026; Xia et al., 2026), and interface-level test-time scaling and native tool execution (Muennighoff et al., 2025; Wang et al., 2024b; HKUDS, 2026). In parallel, long-context and long-horizon settings have exposed that the control stack—including state management, context curation, and context

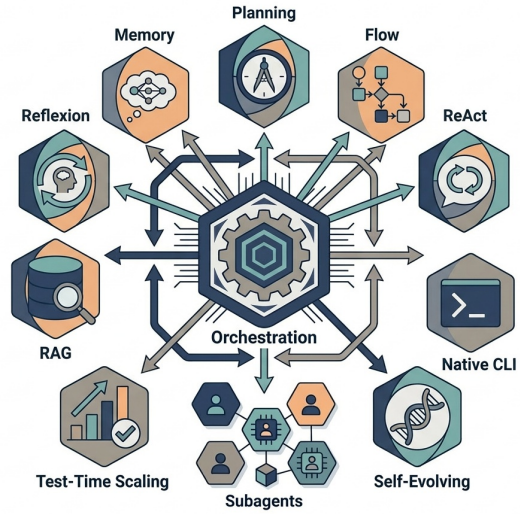


Figure 1: Examples of harness design patterns used by modern agents (reason-act, retrieval, reflection, verification, memory, search, orchestration).

folding—can bottleneck performance even when the base model is fixed (Liu et al., 2024; Chroma Research, 2025; Tang et al., 2025, 2026a,b; Sun et al., 2025; Su et al., 2026). The same pressure appears in scaffold-aware evaluation and increasingly demanding reasoning settings, where differences in scaffolds and harnesses can dominate outcomes even under fixed base models (Ding et al., 2026; An et al., 2025; Zhan et al., 2026b,a).

This shift reframes “prompt engineering” into the broader practice of *context engineering*: deciding what instructions, evidence, intermediate artifacts, and state should be made available at each step of a long run. Practitioner accounts emphasize that as tasks span many context windows, robust progress depends less on one-shot phrasing and more on durable state surfaces, validation gates, and clear responsibility boundaries (Anthropic, 2024, 2025a,b; Bui, 2026). In the same spirit, recent discussions of *harness engineering*

*Corresponding author.