Celebrate the Joy of Living

with

ELANPRO®

The Commercial Refrigeration Experts

Group

iCOLD™ Cold Room

thingif(y) Cold Chain Monitoring



Kitchen Refrigeration - Reach-in & Counters - Static & Frost Free



CGN 650TNM/BTM
RI 551C2/F2



CGN 1410TNM/BTM
RI 1101C4/F4

Elanpro Professional Reach Ins and Under counters for refrigeration or freezer application are designed to meet the tough Indian Kitchen Conditions. Our machines are tested to perform in ambient environment of 43°C* and presents a host of exciting new features.



CGN 2100TN/BT



CS 900



CPS 200



CVRX 1200 / CVRX 1400

Key Features:

- Dixell digital controller
- Removable gasket
- Adjustable shelves
- Heavy duty lockable castors
- Lock
- Built in handle
- Environment Friendly Refrigerant
  - R134A for Chillers
  - R404A for Freezers

Optional Features:

- Left or Right hinged door
- Single or multi door
- Heavy duty adjustable SS legs

Common - All Models

- HACCP Compliance
- Adjustable Feet

	Model	Description	Capacity (Ltrs)	Dimension (WxDxH) mm	Temperature Range	GN Compatibility	No. of Shelves	Climate Class	Inside SS
FROST FREE	CGN 650TNM	2 Door Reach-in Chiller	650	740 x 830 x 2010	2°C ~ 8°C	2 x GN 1/1	3	43°C	SS 430
	CGN 650BTM	2 Door Reach-in Freezer	650	740 x 830 x 2010	-18°C ~ -22°C	2 x GN 1/1	3	43°C	SS 430
	CGN 1410TNM	4 Door Reach-In Chiller	1410	1480 x 830 x 2010	2°C ~ 8°C	2 x GN 1/1	6	43°C	SS 430
	CGN 1410BTM	4 Door Reach-in Freezer	1410	1480 x 830 x 2010	-18°C ~ -22°C	2 x GN 1/1	6	43°C	SS 430
	CGN 2100TN	2 Door Under Counter Chiller	265	1360 x 700 x 850	2°C ~ 8°C	1 x GN 1/1	2	38°C	SS 430
	CGN 3100TN	3 Door Under Counter Chiller	400	1795 x 700 x 850	2°C ~ 8°C	1 x GN 1/1	3	38°C	SS 430
	CGN 2100BT	2 Door Under Counter Freezer	265	1360 x 700 x 850	-18°C ~ -22°C	1 x GN 1/1	2	38°C	SS 430
	CGN 3100BT	3 Door Under Counter Freezer	400	1795 x 700 x 850	-18°C ~ -22°C	1 x GN 1/1	3	38°C	SS 430
	CSH 2000	2 Door Salad Under Counter with Prep Table	337	1510 x 800 x 1085	2°C ~ 8°C	6 x GN 1/3	2	38°C	SS 430
	CSH 3000	3 Door Salad Under Counter with Prep Table	497	2020 x 800 x 1085	2°C ~ 8°C	10 x GN 1/3	3	38°C	SS 430
STATIC	CS 900	2 Door Salad Under Counter	240	900 x 700 x 970	2°C ~ 8°C	NA	2	32°C	SS 430
	CS 903	3 Door Salad Under Counter	360	1365 x 700 x 970	2°C ~ 8°C	NA	3	32°C	SS 430
	CPS 200	2 Door Salad Under Counter with Prep Table	240	900 x 700 x 970	2°C ~ 8°C	5 x GN 1/6	2	32°C	SS 430
	CPS 300	3 Door Salad Under Counter with Prep Table	360	1365 x 700 x 970	2°C ~ 8°C	8 x GN 1/6	3	32°C	SS 430
	CVRX 1200	Salad Display Counter	NA	1200 x 335 x 225	2°C ~ 8°C	5 x GN 1/4	NA	32°C	SS 430
	CVRX 1400	Salad Display Counter	NA	1400 x 335 x 225	2°C ~ 8°C	6 x GN 1/4	NA	32°C	SS 430
	RI 551C	2 Door Reach-in Chiller	550	680 x 710 x 2010	2°C ~ 8°C	NA	3	43°C	SS 201
	RI 1101C	4 Door Reach-in Chiller	1100	1340 x 710 x 2010	2°C ~ 8°C	NA	6	43°C	SS 201
	RI 551F	2 Door Reach-in Freezer	550	680 x 710 x 2010	-10°C ~ -20°C	NA	3	43°C	SS 201
	RI 1101F	4 Door Reach-in Freezer	1100	1340 x 710 x 2010	-10°C ~ -20°C	NA	6	43°C	SS 201
	UC 1501C	2 Door Undercounter Chiller	265	1360 x 600 x 850	2°C ~ 8°C	NA	2	38°C	SS 201
	UC 1502C	2 Door Undercounter Chiller	265	1360 x 700 x 850	2°C ~ 8°C	NA	2	38°C	SS 201
	UC 1801C	3 Door Undercounter Chiller	400	1795 x 600 x 850	2°C ~ 8°C	NA	3	38°C	SS 201
	UC 1802C	3 Door Undercounter Chiller	400	1795 x 700 x 850	2°C ~ 8°C	NA	3	38°C	SS 201

Specifications, features and colours are subject to change without any notice, due to continuous product development. GN pan are optional and not supplied with the equipments. *Selected models.

Kitchen Refrigeration - Reach-in, Salad & Prep Counters - Frost Free



EGN 1410TNM/BTM



EGN 650TNM/BTM



EGN 2100TN/BT

Elanpro Professional Reach Ins for refrigeration or freezer application are designed to meet the tough Indian Kitchen Conditions. Our machines are tested to perform in ambient environment of 43°C* and presents a host of exciting new features.



EGN 3F Frost Top



EGN 3V



ESH 3000

Key Features:

- DANFOSS/EMBRACO compressor in Reach-in Only
- Dixell digital controller
- EBM Fan Motor
- Removable gasket
- Adjustable shelves
- Heavy duty lockable castors
- Lock
- Built in handle
- Environment Friendly Refrigerant
  - R134A for Chillers
  - R404A for Freezers

Optional Features:

- Left or Right hinged door
- Single or multi door
- Heavy duty adjustable SS legs

Common - All Models

- HACCP Compliance
- Adjustable Feet

	Model	Description	Capacity (Ltrs)	Dimension (WxDxH) mm	Temperature Range	GN Compatibility	No. of Shelves	Climate Class	Inside SS
FROST FREE	EGN 650TNM	2 Door Reach-in Chiller	650	740 x 830 x 2010	2°C ~ 8°C	2 x GN 1/1	3	43°C	SS 304
	EGN 650BTM	2 Door Reach-in Freezer	650	740 x 830 x 2010	-18°C ~ -22°C	2 x GN 1/1	3	43°C	SS 304
	EGN 1410TNM	4 Door Reach-In Chiller	1410	1480 x 830 x 2010	2°C ~ 8°C	2 x GN 1/1	6	43°C	SS 304
	EGN 1410BTM	4 Door Reach-in Freezer	1410	1480 x 830 x 2010	-18°C ~ -22°C	2 x GN 1/1	6	43°C	SS 304
	RI 1150CF	4 Door Reach-in Combi	550C + 550F	1220 x 755 x 960	2°C ~ 8°C / -10°C ~ -20°C	NA	6	38°C	SS 304
	EGN 2100TN	2 Door Under Counter Chiller	265	1360 x 700 x 850	2°C ~ 8°C	1 x GN 1/1	2	38°C	SS 304
	EGN 3100TN	3 Door Under Counter Chiller	400	1795 x 700 x 850	2°C ~ 8°C	1 x GN 1/1	3	38°C	SS 304
	EGN 2100BT	2 Door Under Counter Freezer	265	1360 x 700 x 850	-18°C ~ -22°C	1 x GN 1/1	2	38°C	SS 304
	EGN 3100BT	3 Door Under Counter Freezer	400	1795 x 700 x 850	-18°C ~ -22°C	1 x GN 1/1	3	38°C	SS 304
	ESH 2000	2 Door Salad Under Counter with Prep Table	337	1510 x 800 x 1085	2°C ~ 8°C	6 x GN 1/3	2	38°C	SS 304
	ESH 3000	3 Door Salad Under Counter with Prep Table	497	2020 x 800 x 1085	2°C ~ 8°C	10 x GN 1/3	3	38°C	SS 304
	EGN 600 Fish	Reach In Fish Chiller	600	680 x 810 x 2000	-2°C ~ 8°C	NA	5	40°C	SS 304
	EGN 3F FROST TOP	Frost Top	NA	1102 x 678 x 430	-10°C	NA	NA	38°C	SS 304
	EGN 3V	Ventilated Cooling Well	NA	1102 x 678 x 533	2°C ~ 8°C	3 x GN 1/1	NA	32°C	SS 304

Specifications, features and colours are subject to change without any notice, due to continuous product development. Manufactured as per European Technology and Standards. GN Pan are optional. *Selected models.

Kitchen Refrigeration - Flexi Drawer Undercounter

Elanpro Flex drawer are designed to save space and enhance user experience at a touch of a button. The unique convertible feature helps in converting freezer to fridge and vice versa.



CBR - 1



CBR - 2

Key Features:

- CFC Free Refrigerant
- User friendly controls with LED Temperature display
- Change drawer temperature from fridge to freezer at the touch of a button
- Auto energy saving hot gas defrost
- Removable gasket for easy cleaning
- GN 1/1 – 150 mm deep pan capacity maximizes available storage space
- Tropicalized to perform at 38°C ambient

Model	Description	Capacity (Ltrs)	Dimension (WxDxH) mm	Temperature Range	GN Compatibility
CBR 1-2	Flexi Drawer Counter	78	905 x 700 x 565	1°C ~ 4°C / -18°C ~ -21°C	2 x GN 1/1
CBR 1-3	Flexi Drawer Counter	116	1230 x 700 x 565	1°C ~ 4°C / -18°C ~ -21°C	3 x GN 1/1
CBR 2-2	Flexi Drawer Counter	179	905 x 700 x 830	1°C ~ 4°C / -18°C ~ -21°C	4 x GN 1/1
CBR 2-3	Flexi Drawer Counter	262	1230 x 700 x 830	1°C ~ 4°C / -18°C ~ -21°C	6 x GN 1/1

Manufactured as per European Technology and Standards. GN Pan are optional.

Blast Chillers & Freezers

Deep-Freezing or Freezing

These two terms are often confused but the end result is the same in both cases: the temperature of a food product is lowered but the water contained in it does not freeze completely. The difference is that with freezing there are no time limits and macro crystals are formed internally, whereas deep- freezing means reaching a temperature of –18°C in the centre of the product within 4 hours, avoiding the formation of macro crystals.



D14



D3

Key Features:

- CFC refrigerant and foam
- Complete structure interior & exterior in stainless steel with round internal edges for easy cleaning
- Self closing doors with easy to clean and replace magnetic balloon gasket
- Replaceable Electric door mullion heater
- 75mm thickness insulation for excellent thermal efficiency
- Ventilated refrigeration compartment
- Dixell controller and compact footprints
- Danfoss refrigeration components
- EBM Fan



Blast Chillers:

Why is it Necessary to use?

All fresh organic food products contain a natural bacterial load which, in favourable ambient conditions (temperature and humidity), multiplies producing hazardous effects on consumer health.

The most dangerous thermal threshold is between +65°C and +35°C: in this temperature range, bacterial multiplication is accelerated. Micro-organisms begin to develop between +35°C and +10°C.

Blast chilling means lowering the temperature in the centre of the product from +70°C to +4°C as quickly as possible, and in any case within 90 minutes. Blast chilling of a cooked product not only prevents bacterial proliferation but also prolongs product conservation time. The quality of the food is not affected, and the product can be stored up to a couple of month.



Shock Freezers 70°C to -18°C

The maximum storages is achieved through the rapid production of cold to allow the production of micro crystals that optimally preserve the cells of the foodstuff.

The Shock Freezing drops the temperature from 70°C to -18°C in a maximum time of 240 minutes.

The food is quickly frozen and then be kept for months in normal freezer.

Model	Dimension (WxDxH) mm	Capacity (Ltrs)	Cooling Capability#	Tray	Power Supply	Cooling Mode
T3	660 x 650 x 430	39	8 kg / 5 kg	3	230 V / 50 Hz	Ventilated
D3	800 x 815 x 945	139	12 kg / 8 kg	3	230 V / 50 Hz	Ventilated
D5	800 x 815 x 1015	169	18 kg / 14 kg	5	230 V / 50 Hz	Ventilated
D10	800 x 815 x 1645	241	40 kg / 28 kg	10	230 V / 50 Hz	Ventilated
D14	800 x 815 x 2170	318	55 kg / 38 kg	14	380 V / 50 Hz	Ventilated

Specifications, features and colours are subject to change without any notice, due to continuous product development. # 70/3°C in 90 minute & 70/-18°C in 240 minute.

Hospitality Solutions - Bar Refrigeration

Elanpro Wine Chillers are known for their aesthetics and ease of operation, pull out wooden shelf helps in storage and selection of wine. Twin cabinet with individual temperature control ensures your White and Red wine are perfectly maintained to offer you the experience of Wine at any time.

Elanpro back bar come in Black & SS finish.



EBB 2D/2D SS



EGF 5G



EBB 3D/3D SS



CGN 2100TNG

Key Features - Wine Chillers

- Two separate zones for Red and White wine
- Actual and set temperature display
- Lock
- No frost
- Anti-Vibration
- Elegant stainless steel door frame
- Blue LED Light
- Double layer anti UV tinted glass door
- Cabinet colour: Black
- Pullout sliding shelves
- Beach wooden shelves
- Charcoal filter



EWG 130D

Particulars	EGF 5G	EBB 2D/2DSS	EBB 3D/3DSS	CGN 2100TNG	CGN 3100TNG	EWG 51D	EWG 130D
Descriptions	1 Door Glass Froster	2 Door Back Bar	3 Door Back Bar	Under Counter Bar	Under Counter Bar	Wine Cooler	Wine Cooler
Dimension (WxDxH) mm	595 x 525 x 875	900 x 520 x 900	1350 x 520 x 900	1360 x 700 x 850	1795 x 700 x 850	595 x 575 x 870	595 x 705 x 1417
Capacity	100 Ltrs.	223 Ltrs.	335 Ltrs.	265 Ltrs.	400 Ltrs.	52 Bottles	128 Bottles
Power Consumption (W)	280	230	320	396	514	75	110
Temperature Range	-5°C ~ -10°C	2°C ~ 10°C	2°C ~ 10°C	2°C ~ 10°C	2°C ~ 10°C	5°C ~ 12°C 12°C ~ 22°C	5°C ~ 12°C 12°C ~ 22°C
No of Shelf	2	2	3	2	3	6	11
Castors	No	No	No	Yes	Yes	No	No
Lock	No	Yes	Yes	No	No	Yes	Yes

Specifications, features and colours are subject to change without any notice, due to continuous product development.


Wide Range of Beer & Beverage Cooling Solutions

Elanpro is known for its pioneer presence in Draft beer solution with most innovative range of Towers in Brass, Copper, SS, Raisin and Ceramic finish with Illuminated and non -illuminated branding option. The cooling solution starts from single line upto 16 lines to meet any type of Beer installation requirements. With over 5000 installations in the country Elanpro today has dominating presence in Draft beer segment.

VINSERVICE ITALY



Old Brewery (4-9)

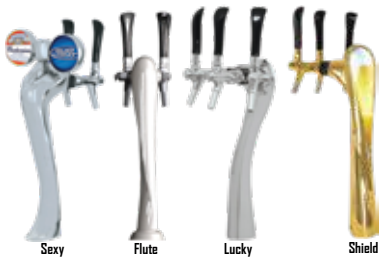

Sexy Flute Lucky Shield



Mini Lady



HE 90 / 120

Cooling unit to dispense extra cold beer between 0°C & 2°C and to frost the tower

Model	Dimension (WxDxH) mm	Compressor	Tank Capacity Ltrs.	Ice Bank (Kgs)	No. of Coils/ Length	Rate of Drink Per/Min (200 ml)	Cooling Capacity*
Mini Lady	407 x 407 x 280	1/6 Hp	12 H²O/Ltrs.	4	1-2/8 Mtrs.	2 Glass	25 Ltrs./Hr.
HE 90	390 x 390 x 720	1/3 Hp	36 H²O/Ltrs.	14	1-4/17 Mtrs.	8 Glass	90 Ltrs/Hr.
HE 120	450 x 450 x 800	1/2 Hp	50 H²O/Ltrs.	25	1-8/22 Mtrs.	10 Glass	120 Ltrs./Hr.
HE 250	520 x 820 x 870	3/4 Hp	90 H²O/Ltrs.	40	1-10/23 Mtrs.	20 Glass	250 Ltrs/Hr.
HE 600	600 x 920 x 870	11/4 Hp	150 H²O/Ltrs.	75	1-12/23 Mtrs.	40 Glass	480 Ltrs./Hr.

* Beer at 25°C input/4°C output in 25°C ambient on peak load.

Confectionery Showcases

The stylish confectionery showcase range from Elanpro comes in multiple shapes and sizes with 3 and 4 layers of display option. Elanpro offers showcases in cold, hot and ambient temperature.



EDC 900 F3 / EDC 1200 F3



EDG 900 C3 / EDG 1200 C3
Grab & Go

Key Features - EDC Series:

- Double tempered with special heated glass enhances visibility and prevents moisture
- Available in stainless steel & marble finish
- Stainless steel interior
- LED lights on each shelf
- Ventilated refrigeration for uniform cooling
- Lockable Castors for easy mobility



LSC 408



EHTC & EHTH 160/161
EHTC 100



EDCC 900/1200

Model	Description	Dimension (WxDxH) mm	Temperature Range	No. of Shelves
LSC 408	4 Side Pastry Showcase	711 x 711 x 1800	2°C ~ 8°C	Base + 4
EDC 900C3/F3 A	Pastry Showcase	900 x 700 x 1270	2°C ~ 8°C	Base + 3
EDC 1200C3/F3 A	Pastry Showcase	1200 x 700 x 1270	2°C ~ 8°C	Base + 3
EDC 1500C3/F3 A	Pastry Showcase	1500 x 700 x 1270	2°C ~ 8°C	Base + 3
EDCC 900	Chocolate Showcase	900 x 700 x 1400	2°C ~ 8°C	Base
EDCC 1200	Chocolate Showcase	1200 x 700 x 1400	2°C ~ 8°C	Base
EHTH 160	Countertop Hot Showcase	873 x 570 x 670	30°C ~ 65°C	Base + 2
EHTC 100	Countertop Cold Showcase	670 x 452 x 670	2°C ~ 8°C	Base + 2
EHTC 160/161	Countertop Cold Showcase	873 x 570 x 670	2°C ~ 8°C	Base + 2

Specifications, features and colours are subject to change without any notice, due to continuous product development. 30°C ambient temperature / 55% RH
EDC series available in hot & ambient model with same dimension.

Ice Machines/Flakers

Elanpro offers both under counter Ice machines with built in Storage Bins as well as modular Ice machine with separate Bins. Elanpro ice machines have vertical evaporator and are specially designed for large scale usage such as fast foods, hotels and bars. They are highly relevant for commercial outlets where space is at a premium, they present the best options for bars, coffee shops and restaurants and can also be used for various applications.



EFM 101





EIM 201 / EIM 351 / EIM 501



Regular Cube
28 x 32 x 22



EIM 41/61 BW#



EIM 101

Key Features:

- Low energy consumption
- Low water consumption per kg of ice produced
- Compatible Ice Storage Bins available separately at an extra cost.
- Air cooled
- Control board with display
- Option of flake & dice shape
- Vertical evaporator
- Stainless steel body
- Adjustable feet
- Pre Filter



EIM 1001

Model	EFM 101	EIM 41BW#	EIM 61BW#	EIM 101	EIM 201	EIM 351	EIM 501	EIM 1001
Rated Capacity* (Kg/24 hrs)	100	36	55	95	191	318	455	909
Bin Size (Kg)	20	15	18	40	105	125	125	315
Machine Dim. (WxDxH) mm	520 x 550 x 960	500 x 450 x 840	500 x 590 x 890	660 x 685 x 920	560 x 830 x 1718	760 x 830 x 1718	760 x 830 x 1893	1227 x 973 x 2058
Ice Type	Flake	Dice	Dice	Dice	Dice	Dice	Dice	Dice
Cube Size (WxDxH) mm	NA	22 x 22 x 22	28 x 32 x 22	28 x 32 x 22	28 x 28 x 22	28 x 28 x 22	28 x 28 x 22	28 x 28 x 22

* Rated capacity at 10°C Water and 21°C Air. # with online OR bottled water option.

Slush Dispenser



FB X 224

Features

- High density - food grade polycarbonate (PC) bowls
- Liquid crystal display, intelligent temperature control
- Stainless steel evaporator. built-in copper coil. novel appearance, colors are optional
- Super cooling, humanized residual liquid pipe design.
- Applicable to the soda fountain, hotel restaurants, convenience stores, chain restaurant and so on

Model	Capacity (ltrs)	Dimension (WxDxH) mm	Power Watts	Energy Consumption	Weight (kg)
FB XC 112	12	340 x 480 x 820	480	3.3 A	31
FB XC 224	12x2	400 x 480 x 820	900	5.5 A	46
FB XC 336	12x3	600 x 480 x 820	1050	6.0 A	65

Power : 220v/50Hz

Thick Shake Dispenser

A compact counter machine that dispenses cold creams, sherbets and other creamy specialties. Your customer will be captivated by SP, thanks to the perfect consistency of the products it delivers and to its elegant design.



SP 3

Features

- Food-grade polycarbonate (PC) bowls
- Intelligent temperature control
- Stainless evaporator, built-in copper coil
- New appearance, novel and generous
- Super cooling

Model	Capacity (ltrs)	Dimension (WxDxH) mm	Power Watts	Weight (kg)
SP 2	5x2	447 x 438 x 612	500	48
SP 3	5x3	627 x 443 x 612	1000	65

Power : 220v/50Hz

Soft Ice Machine

Elanpro offers two types of soft serve ice cream and frozen yoghurt machine. They come in a range of counter top and floor standing models with dual flavor and twin twist options. Elanpro softy machine offers twin refrigerating chamber to ensure optimum pre cooling and preservation coupled with high capacity freezing cylinder for uninterrupted dispensing.



D 520



D 525

Electrical	D 520	D 525
Voltage	220v/50Hz	220v/50Hz
Rated Input	2300 W	2300 W
Phase	Single	Single
Drive Motor	750 W (1 HP)	750 W (1 HP)
Capacity		
Freezing Cylinder	2 x 1.6 L	2 x 1.75 L
Mix Hopper	2 x 5.5 L	2 x 4.3 L
Production	22 L/Hr	22 L/Hr
Refrigeration		
Refrigerant	R 404 A, 1 HP	R 404 A, 1 HP
Cooling Type	Air-cooled	Air-cooled
Dimensions in mm		
W x D x H	540 x 785 x 800	540 x 720 x 1360
Weight		
Net	115 kg	130 kg

Juice Dispenser



JD LJH 8x2

Features

- Food-grade polycarbonate (PC) bowls
- Intelligent temperature control
- Stainless evaporator, built-in copper coil
- New appearance, novel and generous
- Super cooling

Model	Capacity (ltrs)	Dimension (WxDxH) mm	Power Watts	Energy Consumption	Weight (kg)
JD LP 8x2	8x2	290 x 400 x 680	230	1.6 A	24
JD LJH 16x2	16x2	340 x 485 x 635	260	2.0 A	25

Power : 220v/50Hz

Juice Dispenser



JD LJH 20

Features

- Food-grade polycarbonate (PC) bowl
- Intelligent temperature control
- Stainless evaporator, built-in copper coil
- New appearance, novel and generous
- Super cooling
- Rotating cooling

Model	Capacity (ltrs)	Dimension (WxDxH) mm	Power Watts	Energy Consumption	Weight (kg)
JD LJH 20	20	372 x 412 x 724	180	2.0 A	21

Power : 220v/50Hz

Mini Bar & Mini Fridge

Elanpro Minibars are designed keeping in mind the room aesthetics and noise less cooling performance for your discerning guest.


RB 41G


RF 60G


RF 55


RB 31

Key Features - Minibar (RB Series)

- Ammonia refrigerant
- Very low energy consumption
- Silent operation
- Largest range to choose from
  - Sizes : 15 to 60 ltrs
  - Colour : Black, (Brown, & White) (MOQ 200 nos.)
  - Design : Deluxe with solid door & Glass door
  - Designed to perform at 27°C

Key Features - Mini Fridge (RF Series)

- CFC free, R 600a refrigerant
- Low energy consumption and noise
- Available in elegant white colour
- Lock (Optional)
- Designed to perform at 35°C


RF 55


RB 41


RF 61

Model	RB 31	RB 31G	RB 41	RB 41G	RF 55	RF 61	RF 60G
Door Option	Solid	Glass	Solid	Glass	Solid	Solid	Glass
Capacity Ltrs.	30	30	40	40	50	50	50
Input Power (W)	65	65	65	75	80	80	80
Energy Consumption (Kwh)	0.75	0.75	0.8	0.85	1.05	1.05	1.1
Temperature	2°C ~ 10°C						
Dimension (WxDxH)	16 x 17 x 20	16 x 17 x 20	16 x 18 x 22	16 x 18 x 22	19 x 20 x 21	18 x 19 x 24	20 x 18 x 21
Container (20/40 HC)	240/620	240/620	206/484	206/484	220/575	220/575	220/575

Note : Specifications, features and colours are subject to change without any notice, due to continuous product development. Certifications CE/CB/UL

Retail Solutions - Special Products

Elanpro is pioneer in POS coolers which comprises of counter top coolers & freezers, Can coolers, Check out coolers as well as chocolate coolers. Elanpro coolers are very widely used by top brands like Pepsi, Bisleri, Urjja, XXX, Bacardi, Redler, Sting, Nescafe, Baskin robbins among others.


ECG 85



ECG 66


RF 60 G


ECG 105

Aesthically designed to enhance your display


ECG 26



SC 60



SD 450

For more options and technical details, ask for detailed catalogue.

Product	Counter Top Showcase/Cooler/Freezer/Can Coolers						
Model	ECG 26	ECG 66	ECG 85	ECG 105	SC 60	SD 450	RF 60G
Dim. (WxDxH) Inch	13 x 14 x 24	16 x 16 x 29	19 x 20 x 32	19 x 21 x 32	18 x 18 x 37	47 x 31 x 48	20 x 18 x 21
Diameter	NA	NA	NA	NA	18	NA	NA
Capacity	26	60	85	105	60	450	50
Temperature range	1°C ~ 8°C				1°C ~ 10°C	-18°C	2°C ~ 10°C
Ambient	35°C	35°C	35°C	35°C	32°C	30°C	35°C
No. of 330ml cans	24	78	105	NA	60	NA	NA
Input Power Watts	76	120	120	120	129	465	76

Electricals : 220V, 50Hz, Single phase specifications, features and colours are subject to change without any notice, due to continuous product development.

Supermarket

Elanpro brings to India most advanced merchandising solution with innovative cooling options applicable for large hyper mart, super marts as well as modern day kirana stores. Leading brands like Big Bazar, Easy day, Nilgiri, More, CCD essential patronise on Elanpro solution for their display and merchandising application.



ABSS 220 - Multi Deck



Plug-in Multi Deck
SF 100 / 125 / 188 / 250



Remote Multi Deck
RF 188 / 250 / 375



Plug-in Multi Door - Freezer & Chiller
SL2D 131 / SL3D 197 / SL3D 210
SM2D 123 / SM3D 183 / SM4D 245



Remote Multi Door - Freezer & Chiller
RL2D 156 / RL3D 234 / RL4D 312 / RL5D 390
RL2D 123 / RL3D 183 / RL4D 245
RM2D 123 / RM3D 183 / RM4D 245



SCS 125/SCS 188
Serve Over



SPS 125/SPS 188
Serve Over

Available in a very wide range with various sizes to suit all applications. Our range includes:

1. Multi Door Freezer and Chiller with Plug in and remote unit.
2. Multi deck Chiller with Plug in and remote unit.
3. Serve Over counter
4. Fish display counter

Key Features

- Low energy consumption
- Designed for Indian condition
- LED Display
- Digital controller with display
- Night curtain in all open units
- High performing refrigeration system
- R404a refrigerant
- Lock in all with door

DESCRIPTION	SF 100	SF 125	SF 188	SF 250	RF 188	RF 250	RF 375	RF 93	RF 125	RF 188	RF 250	SL2D 131	SL3D 197	SL3D 210	SM2D 123	SM3D 183	SM4D 245	RL2D 156	RL3D 234	RL4D 312	RL5D 390	RL2D 123	RL3D 183	RL4D 245	RM2D 123	RM3D 183	RM4D 245	ABSS 220	SPS 125	SPS 188	SCS 125	SCS 188
Type	**Plug-in Multi Deck**				**Remote Multi Deck (Regular)**			**Remote Multi Deck (Slim)**				**Plug-in Multi Door - Freezer & Chiller**						**Remote Multi Door - Freezer & Chiller**										**Multi Deck**	**Serve Over**			
Capacity (Litres)	510	680	1000	1400	1550	2100	3000	520	700	1100	1400	750	1100	1550	750	1100	1550	1400	2100	2800	3500	850	1300	1750	850	1300	1750	NA	238	358	238	358
Dimension (W) mm	937	1250	1875	2500	1875	2500	3750	937	1250	1875	2500	1310	1970	2100	1230	1835	2450	1560	2340	3120	3900	1230	1835	2450	1230	1835	2450	600	1250	1875	1250	1875
Dimension (DxH) mm	770 x 1930				950 x 2000			770 x 2000				770 x 2000						950 x 2000				760 x 2000						500 x 1880	1180 x 885		1180 x 1200	
Temperature range - °C	2°C ~ 8°C											≤-18°C			2°C ~ 7°C			≤-18°C							2°C ~ 7°C			2°C ~ 8°C	1°C ~ 5°C			

Electricals : 220V, 50Hz, Single phase specifications, features and colours are subject to change without any notice, due to continuous product development.

30°C ambient temperature / 55% RH

Retail Solutions - Showcase Freezers

Elanpro Flat & Curved Glass Freezers are known for their performance, aesthetics and low power consumption. All curved glass models are available with LED light or Illuminate Canopy with full basket, while Flat glass come with high insulation, standard basket and are designed to perform at high ambient.

Premium Series

Classic Series

Illuminated canopy



EKG 155 DC/215 DC

LED inside

Key Features

- High performing cooling systems
- High insulations
- Low power consumptions
- Heavy duty castors



EKG 305/405/505



EKG 235/335



EKG 625 DL



EKG 650



EKG 435/535

DESCRIPTION	EKG 155DC	EKG 215DC	EKG 310DL	EKG 315DL	EKG 410DL	EKG 415DL	EKG 625DL	EKG 205	EKG 305	EKG 405	EKG 505	EKG 650	EKG 235	EKG 335	EKG 435	EKG 535
Type	**Curve Glass Top Freezer**							**Flat Glass Top Freezer**					**Flat Glass Top Freezer**			
Capacity (Litres)	155	205	310	300	410	400	625	200	300	400	500	650	214	319	423	528
External Dim. (Inch)																
Width	24	30	39	41	48	48	71	37	40	48	56	71	32	44	55	66
Depth	26	26	26	27	26	27	27	23	27	27	27	27	27	27	27	27
Height	36	33	33	36	33	36	32	33	33	33	33	33	31	31	31	31
Baskets	2	2	4	4	5	5	9	2	2	2	2	9	2	2	2	2
No. of Door/Type	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass	2/Glass
Temperature range - ^{0}C	-16^{0}C ~ -24^{0}C															
Castors	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Note : Specifications, features and colours are subject to change without any notice, due to continuous product development.

EKG 315 and EKG 415 have high density thickness of 82mm.

Retail Solutions

Presenting Chest Freezers and Chillers with Dual Temperature.

The exciting range of Chest Freezers / Chillers to meet your requirements from 100 ltrs. to 700 ltrs.

Classic Series



EF 735TD

Key Features

- Low power consumption
- High insulation
- Castors for easy mobility
- Dual temperature – convertible Freezer & Chiller



EF 435DD/535DD

DESCRIPTION	EF 135	EF 235	EF 335SD/ 335DD	EF 435DD	EF 535DD	EF 735	EF 415 Combi
Type	**Hart Top Chest Freezer cum Chiller**						
Capacity (Litres)	100	218	322	428	534	700	183F + 218C
External Dim. (Inch)							
Width	22	32	44	55	66	83	55
Depth	24	28	28	28	28	28	28
Height	31	33	34	34	34	34	34
Baskets	1	1	1	2	2	3	2
No. of Door	1	1	1 / 2	2	2	3	2
Temperature range - ^{0}C	8^{0}C ~ -25^{0}C						
Castors	No	Yes	Yes	Yes	Yes	Yes	Yes
Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Note : Specifications, features and colours are subject to change without any notice, due to continuous product development.

Retail Solutions

Premium Series

Elanpro convertible hard top chest freezers conveniently double up as chillers and freezer with the help of a knob and are available in a very pleasing white and grey shades in sizes ranging from 110 to 825 litres to suit every need. You can also choose between single, double and three lid variants.



EF 206



EF 305

Key Features

- Low power consumption
- High insulation
- Castors for easy mobility
- Dual temperature – convertible Freezer & Chiller



EF 452/455/552/555

DESCRIPTION	EF 106	EF 206	EF 305	EF 452	EF 455	EF 552	EF 555	EF 825
Type	**Hart Top Chest Freezer cum Chiller**							
Capacity (Litres)	110	227	300	450	410	550	550	825
External Dim. (Inch)								
Width	23	35	43	50	52	60	65	95
Depth	25	27	26	30	27	30	27	27
Height	34	35	35	33	33	33	33	33
Baskets Qty.	1	1	2	1	2	1	2	3
No. of Door	1	1	1	2	2	2	2	3
Temperature range - ^{0}C	8^{0}C ~ -25^{0}C							
Castors	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Note : Specifications, features and colours are subject to change without any notice, due to continuous product development.

Upright Showcase Chiller & Freezer (Frost Free & Static)


ECG 215/315/415/515


ECG 775


ECG 1075


ECG 1500



EFGV 1075


EFGV 500


EFGV 375




ECG 406

DESCRIPTION	ECG 205	ECG 215	ECG 306	ECG 315	ECG 406	ECG 415	ECG 455	ECG 515	ECG 706	ECG 775	ECG 1055	ECG 1075	ECG 1500	EFGV 205	EFGV 375	EFGV 455	EFGV 500	EFGV 1055	EFGV 1075	EFGV 1500
Type	Upright Chiller													Upright Freezer #						
Capacity (Litres)	200	200	300	305	400	405	400	515	700	700	950	1000	1500	200	375	450	500	1050	950	1500
External Dim. (Inches)																				
Width	20	20	22	21	24	27	23	27	39	41	44	48	81	18	23	24	27	46	48	81
Depth	21	21	25	23	26	23	24	27	23	25	26	28	28	24	24	28	28	35	28	28
Height	60	61	68	78	74	78	78	79	77	80	81	80	78	71	80	81	80	81	80	78
Shelves	3	3	4	4	4	4	5	4	8	8	10	8	15	10	4	5	4	10	8	15
No. of Door/Type	1/Glass	1/Glass	1/Glass	1/Glass	1/Glass	1/Glass	1/Glass	1/Glass	2/Glass	2/Glass	2/Glass	2/Glass	3/Glass	1/Glass	1/Glass	1/Glass	1/Glass	2/Glass	2/Glass	3/Glass
Temperature range-°C	1°C ~ 10°C													-16°C ~ -24°C						
Castors	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Electricals : 220V, 50Hz, Single phase specifications, features and colours are subject to change without any notice, due to continuous product development.

At 32°C ambient


EFGV 205

ELANPRO®
The Commercial Refrigeration Experts

iCOLD™ Cold Room

thingif(y) Cold Chain Monitoring

Customer Care : +91-88823 02532 ▪ Email : care@elanpro.net
Email : enquiry@elanpro.net ▪ Website : www.elanpro.net
E-Waste Helpline : 1800 258 2550, e-waste@elnapro.net

SCAN TO CONNECT: 8010803166

Authorised Distributor

April 2022