

# BioStar X API (1.0.0)

Download OpenAPI specification: [Download](#)

Suprema Inc.: [CS@suprema.co.kr](mailto:CS@suprema.co.kr) | URL: <https://www.supremainc.com>

## Overview

Suprema BioStar X API is a JSON-based API. All requests are made to endpoints beginning with [https://server\\_ip|domain\\_name\[:port\]/api](https://server_ip|domain_name[:port]/api)

The API can be used to perform almost any operation. Following are a few examples of what can be done with Suprema BioStar X API:

- Manage User data
- Manage Access Group data
- Manage Doors data
- Assign an Access Group to one or multiple User
- Assign a User with one or multiple Access Group
- Manage Devices
- And many more...

All requests must be secure (https).

## General Information

To call the API, BioStar X is mainly using HTTP Methods `GET`, `POST`, `PUT`, and `DELETE`.

- `GET` is used to retrieve data from the server at the specified resource. For example, if you want to retrieve the User data with /users endpoint, then by making a `GET` request to the endpoint should result with the list of all available users.

- **POST** request is used to send data to the server to create or a resource. The data sent to the server is stored on the body of the HTTP request.
- **PUT** is similar to **POST** in that it creates or s a resource. The difference between them is that when calling the same **PUT** requests multiple times it will have the same result. While calling a **POST** request repeatedly will create the same resource multiple times.
- **DELETE** is used to delete resources at the specified endpoint.

There are four parameter location that's being used on Suprema BioStar X API:

- **PATH** parameter is located on the URL, usually on the end of an endpoint. For example in `/items/{ItemID}`, the **PATH** parameter is `ItemID`.
- **BODY**. An array of string values will be located on the **BODY** of the HTTP request. The request body needs to be in JSON format.
- **QUERY**. Similar to the **PATH** parameter, **QUERY** parameter is also located on the URL, the difference is **QUERY** parameter will be located after a question mark. Example: `/items?id=###`, the **QUERY** parameter is `id`.
- **HEADER**. Custom headers that are expected as part of the request.

Path templating refers to the usage of template expressions, delimited by curly braces (`{}`), to mark a section of a URL path as replaceable using path parameters.


Example: [https://127.0.0.1:4433/api/some\\_api/{id}](https://127.0.0.1:4433/api/some_api/{id})

Above example shows that the required value will be placed on `{id}`

## Import the Postman collection

To import the Postman collection online, follow these steps:

1. Click the **Download** button at the top of this page to download the OpenAPI specification file( `bsxapi.yaml` ).
2. Go to [Postman](#) and sign in.
3. Select your workspace from the workspace selector in the top left. Or create a workspace if you don't have one.
4. Click **Import** in the sidebar.
5. Select downloaded file, or drag the file into the import window.

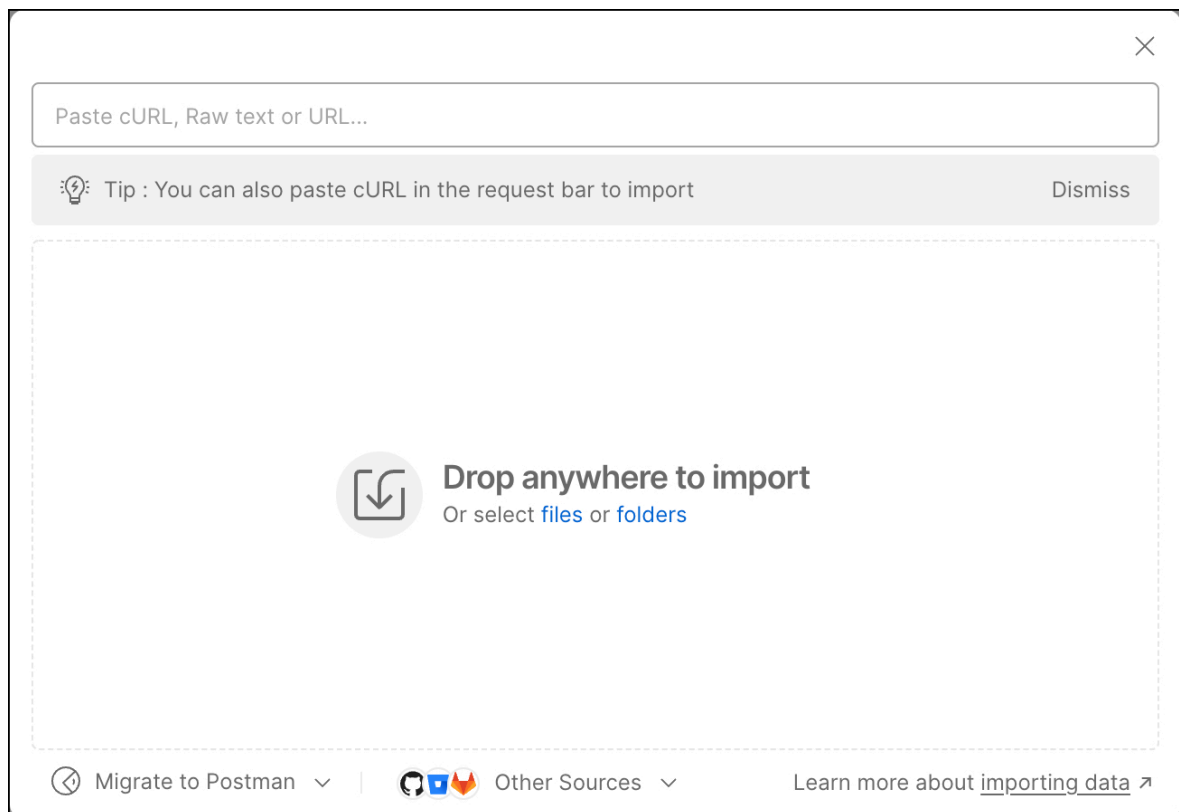

6. Click **Import** to complete the process.

## Release Notes

**2025-09-30**

- Initial version

## Authorization

### Login

In order to create User through Suprema BioStar X API, you will need a Session ID which will be available after you're logged in.

To log in, make a form encoded server side POST request as shown on example right. There will be a key called bs-session-id, which is a consecutive strings of hex

digits located on the header of the response:

```
bs-session-id: 643f64efb7114485a2fd89de17ca13fb
```

This value will be used as authorization of the APIs that will be called. To apply this value, put it on the header of the API that will be called with key name `bs-session-id`.

REQUEST BODY SCHEMA: application/json

---

User ▾ object

---

login\_id string  
Your login ID.

---

password string  
Your password.

---

## Responses

> **200** Successful response

POST /api/login

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3



Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "User": {
    "login_id": "admin",
    "password": "admin"
  }
}
```

Response samples

200

Content type  
application/json

Copy Expand all Collapse all

```

{
  - "User": {
    "user_id": "1",
    "name": "Administrator",
    "gender": "1",
    "email": "admin111@gmail.com",
    "birthday": "1977-10-08T04:00:00.00Z",
    "photo_exists": "false",
    "pin_exists": "false",
    "login_id": "admin",
    "password_exists": "true",
    "d_count": "15",
    "last_modified": "946",
    "idx_last_modified": "263",
    "start_datetime": "2001-01-01T00:00:00.00Z",
    "expiry_datetime": "2030-12-31T23:59:00.00Z",
    "security_level": "0",
    "display_duration": "20",
    "display_count": "3",
    + "permission": { ... },
    "inherited": "false",
    + "user_group_id": { ... },
    "disabled": "false",
    "expired": "false",
    "department": "department 12",
    "user_title": "title",
    "idx_user_id": "1001",
    "idx_user_id_num": "1001",
    "idx_name": "2001",
    "idx_phone": "1001",
    "idx_email": "5001",
    "fingerprint_template_count": "0",
    "face_count": "0",
    "card_count": "0",
    + "access_groups": [ ... ],
    + "user_custom_fields": [ ... ],
    "need_to__pw": "false"
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success"
  }
}
}

```

## Logout

This API is used to Logout from the current session. There are no body parameter on this endpoint. It is required to have `bs-session-id` key on the header, the value generated on successful login. **Known errors:**

- Placing "/" at the end of the endpoint

AUTHORIZATIONS: > *SessionAuth*

## Responses

> 200 OK

POST /api/logout

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request POST \  
  --url https://{baseurl}/api/logout \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{  
  - "Response": {  
    "code": "0",  
    "link": "https://support.supremainc.com/en/support/home",  
    "message": "Success"  
  }  
}
```

## Access Group

This section contains all API related to Access Group (AG)

### Create New Access Group

This request is used to make a new Access Group (AG).

**Note:** If BioStar X does not have license for Elevator module, skip the floor\_levels parameter or set it to an empty string.

Known errors:

- Placing "/" at the end of the endpoint - `name` is a required and unique parameter

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
required

|                                        |                                                          |
|----------------------------------------|----------------------------------------------------------|
| AccessGroup <span>▼</span><br>required | object                                                   |
| name<br>required                       | string<br>The name of the AG. Must be unique             |
| description                            | string<br>AG's description                               |
| users >                                | Array of objects<br>List of user(s) id of the AG         |
| user_groups >                          | Array of objects<br>List of user group(s) id of the AG   |
| access_levels >                        | Array of objects<br>List of access level(s) id of the AG |
| floor_levels >                         | Array of objects<br>List of floor level(s) id of the AG  |

Responses

> 200 OK

POST /api/access\_groups

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "AccessGroup": {
    "name": "ac_grp2",
    "description": "",
    + "users": [ ... ],
    + "user_groups": [ ... ],
    + "access_levels": [ ... ],
    + "floor_levels": [ ... ]
  }
}
```

Response samples

200

**Content type**

application/json

Copy Expand all Collapse all

```
{
  - "AccessGroup": {
    "id": "14",
    "name": "Test1"
  },
  - "DeviceResponse": {
    + "rows": [ ... ],
    "result": "true"
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success"
  }
}
```

## List All Access Group

This API is used to view all available Access Groups.

By default the result will be sorted ascending by `id`.

AUTHORIZATIONS: > *SessionAuth*

## Responses

> 200 OK

GET /api/access\_groups

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
--url https://{baseurl}/api/access_groups \
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "AccessGroupCollection": {
    "total": "3",
    + "rows": [ ... ]
  },
}
```



```
- "Response": {  
  "code": "0",  
  "link": "https://support.supremainc.com/en/support/home",  
  "message": "Success"  
}
```

---

## Delete an Access Group

Delete an Access Group specified by the **id** query parameter.

**Note:** The id parameter is required and must be a valid access group ID.

To get an Access Group's id, you can use `GET /api/access_groups` to view all available Access Groups.

### Known errors:

- Using id which doesn't exist - Using value other than number

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

---

|                                      |                    |
|--------------------------------------|--------------------|
| id                                   | string             |
| required                             |                    |
| Example:                             | <code>id=12</code> |
| ID of the Access Group to be deleted |                    |

---

## Responses

> 200 OK

DELETE /api/access\_groups

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \
--url 'https://{baseUrl}/api/access_groups?id=12' \
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

200

Content type  
application/json

Copy   Expand all   Collapse all

```
{
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success"
  }
}
```

# List All Access Group v2

This API is used to see all Access Groups. It provides more concise response rather than the previous ( `GET /api/access_groups` ) and parameters to filter the response.

## Known errors:

- Empty body
- Input other than number on limit parameter
- Input without key:value pair (name:val or id:val) on order\_by parameter

## Changes:

- v2.9.9:

Trailing slashes (/) at the end of this endpoint are no longer supported.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
**required**

limit  
**required**

integer

To limit result by n record(s), 0 to show all

order\_by  
**required**

string `^(name|id):(true|false)$`

To order result(s) by `name` or `id` . Format - field:direction  
(false=ascending, true=descending)

## Responses

> **200 OK**

POST `/api/v2/access_groups/search`

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{
  "limit": 0,
  "order_by": "id:false"
}
```

Response samples

200

Content type  
application/json

Copy   Expand all   Collapse all

```
{
  - "AccessGroupCollection": {
    "total": 3,
    + "rows": [ ... ]
  },
}
```

```
- "Response": {  
  "code": "0",  
  "link": "https://support.supremainc.com/en/support/home",  
  "message": "Success"  
}
```

---

## View an Access Group

To view an Access Group with id {id} or :id {id} or :id are markers for replacing with the required value.

### Known errors:

- Using id which doesn't exist
- Using value other than number
- Placing "/" at the end of the endpoint

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

---

|                                    |                                |
|------------------------------------|--------------------------------|
| id                                 | integer                        |
| <b>required</b>                    |                                |
| Example:                           | <input type="text" value="1"/> |
| ID of the Access Group to retrieve |                                |

---

## Responses

> **200 OK**

GET /api/access\_groups/{id}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
--url https://{baseurl}/api/access_groups/1 \
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

200

Content type  
application/json

Example  
Basic Access Group

Copy   Expand all   Collapse all

```
{
  - "AccessGroup": {
    "id": "1",
    "name": "Administrative",
    "description": "Administrative access group",
    + "users": [ ... ],
    "user_count": "2",
    + "user_groups": [ ... ],
    + "access_levels": [ ... ]
  },
}
```

```
- "Response": {  
  "code": "0",  
  "link": "https://support.supremainc.com/en/support/home",  
  "message": "Success"  
}
```

---

## Update an Access Group

Update an existing Access Group by replacing it with new data.

### Notes:

- To add/delete multiple, repeat the braces (see users example)
- When you add/update data, it will remove any previous data and add the one that you input.

Ex: If parameter description have value, and on update this parameter value is left empty, then the previous value will be removed.

- To skip a record from updating, either skip the parameter or fill the current data on the update field.
- When updating an AG, parameter `user_group` need to be filled if existing User Group want to be retained. If this parameter is left empty, the existing User Group(s) in the AG that should be still there will not be there.

### Known Errors:

- Repeating the same value on parameter with multiple options

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

---

`id`  
required

integer

Example: `1`

ID of the Access Group which will be updated

---

REQUEST BODY SCHEMA: `application/json`  
required

---

AccessGroup   
**required**

object (AccessGroupUpdate)

|                                |                                                                                                     |
|--------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>name</b><br><b>required</b> | string<br>The name of the Access Group. Must be unique                                              |
| description                    | string<br>Access Group description                                                                  |
| users >                        | Array of objects<br>Current list of user IDs for the Access Group (replaces existing users)         |
| user_groups >                  | Array of objects<br>List of user group IDs for the Access Group (replaces existing user groups)     |
| access_levels >                | Array of objects<br>List of access level IDs for the Access Group (replaces existing access levels) |
| floor_levels >                 | Array of objects<br>List of floor level IDs for the Access Group (replaces existing floor levels)   |
| new_users >                    | Array of objects<br>List of user IDs to add to the Access Group                                     |
| delete_users >                 | Array of objects<br>List of user IDs to remove from the Access Group                                |

## Responses



> 200 OK

PUT /api/access\_groups/{id}

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "AccessGroup": {
    "name": "Meeting Room Name",
    "description": "MR Description",
    + "access_levels": [ ... ],
    + "user_groups": [ ... ],
    + "users": [ ... ],
    + "new_users": [ ... ],
    + "delete_users": [ ... ]
  }
}
```

Response samples

**200**

Content type

application/json

Copy Expand all Collapse all

```
{
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success"
  }
}
```

## View List of Users from an Access Group

To view user information only from AG with id {id} **Known errors:**

- Using id which doesn't exist will return success but show no record
- Using value other than number
- Placing "/" at the end of the endpoint

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

id  
required

integer

Example:

ID of the Access Group to retrieve users from

## Responses

> 200 OK

GET /api/access\_groups/{id}/users

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/access_groups/1/users \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Copy Expand all Collapse all

```
{  
  - "UserCollection": {  
    "total": "3",  
    + "rows": [ ... ]  
  },  
}
```

```
- "Response": {  
  "code": "0",  
  "link": "https://support.supremainc.com/en/support/home",  
  "message": "Success"  
}
```

---

## Access Level

This section contains all API related to Access Level (AL)

### Create New Access Level

Create a new Access Level (AL) with doors and schedule configuration.

#### Important Notes:

- Access level items link doors with schedules
- Multiple doors can be assigned to the same schedule
- Each door can only appear once in the access level items

#### Known errors:

- Placing "/" at the end of the endpoint
- `name` is a required and unique parameter
- Duplicate id on doors instance

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

**required**

AccessLevel   
**required**

object (AccessLevelInput)

---

|                      |                                                                            |
|----------------------|----------------------------------------------------------------------------|
| name<br>required     | string<br>The name of the Access Level. Must be unique                     |
| description          | string<br>Access Level description                                         |
| access_level_items > | Array of objects<br>Array of access level items linking doors to schedules |

Responses

— 200 Access Level created successfully

POST /api/access\_levels

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

**Content type**

application/json

Copy Expand all Collapse all

```
{
  - "AccessLevel": {
    "name": "Access Level Name",
    "description": "Access Level Description",
    + "access_level_items": [ ... ]
  }
}
```

## View All Access Level

This request is used to view all Access Level (AL)

The parameter type is QUERY.

**Known errors:**

- Duplicate id on doors instance

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

limit

integer

Example: 

Limit response record(s) by the amount specified on this parameter. 0 for show all.

offset

integer

Shift response record(s) by the amount specified on this parameter. default value = 0

order\_by

string

Example: `order_by=id:false`

Order the response record(s)

---

# Responses

— 200 Successful response

GET /api/access\_levels

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url 'https://{baseurl}/api/access_levels?limit=50&offset=0&order_by=id%3Afalse' \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Update an Access Level

This request is used to update an Access Level (AL)

## Known errors:

- Placing "/" at the end of the endpoint
- `name` is a required and unique parameter
- Duplicate id on doors instance

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

---

`id`  
**required** integer  
Example: `41`  
ID of the AL that will be updated

---

## REQUEST BODY SCHEMA: application/json

---

`access_level_items` ∨ Array of objects  
Array of access level items linking doors to schedules

---

Array [

`id` integer  
ID of the access level item (for existing items)

---

`doors` > Array of objects  
Array of door objects

---

`schedule_id` > object  
Schedule object

---

]



# Responses

— 200 Successful response

PUT /api/access\_levels/{id}

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "AccessLevel": {
    "name": "Test Update",
    "description": "Update",
    + "access_level_items": [ ... ]
  }
}
```

# Delete an Access Level

This request is used to delete an existing Access Level (AL)

## Known errors:

- Placing "/" at the end of the endpoint
- Value other than number on PATH variable
- Non-existent record id on PATH variable will return success but no action.

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

---

id integer  
**required**  
Example:   
ID of the AL that will be deleted

---

## Responses

— 200 Successful response

DELETE /api/access\_levels/{id}

## Request samples

|                    |                     |                  |                  |
|--------------------|---------------------|------------------|------------------|
| Shell + Curl       | Shell + Httpie      | Shell + Wget     | Node + Native    |
| Node + Request     | Node + Unirest      | Node + Axios     | Node + Fetch     |
| Javascript + Fetch | Javascript + Jquery | Javascript + Xhr | Python + Python3 |
| Python + Requests  | Ruby + Native       | Php + Curl       | Php + Http1      |

|                     |                         |                         |             |             |
|---------------------|-------------------------|-------------------------|-------------|-------------|
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |             |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |             |             |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |             |             |

Copy

```
curl --request DELETE \  
  --url https://{baseurl}/api/access_levels/12 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Backup

## View Backup Configuration

This API is used to view BioStar X Backup configuration.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— **200** Successful response

GET /api/v2/setting/getBackupDbConfig

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url https://{baseurl}/api/v2/setting/getBackupDbConfig \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Check Running Schedule

This API is used to check if there's any running backup process.

Message response will be `True` if there's any, and `False` if there's no running backup process.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/v2/setting/checkBackupScheduler

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
--url https://{baseurl}/api/v2/setting/checkBackupScheduler \
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Update Backup Configuration

This API is used to modify BioStar X backup configuration.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json  
required

use  
required

string

Enum: 

"true"

"false"

Toggle to enable/disable scheduled backup

|                    |                                                                                                                                         |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| cycle<br>required  | string <code>^([1-9] [1-9][0-9] 100)\$</code><br>Number of backup files to keep (1 to 100)                                              |
| path<br>required   | string<br>Backup folder path (must exist)                                                                                               |
| minute<br>required | string <code>^([0-9] [1-5][0-9])\$</code><br>Minute value for scheduled backup (0 to 59)                                                |
| hour<br>required   | string <code>^([0-9] 1[0-9] 2[0-3])\$</code><br>Hour value for scheduled backup (0 to 23)                                               |
| days<br>required   | string<br>Date value for scheduled backup                                                                                               |
| month<br>required  | string<br>Month value for Scheduled Backup. Leave it as * since currently it only support Daily and Weekly.                             |
| weeks<br>required  | string<br>Day value for Scheduled Backup. Used when it's configured as Weekly Backup. (mon tue wed thu fri sat sun, default value is ?) |
| userId<br>required | string<br>User ID of the user who modifies the configuration                                                                            |

## Responses

— 200 Successful response

POST /api/v2/setting/modifyBackupDbConfig

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{
  "use": "true",
  "cycle": "10",
  "path": "C:\\\\Backup",
  "minute": "12",
  "hour": "0",
  "days": "*",
  "month": "*",
  "weeks": "?",
  "userId": "1"
}
```

## Run Backup

This API is used to run Backup process.

It is required to have BODY parameters when running this API. Use `GET /api/v2/setting/getBackupDbConfig` for BODY payload.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|        |                                                                                                                                         |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------|
| use    | string<br>Enum: <input type="checkbox"/> "true" <input type="checkbox"/> "false"<br>Toggle to enable/disable scheduled backup           |
| cycle  | string <code>^([1-9] [1-9][0-9] 100)\$</code><br>Number of backup files to keep (1 to 100)                                              |
| path   | string<br>Backup folder path (must exist)                                                                                               |
| minute | string <code>^[0-9] [1-5][0-9]\$</code><br>Minute value for scheduled backup (0 to 59)                                                  |
| hour   | string <code>^[0-9] 1[0-9] 2[0-3]\$</code><br>Hour value for scheduled backup (0 to 23)                                                 |
| days   | string<br>Date value for scheduled backup                                                                                               |
| month  | string<br>Month value for Scheduled Backup. Leave it as * since currently it only support Daily and Weekly.                             |
| weeks  | string<br>Day value for Scheduled Backup. Used when it's configured as Weekly Backup. (mon tue wed thu fri sat sun, default value is ?) |

Responses

— 200 Successful response



POST /api/v2/setting/backupNow

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{
  "use": "false",
  "cycle": "5",
  "path": "C:\\Program Files\\BioStar 2(x64)\\Backup",
  "minute": "0",
  "hour": "0",
  "days": "*",
  "month": "*",
  "weeks": "*"
}
```

Cards

# Update Wiegand Formats

It is possible to use a custom wiegand format. To create a custom format, you can edit the provided formats which is between id number 5 to 14.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

|          |         |                                                                           |
|----------|---------|---------------------------------------------------------------------------|
| id       | integer | [ 5 .. 14 ]                                                               |
| required |         | ID of the wiegand format which will be updated (5-14 for custom formats). |

---

REQUEST BODY SCHEMA: application/json  
required

---

|                   |                                                            |
|-------------------|------------------------------------------------------------|
| WiegandFormat     | object                                                     |
| id                | string<br>ID of the Wiegand format                         |
| name              | string<br>Name of the Wiegand format                       |
| description       | string<br>Description of the Wiegand format                |
| length            | integer<br>Total bits of the card                          |
| use_facility_code | boolean<br>Enum: true false<br>Toggle to use facility code |
| id_fields         | Array of strings <base64> [ items <base64 > ]              |

|                  |                                                                                                                        |
|------------------|------------------------------------------------------------------------------------------------------------------------|
|                  | Encoded input of the ID bits. Facility code will also be placed here                                                   |
| parity_fields    | Array of strings <base64> [ items <base64> ]<br>Encoded input of the parity bits                                       |
| parity_types     | Array of integers<br>Items Enum: <input type="checkbox"/> 1 <input type="checkbox"/> 2<br>Parity types (1=Odd, 2=Even) |
| parity_positions | Array of integers<br>Position of the parity bits. Put it on the same sequence as parity_types                          |

## Responses

— 200 Successful response

PUT /api/cards/wiegand\_formats/{id}

## Request samples

|                     |                      |                    |                  |               |
|---------------------|----------------------|--------------------|------------------|---------------|
| Payload             | Shell + Curl         | Shell + Httpie     | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest       | Node + Axios       | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery  | Javascript + Xhr   | Python + Python3 |               |
| Python + Requests   | Ruby + Native        | Php + Curl         | Php + Http1      |               |
| Php + Http2         | Java + Okhttp        | Java + Unirest     | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession | Csharp + Restsharp |                  |               |

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "WiegandFormat": {
    "id": "5",
    "name": "Custom Format",
    "description": "Custom Wiegand format description",
    "length": 32,
    "use_facility_code": true,
    + "id_fields": [ ... ],
    + "parity_fields": [ ... ],
    + "parity_types": [ ... ],
    + "parity_positions": [ ... ]
  }
}
```

# View Wiegand Format Detail

This API is used to view a wiegand format detail.

AUTHORIZATIONS: > SessionAuth

## PATH PARAMETERS

id  
required

integer

Example: 1

## Responses

— 200 Successful response

GET /api/cards/wiegand\_formats/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
--url https://{baseurl}/api/cards/wiegand_formats/1 \
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Delete Smart Card Layout

This API is used to delete smart card layout from BioStar X.

AUTHORIZATIONS: > SessionAuth

QUERY PARAMETERS

id

string

Responses

— 200 Successful response

DELETE /api/cards/layouts

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \
--url 'https://{baseurl}/api/cards/layouts?id=SOME_STRING_VALUE' \
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

View Smart Cards Layout

This API is used to view all available smart card layouts.

AUTHORIZATIONS: > *SessionAuth*

## QUERY PARAMETERS

---

limit

string

Example: `limit=null`

Limit the number of responses by n records. Remove this parameter to view all.

---

offset

string

Example: `offset=null`

Offset the response shown by n records.

---

## Responses

— 200 Successful response

GET /api/cards/layouts

## Request samples

|                     |                      |                    |                  |             |
|---------------------|----------------------|--------------------|------------------|-------------|
| Shell + Curl        | Shell + Httpie       | Shell + Wget       | Node + Native    |             |
| Node + Request      | Node + Unirest       | Node + Axios       | Node + Fetch     |             |
| Javascript + Fetch  | Javascript + JQuery  | Javascript + Xhr   | Python + Python3 |             |
| Python + Requests   | Ruby + Native        | Php + Curl         | Php + Http1      |             |
| Php + Http2         | Java + Okhttp        | Java + Unirest     | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession | Csharp + Restsharp |                  |             |

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url 'https://{baseurl}/api/cards/layouts?limit=null&offset=null' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Create Smart Card Layout

This API is used to create smart card layout.

Fill the corresponding parameter with the card's specification.

If the card uses default configuration, then simply fill the name and run the API.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

object

## Responses

— 200 Successful response

POST /api/cards/layouts

## Request samples



|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type  
application/json

Copy   Expand all   Collapse all

```
{
  - "CardLayout": {
    "name": "smart_test",
    "use_second_key": false,
    "number_of_template": 2,
    "template_size": 300,
    "mifare_primary_key": "",
    "mifare_start_block_index": 4,
    "mifare_second_key": "",
    "iclass_primary_key": "",
    "iclass_second_key": "",
    "iclass_start_block_index": 13,
    "desfire_primary_key": "",
    "desfire_second_key": "",
    "desfire_app_id": 1,
    "desfire_file_id": 1,
    "desfire_encryption_type": 0,
    "desfire_advanced_mode": 0,
    "des_adv_app_master_key_index": 0,
    "des_adv_file_read_access_key_index": 1,
    "des_adv_file_write_access_key_index": 2,
    "seos_primary_key": "",
    "seos_second_key": "",
    "seos_adf": "2A8570811E1000070000020000"
  }
}
```

## View All Card Types

This API is used to view all available card types.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/cards/types

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url https://{baseUrl}/api/cards/types \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Check Card Availability

This API is used to check whether a card already posted on the system or not.

If card already posted, then it will show the card's detail on the response.

AUTHORIZATIONS: > *SessionAuth*

QUERY PARAMETERS

card\_idinteger

Example: card\_id=123

ID of the card which will be checked.

---

## Responses

— 200 Successful response

GET /api/v2/cards/registered

### Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url 'https://{baseurl}/api/v2/cards/registered?card_id=123' \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

# View a Card Detail

This API is used to find a card by card ID and find out who owns the card.

AUTHORIZATIONS: > *SessionAuth*

## QUERY PARAMETERS

---

query      integer

Example: `query=1169166509350528`

ID of the card which will be viewed

---

## Responses

— 200 Successful response

GET    /api/cards

## Request samples

|                     |                      |                    |                  |             |
|---------------------|----------------------|--------------------|------------------|-------------|
| Shell + Curl        | Shell + Httpie       | Shell + Wget       | Node + Native    |             |
| Node + Request      | Node + Unirest       | Node + Axios       | Node + Fetch     |             |
| Javascript + Fetch  | Javascript + Jquery  | Javascript + Xhr   | Python + Python3 |             |
| Python + Requests   | Ruby + Native        | Php + Curl         | Php + Http1      |             |
| Php + Http2         | Java + Okhttp        | Java + Unirest     | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession | Csharp + Restsharp |                  |             |

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url 'https://{baseurl}/api/cards?query=1169166509350528' \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Create BioStar X QR

This API is used to create BioStar X QR. **NOTE:** This API will return error if the card\_id already exists in the database. Use Check [Card Availability](#) API to validate.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
**required**

CardCollection ▾  
**required**

object

rows ▾  
**required**

Array of objects

Array of card objects to create

Array [

card\_type >  
**required**

object

Card type configuration

display\_card\_id

integer

Display card ID shown in the interface

card\_id  
**required**

integer

Input value shown/read when scanning the card.  
Must be unique

]

Responses

— 200 Card created successfully

POST /api/cards

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "CardCollection": {
    + "rows": [ ... ]
  }
}
```



---

## List Unassigned Cards

This API is used to view all unassigned cards recorded on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

---

|                   |                                                                                                                                                                             |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| card_type         | string<br>Example: <code>card_type=csn</code><br>Limit the response to show only the specified type of card.<br>Use plus (+) sign as separator to filter by multiple types. |
| limit             | string<br>Example: <code>limit=null</code><br>Limit the number of responses by n records. Remove this parameter to view all.                                                |
| offset            | string<br>Example: <code>offset=null</code><br>Offset the response shown by n records.                                                                                      |
| wiegand_format_id | integer<br>Example: <code>wiegand_format_id=4</code><br>Limit the response to show only the specified wiegand format. Remove this parameter to show all.                    |

## Responses



— 200 Successful response

GET /api/cards/unassigned

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url 'https://{baseurl}/api/cards/unassigned?card_type=csn&limit=null&offset=null&wiegand_1'  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## List Assigned Cards

This API is used to view all assigned cards recorded on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

QUERY PARAMETERS

|                   |         |                                                                                                                                                                       |
|-------------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| card_type         | string  | Example: <code>card_type=wiegang</code><br>Limit the response to show only the specified type of card.<br>Use plus (+) sign as separator to filter by multiple types. |
| offset            | integer | Offset the response shown by n records.                                                                                                                               |
| wiegand_format_id | string  | Limit the response to show only the specified wiegang format. Remove this parameter to show all.                                                                      |

Responses

— 200 Successful response

GET /api/cards/assigned

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url 'https://{baseurl}/api/cards/assigned?card_type=wiegand&offset=0&wiegand_format_id=' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## List Blacklisted Cards

This API is used to view all blacklisted cards recorded on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS


|        |                                                                                                                               |
|--------|-------------------------------------------------------------------------------------------------------------------------------|
| limit  | integer<br>Example: <code>limit=1000</code><br>Limit the number of responses by n records. Remove this parameter to view all. |
| offset | integer<br>Offset the response shown by n records.                                                                            |

## Responses

— **200** Successful response

GET /api/cards/blacklist

## Request samples

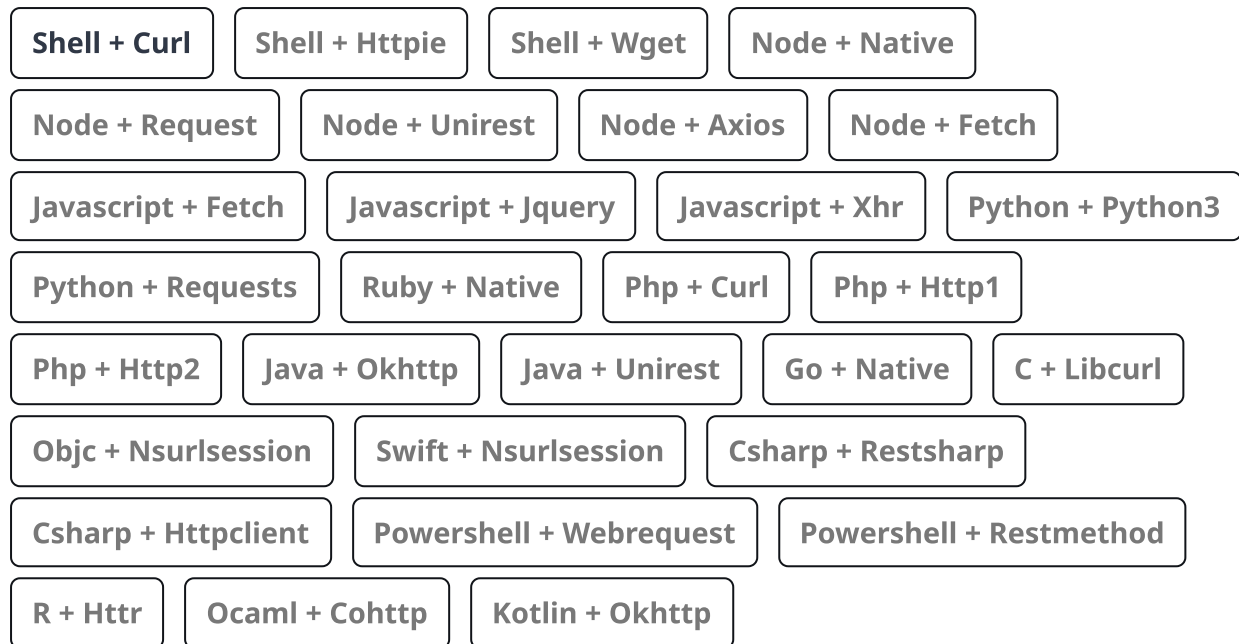

Copy

```
curl --request GET \  
  --url 'https://{baseurl}/api/cards/blacklist?limit=1000&offset=0' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Delete Blacklisted Card

This API is used to remove a blacklisted card from the list.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

id

integer

Example: `id=50`

ID of the blacklisted card which will be removed from the list.

## Responses

— 200 Successful response

DELETE /api/cards/blacklist

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
--url 'https://{baseurl}/api/cards/blacklist?id=50' \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Blacklist Card

This API is used to add a card to blacklist.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json  
required

Blacklist   
required

object

card\_id   
required

object  
Card identifier information

id  
required

integer  
ID of the card which will be added to the blacklist

Responses

— 200 Successful response

POST /api/cards/blacklist

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy Expand all Collapse all

```
{
  - "Blacklist": {
    + "card_id": { ... }
  }
}
```

# View Wiegand Formats

This API is used to view all available wiegand format.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/cards/wiegand\_formats

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch



Copy

```
curl --request GET \  
  --url https://{baseurl}/api/cards/wiegand_formats \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## View a Smart Card Layout Details

This API is used to view a smart card layout details.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

**id**  
**required** integer  
Example:   
ID of the card layout which will be viewed.

## Responses

— **200** Successful response



GET /api/cards/layouts/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/cards/layouts/1 \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Write Card Data

This API is used to create Access on Card and write data to a card (Smart Card, etc.) using the specified device. The device must have a Smart Card layout configured before running this API.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

device\_id  
required

integer

Example: 542353521

ID of the device which will be used to write the card. Do set the Smart Card layout of the device before running this API.

REQUEST BODY SCHEMA: application/json

|                                             |                                                                       |
|---------------------------------------------|-----------------------------------------------------------------------|
| SmartCard <div>▼</div> <div>required</div>  | object                                                                |
| user_id <div>&gt;</div> <div>required</div> | <div>object</div> <div>User information and biometric templates</div> |
| card_id <div>&gt;</div> <div>required</div> | <div>object</div> <div>Card identification information</div>          |

Responses

— 200 Successful response

POST /api/devices/{device\_id}/write\_card

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "SmartCard": {
    + "user_id": { ... },
    + "card_id": { ... }
  }
}
```

# Create Mobile Card

This API is used to create Mobile Card.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
required

|                                    |                                                    |
|------------------------------------|----------------------------------------------------|
| SmartCard <div>required</div>      | object                                             |
| user_id <div>required</div>        | object<br>User information and biometric templates |
| card_id <div>required</div>        | object<br>Card identification information          |
| card_layout_id <div>required</div> | object<br>Layout ID for Mobile Credential          |

options >  
required

object  
Mobile credential options

Responses

— 200 Successful response

POST /api/cards/mobile\_credentials

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "SmartCard": {
    + "user_id": { ... },
    + "card_id": { ... },
    + "card_layout_id": { ... },
    + "options": { ... }
  }
}
```

# Format Smart Card

This API is used to remove the written smart card data from a Smart Card.

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

|          |                                                                                   |
|----------|-----------------------------------------------------------------------------------|
| dev_id   | string                                                                            |
| required | Device ID with the corresponding layout set which will be used to write the card. |

## Responses

— 200 Successful response

POST /api/devices/{dev\_id}/erase\_card

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

|                     |                         |                         |                  |             |
|---------------------|-------------------------|-------------------------|------------------|-------------|
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |             |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |             |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |             |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |             |

Copy

```
curl --request POST \
  --url https://{baseurl}/api/devices/{dev_id}/erase_card \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Send BioStar X QR by Email

This API is used to send BioStar X QR by email.

Before using this API, make sure that:

- SMTP is set
- User email field is filled

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
**required**

id  
**required**

integer

ID of the user which the QR code applied to and the email will be sent to.

language  
**required**

string

Enum: "ko" "en"

Language for the email content. (ko=Korean, en=English)

card\_collection >  
required

Array of objects non-empty  
Collection of QR cards to be sent via email

total  
required

integer  
Total number of cards in the collection

Responses

— 200 QR code email sent successfully

POST /api/v2/send\_email\_qr

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all



"id": 1,

```
    "language": "en",
  -  "card_collection": [
    +  { ... }
  ],
  "total": 1
}
```

# Send Visual Face by Email

This API is used to send Visual Face mobile enrollment link.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
required

|                            |                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| id<br>required             | string<br>User ID                                                                                                                  |
| language<br>required       | string<br>Enum: "ko" "en" "ja"<br>Language which will be used for the email content.<br>(ko=Korean, en=English, ja=Japanese)       |
| adv_criteria ><br>required | object<br>Advanced search criteria for batch processing. See Batch Edit with Advanced Search for <code>adv_criteria</code> details |

## Responses

— 200 Successful response



POST /api/v2/send\_email

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{  
  "id": "1",  
  "language": "en",  
}
```

```
- "adv_criteria": {  
  "user_name": "e",  
  "user_operator_level_id": "0",  
  "user_group_id": 1,  
  "user_group_ids": [],  
  "user_custom_field_1": "string",  
  "user_custom_field_2": "string",  
  "user_custom_field_3": "string",  
  "user_custom_field_4": "string",  
  "user_custom_field_5": "string",  
  "user_custom_field_6": "string",  
  "user_custom_field_7": "string",  
  "user_custom_field_8": "string",  
  "user_custom_field_9": "string",  
  "user_custom_field_10": "string"  
}
```

---

## User Groups

### List User Group

This API is used to list all User Groups.


AUTHORIZATIONS: > *SessionAuth*

### Responses

— 200 Successful response

GET /api/user\_groups

## Request samples

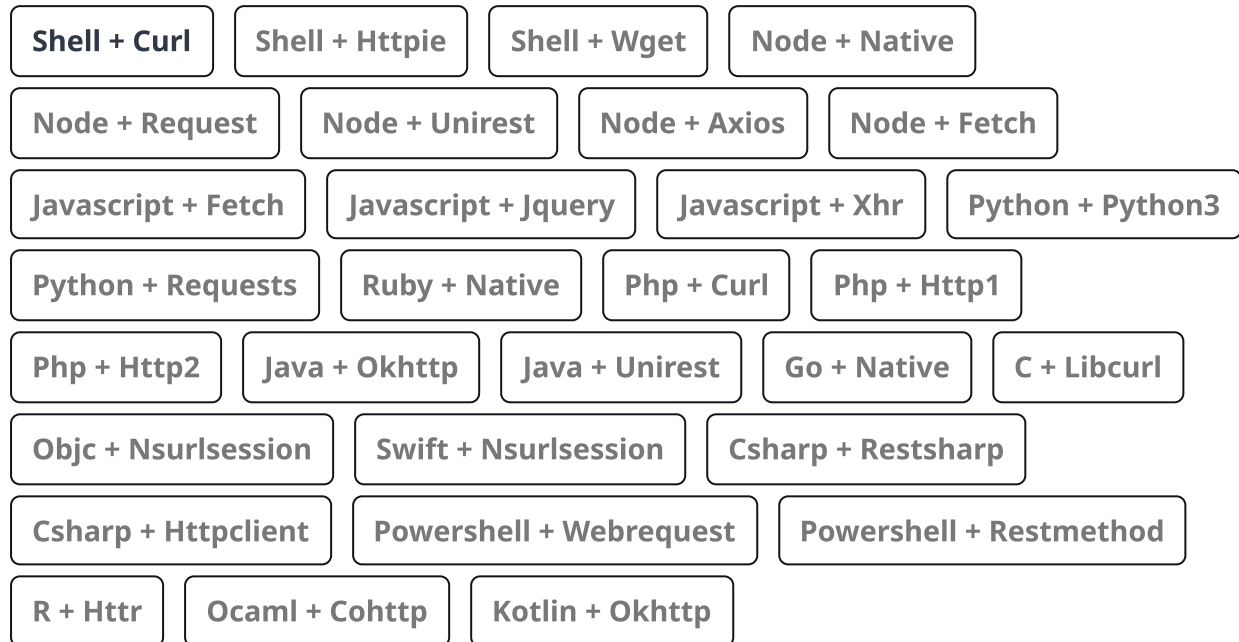

Copy

```
curl --request GET \
  --url https://{baseurl}/api/user_groups \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Create User Group

This API is used to create a new User Group.

### Note:

- User groups may be created in up to 8 levels.
- Up to 48 characters may be entered for a user group name.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
required

|                               |                                                                                                                                         |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| UserGroup <div>required</div> | object                                                                                                                                  |
|                               |                                                                                                                                         |
| parent_id <div>required</div> | <div>object</div> <div>Parent User Group information</div>                                                                              |
|                               |                                                                                                                                         |
| depth                         | <div>integer<div>&lt;= 8</div></div> <div>Depth of the User Group based on the parent (automatically calculated if not provided).</div> |
|                               |                                                                                                                                         |
| name <div>required</div>      | <div>string<div>&lt;= 48 characters</div></div> <div>Name of the User Group.</div>                                                      |

## Responses

— 200 Successful response

POST /api/user\_groups

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy Expand all Collapse all

```
{
  - "UserGroup": {
    + "parent_id": { ... },
    "depth": 1,
    "name": "TestDataXFer3"
  }
}
```

## Delete User Group

This API is used to delete a User Group.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

id

integer

Example: 

Id of the User Group which will be deleted.

## Responses

— 200 Successful response

DELETE /api/user\_groups

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
  --url 'https://{baseurl}/api/user_groups?id=21436' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

Search User Groups by ID

This API is used to list User Group(s) which are specified in the request body.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json  
optional

|                    |                                                                                              |
|--------------------|----------------------------------------------------------------------------------------------|
| user_group_id_list | Array of strings<br>Specify User Group ids which will be viewed. Use comma (,) as separator. |
|--------------------|----------------------------------------------------------------------------------------------|

# Responses

— 200 User Groups retrieved successfully

POST /api/v2/user\_groups/search

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "user_group_id_list": [
    "1004",
    "21109"
  ]
}
```

# Update User Group

This API is used to update a User Group.

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

---

**id**  
**required** integer  
Example:   
ID of the User Group which will be updated

---

REQUEST BODY SCHEMA: application/json

**required**

---

UserGroup ▾ object

---

**name** string   
New name for the user group

---

## Responses

— **200** User Group updated successfully

PUT /api/user\_groups/{id}

## Request samples



|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type

application/json

Copy Expand all Collapse all

```
{
  - "UserGroup": {
    "name": "TestDataXFer3xx"
  }
}
```

## User

This section contains all API related to Users

## Update User Fingerprint Credentials

This API is used to update fingerprint data on a User.

Use `POST /api/devices/{dev_id}/scan_fingerprint` to enroll fingerprint. Use `POST /api/server_matching/identify_finger` to check whether the fingerprint already recorded or not.

## Important Notes:

- Raw data for template0 and template1 available after enrolling a fingerprint
- Fingerprint(s) used for regular access should not be registered as duress fingerprint
- If the fingerprint authentication rate is low, delete the existing fingerprint information and add a new fingerprint
- Use an adequate security level. If 1:1 Security Level is too high, the fingerprint authentication rate may be too low or the false rejection rate (FRR) may be too high
- For best fingerprint scanning quality, make sure to cover the entire surface of the fingerprint sensor with the finger

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

id  
required

integer

Example: 14

ID of the user to update fingerprint credentials

REQUEST BODY SCHEMA: application/json

required

User ▾  
required

object

fingerprint\_templates ▾  
required

Array of objects [ 1 .. 10 ] items

Array of fingerprint templates for the user

Array ([ 1 .. 10 ] items) [

finger\_mask

boolean

Set to true to mark the fingerprint as a duress fingerprint. When threatened by someone to open the door, the user can authenticate using this fingerprint to send an alarm signal to BioStar X.

template0

string

|                                         |                                                                                 |
|-----------------------------------------|---------------------------------------------------------------------------------|
| <div>required</div>                     | First scan template of the fingerprint (Raw data)                               |
| <div>template1<div>required</div></div> | <div>string</div> <div>Second scan template of the fingerprint (Raw data)</div> |
| <div>isNew</div>                        | <div>boolean</div> <div>Indicates if this is a new fingerprint template</div>   |

]

Responses

— 200 Successful response

PUT /api/users/{id}

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

**Content type**

application/json

Copy Expand all Collapse all

```
{
  - "User": {
    + "fingerprint_templates": [ ... ]
  }
}
```

## View a User's Details

This API is used to view a user's details which is recorded on BioStar X.

**Known errors:**

- Putting "/" at the end of the endpoint
- Using User ID which doesn't exist

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS


**id** string  
**required**  
Example: `{{iterIDVal}}`  
ID of the User

## Responses

— **200** Successful response

GET /api/users/{id}

## Request samples

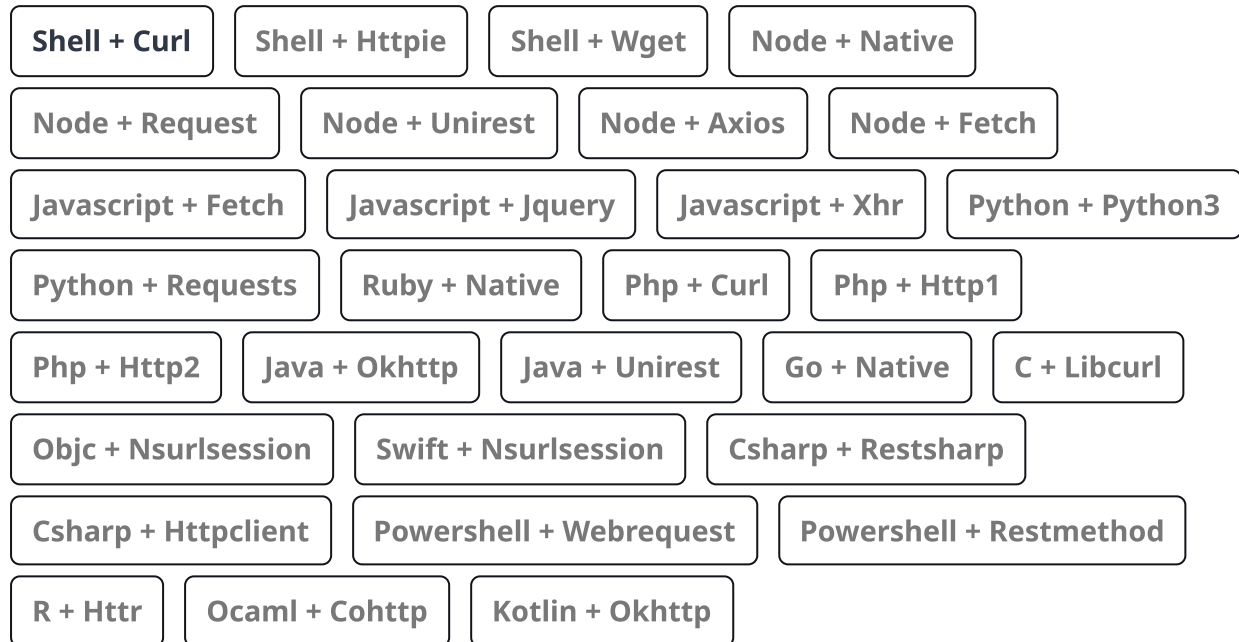

Copy

```
curl --request GET \
  --url https://{baseurl}/api/users/{iterIDVal} \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## User: Bulk Update

This API is used for updating user information in bulk.

The difference of this API and `/api/users?id=1+2+3` is that this API can update different data of many users at the same time.

**Warning:** The maximum number of users that can be modified in a single API call is **100**.

### Response Codes:

- **ret\_code** presents BioStar X response code for modifying each user

- Response.code could be 0 (Overall success), 1 (Partial success), 8 (Overall failed)
- For error code meanings, refer to [BioStar X Install Path]\nginx\html\resources\messages\_en

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json  
required

UserCollection ▾  
required object

rows ▾  
required Array of objects [ 1 .. 100 ] items  
Array of user objects to update (maximum 100 users)

Array ([ 1 .. 100 ] items) [

|                     |                                                                             |
|---------------------|-----------------------------------------------------------------------------|
| user_id<br>required | string<br>User ID of the user. This will be used as the update target       |
| name                | string <= 48 characters<br>Name of the user. Up to 48 characters            |
| user_group_id >     | object<br>User Group information                                            |
| disabled            | boolean<br>Toggle User active or not; false for active, true for non-active |
| start_datetime      | string <date-time><br>Start active period for the User                      |
| expiry_datetime     | string <date-time><br>End active period for the User                        |
| email               | string <email>                                                              |

|            |        |                                                                                      |
|------------|--------|--------------------------------------------------------------------------------------|
|            |        | Email address of the User                                                            |
|            |        | <hr/>                                                                                |
| department | string | <code>&lt;= 64 characters</code>                                                     |
|            |        | Department of the User. Up to 64 characters                                          |
|            |        | <hr/>                                                                                |
| user_title | string |                                                                                      |
|            |        | Title of the User                                                                    |
|            |        | <hr/>                                                                                |
| login_id   | string |                                                                                      |
|            |        | Login ID of the user                                                                 |
|            |        | <hr/>                                                                                |
| password   | string |                                                                                      |
|            |        | Password for the user                                                                |
|            |        | <hr/>                                                                                |
| user_ip    | string |                                                                                      |
|            |        | Limit the access of the User so he/she can only login from the registered IP Address |
|            |        | <hr/>                                                                                |
| ]          |        |                                                                                      |

## Responses

➤ **200** Bulk update completed (success, partial success, or failed)

➤ **400** Bad request - Invalid JSON data or parameters

— **500** 500 Internal Server Error - An unexpected error occurred on the server.

PUT /api/users/bulk

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "UserCollection": {
    + "rows": [ ... ]
  }
}
```

Response samples

200

400

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "UserCollection": {
    + "rows": [ ... ]
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```





## Check Picture Specification

This API is used to check whether the image that will be uploaded on Visual Face credential is according to specification or not.

- Supported image file size is up to 10MB.
- Supported image file formats are JPG, JPEG and PNG.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

template\_ex\_picture string <byte>

Image that will be checked (base64 encoded)

## Responses

— 200 Successful response

PUT /api/users/check/upload\_picture

## Request samples

|                    |                     |                  |                  |               |
|--------------------|---------------------|------------------|------------------|---------------|
| Payload            | Shell + Curl        | Shell + Httpie   | Shell + Wget     | Node + Native |
| Node + Request     | Node + Unirest      | Node + Axios     | Node + Fetch     |               |
| Javascript + Fetch | Javascript + JQuery | Javascript + Xhr | Python + Python3 |               |
| Python + Requests  | Ruby + Native       | Php + Curl       | Php + Http1      |               |

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{
  "template_ex_picture": "/9j/4AAQSkZJRgABAQEASABIAAD/2wBDAAyEBQYFBAYGBQYHBwYIChAK
}
```

# Delete User(s) with Advanced Search

This API is used to delete user(s) which is collected from Advanced Search query. Users matching the advanced search criteria will be deleted from the system.

AUTHORIZATIONS: > SessionAuth

## QUERY PARAMETERS

adv  
required

string  
Example:   
Use this to enable Advanced Search query result

REQUEST BODY SCHEMA: application/json  
required

adv\_criteria ▾  
required

object (AdvancedSearchCriteria)  
Advanced Search criteria for finding users

|                       |                                                                                                                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| limit<br>required     | integer<br>The maximum number of users to return. Default is 50.                                                                                                                                                                 |
| offset                | integer<br>The number of users to skip before starting to return results. Default is 0.                                                                                                                                          |
| user_id               | string<br>The User ID to search, supports like search                                                                                                                                                                            |
| order_by<br>required  | string<br>Order, will accept with format <code>properties:false</code> , for example if we want to order by name, it will be <code>user_name:false</code> . ( <code>false</code> = ASCENDING and <code>true</code> = DESCENDING) |
| user_group_id         | integer<br>Group ID for search user. Also gets the child user group                                                                                                                                                              |
| user_group_ids        | Array of integers<br>Array of Group IDs for advanced search parameter                                                                                                                                                            |
| user_name             | string<br>User name for Advance Search parameter, supports like search both encrypted and unencrypted                                                                                                                            |
| user_email            | string <email><br>User email, supports like search both encrypted and unencrypted                                                                                                                                                |
| user_phone            | string<br>User Phone for Advance Search parameter, supports like search both encrypted and unencrypted                                                                                                                           |
| user_access_group_ids | string                                                                                                                                                                                                                           |

User access group id for advance search parameter, supports multiple value with format String with Delimiter , i.e 1,2,3.

\* = User(s) who have any Access Group.

void = User(s) who does not belong to any Access Group.

|                                    |                                                                                                                                                                    |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| user_operator_level_id<br>required | integer<br>User operator level id for Advance Search parameter Value 0 = user with all operator level, -1 = user with no operator level, else ID of operator level |
| user_department                    | string<br>User Department for Advance Search parameter, supports like search on unencrypted and exact search on encrypted                                          |
| user_title                         | string<br>User title for advance search parameter, supports like search on unencrypted and exact search on encrypted                                               |
| user_card                          | string<br>User card ID to search                                                                                                                                   |
| user_custom_field_1                | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                      |
| user_custom_field_2                | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                      |
| user_custom_field_3                | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on                                                |

|                      |                                                                                                                                                  |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
|                      | encrypted                                                                                                                                        |
| user_custom_field_4  | <div>string or null</div> <div>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted</div> |
| user_custom_field_5  | <div>string or null</div> <div>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted</div> |
| user_custom_field_6  | <div>string or null</div> <div>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted</div> |
| user_custom_field_7  | <div>string or null</div> <div>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted</div> |
| user_custom_field_8  | <div>string or null</div> <div>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted</div> |
| user_custom_field_9  | <div>string or null</div> <div>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted</div> |
| user_custom_field_10 | <div>string or null</div> <div>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted</div> |
| user_status          | <div>boolean</div> <div>Enum: <div>false</div> <div>true</div></div>                                                                             |

User status for advance search parameter. `false` = Active, `true` = Inactive

---

## Responses

> 200 Users deleted successfully

POST /api/users/advance\_search/delete

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "adv_criteria": {
    "limit": 50,
    "offset": 0,
    "user_id": "11",
    "order_by": "user_id:false",
    "user_group_id": 1,
    + "user_group_ids": [ ... ],
    "user_name": "John",
    "user_email": "abc@gmail.com",
    "user_phone": "123-456-7890",
    "user_access_group_ids": "17,18",
    "user_operator_level_id": 0,
    "user_department": "Engineering",
    "user_title": "Manager",
    "user_card": "123456",
    "user_custom_field_1": "string",
    "user_custom_field_2": "string",
    "user_custom_field_3": "string",
    "user_custom_field_4": "string",
    "user_custom_field_5": "string",
    "user_custom_field_6": "string",
    "user_custom_field_7": "string",
    "user_custom_field_8": "string",
    "user_custom_field_9": "string",
    "user_custom_field_10": "string",
    "user_status": false
  }
}
```

## Response samples

200

Content type

application/json

Copy

```
{
  "code": "0",
  "link": "https://support.supremainc.com/en/support/home",
  "message": "Success",
  "by": "web"
}
```

}

## Send User Data to Device

This API is used to send user data to a device. For example when you want to send user John data after credential update to FaceStation F2. **Notes:**

- Set `adv=model1` on Query Parameter to enable advanced search compatibility. This parameter is optional. When not used, it will use the previous capability.
- Maximum of 100 users can be processed in a single request
- Request Body with Advanced Search example (see **Batch Edit with Advanced Search** for `adv_criteria` details)

```
{
  "DeviceCollection" : {
    "rows" : [ {
      "id" : "50362288"
    } ]
  },
  "adv_criteria" : {
    "limit" : 50,
    "order_by" : "user_id:false",
    "user_group_ids" : [ 1014 ],
    "user_id" : "8",
    "user_email" : "support@supremainc.com"
  }
}
```

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

overwrite

boolean

Example: `overwrite=true`

Toggle to overwrite the data on the device. True to overwrite (default value)

id

integer



Example: `id=15`

ID of the User that will be sent to the Device. To send multiple users, use plus (+) sign as separator of each User ID. Ex:  
1001+1002+1003+1004

adv

string

Example: `adv=mode1`

Use this to enable Advanced Search query result.

REQUEST BODY SCHEMA: application/json

required

One of

UserExportInput

UserExportAdvancedInput

DeviceCollection ▾

required

object

rows ▾

required

Array of objects `non-empty`

Array of device IDs to export user data to

Array (non-empty) [

id

required

string

ID of the device

]

## Responses

> **200** Successful response

POST /api/users/export

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Example  
UserExportInput

Copy Expand all Collapse all

```
{
  - "DeviceCollection": {
    + "rows": [ ... ]
  }
}
```

Response samples

200

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DeviceResponse": {
    + "rows": [ ... ],
    "result": "true"
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

---

## Delete User(s) From Device (Advanced Search)

This API is used to delete user data from device(s) based on Advanced Search query results. Users matching the advanced search criteria will have their data removed from the specified devices. **Notes:**

- Requires `adv=mode1` query parameter to enable advanced search functionality
- Only user data is removed from devices, not from the BioStar X database

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

---

adv

string

Example: `adv=mode1`

Use this to enable Advanced Search query result.

---

REQUEST BODY SCHEMA: application/json

**required**

---

DeviceCollection >

**required**

object

---

adv\_criteria >

**required**

object (AdvancedSearchCriteria)

Advanced Search criteria for finding users

---

# Responses

> 200 Successful response

POST /api/users/remove

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DeviceCollection": {
    + "rows": [ ... ]
  },
}
```

```
- "adv_criteria": {  
  "limit": 50,  
  "offset": 0,  
  "user_id": "11",  
  "order_by": "user_id:false",  
  "user_group_id": 1,  
+ "user_group_ids": [ ... ],  
  "user_name": "John",  
  "user_email": "abc@gmail.com",  
  "user_phone": "123-456-7890",  
  "user_access_group_ids": "17,18",  
  "user_operator_level_id": 0,  
  "user_department": "Engineering",  
  "user_title": "Manager",  
  "user_card": "123456",  
  "user_custom_field_1": "string",  
  "user_custom_field_2": "string",  
  "user_custom_field_3": "string",  
  "user_custom_field_4": "string",  
  "user_custom_field_5": "string",  
  "user_custom_field_6": "string",  
  "user_custom_field_7": "string",  
  "user_custom_field_8": "string",  
  "user_custom_field_9": "string",  
  "user_custom_field_10": "string",  
  "user_status": false  
}  
}
```

## Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{  
- "DeviceResponse": {  
  + "rows": [ ... ],  
  "result": "true"  
},  
}
```

```

- "Response": {
  "code": "0",
  "link": "https://support.supremainc.com/en/support/home",
  "message": "Success",
  "by": "web"
}
}

```

## List Idle Users - Multiple ID

This API shows a workaround using this API to get multiple users data by adjusting the parameters.

The advantage of this workaround is that the API response can be adjusted to only show only the required users directly.

- Query parameter search\_month value is set to 0 or removed
- Body parameter conditions:column value set to user\_id, :operator value to 2 (contains), and :value can specify multiple user id which uses comma as separator.

For BODY Parameter details refer to POST List Idle Users.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
required

Query ∨  
required

object

offset  
required

integer

Number of records to skip

limit  
required

integer

Maximum number of records to return (0 for no limit)

conditions >

Array of objects

Array of search conditions

orders >

Array of objects

Array of ordering specifications

Responses

— 200 Successful response

POST /api/users/absence

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy Expand all Collapse all

```
{  
  - "Query": {  
    "offset": 0,  
    "limit": 0,  
    + "conditions": [ ... ],  
    + "orders": [ ... ]  
  }  
}
```

---

## Delete Idle Users

This API is used to delete idle users.

For BODY parameter refer to POST List Idle Users.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

---

search\_month

integer

Example: `search_month=1`

Filter user(s) which idle for the last n month(s).

---

id

string

Example: `id=10 11`

ID of the idle users which will be deleted. Use space as separator to delete multiple users.

---

REQUEST BODY SCHEMA: application/json

**required**

---

Query   
**required**

object

---

offset  
**required**

integer `>= 0`

Number of records to skip

---



|                   |                                                                                      |
|-------------------|--------------------------------------------------------------------------------------|
| limit<br>required | integer <span>&gt;= 0</span><br>Maximum number of records to return (0 for no limit) |
| conditions >      | Array of objects<br>Array of search conditions                                       |
| orders >          | Array of objects<br>Array of ordering specifications                                 |

## Responses

— 200 Successful response

POST /api/users/absence/delete

## Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

**Content type**

application/json

Copy Expand all Collapse all

```
{
  - "Query": {
    "offset": 0,
    "limit": 0,
    + "conditions": [ ... ],
    + "orders": [ ... ]
  }
}
```

## Advanced Search

This API is used to fetch user information via advanced search.

Supports flexible searching across multiple user fields including personal information, group membership, access levels, and custom fields. **Notes:**

- To search users without documents, use `"user_custom_field_#": "No"` for specific custom fields
- To search users with documents, use `"user_custom_field_#": "Yes"` for specific custom fields
- `user_operator_level_id` values: `-1` (None), `0` (All), or specific ID
- Supports both encrypted and unencrypted field searches
- Access group search format: "1,2,3" or "\*" (any Access Group) or "void" (no Access Group)

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

**required**

limit  
**required**

integer

The maximum number of users to return. Default is 50.

|                       |                   |                                                                                                                                                                                                                                        |
|-----------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| offset                | integer           | The number of users to skip before starting to return results. Default is 0.                                                                                                                                                           |
| user_id               | string            | The User ID to search, supports like search                                                                                                                                                                                            |
| order_by<br>required  | string            | Order, will accept with format <code>properties:false</code> , for example if we want to order by name, it will be <code>user_name:false</code> . ( <code>false</code> = ASCENDING and <code>true</code> = DESCENDING)                 |
| user_group_id         | integer           | Group ID for search user. Also gets the child user group                                                                                                                                                                               |
| user_group_ids        | Array of integers | Array of Group IDs for advanced search parameter                                                                                                                                                                                       |
| user_name             | string            | User name for Advance Search parameter, supports like search both encrypted and unencrypted                                                                                                                                            |
| user_email            | string <email>    | User email, supports like search both encrypted and unencrypted                                                                                                                                                                        |
| user_phone            | string            | User Phone for Advance Search parameter, supports like search both encrypted and unencrypted                                                                                                                                           |
| user_access_group_ids | string            | User access group id for advance search parameter, supports multiple value with format String with Delimiter , i.e 1,2,3.<br><br>* = User(s) who have any Access Group.<br><br>void = User(s) who does not belong to any Access Group. |

|                                    |                                                                                                                                                                                                                                 |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| user_operator_level_id<br>required | integer<br>User operator level id for Advance Search parameter Value<br><input type="text" value="0"/> = user with all operator level, <input type="text" value="-1"/> = user with no operator level, else ID of operator level |
| user_department                    | string<br>User Department for Advance Search parameter, supports like search on unencrypted and exact search on encrypted                                                                                                       |
| user_title                         | string<br>User title for advance search parameter, supports like search on unencrypted and exact search on encrypted                                                                                                            |
| user_card                          | string<br>User card ID to search                                                                                                                                                                                                |
| user_custom_field_1                | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                                                                                   |
| user_custom_field_2                | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                                                                                   |
| user_custom_field_3                | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                                                                                   |
| user_custom_field_4                | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                                                                                   |
| user_custom_field_5                | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                                                                                   |
| user_custom_field_6                | string or null                                                                                                                                                                                                                  |

|                      |                                                                                                                                                              |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                      | Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                                  |
| user_custom_field_7  | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                |
| user_custom_field_8  | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                |
| user_custom_field_9  | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                |
| user_custom_field_10 | string or null<br>Custom fields for advance search parameter support like search on unencrypted and exact search on encrypted                                |
| user_status          | boolean<br>Enum: <code>false</code> <code>true</code><br>User status for advance search parameter. <code>false</code> = Active, <code>true</code> = Inactive |

## Responses

### > 200 Successful response

— **400** Bad Request - The request was malformed or missing required parameters.

— **401** Unauthorized - The API key provided was invalid or missing.

— **404** Not Found - The requested resource was not found.

— **500** Internal Server Error - An unexpected error occurred on the server.

POST /api/v2/users/advance\_search

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  "limit": 50,
  "offset": 0,
  "user_id": "11",
  "order_by": "user_id:false",
  "user_group_id": 1,
  - "user_group_ids": [
    1121
  ],
  "user_name": "John",
  "user_email": "abc@gmail.com",
  "user_phone": "123-456-7890",
  "user_access_group_ids": "17,18",
  "user_operator_level_id": 0,
  "user_department": "Engineering",
  "user_title": "Manager",
  "user_card": "123456",
  "user_custom_field_1": "string",
```

```
"user_custom_field_2": "string",
"user_custom_field_3": "string",
"user_custom_field_4": "string",
"user_custom_field_5": "string",
"user_custom_field_6": "string",
"user_custom_field_7": "string",
"user_custom_field_8": "string",
"user_custom_field_9": "string",
"user_custom_field_10": "string",
"user_status": false
```

```
}
```

## Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  - "UserCollection": {
    "total": 1,
    + "rows": [ ... ]
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

## List All User v2

This API is used to list all users recorded on Bio Star X.

### Known errors:

- At least one parameter must exist

- Using unavailable `user_group_id` will show empty response

## AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

**required**

|                          |                                                                                                                                                                                           |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| limit<br><b>required</b> | integer <code>&gt;= 0</code><br>Limit response record(s) by the value specified on this parameter. Use 0 for no limit.                                                                    |
| search_text              | string or null<br>Search record(s) with the text specified on this parameter. Performs like search across user fields.                                                                    |
| user_group_id            | integer or null<br>Filter response record(s) according to user_group_id specified on this parameter                                                                                       |
| order_by                 | string<br>Order the response record(s) by the User parameter such as user_id or name. Format is <code>field_name:false</code> for ascending, <code>field_name:true</code> for descending. |

## Responses

— **200** Successful response

POST /api/v2/users/search

## Request samples



Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{
  "limit": 50,
  "search_text": "John",
  "user_group_id": 1,
  "order_by": "user_id:false"
}
```

# View User by Account Level

This API is used to view all user permission grouped by user account level.

- 1: Administrator
- 2: User Operator
- 3: Monitoring Operator
- 4-252: Custom Account Level
- 253: Video
- 254: TA
- 255: User
- 100000: Visitor

AUTHORIZATIONS: > *SessionAuth*

Responses

— 200 Successful response

GET /api/permissions

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/permissions \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

List User Fields

This API is used to list user fields which can be processed as CSV.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/users/csv\_option

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/users/csv_option \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Download CSV File

This API is used to download exported CSV files from BioStar X Server.

Supports downloading both user-related CSV files and events-related CSV files. The system automatically detects the file type based on the filename pattern.

## Supported File Types:

- **User CSV files:** Generated from `POST /api/users/csv_export`
- **Events CSV files:** Generated from `POST /api/events/export`

## Usage:

1. Export data using the appropriate API (`csv_export` for users, `export` for events)
2. Get the filename from the export response
3. Use the filename as the path parameter in this download API

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

---

csv\_filename  
**required**

string

Examples:

- `User_Import_Error_20220124T143708.csv` - User CSV file
- `Report_20220204T165145.csv` - Events CSV file

Name of the CSV file to download (supports both user and events files)


---

## Responses

— **200** Successful response

GET /download/{csv\_filename}

## Request samples

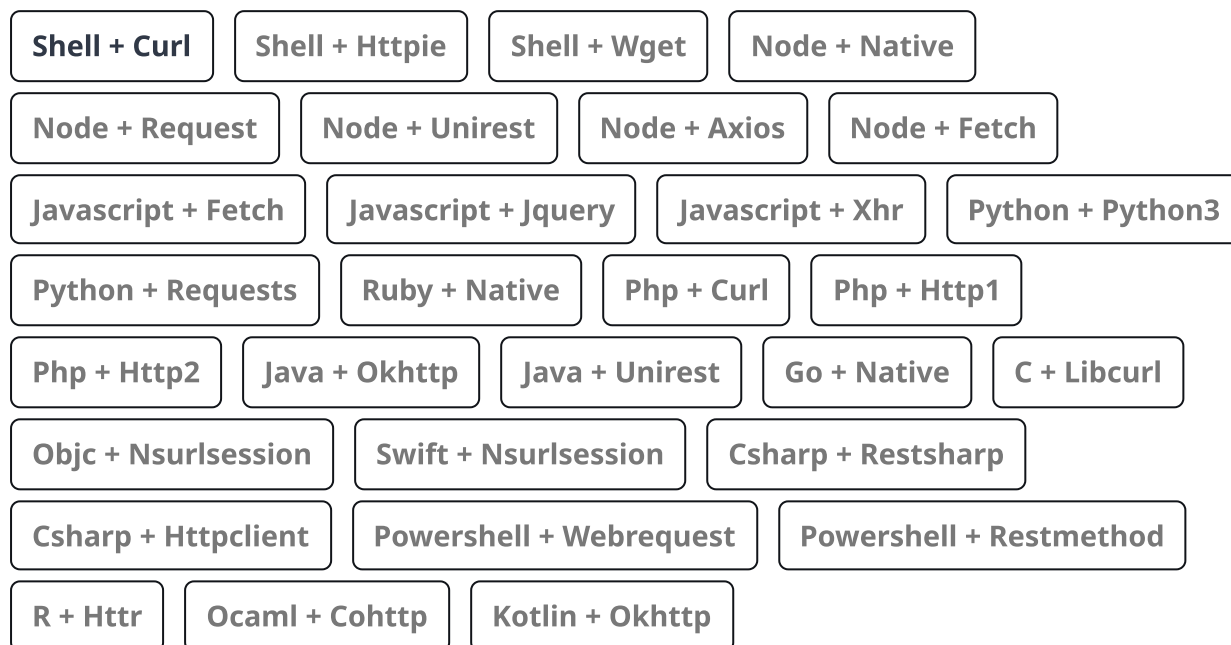

Copy

```
curl --request GET \
  --url https://{baseurl}/download/User_Import_Error_20220124T143708.csv \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Upload User File (CSV/TGZ) to BioStar X Server

This API is used to upload a file to BioStar X Server.

Usage of this API is to upload a .csv or .tgz file to BioStar X Server Installation path, which after the file can be further processed for importing User Data to the database through `POST /api/users/csv_import` or `POST /api/users/data_import`.

Uploaded file will be located on: {{BioStar X Installation Path}}\nginx\html\download

Do note that if there's any file with the same name, it will be overwritten

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: multipart/form-data

---

file string <binary>

---

Responses

— 200 Successful response

POST /api/attachments

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request POST \
  --url https://{baseurl}/api/attachments \
  --header 'bs-session-id: REPLACE_KEY_VALUE' \
  --header 'content-type: multipart/form-data' \
  --form file=/C:/Users/user/Desktop/BioStarX_20220124_173247.tgz
```

## Export User Data as CSV (File Upload Example)

This API is used to export user data as CSV file with customizable columns and headers. Supports exporting user information including custom fields and file upload information. The exported CSV file can be downloaded using the

`/download/{csv_filename}` endpoint.

### Features:

- Customizable column selection and headers
- Support for custom fields including file upload fields
- Advanced search criteria integration
- Flexible user selection (specific IDs, all users, or search results)

### Usage Flow:

1. Call this API with desired query parameters and criteria
2. Get the generated filename from the response
3. Use the filename with `/download/{csv_filename}` to download the actual CSV file

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

id

string

Examples:

- `id=*` - Export all users
- `id=1+2+3` - Export specific users
- `id=1001` - Export single user

ID of the Users to export. Use `*` to export all users. To select multiple users use plus sign (+) or space ( ) as separator.

adv

string

Value: `"mode1"`

Example: `adv=mode1`

## Enable Advanced Search query result mode

REQUEST BODY SCHEMA: application/json  
required

|                         |                                                                          |
|-------------------------|--------------------------------------------------------------------------|
| Query > required        | object<br>Data criteria and formatting options for CSV export            |
| adv_criteria > required | object<br>Advanced Search criteria for finding users                     |
| reason                  | string<br>Reason for exporting user data (Supported in v1.0.1 and later) |

## Responses

> 200 Successful response

POST /api/users/csv\_export

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp



Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy

Expand all

Collapse all

```
{
  - "Query": {
    "offset": 0,
    "group_by": 1,
    + "columns": [ ... ],
    + "headers": [ ... ]
  },
  - "adv_criteria": {
    "limit": 1000,
    "offset": 0,
    "user_id": "11",
    "order_by": "user_id:false",
    "user_group_id": 1,
    + "user_group_ids": [ ... ],
    "user_name": "John",
    "user_email": "abc@gmail.com",
    "user_phone": "123-456-7890",
    "user_access_group_ids": "17,18",
    "user_operator_level_id": 0,
    "user_department": "Engineering",
    "user_title": "Manager",
    "user_card": "123456",
    "user_custom_field_1": "string",
    "user_custom_field_2": "string",
    "user_custom_field_3": "string",
    "user_custom_field_4": "string",
    "user_custom_field_5": "string",
    "user_custom_field_6": "string",
    "user_custom_field_7": "string",
    "user_custom_field_8": "string",
    "user_custom_field_9": "string",
    "user_custom_field_10": "string",
    "user_status": false
  },
  "reason": "For backup"
```

}

## Response samples

**200**

Content type

application/json

Copy Expand all Collapse all

{

```
- "File": {  
  "uri": "User_20241030_7f554f6983034c8eb1b42076f68e488b.csv"  
},  
- "Response": {  
  "code": "0",  
  "link": "https://support.supremainc.com/en/support/home",  
  "message": "Success",  
  "by": "web"
```

}

}

## Import User Data from CSV

This API is used to import User Data from a .csv file to the BioStar X database.

To run this API successfully, it is imperative to run POST `/api/attachments` first to upload the .csv file to the server install path.

After .csv file got uploaded to the server, put the filename value from the above API to the uri and fileName parameter on this API.

Fields listed on Query parameter are also used for field mapping between .csv file and BioStar X database.

For example field user\_id on Query:headers (.csv) will be matched with the first field of Query:columns (BioStar X). To change this mapping, adjust the sequence on Query:headers as desired (eg. exchange field department with user\_id so the value of department will be used on user\_id on BioStar X).

To skip a field from mapping, put empty string ("") on the intended field.

If there's no issue on the import process, the API will shows "Success" response. If there's issue (duplicate email, etc.), the response will show that the "Request is successful but partially" and will include a filename which contain records that caused the errors which can be downloaded by using GET `/download/:csv_filename`

If the CSV file to import contains data for custom user fields and the fields do not exist on the server, then the data for the fields will be ignored during the import process.

To enter user information in a language other than English or Korean, save the CSV file in UTF-8 format.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
**required**

|                                |                                                                |
|--------------------------------|----------------------------------------------------------------|
| File ><br><b>required</b>      | object<br>Information about the uploaded CSV file              |
| CsvOption ><br><b>required</b> | object<br>Import configuration and options                     |
| Query ><br><b>required</b>     | object<br>Field mapping configuration between CSV and database |

## Responses

— **200** Successful response

POST /api/users/csv\_import

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "File": {
    "uri": "User_Test.csv",
    "fileName": "User_Test.csv"
  },
  - "CsvOption": {
    "start_line": 2,
    "import_option": 1
  },
  - "Query": {
    + "headers": [ ... ],
    + "columns": [ ... ]
  }
}
```

# Data File Export

You can store the data file on external storage (USB) and import to BioStar X or device. Up to 500,000 users can be moved from server to device or from device to device.

- The exported data file from devices using older firmware version cannot be imported into BioStar X. Make sure always use the latest version of firmware.
- If you use BioStar 2.8.10 or later, data exported from the previous version of BioStar 2 cannot be imported.
- If you use BioStar 2.8.10 or later, it is impossible to read data from a device that are using older firmware version. Upgrade the device's firmware to a compatible version. Compatible devices and firmware versions are as follows:
  - BioStation 2 FW 1.9.0 or later > device\_type: 8
  - BioStation A2 FW 1.8.0 or later > device\_type: 9
  - FaceStation 2 FW 1.4.0 or later > device\_type: 10
  - FaceStation F2 FW 1.0.0 or later > device\_type: 29
  - X-Station 2 FW 1.0.0 or later > device\_type: 32
- If the fingerprint template format is different, the data file cannot be imported. For example, the data file exported from a device which uses the Suprema fingerprint template format cannot be imported into a device which uses the ISO fingerprint template format.
- When importing user data with visual faces enrolled from FaceStation F2, the existing data will be retained if there are already visual face data enrolled on BioStar 2 via Upload Image or a mobile device.
- The exported data file includes the profile photo, user ID, name, period, access group, PIN, auth. mode, credentials (face, fingerprint, card, mobile access card, visual face, BioStar 2 QR, QR/Barcode), 1:1 security level.
- You can export visual face data directly registered from the device only. It is not possible to export the data registered with the other methods, such as image file upload, CSV import, and mobile devices.
- Be sure that the device is selected correctly. Otherwise, the device cannot recognize the data file.

AUTHORIZATIONS: > *SessionAuth*

## QUERY PARAMETERS

---

id

string

Example: `id=14 15 16`

User ID(s) to export. Use space as separator for multiple users.

---

|     |                                   |
|-----|-----------------------------------|
| adv | string                            |
|     | Example: <code>adv=mode1</code>   |
|     | Enable Advanced Search query mode |

REQUEST BODY SCHEMA: application/json

required

|                            |                              |                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| device_type<br>required    | integer                      | Device type for which the exported data will be applied                                                                                                                                                                                                                                                                                              |
|                            |                              | <ul style="list-style-type: none"><li><code>8</code>: "BioStation 2 (FW 1.9.0 or later)"</li><li><code>9</code>: "BioStation A2 (FW 1.8.0 or later)"</li><li><code>10</code>: "FaceStation 2 (FW 1.4.0 or later)"</li><li><code>29</code>: "FaceStation F2 (FW 1.0.0 or later)"</li><li><code>32</code>: "X-Station 2 (FW 1.0.0 or later)"</li></ul> |
| group_id<br>required       | integer <code>&gt;= 1</code> | Group ID of the device                                                                                                                                                                                                                                                                                                                               |
| adv_criteria ><br>required | object                       | Advanced Search criteria for finding users                                                                                                                                                                                                                                                                                                           |
| reason                     | string                       | Reason for exporting user data (Supported in v1.0.1 and later)                                                                                                                                                                                                                                                                                       |

Responses

> **200** Export completed successfully

POST /api/users/data\_export

Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type  
application/json

Copy Expand all Collapse all



```
"device_type": 35,  
"group_id": 1,
```

```
- "adv_criteria": {
  "limit": 50,
  "offset": 0,
  "user_id": "11",
  "order_by": "user_id:false",
  "user_group_id": 1,
+ "user_group_ids": [ ... ],
  "user_name": "John",
  "user_email": "abc@gmail.com",
  "user_phone": "123-456-7890",
  "user_access_group_ids": "17,18",
  "user_operator_level_id": 0,
  "user_department": "Engineering",
  "user_title": "Manager",
  "user_card": "123456",
  "user_custom_field_1": "string",
  "user_custom_field_2": "string",
  "user_custom_field_3": "string",
  "user_custom_field_4": "string",
  "user_custom_field_5": "string",
  "user_custom_field_6": "string",
  "user_custom_field_7": "string",
  "user_custom_field_8": "string",
  "user_custom_field_9": "string",
  "user_custom_field_10": "string",
  "user_status": false
},
"reason": "For device migration"
}
```

Response samples

200

Content type  
application/json

Copy   Expand all   Collapse all

```
{
- "File": {
  "uri": "BioStar2_20241103_143708.tgz"
},
}
```



```
- "Response": {  
  "code": "0",  
  "link": "https://support.supremainc.com/en/support/home",  
  "message": "Success",  
  "by": "web"  
}
```

---

## Data File Import

You can store the data file on external storage (USB) and import to BioStar 2 or device. Up to 500,000 users can be moved from server to device or from device to device.

- The exported data file from devices using older firmware version cannot be imported into BioStar 2. Make sure always use the latest version of firmware.
- If you use BioStar 2.8.10 or later, data exported from the previous version of BioStar 2 cannot be imported.
- If you use BioStar 2.8.10 or later, it is impossible to read data from a device that are using older firmware version. Upgrade the device's firmware to a compatible version. Compatible devices and firmware versions are as follows:
  - BioStation 2 FW 1.9.0 or later > device\_type: 8
  - BioStation A2 FW 1.8.0 or later > device\_type: 9
  - FaceStation 2 FW 1.4.0 or later > device\_type: 10
  - FaceStation F2 FW 1.0.0 or later > device\_type: 29
  - X-Station 2 FW 1.0.0 or later > device\_type: 32
- If the fingerprint template format is different, the data file cannot be imported. For example, the data file exported from a device which uses the Suprema fingerprint template format cannot be imported into a device which uses the ISO fingerprint template format.
- When importing user data with visual faces enrolled from FaceStation F2, the existing data will be retained if there are already visual face data enrolled on BioStar 2 via Upload Image or a mobile device.

Select the desired file (.tgz) and then click Open.

A success message will appear on the screen when import successfully. Use POST `/api/attachments` to upload the file (.tgz) to the BioStar 2 server. Use the resulting filename on the response as value on the BODY parameter.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
required

|                          |                                                                                                           |
|--------------------------|-----------------------------------------------------------------------------------------------------------|
| file<br>required         | object<br>Information about the uploaded device file                                                      |
| originalName<br>required | string <code>^.*\.tgz\$</code><br>Original filename of the uploaded file                                  |
| name<br>required         | string <code>^.*\.tgz\$</code><br>Current filename of the file on server (from /api/attachments response) |

Responses

— 200 Successful response

POST /api/users/data\_import

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget


Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

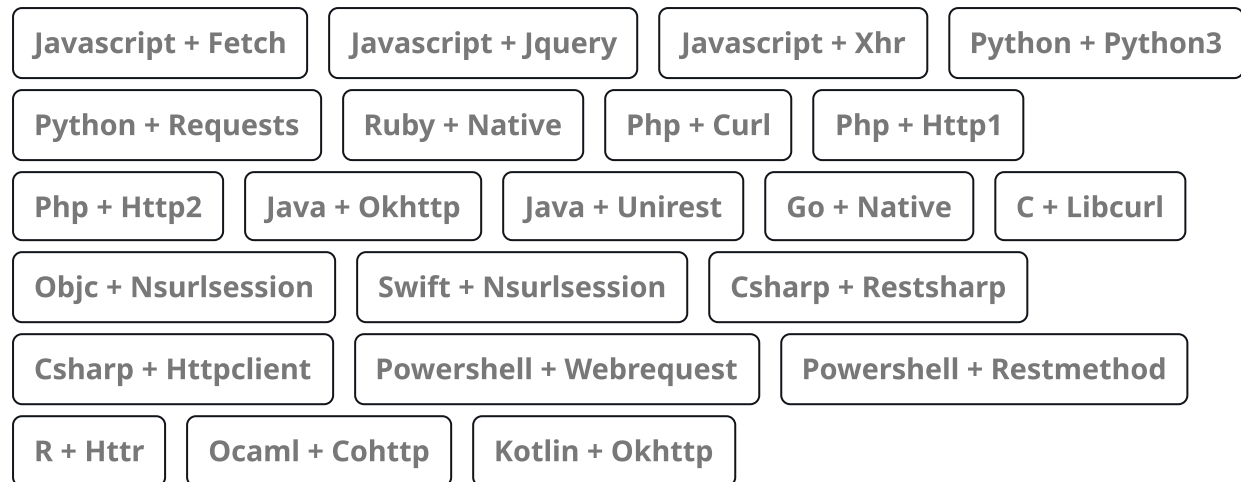

Content type

application/json

Copy Expand all Collapse all

```
{
  - "file": {
    "originalName": "BioStar2_20241103_143708.tgz",
    "name": "BioStar2_20241103_143708.tgz"
  }
}
```

## Export User(s) as PDF/SVG with Advanced Search

Generate customizable user reports in PDF or SVG format using Advanced Search criteria.

### Prerequisites:

- Valid Advanced Search criteria must be provided
- User must have appropriate permissions to generate reports

### Report Configuration:

- Display fields can be customized to show specific user data columns
- Supports various formatting options (page size, orientation, headers)
- Includes pagination and footer customization options

### Output Formats:

- PDF: For printable reports with consistent formatting
- SVG: For web display and scalable graphics

AUTHORIZATIONS: > *SessionAuth*

## QUERY PARAMETERS

---

use\_centigrade    boolean

Example: `use_centigrade=true`

---

adv                string

Example: `adv=mode1`

Use this to enable Advanced Search query result.

---

REQUEST BODY SCHEMA:    application/json

**required**

---

## Report configuration and user data criteria

View >  
**required**

object

Report configuration and layout settings

---

adv\_criteria >  
**required**

object (AdvancedSearchCriteria)

Advanced Search criteria for finding users

---

reason

string

Reason for generating the user report

---

## Responses

> **200** Report generated successfully

POST    /api/users/report

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "View": {
    + "Query": { ... },
    + "display_fields": [ ... ],
    "name": "All Users",
    "show_title_every_page": false,
    "group_by_page_break": false,
    "footer_report_date": true,
    "footer_comment": "Created by Administrator",
    "footer_display_page_number": true,
    "content_type": "PDF",
    "page_size": "A4",
    "page_portrait": false
  },
  - "adv_criteria": {
    "limit": 1000,
    "user_group_ids": [ ],
    "user_group_id": 1,
    "user_operator_level_id": 0,
    "order_by": "user_id:false"
  }
}
```

Response samples

**200**

Content type

application/json

Copy

Expand all

Collapse all

```
{
  - "FileCollection": {
    "total": "1",
    + "rows": [ ... ]
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

## Create/Update User Private Message

This API is used to create or update User Private Message.

This API is available starting from BioStar 2 version 2.9.8.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

**userId**  
required

integer

Example:

User ID of the user to whom the private message will be configured.

**REQUEST BODY SCHEMA:** application/json  
required

Private message data to set for the user

|                    |                                                                                                                                       |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| phrase<br>required | string [ 1 .. 128 ] characters<br>Private message text to display to the user. Maximum 128 bytes - longer messages will be truncated. |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------|

Responses

> 200 Successful response

POST /api/v2/users/phrase/{userId}

Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type  
application/json

Copy

```
{  
  "phrase": "Good morning. Set private message here."  
}
```

## Response samples

200

Content type

application/json

Copy

```
{  
  "code": "0",  
  "link": "https://support.supremainc.com/en/support/home",  
  "message": "Success",  
  "by": "web"  
}
```

## Delete User Private Message

This API is used to delete User Private Message.

This API is available starting from BioStar 2 version 2.9.8.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

userId  
required

integer

Example:

User ID of the user to whom the private message will be deleted.

## Responses



> 200 Successful response

DELETE /api/v2/users/phrase/{userId}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
--url https://{baseUrl}/api/v2/users/phrase/12 \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Copy

```
{  
  "code": "0",  
  "link": "https://support.supremainc.com/en/support/home",  
  "message": "Success",  
}
```

```
"by": "web"  
}
```

## Fetch User Private Message

This API is used to fetch User Private Message.

This API is available starting from BioStar 2 version 2.9.8.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

userId  
required

integer

Example:

User ID of the user to whom the private message will be fetched.

## Responses

> **200** Successful response

GET /api/v2/users/phrase/{userId}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

|                     |                         |                         |             |             |
|---------------------|-------------------------|-------------------------|-------------|-------------|
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1 |             |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |             |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |             |             |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |             |             |

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/v2/users/phrase/12 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

**200**

Content type

application/json

Copy

```
{  
  "user_id": 12,  
  "phrase": "Good morning. You're expected at meeting room 1 at 09.00"  
}
```

## Download File from File Upload Custom Field

This API is used to download the file which contained in a File Upload Custom Field.

This API is available starting from BioStar 2 v2.9.8.

After receiving the response, convert the Base64 data on key `document` to file type specified on key `mimetype`.

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

---

**UserID**  
required

integer

Example:

ID of the user which have the intended file.

---

**customFieldID**  
required

integer

Example:

ID of the File Upload Custom Field which contain the file.

---

## Responses

> **200** Successful response

GET /api/user\_document/{UserID}/{customFieldID}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/user_document/3/5 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{  
  - "Data": {  
    "document": "U1c1IGlzIHRoZSBiZXN0IGRldmVsb3Blcg==",  
    "mimetype": "text/plain",  
    "item": "ACCOUNTS.TXT"  
  },  
  - "Response": {  
    "code": "0",  
    "link": "https://support.supremainc.com/en/support/home",  
    "message": "Success",  
    "by": "web"  
  }  
}
```

---

## View User & Group

Retrieves a combined list of **user groups** and **users**, including hierarchical relationships between groups and their members.

This endpoint is typically used to build a **tree structure** (group → subgroup → user) for user management, filtering, or selection interfaces.

AUTHORIZATIONS: > *SessionAuth*

# Responses

> 200 OK

GET /api/v2/user/filter/user\_and\_group

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/v2/user/filter/user_and_group \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

200

Content type  
application/json

Copy   Expand all   Collapse all

```
{
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "success",
    "by": "web"
  },
  - "UserAndGroupCollection": {
    "total": 10135,
    + "rows": [ ... ]
  }
}
```

## Delete User(s)

This API is used to delete user(s) from BioStar X.

### Known errors:

- Empty parameter `id`
- Using `id` which doesn't exist

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

id

string

Example: `id={{iterIDVal}}`

ID of the User which will be deleted. To delete multiple Users, use plus (+) sign as separator of each User ID. Ex:  
1001+1002+1003+1004 Use GET `/api/users` to list available users

## Responses

— 200 Successful response

DELETE /api/users

## Request samples

|                     |                         |                         |                  |             |
|---------------------|-------------------------|-------------------------|------------------|-------------|
| Shell + Curl        | Shell + Httpie          | Shell + Wget            | Node + Native    |             |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |             |
| Javascript + Fetch  | Javascript + Jquery     | Javascript + Xhr        | Python + Python3 |             |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |             |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |             |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |             |

Copy

```
curl --request DELETE \
  --url 'https://{baseurl}/api/users?id={{iterIDVal}}' \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Batch Edit with Advanced Search

By adding `adv=model1` on Query Parameter, Batch Edit feature can works with Advanced Search result.

The API works by query users based on `adv_criteria` object, then apply new value based on input in User object.

AUTHORIZATIONS: > *SessionAuth*



QUERY PARAMETERS

adv  
required

string  
Value: "mode1"  
Example: adv=mode1  
Use this to enable Advanced Search query result

REQUEST BODY SCHEMA: application/json  
required

User >  
required

object  
User data to change

adv\_criteria >  
required

object (AdvancedSearchCriteria)  
Advanced Search criteria for finding users

Responses

> 200 Batch edit completed successfully

PUT /api/users

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy

Expand all

Collapse all

```
{
-  "User": {
      "start_datetime": "2001-01-02T00:00:00.00Z",
      "expiry_datetime": "2035-12-31T23:59:00.00Z",
      "disabled": true,
+    "user_group_id": { ... },
+    "permission": { ... },
+    "access_groups": [ ... ]
  },
```

```
- "adv_criteria": {
  "limit": 50,
  "offset": 0,
  "user_id": "11",
  "order_by": "user_id:false",
  "user_group_id": 1,
+ "user_group_ids": [ ... ],
  "user_name": "John",
  "user_email": "abc@gmail.com",
  "user_phone": "123-456-7890",
  "user_access_group_ids": "17,18",
  "user_operator_level_id": 0,
  "user_department": "Engineering",
  "user_title": "Manager",
  "user_card": "123456",
  "user_custom_field_1": "string",
  "user_custom_field_2": "string",
  "user_custom_field_3": "string",
  "user_custom_field_4": "string",
  "user_custom_field_5": "string",
  "user_custom_field_6": "string",
  "user_custom_field_7": "string",
  "user_custom_field_8": "string",
  "user_custom_field_9": "string",
  "user_custom_field_10": "string",
  "user_status": false
}
```

## Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
- "FailedUserCollection": {
  "total": "0",
+ "rows": [ ... ]
},
```

```

- "Response": {
  "code": "0",
  "link": "https://support.supremainc.com/en/support/home",
  "message": "Success",
  "by": "web"
}
}

```

## List All User

This API is used to list users which is recorded on BioStar X.

### Known errors:

- Putting "/" at the end of the endpoint
- Using `group_id` which doesn't exist will return success but no records

**Note:** This API is deprecated in BioStar 2 v2.8.12, please use `/api/v2/users/search` instead.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

|          |                                                                                                                                                                                                                 |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| group_id | integer<br>Example: <code>group_id=1</code><br>Filter response record(s) according to the group_id specified on this parameter. Use GET /api/user_groups to list all User Groups. Default value: 1 to show all. |
| limit    | integer<br>Limit response record(s) by the amount specified on this parameter. 0 for show all.                                                                                                                  |
| offset   | integer<br>Shift response record(s) by the amount specified on this parameter. default value = 0. Ex: If you have 10 records, put                                                                               |

value 5 on limit, and when you put value 5 on offset, you will get record 6 to 10 on the result.

order\_by

string

Example: `order_by=user_id:false`

Order the response record(s) by the User parameter such as user\_id or name. False for ascending, True for descending.

last\_modified

integer

Show response record(s) with User last\_modified value which is equal or greater than this parameter value.

## Responses

— 200 Successful response

GET /api/users

## Request samples

|                     |                         |                         |                  |             |
|---------------------|-------------------------|-------------------------|------------------|-------------|
| Shell + Curl        | Shell + Httpie          | Shell + Wget            | Node + Native    |             |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |             |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |             |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |             |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |             |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |             |

Copy

```
curl --request GET \  
  --url 'https://{baseurl}/api/users?group_id=1&limit=0&offset=0&order_by=user_id%3Afalse&la:  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Device Group

### View All Device Group

This API is used to list all device groups recorded on BioStar X database.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

object


### Responses

— 200 Successful response

POST /api/v2/device\_groups/search

### Request samples

[Payload](#)[Shell + Curl](#)[Shell + Httpie](#)[Shell + Wget](#)[Node + Native](#)[Node + Request](#)[Node + Unirest](#)[Node + Axios](#)[Node + Fetch](#)

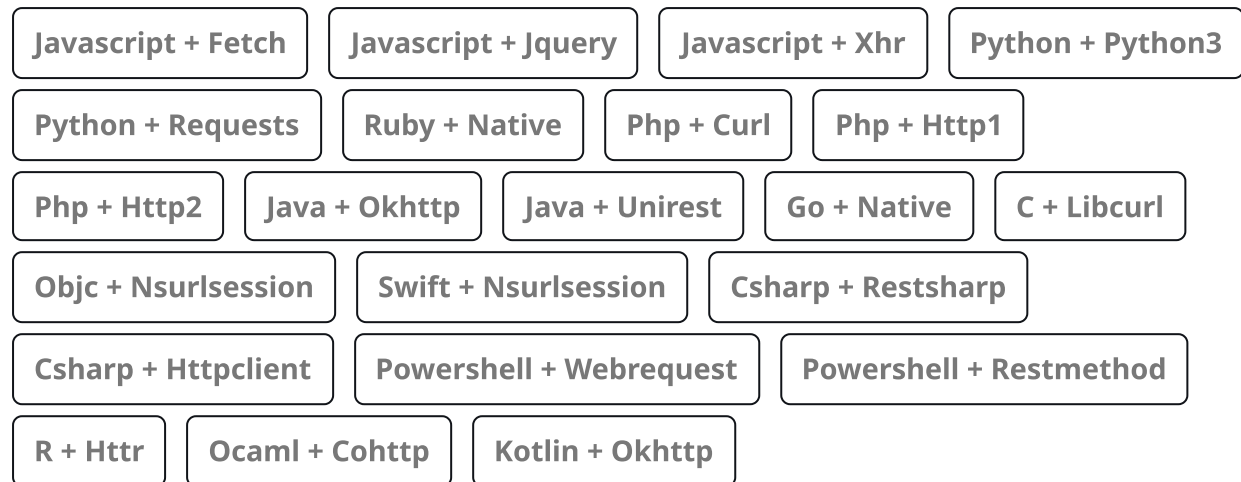

Content type

application/json

Copy

```
{  
  "order_by": "depth:false"  
}
```

## View Device Group(s) with Criteria & Permission

This API is used to list all device groups recorded on BioStar 2 database.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

object

## Responses

— 200 Successful response

POST /api/v2/device\_groups/only\_permission\_item/search

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{  
  "order_by": "depth:false"  
}
```

Create New Device Group

This API is used to create new device group.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

DeviceGroup ▾ object



|             |                                 |
|-------------|---------------------------------|
| name        | string                          |
|             | Name of the device group        |
| description | string                          |
|             | Description of the device group |
| parent_id > | object                          |

Responses

— 200 Successful response

POST /api/device\_groups

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

**Content type**

application/json

Copy Expand all Collapse all

```
{
  - "DeviceGroup": {
    "name": "New Device Group 1",
    "description": "Description of the device group",
    + "parent_id": { ... }
  }
}
```

## Update Device Group

This API is used to update a device group.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

**id**  
**required**

integer

Example:

ID of the device group which will be updated

## Responses

— **200** Successful response

PUT /api/device\_groups/{id}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request PUT \
  --url https://{baseUrl}/api/device_groups/5 \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Delete Device Group

This API is used to delete device group.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

id

required

integer

Example: 5

ID of the device group which will be deleted

## Responses

— 200 Successful response

DELETE /api/device\_groups/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
  --url https://{baseurl}/api/device_groups/5 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

Device

Write Card Data

This API is used to create Access on Card and write data to a card (Smart Card, etc.) using the specified device. The device must have a Smart Card layout configured before running this API.

AUTHORIZATIONS: > *SessionAuth*

#### PATH PARAMETERS

---

**device\_id**  
**required**

integer

Example:

ID of the device which will be used to write the card. Do set the Smart Card layout of the device before running this API.

---

#### REQUEST BODY SCHEMA: application/json

---

**SmartCard** ▾  
**required**

object

---

**user\_id** >  
**required**

object

User information and biometric templates

---

**card\_id** >  
**required**

object

Card identification information

---

## Responses

— **200** Successful response

POST /api/devices/{device\_id}/write\_card

## Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type

application/json

Copy Expand all Collapse all

```
{
  - "SmartCard": {
    + "user_id": { ... },
    + "card_id": { ... }
  }
}
```

## Verify Fingerprint Scan

This API is used to compare 2 fingerprint scan to determine whether it's the same finger or not.

As shown on the example, it is applied on `template0` and `template1` where `template0` is the 1st scan of the finger and `template1` is the 2nd scan.

To get the value for these parameters, use `POST` `/api/devices/:dev_id/scan_fingerprint` two times. The first scan for `template0` and second scan for `template1`.

It will return HTTP 200 and shows message result: true on success, HTTP 500 and shows message result: false on failure.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

dev\_id  
required

integer 

>= 1

Example: 544140034

Unique identifier of the device to perform fingerprint verification

---

REQUEST BODY SCHEMA: application/json  
required

---

Fingerprint templates and verification options

FingerprintTemplate >  
required

object  
Container for the two fingerprint templates to compare

---

VerifyFingerprintOption >

object  
Optional verification configuration

---

Responses

— 200 Successful response

POST /api/devices/{dev\_id}/verify\_fingerprint

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget


Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

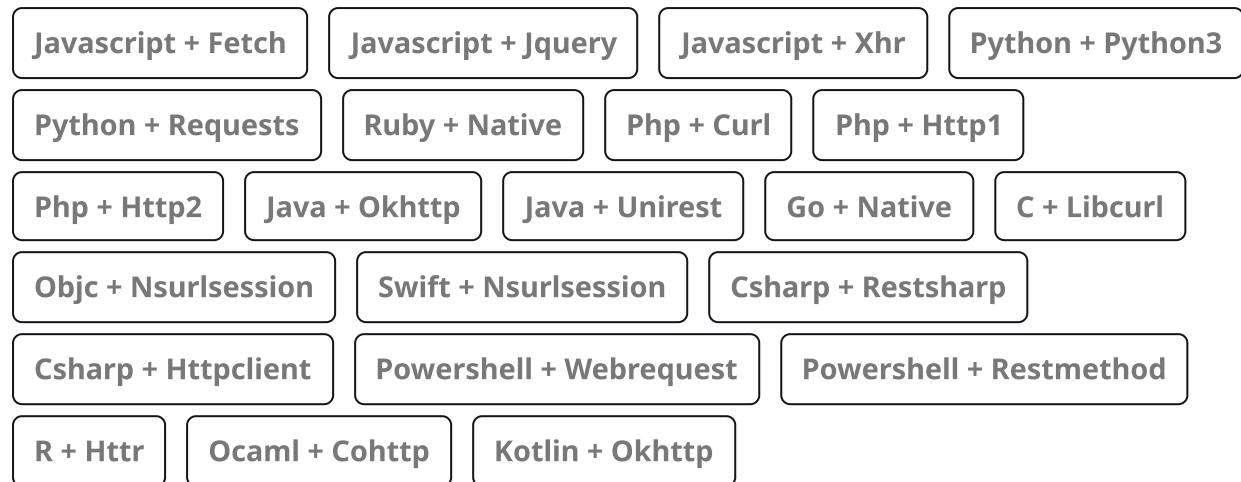

Content type

application/json

Copy Expand all Collapse all

```
{
  - "FingerprintTemplate": {
    "template0": "RSoQFLAAVUYMBEBvBBIEsWSLFITAEIUGBgEYBA/G0W0IAwcgdgEbh2ANixfIM
    "template1": "RSgQFK8AVUYRBDBvhxqEgBGFHsSRZwsIhRF1BQtGIRuEFsZxawgJRwB5AR4H
  },
  - "VerifyFingerprintOption": {
    "security_level": "0"
  }
}
```

## Verify Duplicate Fingerprint

This API is used to verify duplicate fingerprint.

If fingerprint already exist, it will return success (HTTP 200) and response will show the user which currently using the fingerprint.

Use the result of `POST /api/devices/:dev_id/scan_fingerprint` for the value of parameter template (either the 1st or 2nd scan).

If fingerprint available, it will return server error (HTTP 500) with response showing message "Failed to identify fingerprint."



AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

---

ServerMatching  **required** object

---

**required** template string  
Base64-encoded fingerprint template to identify

---

Responses

— 200 Successful response

POST /api/server\_matching/identify\_finger

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

## Content type

application/json

Copy Expand all Collapse all

```
{
  - "ServerMatching": {
    "template": "AA4NE6cAVUYXwGEODRaBgWmJGoLhCoUTw+BohB0EYWaJIMKAWikiAsAjijED4
  }
}
```

## View Waiting Devices

This API is used to view device(s) which is on waiting list after changing connection mode from **Server** > **Device to Device** > **Server**.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/devices/waiting

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/devices/waiting \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Add Slave Device

This example shows how to add slave device to BioStar X.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

DeviceCollection ▾ object

rows ▾ Array of objects

|                  |                              |
|------------------|------------------------------|
| Array [          |                              |
| id               | string<br>ID of the device   |
|                  |                              |
| name             | string<br>Name of the device |
|                  |                              |
| device_type_id > | object                       |

```
    parent_device_id > object
    rs485 > object
  ]
```

Responses

— 200 Successful response

POST /api/devices

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DeviceCollection": {
    + "rows": [ ... ]
  }
}
```

## List All Added Device(s)

This API is used to view all devices added to BioStar X.

Status response for this API:

| Parameter | Type    | Description                                                                          |
|-----------|---------|--------------------------------------------------------------------------------------|
| status    | Integer | Connection status of the device.<br>0: Disconnected<br>1: Connected<br>2: Sync Error |

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/devices

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

|                     |                         |                         |                  |             |
|---------------------|-------------------------|-------------------------|------------------|-------------|
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |             |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |             |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |             |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |             |

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/devices \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Remove Device(s)

This API is used to delete device(s).

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

id

integer

Example: `id=543408590`

ID of the device(s) which will be deleted. To delete multiple device use plus (+) sign as separator.

## Responses

— 200 Successful response

DELETE /api/devices

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
--url 'https://{baseurl}/api/devices?id=543408590' \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Update Device

This API is used to update device's configuration.  
Put value which will be updated on the respective body parameter and remove any parameters which will not be updated.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

|          |                                        |
|----------|----------------------------------------|
| id       | string                                 |
| required | ID of the device which will be updated |

REQUEST BODY SCHEMA: application/json  
required

Device configuration data to update. Only include fields that need to be changed.

|                   |        |                                                    |
|-------------------|--------|----------------------------------------------------|
| Device ▾          | object | Container for all device configuration settings    |
| name              | string | Display name of the device                         |
| device_group_id > | object | Group ID of the device                             |
| lan >             | object | LAN network configuration                          |
| usb >             | object | USB configuration settings                         |
| wlan >            | object | WLAN wireless network configuration                |
| rs485 >           | object | RS485 serial communication configuration           |
| authentication >  | object | Authentication and biometric settings              |
| card >            | object | Card reader configuration and supported card types |
| display >         | object | Display and user interface settings                |
| system >          | object | System-level configuration                         |



|                              |                                                                                    |
|------------------------------|------------------------------------------------------------------------------------|
| wiegand >                    | object<br><b>Wiegand configuration</b>                                             |
| tna >                        | object<br><b>Time and Attendance (T&amp;A) configuration</b>                       |
| input >                      | object<br><b>Input configuration</b>                                               |
| event_filter >               | object<br><b>List of event filters in which image logs are saved on the device</b> |
| voip >                       | object<br><b>VoIP configuration</b>                                                |
| barcode >                    | object<br><b>Barcode configuration</b>                                             |
| pktversion                   | string<br><b>Packet version</b>                                                    |
| support_occupancy            | boolean<br><b>Support occupancy</b>                                                |
| thermal_config >             | object<br><b>Thermal camera configuration for temperature screening</b>            |
| thermal_camera_config >      | object<br><b>Detailed thermal camera settings</b>                                  |
| trigger_actions              | string<br><b>Trigger Actions</b>                                                   |
| authmode >                   | object<br><b>Authentication mode capabilities</b>                                  |
| card_supported_from_device > | object                                                                             |

|                     |                                         |
|---------------------|-----------------------------------------|
|                     | Card types supported by the device      |
| capability >        | object<br>Device capability information |
| imageLogEventInfo > | object<br>Image log event information   |
| use_image_log       | boolean<br>Use image log                |
| dst1                | string<br>DST1                          |
| dst2                | string<br>DST2                          |

Responses

— 200 Successful response

PUT /api/devices/{id}

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
-  "Device": {
      "name": "FaceStation 2 542353521 (192.168.1.23)",
      +  "device_group_id": { ... },
      +  "lan": { ... },
      +  "usb": { ... },
      +  "wlan": { ... },
      +  "rs485": { ... },
      +  "authentication": { ... },
      +  "card": { ... },
      +  "display": { ... },
      +  "system": { ... },
      +  "wiegand": { ... },
      +  "tna": { ... },
      +  "input": { ... },
      +  "event_filter": { ... },
      +  "voip": { ... },
      +  "barcode": { ... },
      "pktversion": "3",
      "support_occupancy": true,
      +  "thermal_config": { ... },
      +  "thermal_camera_config": { ... },
      "trigger_actions": "",
      +  "authmode": { ... },
      +  "card_supported_from_device": { ... },
      +  "capability": { ... },
      +  "imageLogEventInfo": { ... },
      "use_image_log": false,
      "dst1": "0",
      "dst2": "0"
    }
  }
```



# View Device Information

This API is used to view device's information.

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

id

required

integer

Example: 542353521

ID of the device which information will be viewed

## Responses

— 200 Successful response

GET /api/devices/{id}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url https://{baseurl}/api/devices/542353521 \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Update Device Homescreen

Updates the homescreen display resources for one or more BioStar X devices. This API allows you to customize the device display with custom images, logos, or notices that appear on the device's homescreen.

**Prerequisites** Before using this API, you must first configure the device's display settings using the Update Device API ( `/api/devices/{id}` ) with the following parameters:

- `background`: Display mode ( `0` =Default, `2` =Slide Show)
- `background_theme`: Content type ( `0` =Normal, `1` =Notice, `2` =Logo)

```
{
  "Device": {
    "display": {
      "background": "0"
      "background_theme": "2"
    }
  }
}
```

For Slide Show mode, set both `background` and `background_theme` to "2".

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

required

Device collection and resource data for updating homescreen display

DeviceCollection >  
required

object  
Collection of devices to update

ResourceDataCollection >  
required

object  
Collection of resource data to apply to devices

Responses

— 200 Successful response

POST /api/resources/update

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DeviceCollection": {
    "total": 2,
    + "rows": [ ... ]
  },
  - "ResourceDataCollection": {
    "total": 1,
    "type": "2",
    + "rows": [ ... ]
  }
}
```

---

## List Device Types

This API is used to list Suprema devices recorded on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/device\_types

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

|                     |                         |                         |             |             |
|---------------------|-------------------------|-------------------------|-------------|-------------|
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |             |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |             |             |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |             |             |

[Copy](#)

```
curl --request GET \  
  --url https://{baseurl}/api/device_types \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## View Device(s) Based on Enrollment Type

This API is used to view device(s) based on its enrollment capabilities.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

|      |                                                                                                                                |
|------|--------------------------------------------------------------------------------------------------------------------------------|
| type | integer                                                                                                                        |
|      | Device enrollment type. <b>0</b> =All, <b>1</b> =Finger, <b>2</b> =CSN, <b>3</b> =Smart, <b>4</b> =Face, <b>5</b> =Visual Face |

## Responses

— **200** Successful response

GET /api/devices/enrollment

## Request samples



Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url 'https://{baseurl}/api/devices/enrollment?type=0' \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

# List Added Device(s) with Criteria

This API is used to list devices with parameters to filter the result. It is required to at least put {} for the API to run correctly.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

|                        |         |                                                                                  |
|------------------------|---------|----------------------------------------------------------------------------------|
| limit                  | integer | Limit the number of responses according to the specified value                   |
| exclude_device_type_id | integer | Exclude device to show on the response according to the device type id specified |

order\_by

string

Order the response according to the specified value

Responses

> 200 Successful response

POST /api/v2/devices/search

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy

```
{
  "limit": 0,
  "exclude_device_type_id": 254,
  "order_by": "id:false"
}
```

## Response samples

**200**

Content type

application/json

Copy

```
{
  "status": 1,
  "user_sync_status": 0
}
```

---

## View Device Configuration

This API is used to view device's configuration.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

id  
required

integer

Example: 

ID of the device which information will be viewed

---

## Responses

— **200** Successful response

GET    /api/devices/{id}/config

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/devices/543720368/config \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

## View User Statistics in a Device

This API is used to view user statistics in a device.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

id

required

integer

Example: 538152248

ID of the device which will be viewed

## Responses

— 200 Successful response

GET /api/devices/{id}/discover\_userdata

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url https://{baseurl}/api/devices/538152248/discover_userdata \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## View Device Capabilities

This API is used to list device's capabilities such as fingerprint, wifi, etc.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

DeviceCollection ▾ object (DeviceCollectionID)

rows ▾ Array of objects

Array [

id integer  
required ID of the device

]

Responses

— 200 Successful response

POST /api/devices/capability

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DeviceCollection": {
    + "rows": [ ... ]
  }
}
```

# Sync Device Data

This API is used to sync device's data with BioStar X.

AUTHORIZATIONS: > SessionAuth

## QUERY PARAMETERS

clean

boolean

Toggle true to delete data on the device before sync process.

## REQUEST BODY SCHEMA: application/json

DeviceCollection ▾

object (DeviceCollectionID)

rows ▾

Array of objects

Array [

id

required

integer

ID of the device

]

# Responses

— 200 Successful response

POST /api/devices/sync

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DeviceCollection": {
    + "rows": [ ... ]
  }
}
```





---

## Unlock Device

This API is used to set a device state to unlocked.

Manually unlocked device state will persist until it's normalized.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

---

DeviceCollection ▾ object (DeviceCollectionID)

---

rows ▾ Array of objects

---

Array [

id integer  
**required** ID of the device

---

]

## Responses

— **200** Successful response

POST /api/devices/unlock

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DeviceCollection": {
    + "rows": [ ... ]
  }
}
```

Search Devices (TCP)

This API is used to view device's information using TCP.

This API only works for devices which haven't been added to BioStar X.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

|                         |                               |
|-------------------------|-------------------------------|
| Device ▾                | object                        |
| lan ▾                   | object                        |
| ip<br>required          | string<br>IP of the device    |
| device_port<br>required | integer<br>Port of the device |

Responses

— 200 Successful response

POST /api/devices/tcp\_search

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Device": {
    + "lan": { ... }
  }
}
```

# Search Devices (UDP)

This API is used to search devices through UDP.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

UdpSearchOption ▾ object

|            |                                                              |
|------------|--------------------------------------------------------------|
| timeout    | integer<br>Search devices until the specified second reached |
| with_rs485 | boolean<br>Toggle to find device(s) with RS485               |

hide\_known\_devices

boolean

Toggle to show device(s) which already known (added to BioStar X) or not.

---

Responses

— 200 Successful response

POST /api/devices/udp\_search

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy Expand all Collapse all

```
{  
  - "UdpSearchOption": {  
    "timeout": 3,  
    "with_rs485": true,  
    "hide_known_devices": true  
  }  
}
```

---

## View Device IP Settings

This API is used to get the IP settings of a device which have not been added to BioStar X.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

---

Device ▾

object

---

id  
required

integer

ID of the device which the IP setting will be viewed.

---

## Responses

— 200 Successful response

POST /api/devices/udp\_get

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Device": {
    "id": 543408590
  }
}
```

## Update Device IP Settings

This API is used to update IP settings on device which have not been added to BioStar X.

It is required to fill in the id parameter with the id of the device which the IP settings will be updated.

Fill in the required value on the respective parameters and remove those which is not required.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

|                  |                                                    |
|------------------|----------------------------------------------------|
| Device ▾         | object                                             |
| <hr/>            |                                                    |
| id<br>required   | integer<br>ID of the device which will be updated. |
| <hr/>            |                                                    |
| lan >            | object                                             |
| <hr/>            |                                                    |
| device_type_id > | object                                             |
| <hr/>            |                                                    |

Responses

— 200 Successful response

POST /api/devices/udp\_put

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp



Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy

Expand all

Collapse all

```
{
  - "Device": {
    "id": 543408590,
    + "lan": { ... },
    + "device_type_id": { ... }
  }
}
```

## Connect Device

This API is used to connect a device which have been disconnected.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

id

required

integer

Example: 542353521

ID of the device which will be connected

## Responses

— 200 Successful response

POST /api/devices/{id}/connect

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request POST \  
  --url https://{baseurl}/api/devices/542353521/connect \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

Disconnect Device

This API is used to disconnect a device connection from BioStar X.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

id

required

integer

Example: 542353521

ID of the device which will be disconnected

# Responses

— 200 Successful response

POST /api/devices/{id}/disconnect

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request POST \  
  --url https://{baseurl}/api/devices/542353521/disconnect \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Find Wiegand

This API is used to find wiegand device attached to master device.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

id

required

integer

Example: 544140034

ID of the master device

---

Responses

— 200 Successful response

POST /api/devices/{id}/discover\_wiegand

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request POST \  
  --url https://{baseurl}/api/devices/544140034/discover_wiegand \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Find Slave Device

This API is used to find slave device attached to a master device.

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

id

required

integer

Example: 544140034

ID of the master device

## Responses

— 200 Successful response

POST /api/devices/{id}/discover

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request POST \  
  --url https://{baseurl}/api/devices/544140034/discover \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Clear Device Alarm

This API is used to clear alarm from a device.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

DeviceCollection ▾ object

rows ▾ Array of objects

Array [

id integer

]

## Responses

— 200 Successful response

POST /api/devices/clear\_alarm

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DeviceCollection": {
    + "rows": [ ... ]
  }
}
```

View Total User on a Device

This API is used to view user data summary from a device.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

id integer  
**required**  
Example: 543308153

QUERY PARAMETERS

limit integer  
Example: limit=20  
Limit the number of response's records by the specified value. (Default= 50 )

page integer  
Filter the response based on the specified page number. (Default= 1 )

Responses

— 200 Successful response

GET /api/devices/{id}/users

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp



Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url 'https://{baseurl}/api/devices/543308153/users?limit=20&page=0' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Delete User from a Device

This API is used to delete user data on a device.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

**id****required**

integer

Example: 

ID of the device which the user data will be deleted

### QUERY PARAMETERS

**id**

string

Example: 

ID of the user which will be deleted. Use (\*) for all user.

## Responses

— **200** Successful response

DELETE /api/devices/{id}/users

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \
--url 'https://{baseurl}/api/devices/543720368/users?id=*' \
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Export User Data from a Device to BioStar X

This API is used to export user data from a device to BioStar X.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

id

required

integer

Example: 538152248

ID of the device which the user data will be uploaded to.

## QUERY PARAMETERS

id

integer

Example: `id=44004`

ID of the user which will be uploaded. Use plus symbol ( + ) to separate multiple user ID, ex: 1+2+3.

## Responses

> **200** Successful response

POST `/api/devices/{id}/users/export`

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request POST \
  --url 'https://{baseurl}/api/devices/538152248/users/export?id=44004' \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Response samples

200

Content type  
application/json

Copy   Expand all   Collapse all

```
{
  - "UserCollection": {
    "total": "0",
    + "rows": [ ... ]
  },
  - "DeviceResponse": {
    + "rows": [ ... ],
    "result": "true"
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success"
  }
}
```

## View RS485 Devices

This API is used to list devices which connected using RS-485.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

dev\_id  
required

integer  
Example: 542071155  
ID of the device which will be viewed

## Responses

— 200 Successful response

GET /api/devices/rs485/{dev\_id}

### Request samples

|                     |                         |                         |                  |             |
|---------------------|-------------------------|-------------------------|------------------|-------------|
| Shell + Curl        | Shell + Httpie          | Shell + Wget            | Node + Native    |             |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |             |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |             |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |             |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |             |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |             |

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/devices/rs485/542071155 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Door Groups

### View All Door Groups

This API is used to view all available door groups. It is required to put {} on the body parameter to run the API successfully.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

object

## Responses

— 200 Successful response

POST /api/v2/door\_groups/search

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy



# View All Door Groups (Sort)

This API is used to view all door groups while sorting the response using available fields.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|                                                                                                                                                |        |
|------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| order_by                                                                                                                                       | string |
| Sort the response records by value which inputted on this parameter Available fields: <span>id</span> , <span>name</span> , <span>depth</span> |        |

## Responses

— 200 Successful response

POST /api/v2/door\_groups/only\_permission\_item/search

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{
  "order_by": "depth:false"
}
```

# Create Door Group

This API is used to create door groups. **Known issue:**

- Duplicate group name within one parent group
- Depth value not within 1-8
- Using `parent_id` which doesn't exist will result in success but the created group will not be visible.
- Using empty value on name will success creating a door with name: undefined. This door can't be deleted. To resolve this, update the door name then it will be able to be deleted.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|                      |         |
|----------------------|---------|
| DoorGroup ▾          | object  |
| parent_id > required | object  |
| depth required       | integer |



|                  |                                                                                                |
|------------------|------------------------------------------------------------------------------------------------|
|                  | Depth of the group in accordance with the parent group (parent depth+1). Value between 1 to 8. |
| name<br>required | string<br>Name of the group. Do not put empty value on this parameter. Max 48 characters.      |

Responses

— 200 Successful response

POST /api/door\_groups

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
  - "DoorGroup": {  
    + "parent_id": { ... },  
    "depth": 1,  
    "name": "AAAAA5q"  
  }  
}
```

---

## Delete Door Group

This API is used to delete door group.

Put the door's ID on the id parameters of this API to delete door.

### Note:

- Deleting parent group will also delete child group
- Deleting groups with door(s) will also remove door(s) under that group. This will consequently remove doors from Access Levels
- Can't delete groups with `parent_id` which doesn't exist
- Can't delete groups with undefined name

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

---

|                                      |                    |
|--------------------------------------|--------------------|
| id                                   | integer            |
| Example:                             | <code>id=33</code> |
| ID of the door which will be deleted |                    |

---

## Responses

— 200 Successful response

DELETE /api/door\_groups

## Request samples

|                     |                         |                         |                  |             |
|---------------------|-------------------------|-------------------------|------------------|-------------|
| Shell + Curl        | Shell + Httpie          | Shell + Wget            | Node + Native    |             |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |             |
| Javascript + Fetch  | Javascript + Jquery     | Javascript + Xhr        | Python + Python3 |             |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |             |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |             |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |             |

Copy

```
curl --request DELETE \  
  --url 'https://{baseurl}/api/door_groups?id=33' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Update Door Group

This API is used to update door group.

Put the door's ID on the id parameters of this API to update door.

### Note:

- When parent\_id updated, any child group will follow the parent group

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

id integer  
**required**  
Example:

---

REQUEST BODY SCHEMA: application/json

---

|             |                                                                                           |
|-------------|-------------------------------------------------------------------------------------------|
| DoorGroup ▾ | object                                                                                    |
| <hr/>       |                                                                                           |
| name        | string<br>Name of the group. Do not put empty value on this parameter. Max 48 characters. |
| <hr/>       |                                                                                           |
| parent_id > | object                                                                                    |
| <hr/>       |                                                                                           |

Responses

— 200 Successful response

PUT /api/door\_groups/{id}

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DoorGroup": {
    "name": "New11",
    + "parent_id": { ... }
  }
}
```

# Doors

## View a Door Details

This API is used to view a Door details.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

id

required

string

Example: 1

ID of the door which will be viewed

## Responses

— **200** Successful response

GET /api/doors/{id}

### Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url https://{baseurl}/api/doors/1 \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Update a Door

This API is used to update a Door details.

Leave the values to be edited, and remove everything else.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

|          |                                      |
|----------|--------------------------------------|
| id       | string                               |
| required | ID of the door which will be updated |

---

REQUEST BODY SCHEMA: application/json

---

|       |               |                                                                                                                                                                                                                                                                                                                                      |
|-------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Door  | ▼             | object (Door)                                                                                                                                                                                                                                                                                                                        |
| <hr/> |               |                                                                                                                                                                                                                                                                                                                                      |
|       | name          | string<br>Name of the door                                                                                                                                                                                                                                                                                                           |
| <hr/> |               |                                                                                                                                                                                                                                                                                                                                      |
|       | description   | string<br>Description of the door                                                                                                                                                                                                                                                                                                    |
| <hr/> |               |                                                                                                                                                                                                                                                                                                                                      |
|       | door_group_id | > object                                                                                                                                                                                                                                                                                                                             |
| <hr/> |               |                                                                                                                                                                                                                                                                                                                                      |
|       | open_timeout  | integer<br>Configure the maximum allowed time for the door to remain open.                                                                                                                                                                                                                                                           |
| <hr/> |               |                                                                                                                                                                                                                                                                                                                                      |
|       | open_duration | integer<br>Set the duration for which the door will remain open after a user authentication is completed. When the authentication is successful, the relay will be activated for the set time. When this time elapses, the relay no longer sends the signal to the door. Open Time may vary depending on the type of door lock used. |
| <hr/> |               |                                                                                                                                                                                                                                                                                                                                      |
|       | open_once     | boolean<br>Lock when door is closed. When the door sensor detects that the door is closed, the door is locked. Set this option to false if unconditional_lock is true. Set true to enable this parameter. (Default= false )                                                                                                          |
| <hr/> |               |                                                                                                                                                                                                                                                                                                                                      |

|                                                                                                                                                                                            |         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| unconditional_lock                                                                                                                                                                         | boolean |
| Use Automatic Door. When using an automatic door as an entrance door, a relay can operate regardless of the status of a door sensor. Set this option as false if open_once is set to true. |         |
| relay_output_id >                                                                                                                                                                          | object  |
| exit_button_input_id >                                                                                                                                                                     | object  |
| sensor_input_id >                                                                                                                                                                          | object  |

Responses

— 200 Successful response

PUT /api/doors/{id}

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp



Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Door": {
    "name": "Anywhere FS2",
    "description": "Test",
    + "door_group_id": { ... },
    "open_timeout": 15,
    "open_duration": 5,
    "open_once": true,
    "unconditional_lock": true,
    + "entry_device_id": { ... },
    + "relay_output_id": { ... },
    + "exit_button_input_id": { ... },
    + "sensor_input_id": { ... }
  }
}
```

# View All Doors

This API is used to view Doors which is recorded on BioStar 2 database.

AUTHORIZATIONS: > SessionAuth

## QUERY PARAMETERS

|          |                                                                           |
|----------|---------------------------------------------------------------------------|
| limit    | integer<br>Limit the number of records according with the value specified |
| order_by | string<br>Example: order_by=id:true                                       |

Sort the records based on the id, toggle true/false to switch ascending/descending

## Responses

— 200 Successful response

GET /api/doors

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url 'https://{baseurl}/api/doors?limit=0&order_by=id%3Atrue' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Create a Door

This API is used to create a door.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|                    |                                                                                                                                                                                                                                                                                                                                                         |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Door ▾             | object (Door)                                                                                                                                                                                                                                                                                                                                           |
| name               | <div>string</div> <div>Name of the door</div>                                                                                                                                                                                                                                                                                                           |
| description        | <div>string</div> <div>Description of the door</div>                                                                                                                                                                                                                                                                                                    |
| door_group_id >    | <div>object</div>                                                                                                                                                                                                                                                                                                                                       |
| open_timeout       | <div>integer</div> <div>Configure the maximum allowed time for the door to remain open.</div>                                                                                                                                                                                                                                                           |
| open_duration      | <div>integer</div> <div>Set the duration for which the door will remain open after a user authentication is completed. When the authentication is successful, the relay will be activated for the set time. When this time elapses, the relay no longer sends the signal to the door. Open Time may vary depending on the type of door lock used.</div> |
| open_once          | <div>boolean</div> <div>Lock when door is closed. When the door sensor detects that the door is closed, the door is locked. Set this option to false if <code>unconditional_lock</code> is true. Set true to enable this parameter. (Default= <code>false</code> )</div>                                                                                |
| unconditional_lock | <div>boolean</div> <div>Use Automatic Door. When using an automatic door as an entrance door, a relay can operate regardless</div>                                                                                                                                                                                                                      |

of the status of a door sensor. Set this option as false if open\_once is set to true.

|                        |        |
|------------------------|--------|
| relay_output_id >      | object |
| exit_button_input_id > | object |
| sensor_input_id >      | object |

## Responses

— 200 Successful response

POST /api/doors

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

**Content type**

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
  - "Door": {
    "name": "Anywhere FS2",
    "description": "Test",
    + "door_group_id": { ... },
    "open_timeout": 15,
    "open_duration": 5,
    "open_once": true,
    "unconditional_lock": true,
    + "entry_device_id": { ... },
    + "relay_output_id": { ... },
    + "exit_button_input_id": { ... },
    + "sensor_input_id": { ... }
  }
}
```

## Delete Door(s)

This API is used to delete Door(s).

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

**id**

string

Example: 

ID of the door which will be deleted. To delete multiple doors, separate the IDs with space.

## Responses

— 200 Successful response

DELETE /api/doors

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
  --url 'https://{baseurl}/api/doors?id=1' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## View All Doors v2

This API is used to view door records from BioStar X.

It is required to at least put {} on the body for the API to run correctly.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|               |         |                                                                                                                                            |
|---------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------|
| limit         | integer | Limit the number of records on the response according to the value specified                                                               |
| search_text   | string  | Find records with the specified string                                                                                                     |
| door_group_id | integer | Limit the records to only those with <code>door_group_id specified</code>                                                                  |
| order_by      | string  | Sort the response by stated value ( <code>id</code> , <code>door_group_id.name</code> ). Toggle boolean to switch ascending or descending. |

Responses

— 200 Successful response

POST /api/v2/doors/search

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy

```
{  
  "limit": 25,  
  "search_text": "",  
  "door_group_id": 1,  
  "order_by": "door_group_id.name:true"  
}
```

## View Door Status

This API is used to view various door status information such as the door status, relay status, alarm and last event.

- Fire alarm unlocked: A state where the door designated as a fire alarm zone is unlocked because a fire has broken out.
- Manual Lock: A state where the door is locked because the administrator has locked it manually.
- Manual Unlock: A state where the door is unlocked and able to enter without an authentication because the administrator has unlocked it manually.
- Schedule Locked: A state where the door is locked by the schedule that has been set.
- Schedule Unlocked: A state where the door is unlocked by the schedule that has been set.
- Normal: A state where a user can enter the door after an authentication.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

object



# Responses

— 200 Successful response

POST /api/doors/status

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{  
  "monitoring_permission": true  
}
```

# Clear Door Alarm

This API is used to clear alarms of all doors. If an alarm is set in the Zone, the alarm may be continuously output even if the door alarm is released.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

---

DoorCollection ▾ object (DoorCollection)

---

rows ▾ Array of objects

---

Array [

id integer  
ID of the door

---

]

## Responses

— **200** Successful response

POST /api/doors/clear\_alarm

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DoorCollection": {
    + "rows": [ ... ]
  }
}
```

# Clear Anti PassBack: Specific User(s)

This example shows how to clear APB for specific user(s).

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

AntiPassBackConfig ▾ object (TimedAntiPassBackConfig)

AntiPassBackConfig > object

target

string

User target, all users or single user.

Responses

— 200 Successful response

POST /api/doors/clear\_apb\_ex

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "AntiPassBackConfig": {
    + "Door": { ... },
    + "User": [ ... ],
    "UserType": 2
  },
  "target": "users;,[object Object],[object Object]"
}
```

## Manual Lock Door

This API is used to lock a door manually. If you set the state to Manual Lock, the door will have remained inaccessible even if a user authentication succeeded.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

DoorCollection ▾ object (DoorCollection)

rows ▾ Array of objects

Array [

id integer  
ID of the door

]

## Responses

— 200 Successful response

POST /api/doors/lock

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DoorCollection": {
    + "rows": [ ... ]
  }
}
```

Manual Unlock Door

This API is used to unlock a door manually. If you set the state to Manual Unlock, the door will have remained accessible even if a user does not authenticate.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

DoorCollection ▾ object (DoorCollection)

rows ▾ Array of objects

Array [

id integer  
ID of the door

]

Responses

— 200 Successful response

POST /api/doors/unlock

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DoorCollection": {
    + "rows": [ ... ]
  }
}
```

# Release Manual Lock/Unlock

This API is used to release the manual lock or manual unlock set by the administrator.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

DoorCollection ▾ object (DoorCollection)

rows ▾ Array of objects

Array [

id integer  
ID of the door

]



]

Responses

— 200 Successful response

POST /api/doors/release

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DoorCollection": {
    + "rows": [ ... ]
  }
}
```



---

## Clear Timed APB

This API is used to clear Timed APB access record.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

---

TimedAntiPassBackConfig ∨ object (TimedAntiPassBackConfig)

---

AntiPassBackConfig > object

---

target string  
User target, all users or single user.

---

## Responses

> **200** Successful response

— **400** Bad Request - The request was malformed or missing required parameters.

— **401** Unauthorized - The API key provided was invalid or missing.

— **404** Not Found - The requested resource was not found.

— **500** Internal Server Error - An unexpected error occurred on the server.'

POST /api/doors/clear\_timed\_apb\_ex

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "TimedAntiPassBackConfig": {
    + "Door": { ... },
    + "User": [ ... ],
    "UserType": 2
  },
  "target": "users;,[object Object]"
}
```

Response samples

200

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DeviceResponse": {
    + "rows": [ ... ],
    "result": "true"
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success"
  }
}
```

## Open Door

This API is used to open a door.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

DoorCollection ▾ object (DoorCollection)

rows ▾ Array of objects

Array [

id integer

ID of the door

]

# Responses

— 200 Successful response

POST /api/doors/open

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "DoorCollection": {
    + "rows": [ ... ]
  }
}
```

## View Doors with RS485

This API is used to list doors which use devices that connected to the system using RS485.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

id

required

integer

Example: 1

ID of the door which will be viewed

Responses

— 200 Successful response

GET /api/doors/rs485/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/doors/rs485/1 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Retrieve Door Tree

Retrieves the hierarchical structure of door groups and doors, including device and status information.

This endpoint is commonly used to populate door monitoring trees, access control dashboards, or group-based door management UIs.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|                     |                   |                                                                                                         |
|---------------------|-------------------|---------------------------------------------------------------------------------------------------------|
| root_id             | integer           | The ID of the root door group to start searching from.                                                  |
| max_recursion_depth | integer           | Maximum depth of recursive traversal through child groups.                                              |
| collapsed_node_ids  | Array of integers | Fill with child group IDs to set <code>is_collapsed</code> parameter on response to <code>true</code> . |

## Responses

— **200** Successful response

POST /api/v2/door\_tree/search

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  "root_id": 1,
  "max_recursion_depth": 7,
  - "collapsed_node_ids": [
    2
  ]
}
```

## Elevator Groups

### Create Elevator Group

This API is used to create elevator group.



AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|                           |                                                                                                           |
|---------------------------|-----------------------------------------------------------------------------------------------------------|
| ElevatorGroup ▾           | object                                                                                                    |
| parent_id > required      | object                                                                                                    |
| isElevatorGroups required | boolean<br>Marker for elevator group                                                                      |
| depth required            | integer<br>Depth of the group in accordance with the parent group (parent depth+1). Value between 1 to 8. |
| sync_device_groups        | Array of objects<br>Synchronized device groups                                                            |
| sync_devices              | Array of objects<br>Synchronized devices                                                                  |
| inherited required        | boolean<br>Inheritance marker of the group                                                                |
| iconCls                   | string<br>Icon class for the elevator group                                                               |
| text                      | string<br>Text for the elevator group                                                                     |
| name required             | string<br>Name of the elevator group. Up to 48 characters may be entered for an elevator group name.      |

# Responses

— 200 Successful response

POST /api/elevator\_groups

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "ElevatorGroup": {
    + "parent_id": { ... },
    "isElevatorGroups": true,
    "depth": 1,
    "sync_device_groups": [],
    "sync_devices": [],
    "inherited": true,
    "iconCls": "elevatorGroupIcon",
    "text": "New Elevator Group 2",
    "name": "New Elevator Group 2"
  }
}
```



## List Elevator Group

This API is used to list elevator groups recorded in BioStar X.

It is required to at least put {} on body for the API to run correctly.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

object

## Responses

— 200 Successful response

POST /api/v2/elevator\_groups/search

## Request samples

|                     |                      |                    |                  |               |
|---------------------|----------------------|--------------------|------------------|---------------|
| Payload             | Shell + Curl         | Shell + Httpie     | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest       | Node + Axios       | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + Jquery  | Javascript + Xhr   | Python + Python3 |               |
| Python + Requests   | Ruby + Native        | Php + Curl         | Php + Http1      |               |
| Php + Http2         | Java + Okhttp        | Java + Unirest     | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession | Csharp + Restsharp |                  |               |

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy



## List Elevator Group with Criteria & Permission

This API is used to view elevator groups with criteria and permissions.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

order\_by

string

Sort the response records by value which inputted on this parameter Available fields: `id`, `name`, `depth`

## Responses

— 200 Successful response

POST /api/v2/elevator\_groups/only\_permission\_item/search

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{  
  "order_by": "depth:false"  
}
```

## Update Elevator Group

This API is used to update elevator group.  
Up to 48 characters may be entered for an elevator group name.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

|          |                                                |
|----------|------------------------------------------------|
| id       | string                                         |
| required | ID of the elevator group which will be updated |

REQUEST BODY SCHEMA: application/json

ElevatorGroup ▾

object

|                              |                                                                                                           |
|------------------------------|-----------------------------------------------------------------------------------------------------------|
| parent_id ><br>required      | object                                                                                                    |
| isElevatorGroups<br>required | boolean<br>Marker for elevator group                                                                      |
| depth<br>required            | integer<br>Depth of the group in accordance with the parent group (parent depth+1). Value between 1 to 8. |
| sync_device_groups           | Array of objects<br>Synchronized device groups                                                            |
| sync_devices                 | Array of objects<br>Synchronized devices                                                                  |
| inherited<br>required        | boolean<br>Inheritance marker of the group                                                                |
| iconCls                      | string<br>Icon class for the elevator group                                                               |
| text                         | string<br>Text for the elevator group                                                                     |
| name<br>required             | string<br>Name of the elevator group. Up to 48 characters may be entered for an elevator group name.      |

Responses

— 200 Successful response

PUT /api/elevator\_groups/{id}

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "ElevatorGroup": {
    + "parent_id": { ... },
    "isElevatorGroups": true,
    "depth": 1,
    "sync_device_groups": [ ],
    "sync_devices": [ ],
    "inherited": true,
    "iconCls": "elevatorGroupIcon",
    "text": "New Elevator Group 2",
    "name": "New Elevator Group 2"
  }
}
```

# Delete Elevator Group

This API is used to delete elevator group.

Deleting a group deletes all elevators in the group.

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

id

required

integer

Example:

ID of the elevator group which will be deleted

## Responses

— 200 Successful response

DELETE /api/v2/elevator\_groups/{id}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp



Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
  --url https://{baseurl}/api/v2/elevator_groups/5 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Elevators

### Create Elevator

This API is used to create elevator.

The minimum values is name, `elevator_group_id` (id, name), `reader_devices` (id, name), `control_device_id` (id, name, device\_type\_id), `floors` (name, order, elevator\_device\_id, relay\_index). The rest can be removed.

**Controller** - `control_device_id`

Select a device that controls the elevator access permission.

- Only a master device can be selected.
- You can select it from the list of registered devices. **Reader** - `reader_devices`  
Select a device you intend to use for authentication.
- You can select a device among the master device, slave device, and Wiegand device.
- You can select up to 4 readers.
- OM-120 cannot be set as the reader.

**Module** - `module_devices`

Select OM-120 to control the elevator button relay.

- Only OM-120 can be selected.

**Total Number of Floors -** floors

Enter the total number of floors that you can move using the elevator.

- Up to 192 floors can be entered.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|                       |                                                            |
|-----------------------|------------------------------------------------------------|
| Elevator ▾            | object (Elevator)                                          |
| name                  | string<br>Name of the elevator. Max 48 characters.         |
| description           | string<br>Description of the elevator. Max 255 characters. |
| elevator_group_id >   | object                                                     |
| reader_devices >      | Array of objects<br>List of reader devices.                |
| control_device_id >   | object                                                     |
| floors >              | Array of objects<br>List of floors in the elevator.        |
| module_devices >      | Array of objects<br>List of module devices.                |
| trigger_actions       | Array of objects<br>List of trigger actions.               |
| active_timeout        | string<br>Active timeout duration.                         |
| dual_authentication > | object                                                     |

tamper\_device > object

Responses

— 200 Successful response

POST /api/elevators

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Elevator": {
    "name": "Odds",
    "description": "Odds elevator",
    + "elevator_group_id": { ... },
    + "reader_devices": [ ... ],
    + "control_device_id": { ... },
    + "floors": [ ... ],
    + "module_devices": [ ... ],
    "trigger_actions": [ ],
    "active_timeout": "10",
    + "dual_authentication": { ... },
    + "tamper_device": { ... }
  }
}
```

---

## Delete Elevator

This API is used to delete elevator.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

---

|    |                                          |
|----|------------------------------------------|
| id | string                                   |
|    | ID of the elevator which will be deleted |

## Responses

— **200** Successful response

DELETE /api/elevators

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
  --url 'https://{baseurl}/api/elevators?id=SOME_STRING_VALUE' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## List Elevators

This API is used to list elevators recorder in BioStar X

It is required to at least put {} for the API to run correctly.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|             |                                                                      |
|-------------|----------------------------------------------------------------------|
| limit       | integer                                                              |
|             | Limit the response records by the number specified on this parameter |
| search_text | string                                                               |
|             | Search records based on the value specified                          |

|                   |         |                                        |
|-------------------|---------|----------------------------------------|
| elevator_group_id | integer | List elevators with specified group id |
| order_by          | string  | Sort response by specified value       |

## Responses

— 200 Successful response

POST /api/v2/elevators/search

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy



"limit": 50,

```
"search_text": "Odds",  
"elevator_group_id": 1,  
"order_by": "elevator_group_id:false"  
}
```

## View an Elevator Details

This API is used to view an elevator details.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

**id**  
**required** integer  
Example:   
ID of the elevator which will be viewed

## Responses

— **200** Successful response

GET /api/elevators/{id}

## Request samples

|                    |                     |                  |                  |
|--------------------|---------------------|------------------|------------------|
| Shell + Curl       | Shell + Httpie      | Shell + Wget     | Node + Native    |
| Node + Request     | Node + Unirest      | Node + Axios     | Node + Fetch     |
| Javascript + Fetch | Javascript + JQuery | Javascript + Xhr | Python + Python3 |
| Python + Requests  | Ruby + Native       | Php + Curl       | Php + Http1      |



Copy

```
curl --request GET \  
  --url https://{baseurl}/api/elevators/32770 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Update Elevator

This API is used to update an elevator configuration.

Leave values which will be edited and remove everything else.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

**id**  
**required** integer  
Example:   
ID of the elevator which will be updated

### REQUEST BODY SCHEMA: application/json

Elevator ▾

object (Elevator)

**name** string  
Name of the elevator. Max 48 characters.

**description** string  
Description of the elevator. Max 255 characters.



|                       |                                                     |
|-----------------------|-----------------------------------------------------|
| elevator_group_id >   | object                                              |
| reader_devices >      | Array of objects<br>List of reader devices.         |
| control_device_id >   | object                                              |
| floors >              | Array of objects<br>List of floors in the elevator. |
| module_devices >      | Array of objects<br>List of module devices.         |
| trigger_actions       | Array of objects<br>List of trigger actions.        |
| active_timeout        | string<br>Active timeout duration.                  |
| dual_authentication > | object                                              |
| tamper_device >       | object                                              |

## Responses

— 200 Successful response

PUT /api/elevators/{id}

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Elevator": {
    "name": "Odds",
    "description": "Odds elevator",
    + "elevator_group_id": { ... },
    + "reader_devices": [ ... ],
    + "control_device_id": { ... },
    + "floors": [ ... ],
    + "module_devices": [ ... ],
    "trigger_actions": [ ],
    "active_timeout": "10",
    + "dual_authentication": { ... },
    + "tamper_device": { ... }
  }
}
```

# View Elevator(s) Status

This API is used to view elevator status.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

ElevatorCollection ▾ object (ElevatorCollection)

rows ▾ Array of objects

Array [  
    id integer  
      required ID of the elevator.  
]

Responses

— 200 Successful response

POST /api/elevators/status

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy

Expand all

Collapse all

```
{
  - "ElevatorCollection": {
    + "rows": [ ... ]
  }
}
```

## Manual Lock Elevator

This API is used to lock elevator access to single/multiple floor manually. If you set the state to Manual Lock, the elevator will have remained inaccessible even if a user authentication succeeded.

`floors:order` correlates with `order` on `GET /api/elevators/:id` or with `floor_id:index` on `POST /api/elevators/status`

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

ElevatorCollection ▾ object (ElevatorCollectionFloor)

rows ▾ Array of objects

Array [

|                 |                     |
|-----------------|---------------------|
| id              | integer             |
| <b>required</b> | ID of the elevator. |
| <hr/>           |                     |
| floor >         | object              |
| <hr/>           |                     |
| ]               |                     |

## Responses

— 200 Successful response

POST /api/elevators/lock

## Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "ElevatorCollection": {
    + "rows": [ ... ]
  }
}
```

## Manual Unlock Elevator

This API is used to unlock an elevator manually. If you set the state to Manual Unlock, the elevator will have remained accessible even if a user does not authenticate.

`floors:order` correlates with `order` on `GET /api/elevators/:id` or with `floor_id:index` on `POST /api/elevators/status`

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

ElevatorCollection ▾ object (ElevatorCollectionFloor)

rows ▾ Array of objects

Array [

id integer  
required ID of the elevator.

floor > object

]

# Responses

— 200 Successful response

POST /api/elevators/unlock

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "ElevatorCollection": {
    + "rows": [ ... ]
  }
}
```

# Release Elevator Manual Lock/Unlock

This API is used to release the manual lock or manual unlock set by the administrator. When running this API, it will also reset the status caused by `POST /api/elevators/open` `floors:order` correlates with `order` on `GET /api/elevators/:id` or with `floor_id:index` on `POST /api/elevators/status`

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

ElevatorCollection ▾ object (ElevatorCollectionFloor)

rows ▾ Array of objects

Array [

id integer  
**required** ID of the elevator.

floor > object

]

## Responses

— **200** Successful response



POST /api/elevators/release

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "ElevatorCollection": {
    + "rows": [ ... ]
  }
}
```

Open Elevator Floor(s)

This API is used to open a floor.

Will only works if the floor status is clear/default (not manually locked/unlocked or there's active alarm)

`floors:order` correlates with `order` on `GET /api/elevators/:id` or with `floor_id:index` on `POST /api/elevators/status`

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

---

ElevatorCollection ▾ object (ElevatorCollectionFloor)

---

rows ▾ Array of objects

---

Array [

id integer  
**required** ID of the elevator.

---

floor > object

---

]

## Responses

— **200** Successful response

POST /api/elevators/open

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "ElevatorCollection": {
    + "rows": [ ... ]
  }
}
```

# Clear Elevator Alarm

This API is used to clear alarms of all doors. If an alarm is set in the Zone, the alarm may be continuously output even if the elevator alarm is released.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

ElevatorCollection ▾ object (ElevatorCollection)

|                |                                |
|----------------|--------------------------------|
| rows ▾         | Array of objects               |
| <hr/>          |                                |
| Array [        |                                |
| id<br>required | integer<br>ID of the elevator. |
| <hr/>          |                                |
| ]              |                                |

Responses

— 200 Successful response

POST /api/elevators/clear\_alarm

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "ElevatorCollection": {
    + "rows": [ ... ]
  }
}
```

# Firmware

## Update Firmware

This API is used to update a device's firmware.

Firmware file need to be placed on `[BioStar X Install Path]\firmware` folder.

Use `/api/device_types` to find `device_type` and `device_type_id` , find the device's name and get the id for the parameters value.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|                    |        |
|--------------------|--------|
| FirmwareFile >     | object |
| DeviceCollection > | object |

# Responses

— 200 Successful response

POST /api/firmwares/update

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "FirmwareFile": {
    "filename": "bs3-all_v1.1.1_20230621_sign.bin",
    "device_type": "35"
  },
  - "DeviceCollection": {
    + "rows": [ ... ]
  }
}
```

## View Firmwares Information

This API is used to view firmwares information which is placed on folder `[BioStar X Install Path]\firmware`.

### Response Information Table

| Device Type             | Value |
|-------------------------|-------|
| BS2_DEVICE_TYPE_UNKNOWN | 0     |
| BIOENTRY_PLUS           | 1     |
| BIOENTRY_W              | 2     |
| BIOLITE_NET             | 3     |
| XPASS                   | 4     |
| XPASS_S2                | 5     |
| SECURE_IO_2             | 6     |
| DOOR_MODULE_20          | 7     |
| BIOSTATION_2            | 8     |
| BIOSTATION_A2           | 9     |
| FACESTATION_2           | 10    |
| IO_DEVICE               | 11    |
| BIOSTATION_L2           | 12    |
| BIOENTRY_W2             | 13    |
| CORESTATION_40          | 14    |
| OUTPUT_MODULE           | 15    |
| INPUT_MODULE            | 16    |
| BIOENTRY_P2             | 17    |

| Device Type         | Value |
|---------------------|-------|
| BIOLITE_N2          | 18    |
| XPASS2              | 19    |
| NOT USED            | 20    |
| BIOENTRY_R2         | 21    |
| XPASS_D2            | 22    |
| DOOR_MODULE_21      | 23    |
| XPASS_D2_KEYPAD     | 24    |
| FACELITE            | 25    |
| XPASS2_KEYPAD       | 26    |
| XPASS_D2_REV        | 27    |
| XPASS_D2_KEYPAD_REV | 28    |
| FACESTATION_F2_FP   | 29    |
| FACESTATION_F2      | 30    |
| XSTATION_2_QR       | 31    |
| XSTATION_2          | 32    |
| IM_120              | 33    |
| XSTATION_2_FP       | 34    |
| BIOSTATION_3        | 35    |
| 3RD_OSDP_DEVICE     | 36    |
| 3RD_OSDP_IO_DEVICE  | 37    |
| BIOSTATION_2A       | 38    |
| UZ_OSDP_MODULE      | 39    |
| UZ_OSDP_DOOR_HANDLE | 40    |
| UZ_OSDP_DOOR_KNOB   | 41    |



| Device Type | Value |
|-------------|-------|
| BIOENTRY_W3 | 42    |

| Card Model | Value |
|------------|-------|
| OMPW       | 0     |
| OIPW       | 1     |
| OEPW       | 2     |
| OHPW       | 3     |
| ODPW       | 4     |
| OAPW       | 5     |
| ODSPW      | 6     |
| PMPW       | 20    |
| PIPW       | 21    |
| PEPW       | 22    |
| PHPW       | 23    |
| PDPW       | 24    |
| PAPW       | 25    |
| PDSPW      | 26    |
| ALL        | 30    |

## Model Code

| Code | Position | Description                     |
|------|----------|---------------------------------|
| O    | Front    | Optical FP Sensor               |
| P    | Front    | PIV Certified Optical FP Sensor |
| A    | Middle   | All Cards                       |

| Code | Position | Description                                               |
|------|----------|-----------------------------------------------------------|
| M    | Middle   | Mifare & DESFire                                          |
| I    | Middle   | iClass                                                    |
| E    | Middle   | EM                                                        |
| H    | Middle   | HID                                                       |
| D    | Middle   | Dual Frequency (Mifare/DESFire [13.56 MHz], EM [125 kHz]) |
| DS   | Middle   | Dual Frequency with SAM Card Slot                         |
| P    | End      | PoE                                                       |
| W    | End      | WiFi                                                      |

**Note:**

- PoE and WiFi may differ by device. Please check the devices specification from Suprema website (<https://www.supremainc.com>)

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/firmwares

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/firmwares \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Floor Levels

## View Floor Levels

This API is used to view floor levels recorded on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

|          |                                                                                          |
|----------|------------------------------------------------------------------------------------------|
| limit    | string<br>Limit the number of responses by n records. Remove this parameter to view all. |
| offset   | string<br>Offset the response shown by n records.                                        |
| order_by | string                                                                                   |

Example: `order_by=id:false`

Order the response result either ascending or descending

## Responses

— 200 Successful response

GET /api/floor\_levels

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
--url 'https://{baseurl}/api/floor_levels?limit=SOME_STRING_VALUE&offset=SOME_STRING_VAL
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Create Floor Levels

This API is used to create floor level.

You can configure the floor access privileges by using elevators and floor information.

**Known errors:**

- Duplicate name

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|                     |                                          |
|---------------------|------------------------------------------|
| FloorLevel ▾        | object (FloorLevel)                      |
| name                | string<br>Name of the floor level        |
| description         | string<br>Description of the floor level |
| floor_level_items > | Array of objects                         |

## Responses

— 200 Successful response

POST /api/floor\_levels

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "FloorLevel": {
    "name": "aaaax",
    "description": "aaaa",
    + "floor_level_items": [ ... ]
  }
}
```

## View a Floor Level Detail

This API is used to view the details of a floor level.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

id  
required integer

Example: 

32769

  
ID of the floor level which will be viewed

## Responses

— 200 Successful response

GET /api/floor\_levels/{id}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/floor_levels/32769 \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Update Floor Levels

This API is used to update floor level. **Known errors:**

- Duplicate name

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

|                                             |                             |
|---------------------------------------------|-----------------------------|
| <b>id</b><br><b>required</b>                | integer                     |
|                                             | Example: <span>32776</span> |
| ID of the floor level which will be updated |                             |

---

REQUEST BODY SCHEMA: application/json

---

|                     |                                |
|---------------------|--------------------------------|
| FloorLevel ▾        | object (FloorLevel)            |
| <hr/>               |                                |
| name                | string                         |
|                     | Name of the floor level        |
| <hr/>               |                                |
| description         | string                         |
|                     | Description of the floor level |
| <hr/>               |                                |
| floor_level_items > | Array of objects               |
| <hr/>               |                                |

## Responses

— 200 Successful response

PUT /api/floor\_levels/{id}

## Request samples



Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "FloorLevel": {
    "name": "aaaaxxx",
    "description": "aaa",
    + "floor_level_items": [ ... ]
  }
}
```

# Delete Floor Level

This API is used to delete floor levels.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

id

required

integer

Example: 32775

ID of the floor level which will be deleted

## Responses

— 200 Successful response

DELETE /api/floor\_levels/{id}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \
--url https://{baseurl}/api/floor_levels/32775 \
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Schedules

## View Schedules

This API is used to view all schedules recorded on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

---

|        |                                                                                |
|--------|--------------------------------------------------------------------------------|
| limit  | string                                                                         |
|        | Limit the number of responses by n records. Remove this parameter to view all. |
| offset | string                                                                         |
|        | Offset the response shown by n records.                                        |

---

## Responses

— 200 Successful response

GET /api/schedules

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url 'https://{baseurl}/api/schedules?limit=SOME_STRING_VALUE&offset=SOME_STRING_VALU\  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Create Schedule (Daily)

This API example shows how to create daily schedule.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

Schedule ▾

object (Schedule)

|                   |                                                   |
|-------------------|---------------------------------------------------|
| name              | string<br>Name of the schedule                    |
| description       | string<br>Description of the schedule             |
| daily_schedules > | Array of objects<br>Daily schedules configuration |

|                     |                                                                            |
|---------------------|----------------------------------------------------------------------------|
| holiday_schedules   | Array of objects<br>Holiday schedules used                                 |
| days_of_iteration   | integer<br>Repeat schedule every N days                                    |
| start_date          | string <date-time><br>Enable schedule from specified date                  |
| use_daily_iteration | boolean<br>Specify schedule weekly or daily. <code>False</code> for weekly |

## Responses

— 200 Successful response

POST /api/schedules

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Schedule": {
    "name": "Daily",
    "description": "DDD",
    + "daily_schedules": [ ... ],
    "holiday_schedules": [ ],
    "days_of_iteration": 2,
    "start_date": "2022-04-26T00:00:00.00Z",
    "use_daily_iteration": true
  }
}
```

# View a Schedule Detail

This API is used to view a schedule detail recorded on BioStar X.

AUTHORIZATIONS: > SessionAuth

## PATH PARAMETERS

id  
required

integer

Example: 2

ID of the schedule which will be viewed

## Responses

— 200 Successful response

GET /api/schedules/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/schedules/2 \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Delete Schedules

This API is used to delete schedules recorded on BioStar X.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

id

required

integer

Example: 5

ID of the schedule which will be deleted

Responses

— 200 Successful response

DELETE /api/schedules/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
--url https://{baseurl}/api/schedules/5 \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Update a Schedule



This API is used to update a schedule.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

|          |                                          |
|----------|------------------------------------------|
| id       | string                                   |
| required | ID of the schedule which will be updated |

---

REQUEST BODY SCHEMA: application/json

---

|                     |                    |                                                                 |
|---------------------|--------------------|-----------------------------------------------------------------|
| Schedule            | ▼                  | object (Schedule)                                               |
| <hr/>               |                    |                                                                 |
| name                | string             | Name of the schedule                                            |
| <hr/>               |                    |                                                                 |
| description         | string             | Description of the schedule                                     |
| <hr/>               |                    |                                                                 |
| daily_schedules     | > Array of objects | Daily schedules configuration                                   |
| <hr/>               |                    |                                                                 |
| holiday_schedules   | Array of objects   | Holiday schedules used                                          |
| <hr/>               |                    |                                                                 |
| days_of_iteration   | integer            | Repeat schedule every N days                                    |
| <hr/>               |                    |                                                                 |
| start_date          | string <date-time> | Enable schedule from specified date                             |
| <hr/>               |                    |                                                                 |
| use_daily_iteration | boolean            | Specify schedule weekly or daily. <span>False</span> for weekly |
| <hr/>               |                    |                                                                 |

# Responses

— 200 Successful response

PUT /api/schedules/{id}

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Schedule": {
    "name": "Daily",
    "description": "DDD",
    + "daily_schedules": [ ... ],
    "holiday_schedules": [ ],
    "days_of_iteration": 2,
    "start_date": "2022-04-26T00:00:00.00Z",
    "use_daily_iteration": true
  }
}
```

# Holiday Groups

## View Holiday Groups

This API is used to view all holiday groups recorded on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

---

|        |                                                                                          |
|--------|------------------------------------------------------------------------------------------|
| limit  | string<br>Limit the number of responses by n records. Remove this parameter to view all. |
| offset | string<br>Offset the response shown by n records.                                        |

---

## Responses

— **200** Successful response

GET /api/holiday\_groups

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url 'https://{baseurl}/api/holiday_groups?limit=SOME_STRING_VALUE&offset=SOME_STRING_
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Create Holiday Group

This API is used to create holiday groups on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|              |        |                                  |
|--------------|--------|----------------------------------|
| HolidayGroup | ▼      | object (HolidayGroup)            |
| name         | string |                                  |
| required     |        | Name of the holiday group        |
| description  | string |                                  |
|              |        | Description of the holiday group |

holidays > Array of objects

List of holidays in the group

---

Responses

— 200 Successful response

POST /api/holiday\_groups

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy Expand all Collapse all

```
{
  - "HolidayGroup": {
    "name": "Idul Fitri 2022",
    "description": "Idul Fitri for year 2022",
    + "holidays": [ ... ]
  }
}
```

# Update Holiday Group

This API is used to update holiday groups on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

|          |                                                |
|----------|------------------------------------------------|
| id       | string                                         |
| required | ID of the holiday group which will be updated. |

REQUEST BODY SCHEMA: application/json

|              |          |                                                   |
|--------------|----------|---------------------------------------------------|
| HolidayGroup | ▼        | object (HolidayGroup)                             |
| name         | required | string<br>Name of the holiday group               |
| description  |          | string<br>Description of the holiday group        |
| holidays     | >        | Array of objects<br>List of holidays in the group |

# Responses

— 200 Successful response

PUT /api/holiday\_groups/{id}

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "HolidayGroup": {
    "name": "Idul Fitri 2022",
    "description": "Idul Fitri for year 2022",
    + "holidays": [ ... ]
  }
}
```

# Delete Holiday Group

This API is used to delete holiday group.

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

---

|                                               |         |
|-----------------------------------------------|---------|
| id                                            | integer |
| required                                      |         |
| Example:                                      | 1       |
| ID of the holiday group which will be deleted |         |

---

## Responses

— 200 Successful response

DELETE /api/holiday\_groups/{id}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp



Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
  --url https://{baseurl}/api/holiday_groups/1 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Trigger Actions

### View Trigger Actions

This API is used to view all Trigger & Actions.

AUTHORIZATIONS: > *SessionAuth*

#### QUERY PARAMETERS

|        |                                                                                          |
|--------|------------------------------------------------------------------------------------------|
| limit  | string<br>Limit the number of responses by n records. Remove this parameter to view all. |
| offset | string<br>Offset the response shown by n records.                                        |

### Responses

— 200 Successful response

GET /api/trigger\_actions

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
--url 'https://{baseurl}/api/trigger_actions?limit=SOME_STRING_VALUE&offset=SOME_STRING_'
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Create Trigger Actions (Zone)

You can set the device or BioStar X to do a specific operation when a specific event has occurred at the devices, doors and zones.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

TriggerAction ▾ object (TriggerAction)

|               |                                        |
|---------------|----------------------------------------|
| name          | string                                 |
|               | Name of the Trigger & Action           |
| priority      | integer                                |
|               | Priority index of the Trigger & Action |
| schedule_id > | object                                 |
| trigger >     | object                                 |
| action >      | object                                 |

Responses

— 200 Successful response

POST /api/trigger\_actions

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "TriggerAction": {
    "name": "Zone",
    "priority": 0,
    + "schedule_id": { ... },
    + "trigger": { ... },
    + "action": { ... }
  }
}
```

# Update Trigger Actions

This API is used to update Trigger/Actions.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

id  
required

integer

Example: 2

ID of the Trigger & Actions which will be updated.

REQUEST BODY SCHEMA: application/json

TriggerAction ▾

object (TriggerAction)

name

string

Name of the Trigger & Action

|               |                                        |
|---------------|----------------------------------------|
| priority      | integer                                |
|               | Priority index of the Trigger & Action |
| schedule_id > | object                                 |
| trigger >     | object                                 |
| action >      | object                                 |

Responses

— 200 Successful response

PUT /api/trigger\_actions/{id}

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

**Content type**

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
  - "TriggerAction": {  
    "name": "Door",  
    "priority": 0,  
    + "schedule_id": { ... },  
    + "trigger": { ... },  
    + "action": { ... }  
  }  
}
```

## Delete Trigger Actions

This API is used to view all Trigger & Actions.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

**id**  
**required**

integer

Example:

ID of the Trigger & Action which will be deleted.

## Responses

— **200** Successful response

DELETE /api/trigger\_actions/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
  --url https://{baseurl}/api/trigger_actions/2 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

Create Multiple Trigger Actions

This API is used to create multiple trigger actions.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

TriggerAction ▾ object (MultipleTriggerAction)

|                           |                                                                                                                                  |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| name<br>required          | string<br>Name of the Trigger & Action                                                                                           |
| priority<br>required      | integer<br>Priority index of the Trigger & Action                                                                                |
| schedule_id ><br>required | object                                                                                                                           |
| is_quick_action           | string<br>Fill with character "Y" or "N". This parameter used to describe that the Trigger & Action can be use as a Quick Action |
| trigger ><br>required     | object                                                                                                                           |
| action ><br>required      | object                                                                                                                           |

## Responses

> **200** Successful response

— **400** Bad Request - The request was malformed or missing required parameters.

— **401** Unauthorized - The API key provided was invalid or missing.

— **404** Not Found - The requested resource was not found.

— **500** Internal Server Error - An unexpected error occurred on the server.

POST /api/multiple/trigger\_actions



Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "TriggerAction": {
    "name": "sample triggeraction",
    "priority": 0,
    + "schedule_id": { ... },
    "is_quick_action": "N",
    + "trigger": { ... },
    + "action": { ... }
  }
}
```

Response samples

200

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "TriggerAction": {
    "name": "ta 1",
    "priority": 0,
    + "trigger": { ... },
    + "schedule_id": { ... },
    + "action": { ... }
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

---

## Delete Multiple Trigger Actions Copy

This API is used to delete multiple trigger actions by ID.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

---

|    |                                                                               |
|----|-------------------------------------------------------------------------------|
| id | string                                                                        |
|    | Trigger and Action ID(s). Delimit each ID by using plus symbol (+; ex: 1+2+3) |

---

## Responses

> **200** Successful response

— **400** Bad Request - The request was malformed or missing required parameters.

— **401** Unauthorized - The API key provided was invalid or missing.

- **404** Not Found - The requested resource was not found.
- **500** Internal Server Error - An unexpected error occurred on the server.

DELETE /api/multiple/trigger\_actions

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
  --url 'https://{baseurl}/api/multiple/trigger_actions?id=SOME_STRING_VALUE' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

# Update Multiple Trigger Actions

This API is used to update multiple trigger actions by ID.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

id  
required

string

Trigger & Action's ID

REQUEST BODY SCHEMA: application/json

|                           |                                                   |
|---------------------------|---------------------------------------------------|
| TriggerAction >           | object (MultipleTriggerAction)                    |
| name<br>required          | string<br>Name of the Trigger & Action            |
| priority<br>required      | integer<br>Priority index of the Trigger & Action |
| schedule_id ><br>required | object                                            |

|                    |                                                                                                                        |
|--------------------|------------------------------------------------------------------------------------------------------------------------|
| is_quick_action    | string                                                                                                                 |
|                    | Fill with character "Y" or "N". This parameter used to describe that the Trigger & Action can be use as a Quick Action |
| trigger > required | object                                                                                                                 |
| action > required  | object                                                                                                                 |

## Responses

> **200** Successful response

— **400** Bad Request - The request was malformed or missing required parameters.

— **401** Unauthorized - The API key provided was invalid or missing.

— **404** Not Found - The requested resource was not found.

— **500** Internal Server Error - An unexpected error occurred on the server.

PUT /api/multiple/trigger\_actions/{id}

## Request samples

|                    |                     |                  |                  |               |
|--------------------|---------------------|------------------|------------------|---------------|
| Payload            | Shell + Curl        | Shell + Httpie   | Shell + Wget     | Node + Native |
| Node + Request     | Node + Unirest      | Node + Axios     | Node + Fetch     |               |
| Javascript + Fetch | Javascript + JQuery | Javascript + Xhr | Python + Python3 |               |
| Python + Requests  | Ruby + Native       | Php + Curl       | Php + Http1      |               |

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "TriggerAction": {
    "name": "sample triggeraction",
    "priority": 0,
    + "schedule_id": { ... },
    "is_quick_action": "N",
    + "trigger": { ... },
    + "action": { ... }
  }
}
```

Response samples

200

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

# View Multiple Trigger Actions

This API is used to view trigger actions by ID.

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

---

|                       |                                                              |
|-----------------------|--------------------------------------------------------------|
| <b>id</b><br>required | string<br>ID of the Trigger and Action which will be viewed. |
|-----------------------|--------------------------------------------------------------|

---

## Responses

> **200** Successful response

— **400** Bad Request - The request was malformed or missing required parameters.

— **401** Unauthorized - The API key provided was invalid or missing.

— **404** Not Found - The requested resource was not found.

— **500** Internal Server Error - An unexpected error occurred on the server.

GET /api/multiple/trigger\_actions/{id}

## Request samples



|                     |                         |                         |             |             |
|---------------------|-------------------------|-------------------------|-------------|-------------|
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |             |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |             |             |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |             |             |

Copy

```
curl --request GET \  
--url https://{baseurl}/api/multiple/trigger_actions/{id} \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

**200**

Content type

application/json

Copy Expand all Collapse all

```
{  
  - "TriggerAction": {  
    "name": "sample triggeraction",  
    "priority": 0,  
    + "trigger": { ... },  
    + "schedule_id": { ... },  
    + "action": { ... }  
  },  
  - "Response": {  
    "code": "0",  
    "link": "https://support.supremainc.com/en/support/home",  
    "message": "Success",  
    "by": "web"  
  }  
}
```



# Quick Action

## Trigger Quick Action by ID

This API is used to trigger Quick Action by ID.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

---

**id**  
**required**

integer

Example:

ID of the Quick Action which will be viewed.

---

## Responses

> **200** Successful response

— **400** Bad Request - The request was malformed or missing required parameters.

— **401** Unauthorized - The API key provided was invalid or missing.

— **404** Not Found - The requested resource was not found.

— **500** Internal Server Error - An unexpected error occurred on the server.

GET /api/quick\_action/{id}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
--url https://{baseurl}/api/quick_action/2 \
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Copy   Expand all   Collapse all

```
{
  "QuickActionID": 1,
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

# View Trigger Action with Quick Action Enabled

This API is used to fetch Trigger Actions with Quick Action status enabled.

AUTHORIZATIONS: > *SessionAuth*

## Responses

> **200** Successful response

— **400** Bad Request - The request was malformed or missing required parameters.

— **401** Unauthorized - The API key provided was invalid or missing.

— **404** Not Found - The requested resource was not found.

— **500** Internal Server Error - An unexpected error occurred on the server.

GET /api/v2/quick\_action/alarm\_set

## Request samples

|                     |                      |                    |                  |             |
|---------------------|----------------------|--------------------|------------------|-------------|
| Shell + Curl        | Shell + Httpie       | Shell + Wget       | Node + Native    |             |
| Node + Request      | Node + Unirest       | Node + Axios       | Node + Fetch     |             |
| Javascript + Fetch  | Javascript + JQuery  | Javascript + Xhr   | Python + Python3 |             |
| Python + Requests   | Ruby + Native        | Php + Curl         | Php + Http1      |             |
| Php + Http2         | Java + Okhttp        | Java + Unirest     | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession | Csharp + Restsharp |                  |             |

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/v2/quick_action/alarm_set \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

**200**

Content type

application/json

Copy Expand all Collapse all

```
{  
  - "alarm_sets": {  
    "id": 1,  
    + "alarm_sets": [ ... ]  
  },  
  - "Response": {  
    "code": "0",  
    "link": "https://support.supremainc.com/en/support/home",  
    "message": "Success",  
    "by": "web"  
  }  
}
```

## View All Quick Action

This API is used to fetch all configured quick actions.

AUTHORIZATIONS: > *SessionAuth*

## Responses

> **200** Successful response

— **400** Bad Request - The request was malformed or missing required parameters.


— **401** Unauthorized - The API key provided was invalid or missing.

— **404** Not Found - The requested resource was not found.

— **500** Internal Server Error - An unexpected error occurred on the server.

GET /api/v2/quick\_action

## Request samples

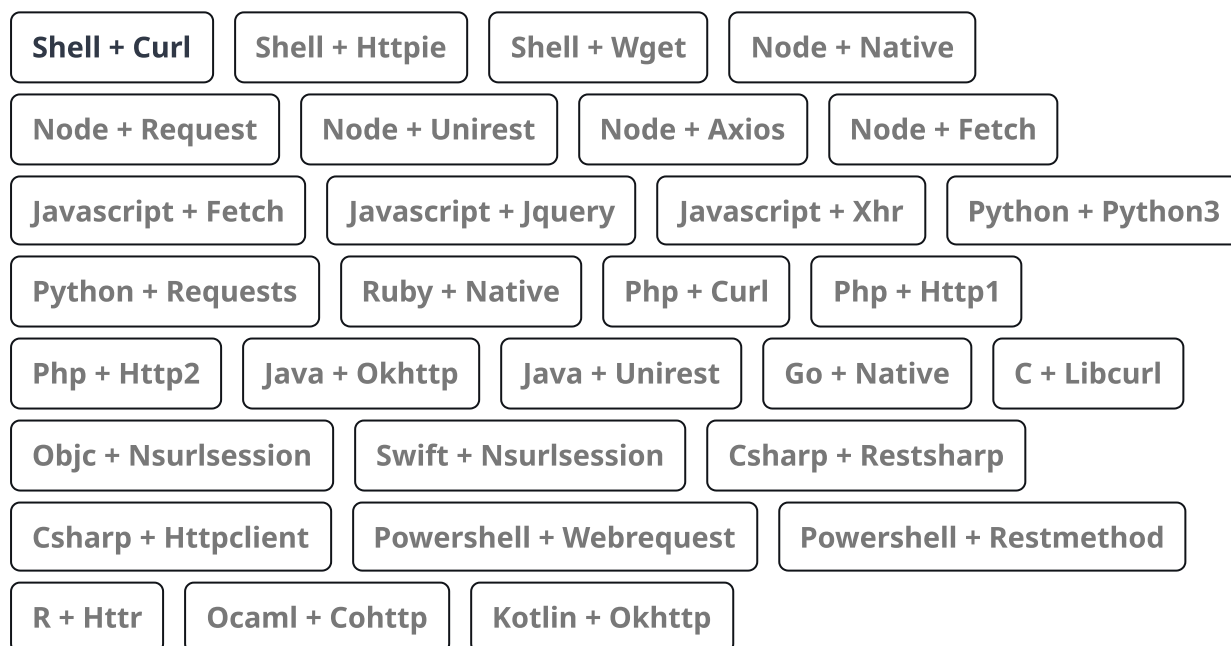

Copy

```
curl --request GET \
  --url https://{baseurl}/api/v2/quick_action \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

**200**

Content type

application/json

Copy Expand all Collapse all

```
{
  - "quick_action": [
    + { ... }
  ],
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

## Save/Update/Delete Quick Action

This API is used to save/update/delete Quick Action.

**To CREATE**: Fill in all Quick Action(s) parameter (excluding ID). It is possible to create multiple Quick Action in one payload.

In the case creating new one while there's existing Quick Action(s), the new one doesn't require ID while the existing require it.

**To DELETE**: Fill in all Quick Action(s) parameter (including ID). Input all Quick Action(s) besides the one that will be deleted. To delete all, simply send an empty payload.

**To UPDATE**: Fill in all Quick Action(s) parameter (including ID). Input all Quick Action(s) including any which will not be updated.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

QuickActions ▾

Array of objects

Array [

|                    |                                                                                                                          |
|--------------------|--------------------------------------------------------------------------------------------------------------------------|
| name               | string<br>Quick Action name.                                                                                             |
| description        | string<br>Quick Action description.                                                                                      |
| confirm_before_run | string<br>Confirmation before run ( <input type="checkbox"/> =enabled, <input type="checkbox"/> =disabled).              |
| operator_level_ids | Array of integers<br>List Operator Level ID(s) which allowed to run the Quick Action.                                    |
| trigger_action_ids | Array of integers<br>List Trigger & Action ID(s) which will be executed when Quick Action triggered.                     |
| order_number       | integer<br>Quick Action order number.                                                                                    |
| id                 | integer<br>Quick Action's ID. Will be generated after Quick Action created. Required to be filled when update or adding. |

]

## Responses

> **200** Successful response

— **400** Bad Request - The request was malformed or missing required parameters.

- **401** Unauthorized - The API key provided was invalid or missing.
- **404** Not Found - The requested resource was not found.
- **500** Internal Server Error - An unexpected error occurred on the server.

POST /api/v2/quick\_action

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "QuickActions": [
    + { ... },
    + { ... }
  ]
}
```

Response samples



**200**

Content type

application/json

Copy Expand all Collapse all

```
{
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

## View All Quick Action by Permission ID

This API is used to fetch Quick Actions by Permission ID.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

|                       |                                                                   |
|-----------------------|-------------------------------------------------------------------|
| <b>id</b><br>required | string<br>Permission ID of the Quick Action which will be viewed. |
|-----------------------|-------------------------------------------------------------------|

## Responses

> **200** Successful response

— **400** Bad Request - The request was malformed or missing required parameters.

— **401** Unauthorized - The API key provided was invalid or missing.

- **404** Not Found - The requested resource was not found.
- **500** Internal Server Error - An unexpected error occurred on the server.

GET /api/v2/quick\_action/permission/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/v2/quick_action/permission/{id} \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "quick_action": [
    + { ... }
  ],
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

---

## View Quick Action by ID

This API is used to fetch Quick Action information by ID.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

|          |                                              |
|----------|----------------------------------------------|
| id       | string                                       |
| required | ID of the Quick Action which will be viewed. |

---

## Responses

> **200** Successful response

— **400** Bad Request - The request was malformed or missing required parameters.

— **401** Unauthorized - The API key provided was invalid or missing.

— **404** Not Found - The requested resource was not found.

— **500** Internal Server Error - An unexpected error occurred on the server.

GET /api/v2/quick\_action/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/v2/quick_action/{id} \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Copy Expand all Collapse all

```
{  
  - "quick_action": [  
    + { ... }  
  ],  
}
```

```
- "Response": {  
  "code": "0",  
  "link": "https://support.supremainc.com/en/support/home",  
  "message": "Success",  
  "by": "web"  
}
```

## Setting

### Update BioStar X Settings

This API is used to update various BioStar X settings.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

BioStar ▾

object

session\_timeout

string

Set a session timeout period. If there is no activity on BioStar X for the set time after logging in, the session is logged out automatically. This value represents second.

server\_port

string

Port number that BioStar X uses.

server\_matching >

object (ServerMatching)

user\_sync\_method

integer

Automatic user synchronization setting. Need to be combined with `user_by_device_sync_method` to use.

- Not Used : `user_sync_method` : "0" & `user_by_device_sync_method` : "0"
- All Devices : `user_sync_method` : "1" & `user_by_device_sync_method` : "0"
- All Devices (Including user update from device) : `user_sync_method` : "1" & `user_by_device_sync_method` : "1"
- Specific Devices (Only devices belonging to the access group) : `user_sync_method` : "3" & `user_by_device_sync_method` : "0"

`user_by_device_sync_method` integer

See `user_sync_method`

`log_sync_method`

integer

Toggle value to 1 to set the Log Upload to manual, and 0 for automatic.

## Responses

— **200** Successful response

PUT /api/setting/biostar

## Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type  
application/json

Copy   Expand all   Collapse all

```

{
  - "BioStar": {
    "session_timeout": "216000",
    "server_port": "51212",
    + "server_matching": { ... },
    "user_sync_method": 1,
    "user_by_device_sync_method": 0,
    "log_sync_method": 0,
    "check_duplicate_id_at_devices": 0,
    "automatic_server_upgrade": 0,
    "upgrade_when": 0,
    "fingerprint_format": 0,
    "licese_server_addr": "http://license.biostar2.com",
    + "backup": { ... },
    "support_mobile_credential": "true",
    "language": "en",
    "server_addr": "",
    "delete_credential_after_aoc": "false",
    + "secure_communication": { ... },
    + "system_security": { ... },
    "web_request_timeout": "60",
    "imglog_dir": ".\\imglog\\",
    "websocket_cors": "*",
    "enable_websocket_connection_bsSessionId": "false",
    "enckey_dir": "C:\\Program Files\\BioStar 2(x64)\\util",
    "device_event_log_skip_enroll_success_user": "false",
    + "http": { ... },
    + "https": { ... },
    + "cloud": { ... },
    + "tna": { ... },
    + "video": { ... },
    + "licenses": [ ... ],
    + "mobile": { ... },
    + "log_level": { ... },
    + "server_ip_list": [ ... ],
    "use_alphanumeric": "false",
    "is_set_new_administrator_password": "false",
    "ischanged_db_data_encryption": "false",
    "ischanged_data_encryption": "false",
    + "eventlog": { ... },
    + "log": { ... }
  }
}

```



# Create Custom Field(s)

This API is used to create user custom field(s) on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

CustomFieldCollection ▾ object (CustomFieldCollection)

rows ▾ Array of objects

Array [

|                   |                                                                          |
|-------------------|--------------------------------------------------------------------------|
| order<br>required | integer<br>Unique                                                        |
| name<br>required  | string<br>Unique                                                         |
| type<br>required  | integer<br>0: Text Input, 1: Number Input, 2: Combo Box, 3: File Upload. |
| data              | string<br>Combo Box options, use (;) as separator of each value.         |
| enable            | boolean<br>Toggle <code>true</code> to enable custom field.              |

]

# Responses

> 200 Successful response

POST /api/setting/custom\_fields

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "CustomFieldCollection": {
    + "rows": [ ... ]
  }
}
```

## Response samples

**200**

Content type

application/json

Copy

```
{
  "code": "0",
  "link": "https://support.supremainc.com/en/support/home",
  "message": "Success",
  "by": "web"
}
```

## Update Custom Field(s)

This example shows how to update custom field.

### Note:

- The main difference between Create and Updating custom field(s) is on Update, ID needs to be specified.
- To get the custom field's ID, use `GET /api/setting/custom_fields`
- When updating a custom field when there are more than 1 custom fields, the custom fields which are not updated need to be specified since the API is using `PUT` method.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

CustomFieldCollection ▾ object (CustomFieldCollection)

rows ▾ Array of objects

Array [

|                   |                                                                          |
|-------------------|--------------------------------------------------------------------------|
| order<br>required | integer<br>Unique                                                        |
| name<br>required  | string<br>Unique                                                         |
| type<br>required  | integer<br>0: Text Input, 1: Number Input, 2: Combo Box, 3: File Upload. |
| data              | string<br>Combo Box options, use (;) as separator of each value.         |
| enable            | boolean<br>Toggle <code>true</code> to enable custom field.              |

]

Responses

— 200 Successful response

PUT /api/setting/custom\_fields

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "CustomFieldCollection": {
    + "rows": [ ... ]
  }
}
```

## Delete Custom Field(s)

This API is used to delete user custom fields which recorded on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

|    |                                                                                               |
|----|-----------------------------------------------------------------------------------------------|
| id | string                                                                                        |
|    | ID of the Custom Field(s) which will be deleted. Use space ( ) as separator for multiple IDs. |

### Responses

— 200 Successful response

DELETE /api/setting/custom\_fields

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
  --url 'https://{baseurl}/api/setting/custom_fields?id=SOME_STRING_VALUE' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

List Available Custom Field(s)

This API is used to view all available user custom fields.

AUTHORIZATIONS: > SessionAuth

Responses

> 200 OK

GET /api/setting/custom\_fields

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/setting/custom_fields \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Copy   Expand all   Collapse all

```
{
  - "CustomFieldCollection": {
    "total": 5,
    + "rows": [ ... ]
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success"
  }
}
```

---

## View Output Signal

This API is used to view output signals which used on certain actions for setting the relay of the device to trigger in certain signals. The trigger & action from the device configuration is one of them.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/setting/output\_signals

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3



Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/setting/output_signals \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

# Create Output Signal

This API is used to create output signal.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

|              |         |                            |
|--------------|---------|----------------------------|
| OutputSignal | ▼       | object                     |
| name         | string  |                            |
| required     |         | Name of the output signal  |
| delay        | integer | Set the signal delay       |
| count        | integer | Set the signal count       |
| on_duration  | integer | Set the signal ON duration |

off\_duration integer

Set the signal OFF duration

---

Responses

— 200 Successful response

POST /api/setting/output\_signals

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy Expand all Collapse all

```
{
  - "OutputSignal": {
    "name": "TestElevatorSignal2",
    "delay": 0,
    "count": 0,
    "on_duration": 0,
    "off_duration": 0
  }
}
```

---

## Update Output Signal

This API is used to update output signal.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

|                       |                                                          |
|-----------------------|----------------------------------------------------------|
| <b>id</b><br>required | string<br>ID of the output signal which will be updated. |
|-----------------------|----------------------------------------------------------|

---

## Responses

— 200 Successful response

PUT /api/setting/output\_signals/{id}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

|                     |                         |                         |                  |             |
|---------------------|-------------------------|-------------------------|------------------|-------------|
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |             |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |             |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |             |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |             |

Copy

```
curl --request PUT \
  --url https://{baseUrl}/api/setting/output_signals/{id} \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Delete Output Signal

This API is used to delete output signal.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

|                 |                                                |
|-----------------|------------------------------------------------|
| id              | string                                         |
| <b>required</b> | ID of the output signal which will be deleted. |

## Responses

— 200 Successful response

DELETE /api/setting/output\_signals/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
  --url https://{baseurl}/api/setting/output_signals/{id} \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

Update Server Matching

If server matching enabled, the user’s fingerprint will be matched from BioStar X, not the device. The Server Matching can be used when the corresponding license is activated.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

BioStar

object

server\_matching ▾ object (ServerMatching)

---

use-server-matching

boolean

Activates/Deactivates server matching.  
Toggle `true` to activate.

---

matching-concurrency-count

integer

Configure how many matchings can be done simultaneously.

---

security-level

integer

Configure the server matching's security level for fingerprints. The higher the security level is set, the more the false rejection rate (FRR) can occur.

---

fast-mode

boolean

Configure the fingerprint matching speed.

---

face-security-level

integer

Configure the server matching's security level for faces. The higher the security level is set, the more the false rejection rate (FRR) can occur.

---

## Responses

— 200 Successful response

PUT /api/setting/biostar/server\_matching

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "BioStar": {
    + "server_matching": { ... }
  }
}
```

Check BioStar X Version

This API is used to check BioStar X's version.

AUTHORIZATIONS: > *SessionAuth*

Responses

— 200 Successful response

GET /js/info.json

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url https://{baseurl}/js/info.json \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```



# Active Directory

Active Directory integration and configuration

## Check Active Directory Connection

This API is used to test BioStar X connection with Windows Active Directory.

Successful connection will return `code : 0`.

See these articles for more information on connecting BioStar X with Active Directory:

- <https://support.supremainc.com/en/support/solutions/articles/24000044140>
- <https://support.supremainc.com/en/support/solutions/articles/24000041940--biostar-2-how-to-confirm-active-directory-information/en>

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
**required**

Active Directory or Entra ID connection configuration parameters

|                                   |                                                                            |
|-----------------------------------|----------------------------------------------------------------------------|
| serverAddress<br><b>required</b>  | string<br>IP Address of the Domain Controller                              |
| userName<br><b>required</b>       | string<br>User Name which will be used to connect to the Domain Controller |
| password<br><b>required</b>       | string <password><br>User Name's corresponding password                    |
| userDomainName<br><b>required</b> | string<br>BaseDN of the Domain Controller                                  |

|                                   |                                                                                                                                                                                                                                           |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>useSSL</b><br>required         | <p>boolean</p> <p>Option to use encryption when communicating with a Windows Active Directory server.</p> <p>Install Active Directory Certificate Services and set the keystore password by referring to Active Directory Encryption.</p> |
| <b>adlogin</b><br>required        | <p>boolean</p> <p>Enable logging into BioStar X using the Windows Active Directory account.</p>                                                                                                                                           |
| <b>RedirectionUri</b><br>required | <p>string &lt;uri&gt;</p> <p>Required for Entra ID interworking.</p>                                                                                                                                                                      |
| <b>adEnable</b><br>required       | <p>string</p> <p>Set to 0.</p>                                                                                                                                                                                                            |
| <b>adType</b><br>required         | <p>string</p> <p>Enum: "A" "E"</p> <p>Interworking target classification. (Active Directory= A , Entra ID= E )</p>                                                                                                                        |
| <b>prevAdType</b><br>required     | <p>string</p> <p>Enum: "A" "E"</p> <p>It is required to enter the previous connection information when modifying the interworking target. If there is no change, enter the current connection information.</p>                            |
| <b>prevDomainName</b><br>required | <p>string</p> <p>It is required to enter the previous connection information when modifying the interworking target. If there is no change, enter the current connection information.</p>                                                 |
| <b>prevServerAddr</b><br>required | <p>string</p> <p>It is required to enter the previous connection information when modifying the interworking target. If there is no change, enter the current connection information.</p>                                                 |

|                                  |                                                                                                                                                                                                               |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| resetSync<br>required            | boolean<br>Default: <code>false</code><br>Delete existing users and user groups due to changes in connection information and set them to <code>true</code> if new settings are required.                      |
| scheduleSyncInterval<br>required | integer <code>[ 0 .. 10080 ]</code><br>Set the time interval for automatic synchronization. ( <code>0</code> =Manual synchronization, <code>30</code> to <code>10080</code> =Automatic synchronization)       |
| syncEvtCheck<br>required         | boolean<br>Settings for whether to leave event logs on BioStar X. ( <code>true</code> =event logs are kept on BioStar X as usual.)                                                                            |
| syncType<br>required             | string<br>Enum: <code>"N"</code> <code>"A"</code><br>Toggle automatic synchronization. ( <code>N</code> =Manual synchronization, <code>A</code> =Automatic synchronization)                                   |
| useCustomField<br>required       | boolean<br>Set this parameter to <code>true</code> if a custom user field has been added via <b>Change AD User Mapping</b> . If no custom user field is being used, set the parameter to <code>false</code> . |

## Responses

— 200 Successful response

POST /api/v2/setting/adserverconnect

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{
  "serverAddress": "",
  "userName": "3323232-1111-33b6-a0a0-dfeq6bc7a762",
  "password": "asdfasdfas~!2sdfsdffasdf",
  "userDomainName": "test.onmicrosoft.com",
  "useSSL": false,
  "adlogin": false,
  "RedirectionUri": "https://127.0.0.1/api/v2/entraid/auth",
  "adEnable": "0",
  "adType": "E",
  "prevAdType": "E",
  "prevDomainName": "test.onmicrosoft.com",
  "prevServerAddr": "",
  "resetSync": false,
  "scheduleSyncInterval": 0,
  "syncEvtCheck": false,
  "syncType": "N",
  "useCustomField": true
}
```

# User Group Search

To run BioStar X AD APIs, it is required to be connected to the AD server.

This API is used to get User Group information from the Domain Controller.

It is required to put domain name information on the body.

The response value is returned in JSON format. At this time,

`Collection.rows.userGroups` is used for the next user group update.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

---

string

## Responses

— 200 Successful response

POST /api/v2/setting/adUserGroupList

## Request samples

|                     |                      |                    |                  |               |
|---------------------|----------------------|--------------------|------------------|---------------|
| Payload             | Shell + Curl         | Shell + Httpie     | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest       | Node + Axios       | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery  | Javascript + Xhr   | Python + Python3 |               |
| Python + Requests   | Ruby + Native        | Php + Curl         | Php + Http1      |               |
| Php + Http2         | Java + Okhttp        | Java + Unirest     | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession | Csharp + Restsharp |                  |               |

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

"DC=domain,DC=com"

# User Group Update

Based on the user group information queried in User Group Search, the user group which will be linked is updated.

Update the user group and save it to the Biostar X server.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

|                              |                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------|
| allUserGroup<br>required     | boolean<br>Toggle True when selecting all User Groups.                                         |
| dn<br>required               | string<br>Domain Name                                                                          |
| lastSyncVersion<br>required  | integer<br>Set to 0                                                                            |
| userGroups<br>required       | Array of objects<br>Put Collection.rows.userGroups from User Group Search                      |
| userGroupFilters<br>required | Array of objects<br>Place the id and name of the user groups to be synchronized into an array. |

# Responses

— 200 Successful response

POST /api/v2/setting/adUserGroupFilterSetting

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  "allUserGroup": true,
  "dn": "DC=domain,DC=com",
  "lastSyncVersion": 0,
  - "userGroups": [
    + { ... }
  ],
  - "userGroupFilters": [
    + { ... }
  ]
}
```



# View AD User Group Filter List

View group information, subgroup information and filter information that Active Directory or EntraID is using.

AUTHORIZATIONS: > *SessionAuth*

## Responses

> 200 OK

GET /api/v2/setting/adUserGroupFilterSetting

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp



Copy

```
curl --request GET \
  --url https://{baseUrl}/api/v2/setting/adUserGroupFilterSetting \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

**200****Content type**

application/json

Copy Expand all Collapse all

```
{
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "success",
    "by": "web"
  },
  - "Collection": {
    "total": 1,
    + "rows": [ ... ]
  }
}
```

## Change AD User Mapping

This API is used to set the user field configuration.

The payload is in the form of a JSON array.

Each array has BioStar X column name (columnm), AD column name (adcolumnm), whether to use (use), and column description (columnmdescription).

[

```
{ "columnm": "usrId", "adcolumnm": "sAMAccountName", "use": "true", "columnm  
description": "userid" } { "columnm": "nm", "adcolumnm": "displayName"  
,"use": "true", "columnmdescription": "User NAME" }  
]
```

If you set the payload as above, you can sync the username as well.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

Array [

|                                |                                        |
|--------------------------------|----------------------------------------|
| columnm<br>required            | string<br>BioStar X column name        |
| adcolumnm<br>required          | string<br>Active Directory column name |
| use<br>required                | string<br>Whether to use this mapping  |
| columnmdescription<br>required | string<br>Column description           |

]

## Responses

— 200 Successful response

POST /api/v2/setting/changeadusrmappinglist

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
[
  - {
    "columnm": "usrid",
    "adcolumnm": "initials",
    "use": "true",
    "columnmdescription": "User ID"
  },
  - {
    "columnm": "nm",
    "adcolumnm": "displayName",
    "use": "true",
    "columnmdescription": "User Name"
  }
]
```

# Synchronize

This API is used to synchronizes AD user information with Biostar X.

If there is no user group change or field reorganization then only this synchronization operation is sufficient.

serverAddress, userName, password, userDomainName, and useSSL must be sent in the payload.

lastSyncTime, lastSyncResult, lastUpdateTime fields on response are "recent sync time with ad server", "recent sync result", "recent update time of ad server information",

It can be checked through `GET /api/v2/setting/adserversetting`

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|                            |                                                                                                                                                                                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| serverAddress<br>required  | string<br>IP Address of the Domain Controller                                                                                                                                                                                  |
| userName<br>required       | string<br>User Name which will be used to connect to the Domain Controller                                                                                                                                                     |
| password<br>required       | string <password><br>User Name's corresponding password                                                                                                                                                                        |
| userDomainName<br>required | string<br>BaseDN of the Domain Controller                                                                                                                                                                                      |
| useSSL<br>required         | boolean<br>Option to use encryption when communicating with a Windows Active Directory server.<br><br>Install Active Directory Certificate Services and set the keystore password by referring to Active Directory Encryption. |
| adlogin<br>required        | boolean<br>Enable logging into BioStar X using the Windows Active Directory account.                                                                                                                                           |

|                                  |                                                                                                                                                                                                 |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RedirectionUri<br>required       | string <uri><br>Required for Entra ID interworking.                                                                                                                                             |
| adEnable<br>required             | string<br>Set to 0.                                                                                                                                                                             |
| adType<br>required               | string<br>Enum: "A" "E"<br>Interworking target classification. (Active Directory= <b>A</b> , Entra ID= <b>E</b> )                                                                               |
| prevAdType<br>required           | string<br>Enum: "A" "E"<br>It is required to enter the previous connection information when modifying the interworking target. If there is no change, enter the current connection information. |
| prevDomainName<br>required       | string<br>It is required to enter the previous connection information when modifying the interworking target. If there is no change, enter the current connection information.                  |
| prevServerAddr<br>required       | string<br>It is required to enter the previous connection information when modifying the interworking target. If there is no change, enter the current connection information.                  |
| resetSync<br>required            | boolean<br>Default: false<br>Delete existing users and user groups due to changes in connection information and set them to <b>true</b> if new settings are required.                           |
| scheduleSyncInterval<br>required | integer [ 0 .. 10080 ]<br>Set the time interval for automatic synchronization.<br>( <b>0</b> =Manual synchronization, <b>30</b> to <b>10080</b> =Automatic synchronization)                     |

syncEvtCheck  
required

boolean

Settings for whether to leave event logs on BioStar X.  
( `true` =event logs are kept on BioStar X as usual.)

syncType  
required

string

Enum: `"N"` `"A"`

Toggle automatic synchronization. (`N` =Manual synchronization, `A` =Automatic synchronization)

useCustomField  
required

boolean

Set this parameter to `true` if a custom user field has been added via **Change AD User Mapping**. If no custom user field is being used, set the parameter to `false`.

## Responses

— 200 Successful response

POST /api/v2/setting/syncadserver

## Request samples

|                     |                      |                    |                  |               |
|---------------------|----------------------|--------------------|------------------|---------------|
| Payload             | Shell + Curl         | Shell + Httpie     | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest       | Node + Axios       | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery  | Javascript + Xhr   | Python + Python3 |               |
| Python + Requests   | Ruby + Native        | Php + Curl         | Php + Http1      |               |
| Php + Http2         | Java + Okhttp        | Java + Unirest     | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession | Csharp + Restsharp |                  |               |

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy

```
{
  "adType": "E",
  "RedirectionUri": "https://192.168.12.161/api/v2/entraid/auth",
  "scheduleSyncInterval": 0,
  "syncType": "N",
  "useSSL": false,
  "adlogin": false,
  "adEnable": "0",
  "serverAddress": "",
  "userName": "3323232-1111-33b6-a0a0-dfeq6bc7a762",
  "password": "asdfasdfs~!2sdfsdfasdf",
  "userDomainName": "test.onmicrosoft.com",
  "syncEvtCheck": true,
  "prevAdType": "E",
  "prevDomainName": "",
  "prevServerAddr": "",
  "resetSync": false,
  "useCustomField": true
}
```

## View AD Server Setting

Retrieves AD server configurations.

AUTHORIZATIONS: > *SessionAuth*

## Responses

> 200 OK

GET /api/v2/setting/adserversetting

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/v2/setting/adserversetting \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Example  
AD Status

Copy Expand all Collapse all



```
{
  - "ADServerSettingCollection": {
    "total": 1,
    + "rows": [ ... ]
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "success",
    "by": "web"
  }
}
```

---

## View AD User Mapping List

Retrieves the mapping relationships between user attribute fields in BioStar X and those used in Active Directory or Entra ID.

Please note that the required mapping information differs between Entra ID and Active Directory.

AUTHORIZATIONS: > *SessionAuth*

## Responses

> 200 OK

GET /api/v2/setting/adusrmappinglist

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/v2/setting/adusrmappinglist \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Example  
When Linked with EntraID

Copy   Expand all   Collapse all

```
{
  - "ADUsrMappingCollection": {
    "total": 9,
    + "rows": [ ... ]
  },
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "success",
    "by": "web"
  }
}
```

---

## View AD Column List

Retrieve user property information used by Active Directory or EntraID.

AUTHORIZATIONS: > *SessionAuth*

## Responses

> 200 OK

GET /api/v2/setting/adcolumnlist

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseUrl}/api/v2/setting/adcolumnlist \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Copy   Expand all   Collapse all

```
{  
  - "List<String>": {  
    "total": 286,  
    + "rows": [ ... ]  
  },  
  - "Response": {  
    "code": "0",  
    "link": "https://support.supremainc.com/en/support/home",  
    "message": "success",  
    "by": "web"  
  },  
  - "ADColumnCollection": {  
    "total": 286,  
    + "rows": [ ... ]  
  }  
}
```

# Check EntraID SSO Login Setting

Checks whether Entra ID SSO Login is enabled.

If the **"BioStar X Login with Entra ID"** option is enabled in the Directory Integration settings, the returned value is `'E'`. If it is disabled (default), the value is `'D'`.

AUTHORIZATIONS: > *SessionAuth*

## Responses

> 200 OK

GET /api/v2/setting/checkEntraIDSetting

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/v2/setting/checkEntraIDSetting \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

200

### Content type

application/json

### Example

Disabled

Copy

```
{  
  "code": "0",  
  "link": "https://support.supremainc.com/en/support/home",  
  "message": "D",  
  "by": "web"  
}
```

---

## Email Setting

Email notification settings

## View Email Setting

This API is used to view the email template for Visual Face and BioStar X QR.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/setting\_email

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
--url https://{baseurl}/api/setting_email \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Create Email Setting (Visual Face / QR)

This API is used to set email template for Visual Face and BioStar X QR.

AUTHORIZATIONS: > SessionAuth

QUERY PARAMETERS

email\_type integer

Example: `email_type=1`  
1:Visual face mobile enrollment contents, 2:QR credential contents

REQUEST BODY SCHEMA: application/json

|                                              |                                                                                                                                                                                                   |
|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>title</div> <div>required</div>         | <div>string</div> <div>Enter the title of the email.</div>                                                                                                                                        |
| <div>company_name</div> <div>required</div>  | <div>string</div> <div>Enter the company name.</div>                                                                                                                                              |
| <div>company_logo</div> <div>required</div>  | <div>string</div> <div>Supported image file formats are GIF, JPG, JPEG, JPE, JFIF, PNG.</div> <div>Supported image file size is up to 5MB. Base64 encoded string of the company logo image.</div> |
| <div>admin_contact</div> <div>required</div> | <div>string</div> <div>Enter the contact information of the person in charge.</div>                                                                                                               |
| <div>use_setting</div> <div>required</div>   | <div>boolean</div> <div>To use the enrollment set it as Use. If you set it as Not Use, BioStar X will be unable to send the visual face mobile enrollment link or QR to users.</div>              |

Responses

— 200 Successful response

POST /api/setting\_email

Request samples



Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{
  "title": "VisualFace",
  "company_name": "Suprema Inc.",
  "company_logo": "",
  "admin_contact": "admin@example.com",
  "use_setting": true
}
```

# Update Email Setting (Visual Face / QR)

This API is used to set email template for Visual Face and BioStar X QR.

AUTHORIZATIONS: > *SessionAuth*

QUERY PARAMETERS

email\_type

integer

Example: email\_type=1

1:Visual face mobile enrollment contents, 2:QR credential contents

REQUEST BODY SCHEMA: application/json

|                                              |                                                                                                                                                                                                   |
|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>title</div> <div>required</div>         | <div>string</div> <div>Enter the title of the email.</div>                                                                                                                                        |
| <div>company_name</div> <div>required</div>  | <div>string</div> <div>Enter the company name.</div>                                                                                                                                              |
| <div>company_logo</div> <div>required</div>  | <div>string</div> <div>Supported image file formats are GIF, JPG, JPEG, JPE, JFIF, PNG.</div> <div>Supported image file size is up to 5MB. Base64 encoded string of the company logo image.</div> |
| <div>admin_contact</div> <div>required</div> | <div>string</div> <div>Enter the contact information of the person in charge.</div>                                                                                                               |
| <div>use_setting</div> <div>required</div>   | <div>boolean</div> <div>To use the enrollment set it as Use. If you set it as Not Use, BioStar X will be unable to send the visual face mobile enrollment link or QR to users.</div>              |

Responses

— 200 Successful response

PUT /api/setting\_email

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{
  "title": "VisualFace",
  "company_name": "Suprema Inc.",
  "company_logo": "",
  "admin_contact": "admin@example.com",
  "use_setting": true
}
```

# View SMTP Setting

This API is used to view the SMTP (Simple Mail Transfer Protocol) for sending emails.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/setting/alarm\_smtps

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url https://{baseurl}/api/setting/alarm_smtps \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Create SMTP Setting

This API is used to set the SMTP (Simple Mail Transfer Protocol) for sending emails.

### Note:

When using an SMTP server with an email account that has two-factor authentication (2FA) enabled, be aware of the following:

- Once 2FA is set up, the SMTP password is **not** the same as the email account password. Instead, it corresponds to an **app password** generated specifically for use with 2FA.
- If you change the email account password, all existing app passwords are automatically revoked. As a result, the previously configured SMTP password will no longer work.
- After changing the email account password, you must **generate a new app password** and **update the SMTP settings** with the new value.

#### AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

AlarmSmtip ▾

object

name string

Enter the SMTP server name.

description string

Enter the description.

smtp\_server\_addr string

Enter the SMTP server address. SMTP server address is the same form as 'smtp. Email Service Provider.com', and you can check it on the settings screen of email to use as an SMTP.

smtp\_server\_port string

Enter the port number of the SMTP server. you can check it on the settings screen of email to use as an SMTP

smtp\_username string

Enter the user name of the SMTP server.

smtp\_password string <password>

Enter the password of the SMTP server.

smtp\_security string

Select the security type of the SMTP server.

smtp\_sender

string

Enter the sender email address.

Responses

— 200 Successful response

POST /api/setting/alarm\_smtps

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{  
  - "AlarmSntp": {  
    "name": "smtp.example.com",  
    "description": "Example SMTP Server",  
    "smtp_server_addr": "smtp.example.com",  
    "smtp_server_port": "587",  
    "smtp_username": "user@example.com",  
    "smtp_password": "pa$$word",  
    "smtp_security": "2",  
    "smtp_sender": "sender@example.com"  
  }  
}
```

---

## Update SMTP Setting

This API is used to update the SMTP (Simple Mail Transfer Protocol) for sending emails.

### Note:

When using an SMTP server with an email account that has two-factor authentication (2FA) enabled, be aware of the following:

- Once 2FA is set up, the SMTP password is **not** the same as the email account password. Instead, it corresponds to an **app password** generated specifically for use with 2FA.
- If you change the email account password, all existing app passwords are automatically revoked. As a result, the previously configured SMTP password will no longer work.
- After changing the email account password, you must **generate a new app password** and **update the SMTP settings** with the new value.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

id  
required

string

ID of the SMTP setting which will be updated.

---

## REQUEST BODY SCHEMA: application/json

AlarmSntp ▾

object

name

string

Enter the SMTP server name.

description

string

Enter the description.

smtp\_server\_addr

string

Enter the SMTP server address. SMTP server address is the same form as 'smtp. Email Service Provider.com', and you can check it on the settings screen of email to use as an SMTP.

smtp\_server\_port

string

Enter the port number of the SMTP server. you can check it on the settings screen of email to use as an SMTP

smtp\_username

string

Enter the user name of the SMTP server.

smtp\_password

string &lt;password&gt;

Enter the password of the SMTP server.

smtp\_security

string

Select the security type of the SMTP server.

smtp\_sender

string

Enter the sender email address.

## Responses



— 200 Successful response

PUT /api/setting/alarm\_smtps/{id}

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "AlarmSmtplib": {
    "name": "smtp.example.com",
    "description": "Example SMTP Server",
    "smtp_server_addr": "smtp.example.com",
    "smtp_server_port": "587",
    "smtp_username": "user@example.com",
    "smtp_password": "pa$$word",
    "smtp_security": "2",
    "smtp_sender": "sender@example.com"
  }
}
```

## Test SMTP Connection

This API is used to test SMTP connection by sending an email to the specified address.

Do note that the address input here need to be a complete email address.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

target\_email string

Target email address to send the test email.

## Responses

— 200 Successful response

POST /api/test\_smtp\_connection

## Request samples

|                     |                      |                    |                  |               |
|---------------------|----------------------|--------------------|------------------|---------------|
| Payload             | Shell + Curl         | Shell + Httpie     | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest       | Node + Axios       | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + Jquery  | Javascript + Xhr   | Python + Python3 |               |
| Python + Requests   | Ruby + Native        | Php + Curl         | Php + Http1      |               |
| Php + Http2         | Java + Okhttp        | Java + Unirest     | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession | Csharp + Restsharp |                  |               |

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{  
  "target_email": "example@example.com"  
}
```

# Preference

System preferences and configuration

# View Preference

This API is used to view preference information.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

id

required

integer

Example: 1

ID of the user which preference will be viewed.

# Responses

— 200 Successful response

GET /api/preferences/{id}

## Request samples

|                     |                         |                         |                  |             |
|---------------------|-------------------------|-------------------------|------------------|-------------|
| Shell + Curl        | Shell + Httpie          | Shell + Wget            | Node + Native    |             |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |             |
| Javascript + Fetch  | Javascript + Jquery     | Javascript + Xhr        | Python + Python3 |             |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |             |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |             |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |             |

Copy

```
curl --request GET \  
--url https://{baseurl}/api/preferences/1 \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Update Preference

This API is used to update preference configuration.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

id

required

integer

Example: 1

REQUEST BODY SCHEMA: application/json

Preference

object

- language

string

Preference language. Example - ko, en
- date\_format

string

Format of the date
- time\_format

string

Format of the time
- time\_long\_term\_format

string

Format for long term time
- time\_zone

string

Select the time zone that corresponds to your current location.

| Time Zone | ID  | Time Zone | ID   |
|-----------|-----|-----------|------|
| UTC-12:00 | 0   | UTC+03:30 | 17   |
| UTC-11:00 | 1   | UTC+04:00 | 18   |
| UTC-10:00 | 2   | UTC+04:30 | 19   |
| UTC-09:30 | 3-1 | UTC+05:00 | 20   |
| UTC-09:00 | 3   | UTC+05:30 | 21   |
| UTC-08:00 | 4   | UTC+05:45 | 22   |
| UTC-07:00 | 5   | UTC+06:00 | 23   |
| UTC-06:00 | 6   | UTC+06:30 | 23+1 |

| Time Zone | ID  | Time Zone | ID   |
|-----------|-----|-----------|------|
| UTC-05:00 | 7   | UTC+07:00 | 24   |
| UTC-04:30 | 8-1 | UTC+08:00 | 25   |
| UTC-04:00 | 8   | UTC+08:30 | 25+1 |
| UTC-03:30 | 9   | UTC+08:45 | 25+2 |
| UTC-03:00 | 10  | UTC+09:00 | 26   |
| UTC-02:00 | 11  | UTC+09:30 | 27   |
| UTC-01:00 | 12  | UTC+10:00 | 28   |
| UTC±00:00 | 13  | UTC+10:30 | 28+1 |
| UTC+01:00 | 14  | UTC+11:00 | 29   |
| UTC+02:00 | 15  | UTC+12:00 | 30   |
| UTC+03:00 | 16  | UTC+12:45 | 30+1 |
|           |     | UTC+13:00 | 31   |
|           |     | UTC+14:00 | 32   |

|              |                                                                                         |
|--------------|-----------------------------------------------------------------------------------------|
| dst1         | <div>string</div> <div>ID of the first Daylight Saving Time applied. 0 for none.</div>  |
| dst2         | <div>string</div> <div>ID of the second Daylight Saving Time applied. 0 for none.</div> |
| depend_on_os | <div>boolean</div>                                                                      |
| user_id >    | <div>object</div>                                                                       |

# Responses

— 200 Successful response

PUT /api/preferences/{id}

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Preference": {
    "language": "en",
    "date_format": "yyyy/MM/dd",
    "time_format": "HH:mm",
    "time_long_term_format": "HH:mm:ss",
    "time_zone": "25",
    "dst1": "0",
    "dst2": "0",
    "depend_on_os": true,
    + "user_id": { ... }
  }
}
```



# Add Preference

This API is used to add preference configuration.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

Preference ▾

object

language

string

Preference language. Example - ko, en

date\_format

string

Format of the date

time\_format

string

Format of the time

time\_long\_term\_format

string

Format for long term time

time\_zone

string

Select the time zone that corresponds to your current location.

| Time Zone | ID | Time Zone | ID |
|-----------|----|-----------|----|
| UTC-12:00 | 0  | UTC+03:30 | 17 |
| UTC-11:00 | 1  | UTC+04:00 | 18 |
| UTC-10:00 | 2  | UTC+04:30 | 19 |



| Time Zone | ID  | Time Zone | ID   |
|-----------|-----|-----------|------|
| UTC-09:30 | 3-1 | UTC+05:00 | 20   |
| UTC-09:00 | 3   | UTC+05:30 | 21   |
| UTC-08:00 | 4   | UTC+05:45 | 22   |
| UTC-07:00 | 5   | UTC+06:00 | 23   |
| UTC-06:00 | 6   | UTC+06:30 | 23+1 |
| UTC-05:00 | 7   | UTC+07:00 | 24   |
| UTC-04:30 | 8-1 | UTC+08:00 | 25   |
| UTC-04:00 | 8   | UTC+08:30 | 25+1 |
| UTC-03:30 | 9   | UTC+08:45 | 25+2 |
| UTC-03:00 | 10  | UTC+09:00 | 26   |
| UTC-02:00 | 11  | UTC+09:30 | 27   |
| UTC-01:00 | 12  | UTC+10:00 | 28   |
| UTC±00:00 | 13  | UTC+10:30 | 28+1 |
| UTC+01:00 | 14  | UTC+11:00 | 29   |
| UTC+02:00 | 15  | UTC+12:00 | 30   |
| UTC+03:00 | 16  | UTC+12:45 | 30+1 |
|           |     | UTC+13:00 | 31   |
|           |     | UTC+14:00 | 32   |

|      |                                                                                         |
|------|-----------------------------------------------------------------------------------------|
| dst1 | <div>string</div> <div>ID of the first Daylight Saving Time applied. 0 for none.</div>  |
| dst2 | <div>string</div> <div>ID of the second Daylight Saving Time applied. 0 for none.</div> |

|              |         |
|--------------|---------|
| depend_on_os | boolean |
| user_id >    | object  |

Responses

— 200 Successful response

POST /api/preferences

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{  
  - "Preference": {  
    "language": "en",  
    "date_format": "yyyy/MM/dd",  
    "time_format": "HH:mm",  
    "time_long_term_format": "HH:mm:ss",  
    "time_zone": "25",  
    "dst1": "0",  
    "dst2": "0",  
    "depend_on_os": true,  
    + "user_id": { ... }  
  }  
}
```

---

## Virtual Device & Event Import

This feature allows external systems (e.g., mobile T&A apps) to send **punch/access events** directly to **BioStar X without database-level integration**.

To ensure data consistency, each event must be associated with a **Virtual Device** — a device record created inside BioStar X to represent the external source.

### Notes:

- Virtual Devices are **non-functional placeholders** and **cannot be used for access control, doors, or Advanced AC features**. Their only purpose is to logically link imported events to a known device identity.
- **BioStar X Event Log API** license is required for the feature.

## Step-by-Step: How to Use

### Step 1: Create a Virtual Device

- Use `POST /api/v2/virtual_devices` to create a new virtual device.
- Usable ID range: **100001–999999**
- Ensure it's **not a duplicate ID or name**.
- Assign it to an existing **device group**.

## Step 2: Verify Virtual Device

- Use `GET /api/v2/virtual_devices`

to confirm your virtual device is registered and visible.

## Step 3: Import Events

- Prepare your event payload with the same `packet_device_id` as the virtual device ID.
- Ensure all timestamps are in **UTC**.
- Use `POST /api/events/import` to upload multiple events at once.

## Step 4: Verify Event Import

- After import, use existing endpoints such as:
  - `POST /api/events/search`

to confirm the events are visible in BioStar X event logs.

## Step 5: Troubleshooting

If an error occurs:

- Check that `is_virtual_device` is `"true"`.
- Confirm all `user_id`s exist.
- Verify datetime formatting ( `YYYY-MM-DDTHH:mm:ssZ` ).
- Ensure the event code is either `4088` or `6400`.

# Create a New Virtual Device

Registers a **virtual device** within BioStar X.

Each virtual device:

- Must have a unique `id` (range: 100001–999999).
- Cannot duplicate existing device IDs or names.
- Appears in device lists when `?virtual=true` is included in search queries.

Notes:

- Virtual devices are **non-functional** placeholders (cannot control doors or perform access).
- Once created, the **device ID cannot be modified**.
- Virtual devices can be listed using `GET /api/v2/devices/search?virtual=true`.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|                                                     |                                                                                                                             |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| VirtualDevice <div>required</div>                   | object (VirtualDeviceInput)<br>Root object containing virtual device details.                                               |
| <div>id</div> <div>required</div>                   | integer<br>Unique identifier for the virtual device. Must be within 100001-999999 and not duplicate any existing device ID. |
| <div>name</div> <div>required</div>                 | string<br>Display name of the virtual device. Must be unique (no duplicate with existing devices).                          |
| <div>description</div>                              | string<br>Optional text description for internal reference.                                                                 |
| <div>device_group_id</div> <div>&gt; required</div> | object<br>Defines which device group this virtual device belongs to.                                                        |

Responses

> 200 OK

> 403 Forbidden

POST /api/v2/virtual\_devices

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "VirtualDevice": {
    "id": 100001,
    "name": "Virtual Device 100001",
    "description": "Virtual device for mobile punch import",
    + "device_group_id": { ... }
  }
}
```

Response samples

200

403

**Content type**

application/json

Copy Expand all Collapse all

```
{
  - "VirtualDevices": [
    + { ... }
  ],
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

## Fetch Registered Virtual Devices

Retrieve a list of registered virtual devices.

AUTHORIZATIONS: > *SessionAuth*

## Responses

> 200 OK

GET /api/v2/virtual\_devices

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
--url https://{baseurl}/api/v2/virtual_devices \
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Copy   Expand all   Collapse all

```
{
- "VirtualDevices": [
+ { ... }
],
- "Response": {
  "code": "0",
  "link": "https://support.supremainc.com/en/support/home",
  "message": "Success",
  "by": "web"
}
```



# Delete Virtual Device

Deletes one or more virtual devices based on provided IDs.

AUTHORIZATIONS: > *SessionAuth*

## QUERY PARAMETERS

---

id

integer

Example: `id=100002`

ID of the Virtual Devices which will be deleted. Use plus symbol (+) to delimit multiple IDs (e.g. 10001+10002)

---

## Responses

> **200 OK**

DELETE /api/v2/virtual\_devices

## Request samples

|                     |                      |                    |                  |             |
|---------------------|----------------------|--------------------|------------------|-------------|
| Shell + Curl        | Shell + Httpie       | Shell + Wget       | Node + Native    |             |
| Node + Request      | Node + Unirest       | Node + Axios       | Node + Fetch     |             |
| Javascript + Fetch  | Javascript + JQuery  | Javascript + Xhr   | Python + Python3 |             |
| Python + Requests   | Ruby + Native        | Php + Curl         | Php + Http1      |             |
| Php + Http2         | Java + Okhttp        | Java + Unirest     | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession | Csharp + Restsharp |                  |             |

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \
  --url 'https://{baseurl}/api/v2/virtual_devices?id=100002' \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

Response samples

200

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Devices deleted successfully",
    "by": "web"
  }
}
```

Modify Existing Virtual Device

Modify existing virtual device details. Only updatable fields need to be included.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

id  
required

integer

Example: 100001

ID of the Virtual Device which will be modified.

REQUEST BODY SCHEMA: application/json

object

Responses

> 200 OK

PUT /api/v2/virtual\_devices/{id}

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "VirtualDevice": {
    + "device_group_id": { ... }
  }
}
```

## Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  - "VirtualDevices": [
    + { ... }
  ],
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

## Import Events

Imports external access events into the system.

Allows batch import of **Access Granted (4088)** and **Access Denied (6400)** events generated by a **Virtual Device**.

This is typically used when an external app generates punch logs (e.g., mobile attendance).

Each imported event is stored as a normal BioStar X event, visible in event logs and reports.

### Important Rules

- `packet_device_id` and every `events[].dev_id` must match.
- Only **virtual devices** are allowed.
- Only **event codes 4088 or 6400** are permitted.
- `datetime` must be in **UTC** (convert local time accordingly).

- All `user_id`s must exist in the system.
- Each imported event will be logged individually (one row per event).

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
**required**

Event import data containing device information and events array

|                                                   |                                                                                                  |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------|
| <code>packet_device_id</code><br><b>required</b>  | integer<br>Must match <code>dev_id</code> of all included events.                                |
| <code>is_virtual_device</code><br><b>required</b> | boolean<br>Indicates whether the device is virtual. Must be <code>true</code> for event imports. |
| <code>events</code> ><br><b>required</b>          | Array of objects (ImportEventItem)<br>List of event objects to import.                           |

## Responses

> 200 Events imported successfully

POST /api/events/import

## Request samples

|                    |                     |                  |                  |               |
|--------------------|---------------------|------------------|------------------|---------------|
| Payload            | Shell + Curl        | Shell + Httpie   | Shell + Wget     | Node + Native |
| Node + Request     | Node + Unirest      | Node + Axios     | Node + Fetch     |               |
| Javascript + Fetch | Javascript + JQuery | Javascript + Xhr | Python + Python3 |               |
| Python + Requests  | Ruby + Native       | Php + Curl       | Php + Http1      |               |

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  "packet_device_id": 100001,
  "is_virtual_device": true,
  - "events": [
    + { ... },
    + { ... }
  ]
}
```

Response samples

200

Content type  
application/json

Copy

```
{
  "code": "0",
  "link": "https://support.supremainc.com/en/support/home",
  "message": "Success",
  "by": "web"
}
```

# Mobile Access

## Delete Mobile Access Card in Airfob Portal: ALL on User ID

This API is used to delete Mobile Access Card in Airfob Portal.

There are three variations in using this API:

1. Using Card ID
  2. Using User ID
  3. Using ALL parameter on User ID
- To delete multiple `card_id` or `user_id`, separate each value with comma (,).  
Ex: ["1", "2", "3"]
  - This API only remove Mobile Access Card information from Airfob Portal. To remove Mobile Access credential from the user, use `PUT /api/users/:id`

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

MobileCollection ▾ object

mobile ▾ object

user\_id string

The use of ALL parameter will remove Airfob's Mobile Access Card from all user which have Mobile Access Card on their credential list.

|         |                                                           |
|---------|-----------------------------------------------------------|
| card_id | Array of strings<br>List of Mobile Access Card's card ID. |
| param > | object                                                    |

Responses

> 200 Successful response

POST /api/v2/mobile/delete

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json



[Copy](#) [Expand all](#) [Collapse all](#)

```
{
  - "MobileCollection": {
    + "mobile": { ... }
  }
}
```

## Response samples

**200****Content type**

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
  "failedUsers": [ ],
  "failedCards": [ ],
  - "mobileUsers": [
    "3",
    "4"
  ],
  "status": 0,
  "errorMessage": "",
  - "Response": {
    "code": "0",
    "link": "https://support.supremainc.com/en/support/home",
    "message": "Success",
    "by": "web"
  }
}
```

---

## Create Mobile Access Card in Airfob Portal

This API is used to create Mobile Access Card in Airfob Portal.

### Note:

- When creating mobile access cards, Airfob portal sites are divided into regular and dynamic
- The startDate and endDate fields are used when the sites are dynamic sites

## ToM

- ToM uses Extend mode for personal authentication mode when creating a card
- If another device supports ToM in the future, a value mapped to cardAuthMode (standard) and cardAuthModeEx (extend) should be added for compatibility with devices that do not support Extend
- In API, if you put in the cardAuthModeEx value, the server internally maps the cardAuthMode value

## Card AuthMode Mapping Table:

| <b>cardAuthModeEx</b>                  | <b>cardAuthMode</b>           |
|----------------------------------------|-------------------------------|
| 21 - Card                              | 2 - Card only                 |
| 22 - Card + Face                       | 3 - Card + Fingerprint        |
| 23 - Card + Fingerprint                | 3 - Card + Fingerprint        |
| 24 - Card + PIN                        | 4 - Card + PIN                |
| 25 - Card + Face or Fingerprint        | 5 - Card + Fingerprint or PIN |
| 26 - Card + Face or PIN                | 5 - Card + Fingerprint or PIN |
| 27 - Card + Fingerprint or PIN         | 5 - Card + Fingerprint or PIN |
| 28 - Card + Face or Fingerprint or PIN | 5 - Card + Fingerprint or PIN |
| 29 - Card + Face + Fingerprint         | 6 - Card + Fingerprint + PIN  |
| 30 - Card + Face + PIN                 | 6 - Card + Fingerprint + PIN  |
| 31 - Card + Fingerprint + Face         | 6 - Card + Fingerprint + PIN  |
| 32 - Card + Fingerprint + PIN          | 6 - Card + Fingerprint + PIN  |
| 33 - Card + Face or Fingerprint + PIN  | 6 - Card + Fingerprint + PIN  |
| 34 - Card + Face + Fingerprint or PIN  | 6 - Card + Fingerprint + PIN  |

| cardAuthModeEx                        | cardAuthMode                 |
|---------------------------------------|------------------------------|
| 35 - Card + Fingerprint + Face or PIN | 6 - Card + Fingerprint + PIN |

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
required

MobileCollection ▾  
required      object

mobile ▾  
required      object

|                     |                                                                  |
|---------------------|------------------------------------------------------------------|
| user_id<br>required | Array of strings<br>User ID                                      |
| name                | Array of strings or null<br>User Name                            |
| title               | Array of strings or null<br>User's Title                         |
| department          | Array of strings or null<br>Department Name                      |
| phone               | Array of strings or null<br>Phone Number                         |
| email<br>required   | Array of strings <email> [ items <email > ]<br>Email address     |
| portraitData        | Array of strings or null<br>Photo encoding data in Base64 format |
| card_id<br>required | Array of strings<br>Card ID                                      |

|                       |                                                                                                                                                                          |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| startDate             | <p>Array of integers or null &lt;int64&gt; [ items &lt;int64 &gt; ]</p> <p>Start Date for Dynamic Site (timestamp in milliseconds, required for Dynamic Site)</p>        |
| endDate               | <p>Array of integers or null &lt;int64&gt; [ items &lt;int64 &gt; ]</p> <p>End Date for Dynamic Site (timestamp in milliseconds, required for Dynamic Site)</p>          |
| startTime<br>required | <p>Array of integers &lt;int64&gt; [ items &lt;int64 &gt; ]</p> <p>User period start date (timestamp in milliseconds, required)</p>                                      |
| endTime<br>required   | <p>Array of integers &lt;int64&gt; [ items &lt;int64 &gt; ]</p> <p>User period end date (timestamp in milliseconds, required)</p>                                        |
| issueCount            | <p>Array of integers or null</p> <p>ToM card issue round (required for ToM)</p>                                                                                          |
| duressMask            | <p>Array of strings or null</p> <p>Duress value</p>                                                                                                                      |
| useAlphanumericID     | <p>Array of integers or null</p> <p>Items Enum: 0 1</p> <p>ID type: 0 for Numeric, 1 for Alphanumeric</p>                                                                |
| cardAuthModeEx        | <p>Array of integers</p> <p>Items Enum: 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35</p> <p>Extended card authentication mode (see mapping table in API description)</p> |
| pin                   | <p>Array of strings or null</p> <p>PIN number</p>                                                                                                                        |
| accessGroupId         | <p>Array of strings or null</p> <p>Access Group ID</p>                                                                                                                   |
| mobileCardType        | <p>Array of strings</p>                                                                                                                                                  |

required

Items Enum:

Mobile card type (required):  for CSN Mobile,  
 for ToM\_AoC,  for ToM\_SCC

---

## Responses

> 200 Successful response

POST /api/v2/mobile

### Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{  
  - "MobileCollection": {  
    + "mobile": { ... }  
  }  
}
```

## Response samples

**200****Content type**

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
  - "MobileCollection": {  
    + "listMobile": [ ... ],  
    + "recordMobile": [ ... ]  
  },  
  - "Response": {  
    "code": "0",  
    "link": "https://support.supremainc.com/en/support/home",  
    "message": "Success",  
    "by": "web"  
  }  
}
```

---

## View Deleted CSN Mobile

This API is used to fetch CSN Mobile information deleted from the list.

AUTHORIZATIONS: > *SessionAuth*

QUERY PARAMETERS

---

**limit**

integer

Example:

Limit the number of responses by n records. Remove this parameter to view all.

offset

integer

Offset the response shown by n records.

search\_type

string

Example: `search_type=DELETED_CSN_MOBILE`

Filter the response by card type (DELETED\_CSN\_MOBILE).

## Responses

> 200 Successful response

GET /api/v2/cards/mobile/search

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url 'https://{baseurl}/api/v2/cards/mobile/search?limit=50&offset=0&search_type=DELETED_('
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

**200****Content type**

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
  - "CardCollection": {
    + "rows": [ ... ],
    "total": 3
  },
  - "Response": {
    "code": 0
  }
}
```

## Delete CSN Mobile

This API is used to delete CSN Mobile information.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

**id**

string

Example: `id=18,19,20`

Card UID value, separate using comma (,). Use asterisk (\*) to select all.



# Responses

> 200 Successful response

DELETE /api/v2/cards/mobile/enable

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
--url 'https://{baseurl}/api/v2/cards/mobile/enable?id=18%2C19%2C20' \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

200

Content type  
application/json

Copy

```
{  
  "code": "0",  
}
```

```
"link": "https://support.supremainc.com/en/support/home",  
"message": "Success",  
"by": "web"
```

```
}
```

## Count Deleted CSN Mobile

This API is used to count deleted CSN Mobile information.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

cardUids  
**required**

string

List of Mobile Card UID(s) which will be counted, separated by comma (,).

## Responses

> **200** Successful response

POST /api/v2/cards/mobile/count

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{
  "cardUids": "11,12,13,16,17"
}
```

Response samples

200

Content type  
application/json

Copy   Expand all   Collapse all

```
{
  - "CardCollection": {
    "count": 2
  },
  - "Response": {
    "code": "0"
  }
}
```

Events

# Download CSV File

This API is used to download exported CSV files from BioStar X Server.

Supports downloading both user-related CSV files and events-related CSV files. The system automatically detects the file type based on the filename pattern.

## Supported File Types:

- **User CSV files:** Generated from `POST /api/users/csv_export`
- **Events CSV files:** Generated from `POST /api/events/export`

## Usage:

1. Export data using the appropriate API (`csv_export` for users, `export` for events)
2. Get the filename from the export response
3. Use the filename as the path parameter in this download API

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

---

csv\_filename  
**required**

string

Examples:

- `User_Import_Error_20220124T143708.csv` - User CSV file
- `Report_20220204T165145.csv` - Events CSV file

Name of the CSV file to download (supports both user and events files)

---

## Responses

— **200** Successful response

GET /download/{csv\_filename}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url https://{baseurl}/download/User_Import_Error_20220124T143708.csv \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

Fetch Event Image

When query events through **Search Events** ( /api/events/search ), events that contain image logs include the response fields. The `image_data` value can be used to retrieve the corresponding image file.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

|            |        |
|------------|--------|
| image_data | string |
| required   |        |

(String, Required) – The identifier of the image, obtained from the event search response.

## Responses

> 200 Successful response

GET /api/events/images/{image\_data}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url https://{baseUrl}/api/events/images/{image_data} \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Response samples

200

**Content type**

application/json

Copy

Expand all

Collapse all

```
{
  - "image_id": {
    "image_data": 1.7550623415478388e+24,
    "image_type": "JPG",
    "photo": "false"
  }
}
```

## Search Thermal Events

This API is used to view events with thermal data.

Parameters on this API is the same as Search Events.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

---

object

## Responses

— **200** Successful response

POST /api/events/search/thermal

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Query": {
    "limit": 51,
    + "conditions": [ ... ],
    + "orders": [ ... ]
  }
}
```

## Export as CSV

This API is used to export events to a .csv file. Exported .csv will be saved on BioStar X Server installation path. To get it from the server, use Download Events Exported CSV API.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

time\_offset      integer



Example: `time_offset=480`

Shift time on the exported file by n minutes

use\_centigrade    boolean

Example: `use_centigrade=true`

Toggle for the use of centigrade

REQUEST BODY SCHEMA:    application/json

Query ▾

object (ExportCSV)

conditions >

Array of objects (QueryConditions)

A set of conditions to filter the response of the API. On this case, it's using the datetime field to filter according to the values given.

offset

integer

Offset the response's records by the specified value.

columns  
required

Array of strings

List of columns which will be included on the CSV.

headers  
required

Array of strings

Name of the header on the exported .csv file.

# Responses

— 200 Successful response

POST    /api/events/export

# Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Query": {
    + "conditions": [ ... ],
    "offset": 0,
    + "columns": [ ... ],
    + "headers": [ ... ]
  }
}
```

## List All Alerts: Filter & Sort by Date

This example shows how to use the parameters on this API to filter responses according to the datetime of the alert events.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

Query ▾

object

conditions &gt;

Array of objects (QueryConditions)

A set of conditions to filter the response of the API. On this case, it's using the datetime field to filter according to the values given.

orders &gt;

Array of objects

## Responses

— 200 Successful response

POST /api/alerts/search

## Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type

application/json

Copy Expand all Collapse all

```
{
  - "Query": {
    + "conditions": [ ... ],
    + "orders": [ ... ]
  }
}
```

## Update Alert History

This API is used to log `alertable: true` events ( `GET /api/event_types` ) to Alert Collection ( `POST /api/alerts/search` )

AUTHORIZATIONS: > *SessionAuth*

## PATH PARAMETERS

**alert\_id**  
required

integer

Example: 1.643790735054372e+29

Unique ID recorded on hint parameter (POST /api/events/search)

REQUEST BODY SCHEMA: application/json

Alert  object

```
event_id > object
required
```

|          |            |
|----------|------------|
| status   | integer    |
| required | Default: 1 |
|          | Default: 1 |

|                                      |                                                                  |
|--------------------------------------|------------------------------------------------------------------|
| <div>ack_user_id &gt; required</div> | object                                                           |
| <div>ack_message required</div>      | string<br>Custom message which will be recorded on the Alert Log |

Responses

— 200 Successful response

PUT /api/alerts/{alert\_id}

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Alert": {
    + "event_id": { ... },
    "status": 1,
    + "ack_user_id": { ... },
    "ack_message": "test"
  }
}
```

# View a Muster Zone Status

This API is used to view a muster zone status.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

id integer  
required  
Example: 32787

REQUEST BODY SCHEMA: application/json

Query ▾ object

limit integer  
required  
Specify the number of records which shown on the response

## Responses

— 200 Successful response

POST /api/zones/{id}/tracking

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Query": {
    "limit": 51
  }
}
```

Audit

# Audit Search

This API is used to view Audit Trail logs.

It is possible to use multiple conditions in a request. Separate each condition using comma (,).

Example: [ {condition 1}, {condition 2}, .. ]

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json  
required

Search criteria and pagination settings for audit trail logs

|                           |                                                                                                                                    |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Query <div>required</div> | object<br>Search query configuration with conditions and pagination                                                                |
| offset                    | integer<br>Offset the response's records by the specified value.                                                                   |
| limit <div>required</div> | integer<br>Limit the number of response's records by the specified value.                                                          |
| total                     | boolean<br>Default: <input type="checkbox"/> false<br>Toggle true to get total count of the Audit Trail based on condition(s) set. |
| conditions >              | Array of objects (AuditSearchCondition)<br>Array of search conditions to filter audit logs                                         |



# Responses

— 200 Audit logs retrieved successfully

POST /api/audit/search

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Query": {
    "offset": 0,
    "limit": 5,
    + "conditions": [ ... ],
    "total": false
  }
}
```

# Audit Search User

This API is used to filter user by the specified input.

Do note the API will only show records of user which have Audit Trail logs only.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|            |                                                                                                                                                                  |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Userlist ▾ | object (AuditSearchRequest)                                                                                                                                      |
| search     | <div>string</div> <div>Search term to filter with Audit Trail log. To show all which have Audit Trail logs, simply remove this parameter from the request.</div> |
| limit      | <div>integer</div> <div>Limit the number of response's records by the specified value.</div>                                                                     |
| offset     | <div>integer</div> <div>Offset the response's records by the specified value.</div>                                                                              |

## Responses

— 200 Successful response

POST /api/audit/userlist

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Userlist": {
    "search": "ag",
    "limit": 201,
    "offset": 0
  }
}
```

## Audit Search Operator Level

This API is used to filter Operator Level by the specified input.

Do note the API will only show records of Operator Level which have Audit Trail logs only.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

Permlist ▾

object (AuditSearchRequest)

search

string

Search term to filter with Audit Trail log. To show all which have Audit Trail logs, simply remove this parameter from the request.

limit

integer

Limit the number of response's records by the specified value.

offset

integer

Offset the response's records by the specified value.

## Responses

— 200 Successful response

POST /api/audit/permlist

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Permlist": {
    "search": "ag",
    "limit": 201,
    "offset": 0
  }
}
```

# Audit Search IP List

This API is used to filter IP records by the specified input.

Do note the API will only show records which have Audit Trail logs only.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

|          |                                                                                                                                               |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Iplist ▾ | object (AuditSearchRequest)                                                                                                                   |
| search   | string<br>Search term to filter with Audit Trail log. To show all which have Audit Trail logs, simply remove this parameter from the request. |
| limit    | integer                                                                                                                                       |

|        |                                                                  |
|--------|------------------------------------------------------------------|
|        | Limit the number of response's records by the specified value.   |
| offset | integer<br>Offset the response's records by the specified value. |

Responses

— 200 Successful response

POST /api/audit/iplist

Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Iplist": {
    "search": "ag",
    "limit": 201,
    "offset": 0
  }
}
```

---

## Audit Search Target List

This API is used to filter Target records by the specified input.

Do note the API will only show records which have Audit Trail logs only.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

---

Targetlist ▾

object (AuditSearchRequest)

---

search

string

Search term to filter with Audit Trail log. To show all which have Audit Trail logs, simply remove this parameter from the request.

---

limit

integer

Limit the number of response's records by the specified value.

---

offset

integer

Offset the response's records by the specified value.

---

# Responses

— 200 Successful response

POST /api/audit/targetlist

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Targetlist": {
    "search": "ag",
    "limit": 201,
    "offset": 0
  }
}
```



# Audit CSV Export

This API is used to generate CSV file based on the parameters. Make use of `Events\Download Events Exported CSV` API to download the exported CSV.

AUTHORIZATIONS: > *SessionAuth*

## QUERY PARAMETERS

---

time\_offset

integer

Example: `time_offset=480`

Adjust the time value according to the required Time Zone. If the required TZ is UTC+8, then the value will be 480 (60 x 8).

---

## REQUEST BODY SCHEMA: application/json

---

Query >

object (ExportCSV)

---

reason

string

Reason for exporting audit data (Supported in v1.0.1 and later)

---

## Responses

— **200** Successful response

POST /api/audit/export

## Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + Jquery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Query": {
    "offset": 0,
    + "conditions": [ ... ],
    + "columns": [ ... ],
    + "headers": [ ... ]
  }
}
```

## Zones

### Interlock: Create

Interlock zone monitors the status of two or more doors by door sensor and relay state to control that one door cannot be opened or close if other doors are open or unlocked. You can also disable access if a user stays within the zone.

- An interlock zone can be configured with up to 4 doors.
- An interlock zone can only set the doors with the devices connected to the CoreStation.
- A device set as an interlock zone cannot be set to another zone.
- A door set as an interlock zone cannot be set to another zone other than the fire alarm zone.

## AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|                          |                                                                                                                                                                                                 |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Zone<br>required         | object                                                                                                                                                                                          |
| name<br>required         | string [ 1 .. 48 ] characters<br>Enter an interlock zone name.                                                                                                                                  |
| description              | string <= 255 characters<br>Enter an interlock zone description.                                                                                                                                |
| zone_type<br>required    | integer<br>View the zone type.                                                                                                                                                                  |
| is_global<br>required    | integer<br>You can check the application range of the zone. Only Local mode is supported for interlock zone, and the zone can be set only with devices connected to the CoreStation and RS-485. |
| enable<br>required       | integer<br>You can disable the interlock zone. input <input type="checkbox"/> to enable it.                                                                                                     |
| inter_lock ><br>required | object                                                                                                                                                                                          |

# Responses

— 200 Successful response

POST /api/zones

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Zone": {
    "name": "IN1",
    "description": "",
    "zone_type": 7,
    "is_global": 0,
    "enable": 1,
    + "inter_lock": { ... }
  }
}
```

# View Zones

This API is used to view zones.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/zones

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/zones \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

---

## APB: Clear APB

This endpoint allows administrators to reset the Anti-Passback state within a zone. It can be applied either to **all users in the zone** or to a **specific set of users**

### Response Codes:

- 200 OK: Request successful
- 400 Bad Request (Code 671): Zone ID mismatch (zone not found)
- 401 Unauthorized: Login required or invalid session token

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

---

AntiPassBackConfig > object

---

User > Array of objects  
List of user objects with user\_id. Required when  
UserType= 2.

---

## Responses

> **200** Successful response

> **400** Bad Request

— **401** Unauthorized - The API key provided was invalid or missing.

POST /api/zones/clear\_apb\_ex

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "AntiPassBackConfig": {
    + "Zone": { ... },
    "UserType": 1
  }
}
```

Response samples

200

400

Content type  
application/json

Copy

```
{
  "code": "0",
```

```
"link": "https://support.supremainc.com/en/support/home",
"message": "Success",
"by": "web"
}
```

# Zones: Update

This API is used to update a Zone.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

|          |                                       |
|----------|---------------------------------------|
| id       | string                                |
| required | ID of the Zone which will be updated. |

REQUEST BODY SCHEMA: application/json

|             |                                                                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Zone        | object                                                                                                                                                                               |
| name        | string [ 1 .. 48 ] characters                                                                                                                                                        |
| required    | Enter the zone name.                                                                                                                                                                 |
| description | string <= 255 characters                                                                                                                                                             |
|             | Enter the zone description.                                                                                                                                                          |
| zone_type   | integer                                                                                                                                                                              |
| required    | View the zone type.                                                                                                                                                                  |
| is_global   | integer                                                                                                                                                                              |
| required    | You can check the application range of the zone. Only Local mode is supported for interlock zone, and the zone can be set only with devices connected to the CoreStation and RS-485. |



|                    |                                                                                                   |
|--------------------|---------------------------------------------------------------------------------------------------|
| enable<br>required | integer<br>You can disable the interlock zone. input <input type="text" value="1"/> to enable it. |
| status             | integer<br>View the zone status.                                                                  |

## Responses

— 200 Successful response

PUT /api/zones/{id}

### Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "Zone": {
    "name": "testmuster1",
    "zone_type": 8,
    "is_global": 1,
    "enable": 1,
    "status": 64,
    + "muster": { ... }
  }
}
```

---

## Zones: Delete

This API is used to delete a Zone.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

|                              |                                                                                                 |
|------------------------------|-------------------------------------------------------------------------------------------------|
| <b>id</b><br><b>required</b> | integer<br>Example: <input type="text" value="32786"/><br>ID of the zone which will be deleted. |
|------------------------------|-------------------------------------------------------------------------------------------------|

---

## Responses

— **200** Successful response

DELETE /api/zones/{id}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
  --url https://{baseurl}/api/zones/32786 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

# View a Zone Detail

This API is used to view a zone detailed information.

AUTHORIZATIONS: > SessionAuth

## PATH PARAMETERS

id

required

integer

Example: 32787

ID of the zone which will be viewed.

## Responses

— 200 Successful response

GET /api/zones/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/zones/32787 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

Occupancy Limit

Occupancy: Create New

Create and manage occupancy limit zones to control population density in specific areas and prevent overcrowding.

You can monitor occupancy status and set alerts when zones reach capacity.

**Capacity:** Up to 100 occupancy limit zones can be added.

**Compatible Devices:**

- FaceStation F2 firmware version 1.1.0 or later
- FaceStation 2 firmware version 1.5.0 or later

**Important Notes:**

- A device cannot be assigned to both entry and exit simultaneously
- Maximum 128 entry and exit devices combined
- Devices using Dual Authentication cannot be set as entry or exit devices
- Auto Count Reset time is based on UTC for the zone's location
- Alert values must be smaller than the limit value and different from each other
- Count Bypass feature is not available when using Thermal & Mask Check Mode without authentication
- Up to 16 bypass groups can be added

AUTHORIZATIONS: > *SessionAuth*

QUERY PARAMETERS

---

time\_zone      integer  
Default: 26  
Example: time\_zone=25  
Time Zone ID for system operations. Affects timing calculations based on UTC offset.

**Available Time Zones:**

| ID | Offset | Description | ID | Offset | Description |
|----|--------|-------------|----|--------|-------------|
| 0  | -720   | UTC-12:00   | 17 | +210   | UTC+03:30   |
| 1  | -660   | UTC-11:00   | 18 | +240   | UTC+04:00   |

| ID  | Offset | Description | ID   | Offset | Description         |
|-----|--------|-------------|------|--------|---------------------|
| 2   | -600   | UTC-10:00   | 19   | +270   | UTC+04:30           |
| 3-1 | -570   | UTC-09:30   | 20   | +300   | UTC+05:00           |
| 3   | -540   | UTC-09:00   | 21   | +330   | UTC+05:30           |
| 4   | -480   | UTC-08:00   | 22   | +345   | UTC+05:45           |
| 5   | -420   | UTC-07:00   | 23   | +360   | UTC+06:00           |
| 6   | -360   | UTC-06:00   | 23+1 | +390   | UTC+06:30           |
| 7   | -300   | UTC-05:00   | 24   | +420   | UTC+07:00           |
| 8-1 | -270   | UTC-04:30   | 25   | +480   | UTC+08:00           |
| 8   | -240   | UTC-04:00   | 25+1 | +510   | UTC+08:30           |
| 9   | -210   | UTC-03:30   | 25+2 | +525   | UTC+08:45           |
| 10  | -180   | UTC-03:00   | 26   | +540   | UTC+09:00 (Default) |
| 11  | -120   | UTC-02:00   | 27   | +570   | UTC+09:30           |
| 12  | -60    | UTC-01:00   | 28   | +600   | UTC+10:00           |
| 13  | 0      | UTC±00:00   | 28+1 | +630   | UTC+10:30           |
| 14  | +60    | UTC+01:00   | 29   | +660   | UTC+11:00           |
| 15  | +120   | UTC+02:00   | 30   | +720   | UTC+12:00           |
| 16  | +180   | UTC+03:00   | 30+1 | +765   | UTC+12:45           |
|     |        |             | 31   | +780   | UTC+13:00           |
|     |        |             | 32   | +840   | UTC+14:00           |

REQUEST BODY SCHEMA: application/json  
required

is\_enabled integer

|                    |          |                                                                                                                                                                                                                                                                                   |
|--------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| required           |          | Enum: <input type="checkbox"/> 0 <input type="checkbox"/> 1                                                                                                                                                                                                                       |
|                    |          | Deactivate the occupancy limit zone. If the zone is deactivated, both Count that refers to the number of users in the zone and Count Bypass settings will be initialized. Select Active to enable it. ( <input type="checkbox"/> 1 =Active, <input type="checkbox"/> 0 =Inactive) |
| name               | required | string <input type="text" value="[ 1 .. 48 ] characters"/><br>Enter an occupancy limit zone name. Name can be up to 48 characters in length and cannot be set to the same name as other zones.                                                                                    |
| zone_type          | required | integer<br>View the zone type.                                                                                                                                                                                                                                                    |
| status             | required | integer<br>Current status of the zone                                                                                                                                                                                                                                             |
| occupancy_detail > | required | object                                                                                                                                                                                                                                                                            |

Responses

— 200 Successful response

POST /api/v2/zones/occupancy

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "is_enabled": 1,
  "name": "OccupancyZone1",
  "zone_type": 11,
  "status": 0,
  - "occupancy_detail": {
    "limit_count": 100,
    + "entry_devices": [ ... ],
    + "exit_devices": [ ... ],
    + "almost_full_alert_setting": { ... },
    + "auto_reset_count_time": { ... },
    "network_fail_action": 0,
    + "bypass_groups": [ ... ]
  }
}
```

## Occupancy: Delete

This API is used to delete Occupancy Zone.

AUTHORIZATIONS: > *SessionAuth*

## Responses



— 200 Successful response

DELETE /api/v2/zones/occupancy

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request DELETE \  
--url https://{baseurl}/api/v2/zones/occupancy \  
--header 'bs-session-id: REPLACE_KEY_VALUE'
```

Occupancy: List All

This API is used to list all configured Occupancy Zone.

AUTHORIZATIONS: > SessionAuth

Responses

— 200 Successful response

GET /api/v2/zones/occupancy

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url https://{baseurl}/api/v2/zones/occupancy \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Occupancy: Update

This API is used to update occupancy zone configuration.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

id  
required

integer

Example: 32784

ID of the occupancy zone which will be updated.

QUERY PARAMETERS

time\_zone

integer

Default: 26

Example: time\_zone=25

Time Zone ID for system operations. Affects timing calculations based on UTC offset.

Available Time Zones:

| ID  | Offset | Description | ID   | Offset | Description         |
|-----|--------|-------------|------|--------|---------------------|
| 0   | -720   | UTC-12:00   | 17   | +210   | UTC+03:30           |
| 1   | -660   | UTC-11:00   | 18   | +240   | UTC+04:00           |
| 2   | -600   | UTC-10:00   | 19   | +270   | UTC+04:30           |
| 3-1 | -570   | UTC-09:30   | 20   | +300   | UTC+05:00           |
| 3   | -540   | UTC-09:00   | 21   | +330   | UTC+05:30           |
| 4   | -480   | UTC-08:00   | 22   | +345   | UTC+05:45           |
| 5   | -420   | UTC-07:00   | 23   | +360   | UTC+06:00           |
| 6   | -360   | UTC-06:00   | 23+1 | +390   | UTC+06:30           |
| 7   | -300   | UTC-05:00   | 24   | +420   | UTC+07:00           |
| 8-1 | -270   | UTC-04:30   | 25   | +480   | UTC+08:00           |
| 8   | -240   | UTC-04:00   | 25+1 | +510   | UTC+08:30           |
| 9   | -210   | UTC-03:30   | 25+2 | +525   | UTC+08:45           |
| 10  | -180   | UTC-03:00   | 26   | +540   | UTC+09:00 (Default) |

| ID | Offset | Description | ID   | Offset | Description |
|----|--------|-------------|------|--------|-------------|
| 11 | -120   | UTC-02:00   | 27   | +570   | UTC+09:30   |
| 12 | -60    | UTC-01:00   | 28   | +600   | UTC+10:00   |
| 13 | 0      | UTC±00:00   | 28+1 | +630   | UTC+10:30   |
| 14 | +60    | UTC+01:00   | 29   | +660   | UTC+11:00   |
| 15 | +120   | UTC+02:00   | 30   | +720   | UTC+12:00   |
| 16 | +180   | UTC+03:00   | 30+1 | +765   | UTC+12:45   |
|    |        |             | 31   | +780   | UTC+13:00   |
|    |        |             | 32   | +840   | UTC+14:00   |

REQUEST BODY SCHEMA: application/json  
required

is\_enabled  
required

integer  
Enum: 0 1  
Deactivate the occupancy limit zone. If the zone is deactivated, both Count that refers to the number of users in the zone and Count Bypass settings will be initialized. Select Active to enable it. (1 =Active, 0 =Inactive)

name  
required

string [ 1 .. 48 ] characters  
Enter an occupancy limit zone name. Name can be up to 48 characters in length and cannot be set to the same name as other zones.

zone\_type  
required

integer  
View the zone type.

status  
required

integer  
Current status of the zone

occupancy\_detail >  
required

object

# Responses

— 200 Successful response

PUT /api/v2/zones/occupancy/{id}

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  "is_enabled": 1,
  "name": "OccupancyZone1",
  "zone_type": 11,
  "status": 0,
```

```
- "occupancy_detail": {
  "limit_count": 100,
  + "entry_devices": [ ... ],
  + "exit_devices": [ ... ],
  + "almost_full_alert_setting": { ... },
  + "auto_reset_count_time": { ... },
  "network_fail_action": 0,
  + "bypass_groups": [ ... ]
}
```

---

## Occupancy: View Details

This API is used to view details of an Occupancy Zone.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

---

**id**  
**required** integer  
Example:   
ID of the Occupancy Zone which will be viewed.

---

### QUERY PARAMETERS

---

**time\_zone** integer  
Example:

---

## Responses

— **200** Successful response

GET /api/v2/zones/occupancy/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url 'https://{baseurl}/api/v2/zones/occupancy/32784?time_zone=25' \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

Occupancy: Search by Name

This API is used to search Occupancy Zone by name.

AUTHORIZATIONS: > SessionAuth

PATH PARAMETERS

id

required

string

Example:

Name of the Occupancy Zone which will be searched.

## Responses

— 200 Successful response

GET /api/v2/zones/occupancy/search/{id}

### Request samples

|                     |                         |                         |                  |             |
|---------------------|-------------------------|-------------------------|------------------|-------------|
| Shell + Curl        | Shell + Httpie          | Shell + Wget            | Node + Native    |             |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |             |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |             |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |             |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |             |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |             |

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/v2/zones/occupancy/search/occ \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Occupancy: List Dual Auth. Devices

This API is used to get a list of dual authentication devices.



## AUTHORIZATIONS: > *SessionAuth*

### Responses

— 200 Successful response

GET /api/v2/zones/occupancy/devices/dual

### Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/v2/zones/occupancy/devices/dual \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Occupancy: View Assigned Devices

This API is used to list assigned devices on a Occupancy Zone.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

id

required

integer

Example: 32784

ID of the Occupancy Zone

---

Responses

— 200 Successful response

GET /api/v2/zones/occupancy/devices/{id}

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \  
  --url https://{baseurl}/api/v2/zones/occupancy/devices/32784 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Occupancy: Increase Count

This API is used to increase an occupancy count.

Count will be higher or equal to 0 and will be lower or equal to Count Limit.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

**id**  
**required** integer  
Example:   
ID of the Occupancy Limit.

## Responses

— **200** Successful response

PUT /api/v2/zones/occupancy/count/increase/{id}

## Request samples

|                    |                     |                  |                  |
|--------------------|---------------------|------------------|------------------|
| Shell + Curl       | Shell + Httpie      | Shell + Wget     | Node + Native    |
| Node + Request     | Node + Unirest      | Node + Axios     | Node + Fetch     |
| Javascript + Fetch | Javascript + JQuery | Javascript + Xhr | Python + Python3 |
| Python + Requests  | Ruby + Native       | Php + Curl       | Php + Http1      |

|                     |                         |                         |             |             |
|---------------------|-------------------------|-------------------------|-------------|-------------|
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |             |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |             |             |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |             |             |

Copy

```
curl --request PUT \  
  --url https://{baseurl}/api/v2/zones/occupancy/count/increase/32784 \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Occupancy: Decrease Count

This API is used to decrease an occupancy count.

Count will be higher or equal to 0 and will be lower or equal to Count Limit.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

**id** integer  
**required**  
Example:   
ID of the Occupancy Limit

## Responses

— **200** Successful response

PUT /api/v2/zones/occupancy/count/decrease/{id}

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request PUT \
  --url https://{baseurl}/api/v2/zones/occupancy/count/decrease/32784 \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Occupancy: Set Count

This API is used to set and occupancy limit count.

Count value will be higher or equal to 0 and will be lower or equal to Count Limit.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

id

required

integer

Example: 32784

ID of the Occupancy Limit.

REQUEST BODY SCHEMA: application/json

count

required

integer

Set count value

Responses

— 200 Successful response

PUT /api/v2/zones/occupancy/count/set/{id}

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy

```
{
  "count": 85
}
```

# Occupancy: Reset Count

This API is used to reset current counts and bypass counts of the occupancy limit zone.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

|     |                                                                      |
|-----|----------------------------------------------------------------------|
| ids | Array of integers<br>List of Occupancy Zone IDs which will be reset. |
|-----|----------------------------------------------------------------------|

## Responses

— 200 Successful response

PUT /api/v2/zones/occupancy/reset

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type

application/json

Copy

Expand all

Collapse all

```
{
  - "ids": [
    32784
  ]
}
```

## Occupancy: Disable

This API is used to disable Occupancy Limit Zone.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

object

## Responses

— **200** Successful response



PUT /api/v2/zones/occupancy/disable

Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "ids": [
    32784
  ]
}
```

Occupancy: Enable

This API is used to enable Occupancy Limit Zone.

AUTHORIZATIONS: > SessionAuth

REQUEST BODY SCHEMA: application/json

object

# Responses

— 200 Successful response

PUT /api/v2/zones/occupancy/enable

## Request samples

Payload

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + JQuery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Httr

Ocaml + Cohttp

Kotlin + Okhttp

Content type  
application/json

Copy Expand all Collapse all

```
{
  - "ids": [
    32784
  ]
}
```

# Event Log

## View Event Types

This API is used for listing event types recorded on BioStar X.

AUTHORIZATIONS: > *SessionAuth*

### QUERY PARAMETERS

---


|                |                                                                                                                                                                                                                   |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| is_break_glass | boolean<br>Filter event types which is marked as break glass.                                                                                                                                                     |
| setting_alert  | boolean<br>Toggle <code>true</code> to list events which will trigger alert. Marked by 'alertable' parameter on the event. 'enable_alert' is used for marking which event will show a pop up notice on BioStar X. |
| setting_all    | boolean<br>Example: <code>setting_all=true</code><br>Toggle true to list all events recorded on database.                                                                                                         |

## Responses

— 200 Successful response

GET /api/event\_types

## Request samples

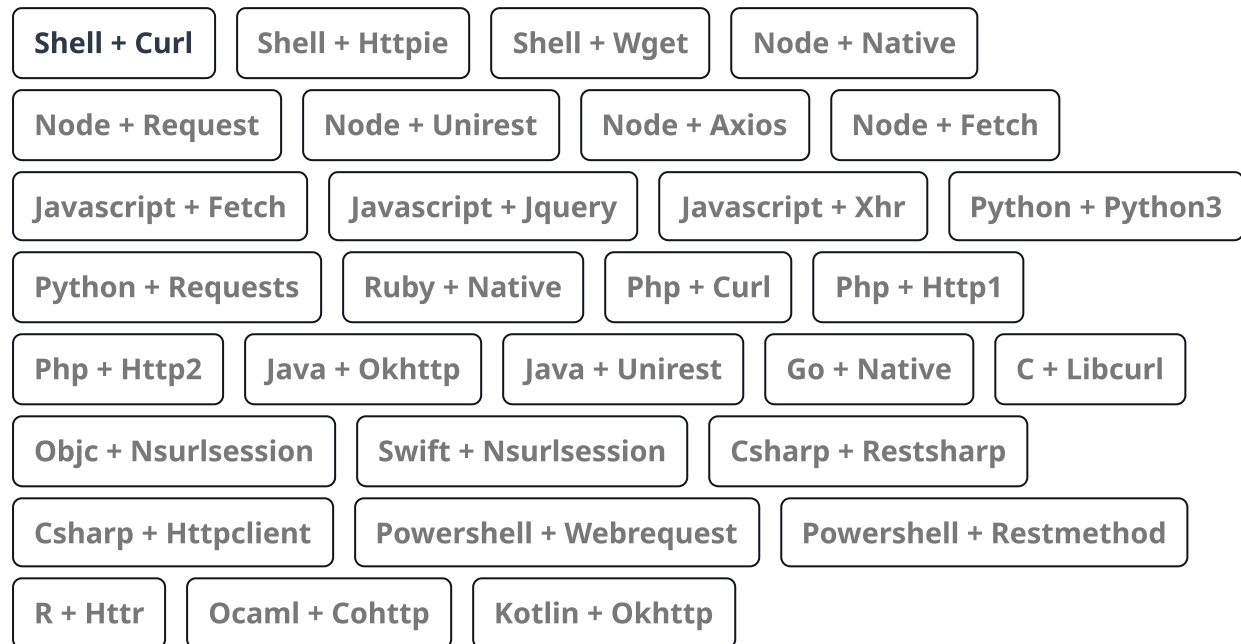

Copy

```
curl --request GET \
  --url 'https://{baseurl}/api/event_types?is_break_glass=false&setting_alert=false&setting_all=tr
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## Search Events Example

This example shows how to view event log from device with id: 543308153 (device timezone set as UTC+8) and log with datetime between 2022-06-01 00:05 to 2022-06-30 23:58.

Note that the datetime used on the API criteria is different from what the user would like to see. This is because the device was set to use UTC+8, so to view the correct log, use datetime which have been converted to UTC-0.

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json

Query ▾

object

|              |                                             |
|--------------|---------------------------------------------|
| limit        | integer                                     |
|              | Limit the number of responses by n records. |
| conditions > | Array of objects                            |
| orders >     | Array of objects                            |

## Responses

— 200 Successful response

POST /api/events/search

### Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |

Content type  
application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{  
  - "Query": {  
    "limit": 5,  
    + "conditions": [ ... ],  
    + "orders": [ ... ]  
  }  
}
```

---

## Create User

## 02 View BioStar Settings

After logged in, use this API to view the User ID setting of the BioStar X, is it AlphaNumeric or Number.

It can be seen on parameter `use_alphanumeric`, if the value is false then the current setting for User ID is Number, else it's AlphaNumeric.


AUTHORIZATIONS: > *SessionAuth*

## Responses

— **200** Successful response

GET /api/setting/biostar

## Request samples

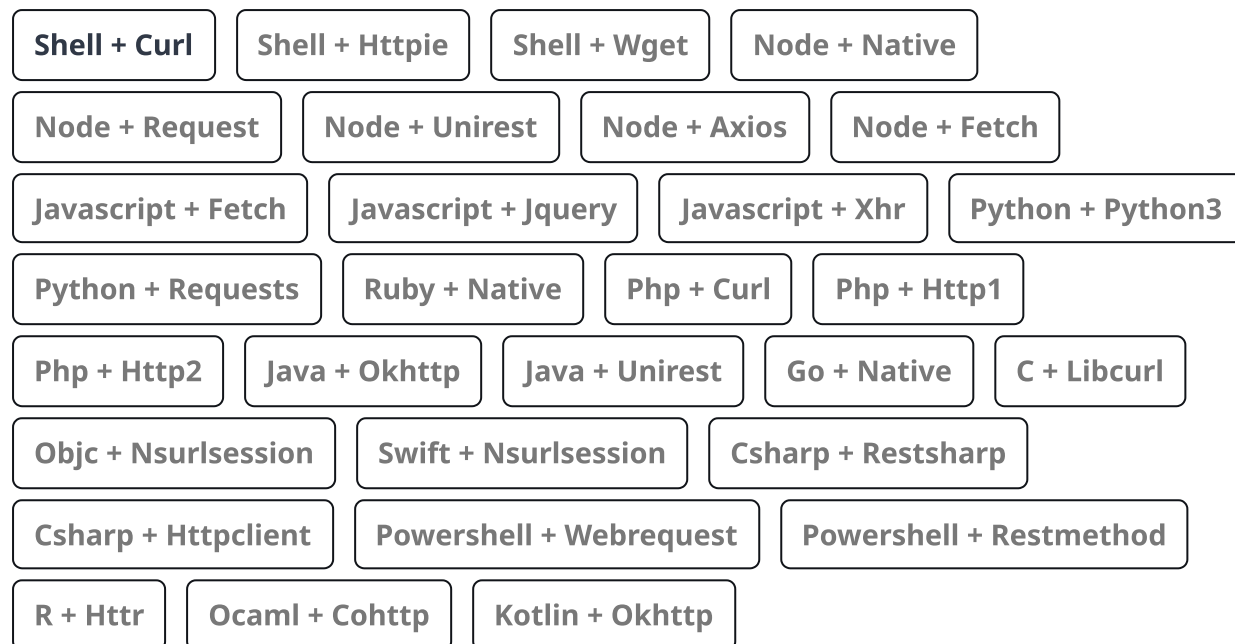

Copy

```
curl --request GET \
  --url https://{baseurl}/api/setting/biostar \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## 03 Find Next Available UserID

After User ID setting of BioStar X is confirmed, use this API to get the next `user_id` for new user.

This API will only shows next available ID in number format.

Keep this ID for input on `user_id` parameter when creating new user.

AUTHORIZATIONS: > *SessionAuth*

## Responses

— 200 Successful response

GET /api/users/next\_user\_id

## Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request GET \
  --url https://{baseUrl}/api/users/next_user_id \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## 04a Enroll Card Credential

Next step on creating a new user it to enroll the credential that the user will be using. Either it's Card, Face, Visual Face or Fingerprint.

This API is used to enroll card credential using the specified device.

Keep the card\_id value on the response which shows after running this API to apply it to the user which will be created.



To view device(s) with capability to enroll a card, use **View Device(s) Based on Enrollment Type** API.

AUTHORIZATIONS: > *SessionAuth*

PATH PARAMETERS

---

id

required

integer

Example: 543720368

ID of the device which will be used for enrollment

---

Responses

— 200 Successful response

POST /api/devices/{id}/scan\_card

Request samples

Shell + Curl

Shell + Httpie

Shell + Wget

Node + Native

Node + Request

Node + Unirest

Node + Axios

Node + Fetch

Javascript + Fetch

Javascript + Jquery

Javascript + Xhr

Python + Python3

Python + Requests

Ruby + Native

Php + Curl

Php + Http1

Php + Http2

Java + Okhttp

Java + Unirest

Go + Native

C + Libcurl

Objc + Nsurlsession

Swift + Nsurlsession

Csharp + Restsharp

Csharp + HttpClient

Powershell + Webrequest

Powershell + Restmethod

R + Htttr

Ocaml + Cohttp

Kotlin + Okhttp

Copy

```
curl --request POST \  
  --url https://{baseurl}/api/devices/543720368/scan_card \  
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

---

## 04b Enroll Face Credential

Use this API to enroll face credential from a device.

Set the `pose_sensitivity` to `0` if you're doing a Visual Face scan.

Keep the response of this API after running to apply it to the user which will be created.

To view device(s) with capability to enroll Face/Visual Face, use [View Device\(s\) Based on Enrollment Type](#) API.

AUTHORIZATIONS: > *SessionAuth*

### PATH PARAMETERS

---

|                                    |                                                                                             |
|------------------------------------|---------------------------------------------------------------------------------------------|
| <code>id</code><br><b>required</b> | integer<br>Example: <code>543408590</code><br>ID of the device which will be used to enroll |
|------------------------------------|---------------------------------------------------------------------------------------------|

---

### QUERY PARAMETERS

---

|                               |                                                                                                                                                                                                                                    |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>pose_sensitivity</code> | integer<br>Example: <code>pose_sensitivity=4</code><br>Set the sensitivity for the position, angle, and distance of a face when registering the face. Set the sensitivity high if you wish to obtain a detailed face template. 0-9 |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

---

## Responses

— 200 Successful response

GET /api/devices/{id}/credentials/face

## Request samples

|                     |                         |                         |                  |             |
|---------------------|-------------------------|-------------------------|------------------|-------------|
| Shell + Curl        | Shell + Httpie          | Shell + Wget            | Node + Native    |             |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |             |
| Javascript + Fetch  | Javascript + Jquery     | Javascript + Xhr        | Python + Python3 |             |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |             |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |             |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |             |
| R + Htttr           | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |             |

Copy

```
curl --request GET \
  --url 'https://{baseurl}/api/devices/543408590/credentials/face?pose_sensitivity=4' \
  --header 'bs-session-id: REPLACE_KEY_VALUE'
```

## 04c Enroll Fingerprint

Use this API to scan a fingerprint.

On calling this API, it is required to specify the device which will be used as fingerprint scanner. It is done by specifying Device ID on the API Path, which marked by `:dev_id`.

The procedure to add a fingerprint as follows:

- Scan a finger using this API
- Use `POST /api/server_matching/identify_finger` to check if it's already exist
- If it's not exist, then run a second scan using this API for the same finger
- Compare 1st and 2nd scan result using `POST /api/devices/:dev_id/verify_fingerprint` to make sure that 1st and 2nd scan are the same finger
- After running `Verify Fingerprint Scan`, keep the value of template 0 and 1 to assign the enrolled finger to a user using `POST|PUT /api/users/:id`

AUTHORIZATIONS: > *SessionAuth*

#### PATH PARAMETERS

---

|                                 |                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|
| <code>dev_id</code><br>required | integer<br>Example: <code>544140034</code><br>Unique identifier of the device to perform fingerprint scanning |
|---------------------------------|---------------------------------------------------------------------------------------------------------------|

---

REQUEST BODY SCHEMA: `application/json`

---

|                                                  |         |
|--------------------------------------------------|---------|
| <code>ScanFingerprintOption</code> ><br>required | object  |
| <code>noblockui</code><br>required               | boolean |


---

## Responses

— **200** Successful response

POST `/api/devices/{dev_id}/scan_fingerprint`

## Request samples

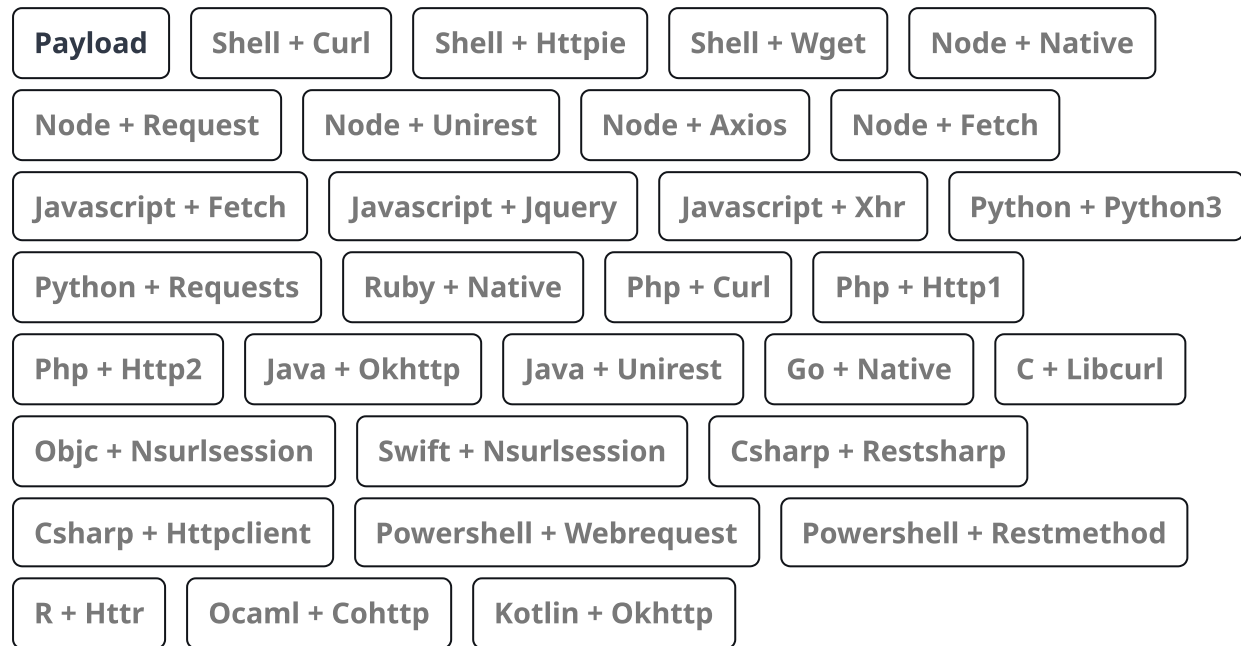

Content type

application/json

Copy Expand all Collapse all

```
{
  - "ScanFingerprintOption": {
    "enroll_quality": 80,
    "raw_image": false
  },
  "noblockui": true
}
```

## 05 Create New User

After preparing available user\_id and credential(s), use this API to create a new user using the basic configuration.

For applying configuration beyond this, such as credential(s) or custom fields, refer to the subsequent example.

When Setting > Server is set to Number, you can make use of endpoint

`/api/users/next_user_id` to automatically get the next user\_id.

**Known validation errors:**

- `name` is more than 48 characters
- Using single quote on name
- Duplicate `user_id` , `email` , or `login_id`
- Empty required fields
- Using non-existent `user_group_id`
- Password with 3 or more subsequent letter or number
- Start and expiry date difference is more than 30 years

AUTHORIZATIONS: > *SessionAuth*

REQUEST BODY SCHEMA: application/json  
`required`

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| User <div>required</div>                          | object                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <div>user_id</div> <div>required</div>            | <div>string</div> <div>ID of the User. Unique. When User ID Type in <b>Setting</b> → <b>Server</b> is set to <b>Number</b>, a number between 1 and 4294967295 can be entered.</div> <div>When <b>Alphanumeric</b> is set, a combination of alphabetic characters and numbers can be entered. Do not use spaces when entering ID.</div> <div>Numbers or Alphanumeric characters can be set for <code>user_id</code> . For more details, refer to Setting Section of this documentation.</div> |
| name                                              | <div>string <div>&lt;= 48 characters</div></div> <div>Name of the user. Up to 48 characters.</div>                                                                                                                                                                                                                                                                                                                                                                                           |
| <div>user_group_id &gt;</div> <div>required</div> | <div>object</div> <div>ID of the User Group that the user will be under Refer to User Group Section of this documentation for listing available User Groups.</div>                                                                                                                                                                                                                                                                                                                           |
| disabled                                          | <div>boolean</div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

|                             |                                                                                                                                                                                                               |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | Toggle User active or not; false for active, true for non-active                                                                                                                                              |
| start_datetime<br>required  | string <date-time><br>Start active period for the User                                                                                                                                                        |
| expiry_datetime<br>required | string <date-time><br>End active period for the User                                                                                                                                                          |
| email                       | string <email><br>Email address of the User                                                                                                                                                                   |
| department                  | string <= 64 characters<br>Department of the User. Up to 64 characters.                                                                                                                                       |
| title                       | string<br>Title of the User                                                                                                                                                                                   |
| photo                       | string <base64><br>Photo of the User (Base64 encoded)                                                                                                                                                         |
| phone                       | string<br>Phone number of the User                                                                                                                                                                            |
| permission >                | object<br>Operator Level of the User                                                                                                                                                                          |
| access_groups >             | Array of objects<br>ID of the Access Group that the User will have access.<br>Refer to Access Group Section of this documentation for listing available Access Groups.<br>Can enter more than 1 Access Group. |
| login_id                    | string<br>Required when permission parameter is not removed.                                                                                                                                                  |
| password                    | string<br>Required when permission parameter is not removed.                                                                                                                                                  |

user\_ip

string

Limit the access of the User so he/she can only login from the registered IP Address. The user IP can be entered in the format xxx.xxx.xxx.xxx. Each octet can only be entered in numbers between 0 and 255. Users whose user IP is not registered can log in from any IP.

pin

integer <= 32 characters

PIN of the user. Maximum 32 digit.

## Responses

— **200** User created successfully

POST /api/users

## Request samples

|                     |                         |                         |                  |               |
|---------------------|-------------------------|-------------------------|------------------|---------------|
| Payload             | Shell + Curl            | Shell + Httpie          | Shell + Wget     | Node + Native |
| Node + Request      | Node + Unirest          | Node + Axios            | Node + Fetch     |               |
| Javascript + Fetch  | Javascript + JQuery     | Javascript + Xhr        | Python + Python3 |               |
| Python + Requests   | Ruby + Native           | Php + Curl              | Php + Http1      |               |
| Php + Http2         | Java + Okhttp           | Java + Unirest          | Go + Native      | C + Libcurl   |
| Objc + Nsurlsession | Swift + Nsurlsession    | Csharp + Restsharp      |                  |               |
| Csharp + HttpClient | Powershell + Webrequest | Powershell + Restmethod |                  |               |
| R + Httr            | Ocaml + Cohttp          | Kotlin + Okhttp         |                  |               |



## Content type

application/json

[Copy](#) [Expand all](#) [Collapse all](#)

```
{
  - "User": {
    "user_id": "1001",
    "name": "John Doe",
    + "user_group_id": { ... },
    "disabled": false,
    "start_datetime": "2001-01-01T00:00:00.00Z",
    "expiry_datetime": "2030-12-31T23:59:00.00Z",
    "email": "john.doe@example.com",
    "department": "Engineering",
    "title": "Software Engineer",
    "photo": "",
    "phone": "+1-555-0123",
    + "permission": { ... },
    + "access_groups": [ ... ],
    "login_id": "john.doe",
    "password": "ZxwOzbCK2VQ1dyv",
    "user_ip": "192.168.1.100",
    "pin": 1234
  }
}
```