

## Extracted Titles

No.	Title	Page
1	Security Problem	1
2	Product quality model of ISO/IEC 25010	2
3	Resistance or Resilience	3
4	Security on Cloud	6
5	Attack Surfaces	7
6	Malware Nomenclature	9
7	More terms Viruses Virus structure	10
8	Virus classification Morris worm	11
9	Security Trends	12
10	Anatomy of Attacks	13
11	<a href="https://cert-in.org.in/">https://cert - in.org.in/</a>	15
12	Thank You!	16
13	Software Requirements	18
14	Software quality	20
15	Software Maintenance	21
16	Software Engineering Process	22
17	Thank You!	23
18	Use - Cases	24
19	Misuse case Misuse case	25
20	OWASP SAMM	27
21	Security Development Lifecycle	29
22	BSIMM Terminology BSIMM Terminology	31
23	DevOps	35
24	Thank You!	37
25	Characteristics of Computer Intrusion	38
26	Who are Attackers Methods of defense	40
27	SDL Threat Modeling	41
28	Validating Threat Models	43
29	Threats (STRIDE)	44
30	Threat Tree (Spoofing data flow)	46
31	External Dependencies Trust Levels	49
32	Assets Assets Assets	50
33	Example Countermeasures (ASF) DREAD DREAD Example	52
34	MITRE ATT&CK	53
35	LINDDUN LINDDUN	54
36	LINDDUN	55
37	Thank You!	56
38	Eliciting Requirements Quality Function Deployment	58
39	Security Requirements Engineering	60

No.	Title	Page
40	CMU SQUARE Process Model	62
41	CMU SQUARE Work Products	64
42	OWASP Recommendations	67
43	SAMM Security Requirements	68
44	SDL Recommendations	69
45	Thank You!	72
46	Secure Architecture & Design - Introduction	73
47	Uses of software architecture descriptions	74
48	Secure Architecture Risk Analysis	75
49	Principles for Secure Design	77
50	Securing the Weakest Link	78
51	Secure Architectural Patterns	82
52	Secure Design Patterns	84
53	Secure Implementation Patterns	85
54	Software Composition Analysis	86
55	Network Security	87
56	Thank You!	89
57	Security Testing (SWEBOK)	90
58	Source Code Analyzers	91
59	Soundness vs Completeness	94
60	White Box Testing White Box Testing for Security	95
61	Black Box Security Testing	96
62	Black Box Testing for Security	97
63	Fuzz Testing	98
64	Dealing with crashes in Fuzz Testing	100
65	Penetration Testing	101
66	Penetration Testing Skills	102
67	Ethical Hacking	104
68	Thank You!	105
69	Secure Coding	107
70	Memory Safety	109
71	Thank You!	111
72	Buffer Overflows	112
73	Arc Injection (return - into - libc )	116
74	Buffer Overflow Defenses	117
75	C String Library ( SafeStr )	118
76	Heap & Integer Vulnerabilities	120
77	Integer Conversions	121
78	Format String Vulnerabilities	122
79	Java Security	124
80	Java Security Weaknesses	125
81	Open Source Security	126

No.	Title	Page
82	Thank You!	128
83	Case Study	129
84	Assignment	130
85	Thank You!	132
86	Data in Enterprise Databases	133
87	Database Security Overview	134
88	Database Security	135
89	Discretionary & Mandatory Access Control	136
90	Inference Control	138
91	Inference Detection	139
92	Flow Control	140
93	Covert Channels Covert Channels - Challenges	141
94	Injection Attacks SQL Injection	142
95	Protection against SQL Injection	144
96	Why Injection Attacks?	145
97	Thank You!	146
98	Web Application Security	147
99	Goals of web security	148
100	Large Attack Surface	149
101	Anatomy of Web Attack	150
102	Cross - site Scripting	151
103	Cross - site Scripting attack	152
104	XSS Variants	153
105	Reflected XSS	154
106	Cross - Site Request Forgery	155
107	Cloud Security	156
108	Encryption for Security	159
109	data and ever bit of key	160
110	RSA	162
111	Thank You!	165
112	Why Intrusion Detection/Prevention	166
113	Base Rate Fallacy Base Rate Fallacy	168
114	Intruder Behavior	170
115	Detection techniques	171
116	Host - based IDS	172
117	Common data sources	173
118	Network - Based IDS	174
119	NIDS intrusion detection techniques	175
120	Honeypots	176
121	Packet Filtering Firewall	178
122	Packet - Filtering Examples	179
123	• Several options for locating firewall:	180

No.	Title	Page
124	Virtual Private Networks	181
125	Thank You!	183
126	DARPA IDS Data	184
127	Governance for Security	185
128	IT Security Controls	186
129	Managing for Security	187
130	IT Security Management	189
131	Risk Management	190
132	Case Study: Silver Star Mines	192
133	Cognitive Bias	194
134	You have a Choice!	195
135	Security Incident Handling	196
136	Documenting Incidents	197
137	Thank You!	198
138	Key Security Concepts	199
139	Attack Surfaces	200
140	SQUARE Process Steps Architectural Risk Analysis	201
141	Source Code Analysis Tools	203
142	Capabilities of Security Analyzers	204
143	Vulnerable Program Buffer Overflow Defenses	206
144	Format Strings Abuse	207
145	Web Security Cross - site Scripting attack	208
146	IT Security Management Overview	211
147	Thank You!	212



**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

SE/SS ZG566

## Secure Software Engineering

T V Rao



**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad



## Definitions and concepts of security

- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*

1/19/2025

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Security Problem

Organizations store, process, transmit their most sensitive information using software-intensive systems.

Private citizens depend on software to shop, bank, invest, and carry out most personal and social activities

Global connectivity makes the sensitive information and software systems vulnerable to unintentional and unauthorized use.

As per some experts, we are in era of

- Information warfare
- Cyber terrorism
- Computer crime

Terrorists, Organized criminals, other criminals are targeting software-intensive systems and are able to gain entry.


- There are many systems which can not resist attacks

# Security Principles

Saltzer and Schroeder defined security as “techniques that control who may use or modify the computer or the information contained in it”

Described the three main categories of concern:

- Confidentiality
- Integrity
- Availability

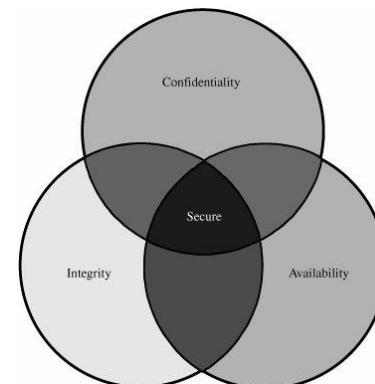

**Security implies Confidentiality, Integrity, and Availability**

Saltzer and Schroeder, "The Protection of Information in Computer Systems." *Communications of the ACM*, 1974

Secure Software Engineering

5

BITS-Pilani

## Two additional properties

Two additional properties commonly associated with human users are required in software entities that act as users, e.g. proxy agents, web services etc.

- Accountability : All security-relevant actions of the software-as-user must be recorded and tracked with attribution, both while and after the recorded action occurs
- Non-repudiation : Ability to prevent the software-as-user from disproving or denying responsibilities for actions it has performed

# Key Security Concepts

## Confidentiality

- Preserving authorized restrictions on information access and disclosure, including means for protecting personal privacy and proprietary information

## Integrity


- Guarding against improper information modification or destruction, including ensuring information nonrepudiation and authenticity

## Availability

- Ensuring timely and reliable access to and use of information

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

# Product quality model of ISO/IEC 25010

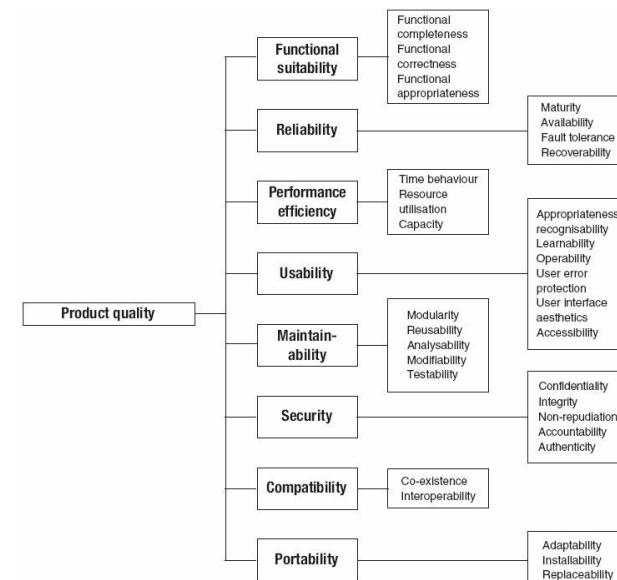

# Software Assurance

The Department of Defense (DoD) defines software assurance as follows:

- *System assurance (SA) is the justified confidence that the system functions as intended and is free of exploitable vulnerabilities, either intentionally or unintentionally designed or inserted as part of the system at any time during the life cycle. This ideal of no exploitable vulnerabilities is usually unachievable in practice, so programs must perform risk management to reduce the probability and impact of vulnerabilities to acceptable levels*

A more practical definition (given by SEI CMM) emphasizes risk management by balancing cost and potential loss

- *the level of confidence we have that a system behaves as expected and the security risks associated with the business use of the software are acceptable*

Software assurance includes software reliability, software safety, and software security

- Software assurance becomes important since critical infrastructure (viz. power, communication etc.) depend on software-intensive systems

# Resistance or Resilience

What Makes a System Resilient?

- A system is resilient if it continues to carry out its mission in the face of adversity
  - Being resilient is important because no matter how well a system is engineered, reality will sooner or later conspire to disrupt the system
- An unknown or uncorrected security vulnerability will enable an attacker to compromise the system
- A resilient system resists adversity and provide continuity of service, possibly under a degraded mode of operation, despite disturbances due to adverse events and conditions. It also recovers rapidly from any harm.
- Resilience is a matter of degree, no system may be 100% resilient

# Software Resilience

The definition of software resilience adapted from the National Infrastructure Advisory Council (NIAC) definition of infrastructure resilience:

- *Software resilience is the ability to reduce the magnitude and/or duration of disruptive events. The effectiveness of a resilient application or infrastructure software depends upon its ability to anticipate, absorb, adapt to, and/or rapidly recover from a potentially disruptive event*

# Processes for Secure Software


The most critical difference between secure and insecure software lies in the nature of the processes and practices used to specify, design, and develop the software

- Gortzel[2006]

Software vulnerabilities can originate from

- Decisions made by software engineers
- Flaws introduced in specification & design
- Faults from developed code
- Choice of programming language, development tools, operational environment etc.

# Security Concepts and Relationships

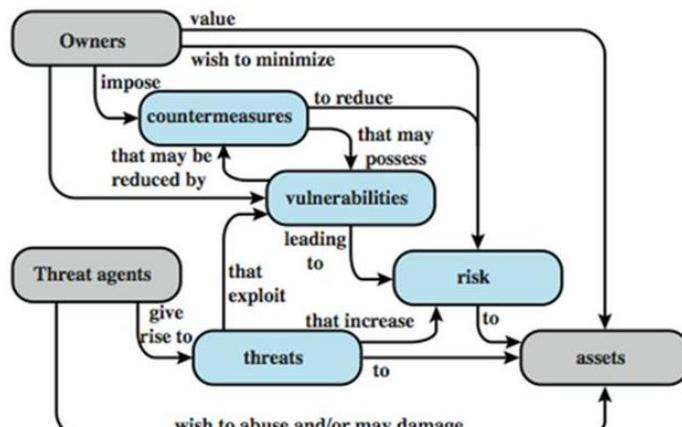

# Security Concepts and Relationships

The principle of **defense-in-depth** is that layered security mechanisms increase security of the system as a whole. If an attack causes one security mechanism to fail, other mechanisms may still provide the necessary security to protect the system.

**Social engineering** attack is based on deceiving end users or administrators at a target site. Such attacks are typically carried out by email or by contacting users by phone and impersonating an authorized user, in an attempt to gain unauthorized access to a system or application

# Security Concepts and Relationships

## Threat

- Any circumstance or event with the potential to adversely impact organizational operations (including mission, functions, image, or reputation), organizational assets, individuals, other organizations, or the Nation through an information system via unauthorized access, destruction, disclosure, modification of information, and/or denial of service. [CNSS 2010] 2. Any event that will cause an undesirable impact or loss to an organization if it occurs.

## Vulnerability

- Weakness in an information system, system security procedures, internal controls, or implementation that could be exploited by a threat source. [CNSS 2010] 2. The absence or weakness of a safeguard. It can also be described as a weakness in an asset or the methods of ensuring that the asset is survivable.

## Risk

- A measure of the extent to which an entity is threatened by a potential circumstance or event, and typically a function of 1) the adverse impacts that would arise if the circumstance or event occurs; and 2) the likelihood of occurrence.

## Countermeasure

- Actions, devices, procedures, or techniques that meet or oppose(i.e., counters) a threat, a vulnerability, or an attack by eliminating or preventing it, by minimizing the harm it can cause, or by discovering and reporting it so that corrective action can be taken. NIST SP 800-53: Actions, devices, procedures, techniques, or other measures that reduce the vulnerability of an information system. Synonymous with security controls and safeguards. [CNSS 2010]

# Security Concepts and Relationships

In computer security, a **sandbox** is a security mechanism for separating running programs.

- It is often used to execute untested code, or untrusted programs from unverified third parties, suppliers, untrusted users and untrusted websites.
- A **sandbox** typically provides a tightly controlled set of resources for guest programs to run in, such as disk and memory, network access, the ability to inspect the host system or read from input devices (disallowed or heavily restricted).

**Sandboxes** may be seen as a specific example of virtualization.

**Sandboxing** is frequently used to test unverified programs that may contain a virus or other malicious code, without allowing the software to harm the host device

- “Data protection will be as significant as antitrust or anti-corruption in terms of compliance risk.” – *Hunton & Williams*
- Many small companies including news sites blocking EU users
- Product team compliance includes
  - Changes, often major, to back-end data logging
  - User interface changes
  - New tools for access, correction, portability, etc.
- Legal team compliance includes
  - Data Impact Assessments
  - Internal record-keeping
  - Renegotiating commercial contracts
  - Changing user Terms of Service
  - In some cases appointing Data Protection Officer resident in EU

GDPR – General Data Protection Regulation  
Cyberlaw.Stanford.edu

Secure Software Engineering

17

BITS-Pilani

## The Asymmetric Problem of Security

Basics of Secure Design Development Test

– www.microsoft.com



## Threats to Software/Assets

## Hacking a Politician email

Hacker chooses to hack politician's mail account and possibly impact US elections(2008)

The approach was

- Find the mail id
- Use Forgot Password feature
- The mail provider asks standard personal questions
- The politician biography is well known

## Security on Cloud (Example)

Code Spaces kept up their security measures, ensured that their server security was tight, and relied on Amazon for the bulk of their infrastructure -- like thousands of other companies.

The attack that brought Code Spaces under was as simple as gaining access to its AWS control panel.

Code Spaces was built mostly on AWS, using storage and server instances to provide its services. Those server instances weren't hacked, nor was Code Spaces' database compromised or stolen.

Attacker gained access to the company's AWS control panel & deleted resources on the cloud.

**The demise of Code Spaces at the hands of an attacker shows that, in the cloud, off-site backups and separation of services could be key to survival**

<http://www.infoworld.com/article/2608076/data-center/murder-in-the-amazon-cloud.html> 23 June 2014

Secure Software Engineering

21

BITS-Pilani

In the space of one hour, my entire digital life was destroyed. First my Google account was taken over, then deleted. Next my Twitter account was compromised, and used as a platform to broadcast racist and homophobic messages. And worst of all, my AppleID account was broken into, and my hackers used it to remotely erase all of the data on my iPhone, iPad, and MacBook.

My accounts were daisy-chained together. Getting into Amazon let my hackers get into my Apple ID account, which helped them get into Gmail, which gave them access to Twitter.

— Mat Honan, Sr. Staff Writer, wired.com

<http://www.wired.com/2012/08/apple-amazon-mat-honan-hacking/>

How Apple and Amazon Security Flaws Led to My Epic Hacking \_ WIRED

If it wasn't clear before, it certainly is now: Your username and password are almost impossible to keep safe.

Nearly 443,000 e-mail addresses and passwords for a Yahoo site [were exposed late Wednesday](#). The impact stretched beyond Yahoo because the site allowed users to log in with credentials from other sites -- which meant that user names and passwords for Yahoo ([YHOO, Fortune 500](#)), Google's ([GOOG, Fortune 500](#)) Gmail, Microsoft's ([MSFT, Fortune 500](#)) Hotmail, AOL (AOL) and many other e-mail hosts were among those posted publicly on a hacker forum.

The group of seven hackers, who belong to a hacker collective called D33Ds Company, got into [Yahoo's Contributor Network](#) database by using a rudimentary attack called a [SQL injection](#).

...

Verizon Communications, which acquired Yahoo this year, said on Tuesday that a previously disclosed attack that had occurred in 2013 affected all three billion of Yahoo's user accounts.

<http://money.cnn.com/2012/07/12/technology/yahoo-hack/>  
<https://www.nytimes.com/2017/10/03/technology/yahoo-hack-3-billion-users.html>

Secure Software Engineering

23

BITS-Pilani

Secure Software Engineering

24

BITS-Pilani

# Attack Surfaces

Consist of the reachable and exploitable vulnerabilities in a system

Examples:

Open ports on outward facing Web and other servers, and code listening on those ports

Services available on the inside of a firewall

Code that processes incoming data, email, XML, office documents, and industry-specific custom data exchange formats

Interfaces, SQL, and Web forms

An employee with access to sensitive information vulnerable to a social engineering attack

## Attack surfaces

Attack surface: the reachable and exploitable vulnerabilities in a system

- Open ports
- Services outside a firewall
- An employee with access to sensitive info
- ...

### Three categories

- **Network attack surface** (i.e., network vulnerability)
- **Software attack surface** (i.e., software vulnerabilities)
- **Human attack surface** (e.g., social engineering)

Attack analysis: assessing the scale and severity of threats

# Security Concepts and Relationships

The **attack surface** of a software environment is the sum of the different points (the "attack vectors") where an unauthorized user (the "attacker") can try to enter data to or extract data from an environment.

An **attack vector** is a path or means by which a hacker (or cracker) can gain access to a computer or network server in order to deliver a payload or malicious outcome.

If an attack vector is thought of as a guided missile (e.g. email), its payload can be compared to the warhead (e.g. malicious attachment) in the tip of the missile.

## Automotive Attack Surface

Modern cars are controlled by complex distributed computer systems comprising millions of lines of code executing on tens of heterogeneous processors with rich connectivity provided by internal networks (e.g., Controller Area Network CAN).

This structure has offers significant benefits to efficiency, safety and cost, but also creates the opportunity for new attacks.

<https://www.microsoft.com/en-us/industry/blog/manufacturing-and-mobility/automotive/2023/10/31/the-security-cultural-transformation-of-the-automotive-industry/>

## Examples of threats

	Availability	Confidentiality	Integrity
Hardware	Equipment is stolen or disabled, thus denying service.	An unencrypted CD-ROM or DVD is stolen.	
Software	Programs are deleted, denying access to users.	An unauthorized copy of software is made.	A working program is modified, either to cause it to fail during execution or to cause it to do some unintended task.
Data	Files are deleted, denying access to users.	An unauthorized read of data is performed. An analysis of statistical data reveals underlying data.	Existing files are modified or new files are fabricated.
Communication Lines and Networks	Messages are destroyed or deleted. Communication lines or networks are rendered unavailable.	Messages are read. The traffic pattern of messages is observed.	Messages are modified, delayed, reordered, or duplicated. False messages are fabricated.

## Attack trees

A branching, hierarchical data structure that represents a set of potential vulnerabilities

Objective: to effectively exploit the info available on attack patterns

- published on CERT or similar forums
- Security analysts can use the tree to guide design and strengthen countermeasures

## Data in Transit

Attacks on data in networks can be


Passive attacks : eavesdropping on, or monitoring of transmissions

- Release of message contents
- Traffic analysis : Encrypted message can not be read. Location, identity of host, frequency, and length of messages can help opponents make guess

Active attacks

- Replay : passive capture of data & subsequent retransmission to produce an unauthorized effect
- Masquerade : one entity pretends to be another entity.
- Modification of messages : some portion of a legitimate message is altered.
- Denial of service : inhibit normal use of facilities

## An attack tree (to deface a web site)

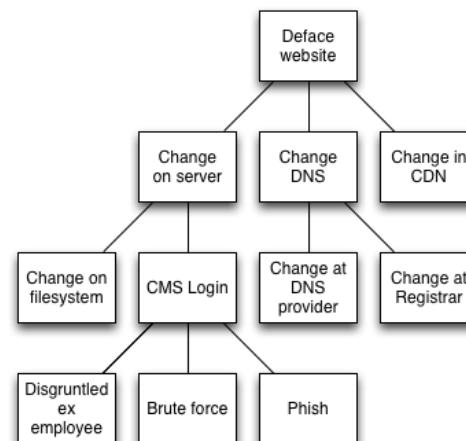

Content delivery network (CDN) : System of distributed servers (network) that deliver webpages and other Web content to user based on the geographic locations

Domain Name System (DNS) : Hierarchical decentralized naming system for computers, services, or any resource connected to the Internet or a private network

CMS : Content Management System



## Malware Nomenclature

### Malicious software

Programs exploiting system vulnerabilities

Known as malicious software or malware

- program fragments that need a host program
  - e.g. viruses, logic bombs, and backdoors
- independent self-contained programs
  - e.g. worms, bots
- replicating or not

Sophisticated threat to computer systems

## Malware

“A program that is inserted into a system, usually covertly, with the intent of compromising the confidentiality, integrity, or availability of the victim’s data, applications, or operating system or otherwise annoying or disrupting the victim.”

### Malware Terminology

Virus: *attaches itself to a program*

Worm: *propagates copies of itself to other computers*

Logic bomb: *“explodes” when a condition occurs*

Trojan horse: *fakes/contains additional functionality*

Backdoor (trapdoor): *allows unauthorized access to functionality*

Mobile code: *moves unchanged to heterogeneous platforms*

Auto-router Kit (virus generator): *malicious code (virus) generators*

Spammer and flooder programs: *large volume of unwanted “pkts”*

Keyloggers: *capture keystrokes*

Rootkit: *sophisticated hacker tools to gain root-level access*

Zombie: *software on infected computers that launch attack on others (aka bot)*

## More terms

Payload: actions of the malware

Crimeware: kits for building malware; include propagation and payload mechanisms

- Zeus, Sakura, Blackhole, Phoenix

APT (advanced persistent threats)

- Advanced: sophisticated
- Persistent: attack over an extended period of time
- Threat: selected targets (capable, well-funded attackers)

<https://www.theguardian.com/world/2022/jan/14/ukraine-massive-cyber-attack-government-websites-suspected-russian-hackers>

## Virus structure

Components:

- infection mechanism: enables replication
- trigger: event that makes payload activate
- payload: what it does, malicious or benign

Prepended/postponed/embedded

– When infected program invoked, executes virus code then original program code

Can block initial infection (difficult) or propagation (with access controls)

## Viruses

Piece of software that infects programs

- modifying them to include a copy of the virus
- so it executes secretly when host program is run

Specific to operating system and hardware

- taking advantage of their details and weaknesses

A typical virus goes through phases of:

- dormant: *idle*
- propagation: *copies itself to other program*
- triggering: *activated to perform functions*
- execution: *the function is performed*

Biological Virus : Tiny scraps of genetic code – DNA or RNA – that can take over a living cell and trick it into making replicas of the original virus

## Virus structure (abstract)

```
program V :=
(goto main;
1234567;

subroutine infect-executable :=
  (loop:
   file := get-random-executable-file;
   if (first-line-of-file = 1234567)
     then goto loop
   else prepend V to file; )

subroutine do-damage :=
  {whatever damage is to be done}

subroutine trigger-pulled :=
  {return true if some condition holds}

main:  main-program :=
  {infect-executable;
   if trigger-pulled then do-damage;
   goto next; }

next:
}
```

# Virus classification

## By target

- boot sector: *infect a master boot record*
- file infector: *infects executable OS files*
- macro virus: *infects files to be used by an app*
- multipartite: infects multiple ways

## By concealment

- encrypted virus: *encrypted; key stored in virus*
- stealth virus: *hides itself (e.g., compression)*
- polymorphic virus: *recreates with diff “signature”*
- metamorphic virus: *recreates with diff signature and behavior*

# Worms

Replicating program that propagates over net

- using email, remote exec, remote login

Has phases like a virus:

- dormant, propagation, triggering, execution
- propagation phase: searches for other systems, connects to it, copies self to it and runs

May disguise itself as a system process

Concept seen in Brunner's "Shockwave Rider"

Implemented by Xerox Palo Alto labs in 1980's

- Non-malicious search for idle systems

# Virus Variants

## Macro and scripting viruses

- Became very common in mid-1990s since
  - platform independent
  - infect documents
  - easily spread
- Exploit macro capability of Office apps
  - executable program embedded in office doc
  - often a form of Basic
- More recent releases include protection
- Recognized by many anti-virus programs

## E-Mail Viruses

- More recent development
- Example : Melissa
  - exploits MS Word macro in attached doc
  - if attachment opened, macro activates
  - sends email to all on users address list and does local damage

# Morris worm

One of best known worms

Released by Robert Morris in 1988

- Affected 6,000 computers; cost \$10-\$100 M


Various attacks on UNIX systems

- cracking password file to use login/password to logon to other systems
- exploiting a bug in the finger protocol
- exploiting a bug in sendmail

If succeed have remote shell access

- sent bootstrap program to copy worm over

## Worm Propagation Model (based on recent attacks)

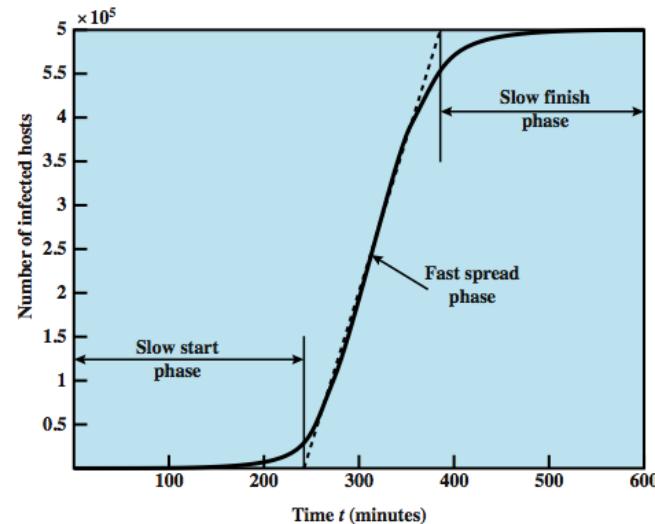

## Worm countermeasures

Overlaps with anti-virus techniques

Once worm on system A/V can detect

Worms also cause significant net activity

Worm defense approaches include:

- signature-based worm scan filtering: define signatures
- filter-based worm containment (focus on contents)
- payload-classification-based worm containment (examine packets for anomalies)
- threshold random walk scan detection (limit the rate of scan-like traffic)
- rate limiting and rate halting (limit outgoing traffic when a threshold is met)

## State of worm technology

Multiplatform: not limited to Windows

Multi-exploit: Web servers, emails, file sharing ...

Ultrafast spreading: do a scan to find vulnerable hosts

Polymorphic: each copy has a new code

Metamorphic: change appearance/behavior

Transport vehicles (e.g., for DDoS)

Zero-day exploit of unknown vulnerability (to achieve max surprise/distribution)

## Security Trends



## Trends of reported vulnerabilities

[https://nvd.nist.gov/vuln/search/statistics?form\\_type=Basic&results\\_type=statistics&search\\_type=all&isCpeNameSearch=false](https://nvd.nist.gov/vuln/search/statistics?form_type=Basic&results_type=statistics&search_type=all&isCpeNameSearch=false)

Source : National Vulnerability Database of NIST (National Institute of Standards and Technology)

NVD is the U.S. government repository of standards based vulnerability management data. This data enables automation of vulnerability management, security measurement, and compliance

## Cyberattacks in India during 2024

<https://www.indiatoday.in/india/story/2024-a-year-of-data-leaks-espionage-and-ddos-attacks-ransomware-data-breach-2654230-2024-12-23>

## Gartner perspective

<https://www.gartner.com/en/newsroom/press-releases/2022-02-24-gartner-says-the-cybersecurity-leader-s-role-needs-to>

## Anatomy of Attacks

<https://www.publicpower.org/sites/default/files/inline-images/PPM-Sep18-Anatomy%20of%20a%20Cyber%20Attack-bug.jpg>

The DarkSide ransomware group was responsible for the Colonial Pipeline Company ransomware incident in May 2021, which led to the company's decision to proactively and temporarily shut down the 5,500-mile pipeline that carries 45 percent of the fuel used on the East Coast of the United States.



### DarkSide Ransomware As a Service Group

SUBMIT TIPS VIA TELEPHONE OR THE FBI WEBSITE BELOW

Follow-on contacts to be established through WhatsApp, Telegram, Signal, or other platform of reporting party's choosing

# Supply Chain Attacks

A software supply chain attack occurs when a cyber threat actor infiltrates a software vendor's network and employs malicious code to compromise the software before the vendor sends it to their customers.

- Newly acquired software may be compromised from the outset, or a compromise may occur through other means like a patch or hotfix.
- The compromised software then compromises the customer's data or system
- These types of attacks affect all users of the compromised software and can have widespread consequences for government, critical infrastructure, and private sector software customers

[https://www.cisa.gov/sites/default/files/publications/defending\\_against\\_software\\_supply\\_chain\\_attacks\\_508\\_1.pdf](https://www.cisa.gov/sites/default/files/publications/defending_against_software_supply_chain_attacks_508_1.pdf)

## Supply Chain Attack

<https://thecyberexpress.com/hezbollahs-pager-explosions-threat-smartphones/>

# Supply Chain Attacks

Lifecycle Phase	Example of Threat
Design	<b>Hijacked Cellular Devices.</b> 2016 – A foreign company designed software used by a U.S. cell phone manufacturer. The phones made encrypted records of text and call histories, phone details, and contact information and transmitted that data to a foreign server every 72 hours.
Development & Production	<b>SolarWinds.</b> 2020 – An IT management company was infiltrated by a foreign threat actor who maintained persistence in its network for months. The threat actor left the network only after it had compromised the company's build servers and used its update process to infiltrate customer networks.
Distribution	<b>End-User Device Malware.</b> 2012 – Researchers from a major U.S. software company investigating counterfeit software found malware preinstalled on 20 percent of devices they tested. The malware was installed in new desktop and laptop computers after they were shipped from a factory to a distributor, transporter, or reseller.
Acquisition & Deployment	<b>Kaspersky Antivirus.</b> 2017 – An overseas-based antivirus vendor was being used by a foreign intelligence service for spying. U.S. government customers were directed to remove the vendor's products from networks and disallowed from acquiring future products from that vendor.
Maintenance	<b>Backdoors Embedded in Routine Maintenance Updates.</b> 2020 – Thousands of public and private networks were infiltrated when a threat actor used a routine update to deliver a malicious backdoor.
Disposal	<b>Sensitive Data Spillage.</b> 2019 – A researcher bought old computers, flash drives, phones and hard drives, and found only two properly wiped devices out of 85 examined. Also found were hundreds of instances of personally identifiable information (PII) spillage, including Social Security numbers, passport numbers, and credit card numbers.

[https://www.cisa.gov/sites/default/files/publications/defending\\_against\\_software\\_supply\\_chain\\_attacks\\_508\\_1.pdf](https://www.cisa.gov/sites/default/files/publications/defending_against_software_supply_chain_attacks_508_1.pdf)

## Gen AI

<https://www.paloaltonetworks.com/cyberpedia/generative-ai-in-cybersecurity>

The Open Web Application Security Project (OWASP) is a worldwide not-for-profit charitable organization focused on improving the security of software. “Our mission is to make software security visible, so that individuals and organizations worldwide can make informed decisions about true software security risks.”

There are thousands of active wiki users around the globe who review the changes to the site to help ensure quality. Has a global group of volunteers with thousands of participants.

## [www.cert.org](http://www.cert.org)

Or [https://www.sei.cmu.edu/about/divisions/cert/index.cfm](http://www.sei.cmu.edu/about/divisions/cert/index.cfm)

“At the Computer emergency response teams (CERT) Division of the Software Engineering Institute (SEI) of Carnegie Mellon University(CMU), we study and solve problems with widespread cybersecurity implications, research security vulnerabilities in software products, contribute to long-term changes in networked systems, and develop cutting-edge information and training to help improve cybersecurity.”

“We are more than a research organization. Working with software vendors, we help resolve software vulnerabilities. We develop tools, products, and methods to help organizations conduct forensic examinations, analyze vulnerabilities, and monitor large-scale networks. We help organizations determine how effective their security-related practices are”.

Department of Homeland Security (part of US government) offers information and campaigns for awareness of cybersecurity.

The cybersecurity part is available at  
<https://www.dhs.gov/topic/cybersecurity>

CISA – Cybersecurity and Infrastructure Security Agency


The Indian Computer Emergency Response Team (CERT-IN) is an office within the Ministry of Electronics and Information Technology of the Government of India. It is the nodal agency to deal with cyber security threats like hacking and phishing. It strengthens security-related defence of the Indian Internet domain.

Secure, Resilient, and Agile Software Development By Mark Merkow, 2019  
Computer Security: Principles and Practice by William Stallings, and Lawrie Brown  
Pearson, 2018.  
Software Security Engineering, Julia H. Allen, et al, Pearson, 2008.

# Thank You!



A slide template for 'Secure Software Engineering' at BITS-Pilani. The top bar is orange, the middle bar is light blue, and the bottom bar is red. The title 'Secure Software Engineering' is at the top left, page number '61' is in the center, and 'BITS-Pilani' is at the top right. The main content area features a yellow clock tower against a blue sky. The bottom left contains the BITS Pilani logo and text 'BITS Pilani', 'Pilani | Dubai | Goa | Hyderabad'. The bottom right contains the name 'T V Rao'. The footer bar has a yellow section at the bottom.

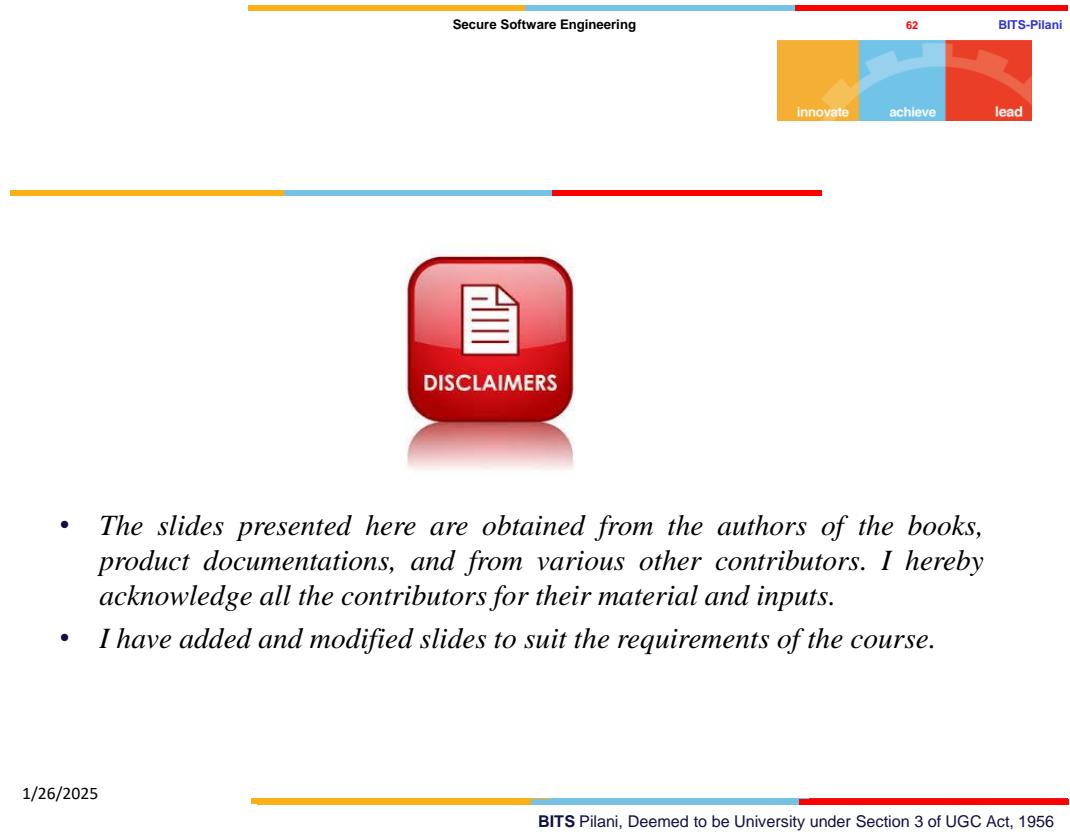

A slide template for 'Secure Software Engineering' at BITS-Pilani. The top bar is orange, the middle bar is light blue, and the bottom bar is red. The title 'Secure Software Engineering' is at the top left, page number '62' is in the center, and 'BITS-Pilani' is at the top right. The bottom bar has three colored sections: yellow ('innovate'), blue ('achieve'), and red ('lead'). The main content area features a red button with a white document icon and the word 'DISCLAIMERS' below it. The footer bar has a yellow section at the bottom.

- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*



## Phases in software development

## Knowledge Areas in v3(2014) of SWEBOK

Requirements	Configuration Management
Design	Quality
Construction	Processes
Testing	Models & Methods
Maintenance	Engineering Management
	Project Management
	Economics

Some Authors refer two columns as Primary & Supporting Activities  
Pressman calls them Framework and Umbrella Activities

## Software Engineering - Definitions

- (1969 – Fritz Bauer) Software engineering is the establishment and use of *sound engineering principles* in order to obtain *economically* software that is *reliable* and works *efficiently* on *real machines*
- (IEEE) The application of a *systematic, disciplined, quantifiable* approach to the *development, operation, and maintenance* of software; that is, the application of engineering to software

## Software Engineering Process KA

A Process defines who is doing what, when, and how to reach a certain goal  
-Ivar Jacobson, Grady Booch, and James Rumbaugh

A software process is a set of interrelated activities and tasks that transform input work products into output work products. At minimum, the description of a software process includes required inputs, transforming work activities, and outputs generated.

- SWEBOK

A software process infrastructure can provide process definitions, policies for interpreting and applying the processes, and descriptions of the procedures to be used to implement the processes.

A software development life cycle (SDLC) includes the software processes used to specify and transform software requirements into a deliverable software product.

## How Process Models Differ?

While all Process Models take same primary and supporting activities, they differ with regard to

- Overall flow of activities, actions, and tasks and the interdependencies among them
- Degree to which actions and tasks are defined within each framework activity
- Degree to which work products are identified and required
- Manner in which quality assurance activities are applied
- Manner in which project tracking and control activities are applied
- Overall degree of detail and rigor with which the process is described
- Degree to which customer and other stakeholders are involved in the project
- Level of autonomy given to the software team
- Degree to which team organization and roles are prescribed

## Software Requirements

The Software Requirements knowledge area (KA) is concerned with the elicitation, analysis, specification, and validation of software requirements as well as the management of requirements during the whole life cycle.

Software projects are critically vulnerable when the requirements related activities are poorly performed

## Prescriptive and agile processes

Prescriptive processes are processes where all of the process activities are planned in advance and progress is measured against this plan.

In agile processes, planning is incremental and it is easier to change the process to reflect changing customer requirements.

In practice, most practical processes may include elements of both plan-driven and agile approaches.

***There are NO right or wrong software processes.***

## Functional & Nonfunctional Requirements

*Functional* requirements describe the functions that the software is to execute; for example, formatting some text or modulating a signal. They are sometimes known as capabilities or features. A functional requirement can also be described as one for which a finite set of test steps can be written to validate its behavior.

*Nonfunctional* requirements are the ones that act to constrain the solution. Nonfunctional requirements are aka constraints or quality requirements. They can be classified according to whether they are performance requirements, maintainability requirements, safety requirements, reliability requirements, security requirements, interoperability requirements

## Emergent properties of software

Some requirements represent *emergent properties* of software—that is, requirements that cannot be addressed by a single component but that depend on how all the software components interoperate.

- The throughput requirement for a call center would, for example, depend on how the telephone system, information system, and the operators all interacted under actual operating conditions.

Emergent properties are crucially dependent on the system architecture.

Experts consider **Security** as an *emergent property* of the software.

## Software Design

- Software design principles include abstraction; coupling and cohesion; decomposition and modularization; encapsulation/information hiding; separation of interface and implementation; sufficiency, completeness, and primitiveness; and separation of concerns.
- Design for security is concerned with
  - How to prevent unauthorized disclosure, creation, change, deletion, or denial of access to information and other resources.
  - It is also concerned with how to tolerate security-related attacks or violations by limiting damage, continuing service, speeding repair and recovery, and failing and recovering securely.

## Software Design

Software design consists of two activities that fit between software requirements analysis and software construction:

- Software architectural design (sometimes called high-level design): develops top-level structure and organization of the software and identifies the various components.
- Software detailed design: specifies each component in sufficient detail to facilitate its construction.

## Software Construction

Software construction refers to the detailed creation of working software through a combination of coding, verification, unit testing, integration testing, and debugging.

Throughout construction, software engineers both unit test and integration test their work. Thus, the Software Construction KA is closely linked to the Software Testing KA.

Code is the ultimate deliverable of a software project, and thus the Software Quality KA is closely linked to the Software Construction KA.

Software testing consists of the *dynamic* verification that a program provides *expected* behaviors on a *finite* set of test cases, suitably *selected* from the usually infinite execution domain

- *Dynamic*: The input value alone is not always sufficient to specify a test, since a system might react to the same input with different behaviors, depending on the system state.
- *Finite*: Even in simple programs, so many test cases are theoretically possible that exhaustive testing is infeasible.
- *Selected*: How to identify the most suitable test set under given conditions is a complex problem; in practice, risk analysis techniques and software engineering expertise are applied.
- *Expected*: It must be possible, although not always easy, to decide whether the observed outcomes of program testing are acceptable or not.



## Software development – Supporting Activities

# Software quality

Software quality may refer:

- to desirable characteristics of software products,
- to the extent to which a particular software product possess those characteristics, and
- to processes, tools, and techniques used to achieve those characteristics

Experts defined variously

“conformance to requirements” - Phil Crosby

“achieving excellent levels of fitness for use” - Watt Humphrey

“market-driven quality” where the “customer is the final arbiter” - IBM

# Software quality

A healthy software engineering culture includes the understanding that tradeoffs among cost, schedule, and quality are a basic tenant of the engineering of any product. The tradeoff is best decided by understanding four cost of quality categories: prevention, appraisal, internal failure, and external failure.

Prevention costs include investments in software process improvement efforts, quality infrastructure, quality tools, training, audits, and management reviews

Appraisal costs arise from project activities that find defects.

Costs of internal failures are those that are incurred to fix defects found during appraisal activities and discovered prior to delivery of the software product to the customer

External failure costs include activities to respond to software problems discovered after delivery to the customer.

## Configuration management

Configuration management (CM) is the discipline of identifying the configuration of a system at distinct points in time for the purpose of systematically controlling changes to the configuration and maintaining the integrity and traceability of the configuration throughout the system life cycle.

A system can be defined as the combination of interacting elements organized to achieve one or more stated purposes

Configuration of a software system is collection of specific versions of hardware, firmware, or software items combined according to specific build procedures for a purpose.

## Maintainer's activities

Five key characteristics comprise the maintainer's activities:

- maintaining control over the software's day-to-day functions;
- maintaining control over software modification;
- perfecting existing functions;
- identifying security threats and fixing security vulnerabilities; and
- preventing software performance from degrading to unacceptable levels.

## Software Maintenance

A software product must change or evolve over time. Once a software is in operation, defects are uncovered, operating environments change, and new user requirements surface.

Software maintenance is an integral part of a software life cycle. However, software development used to receive more importance than software maintenance in most organizations. It is changing

- Due to large capital spending needed for software development, organizations are trying to maximize lifespan of existing software
- Due to large scale availability of open source components, organizations increased focus on maintenance

## Software Engineering Management

Software engineering management can be defined as the application of management activities — planning, coordinating, measuring, monitoring, controlling, and reporting — to achieve quality etc.

There are aspects specific to software projects and software life cycle that complicate effective management, including

- Clients often don't know what is needed or what is feasible
- As a result of changing requirements, software is often built using an iterative process
- The degree of novelty and complexity is often high
- There is often a rapid rate of change in the underlying technology

## Software Engineering Economics

Software engineering economics is about relating the attributes of software and software processes to economic measures

- involves balancing risk and profitability, while maximizing benefits and wealth of the organization.
- identify organizational goals, time horizons, risk factors, and financial constraints
- identify and implement the appropriate portfolio and investment decisions to manage cash flow, and funding;
- measure financial performance, such as cash flow and ROI

## Software Engineering Process

software process is a set of interrelated activities and tasks that transform input work products into output work products

a software process includes required inputs, transforming work activities, and outputs generated

a software process may also include its entry and exit criteria and decomposition of the work activities into tasks, which are the smallest units of work

Value individuals & interactions over processes & tools – Agile manifesto

Agile models are designed to facilitate evolution of the software requirements during the project

## Software Engineering Professional Practice

Software Engineering Professional Practice includes knowledge, skills, and attitudes that software engineers must possess to practice software engineering in a professional, responsible, and ethical manner

The concept of professional practice becomes applicable within the professions that have a generally accepted body of knowledge

A code of ethics and professional conduct for software engineering was approved by the ACM Council and the IEEE CS Board of Governors in 1999

—Software engineers shall commit themselves to making the analysis, specification, design, development, testing and maintenance of software a beneficial and respected profession. In accordance with their commitment to the health, safety and welfare of the public, software engineers shall adhere to the eight principles concerning the public, client and employer, product, judgment, management, profession, colleagues, and self, respectively

Software Engineering: A Practitioner's Approach, 7/e Roger Pressman

Software Engineering, Pearson Education, 9th Ed., 2010. Ian Sommerville

SWEBOk by IEEE/ACM

[www.owasp.com](http://www.owasp.com)

[sei.cmu.edu](http://sei.cmu.edu)

# Thank You!



- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*

SE/SS ZG566

## Secure Software Engineering



**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

T V Rao

**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

## Work products during SDLC

# Requirement Models

**Scenario-based modeling** – represents the system from the user's point of view

**Flow-oriented modeling** – provides an indication of how data objects are transformed by a set of processing functions

**Class-based modeling** – defines objects, attributes, and relationships

**Behavioral modeling** – depicts the states of the classes and the impact of events on these states

## SafeHome (from Pressman)

SafeHome: The home security function would protect against and/or recognize a variety of undesirable "situations" such as illegal entry, fire, flooding, carbon monoxide levels, and others. It'll use our wireless sensors to detect each situation. It can be programmed by the homeowner, and will automatically telephone a monitoring agency when a situation is detected.

Objects described for SafeHome might include the control panel, smoke detectors, window and door sensors, motion detectors, an alarm, an event (a sensor has been activated), a display, a PC, telephone numbers, a telephone call, and so on. The list of services might include configuring the system, setting the alarm, monitoring the sensors, dialing the phone, programming the control panel, and reading the display (note that services act on objects).

# Use-Cases

A collection of user scenarios that describe the thread of usage of a system

Each scenario is described from the point-of-view of an "actor"—a person or device that interacts with the software in some way

Each scenario answers the following questions:

- Who is the primary actor, the secondary actor (s)?
- What are the actor's goals?
- What preconditions should exist before the story begins?
- What main tasks or functions are performed by the actor?
- What extensions might be considered as the story is described?
- What variations in the actor's interaction are possible?
- What system information will the actor acquire, produce, or change?
- Will the actor have to inform the system about changes in the external environment?
- What information does the actor desire from the system?
- Does the actor wish to be informed about unexpected changes?

## Use case—detailed example (Pressman)

Example: "SAFEHOME" system (Pressman)

**Use case name:** *InitiateMonitoring*

**Participating actors:** homeowner, technicians, sensors

**Flow of events (homeowner):**

- Homeowner wants to set the system when the homeowner leaves house or remains in house
- Homeowner observes control panel
- Homeowner enters password
- Homeowner selects "stay" or "away"
- Homeowner observes that read alarm light has come on, indicating the system is armed

## Use case—detailed example (Pressman)

### Pre condition(s)

Homeowner decides to set control panel

### Post condition(s)

- Control panel is not ready; homeowner must check all sensors and reset them if necessary
- Control panel indicates incorrect password (one beep)—homeowner enters correct password
- Password not recognized—must contact monitoring and response subsystem to reprogram password
- *Stay* selected: control panel beeps twice and lights *stay* light; perimeter sensors are activated
- *Away* selected: control panel beeps three times and      lights *away* light; all sensors are activated

## Misuse case (searchsoftwarequality.techtarget.com)

### Name: Attack on "forgot password" functionality

**Summary:** A malicious user tries to attack the "forgot password" functionality in order to gain access to the Web application or guess a valid e-mail address

**Author:** Anurag Agarwal

**Date:** April 15, 2006

### Possible Attacks:

- SQL injection attack
- Brute force attack to guess a valid user
- Sniffing attack on e-mail sent with password on an insecure transmission channel

### Trigger Point: Can happen anytime

### Preconditions: None

### Assumptions:

- The attacker can perform this attack remotely over the Internet
- The attacker can be an anonymous user

## Use case—detailed example (Pressman)

### Quality requirements:

- Control panel may display additional text messages
- time the homeowner has to enter the password from the time the first key is pressed
- Ability to activate the system without the use of a password or with an abbreviated password
- Ability to deactivate the system before it actually activates

## Misuse case (searchsoftwarequality.techtarget.com)

### Worst case threat (post condition) :

- Attacker gains entry into the company database and steals sensitive information
- Attacker is able to modify an existing e-mail address to its own e-mail address and mails the password to himself to gain unauthorized entry into the system

### Related business rule:

- The system should e-mail the password to a valid e-mail address entered

### Capture guarantee (post condition) :

- Attacker cannot gain access to the database to steal or modify information
- Attacker cannot identify the e-mail address of a valid user
- Attacker cannot view the password sent in an e-mail to an e-mail address of a valid user

### Potential misuser profile:

- Script kiddie
- Skilled attacker

**Threat level:** High

### Mitigation steps:

- SQL injection attack
  - List all the mitigation steps to avoid a SQL injection attack.
- Brute force attack
  - Accept first name, last name along with e-mail address
  - Have proper error handling so as not to reveal information to the attacker
  - Delay 3 to 5 seconds before re-entering the e-mail address
  - Lock out page for that IP address after 10 attempts
- Sniffing attack
  - Send password e-mail on a secure transmission channel with strong encryption

## Data Flow Modeling

### Guidelines

- Depict the system as single bubble in level 0.
- Carefully note primary input and output.
- Refine by isolating candidate processes and their associated data objects and data stores.
- Label all elements with meaningful names.
- Maintain information conformity between levels.
- Refine one bubble at a time.

## Data Flow Modeling


### Data Flow Diagram

- Depicts how input is transformed into output as data objects move through a system


### Process Specification

- Describes data flow processing at the lowest level of refinement in the data flow diagrams

## Data Flow Diagram

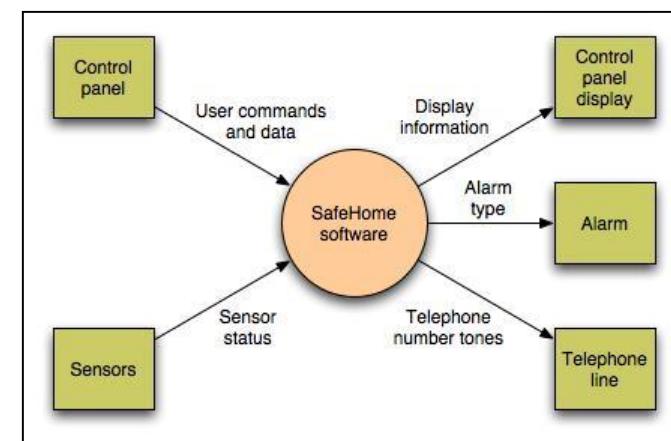

# Data Flow Diagram (Next Level)

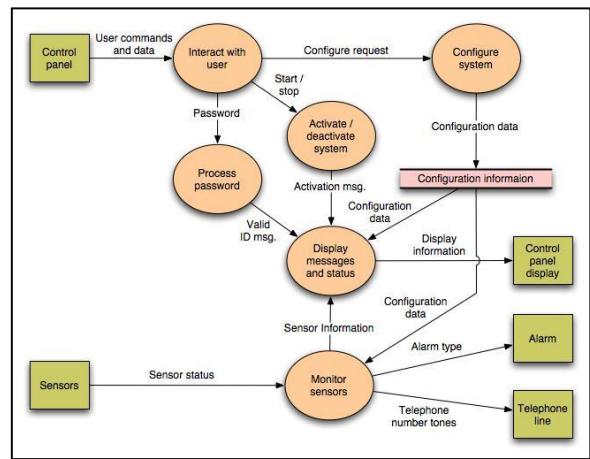

## What is OWASP SAMM?

SAMM (Software Assurance Maturity Model) is a OWASP Project

Mission of SAMM is

- To provide an effective and measurable way for all types of organizations to analyze and improve their software security posture.
- To raise awareness and educate organizations on how to design, develop, and deploy secure software through our self-assessment model.
- To support the complete software lifecycle and is technology and process agnostic.


## Security implications to SDLC

## OWASP SAMM

SAMM (Software Assurance Maturity Model) is meant to help organizations assess, formulate, and implement a strategy for software security, that can be integrated into their existing SDLC.

- SAMM is based around 15 security practices grouped into 5 business functions.
- Every security practice contains a set of activities, structured into 3 maturity levels.
- The activities on a lower maturity level are typically easier to execute and require less formalization than the ones on a higher maturity level.

# OWASP SAMM

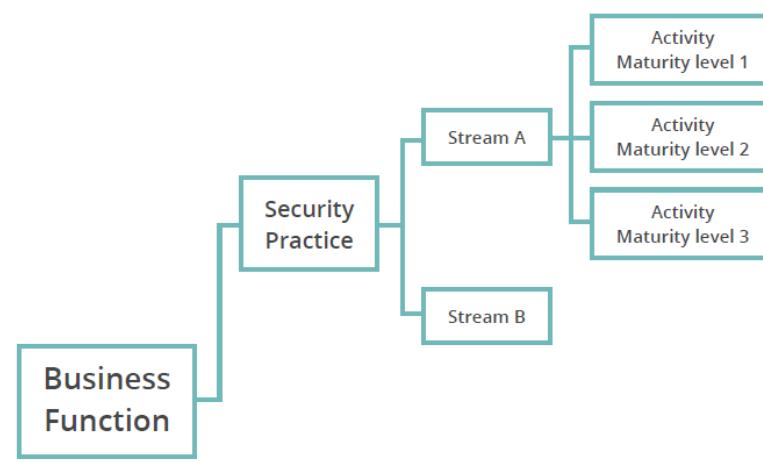


<https://owaspssamm.org/model/>

Secure Software Engineering

20

BITS-Pilani

# OWASP SAMM Overview

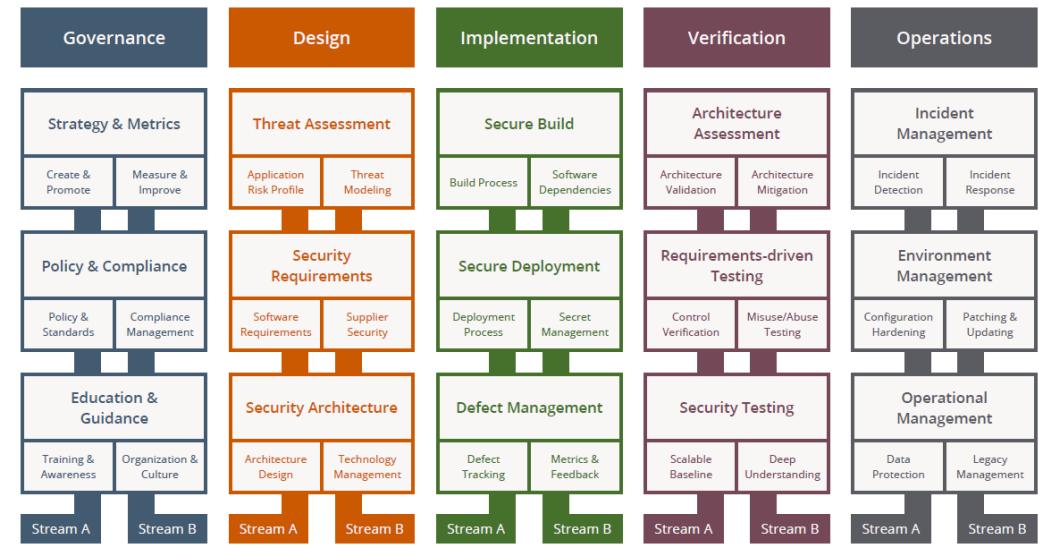

<https://owaspssamm.org/model/>

21

BITS-Pilani

## SAMM Checklist

OWASP SAMM Toolkit.xlsx

(<https://owaspssamm.org/assessment/>)

Secure Software Engineering

22

BITS-Pilani

## OWASP SAMM Practices

SAMM prescribes methodology for practice that includes

- Assessment
- Results
- Success metrics
- Costs
- Personnel (Roles)
- Levels

Secure Software Engineering

23


BITS-Pilani



## Security implications to SDLC

### Security Development Lifecycle

## Security Development Lifecycle

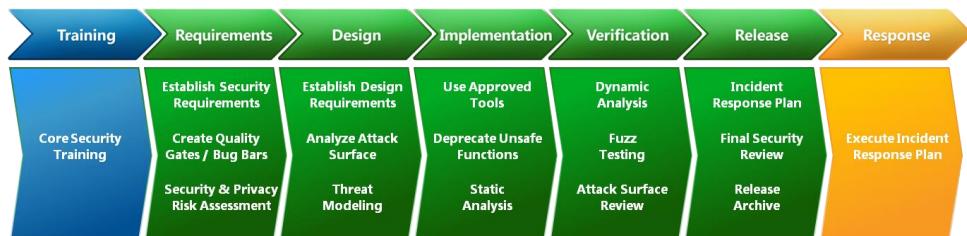

## Security Development Lifecycle

The Security Development Lifecycle (SDL) is a security assurance process developed by Microsoft as a company-wide initiative and a mandatory policy to reduce the number and severity of vulnerabilities in software products.

The Microsoft SDL is based on three core concepts —

- education,*
- continuous process improvement, and*
- accountability*

## SDL - Core Security Training

Basic software security training should cover foundational concepts such as:

- Secure design, including the following topics: Attack surface reduction, Defense in depth, principle of least privilege, Secure defaults
- Threat modeling, including the following topics: Overview of threat modeling, Design implications of a threat model, Coding constraints based on a threat model
- Secure coding, including the following topics: Buffer overruns (for applications using C and C++), Integer arithmetic errors (for applications using C and C++), Cross-site scripting (for managed code and Web applications), SQL injection (for managed code and Web applications), Weak cryptography
- Security testing, including the following topics: Differences between security testing and functional testing, Risk assessment, Security testing methods
- Privacy, including the following topics: Types of privacy-sensitive data, Privacy design best practices, Risk assessment, Privacy development best practices, Privacy testing best practices

# SDL Roles

SDL roles are designed to provide project security and privacy oversight and have the authority to accept or reject security and privacy plans from a project team.

**Security Advisor/Privacy Advisor.** This role is filled by subject-matter experts (SMEs) from outside the project team. The person chosen for this task must fill two sub-roles:

- Auditor: monitors each phase of the software development process and attest to successful completion of each security requirement
- Expert: must possess verifiable subject-matter expertise in security.

**Team Champion.** should be filled by SMEs from the project team. Responsible for the negotiation, acceptance, and tracking of minimum security and privacy requirements

# Some SDL Practices

## Static Analysis

- The team should be aware of the strengths and weaknesses of static analysis tools and be prepared to augment static analysis tools with other tools or human review as appropriate

## Dynamic Program Analysis

- specify tools that monitor application behavior for memory corruption, user privilege issues, and other critical security problems

## Fuzz Testing

- a specialized form of dynamic analysis used to induce program failure by deliberately introducing malformed or random data to an application

# Some SDL Practices

## Threat Modeling

- used in environments where there is meaningful security risk
- allows development teams to consider, document, and discuss the security implications of designs in the context of their planned operational environment
- Threat modeling is a team exercise, encompassing program/project managers, developers, and testers, performed during the software design stage

## Attack Surface Reduction

- a means of reducing risk by giving attackers less opportunity to exploit a potential weak spot or vulnerability
- encompasses shutting off or restricting access to system services, applying the principle of least privilege, and employing layered defenses wherever possible

# Some SDL Practices

## Final Security Review

- a deliberate examination of all the security activities performed on a software application prior to release
- performed by the security advisor with assistance from the regular development staff and the security and privacy team leads
- includes an examination of threat models, exception requests, tool output, and performance against the previously determined quality gates or bug bars
- If a team does not meet all SDL requirements and the security advisor cannot approve the project, the project cannot be released
- Teams must either address whatever SDL requirements that they can prior to launch or escalate to executive management for a decision



## BSIMM

# BSIMM Terminology

- **Activity.** Actions or efforts carried out or facilitated by the SSG as part of a practice. Activities are divided into three levels in the BSIMM based on observation rates.
- **Capability.** A set of BSIMM activities spanning one or more practices working together to serve a cohesive security function.
- **Champions.** A group of interested and engaged developers, cloud security engineers, deployment engineers, architects, software managers, testers, or people in similar roles who have an active interest in software security and contribute to the security posture of the organization and its software.
- **Domain.** One of the four categories the framework is divided into, i.e., Governance, Intelligence, SSDL Touchpoints, and Deployment.
- **Participants.** The group of firms in the current data pool.
- **Practice.** A grouping of BSIMM activities. The SSF is organized into 12 practices, three in each of four domains.

## The Building Security In Maturity Model (BSIMM)

BSIMM is a study of existing software security initiatives.

Representatives from Digital® and Fortify® conduct interviews and collect data from companies with sound security practices, including

- Adobe®,
- Dell®
- EMC®,
- Google™,
- Microsoft®
- etc.

<https://www.synopsys.com/software-integrity/resources/analyst-reports/bsimm.html>

# BSIMM Terminology

- **Secure SDL (SSDL).** Any software lifecycle with integrated software security checkpoints and activities.
- **Software security framework (SSF).** The basic structure underlying the BSIMM, comprising 12 practices divided into four domains.
- **Software security group (SSG).** The internal group charged with carrying out and facilitating software security. The group's name might also have an appropriate organizational focus, such as application security group or product security group.
- **Software security initiative (SSI).** An organization-wide program to instill, measure, manage, and evolve software security activities in a coordinated fashion. Also referred to in some organizations as an application security program, product security program, or perhaps as a DevSecOps program.

# The BSIMM Skeleton

GOVERNANCE		
STRATEGY & METRICS	COMPLIANCE & POLICY	TRAINING
<ul style="list-style-type: none"> <li>Publish process and evolve as necessary.</li> <li>Educate executives on software security.</li> <li>Implement security checkpoints and associated governance.</li> <li>Publish data about software security internally and use it to drive change.</li> <li>Enforce security checkpoints and track exceptions.</li> <li>Create or grow a satellite (security champions).</li> <li>Require security sign-off prior to software release.</li> <li>Create evangelism role and perform internal marketing.</li> <li>Use a software asset tracking application with portfolio view.</li> <li>Make SSI efforts part of external marketing.</li> <li>Identify metrics and use them to drive resourcing.</li> <li>Integrate software-defined lifecycle governance.</li> <li>Integrate software supply chain risk management.</li> </ul>	<ul style="list-style-type: none"> <li>Unify regulatory pressures.</li> <li>Identify privacy obligations.</li> <li>Create policy.</li> <li>Build a PII inventory.</li> <li>Require security sign-off for compliance-related risk.</li> <li>Implement and track controls for compliance.</li> <li>Include software security SLAs in all vendor contracts.</li> <li>Ensure executive awareness of compliance and privacy obligations.</li> <li>Document a software compliance story.</li> <li>Ensure compatible vendor policies.</li> <li>Drive feedback from software lifecycle data back to policy.</li> </ul>	<ul style="list-style-type: none"> <li>Conduct software security awareness training.</li> <li>Deliver on-demand individual training.</li> <li>Include security resources in onboarding.</li> <li>Enhance satellite (security champions) through training and events.</li> <li>Create and use material specific to company history.</li> <li>Deliver role-specific advanced curriculum.</li> <li>Host software security events.</li> <li>Require an annual refresher.</li> <li>Provide expertise via open collaboration channels.</li> <li>Reward progression through curriculum.</li> <li>Provide training for vendors and outsourced workers.</li> <li>Identify new satellite members (security champions) through observation.</li> </ul>

# The BSIMM Skeleton

SSDL TOUCHPOINTS		
ARCHITECTURE ANALYSIS	CODE REVIEW	SECURITY TESTING
<ul style="list-style-type: none"> <li>Perform security feature review.</li> <li>Perform design review for high-risk applications.</li> <li>Use a risk methodology to rank applications.</li> <li>Perform architecture analysis using a defined process.</li> <li>Standardize architectural descriptions.</li> <li>Have SSG lead design review efforts.</li> <li>Have engineering teams lead AA process.</li> <li>Drive analysis results into standard design patterns.</li> <li>Make the SSG available as an AA resource or mentor.</li> </ul>	<ul style="list-style-type: none"> <li>Perform opportunistic code review.</li> <li>Use automated code review tools.</li> <li>Make code review mandatory for all projects.</li> <li>Assign code review tool mentors.</li> <li>Use custom rules with automated code review tools.</li> <li>Use a top N bugs list (real data preferred).</li> <li>Use centralized defect reporting to close the knowledge loop.</li> <li>Build a capability to combine AST results.</li> <li>Create capability to eradicate bugs.</li> <li>Automate malicious code detection.</li> <li>Enforce secure coding standards.</li> </ul>	<ul style="list-style-type: none"> <li>Perform edge/boundary value condition testing during QA.</li> <li>Drive tests with security requirements and security features.</li> <li>Integrate opaque-box security tools into the QA process.</li> <li>Drive QA tests with AST results.</li> <li>Include security tests in QA automation.</li> <li>Perform fuzz testing customized to application APIs.</li> <li>Drive tests with design review results.</li> <li>Leverage code coverage analysis.</li> <li>Begin to build and apply adversarial security tests (abuse cases).</li> <li>Implement event-driven security testing in automation.</li> </ul>

# The BSIMM Skeleton

INTELLIGENCE		
ATTACK MODELS	SECURITY FEATURES & DESIGN	STANDARDS & REQUIREMENTS
<ul style="list-style-type: none"> <li>Use a data classification scheme for software inventory.</li> <li>Identify potential attackers.</li> <li>Gather and use attack intelligence.</li> <li>Build attack patterns and abuse cases tied to potential attackers.</li> <li>Collect and publish attack stories.</li> <li>Build an internal forum to discuss attacks.</li> <li>Have a research group that develops new attack methods.</li> <li>Monitor automated asset creation.</li> <li>Create and use automation to mimic attackers.</li> <li>Create technology-specific attack patterns.</li> <li>Maintain and use a top N possible attacks list.</li> </ul>	<ul style="list-style-type: none"> <li>Integrate and deliver security features.</li> <li>Application architecture teams engage with the SSG.</li> <li>Leverage secure-by-design components and services.</li> <li>Create capability to solve difficult design problems.</li> <li>Form a review board to approve and maintain secure design patterns.</li> <li>Require use of approved security features and frameworks.</li> <li>Find and publish secure design patterns from the organization.</li> </ul>	<ul style="list-style-type: none"> <li>Create security standards.</li> <li>Create a security portal.</li> <li>Translate compliance constraints to requirements.</li> <li>Identify open source.</li> <li>Create a standards review process.</li> <li>Create SLA boilerplate.</li> <li>Control open source risk.</li> <li>Communicate standards to vendors.</li> <li>Use secure coding standards.</li> <li>Create standards for technology stacks.</li> </ul>

# The BSIMM Skeleton

DEPLOYMENT		
PENETRATION TESTING	SOFTWARE ENVIRONMENT	CONFIGURATION MANAGEMENT & VULNERABILITY MANAGEMENT
<ul style="list-style-type: none"> <li>Use external penetration testers to find problems.</li> <li>Feed results to the defect management and mitigation system.</li> <li>Use penetration testing tools internally.</li> <li>Penetration testers use all available information.</li> <li>Schedule periodic penetration tests for application coverage.</li> <li>Use external penetration testers to perform deep-dive analysis.</li> <li>Customize penetration testing tools.</li> </ul>	<ul style="list-style-type: none"> <li>Use application input monitoring.</li> <li>Ensure host and network security basics are in place.</li> <li>Implement cloud security controls.</li> <li>Define secure deployment parameters and configurations.</li> <li>Protect code integrity.</li> <li>Use application containers to support security goals.</li> <li>Use orchestration for containers and virtualized environments.</li> <li>Use code protection.</li> <li>Use application behavior monitoring and diagnostics.</li> <li>Create bills of materials for deployed software.</li> <li>Perform application composition analysis on code repositories.</li> <li>Protect integrity of development toolchains.</li> </ul>	<ul style="list-style-type: none"> <li>Create or interface with incident response.</li> <li>Identify software defects found in operations monitoring and feed them back to engineering.</li> <li>Track software defects found in operations through the fix process.</li> <li>Have emergency response.</li> <li>Develop an operations software inventory.</li> <li>Fix all occurrences of software defects found in operations.</li> <li>Enhance the SSDL to prevent software defects found in operations.</li> <li>Simulate software crises.</li> <li>Operate a bug bounty program.</li> <li>Automate verification of operational infrastructure security.</li> <li>Publish risk data for deployable artifacts.</li> <li>Streamline incoming responsible vulnerability disclosure.</li> <li>Do attack surface management for deployed applications.</li> </ul>



## Security in Agile Development



### What is “Agility”?

Effective (rapid and adaptive) response to change

Effective communication among all stakeholders

Drawing the customer onto the team

Organizing a team so that it is in control of the work performed

*Yielding ...*

Rapid, incremental delivery of software

## The Manifesto for Agile Software Development

“We are uncovering better ways of developing software by doing it and helping others do it. Through this work we have come to value:

- Individuals and interactions over processes and tools
- Working software over comprehensive documentation
- Customer collaboration over contract negotiation
- Responding to change over following a plan

That is, while there is value in the items on the right, we value the items on the left more.”

Kent Beck et al

February 1, 2025

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



Table 1: Security Activities for Agile Software Development

Security Activity	Definition
<i>Addressing security in early iterations with requirements and testing</i>	This security activity emphasizes the importance of development teams addressing security issues and concerns early in the project before deploying the software.
<i>Stating security requirements that are expected in the production software</i>	This requires incorporating security expectations in project requirements when describing the responsibilities and behavior of the software.
<i>Adding a security specialist to your team</i>	Security specialists, such as a Security Master, are members of a development team that focus on security aspects of the project to address concerns and ensure the security of the system.
<i>Additional points or weights to issues with an impact on security</i>	This activity involves increasing the weights, such as story points in an Agile development environment, of issues that will have a higher impact on the security of the product to prioritize security-related tasks and encourage more secure development and testing.
<i>Iterative and incremental vulnerability and penetration testing</i>	This security activity suggests incorporating recurring security scanning, such as Dynamic Application Security Testing (DAST), to test for security flaws in the working software automatically.
<i>Iterative and incremental security static analysis</i>	Similar to DAST, Static Application Security Testing (SAST) involves using security-related static analysis tools to detect potential security vulnerabilities by scanning the source code.
<i>Iterative and incremental risk analysis, countermeasure graphs</i>	This security activity consists of using tools to monitor networks, applications, and infrastructure and perform risk analysis to identify vulnerabilities. These tools can evaluate the system's security and suggest methods to prevent attacks.
<i>Automatic testing</i>	This security activity involves incorporating secure coding practices, such as vulnerabilities analysis and risk assessment, into the deployment pipeline for software projects. This allows security checks to be automatically triggered with code changes and issues to be addressed before the software is deployed to users.

# Security in Agile Development

## 1. Utilize the hacker in that developer

A developer with the right tools, training and mindset can uncover the most common security pitfalls in code.

–Developers must be empowered through training and the provision of the right tools that will enable them to analyze code before submitting it to quality assurance or testing teams.

All development team members must be aware of the most common vulnerabilities in each system they develop.

–With developers' ratio to security specialists standing at about 100:1, it is only plausible to pass the responsibility of securing systems to the developers. They can then perform routine scans of their code and fix any issues that may arise during the core development process.

Team leaders can decide to incorporate the security team members into individual development teams to discover vulnerabilities early in development.

## 2. Always consider the “evil” user interacting with the system

Many developers envision a perfect software without taking into account the possibility of an “evil” user interaction

Team players should be made aware of the possible ways an attacker may interact with the system.

This is a continuous process starting with the statement of security-based user stories.

Only a few clients will talk about security in user stories. Security team has to identify critical points and valuable assets of the software that may be targeted by an attacker. They can enumerate possible attack goals and advise the development team in advance.

# Security in Agile Development

## 3. Uphold continuous integration practices, tools and platforms

There are tools to integrate with development platforms and give insightful information about code.

These include code integration tools, code scanners and shared repositories.

Code analysis tools are available to help debug and refactor buggy code, thereby improving the system's overall safety.

Upholding continuous integration best practices work and help improve the quality of the software, thereby assuring the security of users, user data and vendors.

## 4. Review user stories with every iteration and adapt as necessary

Agile methodologies have short iterations, resulting in the release of new or improved software system features.

–Therefore, it is possible to review all user stories that necessitate iteration and how they relate to the system's general security before releasing it for public use.

The team leader must also organize peer review of code and how frequently this occurs. Two pairs of eyes are often better than one during code review.

The software must be adapted to better its reliability and security if vulnerabilities are discovered in the review process.

<https://resources.infosecinstitute.com/topic/top-6-security-best-practices-for-agile-development-environments/>

# Security in Agile Development

## 5. Innovate with security

Agile teams neglect security due to absence of robust, agile security practices and testing tools.

Progressive teams have to innovate workable security policies and developing tools based on such policies.

Most CI tools are open to customization.

Therefore, an organization or team can choose a tool that works with their development practices and customize it to serve the most common security concerns affecting their code.

## 6. Cultivate the culture of security

Organizational culture influences how things are generally done.

If team leaders have high regard for secure systems, the juniors are likely to copy the same and practice it when writing code.

Educating the team and organizing seminars for security and agile development can also help members adopt the security needs of software quickly.

Every new team member should be taken through the necessary software security procedures and guidelines of organization.

Furthermore, combining all the other security aspects of agile development with a supportive and dynamic security culture will boost the general feel of your software.

<https://resources.infosecinstitute.com/topic/top-6-security-best-practices-for-agile-development-environments/>


<https://resources.infosecinstitute.com/topic/top-6-security-best-practices-for-agile-development-environments/>



# DevOps and DevSecOps

# DevOps

A set of practices that combines software development (Dev) and IT operations (Ops)

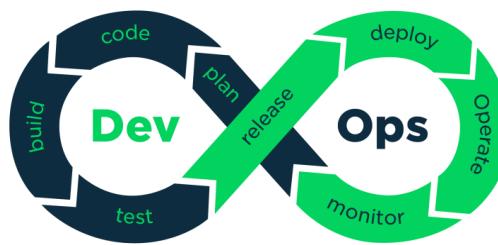

Why DevOps? Iterative and Rapid Software release cycles mean software moves between development team to IT operations team repeatedly. It means strong binding is needed between two teams.

DevOps is complementary with Agile software development; several DevOps aspects came from the Agile methodology

## What is DevSecOps?

DevSecOps—short for *development, security, and operations*—automates the integration of security at every phase of the software development lifecycle, from initial design through integration, testing, deployment, and software delivery.

- In the past, security was incorporated to software at the end of the development cycle by a separate security team and was tested by a separate QA team

DevSecOps integrates application and infrastructure security seamlessly into Agile and DevOps processes and tools.

DevSecOps makes application and infrastructure security a shared responsibility of development, security, and IT operations teams, rather than the sole responsibility of a security silo

## DevOps Practices

### Continuous integration and continuous delivery (CI/CD)

- CI - merge code changes frequently into the main code. CD - frequent, automated deployment of new versions into a production environment

### Version Control

- tracking revisions and change history to make code easy to review and recover

### Agile software development

- emphasizes team collaboration, customer and user feedback, and rapid change through short release cycles

### Infrastructure as code

- defines system resources and topologies in a descriptive manner that allows teams to manage those resources as they would code


### Configuration management

- managing the state of resources in a system including servers, virtual machines, and databases

### Continuous monitoring

- having real-time visibility into the performance and health of the entire stack, from the underlying infrastructure to higher-level software components

## DevSecOps Software Lifecycle

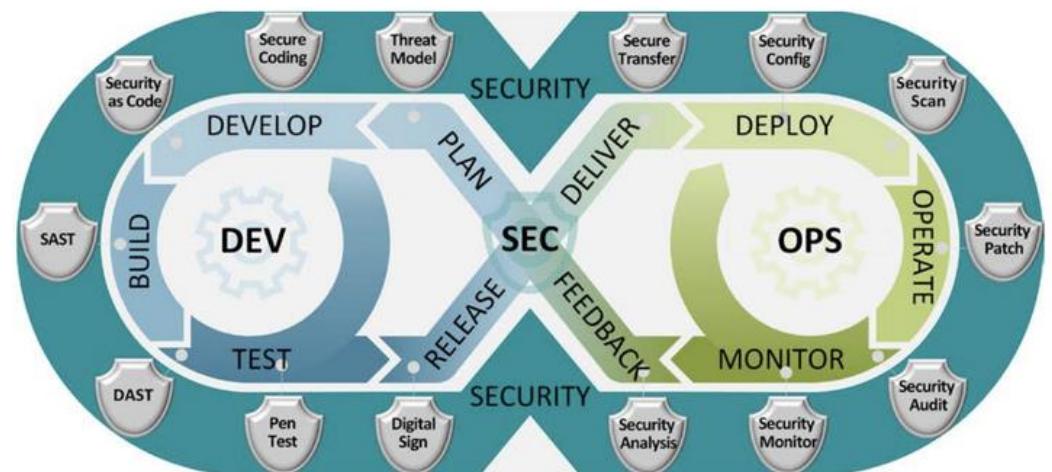

## Best Practices for DevSecOps

### Shift left

- It encourages software engineers to move security from the right (end) to the left (beginning) of the DevOps (delivery) process.
- Shifting left allows the DevSecOps team to identify security risks and exposures early and ensures that these security threats are addressed immediately

### Security education

- development engineers, operations teams, and compliance teams should be familiar with the basic principles of application security and other security engineering practices

### Traceability, auditability, and visibility

- Traceability helps to track configuration items across the development cycle to where requirements are implemented in the code
- Auditability is for ensuring compliance with security controls
- Visibility means the organization has a measure the heartbeat of the operation, send alerts, has awareness of cyberattacks as they occur, and provide accountability

## Shift Left

### Shifting Left in Software Engineering

<https://dzone.com/articles/shifting-left-in-software-engineering>

<https://solutionshub.epam.com/blog/post/shift-left-testing>

<https://www.oshyn.com/blog/shift-left-test-automation>

## Why DevSecOps is Not Easy?

<https://insights.sei.cmu.edu/blog/5-challenges-to-implementing-devsecops-and-how-to-overcome-them/>

### The most common challenges are:

- Lack of security assurance at the business and project levels
- Organizational barriers related to collaboration, tooling, and culture
- Impact to quality because security is not a priority while systems are getting more complex
- Lack of security skills for developers, business stakeholders, and auditors
- Insufficient security guidance due to lack of resources, standards, and data

## Low Code Platform Security

<https://owasp.org/www-project-top-10-low-code-no-code-security-risks/>

<https://www.outsystems.com/blog/posts/low-code-security/>

Software Engineering: A Practitioner's Approach, 7/e Roger Pressman  
Software Engineering, Pearson Education, 9th Ed., 2010. Ian Sommerville  
SWEBOK by IEEE/ACM  
[www.owasp.com](http://www.owasp.com)  
[sei.cmu.edu](http://sei.cmu.edu)  
[www.microsoft.com](http://www.microsoft.com)  
[www.devopedia.org/devops](http://www.devopedia.org/devops)  
[www.ibm.com](http://www.ibm.com)

# Thank You!

Secure Software Engineering 56 BITS-Pilani



SE/SS ZG566  
**Secure Software Engineering**  
T V Rao

BITS Pilani  
Pilani | Dubai | Goa | Hyderabad



Secure Software Engineering 57 BITS-Pilani



innovate achieve lead




- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*



## Threat Modelling

### Security Concepts and Relationships

Review

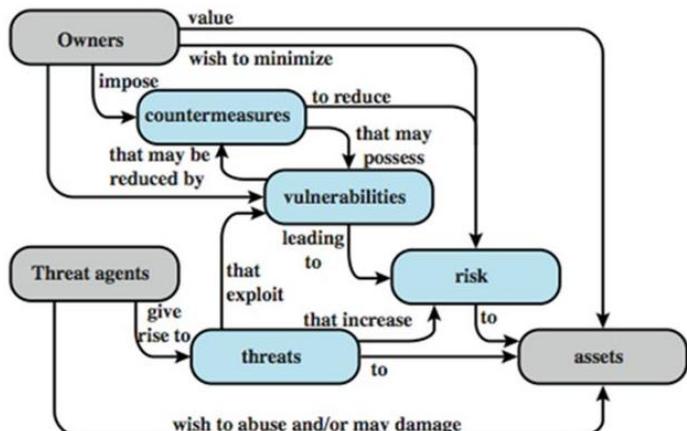

## Securing a Computer Based System

A computer-based system has three separate but valuable components (Assets) :

- Hardware
- Software
- Data

### Vulnerabilities

- Weaknesses in a system that may be able to be *exploited* in order to cause loss or harm
  - e.g., a file server that doesn't authenticate its users

### Threats

- A loss or harm that might befall a system
  - e.g., users' personal files may be revealed to the public

## Characteristics of Computer Intrusion

By computing system, we include

- Hardware
- Software
- Storage media
- Data and
- People

A system is most vulnerable at its weakest point

- A robber will not attempt to penetrate a 2-inch-thick metal door if a window gives easy access

# Principle of Easiest Penetration

An intruder must be expected to use any available means of penetration. The penetration may not necessarily be by the most obvious means, nor is it necessarily the one against which the most solid defense has been installed. And it certainly does not have to be the way we want the attacker to behave.

## Threats to Assets

According to Pfleeger, the threats are

- **Interruption** – an asset is destroyed, unavailable or unusable (*availability*)
- **Interception** – unauthorized party gains access to an asset (*confidentiality*)
- **Modification** – unauthorized party tampers with asset (*integrity*)
- **Fabrication** – unauthorized party inserts counterfeit object into the system (*authenticity*)

# Threat Model

When designing a system, we need to state the threat model

## Threat Model

- Set of threats we are undertaking to defend against
  - Whom do we want to prevent from doing what?
- Attack**
- An action which exploits a vulnerability to execute a threat
  - e.g., telling the file server you are a different user in an attempt to read or modify their files

## Threat Consequences (IETF RFC 4949)

Threat Action (Attack)	Threat Consequence
<b>Exposure:</b> Sensitive data are directly released to an unauthorized entity. <b>Interception:</b> An unauthorized entity directly accesses sensitive data traveling between authorized sources and destinations. <b>Inference:</b> A threat action whereby an unauthorized entity indirectly accesses sensitive data (but not necessarily the data contained in the communication) by reasoning from characteristics or by-products of communications. <b>Intrusion:</b> An unauthorized entity gains access to sensitive data by circumventing a system's security protections.	<b>Unauthorized Disclosure</b> A circumstance or event whereby an entity gains access to data for which the entity is not authorized
<b>Masquerade:</b> An unauthorized entity gains access to a system or performs a malicious act by posing as an authorized entity. <b>Falsification:</b> False data deceive an authorized entity. <b>Repudiation:</b> An entity deceives another by falsely denying responsibility for an act	<b>Deception</b> A circumstance or event that may result in an authorized entity receiving false data and believing it to be true
<b>Incapacitation:</b> Prevents or interrupts system operation by disabling a system component. <b>Corruption:</b> Undesirably alters system operation by adversely modifying system functions or data. <b>Obstruction:</b> A threat action that interrupts delivery of system services by hindering system operation	<b>Disruption</b> A circumstance or event that interrupts or prevents the correct operation of system services and functions
<b>Misappropriation:</b> An entity assumes unauthorized logical or physical control of a system resource. <b>Misuse:</b> Causes a system component to perform a function or service that is detrimental to system security	<b>Usurpation</b> A circumstance or event that results in control of system services or functions by an unauthorized entity

# Who are Attackers

One approach to prevention is to understand who carries out attacks and why

## Amateurs

- Ordinary computer professionals or users who, while doing their jobs, discover they have access to something valuable. Amateurs may be disgruntled employees who vow to get even with management

## Crackers or Malicious Hackers

- Attempt to access computing facilities for which they have not been authorized (often students who see it as victimless crime). Some carry out for curiosity, personal gain or self-satisfaction

# Who are Attackers

## Career Criminals

- Understands the targets of computer crime; often begin as computer professionals, then shift to crime finding payoff. “They don’t want to write a worm that destroys your hardware. They want to assimilate your computers and use them to make money”

## Terrorists

- They use computers in three ways
  - Targets of attack – denial of service, web site defacement attacks are popular to attract attention to the cause and bring undesired negative attention to the targets of attack
  - Propaganda vehicles – inexpensive way to get a message to many
  - Methods of attack – use computers to launch attacks

# Method, Opportunity, Motive (M-O-M triad)

A malicious attacker must have three things

- Method : the skills, knowledge, tools, and other things with which to be able to pull off the attack
- Opportunity : the time and access to accomplish the attack
- Motive : a reason to want to perform this attack against this system

Deny any of those three things and the attack will not occur.

# Methods of defense

How can we defend against a threat?

- Prevent it: prevent the attack
- Deter it: make the attack harder or more expensive
- Deflect it: make yourself less attractive to attacker
- Detect it: notice that attack is occurring (or has occurred)
- Recover from it: mitigate the effects of the attack

Threat: your car may get stolen

How to defend?

- Prevent: Immobilizer? Is it possible to absolutely prevent?
- Deter: Store your car in a secure parking facility
- Deflect: Have sticker mentioning car alarm, keep valuables out of sight
- Detect: Car alarms
- Recover: Insurance

## Structured Approach to Threat Modeling

According to Adam Shostack, you begin threat modeling by focusing on four key questions

- What are you building?
- What can go wrong?
- What should you do about those things that can go wrong?
- Did you do a decent job of analysis (retrospect)

## What Threat Modelling is (not)

What threat modelling is	What threat modelling is not
A team activity	An activity performed by a single team member in isolation
An activity that helps identify security vulnerabilities in a variety of software applications	Just for large software projects
An activity that should be performed for every iteration or sprint during agile development	An activity done once during the lifecycle of the project

## Structured Approach to Threat Modeling

People often use an approach centered on

- Models of their assets (Valuable things they have),
- Models of attackers (People who might go after assets), or
- Models of their software (Common way to attack is via the deployed software)

Centering on one of these is preferable to using approaches that combine them because the combinations tend to be confusing

According to Adam Shostack, first two sets of models help in engaging with non-technical people and third type of models are important for software development

## SDL Threat Modeling



## Objectives

Produce software that's secure by design

- Improve designs the same way we've improved code

Because attackers think differently

- Creator blindness/new perspective

Allow you to predictably and effectively find security problems early in the process

## Responsibilities

Building a threat model (at Microsoft)

- Program Manager (PM) owns overall process
- Testers
  - Identify threats in analyze phase
  - Use threat models to drive test plans
- Developers create diagrams

## Customers / Work Products

Customers for threat models

- Your team
- Other features, product teams
- Customers, via user education
- “External” quality assurance resources, such as pen testers

Threat model documentation

- The product as a whole
- The security-relevant features
- The attack surfaces

## The Process in a Nutshell



- Defining security requirements.
- Creating an application diagram.
- Identifying threats.
- Mitigating threats.
- Validating that threats have been mitigated.

## Define Security Requirements

Security requirements may come from

- industry standards,
- applicable laws, and
- history of past vulnerabilities

Security requirements provide a foundation of vetted security functionality for an application

Allow developers to reuse the definition of security controls and best practices

Prevent the repeat of past security failures

## Diagramming

Use DFDs (Data Flow Diagrams)

- Include processes, data stores, data flows
- Include *trust boundaries*
- Diagrams per scenario may be helpful

Update diagrams as product changes

Enumerate assumptions, dependencies

Number everything (if manual)

## Effective Threat Modeling Meetings

Develop draft threat model before the meeting

- Use the meeting to discuss

Start with a DFD walkthrough

Identify most interesting elements

- Assets (if you identify any)
- Entry points/trust boundaries

Walk through STRIDE against those elements

Threats that cross elements/recur

- Consider library, redesigns

## Validating Threat Models

Validate the whole threat model

- Does diagram match final code?
- Are threats enumerated?
- Minimum: STRIDE per element that touches a trust boundary
- Has Test / QA reviewed the model?
  - Tester approach often finds issues with threat model or details
- Is each threat mitigated?
- Are mitigations done right?

Did you check these before Final Security Review?

- Shipping will be more predictable

## Threats (STRIDE)

Type	Examples
Spoofing	Threat action aimed to illegally access and use another user's credentials, such as username and password.
Tampering	Threat action aimed to maliciously change/modify persistent data, such as persistent data in a database, and the alteration of data in transit between two computers over an open network, such as the Internet.
Repudiation	Threat action aimed to perform illegal operations in a system that lacks the ability to trace the prohibited operations.
Information disclosure	Threat action to read a file that one was not granted access to, or to read data in transit.
Denial of service	Threat aimed to deny access to valid users, such as by making a web server temporarily unavailable or unusable.
Elevation of privilege	Threat aimed to gain privileged access to resources for gaining unauthorized access to information or to compromise a system.

Some experts extend STRIDE to include Lateral Movement (LM) and refer as STRIDE-LM

## Threat: Spoofing

Threat	<b>Spoofing</b>
Property	Authentication
Definition	Impersonating something or someone else
Example	Pretending to be any of billg, microsoft.com, or ntdll.dll

## Threat: Tampering

Threat	<b>Tampering</b>
Property	Integrity
Definition	Modifying data or code
Example	Modifying a DLL on disk or DVD, or a packet as it traverses the LAN

## Threat: Repudiation

Threat	<b>Repudiation</b>
Property	Non-Repudiation
Definition	Claiming to have not performed an action
Example	"I didn't send that email," "I didn't modify that file," "I didn't visit that web site"

## Threat: Information Disclosure

Threat	Information Disclosure
Property	Confidentiality
Definition	Exposing information to someone not authorized to see it
Example	Allowing someone to read the Windows source code; publishing a list of customers to a Web site

## Threat: Denial of Service

Threat	Denial of Service
Property	Availability
Definition	Deny or degrade service to users
Example	Crashing Windows or a Web site, sending a packet and absorbing seconds of CPU time, or routing packets into a black hole


## Threat: Elevation of Privilege

Threat	Elevation of Privilege (EoP)
Property	Authorization
Definition	Gain capabilities without proper authorization
Example	Allowing a remote Internet user to run commands is the classic example, but going from a “Limited User” to “Admin” is also EoP

## Threat: Lateral movement

Threat	Lateral Movement (EoP)
Property	Authentication/Authorization
Definition	Pivoting across the network with the eventual goal of reaching the crown jewels of the system
Example	Lateral movement is typically coupled with elevation of privilege to gain access to other parts of the Environment. Controls to mitigate include proper segmentation of network with strong firewall rules

## Threat Tree (Spoofing data flow)

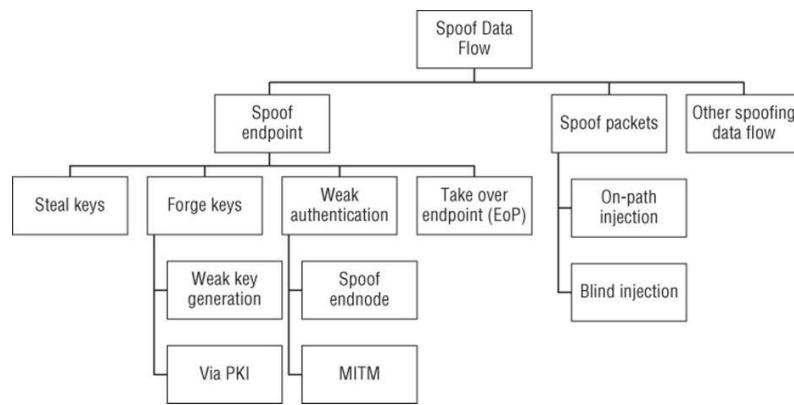

## Standard Mitigations

Spoofing	Authentication	To authenticate principals: <ul style="list-style-type: none"><li>Cookie authentication</li><li>Kerberos authentication</li></ul> To authenticate code or data: <ul style="list-style-type: none"><li>Digital signatures</li></ul>
Tampering	Integrity	<ul style="list-style-type: none"><li>ACLs</li><li>Digital signatures</li></ul>
Repudiation	Non Repudiation	<ul style="list-style-type: none"><li>Secure logging and auditing</li><li>Digital Signatures</li></ul>
Information Disclosure	Confidentiality	<ul style="list-style-type: none"><li>Encryption</li><li>ACLS</li></ul>
Denial of Service	Availability	<ul style="list-style-type: none"><li>ACLs</li><li>Filtering</li><li>Quotas</li></ul>
Elevation of Privilege	Authorization	<ul style="list-style-type: none"><li>ACLS</li><li>Group or role membership</li><li>Privilege ownership</li><li>Input validation</li></ul>

## How to Mitigate

Address each threat

Four ways to address threats

1. Redesign to eliminate
  - Change the system design to prevent the threat from occurring.
2. Apply standard mitigations
  - What have similar software packages done and how has that worked out for them?
3. Invent new mitigations (riskier)
4. Accept vulnerability in design

## OWASP Threat Modelling Example



# OWASP Threat Modeling

According to OWASP, the threat modeling process for software application can be decomposed into 3 high level steps

- Decompose the Application
- Determine and rank threats
- Determine countermeasures and mitigation

## Determine and rank threats (step 2)

A threat categorization such as STRIDE can be used,

Spoofing

Tampering

Repudiation

Information disclosure

Denial of service

Elevation of privilege

The STRIDE categorization helps to identify threats from the attacker perspective.

## Decompose the Application (step 1)

Understanding of the application and how it interacts with external entities.

- involves creating use-cases to understand how the application is used,
- identifying entry points to see where a potential attacker could interact with the application,
- identifying assets i.e. items/areas that the attacker would be interested in, and
- identifying trust levels which represent the access rights that the application will grant to external entities.

Produce data flow diagrams (DFDs) for the application. The DFDs show the different paths through the system, highlighting the privilege boundaries.

## Determine and rank threats (step 2)

A threat categorization ASF (Application Security Framework) defines threat categories such as

Auditing & Logging,

Authentication,

Authorization,

Configuration Management,

Data Protection in Storage and Transit,

Data Validation,

Exception Management.

The ASF categorization helps to identify threats from the defensive perspective.

## Determine and rank threats (step 2)

DFDs produced in step 1 help to identify the potential threat targets from the attacker's perspective, viz.

- data sources,
- processes,
- data flows, and
- interactions with users.

Use and abuse cases can illustrate how existing protective measures could be bypassed, or where a lack of such protection exists.

## Determine countermeasures and mitigation

A lack of protection against a threat might indicate a vulnerability whose risk exposure could be mitigated with the implementation of a countermeasure.


Countermeasures can be identified using threat-countermeasure mapping lists.

Based on risk ranking assigned to the threats, it is possible to sort threats from the highest to the lowest risk, and prioritize the mitigation effort, such as by responding to such threats by applying the identified countermeasures

## Determine and rank threats (step 2)

These threats can be identified further as the roots for threat trees;

- one tree for each threat goal.

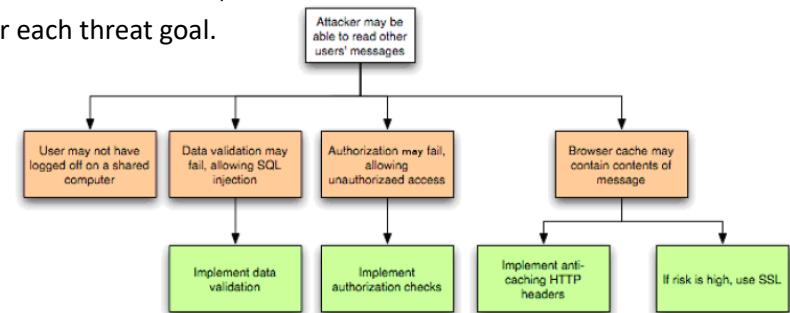

From the defensive perspective, ASF categorization helps to identify the threats as weaknesses of security controls for such threats.

The determination of the security risk for each threat can be determined using a value-based risk model such as DREAD

## OWASP Threat Modeling Example

### Application Description:

The college library website is the first implementation of a website to provide librarians and library patrons (students and college staff) with online services. As this is the first implementation of the website, the functionality will be limited. There will be three users of the application:

1. Students
2. Staff
3. Librarians

Staff and students will be able to log in and search for books, and staff members can request books. Librarians will be able to log in, add books, add users, and search for books.

# External Dependencies

External dependencies are items external to the code of the application that may pose a threat to the application. These items are typically still within the control of the organization, but possibly not within the control of the development team

ID	Description
1	The college library website will run on a Linux server running Apache. This server will be hardened per the college's server hardening standard. This includes the installation of the latest operating system and application security patches.
2	The database server will be MySQL and it will run on a Linux server. This server will be hardened per the college's server hardening standard. This will include the installation of the latest operating system and application security patches.
3	The connection between the web server and the database server will be over a private network.
4	The web server is behind a firewall and the only communication available is TLS.

# Trust Levels

Trust levels represent the access rights that the application will grant to external entities.

The trust levels are cross referenced with the entry points and assets.

This allows us to define the access rights or privileges required at each entry point, and those required to interact with each asset

# Trust Levels

ID	Name	Description
1	Anonymous Web User	A user who has connected to the college library website but has not provided valid credentials.
2	User with Valid Login Credentials	A user who has connected to the college library website and has logged in using valid login credentials.
3	User with Invalid Login Credentials	A user who has connected to the college library website and is attempting to log in using invalid login credentials.
4	Librarian	The librarian can create users on the library website and view their personal information.
5	Database Server Administrator	The database server administrator has read and write access to the database that is used by the college library website.
6	Website Administrator	The Website administrator can configure the college library website.
7	Web Server User Process	This is the process/user that the web server executes code as and authenticates itself against the database server as.
8	Database Read User	The database user account used to access the database for read access.
9	Database Read/Write User	The database user account used to access the database for read and write access.

# Entry Points

Entry points define the interfaces through which potential attackers can interact with the application or supply it with data. In order for a potential attacker to attack an application, entry points must exist.

ID	Name	Description	Trust Levels
1	HTTPS Port	The college library website will be only be accessible via TLS. All pages within the college library website are layered on this entry point.	(1) Anonymous Web User (2) User with Valid Login Credentials (3) User with Invalid Login Credentials (4) Librarian
1.1	Library Main Page	The splash page for the college library website is the entry point for all users.	(1) Anonymous Web User (2) User with Valid Login Credentials (3) User with Invalid Login Credentials (4) Librarian
1.2	Login Page	Students, faculty members and librarians must log in to the college library website before they can carry out any of the use cases.	(1) Anonymous Web User (2) User with Login Credentials (3) User with Invalid Login Credentials (4) Librarian
1.2.1	Login Function	The login function accepts user supplied credentials and compares them with those in the database.	(2) User with Valid Login Credentials (3) User with Invalid Login Credentials (4) Librarian
1.3	Search Entry Page	The page used to enter a search query.	(2) User with Valid Login Credentials (4) Librarian

# Assets

Attacker is interested in the system because it has Assets  
Assets can be

- Physical – Private Data, List of customers etc.
- Privilege – System has ability to update/process data
- Abstract – Reputation of the organization

Assets are documented in the threat model as follows:

- ID,
- Name,
- Description
- Trust Level (required for access)

# Assets

ID	Name	Description	Trust Levels
1	Library Users and Librarian	<b>Assets relating to students, faculty members, and librarians.</b>	
1.1	User Login Details	The login credentials that a student or a faculty member will use to log into the College Library website.	(2) User with Valid Login Credentials (4) Librarian (5) Database Server Administrator (7) web server User Process (8) Database Read User (9) Database Read/Write User
1.2	Librarian Login Details	The login credentials that a Librarian will use to log into the College Library website.	(4) Librarian (5) Database Server Administrator (7) web server User Process (8) Database Read User (9) Database Read/Write User
1.3	Personal Data	The College Library website will store personal information relating to the students, faculty members, and librarians.	(4) Librarian (5) Database Server Administrator (6) Website Administrator (7) web server User Process (8) Database Read User (9) Database Read/Write User

## Assets (contd.)

ID	Name	Description	Trust Levels
2	System	<b>Assets relating to the underlying system.</b>	
2.1	Availability of College Library Website	The College Library website should be available 24 hours a day and can be accessed by all students, college faculty members, and librarians.	(5) Database Server Administrator (6) Website Administrator
2.2	Ability to Execute Code as a web server User	This is the ability to execute source code on the web server as a web server user.	(6) Website Administrator (7) web server User Process
2.3	Ability to Execute SQL as a Database Read User	This is the ability to execute SQL select queries on the database, and thus retrieve any information stored within the College Library database.	(5) Database Server Administrator (8) Database Read User (9) Database Read/Write User
2.4	Ability to Execute SQL as a Database Read/Write User	This is the ability to execute SQL. Select, insert, and update queries on the database and thus have read and write access to any information stored within the College Library database.	(5) Database Server Administrator (9) Database Read/Write User

## Assets (contd.)


ID	Name	Description	Trust Levels
3	Website	<b>Assets relating to the College Library website.</b>	
3.1	Login Session	This is the login session of a user to the College Library website. This user could be a student, a member of the college faculty, or a Librarian.	(2) User with Valid Login Credentials (4) Librarian
3.2	Access to the Database Server	Access to the database server allows you to administer the database, giving you full access to the database users and all data contained within the database.	(5) Database Server Administrator
3.3	Ability to Create Users	The ability to create users would allow an individual to create new users on the system. These could be student users, faculty member users, and librarian users.	(4) Librarian (6) Website Administrator
3.4	Access to Audit Data	The audit data shows all audit-able events that occurred within the College Library application by students, staff, and librarians.	(6) Website Administrator

# Data Flow Diagrams


Knowledge of Assets, Entry points, etc. help in creating DFDs.

- The DFDs will allow us to gain a better understanding of the application by providing a visual representation of how the application processes data
- DFDs focus on how data moves through the application and what happens to the data as it moves
- DFDs are hierarchical in structure, so they can be used to decompose the application into subsystems and lower-level subsystems

## DFD for the example

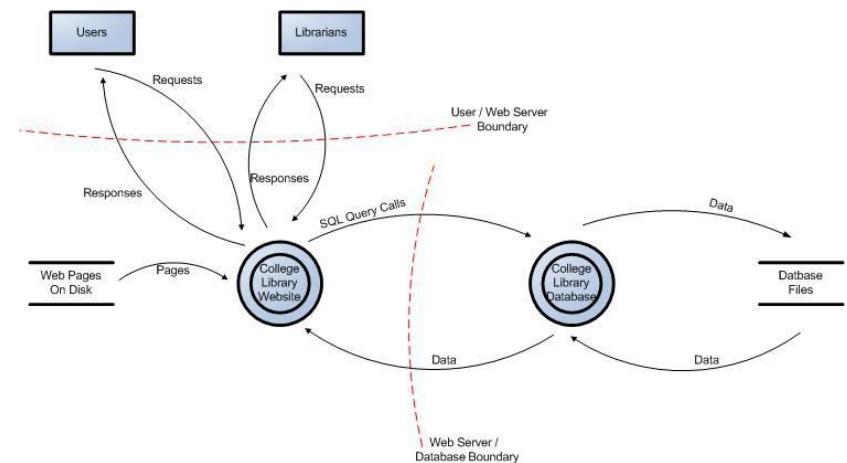

## Partially Expanded DFD

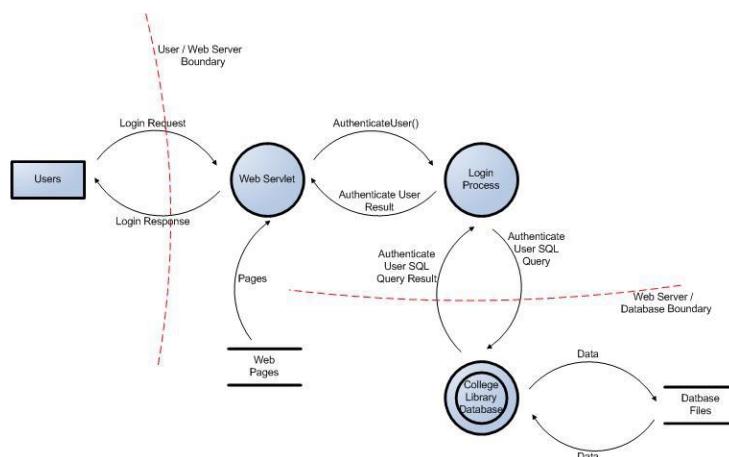

## Trust Boundaries in DFD

Add trust boundaries that intersect data flows

- Points/surfaces where an attacker can interject
  - Machine boundaries, privilege boundaries, integrity boundaries are examples of trust boundaries
  - Threads in a native process are often inside a trust boundary, because they share the same privileges, rights, identifiers and access
- Processes talking across a network always have a trust boundary
  - They may create a secure channel, but they're still distinct entities
  - Encrypting network traffic doesn't address tampering or spoofing

Iterate over processes, data stores, and see where they need to be broken down

## Threat Perspectives

Threat categorization helps to identify threats.

- Threat categorization to help identify threats from the attacker  
–(STRIDE)
- Threat categorization to help identify threats from the defensive perspective  
– Application Security Framework(ASF)

## DREAD

In the Microsoft DREAD threat-risk ranking model, the technical risk factors for impact are Damage and Affected Users, while the ease of exploitation factors are Reproducibility, Exploitability and Discoverability. This risk factorization allows the assignment of values to the different influencing factors of a threat. To determine the ranking of a threat, the threat analyst has to answer basic questions for each factor of risk

- For Damage: How big would the damage be if the attack succeeded?
- For Reproducibility: How easy is it to reproduce an attack to work?
- For Exploitability: How much time, effort, and expertise is needed to exploit the threat?
- For Affected Users: If a threat were exploited, what percentage of users would be affected?
- For Discoverability: How easy is it for an attacker to discover this threat?

## Example Countermeasures (ASF)

Threat Type	Countermeasure
Authentication	1.Credentials and authentication tokens are protected with encryption in storage and transit 2.Protocols are resistant to brute force, dictionary, and replay attacks
Authorization	1.Strong ACLs are used for enforcing authorized access to resources 2.Role-based access controls are used to restrict access to specific operations
Configuration Management	1.Least privileged processes are used and service accounts with no administration capability 2.Auditing and logging of all administration activities is enabled
Data Protection in Storage and Transit	1.Standard encryption algorithms and correct key sizes are being used 2.Hashed message authentication codes (HMACs) are used to protect data integrity
Data Validation / Parameter Validation	1.Data type, format, length, and range checks are enforced 2.No security decision is based upon parameters (e.g. URL parameters) that can be manipulated
Error Handling and Exception Management	1.All exceptions are handled in a structured manner 2.Error messages are scrubbed so that no sensitive information is revealed to the attacker
User and Session Management	1.No sensitive information is stored in clear text in the cookie 2.Cookies are configured to expire
Auditing and Logging	1.Sensitive information (e.g. passwords, PII) is not logged 2.Integrity controls (e.g. signatures) are enforced on log files to provide non-repudiation

## DREAD Example

The college library website use case:

**Threat:** *Malicious user views confidential information of students, faculty members and librarians.*

- **Damage potential:** Threat to reputation as well as financial and legal liability:8
- **Reproducibility:** Fully reproducible:10
- **Exploitability:** Require to be on the same subnet or have compromised a router:7
- **Affected users:** Affects all users:10
- **Discoverability:** Can be found out easily:10

Overall DREAD score:  $(8+10+7+10+10) / 5 = 9$

In this case having 9 on a 10 point scale is certainly a high risk threat



## MITRE ATT&CK

### Lockheed Martin Cyber Kill Chain

## MITRE ATT&CK

Threat modelling for Web Application and Database System, as per **MITRE ATT&CK** :

- The attacker can access to a client with the web application [TA0001] from the internet.
- Attacker exploits vulnerabilities to run malicious code [TA0002] via attacks such as cross-site scripting.
- Through which, he can login to the application, perhaps even as an administrator [TA0004].
- Attacker may establish persistence so that he will not be booted out [TA0003].
- He operates as a trusted user to evade detection [TA0005].
- Through credential stealing [TA0006], as well as network and host enumeration [TA0007], he can know how to move laterally and pivot through the system [TA0008] towards the crown jewels.
- Then attacker can query from the SQL database to steal desired information [TA0009] [TA0010].

## MITRE ATT&CK

ATT&CK (Adversarial Tactics, Techniques, and Common Knowledge) by the MITRE Corporation is a publicly accessible knowledge base. It can be used for the development of specific threat models. The framework provides a comprehensive matrix of tactics and techniques used by attackers.

ATT&CK consists of 12 tactical categories, which is the “why” of an attack

MITRE ID	Name	Description
TA0001	Initial Access	To enter the system
TA0002	Execution	To run malicious code
TA0003	Persistence	To maintain a foothold
TA0004	Privilege Escalation	To gain higher-level permissions
TA0005	Defence Evasion	To avoid being detected
TA0006	Credential Access	To steal account names and passwords
TA0007	Discovery	To learn about the system environment
TA0008	Lateral Movement	To traverse through the system environment
TA0009	Collection	To gather information of interest
TA0011	Command and Control	To control a compromised system
TA0010	Exfiltration	To steal data
TA0040	Impact	To manipulate, interrupt, or destroy your systems and data

<https://attack.mitre.org/matrices/>

Secure Software Engineering

64

BITS-Pilani

## Lockheed Martin Cyber Kill Chain

The Lockheed Martin Cyber Kill Chain (Kill Chain) framework was derived from military offensive strategy. The framework is a series of well-defined sequence of stages that the attackers are likely to complete in order to achieve their end objective



- Reconnaissance - research, identification, and selection of targets
- Weaponization - pairing malware containing exploits with a deliverable payload e.g. Adobe PDF and Microsoft Office files
- Delivery – transmitting the weapon to the target e.g. via email attachments, websites, or USB drives
- Exploitation - once delivered, the weapon's code is triggered, exploiting vulnerable applications or systems
- Installation - the weapon may install a backdoor on a target's system allowing persistent access
- Command and Control (C2) – malicious external servers communicate with the system through call-backs e.g. remote shell
- Actions on Objective - attacker works to reach the crown jewels and achieve the objective of the intrusion e.g. exfiltration or destruction of data, disruption of processes

<https://www.lockheedmartin.com/en-us/capabilities/cyber/cyber-kill-chain.html>

Secure Software Engineering

66

BITS-Pilani

<https://www.enisa.europa.eu/publications/cyber-security-and-resilience-for-smart-hospitals>



## Privacy Threat Modelling LINDDUN

## LINDDUN

LINDDUN was created at KU Research University, Belgium

It is Systematic elicitation and mitigation of privacy. LINDDUN Stands for

- Linkability,
- Identifiability,
- Non-Repudiation,
- Detectability,
- Disclosure of Information,
- Unawareness,
- Non-Compliance

## LINDDUN


- Linkability - Being able to sufficiently distinguish whether 2 IOI (items of interest) are linked or not, even without knowing the actual identity of the subject of the linkable IOI
- Identifiability - Being able to sufficiently identify the subject within a set of subjects (i.e. the anonymity set) Or Not being able to hide the link between the identity and the IOI (an action or piece of information).
- Non-Repudiation – works differently in the context of privacy
- Detectability - An attacker can sufficiently distinguish whether an item of interest (IOI) exists or not
- Disclosure of Information - Exposing information to someone not authorized to see it.
- Unawareness - Not understanding the consequences of sharing personal information in the past, present, or future.
- Non-Compliance - Not following the (data protection) legislation, the advertised policies or the existing user consents

## Non-Repudiation in Privacy context

- In the context of privacy, non-repudiation works differently from a financial transaction perspective.
- Privacy context expects that attacker can not prove
  - Typical non-repudiation examples exist e.g.
    - Anonymous online voting systems, and
    - Whistleblowing systems
  - where plausible deniability is required
- Non-repudiation is actually a security goal, for many systems (e.g. systems where payments are involved)

## LINDDUN

LINDDUN provides a systematic approach to privacy assessment, consisting of 6 steps

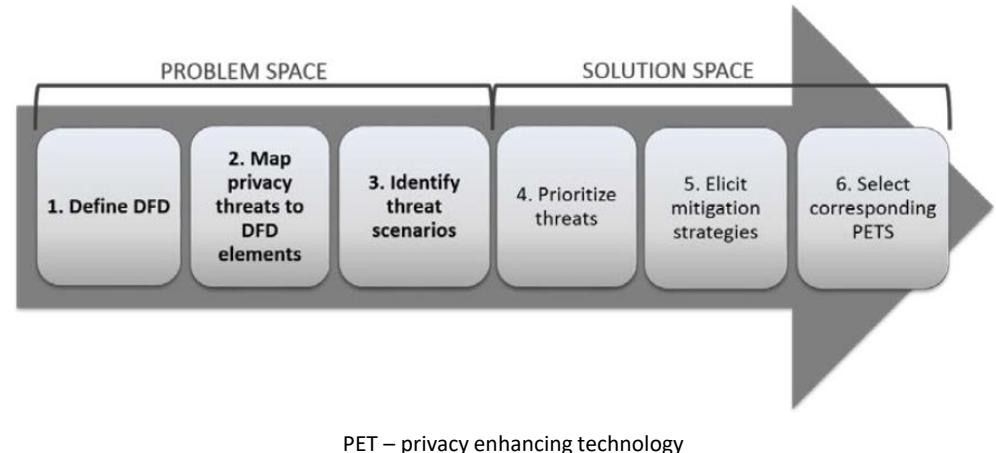

## More Methods of Threat Modeling

<https://resources.sei.cmu.edu/library/asset-view.cfm?assetid=524448>

## References

Threat Modelling by Adam Shostack, John Wiley 2014  
Security in Computing by Charles P. Pfleeger, Shari L. Pfleeger, and Deven Shah Pearson Education 2009  
Computer Security: Principles and Practice by William Stallings, and Lawrie Brown Pearson, 2018.  
[www.owasp.com](http://www.owasp.com)  
[https://owasp.org/www-community/Threat\\_Modeling\\_Process](https://owasp.org/www-community/Threat_Modeling_Process)  
[sei.cmu.edu](http://sei.cmu.edu)  
[www.microsoft.com](http://www.microsoft.com)  
[www.ibm.com](http://www.ibm.com)

# Thank You!



- The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.
- I have added and modified slides to suit the requirements of the course.



A large, light-colored stone clock tower with a red roof and two circular clock faces. The tower is set against a clear blue sky. The image is framed by a dark border at the top and bottom, with a thin red line on the right side.

SE/SS ZG566

**Secure Software Engineering**

T V Rao

**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

## Security Requirements Engineering

## What is a requirement?

It may range from a high-level abstract statement of a service or of a system constraint to a detailed mathematical functional specification.

This is because requirements serve dual function

- May be the basis for a bid for a contract - therefore must be open to interpretation;
- May be the basis for the contract itself - therefore must be defined in detail;
- Both these statements may be called requirements.

2/15/2025

February 15, 2025

Sommerville, I., Software Engineering, Pearson Education, 9th Ed., 2010

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## What is a "Requirement"

*A requirement is a need, expectation, constraint or interface of any stakeholders that must be fulfilled by the proposed software product during its development*

- **Need**—It is something basic without which the existence becomes untenable. It is the absolute minimum necessity if the system is to be useful
- **Expectation**—Expectation is an unstated need. It is expected that the development team brings expertise of software to bridge the gap in the needs stated by the user
- **Constraint**—It is a hurdle that the user has to live with
- **Interface**—It is the basis for interaction with the customers, suppliers, and peers of the user
- **Stakeholders**—A stakeholder is someone who is affected by the outcome of a endeavor, viz. end user, project team, marketing team to sell product, management

## What is a "Requirement"

When the end result of the software development activity is a COTS (Commercial Off The Shelf) product, we term requirements as product specifications.

When the end result of the software development activity is to deliver the product to a single client in a project scenario, we use the term requirements

2/15/2025

Requirements Engineering and Management for Software Development Projects by Murali Chemuturi Springer © 2013

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Importance of Requirements Engineering

Some studies have shown that requirements engineering defects cost 10 to 200 times as much to correct once the system has become operational than if they were detected during requirements development.

According to Charette[2005], Requirements problems are among the top causes of the following undesirable phenomena

- Projects are significantly over budget, go past schedule, have significantly reduced scope, or are cancelled
- Development teams deliver poor-quality applications
- Products are not significantly used once delivered

# Requirements Engineering Overview

**Inception**—ask a set of questions that establish ...

- basic understanding of the problem
- the people who want a solution
- the nature of the solution that is desired, and
- the effectiveness of preliminary communication and collaboration between the customer and the developer

**Elicitation**—elicit requirements from all stakeholders

**Elaboration**—create an analysis model that identifies data, function and behavioral requirements

**Negotiation**—agree on a deliverable system that is realistic for developers and customers

**Specification**—can be any one (or more) of the following:

- A written document
- A set of graphical models
- A formal mathematical model
- A collection of user scenarios (use-cases)
- A prototype

**Validation**—a review mechanism that looks for

- errors in content or interpretation
- areas where clarification may be required
- missing information
- inconsistencies (a major problem when large products or systems are engineered)
- conflicting or unrealistic (unachievable) requirements.

**Requirements management**


February 15, 2025

Secure Software Engineering

8

BITS-Pilani

## Eliciting Requirements

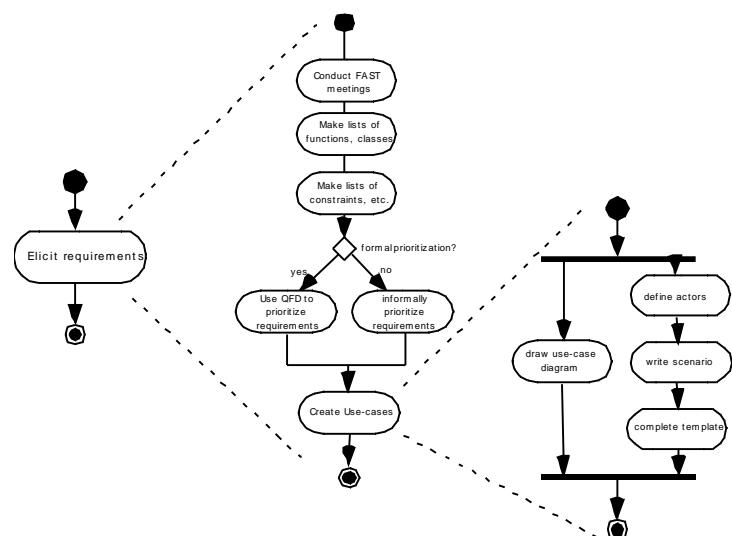

February 15, 2025

Secure Software Engineering

10

BITS-Pilani

## Eliciting Requirements

- Meetings are conducted and attended by both software engineers and customers
- Rules for preparation and participation are established
- An agenda is suggested
- A "facilitator" (can be a customer, a developer, or an outsider) controls the meeting
- A "definition mechanism" (can be work sheets, flip charts, or wall stickers or an electronic bulletin board, chat room or virtual forum) is used
- The goal is
  - to identify the problem
  - propose elements of the solution
  - negotiate different approaches, and
  - specify a preliminary set of solution requirements

February 15, 2025

Secure Software Engineering

9

BITS-Pilani

## Quality Function Deployment

-Dr Yoji Akao et al (1966)

*QFD is a focused methodology for carefully listening to the voice of the customer and then effectively responding to those needs and expectations – American Society for Quality*

QFD translates needs of customer into technical requirements for software

**Function deployment** determines the “value” (as perceived by the customer) of each function required of the system

A requirement may be

- Normal - Stated
- Expected - Implicit
- Exciting - Beyond the above two

**Information deployment** identifies data objects and events

**Task deployment** examines the behavior of the system

**Value analysis** determines the relative priority of requirements

February 15, 2025

Secure Software Engineering

11


BITS-Pilani

## Requirements Engineering Challenges

Requirements Engineering on individual projects often suffers from the following problems:

- Requirements identification typically does not include all relevant stakeholders and does not use the most modern or efficient techniques.
- Requirements are often statements describing architectural constraints or implementation mechanisms rather than statements describing what the system must do.
- Requirements are often directly specified without any analysis or modeling. When analysis is done, it is usually restricted to functional end-user requirements, ignoring
  - 1) quality requirements such as security,
  - 2) other functional and nonfunctional requirements, and
  - 3) architecture, design, implementation, and testing constraints.

## Elicitation is not easy

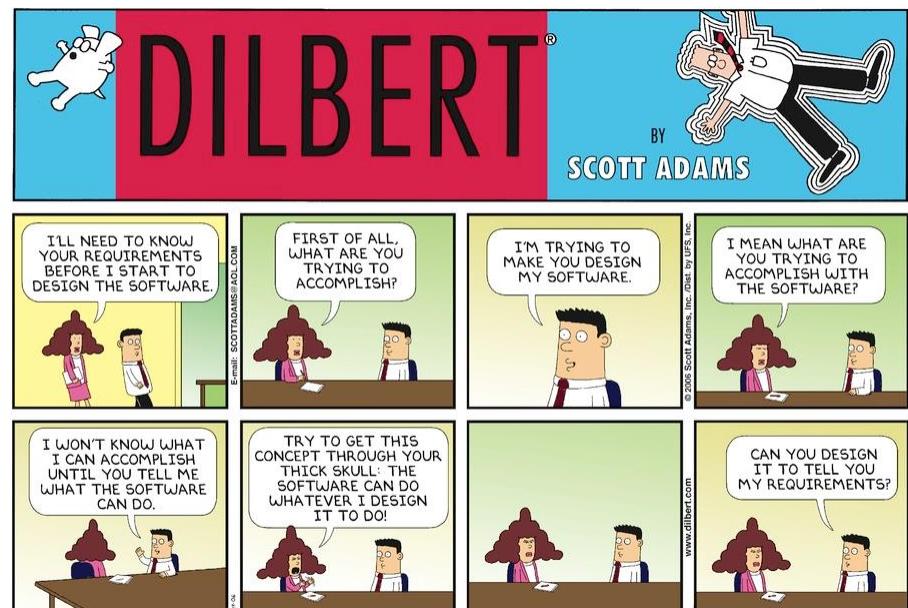

## Requirements Engineering Challenges

Requirements specification is typically haphazard, with specified requirements being

- ambiguous,
- incomplete (e.g., nonfunctional requirements are often missing),
- inconsistent,
- not cohesive,
- infeasible,
- obsolete,
- neither testable nor capable of being validated, and
- not usable by all of their intended audiences.

Requirements management is typically weak, with ineffective forms of data capture

- e.g., in one or more documents (rather than in a database or tool) and missing attributes.
- often limited to tracing, scheduling, and prioritization, without change tracking or other configuration management.

## Quality Requirements

Project teams often neglect *quality* requirements, such as performance, safety, security, reliability, and maintainability.

- Developers of certain kinds of mission-critical systems and systems in which human life is involved, such as the space shuttle, have long recognized the importance of quality requirements and have accounted for them in software development.
- In many other systems, however, quality requirements are treated in an inadequate way. Hence we see the failure of software associated with power systems, telephone systems, unmanned spacecraft, and so on.

This inattention to quality requirements is exacerbated by the desire to keep costs down and meet aggressive schedules.

## Security Requirements Engineering

According to BSI[09], if security requirements are not effectively defined, the resulting system cannot be **evaluated** for success or failure prior to its implementation

Operational environments and business goals often change **dynamically**, with the result that security requirements development is not a one-time activity.

Requirements engineering research and practice pay a lot of attention to the functionality of the system from the user's perspective, but little attention is devoted to what the system should **not** do [Bishop 2002]

## Security Is Not a Set of Features

Security features such as password protection, firewalls, virus detection tools etc. are, in fact, not security requirements.

They are rather implementation mechanisms that are intended to satisfy unstated requirements, such as authenticated access

A systematic approach to security requirements engineering will help avoid the problem of generic lists of features and take into account the attacker's perspective.

No convenient security pull-down menu that will let you select "security" and do the needful.

## Security Requirements Engineering

Users have implicit assumptions for the software applications and systems to be secure and are surprised when they are not. These user assumptions need to be translated into security requirements for the software systems when they are under development.

It is important for requirements engineers to think about the attacker's perspective and not just the functionality of the system from the end-user's perspective.

- An attacker is not particularly interested in functional features of the system, unless they provide an avenue for attack. Instead, the attacker typically looks for defects and other conditions outside the norm that will allow a successful intrusion to take place.

## Security Is Not a Set of Features

Security is an **emergent** property of a system, not a feature

Because security is not a feature, it cannot be bolted on after other software features are codified, nor can it be **patched** in after attacks have occurred in the field. Instead, security must be built into the product from the ground up

Most cost-effective approach to software security incorporates thinking beyond normative features and maintains that thinking throughout the development process

Every time a new requirement, feature, or use case is created, the developer or security specialist should spend some time thinking about how that feature might be unintentionally misused or intentionally abused

## Thinking Beyond Normal

When we design and analyze a system, we're in a great position to know our systems better than potential attackers do.

We can leverage this knowledge to the benefit of security and reliability, by asking and answering the critical questions:

- Which assumptions are implicit in our system?
- Which kinds of things make our assumptions false?
- Which kinds of attack patterns will an attacker bring to bear?

## Thinking like an attacker

System's creators are not the best security analysts of that system.

'Thinking like an attacker' is extremely difficult for those who have built up a set of implicit assumptions

System Creators make excellent subject matter experts (SMEs).

Together, SMEs and security analysts can ferret out base assumptions in a system under analysis and think through the ways an attacker will approach the software

## Creating Useful Misuse Cases

Misuse cases is to decide and document *a priori* how software should react to illegitimate use

Unlike the functional requirements, designers/developers play the role of user and explain design and underlying assumptions to security experts

To guide brainstorming, software security experts ask many questions of a system's designers to help identify the places where the system is likely to have weaknesses. This activity mirrors the way attackers think.

The brainstorming covers user interfaces, environmental factors, and events that developers assume a person can't or won't do

- "Users can't enter more than 50 characters because the JavaScript code won't let them"
- "Users don't understand the format of the cached data, so they can't modify it."

## Misuse vs. Abuse

According to Chun Wei,

Misuse cases are defined as "behavior that the system/entity owner does not want to occur"

- An interaction results in a session key being revealed to an actor who should not see the session key

Abuse cases are defined as "... where the results of the interaction are harmful to the system ..."

- the actor posts the session key on a public website, then an abuse case takes place

But some authors do not distinguish

## Specifying Abuse Cases

The process of specifying abuse cases makes a designer very clearly differentiate appropriate use from inappropriate use.

The security expert/designer must ask the right questions:

- How can the system distinguish between good input and bad input?
- Can it tell whether a request is coming from a legitimate application or from a rogue application replaying traffic?
- where might a bad guy be positioned? On the wire? At a workstation? In the back office?
- Any communication line between two endpoints or two components is a place where an attacker might try to interpose himself or herself
- what can this attacker do in the system? Watch communications traffic? Modify and replay such traffic? Read files stored on the workstation? Change registry keys or configuration files? Be the DLL?

Trying to answer such questions helps software designers explicitly question design and architecture assumptions, and it puts the designer squarely ahead of the attacker by identifying and fixing a problem before it's ever created.



## CMU SQUARE Process Model

## SQUARE Process Model

Security Quality Requirements Engineering (SQUARE) is a process model that was developed at Carnegie Mellon University [Mead 2005].

SQUARE provides a means for eliciting, categorizing, and prioritizing security requirements for information technology systems and applications.

The focus of the model is to build security concepts into the early stages of the SDLC. It can also be used for documenting and analyzing the security aspects of systems once they are implemented in the field and for steering future improvements and modifications to those systems.

The SQUARE work is supported by the Army Research Office through grant ("Perpetually Available and Secure Information Systems") to Carnegie Mellon University's CyLab.

## SQUARE Process Steps

1. Agree on definitions
2. Identify security goals
3. Develop artifacts to support security requirements definition
4. Perform (security) risk assessment
5. Select elicitation techniques
6. Elicit security requirements
7. Categorize requirements as to level (e.g., system, software) and whether they are requirements or other kinds of constraints
8. Prioritize requirements
9. Inspect requirements

## SQUARE Process Steps

No	Step	Input	Techniques	Participants	Output
1	Agree on definitions	Candidate definitions from IEEE and other standards	Structured interviews, focus group	Stakeholders, requirements engineers	Agreed-to definitions
2	Identify security goals	Definitions, candidate goals, business drivers, policies and procedures, examples	Facilitated work session, surveys, interviews	Stakeholders, requirements engineers	Goals
3	Develop artifacts to support security requirements definition	Potential artifacts list (e.g., scenarios, misuse cases, templates, forms)	Work session	Requirements engineers	Needed artifacts: scenarios, misuse cases, models, templates, forms

## SQUARE Process Steps

No	Step	Input	Techniques	Participants	Output
4	Perform (security) risk assessment	Misuse cases, scenarios, security goals	Risk assessment method, analysis of anticipated risk against organizational risk tolerance, including threat analysis	Requirements engineers, risk expert, stakeholders	Risk assessment results
5	Select elicitation techniques	Goals, definitions, candidate techniques, expertise of stakeholders, organizational style, culture, level of security needed, cost-benefit analysis	Work session	Requirements engineers	Selected elicitation techniques

## SQUARE Process Steps

No	Step	Input	Techniques	Participants	Output
6	Elicit security requirements	Artifacts, risk assessment results, selected techniques	QFD, Joint Application Development, interviews, surveys, model based analysis, checklists, lists of reusable requirements types, document reviews	Stakeholders facilitated by requirements engineers	Initial cut at security requirements
7	Categorize requirements as to level (e.g., system, s/w ) and whether they are requirements or other kinds of constraints	Initial requirements, architecture	Work session using a standard set of categories	Requirements engineers, other specialists as needed	Categorized requirements

## SQUARE Process Steps

No	Step	Input	Techniques	Participants	Output
8	Prioritize requirements	Categorized requirements and risk assessment results	Prioritization methods such as Analytical Hierarchy Process (AHP - structured technique for organizing information) etc.	Stakeholders facilitated by requirements engineers	Prioritized requirements
9	Inspect requirements	Prioritized requirements, candidate formal inspection technique	Inspection method such as Fagan (formal approach with exit criteria) and peer reviews	Inspection team	Initial selected requirements, documentation of decision-making process and rationale



## CMU SQUARE Work Products

### Attack Patterns

Attack patterns are descriptions of common methods for exploiting software. Act as a mechanism to capture and communicate the attacker's perspective.

They derive from the concept of design patterns [Gamma 95] applied in a destructive rather than constructive context and are generated from in-depth analysis of specific real-world exploit examples

The following typical information is captured for each attack pattern:

- |  |                                 |
|--|---------------------------------|
| • Pattern name and classification        | • Attacker skill level required |
| • Attack prerequisites                   | • Resources required            |
| • Description                            | • Blocking solutions            |
| • Targeted vulnerabilities or weaknesses | • Context description           |
| • Method of attack                       | • References                    |
| • Attacker goal                          |                                 |

### Sample: Identify Security Goals

Work with the client to identify security goals that mapped to the company's overall business goals.

Consider Asset Management System (AMS) of Acme Co.

*Business goal of AMS:* To provide an application that supports asset management and planning.

*Security goals:* Three high-level security goals were derived for the system:

- Management shall exercise effective control over the system's configuration and use.
- The confidentiality, accuracy, and integrity of the AMS shall be maintained.
- The AMS shall be available for use when needed.

### Attack Patterns

- **Pattern Name and Classification:** A unique, descriptive identifier for the pattern.
- **Attack Prerequisites:** What conditions must exist or what functionality and what characteristics must the target software have, or what behavior must it exhibit, for this attack to succeed?
- **Description:** A description of the attack including the chain of actions taken.
- **Related Vulnerabilities or Weaknesses:** What specific vulnerabilities or weaknesses does this attack leverage?
- **Method of Attack:** What is the vector of attack used (e.g., malicious data entry, maliciously crafted file, protocol corruption etc.)?

## Attack Patterns

- **Attack Motivation-Consequences:** What is the attacker trying to achieve by using this attack?
- **Attacker Skill or Knowledge Required:** What level of skill or specific knowledge must the attacker have to execute such an attack?
- **Resources Required:** What resources (e.g., CPU cycles, IP addresses, tools, time) are required to execute the attack?
- **Solutions and Mitigations:** What actions or approaches are recommended to mitigate this attack, either through resistance or through resiliency?
- **Context Description:** In what technical contexts (e.g., platform, OS, language, architectural paradigm) is this pattern relevant? This information is useful for selecting a set of attack patterns that are appropriate for a given context.
- **References:** What further sources of information are available to describe this attack?


## Attack Pattern Example

- **Pattern name and classification:** Shell Command Injection—Command Delimiters.
- **Attack Prerequisites:** The application must pass user input directly into a shell command.
- **Description:** Using the semicolon or other off-nominal characters, multiple commands can be strung together. Unsuspecting target programs will execute all the commands. An example may be when authenticating a user using a web form, where the username is passed directly to the shell as in: exec( "cat data\_log\_" + userInput + ".dat").
  - The "+" sign denotes concatenation. The developer expects that the user will only provide a username. However, a malicious user could supply "username.dat; rm -rf /;" as the input to execute the malicious commands on the machine running the target software. In the above case, the actual commands passed to the shell will be: cat data\_log\_username.dat; rm -rf /; .dat
  - The first command may or may not succeed; the second command will delete everything on the file system to which the application has access, and success/failure of the last command is irrelevant.


## Attack Pattern Example

- **Related Vulnerabilities or Weaknesses:** : CWE-OS Command Injection, CVE-1999-0043, CVE-1999-0067, CVE-1999-0097, CVE-1999-0152, CVE-1999-0210, CVE-1999-0260, 1999-0262, CVE-1999-0279, CVE-1999-0365, etc.
- **Method of Attack:** By injecting other shell commands into other data that are passed directly into a shell command.
- **Attack Motivation-Consequences:** Execution of arbitrary code.
- **Attacker Skill or Knowledge Required:** Finding and exploiting this vulnerability does not require much skill.
- **Resources Required:** No special or extensive resources are required for this attack.
- **Solutions and Mitigations:** Define valid inputs to all fields and ensure that the user input is always valid. Also perform white-list and/or black-list filtering as a backup to filter out known command delimiters.
- **Context Description:** OS: UNIX.
- **References:** Exploiting Software [Hoglund 04].


## A Threat Tree Example

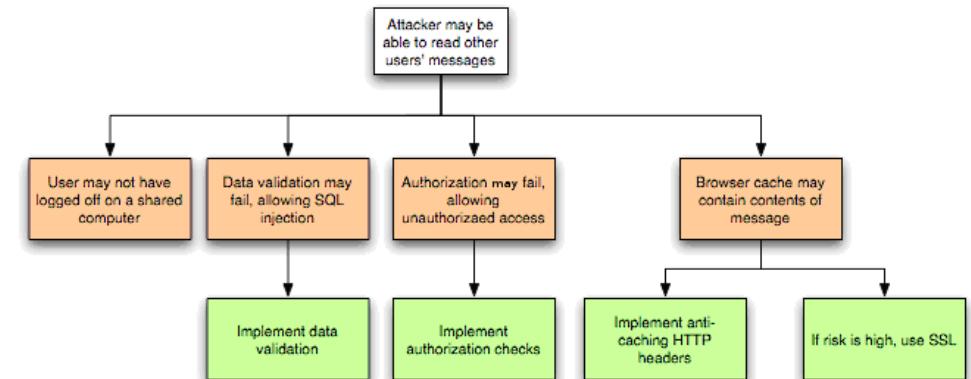

## Use Case with Abuse Case

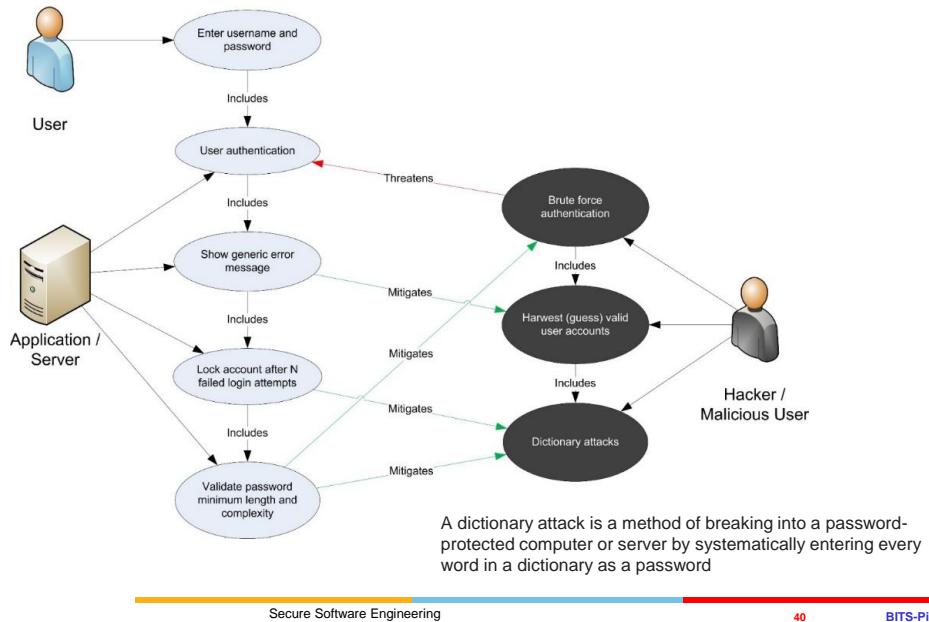

## Abuse case example

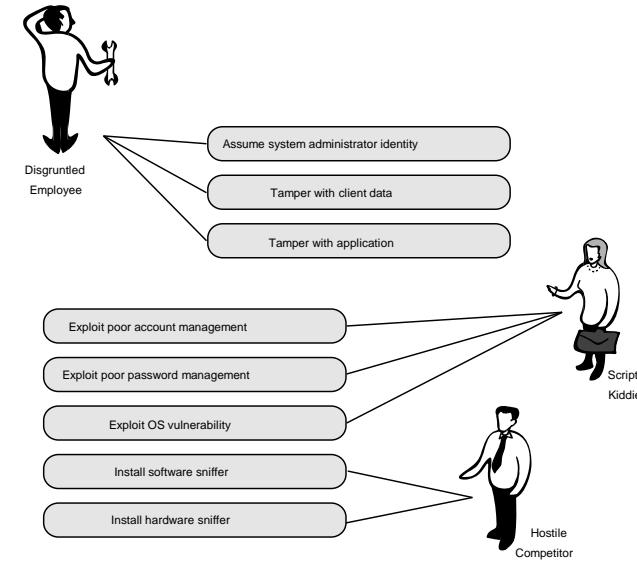

## Sample: Perform Risk Assessment

There are two essential assets in this system.

- The first is the Windows Server computer, which houses the majority of the production system's intellectual assets (that is, the code that runs the system). This computer acts as a server that allows remote users to access the Asset Management System.
- The second essential asset is the information inside the Windows Server computer—specifically, the files stored in the Microsoft IIS server and the information stored in the Sybase database and MapGuide database are critical for making informed decisions. If this information is lost or compromised, the ability to make accurate decisions is lost.

## Elicitation Methods


- Misuse/Abuse cases:
  - Misuse/abuse cases apply the concept of a negative scenario—that is, a situation that the system's owner does not want to occur—in a use-case context. Business leaders, military planners, and game players are familiar with the strategy of analyzing their opponents' best moves as identifiable threats
- QFD
  - As per Dr. Yoji Akao, who originally developed Quality Function Deployment (QFD) in Japan in 1966, it is a “method to transform qualitative user demands into quantitative parameters, to deploy the functions forming quality, and to deploy methods for achieving the design quality into subsystems and component parts, and ultimately to specific elements of the process”
- Joint Application Development (JAD)
  - The JAD methodology [Wood 1995] involves all stakeholders via highly structured and focused meetings. In the preliminary phases of JAD, the requirements engineering team is charged with fact-finding and information-gathering tasks. Typically, the outputs of this phase, as applied to security requirements elicitation, are security goals and artifacts. The actual JAD session is then used to validate this information by establishing an agreed-on set of security requirements for the product.

## Sample: Elicit and Categorize Security Requirements

Security requirements are identified and then organized to map to the high-level security goals (from Step 2).

Examples include :


- Requirement 1: The system is required to have strong authentication measures in place at all system gateways and entrance points (maps to Goals 1 and 2).
- Requirement 2: The system is required to have sufficient means to govern which system elements (e.g., data, functionality) users can view, modify, and/or interact with (maps to Goals 1 and 2).
- Requirement 3: A continuity of operations plan (COOP) is required to assure system availability (maps to Goal 3).

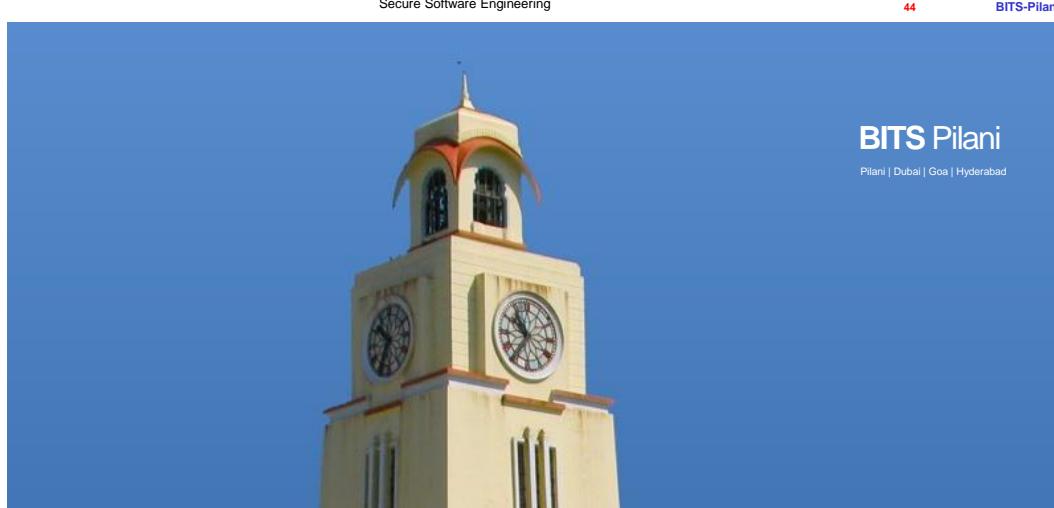

## OWASP Recommendations

## Incorporating SQUARE in SDLC

- All nine steps of SQUARE fall under the requirements analysis and specification phase.
- The software requirements specification (SRS) should accommodate the outcome of the first eight SQUARE steps
  - The SRS must clearly specify the security definitions agreed on (Step 1). It is necessary to document security goals (Step 2) along with the project goals and constraints. Develop artifacts (Step 3) such as misuse cases and scenarios to support security requirements definition
  - Categorize the security requirements (Step 7) and prioritize them (Step 8) along with documented functional requirements. (For clarity, it is preferable to separate security requirements from functional requirements.)



## OWASP SAMM

SAMM (Security Assessment Maturity Model) divides activities associated with software development into 5 business functions for incorporating security

- Governance
  - Includes strategy, metrics, policy, compliance, education and guidance
- Design
  - Includes threat assessment, security requirements, and secure architecture
- Implementation
  - Includes secure build, secure deployment, and defect management
- Verification
  - Includes design review, implementation review, and security testing
- Operations
  - Includes issue management, environment hardening, operational enablement



## SAMM Security Requirements

SAMM expects the following as part of security requirements:

- Consider security explicitly during the software requirements process
- Increase granularity of security requirements derived from business logic and known risks.
- Mandate security requirements process for all software projects and third-party dependencies.

### Consider security explicitly – SR1

(during the software requirements process)

Goal	Activities	Quality Criteria
Consider security explicitly during the software requirements process.	Identify security requirements	<ul style="list-style-type: none"><li>• Teams derive security requirements from functional requirements and customer or organization concerns</li><li>• Security requirements are specific, measurable, and reasonable</li><li>• Security requirements are in line with the organizational baseline</li></ul>
	Perform vendor assessments	<ul style="list-style-type: none"><li>• Consider including specific security requirements, activities, and processes when creating third-party agreements</li><li>• A vendor questionnaire is available and used to assess the strengths and weaknesses of your suppliers</li></ul>

### Increase granularity – SR2

(of security requirements derived from business logic and known risks)

Goal	Activities	Quality Criteria
Increase granularity of security requirements derived from business logic and known risks.	Standardize and integrate security requirements	<ul style="list-style-type: none"><li>• Security requirements take into consideration domain specific knowledge when applying policies and guidance to product development</li><li>• Domain experts are involved in the requirements definition process</li><li>• You have an agreed upon structured notation for security requirements</li><li>• Development teams have a security champion dedicated to reviewing security requirements and outcomes</li></ul>
	Discuss security responsibilities with suppliers	<ul style="list-style-type: none"><li>• You discuss security requirements with the vendor when creating vendor agreements</li><li>• Vendor agreements provide specific guidance on security defect remediation within an agreed upon timeframe</li><li>• The organization has a templated agreement of responsibilities and service levels for key vendor security processes</li><li>• You measure key performance indicators</li></ul>

### Mandate security requirements process – SR3


(for all software projects and third-party dependencies)

Goal	Activities	Quality Criteria
Mandate security requirements process for all software projects and third-party dependencies.	Develop a security requirements framework	<ul style="list-style-type: none"><li>• A security requirements framework is available for project teams</li><li>• The framework is categorized by common requirements and standards-based requirements</li><li>• The framework gives clear guidance on the quality of requirements and how to describe them</li><li>• The framework is adaptable to specific business requirements</li></ul>
	Align security methodology with suppliers	<ul style="list-style-type: none"><li>• The vendor has a secure SDLC that includes secure build, secure deployment, defect management, and incident management that align with those used in your organization</li><li>• You verify the solution meets quality and security objectives before every major release</li><li>• When standard verification processes are not available, you use compensating controls such as software composition analysis and independent penetration testing</li></ul>

## Assessment Matrix for Security Requirements

Score ->	0.0	0.2	0.5	1.0
Do project teams specify security requirements during development?	No	Yes, for some applications	Yes, for at least half of the applications	Yes, for most or all of the applications
Do stakeholders review vendor collaborations for security requirements and methodology?	No	Yes, some of the time	Yes, at least half of the time	Yes, most or all of the time
Do you define, structure, and include prioritization in the artifacts of the security requirements gathering process?	No	Yes, some of the time	Yes, at least half of the time	Yes, most or all of the time
Do vendors meet the security responsibilities and quality measures of service level agreements defined by the organization?	No	Yes, some of the time	Yes, at least half of the time	Yes, most or all of the time
Do you use a standard requirements framework to streamline the elicitation of security requirements?	No	Yes, for some applications	Yes, for at least half of the applications	Yes, for most or all of the applications
Are vendors aligned with standard security controls and software development tools and processes that the organization utilizes?	No	Yes, some of the time	Yes, at least half of the time	Yes, most or all of the time

## Security Development Lifecycle (SDL)

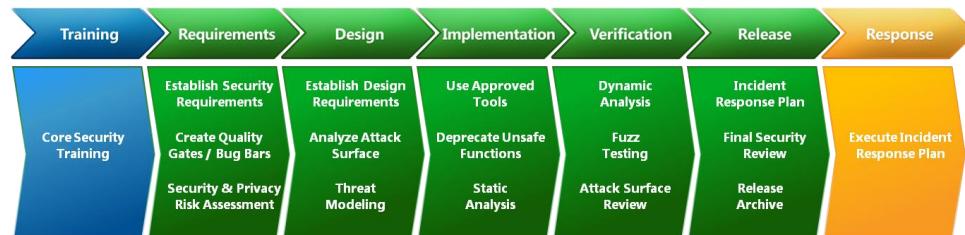

## SDL Recommendations

### SDL Requirements Phase

The Requirements phase of the SDL includes

- Project Inception—when you consider security and privacy at a foundational level
  - Development teams identify key objectives and integrate security and privacy to minimize disruption to plans and schedules
- Cost analysis—when you determine if development and support costs for improving security and privacy are consistent with business needs.

## SDL Requirements Practices

The major SDL practices during requirements analysis are

- Establish Security & Privacy Requirements
- Create Quality Gates/Bug Bars
- Create Security/Privacy Risk Assessments

## Create Quality Gates/Bug Bars

Defining minimum acceptable levels of security and privacy quality

- the team understand risks associated with security issues,
- Team identifies and fixes security bugs during development, and
- Team apply the standards throughout the entire project.

Set a bug bar to clearly define the severity thresholds of security vulnerabilities

- (for example, no known vulnerabilities in the application with a “critical” or “important” rating at time of release)

When should this practice be implemented?

- Traditional Software development: Requirements Phase
- Agile development: One Time

## Establish Security & Privacy Requirements

Define and integrate security and privacy requirements early

- identify key milestones and deliverables and minimize disruptions to plans and schedules.

Security and privacy analysis including

- assigning security experts,
- defining minimum security and privacy criteria for an application, and
- deploying a security vulnerability/work item tracking system.

When should this practice be implemented?

- Traditional Software development: Requirements Phase
- Agile development: One Time

## Security/Privacy Risk Assessments

Identify portions of a project requiring threat modeling and security design reviews before release

Determine the Privacy Impact Rating of a feature, product, or service

When should this practice be implemented?

- Traditional Software development: Requirements Phase
- Agile development: One Time

## SDL - Agile

- SDL was developed by Microsoft for securing very large products, such as Windows and Microsoft Office
- The SDL team at Microsoft developed an approach that melds agile methods and security—the Security Development Lifecycle for Agile Development (SDL-Agile)
- There is a need to reconcile
  - Agile release cycles are short, there isn't enough time for teams to complete all of the SDL requirements for every release
  - There are serious security issues that the SDL is designed to address, and these issues simply can't be ignored for any release

## Every-Sprint Requirements

- SDL requirements that are so essential to security that no software should ever be released without these requirements being met
- Examples are:
  - Run analysis tools daily or per build
  - Threat model all new features
  - Ensure that each project member has completed at least one security training course

Appendix P of Microsoft-SDL V5.2

## SDL-Agile Requirements

- SDL requirements are represented as tasks and added to the product and sprint backlogs
- SDL tasks are added to the backlog as non-functional stories
- SDL-Agile places each SDL requirement into one of three categories defined by frequency of completion
  - Every-sprint requirements - that are so essential to security that no software should ever be released without these requirements being met
  - Bucket Requirements - tasks that must be performed on a regular basis over the lifetime of the project but that are not so critical as to be mandated for each sprint
  - One-Time Requirements - that need to be met when starting a new project with SDL-Agile

## Bucket Requirements

- Consists of tasks that must be performed on a regular basis over the lifetime of the project but that are not so critical as to be mandated for each sprint
- The table below contains a sampling of the tasks

Verification Tasks	Design Review	Planning
ActiveX fuzzing	Conduct a privacy review	Create privacy support documents
Attack surface analysis	Review crypto design	Update security response contacts
Binary analysis (BinScope)	Assembly naming and APTCA	Update network down plan
File fuzz testing	User Account Control	Define/update security bug bar

- Appendix Q of Microsoft-SDL V5.2

## One-Time Requirements

- SDL requirements that need to be met when you start a new project with SDL-Agile
- SDL-Agile allows a grace period to complete each one-time requirement. The period generally ranges from one month to one year after the start of the project
- For example,
  - Choosing a security advisor has a one-month completion deadline,
  - Updating your project to use the latest version of the compiler is considered a potentially long, difficult task and has a one-year completion deadline
- Appendix R of Microsoft-SDL V5.2

Software Security Engineering, Julia H. Allen, et al, Pearson, 2008

Security in Computing by Charles P. Pfleeger, Shari L. Pfleeger, and Deven Shah  
Pearson Education 2009

Computer Security: Principles and Practice by William Stallings, and Lawrie Brown Pearson, 2018.

[www.owasp.com](http://www.owasp.com)

[sei.cmu.edu](http://sei.cmu.edu)

[www.microsoft.com](http://www.microsoft.com)

# Thank You!



**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

SE/SS ZG566

## Secure Software Engineering

T V Rao



- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Nomenclature (SWEBOK)

Software design is the activity that uses software requirements to produce a description of the software's internal structure that will serve as the basis for its construction

Software design consists of two activities :

- Software architectural design (sometimes called high-level design): develops top-level structure and organization of the software and identifies the various components.
- Software detailed design: specifies each component in sufficient detail to facilitate its construction.

## Secure Architecture & Design - Introduction

### Understanding Software Architecture

The software architecture of a program or computing system is the structure or structures of the system which comprise

- The software components
- The externally visible properties of those components
- The relationships among the components

Software architectural design represents the structure of the data and program components that are required to build a computer-based system

An architectural design model is transferable

- It can be applied to the design of other systems
- It represents a set of abstractions that enable software engineers to describe architecture in predictable ways

## Importance of Software Architecture

- Representations of software architecture are an enabler for communication between all stakeholders interested in the development of a computer-based system
- The software architecture highlights early design decisions that will have a profound impact on all software engineering work that follows and, as important, on the ultimate success of the system as an operational entity
- The software architecture constitutes a relatively small, intellectually graspable model of how the system is structured and how its components work together

## General Objectives of Software Architecture and Design

### Completeness

- Supports the full scope of the defined requirements

### Stability

- Consistently performs as intended within its defined operational context

### Flexibility

- Can adapt to changing conditions
- Decompose such that selected components can be replaced going forward with minimal impact to the software

### Extensibility

- Leverages industry standards
- Long-lived and resistant to obsolescence

### Scalability

- Operates effectively at any size and load

## Uses of software architecture descriptions

- **Reuse:** Architecture descriptions can help software reuse.
  - The software engineering world has, for a long time, been working towards a discipline where software can be assembled from parts that are developed by different people and are available for others to use.
- **Construction and Evolution:** As architecture partitions the system into parts, some architecture provided partitioning can naturally be used for constructing the system
  - which also requires that the system be broken into parts such that different teams (or individuals) can separately work on different parts.
- **Analysis:** It is highly desirable if some important properties about the behaviour of the system can be determined before the system is actually built.
  - This will allow the designers to consider alternatives and select the one that will best suit the needs.

## Security-Specific Objectives of Software Architecture and Design

### Comprehensive functional security architecture

- Security features and capabilities are fully enabled

### Attack resistance

- Contains minimal security weaknesses that could be exploited

### Attack tolerance

- While resisting attack, software function and capability are not unduly affected

### Attack resilience

- In the face of successful attack, the effects on the software are minimized
- Operates effectively at any size and load

A designer must practice diversification and convergence -[Belady]

- The designer selects from design components, component solutions, and knowledge available through catalogs, textbooks, and experience
- The designer then chooses the elements from this collection that meet the requirements defined by requirements engineering and analysis modeling
- Convergence occurs as alternatives are considered and rejected until one particular configuration of components is chosen

Software design is an iterative process

- As design iteration occurs, refinements lead to design representations at lower levels of abstraction

## Architectural Issues

- Security architecture (the architecture of security components, e.g. firewall, encryption mechanism) is not same as secure architecture (i.e. resilient and resistant to attacks)
- Secure architecture not only must address known weaknesses and attacks, but must be flexible and resilient under changing security conditions
- Architects (and designers) must focus on minimizing the risk profile. It requires complex and diverse knowledge (both on threats and technologies).



## Secure Architecture Risk Analysis

## Architectural Risk Analysis

- The risk assessment methodology encompasses six fundamental activity stages:
  - software characterization
  - threat analysis
  - architectural vulnerability assessment
  - risk likelihood determination
  - risk impact determination
  - risk mitigation

## Software Characterization

- Assessing the architectural risks for a software system is easier when the boundaries of the software system are identified, along with the resources, integration points, and information that constitute the system
- The following artifacts may be used for review:
  - software business case
  - functional and non-functional requirements
  - enterprise architecture requirements
  - use case documents
  - misuse and abuse case documents
  - software architecture documents describing logical, physical, and process views
  - data architecture documents
- detailed design documents such as UML diagrams that show behavioral and structural aspects of the system
- software development plan
- transactions
- security architecture documents
- identity services and management architecture documents
- quality assurance plan
- test plan/acceptance plan
- risk list / risk management plan
- problem resolution plan
- issues list
- project metrics
- programming guidelines
- configuration and change management plan
- project management plan
- disaster recovery plan
- system logs
- operational guides

*Idea is to get comprehensive, yet concise picture of the nature of application*

## Known Vulnerability Analysis

- Consider the architecture against a body of known bad practices or known good principles for confidentiality, integrity, and availability
  - e.g., the good principle of "*least privilege*" prescribes that all software operations should be performed with the least possible privilege.
  - Diagram the system's major modules, classes, or subsystems and circle areas of high privilege versus areas of low privilege. Consider the boundaries between these areas and the kinds of communications across those boundaries.

## Architectural Vulnerability Analysis

- Architectural risk analysis examines the preconditions that must be present for vulnerabilities to be exploited and assesses the states that the system may enter upon exploitation.
  - assess vulnerabilities not just at a component or function level, but also at interaction points
  - risk analysis testing can only prove the presence, not the absence, of flaws
- Three activities can guide architectural risk analysis:
  - known vulnerability analysis,
  - ambiguity analysis, and
  - underlying platform vulnerability analysis

## Ambiguity Analysis

- Ambiguity can be a source of vulnerabilities when it exists between requirements or specifications and development.
  - Note places where the requirements are ambiguously stated and the implementation and architecture either disagree or fail to resolve the ambiguity.
    - e.g., a requirement for a web application might state that an administrator can lock an account and the user can no longer log in while the account remains locked. What about sessions for that user that are actively in use at the time the administrator locks the account? Is the user suddenly and forcibly logged out, or is the active session still valid until the user logs out?

- Carry out analysis of the vulnerabilities associated with the application's execution environment including operating system vulnerabilities, network vulnerabilities, platform vulnerabilities, and interaction vulnerabilities resulting from the interaction of components.
- There are web sites that aggregate vulnerability information. These sites and lists should be consulted regularly to keep the vulnerability list current for a given architecture.



## Principles for Secure Design

### Fundamental Design Concepts

Abstraction—data, procedure, control

Patterns—"conveys the essence" of a proven design solution

Separation of concerns—any complex problem can be more easily handled if it is subdivided into pieces

Modularity—compartmentalization of data and function

Information Hiding—controlled interfaces

Functional independence—single-minded function and low coupling

Refinement—elaboration of detail for all abstractions

Aspects—a mechanism for understanding how global requirements affect design

Refactoring—a reorganization technique that simplifies the design

*The beginning of wisdom (for a software engineer) is to recognize the difference between getting program to work, and getting it right*  
— M A Jackson


### Design Principles for Software Security

- Securing the Weakest Link
- Defense in Depth
- Failing Securely
- Least Privilege
- Separation of Privilege
- Economy of Mechanism
- Least Common Mechanism
- Reluctance to Trust
- Never Assuming that your Secrets are Safe
- Complete Mediation
- Psychological Acceptability
- Promoting Privacy

## Securing the Weakest Link

- A software security system is only as secure as its weakest component
- Some cryptographic algorithms can take many years to break, but the endpoints of communication (e.g., servers) may be much easier to attack.
- Attackers don't attack a firewall unless there's a well-known vulnerability in the firewall itself (something all too common, unfortunately). They'll try to break the applications that are visible through the firewall, since these applications tend to be much easier targets
- Sometimes it's not the software that is the weakest link in your system; e.g., consider social engineering, an attack in which a bad guy uses social manipulation to break into a system

## Securing the Weakest Link

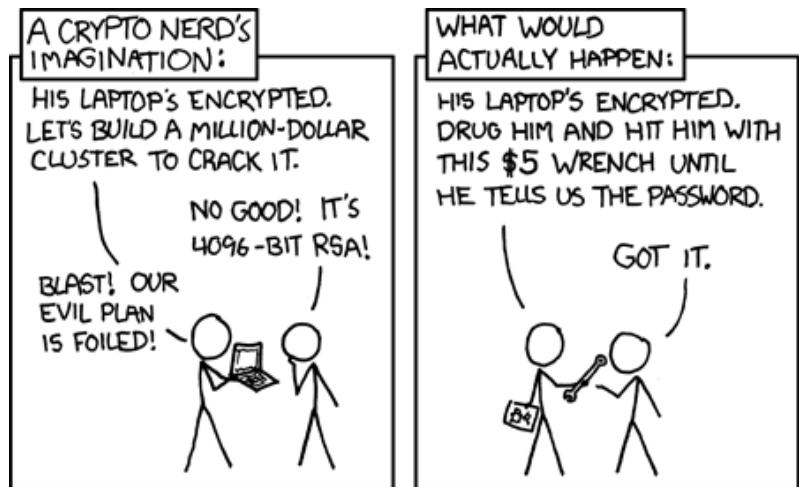

<https://xkcd.com/538/>

## Defense in depth

- Layered security mechanisms increase security of the system as a whole
- If an attack causes one security mechanism to fail, other mechanisms may still provide the necessary security to protect the system
- A software system with authentication checks may prevent intrusion by subverting a firewall.
- Implementing a defense-in-depth strategy may add to the complexity of an application, that might bring new risks with it
  - e.g., increasing the required password length from eight characters to 15 characters may result in users writing their passwords down, thus decreasing the overall security to the system
  - however, adding a smart-card requirement to authenticate to the application would add a complementary layer to the authentication process & can be beneficial.

## Defense in depth

- Success for an attack involves 5 key milestones
- First, the attacker must deliver their attack.
  - Second, this attack must exploit a vulnerability (person, software).
  - Next, that exploit enables the installation of the attacker's bad software.
  - This installation allows the command and control centers of the attackers to connect to the compromised environment.
  - At this point, the final state of the exploitation can occur where the ultimate goals of the attacker have been met.
- Implementing a single mechanism of defense for each key milestone will provide depth of coverage.
- Defense in depth is a structuring of IT security to slow or stop any given attack with multiple mechanisms across the **cyber kill chain**.

<https://seic.com/knowledge-center/field-landmines-layered-resiliency-security>

## Failing Securely

When a system fails, it should do so securely.

- e.g. on failure undo changes and restore to a secure state; always check return values for failure; and in conditional code/filters make sure that there is a default case that does the right thing. The confidentiality and integrity of a system should remain even though availability has been lost

```
DWORD dwRet = IsAccessAllowed(...);  
if (dwRet == ERROR_ACCESS_DENIED)  
{  
    // Security check failed.  
    // Inform user that access is denied.  
} else {  
    // Security check OK.  
}
```

```
DWORD dwRet = IsAccessAllowed(...);  
if (dwRet == NO_ERROR) {  
    // Secure check OK.  
    // Perform task.  
} else {  
    // Security check failed.  
    // Inform user that access is denied.  
}
```

## Economy of Mechanism

- If the design, implementation, or security mechanisms are highly complex, then the likelihood of security vulnerabilities increases. Subtle problems in complex systems may be difficult to find, especially in copious amounts of code.
- Simplifying design or code is not always easy, but developers should strive for implementing simpler systems when possible.
- The checking and testing process is less complex, because fewer components and cases need to be tested.
- Complex mechanisms often make assumptions about the system and environment in which they run. If these assumptions are incorrect, security problems may result.

## Least Privilege & Separation of Privilege

- Only the minimum necessary rights should be assigned to a subject that requests access to a resource and should be in effect for the shortest duration necessary (remember to relinquish privileges).
- According to Saltzer and Schroeder [Saltzer 75] in "Basic Principles of Information Protection," Every program and every user of the system should operate using the least set of privileges necessary to complete the job. if a question arises related to misuse of a privilege, the number of things that must be audited is minimized.
  - a programmer who may need to read some sort of data object, but assigns higher privilege, since "Someday I might need to write to this object, and it would suck to have to go back and change this request."
- A system should ensure that multiple conditions are met before granting permissions to an object. If an attacker is able to obtain one privilege but not a second, he or she may not be able to launch a successful attack.
- a protection mechanism that requires two keys to unlock it is more robust and flexible than one that allows access to the presenter of only a single key
- This principle is often used in bank safe-deposit boxes. It is also at work in the defense system that fires a nuclear weapon only if two different people both give the correct command.

## Least Common Mechanism

- Avoid having multiple subjects sharing mechanisms to grant access to a resource. For e.g., serving an application on the Internet allows both attackers and users to gain access to the application.
- Every shared mechanism (especially one involving shared variables) represents a potential information path between users and must be designed with great care to be sure it does not unintentionally compromise security.
- Example : A web site provides electronic commerce services for a major company. Attackers flood the site with messages, and tie up the electronic commerce services. Legitimate customers are unable to access the web site and, as a result, take their business elsewhere.
  - Here, the sharing of the Internet with the attackers' sites caused the attack to succeed. The appropriate countermeasure would be include proxy servers or traffic throttling. The former targets suspect connections; the latter reduces load on the relevant segment of the network indiscriminately.

## Reluctance to Trust

- Developers should assume that the environment in which their system resides is insecure
- Trust in external systems, code, people, etc., should always be closely held and never loosely given.
- Software engineers should anticipate malformed input from unknown users
- Users are susceptible to social engineering attacks, making them potential threats to a system
- No system is one hundred percent secure, so the interface between two systems should be secured.

## Reluctance to Trust

- Point to remember is that trust is transitive. Once you dole out some trust, you often implicitly extend it to anyone the trusted entity may trust
- Hiding secrets in client code is risky. talented end users will be able to abuse the client and steal all its secrets
- According to Viega and McGraw, there are hundreds of products from security vendors with gaping security holes; Many security products introduce more risk than they address
  - Beware of vendors who resort to technobabble using newly invented terms or trademarked terms without actually explaining how the system works
  - Avoid software which uses secret algorithms. "hackers" can reverse-engineer the program to see how it works anyway
- According to Bishop, an entity is trustworthy if there is sufficient credible evidence leading one to believe that the system will meet a set of given requirements. Trust is a measure of trustworthiness, relying on the evidence provided. These definitions emphasize that calling something "trusted" or "trustworthy" does not make it so

## Never Assuming That Your Secrets Are Safe

Relying on an obscure design or implementation does not guarantee that a system is secured. You should always assume that an attacker can obtain enough information about your system to launch an attack.

- Tools such as decompilers and disassemblers allow attackers to obtain sensitive information that may be stored in binary files.
- According to Viega and McGraw, for years, there was an arms race and an associated escalation in techniques of vendors and hackers; vendors would try harder to keep people from finding the secrets to "unlock" software, and the software crackers would try harder to break the software. For the most part, the crackers won.
- According to Viega and McGraw, the most common threat to companies is the insider attack; but many companies say "That won't happen to us; we trust our employees." The infamous FBI spy Richard P. Hanssen carried out the ultimate insider attack against U.S. classified networks for over 15 years.

## Complete Mediation

A software system that requires access checks to an object each time a subject requests access, especially for security-critical objects, decreases the chances of mistakenly giving elevated permissions to that subject.

- A system that checks the subject's permissions to an object only once can invite attackers to exploit that system.
- According to Bishop, When a UNIX process tries to read a file, the operating system determines if the process is allowed to read the file. If so, the process receives a file descriptor encoding the allowed access. Whenever the process wants to read the file, it presents the file descriptor to the kernel. The kernel then allows the access. If the owner of the file disallows the process permission to read the file after the file descriptor is issued, the kernel still allows access. This scheme violates the principle of complete mediation, because the second access is not checked. The cached value is used, resulting in the denial of access being ineffective.

## Time-of-check to time-of-use

TOCTOU race conditions are common in Unix between operations on the file system

In Unix, the following C code, when used by a privileged user, can lead to TOCTOU situation.

```
if (access("file", W_OK) != 0)
    { exit(1); }
fd = open("file", O_WRONLY);
write(fd, buffer, sizeof(buffer));
```

[https://en.wikipedia.org/wiki/Time-of-check\\_to\\_time-of-use](https://en.wikipedia.org/wiki/Time-of-check_to_time-of-use)

34

## Psychological Acceptability

- Accessibility to resources should not be inhibited by security mechanisms. If security mechanisms hinder the usability or accessibility of resources, then users may opt to turn off those mechanisms.
  - Where possible, security mechanisms should be transparent to the users of the system or at most introduce minimal obstruction. Security mechanisms should be user friendly to facilitate their use and understanding in a software application.
- Configuring and executing a program should be as easy and as intuitive as possible, and any output should be clear, direct, and useful.
  - If security-related software is too complicated to configure, system administrators may unintentionally set up the software in a non-secure manner.
- Similarly, security-related user programs must be easy to use and output understandable messages.

## Time-of-check to time-of-use

In Unix, the following C code, when used by a privileged user, can lead to TOCTOU situation.

Victim	Attacker
<pre>if (access("file", W_OK) != 0)     { exit(1); }</pre>	<pre>////// After the access check symlink("/etc/passwd", "file"); // Before the open, "file" points to the password database ////</pre>

[https://en.wikipedia.org/wiki/Time-of-check\\_to\\_time-of-use](https://en.wikipedia.org/wiki/Time-of-check_to_time-of-use)

35

## Promoting Privacy

- Protecting software systems from attackers that may obtain private information is an important part of software security.
- Many users consider privacy a security concern. Try not to do anything that might compromise the privacy of the user.



## Secure Architectural Patterns

### Secure Architectural-level Patterns

Architectural-level patterns focus on the high-level allocation of responsibilities between different components of the system and define the interaction between those high-level components.

- Architectural-level Patterns
  - Distrustful Decomposition
  - Privilege Separation (PrivSep)
  - Defer to Kernel

### Secure Patterns

- A software design pattern is a general repeatable solution to a recurring software engineering problem.
- Secure design patterns are a general solution to a security problem that can be applied in many different situations.
- Secure design patterns are not restricted to object-oriented design approaches but may also be applied, in many cases, to procedural languages.

### Distrustful Decomposition

Separate the functionality of your software into *mutually untrusting chunks*, so as to shrink the attack windows into each chunk

- Design each chunk under the assumption that other software chunks with which it interacts have been attacked, and it is attacker software rather than normal application software that is running in those interacting chunks.
- Do not expose your data to other chunks via shared memory.

As a result of mutually untrusting chunking, your entire system will not be given into the hands of an attacker if any one of its chunks has been compromised


## Distrustful Decomposition (cont..)

**Motivation** : Many attacks target vulnerable applications running with elevated permissions

Some examples of this class of attack are

- Attacks in which versions of IE browser running in an account with administrator privileges is compromised
- Security flaws in Norton AntiVirus 2005 that allowed attackers to run arbitrary VBS scripts when running with administrator privileges
- A buffer overflow vulnerability in BSD-derived telnet daemons that allows an attacker to run arbitrary code as root

**Consequences** : Prevents an attacker from compromising an entire system in the event that a single component program is successfully exploited because no other program trusts the results from the compromised one

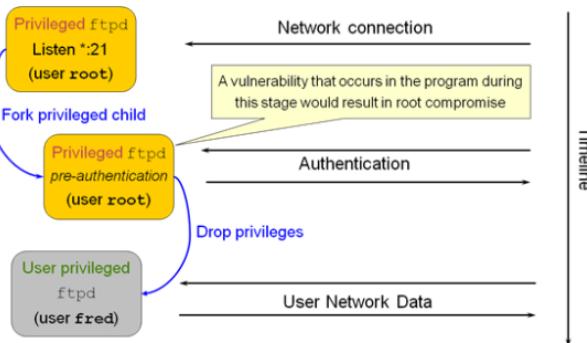


Here is a vulnerable implementation where a privileged process is trying to authenticate an unauthenticated user

## Privilege Separation (PrivSep)

- The PrivSep pattern is a more specific instance of the Distrustful Decomposition pattern.
- Keep to a minimum the part of your code that executes with special privilege.
- If an attacker succeeds in breaking into software that's running at a high level of privilege, the attacker will be operating at a high level of privilege too. That'll give him an extra-wide open "attack window" into your system
- The pattern is applicable if the system performs a set of functions do *not* require elevated privileges, but have relatively large attack surfaces (e.g. communication with untrusted sources, potentially error-prone algorithms)

## Privilege Separation (cont..)

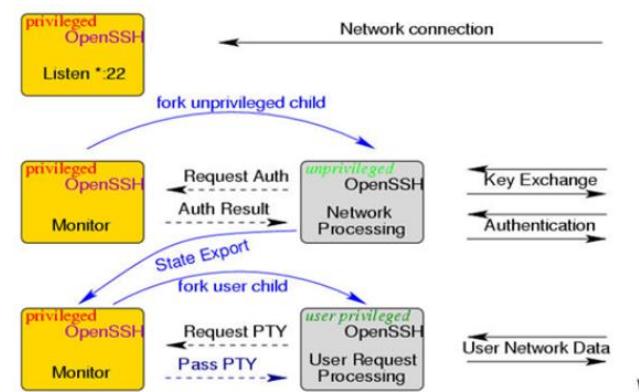

- The implementation as per PrivSep pattern.
- The interactions with user and authentication are moved into an unprivileged process.


## Defer to Kernel

The intent separate “functionality that requires elevated privileges” from “functionality that does not require elevated privileges and to take advantage of existing user verification functionality available at the kernel level.

Designers tend to take control of authorization functionality into their hands. The pattern discourages the tendency

The pattern is applicable to systems:

- That run by users who do not have elevated privileges;
- Where some (possibly all) of the functionality of the system requires elevated privileges; or
- Where the system must verify that the current user is authorized to execute any functionality that requires elevated privileges

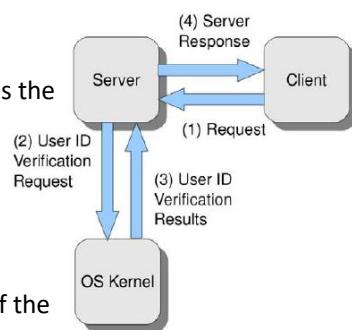

## Classes of Patterns

**Design-level patterns.** Design-level patterns describe how to design and implement pieces of a high-level system component, that is, they address problems in the internal design of a single high-level component, not the definition and interaction of high-level components themselves.

- Secure Factory
- Secure Strategy Factory
- Secure Builder Factory
- Secure Chain of Responsibility
- Secure State Machine
- Secure Visitor



## Secure Design Patterns

## Classes of Patterns

**Implementation-level patterns.** Implementation-level patterns address low-level security issues. Patterns in this class are usually applicable to the implementation of specific functions or methods in the system. Implementation-level patterns address the same problem set addressed by the CERT Secure Coding Standards

- Secure Logger
- Clear Sensitive Information
- Secure Directory
- Input Validation



## Secure Implementation Patterns

### Clear Sensitive Information

It is possible that sensitive information stored in a reusable resource may be accessed by an unauthorized user or adversary if the sensitive information is not cleared before freeing the reusable resource. The use of this pattern ensures that sensitive information is cleared from reusable resources before the resource may be reused.

Reusable resources include things such as the following:

- dynamically allocated memory
- statically allocated memory
- automatically allocated (stack) memory
- memory caches
- disk
- disk caches

### Secure Logger

- The intent of the Secure Logger pattern is to prevent an attacker from gathering potentially useful information about the system from system logs and to prevent an attacker from hiding their actions by editing system logs.
- The Secure Logger pattern is applicable if
  - The system logs information to a log file or some other form of logging subsystem.
  - The information contained in the system log could be used by an attacker to devise attacks on the system.
  - System logs are used to detect and diagnose attacks on the system.

### Secure Directory

The intent of the Secure Directory pattern is to ensure that an attacker cannot manipulate the files used by a program *during* the execution of the program.

– The Secure Directory pattern ensures that the directories in which the files used by the program are stored can only be written (and possibly read) by the user of the program.

The Secure Directory pattern is applicable for use in a program if

- The program will be run in an insecure environment; that is, an environment where malicious users could gain access to the file system used by the program.
- The program reads and/or writes files.
- Program execution could be negatively affected if the files read or written by the program were modified by an outside user while the program was running.

The program should check that a directory offered to it is secure, and refuse to use it otherwise. Implementation of the Secure Directory pattern involves the following steps:

- Find the canonical pathname of the directory of the file to be read or written.
- Check to see if the directory, as referenced by the canonical pathname, is secure.
  - If the directory is secure, read or write the file.
  - If the directory is not secure, issue an error and do not read or write the file.

## Input Validation

Input validation requires that a developer correctly identify and validate all external inputs from untrusted data sources

### Motivation

- The use of unvalidated user input is the root cause of many serious security exploits, such as buffer overflow attacks, SQL injection attacks, and cross-site scripting attacks.
- In a client-server architecture, it is problematic if only client-side validation is performed. It is easy to spoof a web page submission and bypass any scripting on the original page

## Software Composition Analysis

## Software Composition Analysis

- Generally term is used for managing open source component use
- Involves scans of an application's code base to identify all open source components for
  - license compliance data, and
  - security vulnerabilities
- The scan covers identifying
  - direct dependencies &
  - transitive dependencies

## Software Composition Analysis

- SCA tools are expected to perform the following with software vulnerabilities
  - Detection
  - Prioritization – identify risk/criticality of vulnerabilities
  - Remediation
- SCA tool requires
  - Comprehensive vulnerability database
  - Ability to patch

Can any SCA tool determine use of vulnerable component?

<https://www.securitymagazine.com/articles/92368-synopsys-study-shows-91-of-commercial-applications-contain-outdated-or-abandoned-open-source-components>

How often open source software is embedded in enterprise software?

<https://scantist.com/resources/blogs/software-composition-analysis-the-complete-guide>

What is the risk of using open source code?

<https://www.forrester.com/blogs/log4j-open-source-maintenance-and-why-sboms-are-critical-now/>

## Network Security

### Modern Network Security Architecture

Large number of options available for organizational networks today means new requirements for network security

- Public Cloud
- Private Cloud
- Hybrid Cloud
- On-Premises

Each of the above come with wide variety of options and tools

## Modern Network Security Architecture

- Zero-Trust Architecture (ZTA) is a network security paradigm that operates from the assumption that some actors on the network are hostile, and there are too many entry points to fully protect.
- Network firewall is aimed at preventing anyone from directly accessing the network servers that host an organization's applications and data
- Microsegmentation inhibits an attacker already on the network from moving laterally within it to access critical assets
- A secure web gateway (SWG) is responsible for connecting the user to the desired website and perform functions such as URL filtering, malicious content inspection, web access controls etc.
- DNSSEC strengthens authentication in DNS using digital signatures based on public key cryptography.

<https://www.gartner.com/en/articles/17-network-security-concepts-and-acronyms-you-need-to-know>

Secure Software Engineering

62

BITS-Pilani

## Modern Network Security Architecture

- Secure Access Service Edge (SASE) is an emerging framework that combines comprehensive network security functions, such as SWG, SD-WAN and ZTNA
- VDI and DaaS are both solutions for hosted desktops, the key difference between the two is that VDI is managed by the company itself, hosted and managed on-site or at a colocation facility, while DaaS is a managed infrastructure service, delivered by a provider and hosted in their data centres.
- Network Security Policy Management (NSPM) involves analytics and auditing to optimize the rules that guide network security, as well as change management workflow, rule-testing and compliance assessment and visualization. NSPM tools may use a visual network map that shows all the devices and firewall access rules overlaid onto multiple network paths.

Secure Software Engineering

63

BITS-Pilani

## NIST ZTA

<https://nvlpubs.nist.gov/nistpubs/SpecialPublications/NIST.SP.800-207.pdf>

Threat Modelling by Adam Shostack, John Wiley 2014

Security in Computing by Charles P. Pfleeger, Shari L. Pfleeger, and Deven Shah Pearson Education 2009

Computer Security: Principles and Practice by William Stallings, and Lawrie Brown Pearson, 2018.

[www.owasp.com](http://www.owasp.com)

[sei.cmu.edu](http://sei.cmu.edu)

[www.microsoft.com](http://www.microsoft.com)

[www.devopedia.org/devops](http://www.devopedia.org/devops)

[www.ibm.com](http://www.ibm.com)

Secure Software Engineering

64

BITS-Pilani

Secure Software Engineering

65

BITS-Pilani

# Thank You!



- The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.
- I have added and modified slides to suit the requirements of the course.



A photograph of the iconic yellow clock tower of BITS Pilani, featuring two large circular clock faces and a spire against a clear blue sky. The tower is set against a dark blue background with the university's name and other details.

SE/SS ZG566

**Secure Software Engineering**

T V Rao

BITS Pilani

Pilani | Dubai | Goa | Hyderabad



## Testing for Security

## Testing Strategy

The strategy provides a road map that describes the steps to be taken, when, and how much effort, time, and resources will be required

A strategy for software testing integrates the design of software test cases into a well-planned series of steps that result in successful development of the software

The strategy incorporates test planning, test case design, test execution, and test result collection and evaluation

Testing begins at the component level and work outward toward the integration of the entire computer-based system

Different testing techniques are appropriate at different points in time

## Software Testing Key Issues (SWEBOK)

*Dynamic:* The input value alone is not always sufficient to specify a test, since a complex, nondeterministic system might react to the same input with different behaviors, depending on the system state.

*Finite:* Even in simple programs, so many test cases are theoretically possible that exhaustive testing could require months or years to execute.

*Selected:* How to identify the most suitable test set under given conditions is a complex problem; in practice, risk analysis techniques and software engineering expertise are applied.

*Expected:* It must be possible, although not always easy, to decide whether the observed outcomes of program testing are acceptable or not; otherwise, the testing effort is useless.

## Software Testing Axioms

- It is impossible to test a program completely.
- Software testing is a risk-based exercise.
- Testing cannot show the absence of bugs.
  - The Pesticide Paradox
    - In 1990, Boris Beizer, coined the term *pesticide paradox* to describe the phenomenon that the more you test software, the more immune it becomes to your tests
- The more bugs you find, the more bugs there are.
- Not all bugs found will be fixed.
- It is difficult to say when a bug is indeed a bug.
- Specifications are never final.
- Software testers are not the most popular members of a project.
- Software testing is a disciplined and technical profession

## Security Testing (SWEBOK)

- Security testing is focused on the verification that the software is protected from external attacks.
- Security testing verifies the confidentiality, integrity, and availability of the systems and its data.
- Security testing includes verification against misuse and abuse of the software or system (negative testing).

## Security Testing Myth & Reality

### Myth :

In the security industry people frequently test against a set of mental criteria that are neither well defined nor complete. As a result of this, many outsiders regard security testing as a black art.

### Reality :

It is possible for people without in-depth security knowledge to make impactful security testing.

## Penetrate and Patch


A number of software tools exist to support *post facto* security analysis of installed computer systems. Examples include

- Nmap (Network Mapper) a free and open-source network scanner.
- Burp Intruder is a powerful tool for automating customized attacks against web applications.
- Metasploit scans vulnerabilities backed by open-source database of known exploits.

Such tools are reactive.

- Security analysis needs to be performed as part of the software development process, before software is released.
- Crackers often know about vulnerabilities before system administrators
- System administrators have neither the time nor the inclination to patch software if they have not noticed any security breaches.
- While a patch may close one security hole, it may simultaneously open up others.

## Window of Vulnerability (OWASP)

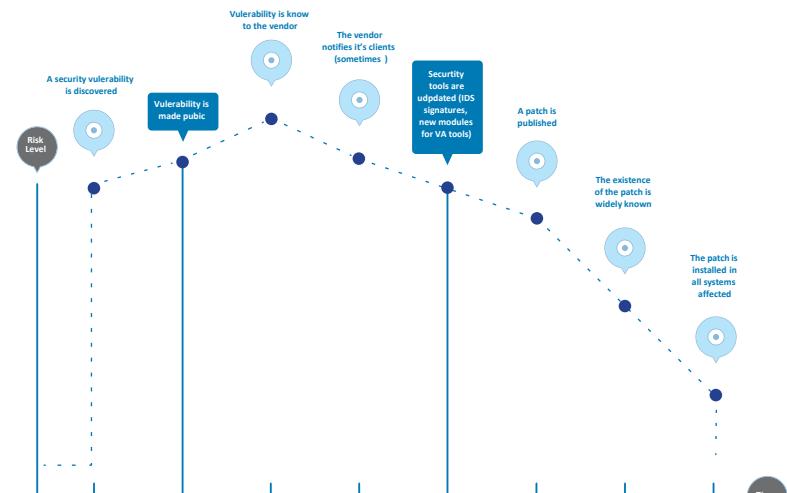

## Source Code Analyzers

## Source Code Analysis Tools

Source Code Analysis Tools (security analyzers) are automated tools for helping analysts find security-related problems in software

- use data- and control-flow analysis to find subtler bugs and to reduce false alarms

Some vulnerabilities (e.g. use of `strcpy()`) can be detected with high accuracy, others are harder to detect, and, in fact, one can always devise vulnerabilities that are undetectable altogether.

Tools have tradeoff between false alarms (also known as false positives) and missed vulnerabilities (also known as false negatives)

- can be configured to make a tool more sensitive (decreasing false negatives while increasing false positives) or make it less sensitive (increasing false negatives while decreasing false positives)

Some of the tools are listed at

<https://resources.infosecinstitute.com/topic/secure-coding-top-15-code-analysis-tools/>

## Check Calls to Potentially Insecure Library Functions

This security-scanning capability can encompass several components:

- A database of vulnerable library calls** is the heart of security scanning technology. The vulnerability database must be up to date, and would have to be constantly updated as well to remain relevant.
- The ability to preprocess source code** is important for C/C++ analyzers, because it lets the analyzer see the same code that will be seen by the compiler. Without this capability there are numerous ways to deceive the analyzer. Many analyzers use heuristics to approximate the functionality of a preprocessor.
- Lexical analysis** is the process of breaking a program into tokens prior to parsing. Lexical analysis is necessary to reliably distinguish variables from functions and to identify function arguments. These functions can also be performed with heuristics—at the cost of some reliability, however.

## Capabilities of Security Analyzers

- Examining Calls to Potentially Insecure Library Functions
- Detecting Bounds-Checking Errors and Scalar Type Confusion
- Detecting Type Confusion Among References or Pointers
- Detecting Memory Allocation Errors
- Detecting Vulnerabilities that Involve Sequences of Operations (Control-Flow Analysis)
- Data-Flow Analysis
- Pointer-Aliasing Analysis
- ...

## Detecting Bounds-Checking Errors and Scalar Type Confusion

Vulnerabilities occur when scalar assignments transparently *change* the value being assigned e.g.

- integer overflow: an integer variable overflows and becomes negative
- integer truncation: an integer value is truncated while being cast to a data type with fewer digits
- unsigned underflow: an unsigned integer value underflows and becomes large

one of these issues results in a vulnerability typically because the affected variable gives the size of a buffer

Type confusion with pointers or references is a common source of bugs and may result in vulnerabilities unless the type confusion is detected at runtime

- In some cases, static type checking can identify reference type confusion
- Usually fail with a cast between incompatible types having a common superclass allowing (for example) methods written for one data type to be applied to a different data type leading to vulnerabilities

## Vulnerabilities Involving Sequences of Operations (Control-Flow Analysis)

File accesses by a program can create vulnerabilities if done incorrectly; operations have to be carried out in the right order

- e.g., a C program first obtains a file handle to check certain properties of the file before it can access the file contents
- the mask governing permissions of newly created files must be set explicitly if a new file may be created
- integer ranges have to be checked before being used without any modification taking place between the time of check and time of use.

Security analyzers often look for specific library function calls and print a warning regardless of whether the operation in question is being carried out correctly, which causes noise

Control-flow analysis be used when some potentially dangerous operation must be preceded by precautionary measures, such as closing and reopening standard file descriptors in C before writing to them, or setting default file permissions before creating a new file

- e.g. a linux file descriptor hangs in system folder if not explicitly closed & stays vulnerable

## Detecting Memory Allocation Errors

- Memory corruption vulnerabilities can vary from one operating system to the next because the operating systems use different techniques for heap maintenance
- Heap corruption can arise if an attacker is able to overwrite information used to maintain the heap
- A number of circumstances can allow an attacker to corrupt this information. e.g.
  - a buffer overflow in an allocated chunk of memory
  - a double free.
  - a write to freed memory.

## Data-Flow Analysis

- Security analyzers use data-flow analysis primarily to reduce false positives and false negatives, e.g., many buffer overflows in real code are not exploitable because the attacker cannot control the data that overflows the buffer.
- The data-flow analysis that is often used in security-related applications is *taint analysis*.
  - A variable is tainted if its value can be influenced by a potential attacker
  - If a tainted variable is used to compute the value of a second variable, then the second variable also becomes tainted

## Pointer-Aliasing Analysis

Pointer aliasing occurs when two pointers point to the same data

- The data that would be found by dereferencing one of the pointers can change even though the source code contains no mention of that pointer.

*Pointer-aliasing analysis* refers to any static technique that tries to solve this problem by tracking which pointers point to what locations

- Related to data flow analysis


Many programming languages allow them to be manipulated in arbitrary ways, for e.g., a loop that increments the value of a pointer until it points to a space character

- Remains a challenging part in static code analysis

## Major weaknesses

- Many types of security vulnerabilities are very difficult to find automatically, such as authentication problems, access control issues, insecure use of cryptography, etc. However, tools of this type are getting better.
- High numbers of false positives (or false alarms).
- Frequently can't find configuration issues, since they are not represented in the code.
- Difficult to 'prove' that an identified security issue is an actual vulnerability.
- Many of these tools have difficulty analyzing code that can't be compiled. Analysts frequently can't compile code because they don't have the right libraries, all the compilation instructions, all the code, etc.

## Soundness vs Completeness of Source Code Analyzers

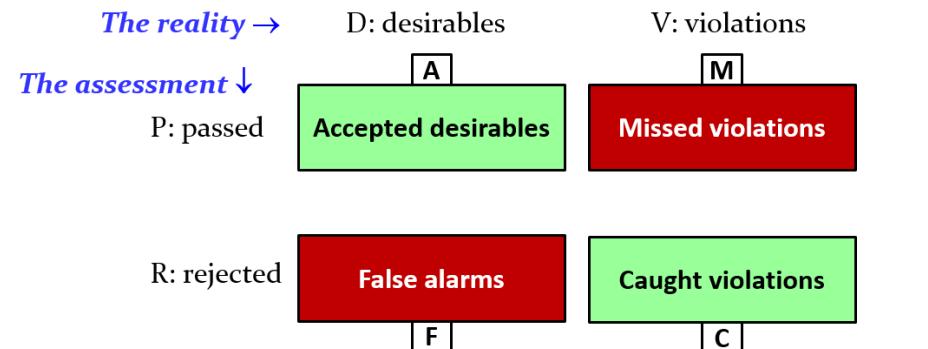

In two categories, marked in green, assessment is right: accepted desirables (A), rightly passed, and caught violations (C), rightly rejected.

In the other two, marked in red, the assessment is off the mark: missed violations (M), wrongly passed; and false alarms (F), wrongly accepted.

<https://cacm.acm.org/blogs/blog-cacm/236068-soundness-and-completeness-with-precision/fulltext>



**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

## White Box Security Testing

## White Box Testing

White box testing consists testing with access to the source code

- it is a good practice to perform white box testing during the unit testing phase

White box testing requires knowing what makes software secure or insecure, how to think like an attacker, and how to use different testing tools and techniques.

- First tester comprehends and analyzes available design documentation, source code, and other relevant development artifacts, so knowing what makes software secure is a fundamental requirement.
- Second, tester creates tests that exploit software, a tester must think like an attacker.
- Third, to perform testing effectively, testers need to know the different tools and techniques available for white box testing

## Data-Flow Analysis

- The data-flow testing technique is based on investigating the ways values are associated with variables and the ways that these associations affect the execution of the program
  - focuses on occurrences of variables, following paths from the definition (or initialization) of a variable to its uses
- A data-flow analysis for an entire program involving all variables and traversing all usage paths may require immense computational resources
  - however, this technique can be applied for select variables
- The path and the usage of the data can help in identifying suspicious code blocks and in developing test cases to validate the runtime behavior of the software.

## White Box Testing for Security

**Data-Flow Analysis**

**Code-Based Fault Injection**

**Abuse Cases**

**Trust Boundaries Mapping**

**Code Coverage Analysis**

## Code-Based Fault Injection

- The fault injection technique perturbs program states by injecting software source code to force changes into the state of the program as it executes.
  - Consists of non-intrusively inserting code into the software that is being analyzed and then compiling and executing the modified (or instrumented) software
- This technique forces non-normative behavior of the software, and the resulting understanding can help determine whether a program has vulnerabilities that can lead to security violations.
  - can be used to force error conditions to exercise the error handling code,
  - change execution paths,
  - input unexpected (or abnormal) data,
  - change return values, etc.

## Abuse Cases

- Abuse cases help security testers view the software under test in the same light as attackers do.
  - can be used to develop innovative and effective test cases mirroring the way attackers would view the system
- The abuse case can also be applied to interactions between components within the system to capture abnormal behavior, should a component misbehave.
- The practical method for creating abuse cases is usually through a process of brainstorming, involving security, reliability, and subject matter expertise
- Known attack patterns help developing abuse cases.

## Code Coverage Analysis

- Code coverage is a way of determining which code statements or paths have been exercised during testing. It is a test effectiveness measurement
- Help in identifying redundant test cases that do not increase coverage and also help in identifying redundant test cases that do not increase coverage
- There are various measures for coverage, such as path coverage, path testing, statement coverage, multiple condition coverage, and function coverage
- Covering all the code paths or statements does not guarantee that the software does not have faults; however, the missed code paths or statements should definitely be inspected.
- Unexercised code has serious bugs that can be leveraged into a successful attack

## Trust Boundaries Mapping

- Defining zones of varying trust in an application helps identify vulnerable areas of communication and possible attack paths for security violations.
- For systems that have n-tier architecture or that rely on several third-party components, the potential for missing trust validation checks is high, so drawing trust boundaries becomes critical for such systems
- Combining trust zone mapping with data-flow analysis helps identify data that move from one trust zone to another and whether data checkpoints are sufficient to prevent trust elevation possibilities



## Black Box Security Testing

## Black Box Testing for Security

Black box tests can help

- identify implementation errors that were not discovered during code reviews, unit tests, or security white box tests
- discover potential security issues resulting from boundary conditions that were difficult to identify and understand during the design and implementation phases
- uncover security issues resulting from incorrect product builds (e.g., old or missing modules/files)
- detect security issues that arise as a result of interaction with underlying environment (e.g., improper configuration files, unhardened OS and applications)

## Black Box Testing Tools

Black box test activities almost universally involve the use of tools to help testers identify potential security vulnerabilities

There are tools that focus on specific areas, including

- network security,
- database security,
- security subsystems, and
- web application security

## Network Security Tools

- *Network security* based test tools focus on identifying vulnerabilities on externally accessible network-connected devices e.g. firewalls, servers, and routers
- Network security tools generally begin by using a port scanner to identify all active devices connected to the network, services operating on the hosts, and applications running on each identified service
- Some network scanning tools identify specific security vulnerabilities associated with the scanned host based on information contained within a vulnerability database.
- Tools are closely associated with penetration testing

## Database Security Test Tools

Tools identify vulnerabilities in a systems database

- incorrect configuration of the database security parameters or
- improper implementation of the business logic used to access the database

Identify vulnerabilities that result in the disclosure or modification of sensitive data in the database

## Security Subsystem Tools

- identify security vulnerabilities in specific subsystems
- used to test whether security-critical subsystems have been designed and implemented properly
  - correct operation of random number generators
  - cryptographic processors, and
  - other security-critical components.

## Web Application Security Tool

- highlight security issues within applications accessed via the Internet
- these tools generally focus on identifying vulnerabilities and abnormal behavior within applications available over ports 80 (HTTP) and 443 (HTTPS)
  - These ports are allowed through a firewall to support web servers.
  - these tools may also test Web Services based application technologies over the same ports



## Fuzz Testing

## Fuzzing

- The term fuzzing is derived from the fuzz utility (of Wisconsin), which is a random character generator for testing applications by injecting random data at their interfaces
- The idea is to look for interesting program behavior that results from noise injection and may indicate the presence of a vulnerability or other software fault.
  - completely random fuzzing is a comparatively ineffective way to uncover problems in an application.
- Fuzzing technology (along with the definition of fuzzing) has evolved to include more intelligent techniques. (Microsoft refers to this as “smart fuzzing”)
- e.g., fuzzing tools are aware of commonly used Internet protocols, so that testers can selectively choose which parts of the data will be fuzzed.

## Kinds of fuzzing

- **Black box**
  - The tool knows nothing about the program or even its inputs.  
Limited benefits
- **Grammar based**
  - The tool generates input based on known grammar
- **White box**
  - The tool generates new inputs based on the code of the program.  
Computationally complex

## Network-based fuzzing

- Act as one of the communicating parties
    - Inputs could be produced
      - from scratch (e.g., from a protocol grammar)
      - replay of the previously recorded interaction
      - alterations of recorded interactions
  - Act as a “man in the middle”
    - mutate messages exchanged between parties (using the knowledge of grammar)
- SPIKE The fuzzer creation kit
  - (<http://resources.infosecinstitute.com/>)

## File format fuzzing

- Instead of just trying really long inputs, a more advanced way to fuzz is to try corner cases in some input format or malformed inputs just outside this input format
  - *CVE-2007-0243 Java JRE GIF Image Processing Buffer Overflow Vulnerability*
    - Critical: Highly critical Impact: System access Where: From remote
    - ... caused by an error when processing GIF images and can be exploited to cause a heap-based buffer overflow via a specially crafted GIF image with an image width of 0
  - *Microsoft Security Bulletin MS04-028 Buffer Overrun in JPEG Processing (GDI+)*
    - Could Allow Code Execution
    - Impact: Remote Code Execution Maximum: Critical
    - ... cause by a zero sized comment field, without content.

## Fuzzing Variations

1. Simple (original) fuzzing
    - try out ridiculously long inputs
    - try really long inputs for string arguments to trigger segmentation faults and hence find buffer overflows
      - e.g. register with Facebook with a 1Mbyte long username
  2. Protocol/format/language fuzzing
    - try out strange inputs, given some format/language
  3. State-based fuzzing
    - try out strange sequences of input
- 2 & 3 are essentially forms of model-based testing

## State-based Protocol Fuzzing

- Instead of fuzzing the content of individual messages, we can also fuzz the order of messages.
- This is interesting for protocols that have different types of messages, which are expected to come in a particular order:
- This can reveal flaws in the application logic (more specifically, flaws in the implementation of the protocol state machine)
- Essentially this is a form of model-based testing, where we automatically test if an implementation conforms to model (in the form of a finite state machine aka finite automaton), by random test sequences

## Finding errors before crash

- **Compile** the program with **Address Sanitizer** (ASAN)
  - <https://github.com/google/sanitizers/wiki/AddressSanitizer>
- ASAN instruments accesses to arrays to check for overflows, and use-after-free errors. (Alarm to be raised in case of deviation/violation)
  - Carry out Fuzz testing
  - Did the execution result in ASAN-signaled error?
  - If so, check for exploitability
- Similarly, it is possible to *compile with other sorts of error checkers* for the purposes of testing

## Dealing with crashes in Fuzz Testing

- One of the most interesting outputs of fuzz testing come from analysis of crashes
  - What is the **root cause** (so it can be fixed)?
  - Is there a way to **make the input smaller**, so it is more understandable?
  - Are **two or more crashes signaling the same bug**?
  - Does the crash signal an **exploitable vulnerability**?

## CERT Basic Fuzzing Framework (BFF)

- The CERT Basic Fuzzing Framework (BFF) is a software testing tool that finds defects in applications that run on the Linux and Mac OS X platforms
  - uses mutational (taking well-formed input data and corrupting it in various ways) fuzzing on software that consumes file input.
  - automatically collects test cases that cause software to crash in unique ways, and associated debugging information
  - helps efficiently discover and analyze security vulnerabilities found via fuzzing
  - Uses machine learning techniques to minimize the manual effort for the fuzzing.
- CERT used the BFF to find a number of critical vulnerabilities in products such as Adobe Reader and Flash Player; Foxit Reader; Apple QuickTime, Preview, and Mac OS X; Xpdf; Poppler; etc.

Advantages	Issues
<ul style="list-style-type: none"><li>Simple to design and perform automated tests</li><li>Find bugs or crashes not easily visible via other testing techniques</li><li>Bugs found are sometimes severe and include defects that could be exploitable in the wild, including unhandled exceptions, crashes, memory faults/leaks and so on</li><li>Usually very inexpensive to implement</li></ul>	<ul style="list-style-type: none"><li>Generally finds very simple faults</li><li>Often takes an extremely long time to run</li><li>Crashes can often be difficult to analyze, especially when using black-box fuzzing</li><li>Mutation templates for applications with complex inputs can often be time-consuming to produce</li></ul>

<http://resources.infosecinstitute.com/>

## Background of Penetration Testing

- By the 1970s, the US government was regularly using teams to assess the security of computer systems by trying to penetrate them. These teams were referred to as red teams, or tiger teams.
- The penetration testing had been largely focused on the environments:
  - Attempt to compromise the security of the Computer operating systems, along with their access control mechanisms by penetration testing.
  - In a networked computer context, operating system configurations, including their respective network services, are usual targets for penetration tests. These operating system components have offered countless opportunities for penetration testing over the years
- Recently push was for applying penetration testing techniques “up” the software abstraction levels, beyond the operating system and network services, towards the application software itself

## Penetration Testing

## Security is not compositional

- According to Leslie Lamport, a Turing Award winner, Security is not compositional.
- Two components that are secure on their own are not necessarily secure when used in combination
  - A change to one component might not break that component, but could break the whole system due to the lack of compositionality
- Upon change to the software, the configuration, the network topology, and so on, potentially new vulnerabilities are created

## An art or a science?

- Pen testers must be creative. They think about how a system is put together, and where assumptions made by designers represent weaknesses
- Pen testers will cleverly adapt the weaknesses to gain a foothold in one place. They may use that foothold to exploit a weakness somewhere else.
- Systems could be incorrectly built or misconfigured in the some ways.
- Tools are built to systematically look for weakness patterns, and exploit them.

Thus Pen testing is both an art and a science.

## Penetration Testing Skills

- A pen tester needs to know a lot about the target domain.
- For example, if the pen tester is attacking web applications, then the pen tester needs to know how the web works. Need to know how systems are built in that domain.
  - What protocols allow applications to communicate. For the web, that's HTTP and TCP, and IP.
  - The languages that are used to build applications like PHP, Java, or Ruby for talking about the web.
  - Frameworks that used to build applications or application components like, for the web, Ruby on Rails, DreamWeaver, Drupal, and so on.
- Pen tester also need to know common weaknesses from that domain.
  - For example, the bugs that are common to web applications like SQL injections or cross-site scripting, or cross-site request forgery. Or common misconfigurations or bad designs, like the use of default passwords or hidden files.

## Categories of Penetration Testing Tools

- **Host-Based Tools**
- **Network-Based Tools**
- **Application Testing Proxies**
- **Application Scanning Tools**
- Tools integrated with other IT security technologies, viz. firewalls, intrusion detection and prevention systems

## Host-Based Tools

- Host-based testing tools test the local operating system to assess its technical strengths and weaknesses, e.g. Dan Farmer's COPS program, which evaluated the security posture of a UNIX computer
  - e.g., evaluate file access control mechanisms for opportunities for attackers to affect the security of the host
  - examine every file, configuration data (including registry keys on Windows systems), installed patch inventory, and so on from the perspective of every ID on the system
  - Check common operating system configuration mistakes and omissions such as dangerous setuid files, unnecessary network services enabled, and excessive privileges for user accounts

## Network-Based Tool

- Network-based testing tools assess the security configuration of a computer operating system from afar—across a network, e.g. Chris Klaus's Internet Security Scanner (ISS) program
- Examine a target computer(s) for weaknesses that may be exploitable from a remote networked location using a database of vulnerabilities
  - Advantage- Scale: A huge number of computers can be evaluated across a network;
  - Limitation- Coverage: Network-based testing can only evaluate the externally accessible interfaces

## Application Testing Proxies

### Application Testing Proxies

- enable the security tester to look behind the graphical user interface when testing a web application or web service
- Requests to and responses from the server are intercepted, observed, and optionally manipulated

### Web applications are common pen testing targets

- Web proxies sit *between* the browser and server
- Displaying exchanged packets
- Modifying them as directed by the tester

## Nmap for network probing

Nmap stands for “network mapper”. Free, open source (commercial versions too) <http://nmap.org/>

### Figures out

- what **hosts** are available on the network,
- what **services** (application name and version) those hosts are offering,
- what **operating systems** (and OS versions) they are running,
- what type of **packet filters/firewalls** are in use
- ... etc.

Works by **sending raw IP packets** into the network and **observing the effects**

- Standard “ping” protocol, Looks for HTTPS(port 443) or HTTP(port 80) servers, - Probes to other TCP ports
- Probes that elicit different responses on different OSes (“fingerprinting”)

### Can be stealthy!

- Control the rate of scanning to “work under the radar”

## Application Scanning Tools

- These tools do penetration testing scans of general purpose web-based software applications
- connect to web applications and attempt a series of well defined tests for each data field, cookie, etc.
- Such tools initiate a “learning mode” in which they observe the normal operation of a web application. Based on learning, they attempt to exploit common web application defects such as data overruns, SQL injection, and cross-site scripting (XSS)

<https://insights.sei.cmu.edu/blog/10-types-of-application-security-testing-tools-when-and-how-to-use-them/>

<https://insights.sei.cmu.edu/blog/decision-making-factors-for-selecting-application-security-testing-tools/>

- Penetration testing tools are meant to reveal security vulnerabilities so that they can be fixed, not so that they can be exploited for the purposes of crime or harm.
- But it is true that people will use these penetration testing tools for nefarious purposes.
- In that way, they are sort of two way tools.
  - Just as guns can be used to defend, guns can be used to attack. Ethical hacking is not to be someone who uses pen testing tools to attack.

## Hacker Hat Types

### Black hat hackers

- are criminals who break into computer networks with malicious intent.
- They may also release malware that destroys files, holds computers hostage, or steals passwords, credit card numbers, and other personal information
- Hacking can operate like big business, boast partners, resellers, vendors, and associates, and they buy and sell licenses for malware to other criminal organizations for use in new regions or markets.
- Some countries are lax with them unless they harm their own citizens

### White hat hackers

- sometimes also called “ethical hackers” or “good hackers”, exploit computer systems or networks to identify their security flaws so they can make recommendations for improvement.
  - White hat hackers use the same hacking methods as black hats, but with the permission of the system owner first.
  - work with network operators to help fix the issue before others discover it.
  - Never cross the law.

### Gray hat hackers

- a blend of both black hat and white hat.
  - Often look for vulnerabilities in a system without the owner's permission.
  - If issues are found, they report them to the owner, sometimes requesting a small fee to fix the problem.

Computer Security: Principles and Practice by William Stallings, and Lawrie Brown Pearson, 2018.

Software Security Engineering, Julia H. Allen, et al, Pearson, 2008.

[www.microsoft.com](http://www.microsoft.com)

[www.owasp.com](http://www.owasp.com)

[sei.cmu.edu](http://sei.cmu.edu)

# Thank You!



- The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.
- I have added and modified slides to suit the requirements of the course.



A photograph of the iconic yellow clock tower of BITS Pilani, featuring two large circular clock faces. The tower is set against a clear blue sky. The slide has a dark blue header and footer. In the header, there is the BITS Pilani logo, the code "SE/SS ZG566", the title "Secure Software Engineering", and the name "T V Rao". In the footer, it says "Pilani | Dubai | Goa | Hyderabad".



## Discussion on few Hacks

## Solar Winds Hack

### [SUNSPOT Malware: A Technical Analysis | CrowdStrike](#)

<https://www.crowdstrike.com/blog/sunspot-malware-technical-analysis/>

### [New Findings From Our Investigation of SUNBURST - Orange Matter \(solarwinds.com\)](#)

<https://orangematter.solarwinds.com/2021/01/11/new-findings-from-our-investigation-of-sunburst/>

### A 'Worst Nightmare' Cyberattack: The Untold Story Of The SolarWinds Hack

<https://www.npr.org/2021/04/16/985439655/a-worst-nightmare-cyberattack-the-untold-story-of-the-solarwinds-hack>

## Log4j Hack

### LOG4J REMOTE CODE EXECUTION VULNERABILITY

<https://www.crowdstrike.com/wp-content/uploads/2021/12/QRG-8.0-CrowdStrike-Services-Information-Guide-Log4j-Remote-Code-Execution-Vulnerability.pdf>

## In-Memory Executions

### The Power of In-Memory Executions: How to Execute Code without Touching Disk

<https://www.linkedin.com/pulse/power-in-memory-executions-how-execute-code-without-touching-maniar/>

**Thank You!**



**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad



SE/SS ZG566

## Secure Software Engineering

T V Rao



**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad



## Secure Coding

- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*

**BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956**

## Security Flaws

Critical Web application security flaws include five related to insecure software code

- Unvalidated input
- Cross-site scripting
- Buffer overflow
- Injection flaws
- Improper error handling

These flaws occur as a consequence of insufficient checking and validation of data and error codes in programs

Awareness of these issues is a critical initial step in writing more secure program code

Emphasis should be placed on the need for software developers to address these known areas of concern



**DISCLAIMERS**

## Reducing Software Vulnerabilities

The NIST report NISTIR 8151 presents a range of approaches to reduce the number of software vulnerabilities

It recommends:

- Stopping vulnerabilities before they occur by using improved methods for specifying and building software
- Finding vulnerabilities before they can be exploited by using better and more efficient testing techniques
- Reducing the impact of vulnerabilities by building more resilient architectures

## Privileged Execution

Programs with root/administrator privileges are a major target of attackers

- They provide highest levels of system access and control
- Are needed to manage access to protected system resources

Often privilege is only needed at start

- Can then run as normal user

Good design partitions complex programs in smaller modules with needed privileges

- Provides a greater degree of isolation between the components
- Reduces the consequences of a security breach in one component
- Easier to test and verify

## Defensive Programming

- Programmers often make assumptions about the type of inputs a program will receive and the environment it executes in
- Assumptions need to be validated by the program and all potential failures handled gracefully and safely
- Requires a changed mindset to traditional programming practices
- Programmers have to understand how failures can occur and the steps needed to reduce the chance of them occurring in their programs

## Interpretation of Program Input

- Program input may be binary or text
  - Binary interpretation depends on encoding and is usually application specific
- There is an increasing variety of character sets being used
  - Care is needed to identify just which set is being used and what characters are being read
- Failure to validate may result in an exploitable vulnerability
- 2014 Heartbleed OpenSSL bug is a recent example of a failure to check the validity of a binary input value

## Heartbeat History

- The Heartbeat Extension for the Transport Layer Security (TLS) and Datagram Transport Layer Security (DTLS) protocols was proposed as a standard in February 2012
  - It provides a way to test and keep alive secure communication links without the need to renegotiate the connection each time
- The flawed code was introduced into OpenSSL's source code repository on 31 December 2011. The defect spread with the release of OpenSSL version 1.0.1 on 14 March 2012. Heartbeat support was enabled by default, causing affected versions to be vulnerable.
- Neel Mehta of Google's security team privately reported Heartbleed to the OpenSSL team on 1 April 2014

<https://en.wikipedia.org/wiki/Heartbleed>

Secure Software Engineering

9

BITS-Pilani



## Memory Safety

## Heartbeat Root causes, Snippets

- The Heartbeat could have prevented if test suite tested invalid inputs cause failures rather than successes
- OpenSSL seems to give more importance to performance than to security.
- OpenSSL developers wrote their own memory management routines and circumvented OpenBSD C standard library
- The author of the change which introduced Heartbleed, Robin Seggelmann, stated that he missed validating a variable containing a length.
- The OpenSSL foundation's president, Steve Marquess, said "The mystery is not that a few overworked volunteers missed this bug; the mystery is why it hasn't happened more often."
- There are indications that blackhats and/or intelligence agencies may have had a long period when they knew about the attack and could use it at their leisure.

<https://en.wikipedia.org/wiki/Heartbleed>  
<https://www.eff.org/deeplinks/2014/04/wild-heart-were-intelligence-agencies-using-heartbleed-november-2013>

Secure Software Engineering

10

BITS-Pilani

## Memory Safety

Memory safety is the state of being protected from various software bugs and security vulnerabilities when dealing with memory access

Java is memory-safe because of its runtime error detection checks for array bounds and pointer dereferences

C and C++ are not memory-safe, since they allow pointer arithmetic with pointers implemented as direct memory addresses with no provision for bounds checking

Secure Software Engineering

12

BITS-Pilani

## Memory Errors

A memory error occurs when an object accessed using a pointer expression is different from the one intended

We can categorize memory errors as

- Spatial Memory Errors
- Temporal Memory Errors

## Temporal Memory Errors

A temporal memory error occurs when a the program dereferences a pointer to an object that no longer exists

Spatial memory errors include

- Dangling pointers
- Double frees

```
int *p = malloc(sizeof(int));
*p = 23;
free(p);
printf("%d\n", *p); //temporal violation
```

## Spatial Memory Errors

A spatial memory error occurs when a pointer pointing outside the bound of its referent is dereferenced

Spatial memory errors include

- Dereferences of uninitialized pointers and non-pointer data
- Valid pointers used with invalid pointer arithmetic where buffer overflows

```
struct { ... int array[100]; ... } s;
int *p;
...
p = &(s.array[101]);
... *p ...    ▷ bounds violation
```

Engineering Problem Solving with C++  
<https://cse.sc.edu/~rose/206/ppt/Chapter9.ppt>

Computer Security: Principles and Practice by William Stallings, and Lawrie Brown Pearson, 2018.  
Software Security Engineering, Julia H. Allen, et al, Pearson, 2008.  
[www.microsoft.com](http://www.microsoft.com)  
[www.owasp.com](http://www.owasp.com)  
[sei.cmu.edu](http://sei.cmu.edu)

# Thank You!





- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## NIST's Definition

“A condition at an interface under which more input can be placed into a buffer or data holding area than the capacity allocated, overwriting other information. Attackers exploit such a condition to crash a system or to insert specially crafted code that allows them to gain control of the system.”

## Buffer Overflows

### Buffer Overflow: A Well-Known Problem

- A very common attack mechanism
  - from 1988 Morris Worm to Code Red, Slammer, Sasser and many others
- Prevention techniques known
- Still of major concern due to
  - legacy of widely deployed buggy code
  - continued careless programming techniques

- One of best known worms
  - Affected 6,000 computers in 1988; cost \$10-\$100 M
- Released by Robert Morris
  - Graduate student at Cornell, son of NSA chief scientist
  - Convicted under Computer Fraud and Abuse Act, sentenced to 3 years of probation and 400 hours of community service
  - Now a computer science professor at MIT
- Worm was intended to propagate slowly and harmlessly measure the size of the Internet. Due to a coding error, it created new copies as fast as it could and overloaded infected machines
- The worm propagated thru buffer overflow attack against a vulnerable version of fingerd on VAX system



## Buffer Overflow example

```
int main(int argc, char *argv[]) {
    int valid = FALSE;
    char str1[8];
    char str2[8];

    next_tag(str1);
    gets(str2);
    if (strncmp(str1, str2, 8) == 0)
        valid = TRUE;
    printf("buffer1: str1(%s), str2(%s), valid(%d)\n", str1, str2, valid);
}
```

- Caused by programming error
- Allows more data to be stored than capacity available in a fixed sized buffer
- buffer can be on stack, heap, global data
  - Overwriting adjacent memory locations
    - corruption of program data
    - unexpected transfer of control
    - memory access violation
    - execution of code chosen by attacker



## Buffer Overflow - Program Output


```
int main(int argc, char *argv[]) {
    int valid = FALSE;
    char str1[8];
    char str2[8];

    next_tag(str1);
    gets(str2);
    if (strncmp(str1, str2, 8) == 0)
        valid = TRUE;
    printf("buffer1: str1(%s), str2(%s), valid(%d)\n", str1, str2, valid);
}
```

```
$ cc -g -o buffer1 buffer1.c
$ ./buffer1
START
buffer1: str1(START), str2(START), valid(1)
$ ./buffer1
EVILINPUTVALUE
buffer1: str1(TVALUE), str2(EVILINPUTVALUE), valid(0)
$ ./buffer1
BADINPUTBADINPUT
buffer1: str1(BADINPUT), str2(BADINPUTBADINPUT), valid(1)
```

## Process in Memory

- Processes are divided into three regions: Text, Data, and Stack.
- The text region includes code (instructions) and read-only data. This region is normally marked read-only and any attempt to write to it will result in a segmentation violation
- The data region contains initialized and uninitialized data. Static variables are stored in this region.
- A procedure call alters the flow of control, when finished performing its task, a function returns control to the statement or instruction following the call. This high-level abstraction is implemented with the help of the stack.
  - The stack is used to dynamically allocate the local variables used in functions, to pass parameters to the functions, and to return values from the function.

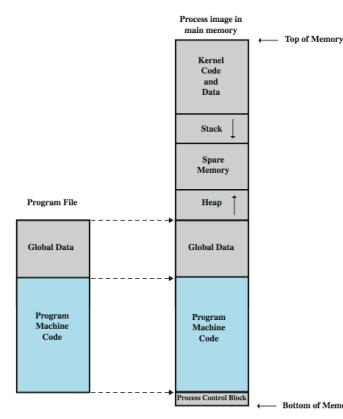

## Consider a simple program


```
int main() {
    int result = getResult();
}

int getResult() {
    int num1 = getNum1();
    int num2 = getNum2();
    return num1 + num2;
}


int getNum1() {
    return 10;
}

int getNum2() {
    return 20;
}
```

## Layout in Unix-like OS

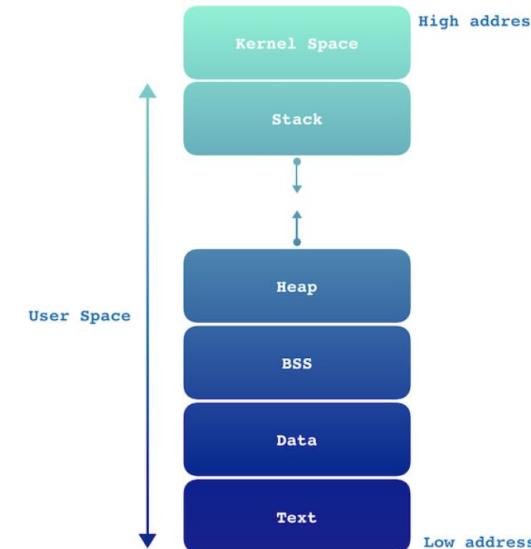

## Sequence of Stack contents

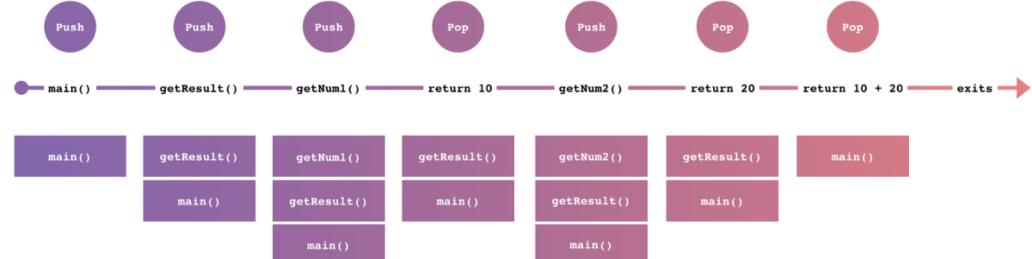


## Stack Frame Structure

- The general process of one function P calling another function Q can be summarized as follows.
- The calling function P
- Pushes the parameters for the called function onto the stack (typically in reverse order of declaration)
  - Executes the call instruction to call the target function, which pushes the return address onto the stack

- The called function Q
- Pushes the current frame pointer value (which points to the calling routine's stack frame) onto the stack
  - Sets the frame pointer to be the current stack pointer value (that is the address of the old frame pointer), which now identifies the new stack frame location for the called function
  - Allocates space for local variables by moving the stack pointer down to leave sufficient room for them
  - Runs the body of the called function
  - As it exits it first sets the stack pointer back to the value of the frame pointer (effectively discarding the space used by local variables)
  - Pops the old frame pointer value (restoring the link to the calling routine's stack frame)
  - Executes the return instruction which pops the saved address off the stack and returns control to the calling function

Lastly, the calling function

- Pops the parameters for the called function off the stack
- Continues execution with the instruction following the function call.

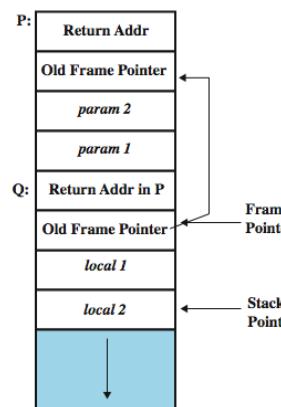

## Another Buffer Overflow

```
void getinp(char *inp, int siz)
{
    puts("Input value: ");
    fgets(inp, siz, stdin);
    printf("buffer3 getinp read %s\n", inp);
}
```

```
void display(char *val)
{
    char tmp[16];
    sprintf(tmp, "read val: %s\n", val);
    puts(tmp);
}

int main(int argc, char *argv[])
{
    char buf[16];
    getinp(buf, sizeof(buf));
    display(buf);
    printf("buffer3 done\n");
}
```

```
$ cc -o buffer3 buffer3.c
$ ./buffer3
Input value:
SAFE
buffer3 getinp read SAFE
read val: SAFE
buffer3 done

$ ./buffer3
Input value:
XXXXXXXXXXXXXXXXXXXXXXXXXXXX
buffer3 getinp read XXXXXXXXXXXXXXXX
read val: XXXXXXXXXXXXXXXX

buffer3 done
Segmentation fault (core dumped)
```


## Exploiting the Buffer-Overflow

To fully exploit a stack buffer-overflow vulnerability,

- Inject the malicious code: need to be able to inject the malicious code into the memory of the target process. This can be done if attacker can control the contents of the buffer in the targeted program.
- Jump to the malicious code: With the malicious code already in the memory, if the targeted program can jump to the starting point of the malicious code, the attacker will be in control.

Stack frame:

- Calling function*: needs a data structure to store the “return” address and parameters to be passed
- Called function*: needs a place to store its local variables somewhere different for every call

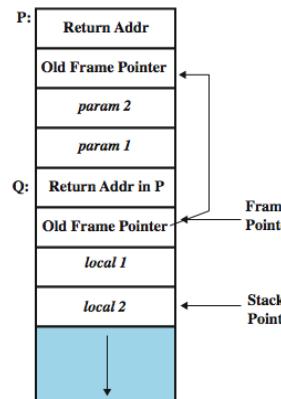

## Vulnerable Program

```
void function(int a, int b, int c) {
    char buffer[20];
    gets(buffer);
}
```

```
void main() {
    function(1,2,3);
    ....
    do more
    ...
}
```

bottom of memory      DDDDDDDDEEEEEEEEEE      EEEE      FFFF      FFFF      FFFF      FFFF      top of memory  
89ABCDEF0123456789AB      CDEF      0123      4567      89AB      CDEF  
sfp      ret      a      b      c

----- [SSSSSSSSSSSSSSSS] [SSSS] [0xD8] [0x01] [0x02] [0x03]

top of stack      |  
bottom of stack      |

- Assuming the stack starts at address 0xFF, and that S stands for the code attackers want to execute the stack should then look like this:

## Arc Injection (return-into-libc)

- Arc injection transfers control to code that already exists in the program's memory space
- refers to how exploits insert a new arc (control-flow transfer) into the program's control-flow graph as opposed to injecting code.
- can install the address of an existing function (such as **system()** or **exec()**), which can be used to execute programs on the local system
- Sophisticated attacks possible using this technique
- “Exploit” code pre-installed in code segment; No code is injected
- Memory based protection schemes cannot prevent arc injection
- Does not require larger overflows
- The original frame can be restored to prevent detection

Secure Software Engineering

18

BITS-Pilani

## Buffer Overflows persist

### CVE-2022-22634 Detail

#### Description

A buffer overflow was addressed with improved bounds checking. This issue is fixed in tvOS 15.4, iOS 15.4 and iPadOS 15.4. A malicious application may be able to execute arbitrary code with kernel privileges.

#### Severity

CVSS Version 3.x

CVSS Version 2.0

CVSS 3.x Severity and Metrics:



NIST: NVD

Base Score: 7.8 HIGH

Vector:

CVSS:3.1/AV:L/AC:L/PR:N/UI:R/S:U/C:H/I:H/A:H

NVD Analysts use publicly available information to associate vector strings and CVSS scores. We also display any CVSS information provided within the CVE List from the CNA.

#### QUICK INFO

CVE Dictionary Entry:

CVE-2022-22634

NVD Published Date:

03/18/2022

NVD Last Modified:

03/24/2022

Source:

Apple Inc.

## Buffer Overflows persist

### Search Results (Refine Search)

Sort results by: Publish Date Descending

There are 14,505 matching records.  
Displaying matches 1 through 20.

1 2 3 4 5 6 7 8 9 10 > >>

Vuln ID

Summary

CVSS Severity

[CVE-2024-2824](#)

A vulnerability was found in Matthias-Wandel jhead 3.08 and classified as critical. This issue affects the function PrintFormatNumber of the file exif.c. The manipulation leads to heap-based buffer overflow. The attack may be initiated remotely. The exploit has been disclosed to the public and may be used. The associated identifier of this vulnerability is VDB-257711.

V3.x:(not available)  
V2.0:(not available)

Published: March 22, 2024; 2:15:08 pm -0400

[CVE-2024-1848](#)

Heap-based Buffer Overflow, Memory Corruption, Out-Of-Bounds Read, Out-Of-Bounds Write, Stack-based Buffer

V3.x:(not available)

Secure Software Engineering

20

BITS-Pilani

Secure Software Engineering

21

BITS-Pilani

## Buffer Overflows persist

### CVE-2021-28560 Detail

#### Current Description

Acrobat Reader DC versions versions 2021.001.20150 (and earlier), 2020.001.30020 (and earlier) and 2017.011.30194 (and earlier) are affected by a Heap-based Buffer Overflow vulnerability. An unauthenticated attacker could leverage this vulnerability to achieve arbitrary code execution in the context of the current user. Exploitation of this issue requires user interaction in that a victim must open a malicious file.

#### QUICK INFO

CVE Dictionary Entry:

CVE-2021-28560

NVD Published Date:

09/02/2021

NVD Last Modified:

09/15/2021

Source:

Adobe Systems Incorporated

Secure Software Engineering

20

BITS-Pilani

Secure Software Engineering

21

BITS-Pilani



# Buffer Overflow Defenses

## Compile-Time Defenses

- Aim to prevent or detect buffer overflows
- Possibilities include
  - Choose a high-level language that does not permit buffer overflows
  - Encourage safe coding standards
  - Use safe standard libraries
  - Include additional code to detect corruption of the stack frame

## Buffer Overflow Defenses

Buffer overflows are widely exploited

Large amount of vulnerable code in use

- despite cause and countermeasures known

Two broad defense approaches

- compile-time - harden new programs
- run-time - handle attacks on existing programs

## Compile-Time Defenses: Programming Language

- Use a modern high-level languages with strong typing
  - not vulnerable to buffer overflow
  - compiler enforces range checks and permissible operations on variables
- Flexibility & Safety come with cost in resource use
  - at compile time
  - additional checks at run time
- Add restrictions on access to hardware
  - still need some code(e.g. device drivers) in C like languages

## Compile-Time Defenses: Safe Coding Techniques

If possible, avoid using potentially unsafe languages e.g. C

Programmer must explicitly write safe code

- by design with new code
- **extensive after code review** of existing code, (e.g., OpenBSD)

Buffer overflow safety a subset of general safe coding techniques

Allow for graceful failure (**know how things may go wrong**)

- check for sufficient space in any buffer

## Compile-Time Defenses: Safe Coding Techniques

Common Unsafe C Functions

<code>gets(char *str)</code>	read line from standard input into str
<code>sprintf(char *str, char *format, ...)</code>	create str according to supplied format and variables
<code>strcat(char *dest, char *src)</code>	append contents of string src to string dest
<code>strcpy(char *dest, char *src)</code>	copy contents of string src to string dest
<code>vsprintf(char *str, char *fmt, va_list ap)</code>	create str according to supplied format and variables

## Compile-Time Defenses: Language Extension, Safe Libraries

Proposals for safety extensions (library replacements) to C

- performance penalties
- must compile programs with special compiler

Several safer standard library variants

- new functions, e.g. `strlcpy()`
- safer re-implementation of standard functions as a dynamic library, e.g. Libsafe

## C String Library (SafeStr)

- The C String Library (SafeStr) from Messier and Viega provides a rich string-handling library for C that has secure semantics yet is interoperable with legacy library code in a straightforward manner
  - The SafeStr library uses a dynamic approach for C that automatically resizes strings as required.
  - SafeStr accomplishes this by reallocating memory and moving the contents of the string whenever an operation requires that a string grow in size.
  - As a result, buffer overflows should not result from using the library
  - The SafeStr library uses a dynamic approach for C that automatically resizes strings as required. SafeStr accomplishes this by reallocating memory and moving the contents of the string whenever an operation requires that a string grow in size. As a result, buffer overflows should not result from using the library

## Compile-Time Defenses: Stack Protection

- Stackguard: add function entry and exit code to check stack for signs of corruption
  - Use random canary
  - e.g. Stackguard, Win/GS, GCC
  - check for overwrite between local variables and saved frame pointer and return address
  - abort program if change found
  - issues: recompilation, debugger support
- Or save/check safe copy of return address (in a safe, non-corruptible memory area), e.g. Stackshield, RAD (Return Address Defender)

## Run-Time Defenses: Non Executable Address Space

- Many BO attacks copy machine code into buffer and xfer ctrl to it
- Use virtual memory support to make some regions of memory non-executable (to avoid exec of attacker's code)
  - e.g. stack, heap, global data
  - need h/w support in MMU (memory management unit)
  - long existed on SPARC/Solaris systems
  - recent on x86 Linux/Unix/Windows systems
- Issues: support for executable stack code

## Run-Time Defenses: Address Space Randomization

Manipulate location of key data structures

- stack, heap, global data: change address by 1 MB
- using random shift for each process
- have large address range on modern systems means wasting some has negligible impact

Randomize location of heap buffers and location of standard library functions

## Run-Time Defenses: Guard Pages

- Place guard pages between critical regions of memory (or between stack frames)
  - flagged in MMU (mem mgmt unit) as illegal addresses
  - any access aborts process
- Can even place between stack frames and heap buffers
  - at execution time and space cost

Source Code Analysis Tools (security analyzers) are automated tools for helping analysts find security-related problems in software

- use data- and control-flow analysis to find subtler bugs and to reduce false alarms

Some vulnerabilities (e.g. use of strcpy()) can be detected with high accuracy, others are harder to detect, and, in fact, one can always devise vulnerabilities that are undetectable altogether.

Tools have tradeoff between false alarms (also known as false positives) and missed vulnerabilities (also known as false negatives)

- can be configured to make a tool more sensitive (decreasing false negatives while increasing false positives) or make it less sensitive (increasing false negatives while decreasing false positives)



## Heap & Integer Vulnerabilities

## Heap Overflow

- Possible to attack buffer located in heap
  - typically located above program code and global data and grows up in memory (while stack grows down towards it)
  - memory requested by programs to use in dynamic data structures, e.g. linked lists
- No return address
  - hence no easy transfer of control
- May have function pointers that can be exploited
  - Typically for custom processing of data, e.g. decoding a compressed image
  - or manipulate management data structures
- Defenses: non executable or random heap

## Heap Overflow Example

```
/* record type to allocate on heap */
typedef struct chunk {
    char inp[64];           /* vulnerable input buffer */
    void (*process)(char *); /* pointer to function */
} chunk_t;

void showlen(char *buf) {
    int len; len = strlen(buf);
    printf("buffer5 read %d chars\n", len);
}

int main(int argc, char *argv[]) {
    chunk_t *next;
    setbuf(stdin, NULL);
    next = malloc(sizeof(chunk_t));
    next->process = showlen;
    printf("Enter value: ");
    gets(next->inp);
    next->process(next->inp);
    printf("buffer5 done\n");
}
```

## Integer Security

Integers represent a source of vulnerabilities in C and C++ programs.

Integer range checking has not been systematically done in many C and C++ software

- Security flaws involving integers exist
- Some of these are likely to be vulnerabilities

Integers in C and C++ are either signed or unsigned.

- For each signed type there is an equivalent unsigned type.
- Signed integers are used to represent positive and negative values.
  - On a computer using two's complement arithmetic, a signed integer ranges from  $-2^{n-1}$  through  $2^{n-1}-1$ .
- Unsigned integer values range from zero to a maximum
  - This maximum value can be calculated as  $2^n-1$ , where n is the number of bits used to represent the unsigned type.

## Integer Conversions

From	To	Method
char	char	Preserve bit pattern; high-order bit becomes sign bit
char	short	Zero-extend
char	long	Zero-extend
char	unsigned short	Zero-extend
char	unsigned long	Zero-extend
short	char	Preserve low-order byte
short	short	Preserve bit pattern; high-order bit becomes sign bit
short	long	Zero-extend
short	unsigned char	Preserve low-order byte
long	char	Preserve low-order byte
long	short	Preserve low-order word
long	long	Preserve bit pattern; high-order bit becomes sign bit
long	unsigned char	Preserve low-order byte
long	unsigned short	Preserve low-order word

Key: Lost data Misinterpreted data

Type conversions may occur in C and C++

- explicitly as a cast or
- implicitly as C language can perform operations on mixed types.

Conversions can lead to lost or misinterpreted data.

## Integer Conversions

From	To	Method
char	short	Sign-extend
char	long	Sign-extend
char	unsigned char	Preserve pattern; high-order bit loses function as sign bit
char	unsigned short	Sign-extend to short; convert short to unsigned short
char	unsigned long	Sign-extend to long; convert long to unsigned long
short	char	Preserve low-order byte
short	long	Sign-extend
short	unsigned char	Preserve low-order byte
short	unsigned short	Preserve bit pattern; high-order bit loses function as sign bit
short	unsigned long	Sign-extend to long; convert long to unsigned long
long	char	Preserve low-order byte
long	short	Preserve low-order word
long	unsigned char	Preserve low-order byte
long	unsigned short	Preserve low-order word
long	unsigned long	Preserve pattern; high-order bit loses function as sign bit

Key: Lost data Misinterpreted data

## Conversion anomaly

```
unsigned int n = ULONG_MAX;
char c = -1;
if (c == n) {
    printf("-1 = 4,294,967,295 ?\n");
}
```

```
#define BUFF_SIZE 10
int main(int argc, char* argv[]){
int len;
char buf[BUFF_SIZE];
len = atoi(argv[1]);
if (len < BUFF_SIZE) {
    memcpy(buf, argv[2], len);
}
}
```

- SafeInt is a C++ template class written by David LeBlanc.
- Implements a precondition approach that tests the values of operands before performing an operation to determine if an error will occur.
- The class is declared as a template, so it can be used with any integer type.
- Every operator has been overridden except for the subscript **operator[]**



## Format String Vulnerabilities

## Format Strings

- Printf (stands for "print formatted") format string are control parameter used by a class of functions in the string-processing libraries.
- The format string is written in a simple template language, and specifies a method for rendering an arbitrary number of varied data type parameters into a string
- e.g.
  - printf ("a has value %d, b has value %d, c is at address: %08x\n", a, b, &c);

## Format Strings Abuse

- Consider e.g.
  - printf ("a has value %d, b has value %d, c is at address: %08x\n", a, b,);
- Here the format string asks for 3 arguments, but the program actually provides only two (i.e. *a* and *b*). This program passes the compiler.
  - The function printf() is defined as function with variable length of arguments. Therefore, by looking at the number of arguments, everything looks fine.
  - To find the miss-match, compilers needs to understand how printf() works and what the meaning of the format string is. However, compilers usually do not do this kind of analysis.
  - Sometimes, the format string is not a constant string, it is generated during the execution of the program. Therefore, there is no way for the compiler to find the miss-match in this case.

## Format Strings Abuse

- The function printf() fetches the arguments from the stack. If the format string needs 3 arguments, it will fetch 3 data items from the stack.
- In a mis-match case, it will fetch some data that do not belong to this function call.
- Crashing the program
  - printf ("%s%s%s%s%s%s%s%s%s%s");
  - For each %s, printf() will fetch a number from the stack, treat this number as an address, and print out the memory contents pointed by this address, until a NULL character (i.e., number 0, not character 0) is encountered.
  - Since the number fetched by printf() might not be an address, the memory pointed by this number might not exist, if so the program will crash.
  - It is also possible that the number happens to be a good address.

## Format Strings Abuse

- Writing an integer in the process memory
  - %n: The number of characters written so far is stored into the integer indicated by the corresponding argument. Consider the code that writes 5 to i:
    - int i;
    - printf ("12345%n", &i);
- Using the same approach as that for viewing memory at any location, we can cause printf() to write an integer into any location. Just replace the %s in the previous example with %n, and the contents at the address 0x10014808 will be overwritten.

## Format Strings Abuse

- Viewing the stack
  - printf ("%08x %08x %08x %08x %08x\n");
    - This instructs the printf-function to retrieve five parameters from the stack and display them as 8-digit padded hexadecimal numbers.
  - So a possible output may look like:
    - 40012980 080628c4  
bffff7a4 00000005  
08059c04

Consider the program

```
int main(int argc, char *argv[])
{ char user_input[100];
... /* other variable definitions and statements */
scanf("%s", user_input); /* getting a string from user */
printf(user_input); /* Vulnerable place */
return 0;
}
```

- If the attacker provides user input of "\x10\x01\x48\x08 %x %x %x %s", the program will print contents at the address 0x10014808

## Format Strings Abuse

- Using this attack, attackers can do the following:
  - Overwrite important program flags that control access privileges \* Overwrite return addresses on the stack, function pointers, etc.
    - However, the value written is determined by the number of characters printed before the %n is reached.
  - Is it really possible to write arbitrary integer values?
    - Use dummy output characters. To write a value of 1000, a simple padding of 1000 dummy characters would do.
    - To avoid long format strings, we can use a width specification of the format indicators.
- Countermeasures
  - Address randomization: just like the countermeasures used to protect against buffer-overflow attacks, address randomization makes it difficult for the attackers to find out what address they want to read/write



## Java Security

### Inherent Java Security


The Java language is designed keeping security in mind.

- Every entity has an associated Access Level:
  - Public, Protected, Default/Package, Private
  - Provides encapsulation
- A strongly typed language:
  - Restrictions on how data types can be mixed
- No direct memory access
  - No notion of pointers
  - Entities are accessed via references (by name)
- Variables must be initialized before they are used
- Objects can't be arbitrarily cast into other objects (ensures a type safe environment):
  - Strict use of extends, implements (inheritance)
  - Compile time type checking of casting
- Provides automatic memory management, garbage collection, and array range-checking

### The Java Runtime Environment (JRE)

- Consists of the Java Virtual Machine (JVM) and Class Libraries
- JVM: available for most platforms, provides the environment for java bytecode to execute
  - Offers Platform Independence: "Write once, run anywhere!"
  - Is an abstract virtual machine
    - Diff. implementations: Sun, IBM, Oracle, MS
    - Each thread has its own stack
    - Typical instruction set: Load/Store, Arithmetic, etc.
  - Interprets bytecode generated by Java compilers
- Class Libraries: The Core Java API, contains classes for language support and added functionality

### Why Java Needs Security

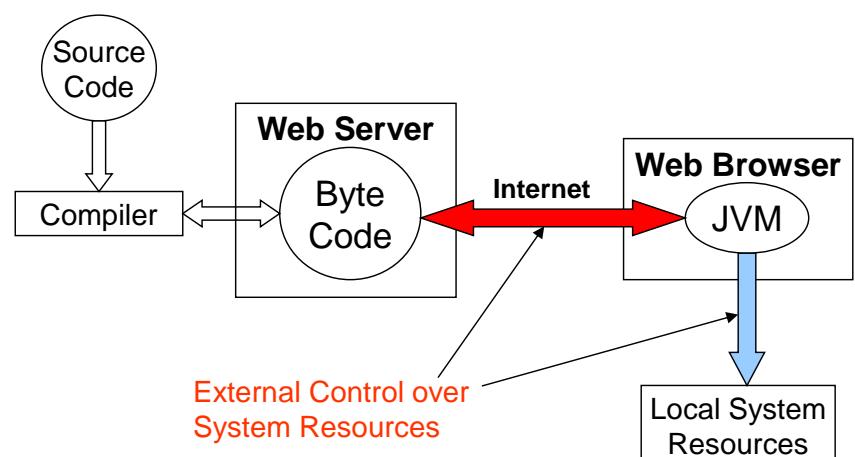

## Bytecode Verifier

When a class loader presents the bytecodes of a newly loaded class to JVM, these bytecodes are first inspected by a Verifier.

- All classes except for system classes are verified; but verification can be deactivated with undocumented `-noverify` option

Here are some of the checks that the verifier carries out:

- Variables are initialized before they are used.
- Method calls match the types of object references.
- Rules for accessing private data and methods are not violated.
- Local variable accesses fall within the runtime stack.
- The runtime stack does not overflow.
  - If any of these checks fails, then the class is considered corrupted and will not be loaded

A class file generated by a compiler for the Java programming language always passes verification. However, the bytecode can be changed by someone with some experience in assembly programming and a hex editor to manually produce a class file that contains valid but unsafe instructions for the Java virtual machine

## Java Security Sandbox

The base Java Security sandbox is comprised of three major components: the **byte code Verifier**, the **Class Loader**, and the **Security Manager**.

- The Security Manager depends on Class Loaders to correctly label code as trusted or untrusted. Class Loaders also shield the Security Manager from spoofing attacks by protecting local trusted classes making up the Java API.
- On the other hand, the class loader system is protected by the Security Manager, which ensures that an applet cannot create and use its own Class Loader.
- The Verifier protects both the Class Loaders and the Security Manager against language-based attacks meant to break the VM. All in all, the three parts intertwine to create a default sandbox.
- However, the three parts are not created or specified by a standards committee.
  - Java applications, including Java-enabled Web browsers, are allowed to customize two of the fundamental portions of the security model to suit their needs (the Class Loader and the Security Manager).
- A great deal of faith is placed in the ability of VM implementations to ensure that untrusted code remains properly contained. Bugs in the system will compromise the entire security model.

## Class Loader

A Java compiler converts source instructions into bytecode for the Java virtual machine.

- Each class file contains the definition and implementation code for one class or interface. These class files must be interpreted into the machine language of the target machine.

The virtual machine loads only those class files that are needed for the execution of a program.

The class loading mechanism doesn't just use a single class loader, has at least three class loaders:

- The bootstrap class loader : loads the system classes, typically from rt.jar; integral part of the JVM; usually implemented in C
- The extension class loader : loads "standard extensions" from jre/lib/ext directory; will find the classes in them, even without any class path
- The system class loader (also sometimes called the application class loader) : loads the application classes. It locates classes in the directories and JAR/ZIP files on the class path (CLASSPATH environment variable or `-classpath` option)
  - In Sun's Java implementation, the extension and system class loaders are implemented in Java

## Java Security Weaknesses

- Fine-grained control with a lot of complexity. Learning curve for developers
- Relies on user to secure their own environment via a complex Policy Tool
- Multiple JVM Implementations: each have their own unique vulnerabilities
- Reverse engineering of class files to source code (software watermarking, code obfuscation can not be security)
- Several flaws have been addressed over the evolution of Java and the JVM

## (Some) Java Security Guidelines

- Java offers several ways to allocate uninitialized objects. The easy way to protect yourself against this problem is to write your classes so that before any object does anything, it verifies that it has been initialized.
- If a class or method is non-final, an attacker could try to extend it in a dangerous and unforeseen way. Make something non-final only if there is a good reason, and document that reason.
- Do not depend on package scope - Classes, methods, and variables, by default, are accessible within the same package. Sometimes an attacker could introduce a new class inside the package, and use this new class to access the things programmer thought hidden
- Java language allows inner classes (class within class). Java byte code has no concept of inner class, so it becomes ordinary class in the package. Further inner class has privilege to access private members in the containing class.

Securing Java by Gary McGraw, Ed Felten, John Wiley

Secure Software Engineering

58

BITS-Pilani



## Open Source Security

## (Some) Java Security Guidelines

- Make Your Classes Uncloneable – Cloning creates new instances without executing constructor. If you must permit cloning, make the clone method final.
  - attacker can define a subclass of your class, and make the subclass implement java.lang.Cloneable. You can prevent subclass cloning by defining the following method in each of your classes:

```
public final void clone() throws java.lang.CloneNotSupportedException {  
    throw new java.lang.CloneNotSupportedException();  
}
```
- Make Your Classes Unserializable - Serialized classes expose internal dynamic state of objects in byte code format to an attacker.
- Make Your Classes Undeserializable - Even if a class is not serializable, it may be deserializable. An adversary can create a sequence of bytes that happens to deserialize to an instance of your class, and you do not have control over what state the deserialized object is in.

Securing Java by Gary McGraw, Ed Felten, John Wiley

Secure Software Engineering

59

BITS-Pilani

## Open Source Security

### What is open source software

- Open-source software is computer software that is released under a license in which the copyright holder grants users the rights to use, study, change, and distribute the software and its source code to anyone and for any purpose. - Wikipedia

### Why Open Source?

- Open collaboration by online participation.
- High Reuse
- Examination of the code facilitates public trust

## Open Source Security

Casson and Ryan have pointed out several policy-based reasons for adoption of open source –

- Security
- Interoperability
- Affordability
- Flexibility
- Transparency
- Localization
- Perpetuity


It has become double-edge sword

- Both high productivity and security if used proven packages
- Huge risk and challenges if package vulnerabilities are exposed

## Python Security – An Empirical Study

Ranking of the 5 most commonly found vulnerability types (CWE) in PyPi

Rank	Vulnerability type (CWE)	Freq.	Frequency by severity
			High    Medium    Low
1	Cross-Site-Scripting (XSS)	130	4    118    8
2	Denial of Service (DoS)	72	11    59    2
3	Arbitrary Code Execution	66	39    26    1
4	Information Exposure	60	8    44    8
5	Access Restriction Bypass	34	10    23    1

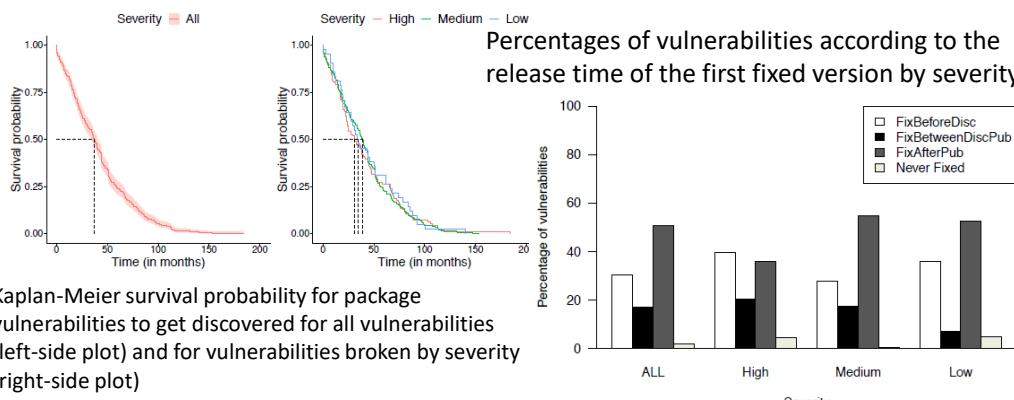

Kaplan-Meier survival probability for package vulnerabilities to get discovered for all vulnerabilities (left-side plot) and for vulnerabilities broken by severity (right-side plot)

## Python Security – An Empirical Study

- Level of code reusability supported by software ecosystems also makes the discovery of security vulnerabilities much more difficult

An empirical study of 550 vulnerability reports affecting 252 Python packages showed

- The discovered vulnerabilities in Python packages are increasing over time
- Some take more than 3 years to be discovered
- The majority of these vulnerabilities (50.55%) are only fixed after being publicly announced, giving ample time for attackers exploitation

<https://www.blackduck.com/resources/analyst-reports/open-source-security-risk-analysis.html>

Computer Security: Principles and Practice by William Stallings, and Lawrie Brown Pearson, 2018.  
Software Security Engineering, Julia H. Allen, et al, Pearson, 2008.  
[www.microsoft.com](http://www.microsoft.com)  
[www.owasp.com](http://www.owasp.com)  
[sei.cmu.edu](http://sei.cmu.edu)

# Thank You!

Secure Software Engineering 66 BITS-Pilani



SE/SS ZG566  
**Secure Software Engineering**  
T V Rao

BITS Pilani  
Pilani | Dubai | Goa | Hyderabad

Secure Software Engineering 67 BITS-Pilani



innovate achieve lead



- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*



## Case Study

### Sony Hack

Hackers stole the data before destroying on Sony machines.

- they started dumping unfinished movie scripts and confidential emails to salary lists and more than 47,000 Social Security numbers.
- Five Sony films, four of them unreleased, were leaked to piracy websites for free viewing.

Hackers threatened a 9/11-style attack against theaters, where Sony is to do the movie *The Interview's* Christmas release

- Sony abandoned the movie release
- Sony Pictures released it on internet through video on demand and in few select theatres

### Sony Hack

At about 7 a.m. Pacific time on Monday, Nov. 24, 2014—a severe cyberattack was launched on Sony Pictures, US.

- Employees logging on to its network were met with the sound of gunfire, scrolling threats, and the menacing image of a fiery skeleton looming over the tiny zombified heads of the studio's top two executives.

Hackers' malware had spread across continents, wiping out half of Sony's global network

- It erased 3,262 of the company's 6,797 personal computers and 837 of its 1,555 servers
- Sony Pictures started using fax machines, postal services, and paid its 7,000 employees with paper checks

4/20/2025

<http://fortune.com/sony-hack-part-1/>

4

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



### The Interview – A Sony film

The Interview is a 2014 American political satire comedy film - a comedy depicting the killing of North Korea's sovereign leader

- In June 2014, the North Korean government threatened action against the United States if the film is released.
- Producers delayed the release from October to December, and reportedly re-edited the film to make it more acceptable to North Korea.
- In November, the computer systems of Sony Pictures Entertainment were hacked by the "Guardians of Peace", a group the FBI claims has ties to North Korea.
- The hacker group also threatened terrorist attacks against cinemas that showed the film.

President Obama expressed dissatisfaction with the film producers' response

<https://www.sans.org/reading-room/whitepapers/casestudies/paper/36022>

On November 24, 2014, an incident almost pulled right out of a 90's hacker movie transformed into a massive computer hack. A group calling itself The Guardians of Peace (GOP) managed to breach Sony Pictures Entertainment and bring their systems down to a screeching halt. Resulting from this breach the GOP claims to have stolen over 100 terabytes of data containing Social Security numbers, salaries, movies, and other personally identifiable information. Within days, the stolen data was posted on the Internet along with demands from the GOP group that included not releasing *The Interview*.

This paper will point out some of the Critical Controls that could have been utilized to minimize the impact the GOP had on the Sony breach. Utilizing even a few of the Critical Controls such as malware defenses, monitoring, audit logs, encryption, controlled use of administrative credentials, and incident response could have provided the necessary implementations required to prevent a 90's hacker movie from turning into reality.

## Steps for Reducing Risk with Critical Controls (SANS Institute)

**Step 1:** Perform Initial Gap Assessment - determining what has been implemented and where gaps remain for each control and sub-control.

**Step 2:** Develop an Implementation Roadmap - selecting the specific controls (and subcontrols) to be implemented in each phase, and scheduling the phases based on business risk considerations.

**Step 3:** Implement the First Phase of Controls - identifying existing tools that can be repurposed or more fully utilized, new tools to acquire, processes to be enhanced, and skills to be developed through training.

**Step 4:** Integrate Controls into Operations - focusing on continuous monitoring and mitigation and weaving new processes into standard acquisition and systems management operations.


**Step 5:** Report and Manage Progress against the Implementation Roadmap developed in Step 2. Then repeat Steps 3-5 in the next phase of the Roadmap.

## Top 20 Critical Controls (SANS Institute)

Table 1: Top 20 Critical Controls (SANS Institute, 2015b).

### Top 20 Critical Controls

1. Inventory of Authorized and Unauthorized Devices
2. Inventory of Authorized and Unauthorized Software
3. Secure Configurations for Hardware and Software on Mobile Devices, Laptops, Workstations, and Servers
4. Continuous Vulnerability Assessment and Remediation
5. Malware Defenses
6. Application Software Security
7. Wireless Access Control
8. Data Recovery Capability
9. Security Skills Assessment and Appropriate Training to Fill Gaps
10. Secure Configurations for Network Devices such as Firewalls, Routers, and Switches
11. Limitation and Control of Network Ports, Protocols, and Services
12. Controlled Use of Administrative Privileges
13. Boundary Defense
14. Maintenance, Monitoring, and Analysis of Audit Logs
15. Controlled Access Based on the Need to Know
16. Account Monitoring and Control
17. Data Protection
18. Incident Response and Management
19. Secure Network Engineering
20. Penetration Tests and Red Team Exercises

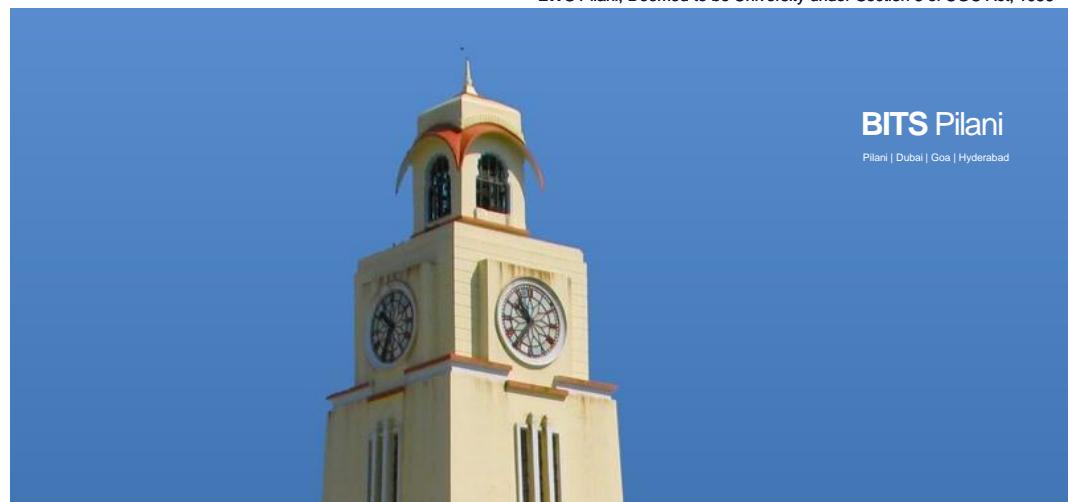

## Assignment

## Option 1 (Reactive Assignment)

Step – 1:

Refer to a prominent security breach that is widely published, e.g. one from <https://www.csoonline.com/article/2130877/the-biggest-data-breaches-of-the-21st-century.html>

Or OWASP top ten

Or Panama Papers Incident

Etc. (Any significant security incident of interest to you)

Step-2:

Identify root cause of the incident. List corresponding CVEs and CWEs.

Step-3:

Provide list of practices/recommendations that would have avoided the incident.

## Option 3 (Survey Assignment)

Step – 1:

Pick an area for deep exploration. Some suggested areas:

- Database Hardening
- Operating System Hardening
- Anti-Ransomware Solutions
- Dark Web
- Any other area (with prior approval of the faculty)

Step-2:

Cover Challenges, Best Practices, and Vendor offerings

Expect illustrations in the write-up to connect with listings from CVE/CWE/OWASPTop10 and other known events.

## Option 2 (Proactive Assignment)

Step – 1:

Pick an industry (e.g. bank, telecom etc.) of your choice. Choose technology platforms / reference architecture that are commonly used.

Step-2:

Perform Threat Modelling for the organization and software to be developed. Generate necessary artifacts. Document in detail at least one of the artifact. Propose security-specific requirements.

Step-3:

Provide recommendations to the technology group w.r.t. development/operations.

## Individual or Group?

If you decide to work as a group, you need to submit a file that describes contributions made by each individual.

Assessment will be done individually based on quality, concepts, structure, and practical applicability of the work.

# Thank You!



- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*



A large, light-colored stone clock tower with a red roof and two circular clock faces. The tower is set against a clear blue sky. The image is part of a presentation slide.

SE/SS ZG566

**Secure Software Engineering**

T V Rao

**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

## Data in Enterprise

# Data in Enterprise

Can be

- Structured
- Semi-structured
- Unstructured

Can have varying ROB (return on byte)

May require

- ACID property
- BASE may be fine

Can have varying velocity

- Stream
- Batch

4

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Why go beyond RDBMS?

Its strengths are also its weakness

	Strength	Weakness
<b>Schema</b>	Clearly defines data and relationship; ensures data quality and integrity.	Not suitable for semi-structured data.
<b>ACID</b>	Guarantees the correctness of the operations and the durability of the data.	Makes it very difficult to scale
<b>SQL</b>	One language for all data and all RDBMS.	Impedes rapid application development (RAD) due to the mismatch between SQL and the application languages.

6

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

# Databases

Can be

- SQL based RDBMS (most business transactions)
  - Support for ACID
- NoSQL databases
  - Mostly BASE

SQL based RDBMS

- Transactional/Operational DBMS
  - Designed by ER modeling
  - Serves OLTP
- Data Warehouse
  - Designed by Star/Snowflake modeling
  - Serves OLAP

NoSQL based DBMS

- Key-Value Stores
- Document Databases
- Column Family Stores
- Graph Databases

5

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Diverse kinds of Data

Besides relational database data (from operational or analytical systems), there are many other kinds of data that have diverse forms and structures and different semantic meanings.

Examples of data can be :


- time-related or sequence data (e.g., historical records, stock exchange data, and time-series and biological sequence data),
- data streams (e.g., video surveillance and sensor data, which are continuously transmitted),
- spatial data (e.g., maps),
- engineering design data (e.g., the design of buildings, system components, or integrated circuits),
- hypertext and multimedia data (including text, image, video, and audio data),
- graph and networked data (e.g., social and information networks), and
- the Web (a widely distributed information repository).

Diversity of data brings in new challenges such as handling special structures (e.g., sequences, trees, graphs, and networks) and specific semantics (such as ordering, image, audio and video contents, and connectivity)

7

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Gartner DBMS Market Share Ranks: 2011-2023

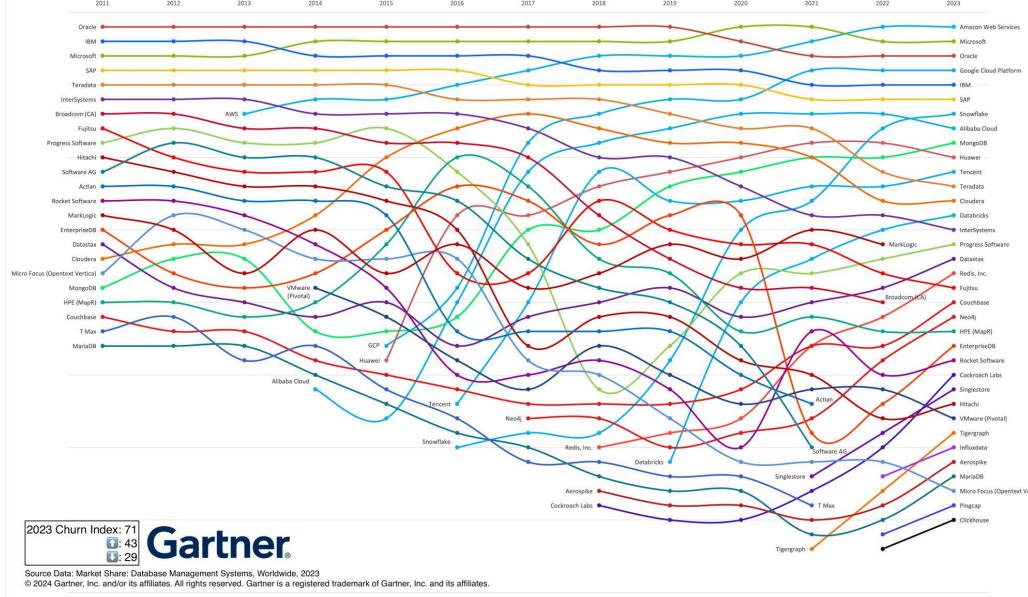

## Ranking of the most popular DBMS

<https://db-engines.com/en/ranking>

<https://www.linkedin.com/in/aronthal/>

<https://www.linkedin.com/feed/update/urn:li:activity:7186011497754439680/>

## Enterprise Data Strategy: What, Why, How

<https://www.dataversity.net/building-an-enterprise-data-strategy-what-why-how/>

**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

## Database Security Overview

# Databases

- Structured collection of data stored for use by one or more applications
- Contains the relationships between data items and groups of data items
- Often contains sensitive data that needs to be secured


## Query language

- Provides a uniform interface to the database for users and applications

### Database management system (DBMS)

- Suite of programs for constructing and maintaining the database
- Offers ad hoc query facilities to multiple users and applications

# Database Security

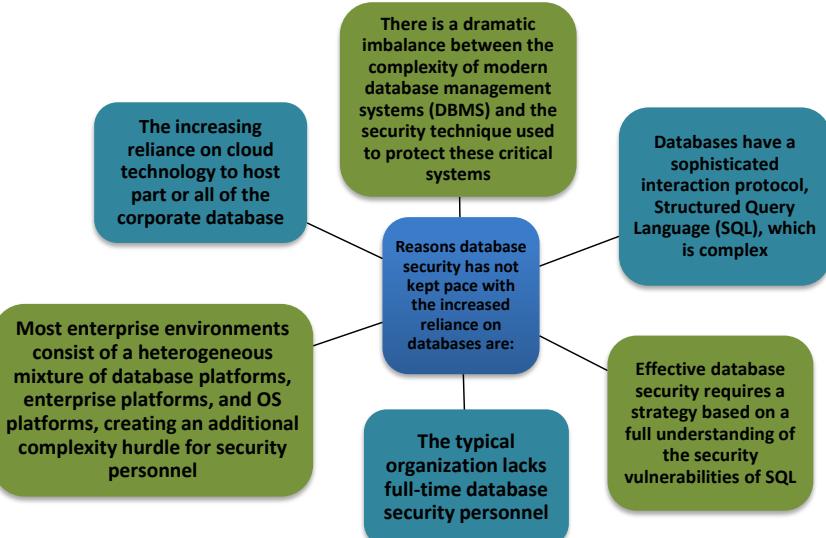

# Database Security

## Threats to databases

- Loss of **integrity**
  - Information be protected from improper modification
- Loss of **availability**
  - Available to user or program with legitimate right
- Loss of **confidentiality**
  - Protection of data from unauthorized disclosure

To protect databases against these types of threats four kinds of countermeasures can be implemented:

- Access control
- Inference control
- Flow control
- Encryption

# Introduction to Database Security

- The security mechanism of a DBMS must include provisions for restricting access to the database as a whole
  - This function is called **access control** and is handled by creating user accounts and passwords to control login process by the DBMS.
- The security problem associated with databases is that of controlling the access to a **statistical database**, which is used to provide statistical information or summaries of values based on various criteria.
  - The countermeasures to **statistical database security** problem is called **inference control measures**.
- Another security is that of **flow control**, which prevents information from flowing in such a way that it reaches unauthorized users.
  - Channels that are pathways for information to flow implicitly in ways that violate the security policy of an organization are called **covert channels**.
- A final security issue is **data encryption**, which is used to protect sensitive data (such as credit card numbers) that is being transmitted via some type communication network.
  - The data is **encoded** using some **encoding algorithm**.
  - An unauthorized user who access encoded data will have difficulty deciphering it, but authorized users are given decoding or decrypting algorithms (or keys) to decipher data.

## Information Security vs Information Privacy

- Questions of who has what rights to information about individuals for which purposes become more important in this information age
- There is a considerable overlap between issues related to access to resources (security) and issues related to appropriate use of information (privacy).
- Security in information technology refers to many aspects of protecting a system from unauthorized use, including authentication of users, information encryption, access control, firewall policies, and intrusion detection.
- The concept of privacy goes beyond security. Privacy examines how well the use of personal information that the system acquires about a user conforms to the explicit or implicit assumptions regarding that use.
  - Two different perspectives for privacy: preventing storage of personal information versus ensuring appropriate use of personal information.

## Database Logs and Database Audit

The database system must also keep **track of all operations** on the database that are applied by a certain user throughout **each login session**.

- To keep a record of all updates applied to the database and of the particular user who applied each update, we can modify **system log**, which includes an entry for each operation applied to the database that may be required for recovery from a transaction failure or system crash.

If any tampering with the database is suspected, a database audit is performed

- A database audit consists of reviewing the log to examine all accesses and operations applied to the database during a certain time period.

A database log that is used mainly for security purposes is sometimes called an audit trail

## Database Security and DBA

The DBA (database administrator)'s responsibilities include safeguarding database security. The DBA holds privileged account & among others activities, performs

- Account creation. This action creates a new account and password for a user or a group of users to enable access to the DBMS.
- Privilege granting. This action permits the DBA to grant certain privileges to certain accounts.
- Privilege revocation. This action permits the DBA to revoke (cancel) certain privileges that were previously given to certain accounts.
- Security level assignment. This action consists of assigning user accounts to the appropriate security clearance level.



## Discretionary & Mandatory Access Control

## Database Security Mechanisms

- A DBMS typically includes a database security and authorization subsystem that is responsible for ensuring the security portions of a database against unauthorized access.
- Two types of database security mechanisms:
  - Discretionary security mechanisms
    - used to grant privileges to users, including the capability to access specific data files, records, or fields in a specified mode (such as read, insert, delete, or update)
  - Mandatory security mechanisms
    - used to enforce multilevel security by classifying the data and users into various security classes (or levels) and then implementing the appropriate security policy of the organization

## Mandatory Access Control

- The discretionary access control is an all-or-nothing method, e.g. a user has privilege to access customer data or Not.
- Business may not be treating all customers equal. Discretionary access control has no direct mechanism to handle such situation.
- Many applications require additional security policy that classifies data and users based on security classes. This is called Mandatory Access Control.
  - This approach as mandatory access control, would typically be combined with the discretionary access control mechanisms
- To incorporate **multilevel security** notions into the relational database model, it is common to consider attribute values and tuples as data objects.
- Hence, each attribute A is associated with a classification attribute C in the schema, and each attribute value in a tuple is associated with a corresponding security classification.
- In addition, in some models, a tuple classification attribute TC is added to the relation attributes to provide a classification for each tuple as a whole.
- Hence, a multilevel relation schema R with n attributes would be represented as  
$$R(A_1, C_1, A_2, C_2, \dots, A_n, C_n, T_C)$$
where each  $C_i$  represents the classification attribute associated with attribute  $A_i$ .

## Discretionary Access Control

The typical method of enforcing **discretionary access control** in a database system is based on the **granting** and **revoking** privileges.

### Types of Discretionary Privileges

- The account level:
  - At this level, the DBA specifies the particular privileges that each account holds independently of the relations in the database.
- The relation level (or table level):
  - At this level, the DBA can control the privilege to access each individual relation or view in the database.

The privileges at the **account level** apply to the capabilities provided to the account itself and can include

- the **CREATE SCHEMA** or **CREATE TABLE** privilege, to create a schema or base relation;
- the **CREATE VIEW** privilege;
- the **ALTER** privilege, to apply schema changes such adding or removing attributes from relations;
- the **DROP** privilege, to delete relations or views;
- the **MODIFY** privilege, to insert, delete, or update tuples;
- and the **SELECT** privilege, to retrieve information from the database by using a **SELECT** query.

## Security Classes - Mandatory Access Control and Multilevel Security


- Typical security classes are top secret (TS), secret (S), confidential (C), and unclassified (U), where TS is the highest level and U the lowest:  $TS \geq S \geq C \geq U$
- The commonly used model for multilevel security, known as the Bell-LaPadula model, classifies each subject (user, account, program) and object (relation, tuple, column, view, operation) into one of the security classifications, T, S, C, or U:
  - Represent clearance (classification) of a subject S as class(S) and to the classification of an object O as class(O).
- A multilevel relation will appear to contain different data to subjects (users) with different clearance levels.
- In some cases, it is possible to store a single tuple in the relation at a higher classification level and produce the corresponding tuples at a lower-level classification through a process known as **filtering**.
- In other cases, it is necessary to store two or more tuples at different classification levels with the same value for the **apparent key**.
  - The apparent key of a multilevel relation is the set of attributes that would have formed the primary key in a regular (single-level) relation
- This leads to the concept of **polystatification** where several tuples can have the same apparent key value but have different attribute values for users at different classification levels.

## Confidentiality - Bell-LaPadula Model

- A confidentiality policy prevents the unauthorized disclosure of information.
  - e.g., the navy must keep confidential the date on which a troop ship will sail.
- Bell-LaPadula Model is a multi-level model proposed by Bell and LaPadula of MITRE for enforcing access control in government and military applications
- It uses military-style classifications. Subjects and Objects are often partitioned into different security levels
- A subject can only access objects at certain levels determined by his/her/its security level

## The Model

- The confidentiality classification is a set of security clearances arranged in a linear (total) ordering.
- Clearances represent the security levels. The higher the level, the more sensitive the info.
  - A subject has a security clearance. An object has a security classification. While referring to both subject clearances and object classifications, the term "classification" is used

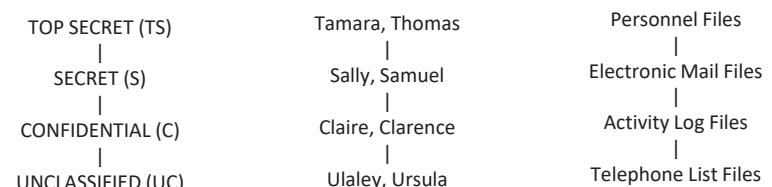

The basic confidentiality classification system. The four security levels are arranged with the most sensitive at the top and the least sensitive at the bottom.

## Security Requirements - Bell-LaPadula Model

Let  $L(S)=l_s$  be the security clearance of subject S.

Let  $L(O)=l_o$  be the security classification of object O.

For all security classification  $l_i$ ,  $i=0, \dots, k-1$ ,  $l_i < l_{i+1}$

Simple Security Condition:

S can read O if and only if  $l_o \leq l_s$  and

S has discretionary read access to O.


\*-Property (Star property):

S can write O if and only if  $l_s \leq l_o$  and

S has discretionary write access to O.

TS subject can not write documents lower than TS.

– Prevent classified information leak.

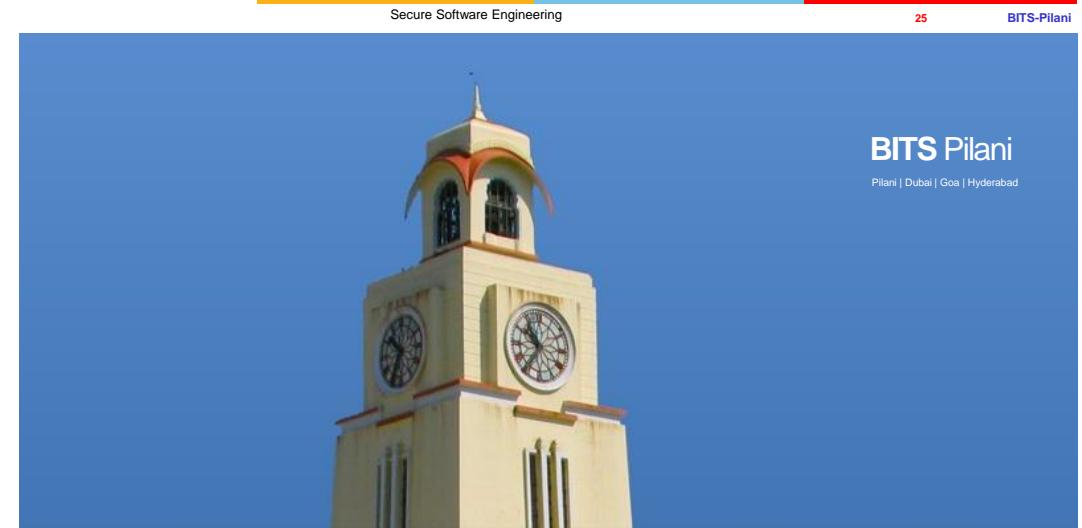

## Inference Control

## Statistical Database Security

- Statistical databases are used mainly to produce statistics on various populations.
- The database may contain confidential data on individuals, which should be protected from user access.
- Users are permitted to retrieve statistical information on the populations, such as averages, sums, counts, maximums, minimums, and standard deviations.
- A population is a set of tuples of a relation (table) that satisfy some selection condition.
- Statistical queries involve applying statistical functions to a population of tuples.

## Inference Control

- It is DBMS's responsibility to ensure confidentiality of information about individuals, while still providing useful statistical summaries of data about those individuals to users. Provision of privacy protection of users in a statistical database is paramount.
- In some cases it is possible to infer the values of individual tuples from a sequence of statistical queries.
- This is particularly true when the conditions result in a population consisting of a small number of tuples.

Consider the following statistical queries:

Q1: SELECT COUNT (\*) FROM PERSON  
WHERE <condition>;

Q2: SELECT AVG (Income) FROM PERSON  
WHERE <condition>;

Suppose that we are interested in finding the Salary of Jane Smith, and we know that she has a Ph.D. degree and that she lives in the city of Bellaire, Texas.

We issue the statistical query Q1 with the following condition:

(Last\_degree='Ph.D.' AND Sex='F' AND  
City='Bellaire' AND State='Texas')


If we get a result of 1 for this query, we can issue Q2 with the same condition and find the Salary of Jane Smith

Even if Q1 gives higher than 1, we may be able to infer if the number is small

## Statistical Queries

- Statistical database security techniques must prohibit the retrieval of individual data.
- This can be achieved by prohibiting queries that retrieve attribute values and by allowing only queries that involve statistical aggregate functions such as COUNT, SUM, MIN, MAX, AVERAGE, and STANDARD DEVIATION.
- Such queries are sometimes called statistical queries.

## Inference Detection

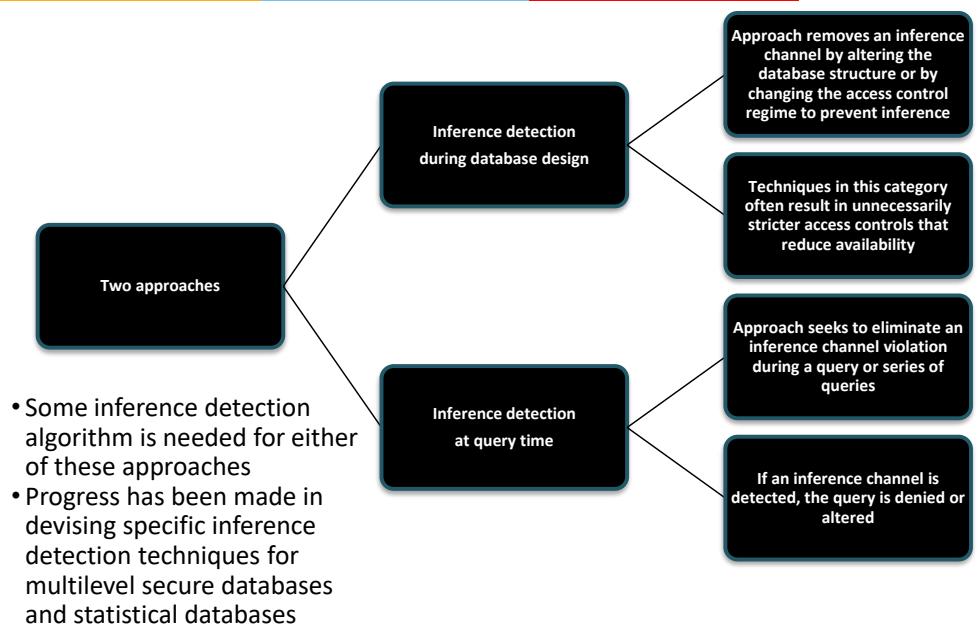

The risk of inferring individual information from statistical queries is reduced if no statistical queries are permitted

- Whenever the number of tuples in the population specified by the selection condition falls below some threshold.
- Another technique for prohibiting retrieval of individual information is to prohibit sequences of queries that refer repeatedly to the same population of tuples.
- Another technique is partitioning of the database. Partitioning implies that records are stored in groups of some minimum size; queries can refer to any complete group or set of groups, but never to subsets of records within a group.



## Flow Control

### Introduction to Flow Control

- **Flow control** regulates the distribution or flow of information among accessible objects.
- A **flow** between object X and object Y occurs when a program reads values from X and writes values into Y.
  - Flow controls check that information contained in some objects does not flow explicitly or implicitly into less protected objects.
- A **flow policy** specifies the channels along which information is allowed to move.
  - The simplest flow policy with just two classes of information:
    - confidential (C) and nonconfidential (N)
  - allows all flows except those from class C to class N.

### Flow Control & Access Control

- Access control mechanisms help in Flow control.
- Flow controls can be enforced by an extended access control mechanism, which involves assigning a security class (usually called the clearance) to each running program.
  - The program is allowed to read a particular memory segment only if its security class is as high as that of the segment.
  - It is allowed to write in a segment only if its class is as low as that of the segment.
- This automatically ensures that no information transmitted by the person can move from a higher to a lower class.
  - For example, a military program with a secret clearance can only read from objects that are unclassified and confidential and can only write into objects that are secret or top secret.

## Covert Channels

- A **covert channel** allows a transfer of information that violates the security or the policy.
- A **covert channel** allows information to pass from a higher classification level to a lower classification level through **improper means**.
- **Covert channels** can be classified into two broad categories:
  - **Storage channels** do not require any temporal synchronization, in that information is conveyed by accessing system information or what is otherwise inaccessible to the user.
  - **Timing channel** allow the information to be conveyed by the timing of events or processes.

## Covert Channels - Examples

- Two virtual machines share cylinders 100 through 200 on a disk. The disk uses a SCAN algorithm to schedule disk accesses. One virtual machine has security class *High*, and the other has class *Low*.
- A process on the *High* machine should not send information to a process on the *Low* machine.
- The process on the *Low* machine reads data on cylinder 150. When that request completes, it relinquishes the CPU. The process on the *High* machine runs, issues a seek to cylinder 140, and relinquishes the CPU. The process on the *Low* machine runs and issues seek requests to cylinders 139 and 161.
- Because the disk arm is moving over the cylinders in descending order, the seek issued to cylinder 139 is satisfied first, followed by the seek issued to cylinder 161. This knowledge of ordering is a bit of information.

## Covert Channels - Challenges

- Difficult to detect
- Can operate for a long time and leak a substantial amount of classified data
- Can compromise an otherwise secure system, including one that has been formally verified.

## Covert Channels - Examples

- A programmer for a bank has no need to access the names or balances in depositors' accounts.
- Programmers for brokerage firms do not need to know what buy and sell orders exist for clients.
- During program testing, access to a form of real data or some sample test data may be justifiable, but not after the program has been accepted for regular use.
- This represents information leakage thru covert channel.



## Injection Attacks



## SQL Injection

## Injection Attacks

- The injection is a mechanism used by an attacker to introduce (or "inject") code into a vulnerable computer program and change the course of execution
- Code injection vulnerabilities occur when an application sends untrusted data to an interpreter – An input validation failure

Injection flaws are most often found in

- SQL,
- LDAP,
- XPath,
- NoSQL queries,
- OS commands,
- XML parsers,
- Program arguments,
- etc.

Even XSS is really just a form of HTML injection

## SQL Injection - Introduction

- Web applications (that access a database) often have 2-way communication with database
  - can send commands and data to the database
  - display data retrieved from the database through the Web browser.
- In an SQL Injection attack, the attacker injects a (malicious)string input through the application, which changes or manipulates the SQL statement to the attacker's advantage.
- An SQL Injection attack can harm the database in various ways, such as
  - unauthorized manipulation of the database, or
  - retrieval of sensitive data.
  - It can also be used to execute system level commands
- Most common attack goal is bulk extraction of data

## SQL Injection : Typical Query

Customer Record Manager

Username	Krishna
Password	dwaraka

**Submit**

```
SELECT * FROM Customers  
WHERE username =  
'Krishna' AND password =  
'dwaraka'
```

Krishna's customer entries are displayed  
No harm done

## SQL Injection : Malicious Query

Customer Record Manager

Username	Krishna' OR 1=1 --
Password	anything

**Submit**

```
SELECT * FROM Customers  
WHERE username =  
'Krishna' OR 1=1 -- AND password = 'anything'
```

All customer entries are displayed  
Confidentiality lost.

## SQL Injection : Malicious Query

Customer Record Manager

Username	'; DROP table Customers--
Password	anything

**Submit**

```
SELECT * FROM Customers  
WHERE username =  
"'; DROP table Customers -- AND  
password = 'anything'
```

All customer entries are eliminated.  
Availability lost.

## SQL Injection - Function Call Injection

- A database function or operating system function call may be inserted into a vulnerable SQL statement to manipulate the data or make a privileged system call
  - e.g., the dual table is used in the FROM clause of SQL in Oracle when a user needs to run SQL that does not logically have a table name.
- Here, TRANSLATE is used to replace a string of characters with another string of characters.  
`SELECT TRANSLATE ('user input', 'from_string', 'to_string') FROM dual;`
- This type of SQL statement can be subjected to a function injection attack
  - `SELECT TRANSLATE (" || UTL_HTTP.REQUEST ('http://129.107.2.1/') || ", '98765432', '9876') FROM dual;`
  - The attacker could make the server access a URL to get (possibly privileged) content.

## SQL Injection – UNION Attacks

- The UNION keyword allows database users to append additional SELECT queries to an original query
  - e.g., `SELECT a, b FROM originatetable UNION SELECT e, f FROM othertable`
  - work only if each of the queries return the same number of columns, and the data types in each corresponding column are the same
- Techniques to prevent UNION SQL injection.
  - Disable errors—Attackers learn through errors displayed by the application.
  - Use parameterized queries—Do not append user inputs as strings into a SQL query.
  - Limit input length—limiting the length of input fields make difficult for the attacker to append strings to the query
  - Character allowlists—user inputs used in SQL statements should be limited to specific, safe characters, such as alphanumeric characters only.
  - Character denylists—disallow common characters used in SQL Injection.
  - Set up database auditing to ensure that all SQL queries on the database are audited.

<https://www.brightsec.com/blog/union-sql-injection/>

Secure Software Engineering

48

BITS-Pilani

<https://www.invicti.com/blog/web-security/sql-injection-cheat-sheet/>

## Protection against SQL Injection

- Certain programming rules to all Web-accessible procedures and functions (to protect from SQL Injection)
- Bind Variables (Using Parameterized Statements). The use of bind variables (Instead of embedding the user input into the statement) protects against injection attacks. For e.g. in Java and JDBC:

```
PreparedStatement stmt = conn.prepareStatement("SELECT * FROM EMPLOYEE WHERE EMPLOYEE_ID=? AND PASSWORD=?");  
stmt.setString(1, employee_id);  
stmt.setString(2, password);
```
- Filtering Input (Input Validation): remove escape characters(non-whitelisted characters) from input strings by using the SQL Replace function.
- Function Security: Database functions, both standard and custom, should be restricted, as they can be exploited in the SQL function injection attacks.

Secure Software Engineering

50

BITS-Pilani

## Some Serious SQL Injection

- On August 17, 2009, the United States Department of Justice charged an American citizen, Albert Gonzalez, and two unnamed Russians with the theft of 130 million credit card numbers using an SQL injection attack. In reportedly "the biggest case of identity theft in American history", the man stole cards from a number of corporate victims after researching their payment processing systems.
- In October 2015, SQL injection was believed to be used to attack the British telecommunications company TalkTalk's servers, stealing the personal details of up to four million customers.

[https://en.wikipedia.org/wiki/SQL\\_injection](https://en.wikipedia.org/wiki/SQL_injection)

Secure Software Engineering

51

BITS-Pilani

What do you think about NoSQL Database Security?

## Injection Attacks

- SQL injection is one type of Injection Attacks
- Injection Attack is listed as the number one web application security risk in the OWASP Top 10
- In an injection attack, an attacker supplies malicious input to a program. This input gets processed by an interpreter as part of a command or query. In turn, this alters the execution of that program
- The primary reason for injection vulnerabilities is insufficient user input validation
- Injection attack can result in data theft, data loss, loss of data integrity, denial of service, as well as full system compromise

## Why Injection Attacks?

## Injection Attacks

- Some of the well-known types of Injection Attacks are
- SQL injection
  - Cross-site Scripting (XSS) – JavaScript injection
    - The attacker injects an arbitrary script (usually in JavaScript) that is then executed inside the victim's browser.
  - LDAP Injection
  - OS Command Injection
  - Email Header Injection
    - The attacker sends IMAP/SMTP commands to a mail server
  - Code injection
  - XPath injection
    - The attacker injects data to execute crafted XPath queries

## Injections – Why They Happen?

Software environment has large number of interpreters

- SQL, LDAP, Operating System, XPath, XQuery, and many more

Interpreters run with a lot of access, so a successful attack can result in significant breaches

- Subtleties of data flow, parsers, contexts, capabilities, and escaping make it difficult to detect
- Every interpreter requires a parser supporting a grammar
  - Injection attackers trick the parsers into interpreting data as commands
- Real-world parsers may not have well-defined grammar, may have flaws, and misbehaving corner cases

Computer Security: Principles and Practice by William Stallings, and Lawrie Brown Pearson, 2018.

Software Security Engineering, Julia H. Allen, et al, Pearson, 2008.

[www.microsoft.com](http://www.microsoft.com)

[www.owasp.com](http://www.owasp.com)

[sei.cmu.edu](http://sei.cmu.edu)

## Injection Attacks

- Injection attacks target those parsers (Every interpreter has a parser)
  - Trick the parser into interpreting data as commands
- Real world parsers have many corner cases and flaws that may not match the spec.
- Typically the interpreters run with a lot of access, so a successful attack can easily result in significant data breaches
- Injection attacks are at the top of OWASP top 10.

# Thank You!



**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

SE/SS ZG566

## Secure Software Engineering

T V Rao



**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

## Web Application Security



- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*

**BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956**

## Web Security

Web has two distinct components

- Server
  - Has resources to serve. Content(resources) delivered to the client based on URL etc.
  - Generally managed by an administrator.
  - Self-service models reduce control
- Client/Browser
  - The component that is likely to approach a server for content.
  - Meant for end-user(non-technical)

### Security

- Need to consider both sides for protecting users

# Goals of web security

## Safely browse the web

- Users should be able to visit a variety of web sites, without incurring harm:
  - No stolen information
  - Site A cannot compromise session at Site B

## Secure web applications

- Applications delivered over the web should have the same security properties we require for stand-alone applications

# JavaScript Security Vulnerabilities

<https://www.youtube.com/watch?v=ypNKKYUJE5o>

# Web Security

During early stages of web, entire security focus was on servers.

Today browsers have acquired lot of capabilities:

- JavaScript: Allows a page to execute client-side code.
- DOM model Provides a JavaScript interface to the page's HTML, allowing the page to add/remove tags, change their styling, etc.
- XMLHttpRequests (AJAX): Asynchronous HTTP requests.
- Web sockets: Full-duplex client-server communication over TCP.
- Web workers: Multi-threading support.
- Multimedia support: (video), web cams, screen-sharing.
- Geolocation: Browser can determine your location by examining GPS units. Firefox can also locate you by passing your WiFi information to the Google Location Service.
- <canvas> and WebGL: Bitmap manipulation and interactive 2D/3D graphics.
  - WebGL (Web Graphics Library) is a JavaScript API for rendering graphics within any compatible web browser without the use of plug-ins
- Nacl (Native Client): Allows browsers to run native code!

# Browser Vulnerabilities

Whenever a browser communicates with a website,

- the website, as part of that communication, collects some information about the browser (in order to process the formatting of the page to be delivered, if nothing else).
- If malicious code has been inserted into the website's content, then vulnerabilities specific to a particular browser can allow this malicious code to run processes within the browser application in unintended ways (one of the bits of information that a website collects from a browser communication is the browser's identity- allowing specific vulnerabilities to be exploited).
- Once an attacker is able to run processes on the visitor's machine, then exploiting known security vulnerabilities can allow the attacker to gain privileged access to the victim's machine or network

## Securing Web Browser

Web browsers can be breached in one or more of the following ways:

- Operating system is breached and malware is reading/modifying the browser memory space in privilege mode
- Operating system has a malware running as a background process, which is reading/modifying the browser memory space in privileged mode
- Main browser executable can be hacked
- Browser components may be hacked
- Browser plugins can be hacked
- Browser network communications could be intercepted outside the machine

The browser may not be aware of any of the breaches above and may show the user a safe connection is made

[https://en.wikipedia.org/wiki/Browser\\_security](https://en.wikipedia.org/wiki/Browser_security)

<https://browser-security.x41-dsec.de/X41-Browser-Security-White-Paper.pdf>

## Browser security

- Vulnerabilities in the web browser software itself can be minimized by keeping browser software updated, but will not be sufficient if the underlying operating system is compromised, for example, by a rootkit.
- Some subcomponents of browsers such as scripting, add-ons, and cookies are particularly vulnerable
- Improper Input Validation (CWE-20) and Improper Access Control (CWE-284) are the most occurring root causes for security vulnerabilities
- Hundreds of vulnerabilities are reported every year. Large number of vulnerabilities occurred in Chrome because of reusing or importing vulnerable versions of third party libraries

[https://en.wikipedia.org/wiki/Browser\\_security](https://en.wikipedia.org/wiki/Browser_security)

## Usage Share of Browsers


[https://en.wikipedia.org/wiki/Usage\\_share\\_of\\_web\\_browsers](https://en.wikipedia.org/wiki/Usage_share_of_web_browsers)

<https://gs.statcounter.com/browser-market-share#monthly-201004-202503>

## Large Attack Surface

- Web has become a complex platform for distributed computation
- Developed a Huge Attack Surface
- A single web application spans multiple programming languages, Operating Systems, hardware platforms, throwing up emergent vulnerabilities.
  - E.g. might be running Chrome on Windows interacting with a Linux server running Apache and interfacing with MySQL
  - Difficult (almost impossible) to verify end--to--end correctness
- The web specs are very long, very complex, sometimes contradictory, and constantly evolving (quirks at quirksmode.org and several security information sites)

## Anatomy of Web Attack

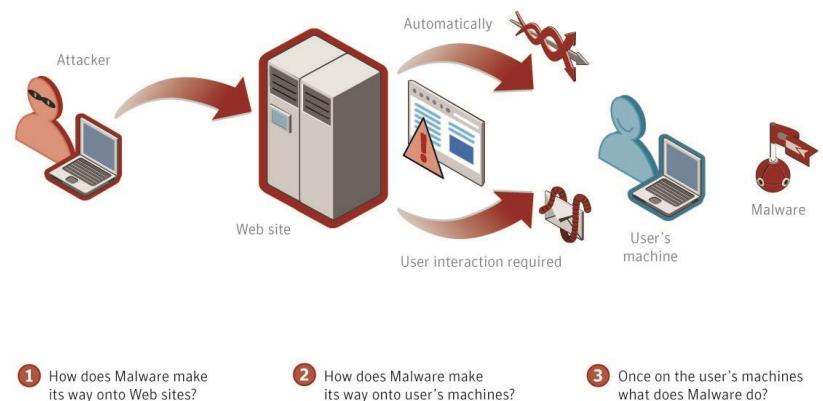

4/28/2025

[www.Symantec.com](http://www.Symantec.com) white paper

Secure Software Engineering

13

BITS-Pilani

## Web : Risks & Defenses

- Risk #1: we don't want a malicious site to be able to trash my files/programs on my computer
  - Browsing to danger.com (or evil.com) should not infect my computer with malware, read or write files on my computer, etc.
  - Defense: Javascript is sandboxed; try to avoid security bugs in browser code; privilege separation; automatic updates; etc.
- Risk #2: we don't want a malicious site to be able to spy on or tamper with my information or interactions with other websites
  - Browsing to evil.com should not let evil.com spy on my emails in Gmail or buy stuff with my Amazon account
  - Defense: the same-origin policy - A security policy grafted on after-the-fact, and enforced by web browsers
    - A web browser permits scripts contained in a first web page to access data in a second web page, but only if both web pages have the same origin
      - An origin is defined as a combination of URI scheme, hostname, and port number
      - This policy prevents a malicious script on one page from obtaining access to sensitive data on another web page through that page's Document Object Model
- Risk #3: we want data stored on a web server to be protected from unauthorized access
  - Defense: server-side security

Secure Software Engineering

15

BITS-Pilani

## Anatomy of Web Attack

- Typically attacker breaks into a legitimate Web site and posts malware
- malware is not exclusive to malicious web sites. Often mainstream web sites are made to act as parasitic hosts that serve up malware to their unsuspecting visitors. Due to the complexity of modern web sites there are several techniques by which they are compromised.
- Attacking enduser machines
  - malware on a web site makes its way down on to a user's machine when that user visits the host Web site.
  - Some of the techniques enable this to happen with no user interaction – 'drive-by-download'.
  - Some techniques which do require some input from the user.
- Leveraging end user machines for malicious activity
  - The most malicious activities begin once new malware has established a presence on a user's machine.

Secure Software Engineering

14

BITS-Pilani


## Chromium Architecture

Chromium's architecture has two modules: a rendering engine and a browser kernel.

- The rendering engine is responsible for converting HTTP responses and user input events into rendered bitmaps.
- The browser kernel is responsible for interacting with the operating system.

The browser kernel is trusted to act as the user, whereas the rendering engine is trusted only to act as the web.

## Chromium Architecture

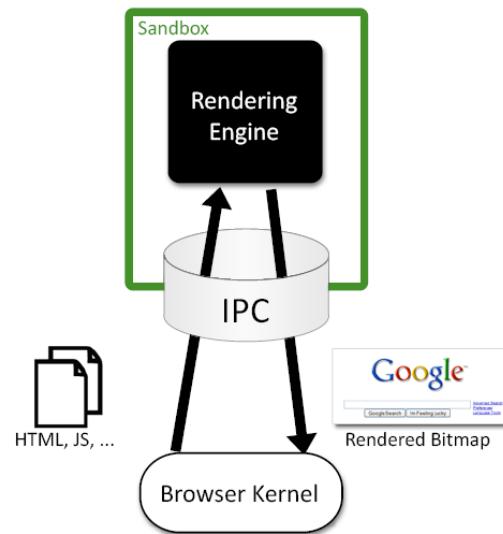

The browser kernel treats the rendering engine as a black box that parses web content and emits bitmaps of the rendered document.

<https://seclab.stanford.edu/websec/chromium/chromium-security-architecture.pdf>

Secure Software Engineering

17

BITS-Pilani

The assignment of tasks between the rendering engine and the browser kernel.

Rendering Engine	Browser Kernel
HTML parsing	Cookie database
CSS parsing	History database
Image decoding	Password database
JavaScript interpreter	Window management
Regular expressions	Location bar
Layout	Safe Browsing blacklist
Document Object Model	Network stack
Rendering	SSL/TLS
SVG	Disk cache
XML parsing	Download manager
XSLT	Clipboard
Both	
URL parsing	
Unicode parsing	

The Security Architecture of the Chromium Browser, Adam Barth et al

Secure Software Engineering

18

BITS-Pilani

**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

<https://developer.chrome.com/blog/inside-browser-part1>

<https://developer.chrome.com/blog/inside-browser-part2>

<https://developer.chrome.com/blog/inside-browser-part3>


## Cross-site Scripting

## Cross-site Scripting attack

An XSS attack needs three actors — **the website, the victim and the attacker**

- The attacker injects a payload in the website's database by submitting a vulnerable form with some malicious JavaScript
- The victim requests the web page from the website
- The website serves the victim's browser the page with the attacker's payload(malicious javascript) as part of the HTML body.
- The victim's browser will execute the malicious script inside the HTML body. In this case it would send the victim's cookie to the attacker's server. The attacker now simply needs to extract the victim's cookie when the HTTP request arrives to the server, after which the attacker can use the victim's stolen cookie for impersonation.

## Cross-site Scripting attack

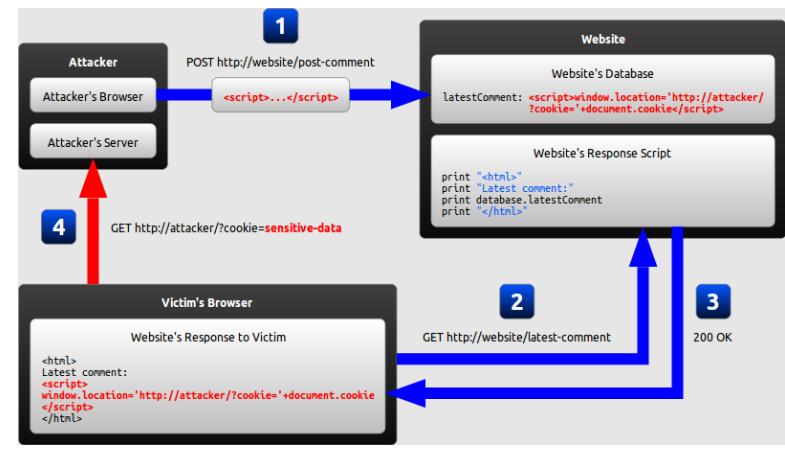

<http://www.acunetix.com/websesecurity/cross-site-scripting/>

<https://www.acunetix.com/blog/articles/persistent-xss/>

## What can an attacker can do with JavaScript?

JavaScript has access to the following

- Malicious JavaScript has access to all the same objects the rest of the web page has, including access to cookies. Cookies are often used to store session tokens, if an attacker can obtain a user's session cookie, they can impersonate that user
- JavaScript can read and make arbitrary modifications to the browser's DOM (within the page that JavaScript is running).
- JavaScript can use XMLHttpRequest to send HTTP requests with arbitrary content to arbitrary destinations.
- JavaScript in modern browsers can leverage HTML5 APIs such as accessing a user's geolocation, webcam, microphone and even the specific files from the user's file system. While most of these APIs require user opt-in, XSS in conjunction with some clever social engineering can bring an attacker a long way.

## The consequences of malicious JavaScript

Cookie theft:

- The attacker can access the victim's cookies associated with the website using document.cookie, send them to his own server, and use them to extract sensitive information like session IDs.

Keylogging:

- The attacker can register a keyboard event listener using addEventListener and then send all of the user's keystrokes to his own server, potentially recording sensitive information such as passwords and credit card numbers.

Phishing:

- The attacker can insert a fake login form into the page using DOM manipulation, set the form's action attribute to target his own server, and then trick the user into submitting sensitive information.

The wife of the former prime minister Gordon Brown, who has more than a million followers on Twitter, unknowingly sent a link which contained malicious code that would redirect anyone who moved their mouse over it - but didn't click it - to an evil site.

- The problem arises because users are able to post chunks of Javascript program code inside tweets - and because Twitter has not taking precautions to disable the code by "escaping" the relevant characters, the Javascript becomes active.
- The specific code being used is onMouseOver, which carries out a function when you move the mouse over the link. Users don't have to click the link to be redirected.

<https://www.theguardian.com/technology/blog/2010/sep/21/twitter-bug-malicious-exploit-xss>

With a day to go before a critical Pennsylvania Democratic primary, Barack Obama's team has been busy patching security holes.

- According to Netcraft, a hacker exploited security flaws in Obama's site to redirect traffic to Hillary Clinton's site. Anyone that visited Obama's community blogs section of the site was sent to Clinton.

<http://www.zdnet.com/article/obama-site-hacked-redirected-to-hillary-clinton>

More sophisticated ones: <https://brightsec.com/blog/xss-attack/>

## Variants of XSS

Cross-site scripting vulnerabilities may be of two broad types:

- Persistent
  - Persistent attacks occur when the malicious code is submitted to a web site where it's stored for a period of time. Examples of an attacker's favorite targets often include message board posts, web mail messages, and web chat software. The user is not required to interact with any additional site/link (e.g. an attacker site or a malicious link sent via email), just simply view the web page containing the malicious code.
- Non-persistent
  - Non-persistent attacks (and DOM-based attacks) require a user to either visit a specially crafted link laced with malicious code, or visit a vulnerable web page containing a web form

They may further be divided into two varieties:


- Traditional (caused by server-side code flaws) and
- DOM-based (in client-side code)



## XSS Variants

### Reflected XSS (non-persistent)

In a reflected XSS attack, the malicious string is part of the victim's request to the website. The website then includes this malicious string in the response sent back to the user

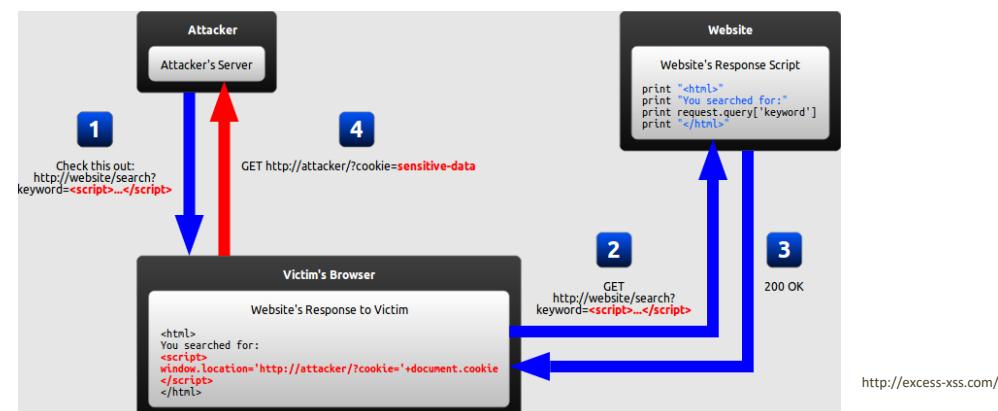

## Reflected XSS

1. The attacker crafts a URL containing a malicious string and sends it to the victim.
2. The victim is tricked by the attacker into requesting the URL from the website.
3. The website includes the malicious string from the URL in the response.
4. The victim's browser executes the malicious script inside the response, sending the victim's cookies to the attacker's server.

## How can reflected XSS succeed?


- Reflected XSS requires the victim to actually send a request containing a malicious string, hence it may seem unlikely attack.
- Two common ways of causing a victim to launch a reflected XSS attack against himself
  - If attacker targets a specific individual, he can send the malicious URL to the victim (using e-mail or instant messaging, for example) and trick him into visiting it.
  - If the attacker targets a large group of people, he can publish a link to the malicious URL (on his own website or on a social network, for example) and wait for visitors to click it.
- With the use of a URL shortening service, which masks the malicious string from users, the chances of successful attack increase.

## DOM-based XSS

- DOM-based XSS is a variant of both persistent and reflected XSS.
- Here the legitimate website does not send attacker's script
- In a DOM-based XSS attack, the malicious string is parsed by the victim's browser after the website's legitimate JavaScript is executed
- The legitimate script directly makes use of user input in order to add HTML to the page
- Since the malicious string is inserted into the page using innerHTML, it is parsed as HTML, causing the malicious script to be executed
- Even with completely secure server-side code, the client-side code might still unsafely include user input in a DOM update after the page has loaded

<https://www.acunetix.com/blog/articles/dom-xss-explained/>  
[https://owasp.org/www-community/attacks/DOM-Based\\_XSS](https://owasp.org/www-community/attacks/DOM-Based_XSS)

## DOM-based XSS

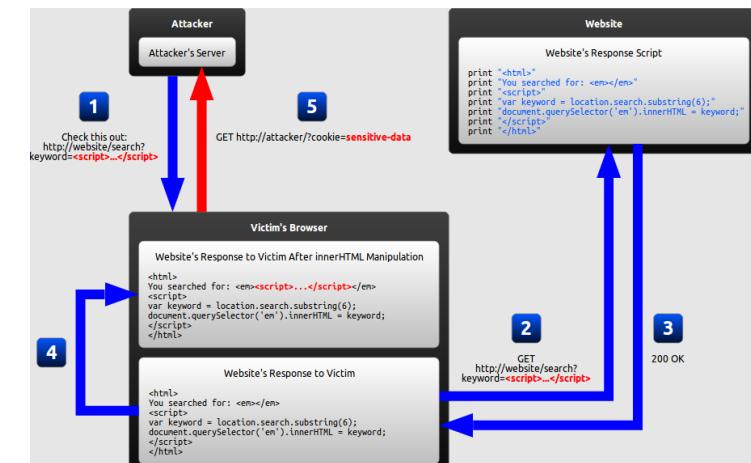

1. The attacker crafts a URL containing a malicious string and sends it to the victim.
2. The victim is tricked by the attacker into requesting the URL from the website.
3. The website receives the request, but does not include the malicious string in the response.
4. The victim's browser executes the legitimate script inside the response, causing the malicious script to be inserted into the page.
5. The victim's browser executes the malicious script inserted into the page, sending the victim's cookies to the attacker's server




## Cross-Site Request Forgery

### Cross-Site Request Forgery

- Cross-Site Request Forgery (CSRF) is an attack that forces a victim to execute unwanted actions on a web application on which he/she is currently authenticated.
- CSRF attacks specifically target state-changing requests, (no direct theft of data), since the response to the forged request goes to victim.
- With social engineering (such as sending a link via email or chat), an attacker may trick the users of a web application into executing actions of the attacker's choosing (including fund transfers etc.)

### Cross-Site Request Forgery (CSRF)

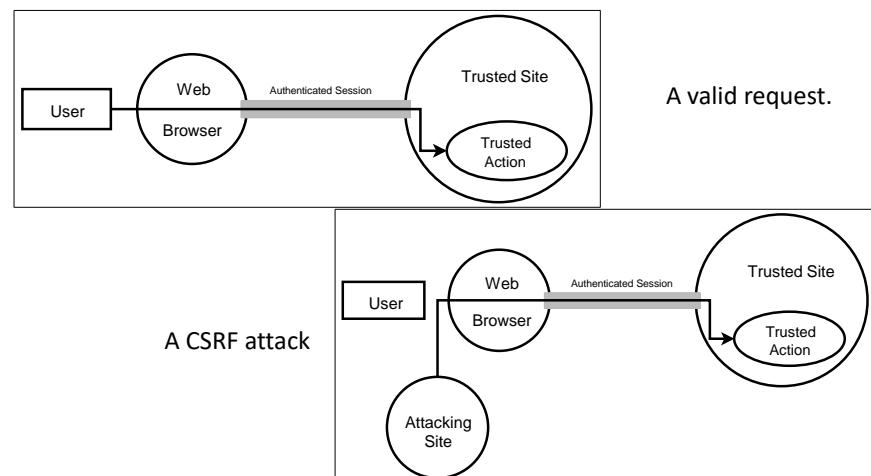

## Common ways to perform a CSRF attack

Common ways to execute CSRF attacks is by using a HTML image tag,

e.g. **IMG SRC**

```

```

or JavaScript image object

e.g. **SCRIPT SRC**

```
<script src="http://host/?command">
```

## CSRF Attacks

- Vulnerability discovered in January 2007 which allowed a attacker to steal a GMail user's contact list.
- Discovered in Netflix which allowed an attacker to change the name and address on the account, as well as add movies to the rental queue etc.




**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad


## Cloud Security

## Cloud Computing


As per NIST, "Cloud computing is A model for enabling ubiquitous, convenient, on-demand network access to a shared pool of configurable computing resources (e.g., networks, servers, storage, applications, and services) that can be rapidly provisioned and released with minimal management effort or service provider interaction. This cloud model promotes availability and is composed of five essential characteristics, three service models, and four deployment models."

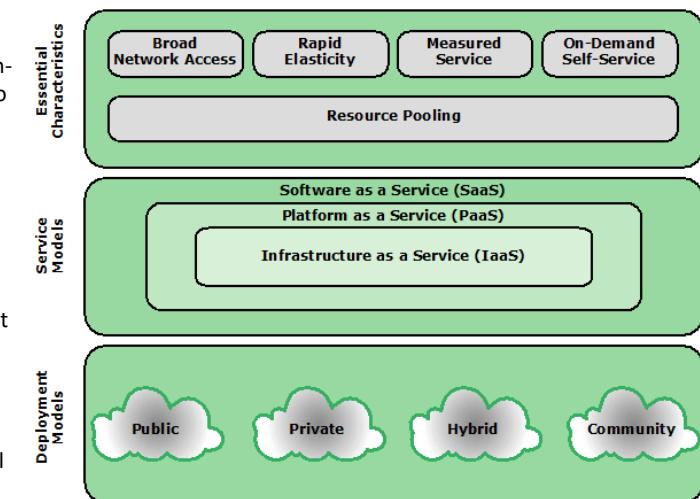

## Cloud Service Models

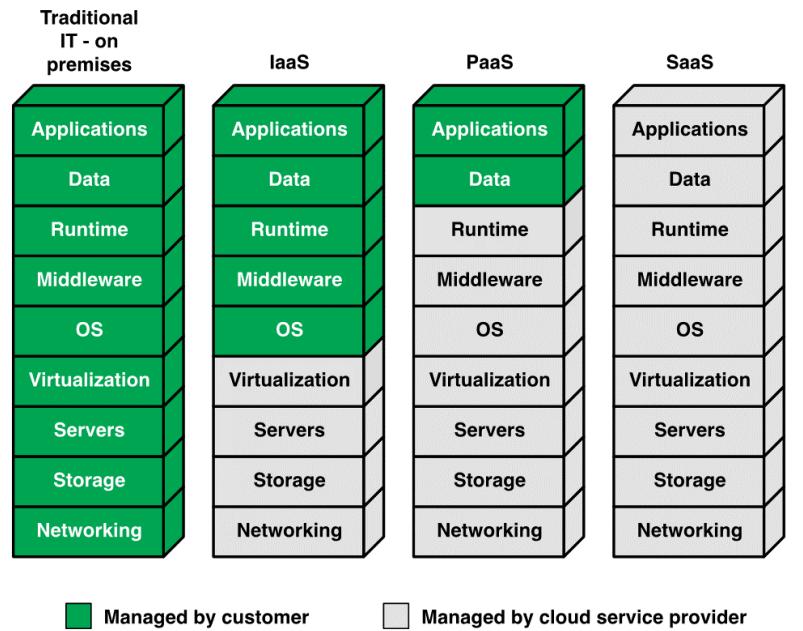


## Cloud Deployment Models

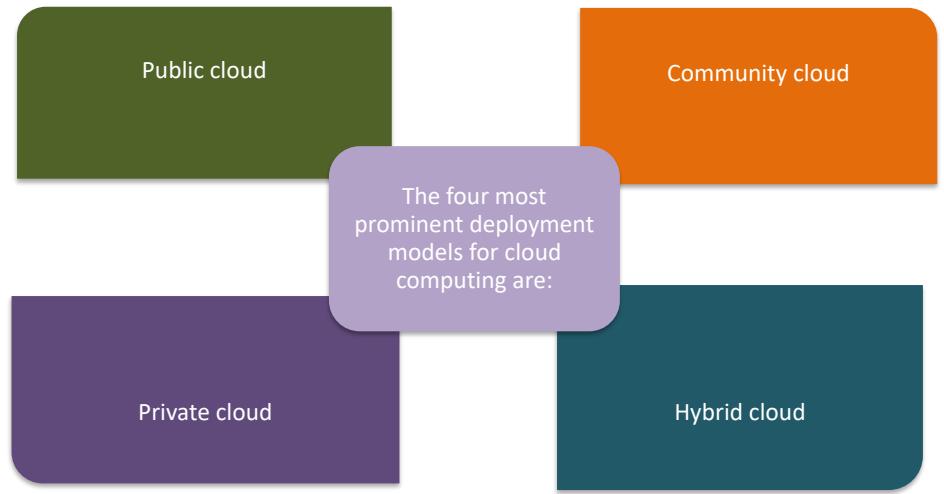

## Cloud Deployment Models

Public Cloud	Private cloud	Hybrid cloud	Community cloud
<p>Makes it possible for anybody to access systems and services. Infrastructure in this cloud model is owned by the provider.</p> <p><b>Minimal Investment</b></p> <p><b>No setup cost</b></p> <p><b>Infrastructure</b></p> <p><b>Management is not required</b></p> <p><b>No maintenance: Dynamic Scalability</b></p>	<p>The cloud platform is implemented in a secure environment under the supervision of an organization's IT department.</p> <p>The private cloud gives the greater flexibility of control over cloud resources.</p> <p><b>Flexibility and control</b></p> <p><b>Data Security and Privacy</b></p> <p><b>Supports Legacy Systems</b></p> <p><b>Customization</b></p>	<p>Bridges the public and private clouds with a layer of proprietary software. Organizations can move data and applications between different clouds depending on their needs.</p> <p><b>Cost Effective</b></p> <p><b>Security</b></p> <p><b>Shared resources</b></p> <p><b>Collaboration and data sharing</b></p>	<p>Systems and services to be accessible by a group of organizations.</p> <p>The infrastructure could be shared between the organization which has shared concerns or tasks, e.g. healthcare, banking</p>

## NIST Cloud Reference Architecture

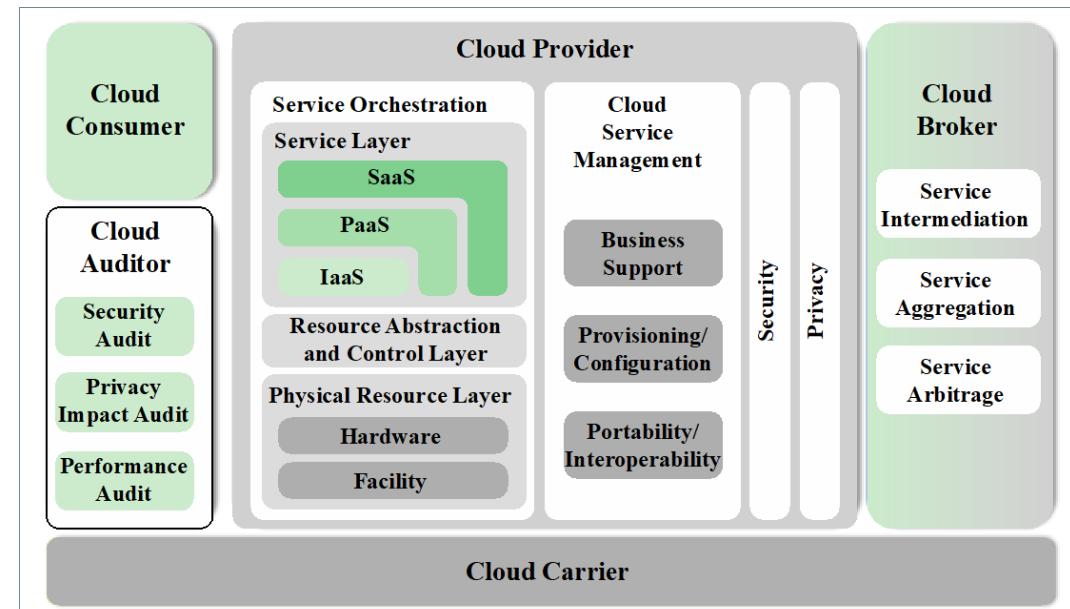

## NIST Cloud Reference Architecture

The NIST reference architecture, defines five major actors in terms of the roles and responsibilities:

- **Cloud service consumer (CSC):** A person or organization that maintains a business relationship with, and uses service from, cloud providers.
- **Cloud service provider (CSP):** A person, organization, or entity responsible for making a service available to interested parties.
- **Cloud auditor:** A party that can conduct independent assessment of cloud services, information system operations, performance, and security of the cloud implementation.
- **Cloud broker:** An entity that manages the use, performance, and delivery of cloud services, and negotiates relationships between CSPs and cloud consumers. A cloud broker can offer three areas of support:
  - **Service intermediation:** These are value-added services, such as identity management, performance reporting, and enhanced security.
  - **Service aggregation:** The broker combines multiple cloud services to meet consumer needs not specifically addressed by a single CSP, or to optimize performance or minimize cost.
  - **Service arbitrage:** The broker has the flexibility to choose services from multiple agencies. The cloud broker can use parameters to measure and select an agency with the best provider.
- **Cloud carrier:** An intermediary that provides connectivity and transport of cloud services from CSPs to cloud consumers.
  - Typically, a CSP will set up service level agreements (SLAs) with a cloud carrier to provide services

## NIST Cloud Reference Architecture

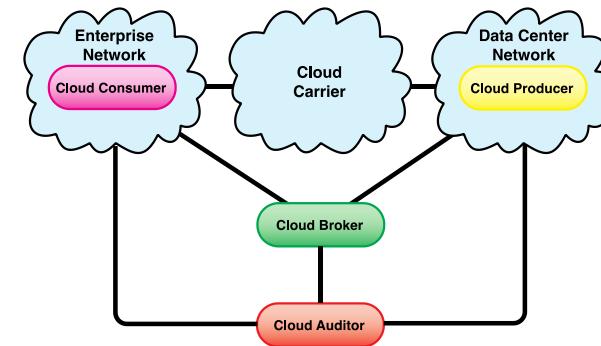


Figure 13.4 Interactions Between Actors in Cloud Computing

## Security Issues for Cloud Computing

- Security is a major consideration when augmenting or replacing on-premises systems with cloud services
  - Allaying security concerns is frequently a prerequisite for further discussions about migrating part or all of an organization's computing architecture to the cloud
- Availability is another major concern
- Auditability of data must be ensured
- Businesses should perform due diligence on security threats both from outside and inside the cloud
  - Cloud users are responsible for application-level security
  - Cloud vendors are responsible for physical security and some software security
  - Security for intermediate layers of the software stack is shared between users and vendors
  - Cloud providers must guard against theft or denial-of-service attacks by their users and users need to be protected from one another
  - Businesses should consider the extent to which subscribers are protected against the provider, especially in the area of inadvertent data loss

## Security Issues for Cloud Computing

<https://cloudsecurityalliance.org/artifacts/top-threats-to-cloud-computing-2024>

<https://cloudsecurityalliance.org/artifacts/top-threats-to-cloud-computing-pandemic-eleven-deep-dive>


<https://www.infosecurity-magazine.com/opinions/ransomcloud-ransomwares-cloud/>

Palo Alto Networks Attack Surface Report

[https://start.paloaltonetworks.com/rs/531-OCS-018/images/Unit42\\_ASM\\_Threat\\_Report\\_2023.pdf](https://start.paloaltonetworks.com/rs/531-OCS-018/images/Unit42_ASM_Threat_Report_2023.pdf)

## Data Protection in the Cloud

The threat of data compromise increases in the cloud, due to the number of, and interactions between, risks and challenges that are either unique to the cloud or more dangerous because of the architectural or operational characteristics of the cloud environment

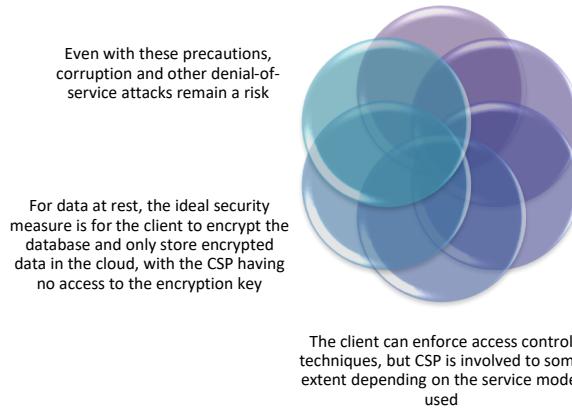

## BYOK vs KYOK

(Bring Your Own Key vs Keep Your Own Key)

- Nearly half (48%) of all corporate data is stored in the cloud according to the 2019 Thales Global Cloud Security Study conducted by the Ponemon Institute.
  - Organizations admitted that on average, only about half (49%) of the data stored in the cloud is secured with encryption and
  - Only one-third (32%) believe protecting data in the cloud is their responsibility
- The question is “Who is responsible for cloud security, the cloud provider or organizations consuming cloud services?”
  - According to the shared security model, the answer is both.
- Bring Your Own Key (BYOK) allows enterprises to encrypt their data and retain control and management of their encryption keys. The HSM (Hardware Security Module) stays with CSP.
- Keep Your Own Key (KYOK) allows the enterprise to retain the physical ownership and logical control of customer managed encryption keys.

## Cloud Security as a Service

- In the context of cloud computing, cloud security as a service, designated SecaaS, is a segment of the SaaS offering of a CSP
- The CSA defines SecaaS as the provision of security applications and services via the cloud either to cloud-based infrastructure and software, or from the cloud to the customers’ on-premise systems
- The CSA has identified the following SecaaS categories of service:
  - Identity and access management
  - Data loss prevention
  - Web security
  - E-mail security
  - Security assessments
  - Intrusion management
  - Security information and event management
  - Encryption
  - Business continuity and disaster recovery
  - Network security

## Encryption for Security

## Cryptography Basics

Cryptography is the science of secret, or hidden writing

- It has two main Components:
  1. Encryption
    - Practice of hiding messages so that they can not be read by anyone other than the intended recipient
  2. Authentication & Integrity
    - Ensuring that users of data/resources are the persons they claim to be and that a message has not been surreptitiously altered


## Properties of Trustworthy Encryption Systems

- Based on sound mathematics.
  - Good cryptographic algorithms are derived from solid principles.
- Analyzed by competent experts and found to be sound.
  - Since it is hard for the writer to envisage all possible attacks on the algorithm
- Stood the “test of time.”
  - Over time people continue to review both mathematical foundations of an algorithm and the way it builds upon those foundations.
  - The flaws in most algorithms are discovered after their release.

## Data Encryption Standard (DES)

- DES completely scrambles block of data so that every bit of cipher text depends on every bit of data and ever bit of key
- DES is a block Cipher Algorithm
  - Encodes plaintext in 64 bit chunks
  - One parity bit for each of the 8 bytes thus it reduces to 56 bits
- It is (along with variants) widely used algorithm
  - Standard approved by US National Bureau of Standards for Commercial and non-classified US government use in 1993

## Data Encryption Standard (DES)

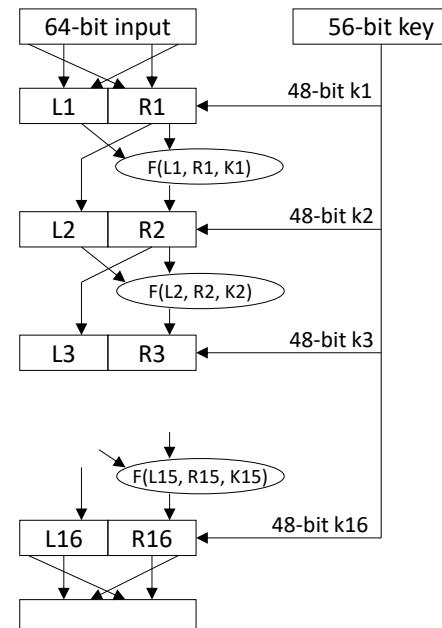

- From original 56-bit key, 16 subkeys are generated
- DES runs in reverse to decrypt
- Cracking DES
  - 1997: 140 days
  - Today: Minute
- TripleDES uses DES 3 times in tandem
  - Output from 1 DES is input to next DES

## Triple DES

- First standardized for use in financial applications in 1985
- Incorporated in DES FIPS PUB 46-3 standard of 1999
- Uses three keys & three DES executions:
  - $C = E(K_3, D(K_2, E(K_1, P)))$
- Decryption same with keys reversed
- Use of decryption in second stage gives compatibility with original DES users
- Effective 168-bit key length, slow, secure
- AES to eventually replace 3DES

## Encryption Algorithms (symmetric)

Algorithm	Type	Key Size	Features
DES	Block Cipher	56 bits	Most Common, Not strong enough
TripleDES	Block Cipher	168 bits (112 effective)	Modification of DES, Adequate Security
Blowfish	Block Cipher	Variable (Up to 448 bits)	Excellent Security
AES	Block Cipher	Variable (128, 192, or 256 bits)	Replacement for DES, Excellent Security
RC4	Stream Cipher	Variable (40 or 128 bits)	Fast Stream Cipher, Used in most SSL implementations

## Symmetric Encryption - Key Strength

- Strength of algorithm is determined by the size of the key
  - The longer the key the more difficult it is to crack
- Key length is expressed in bits
  - Typical key sizes vary between 48 bits and 448 bits
- Set of possible keys for a cipher is called key space
  - For 40-bit key there are  $2^{40}$  possible keys
  - For 128-bit key there are  $2^{128}$  possible keys
  - Each additional bit added to the key length doubles the security
- To crack the key the hacker has to use brute-force
  - (i.e. try all the possible keys till a key that works is found)
  - Super Computer can crack a 56-bit key in 24 hours
  - It will take  $2^{72}$  times longer to crack a 128-bit key (billions of years)

## Symmetric Encryption - Limitations


- Any exposure to the secret key compromises secrecy of ciphertext
- A key needs to be delivered to the recipient of the coded message for it to be deciphered
  - Potential for eavesdropping attack during transmission of key

## Stream Ciphers

- Processes input elements continuously
- Key input to a pseudorandom bit generator
  - produces stream of random like numbers
  - unpredictable without knowing input key
  - XOR keystream output with plaintext bytes
- Are faster and use far less code
- Design considerations:
  - encryption sequence should have a large period
  - keystream should approximate random number properties
  - use a sufficiently long key (to guard against brute-force attacks)

## Asymmetric Encryption

- Uses a pair of keys for encryption
  - Public key for encryption
  - Private key for decryption
- Messages encoded using public key can only be decoded by the private key
  - Secret transmission of key for decryption is not required
  - Every entity can generate a key pair and release its public key

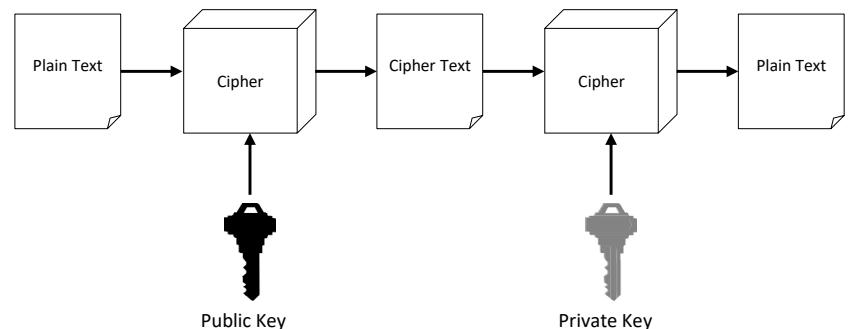

## Asymmetric Encryption Types

- Two most popular algorithms are RSA & El Gamal
  - RSA
    - Developed by Ron Rivest, Adi Shamir, Len Adelman
    - Both public and private key are interchangeable
    - Variable Key Size (512, 1024, or 2048 bits)
    - Most popular public key algorithm
  - El Gamal
    - Developed by Taher ElGamal
    - Variable key size (512 or 1024 bits)
    - Less common than RSA, used in protocols like PGP

## RSA

- Choose two large prime numbers p & q
- Compute  $n=pq$  and  $z=(p-1)(q-1)$
- Choose number e, less than n, which has no common factor (other than 1) with z
- Find number d, such that  $ed - 1$  is exactly divisible by z
- Keys are generated using n, d, e
  - Public key is  $(n, e)$
  - Private key is  $(n, d)$
- Encryption:  $c = m^e \text{ mod } n$ 
  - m is plain text
  - c is cipher text
- Decryption:  $m = c^d \text{ mod } n$
- Public key is shared and the private key is hidden

## RSA Example


- $P=5$  &  $q=7$
  - $n=5*7=35$  and  $z=(4)*(6) = 24$
  - $e = 5$
  - $d = 29$  ,  $(29 \times 5 - 1)$  is exactly divisible by 24
  - Keys generated are
    - Public key:  $(35, 5)$
    - Private key is  $(35, 29)$
  - Encrypt the message using  $(c = m^e \text{ mod } n)$ 
    - Assume that the alphabets are between 1 to 26

Numeric Representation	$m^e$	Cipher Text ( $c = m^e \bmod n$ )
12	248832	17
15	759375	15
22	5153632	22
5	3125	10

## RSA Example

- Decrypt the message using  $(m = c^d \bmod n)$ 
    - $n = 35$ ,  $d=29$

## Requirements for Public-Key Cryptosystems

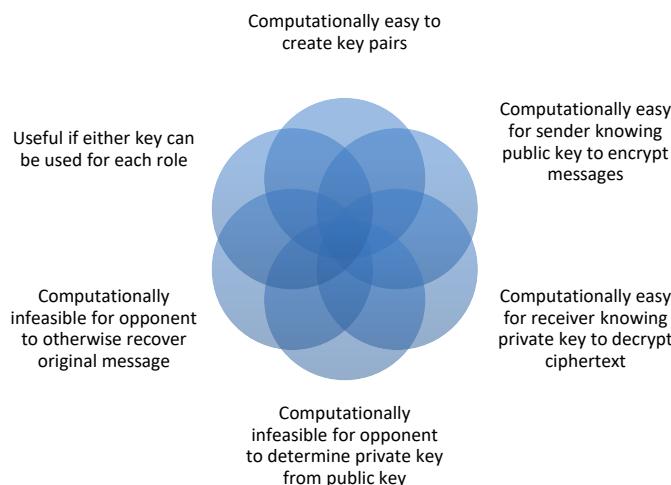

## Timing Attacks

- Paul Kocher, a cryptographic consultant, demonstrated that a snooper can determine a private key by keeping track of how long a computer takes to decipher messages
  - Timing attacks are applicable not just to RSA, but also to other public-key cryptography systems
  - This attack is alarming for two reasons:
    - It comes from a completely unexpected direction
    - It is a ciphertext-only attack

## Timing Attack Countermeasures


Constant exponentiation time	Random delay	Blinding
<ul style="list-style-type: none"><li>Ensure that all exponentiations take the same amount of time before returning a result</li><li>This is a simple fix but does degrade performance</li></ul>	<ul style="list-style-type: none"><li>Better performance could be achieved by adding a random delay to the exponentiation algorithm to confuse the timing attack</li><li>If defenders do not add enough noise, attackers could still succeed by collecting additional measurements to compensate for the random delays</li></ul>	<ul style="list-style-type: none"><li>Multiply the ciphertext by a random number before performing exponentiation</li><li>This process prevents the attacker from knowing what ciphertext bits are being processed inside the computer and therefore prevents the bit-by-bit analysis essential to the timing attack</li></ul>

## Asymmetric Encryption Weaknesses

- Efficiency is lower than Symmetric Algorithms
  - A 1024-bit asymmetric key is equivalent to 128-bit symmetric key
- Potential for man-in-the middle attack
- It is problematic to get the key pair generated for the encryption


## Session-Key Encryption (Asymmetric Encryption)

- Used to improve efficiency
  - Symmetric key is used for encrypting data
  - Asymmetric key is used for encrypting the symmetric key

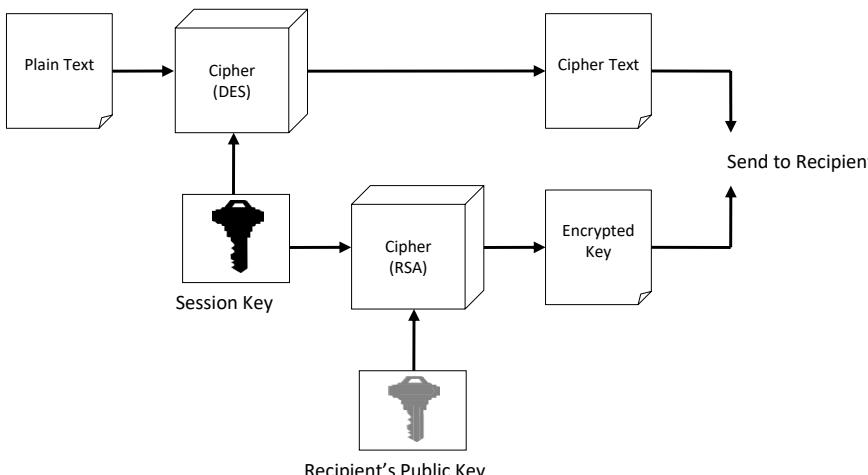


## Authentication using Digital Signatures

- A digital signature is a data item which accompanies or is logically associated with a digitally encoded message.
- It has two goals
  - A guarantee of the source of the data
  - Proof that the data has not been tampered with

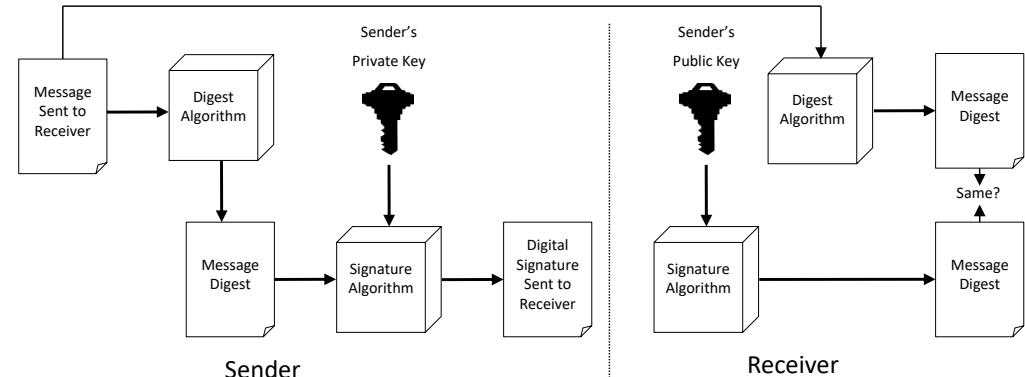

# Authentication - Digital Certificates

- A digital certificate is a signed statement by a trusted party that another party's public key belongs to them.
  - This allows one certificate authority to be authorized by a different authority (root CA)
- Top level certificate must be self signed
- Any one can start a certificate authority
  - Name recognition is key to some one recognizing a certificate authority
  - Verisign is industry standard certificate authority

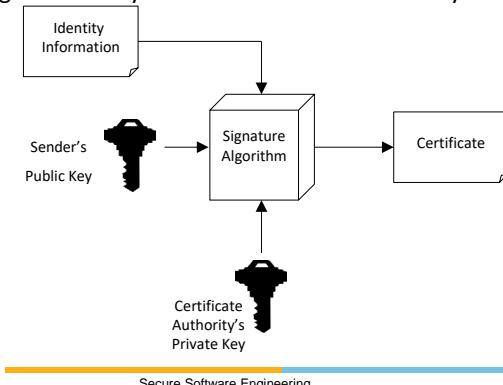

Secure Software Engineering

73

BITS-Pilani

Computer Security: Principles and Practice by William Stallings, and Lawrie Brown Pearson, 2018.

Software Security Engineering, Julia H. Allen, et al, Pearson, 2008.

[www.microsoft.com](http://www.microsoft.com)

[www.owasp.com](http://www.owasp.com)

[sei.cmu.edu](http://sei.cmu.edu)

# Thank You!

Secure Software Engineering

75

BITS-Pilani



# Why Intrusion Detection/Prevention



- The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- I have added and modified slides to suit the requirements of the course.*

How much does a data breach cost?

<https://www.ibm.com/reports/data-breach>

## How does IBM calculate Cost of Breach

### Detection and escalation

Activities that enable an organization to detect the breach include:

- Forensic and investigative activities
- Assessment and audit services
- Crisis management
- Communications to executives and boards

### Notification

Activities that enable an organization to notify data subjects, data protection regulators and other third parties include:

- Emails, letters, outbound calls or general notices to data subjects
- Determination of regulatory requirements
- Communication with regulators
- Engagement of outside experts

### Post-breach response

Activities to help victims of a breach communicate with an organization and conduct redress activities to victims and regulators include:

- Help desk and inbound communications
- Credit monitoring and identity protection services
- Issuing of new accounts or credit cards
- Legal expenditures
- Product discounts
- Regulatory fines

### Lost business

Activities that attempt to minimize the loss of customers, business disruption and revenue losses include:

- Business disruption and revenue losses due to system downtime
- Cost of losing customers and acquiring new customers
- Reputational damage and diminished goodwill

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

BITS Pilani

Pilani | Dubai | Goa | Hyderabad



## Intrusion Detection

# Security Intrusion & Detection

## RFC 2828 - Internet Security Glossary

- **Security intrusion:** a security event, or combination of multiple security events, that constitutes a security incident in which an intruder ***gains, or attempts to gain***, access to a system (or system resource) without having authorization to do so.
- **Intrusion detection:** a security service that monitors and analyzes system events for the purpose of finding, and providing real-time or near real-time warning of attempts to access system resources in an unauthorized manner.

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Why Intrusion Detection?

- Applications do not detect attacks, but instead try their best to fulfill the attackers' requests
- Lack of intrusion detection allows an attacker to attempt attacks until a successful one is identified
- There are three types of requests that an application might receive:
  - Almost certainly an attack
  - Not sure whether it an attack or not
  - Almost certainly legitimate input
- In terms of the accuracy of an IDS, there are four possible states for each activity observed.
  - A true positive state is when the IDS identifies an activity as an attack and the activity is actually an attack.
  - A true negative state is similar.
  - A false positive state is when the IDS identifies an activity as an attack but the activity is acceptable behavior. A false positive is a false alarm
  - A false negative state is the most serious and dangerous state. This is when the IDS identifies an activity as acceptable when the activity is actually an attack

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

# Intrusion Techniques

- Objective to gain access or increase privileges
- Initial attacks often exploit system or software vulnerabilities to execute code to get backdoor
  - e.g. buffer overflow
- Or to gain protected information
  - Password guessing or acquisition (or via social engineering)

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Intrusion detection systems

- **Host-based IDS:** monitor single host activity
- **Network-based IDS:** monitor network traffic
- **Distributed or hybrid:** Combines information from a number of sensors, often both host and network based, in a central analyzer that is able to better identify and respond to intrusion activity

### Comprises three logical components:

- **Sensors:** collect data
- **Analyzers:** determine if intrusion has occurred
- **User interface:** view output or control system behavior

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Base Rate Fallacy

- Bayes theorem:

$$P(A|B) = \frac{P(A) \cdot P(B|A)}{P(B)}$$

- More generally:

$$P(A|B) = \frac{P(A) \cdot P(B|A)}{\sum_{i=1}^n P(A_i) \cdot P(B|A_i)}$$

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Base Rate Fallacy

$$P(S|P) = \frac{P(S) \cdot P(P|S)}{P(S) \cdot P(P|S) + P(\neg S) \cdot P(P|\neg S)}$$

$$P(S|P) = \frac{1/10000 \cdot 0.99}{1/10000 \cdot 0.99 + (1 - 1/10000) \cdot 0.01} = \\ = 0.00980 \dots \approx 1\%$$

- Even though the test is 99% certain, your chance of having the disease is 1/100, because the population of healthy people is much larger than sick people

## Base Rate Fallacy (Axelsson, 1999)

The base-rate fallacy is best described through example:

Suppose a doctor performs on a patient a diagnostic test that is 99% accurate symmetrically (i.e. both for presence and absence of disease).

The doctor may report the test result as bad news + good news

- Bad News – the patient is tested positive
- Good News – Out of entire population, rate of incidence is only 1 in 10000.

Now what is the probability that the patient has the disease?

The Base-Rate Fallacy and the Difficulty of Intrusion Detection by Stefan Axelsson ACM Transactions on Information and System Security

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Base Rate Fallacy in Intrusion Detection

- I: intrusive behavior,
- $\neg I$ : non-intrusive behavior
- A: alarm
- $\neg A$ : no alarm

Detection rate (true positive rate):  $P(A|I)$

False alarm rate:  $P(A|\neg I)$

Goal is to maximize both

- Bayesian detection rate,  $P(I|A)$
- $P(\neg I|\neg A)$

The Base-Rate Fallacy and the Difficulty of Intrusion Detection by Stefan Axelsson ACM Transactions on Information and System Security

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Detection Rate vs False Alarm Rate

$$P(I|A) = \frac{P(I) \cdot P(A|I)}{P(I) \cdot P(A|I) + P(\neg I) \cdot P(A|\neg I)}$$

Suppose there are about 20 intrusions Per million

$$P(I) = 1 / \frac{1 \cdot 10^6}{2 \cdot 10} = 2 \cdot 10^{-5};$$


$$P(\neg I) = 1 - P(I) = 0.99998$$

$$P(I|A) = \frac{2 \cdot 10^{-5} \cdot P(A|I)}{2 \cdot 10^{-5} \cdot P(A|I) + 0.99998 \cdot P(A|\neg I)}$$

- False alarm rate becomes more dominant if  $P(I)$  is very low

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Detection Rate vs False Alarm Rate

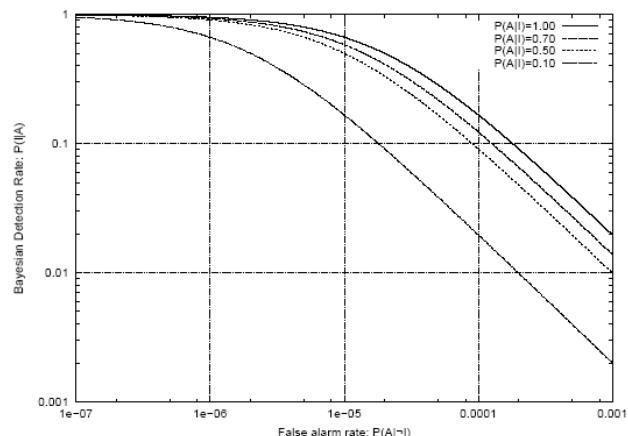

- Axelsson: We need an extremely low false alarm rate to achieve a reasonable Bayesian detection rate

## Detection Rate vs False Alarm Rate

$$P(I|A) = \frac{P(I) \cdot P(A|I)}{P(I) \cdot P(A|I) + P(\neg I) \cdot P(A|\neg I)}$$

If there are about 20 intrusions Per million

$$P(I) = 1 / \frac{1 \cdot 10^6}{2 \cdot 10} = 2 \cdot 10^{-5};$$

$$P(\neg I) = 1 - P(I) = 0.99998$$

$$P(I|A) = \frac{2 \cdot 10^{-5} \cdot P(A|I)}{2 \cdot 10^{-5} \cdot P(A|I) + 0.99998 \cdot P(A|\neg I)}$$

Say, we got a system with 99% accuracy, i.e.  $P(A|I)=0.99$  and  $P(A|\neg I)=0.01$ , then

$$P(I|A) \approx 0.002, \text{ i.e. there are more than 99\% false alarms}$$

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Intrusion Detection Evaluation Metrics: Confusion Matrix

### Confusion Matrix:

Given  $m$  classes, an entry,  $CM_{ij}$  in a **confusion matrix** indicates # of tuples in class  $i$  that were labeled by the classifier as class  $j$

May have extra rows/columns to provide totals

Predicted class ->	$C_1$	$\neg C_1$
Actual class ↓		
$C_1$	True Positives (TP)	False Negatives (FN)
$\neg C_1$	False Positives (FP)	True Negatives (TN)

# Intruder Behavior




Also see Adversary tactics & techniques at <https://attack.mitre.org/>

18

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## IDS requirements

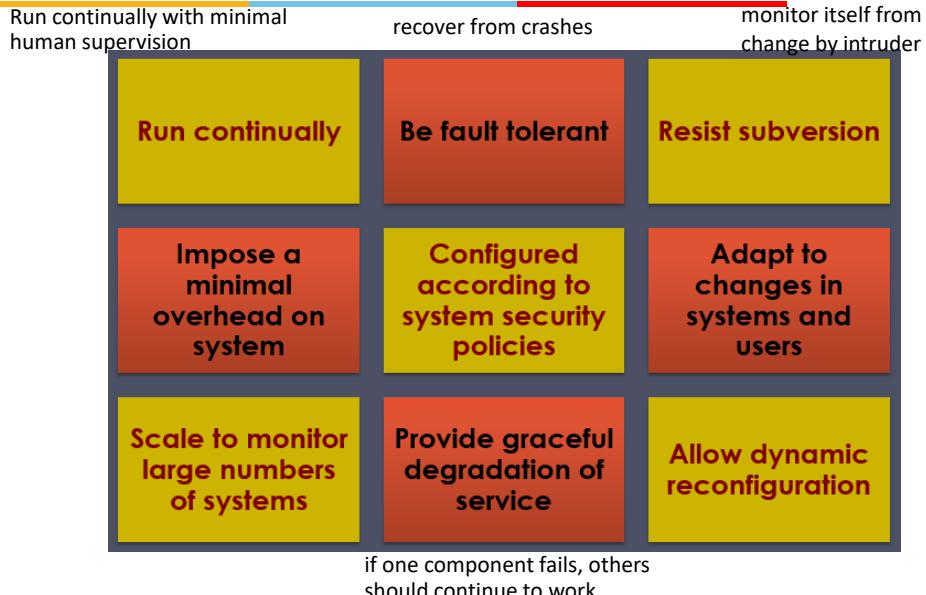

### (a) Target Acquisition and Information Gathering

- Explore corporate website for information on corporate structure, personnel, key systems, as well as details of specific web server and OS used.
- Gather information on target network using DNS lookup tools such as dig, host, and others; and query WHOIS database.
- Map network for accessible services using tools such as NMAP.
- Send email to customer service contact, review response for information on mail client, server, and OS used, and also details of person responding.
- Identify potentially vulnerable services, eg vulnerable web CMS.

### (b) Initial Access

- Brute force (guess) a user's web content management system (CMS) password.
- Exploit vulnerability in web CMS plugin to gain system access.
- Send spear-phishing email with link to web browser exploit to key people.

### (c) Privilege Escalation

- Scan system for applications with local exploit.
- Exploit any vulnerable application to gain elevated privileges.
- Install sniffers to capture administrator passwords.
- Use captured administrator password to access privileged information.

### (d) Information Gathering or System Exploit

- Scan files for desired information.
- Transfer large numbers of documents to external repository.
- Use guessed or captured passwords to access other servers on network.

### (e) Maintaining Access

- Install remote administration tool or rootkit with backdoor for later access.
- Use administrator password to later access network.
- Modify or disable anti-virus or IDS programs running on system.

### (f) Covering Tracks

- Use rootkit to hide files installed on system.
- Edit logfiles to remove entries generated during the intrusion.

Table 8.1

## Examples of Intruder Behavior



## What are the current Threats ?

### IBM X-Force Threat Intelligence Index 2025

[/https://www.ibm.com/reports/threat-intelligence](https://www.ibm.com/reports/threat-intelligence)



# Detection techniques



## Anomaly Detection

A variety of classification approaches are used:

Statistical
<ul style="list-style-type: none"> <li>Analysis of the observed behavior using univariate, multivariate, or time-series models of observed metrics</li> </ul>

Knowledge based
<ul style="list-style-type: none"> <li>Approaches use an expert system that classifies observed behavior according to a set of rules that model legitimate behavior</li> </ul>

Machine-learning
<ul style="list-style-type: none"> <li>Approaches automatically determine a suitable classification model from the training data using data mining techniques</li> </ul>

## Detection techniques

### Anomaly detection

Involves the collection of data relating to the behavior of legitimate users over a period of time

Current observed behavior is analyzed to determine whether this behavior is that of a legitimate user or that of an intruder

### Signature/Heuristic detection

Uses a set of known malicious data patterns or attack rules that are compared with current behavior

Also known as misuse detection  
Can only identify known attacks for which it has patterns or rules

5/3/2025

Secure Software Engineering


BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Example of metrics

- Counters:** e.g., number of logins during an hour, number of times a cmd executed
- Gauge:** e.g., the number of outgoing messages [pkts]
- Interval time:** the length of time between two events, e.g., two successive logins
- Resource utilization:** quantity of resources used (e.g., number of pages printed)
- Mean and standard deviations

# Signature/heuristic detection

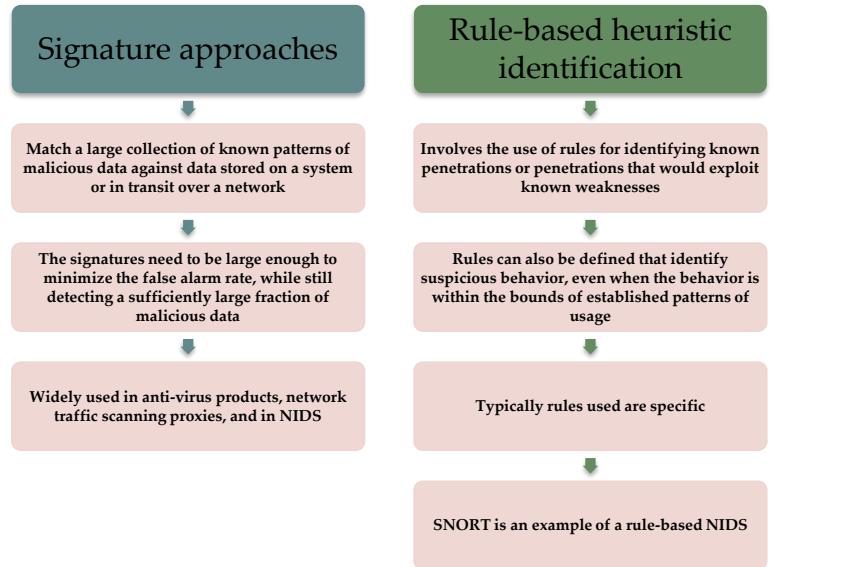

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



BITS Pilani

Pilani | Dubai | Goa | Hyderabad

## Host-based IDS

# Example rules in a signature detection IDS

- Users should not be logged in more than one session
- Users do not make copies of system, password files
- Users should not read in other users' directories
- Users must not write other users' files
- Users who log after hours often access the same files they used earlier
- Users do not generally open disk devices but rely on high-level OS utilities

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Host-based IDS

- Specialized software to monitor system activity to detect suspicious behavior
  - primary purpose is to detect intrusions, log suspicious events, and send alerts
  - can detect both external and internal intrusions
  - used on sensitive systems e.g. database servers, administrative systems
- Two approaches, often used in combination:
  - **Anomaly detection:** consider normal/expected behavior over a period of time; apply statistical tests to detect intruder
    - threshold detection: for various events (#/volume of copying)
    - profile based (time/duration of login)
  - **Signature detection:** defines proper (or bad) behavior (rules)

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Common data sources

- Fundamental component of intrusion detection is the sensor that collects data. Common data sources include
  - System call traces
  - Audit (log file) records
  - File integrity checksums
  - Registry access

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Distributed host-based IDS

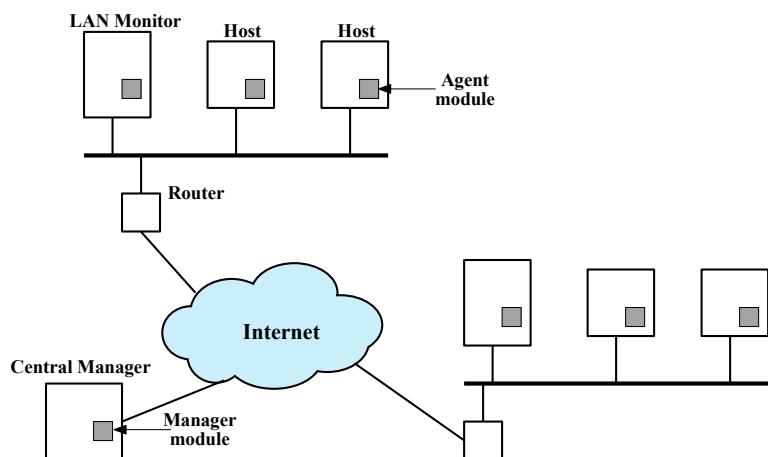


Figure 8.2 Architecture for Distributed Intrusion Detection

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Linux System Calls and Windows DLLs Monitored

### Ubuntu Linux System Calls

```

accept, access, acct, adjtime, aiocancel, aioread, aiowait, aiowrite, alarm, async_daemon,
audits, bind, chdir, chmod, chown, chroot, close, connect, creat, dup, dup2, execv, execve,
exit, exportfs, fchdir, fchmod, fchown, fchroot, fcntl, flock, fork, fpathconf, fstat, fstat,
fstatfs, fsync, ftime, ftruncate, getdents, getdirent, getdomainname, getopt, getoptlong, getoptsize,
getfh, getgid, getgroups, gethostid, gethostname, getitimer, getmsg, getpagesize,
getpeername, getpgrp, getpid, getpriority, getrlimit, getrusage, getsockname, getsockopt,
gettimeofday, getuid, getvty, ioctl, kill, killpg, link, listen, lseek, lstat, madvise, mct, mincore,
mkdir, mknod, mmap, mount, mprotect, mpxchan, msgsys, msync, munmap,
nfs_mount, nfssvc, nice, open, pathconf, pause, pcfs_mount, phys, pipe, poll, profil, ptrace,
putmsg, quota, quotactl, read, readlink, ready, reboot, recv, recvfrom, recvmsg, rename,
reuba, rfssys, rmdir, sbreak, sbrk, select, semsys, send, sendmsg, sendto, setdomainname,
setdopt, setgid, setgroups, sethostid, sethostname, settimer, setpid, setpgrp, setppr,
setpriority, setquotu, setregid, setreuid, setrlimit, setsid, setsockopt, settimeofday, setuid,
shmsys, shutdown, sigblock, sigpause, sigpending, sigsetmask, sigstack, sigsys, sigvec,
socket, socketaddr, socketpair, ssrk, stat, statfs, stime, stty, swapon, symlink, sync,
sysconf, time, times, truncate, umask, umount, uname, unlink, umount, ustat, utime, utimes,
vadvise, vfork, vhangup, vlimit, vpxsys, vread, vitimes, vtrace, vwrite, wait, wait3, wait4,
write, writev
    
```

### Key Windows DLLs and Executables

```

comctl32
kernel32
msvcp
msvcr
mswsock
ntdll
ntoskrnl
user32
ws2_32
    
```

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Agent Architecture

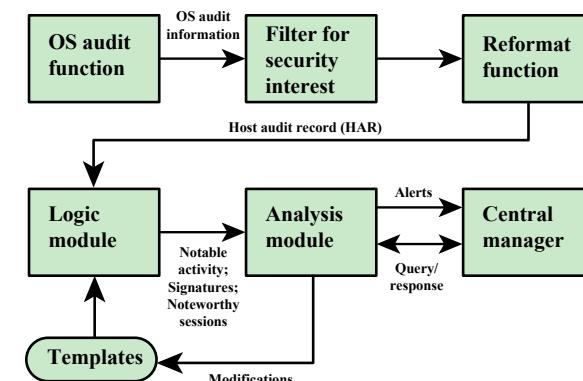


Figure 8.3 Agent Architecture

5/3/2025


Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Network-Based IDS

### Passive sensors

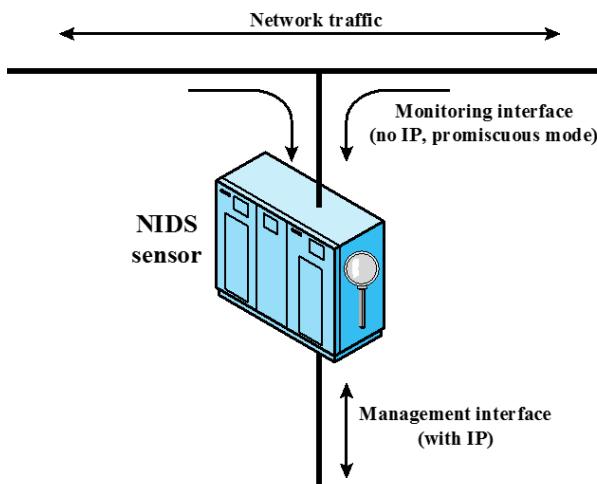

## Network-Based IDS

Monitors traffic at selected points on a network

Examines traffic packet by packet in real or close to real time

May examine network, transport, and/or application-level protocol activity

Comprised of a number of sensors, one or more servers for NIDS management functions, and one or more management consoles for the human interface

Analysis of traffic patterns may be done at the sensor, the management server or a combination of the two


5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## NIDS Sensor Deployment

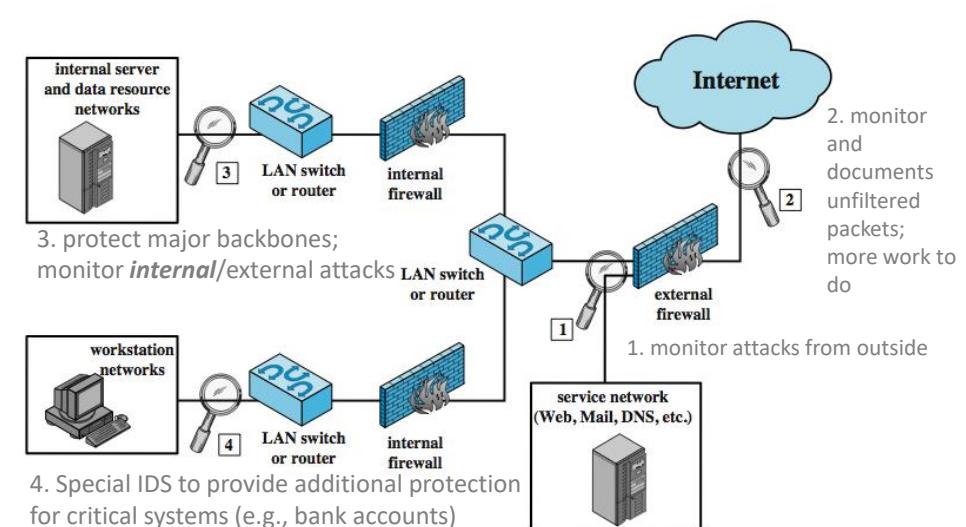

## NIDS intrusion detection techniques

- Signature detection
  - at application (*FTP*), transport (*port scans*), network layers (*ICMP*); unexpected application services (*host running unexpected app*), policy violations (*inappropriate website use*)
- Anomaly detection
  - of denial of service attacks, scanning, worms (*significant traffic increase*)
- When potential violation detected, sensor sends an alert and logs information
  - Used by analysis module to refine intrusion detection parameters and algorithms
  - by security admin to improve protection

5/3/2025

## Logging of alerts (for all types)

- Typical information logged by a NIDS sensor includes:
  - Timestamp
  - Connection or session ID
  - Event or alert type
  - Rating
  - Network, transport, and application layer protocols
  - Source and destination IP addresses
  - Source and destination TCP or UDP ports, or ICMP types and codes
  - Number of bytes transmitted over the connection
  - Decoded payload data, such as application requests and responses
  - State-related information

5/3/2025

## Distributed hybrid intrusion detection (host-based, NIDS, distributed host-based)


### Issues:

1. Tools may not recognize new threats
2. Difficult to deal with rapidly spreading attacks

### Solution:

Distributed Adaptive IDS thru Peer-to-peer gossip and cooperation

One developed by Intel, called Autonomic Enterprise Security

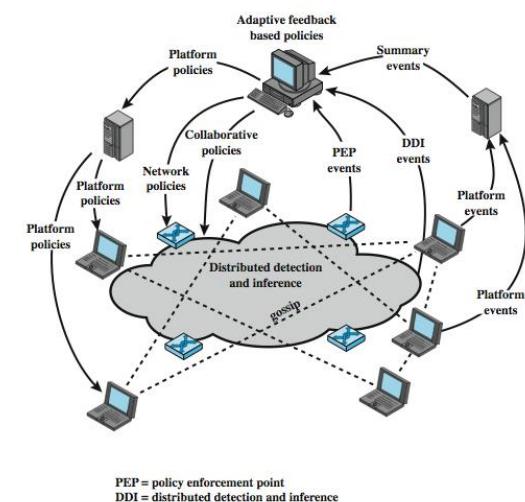

5/3/2025

## Intrusion detection exchange format

A data format used to exchange information between software enabling intrusion detection, intrusion prevention, security information collection and management systems that may need to interact with them along with personnel. Includes XML DTD

**To facilitate development of a distributed IDS**

**Not a product, but a proposed IETF standard RFC 4765**

### Key elements

**Data source:** raw data from an IDS


**Sensor:** collect and forward events

**Analyzer:** process data

**Administrator** defines sec policy

**Manager:** a process for operator to manage the IDS system

**Operator:** the user of the Manager

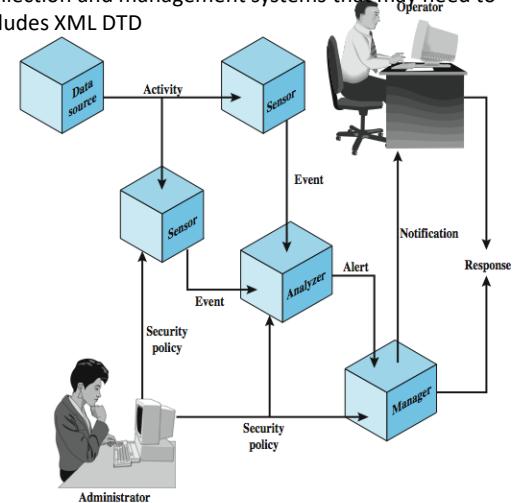

5/3/2025



# Honeypots

## Honeypot classification


- Low interaction honeypot
  - Consists of a software package that emulates particular IT services or systems well enough to provide a realistic initial interaction, but does not execute a full version of those services or systems
  - Provides a less realistic target
  - Often sufficient for use as a component of a distributed IDS to warn of imminent attack
- High interaction honeypot
  - A real system, with a full operating system, services and applications, which are instrumented and deployed where they can be accessed by attackers

# Honeypots

- Decoy systems
  - Filled with fabricated info and instrumented with monitors/event loggers
  - Lure a potential attacker away from critical systems
  - Collect information about the attacker's activity
  - Encourage the attacker to stay on the system long enough for administrators to respond
  - Divert and hold attacker to collect activity info without exposing production systems
- Initially were single systems
- More recently are/emulate entire networks



## Honeypot deployment

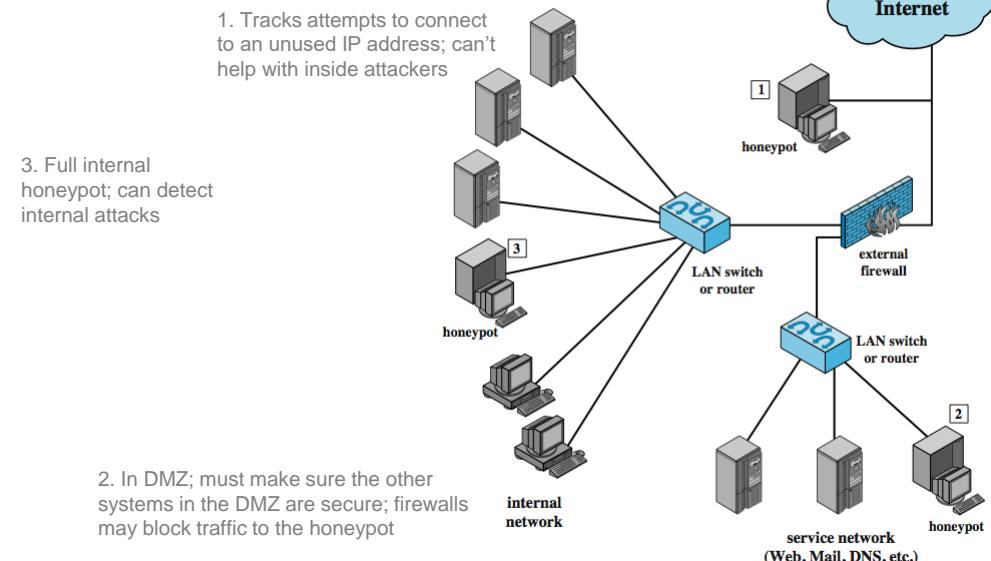



## Snort IDS




## Firewalls and Intrusion Prevention Systems

## Snort IDS

### Lightweight IDS

- Open source (rule-based)
- Real-time packet capture and rule analysis
- Passive or inline
- Components: decoder, detector, logger, alerter

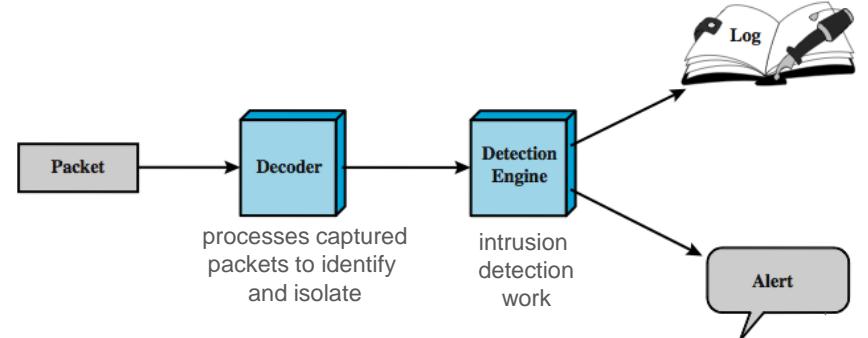

5/3/2025

## Firewalls and Intrusion Prevention Systems

- Effective means of protecting LANs
- Internet connectivity essential
  - For organization and individuals
  - But creates a threat
- Could secure workstations and servers
- Also use firewall as perimeter defence
  - Single choke point to impose security

5/3/2025


## Firewall Access Policy

- A critical component in the planning and implementation of a firewall is specifying a suitable access policy
  - Types of traffic authorized to pass through the firewall
  - Includes address ranges, protocols, applications and content types
- The policy should be developed from the organization's security risk assessment and policy
- Should be developed from a broad specification of which traffic types the organization needs to support
  - Then refined to detail the filter elements which can then be implemented within an appropriate firewall topology

5/3/2025

## Firewall Filter Characteristics

Characteristics that a firewall access policy could use to filter traffic include:

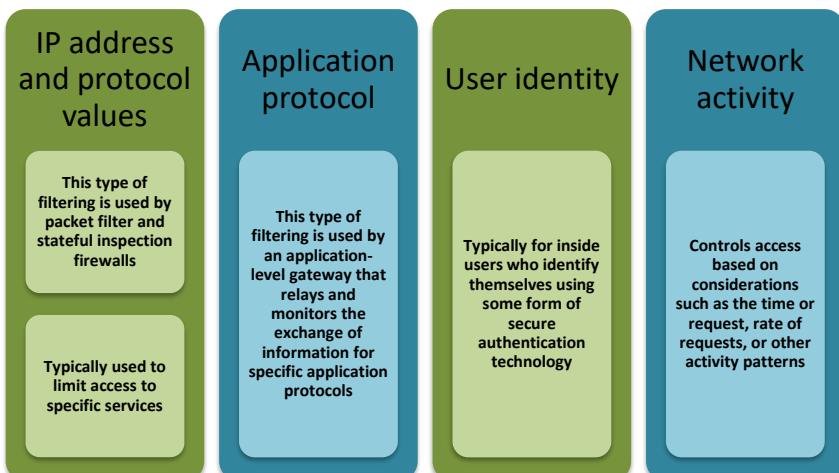

5/3/2025


## Firewall Capabilities & Limits

- **Capabilities**
  - Defines a single choke point
  - Provides a location for monitoring security events
  - Convenient platform for some Internet functions such as NAT, usage monitoring, IPSEC, VPNs
- **Limitations**
  - Cannot protect against attacks bypassing firewall (internal systems can dial-out to an ISP)
  - May not protect fully against internal threats
  - Improperly secured wireless LAN
  - Laptop, PDA, portable storage device infected outside then used inside

5/3/2025

## Packet Filtering Firewall

- Applies rules to each incoming and outgoing IP packet
  - Typically a list of rules based on matches in the IP or TCP header
  - Forwards or discards the packet based on rules match

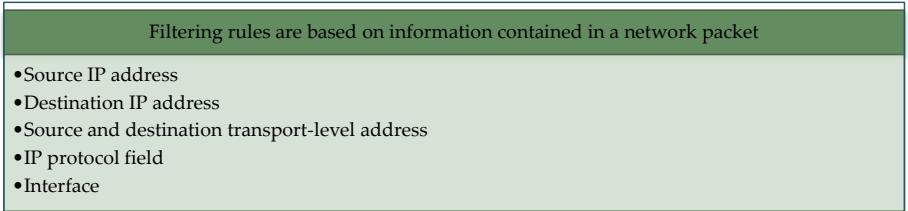

- Two default policies:
  - Discard - prohibit unless expressly permitted
    - More conservative, controlled, visible to users
  - Forward - permit unless expressly prohibited
    - Easier to manage and use but less secure

5/3/2025

## Packet-Filtering Examples

Rule	Direction	Src address	Dest address	Protocol	Dest port	Action
1	In	External	Internal	TCP	25	Permit
2	Out	Internal	External	TCP	>1023	Permit
3	Out	Internal	External	TCP	25	Permit
4	In	External	Internal	TCP	>1023	Permit
5	Either	Any	Any	Any	Any	Deny

## Stateful Inspection Firewall

Tightens rules for TCP traffic by creating a directory of outbound TCP connections

- There is an entry for each currently established connection
- Packet filter allows incoming traffic to high numbered ports only for those packets that fit the profile of one of the entries in this directory

Reviews packet information but also records information about TCP connections

- Keeps track of TCP sequence numbers to prevent attacks that depend on the sequence number
- Inspects data for protocols like FTP, IM and SIPS commands

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Application-Level (Proxy) Gateway

- Acts as a relay of application-level traffic
  - User contacts gateway with remote host name
  - Authenticates themselves
  - Gateway contacts application on remote host and relays TCP segments between server and user
- Must have proxy code for each application
  - May restrict application features supported
  - Some services may not be available
- More secure than packet filters
- But have higher overheads

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Circuit-Level Gateway

- Sets up two TCP connections, to an inside user and to an outside host
- Once connection is established, relays TCP segments from one connection to the other without examining contents
  - Hence independent of application logic
  - Just determines whether relay is permitted
- Typically used when inside users trusted
  - May use application-level gateway inbound and circuit-level gateway outbound
  - Hence lower overheads

5/3/2025

Secure Software Engineering


BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Packet Filtering vs Gateway vs Application-Level Firewall

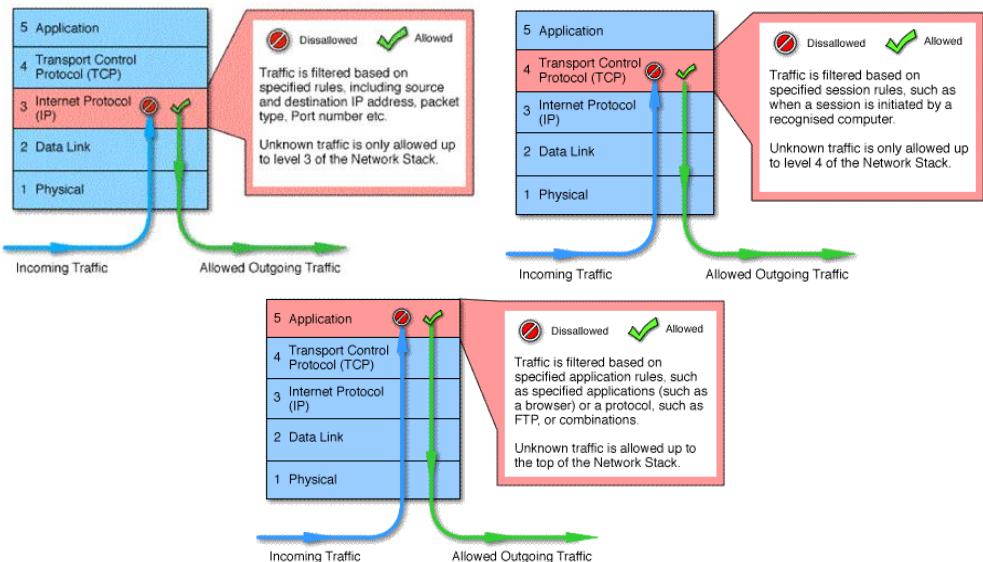

5/3/2025

## Bastion Hosts

- Critical strongpoint in network
- Hosts application/circuit-level gateways
- Common characteristics:
  - Runs secure O/S, only essential services
  - May require user auth to access proxy or host
  - There may be many proxy services
  - Each proxy can restrict features, hosts accessed
  - Each proxy small, simple, checked for security
  - Each proxy is independent, can be uninstalled

## Firewall Basing

- Several options for locating firewall:

- Bastion host

- Individual host-based firewall

- Personal firewall

5/3/2025

## Host-Based Firewalls

- Used to secure individual host
- Available in/add-on for many O/S
- Filter packet flows
- Often used on servers
- Advantages:
  - Tailored filter rules for specific host needs
  - Protection from both internal/external attacks
  - Additional layer of protection to org firewall when used with a standalone firewall

5/3/2025

5/3/2025

## Personal Firewall


- Controls traffic flow to/from PC/workstation
- For both home or corporate use
- May be software module on PC
- Or in home cable/DSL router/gateway
- Typically much less complex
- Primary role to deny unauthorized access
- May also monitor outgoing traffic to detect/block worm/malware activity

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Virtual Private Networks

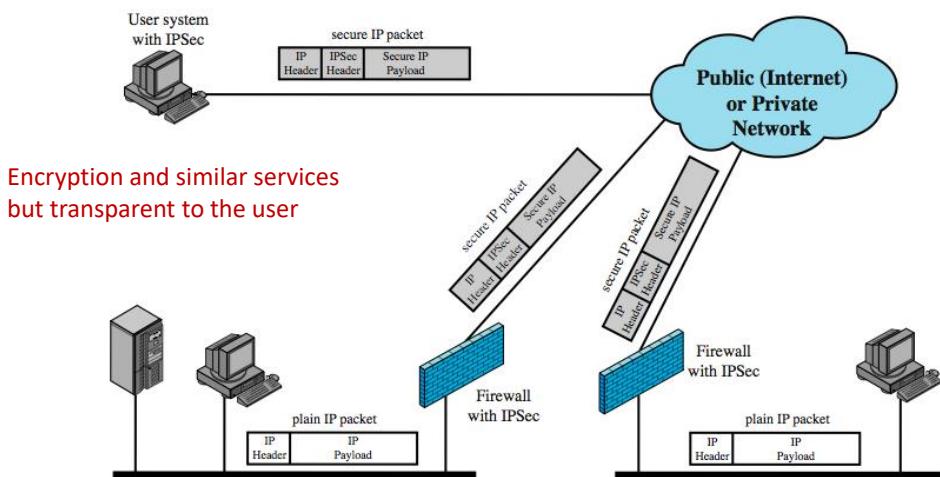

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Firewall Locations

External firewall: protection for the DMZ consistent with their need for external connectivity


Internal firewall:

- more stringent filtering capability to provide protection from external attacks
- provides two way protection wrt the DMZ network

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

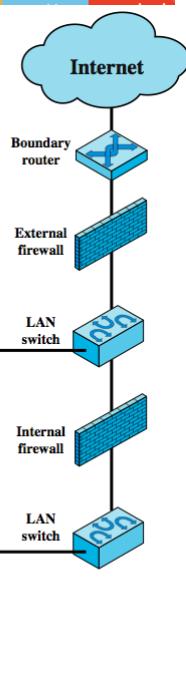


## Distributed Firewalls

A combination of earlier firewalls

Host-resident firewall on 100s of PCs plus standalone firewalls under a central administration

5/3/2025

Secure Software Engineering

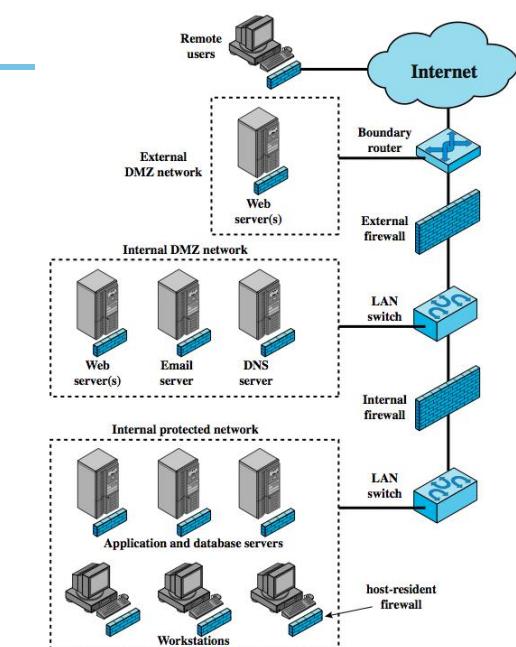

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Firewall vs IPS

- A firewall will block traffic based on network information such as IP address, network port and network protocol.
  - It can make some decisions based on the state of the network connection
- An IPS will inspect content of the request and be able to drop, alert, or potentially clean a malicious network request based on that content.
  - The determination of what is malicious is based either on behavior analysis or through the use of signatures

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Host-Based IPS

- Identifies attacks using both:
  - Signature techniques
    - malicious application packets
  - Anomaly detection techniques
    - behavior patterns that indicate malware
- Example of malicious behavior: buffer overflow, access to email contacts, directory traversal
- Can be tailored to the specific platform
  - e.g. general purpose, web/database server specific
- Can also sandbox applets to monitor behavior
- May give desktop file, registry, I/O protection

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Intrusion Prevention Systems (IPS)

- Also known as Intrusion Detection and Prevention System (IDPS)
- Is an extension of an IDS that includes the capability to attempt to block or prevent detected malicious activity
- Can be host-based, network-based, or distributed/hybrid
- Can use anomaly detection to identify behavior that is not that of legitimate users, or signature/heuristic detection to identify known malicious behavior can block traffic as a firewall does, but makes use of the types of algorithms developed for IDSs to determine when to do so

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Network-Based IPS

- inline NIDS that can discard packets or terminate TCP connections
- uses signature and anomaly detection
- may provide flow data protection
  - monitoring full application flow content
- can identify malicious packets using:
  - pattern matching (for specific byte seq)
  - stateful matching (to stop attack streams rather than a single pkts)
  - protocol anomaly (deviations from stds)
  - traffic anomaly (unusual traffic like a UDP floods)

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

# Unified Threat Management Products



Reduce admin burden by replacing network products (firewall, IDS, IPS, ...) With a single device

Cisco ASA Content Security and Control (CSC) Security Services Module providing comprehensive antivirus, anti-spyware, file blocking, anti-spam, anti-phishing, URL blocking and filtering, and content filtering


-all available in a comprehensive easy-to-manage solution

Also, IBM QRadar documentation at <https://www.ibm.com/downloads/cas/OP62GKAR>

5/3/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

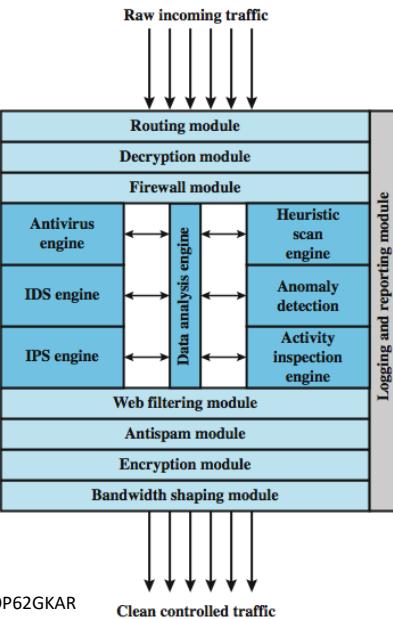

Computer Security: Principles and Practice by William Stallings, and Lawrie Brown Pearson, 2018.

Software Security Engineering, Julia H. Allen, et al, Pearson, 2008.

[www.ibm.com](http://www.ibm.com)

[www.owasp.com](http://www.owasp.com)

[sei.cmu.edu](http://sei.cmu.edu)

# Thank You!

SE/SS ZG566  
**Secure Software Engineering**



**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

T V Rao



- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## DARPA IDS Data

- The intrusion detection learning task is to build a predictive model capable of distinguishing between ``bad'' connections, called intrusions or attacks, and ``good'' normal connections
- The 1998 DARPA Intrusion Detection Evaluation Program was prepared and managed by MIT Lincoln Labs
  - A standard set of data to be audited, which includes a wide variety of intrusions simulated in a military network environment, was provided.
  - The 1999 KDD intrusion detection contest uses a version of this dataset

## DARPA IDS Data

[https://www.researchgate.net/publication/325159145\\_Machine\\_Learning\\_and\\_Deep\\_Learning\\_Methods\\_for\\_Cybersecurity](https://www.researchgate.net/publication/325159145_Machine_Learning_and_Deep_Learning_Methods_for_Cybersecurity)

Page 5: List of features in the KDDcup99 intrusion dataset

Challenges in having a good dataset and relevant efforts:

<https://www.semanticscholar.org/paper/Toward-Generating-a-New-Intrusion-Detection-Dataset-Sharaafaldin-Lashkari/a27089efabc5f4abd5ddf2be2a409bff41f31199>



## Governance for Security

### Governance vs. Management

Governance	Management
Oversight	Implementation
Authorizes decision rights	Authorized to make decisions
Enact policy	Enforce policy
Accountability	Responsibility
Strategic planning	Project planning
Resource allocation	Resource utilization

### Governance vs. Management

- IT governance is a framework for decision rights and accountability to encourage desirable behavior in the use of IT.
- IT management is the daily decision making and implementation activities around the firm's use of IT.
- Governance identifies who will make key IT decisions and how will they be held accountable.
  - Good governance is enabling action and reduces bureaucracy and dysfunctional politics by formalizing organizational learning and thus avoiding the trap of repeating the same mistakes.

### Governance for Security

- According to NIST, IT governance is the process of establishing and maintaining a framework to provide assurance that information security strategies
  - are aligned with and support business objectives,
  - are consistent with applicable laws and regulations through adherence to policies and internal controls, and
  - provide assignment of responsibility,all in an effort to manage risk

## Characteristics of effective security governance

- It is an institution-wide issue
- Leaders are accountable
- It is viewed as an institutional requirement (cost of doing business)
- It is risk-based
- Roles, responsibilities and segregation of duties are defined
- It is addressed and enforced in policy
- Adequate resources are committed
- Staff are aware and trained
- A development life cycle is required
- It is planned, managed, measurable and measured
- It is reviewed and audited



## IT Security Controls

Control is defined as:

"An action, device, procedure, or other measure that reduces risk by eliminating or preventing a security violation, by minimizing the harm it can cause, or by discovering and reporting it to enable corrective action."

### Management controls

- Focus on security policies, planning, guidelines, and standards that influence the selection of operational and technical controls to reduce the risk of loss and to protect the organization's mission
- These controls refer to issues that management needs to address

### Operational controls

- Address the correct implementation and use of security policies and standards, ensuring consistency in security operations and correcting identified operational deficiencies
- These controls relate to mechanisms and procedures that are primarily implemented by people rather than systems
- They are used to improve the security of a system or group of systems


### Technical controls

- Involve the correct use of hardware and software security capabilities in systems
- These range from simple to complex measures that work together to secure critical and sensitive data, information, and IT systems functions



## IT Security Controls

## IT Security Controls address Risks

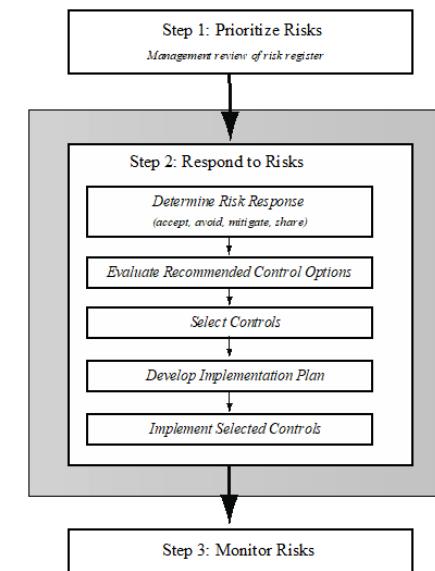


## Technical Controls

**Supportive:** generic, underlying technical IT capabilities

**Preventive:** focus on preventing security breaches by warning of violations

**Detection/recovery:** focus on response to a security breach

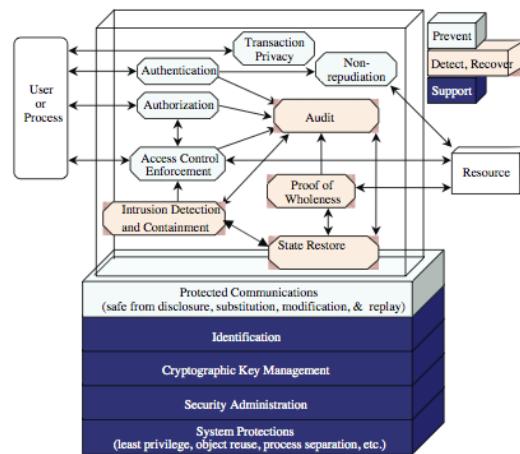

**Proof of Wholeness :** In order to determine that integrity has been compromised, the ability must exist to detect when information or system state is potentially corrupted. The proof of wholeness service provides this ability.

5/12/2025

Secure Software Engineering

BITs Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Managing for Security

## NIST SP800-53 Security Controls

CLASS	CONTROL FAMILY
Management	Planning
Management	Program Management
Management	Risk Assessment
Management	Security Assessment and Authorization
Management	System and Services Acquisition
Operational	Awareness and Training
Operational	Configuration Management
Operational	Contingency Planning
Operational	Incident Response
Operational	Maintenance
Operational	Media Protection
Operational	Personnel Security
Operational	Physical and Environmental Protection
Operational	System and Information Integrity
Technical	Access Control
Technical	Audit and Accountability
Technical	Identification and Authentication
Technical	System and Communications Protection

5/12/2025

Secure Software Engineering

BITs Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## IT Security Management Overview

Is the formal process of answering the questions:



Ensures that critical assets are sufficiently protected in a cost-effective manner

Security risk assessment is needed for each asset in the organization that requires protection

Provides the information necessary to decide what management, operational, and technical controls are needed to reduce the risks identified

## Security Policy

- Organizations are expected to have a security policy in order to bring all stakeholders together.
- Security Policy may address
  - Scope and purpose including relation of objectives to business, legal, regulatory requirements
  - IT security requirements
  - Assignment of responsibilities
  - Risk management approach

## Organizational Context and Security Policy

- Maintained and updated regularly
  - Using periodic security reviews
  - Reflect changing technical/risk environments
- Examine role and importance of IT systems in organization

First examine organization's IT security:

**Objectives** - wanted IT security outcomes

**Strategies** - how to meet objectives

**Policies** - identify what needs to be done

## Security Policy

- Security Policy is also expected to address
- Security awareness and training
  - General personnel issues and any legal sanctions
  - Integration of security into systems development
  - Information classification scheme
  - Contingency and business continuity planning
  - Incident detection and handling processes
  - How, when policy reviewed, and change control to it

## Management Support

- IT security policy must be supported by senior management
- Need IT security officer
  - to provide consistent overall supervision
  - manage process
  - handle incidents
- Large organizations need IT security officers on major projects/teams
  - manage process within their areas


## IT Security Management

- **IT Security Management:** a process used to achieve and maintain appropriate levels of
  - Confidentiality,
  - Integrity,
  - Availability,
  - Accountability,
  - Authenticity and
  - Reliability

## IT Security Management

- IT security management functions include:
  - Help determine organizational IT security objectives, strategies and policies
  - Help determining organizational IT security requirements
  - Identifying and analyzing security threats to IT assets
  - Identifying and analyzing risks
  - Specifying appropriate safeguards
  - Monitoring the implementation and operation of safeguards
  - Developing and implement a security awareness program
  - Detecting and reacting to incidents

## IT Security Management Process

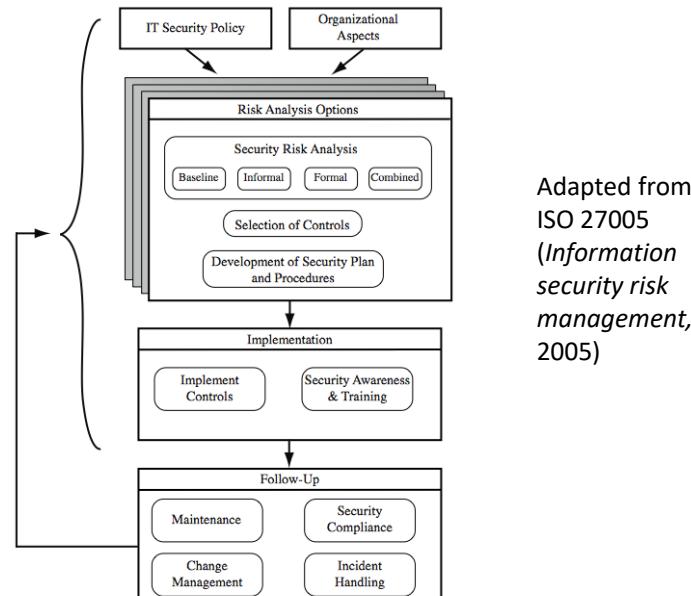

Adapted from  
ISO 27005  
(*Information  
security risk  
management*,  
2005)


## IT Security Plan

Provides details of:

- What will be done
- What resources are needed
- Who is responsible

Goal is to detail the actions needed to improve the identified deficiencies in the risk profile

### Should include

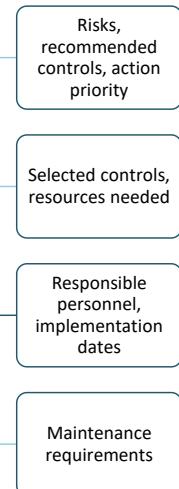



## Risk Management

### Definition of Risk

- A risk is a potential problem – it might happen and it might not
- Conceptual definition of risk
  - Risk concerns future happenings
  - Risk involves change in mind, opinion, event, action, place, etc.
  - Risk involves choice and the uncertainty that choice entails
- Two characteristics of risk
  - Uncertainty – the risk may or may not happen, that is, there are no 100% risks (those, instead, are called constraints)
  - Loss – the risk becomes a reality and unwanted consequences or losses occur

### Risk Management



The time to repair the roof is when the sun is shining.

John F. Kennedy


### Security Risk Assessment

- Critical component of process
  - else may have vulnerabilities or waste money
- Ideally examine every asset vs risk
  - not feasible in practice
- Choose one of possible alternatives based on organization's resources and risk profile
  - Baseline - use "industry best practice", implement safeguards against most common threats
  - Informal - informal, pragmatic risk analysis with knowledge and expertise of analyst
  - Formal - most comprehensive, costly and slow
  - Combined – formal assessment for critical assets, risks

## Detailed Risk Analysis Process

1. System Characterization
2. Threat Identification
3. Vulnerability Identification
4. Control Analysis
5. Likelihood Determination
6. Impact Analysis
7. Risk Determination
8. Control Recommendations
9. Result Documentation

## Generic Organizational Risk Context

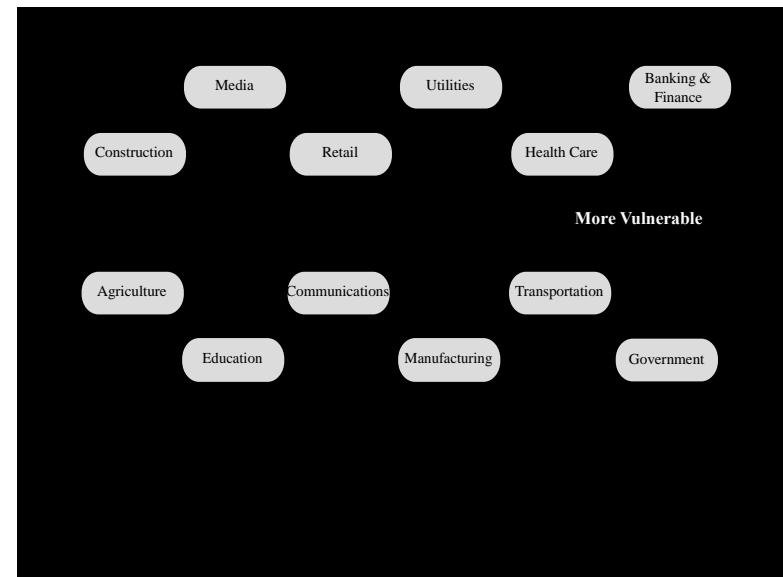

Adapted from an IDC 2000 report.  
Landscape might have evolved since then.

## Risk Terminology (Stallings)

Asset:	A system resource or capability of value to its owner that requires protection
Threat:	A potential for a threat source to exploit a vulnerability in some asset, which if it occurs may compromise the security of the asset and cause harm to the asset's owner
Vulnerability:	A flaw or weakness in an asset's design, implementation, or operation and management that could be exploited by some threat
Risk:	The potential for loss computed as the combination of the likelihood that a given threat exploits some vulnerability to an asset, and the magnitude of harmful consequence that results to the asset's owner

## Threats/Vulnerabilities identification

Threats may be

- Natural “acts of God”
- Man-made
- Accidental or Deliberate

For a deliberate attacker, consider

- Motivation
- Capability
- Resources
- Probability of Attack
- Deterrence

Past experience can be a guide

- Identify exploitable flaws or weaknesses in organization's IT systems or processes
- Determines applicability and significance of threat to organization
- Need combination of threat and vulnerability to create a risk to an asset
- Outcome should be a list of threats and vulnerabilities with brief descriptions of how and why they might occur

## Analyze Risks

- Specify likelihood of occurrence of each identified threat to asset given existing controls
- Specify consequence should threat occur
- Derive overall risk rating for each threat
  - Risk = probability threat occurs x cost to organization
  - Hard to determine accurate probabilities and realistic cost consequences
  - Use qualitative, not quantitative ratings

## Risk Determination

Likelihood	Consequences					
	Doomsday	Catastrophic	Major	Moderate	Minor	Insignificant
Almost Certain	E	E	E	E	H	H
Likely	E	E	E	H	H	M
Possible	E	E	E	H	M	L
Unlikely	E	E	H	M	L	L
Rare	E	H	H	M	L	L

Risk Level	Description
Extreme (E)	Will require detailed research and management planning at an executive/director level. Ongoing planning and monitoring will be required with regular reviews. Substantial adjustment of controls to manage the risk are expected, with costs possibly exceeding original forecasts.
High (H)	Requires management attention, but management and planning can be left to senior project or team leaders. Ongoing planning and monitoring with regular reviews are likely, though adjustment of controls are likely to be met from within existing resources.
Medium (M)	Can be managed by existing specific monitoring and response procedures. Management by employees is suitable with appropriate monitoring and reviews.
Low (L)	Can be managed through routine procedures.

## Risk Handling/Treatment Alternatives



**risk acceptance:** accept risk (perhaps because of excessive cost of risk treatment)

**risk avoidance:** do not proceed with the activity that causes the risk (loss of convenience)

**risk transfer:** buy insurance; outsource

**reduce consequence:** modify the uses of an asset to reduce risk impact (e.g., offsite backup)

**reduce likelihood:** implement suitable controls

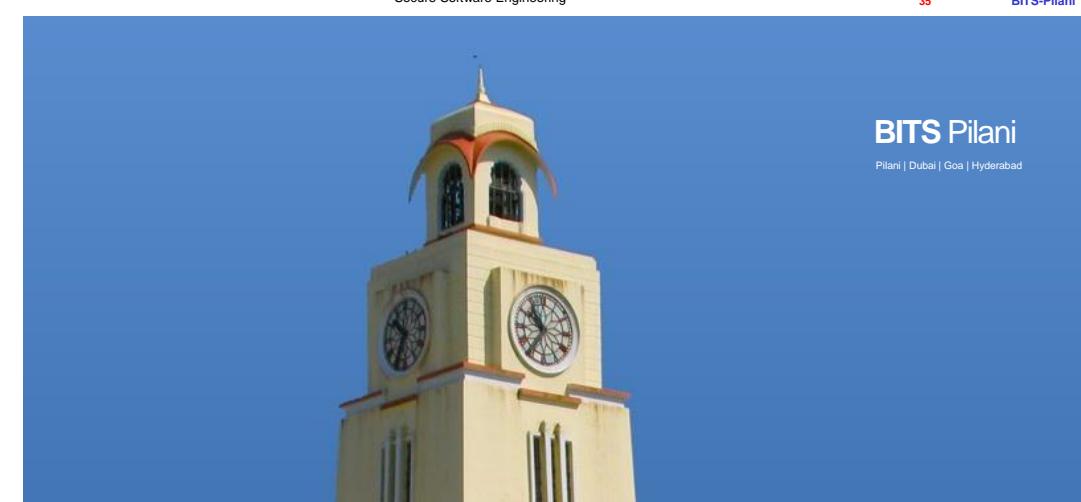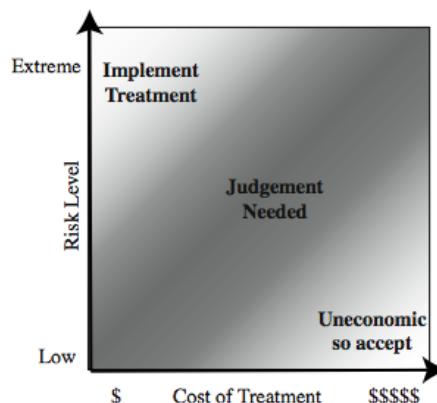

## Case Study: Silver Star Mines (Stallings)

## Establishing the Context

- Initial step
  - Determine the basic parameters of the risk assessment
  - Identify the assets to be examined
- Explores political and social environment in which the organization operates
  - Legal and regulatory constraints
  - Provide baseline for organization's risk exposure
- Risk appetite
  - The level of risk the organization views as acceptable

5/12/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Asset Identification

- Draw on expertise of people in relevant areas of organization to identify key assets
  - Identify and interview such personnel

### What is an Asset

- “anything that needs to be protected” because it has value to the organization and contributes to the successful attainment of the organization’s objectives

## Case Study: Silver Star Mines

- Fictional operation of global mining company
- Large IT infrastructure
  - both common and specific software
  - some directly relates to health & safety
  - formerly isolated systems now networked
- Decided on combined approach
- Mining industry less risky end of spectrum
- Management accepts moderate or low risk


5/12/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Assets

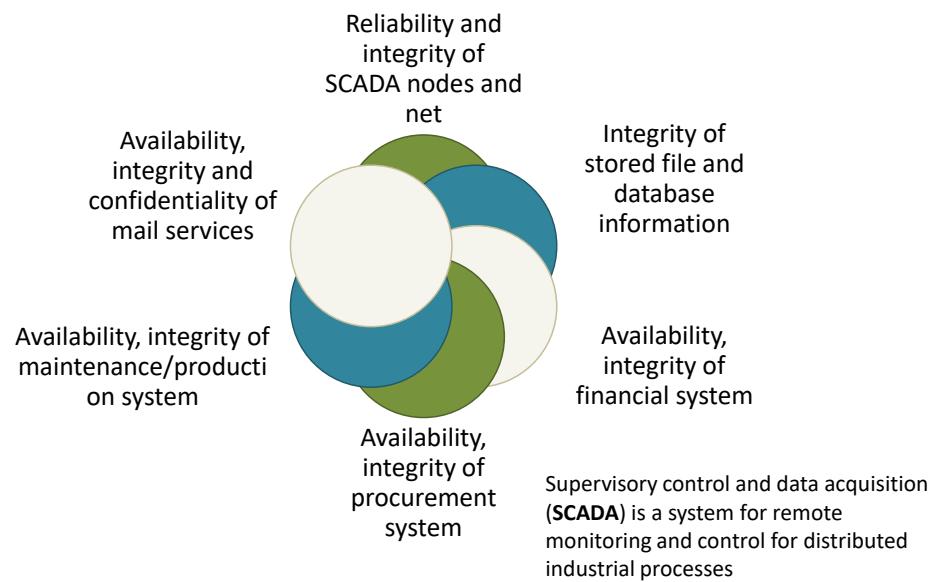

5/12/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Risk Register

Asset	Threat/ Vulnerability	Existing Controls	Likelihood	Consequence	Level of Risk	Risk Priority
Reliability and integrity of the SCADA nodes and network	Unauthorized modification of control system	Layered firewalls and servers	Rare	Major	High	1
Internet Router	Outside hacker attack	Admin password only	Possible	Moderate	High	2
Availability and integrity of financial system	Attacks/errors affecting system	Firewall, policies	Possible	Moderate	High	3
Availability and integrity of procurement system	Attacks/errors affecting system	Firewall, policies	Possible	Moderate	High	4
Availability and integrity of maintenance/production system	Attacks/errors affecting system	Firewall, policies	Possible	Minor	Medium	5
Availability, integrity and confidentiality of mail services	Attacks/errors affecting system	Firewall, ext mail gateway	Almost Certain	Minor	High	6

5/12/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Implementation Plan

Risk (Asset/Threat)	Hacker attack on Internet router
Level of Risk	High
Recommended Controls	<ul style="list-style-type: none"> <li>Disable external telnet access</li> <li>Use detailed auditing of privileged command use</li> <li>Set policy for strong admin passwords</li> <li>Set backup strategy for router configuration file</li> <li>Set change control policy for the router configuration</li> </ul>
Priority	High
Selected Controls	<ul style="list-style-type: none"> <li>Implement all recommended controls</li> <li>Update related procedures with training for affected staff</li> </ul>
Required Resources	<ul style="list-style-type: none"> <li>3 days IT net admin time to change &amp; verify router configuration, write policies;</li> <li>1 day of training for network administration staff</li> </ul>
Responsible Persons	John Doe, Lead Network System Administrator, Corporate IT Support Team
Start – End Date	February 6, 2017 to February 9, 2017
Other Comments	<ul style="list-style-type: none"> <li>Need periodic test and review of configuration and policy use</li> </ul>

5/12/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## IT Security Plan

Provides details of:

- What will be done
- What resources are needed
- Who is responsible
- Goal is to detail the actions needed to improve the identified deficiencies in the risk profile

### Should include

- Risks, recommended controls, action priority
- Selected controls, resources needed
- Responsible personnel, implementation dates
- Maintenance requirements

5/12/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Cognitive Bias

## You have a Choice!

- Given a choice what do you prefer?

- A cash of Rs 10000/-
- A coin flip – you will get Rs 20000/- if you win.

## You have a Choice!

- Given a choice what do you prefer?

- Pay a fine of Rs 10000/-
- A coin flip – you will pay nothing if you win, but Rs 20000/- if you lose.

5/12/2025

## Prospect theory

- Prospect theory (proposed by Noble laureate Daniel Kahneman et al.) is a behavioral economic theory that describes the way people choose between probabilistic alternatives that involve risk, where the probabilities of outcomes are known.
- Prospect theory shows that a loss is more significant than the equivalent gain, that a sure gain is favored over a probabilistic gain, and that a probabilistic loss is preferred to a definite loss.
- This is considered Framing effect or cognitive bias

5/12/2025

## Prospect theory/Cognitive Bias

Amos Tversky and Daniel Kahneman explored how different phrasing affected participants' responses to a choice in a hypothetical life and death situation in 1981. Participants were asked to choose between two treatments for 600 people affected by a deadly disease. Treatment A was predicted to result in 400 deaths, whereas treatment B had a 33% chance that no one would die but a 66% chance that everyone would die. This choice was then presented to participants either with positive framing, i.e. how many people would live, or with negative framing, i.e. how many people would die.

Framing	Treatment A	Treatment B
Positive	"Saves 200 lives"	"A 33% chance of saving all 600 people, 66% possibility of saving no one."
Negative	"400 people will die"	"A 33% chance that no people will die, 66% probability that all 600 will die."

*Treatment A was chosen by 72% of participants when it was presented with positive framing ("saves 200 lives") dropping to only 22% when the same choice was presented with negative framing ("400 people will die").*

5/12/2025

5/12/2025

## Prospect theory/Information Security

- How does Prospect theory/Cognitive bias (due to framing effect) impact information security
  - Last month, we managed our assets without security investments
  - Do we need expensive protection mechanism now?
  - Can we do with a low-cost solution?

**Bruce Schneier** cryptographer, computer security and privacy specialist, and writer

5/12/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Security Incident Handling


### Incident Handling: Essential Control

- Need procedures specifying how to respond to a security incident
  - given it will most likely occur sometime
- Codify action to avoid panic e.g. mass email worm
  - exploiting vulnerabilities in common apps
  - propagating via email in high volumes
  - should disconnect from Internet or not?
    - responsible individual should make a decision (the policy should indicate how to contact the individual)

### Types of Security Incidents

- Any action threatening classic security services
- Unauthorized access to a system
  - unauthorized viewing by self/other of information
  - bypassing access controls
  - using another user's access
  - denying access to another user
- Unauthorized modification of info on a system
  - corrupting information
  - changing information without authorization
  - unauthorized processing of information

## Managing Security Incidents

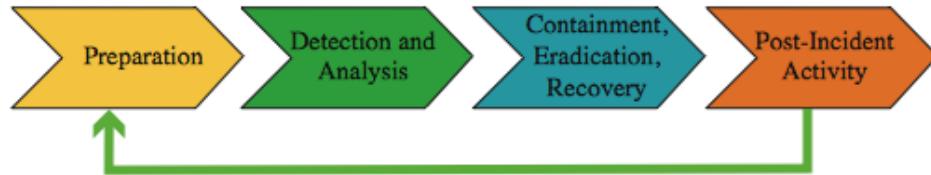

## Documenting Incidents

Need to identify vulnerability used

- how to prevent it occurring in future

Recorded details for future reference

Consider impact on org and risk profile

- may simply be unlucky
- more likely risk profile has changed
- hence risk assessment needs reviewing
- followed by reviewing controls in use

## Managing Security Incidents

### Detecting Incidents

- Reports from users or admin staff
  - train and encourage such reporting
- Detected by automated tools
  - e.g. system integrity verification tools, log analysis tools, network and host intrusion detection systems, intrusion prevention systems
  - updated to reflect new attacks or vulnerabilities
- Admins must monitor vulnerability reports

### Responding to Incidents

- Need documented response procedures
- Procedures should
  - identify typical categories of incidents and approach taken to respond
  - identify management personnel responsible for making critical decisions and their contacts
  - whether to report incident to police/CERT etc

Computer Security: Principles and Practice by William Stallings, and Lawrie Brown Pearson, 2018.

Software Security Engineering, Julia H. Allen, et al, Pearson, 2008.

[www.ibm.com](http://www.ibm.com)

[www.owasp.com](http://www.owasp.com)

[sei.cmu.edu](http://sei.cmu.edu)

# Thank You!



- *The slides presented here are obtained from the authors of the books, product documentations, and from various other contributors. I hereby acknowledge all the contributors for their material and inputs.*
- *I have added and modified slides to suit the requirements of the course.*



SE/SS ZG566  
**Secure Software Engineering**  
Review Session

**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad

T V Rao



**BITS Pilani**

Pilani | Dubai | Goa | Hyderabad


## Review

# Security Principles

Saltzer and Schroeder defined security as “techniques that control who may use or modify the computer or the information contained in it”

Described the three main categories of concern:

- Confidentiality
- Integrity
- Availability

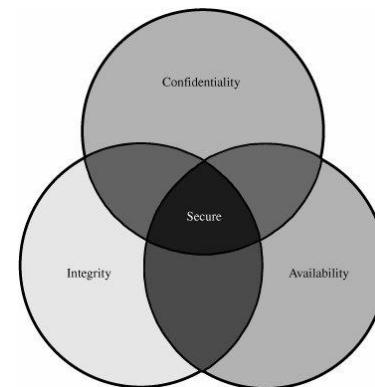

Security implies Confidentiality, Integrity, and Availability


Saltzer and Schroeder, "The Protection of Information in Computer Systems." *Communications of the ACM*, 1974

4

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Product quality model of ISO/IEC 25010

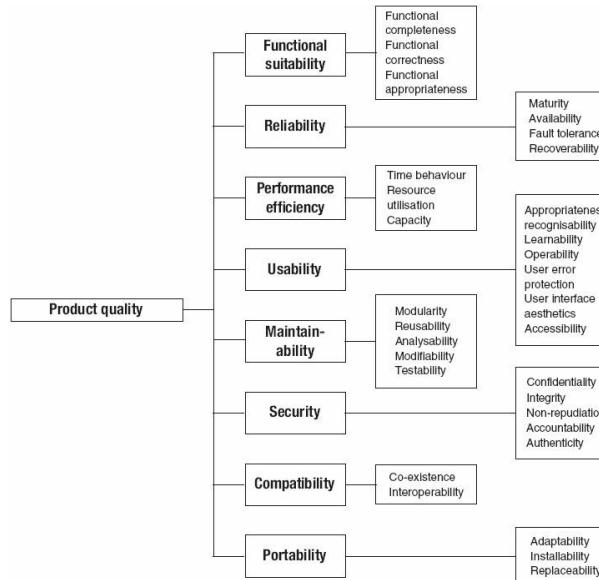

6

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

## Key Security Concepts

### Confidentiality

- Preserving authorized restrictions on information access and disclosure, including means for protecting personal privacy and proprietary information


### Integrity

- Guarding against improper information modification or destruction, including ensuring information nonrepudiation and authenticity

### Availability

- Ensuring timely and reliable access to and use of information

## Security Concepts and Relationships

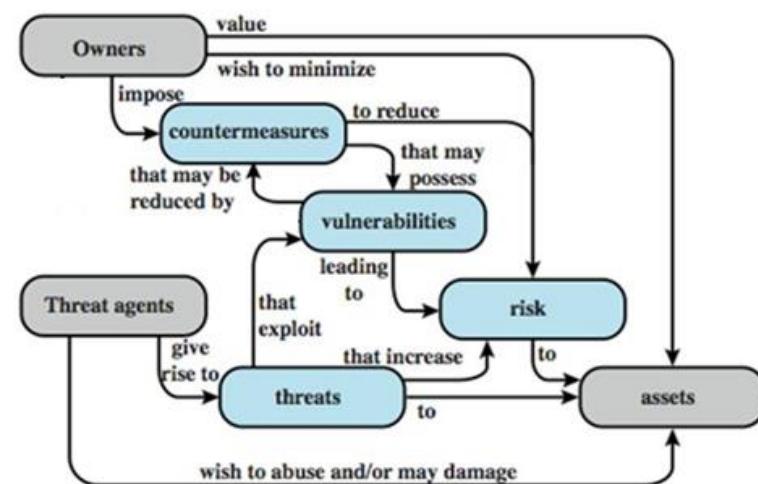

7

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

# Attack Surfaces

Consist of the reachable and exploitable vulnerabilities in a system

Examples:

Open ports on outward facing Web and other servers, and code listening on those ports

Services available on the inside of a firewall

Code that processes incoming data, email, XML, office documents, and industry-specific custom data exchange formats

Interfaces, SQL, and Web forms

An employee with access to sensitive information vulnerable to a social engineering attack

# How Much Security Is Enough?

Answers to these questions aid in understanding security risks to achieving organizational goals and objectives as well as project goals and objectives

- What is the value we must protect? Value can be expressed as a product or service, process, or relationship
- To sustain this value, what assets must be protected? Why must they be protected? What happens if they're not protected? Assets may include information, technology (hardware, software, and systems), facilities, and people.
- What potential adverse conditions and consequences must be prevented and managed? At what cost? How much disruption can we stand before we take action?
- How do we determine and effectively manage residual risk (the risk remaining after mitigation actions are taken)?
- How do we integrate our answers to these questions into an effective, implementable, enforceable security strategy and plan?

9

# OWASP Threat Modeling

According to OWASP, the threat modeling process for software application can be decomposed into 3 high level steps

- Decompose the Application
- Determine and rank threats
- Determine countermeasures and mitigation

## Decompose the Application (step 1)

Understanding of the application and how it interacts with external entities.

- involves creating use-cases to understand how the application is used,
- identifying entry points to see where a potential attacker could interact with the application,
- identifying assets i.e. items/areas that the attacker would be interested in, and
- identifying trust levels which represent the access rights that the application will grant to external entities.

Produce data flow diagrams (DFDs) for the application. The DFDs show the different paths through the system, highlighting the privilege boundaries.

11

## Determine and rank threats (step 2)

These threats can be identified further as the roots for threat trees;

- one tree for each threat goal.

From the defensive perspective, ASF categorization helps to identify the threats as weaknesses of security controls for such threats.

The determination of the security risk for each threat can be determined using a value-based risk model such as DREAD

## SQUARE Process Steps

1. Agree on definitions
2. Identify security goals
3. Develop artifacts to support security requirements definition
4. Perform (security) risk assessment
5. Select elicitation techniques
6. Elicit security requirements
7. Categorize requirements as to level (e.g., system, software) and whether they are requirements or other kinds of constraints
8. Prioritize requirements
9. Inspect requirements

## Determine countermeasures and mitigation

A lack of protection against a threat might indicate a vulnerability whose risk exposure could be mitigated with the implementation of a countermeasure.

Countermeasures can be identified using threat-countermeasure mapping lists.

Based on risk ranking assigned to the threats, it is possible to sort threats from the highest to the lowest risk, and prioritize the mitigation effort, such as by responding to such threats by applying the identified countermeasures

## Architectural Risk Analysis

- The risk assessment methodology encompasses six fundamental activity stages:
  - application characterization
  - architectural vulnerability assessment
  - threat analysis
  - risk likelihood determination
  - risk impact determination
  - risk mitigation

- Architectural risk analysis examines the preconditions that must be present for vulnerabilities to be exploited and assesses the states that the system may enter upon exploitation.
  - assess vulnerabilities not just at a component or function level, but also at interaction points
  - risk analysis testing can only prove the presence, not the absence, of flaws
- Three activities can guide architectural risk analysis:
  - known vulnerability analysis,
  - ambiguity analysis, and
  - underlying platform vulnerability analysis

## Secure Architectural-level Patterns

Architectural-level patterns focus on the high-level allocation of responsibilities between different components of the system and define the interaction between those high-level components.

- Architectural-level Patterns
  - Distrustful Decomposition
  - Privilege Separation (PrivSep)
  - Defer to Kernel

## Design Principles for Software Security

- Securing the Weakest Link
- Defense in Depth
- Failing Securely
- Least Privilege
- Separation of Privilege
- Economy of Mechanism
- Least Common Mechanism
- Reluctance to Trust
- Never Assuming that your Secrets are Safe
- Complete Mediation
- Psychological Acceptability
- Promoting Privacy

## Design-level Patterns

**Design-level patterns.** Design-level patterns describe how to design and implement pieces of a high-level system component, that is, they address problems in the internal design of a single high-level component, not the definition and interaction of high-level components themselves.

- Secure Factory
- Secure Strategy Factory
- Secure Builder Factory
- Secure Chain of Responsibility
- Secure State Machine
- Secure Visitor

**Implementation-level patterns.** Implementation-level patterns address low-level security issues. Patterns in this class are usually applicable to the implementation of specific functions or methods in the system. Implementation-level patterns address the same problem set addressed by the CERT Secure Coding Standards

- Secure Logger
- Clear Sensitive Information
- Secure Directory
- Input Validation

## Penetrate and Patch

A number of software tools exist to support *post facto* security analysis of installed computer systems. Examples include

- Network scanning tool is SATAN.
- Internet Security Scanner (ISS) scans network ports and attempts to find and exploit known vulnerabilities.
- The Computer Oracle and Password System (COPS) is a collection of programs to detect different problem areas in Unix security.

Such tools are reactive.

- Security analysis needs to be performed as part of the software development process, before software is released.
- Crackers often know about vulnerabilities before system administrators
- System administrators have neither the time nor the inclination to patch software if they have not noticed any security breaches.
- While a patch may close one security hole, it may simultaneously open up others.

## Security Testing (SWEBOK)

- Security testing is focused on the verification that the software is protected from external attacks.
- Security testing verifies the confidentiality, integrity, and availability of the systems and its data.
- Security testing includes verification against misuse and abuse of the software or system (negative testing).

## Source Code Analysis Tools

Source Code Analysis Tools (security analyzers ) are automated tools for helping analysts find security-related problems in software

- use data- and control-flow analysis to find subtler bugs and to reduce false alarms

Some vulnerabilities (e.g. use of strcpy() ) can be detected with high accuracy, others are harder to detect, and, in fact, one can always devise vulnerabilities that are undetectable altogether.

Tools have tradeoff between false alarms (also known as false positives) and missed vulnerabilities (also known as false negatives)

- can be configured to make a tool more sensitive (decreasing false negatives while increasing false positives) or make it less sensitive (increasing false negatives while decreasing false positives)

- Examining Calls to Potentially Insecure Library Functions
- Detecting Bounds-Checking Errors and Scalar Type Confusion
- Detecting Type Confusion Among References or Pointers
- Detecting Memory Allocation Errors
- Detecting Vulnerabilities that Involve Sequences of Operations (Control-Flow Analysis)
- Data-Flow Analysis
- Pointer-Aliasing Analysis
- ...

## White Box Testing

White box testing consists testing with access to the source code

- it is a good practice to perform white box testing during the unit testing phase

White box testing requires knowing what makes software secure or insecure, how to think like an attacker, and how to use different testing tools and techniques.

- First tester comprehends and analyzes available design documentation, source code, and other relevant development artifacts, so knowing what makes software secure is a fundamental requirement.
- Second, tester creates tests that exploit software, a tester must think like an attacker.
- Third, to perform testing effectively, testers need to know the different tools and techniques available for white box testing

- Many types of security vulnerabilities are very difficult to find automatically, such as authentication problems, access control issues, insecure use of cryptography, etc. However, tools of this type are getting better.
- High numbers of false positives.
- Frequently can't find configuration issues, since they are not represented in the code.
- Difficult to 'prove' that an identified security issue is an actual vulnerability.
- Many of these tools have difficulty analyzing code that can't be compiled. Analysts frequently can't compile code because they don't have the right libraries, all the compilation instructions, all the code, etc.

## White Box Testing for Security

### Data-Flow Analysis

### Code-Based Fault Injection

### Abuse Cases

### Trust Boundaries Mapping

### Code Coverage Analysis

Black box tests can help

- identify implementation errors that were not discovered during code reviews, unit tests, or security white box tests
- discover potential security issues resulting from boundary conditions that were difficult to identify and understand during the design and implementation phases
- uncover security issues resulting from incorrect product builds (e.g., old or missing modules/files)
- detect security issues that arise as a result of interaction with underlying environment (e.g., improper configuration files, unhardened OS and applications)

## Fuzzing Variations

### 1. Simple (original) fuzzing

- try out ridiculously long inputs
- try really long inputs for string arguments to trigger segmentation faults and hence find buffer overflows
  - e.g. register with Facebook with a 1Mbyte long username

### 2. Protocol/format/language fuzzing

- try out strange inputs, given some format/language

### 3. State-based fuzzing

- try out strange sequences of input

2 & 3 are essentially forms of model-based testing

Black box test activities almost universally involve the use of tools to help testers identify potential security vulnerabilities

There are tools that focus on specific areas, including


- network security,
- database security,
- security subsystems, and
- web application security

## Penetration Testing Skills

- A pen tester needs to know a lot about the target domain.
- For example, if the pen tester is attacking web applications, then the pen tester needs to know how the web works. Need to know how systems are built in that domain.
  - What protocols allow applications to communicate. For the web, that's HTTP and TCP, and IP.
  - The languages that are used to build applications like PHP, Java, or Ruby for talking about the web.
  - Frameworks that used to build applications or application components like, for the web, Ruby on Rails, DreamWeaver, Drupal, and so on.
- Pen tester also need to know common weaknesses from that domain.
  - For example, the bugs that are common to web applications like SQL injections or cross-site scripting, or cross-site request forgery. Or common misconfigurations or bad designs, like the use of default passwords or hidden files.

## Process in Memory

- Processes are divided into three regions: Text, Data, and Stack.
- The text region includes code (instructions) and read-only data. This region is normally marked read-only and any attempt to write to it will result in a segmentation violation
- The data region contains initialized and uninitialized data. Static variables are stored in this region.
- A procedure call alters the flow of control, when finished performing its task, a function returns control to the statement or instruction following the call. This high-level abstraction is implemented with the help of the stack.
  - The stack is used to dynamically allocate the local variables used in functions, to pass parameters to the functions, and to return values from the function.

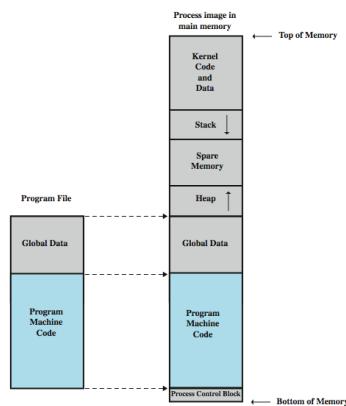

## Vulnerable Program

```
void function(int a, int b, int c) {  
    char buffer[20];  
    gets(buffer);  
}  
  
void main() {  
    function(1,2,3);  
    ...  
    do more  
    ...  
}
```

bottom of memory      DDDDDDDDEEEEEEEEEE      EEEE      FFFF      FFFF      FFFF      FFFF      top of memory  
buffer      89ABCDEF0123456789AB      CDEF      0123      4567      89AB      CDEF  
sfp      ret      a      b      c


----- [SSSSSSSSSSSSSSSS] [SSSS] [0xD8] [0x01] [0x02] [0x03]  
^      |  
| \_\_\_\_\_|  
top of stack      bottom of stack

- Assuming the stack starts at address 0xFF, and that S stands for the code attackers want to execute the stack should then look like this:

## Exploiting the Buffer-Overflow

To fully exploit a stack buffer-overflow vulnerability,

- Inject the malicious code: need to be able to inject the malicious code into the memory of the target process. This can be done if attacker can control the contents of the buffer in the targeted program.
- Jump to the malicious code: With the malicious code already in the memory, if the targeted program can jump to the starting point of the malicious code, the attacker will be in control.

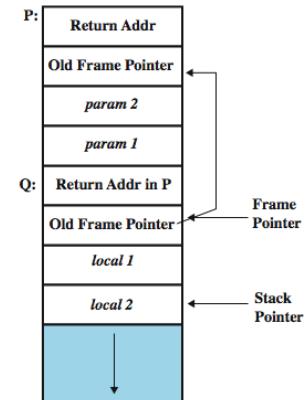

Stack frame:

- *Calling function:* needs a data structure to store the “return” address and parameters to be passed
- *Called function:* needs a place to store its local variables somewhere different for every call

## Buffer Overflow Defenses

Buffer overflows are widely exploited

Large amount of vulnerable code in use

- despite cause and countermeasures known

Two broad defense approaches

- compile-time - harden new programs
- run-time - handle attacks on existing programs

- Consider e.g.
  - `printf ("a has value %d, b has value %d, c is at address: %08x\n", a, b);`
- Here the format string asks for 3 arguments, but the program actually provides only two (i.e. *a* and *b*). This program passes the compiler.
  - The function `printf()` is defined as function with variable length of arguments. Therefore, by looking at the number of arguments, everything looks fine.
  - To find the miss-match, compilers needs to understand how `printf()` works and what the meaning of the format string is. However, compilers usually do not do this kind of analysis.
  - Sometimes, the format string is not a constant string, it is generated during the execution of the program. Therefore, there is no way for the compiler to find the miss-match in this case.

- The function `printf()` fetches the arguments from the stack. If the format string needs 3 arguments, it will fetch 3 data items from the stack.
- In a mis-match case, it will fetch some data that do not belong to this function call.
- Crashing the program
  - `printf ("%s%s%s%s%s%s%s%s%s%s");`
  - For each `%s`, `printf()` will fetch a number from the stack, treat this number as an address, and print out the memory contents pointed by this address as a string, until a NULL character (i.e., number 0, not character 0) is encountered.
  - Since the number fetched by `printf()` might not be an address, the memory pointed by this number might not exist, if so the program will crash.
  - It is also possible that the number happens to be a good address.

## Introduction to Database Security

36

- The security mechanism of a DBMS must include provisions for restricting access to the database as a whole
  - This function is called **access control** and is handled by creating user accounts and passwords to control login process by the DBMS.
- The security problem associated with databases is that of controlling the access to a **statistical database**, which is used to provide statistical information or summaries of values based on various criteria.
  - The countermeasures to **statistical database security** problem is called **inference control measures**.
- Another security is that of **flow control**, which prevents information from flowing in such a way that it reaches unauthorized users.
  - Channels that are pathways for information to flow implicitly in ways that violate the security policy of an organization are called **covert channels**.
- A final security issue is **data encryption**, which is used to protect sensitive data (such as credit card numbers) that is being transmitted via some type communication network.
  - The data is **encoded** using some **encoding algorithm**.
  - An unauthorized user who access encoded data will have difficulty deciphering it, but authorized users are given decoding or decrypting algorithms (or keys) to decipher data.

## Injection Attacks

38

Some of the well-known types of Injection Attacks are

- SQL injection
- Cross-site Scripting (XSS) – JavaScript injection
  - The attacker injects an arbitrary script (usually in JavaScript) that is then executed inside the victim's browser.
- LDAP Injection
- OS Command Injection
- Email Header Injection
  - The attacker sends IMAP/SMTP commands to a mail server
- Code injection
- XPath injection
  - The attacker injects data to execute crafted XPath queries

- Injection attacks target those parsers (Every interpreter has a parser)
  - Trick the parser into interpreting data as commands
- Real world parsers have many corner cases and flaws that may not match the spec.
- Typically the interpreters run with a lot of access, so a successful attack can easily result in significant data breaches
- Injection attacks are at the top of OWASP top 10.

39


39

During early stages of web, entire security focus was on servers.

Today browsers have acquired lot of capabilities:

- JavaScript: Allows a page to execute client-side code.
- DOM model Provides a JavaScript interface to the page's HTML, allowing the page to add/remove tags, change their styling, etc.
- XMLHttpRequests (AJAX): Asynchronous HTTP requests.
- Web sockets: Full-duplex client-server communication over TCP.
- Web workers: Multi-threading support.
- Multimedia support: (video), web cams, screen-sharing.
- Geolocation: Browser can determine your location by examining GPS units. Firefox can also locate you by passing your WiFi information to the Google Location Service.
- <canvas> and WebGL: Bitmap manipulation and interactive 2D/3D graphics.
  - WebGL (Web Graphics Library) is a JavaScript API for rendering graphics within any compatible web browser without the use of plug-ins
- Nacl (Native Client): Allows browsers to run native code!

## Anatomy of Web Attack

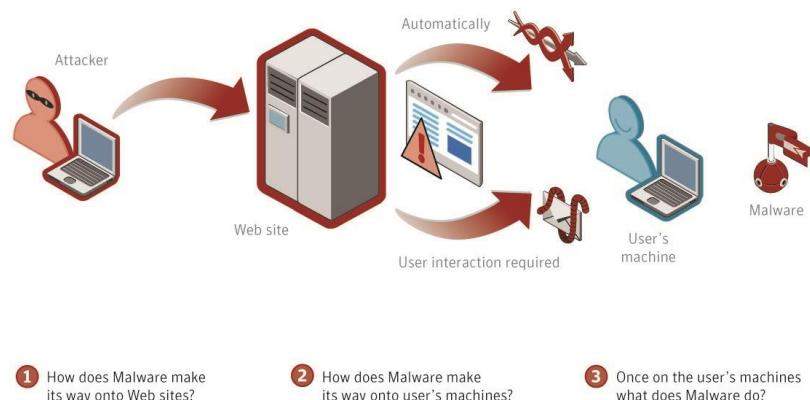

Whenever a browser communicates with a website,


- the website, as part of that communication, collects some information about the browser (in order to process the formatting of the page to be delivered, if nothing else).
- If malicious code has been inserted into the website's content, then vulnerabilities specific to a particular browser can allow this malicious code to run processes within the browser application in unintended ways (one of the bits of information that a website collects from a browser communication is the browser's identity- allowing specific vulnerabilities to be exploited).
- Once an attacker is able to run processes on the visitor's machine, then exploiting known security vulnerabilities can allow the attacker to gain privileged access to the victim's machine or network

## Cross-site Scripting attack

An XSS attack needs three actors — **the website, the victim and the attacker**

- The attacker injects a payload in the website's database by submitting a vulnerable form with some malicious JavaScript
- The victim requests the web page from the website
- The website serves the victim's browser the page with the attacker's payload(malicious javascript) as part of the HTML body.
- The victim's browser will execute the malicious script inside the HTML body. In this case it would send the victim's cookie to the attacker's server. The attacker now simply needs to extract the victim's cookie when the HTTP request arrives to the server, after which the attacker can use the victim's stolen cookie for impersonation.

# Cross-site Scripting attack

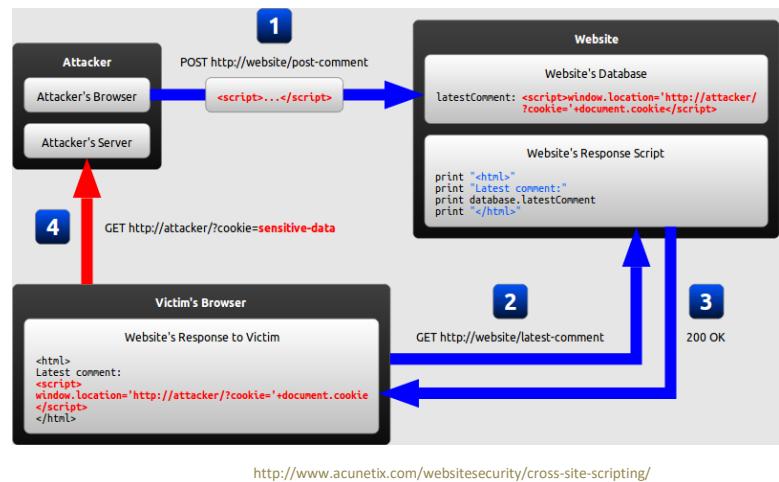

<http://www.acunetix.com/websesecurity/cross-site-scripting/>

## Properties of Trustworthy Encryption Systems

- Based on sound mathematics.
  - Good cryptographic algorithms are derived from solid principles.
- Analyzed by competent experts and found to be sound.
  - Since it is hard for the writer to envisage all possible attacks on the algorithm
- Stood the “test of time.”
  - Over time people continue to review both mathematical foundations of an algorithm and the way it builds upon those foundations.
  - The flaws in most algorithms are discovered after their release.

# Data Protection in the Cloud

The threat of data compromise increases in the cloud, due to the number of, and interactions between, risks and challenges that are either unique to the cloud or more dangerous because of the architectural or operational characteristics of the cloud environment



Even with these precautions, corruption and other denial-of-service attacks remain a risk

For data at rest, the ideal security measure is for the client to encrypt the database and only store encrypted data in the cloud, with the CSP having no access to the encryption key

Data must be secured while at rest, in transit, and in use, and access to the data must be controlled

The client can employ encryption to protect data in transit, though this involves key management responsibilities for the CSP

The client can enforce access control techniques, but CSP is involved to some extent depending on the service model used

## IDS requirements

Run continually with minimal human supervision      recover from crashes      monitor itself from change by intruder

Run continually	Be fault tolerant	Resist subversion
Impose a minimal overhead on system	Configured according to system security policies	Adapt to changes in systems and users
Scale to monitor large numbers of systems	Provide graceful degradation of service	Allow dynamic reconfiguration

if one component fails, others should continue to work

## Detection techniques

### Anomaly detection

Involves the collection of data relating to the behavior of legitimate users over a period of time

Current observed behavior is analyzed to determine whether this behavior is that of a legitimate user or that of an intruder

### Signature/Heuristic detection

Uses a set of known malicious data patterns or attack rules that are compared with current behavior

Also known as misuse detection  
Can only identify known attacks for which it has patterns or rules

5/17/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Firewall Access Policy

- A critical component in the planning and implementation of a firewall is specifying a suitable access policy
  - Types of traffic authorized to pass through the firewall
  - Includes address ranges, protocols, applications and content types
- The policy should be developed from the organization's security risk assessment and policy
- Should be developed from a broad specification of which traffic types the organization needs to support
  - Then refined to detail the filter elements which can then be implemented within an appropriate firewall topology

## Firewalls and Intrusion Prevention Systems

- Effective means of protecting LANs
- Internet connectivity essential
  - For organization and individuals
  - But creates a threat
- Could secure workstations and servers
- Also use firewall as perimeter defence
  - Single choke point to impose security

5/17/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## Firewall Capabilities & Limits

- Capabilities
  - Defines a single choke point
  - Provides a location for monitoring security events
  - Convenient platform for some Internet functions such as NAT, usage monitoring, IPSEC, VPNs
- Limitations
  - Cannot protect against attacks bypassing firewall (internal systems can dial-out to an ISP)
  - May not protect fully against internal threats
  - Improperly secured wireless LAN
  - Laptop, PDA, portable storage device infected outside then used inside

5/17/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

5/17/2025

Secure Software Engineering


BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

# Unified Threat Management Products



Reduce admin burden by replacing network products (firewall, IDS, IPS, ...) With a single device

Cisco ASA Content Security and Control (CSC) Security Services Module providing comprehensive antivirus, anti-spyware, file blocking, anti-spam, anti-phishing, URL blocking and filtering, and content filtering -all available in a comprehensive easy-to-manage solution

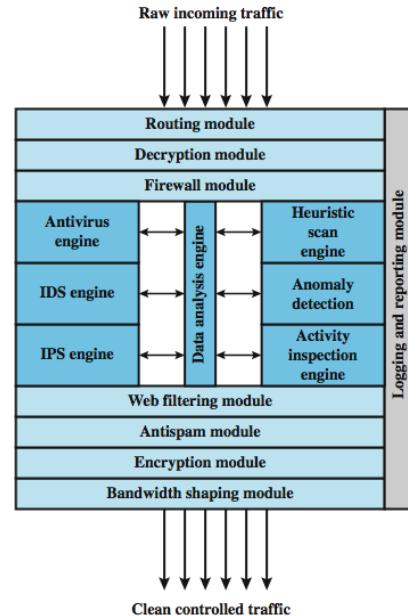


5/17/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



## IT Security Controls address Risks

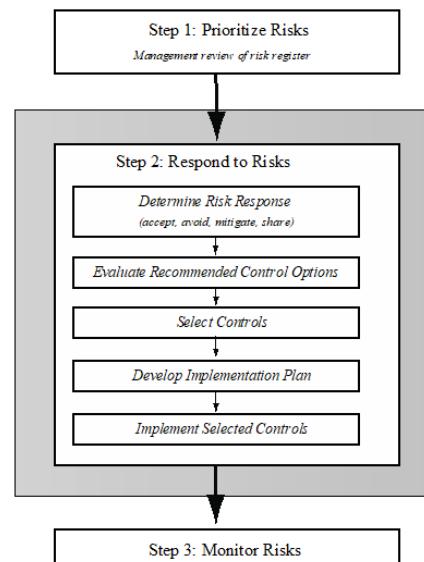

5/17/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

# IT Security Controls



## Management controls

- Focus on security policies, planning, guidelines, and standards that influence the selection of operational and technical controls to reduce the risk of loss and to protect the organization's mission
- These controls refer to issues that management needs to address

## Operational controls

- Address the correct implementation and use of security policies and standards, ensuring consistency in security operations and correcting identified operational deficiencies
- These controls relate to mechanisms and procedures that are primarily implemented by people rather than systems
- They are used to improve the security of a system or group of systems

## Technical controls

- Involve the correct use of hardware and software security capabilities in systems
- These range from simple to complex measures that work together to secure critical and sensitive data, information, and IT systems functions

5/17/2025

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956



# IT Security Management Overview

Is the formal process of answering the questions:



Ensures that critical assets are sufficiently protected in a cost-effective manner

Security risk assessment is needed for each asset in the organization that requires protection

Provides the information necessary to decide what management, operational, and technical controls are needed to reduce the risks identified

55

Secure Software Engineering

BITS Pilani, Deemed to be University under Section 3 of UGC Act, 1956

Provides details of:

- What will be done
- What resources are needed
- Who is responsible

Goal is to detail the actions needed to improve the identified deficiencies in the risk profile

## Should include

Risks,  
recommended  
controls, action  
priority

Selected controls,  
resources needed

Responsible  
personnel,  
implementation  
dates

Maintenance  
requirements

Computer Security: Principles and Practice by William Stallings, and Lawrie Brown Pearson, 2020.

Software Security Engineering, Julia H. Allen, et al, Pearson, 2008

sei.cmu.edu/cert

www.owasp.com

# Thank You!