


(a) Overall architecture

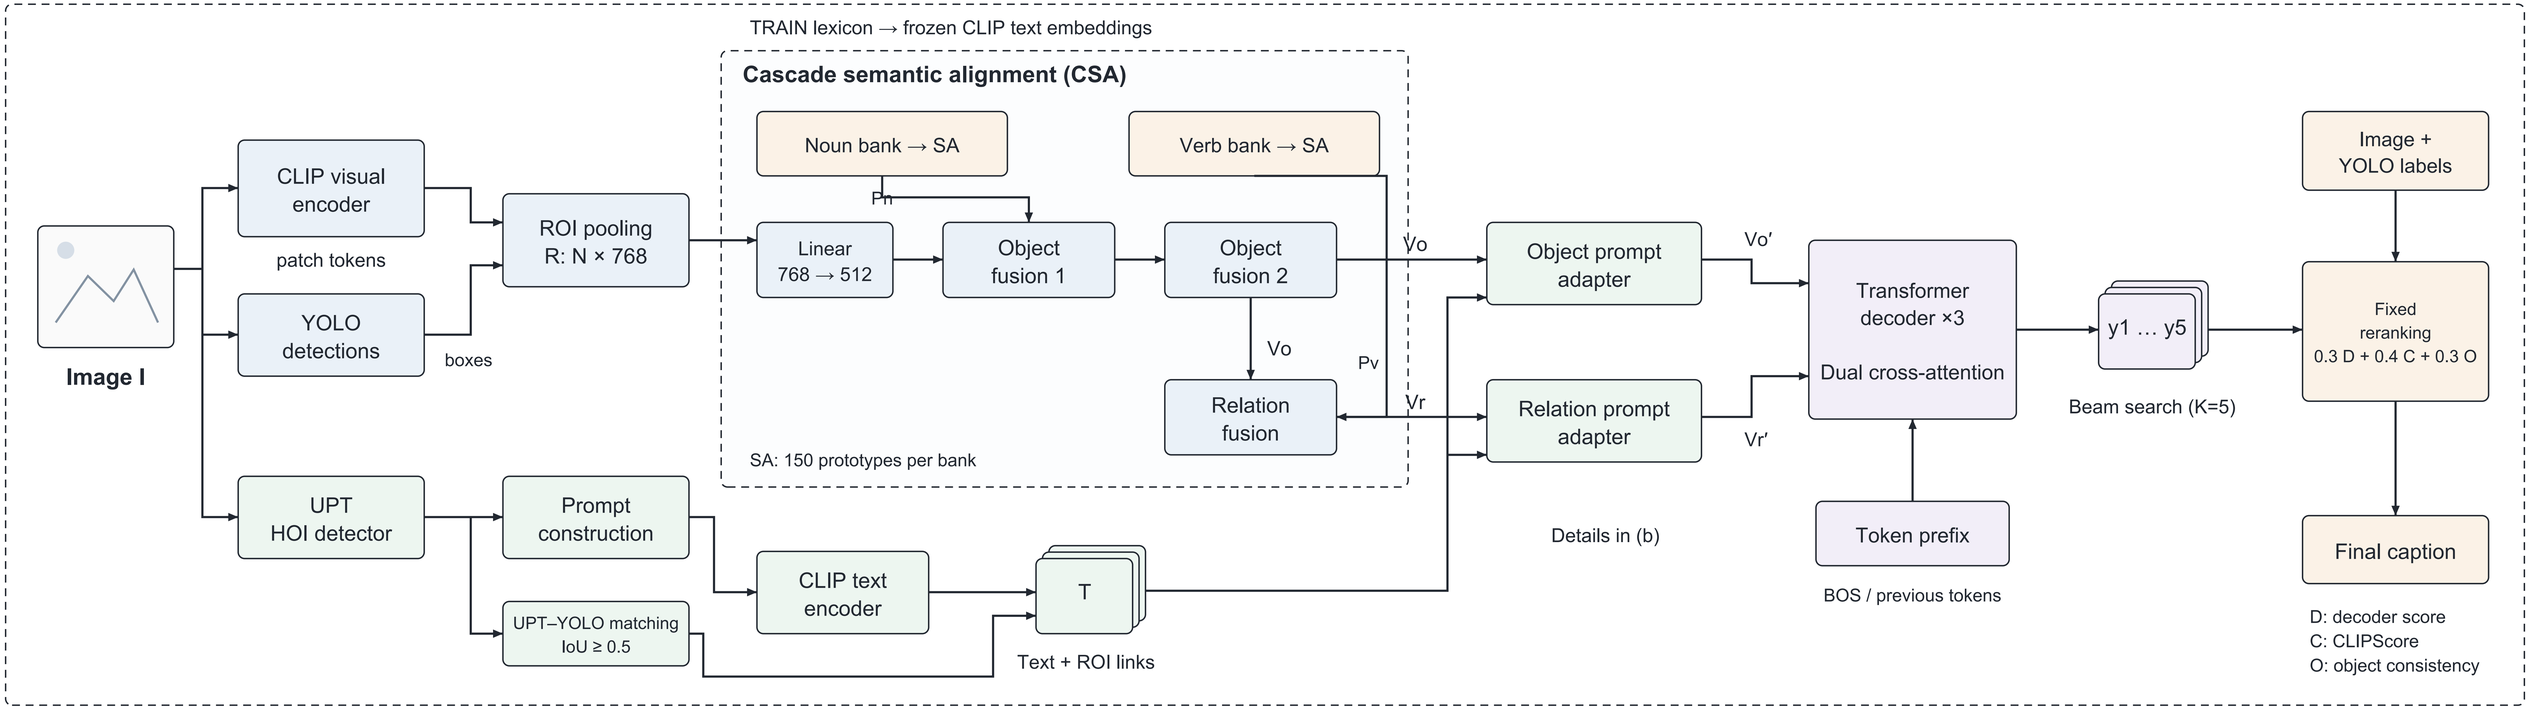

(b) Region-linked prompt adapters

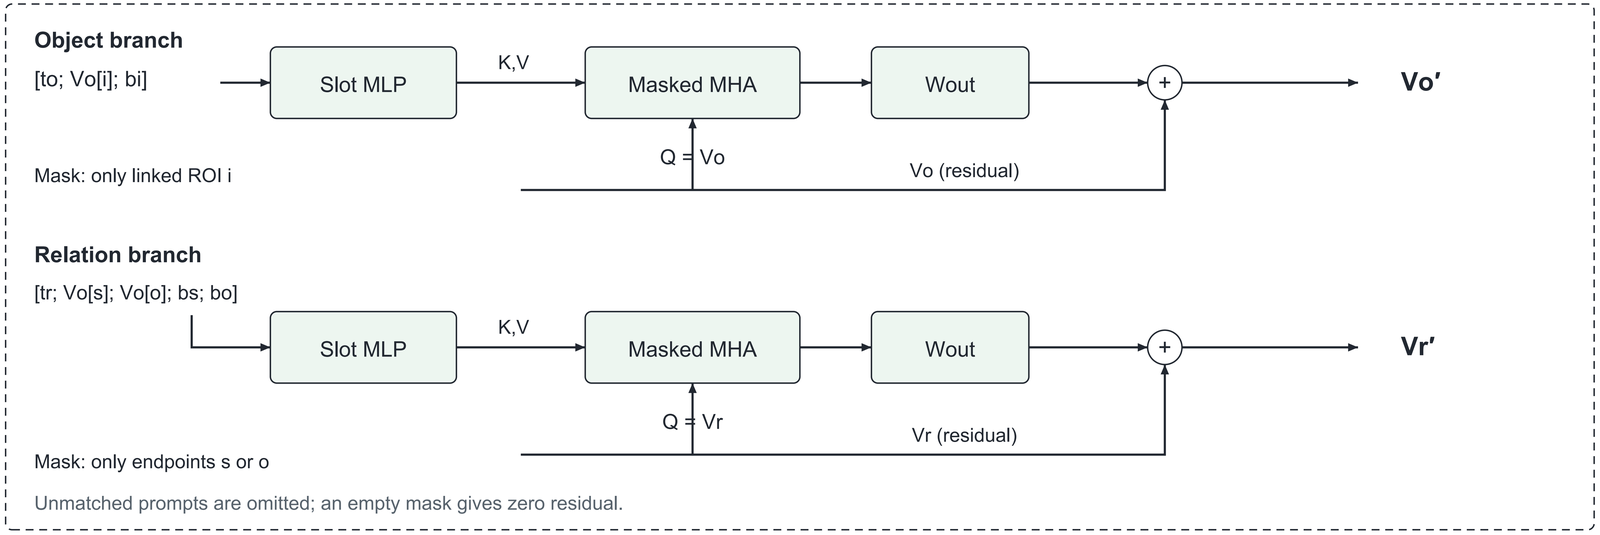

(c) Training objective

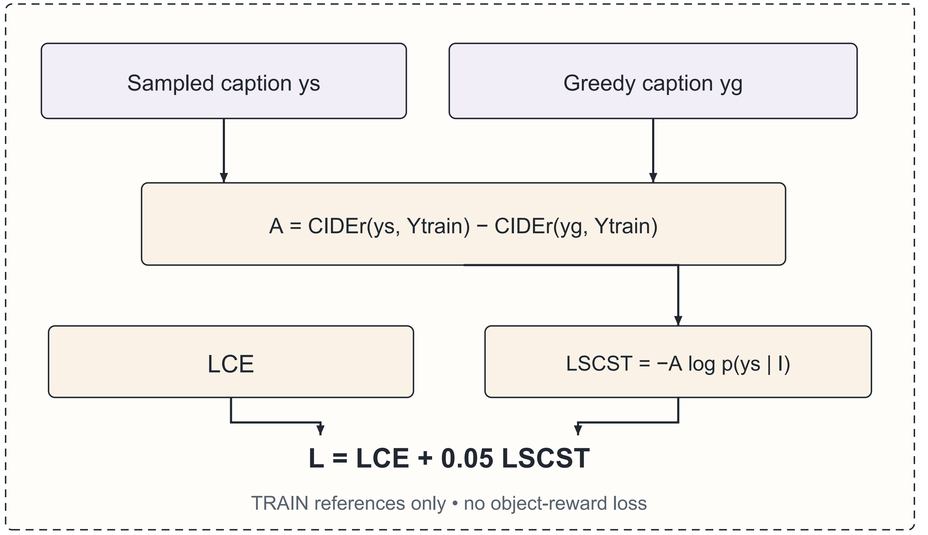

Frozen: CLIP encoders, semantic banks and detectors. Learned: CSA, prompt adapters and decoder. N = valid ROIs; d = 512.

D and C are normalized within the candidate set; O is normalized detector-based object consistency. No reference captions are used for reranking.