


getchar()

- `getchar()` is used to get or read the input (i.e a single character) at runtime.


```
• void main()  
• {  
• char ch;  
• ch = getchar();  
• printf("Input Char Is :%c",ch);  
• }
```

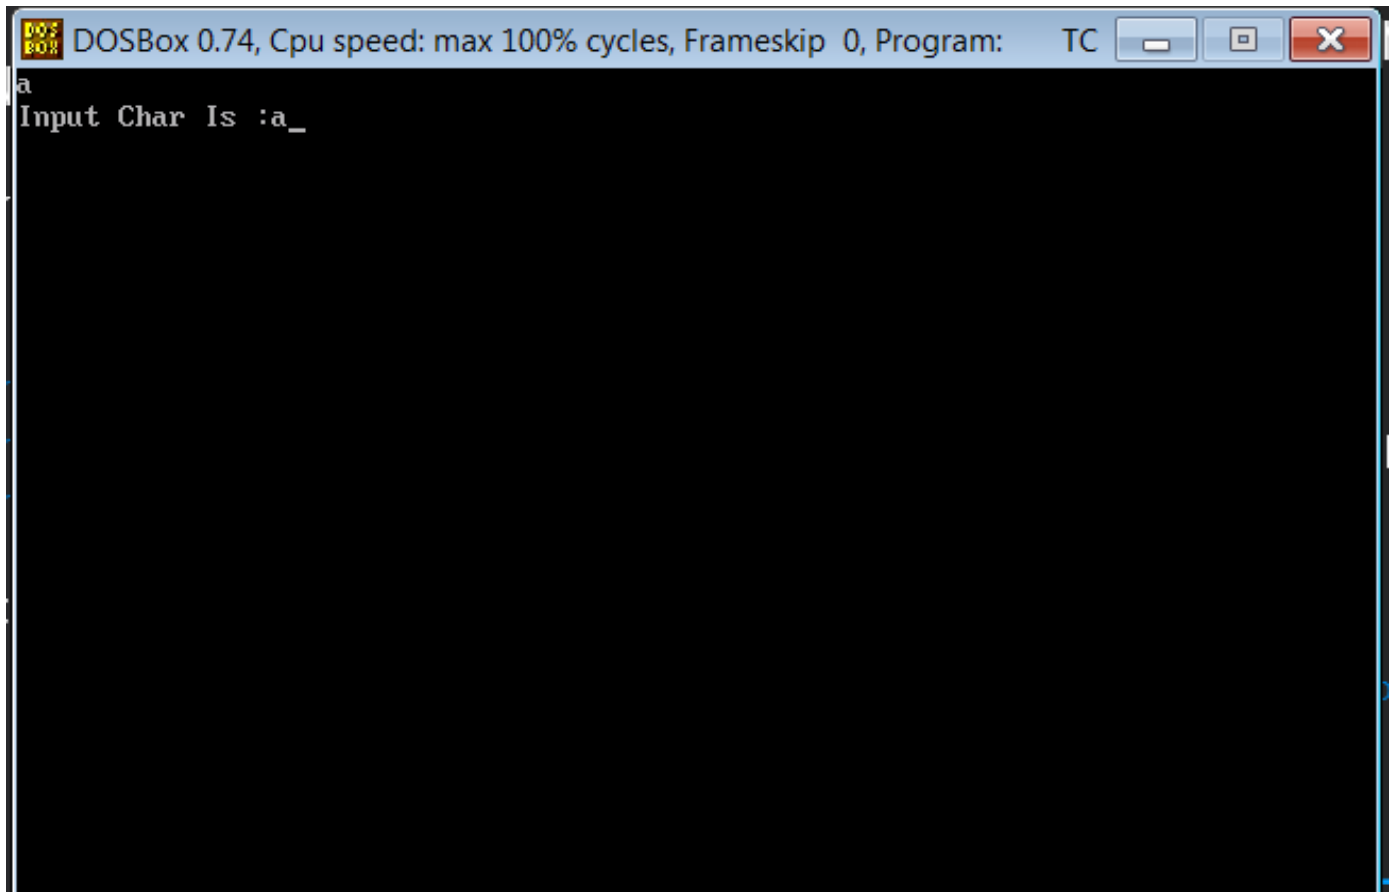


Function : getch()

- getch() is used to get a character from the console and echoes to the screen.

```
• void main()  
• {  
• char ch;  
• ch = getch();  
• printf("Input Char Is :%c",ch);  
• }
```

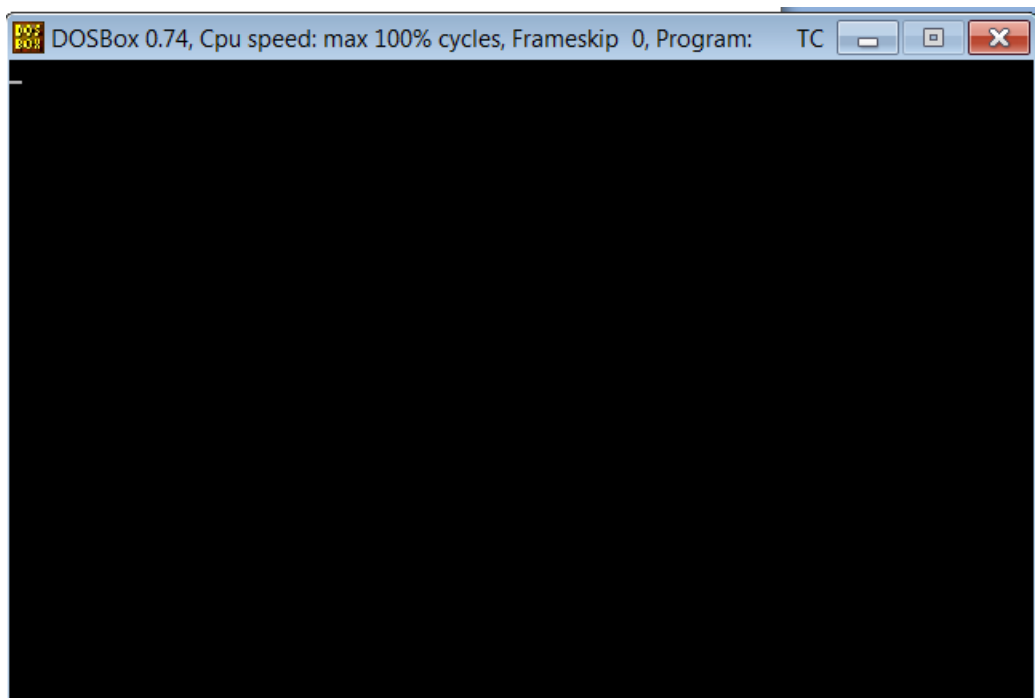

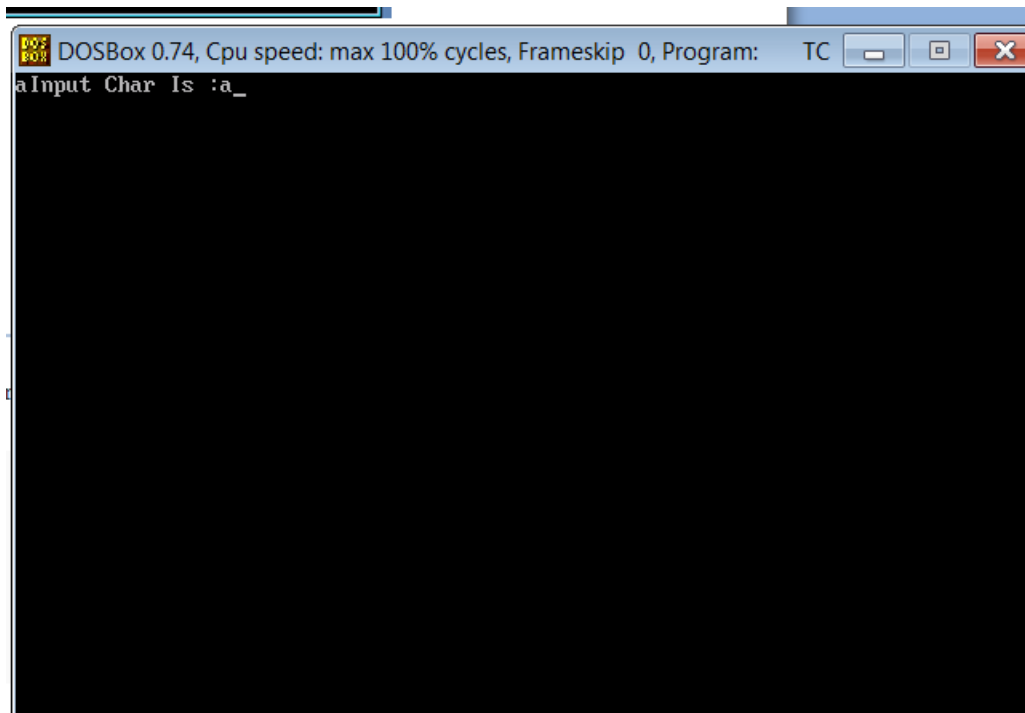

Function : getch()

- getch() is used to get a character from the console but does not echo to the screen.

```
• void main()  
• {  
• char ch;  
• ch = getch();  
• printf("Input Char Is :%c",ch);  
• }
```

