

NEPAL COLLEGE OF INFORMATION TECHNOLOGY

Affiliated to Pokhara University

A Case Study on Student Placement Prediction

Course Name: Data Science And Analytics

Course Code: CMP 360

Program: B.E. Information Technology

Semester: Sixth Semester

Submitted By:

Anushka Joshi [231542]

Dip Kiran Limbu [231512]

Sumit Kumar Das [231536]

Suraj Kumar Jha [231537]

Submitted To: Er. Manil Baidhya

Date: 11 July 2026



Department of Information Technology

**NEPAL COLLEGE OF
INFORMATION TECHNOLOGY**

Balkumari, Lalitpur, Nepal

Contents

1	Problem Statement	2
2	Information of the Data	2
3	Source of Data	3
4	Data Preprocessing	4
4.1	a. Data Cleaning	4
4.2	b. Data Standardization	6
4.3	c. Data Transformation: Binning	6
4.4	d. Handling Categorical Data: Encoding Techniques	7
4.5	e. Outlier Detection	8
5	Data Visualization	9
5.1	Univariate Distributions	9
5.2	Placement vs. Categorical Features	11
5.3	Placement vs. Numeric Features	14
5.4	Correlation Heatmap	16
6	Statistical Analysis	16
6.1	a. Hypothesis Testing	16
6.2	b. Correlation Analysis	18
7	Results and Discussion	19
8	Challenges and Future Enhancement	20

1 Problem Statement

Campus placement outcomes are of central concern to students, academic institutions, and recruiters alike. Institutions want to understand which student attributes — demographic (age, gender, city), academic (CGPA, degree/profession level), or otherwise — are meaningfully associated with whether a student is placed in a job after graduation. Understanding these relationships helps institutions design better placement support programs, and helps students understand what factors genuinely affect employability outcomes versus common assumptions and myths.

This case study analyzes a dataset of 1,100 student records containing demographic and academic attributes alongside a binary placement outcome. The objective is to clean and prepare the raw data, explore it visually, and apply formal statistical tests to answer the central question:

“Which student attributes, if any, are statistically associated with placement status?”

The analysis follows a complete data-science workflow — data cleaning, transformation, encoding, outlier handling, visualization, and hypothesis testing — culminating in evidence-based conclusions about the drivers (or absence thereof) of student placement in this dataset.

2 Information of the Data

The raw dataset contains 1,100 rows and 7 columns, mixing categorical (nominal) and numerical (continuous) features, along with a binary target variable. Table 1 summarizes each column.

Table 1: Dataset column summary

Column	Type	Description	Missing (raw)
name	Categorical (text)	Student’s first name	85 (7.7%)
city	Categorical (nominal)	City of residence (asgard, wakanda, gotham, purgatory)	184 (16.7%)
gender	Categorical (binary)	Gender of the student (male / female)	99 (9.0%)
profession	Categorical (ordinal)	Highest degree pursued (bachelor / masters / phd)	169 (15.4%)
age	Numeric (continuous)	Student’s age in years	112 (10.2%)
cgpa	Numeric (continuous)	Cumulative Grade Point Average (0–10 scale)	132 (12.0%)
placed	Binary (target)	Placement outcome (1 = placed, 0 = not placed)	0 (0%)

The dataset shape was verified using `df.shape` and `df.info()`, confirming 1,100 entries across 7 columns with the null counts and dtypes shown below.

Table 2: Dataset Structure and Column Information

Column	Non-Null Count	Total Entries	Dtype
name	1009	1100	object
city	905	1100	object
gender	994	1100	object
profession	921	1100	object
age	982	1100	float64
cgpa	962	1100	float64
placed	1100	1100	int64

The target variable `placed` is well balanced, with 521 students not placed (50.3%) and 514 students placed (49.7%) after cleaning — an almost even 50/50 split, which is favorable for unbiased statistical comparison between the two groups.

3 Source of Data

The dataset used in this case study, `my_data.csv`, was obtained from Kaggle, from a notebook titled “All-in-one dataset for preprocessing practice” [1]. The dataset was synthetically generated with the explicit purpose of providing a single, self-contained playground for practicing common data preprocessing techniques, including handling of mixed data types, missing values, outliers, duplicates, scaling, encoding, and feature engineering.

The dataset consists of 1,100 records and 7 attributes, summarized in Table 3.

Table 3: Description of Dataset Columns

Column	Type	Description
name	Categorical (Nominal)	Fictional character names (e.g., Sherlock, Moriarty, Sam, Dean)
city	Categorical (Nominal)	Fictional locations (e.g., Gotham, Wakanda, Asgard, Purgatory)
gender	Categorical (Nominal)	Male or Female
profession	Categorical (Ordinal)	Educational qualification in increasing order: Bachelor, Master, PhD
age	Numerical	Age of the individual, in years
cgpa	Numerical	Cumulative Grade Point Average
placed	Label (Binary)	Placement status of the individual

As noted by the dataset’s author, the categorical values in the `name` column (drawn from the *Sherlock Holmes*, *Supernatural*, MCU, and DCU fictional universes) and the `city` column (fictional locations such as Gotham, Wakanda, Asgard, and Purgatory) were intentionally chosen to make the dataset more engaging, and confirm that the data is entirely synthetic rather than sourced from a real institutional placement cell. Consequently, the imperfections present in the dataset — missing values, outliers, and duplicate records — were deliberately introduced by the dataset’s creator to simulate realistic preprocessing challenges, rather than arising organically from a real-world data collection process. This context is relevant when interpreting results: patterns found here characterize the dataset itself and the methodology applied to it, not any real population of students.

4 Data Preprocessing

4.1 a. Data Cleaning

Duplicate Records

Duplicate rows were checked with `df.duplicated().sum()`. The raw dataset ($1,100 \times 7$) contained 65 fully duplicate rows (5.9% of the data), which were removed using `df.drop_duplicates()`. A later verification pass, run after feature engineering (standardization, binning, and encoding had expanded the frame to 16 columns), confirmed 1,032 unique rows with zero remaining duplicates.

Table 4: Sample of Duplicate Rows Identified

Index	name	city	gender	profession	age	cgpa	placed
1000	castiel	asgard	male	masters	24.0	7.71	1
1001	NaN	wakanda	male	bachelor	27.0	7.90	0
1005	moriarity	asgard	male	phd	25.0	NaN	1
1006	sherlock	gotham	male	masters	28.0	7.55	1
1008	dean	wakanda	male	bachelor	20.0	9.31	0
:	:	:	:	:	:	:	:
1094	moriarity	gotham	male	NaN	26.0	7.96	0
1095	holmes	NaN	male	masters	26.0	8.92	1
1096	moriarity	wakanda	male	masters	19.0	9.01	0
1097	sam	asgard	male	bachelor	30.0	7.88	0
1099	sam	asgard	NaN	masters	24.0	8.94	1

Table 5: Summary of Duplicate Row Removal

Description	Shape (Rows, Columns)
Before dropping duplicates	(1100, 7)
Total duplicate rows found	65
After dropping duplicates	(1035, 7)
Duplicate rows remaining after check	0

Missing Value Detection and Treatment

All seven columns except the target were found to contain missing values, ranging from 8.2% (`name`) to 17.8% (`city`). Given the scale of missingness, rows were not dropped outright (this would have discarded a large fraction of the dataset); instead, column-appropriate imputation was applied:

Table 6: Missing Values Count and Percentage (Before Imputation)

Column	Missing Count	Missing Percentage (%)
name	85	8.21
city	184	17.78
gender	99	9.57
profession	169	16.33
age	112	10.82
cgpa	132	12.75
placed	0	0.00

Table 7: Imputation Strategy for Missing Values

Column	Strategy	Justification
age	Median	Robust to outliers/skewness in numerical data
cgpa	Median	Robust to outliers/skewness in numerical data
city	Mode	Categorical variable; most frequent category preserves distribution
gender	Mode	Categorical variable; most frequent category preserves distribution
profession	Mode	Categorical variable; most frequent category preserves distribution
name	Constant (“Unknown”)	Identifier field; imputing statistically is meaningless, so a placeholder is used instead

Table 8: Missing Values Count (After Imputation)

Column	Missing Count
name	0
city	0
gender	0
profession	0
age	0
cgpa	0
placed	0

Data Type Correction

`df.dtypes` revealed that `age` was stored as `float64` despite representing whole years. It was cast to an integer type using `df["age"] = df["age"].astype(int)` for consistency and readability.

Table 9: Data Type Correction

Column	Previous Dtype	Current Dtype
age	float64	int64

4.2 b. Data Standardization

The numerical features `age` and `cgpa` were standardized using scikit-learn’s `StandardScaler`, which rescales values to zero mean and unit variance (z -scores). This step is essential before running distance- or scale-sensitive analyses, and was verified by re-computing the mean (≈ 0) and standard deviation ($= 1.0$) of the resulting `age_standardized` and `cgpa_standardized` columns.

Table 10: Sample Data After Standardization

Name	Age	CGPA	Age (Std.)	CGPA (Std.)
moriarity	28	5.94	0.035	-1.169
moriarity	42	8.55	1.885	0.662
holmes	18	5.56	-1.287	-1.435
sam	25	8.57	-0.362	0.676
sam	19	8.76	-1.155	0.809

Table 11: Mean and Standard Deviation After Standardization

Feature	Mean	Std. Dev.
<code>age_standardized</code>	≈ 0	1.0
<code>cgpa_standardized</code>	≈ 0	1.0

For reference, the descriptive statistics of the cleaned (pre-standardization) numeric columns were:

Table 12: Descriptive Statistics of the Dataset (Before Standardization)

Statistic	age	cgpa	placed
Count	982.00	962.00	1100.00
Mean	28.43	7.61	0.50
Std	9.14	1.50	0.50
Min	18.00	4.01	0.00
25%	22.00	7.17	0.00
50%	26.00	7.93	0.00
75%	30.00	8.76	1.00
Max	50.00	9.49	1.00

4.3 c. Data Transformation: Binning

To support categorical-style analysis (e.g., count plots, chi-square tests) alongside the continuous variables, two new binned features were engineered using `pd.cut()`:

- **Age_Group:** Young (18–25), Adult (25–35), Senior (35–60).
- **CGPA_Category:** Low (4–6), Average (6–8), High (8–10).

Table 13: Binning Scheme for Age and CGPA

Variable	Category	Range
Age	Young	[18, 25]
	Adult	(25, 35]
	Senior	(35, 60]
CGPA	Low	[4, 6]
	Average	(6, 8]
	High	(8, 10]

Table 14: Sample Data After Age and CGPA Binning

Age	Age_Group	CGPA	CGPA_Category
28	Adult	5.94	Low
42	Senior	8.55	High
18	Young	5.56	Low
25	Young	8.57	High
19	Young	8.76	High

The resulting distribution is fairly balanced: 437 Young, 398 Adult, and 200 Senior students; and 423 High, 412 Average, and 200 Low CGPA students.

4.4 d. Handling Categorical Data: Encoding Techniques

Before encoding, a readable copy of the dataframe (`df_viz`) was preserved with the original human-readable category labels, specifically for use in visualizations and hypothesis testing where readability matters more than numeric encoding.

`gender`, a binary categorical variable, was transformed using **Label Encoding** (scikit-learn's `LabelEncoder`), mapping female $\rightarrow$ 0 and male $\rightarrow$ 1.

Table 15: Sample Data After Label Encoding

Name	Gender (Encoded)	Age	CGPA
moriarity	0	28	5.94
moriarity	1	42	8.55
holmes	0	18	5.56
sam	1	25	8.57
sam	1	19	8.76

`city` and `profession`, both nominal categorical variables with more than two categories, were transformed using **One-Hot Encoding** (`pd.get_dummies`), avoiding the false ordinal relationship that label encoding would have implied for these columns.

Table 16: Sample Data After One-Hot Encoding

Name	city_asgard	city_gotham	city_purgatory	city_wakanda	profession_bachelor	profession_masters	profession_phd
moriarity	0	0	0	1	0	0	1
moriarity	1	0	0	0	1	0	0
holmes	0	0	0	1	0	1	0
sam	0	0	0	1	1	0	0
sam	0	0	0	1	1	0	0

4.5 e. Outlier Detection

Outliers in the two continuous variables (`age`, `cgpa`) were detected using two complementary methods: visual inspection via box plots, and the mathematical Interquartile Range (IQR) rule (values beyond $Q1 - 1.5 \times IQR$ or $Q3 + 1.5 \times IQR$).

Table 17: IQR-Based Outlier Detection for Age

Metric	Value
Q1 (25th percentile)	22.0
Q3 (75th percentile)	30.0
IQR	8.0
Lower Limit	10.0
Upper Limit	42.0
Total Outliers Detected	154

Rather than deleting outlier rows outright (which would have discarded a further $\sim 15\%$ of the data), extreme values were clipped to the IQR boundary limits using `df["age"] = df["age"].clip(lower_limit, upper_limit)`. A follow-up check confirmed zero rows remained outside the bounds after clipping.

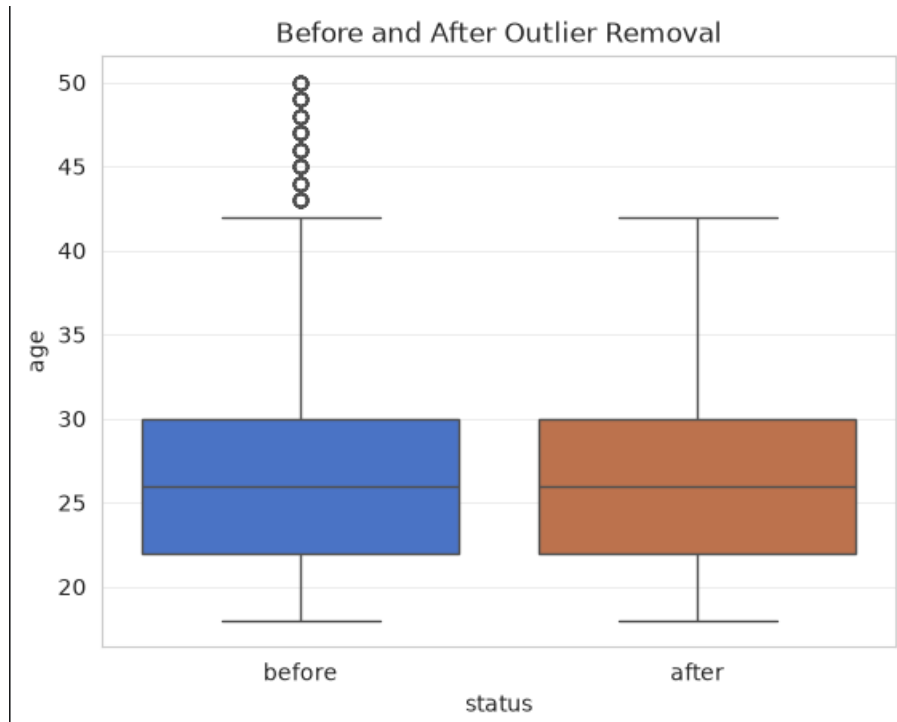


Figure 1: Before and After Outlier Removal

After all cleaning and outlier handling, the final numeric summary (age: mean 27.74, range 18–42; cgpa: mean 7.61, range 4.01–9.49) reflects a clean, well-behaved dataset of 1,035 rows ready for analysis.

5 Data Visualization

A range of univariate and bivariate plots were generated using `matplotlib` and `seaborn` to explore the distribution of each feature and its relationship with the placement outcome.

5.1 Univariate Distributions

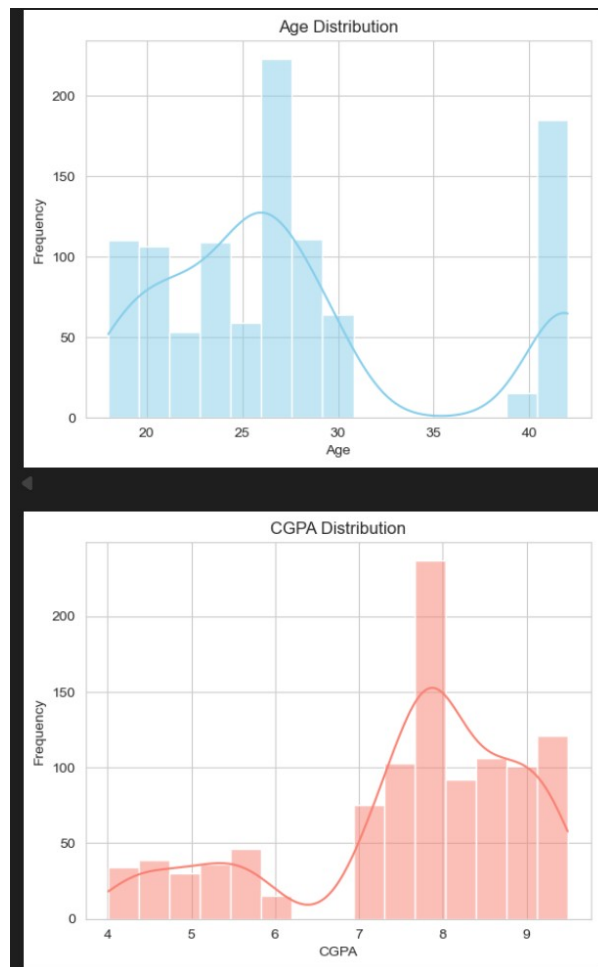


Figure 2: Distribution of Age (mildly bimodal, with a secondary cluster around 40–42) and CGPA (right-skewed, with a secondary low-scoring cluster below 6)

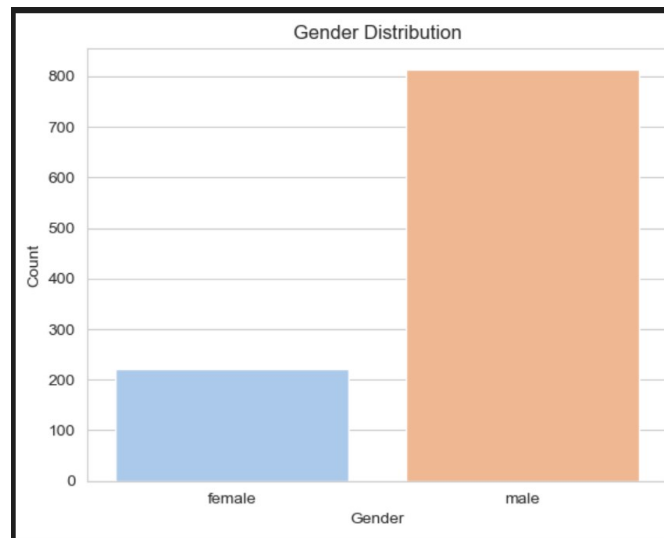


Figure 3: Gender distribution: males (~ 813) considerably outnumber females (~ 220) in the dataset

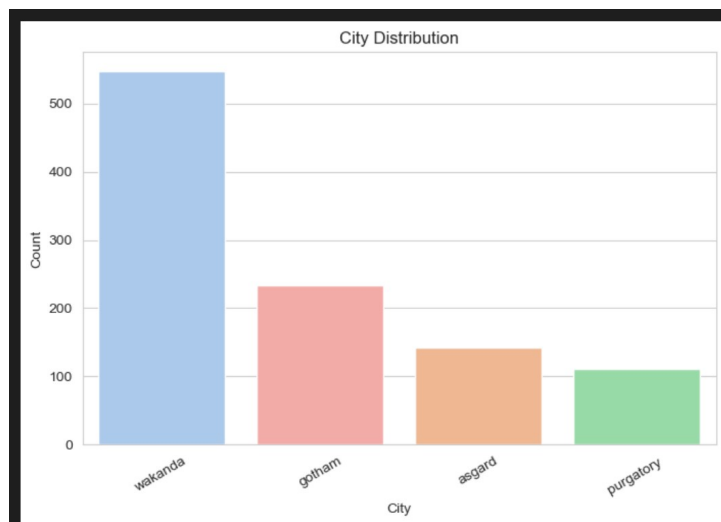


Figure 4: City distribution: Wakanda is the dominant city (~ 547 students), followed by Gotham, Asgard, and Purgatory

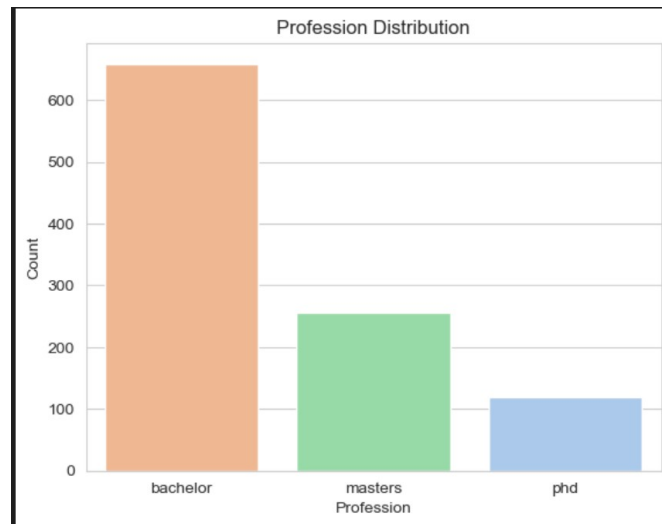


Figure 5: Profession (degree level) distribution: Bachelor's students dominate (~ 657), followed by Master's (~ 254) and PhD (~ 119)

The target variable itself is balanced: 521 students not placed vs. 514 placed (50.3% vs. 49.7%), which avoids the class-imbalance issues that can complicate group comparisons.

5.2 Placement vs. Categorical Features

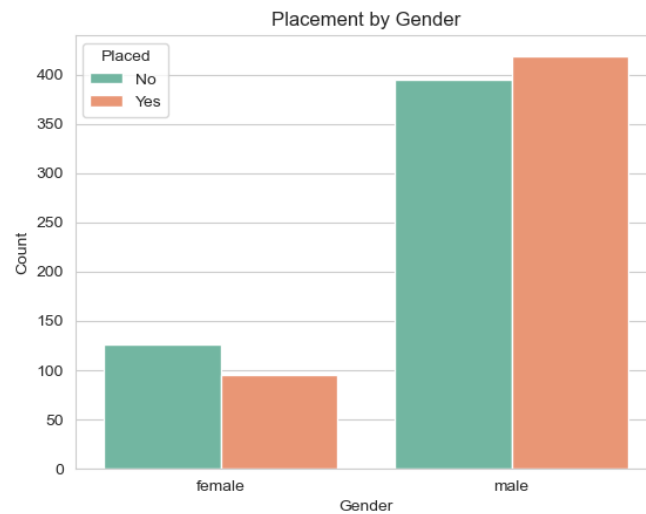


Figure 6: Placement counts by Gender

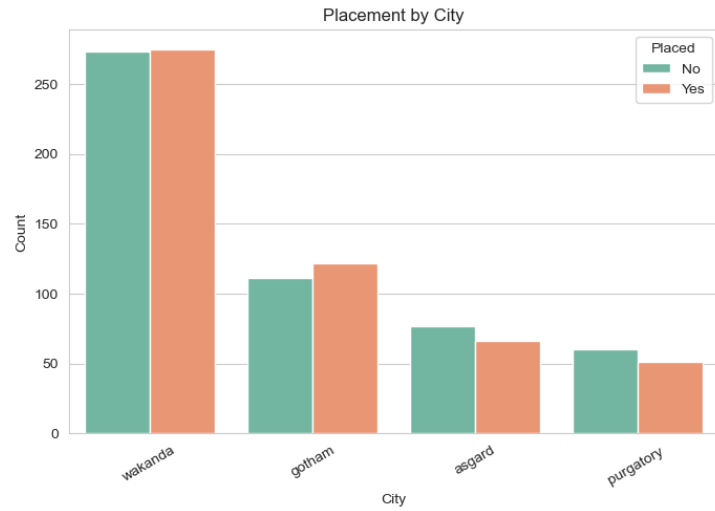


Figure 7: Placement counts by City

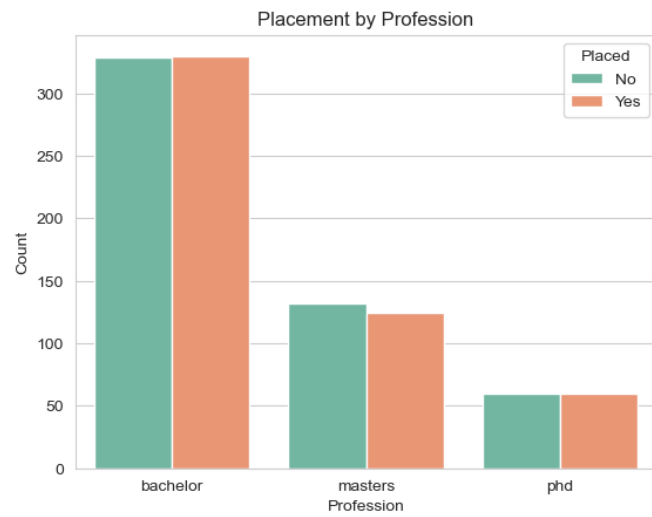


Figure 8: Placement counts by Profession

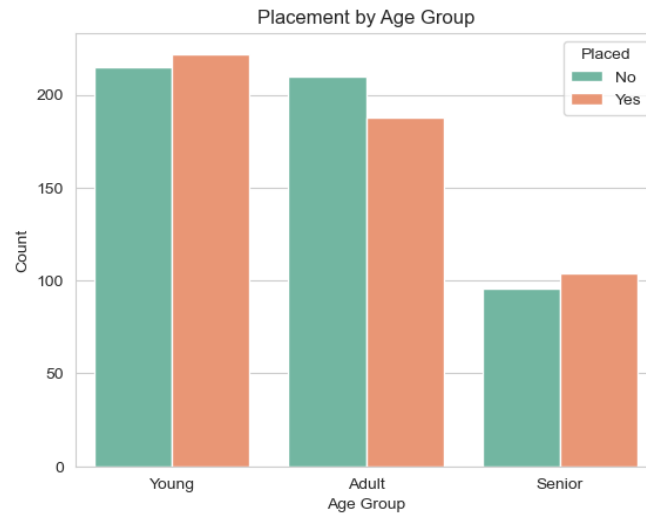


Figure 9: Placement counts by Age Group

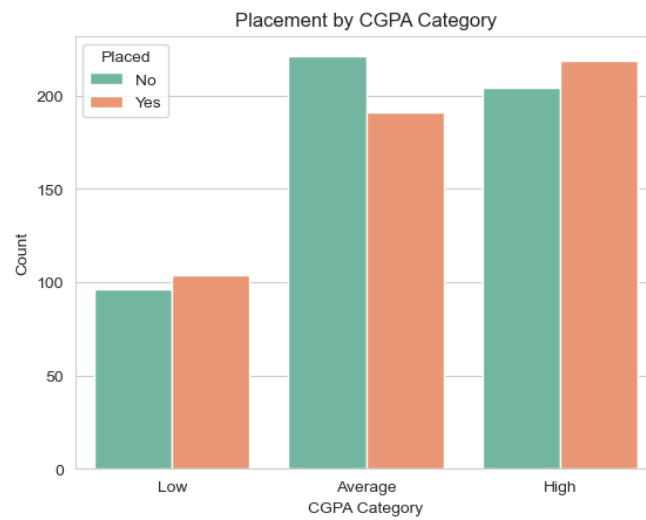


Figure 10: Placement counts by CGPA Category

The placement rate (% placed) within each category, computed with `groupby().mean()`, was:

Table 18: Placement rate by Gender

Gender	Placement Rate
Female	42.99%
Male	51.47%

Table 19: Placement rate by Profession

Profession	Placement Rate
Bachelor	50.08%
Masters	48.44%
PhD	50.00%

Table 20: Placement rate by City

City	Placement Rate
Asgard	46.15%
Gotham	52.36%
Purgatory	45.95%
Wakanda	50.18%

Gender shows the widest gap in raw placement rate (male 51.5% vs. female 43.0%) among the categorical breakdowns, foreshadowing the statistically significant chi-square result found in Section 7.

5.3 Placement vs. Numeric Features

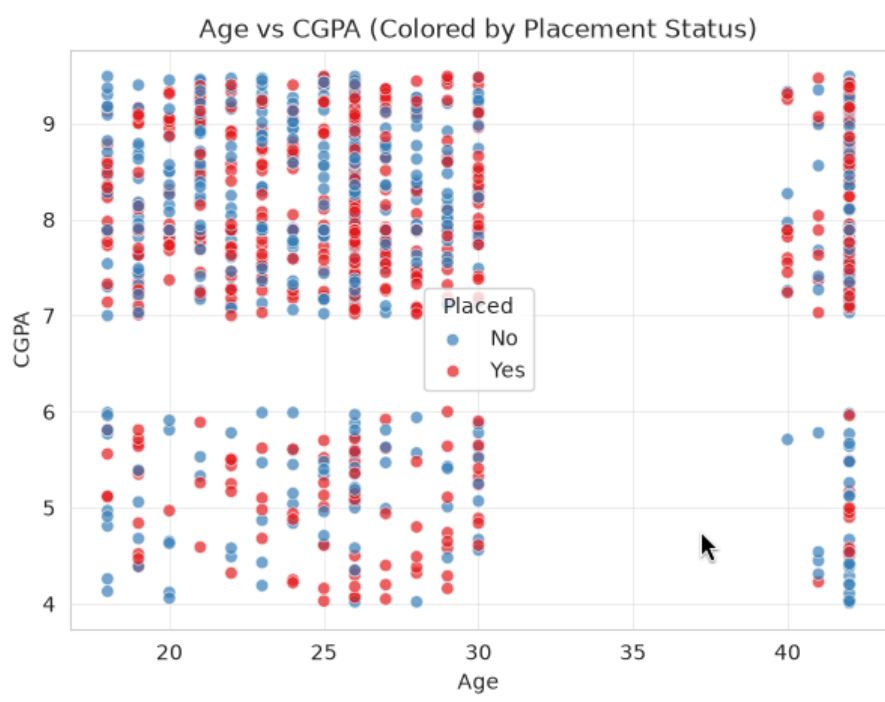


Figure 11: Age vs. CGPA scatter plot, colored by placement status — no visible separation between the two placement groups

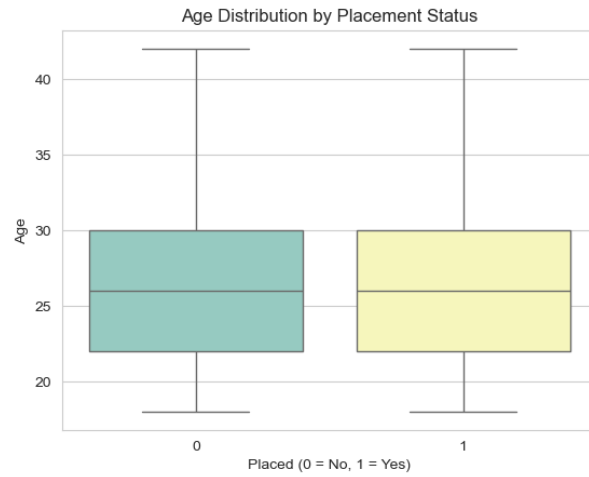


Figure 12: Age distribution by placement status (box plot) — near-identical medians and spread

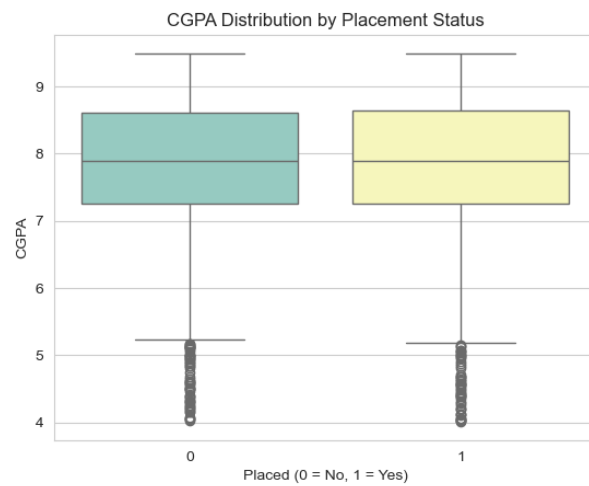


Figure 13: CGPA distribution by placement status (box plot) — near-identical medians and spread

The descriptive statistics confirm the near-total overlap visible in the box plots:

Table 21: Age Summary by Placement Status

Placed	Count	Mean	Std	Min	25%	50%	75%	Max
0	521.0	27.67	7.40	18.0	22.0	26.0	30.0	42.0
1	514.0	27.81	7.74	18.0	22.0	26.0	30.0	42.0

Table 22: CGPA Summary by Placement Status

Placed	Count	Mean	Std	Min	25%	50%	75%	Max
0	521.0	7.60	1.41	4.03	7.26	7.89	8.61	9.49
1	514.0	7.61	1.45	4.01	7.26	7.89	8.64	9.49

5.4 Correlation Heatmap

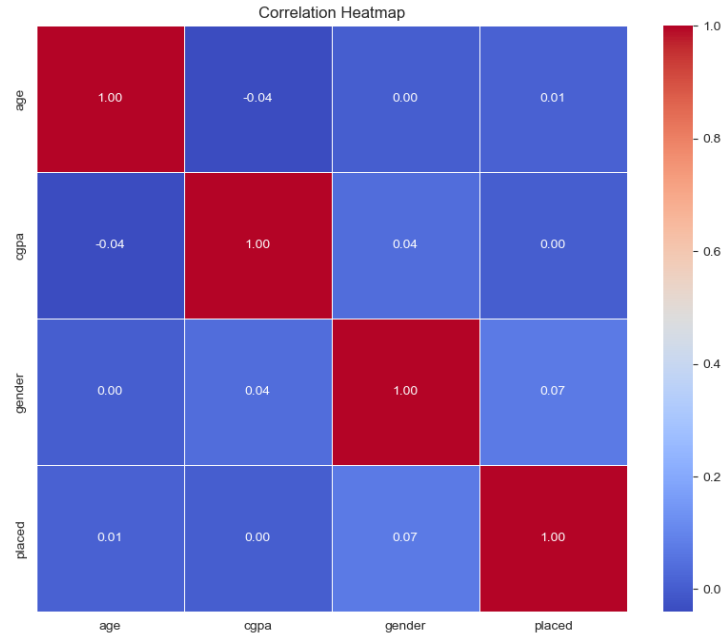


Figure 14: Correlation heatmap of **age**, **cgpa**, **gender**, and **placed**

All pairwise correlations among **age**, **cgpa**, **gender**, and **placed** are very close to zero (largest magnitude: 0.07 between **gender** and **placed**), visually confirming the absence of any strong linear relationship among these variables.

6 Statistical Analysis

Beyond visual inspection, formal statistical hypothesis tests were used to determine whether observed differences and associations in the data are statistically significant ($\alpha = 0.05$) or could plausibly be due to random chance.

6.1 a. Hypothesis Testing

Test 1: Independent *t*-test — CGPA vs. Placed

H_0 : There is no significant difference in mean CGPA between placed and not-placed students.

H_1 : There is a significant difference in mean CGPA between placed and not-placed students.

Table 23: Independent Samples t-Test: CGPA vs. Placement

Metric	Value
Significance Level (α)	0.05
T-statistic	0.1197
P-value	0.9048
Decision	Fail to reject H_0

H_0 : No significant difference in mean CGPA between placed and not-placed students.

Result: $p = 0.9048 > 0.05 \Rightarrow$ **Fail to reject** H_0 . No statistically significant difference in CGPA between placed and not-placed students.

Test 2: Independent t-test — Age vs. Placed

H_0 : There is no significant difference in mean Age between placed and not-placed students.

H_1 : There is a significant difference in mean Age between placed and not-placed students.

Table 24: Independent Samples t-Test: Age vs. Placement

Metric	Value
Significance Level (α)	0.05
T-statistic	0.2921
P-value	0.7703
Decision	Fail to reject H_0

H_0 : No significant difference in mean Age between placed and not-placed students.

Result: $p = 0.7703 > 0.05 \Rightarrow$ **Fail to reject** H_0 . No statistically significant difference in Age between placed and not-placed students.

Test 3: Chi-square Test — Gender vs. Placed

H_0 : Gender and Placement are independent (no association).

H_1 : Gender and Placement are dependent (there is an association).

Table 25: Contingency Table: Gender vs. Placement

Gender	Not Placed (0)	Placed (1)
Female	126	95
Male	395	419

Table 26: Chi-Square Test of Independence: Gender vs. Placement

Metric	Value
Chi-square statistic (χ^2)	4.6751
Degrees of freedom	1
P-value	0.0306
Decision	Reject H_0

H_0 : No significant association between Gender and Placement.

Result: $p = 0.0306 < 0.05 \Rightarrow$ **Reject** H_0 . There is a statistically significant association between Gender and Placement.

Test 4: Chi-square Test — Profession vs. Placed

H_0 : Profession and Placement are independent (no association).

H_1 : Profession and Placement are dependent (there is an association).

Table 27: Contingency Table: Profession vs. Placement

Profession	Not Placed (0)	Placed (1)
Bachelor	329	330
Masters	132	124
PhD	60	60

Table 28: Chi-Square Test of Independence: Profession vs. Placement

Metric	Value
Chi-square statistic (χ^2)	0.2042
Degrees of freedom	2
P-value	0.9029
Decision	Fail to reject H_0

H_0 : No significant association between Profession and Placement.

Result: $p = 0.9029 > 0.05 \Rightarrow$ **Fail to reject** H_0 . No statistically significant association between Profession and Placement.

Summary of Hypothesis Tests

Table 29: Summary of hypothesis test results

Test	Statistic	p -value	Conclusion ($\alpha = 0.05$)
CGPA vs Placed (t -test)	$t = 0.1197$	0.9048	Not significant
Age vs Placed (t -test)	$t = 0.2921$	0.7703	Not significant
Gender vs Placed (χ^2)	$\chi^2 = 4.6751$	0.0306	Significant
Profession vs Placed (χ^2)	$\chi^2 = 0.2042$	0.9029	Not significant

6.2 b. Correlation Analysis

Pearson correlation coefficients were computed for each pair of numeric variables, along with their statistical significance:

Table 30: Pearson Correlation Results

Variable 1	Variable 2	r	p-value	Significance
age	cgpa	-0.0404	0.1945	Not Significant
age	placed	0.0091	0.7703	Not Significant
cgpa	placed	0.0037	0.9048	Not Significant

Table 31: Full Correlation Matrix

	age	cgpa	gender	placed
age	1.000	-0.040	0.003	0.009
cgpa	-0.040	1.000	0.037	0.004
gender	0.003	0.037	1.000	0.070
placed	0.009	0.004	0.070	1.000

Every correlation coefficient is close to zero ($|r| < 0.08$), confirming that none of the numeric variables share a meaningful linear relationship with each other or with the placement outcome, consistent with the heatmap in Figure 11 and the hypothesis test results above.

7 Results and Discussion

Combining the visual exploration and formal statistical testing, the following conclusions emerge from this dataset:

- **Gender** is the only feature with a statistically significant association with placement ($\chi^2 = 4.6751$, $p = 0.0306$). Male students show a placement rate of 51.5% versus 43.0% for female students — a gap of roughly 8.5 percentage points.
- **CGPA** shows no significant relationship with placement, either via t -test ($p = 0.9048$) or correlation ($r = 0.0037$, $p = 0.9048$). Students who were placed and not placed have virtually identical CGPA distributions (means of 7.61 vs. 7.60).
- **Age** shows no significant relationship with placement, either via t -test ($p = 0.7703$) or correlation ($r = 0.0091$, $p = 0.7703$).
- **Profession** (degree level) shows no significant association with placement ($\chi^2 = 0.2042$, $p = 0.9029$); bachelor’s, master’s, and PhD students are placed at almost identical rates (~ 48 – 50%).
- **City** shows a modest spread in raw placement rates (45.9% to 52.4%) but was not formally tested; given the pattern seen with profession, this spread likely reflects sampling noise rather than a true effect.
- **Age and CGPA** are themselves uncorrelated ($r = -0.0404$, not significant), indicating these two numeric features vary independently of one another in this dataset.

Overall, the data suggests that in this dataset, placement outcome behaves close to a random 50/50 split with respect to academic performance (CGPA), age, and degree level — the only detectable (and still modest) signal is a gender-based difference. This is a somewhat counter-intuitive finding relative to common assumptions (e.g., that CGPA strongly predicts placement), and is worth flagging explicitly rather than assuming CGPA “must” matter.

Given the earlier observation that the dataset’s names and cities are drawn from fictional universes, it is plausible that placement outcomes here were generated with a random or near-random process (possibly with a small deliberate gender effect), rather than reflecting a genuine underlying real-world mechanism. This context should be kept in mind: the statistical conclusions are valid descriptions of this dataset, but should not be over-generalized to real placement processes without validation on real institutional data.

8 Challenges and Future Enhancement

Challenges Encountered

- High missing-value rates (8%–18%) across nearly every column required careful, column-specific imputation strategy rather than simple row deletion, to avoid losing a large share of the dataset.
- A meaningful number of exact duplicate rows (5.9%) had to be identified and removed to avoid double-counting records in downstream statistics.
- Right- and left-skewed distributions (age’s bimodal shape; CGPA’s low-end cluster) required outlier handling (IQR clipping) rather than naive z -score filtering, to avoid discarding legitimate data.
- The weak-to-negligible correlations and mostly non-significant test results meant the dataset offered limited explanatory power for placement — a reminder that clean methodology can still yield a “no strong effect” conclusion, which is itself a valid and useful finding.
- Categorical encoding choices (label vs. one-hot) had to be made carefully to avoid introducing false ordinal relationships into nominal variables like `city`.

Future Enhancements

- Incorporate richer features that plausibly drive placement in the real world — interview performance, technical/soft-skill assessments, internship experience, extracurricular involvement, and communication skills.
- Apply predictive machine learning models (e.g., Logistic Regression, Random Forest, Gradient Boosting) to formally test predictive power and quantify feature importance, going beyond pairwise hypothesis tests to a multivariate model.
- Use multivariate/interaction analysis (e.g., two-way ANOVA, interaction terms) to check whether combinations of features (e.g., gender $\times$ profession) reveal effects not visible in single-variable tests.
- Validate findings on a real, verified institutional placement dataset to confirm whether the gender effect observed here generalizes, and to check it does not stem from confounding or sampling artifacts.
- Apply more advanced missing-data techniques (e.g., KNN or iterative/MICE imputation) instead of simple median/mode imputation, to better preserve relationships between correlated features when imputing.
- Build an interactive dashboard (e.g., in Power BI, Tableau, or a Streamlit app) to allow stakeholders to explore placement trends dynamically across cities, professions, and demographic segments.

References

- [1] A. Sharma, “All-in-one dataset for preprocessing practice.” [Online]. Available: <https://www.kaggle.com/datasets/akshatsharma2/all-in-one-dataset-for-preprocessing-practice>. [Accessed: July 2026].