PIZZA SALES ANALYSIS

PIZZA HUT

PIZZA HUT

INTRODUCTION

HELLO!

MY NAME IS SURAJ,
IN THIS PROJECT I HAVE UTLIZIED SQL QUERIES AND POWER BI TO SOLVE QUESTIONS THAT WERE RELATED TO PIZZA SALES.

PIZZA HUT

PROBLEM STATEMENT :

1. Retrieve the total number of orders placed.
2. Calculate the total revenue generated from pizza sales.
3. Identify the highest-priced pizza.
4. Identify the most common pizza size ordered.
5. List the top 5 most ordered pizza types along with their quantities.
6. Join the necessary tables to find the total quantity of each pizza category ordered.
7. Determine the distribution of orders by hour of the day.
8. Join relevant tables to find the category-wise distribution of pizzas.
9. Group the orders by date and calculate the average number of pizzas ordered per day.
10. Determine the top 3 most ordered pizza types based on revenue.
11. Calculate the percentage contribution of each pizza type to total revenue.
12. Analyze the cumulative revenue generated over time.
13. Determine the top 3 most ordered pizza types based on revenue for each pizza category.

PIZZA HUT

KEY FEATURES

★ Key Features of the Pizza Sales Dataset

1.Relational Dataset Structure

•Four interlinked tables: orders, order_details, pizzas, pizza_types

•Suitable for SQL joins and relational analysis

2.Time-Based Order Tracking

•Each order includes precise date and time

•Enables hourly, daily, and seasonal trend analysis

3.Pizza Categorization

•Pizzas grouped by category (Classic, Veggie, Chicken, etc.)

•Each pizza includes a list of unique ingredients

4.Size & Price Variability

•Pizzas come in sizes: S, M, L, XL

•Prices vary by size, useful for revenue breakdown

5.Detailed Sales Information

•Tracks pizza_id and quantity per order

•Enables deep sales insights at the item and order level

PIZZA HUT

DATA MODLING

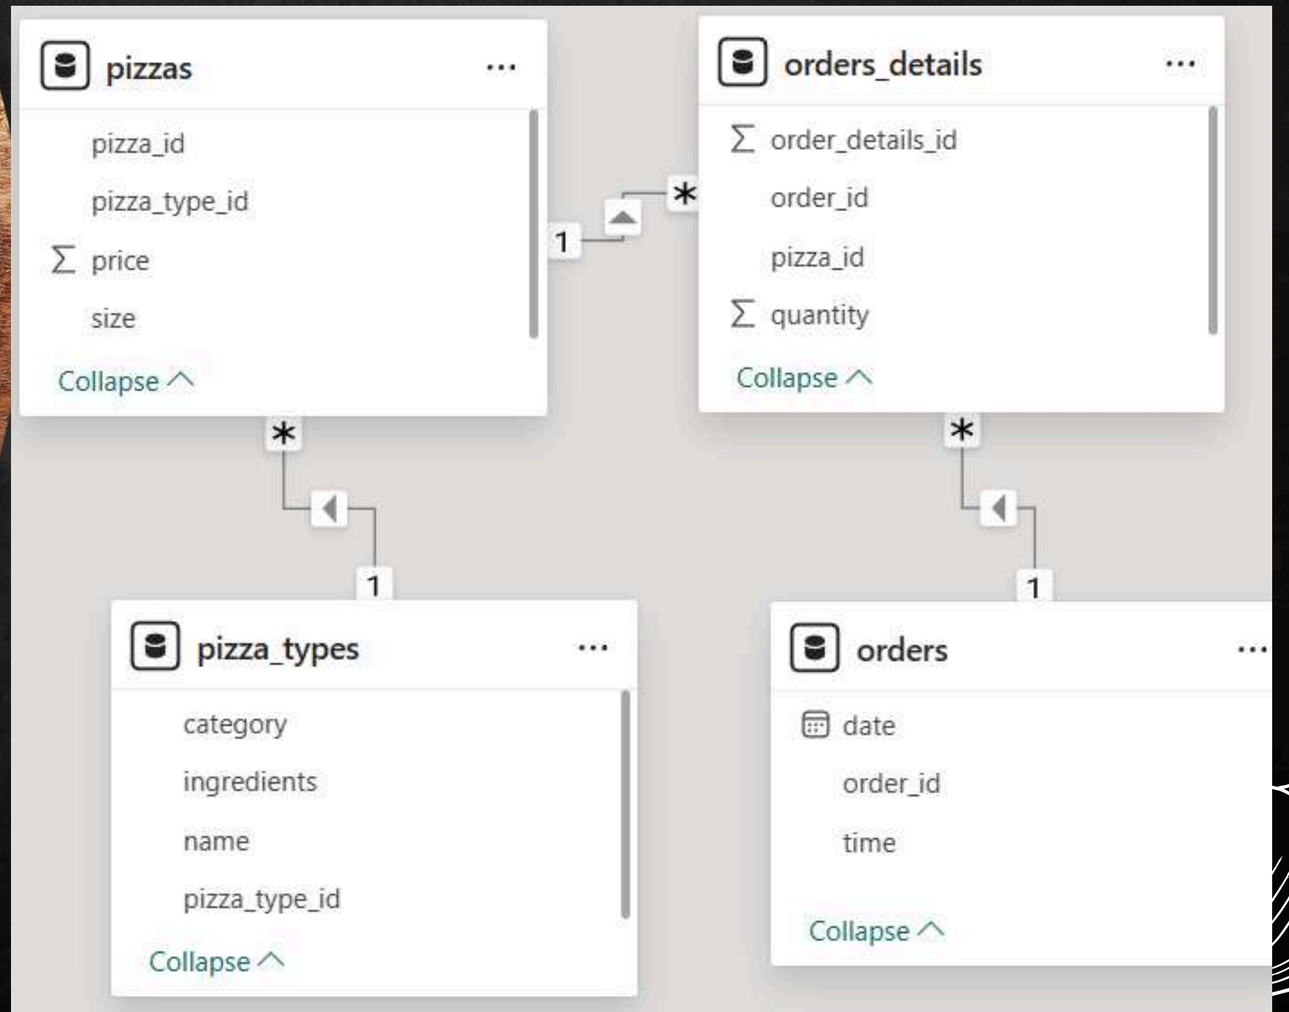

PIZZA HUT

SQL QUERY ANALYSIS

PIZZA HUT

1. RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED

```
SELECT
    COUNT(order_id) AS Total_orders
FROM
    orders;
```

Result Grid

	Total_orders
▶	21350

PIZZA HUT

2. Calculate the total revenue generated from pizza sales.

```sql
SELECT
    ROUND(SUM(orders_details.quantity * pizzas.price),
            2) AS total_sales
FROM
    orders_details
        JOIN
    pizzas ON pizzas.pizza_id = orders_details.pizza_id;
```

Result Grid

	total_sales
▶	817860.05

PIZZA HUT

3 IDENTIFY THE HIGHEST-PRICED PIZZA.

```sql
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```

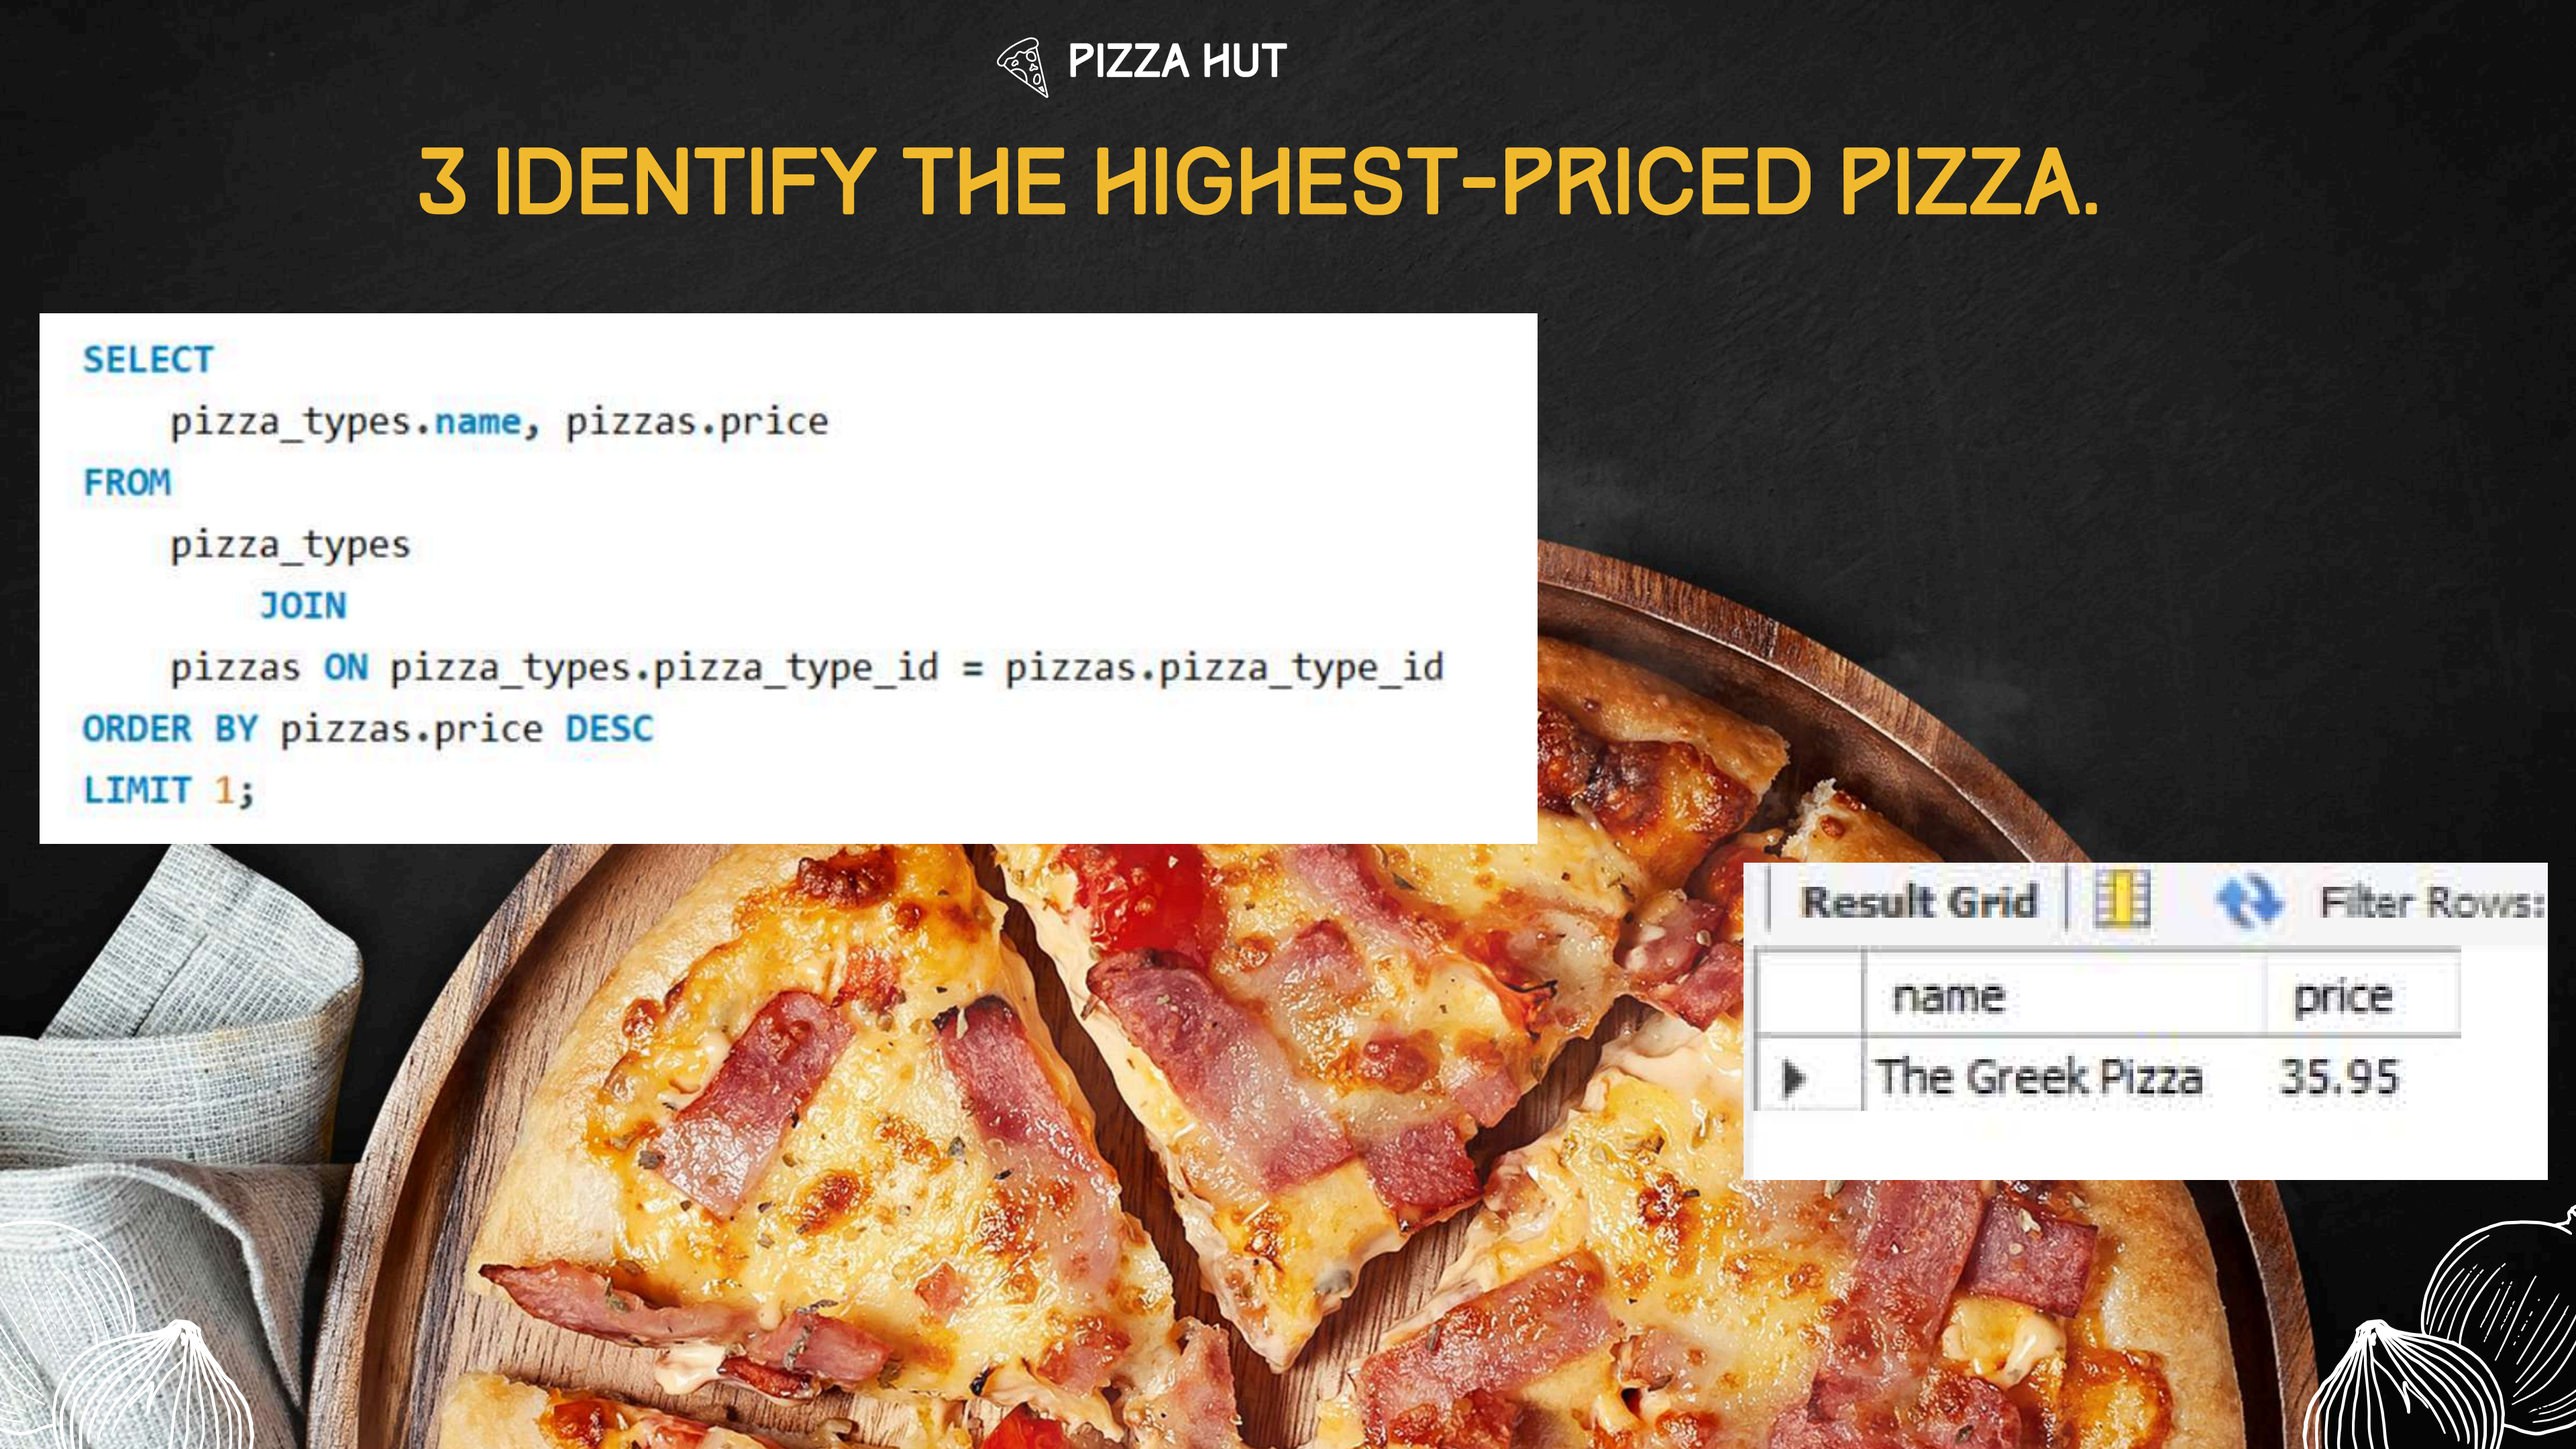

Result Grid | Filter Rows:

name	price
The Greek Pizza	35.95

PIZZA HUT

4 IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED.

```sql
SELECT
    pizzas.size,
    COUNT(orders_details.order_details_id) AS order_count
FROM
    pizzas
        JOIN
    orders_details ON pizzas.pizza_id = orders_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC
LIMIT 1;
```

Result Grid | Filter

	size	order_count
▶	L	18526

5 List the top 10 most ordered pizza types along with their quantities.

PIZZA HUT

```sql
SELECT
    pizza_types.name, SUM(orders_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 10;
```

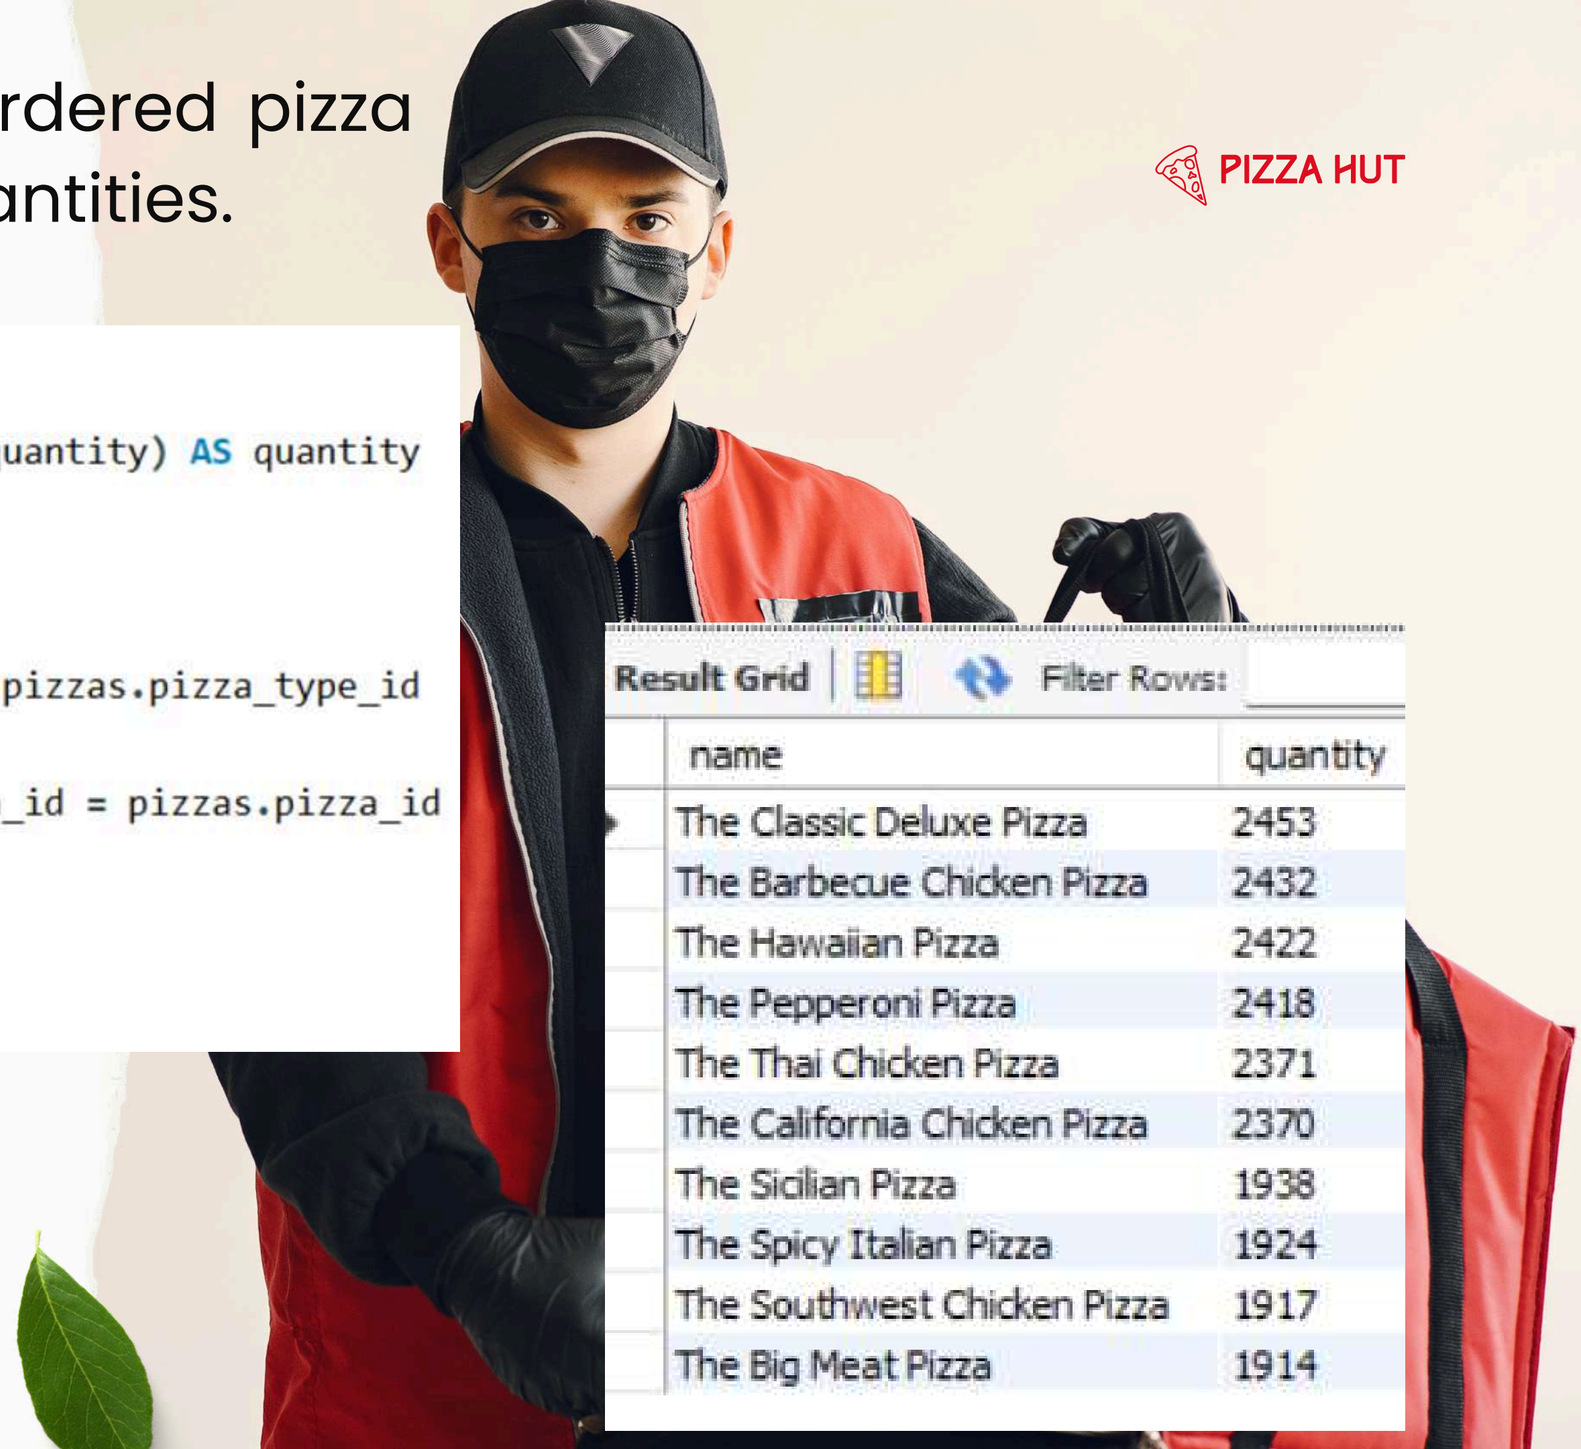

Result Grid | Filter Rows:

name	quantity
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371
The California Chicken Pizza	2370
The Sicilian Pizza	1938
The Spicy Italian Pizza	1924
The Southwest Chicken Pizza	1917
The Big Meat Pizza	1914

PIZZA HUT

6. JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.

```sql
SELECT
    pizza_types.category,
    SUM(orders_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```

Result Grid | Filter R

category	quantity
Classic	14888
Supreme	11987
Veggie	11649
Chicken	11050

PIZZA HUT

7. DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY.

```sql
SELECT
    HOUR(order_time) AS hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY HOUR(order_time);
```

hour	order_count
11	1231
12	2520
13	2455
14	1472
15	1468
16	1920
17	2336
18	2399
19	2009
20	1642
21	1198
22	663
23	28
10	8
9	1

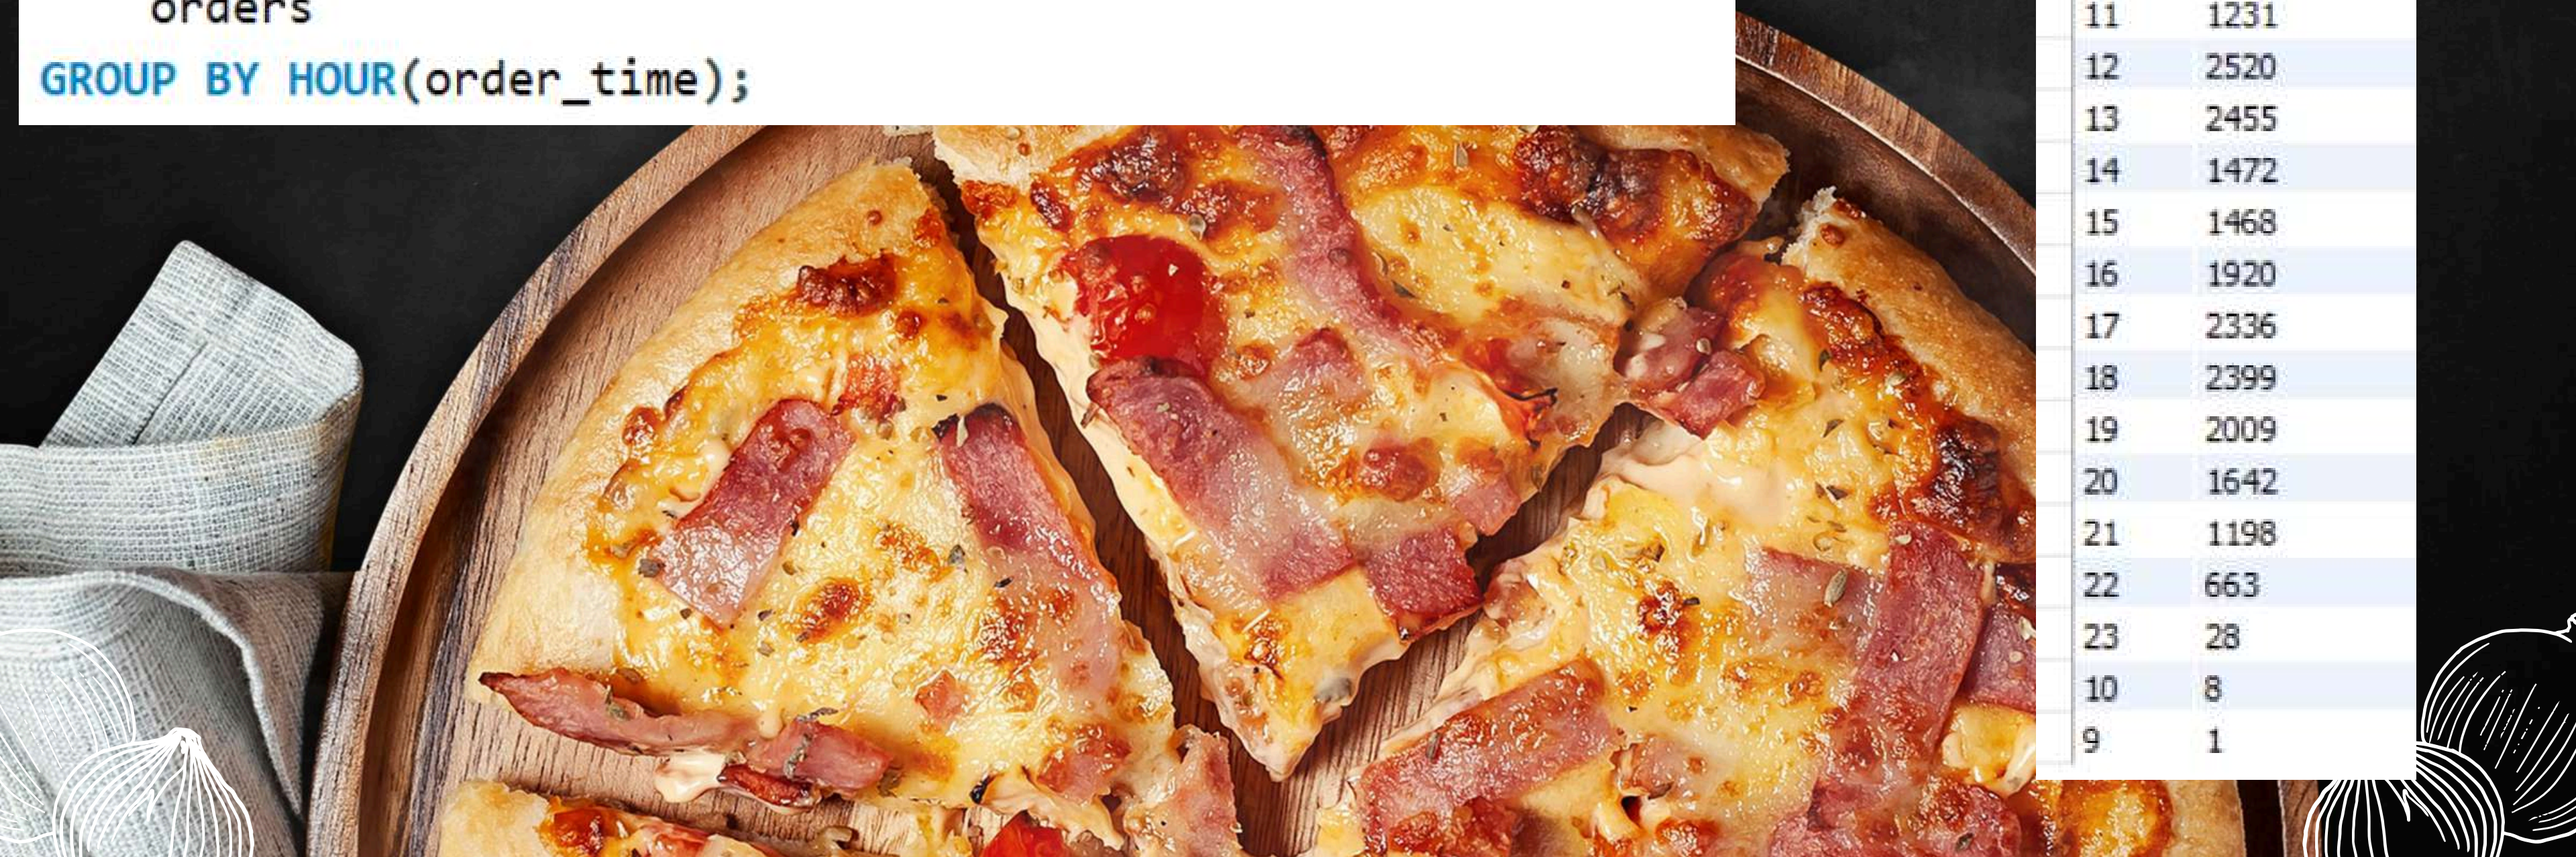

PIZZA HUT

8. JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS.

```
SELECT
    category, COUNT(name)
FROM
    pizza_types
GROUP BY category;
```

category	COUNT(name)
Chicken	6
Classic	8
Supreme	9
Veggie	9

PIZZA HUT

9. GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY.

```sql
SELECT
    ROUND(AVG(quantity), 0) AS avg_pizza_ordered_per_day
FROM
    (SELECT
        orders.order_date, SUM(orders_details.quantity) AS quantity
    FROM
        orders
    JOIN orders_details ON orders.order_id = orders_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```

Result Grid | Filter Rows:

avg_pizza_ordered_per_day
138

PIZZA HUT

10. Determine the top 3 most ordered pizza types based on revenue.

```sql
SELECT
    pizza_types.name,
    ROUND(SUM(orders_details.quantity * pizzas.price),
            2) AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5

PIZZA HUT

11 .CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE.

```sql
SELECT
    pizza_types.category,
    ROUND(SUM(orders_details.quantity * pizzas.price) / (SELECT
                ROUND(SUM(orders_details.quantity * pizzas.price),
                        2) AS total_sales
            FROM
                orders_details
                    JOIN
                pizzas ON pizzas.pizza_id = orders_details.pizza_id) * 100,
        2) AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC;
```

category	revenue
Classic	26.91
Supreme	25.46
Chicken	23.96
Veggie	23.68

PIZZA HUT

12. ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.

```sql
select order_date,
sum(revenue) over(order by order_date) as cum_revenue
from
(select orders.order_date ,
sum(orders_details.quantity * pizzas.price) as revenue
from orders_details join pizzas
on orders_details.pizza_id = pizzas.pizza_id
join orders
on orders.order_id = orders_details.order_id
group by orders.order_date) AS sales;
```

Result Grid | Filter Rows:

order_date	cum_revenue
2015-01-01	2713.8500000000004
2015-01-02	5445.75
2015-01-03	8108.15
2015-01-04	9863.6
2015-01-05	11929.55
2015-01-06	14358.5
2015-01-07	16560.7
2015-01-08	19399.05
2015-01-09	21526.4
2015-01-10	23990.350000000002
2015-01-11	25862.65
2015-01-12	27781.7
2015-01-13	29831.300000000003
2015-01-14	32358.700000000004
2015-01-15	34343.50000000001
2015-01-16	36937.65000000001
2015-01-17	39001.75000000001
2015-01-18	40978.600000000006
2015-01-19	43365.75000000001
2015-01-20	45763.65000000001
2015-01-21	47804.20000000001
2015-01-22	50300.90000000001
2015-01-23	52724.600000000006

PIZZA HUT

13. DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY.

```sql
select name, revenue from
(select category , name , revenue,
rank() over(partition by category order by revenue desc) as rn
from
(select pizza_types.category , pizza_types.name,
sum(orders_details.quantity * pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join orders_details
on orders_details.pizza_id = pizzas.pizza_id
group by pizza_types.category , pizza_types.name ) as a) as b
where rn <=3;
```

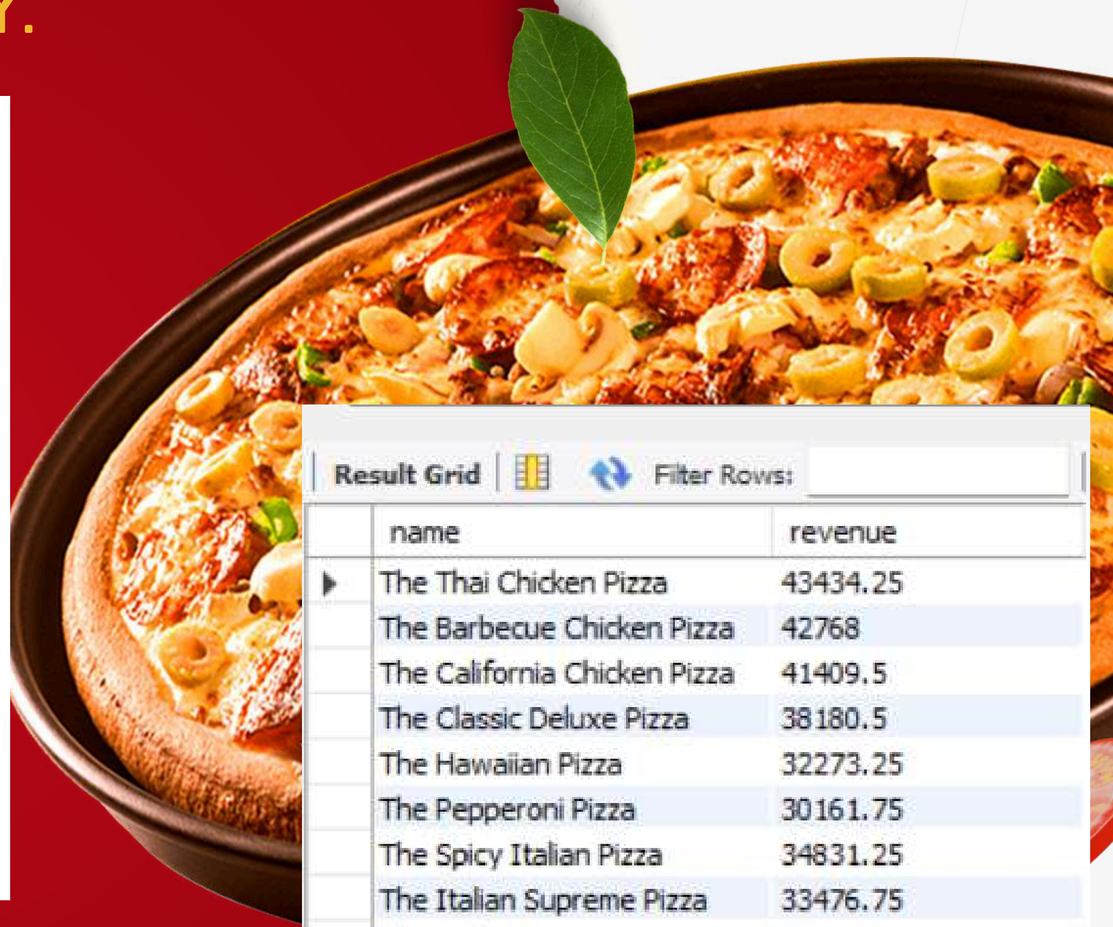

Result Grid | Filter Rows:

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5
The Classic Deluxe Pizza	38180.5
The Hawaiian Pizza	32273.25
The Pepperoni Pizza	30161.75
The Spicy Italian Pizza	34831.25
The Italian Supreme Pizza	33476.75
The Sicilian Pizza	30940.5
The Four Cheese Pizza	32265.70000000065
The Mexicana Pizza	26780.75
The Five Cheese Pizza	26066.5

PIZZA HUT

THANK YOU!