

Lecture: 33-Implementing DataLoader

Step-1: Download and process dataset

Step-2: creating dataloaders

	Label	Text
0	ham	Go until jurong point, crazy.. Available only ...
1	ham	Ok lar... Joking wif u oni...
2	spam	Free entry in 2 a wkly comp to win FA Cup fina...
3	ham	U dun say so early hor... U c already then say...
4	ham	Nah I don't think he goes to usf, he lives aro...
...	...	...
5571	ham	Rofl. Its true to its name

5572 rows x 2 columns

Figure 6.5 Preview of the SMSSpamCollection dataset in a pandas DataFrame, showing class labels ("ham" or "spam") and corresponding text messages. The dataset consists of 5,572 rows (text messages and labels).


- Text messages of varying length.




- To batch these message, we have 2 options.

(i.) Truncate all messages to length of shortest messages.

(ii.) pad all messages to length of longest message

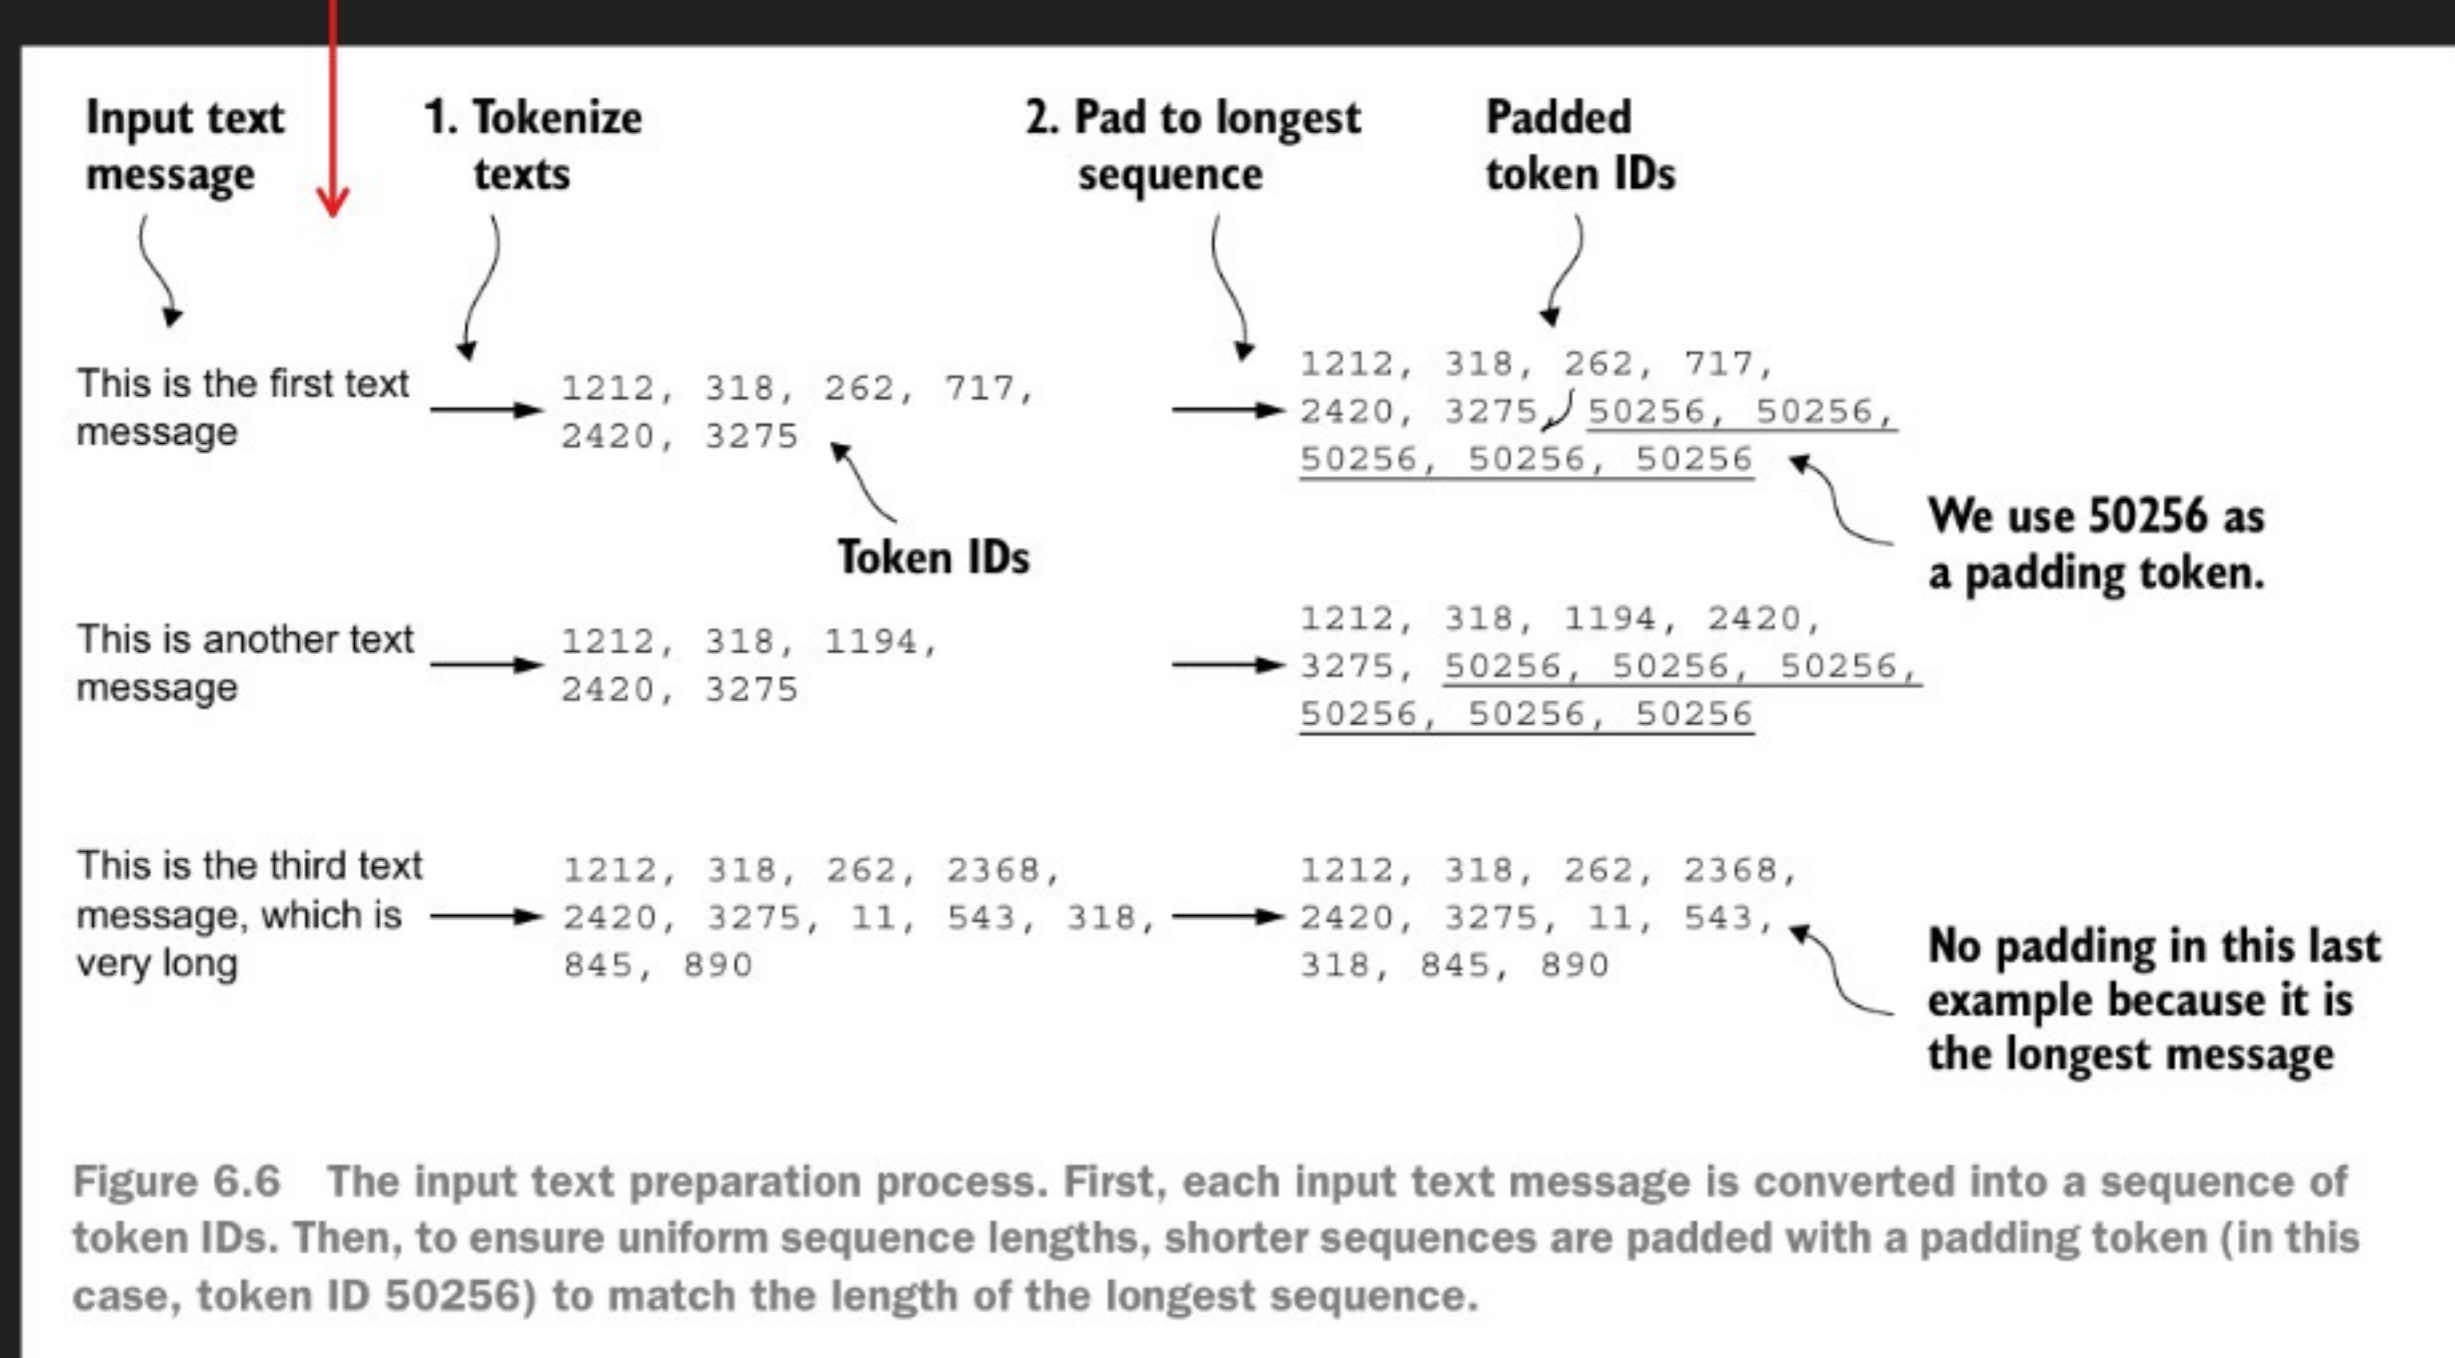

This is what we want to output to be.

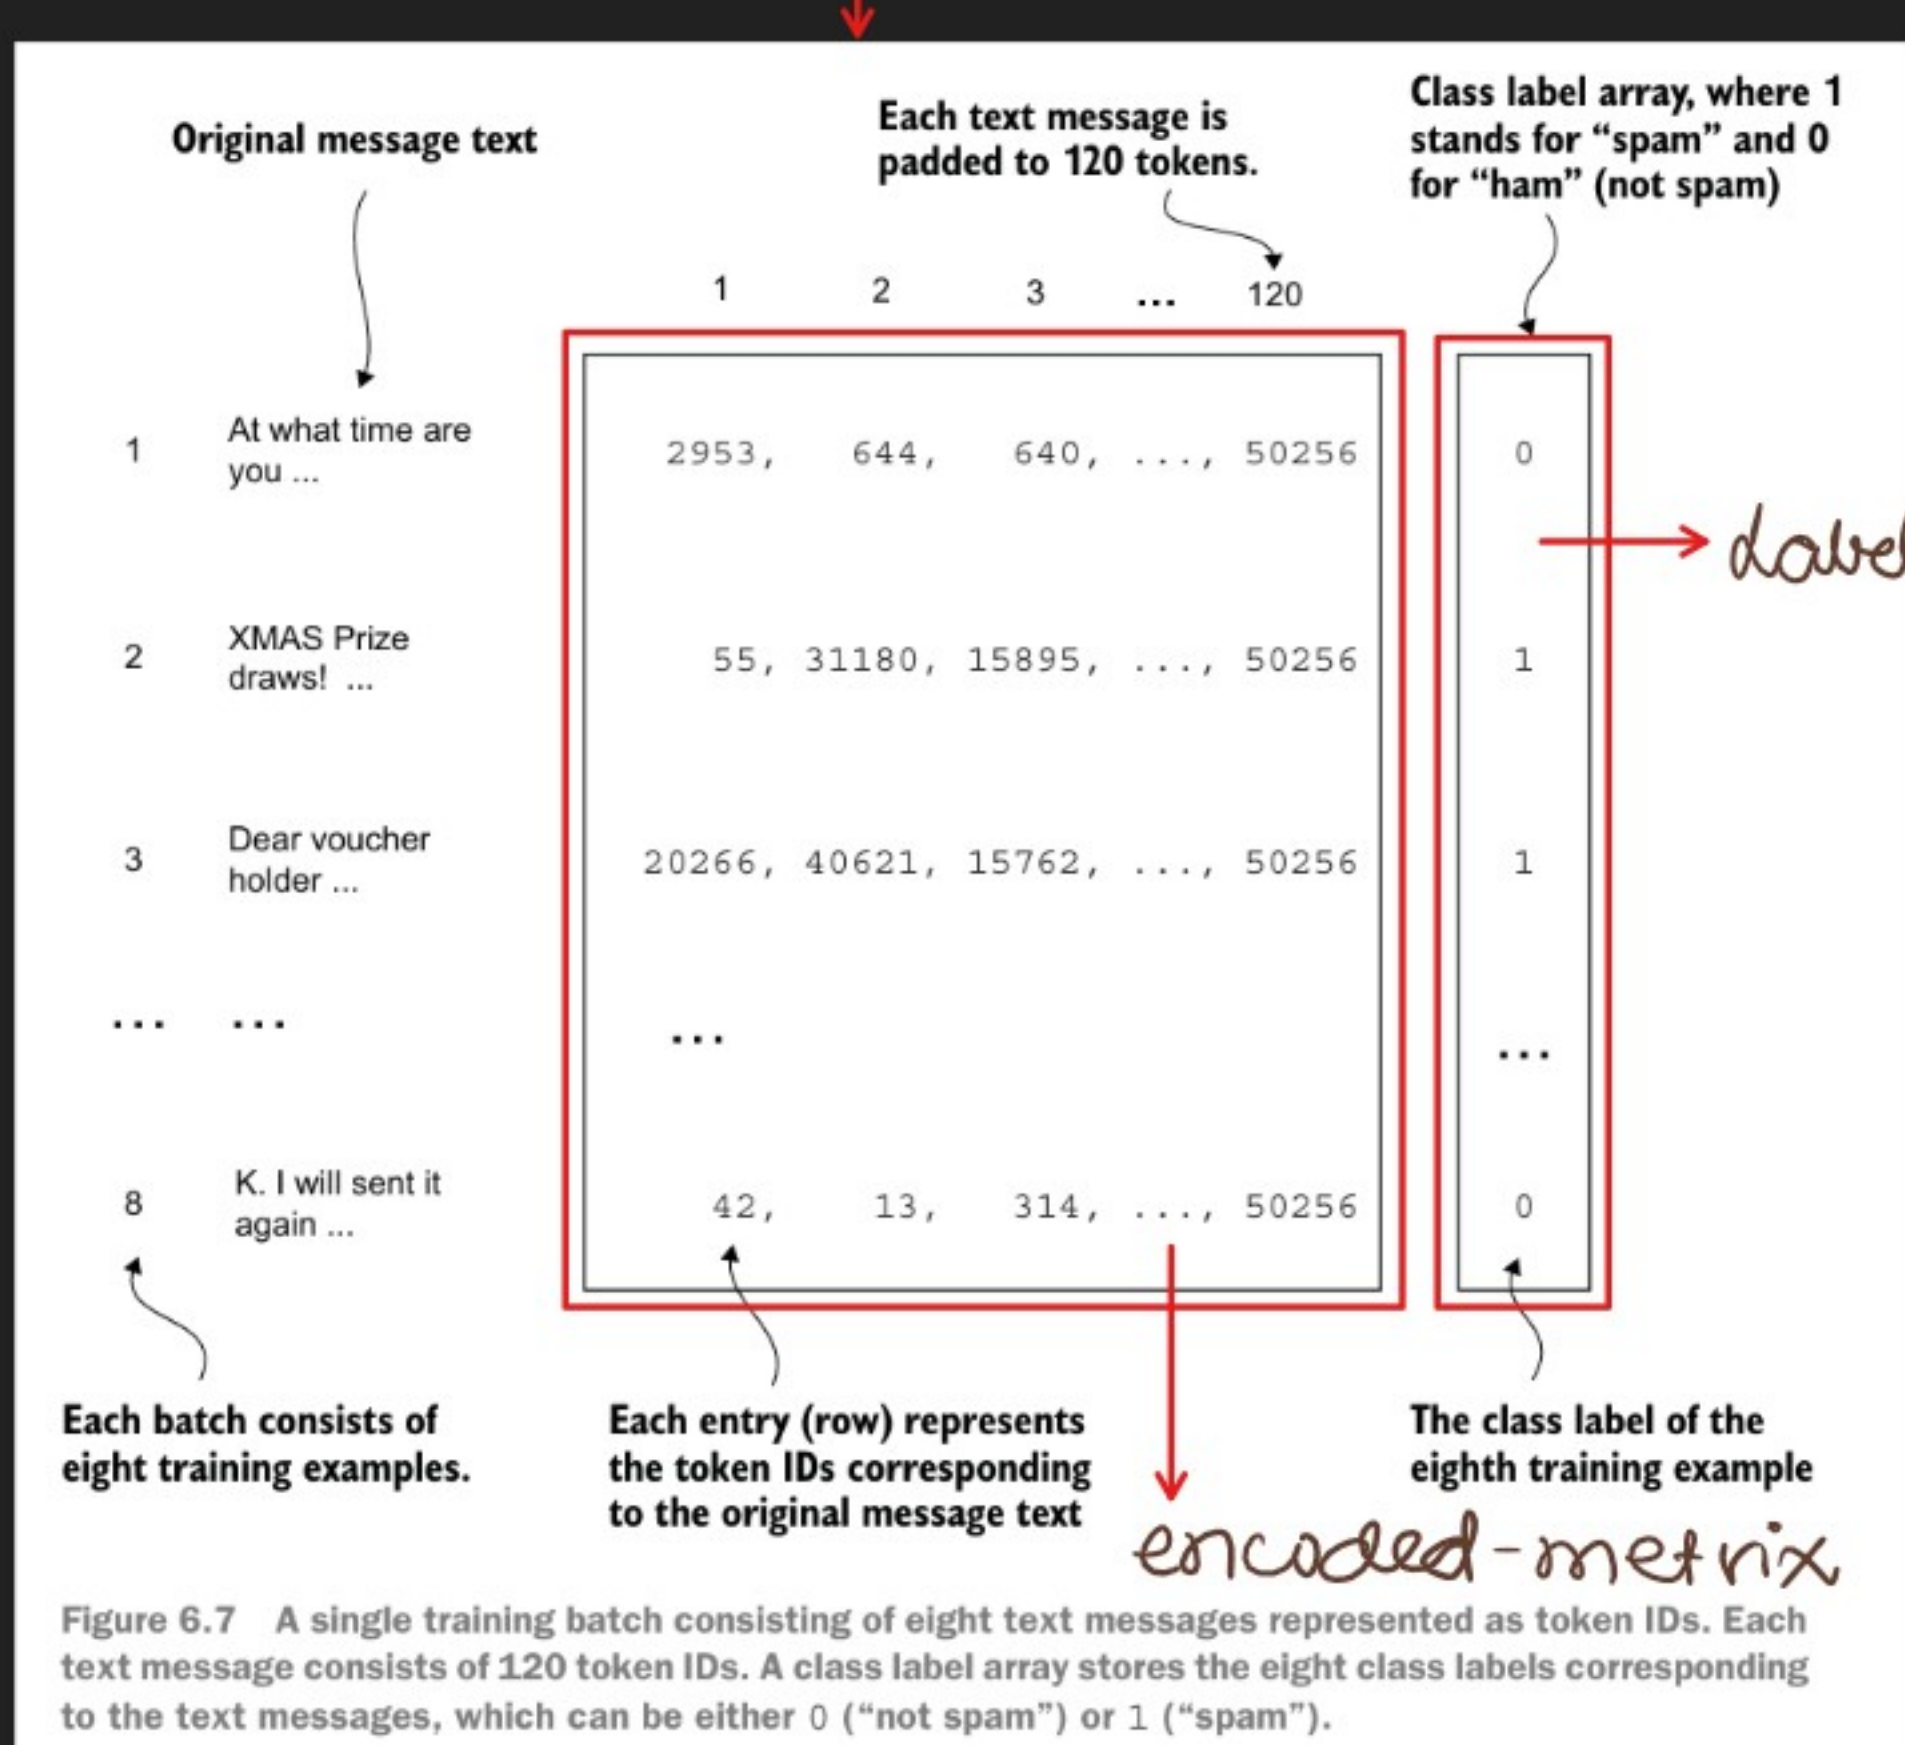

Procedure: Input text

Tokenize

Ensure that all sentence are same length.