


lecture: 39

Step-4: loading a pretrained LLM


Now, we create the PyTorch data loaders we will use for fine-tuning the LLM.

Stage 1:
Preparing the dataset

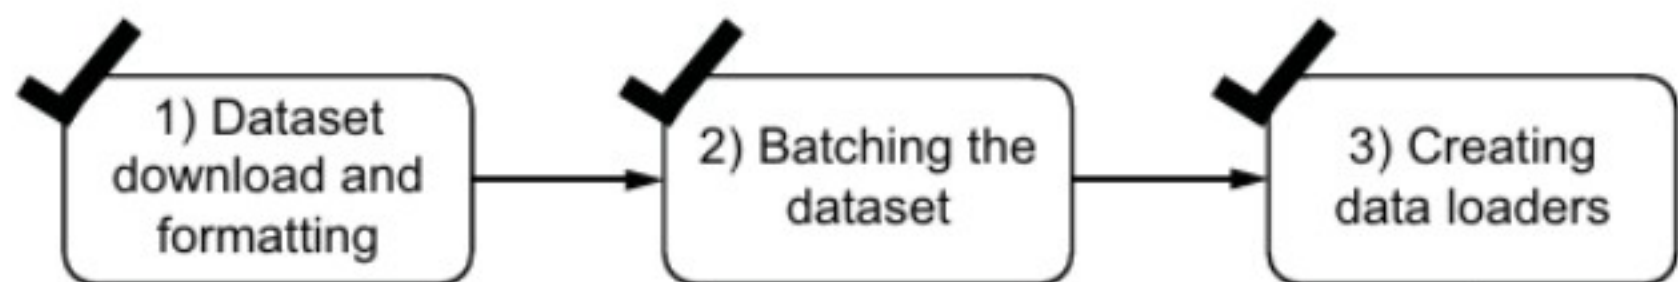


Now, we are loading the LLM for fine-tuning.

Stage 2:
Fine-tuning the LLM

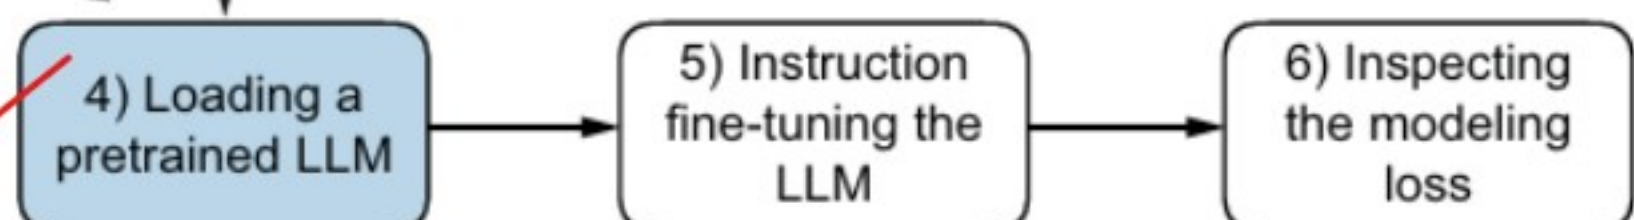

Stage 3:
Evaluating the LLM

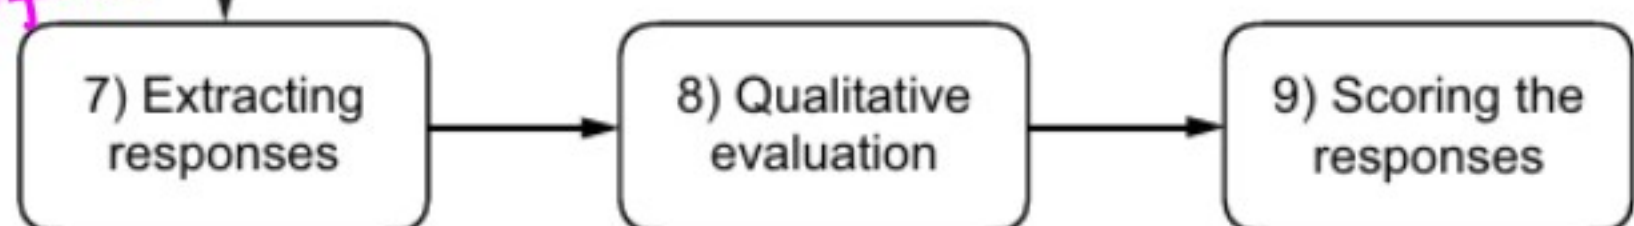

model starts from a knowledgeable state instead of a random initialization.

Figure 7.15 The three-stage process for instruction fine-tuning an LLM. After the dataset preparation, the process of fine-tuning an LLM for instruction-following begins with loading a pretrained LLM, which serves as the foundation for subsequent training.

we will load GPT-2 (355M) model weight

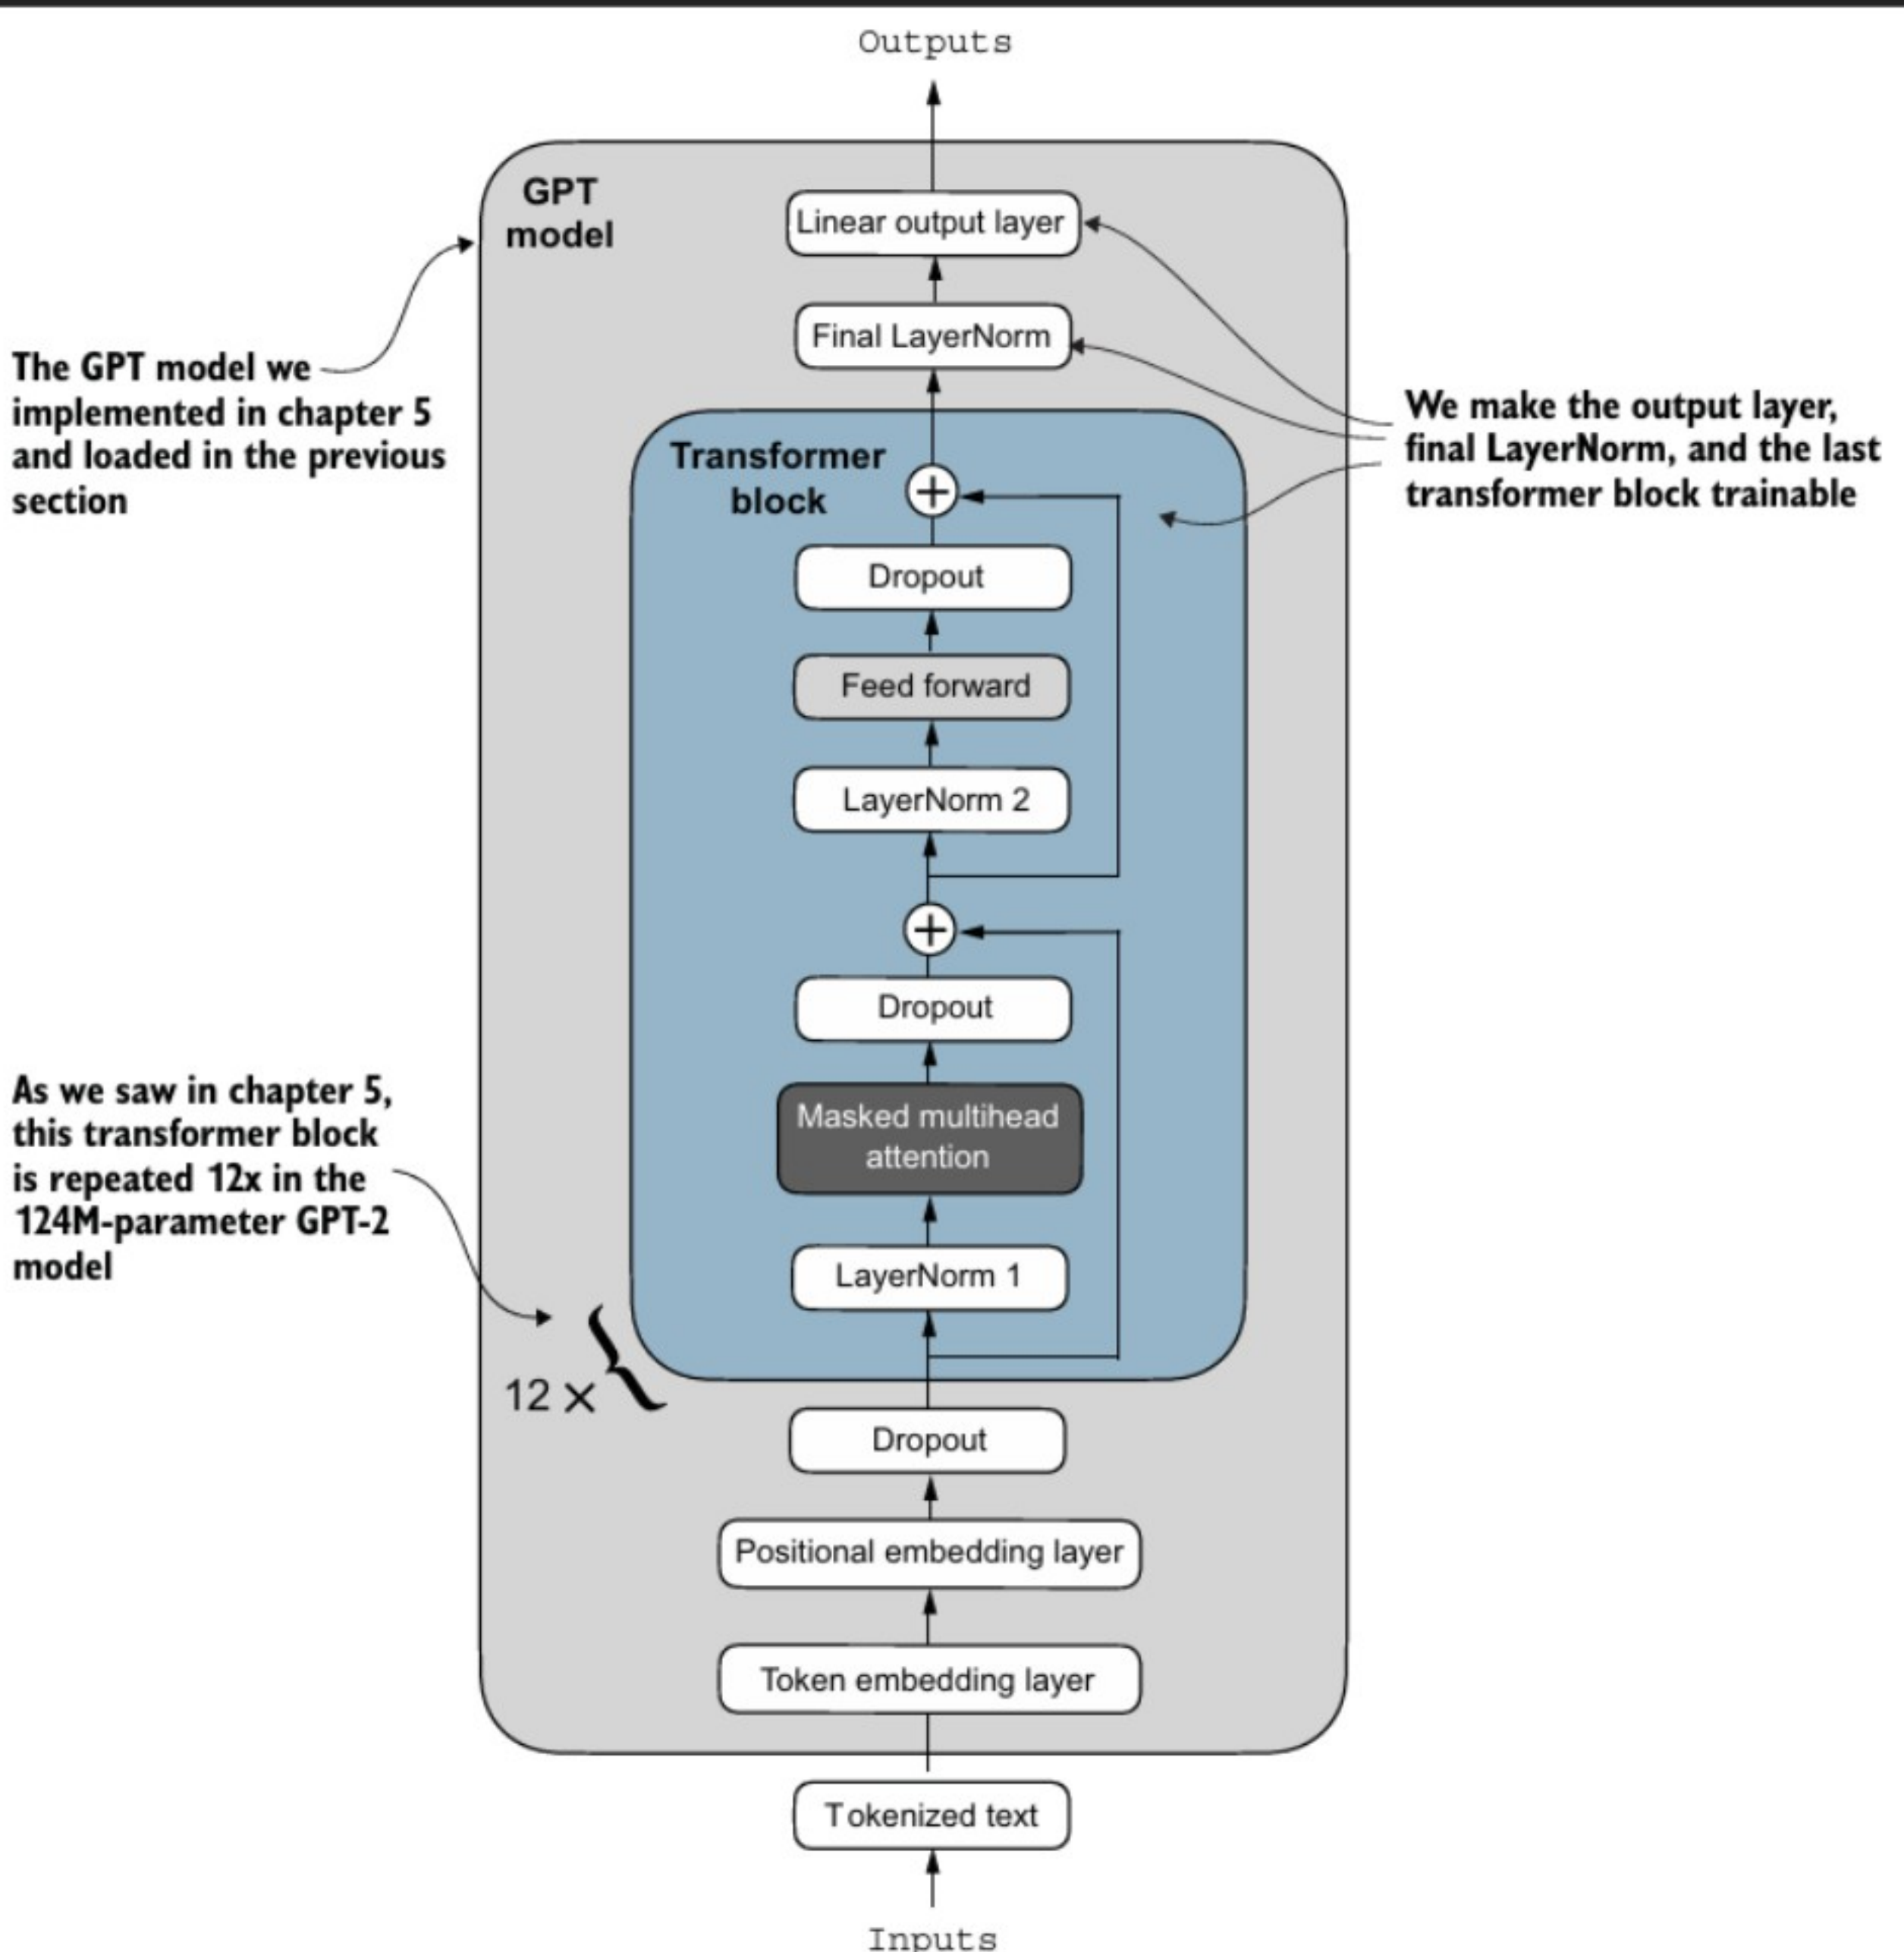


Figure 6.10 The GPT model includes 12 repeated transformer blocks. Alongside the output layer, we set the final LayerNorm and the last transformer block as trainable. The remaining 11 transformer blocks and the embedding layers are kept nontrainable.