



Non-AI compiler workspace: authenticated request-local storage

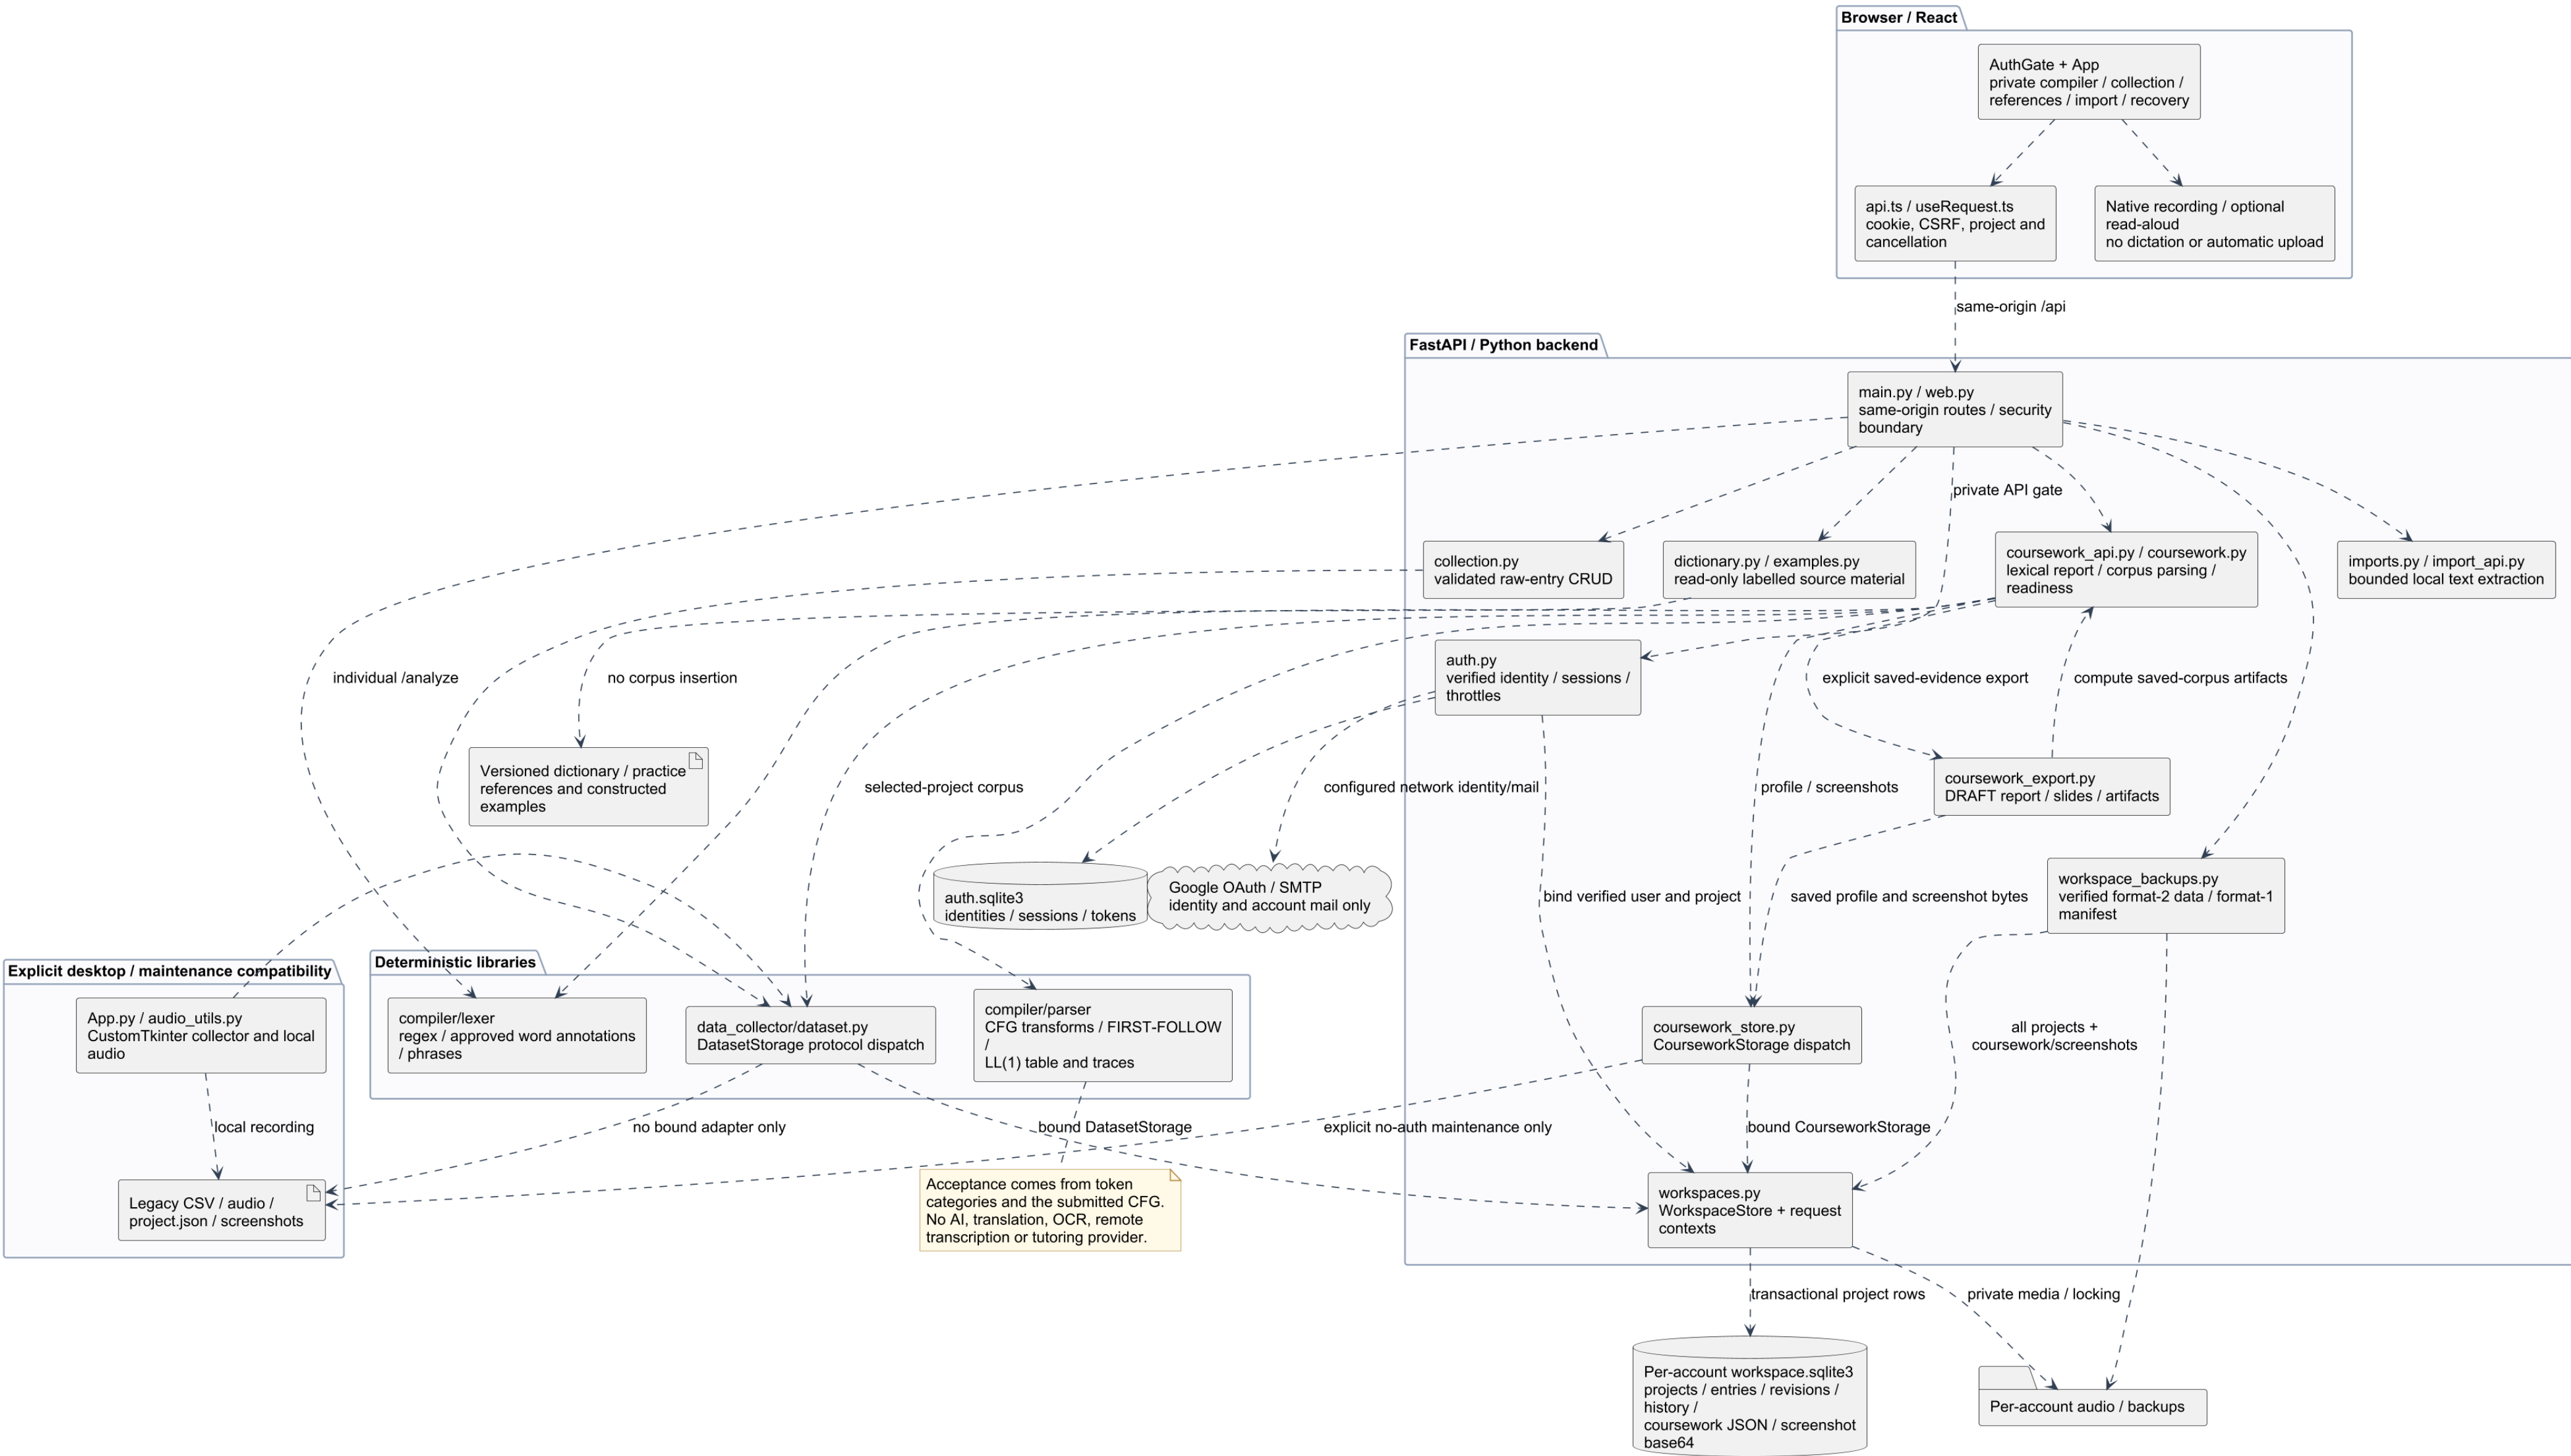


Dashed arrows are dependencies, not associations with invented multiplicities.
Authentication is default; production rejects require_auth=False.
Legacy files are never assigned to a private account automatically.
Coursework ZIPs contain draft deliverables; workspace backups retain audio.
TTS selects only browser-reported localService voices, without remote fallback.
Browser/OS reporting is not an application-level guarantee of all voice/network behavior.

Deployment: one durable host, local compiler, retained identity services

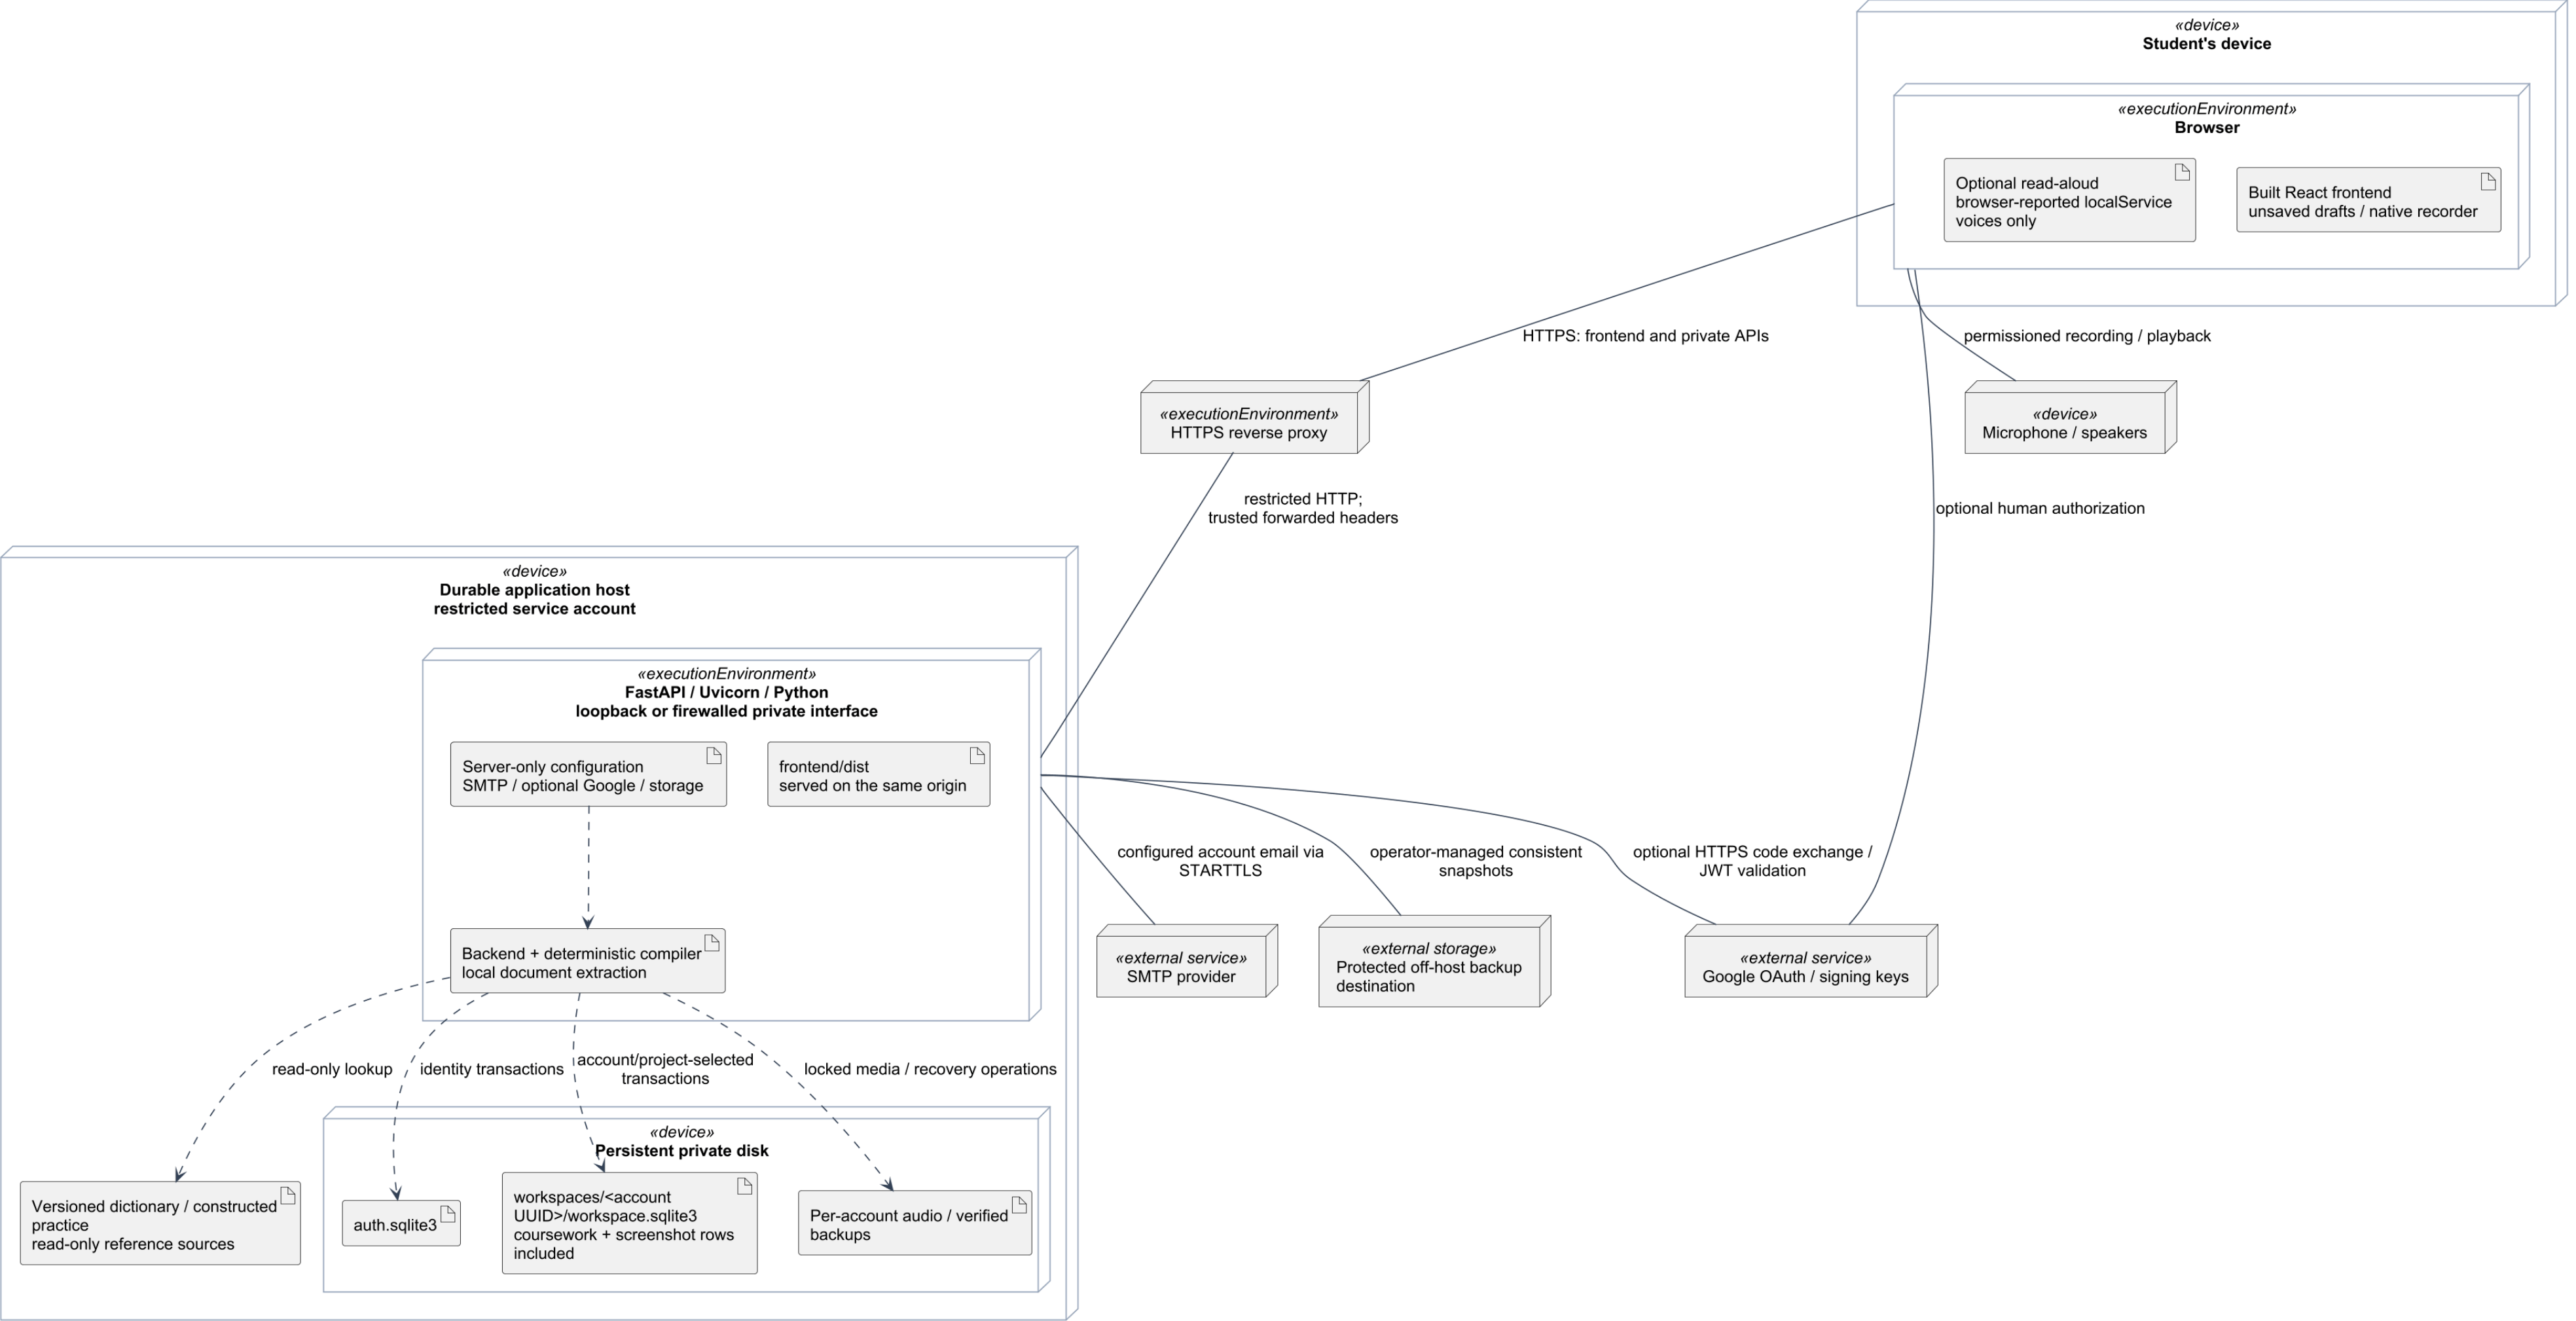


No language-model, OCR or transcription integration exists.
TTS has no remote-voice fallback; the app relies on browser/OS localService reporting.
That reporting is not a guarantee about every underlying browser/OS network behavior.
Google/SMTP are network identity services; local compilation is not a claim of an offline website.
Local development: browser -> loopback FastAPI; no public proxy needed.
Authentication stays enabled; legacy CSV/profile/screenshots are a separate maintenance boundary.
Backup identity/configuration separately from user ZIPs. Account isolation is not E2E encryption.
Do not deploy private SQLite to ephemeral disks or imply a multi-host database cluster.

Assignment user goals and retained identity/recovery

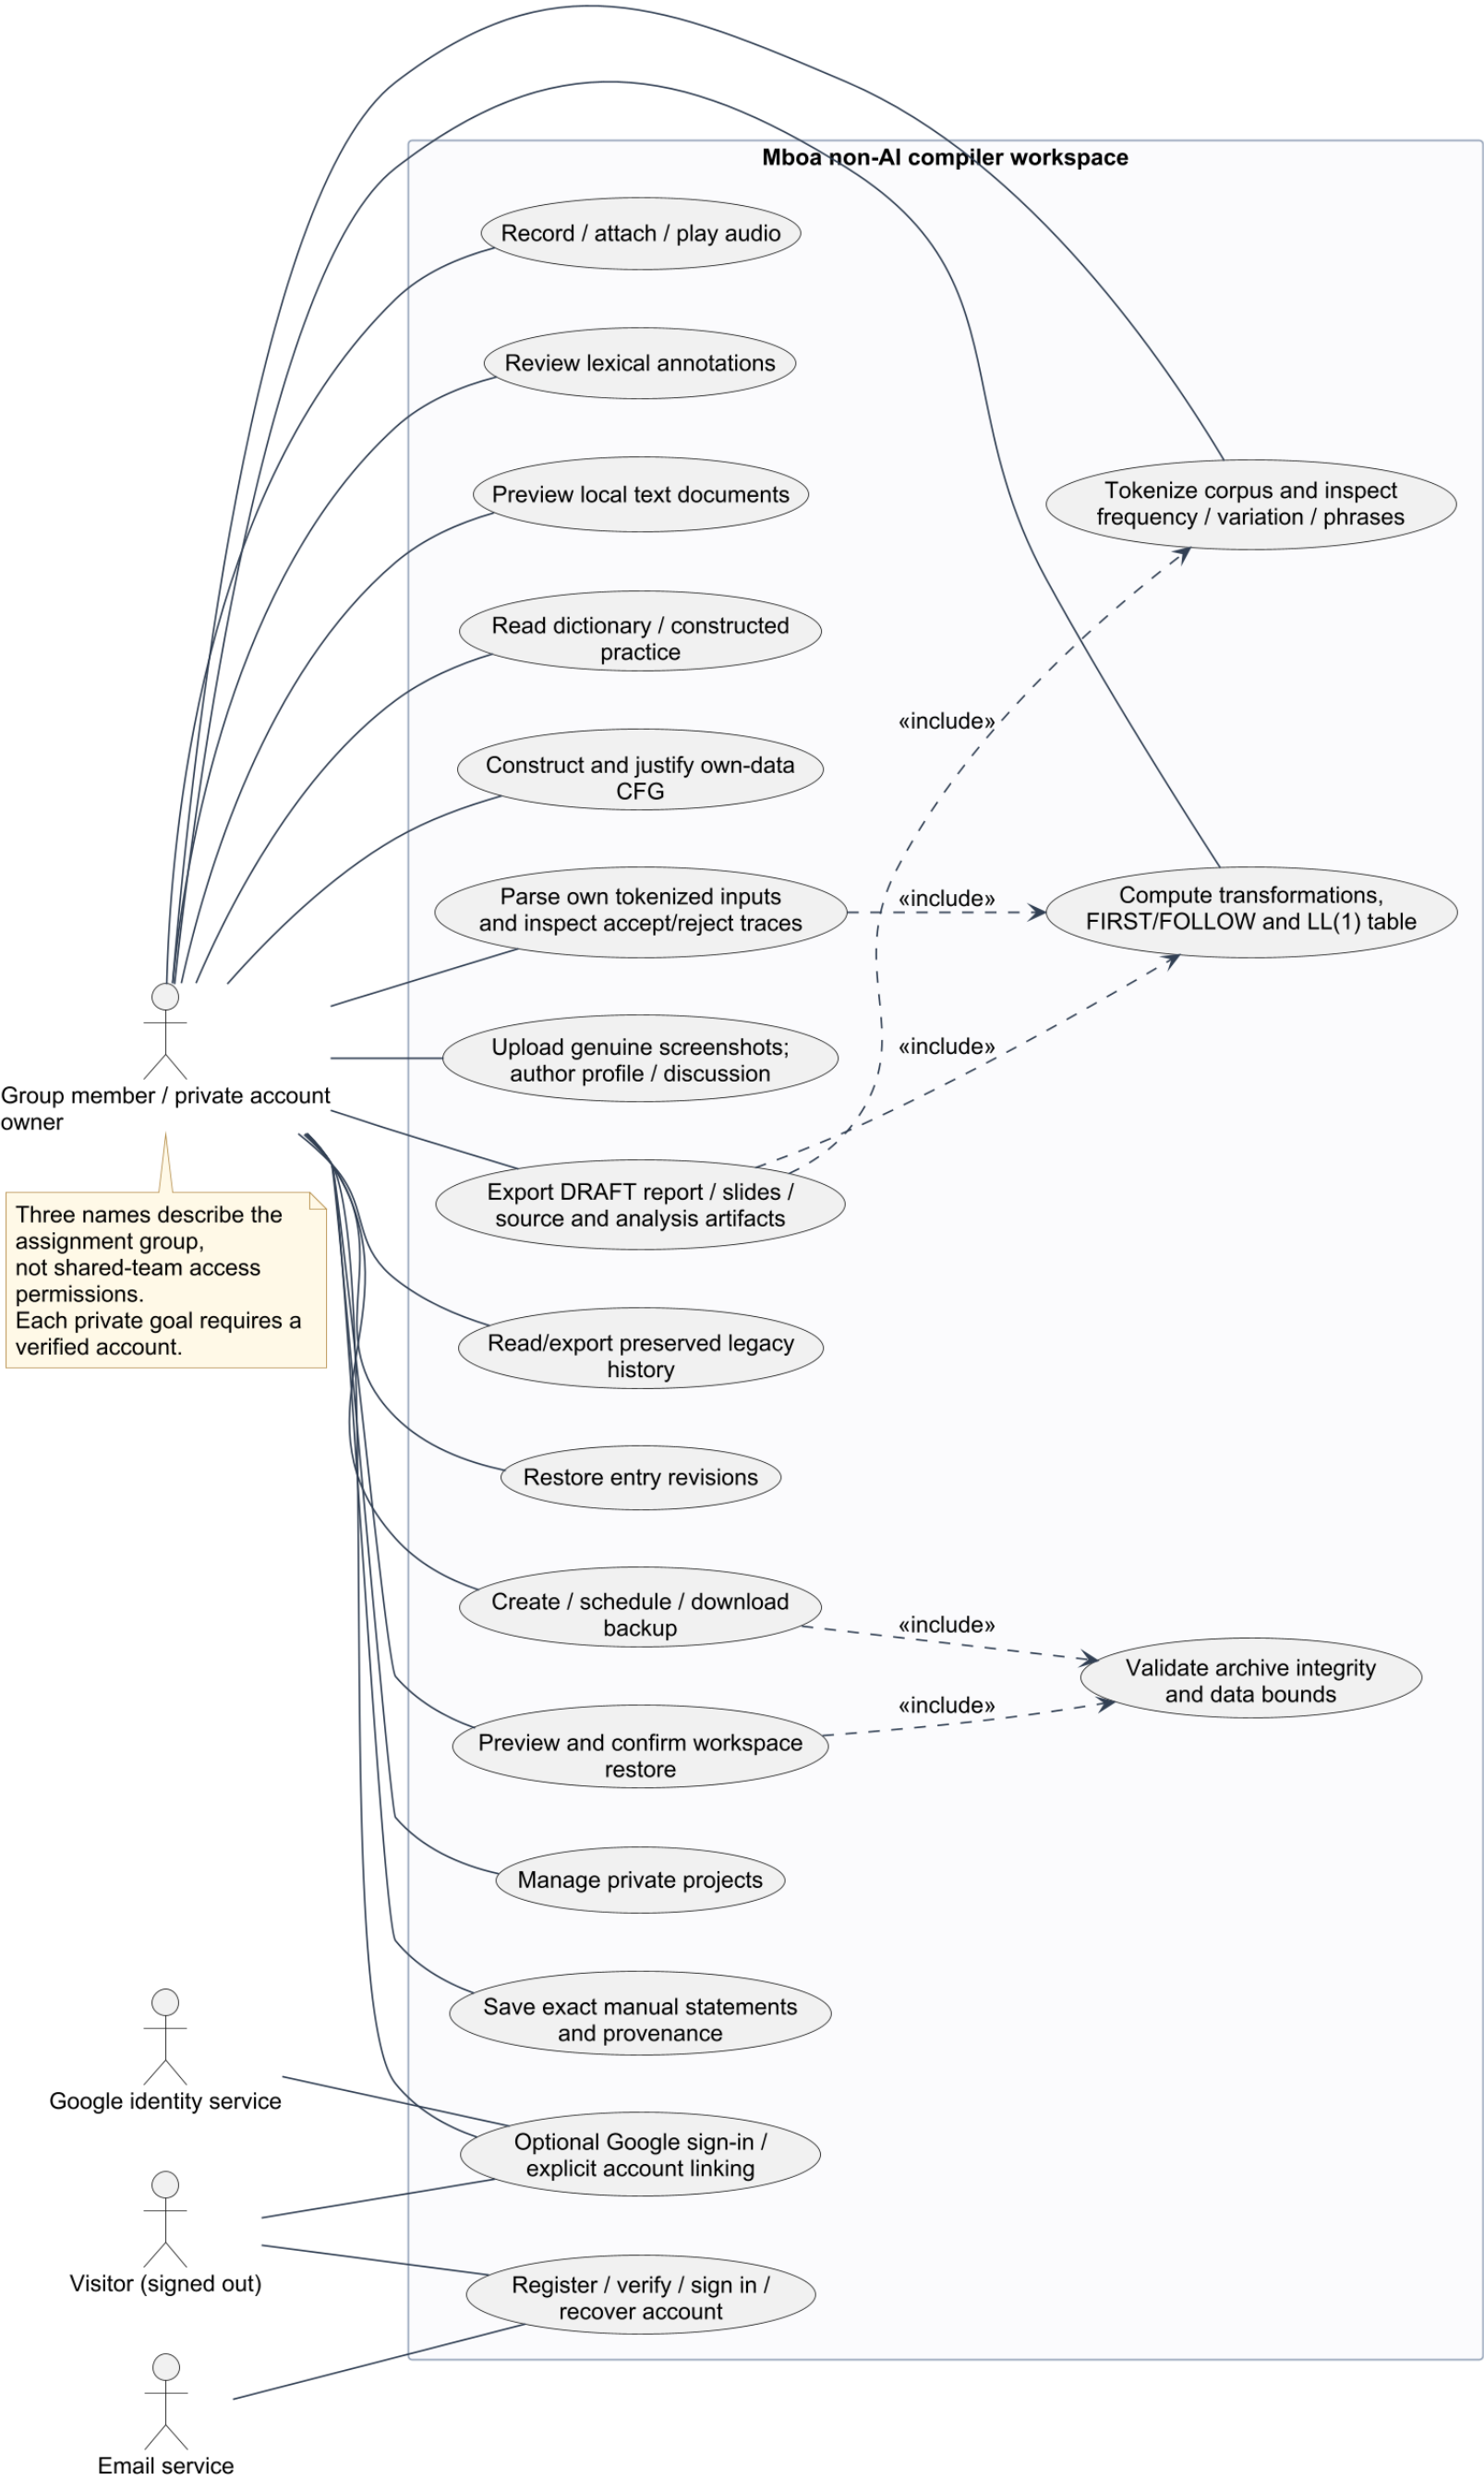


Include points to mandatory reused behavior; no dependency is decorated with cardinalities. Import/reference lookup never automatically saves or authenticates a field statement. Real listening/manual transcription, final pagination and presentation rehearsal remain human work. No AI, translation, chat, OCR, remote transcription or browser dictation use case exists.


Retained private accounts: actual classes and selected operations

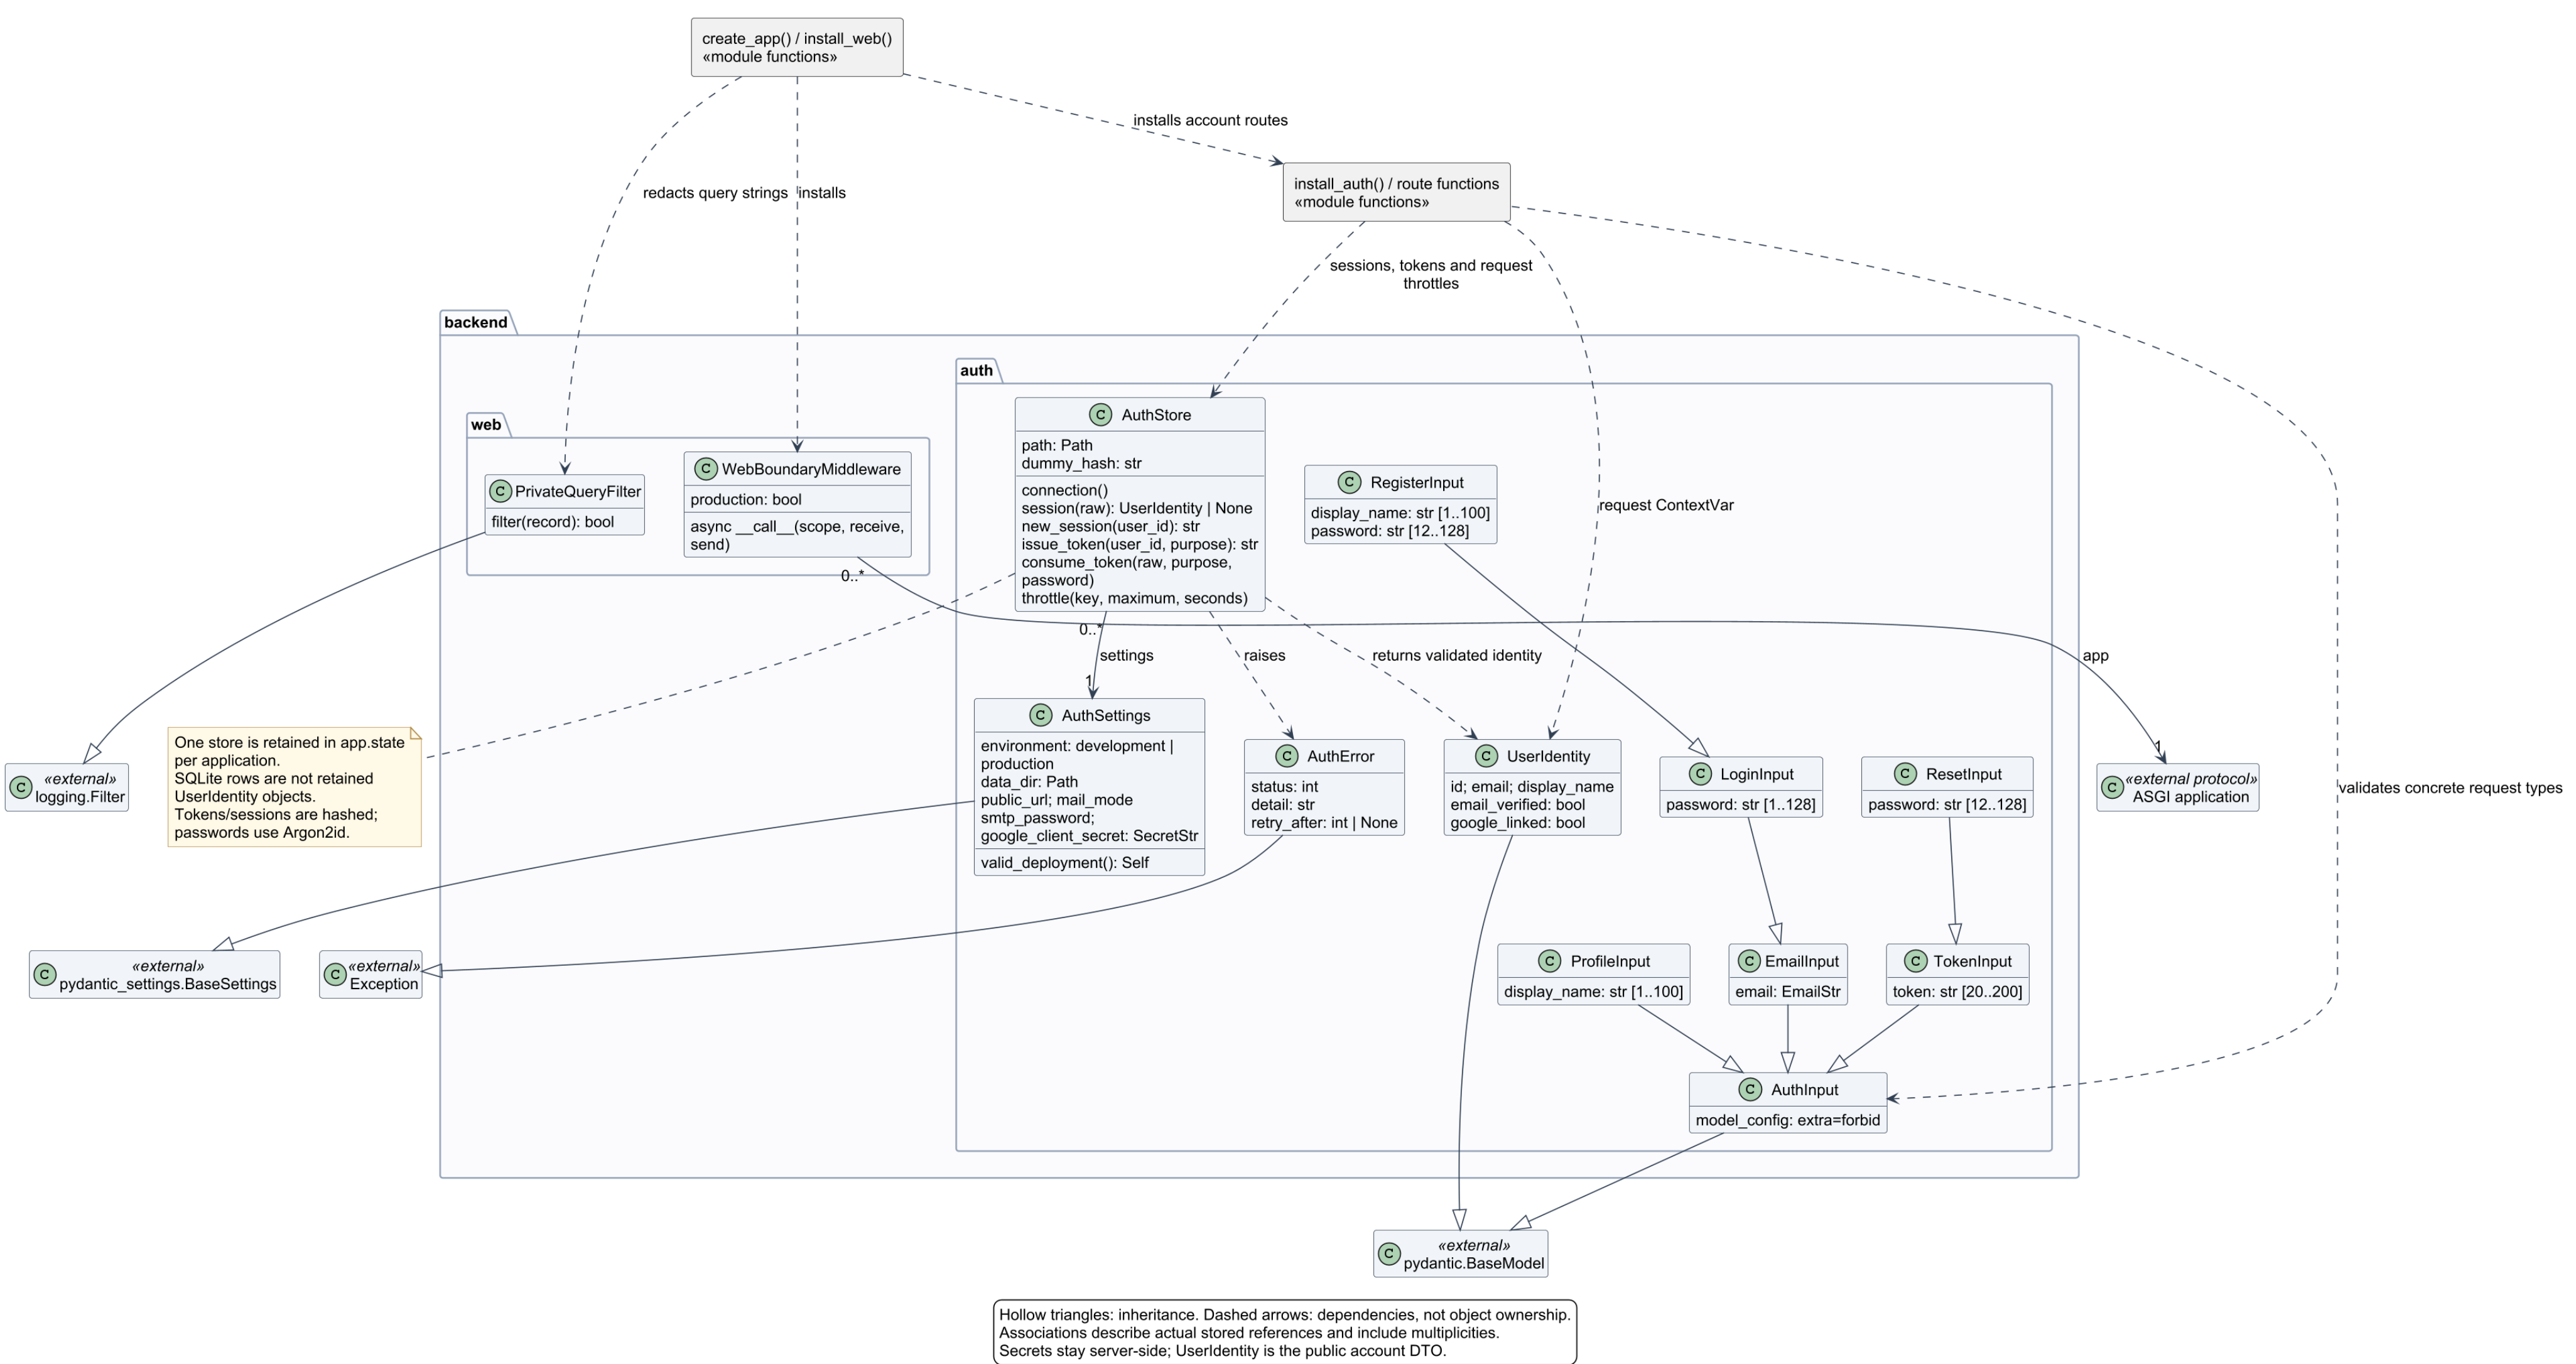

Private projects, coursework, legacy history and recovery

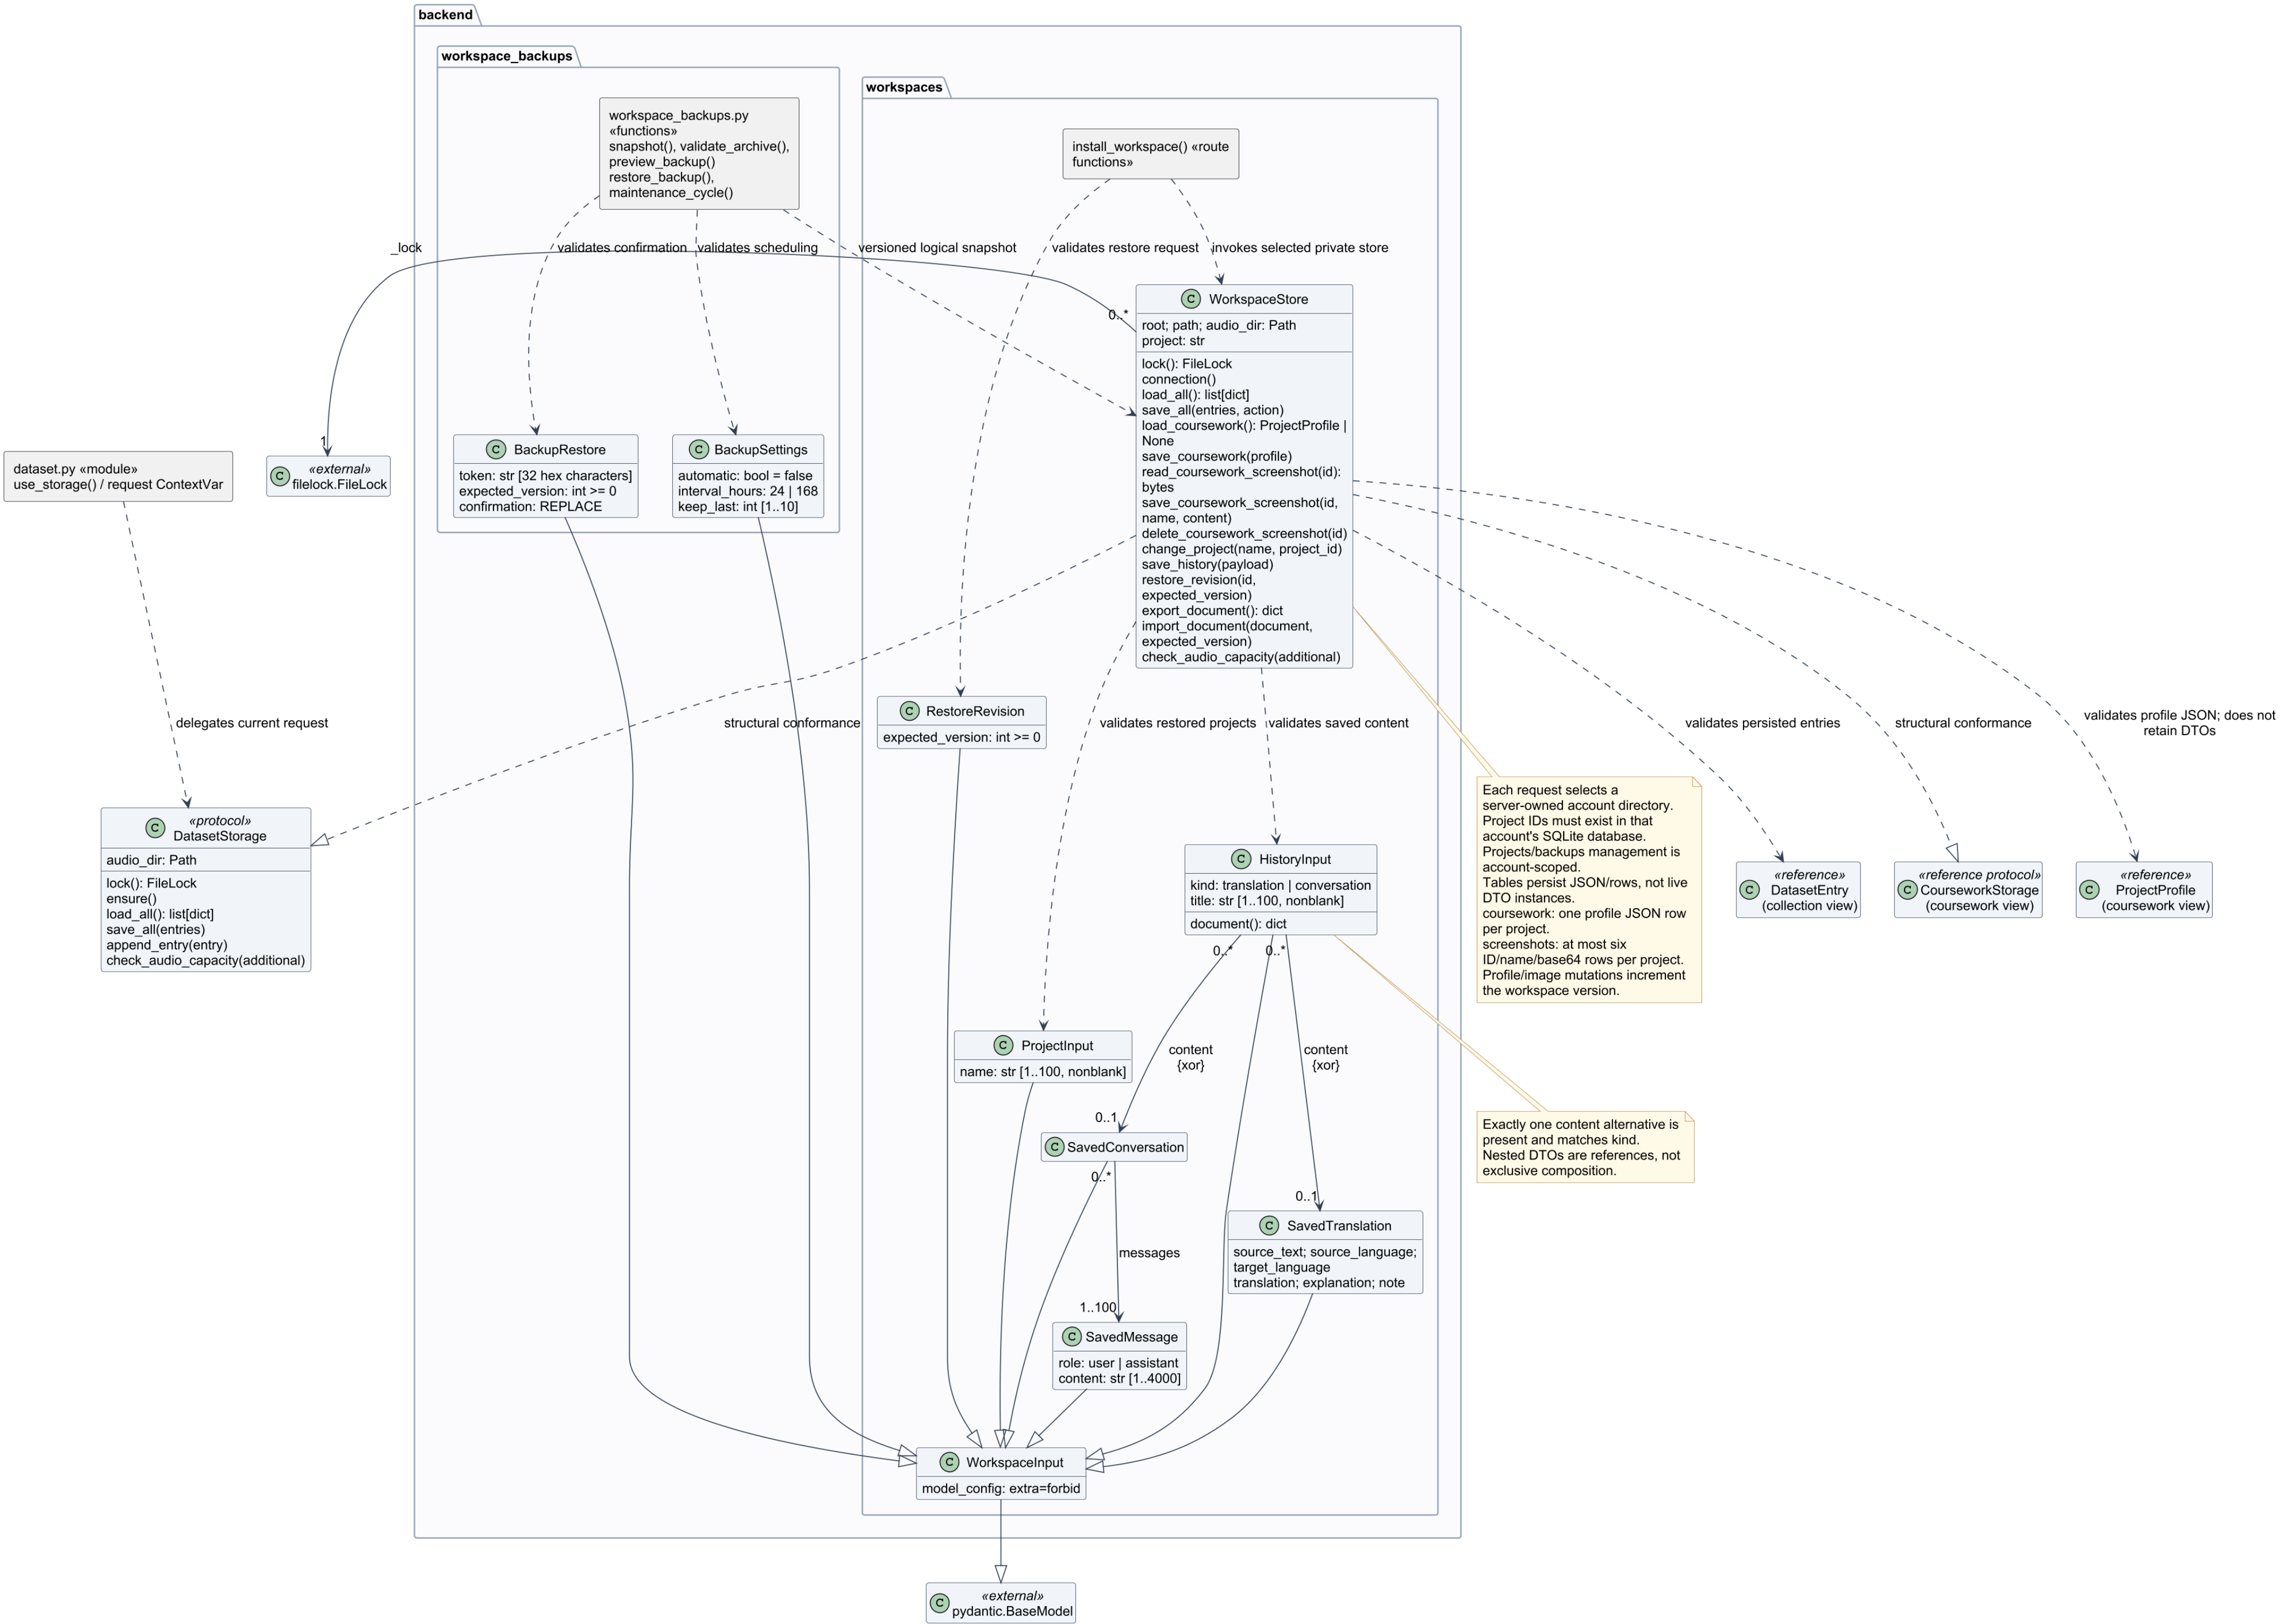


Compiler runtime classes and function modules

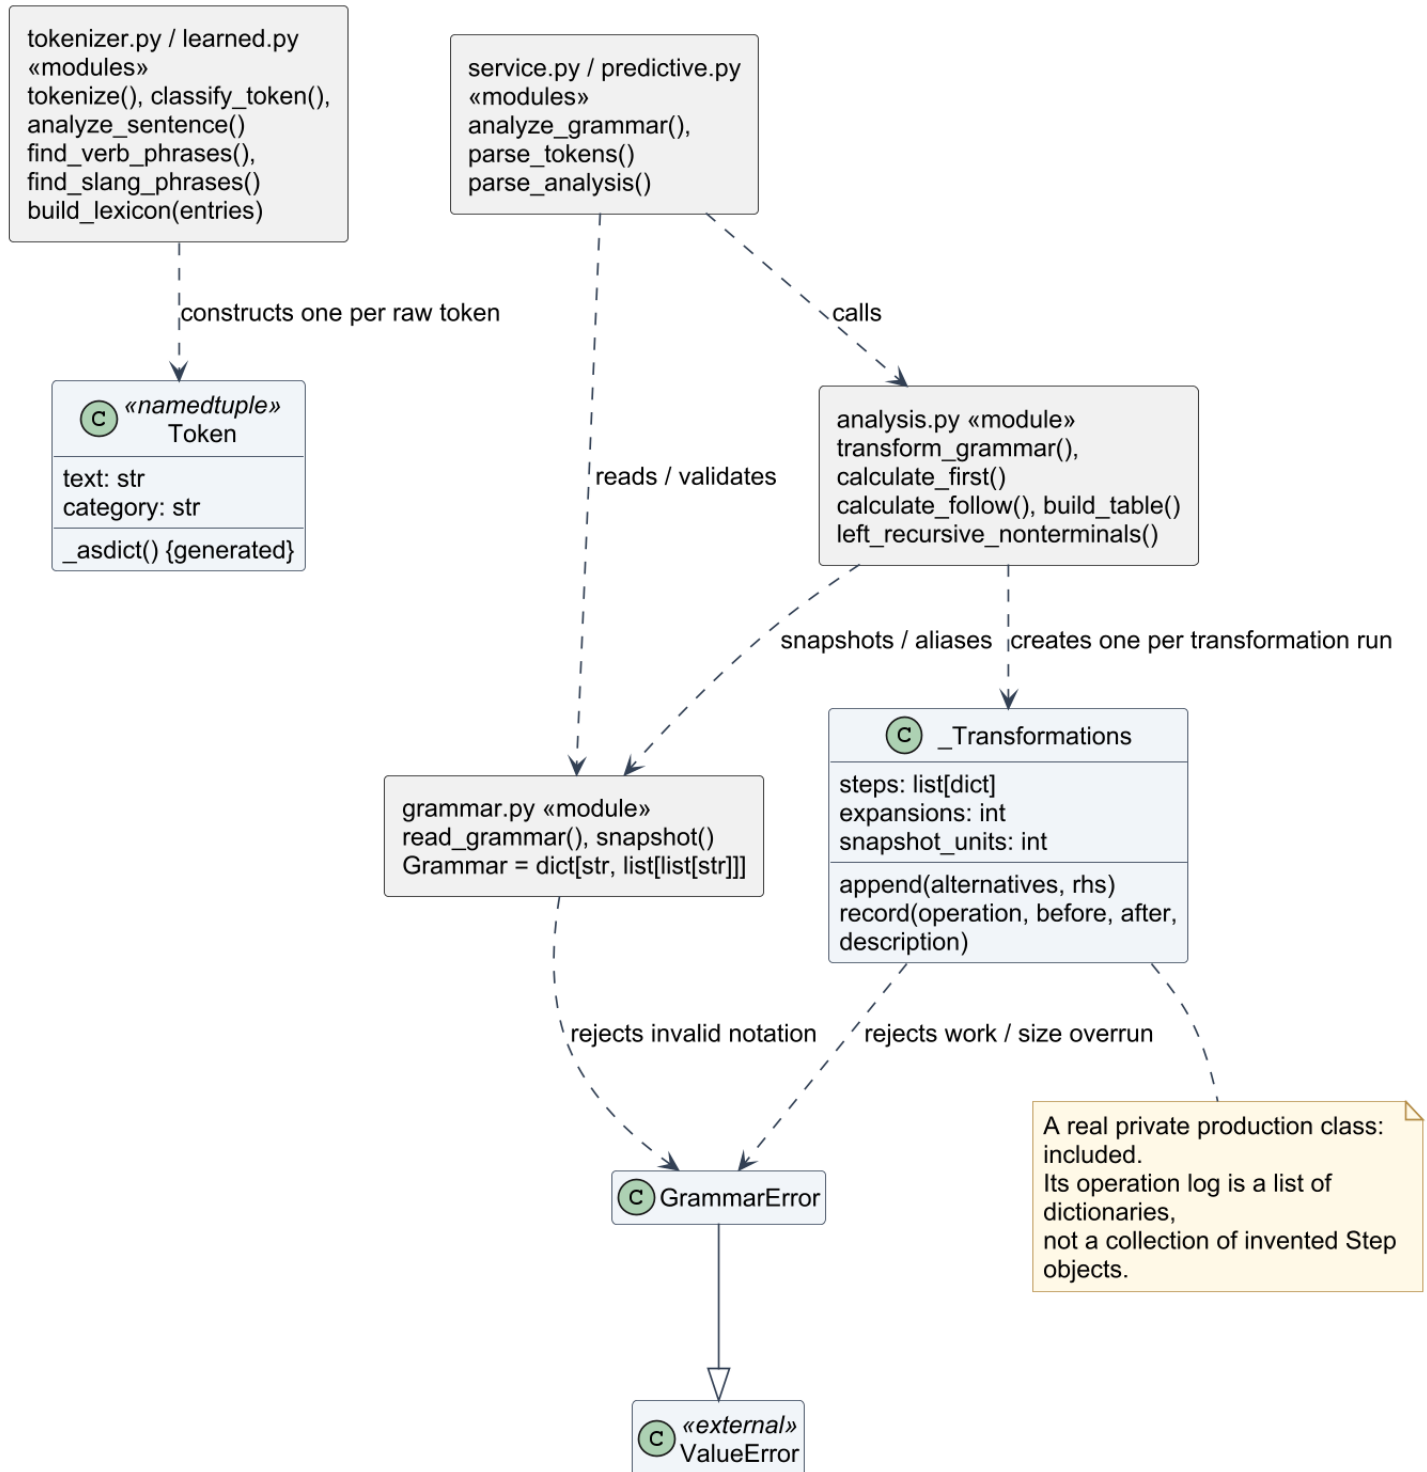

A real private production class:
 included.
 Its operation log is a list of
 dictionaries,
 not a collection of invented Step
 objects.


Token is an application-defined runtime class generated by namedtuple.
 Grammar, Production, analysis results and parse traces are aliases/dictionaries.
 There is no LexerService, Grammar class, Parser class or compiler database.
 Lifetimes of function-local values are not drawn as class compositions.
 Structural/phrase regexes are precompiled; raw text and source-ordered phrase matches are preserved.
 Only the public starter grammar is cached as immutable JSON; each result is decoded afresh.
 Custom grammars, corpus text and reviewed annotations are not cached by that service.

Deterministic analysis request contract

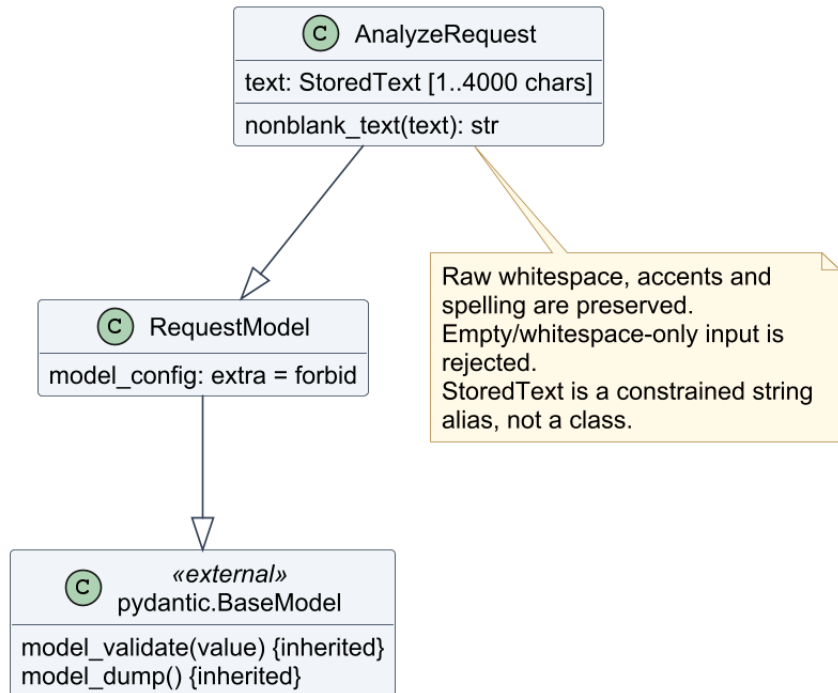


Production classes: `backend.schemas.RequestModel` and `AnalyzeRequest`.
Concrete collection/coursework request subclasses are in their detail views.
Removed translator/chat request classes are not part of the current inventory.

Lexical analysis result values

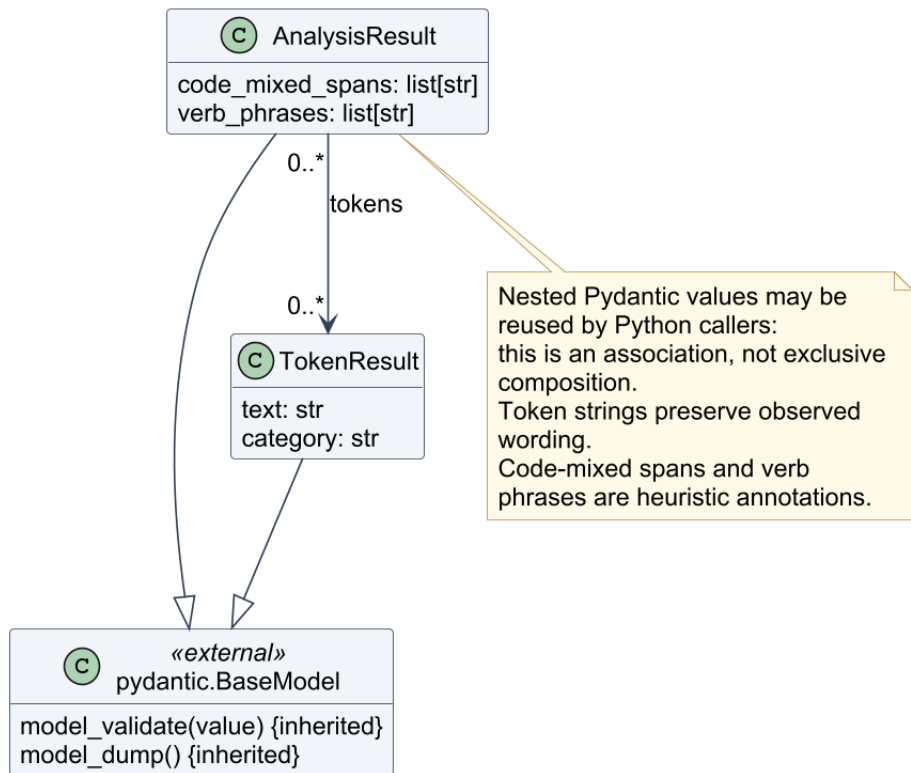


Both primary classes live in `backend.schemas`. Grammar analyses, parse traces and corpus reports are dictionaries, not hidden DTO classes. No translation, provider-evidence or generated-reply classes remain.

Private manual collection and read-only reference DTOs

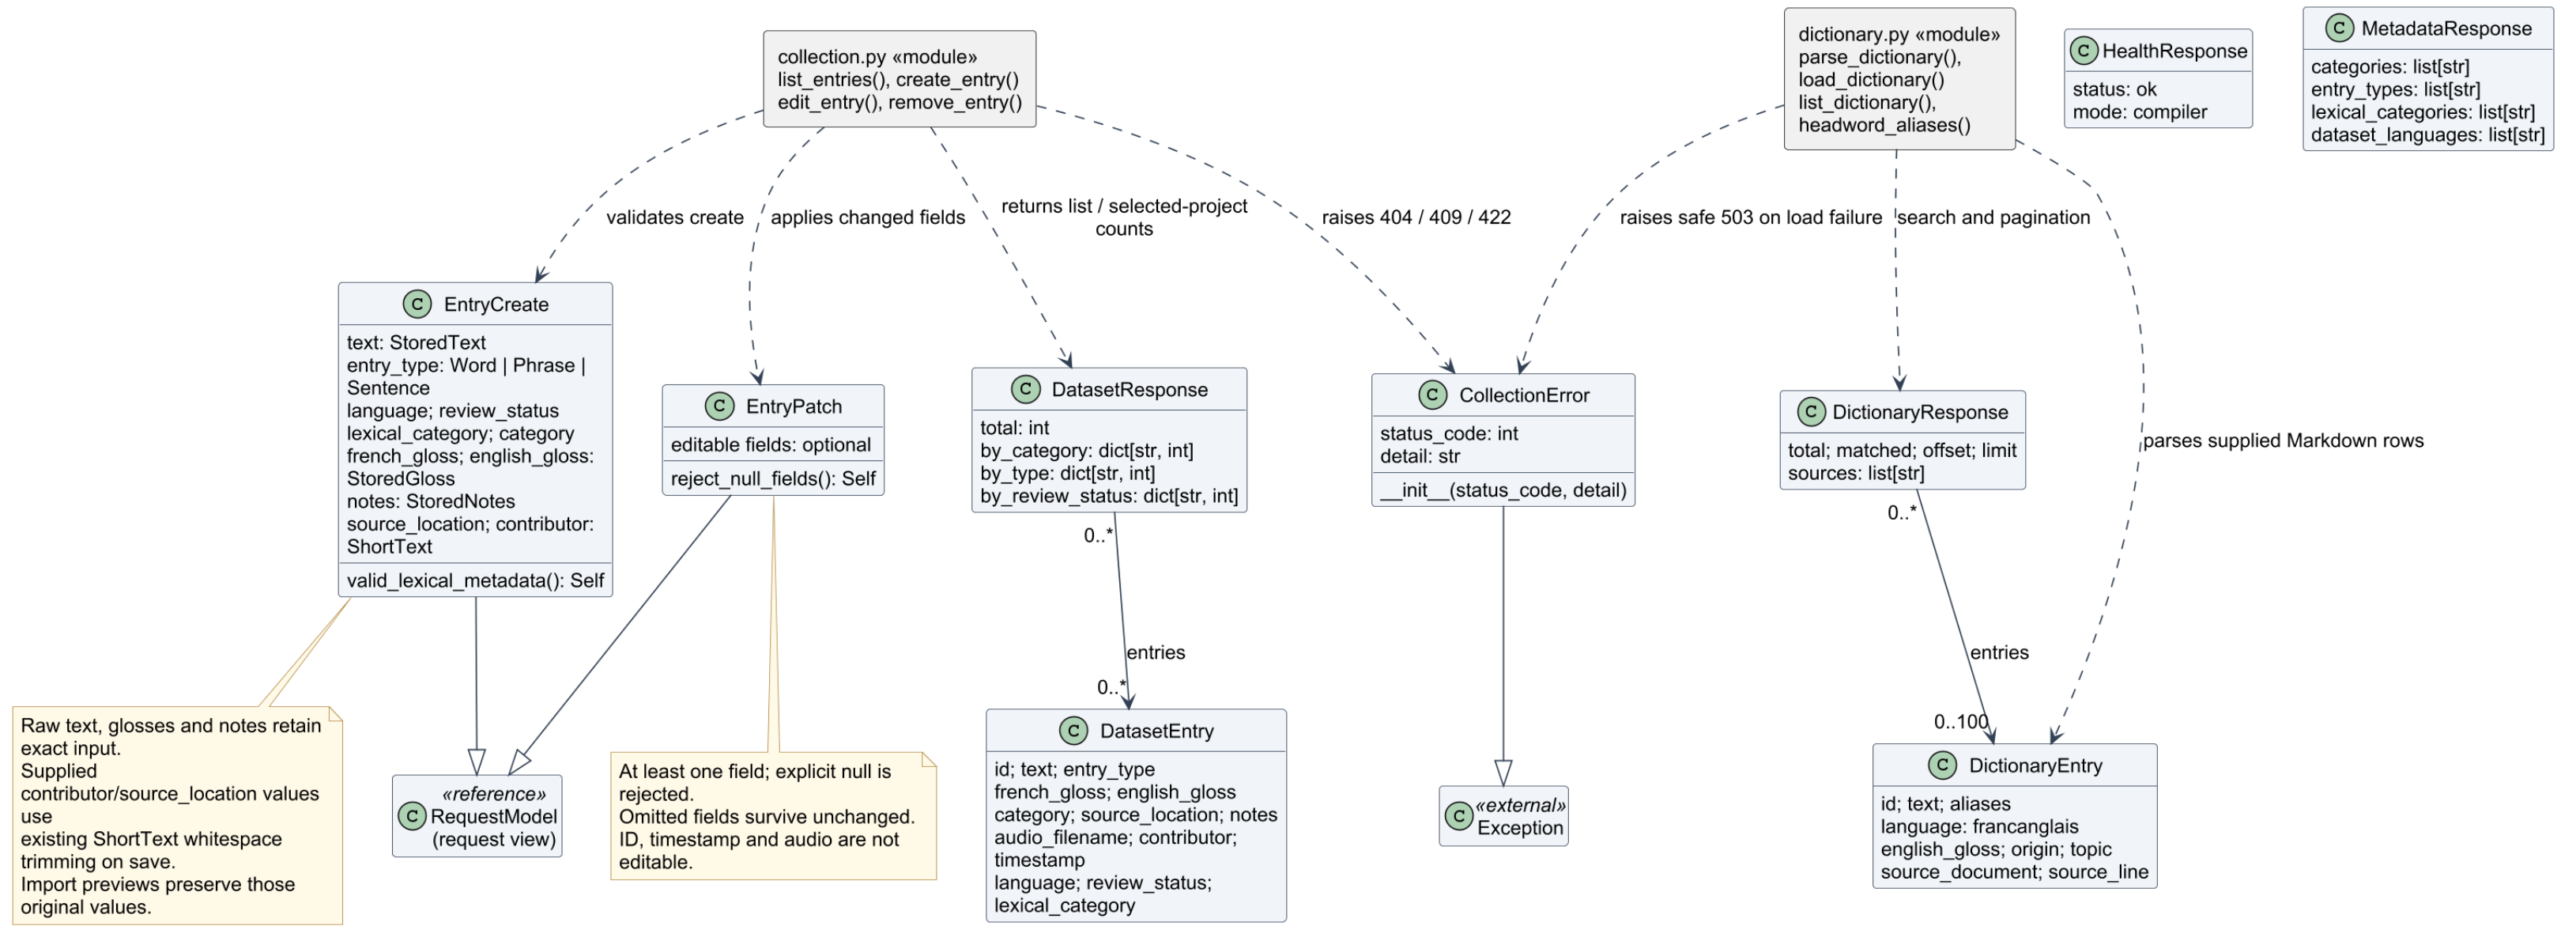


Local imports, private coursework and constructed practice

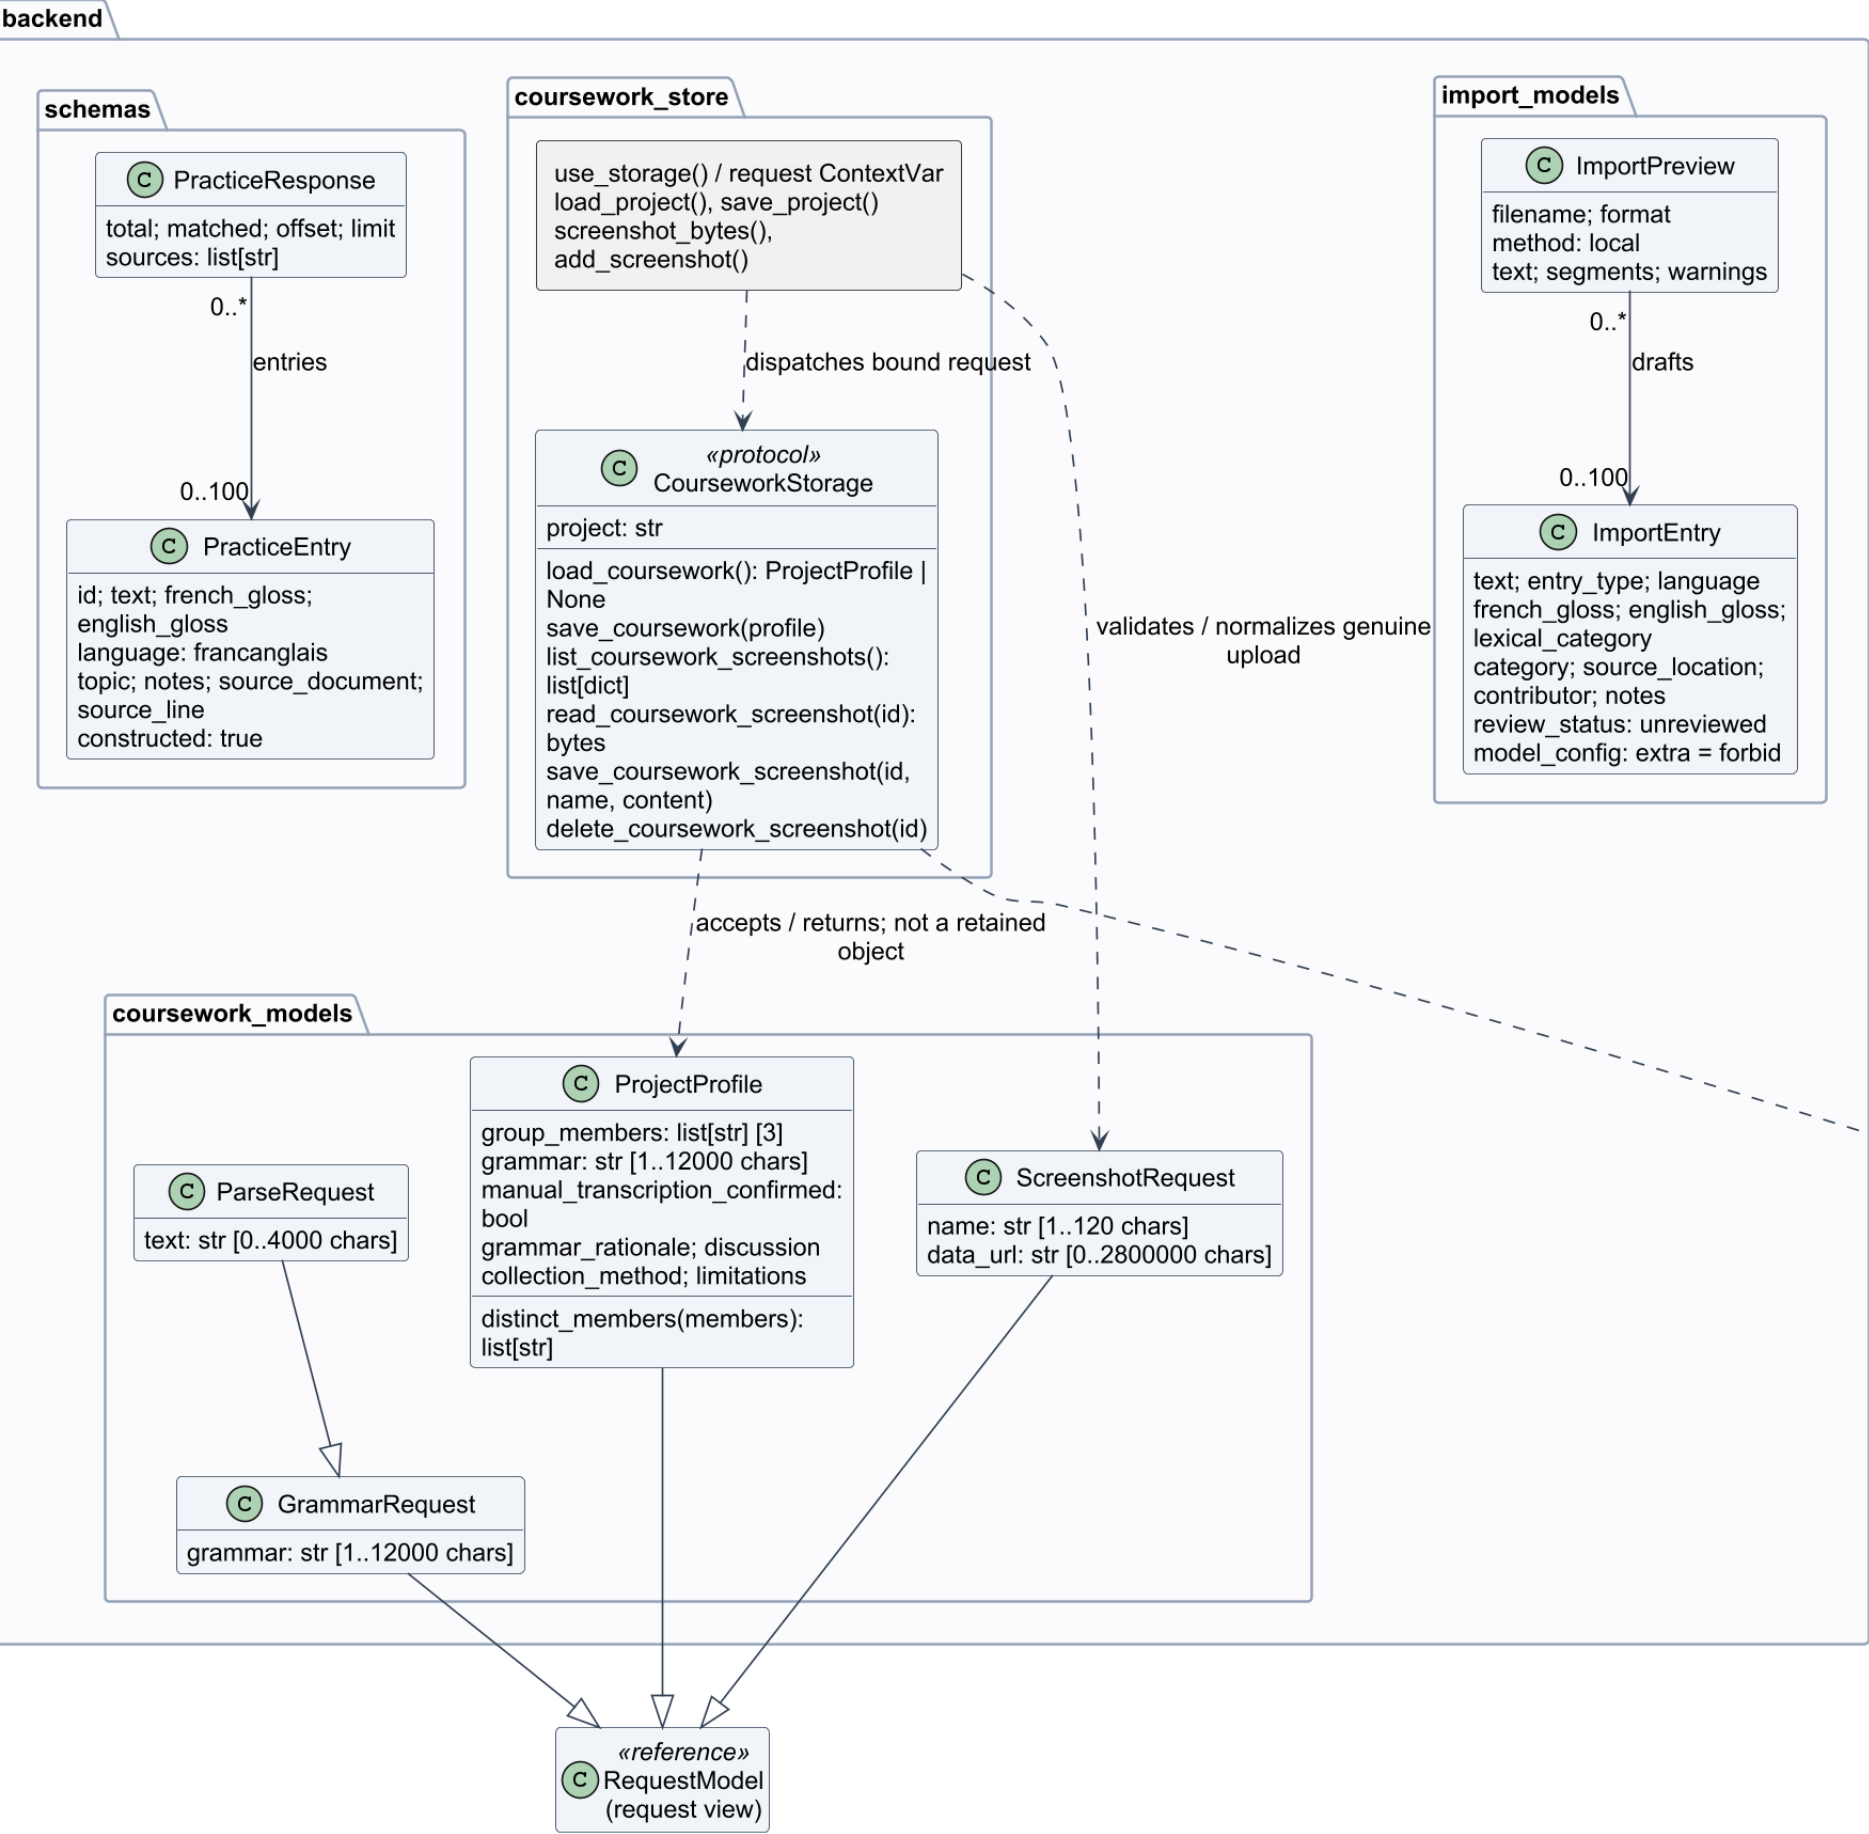


WorkspaceStore structurally implements this protocol. Normal requests never read the legacy global profile/screenshots. Screenshots are rows/bytes, not an invented Screenshot class.

Import/practice DTOs directly extend BaseModel; serialization methods are inherited. Three member strings may be blank initially; nonblank names must be distinct. ImportEntry never accepts an approved status. No suggestion/generation model exists. Preview provenance stays unchanged; only a collection save trims short contributor/location fields. Screenshot limits: 6/project, 2 MiB decoded/normalized, 12 MP; JSON route cap 3 MiB. Reference/practice records do not silently become field statements.

Runtime configuration and actual function boundaries

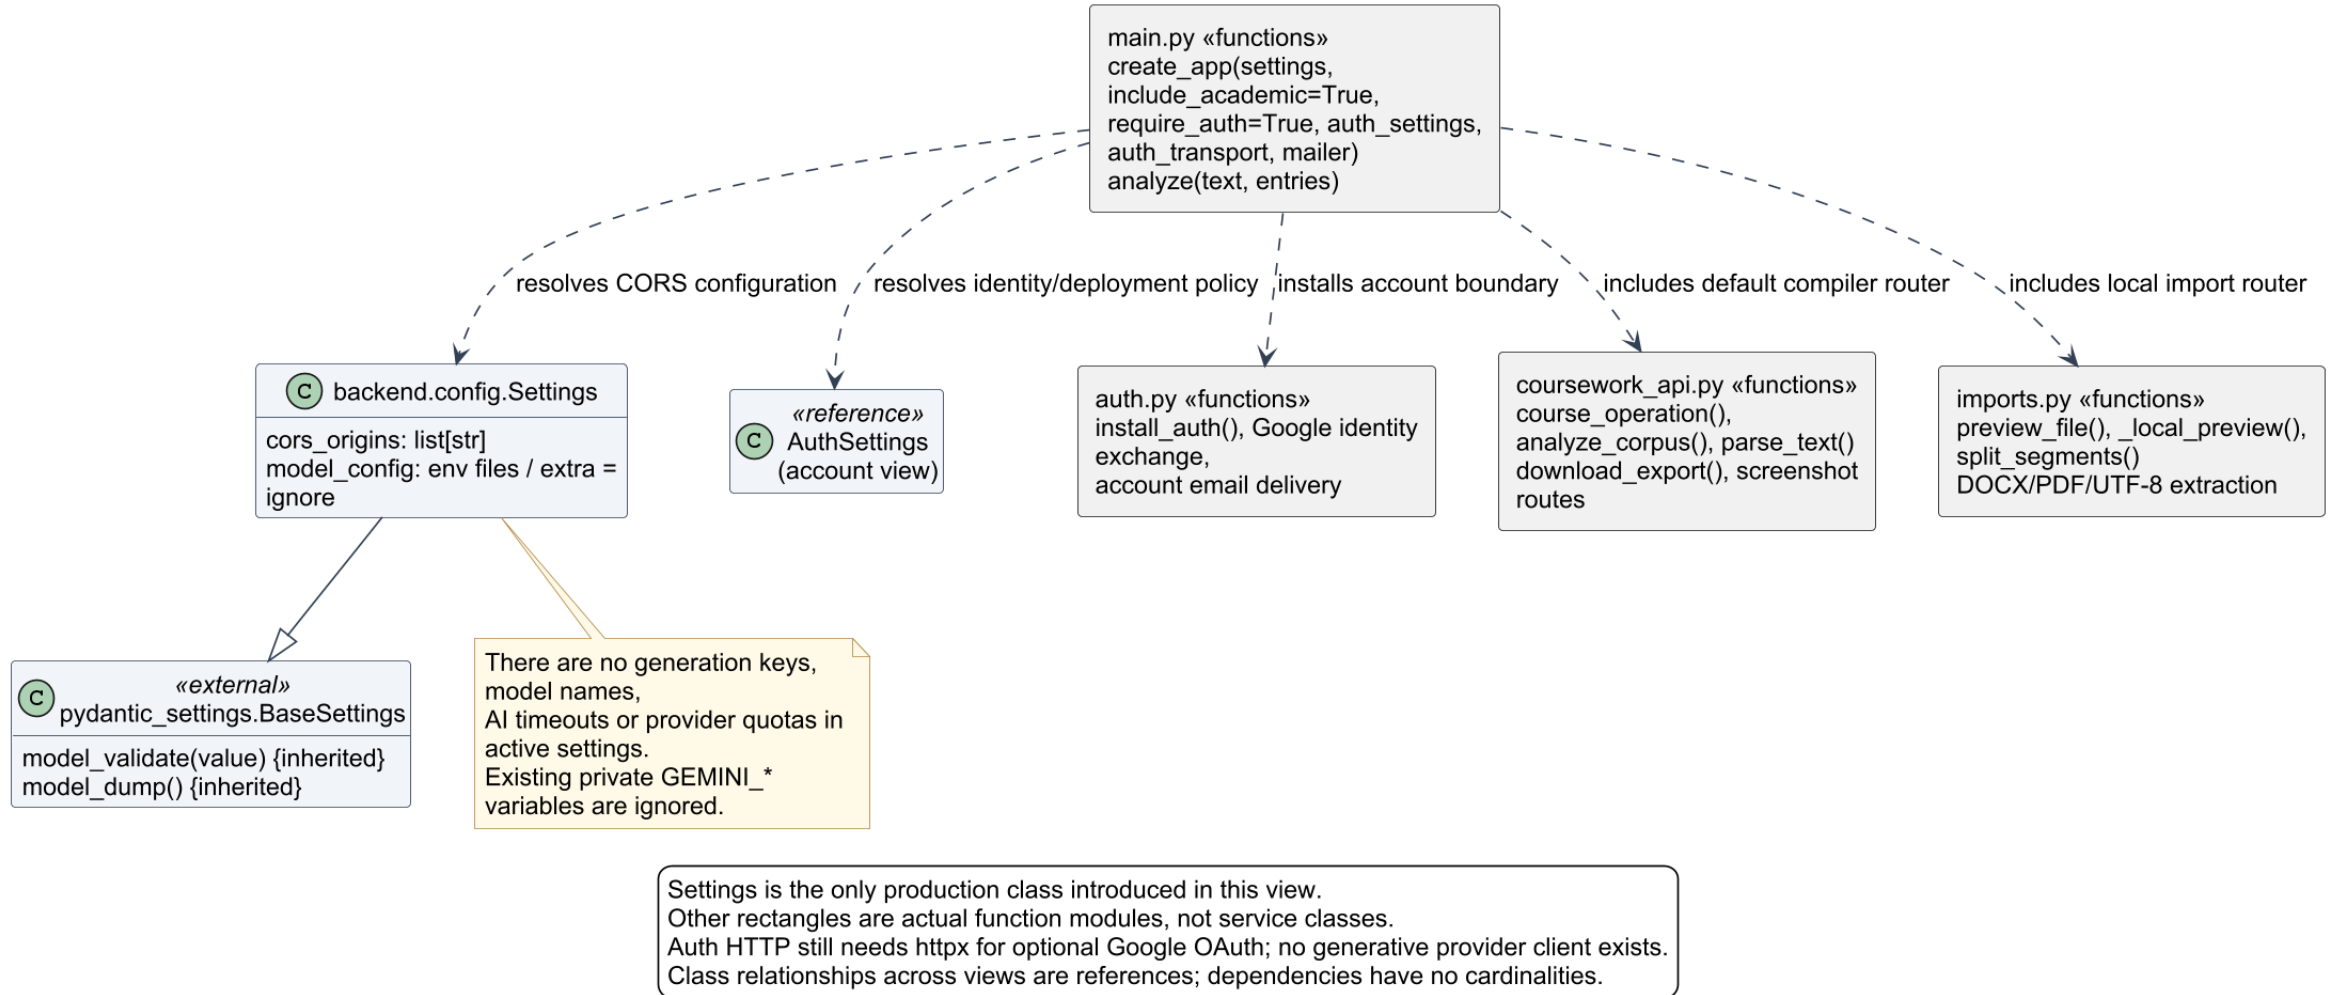


Non-AI frontend: one runtime class, function components and hooks

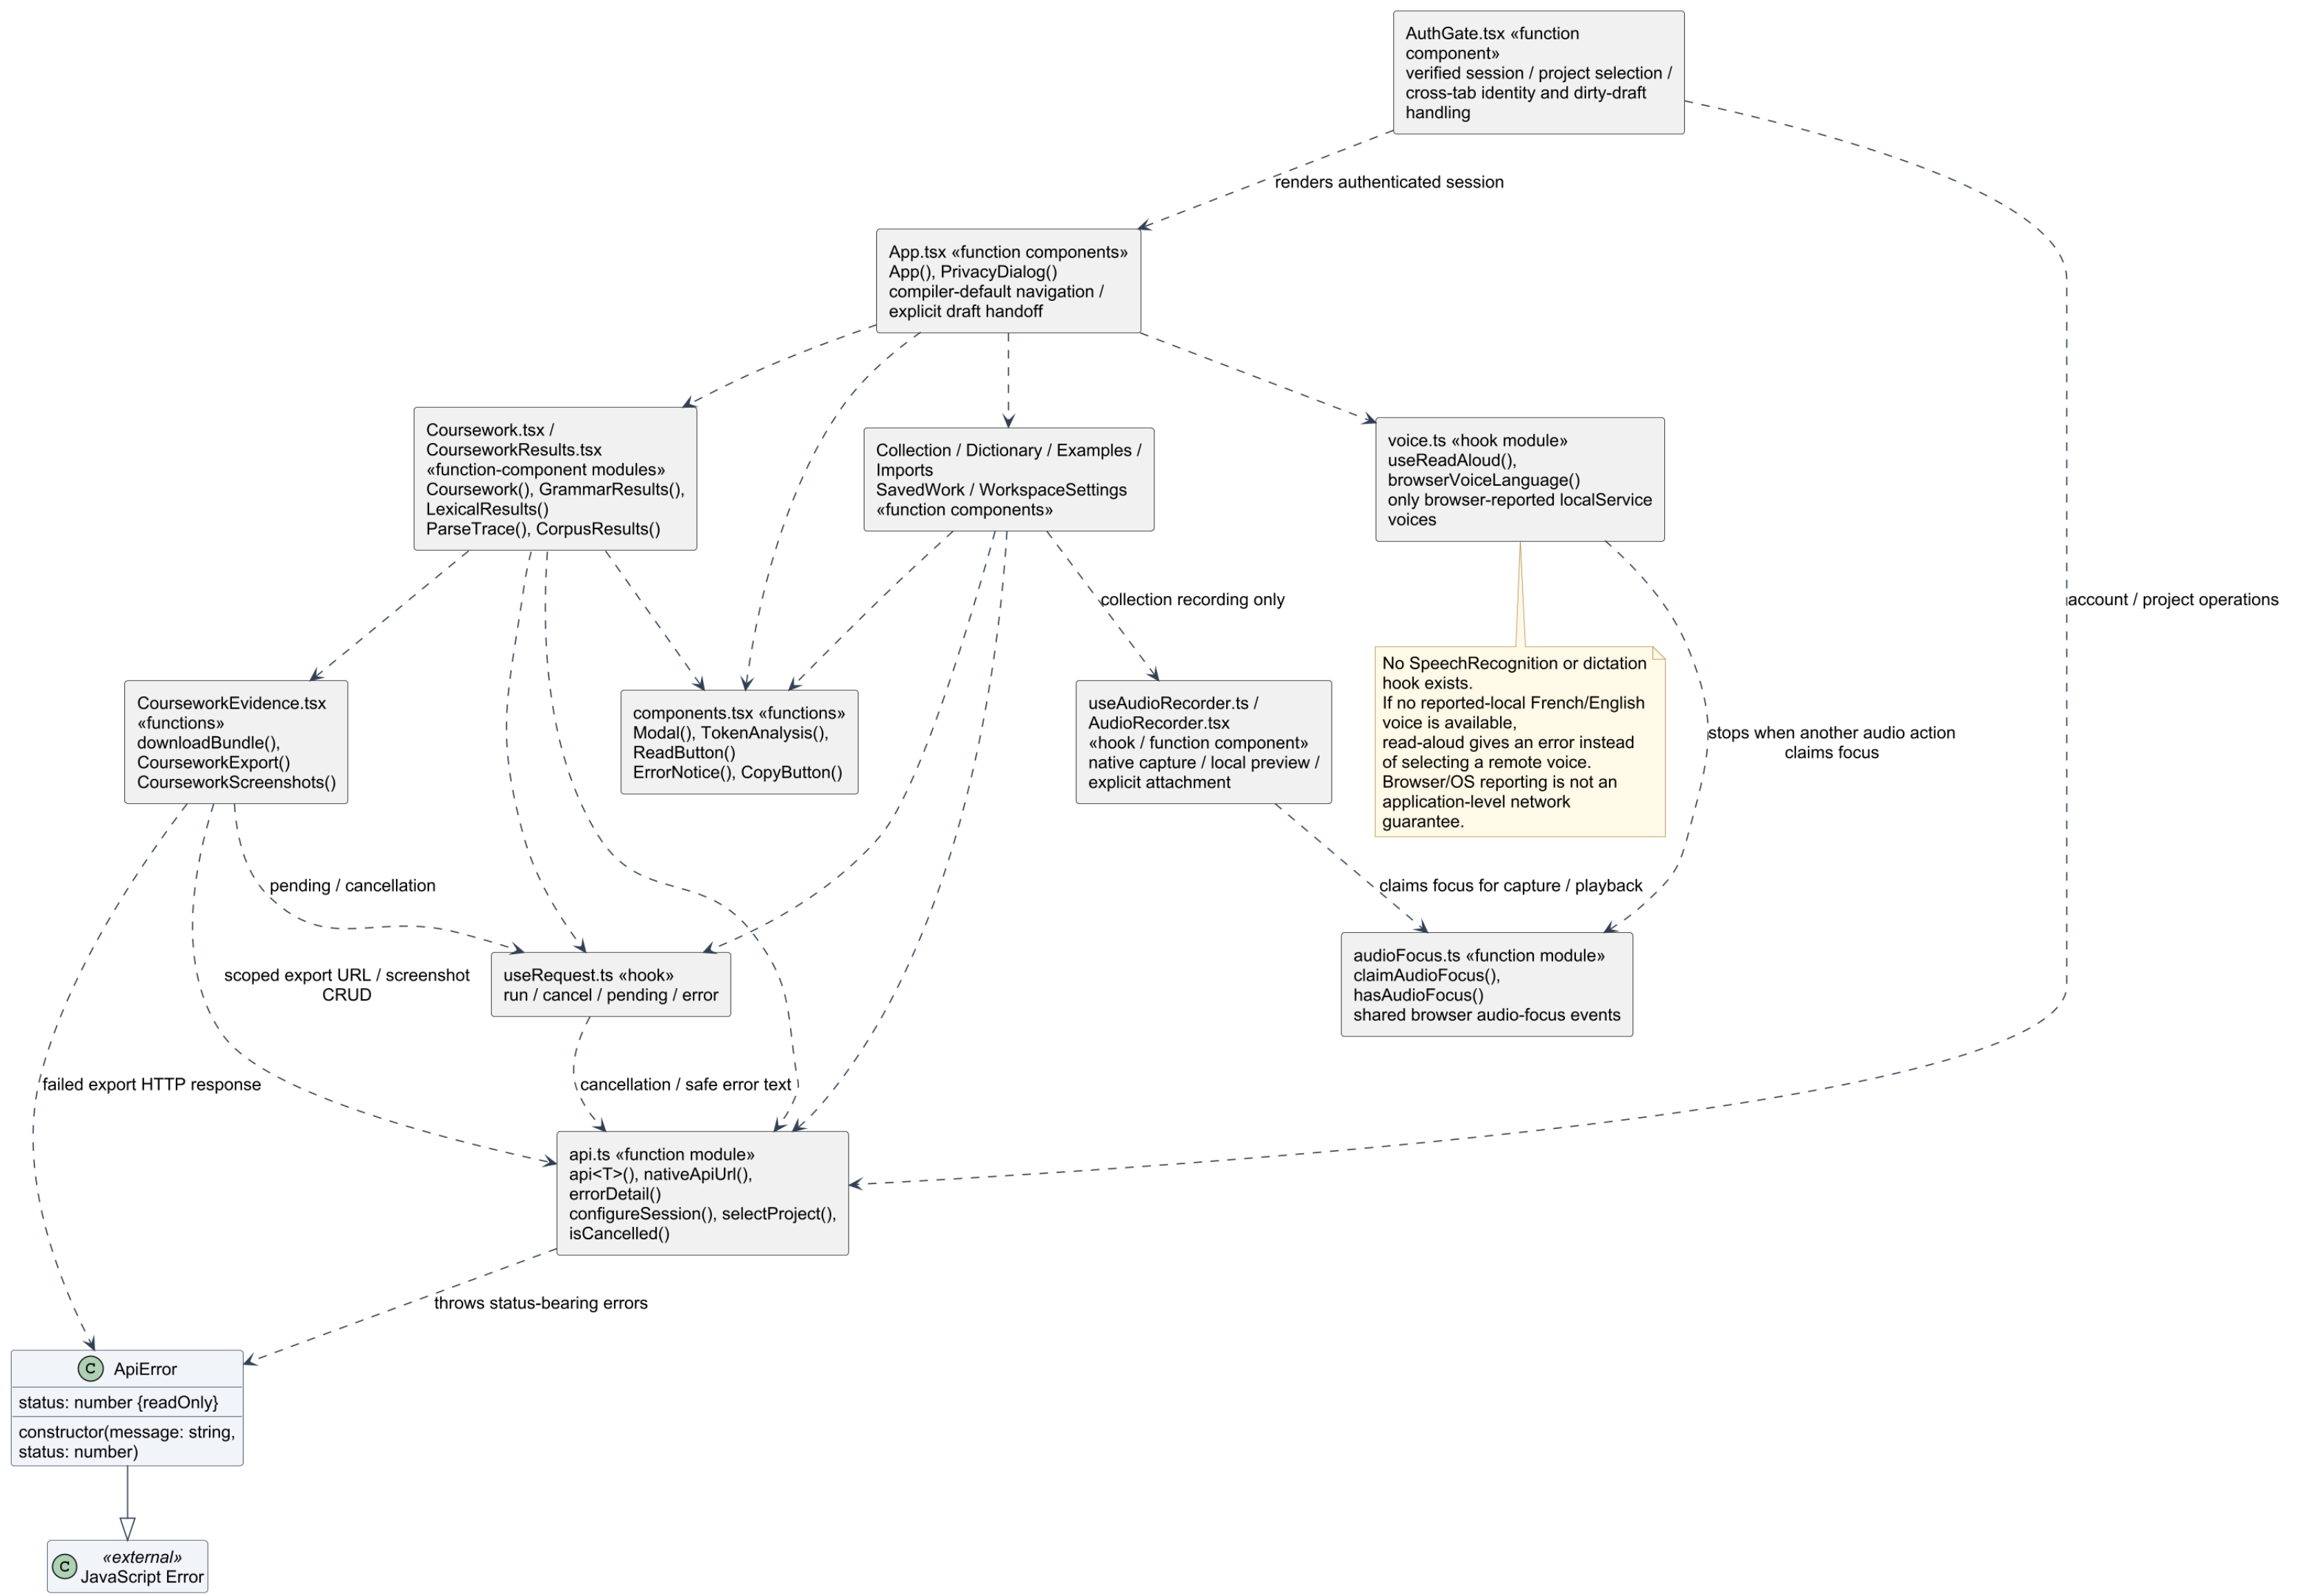


frontend.src.api.ApiError is the authored runtime class.
Interfaces/types, including recorder state shapes, are erased and not invented classes.
Rectangles show dependencies, not object ownership or associations with multiplicities.
Coursework is the default product. History preserves legacy data without generation.
API generation guards prevent older account/project responses replacing current state.

Preserved desktop compatibility: actual classes and audio ownership

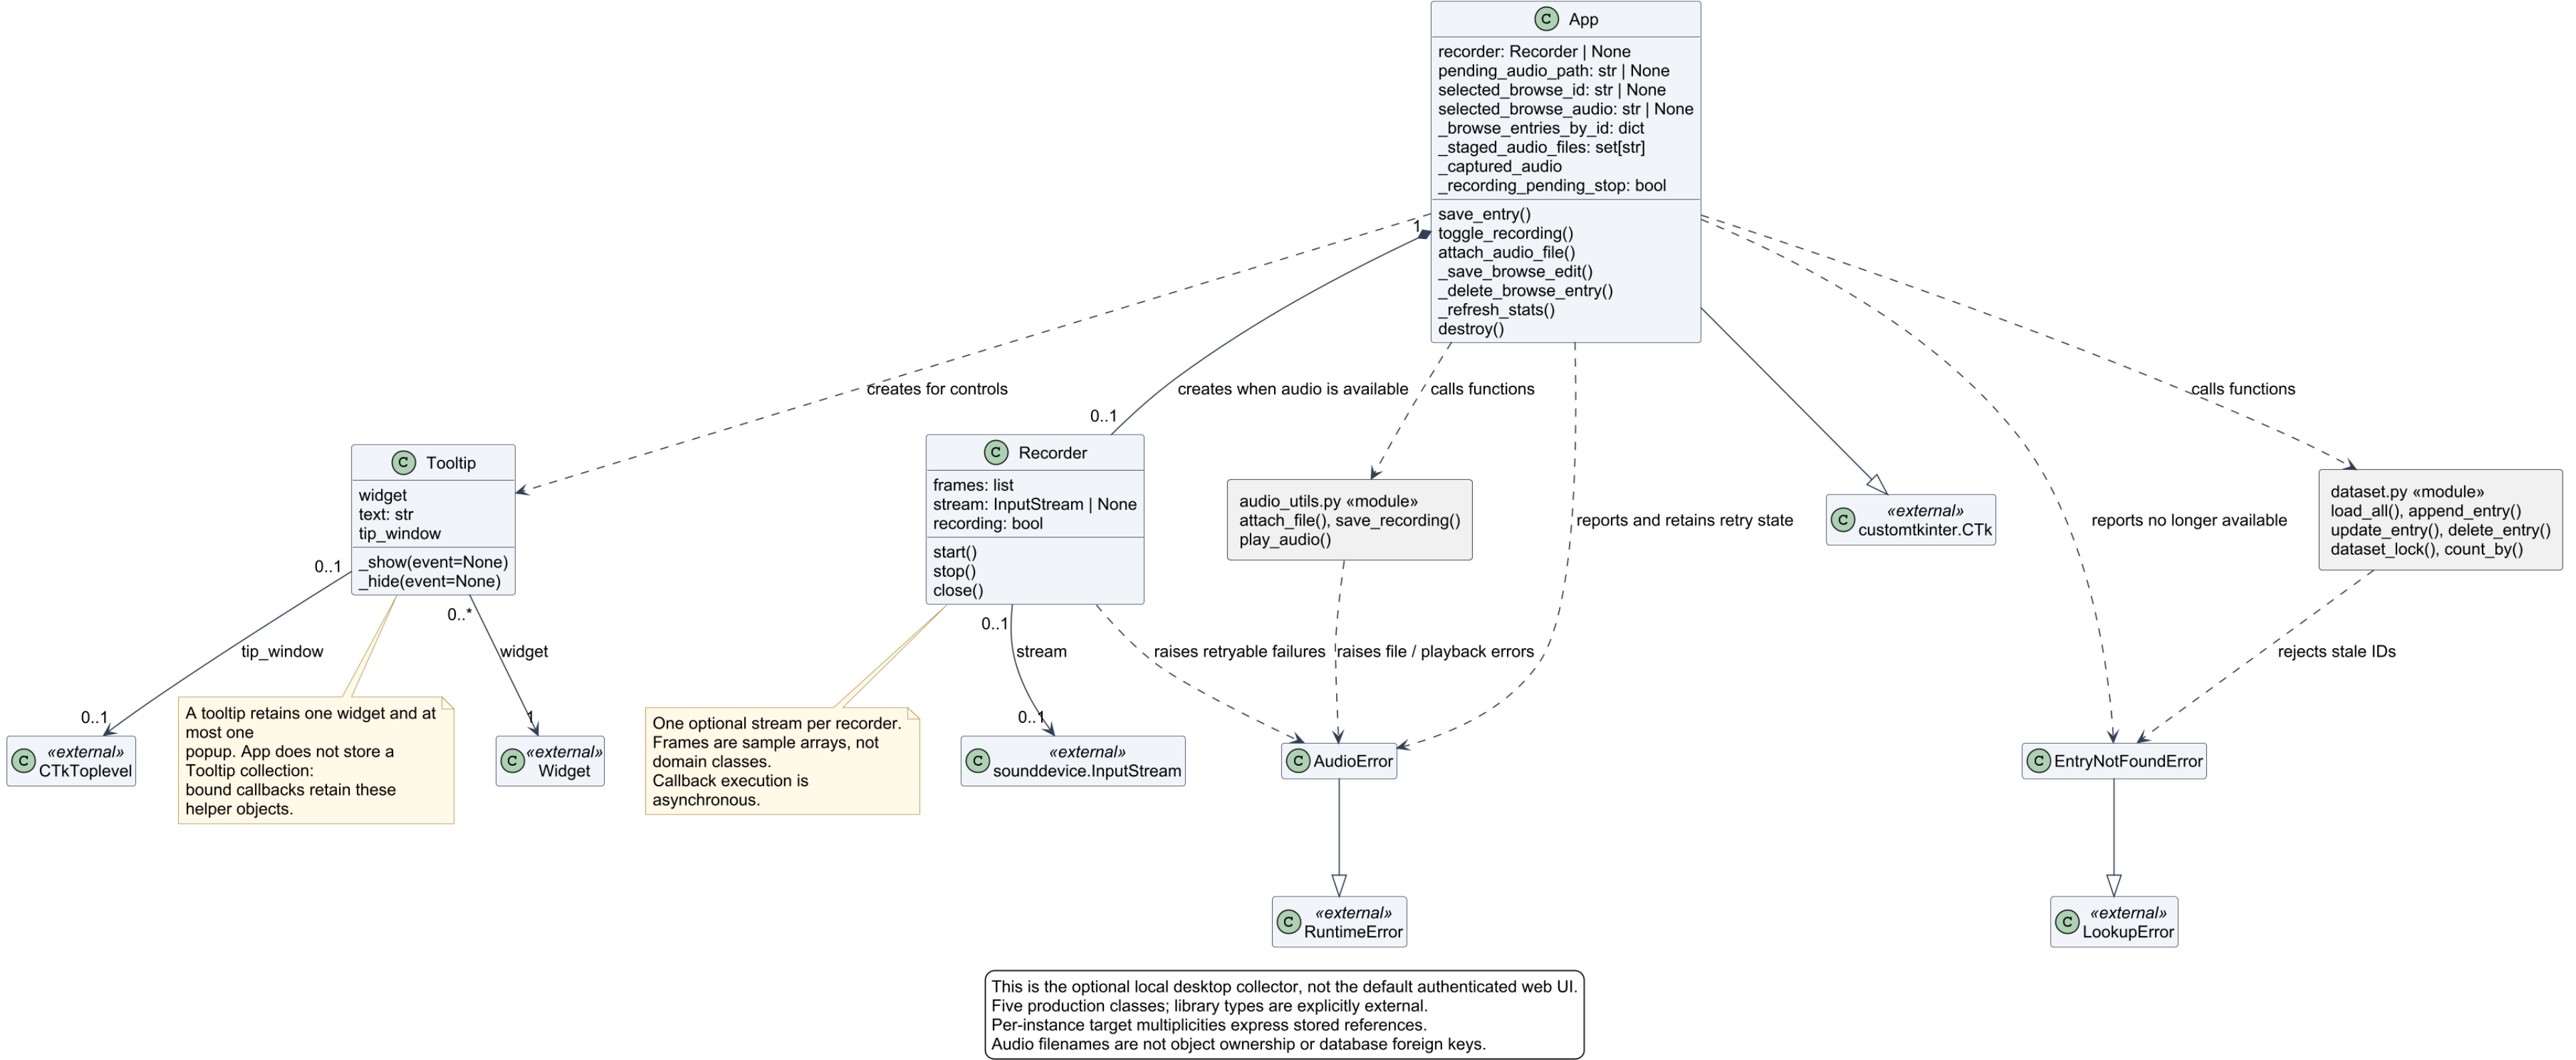


Coursework loop: real observations before formal analysis

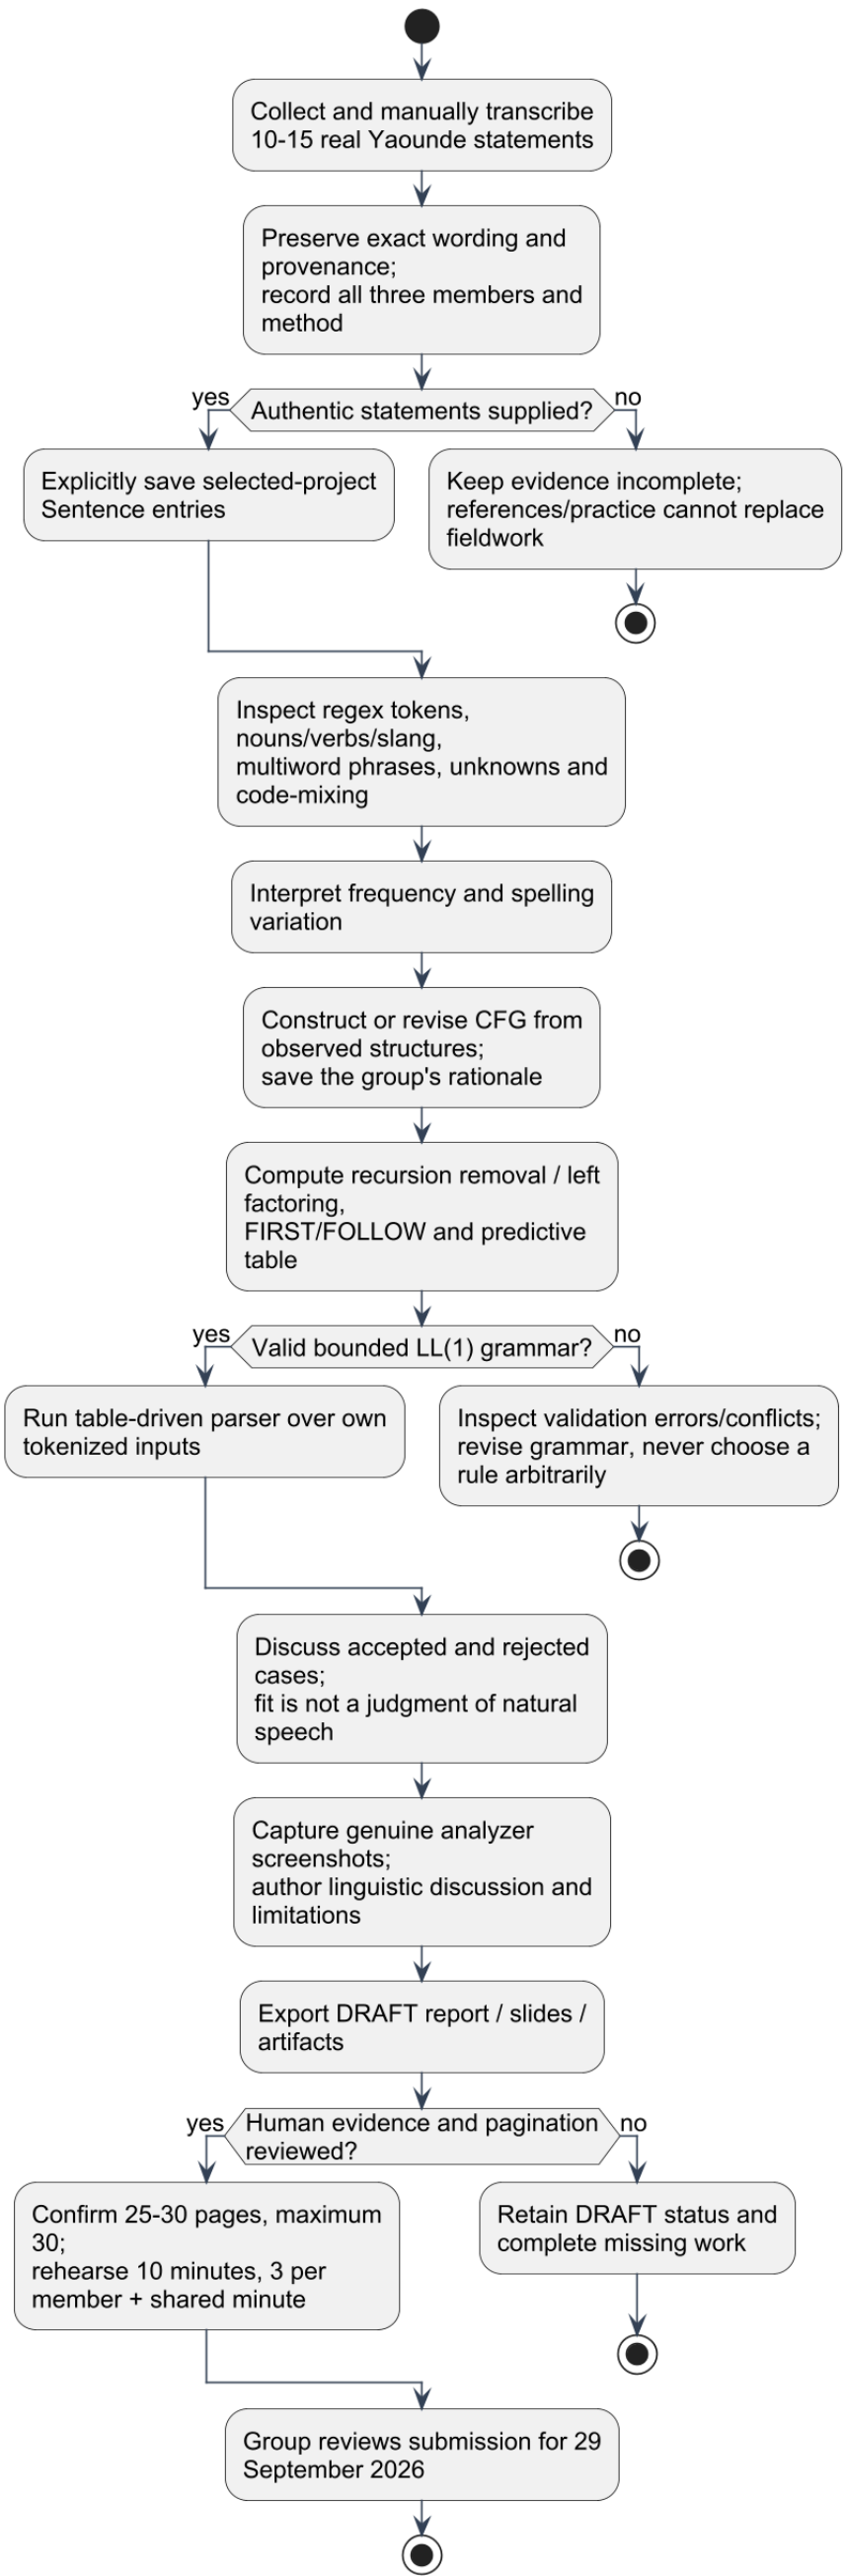


This activity combines implemented software steps and explicitly human coursework tasks. Suggested topic coverage is a discussion aid, not a mandatory one-sentence-per-topic gate. The default CFG is illustrative until justified against real statements. Export is not evidence certification and is separate from the engineering SRS/SDD.

One desktop save attempt, including failure boundaries

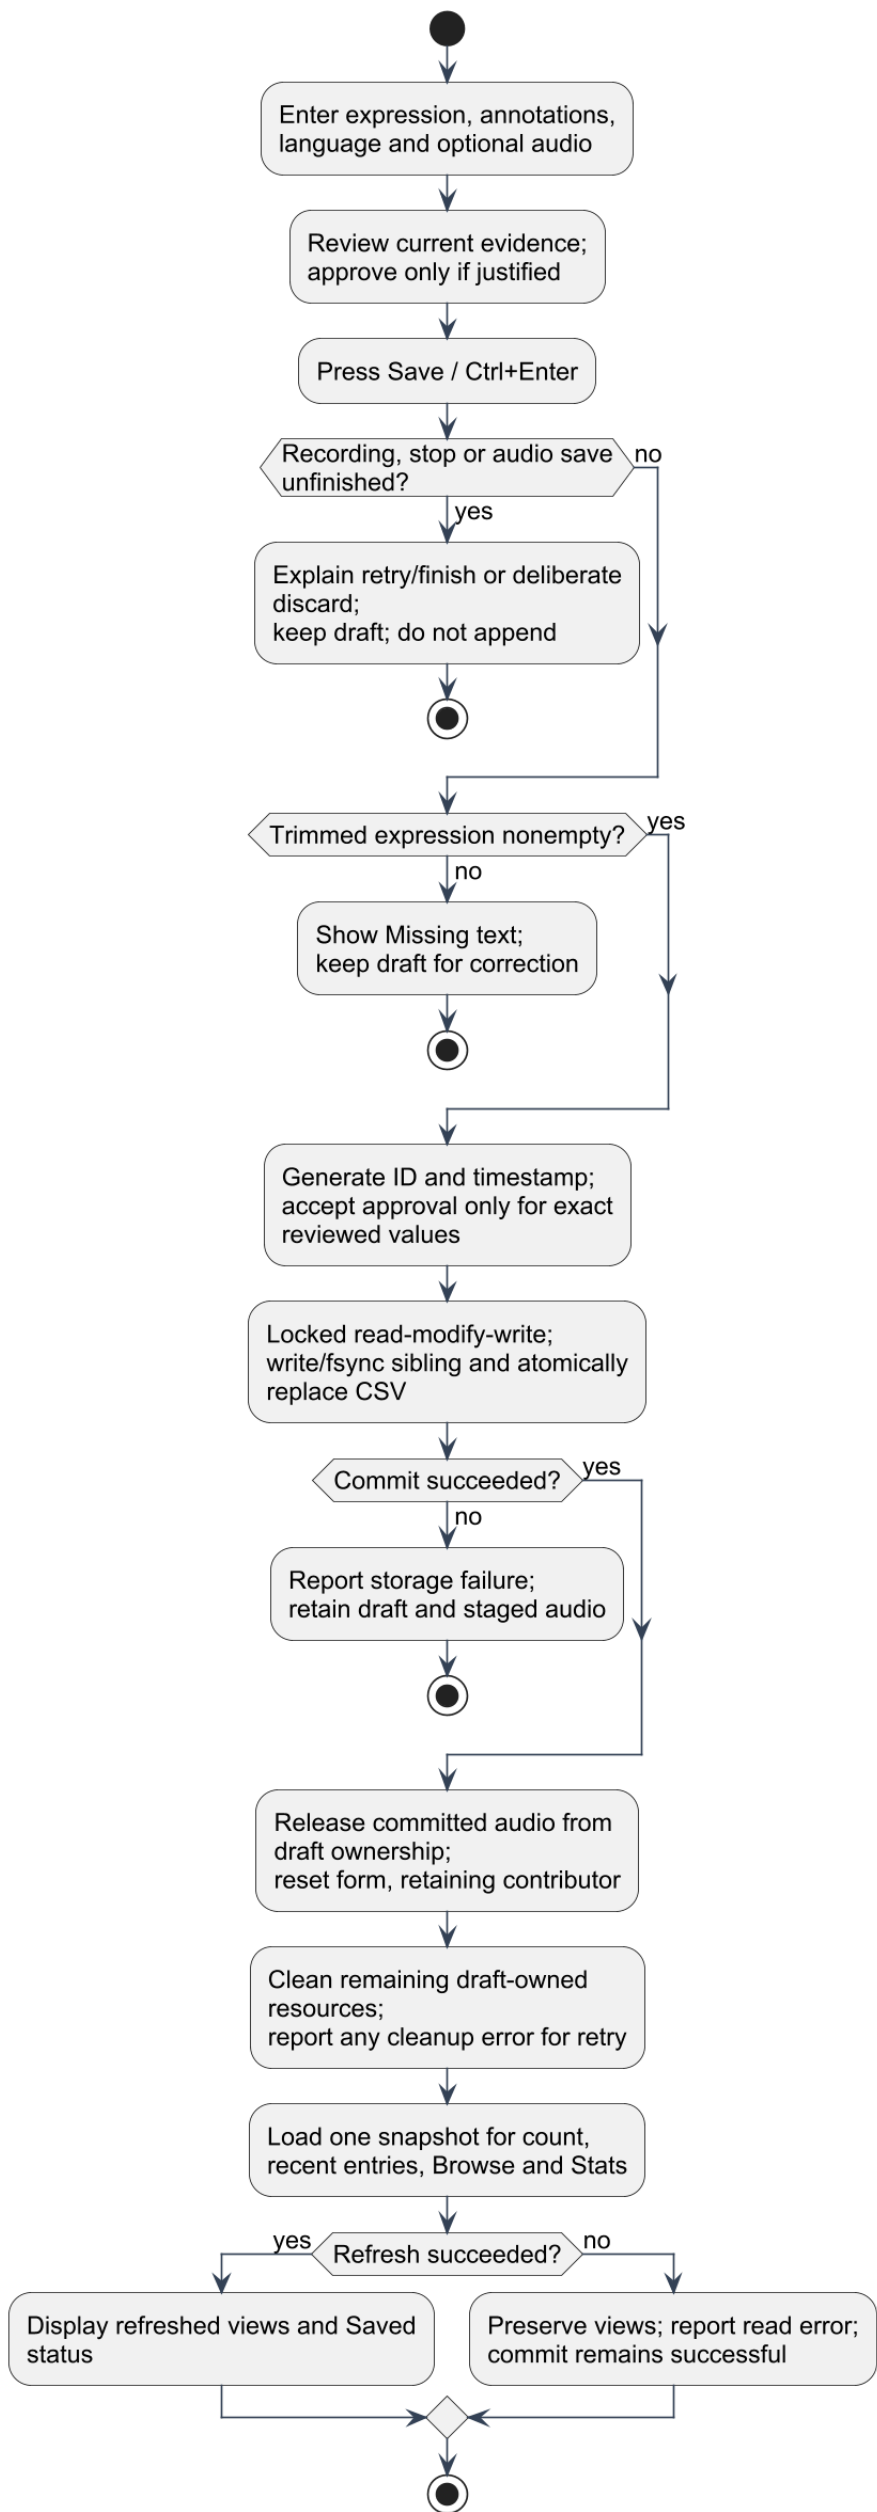


Preserved desktop compatibility only; web saves use private WorkspaceStore transactions.
Diamonds represent exclusive guarded decisions, not parallel work.
One final node ends this attempt, not the collector application.
Duplicate warnings are advisory on desktop; API duplicates return 409.
File staging is separate; recording details appear in the sequence view.

Private workspace restore: guarded replacement and failure paths

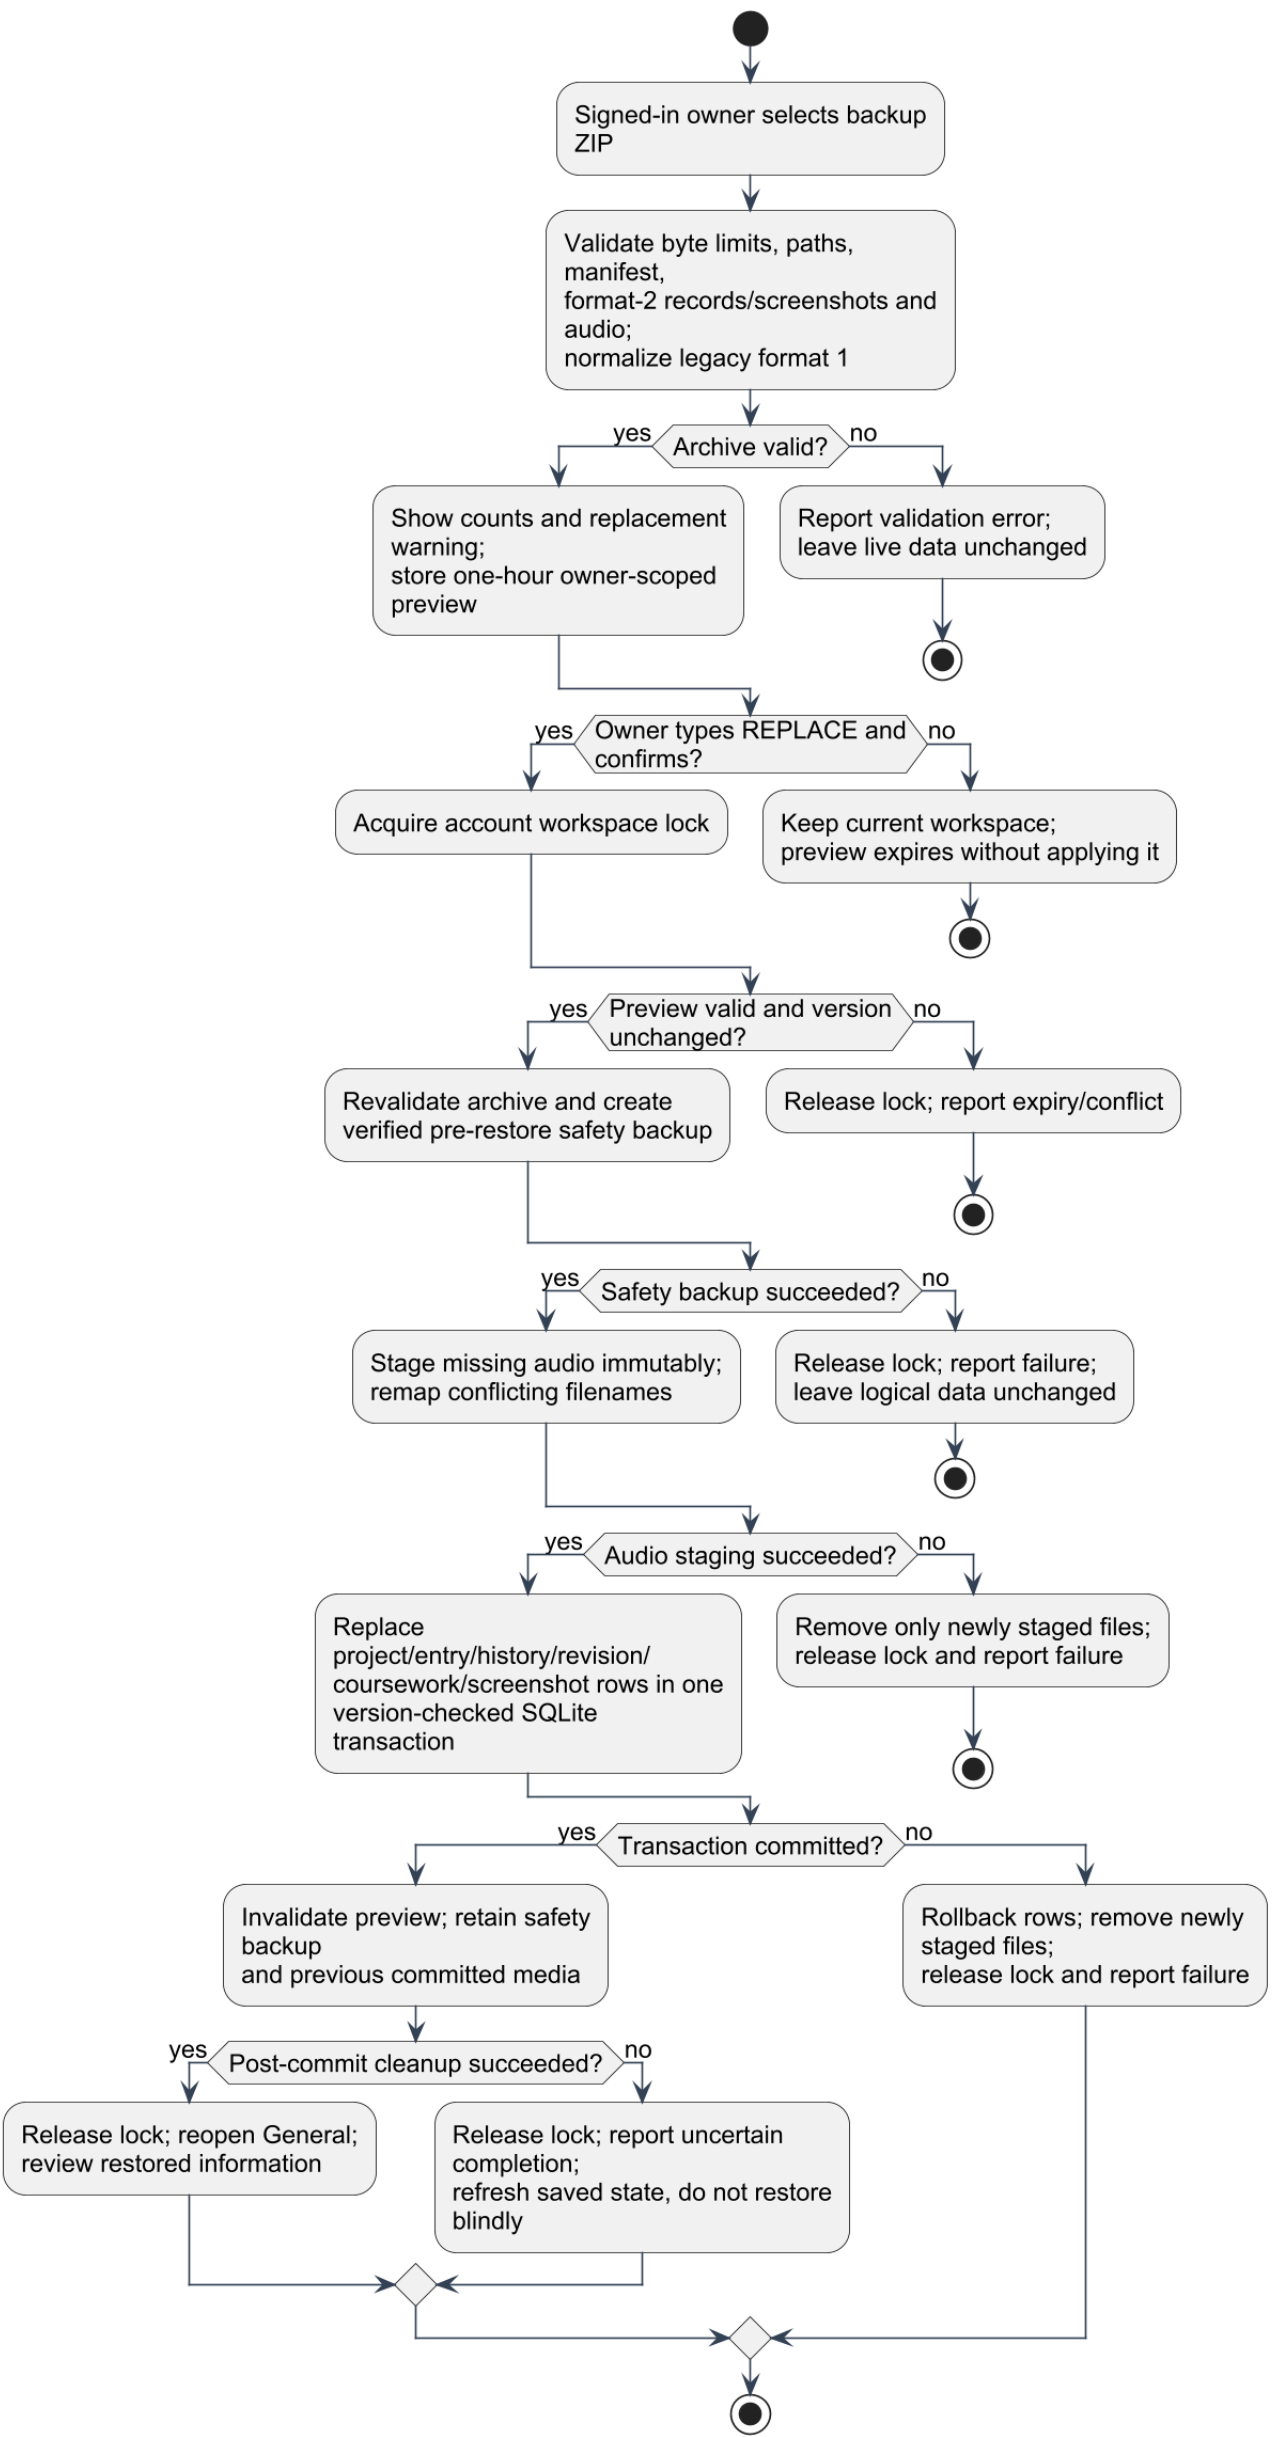


Branch guards are exclusive; each final node ends this attempt.
A cleanup error is explicit and does not imply a committed transaction rolled back.
This activity does not delete account credentials or other users' workspaces.
The workspace document is format 2; the outer archive manifest remains format 1.

Preserved desktop row and selected-editor lifecycle

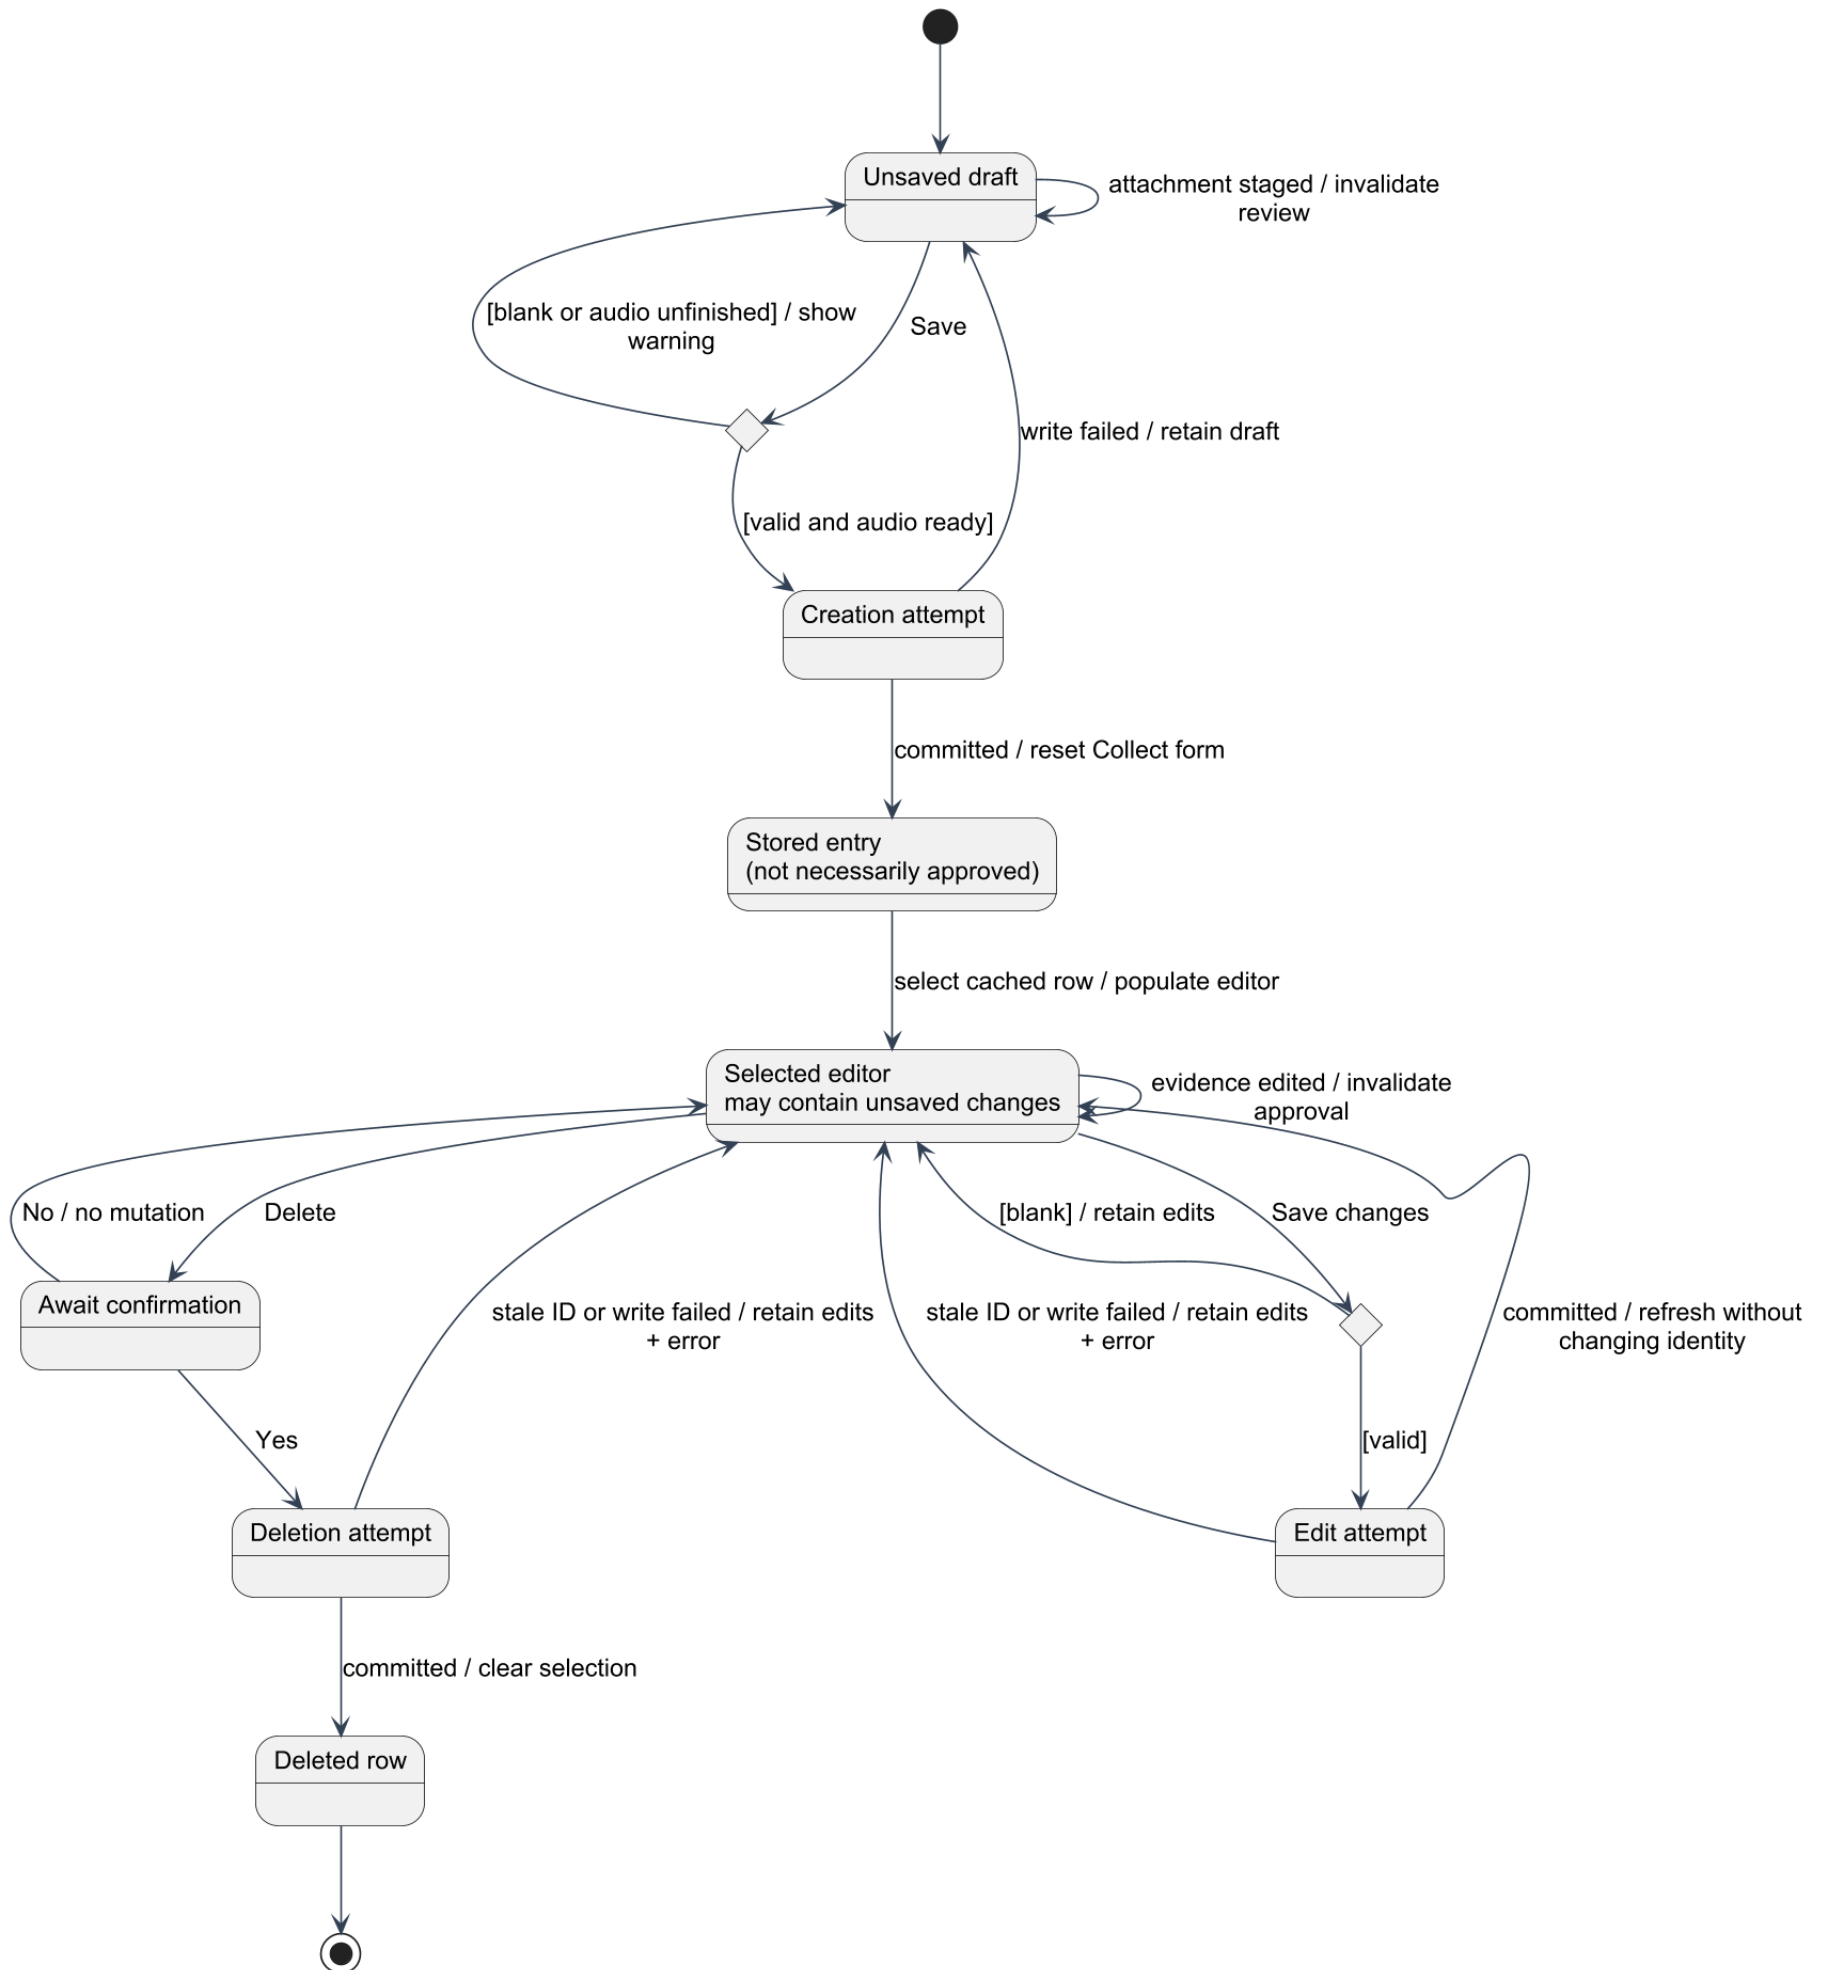


Desktop compatibility view; web account/project lifecycle is separate.
 This is a logical row/editor model, not an implemented enum or whole-app lifecycle.
 The selected editor may outlive a row removed by another writer; stale errors are explicit.
 A successful commit is not reversed by later display/cleanup failure.
 Audio staging has a separate lifetime; deleting a saved row retains its recording.

Desktop capture readiness and retry states

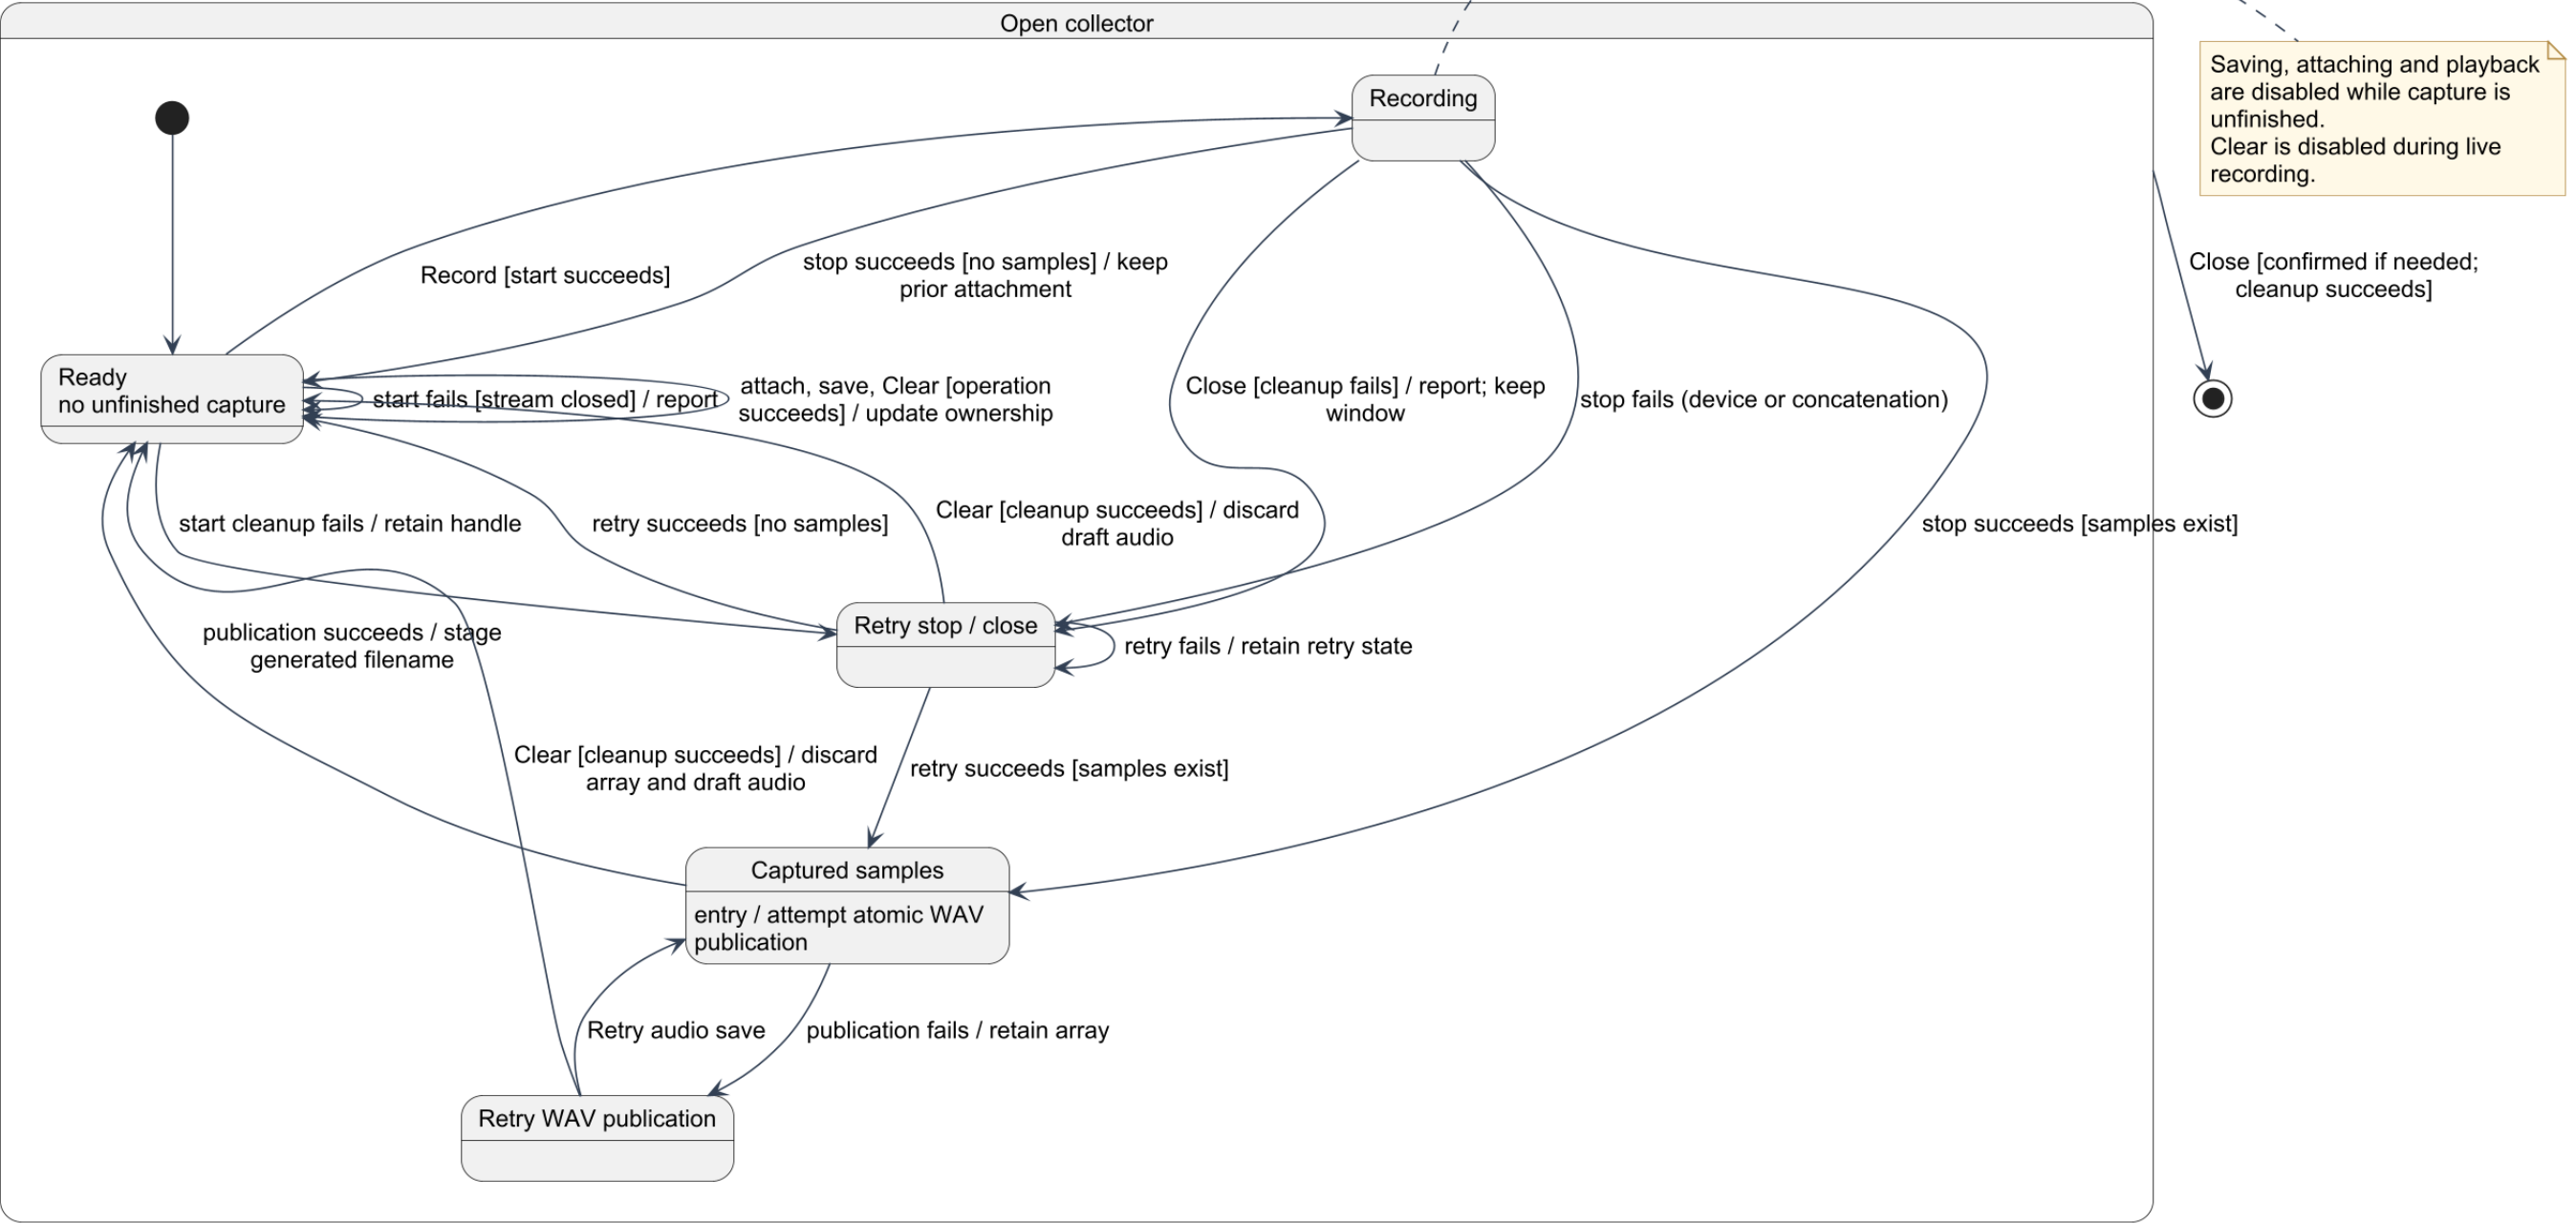


Preserved desktop Recorder/GUI states, not browser dictation or an AI transcription flow. Conceptual states derive from recording, stream, pending-stop and captured-array fields. Ready may contain a staged filename; it does not mean an empty form. Failed cleanup keeps the window/retry state available, not a false closed status. Draft-owned files may be discarded; committed recordings are never owned by the draft.

Email account access and private request binding

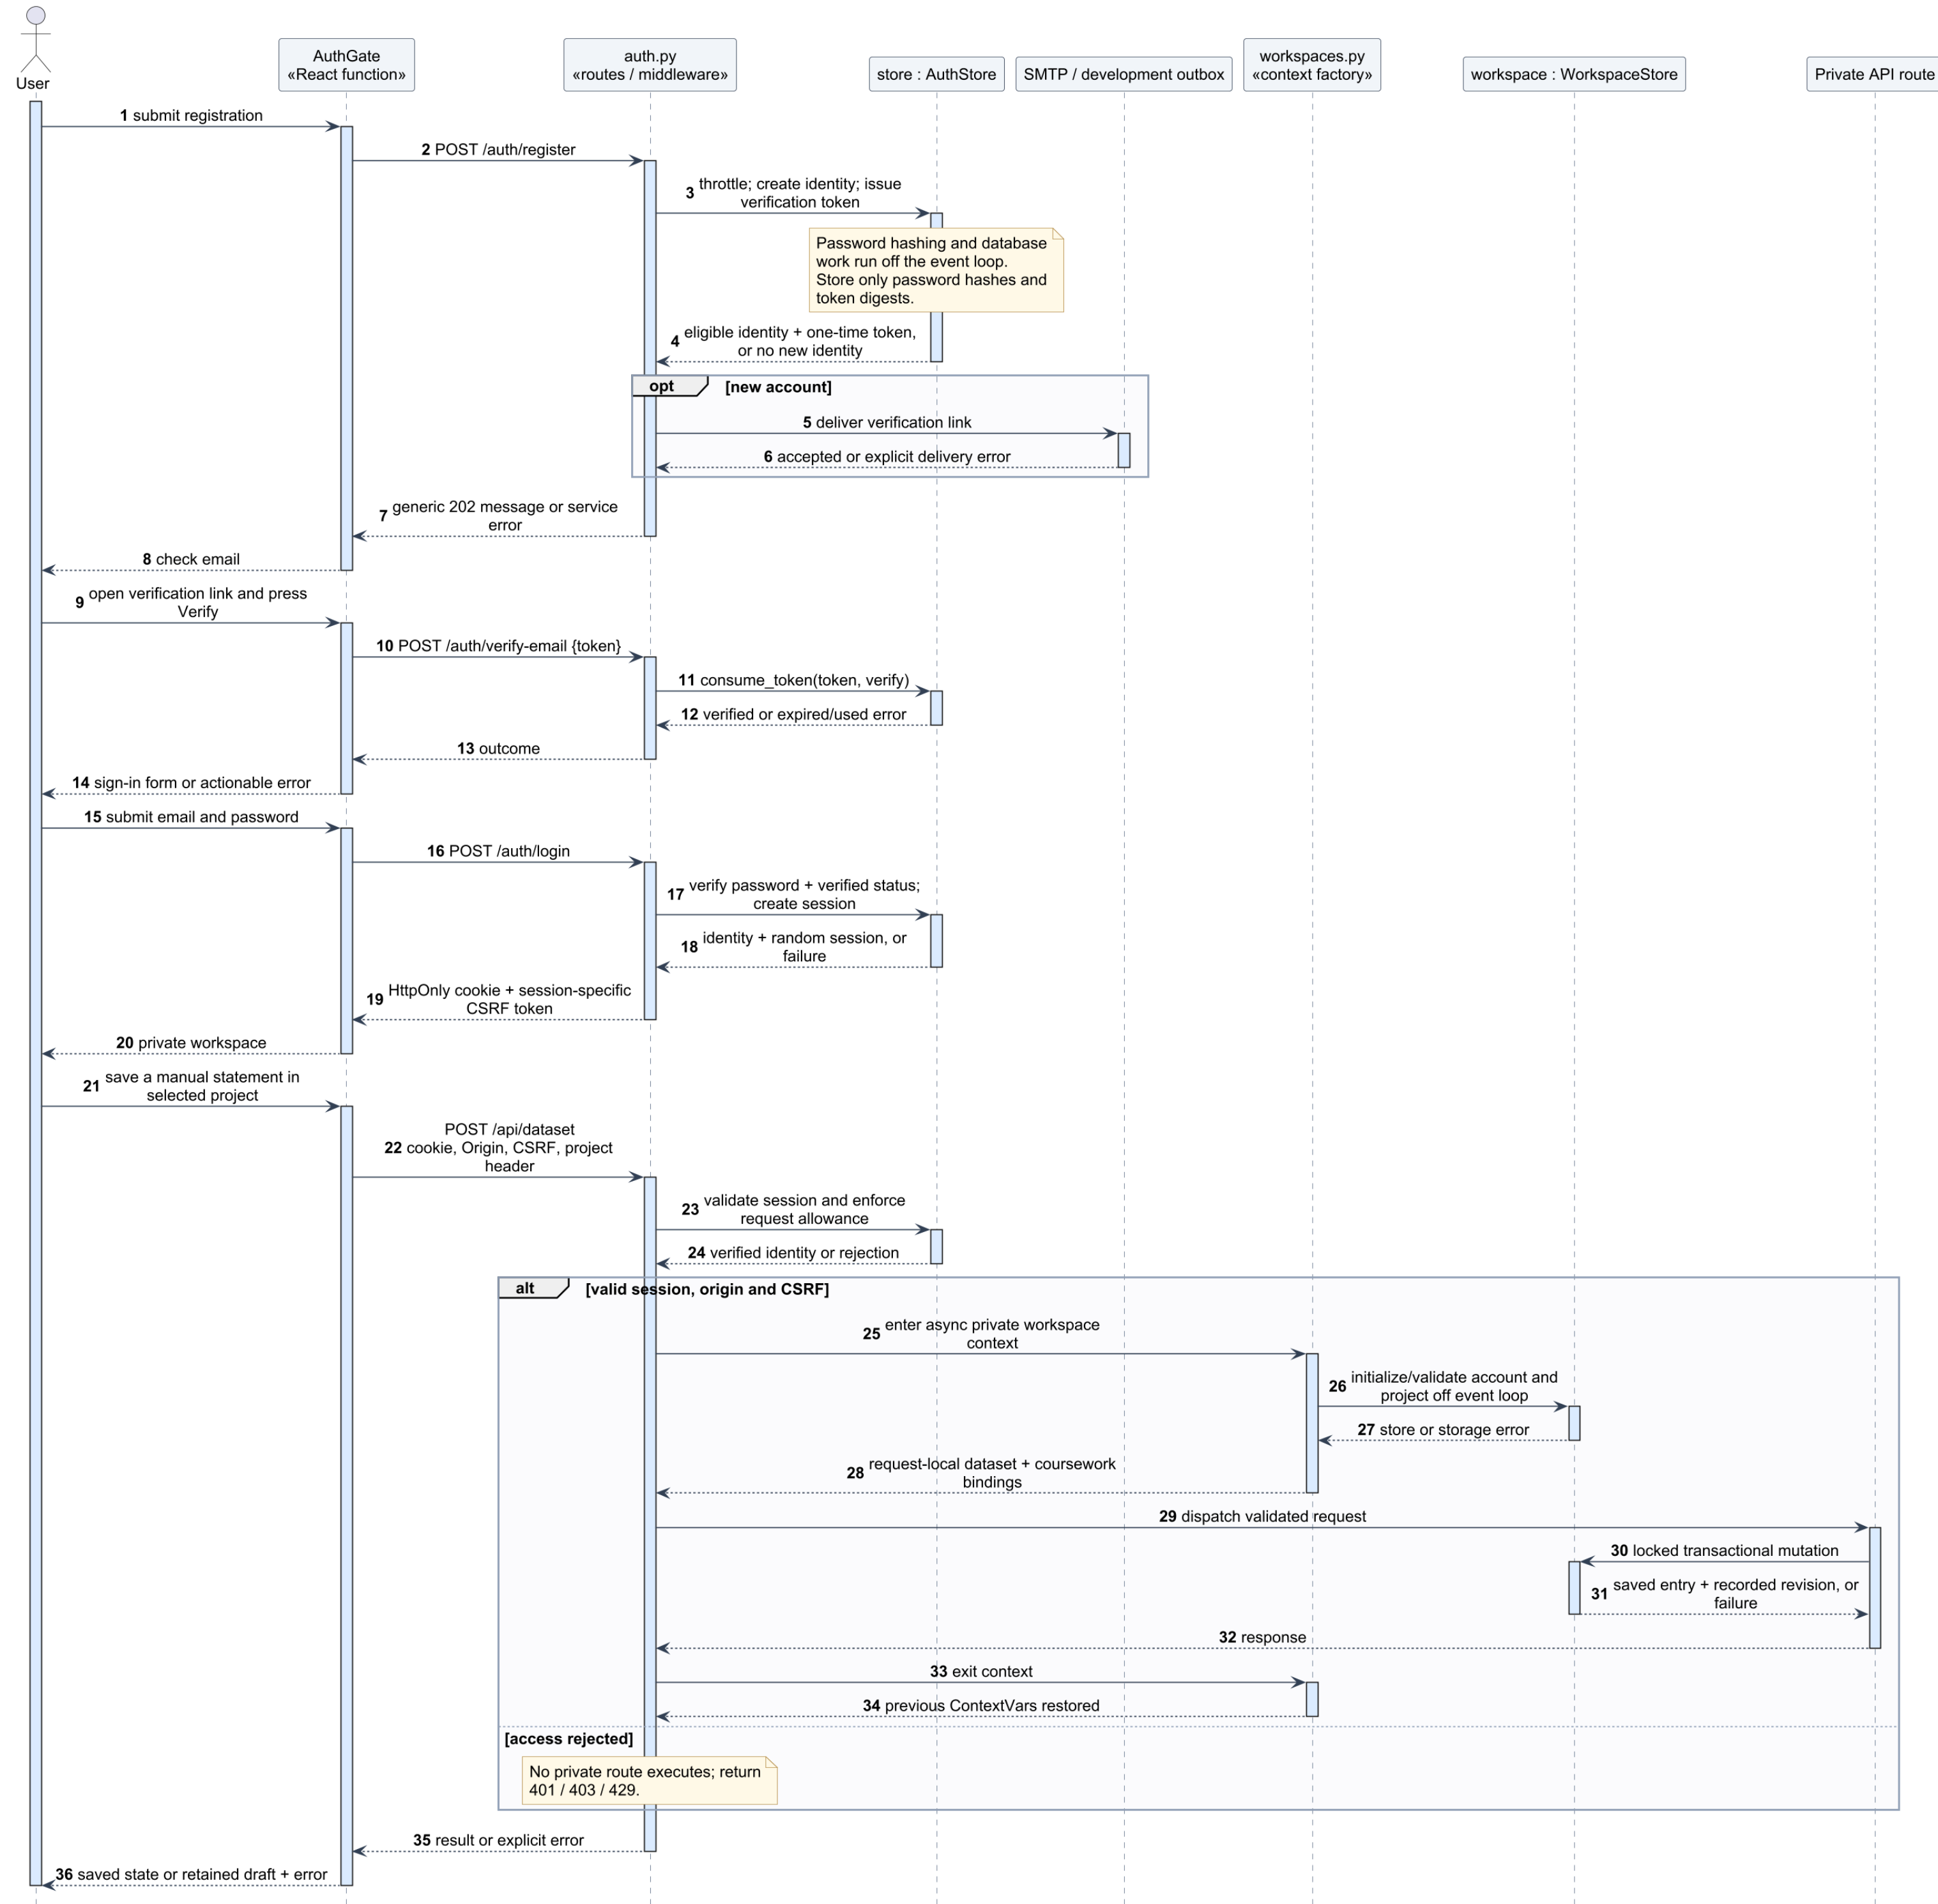


Google sign-in / explicit linking: authorization-code flow with PKCE

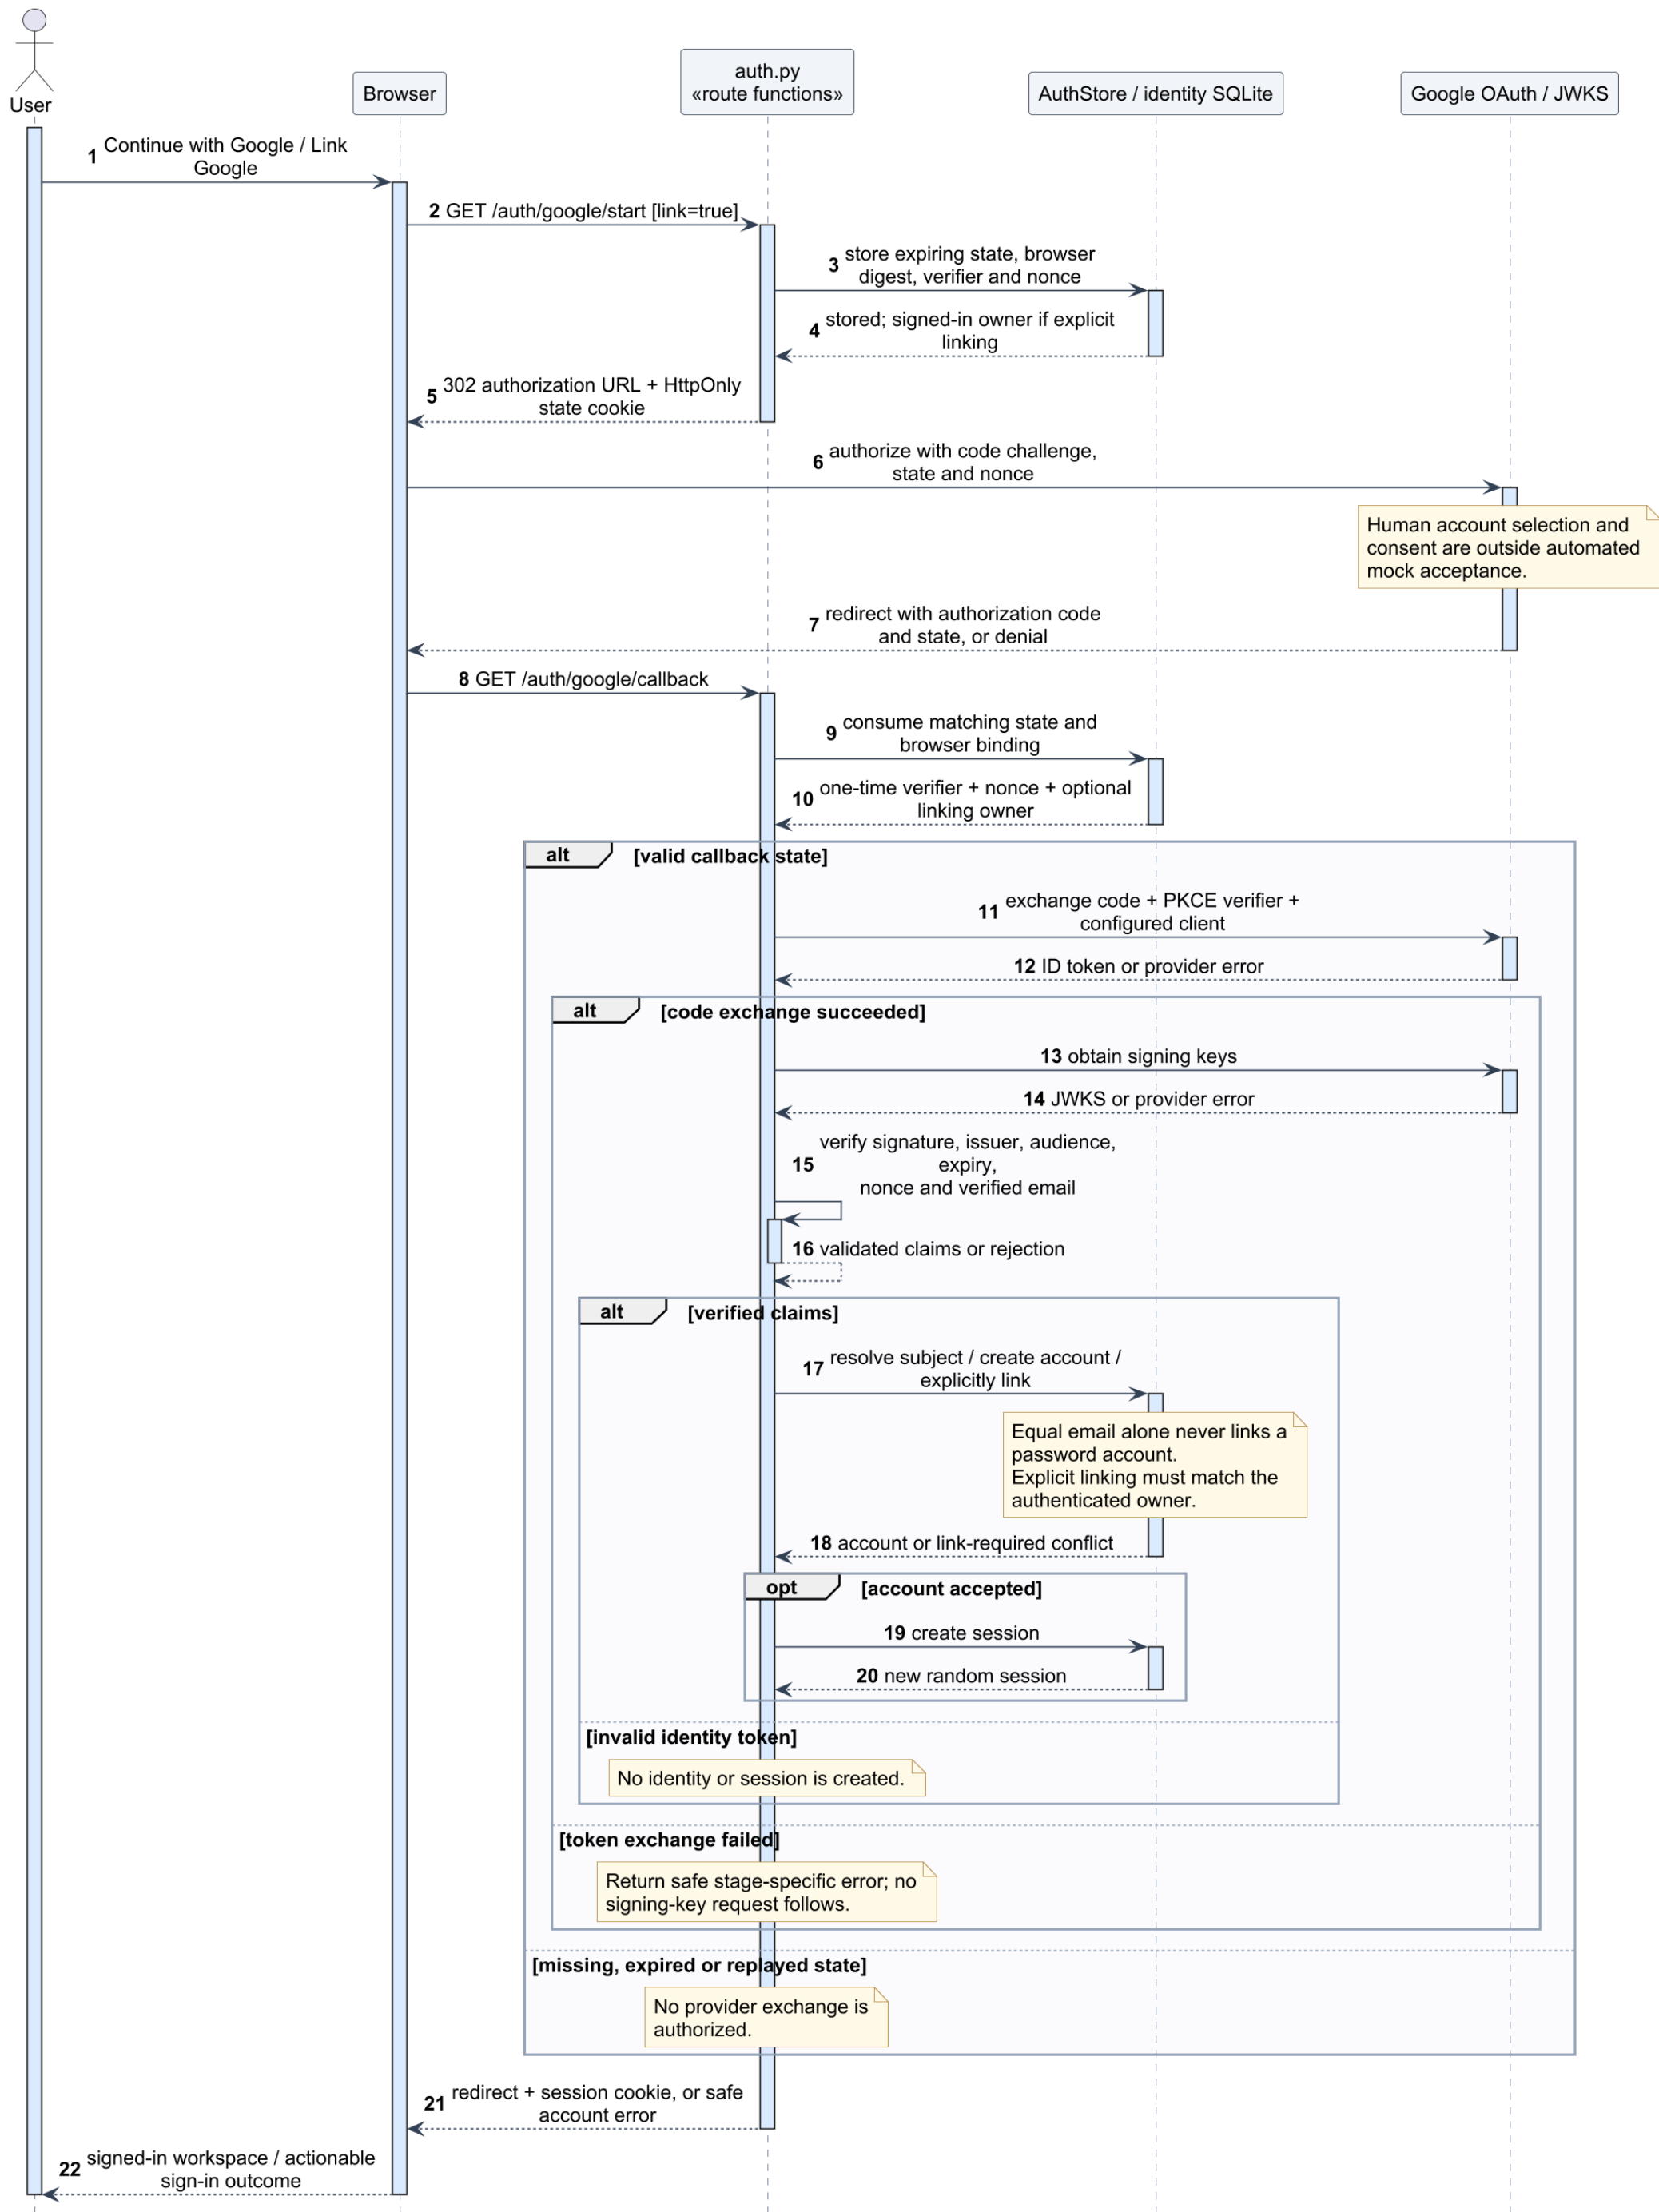


Redirects are HTTP replies; following them begins a new request.
Code, verifier, nonce and credentials are not written to browser storage.
Query values are redacted from application access logs.
This optional identity exchange is retained; it is not a language-provider call.

One request, one account/project: dual storage context binding

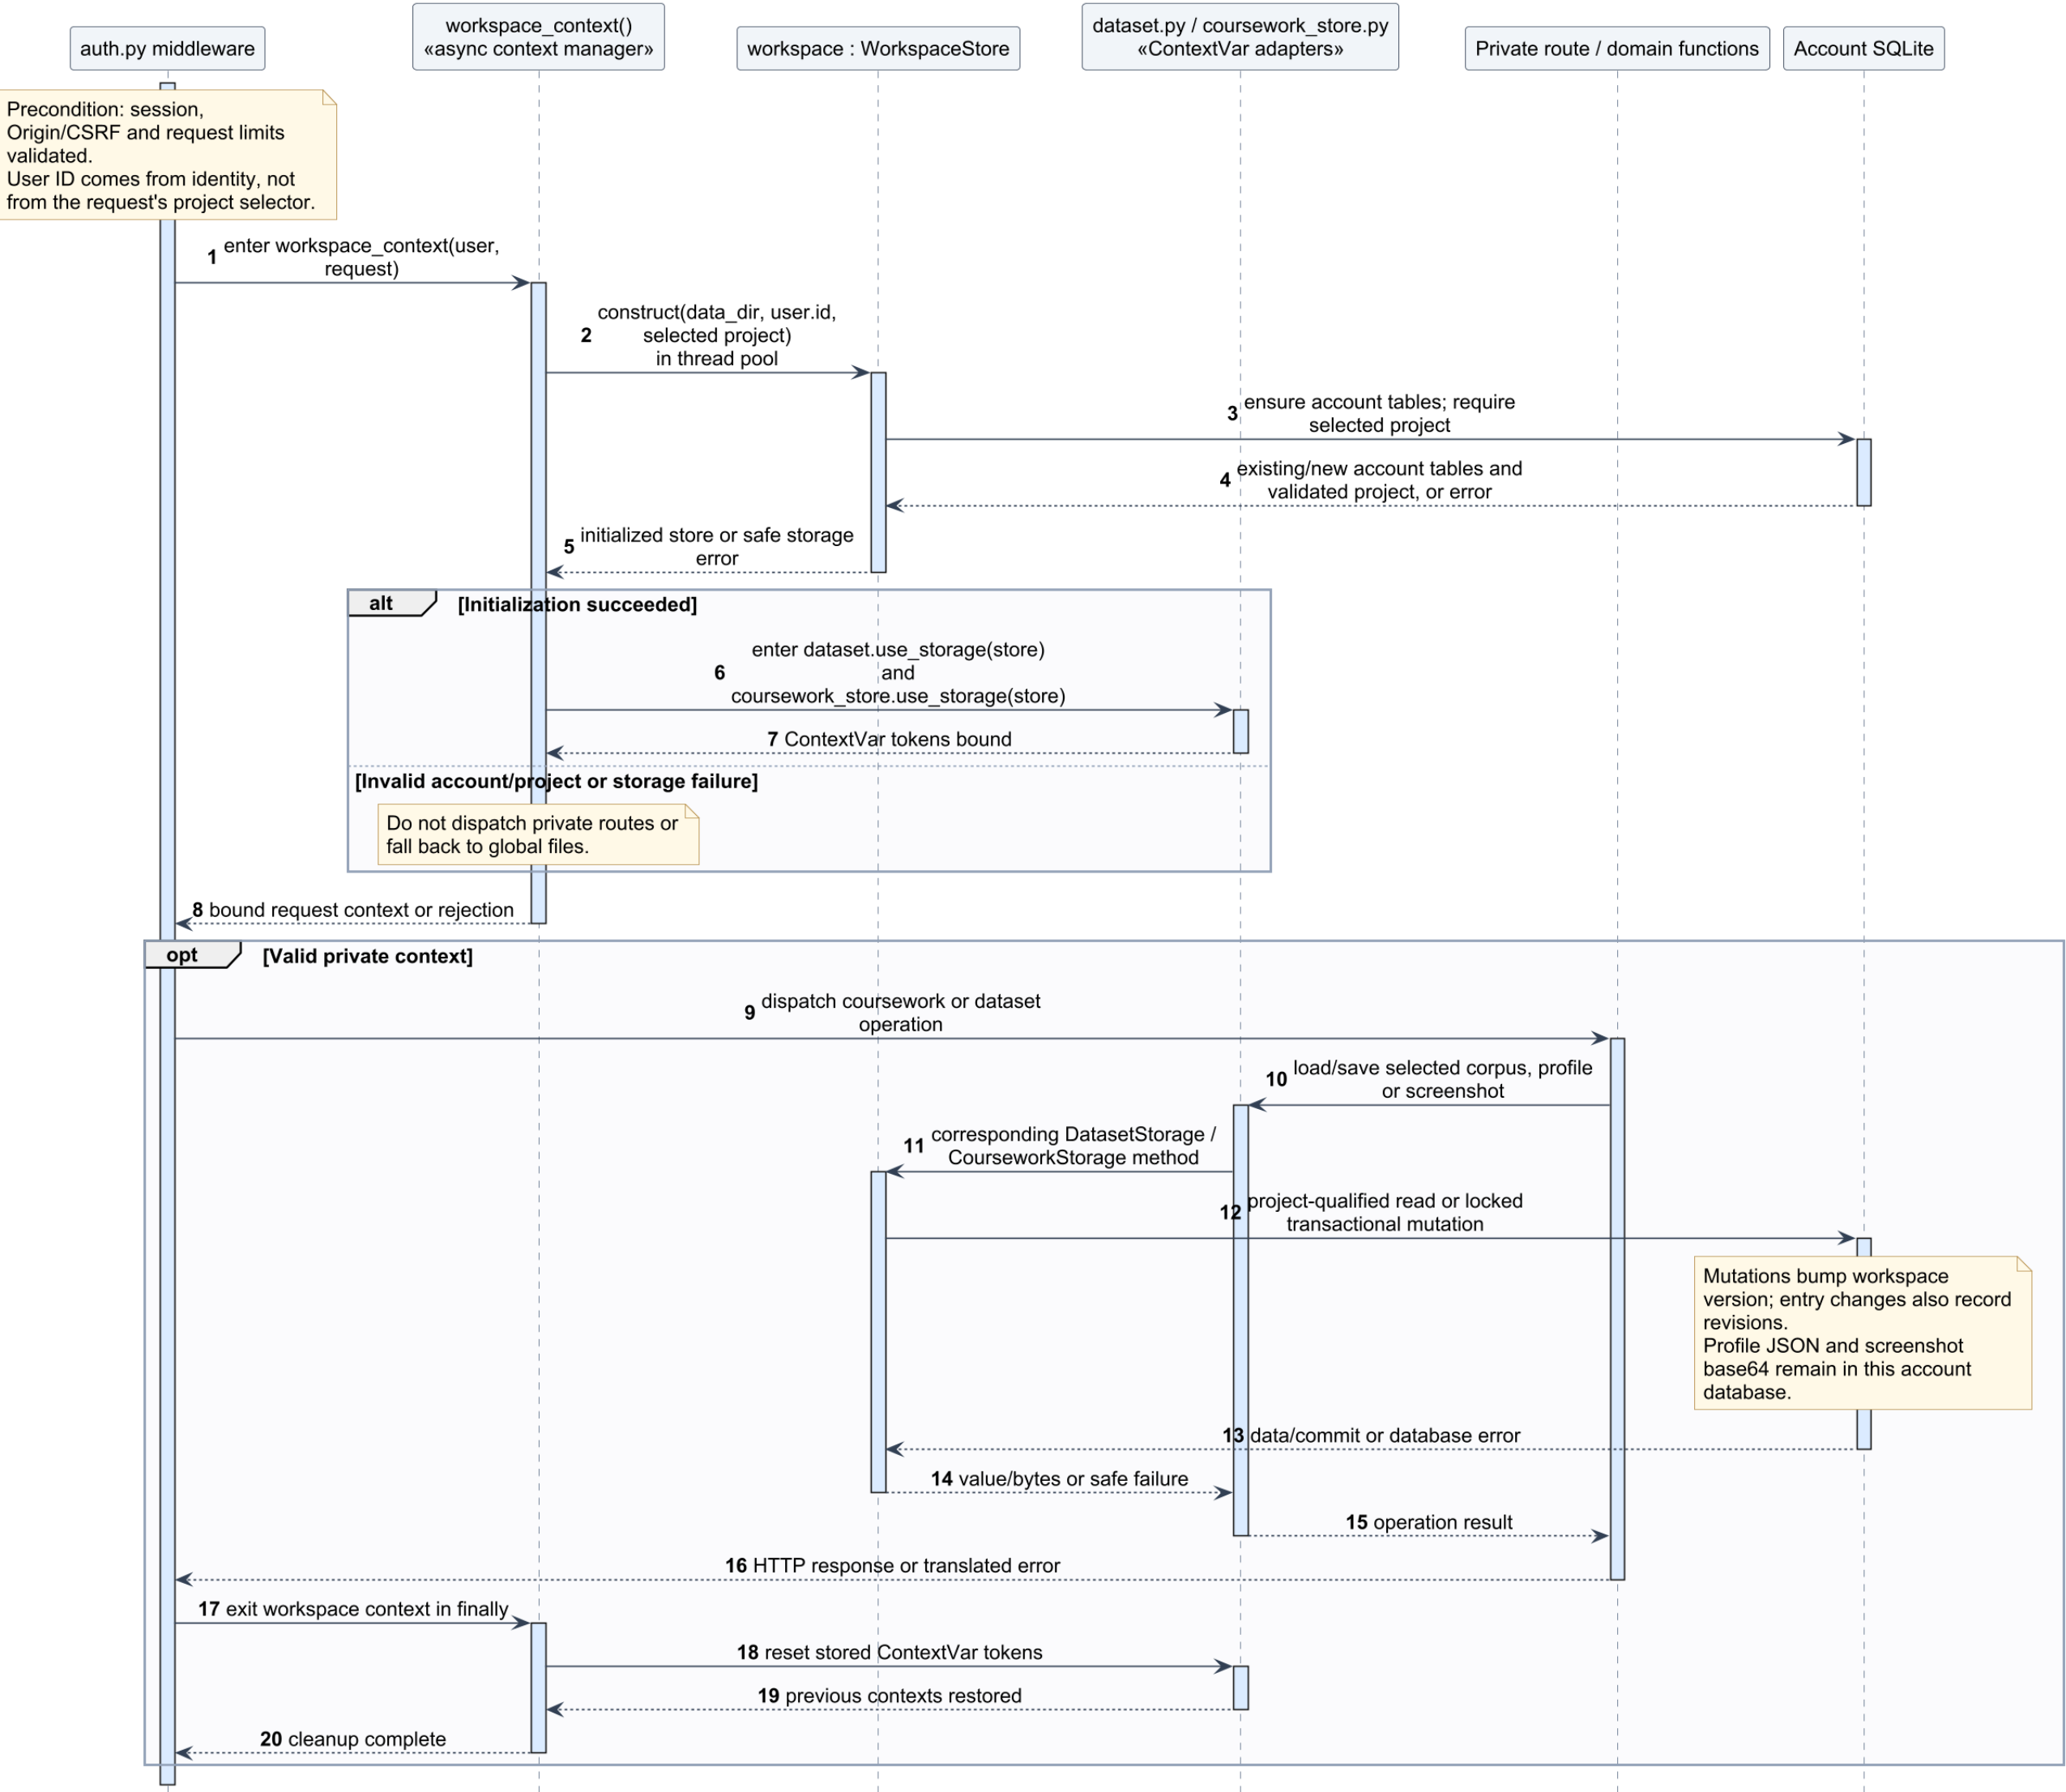


Protocol dispatch is structural; no per-user global CSV path is mutated.
No class association multiplicity is implied by a sequence participant.
Legacy CSV/profile/screenshot access requires no bound adapter and explicit no-auth maintenance.
Default web requests require authentication; production refuses require_auth=False.

Desktop attachment and truthful entry saving

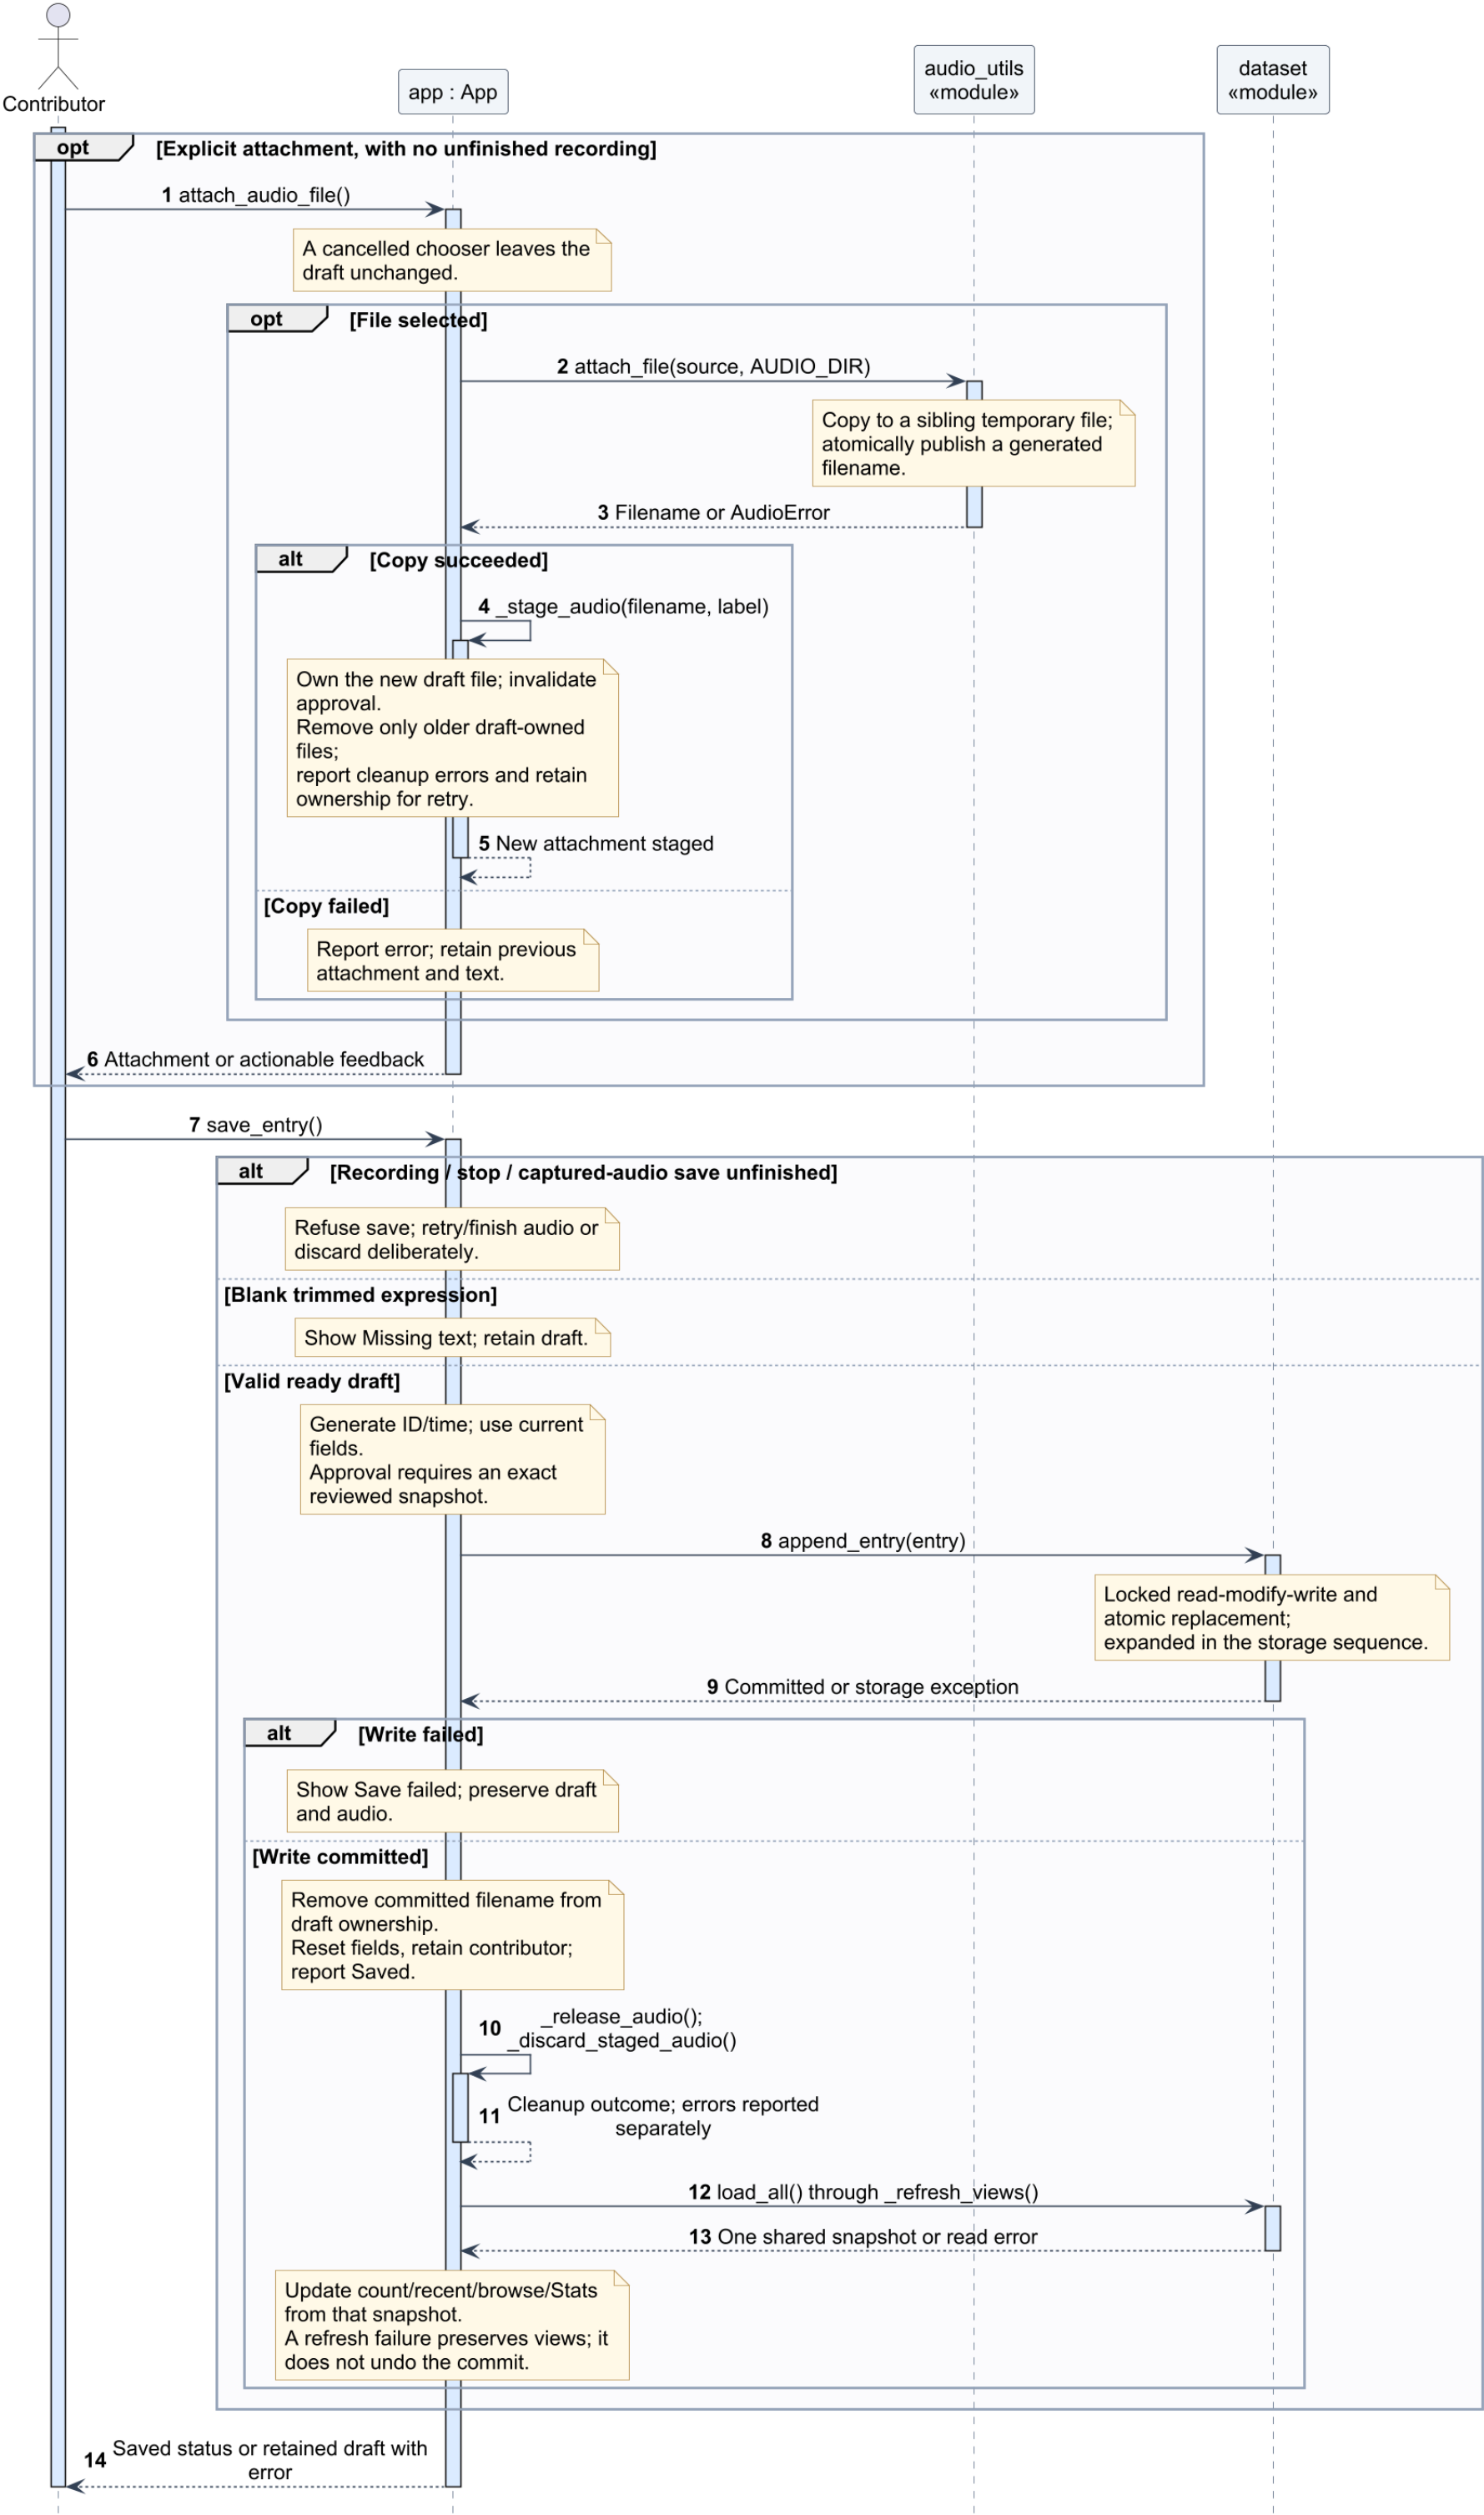


Preserved desktop compatibility only; authenticated web saves never use this global CSV. Files are staged before row creation; CSV and audio are not one transaction. Committed audio survives draft clearing and row deletion. Dialog/widget and low-level I/O calls are condensed, not additional messages.

Desktop search, preserved views and cached selection

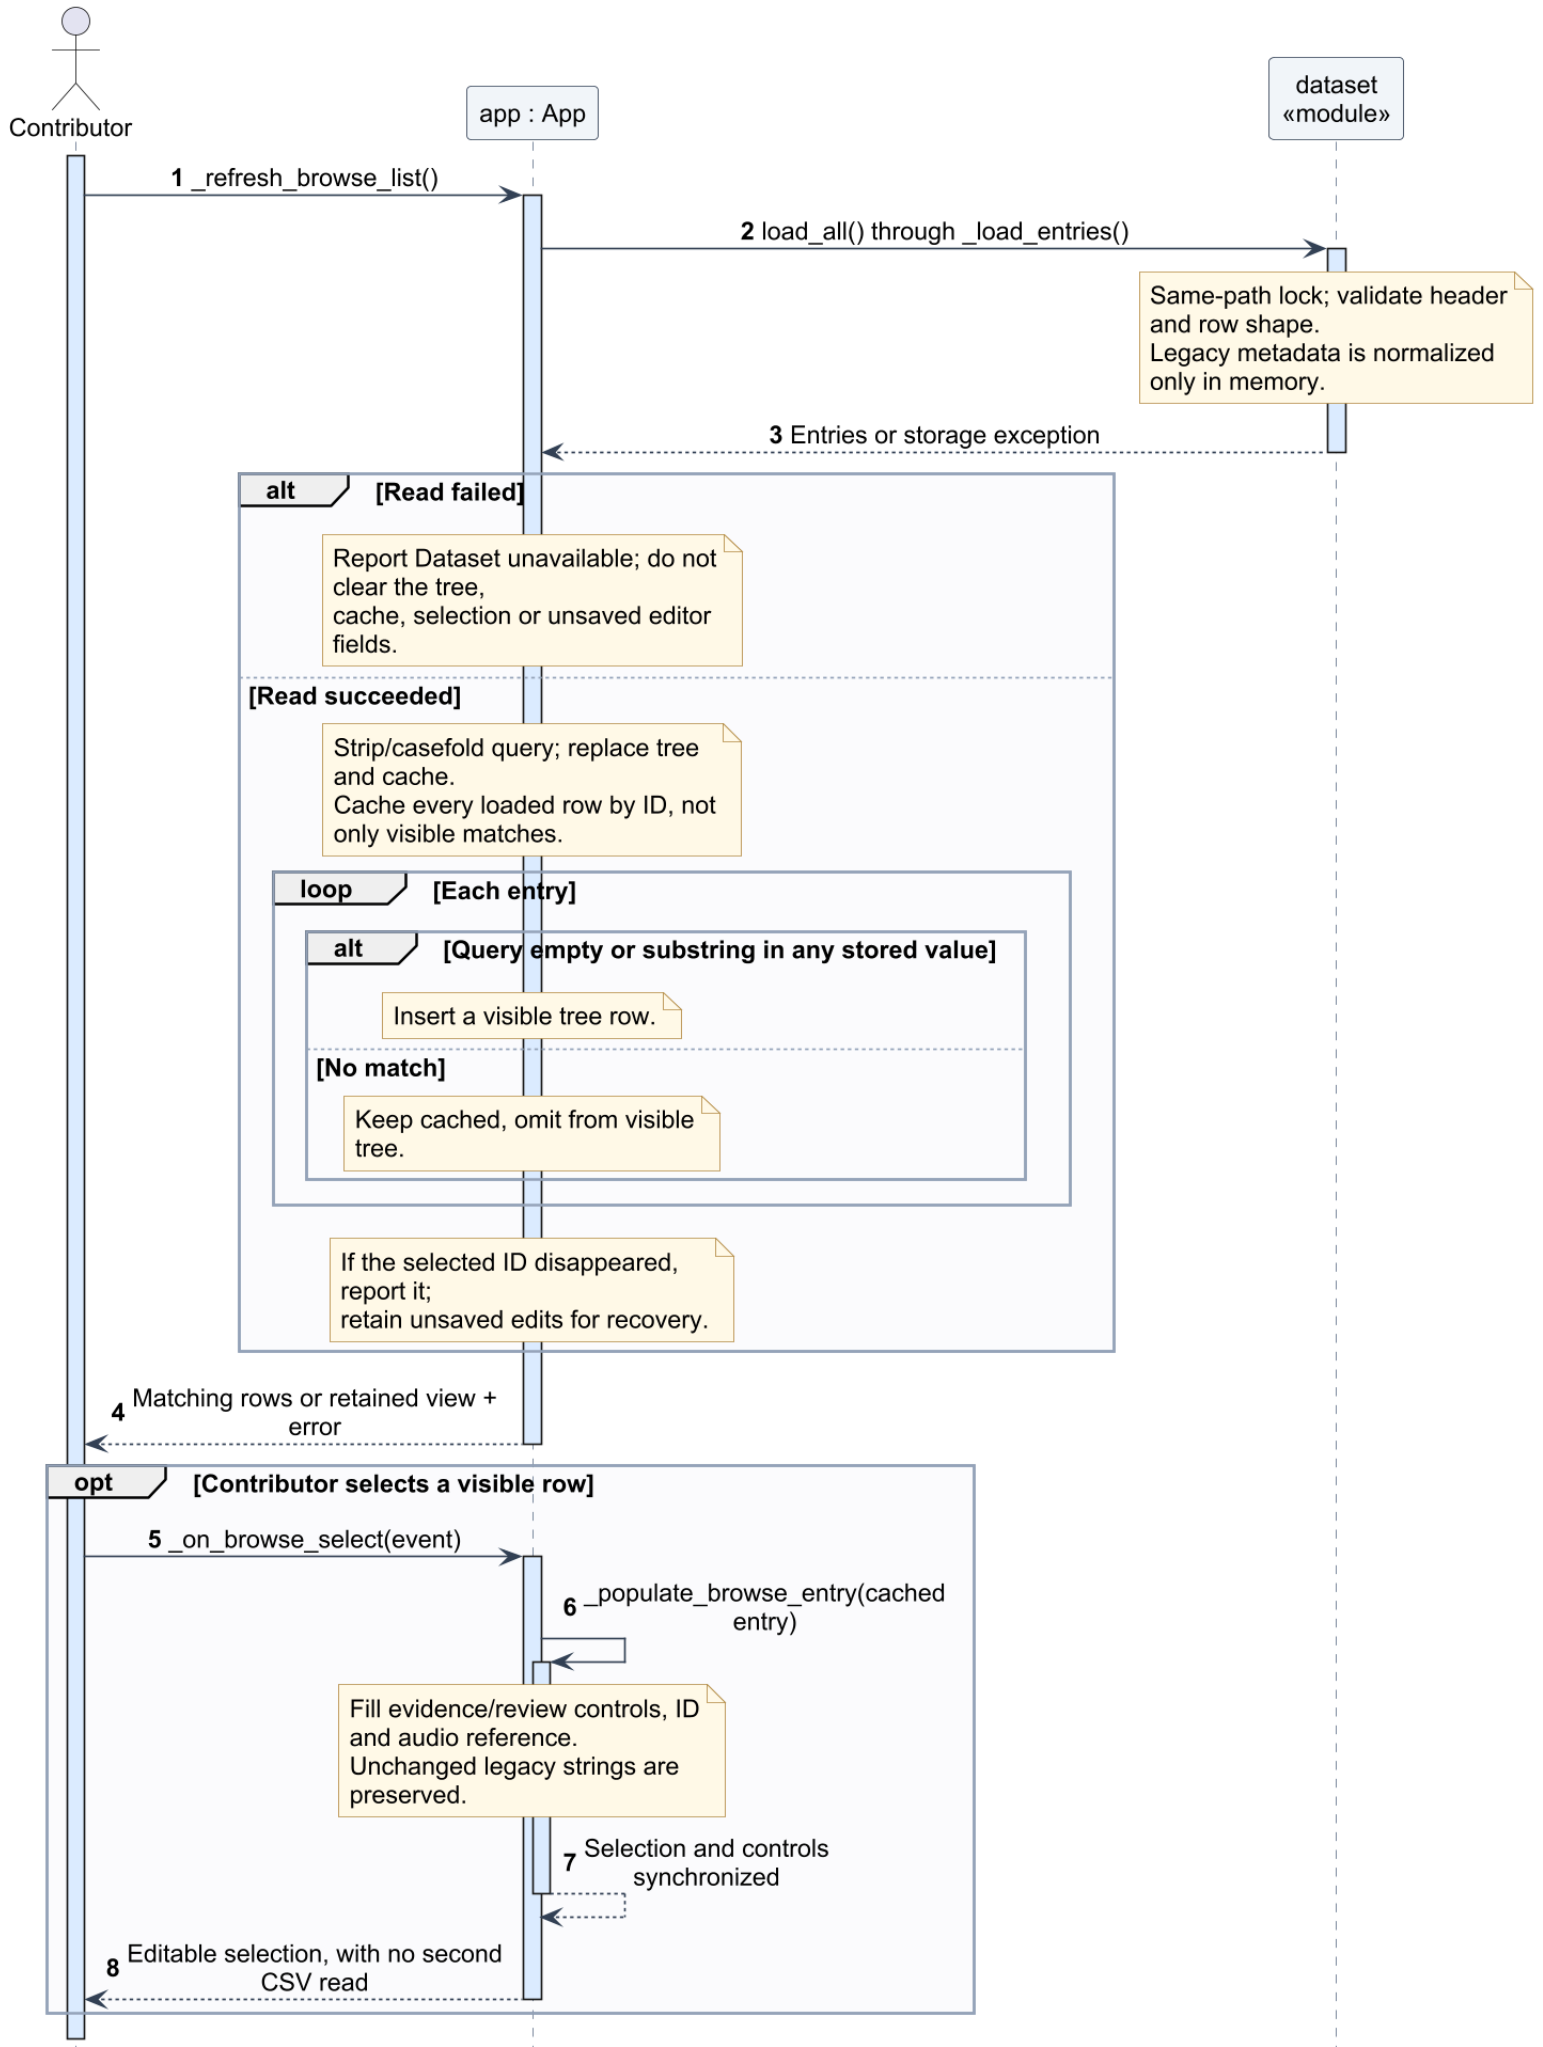


Preserved desktop compatibility only; the web collection reads the selected private project. IDs should remain unique; manually corrupted identifiers are not repaired here. Filtering is read-only. Empty results are distinct from a failed read.

Desktop changed-field editing and review integrity

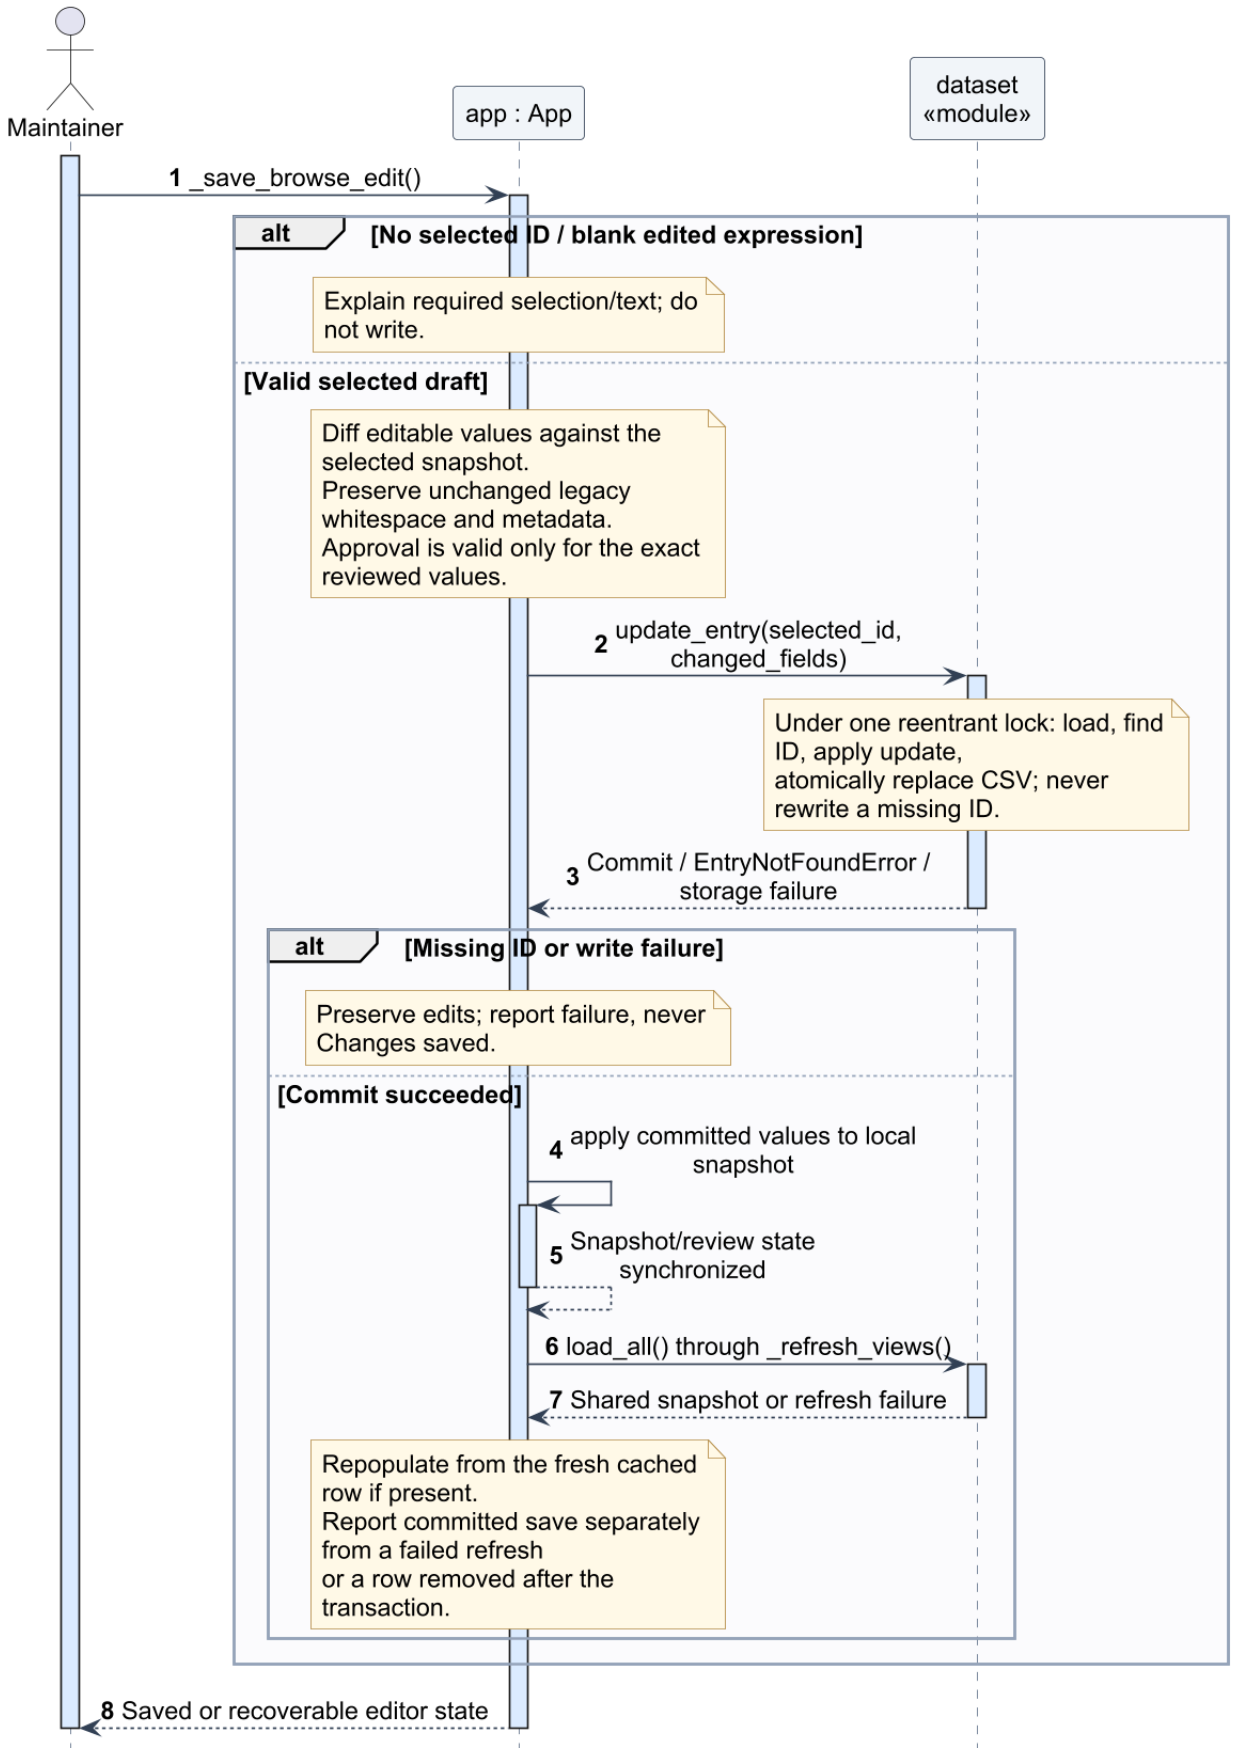


Preserved desktop compatibility only; web mutations also retain private entry revisions. Desktop edits preserve ID, timestamp, contributor and audio reference. Text, glosses, topic, location, notes, language and lexical metadata are editable. Locks prevent interleaved writes, not semantic last-writer-wins conflicts.

Confirmed deletion without false success or media loss

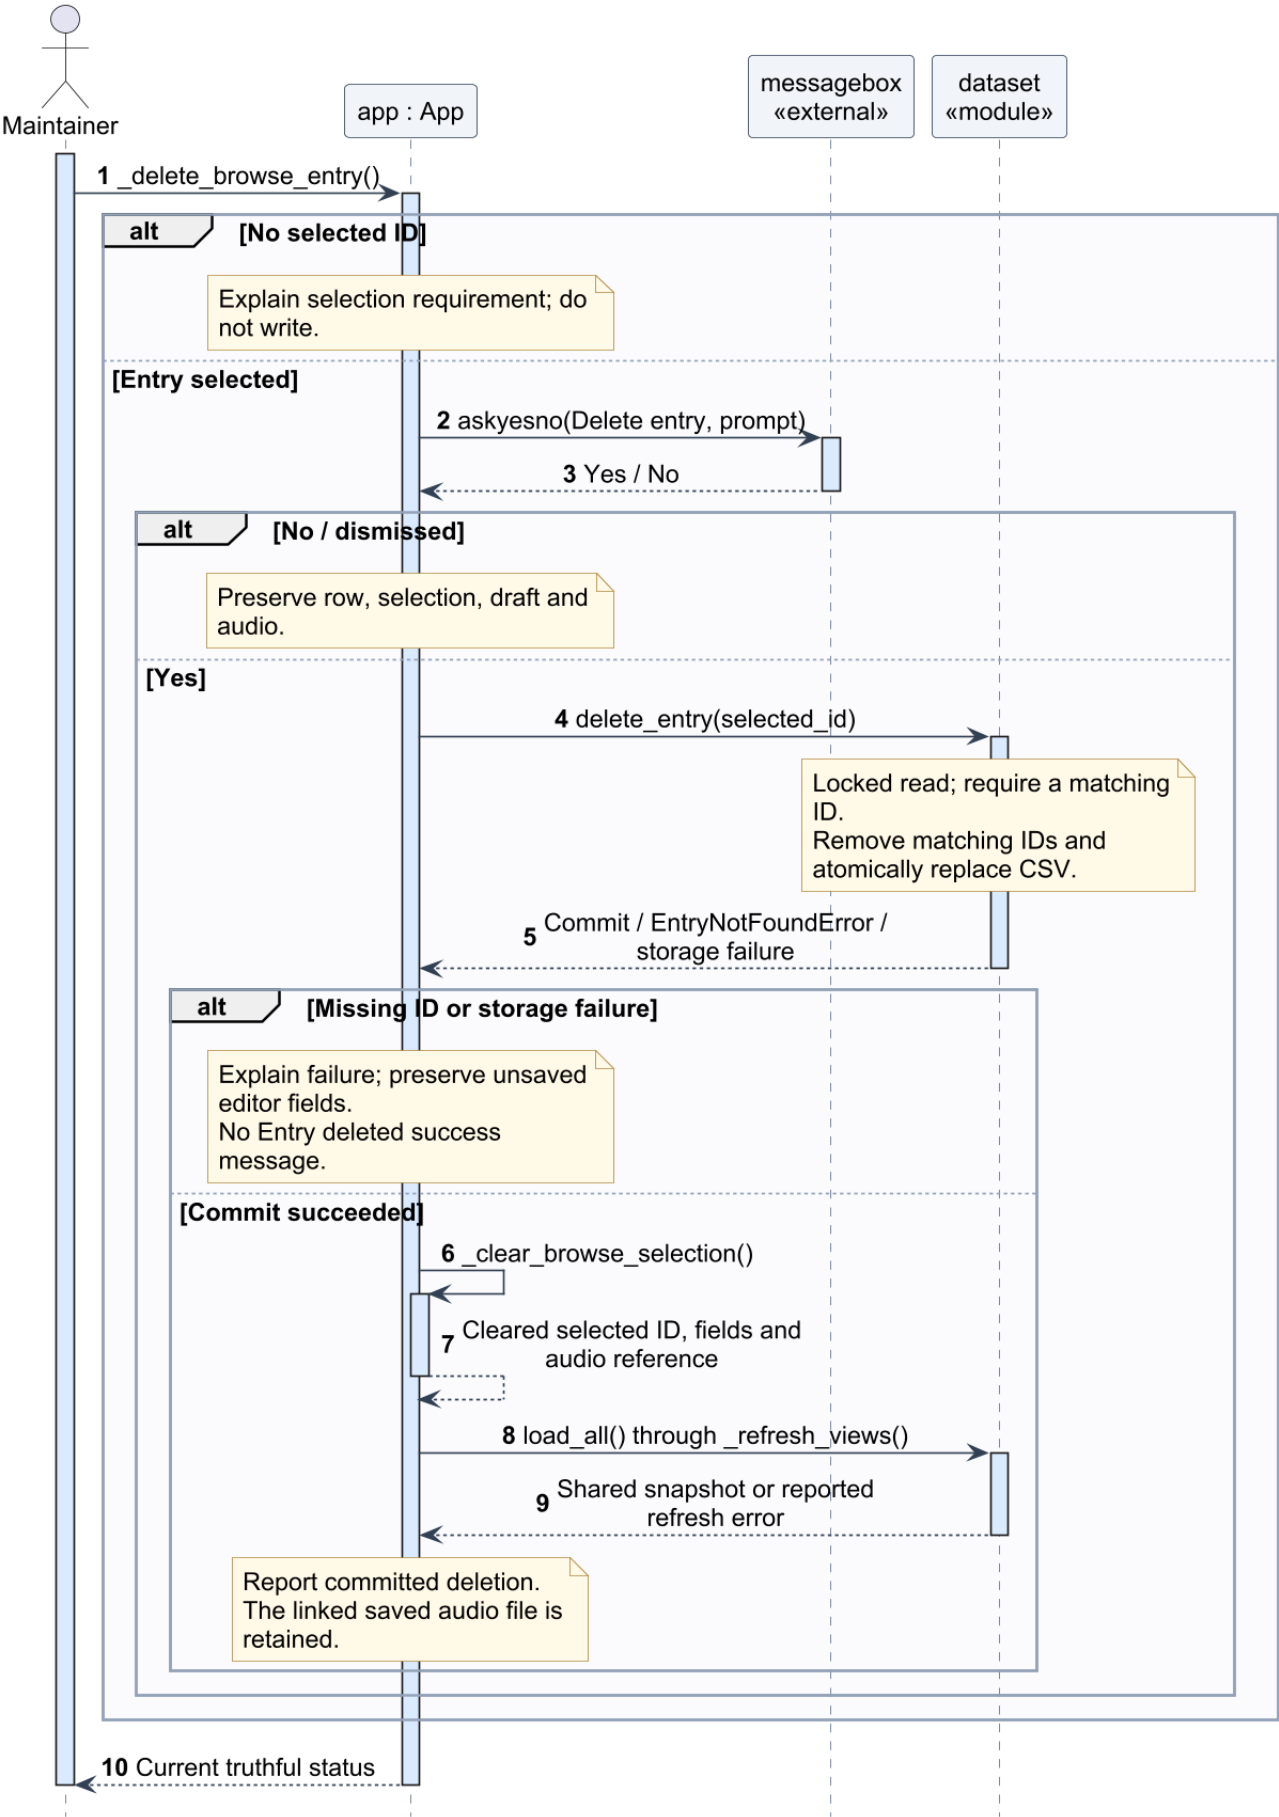


Preserved desktop compatibility only; the authenticated web workspace has separate revisions. Confirmation is a decision, not an authorization or authentication check. Atomic replacement protects write integrity; there is no undo stack.

Retryable microphone capture and WAV staging

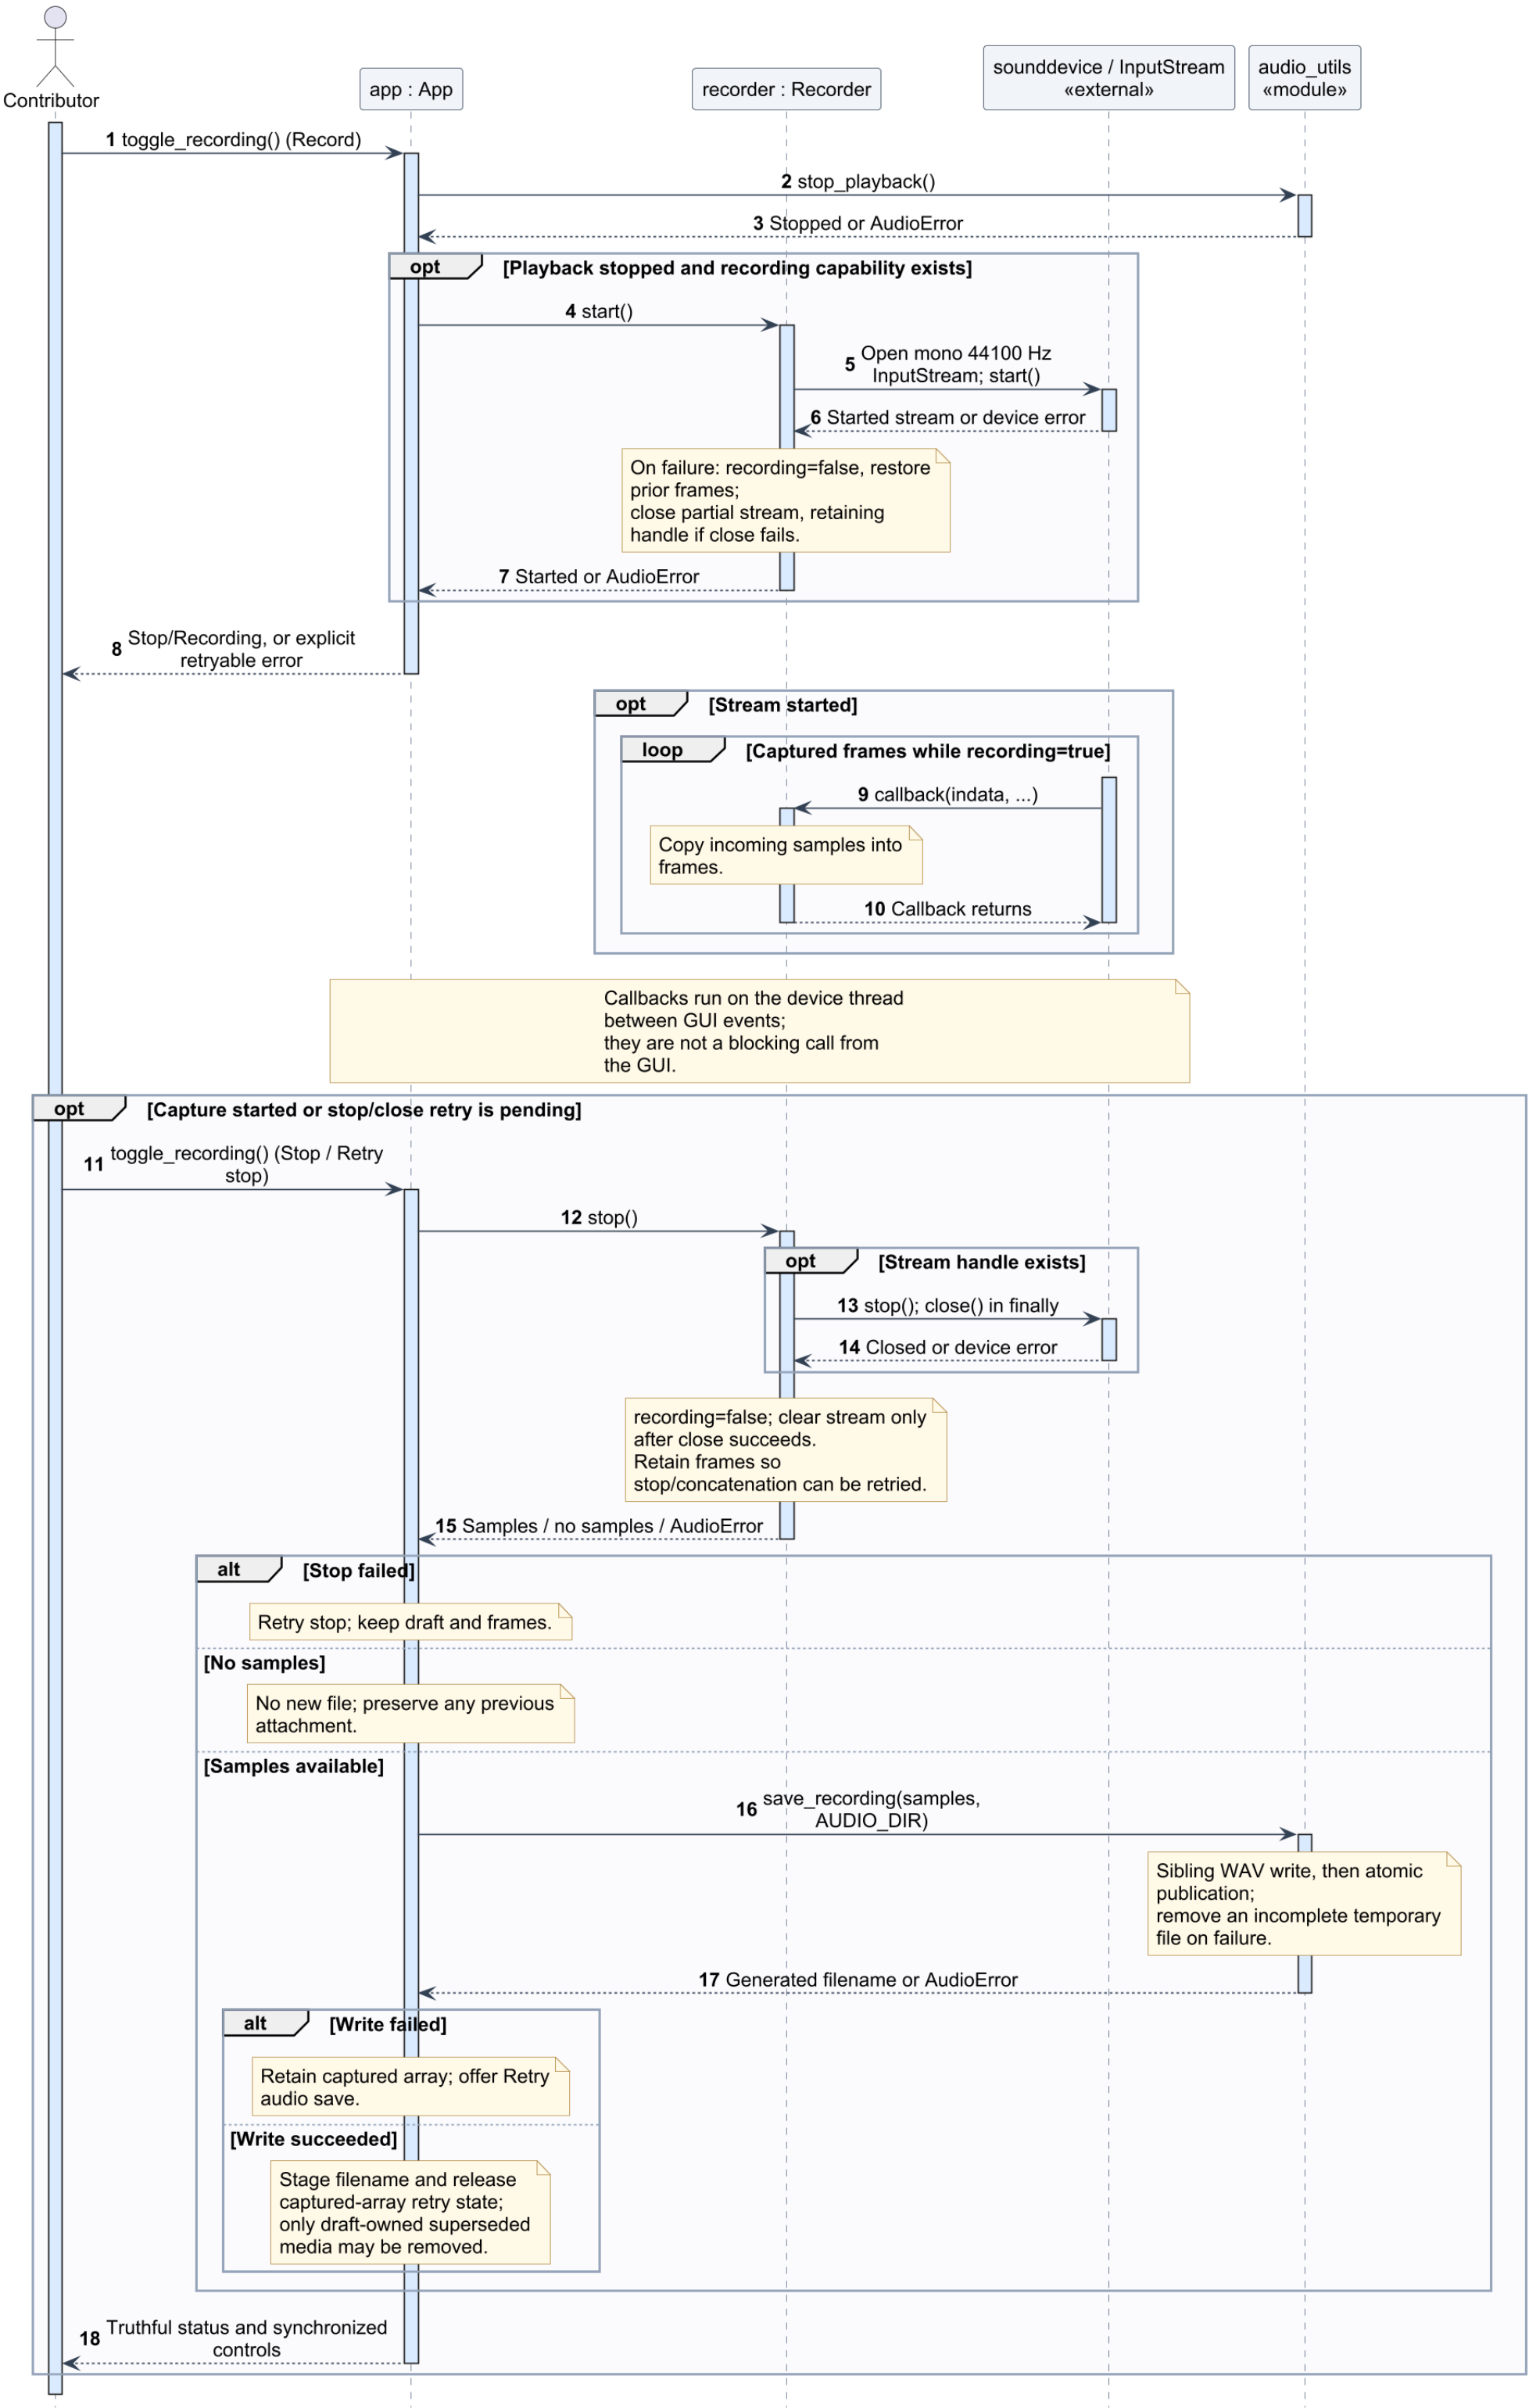


Preserved desktop recorder, not browser dictation or remote transcription.
Device activation spans each callback delivery interval below the start request.
Save, attach and playback are blocked while audio remains unfinished.
Retry audio save calls save_recording again without opening the microphone.
Clear/close deliberately discard draft-owned audio; saved recordings survive.

Preserved desktop playback with library and OS fallback

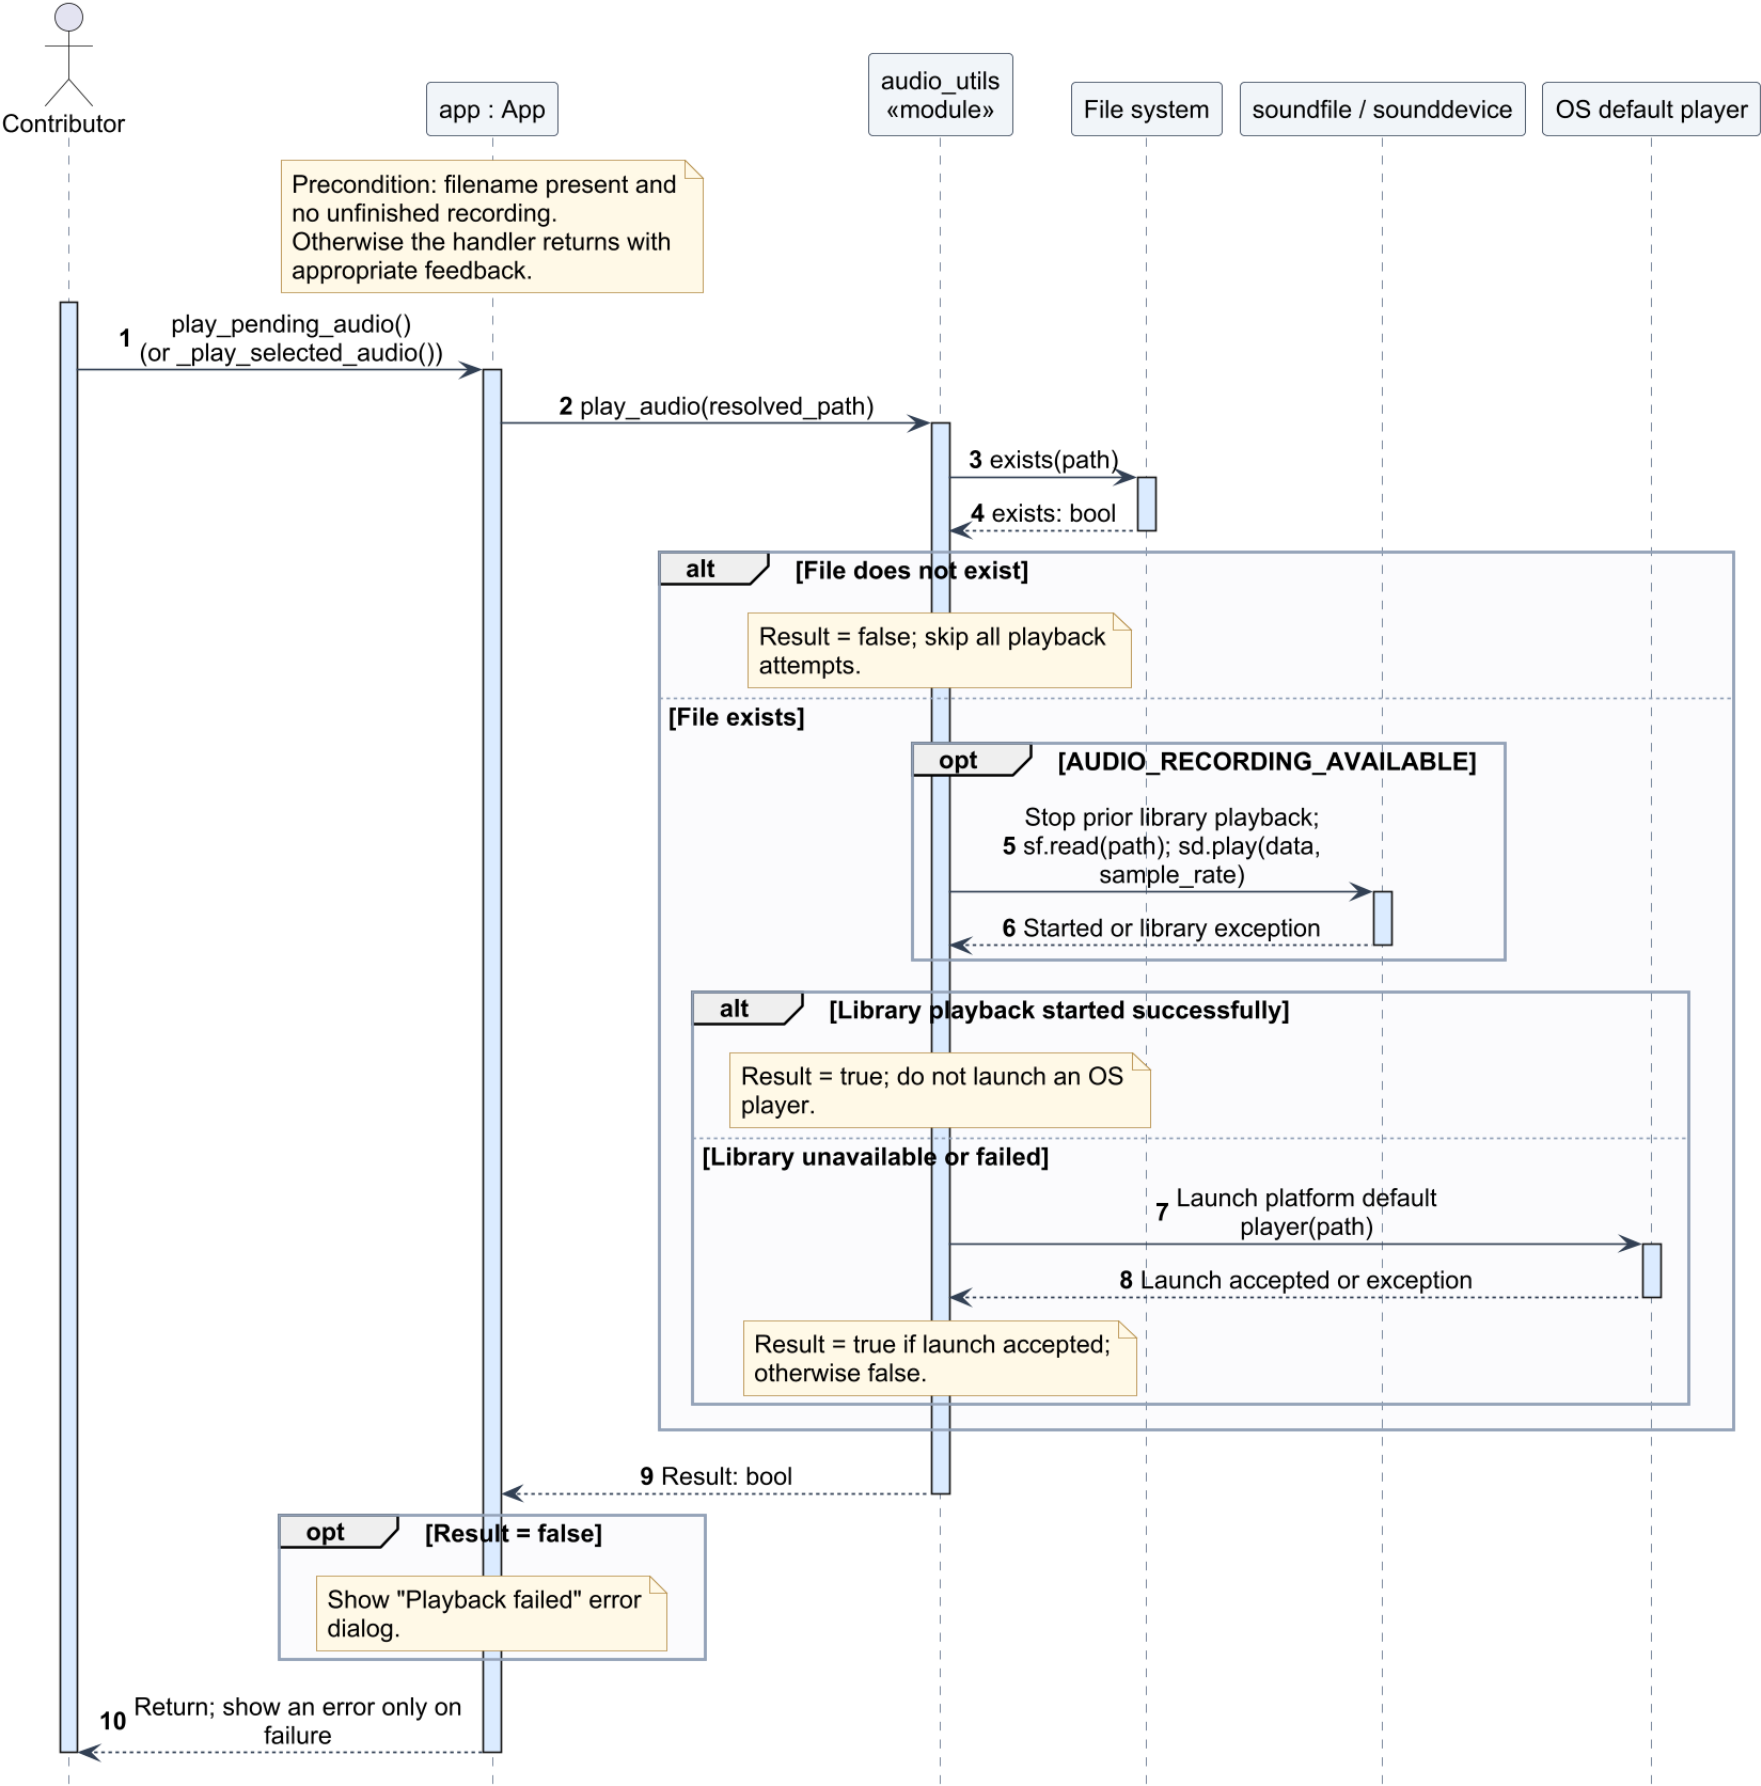


This is the desktop compatibility path, not the browser's private audio download flow. true means a playback request was accepted, not that sound was heard to completion. OS launch acceptance is not playback completion; media decoding is external. Expected audio errors are reported by the GUI; CSV is unchanged. Clear/close can stop in-process playback, not an external OS player's lifetime.

Preserved desktop statistics from one snapshot

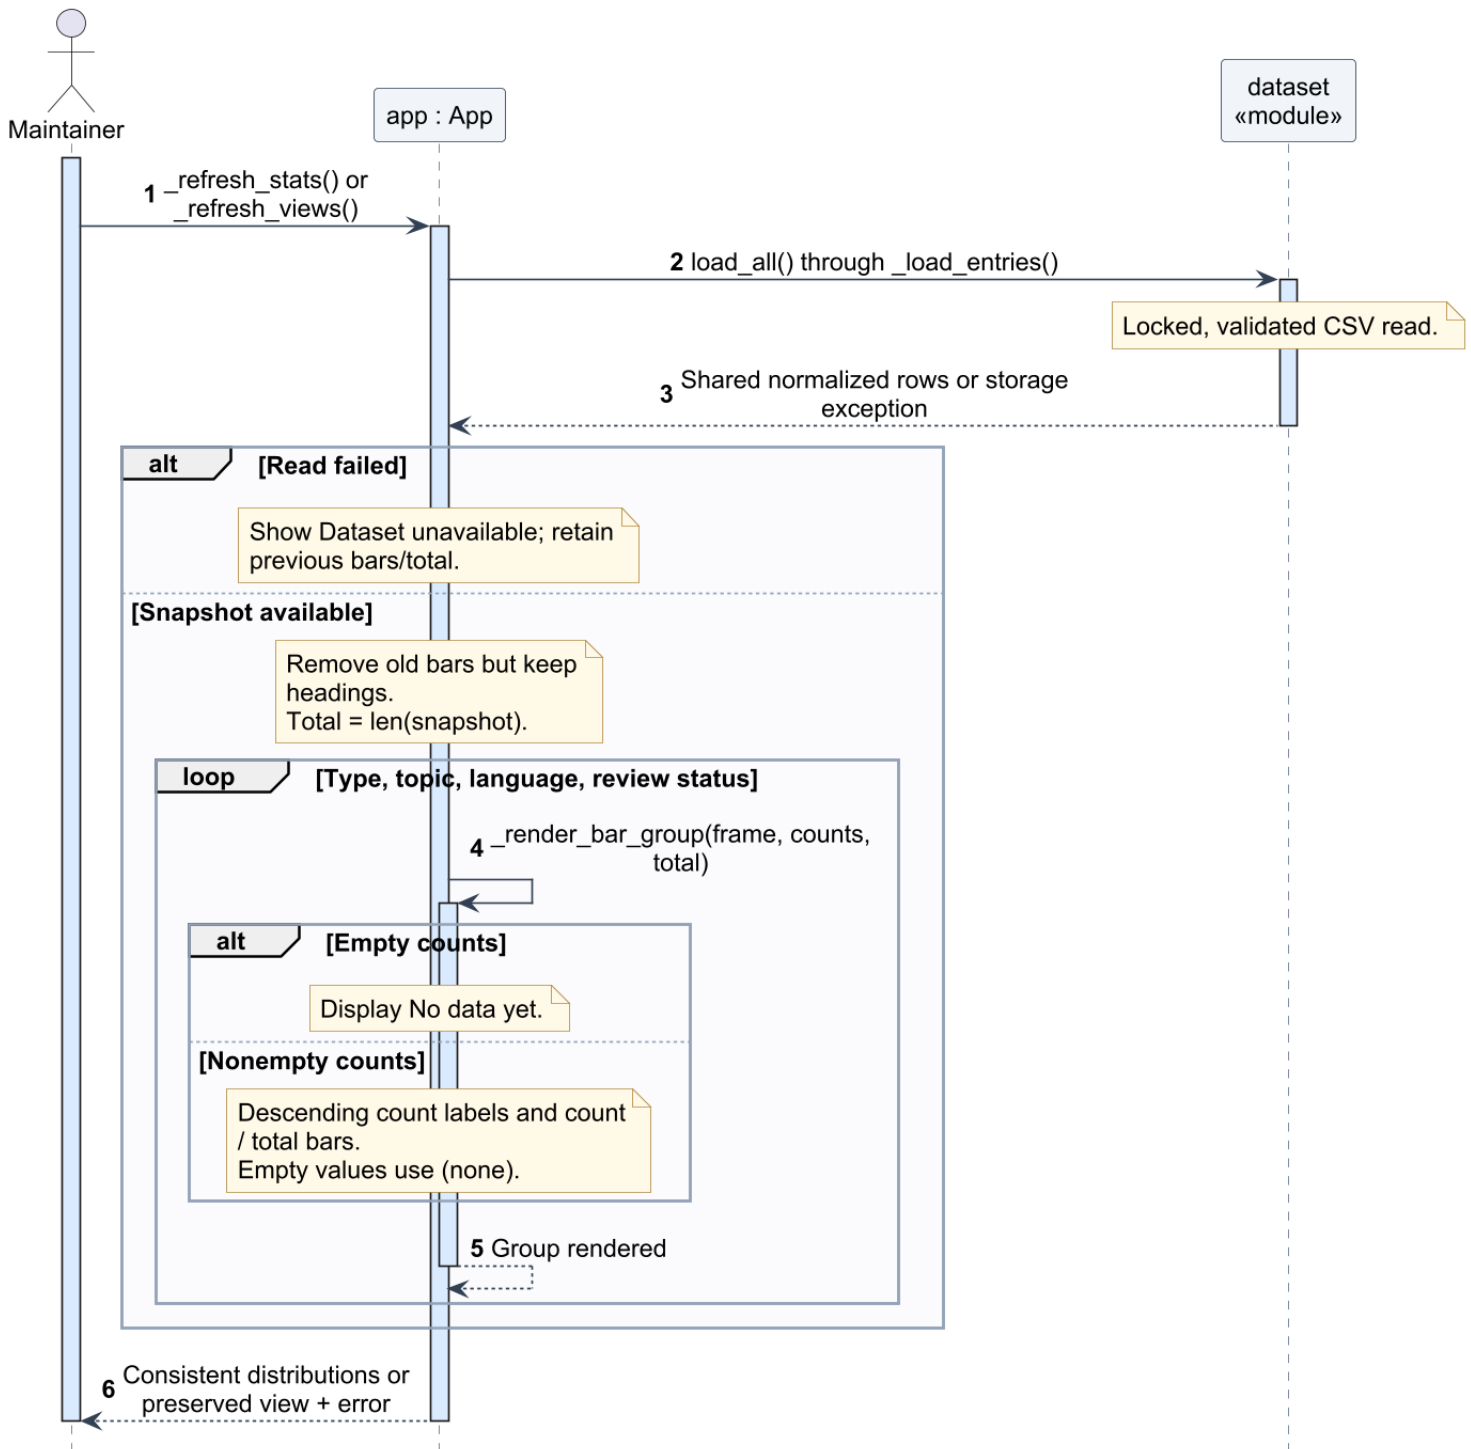


`_refresh_views` also supplies the same rows to count, recent and Browse views.
Direct Stats refresh loads once; `count_by()` is not called by this handler.
Earlier desktop benchmarks are historical; this diagram makes no current timing claim.

Read-only dictionary lookup: source rows, not fieldwork

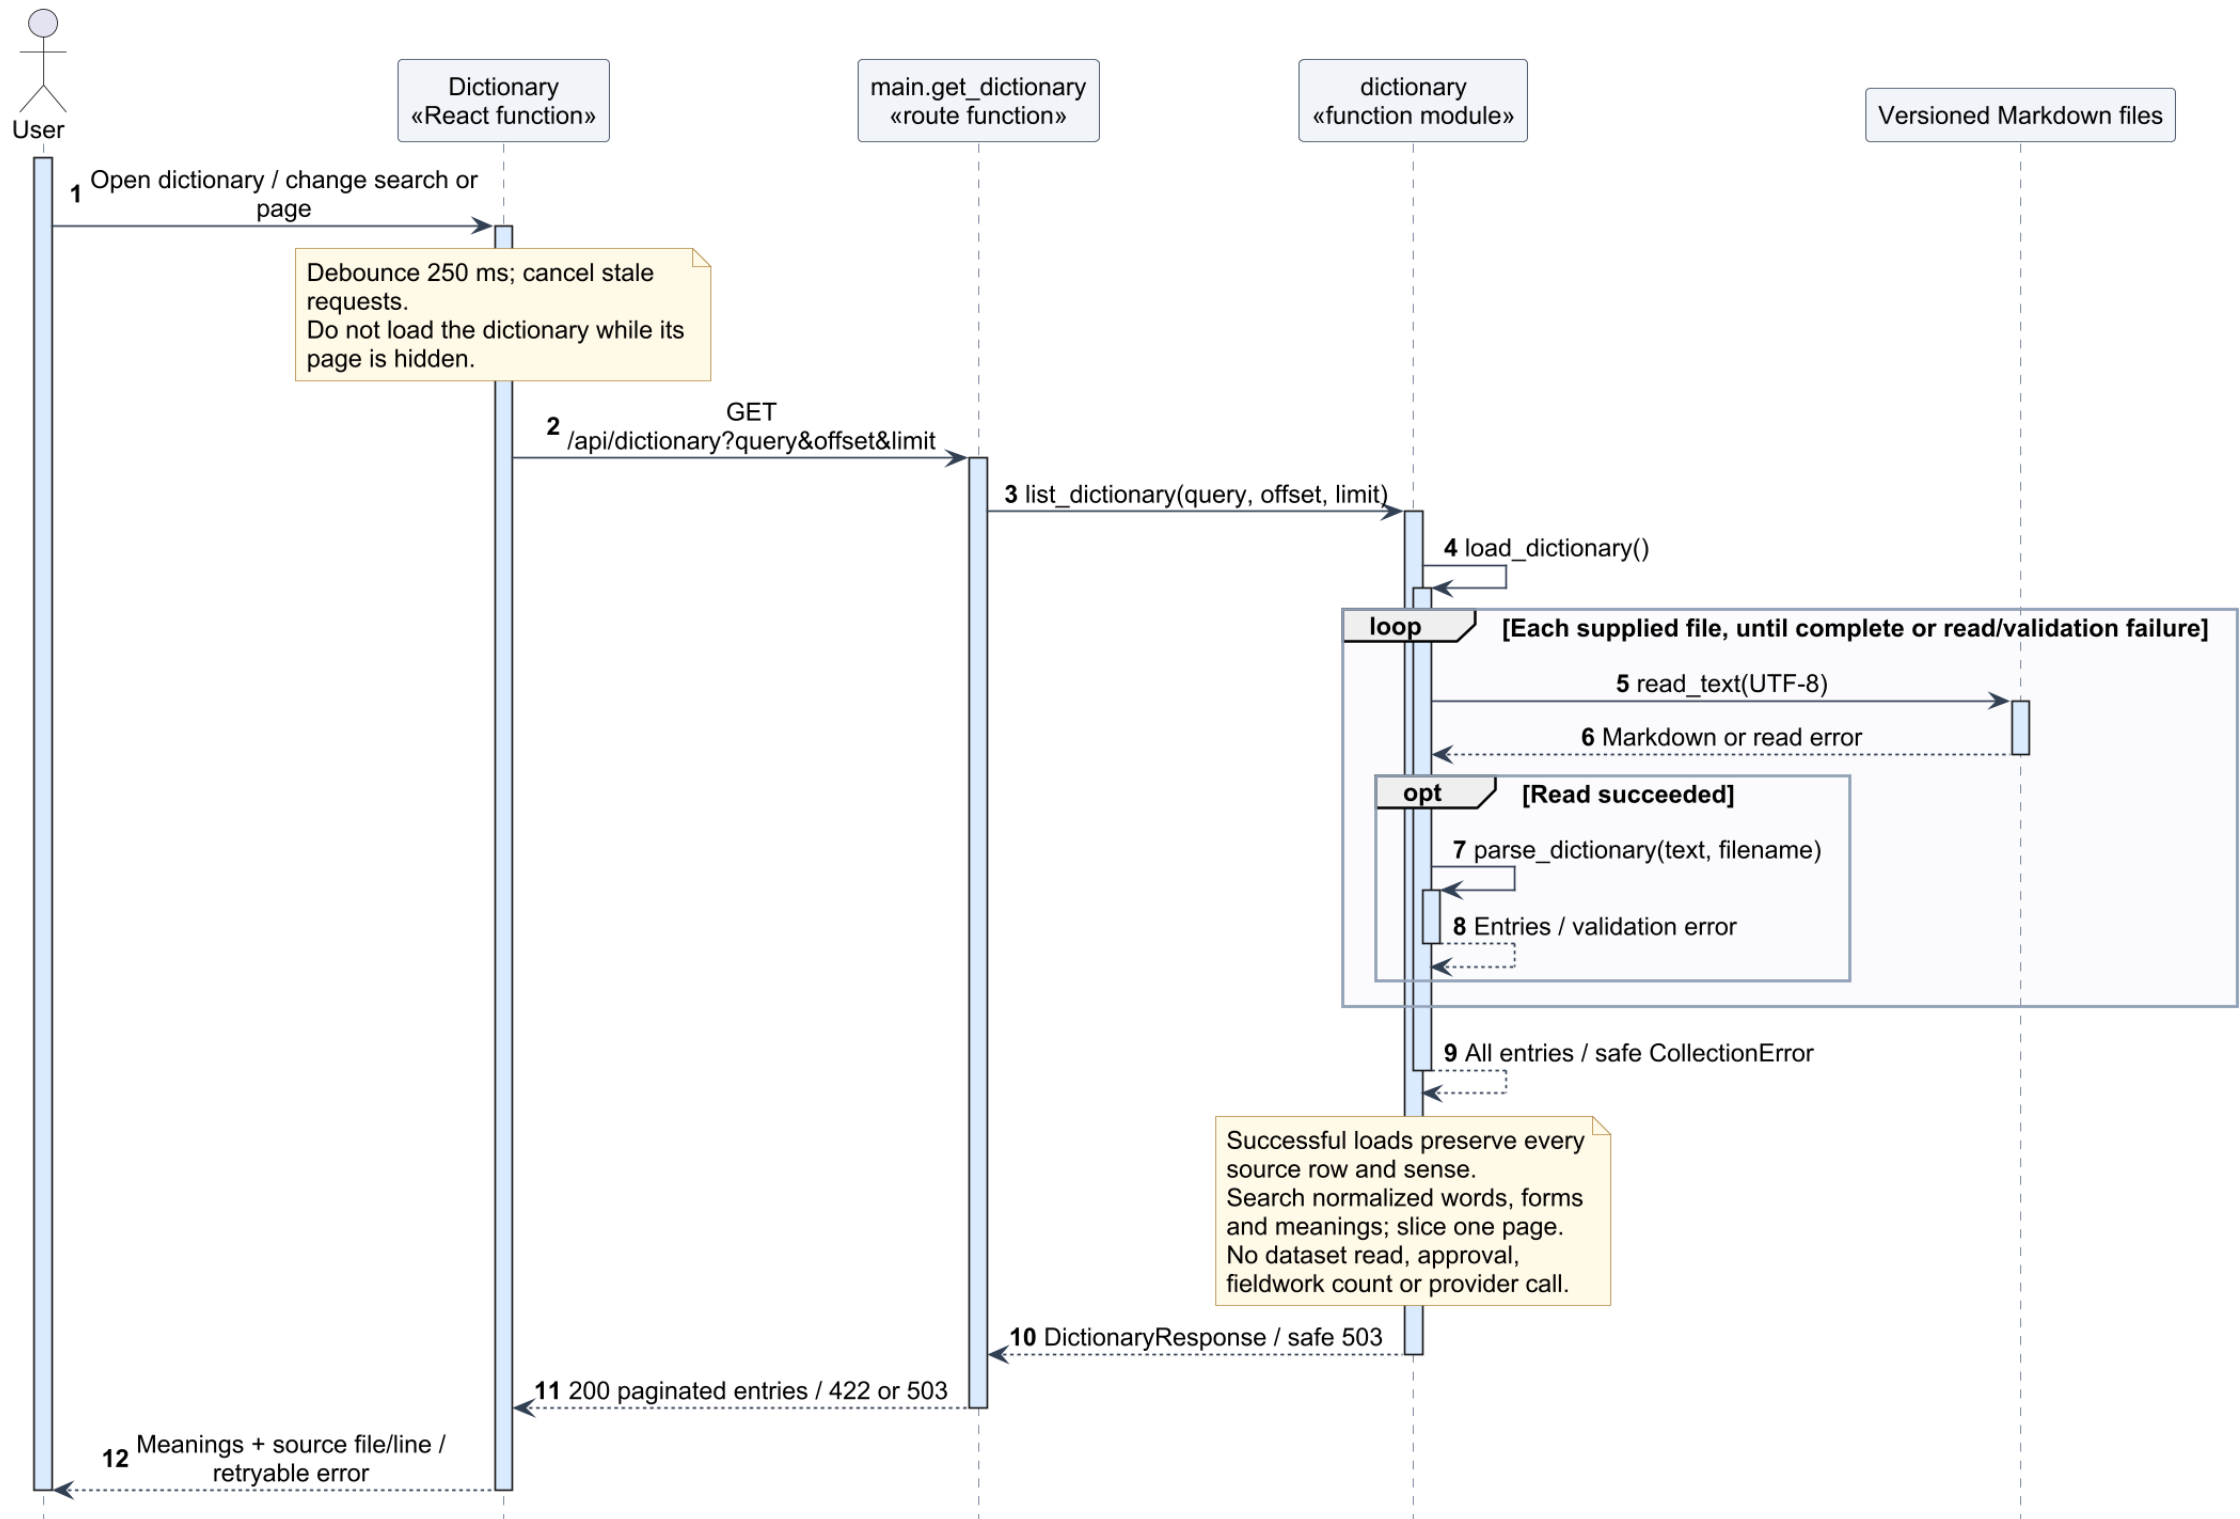


Every dictionary row remains a supplied reference, including repeated forms and senses. English meanings and source origin are not a POS annotation or a reviewed French gloss. The separate practice library is constructed material; neither source is real collected fieldwork. This lookup has no translation/generation side effect.

Local text preview and explicit human-reviewed collection save

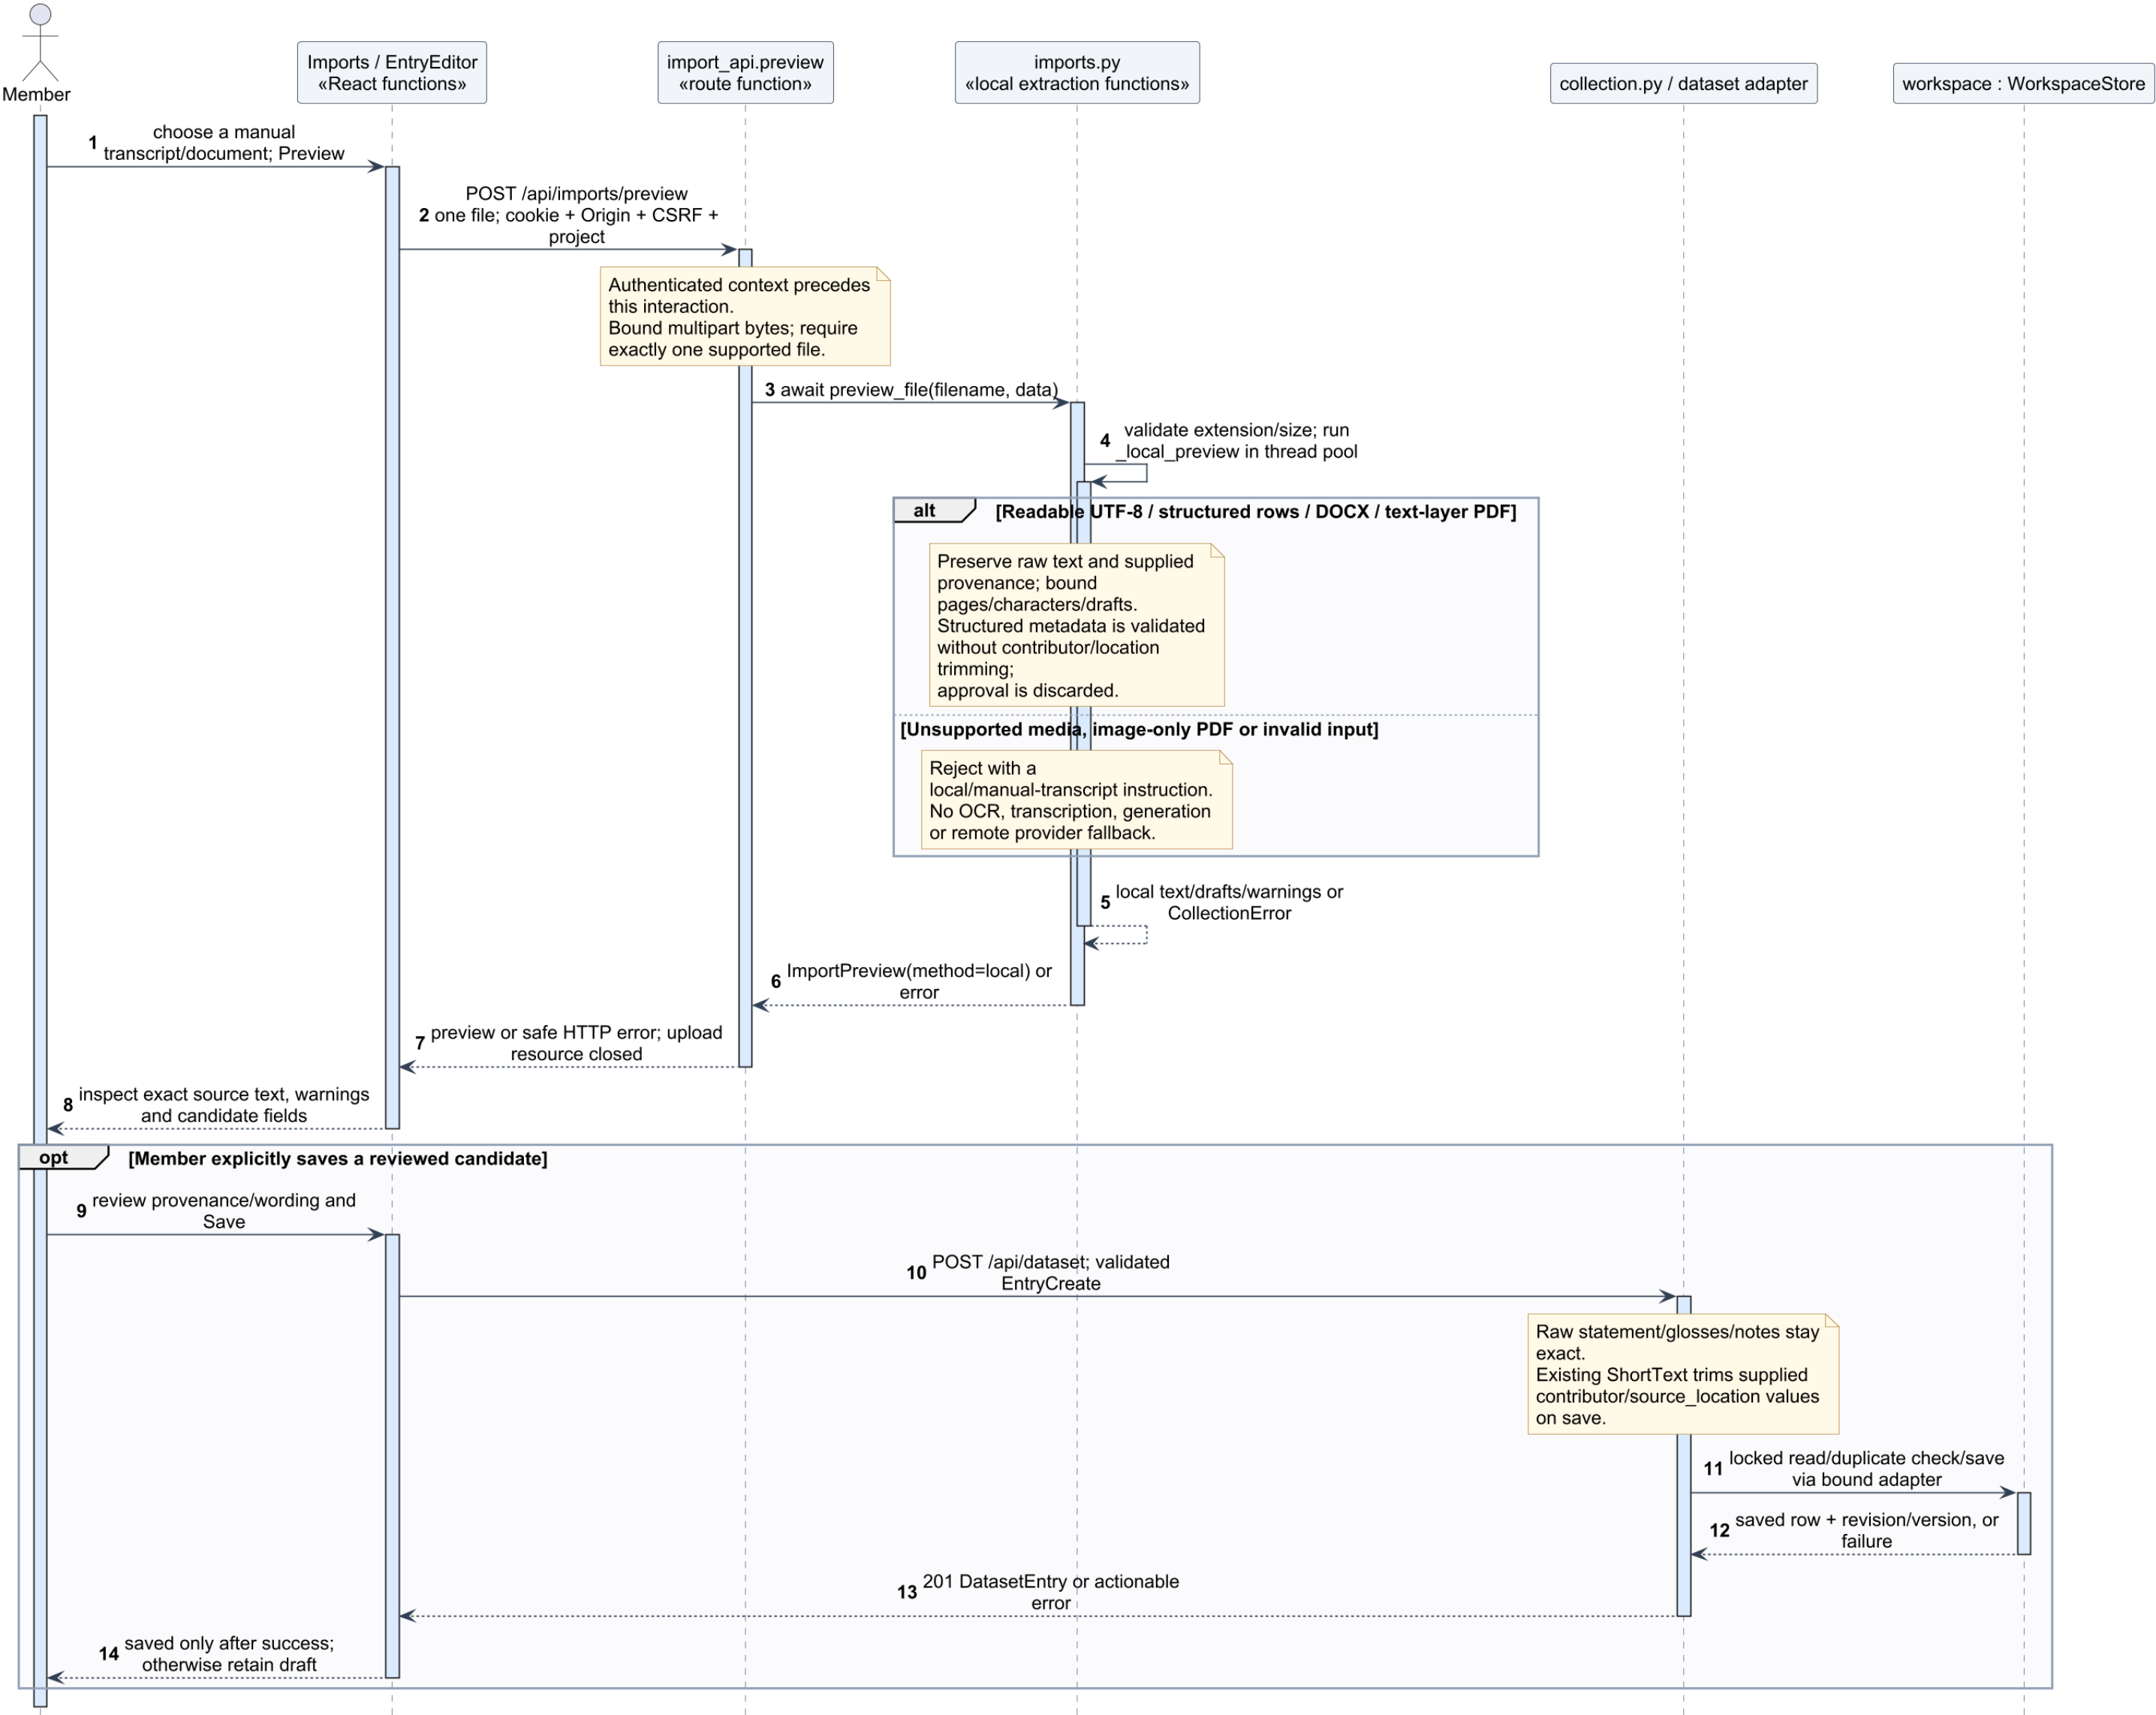


Extraction is local to the application server, not necessarily on-device.
Preview does not save the original document as an attachment or auto-save entries.
Imported text is not proof of real fieldwork; the member supplies authenticity and provenance.
No suggest endpoint or cloud-consent flow remains.

Authenticated compiler lab: grammar analysis and category-token parsing

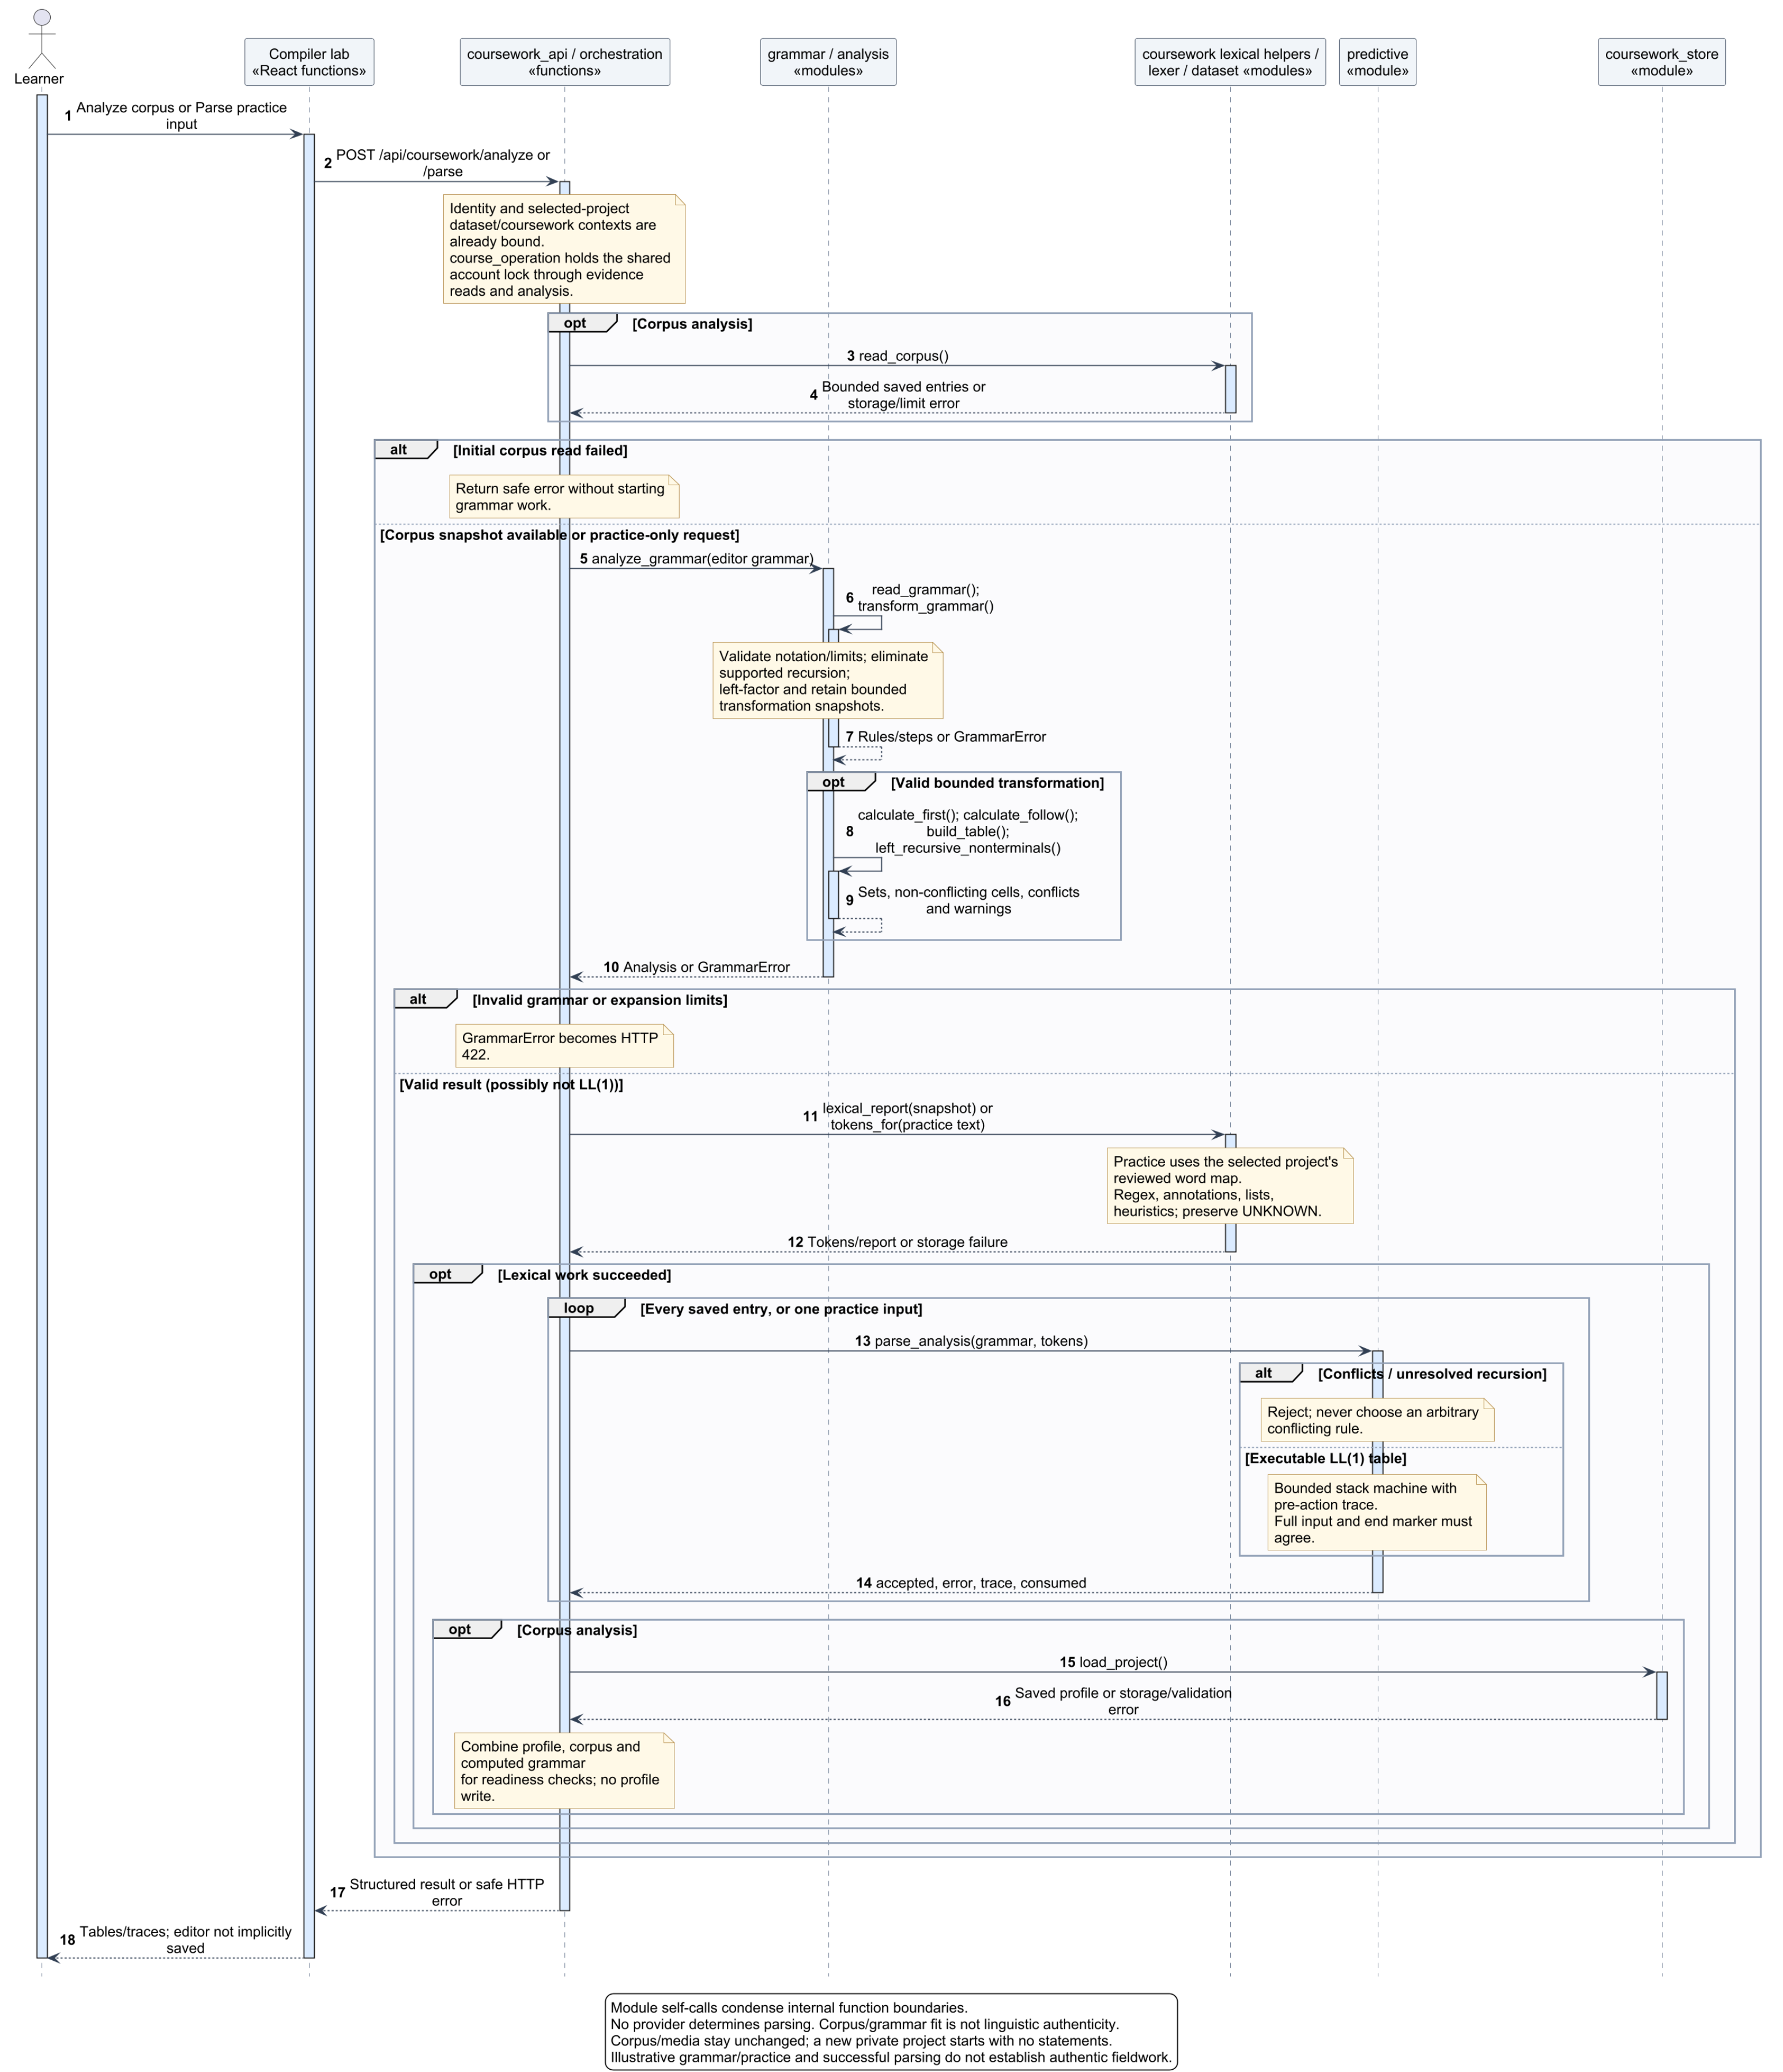


Save project-scoped coursework; export only saved evidence as a DRAFT

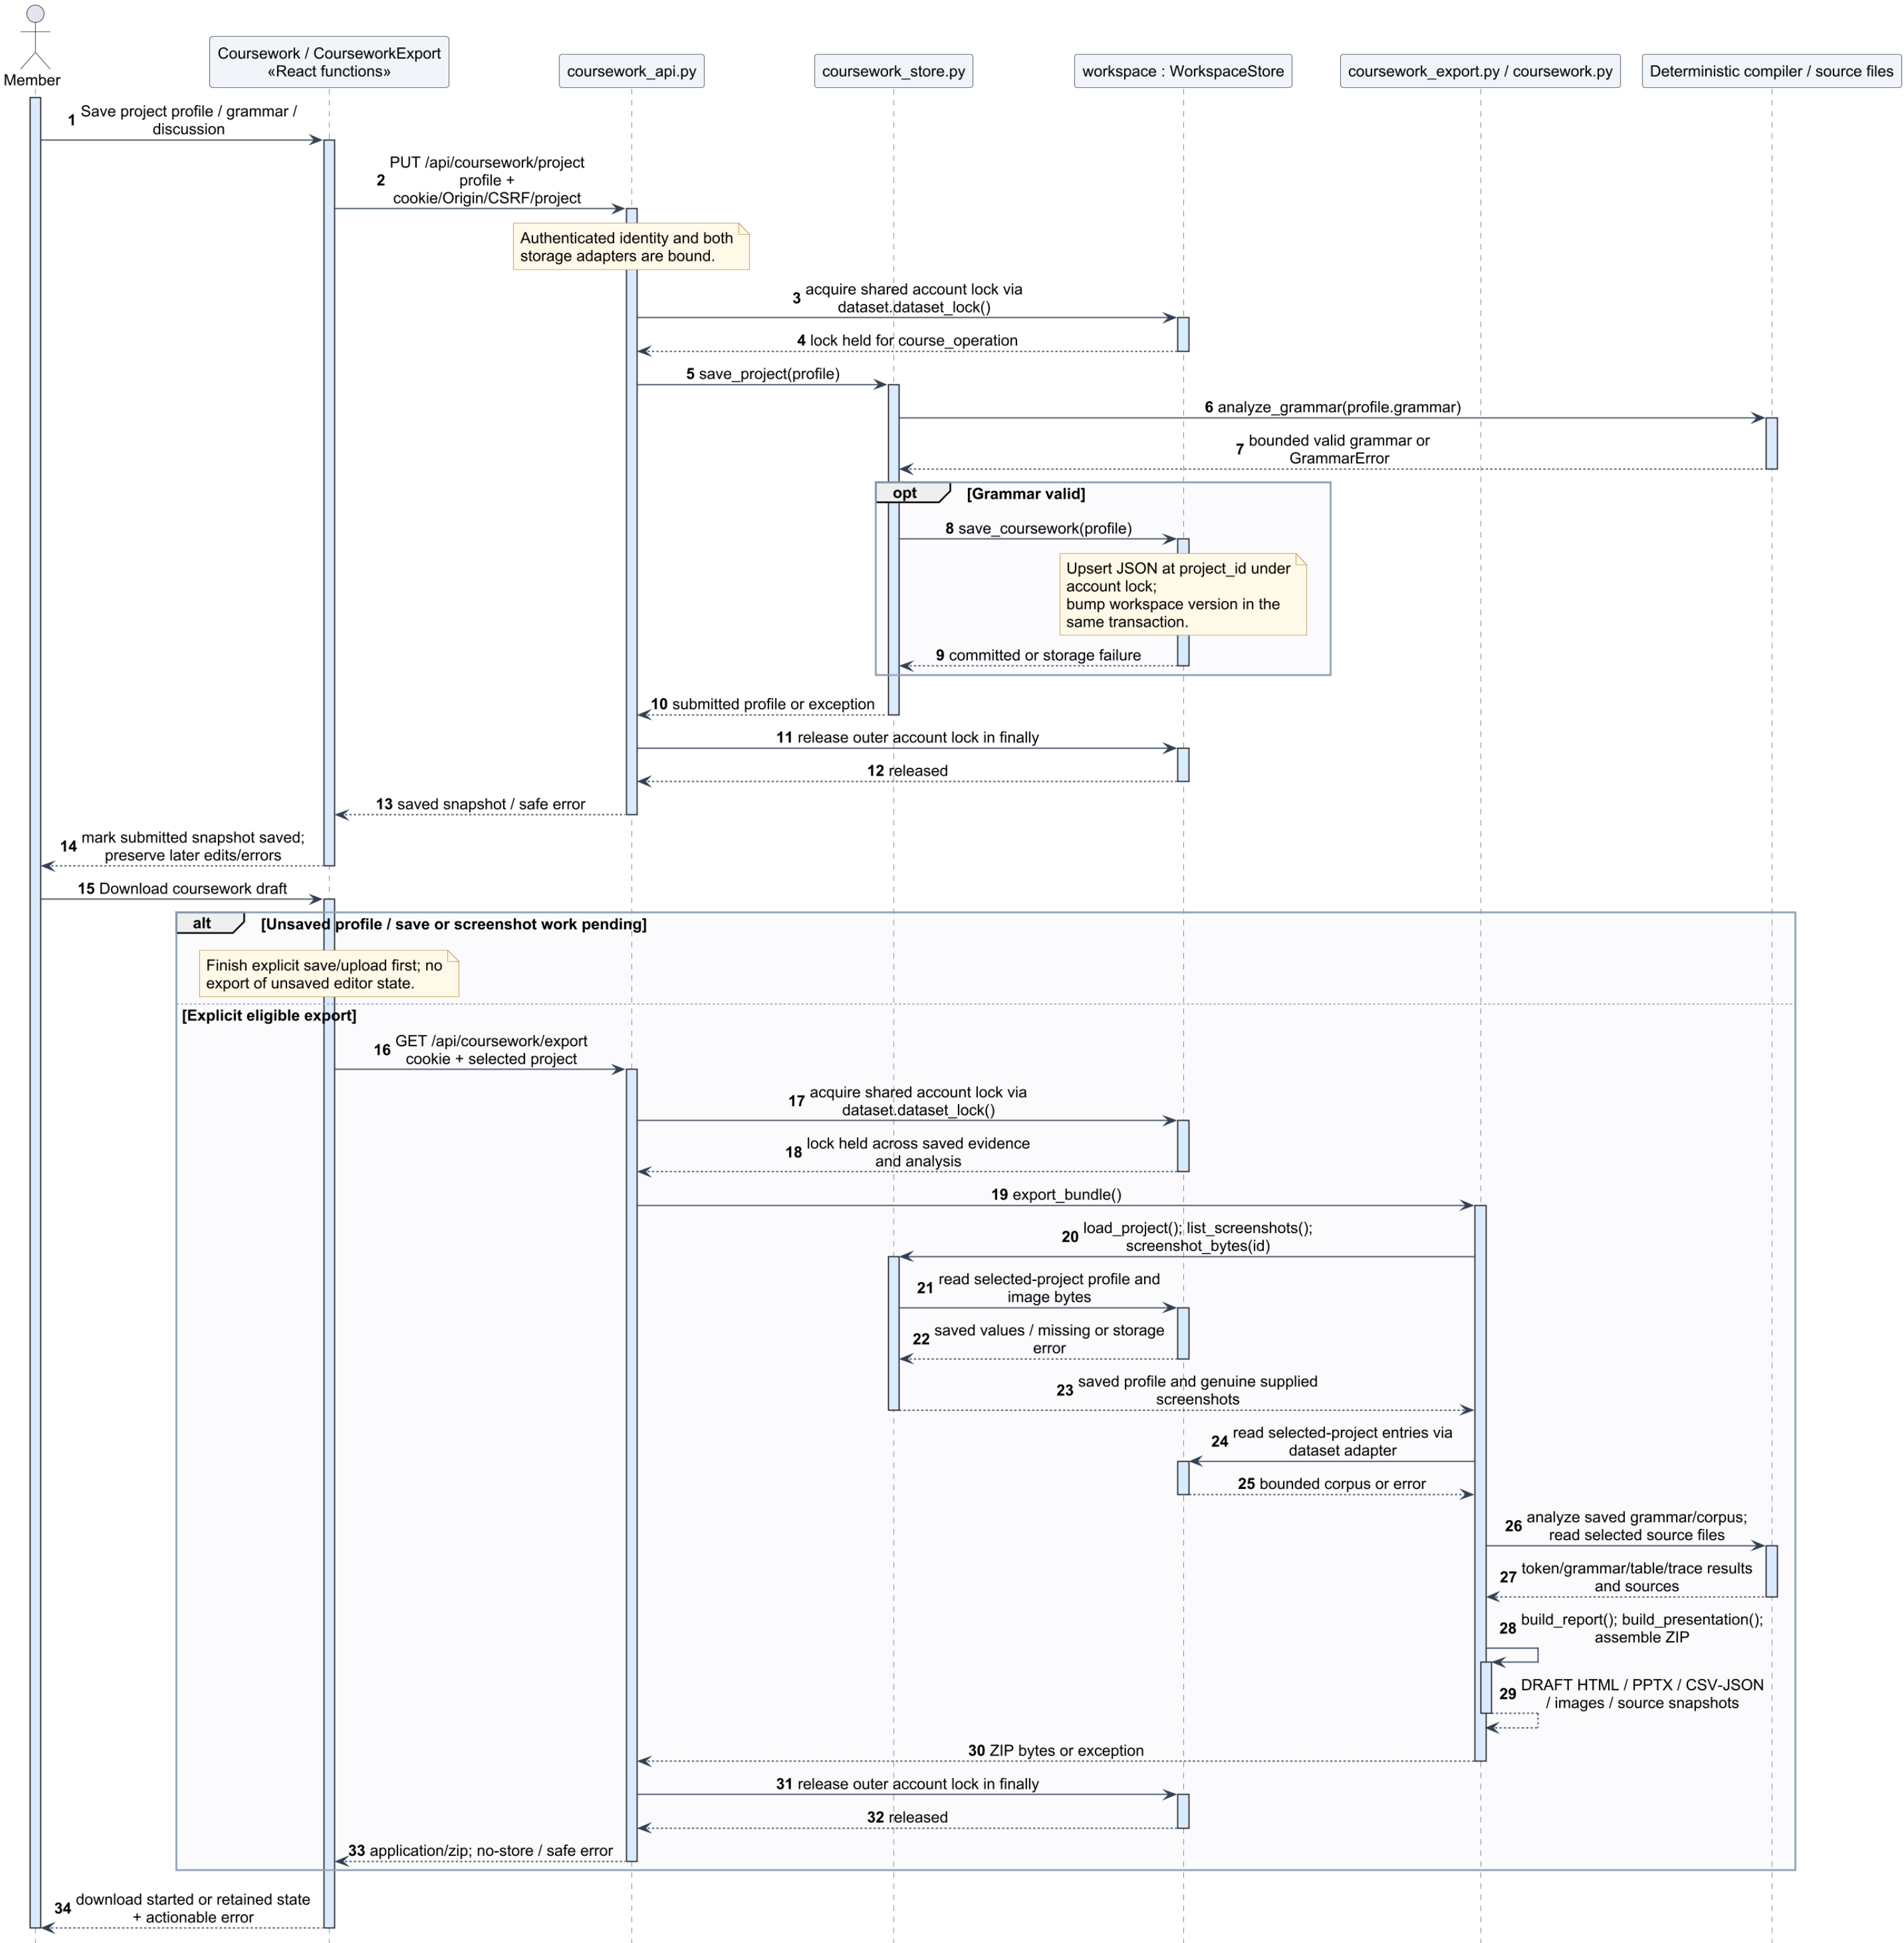


The reentrant account lock prevents profile/corpus/image revision mixing by account mutations. Lock-call activations are not lock ownership duration; ownership spans the whole operation. Source files/external filesystem writers are not part of an account database transaction. Real raw text and contributor metadata are private: review before sharing with course recipients. Raw recordings are not embedded here; full workspace backups retain recordings and coursework. Generated regression expectations replay current parser decisions, not an independent linguistic oracle. Missing research stays visible; 25 sections do not guarantee a 25-30-page final report.

Genuine screenshot evidence: normalized write and owner/project-scoped bytes

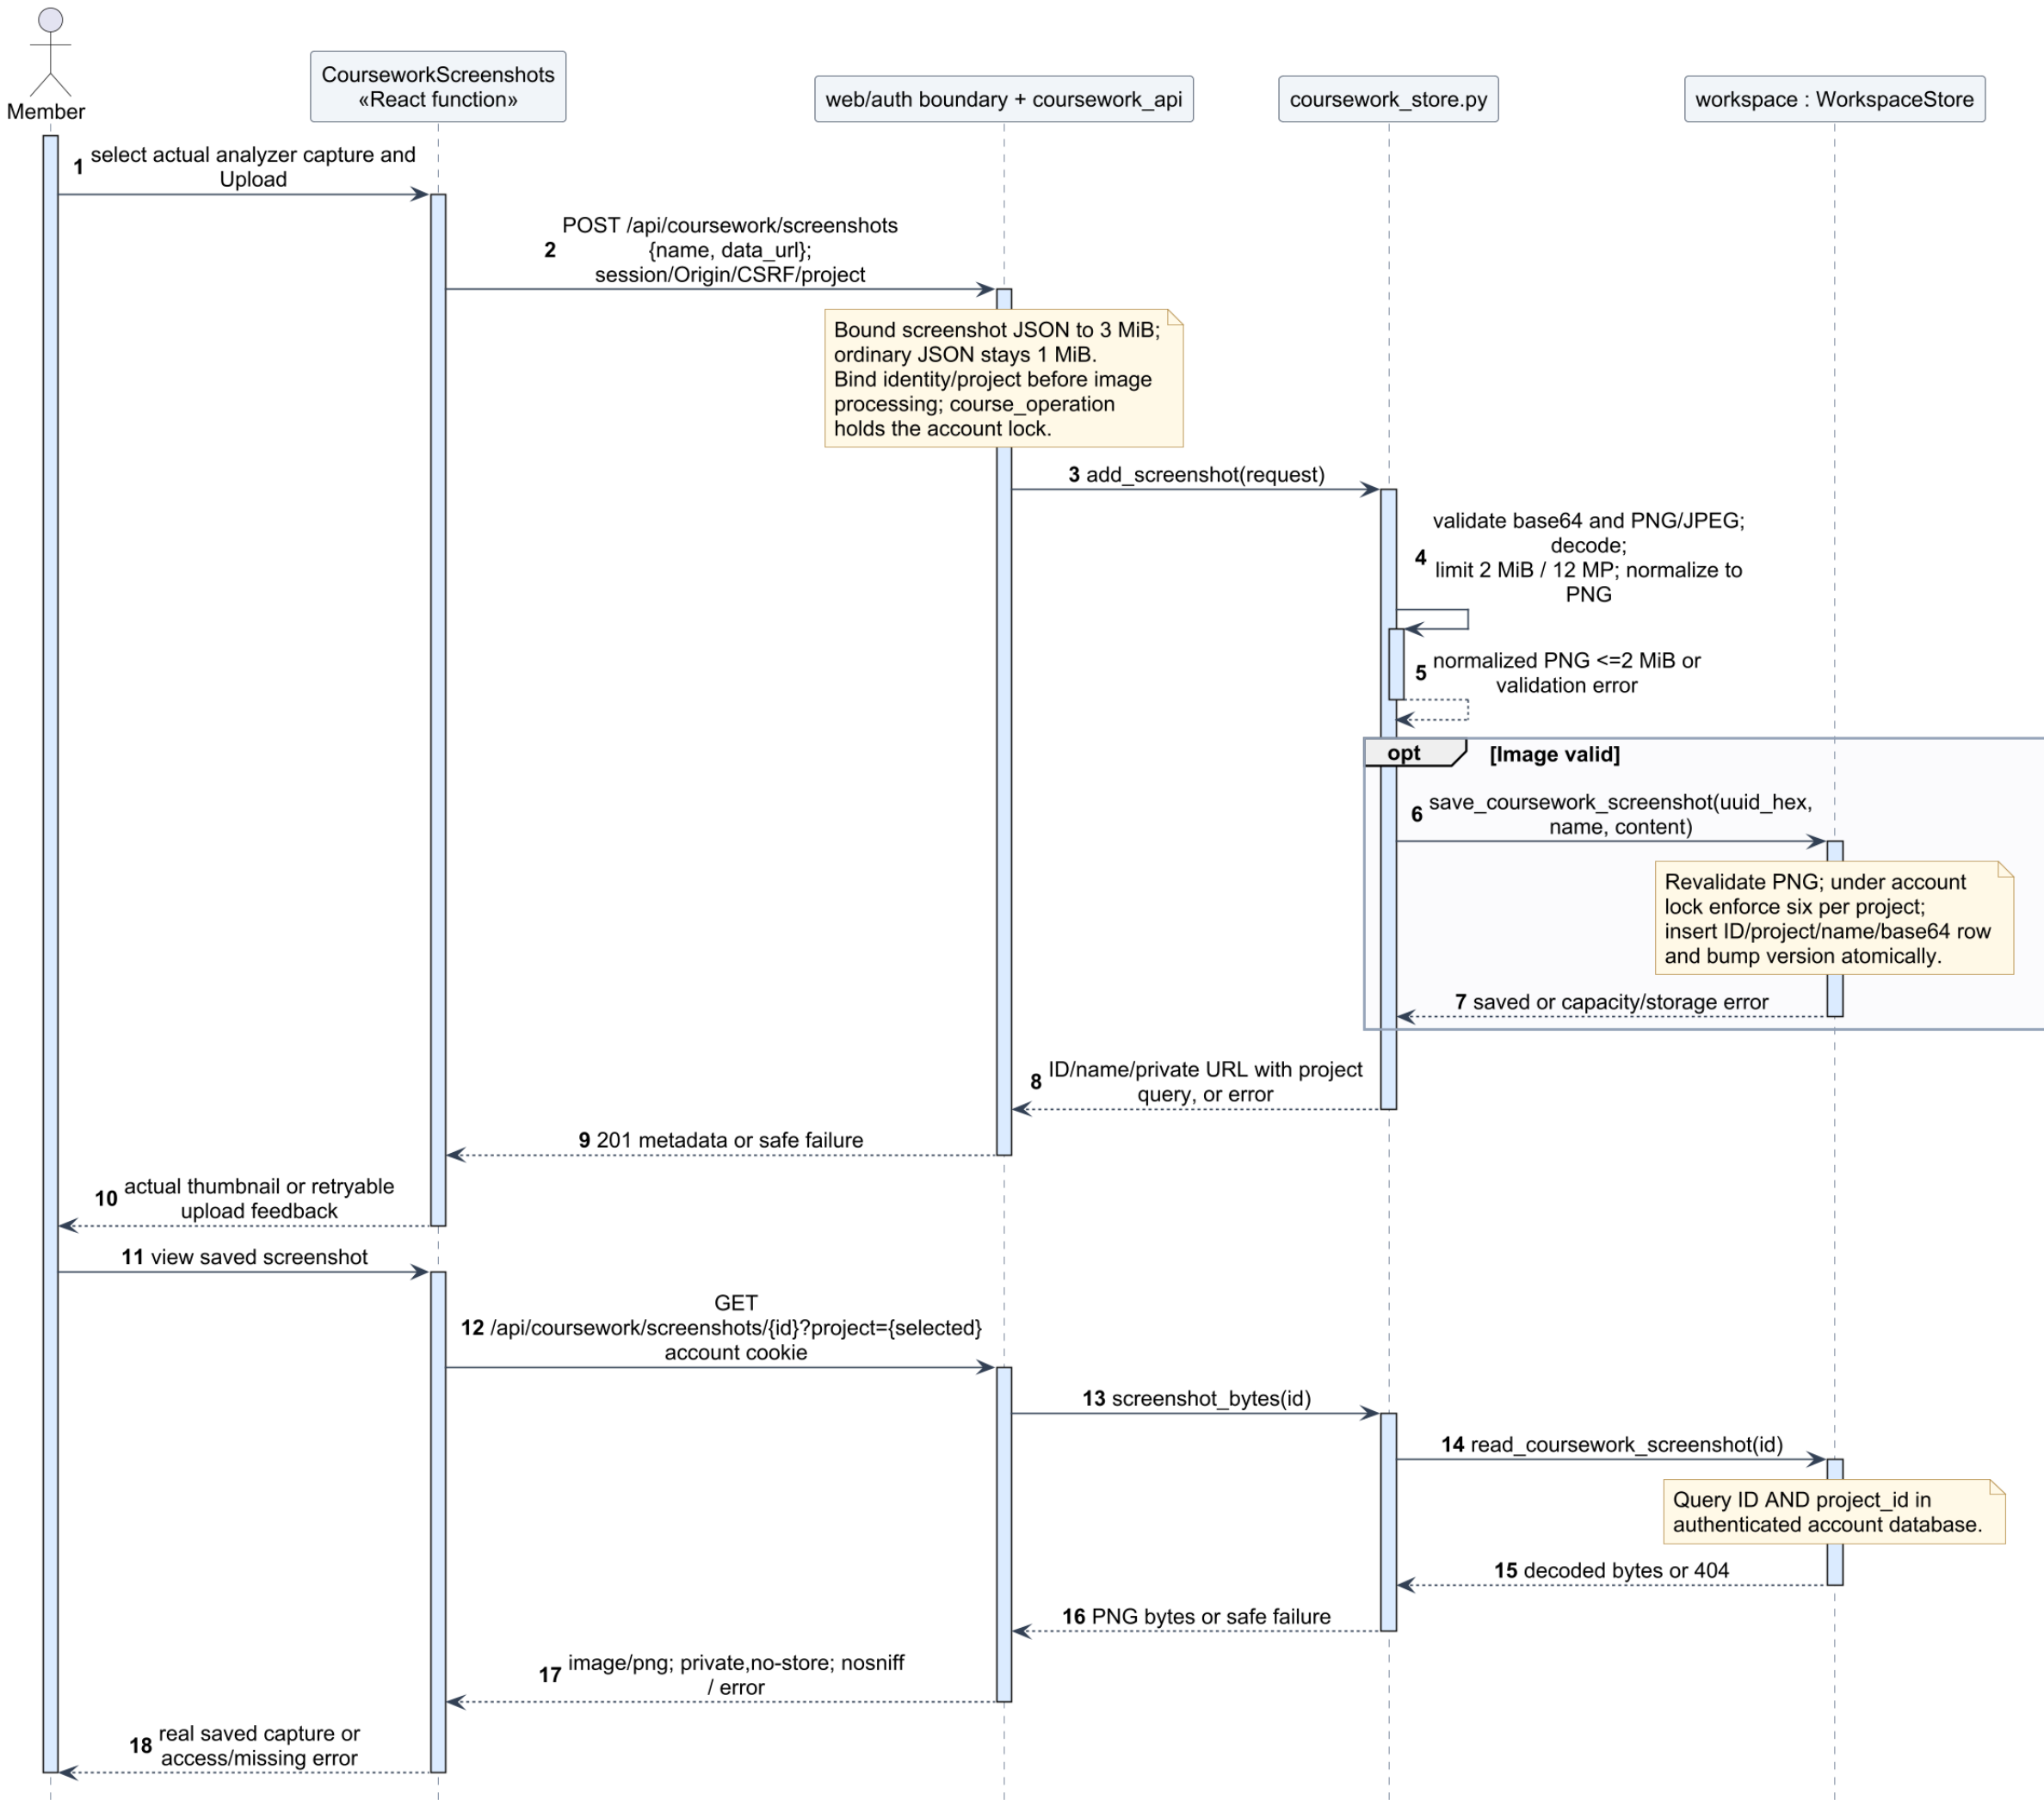

A selected project never selects another user's account directory.
Normal requests do not use legacy screenshot paths; stored bytes are not publicly served files.
Upload/delete mutate the workspace version; a prior restore preview becomes stale.
Image validation cannot prove capture authenticity; the student must supply genuine evidence.

Validated account backup restore with a safety copy

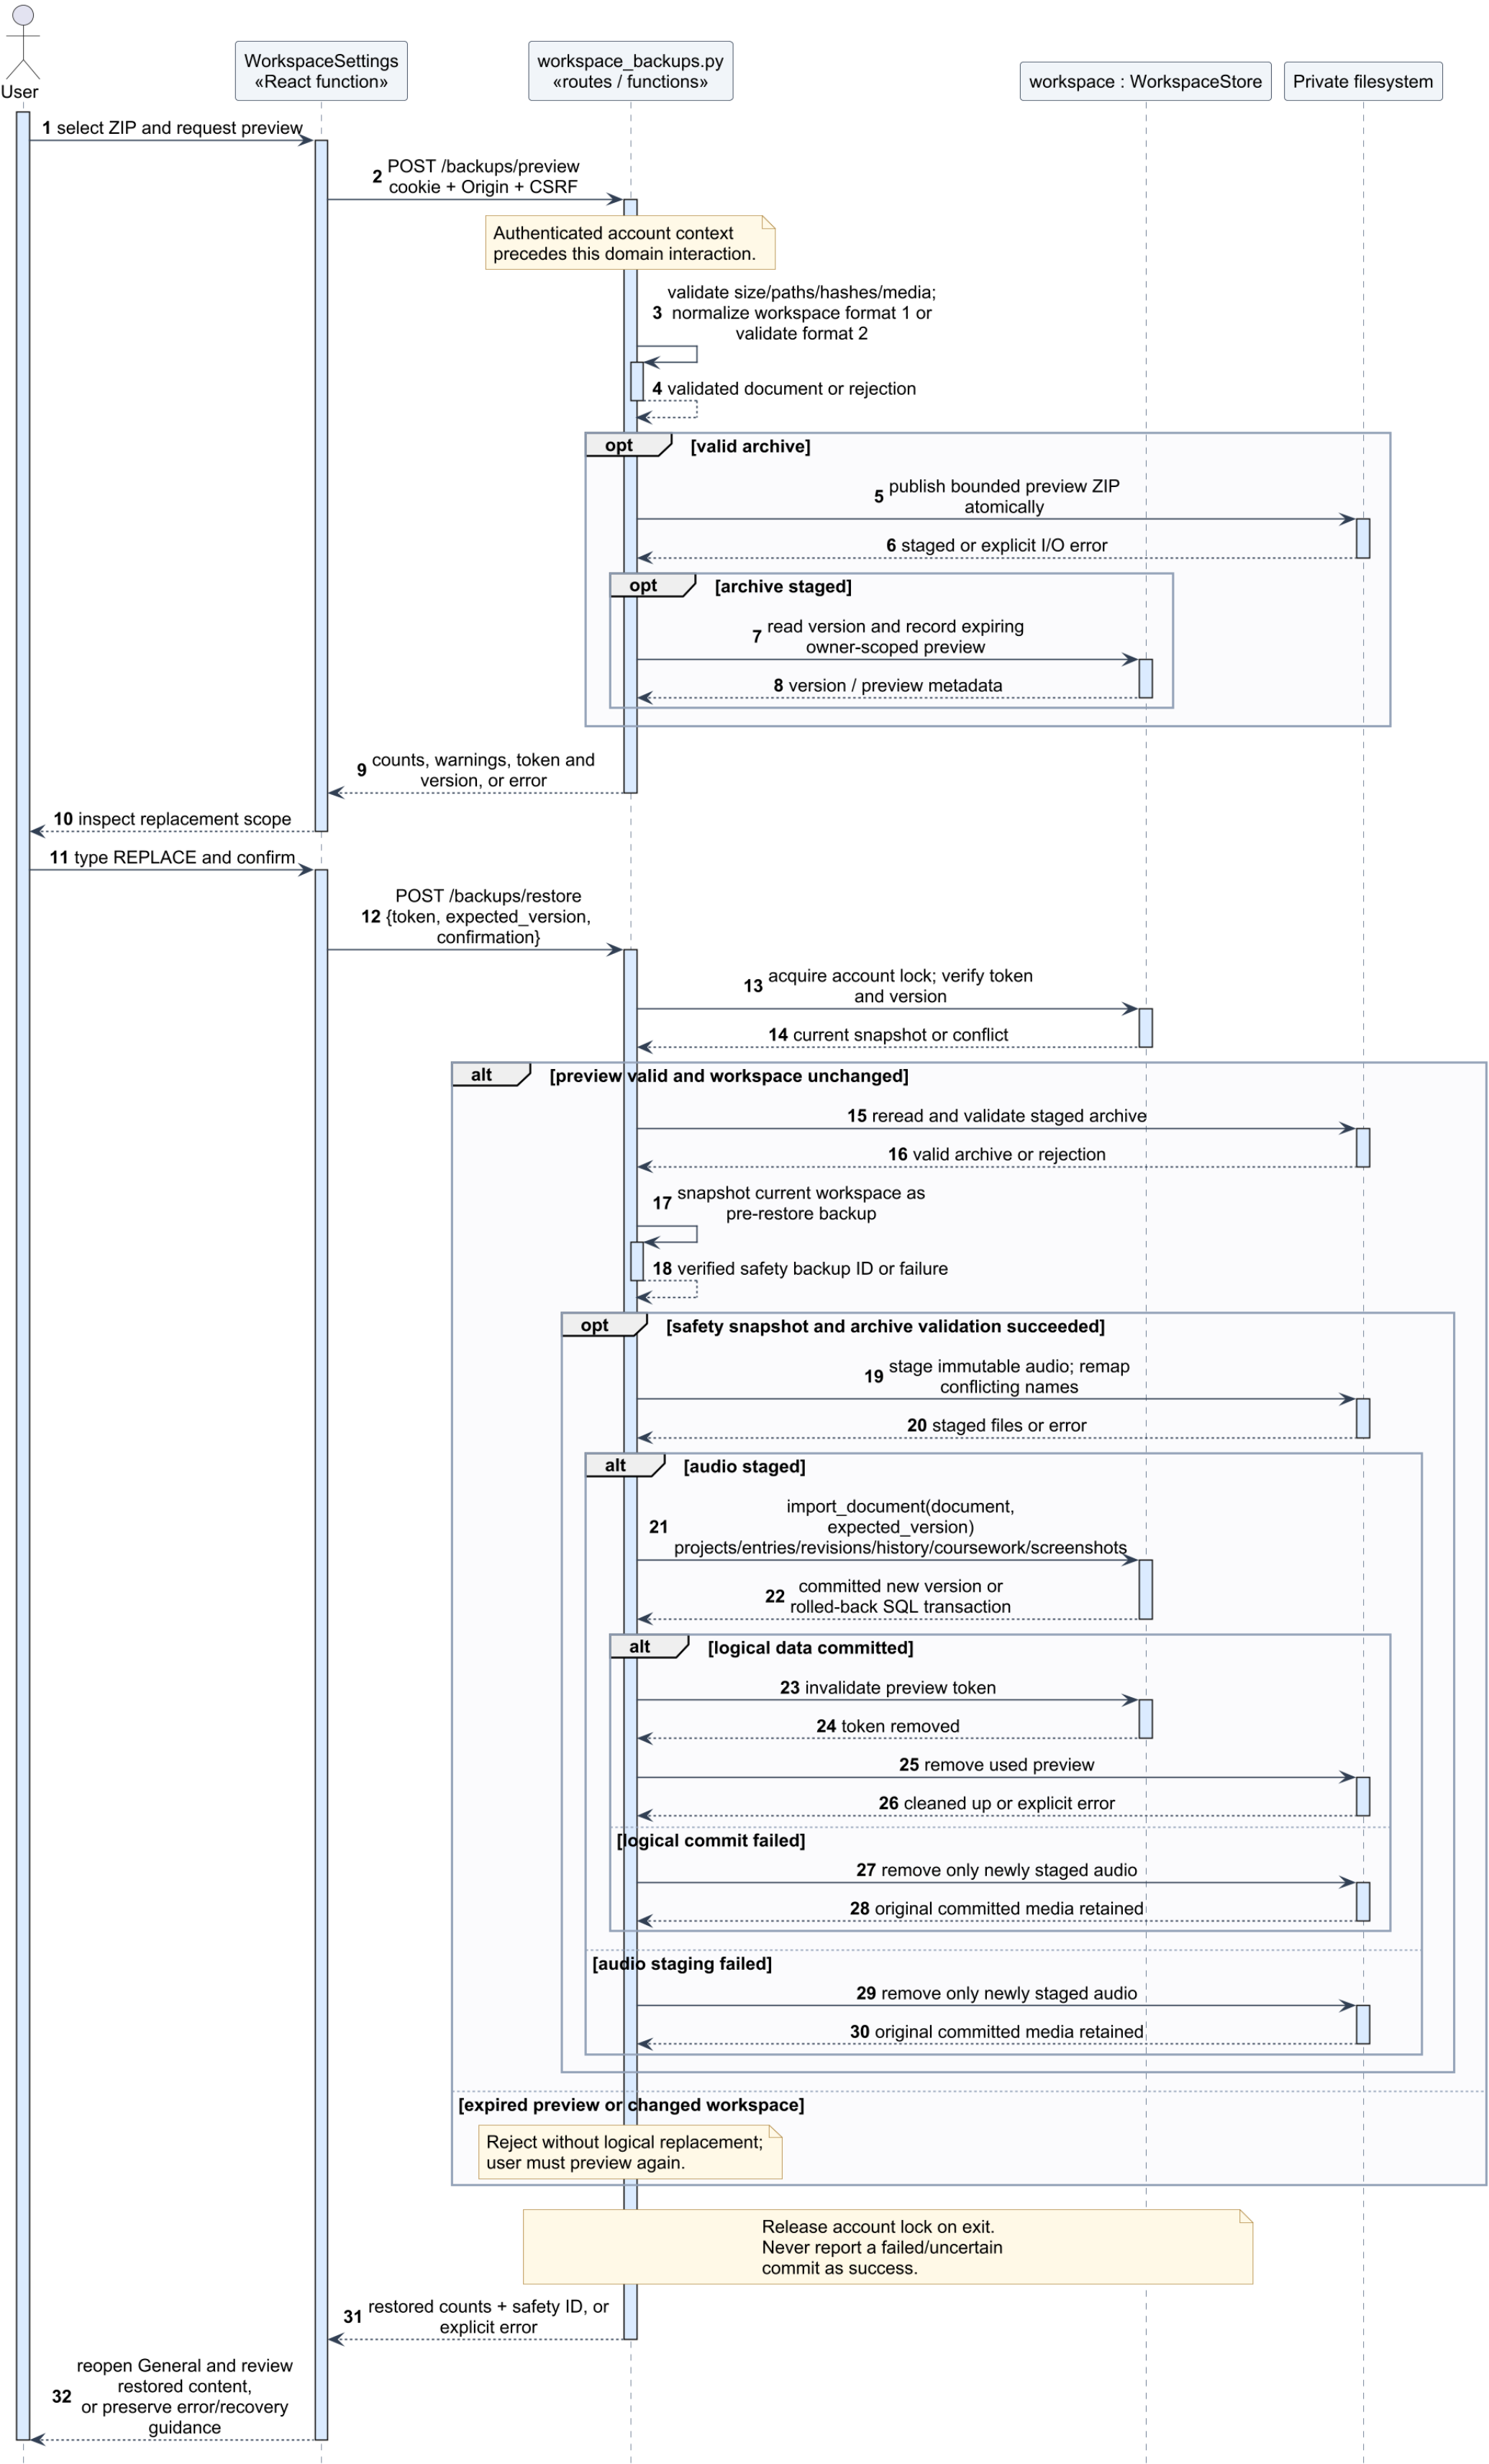

Backups replace logical workspace data, not account credentials or server settings. Workspace document format 2 includes profile JSON and screenshot base64; outer manifest stays format 1. Older format-1 documents normalize to empty coursework/screenshots before replacement. Profile/screenshot mutations invalidate a previously captured expected_version. Late client cancellation does not promise server rollback. Existing committed media remains available for recovery; this is not a cross-file ACID transaction.