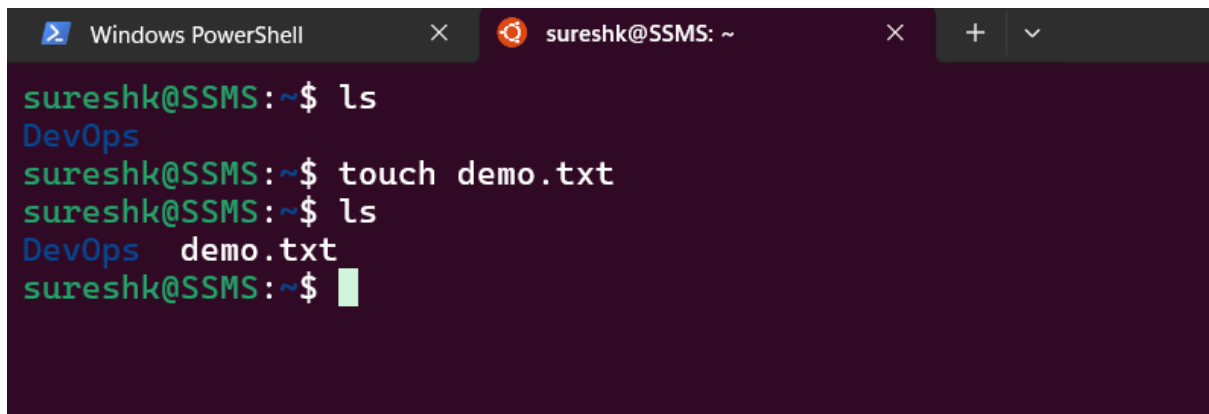
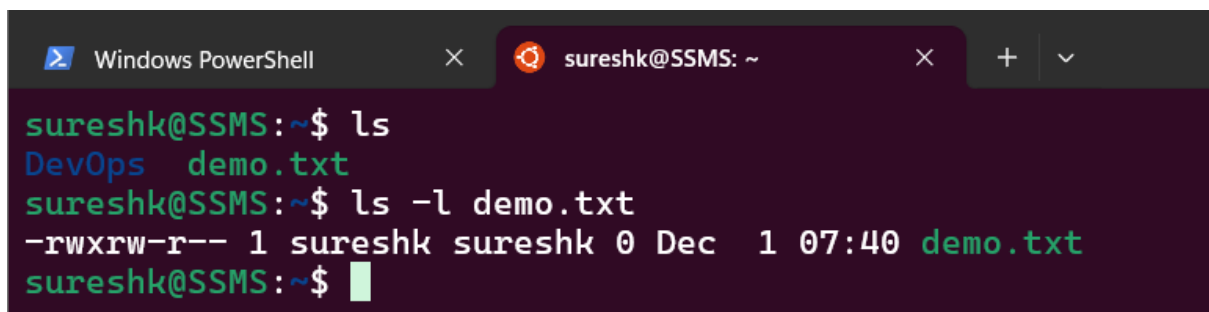


Create Demo.txt

A terminal window with a dark purple background. The title bar shows 'Windows PowerShell' and 'sureshk@SSMS: ~'. The user 'sureshk' is at the 'SSMS' machine in the '~' directory. They run 'ls' and see 'DevOps'. Then they run 'touch demo.txt' and run 'ls' again to see 'demo.txt' added to the list.

```
sureshk@SSMS:~$ ls
DevOps
sureshk@SSMS:~$ touch demo.txt
sureshk@SSMS:~$ ls
DevOps  demo.txt
sureshk@SSMS:~$
```

Change Permission:

A terminal window showing the same user and location. They run 'ls' and see 'demo.txt'. Then they run 'ls -l demo.txt' to view the file's permissions. The output shows '-rwxr--r--' permissions for the file 'demo.txt', owned by 'sureshk' and 'sureshk', with a size of 0 bytes, dated 'Dec 1 07:40'.

```
sureshk@SSMS:~$ ls
DevOps  demo.txt
sureshk@SSMS:~$ ls -l demo.txt
-rwxr--r-- 1 sureshk sureshk 0 Dec  1 07:40 demo.txt
sureshk@SSMS:~$
```