


VIavi

Cable Id :
Location A : LOC A
Job Id :

Fiber Id : Fiber 2826
Location B : LOC B
Technician Id :

SmartOTDR (S/N 28162)		E100AS (S/N 28162)					Date : 04/12/2025 15:17		
Test Setup									
OTDR EXPERT		1550nm	30ns	20km	1.2m	26.1s	1.46800(G652 G657)		-81.0 dB
Alarms									
Thresholds		None							
Summary									
Filename	Laser nm	Link Loss dB	Link Orl dB	Fiber End Km	Direction	Event	Alarms		
_2826_1550_OE.msor	1550	7.758	35.23	16.170	LOC A -> LOC B	13			

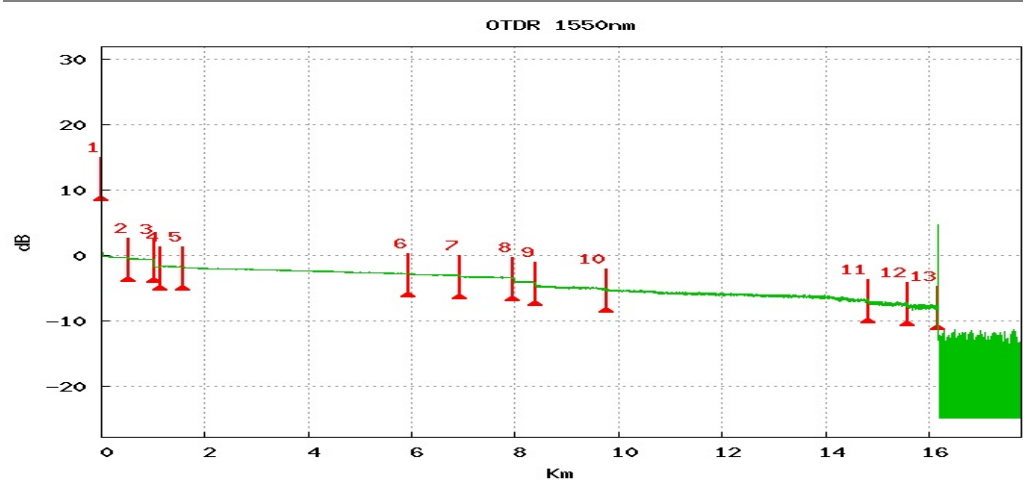

Event	Distance Km	Loss dB	Reflect. dB	Slope dB/km	Section Km	T. Loss dB
1	0.000	0.193	-38.04		0.000	0.000
2	0.530	0.119		0.463	0.530	0.244
3	1.012	1.142		0.203	0.482	0.462
4	1.145	-0.104			0.133	1.632
5	1.594	0.165			0.449	1.589
6	5.933	0.054		0.207	4.338	2.652
7	6.933	0.182		0.162	1.001	2.927
8	7.970	0.609		0.169	1.036	3.284
9	8.386	0.620		0.183	0.416	3.969
10	9.762	0.195		0.274	1.376	4.967
11	14.824	0.541		0.271	5.062	6.576
12	15.587	0.316		0.358	0.763	7.352
13	16.170		-39.94	0.153	0.583	7.758