



Python Booleans

[< Previous](#)[Next >](#)

Booleans represent one of two values: **True** or **False** .

Boolean Values

In programming you often need to know if an expression is **True** or **False** .

You can evaluate any expression in Python, and get one of two answers, **True** or **False** .

When you compare two values, the expression is evaluated and Python returns the Boolean answer:

Example

```
print(10 > 9)
print(10 == 9)
print(10 < 9)
```

Try it Yourself »

When you run a condition in an if statement, Python returns **True** or **False** :

Example

Print a message based on whether the condition is **True** or **False** :

```
a = 200
b = 33

if b > a:
    print("b is greater than a")
else:
    print("b is not greater than a")
```

[Try it Yourself »](#)

Evaluate Values and Variables

The **bool()** function allows you to evaluate any value, and give you **True** or **False** in return,

Example

Evaluate a string and a number:

```
print(bool("Hello"))
print(bool(15))
```

[Try it Yourself »](#)

Example

Evaluate two variables:

```
x = "Hello"
y = 15

print(bool(x))
print(bool(y))
```

Try it Yourself »

ADVERTISEMENT

Most Values are True

Almost any value is evaluated to **True** if it has some sort of content.

Any string is **True** , except empty strings.

Any number is **True** , except **0** .

Any list, tuple, set, and dictionary are **True** , except empty ones.

Example

The following will return True:

```
bool("abc")  
bool(123)  
bool(["apple", "cherry", "banana"])
```

Try it Yourself »

Some Values are False

In fact, there are not many values that evaluate to `False`, except empty values, such as `()`, `[]`, `{}`, `""`, the number `0`, and the value `None`. And of course the value `False` evaluates to `False`.

Example

The following will return False:

```
bool(False)
bool(None)
bool(0)
bool("")
bool(())
bool([])
bool({})
```

[Try it Yourself »](#)

One more value, or object in this case, evaluates to `False`, and that is if you have an object that is made from a class with a `__len__` function that returns `0` or `False`:

Example

```
class myclass():
    def __len__(self):
        return 0

myobj = myclass()
print(bool(myobj))
```

[Try it Yourself »](#)

Functions can Return a Boolean

You can create functions that returns a Boolean Value:

Example

Print the answer of a function:

```
def myFunction() :  
    return True  
  
print(myFunction())
```

[Try it Yourself »](#)

You can execute code based on the Boolean answer of a function:

Example

Print "YES!" if the function returns True, otherwise print "NO!":

```
def myFunction() :  
    return True  
  
if myFunction():  
    print("YES!")  
else:  
    print("NO!")
```

[Try it Yourself »](#)

Python also has many built-in functions that return a boolean value, like the `isinstance()` function, which can be used to determine if an object is of a certain data type:

Example

Check if an object is an integer or not:

```
x = 200  
print(isinstance(x, int))
```

■

[Try it Yourself »](#)

Test Yourself With Exercises

Exercise:

The statement below would print a Boolean value, which one?

```
print(10 > 9)
```

[Submit Answer »](#)

[Start the Exercise](#)

[◀ Previous](#)


[Next ▶](#)



ADVERTISEMENT

NEW

We just launched
W3Schools videos

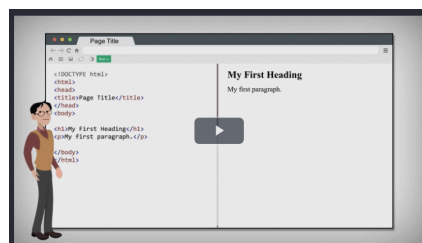

[Explore now](#)

COLOR PICKER



Get certified
by completing
a Python
course today!



Get started

CODE GAME



Play Game

ADVERTISEMENT

ADVERTISEMENT

ADVERTISEMENT



[Report Error](#)

[Spaces](#)

[Pro](#)

[Get Certified](#)

Top Tutorials

[HTML Tutorial](#)
[CSS Tutorial](#)
[JavaScript Tutorial](#)
[How To Tutorial](#)
[SQL Tutorial](#)
[Python Tutorial](#)
[W3.CSS Tutorial](#)
[Bootstrap Tutorial](#)
[PHP Tutorial](#)
[Java Tutorial](#)
[C++ Tutorial](#)
[jQuery Tutorial](#)

Top References

[HTML Reference](#)
[CSS Reference](#)
[JavaScript Reference](#)
[SQL Reference](#)
[Python Reference](#)
[W3.CSS Reference](#)
[Bootstrap Reference](#)
[PHP Reference](#)
[HTML Colors](#)
[Java Reference](#)
[Angular Reference](#)
[jQuery Reference](#)

Top Examples

- HTML Examples
- CSS Examples
- JavaScript Examples
- How To Examples
- SQL Examples
- Python Examples
- W3.CSS Examples
- Bootstrap Examples
- PHP Examples
- Java Examples
- XML Examples
- jQuery Examples

Get Certified

- HTML Certificate
- CSS Certificate
- JavaScript Certificate
- Front End Certificate
- SQL Certificate
- Python Certificate
- PHP Certificate
- jQuery Certificate
- Java Certificate
- C++ Certificate
- C# Certificate
- XML Certificate

[FORUM](#) | [ABOUT](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.
W3Schools is Powered by W3.CSS.

