



NumPy Array Reshaping

[< Previous](#)[Next >](#)

Reshaping arrays

Reshaping means changing the shape of an array.

The shape of an array is the number of elements in each dimension.

By reshaping we can add or remove dimensions or change number of elements in each dimension.

Reshape From 1-D to 2-D

Example

Convert the following 1-D array with 12 elements into a 2-D array.

The outermost dimension will have 4 arrays, each with 3 elements:

```
import numpy as np

arr = np.array([1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12])

newarr = arr.reshape(4, 3)

print(newarr)
```

Reshape From 1-D to 3-D

Example

Convert the following 1-D array with 12 elements into a 3-D array.

The outermost dimension will have 2 arrays that contains 3 arrays, each with 2 elements:

```
import numpy as np

arr = np.array([1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12])

newarr = arr.reshape(2, 3, 2)

print(newarr)
```

Can We Reshape Into any Shape?

Yes, as long as the elements required for reshaping are equal in both shapes.

We can reshape an 8 elements 1D array into 4 elements in 2 rows 2D array but we cannot reshape it into a 3 elements 3 rows 2D array as that would require $3 \times 3 = 9$ elements.

Example

Try converting 1D array with 8 elements to a 2D array with 3 elements in each dimension (will raise an error):

```
import numpy as np

arr = np.array([1, 2, 3, 4, 5, 6, 7, 8])

newarr = arr.reshape(3, 3)

print(newarr)
```

[Try it Yourself »](#)

Returns Copy or View?

Example

Check if the returned array is a copy or a view:

```
import numpy as np

arr = np.array([1, 2, 3, 4, 5, 6, 7, 8])

print(arr.reshape(2, 4).base)
```

[Try it Yourself »](#)

The example above returns the original array, so it is a view.

Unknown Dimension

You are allowed to have one "unknown" dimension.

Meaning that you do not have to specify an exact number for one of the dimensions in the reshape method.

Pass `-1` as the value, and NumPy will calculate this number for you.

Example

Convert 1D array with 8 elements to 3D array with 2x2 elements:

```
import numpy as np

arr = np.array([1, 2, 3, 4, 5, 6, 7, 8])

newarr = arr.reshape(2, 2, -1)

print(newarr)
```

[Try it Yourself »](#)

Note: We can not pass `-1` to more than one dimension.

Flattening the arrays

Flattening array means converting a multidimensional array into a 1D array.

We can use `reshape(-1)` to do this.

Example

Convert the array into a 1D array:

```
import numpy as np

arr = np.array([[1, 2, 3], [4, 5, 6]])

newarr = arr.reshape(-1)

print(newarr)
```

[Try it Yourself »](#)

Note: There are a lot of functions for changing the shapes of arrays in numpy `flatten`, `ravel` and also for rearranging the elements `rot90`, `flip`, `fliplr`, `flipud` etc. These fall under Intermediate to Advanced section of numpy.

Test Yourself With Exercises

Exercise:

Use the correct NumPy method to change the shape of an array from 1-D to 2-D.

```
arr = np.array([1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12])
```

```
newarr = arr.          (4, 3)
```

[Submit Answer »](#)


[Start the Exercise](#)

[◀ Previous](#)

[Next ▶](#)



We just launched
W3Schools videos

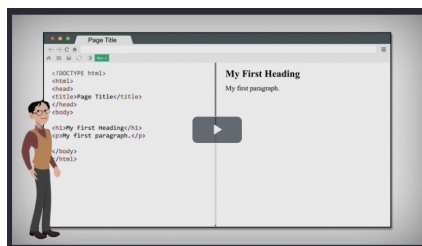

Explore now

COLOR PICKER



Get certified
by completing
a Python
course today!



Get started

CODE GAME



[Play Game](#)



[Report Error](#)

[Spaces](#)

[Pro](#)

[Get Certified](#)

Top Tutorials

- [HTML Tutorial](#)
- [CSS Tutorial](#)
- [JavaScript Tutorial](#)
- [How To Tutorial](#)
- [SQL Tutorial](#)
- [Python Tutorial](#)
- [W3.CSS Tutorial](#)
- [Bootstrap Tutorial](#)
- [PHP Tutorial](#)
- [Java Tutorial](#)
- [C++ Tutorial](#)
- [jQuery Tutorial](#)

Top References

- [HTML Reference](#)
- [CSS Reference](#)
- [JavaScript Reference](#)

[SQL Reference](#)
[Python Reference](#)
[W3.CSS Reference](#)
[Bootstrap Reference](#)
[PHP Reference](#)
[HTML Colors](#)
[Java Reference](#)
[Angular Reference](#)
[jQuery Reference](#)

Top Examples

[HTML Examples](#)
[CSS Examples](#)
[JavaScript Examples](#)
[How To Examples](#)
[SQL Examples](#)
[Python Examples](#)
[W3.CSS Examples](#)
[Bootstrap Examples](#)
[PHP Examples](#)
[Java Examples](#)
[XML Examples](#)
[jQuery Examples](#)

Get Certified

[HTML Certificate](#)
[CSS Certificate](#)
[JavaScript Certificate](#)
[Front End Certificate](#)
[SQL Certificate](#)
[Python Certificate](#)
[PHP Certificate](#)
[jQuery Certificate](#)
[Java Certificate](#)
[C++ Certificate](#)
[C# Certificate](#)
[XML Certificate](#)

[FORUM](#) | [ABOUT](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie](#) and [privacy policy](#).

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.
W3Schools is Powered by W3.CSS.

