



Python Casting

[< Previous](#)[Next >](#)

Specify a Variable Type

There may be times when you want to specify a type on to a variable. This can be done with casting. Python is an object-orientated language, and as such it uses classes to define data types, including its primitive types.

Casting in python is therefore done using constructor functions:

- `int()` - constructs an integer number from an integer literal, a float literal (by removing all decimals), or a string literal (providing the string represents a whole number)
- `float()` - constructs a float number from an integer literal, a float literal or a string literal (providing the string represents a float or an integer)
- `str()` - constructs a string from a wide variety of data types, including strings, integer literals and float literals

Example

Integers:

```
x = int(1)    # x will be 1
y = int(2.8)  # y will be 2
z = int("3")  # z will be 3
```

[Try it Yourself »](#)

Example

Floats:

```
x = float(1)      # x will be 1.0
y = float(2.8)    # y will be 2.8
z = float("3")    # z will be 3.0
w = float("4.2")  # w will be 4.2
```

[Try it Yourself »](#)

Example

Strings:

```
x = str("s1") # x will be 's1'
y = str(2)    # y will be '2'
z = str(3.0)  # z will be '3.0'
```

[Try it Yourself »](#)

[< Previous](#)


[Next >](#)



ADVERTISEMENT

NEW

We just launched
W3Schools videos

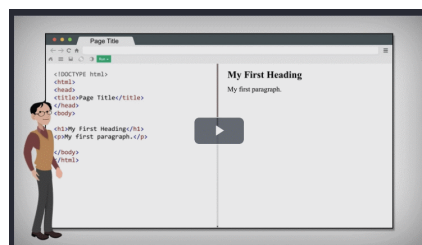

[Explore now](#)

COLOR PICKER



Get certified
by completing
a Python
course today!



Get started

CODE GAME



Play Game

ADVERTISEMENT



Report Error

Spaces

Pro

Get Certified

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial

[W3.CSS Tutorial](#)
[Bootstrap Tutorial](#)
[PHP Tutorial](#)
[Java Tutorial](#)
[C++ Tutorial](#)
[jQuery Tutorial](#)

Top References

[HTML Reference](#)
[CSS Reference](#)
[JavaScript Reference](#)
[SQL Reference](#)
[Python Reference](#)
[W3.CSS Reference](#)
[Bootstrap Reference](#)
[PHP Reference](#)
[HTML Colors](#)
[Java Reference](#)
[Angular Reference](#)
[jQuery Reference](#)

Top Examples

[HTML Examples](#)
[CSS Examples](#)
[JavaScript Examples](#)
[How To Examples](#)
[SQL Examples](#)
[Python Examples](#)
[W3.CSS Examples](#)
[Bootstrap Examples](#)
[PHP Examples](#)
[Java Examples](#)
[XML Examples](#)
[jQuery Examples](#)

Get Certified

[HTML Certificate](#)
[CSS Certificate](#)
[JavaScript Certificate](#)
[Front End Certificate](#)
[SQL Certificate](#)
[Python Certificate](#)
[PHP Certificate](#)
[jQuery Certificate](#)
[Java Certificate](#)
[C++ Certificate](#)
[C# Certificate](#)
[XML Certificate](#)

[FORUM](#) | [ABOUT](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.
W3Schools is Powered by W3.CSS.

