



Python Iterators

[< Previous](#)[Next >](#)

Python Iterators

An iterator is an object that contains a countable number of values.

An iterator is an object that can be iterated upon, meaning that you can traverse through all the values.

Technically, in Python, an iterator is an object which implements the iterator protocol, which consist of the methods `__iter__()` and `__next__()`.

Iterator vs Iterable

Lists, tuples, dictionaries, and sets are all iterable objects. They are iterable *containers* which you can get an iterator from.

All these objects have a `iter()` method which is used to get an iterator:

Example

Return an iterator from a tuple, and print each value:

```
mytuple = ("apple", "banana", "cherry")
myit = iter(mytuple)

print(next(myit))
```

```
print(next(myit))
print(next(myit))
```

[Try it Yourself »](#)

Even strings are iterable objects, and can return an iterator:

Example

Strings are also iterable objects, containing a sequence of characters:

```
myst = "banana"
myit = iter(myst)

print(next(myit))
print(next(myit))
print(next(myit))
print(next(myit))
print(next(myit))
print(next(myit))
```

[Try it Yourself »](#)

Looping Through an Iterator

We can also use a `for` loop to iterate through an iterable object:

Example

Iterate the values of a tuple:

```
mytuple = ("apple", "banana", "cherry")

for x in mytuple:
    print(x)
```

Example

Iterate the characters of a string:

```
mystr = "banana"

for x in mystr:
    print(x)
```

Try it Yourself »

The `for` loop actually creates an iterator object and executes the `next()` method for each loop.

Create an Iterator

To create an object/class as an iterator you have to implement the methods `__iter__()` and `__next__()` to your object.

As you have learned in the [Python Classes/Objects](#) chapter, all classes have a function called `__init__()`, which allows you to do some initializing when the object is being created.

The `__iter__()` method acts similar, you can do operations (initializing etc.), but must always return the iterator object itself.

The `__next__()` method also allows you to do operations, and must return the next item in the sequence.

Example

Create an iterator that returns numbers, starting with 1, and each sequence will increase by one (returning 1,2,3,4,5 etc.):

```
class MyNumbers:
    def __iter__(self):
        self.a = 1
        return self

    def __next__(self):
        x = self.a
        self.a += 1
        return x

myclass = MyNumbers()
myiter = iter(myclass)

print(next(myiter))
print(next(myiter))
print(next(myiter))
print(next(myiter))
print(next(myiter))
```

Try it Yourself »

StopIteration

The example above would continue forever if you had enough `next()` statements, or if it was used in a `for` loop.

To prevent the iteration to go on forever, we can use the `StopIteration` statement.

In the `__next__()` method, we can add a terminating condition to raise an error if the iteration is done a specified number of times:

Example

Stop after 20 iterations:

```
class MyNumbers:
    def __iter__(self):
        self.a = 1
        return self

    def __next__(self):
```

```
if self.a <= 20:  
    x = self.a  
    self.a += 1  
    return x  
else:  
    raise StopIteration
```

```
myclass = MyNumbers()  
myiter = iter(myclass)
```

```
for x in myiter:  
    print(x)
```

Try it Yourself »


◀ Previous

Next ▶



NEW

We just launched
W3Schools videos

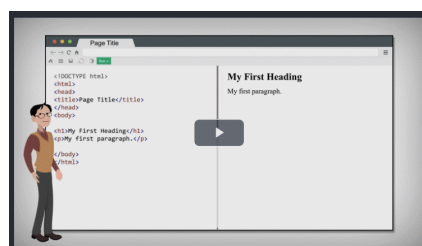

Explore now

COLOR PICKER



Get certified
by completing
a Python
course today!



Get started

CODE GAME



Play Game

[Report Error](#)

[Spaces](#)

[Pro](#)

[Get Certified](#)

Top Tutorials

[HTML Tutorial](#)
[CSS Tutorial](#)
[JavaScript Tutorial](#)
[How To Tutorial](#)
[SQL Tutorial](#)
[Python Tutorial](#)
[W3.CSS Tutorial](#)
[Bootstrap Tutorial](#)
[PHP Tutorial](#)
[Java Tutorial](#)
[C++ Tutorial](#)
[jQuery Tutorial](#)

Top References

[HTML Reference](#)
[CSS Reference](#)
[JavaScript Reference](#)
[SQL Reference](#)
[Python Reference](#)
[W3.CSS Reference](#)
[Bootstrap Reference](#)
[PHP Reference](#)
[HTML Colors](#)
[Java Reference](#)
[Angular Reference](#)
[jQuery Reference](#)

Top Examples

[HTML Examples](#)
[CSS Examples](#)
[JavaScript Examples](#)
[How To Examples](#)
[SQL Examples](#)
[Python Examples](#)
[W3.CSS Examples](#)
[Bootstrap Examples](#)
[PHP Examples](#)
[Java Examples](#)

[XML Examples](#)
[jQuery Examples](#)

Get Certified

[HTML Certificate](#)
[CSS Certificate](#)
[JavaScript Certificate](#)
[Front End Certificate](#)
[SQL Certificate](#)
[Python Certificate](#)
[PHP Certificate](#)
[jQuery Certificate](#)
[Java Certificate](#)
[C++ Certificate](#)
[C# Certificate](#)
[XML Certificate](#)

[FORUM](#) | [ABOUT](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.
W3Schools is Powered by W3.CSS.

