



NumPy Products

[< Previous](#)[Next >](#)

Products

To find the product of the elements in an array, use the `prod()` function.

Example

Find the product of the elements of this array:

```
import numpy as np

arr = np.array([1, 2, 3, 4])

x = np.prod(arr)

print(x)
```

Try it Yourself »

Returns: 24 because $1*2*3*4 = 24$

Example

Find the product of the elements of two arrays:

```
import numpy as np

arr1 = np.array([1, 2, 3, 4])
arr2 = np.array([5, 6, 7, 8])

x = np.prod([arr1, arr2])

print(x)
```

[Try it Yourself »](#)

Returns: 40320 because $1*2*3*4*5*6*7*8 = 40320$

Product Over an Axis

If you specify `axis=1`, NumPy will return the product of each array.

Example

Perform summation in the following array over 1st axis:

```
import numpy as np

arr1 = np.array([1, 2, 3, 4])
arr2 = np.array([5, 6, 7, 8])

newarr = np.prod([arr1, arr2], axis=1)

print(newarr)
```

[Try it Yourself »](#)

Returns: [24 1680]

Cummulative Product

Cummulative product means taking the product partially.

E.g. The partial product of [1, 2, 3, 4] is [1, 1*2, 1*2*3, 1*2*3*4] = [1, 2, 6, 24]

Perfrom partial sum with the `cumprod()` function.

Example

Take cummulative product of all elements for following array:

```
import numpy as np

arr = np.array([5, 6, 7, 8])

newarr = np.cumprod(arr)

print(newarr)
```

Try it Yourself »

Returns: [5 30 210 1680]


[< Previous](#)

[Next >](#)




NEW

We just launched
W3Schools videos

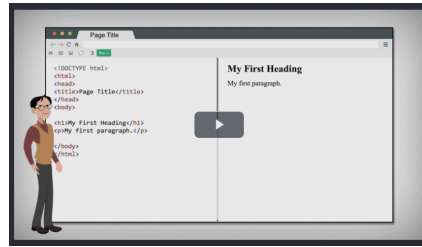

Explore now

COLOR PICKER



Get certified
by completing
a Python
course today!



Get started

CODE GAME



[Play Game](#)

[Report Error](#)

[Spaces](#)

[Pro](#)

[Get Certified](#)

Top Tutorials

[HTML Tutorial](#)
[CSS Tutorial](#)
[JavaScript Tutorial](#)
[How To Tutorial](#)
[SQL Tutorial](#)
[Python Tutorial](#)
[W3.CSS Tutorial](#)
[Bootstrap Tutorial](#)
[PHP Tutorial](#)
[Java Tutorial](#)
[C++ Tutorial](#)
[jQuery Tutorial](#)

Top References

[HTML Reference](#)
[CSS Reference](#)
[JavaScript Reference](#)
[SQL Reference](#)

[Python Reference](#)
[W3.CSS Reference](#)
[Bootstrap Reference](#)
[PHP Reference](#)
[HTML Colors](#)
[Java Reference](#)
[Angular Reference](#)
[jQuery Reference](#)

Top Examples

[HTML Examples](#)
[CSS Examples](#)
[JavaScript Examples](#)
[How To Examples](#)
[SQL Examples](#)
[Python Examples](#)
[W3.CSS Examples](#)
[Bootstrap Examples](#)
[PHP Examples](#)
[Java Examples](#)
[XML Examples](#)
[jQuery Examples](#)

Get Certified

[HTML Certificate](#)
[CSS Certificate](#)
[JavaScript Certificate](#)
[Front End Certificate](#)
[SQL Certificate](#)
[Python Certificate](#)
[PHP Certificate](#)
[jQuery Certificate](#)
[Java Certificate](#)
[C++ Certificate](#)
[C# Certificate](#)
[XML Certificate](#)

[FORUM](#) | [ABOUT](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie](#) and [privacy policy](#).

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.
W3Schools is Powered by W3.CSS.

