



# Python - Access Dictionary Items

[< Previous](#)[Next >](#)

## Accessing Items

You can access the items of a dictionary by referring to its key name, inside square brackets:

### Example

Get the value of the "model" key:

```
thisdict = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964  
}  
x = thisdict["model"]
```

[Try it Yourself »](#)

There is also a method called `get()` that will give you the same result:

### Example

Get the value of the "model" key:

```
x = thisdict.get("model")
```

[Try it Yourself »](#)

---

## Get Keys

The `keys()` method will return a list of all the keys in the dictionary.

### Example

Get a list of the keys:

```
x = thisdict.keys()
```

[Try it Yourself »](#)

The list of the keys is a *view* of the dictionary, meaning that any changes done to the dictionary will be reflected in the keys list.

### Example

Add a new item to the original dictionary, and see that the keys list gets updated as well:

```
car = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964  
}  
  
x = car.keys()  
  
print(x) #before the change  
  
car["color"] = "white"  
  
print(x) #after the change
```

## Get Values

The `values()` method will return a list of all the values in the dictionary.

### Example

Get a list of the values:

```
x = thisdict.values()
```

Try it Yourself »

The list of the values is a *view* of the dictionary, meaning that any changes done to the dictionary will be reflected in the values list.

### Example

Make a change in the original dictionary, and see that the values list gets updated as well:

```
car = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964  
}  
  
x = car.values()  
  
print(x) #before the change  
  
car["year"] = 2020  
  
print(x) #after the change
```

Try it Yourself »

## Example

Add a new item to the original dictionary, and see that the values list gets updated as well:

```
car = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964  
}  
  
x = car.values()  
  
print(x) #before the change  
  
car["color"] = "red"  
  
print(x) #after the change
```

Try it Yourself »

---

## Get Items

The `items()` method will return each item in a dictionary, as tuples in a list.

## Example

Get a list of the key:value pairs

```
x = thisdict.items()
```

Try it Yourself »

The returned list is a *view* of the items of the dictionary, meaning that any changes done to the dictionary will be reflected in the items list.

## Example

Make a change in the original dictionary, and see that the items list gets updated as well:

```
car = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964  
}  
  
x = car.items()  
  
print(x) #before the change  
  
car["year"] = 2020  
  
print(x) #after the change
```

[Try it Yourself »](#)

## Example

Add a new item to the original dictionary, and see that the items list gets updated as well:

```
car = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964  
}  
  
x = car.items()  
  
print(x) #before the change  
  
car["color"] = "red"  
  
print(x) #after the change
```

Try it Yourself »

# Check if Key Exists

To determine if a specified key is present in a dictionary use the **in** keyword:

## Example

Check if "model" is present in the dictionary:

```
thisdict = {  
    "brand": "Ford",  
    "model": "Mustang",  
    "year": 1964  
}  
if "model" in thisdict:  
    print("Yes, 'model' is one of the keys in the thisdict dictionary")
```

Try it Yourself »


◀ Previous

Next ▶




**NEW**

We just launched  
W3Schools videos

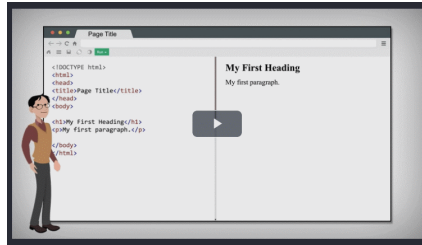

Explore now

COLOR PICKER



Get certified  
by completing  
a Python  
course today!



Get started

CODE GAME



[Play Game](#)



[Report Error](#)

[Spaces](#)

[Pro](#)

[Get Certified](#)

## Top Tutorials

- [HTML Tutorial](#)
- [CSS Tutorial](#)
- [JavaScript Tutorial](#)
- [How To Tutorial](#)
- [SQL Tutorial](#)
- [Python Tutorial](#)
- [W3.CSS Tutorial](#)
- [Bootstrap Tutorial](#)
- [PHP Tutorial](#)
- [Java Tutorial](#)
- [C++ Tutorial](#)
- [jQuery Tutorial](#)

## Top References

- [HTML Reference](#)
- [CSS Reference](#)
- [JavaScript Reference](#)



[SQL Reference](#)  
[Python Reference](#)  
[W3.CSS Reference](#)  
[Bootstrap Reference](#)  
[PHP Reference](#)  
[HTML Colors](#)  
[Java Reference](#)  
[Angular Reference](#)  
[jQuery Reference](#)

## Top Examples

[HTML Examples](#)  
[CSS Examples](#)  
[JavaScript Examples](#)  
[How To Examples](#)  
[SQL Examples](#)  
[Python Examples](#)  
[W3.CSS Examples](#)  
[Bootstrap Examples](#)  
[PHP Examples](#)  
[Java Examples](#)  
[XML Examples](#)  
[jQuery Examples](#)

## Get Certified

[HTML Certificate](#)  
[CSS Certificate](#)  
[JavaScript Certificate](#)  
[Front End Certificate](#)  
[SQL Certificate](#)  
[Python Certificate](#)  
[PHP Certificate](#)  
[jQuery Certificate](#)  
[Java Certificate](#)  
[C++ Certificate](#)  
[C# Certificate](#)  
[XML Certificate](#)

---

[FORUM](#) | [ABOUT](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie](#) and [privacy policy](#).

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.  
W3Schools is Powered by W3.CSS.

