



NumPy Summations

[< Previous](#)[Next >](#)

Summations

What is the difference between summation and addition?

Addition is done between two arguments whereas summation happens over n elements.

Example

Add the values in arr1 to the values in arr2:

```
import numpy as np

arr1 = np.array([1, 2, 3])
arr2 = np.array([1, 2, 3])

newarr = np.add(arr1, arr2)

print(newarr)
```

Try it Yourself »

Returns: [2 4 6]

Example

Sum the values in arr1 and the values in arr2:

```
import numpy as np

arr1 = np.array([1, 2, 3])
arr2 = np.array([1, 2, 3])

newarr = np.sum([arr1, arr2])

print(newarr)
```

Try it Yourself »

Returns: 12

Summation Over an Axis

If you specify `axis=1`, NumPy will sum the numbers in each array.

Example

Perform summation in the following array over 1st axis:

```
import numpy as np

arr1 = np.array([1, 2, 3])
arr2 = np.array([1, 2, 3])

newarr = np.sum([arr1, arr2], axis=1)

print(newarr)
```

Returns: [6 6]

Cummulative Sum

Cummulative sum means partially adding the elements in array.

E.g. The partial sum of [1, 2, 3, 4] would be [1, 1+2, 1+2+3, 1+2+3+4] = [1, 3, 6, 10].

Perfrom partial sum with the `cumsum()` function.

Example

Perform cummulative summation in the following array:

```
import numpy as np

arr = np.array([1, 2, 3])

newarr = np.cumsum(arr)

print(newarr)
```


Try it Yourself »

Returns: [1 3 6]



NEW

We just launched
W3Schools videos

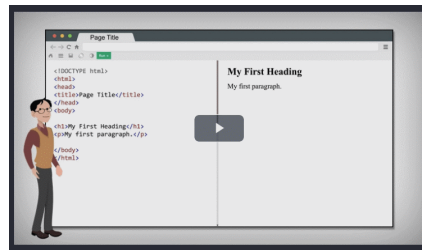

Explore now

COLOR PICKER



Get certified
by completing
a Python
course today!



Get started

CODE GAME



Play Game



Report Error

Spaces

Pro

Get Certified

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial

[C++ Tutorial](#)
[jQuery Tutorial](#)

Top References

[HTML Reference](#)
[CSS Reference](#)
[JavaScript Reference](#)
[SQL Reference](#)
[Python Reference](#)
[W3.CSS Reference](#)
[Bootstrap Reference](#)
[PHP Reference](#)
[HTML Colors](#)
[Java Reference](#)
[Angular Reference](#)
[jQuery Reference](#)

Top Examples

[HTML Examples](#)
[CSS Examples](#)
[JavaScript Examples](#)
[How To Examples](#)
[SQL Examples](#)
[Python Examples](#)
[W3.CSS Examples](#)
[Bootstrap Examples](#)
[PHP Examples](#)
[Java Examples](#)
[XML Examples](#)
[jQuery Examples](#)

Get Certified

[HTML Certificate](#)
[CSS Certificate](#)
[JavaScript Certificate](#)
[Front End Certificate](#)
[SQL Certificate](#)
[Python Certificate](#)
[PHP Certificate](#)
[jQuery Certificate](#)
[Java Certificate](#)
[C++ Certificate](#)
[C# Certificate](#)
[XML Certificate](#)

[FORUM](#) | [ABOUT](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

