



# Python File Open

[< Previous](#)[Next >](#)

File handling is an important part of any web application.

Python has several functions for creating, reading, updating, and deleting files.

## File Handling

The key function for working with files in Python is the `open()` function.

The `open()` function takes two parameters; *filename*, and *mode*.

There are four different methods (modes) for opening a file:

`"r"` - Read - Default value. Opens a file for reading, error if the file does not exist

`"a"` - Append - Opens a file for appending, creates the file if it does not exist

`"w"` - Write - Opens a file for writing, creates the file if it does not exist

`"x"` - Create - Creates the specified file, returns an error if the file exists

In addition you can specify if the file should be handled as binary or text mode

`"t"` - Text - Default value. Text mode

"b" - Binary - Binary mode (e.g. images)

---

## Syntax

To open a file for reading it is enough to specify the name of the file:

```
f = open("demofile.txt")
```

The code above is the same as:

```
f = open("demofile.txt", "rt")
```

Because "r" for read, and "t" for text are the default values, you do not need to specify them.

**Note:** Make sure the file exists, or else you will get an error.


---

[< Previous](#)[Next >](#)

ADVERTISEMENT


**NEW**

We just launched  
W3Schools videos

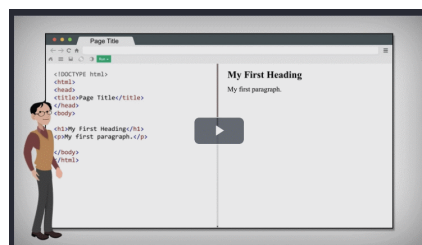

[Explore now](#)

COLOR PICKER



Get certified  
by completing  
a Python  
course today!



Get started

CODE GAME



Play Game

ADVERTISEMENT



Report Error

Spaces

Pro

Get Certified

## Top Tutorials

HTML Tutorial  
CSS Tutorial  
JavaScript Tutorial  
How To Tutorial  
SQL Tutorial  
Python Tutorial  
W3.CSS Tutorial  
Bootstrap Tutorial  
PHP Tutorial  
Java Tutorial

[C++ Tutorial](#)  
[jQuery Tutorial](#)

## Top References

[HTML Reference](#)  
[CSS Reference](#)  
[JavaScript Reference](#)  
[SQL Reference](#)  
[Python Reference](#)  
[W3.CSS Reference](#)  
[Bootstrap Reference](#)  
[PHP Reference](#)  
[HTML Colors](#)  
[Java Reference](#)  
[Angular Reference](#)  
[jQuery Reference](#)

## Top Examples

[HTML Examples](#)  
[CSS Examples](#)  
[JavaScript Examples](#)  
[How To Examples](#)  
[SQL Examples](#)  
[Python Examples](#)  
[W3.CSS Examples](#)  
[Bootstrap Examples](#)  
[PHP Examples](#)  
[Java Examples](#)  
[XML Examples](#)  
[jQuery Examples](#)

## Get Certified

[HTML Certificate](#)  
[CSS Certificate](#)  
[JavaScript Certificate](#)  
[Front End Certificate](#)  
[SQL Certificate](#)  
[Python Certificate](#)  
[PHP Certificate](#)  
[jQuery Certificate](#)  
[Java Certificate](#)  
[C++ Certificate](#)  
[C# Certificate](#)  
[XML Certificate](#)

---

[FORUM](#) | [ABOUT](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

