



# Python Lambda

[< Previous](#)[Next >](#)

A lambda function is a small anonymous function.

A lambda function can take any number of arguments, but can only have one expression.

## Syntax

```
lambda arguments : expression
```

The expression is executed and the result is returned:

## Example

Add 10 to argument `a`, and return the result:

```
x = lambda a : a + 10  
print(x(5))
```

[Try it Yourself »](#)

Lambda functions can take any number of arguments:

## Example

Multiply argument **a** with argument **b** and return the result:

```
x = lambda a, b : a * b
print(x(5, 6))
```

[Try it Yourself »](#)

## Example

Summarize argument **a**, **b**, and **c** and return the result:

```
x = lambda a, b, c : a + b + c
print(x(5, 6, 2))
```

[Try it Yourself »](#)

---

ADVERTISEMENT

---

## Why Use Lambda Functions?

The power of lambda is better shown when you use them as an anonymous function inside another function.

Say you have a function definition that takes one argument, and that argument will be multiplied with an unknown number:

```
def myfunc(n):
    return lambda a : a * n
```

Use that function definition to make a function that always doubles the number you send in:

## Example

```
def myfunc(n):  
    return lambda a : a * n  
  
mydoubler = myfunc(2)  
  
print(mydoubler(11))
```

Try it Yourself »

Or, use the same function definition to make a function that always *triples* the number you send in:

## Example

```
def myfunc(n):  
    return lambda a : a * n  
  
mytripler = myfunc(3)  
  
print(mytripler(11))
```

Try it Yourself »

Or, use the same function definition to make both functions, in the same program:

## Example

```
def myfunc(n):  
    return lambda a : a * n
```

```
mydoubler = myfunc(2)
mytripler = myfunc(3)

print(mydoubler(11))
print(mytripler(11))
```

[Try it Yourself »](#)

Use lambda functions when an anonymous function is required for a short period of time.

## Test Yourself With Exercises

### Exercise:

Create a lambda function that takes one parameter ( `a` ) and returns it.

x =

[Submit Answer »](#)

[Start the Exercise](#)

[◀ Previous](#)


[Next ▶](#)



ADVERTISEMENT

NEW

We just launched  
W3Schools videos

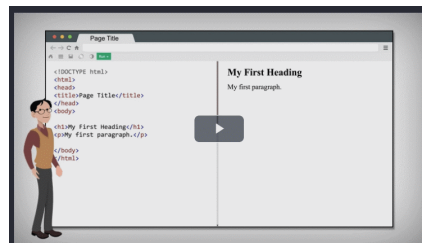

Explore now

## COLOR PICKER



Get certified  
by completing  
a Python  
course today!



Get started

## CODE GAME



Play Game

ADVERTISEMENT

---

ADVERTISEMENT

ADVERTISEMENT



---

[Report Error](#)

[Spaces](#)

[Pro](#)

[Get Certified](#)

---

## Top Tutorials

[HTML Tutorial](#)  
[CSS Tutorial](#)  
[JavaScript Tutorial](#)  
[How To Tutorial](#)  
[SQL Tutorial](#)  
[Python Tutorial](#)  
[W3.CSS Tutorial](#)  
[Bootstrap Tutorial](#)  
[PHP Tutorial](#)  
[Java Tutorial](#)  
[C++ Tutorial](#)  
[jQuery Tutorial](#)

## Top References

[HTML Reference](#)  
[CSS Reference](#)  
[JavaScript Reference](#)  
[SQL Reference](#)  
[Python Reference](#)  
[W3.CSS Reference](#)  
[Bootstrap Reference](#)  
[PHP Reference](#)  
[HTML Colors](#)  
[Java Reference](#)  
[Angular Reference](#)  
[jQuery Reference](#)



## Top Examples

- HTML Examples
- CSS Examples
- JavaScript Examples
- How To Examples
- SQL Examples
- Python Examples
- W3.CSS Examples
- Bootstrap Examples
- PHP Examples
- Java Examples
- XML Examples
- jQuery Examples

## Get Certified

- HTML Certificate
- CSS Certificate
- JavaScript Certificate
- Front End Certificate
- SQL Certificate
- Python Certificate
- PHP Certificate
- jQuery Certificate
- Java Certificate
- C++ Certificate
- C# Certificate
- XML Certificate

---

[FORUM](#) | [ABOUT](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.  
W3Schools is Powered by W3.CSS.

