

Dataset Preprocessing and Visualization

Upload a CSV dataset to preprocess, summarize, and explore it in an interactive dashboard.

Upload your dataset (CSV)



netflix...leaned.csv
3.2MB



Dataset uploaded successfully!



Interactive Dashboard

Rows

8,807

Columns

12

Missing cells

4,307

Duplicate rows

0



Distributions



Categorical Breakdown



Correlation



Data Explorer


Numeric column

release_year



Distribution of release_year

☒ Show as smoothed curve

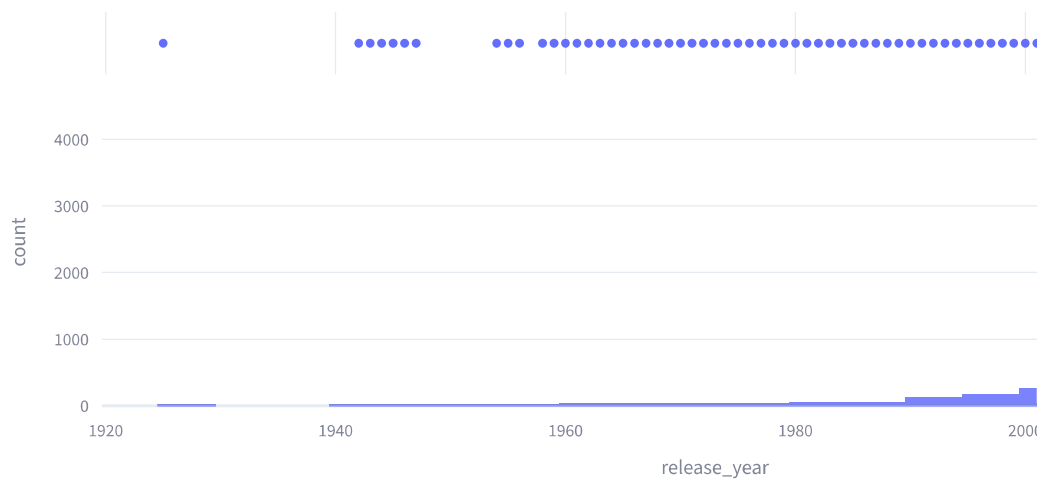

⊞ Run AI Summary & Preprocessing

Dataset Summary

Summary and Insights

Based on the provided summary of the dataset, here's a step-by-step analysis:

1. Structure:

- Number of rows: 8807
- Number of columns: 12
- Data types:
 - show_id: string
 - type: string

Preprocessing

View generated preprocessing code

```
import os
import pandas as pd
import numpy as np
from sklearn.impute import SimpleImputer
from sklearn.preprocessing import LabelEncoder

# Load the dataset into a DataFrame
df = pd.read_csv('temp\\dataset_89aede7-4812-42a7-a291-15ab560666d6.csv')

# Dynamically identify numeric and categorical columns using select_dtypes
numeric_cols = df.select_dtypes(include=['int64']).columns
categorical_cols = df.select_dtypes(include=['str']).columns

# Drop columns with more than 80% missing values
df = df.dropna(thresh=df.shape[0]*0.2, axis=1)

# Identify columns with >=90% identical values
duplicate_columns = []
for col in df.columns:
    if df[col].duplicated().sum() / len(df) >= 0.9:
        duplicate_columns.append(col)
df = df.drop(duplicate_columns, axis=1)

# Impute missing numeric columns with median using SimpleImputer
numeric_imputer = SimpleImputer(strategy='median')
df[numeric_cols] = numeric_imputer.fit_transform(df[numeric_cols])

# Impute missing categorical columns with mode using SimpleImputer
categorical_imputer = SimpleImputer(mode='most_frequent')
df[categorical_cols] = categorical_imputer.fit_transform(df[categorical_cols])

# Handle outliers in numeric columns
for col in numeric_cols:
    Q1 = df[col].quantile(0.25)
    Q3 = df[col].quantile(0.75)
    IQR = Q3 - Q1
    lower_bound = Q1 - 1.5 * IQR
    upper_bound = Q3 + 1.5 * IQR
    df.loc[df[col] < lower_bound, col] = np.nan
    df[col] = (df[col] >= lower_bound) & (df[col] <= upper_bound)
    numeric_imputer = SimpleImputer(strategy='median')
    df[numeric_cols] = numeric_imputer.fit_transform(df[numeric_cols])

# Ensure all column operations include checks for existence and avoid hardcoding column names
```

```
if 'show_id' in df.columns:
    show_id_le = LabelEncoder()
    for col in categorical_cols:
        if col != 'show_id':
            show_id_le.fit(df[col])
            df[col] = show_id_le.transform(df[col])

# Save the cleaned dataset to the provided output path
df.to_csv('temp\cleaned_89aede7-4812-42a7-a291-15ab560666d6.csv', index=False)
```

✔ Cleaned dataset saved as temp\cleaned_89aede7-4812-42a7-a291-15ab560666d6.csv. Dashboard above reflects the cleaned data — scroll up.

Original vs Cleaned Dataset

Original Dataset

	show_id	type	title	director
0	s1	Movie	Dick Johnson Is Dead	Kirsten Johnson
1	s2	TV Show	Blood & Water	None
2	s3	TV Show	Ganglands	Julien Leclercq
3	s4	TV Show	Jailbirds New Orleans	None
4	s5	TV Show	Kota Factory	None
5	s6	TV Show	Midnight Mass	Mike Flanagan
6	s7	Movie	My Little Pony: A New Generation	Robert Cullen,
7	s8	Movie	Sankofa	Haile Gerima

Cleaned Dataset

	show_id	type	title	director
0	s1	Movie	Dick Johnson Is Dead	Kirsten Johnson
1	s2	TV Show	Blood & Water	None
2	s3	TV Show	Ganglands	Julien Leclercq
3	s4	TV Show	Jailbirds New Orleans	None
4	s5	TV Show	Kota Factory	None
5	s6	TV Show	Midnight Mass	Mike Flanagan
6	s7	Movie	My Little Pony: A New Generation	Robert Cullen,
7	s8	Movie	Sankofa	Haile Gerima