

Name : Suryal D . Khirade
 Roll NO: T190424399
 Assignment No :10

##Data Visualization I

1.Use the inbuilt dataset 'titanic'. The dataset contains 891 rows and contains information about the passengers who boarded the unfortunate Titanic ship. Use the Seaborn library to see if we can find any patterns in the data.

2.Write a code to check how the price of the ticket (column name: 'fare') for each passenger is distributed by plotting a histogram.

```
In [1]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
```

```
In [2]: titanic=sns.load_dataset("titanic")
```

```
In [3]: titanic
```

```
Out[3]:
```

	survived	pclass	sex	age	sibsp	parch	fare	embarked	class	who	adult
0	0	3	male	22.0	1	0	7.2500	S	Third	man	
1	1	1	female	38.0	1	0	71.2833	C	First	woman	
2	1	3	female	26.0	0	0	7.9250	S	Third	woman	
3	1	1	female	35.0	1	0	53.1000	S	First	woman	
4	0	3	male	35.0	0	0	8.0500	S	Third	man	
...	
886	0	2	male	27.0	0	0	13.0000	S	Second	man	
887	1	1	female	19.0	0	0	30.0000	S	First	woman	
888	0	3	female	NaN	1	2	23.4500	S	Third	woman	
889	1	1	male	26.0	0	0	30.0000	C	First	man	
890	0	3	male	32.0	0	0	7.7500	Q	Third	man	

891 rows × 15 columns



```
In [4]: titanic.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 15 columns):
 #   Column          Non-Null Count  Dtype  
---  -
 0   survived        891 non-null   int64  
 1   pclass          891 non-null   int64  
 2   sex             891 non-null   object  
 3   age             714 non-null   float64 
 4   sibsp           891 non-null   int64  
 5   parch           891 non-null   int64  
 6   fare            891 non-null   float64 
 7   embarked        889 non-null   object  
 8   class           891 non-null   category
 9   who             891 non-null   object  
10  adult_male      891 non-null   bool    
11  deck            203 non-null   category
12  embark_town     889 non-null   object  
13  alive           891 non-null   object  
14  alone           891 non-null   bool    
dtypes: bool(2), category(2), float64(2), int64(4), object(5)
memory usage: 80.7+ KB
```

```
In [5]: titanic.shape
```

```
Out[5]: (891, 15)
```

In [6]: titanic.describe

```
Out[6]: <bound method NDFrame.describe of
bsp  parch  fare embarked  class  \
0      0      3    male  22.0      1      0  7.2500      S  Thi
rd
1      1      1  female  38.0      1      0  71.2833      C  Fir
st
2      1      3  female  26.0      0      0  7.9250      S  Thi
rd
3      1      1  female  35.0      1      0  53.1000      S  Fir
st
4      0      3    male  35.0      0      0  8.0500      S  Thi
rd
..      ...      ...      ...      ...      ...      ...      ...
...
886      0      2    male  27.0      0      0  13.0000      S  Seco
nd
887      1      1  female  19.0      0      0  30.0000      S  Fir
st
888      0      3  female   NaN      1      2  23.4500      S  Thi
rd
889      1      1    male  26.0      0      0  30.0000      C  Fir
st
890      0      3    male  32.0      0      0  7.7500      Q  Thi
rd

      who  adult_male  deck  embark_town  alive  alone
0      man      True  NaN  Southampton    no  False
1  woman    False    C   Cherbourg    yes  False
2  woman    False  NaN  Southampton    yes  True
3  woman    False    C   Southampton    yes  False
4      man      True  NaN  Southampton    no  True
..      ...      ...      ...      ...      ...      ...
886  man      True  NaN  Southampton    no  True
887  woman    False    B   Southampton    yes  True
888  woman    False  NaN  Southampton    no  False
889  man      True    C   Cherbourg    yes  True
890  man      True  NaN  Queenstown    no  True
```

[891 rows x 15 columns]>

In [7]: titanic.describe

```
Out[7]: <bound method NDFrame.describe of
bsp  parch  fare embarked  class \
0      0      3   male  22.0    1    0   7.2500      S  Thi
rd
1      1      1  female  38.0    1    0  71.2833      C  Fir
st
2      1      3  female  26.0    0    0   7.9250      S  Thi
rd
3      1      1  female  35.0    1    0  53.1000      S  Fir
st
4      0      3   male  35.0    0    0   8.0500      S  Thi
rd
..      ...      ...      ...      ...      ...      ...      ...
...
886      0      2   male  27.0    0    0  13.0000      S  Seco
nd
887      1      1  female  19.0    0    0  30.0000      S  Fir
st
888      0      3  female   NaN    1    2  23.4500      S  Thi
rd
889      1      1   male  26.0    0    0  30.0000      C  Fir
st
890      0      3   male  32.0    0    0   7.7500      Q  Thi
rd

      who  adult_male  deck  embark_town  alive  alone
0      man      True  NaN  Southampton    no  False
1  woman     False    C   Cherbourg    yes  False
2  woman     False  NaN  Southampton    yes   True
3  woman     False    C   Southampton    yes  False
4      man      True  NaN  Southampton    no   True
..      ...      ...      ...      ...      ...      ...
886      man      True  NaN  Southampton    no   True
887  woman     False    B   Southampton    yes   True
888  woman     False  NaN  Southampton    no  False
889      man      True    C   Cherbourg    yes   True
890      man      True  NaN   Queenstown    no   True
```


[891 rows x 15 columns]>

```
In [8]: titanic.isnull().sum()
```

```
Out[8]: survived      0  
pclass      0  
sex         0  
age       177  
sibsp      0  
parch      0  
fare       0  
embarked    2  
class      0  
who         0  
adult_male  0  
deck      688  
embark_town  2  
alive       0  
alone       0  
dtype: int64
```


```
In [9]: sns.countplot(x='sex', data=titanic)
```

```
Out[9]: <Axes: xlabel='sex', ylabel='count'>
```

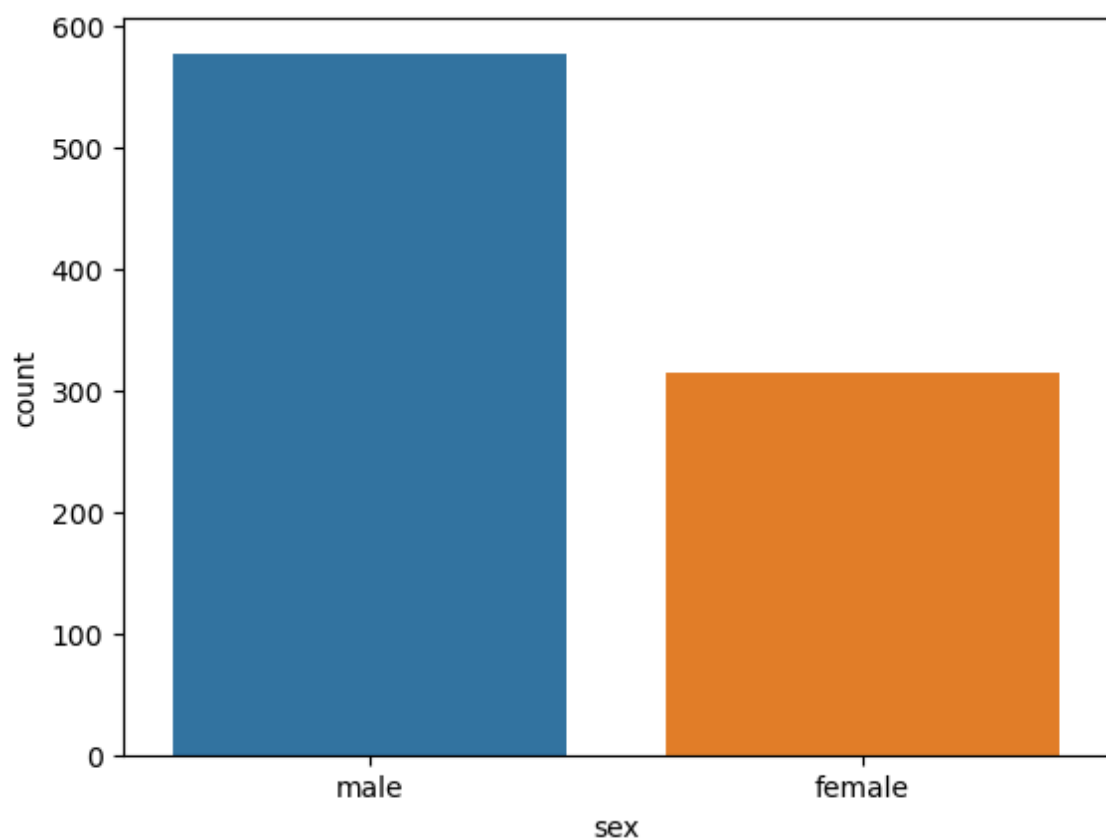


```
In [10]: sns.countplot(x='survived', data=titanic)
```

```
Out[10]: <Axes: xlabel='survived', ylabel='count'>
```

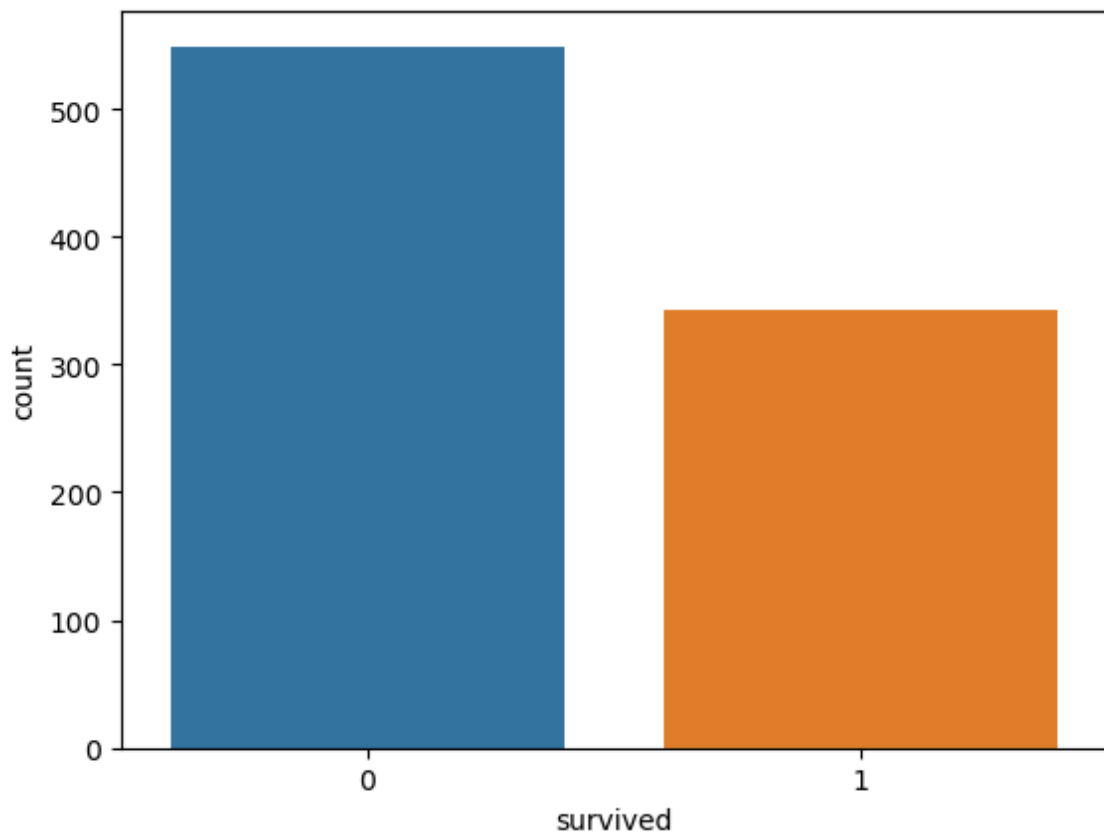


```
In [11]: sns.countplot(x='pclass', data=titanic)
```

```
Out[11]: <Axes: xlabel='pclass', ylabel='count'>
```

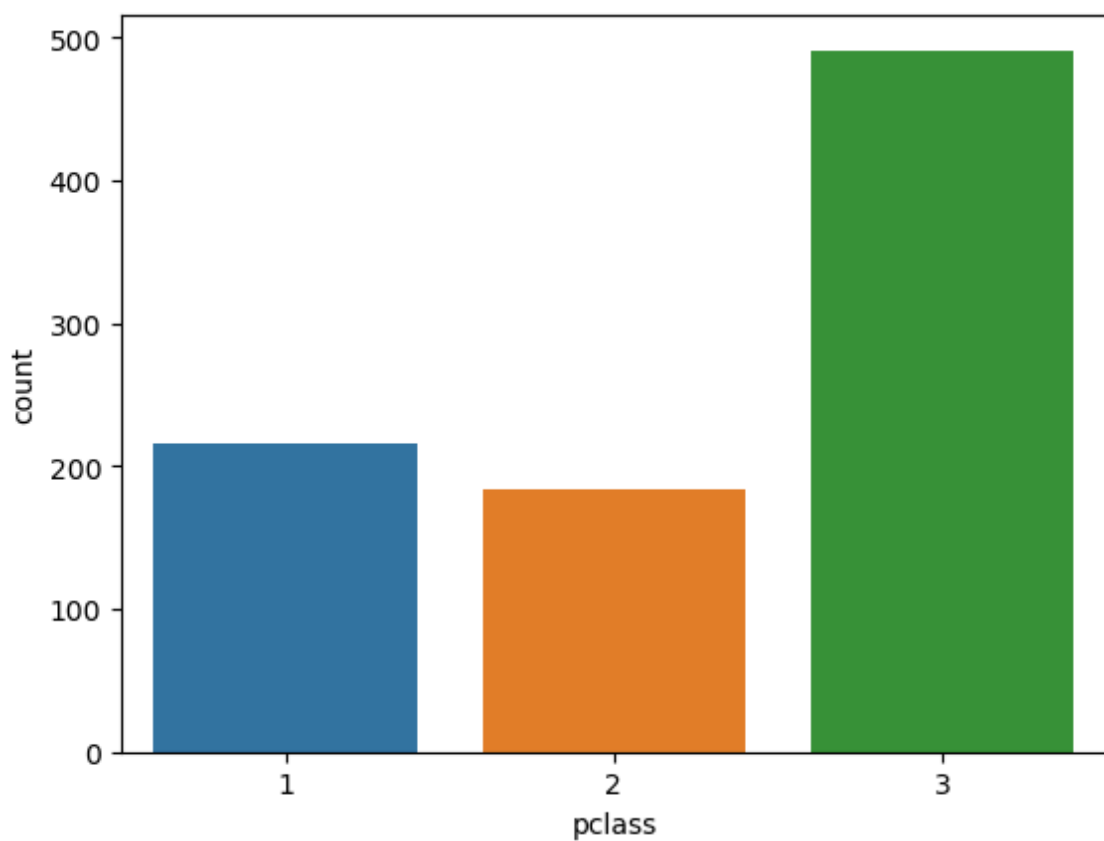


```
In [12]: sns.countplot(x='embark_town', data=titanic)
```

```
Out[12]: <Axes: xlabel='embark_town', ylabel='count'>
```

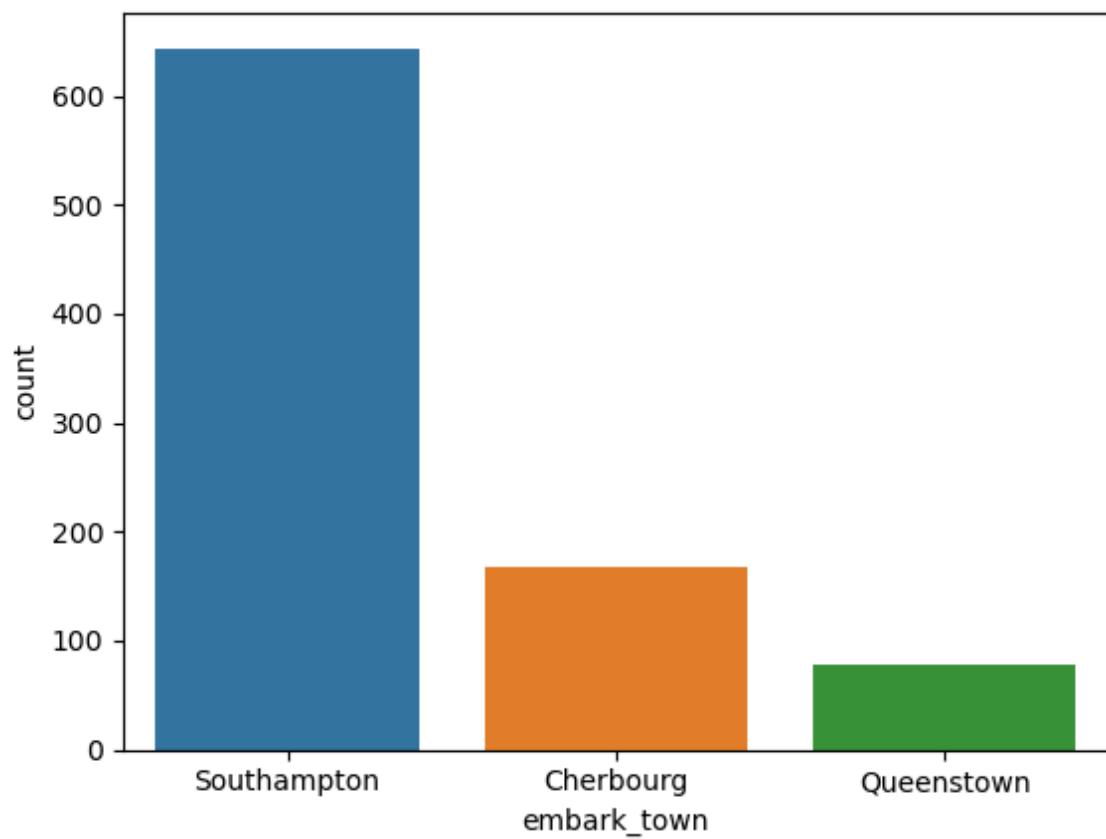


```
In [13]: sns.boxplot(titanic.age)
```

```
Out[13]: <Axes: >
```

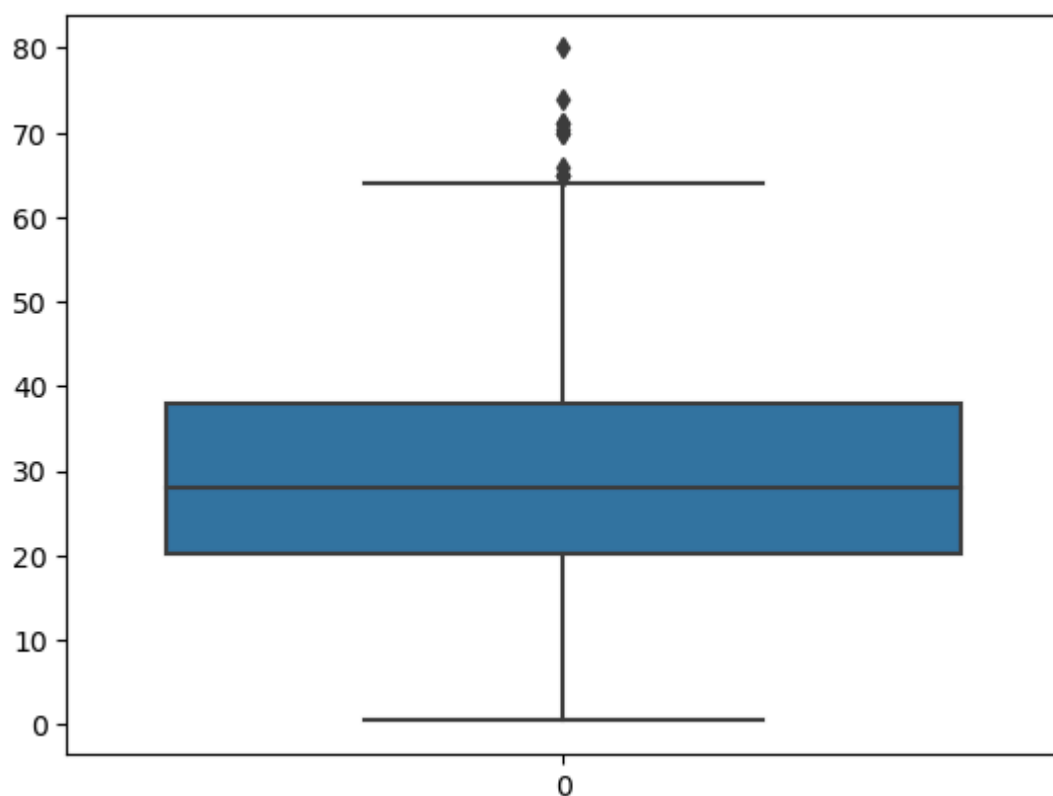


```
In [14]: sns.boxplot(titanic.fare)
```

```
Out[14]: <Axes: >
```

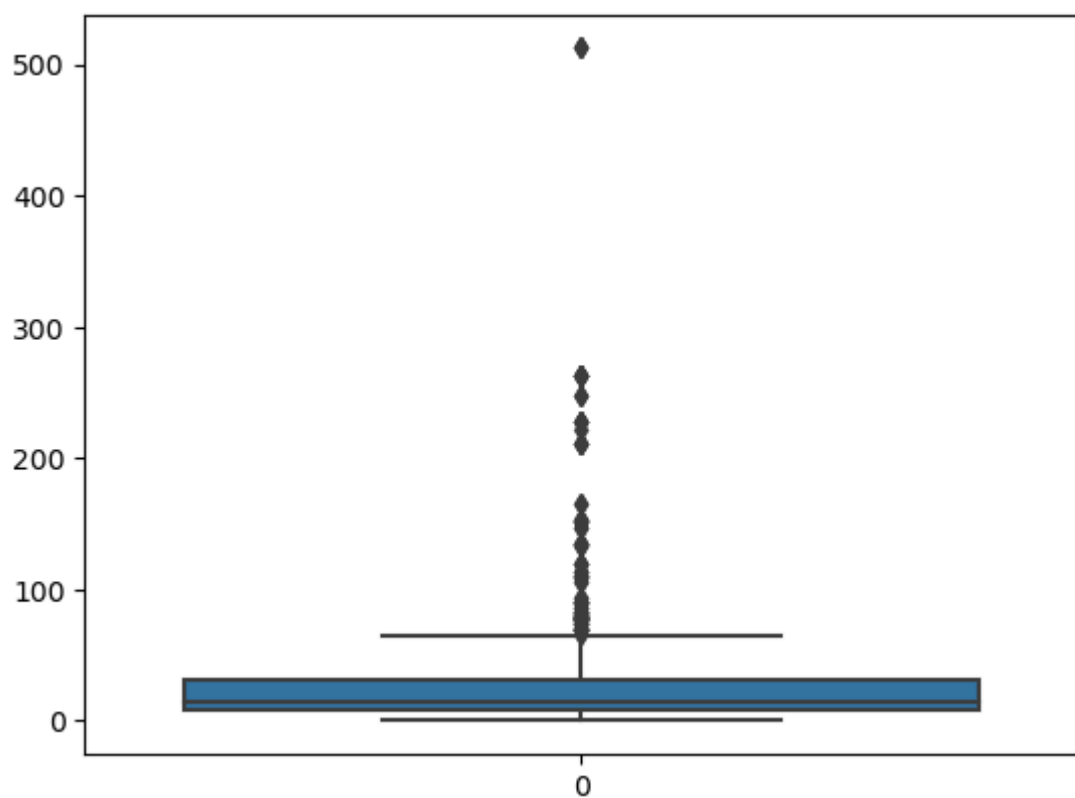


```
In [15]: sns.boxplot(titanic.pclass)
```

```
Out[15]: <Axes: >
```

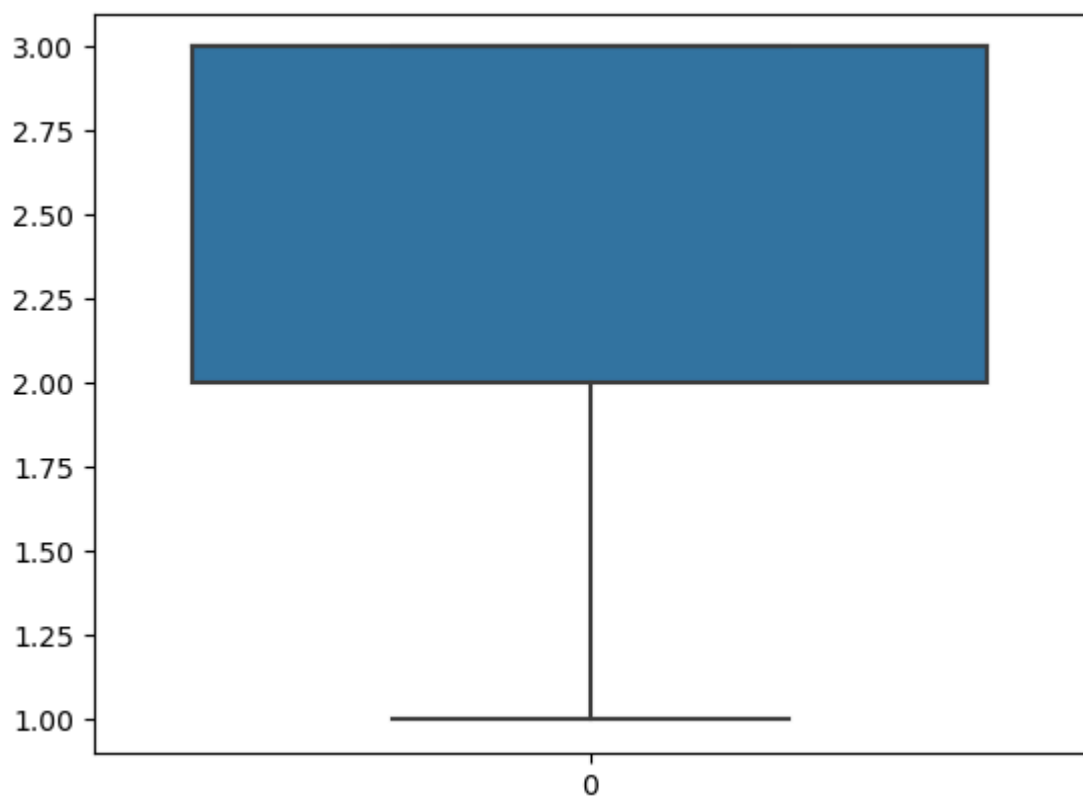


```
In [16]: sns.boxplot(data = titanic , x= "pclass" ,y = "age")
```


```
Out[16]: <Axes: xlabel='pclass', ylabel='age'>
```

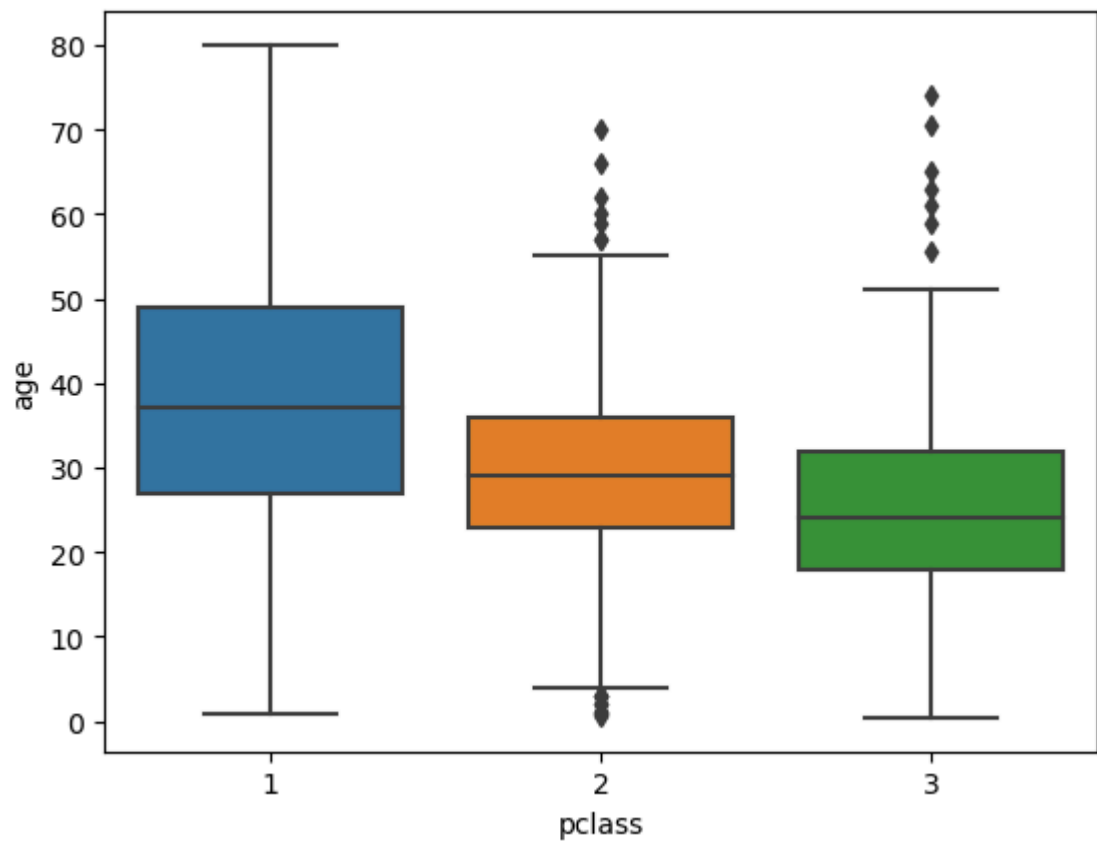

```
In [17]: sns.catplot(x='pclass', y='fare', data=titanic)
```

C:\Users\alisu\anaconda3\Lib\site-packages\seaborn\axisgrid.py:118: UserWarning: The figure layout has changed to tight
self._figure.tight_layout(*args, **kwargs)


```
Out[17]: <seaborn.axisgrid.FacetGrid at 0x200f93279d0>
```

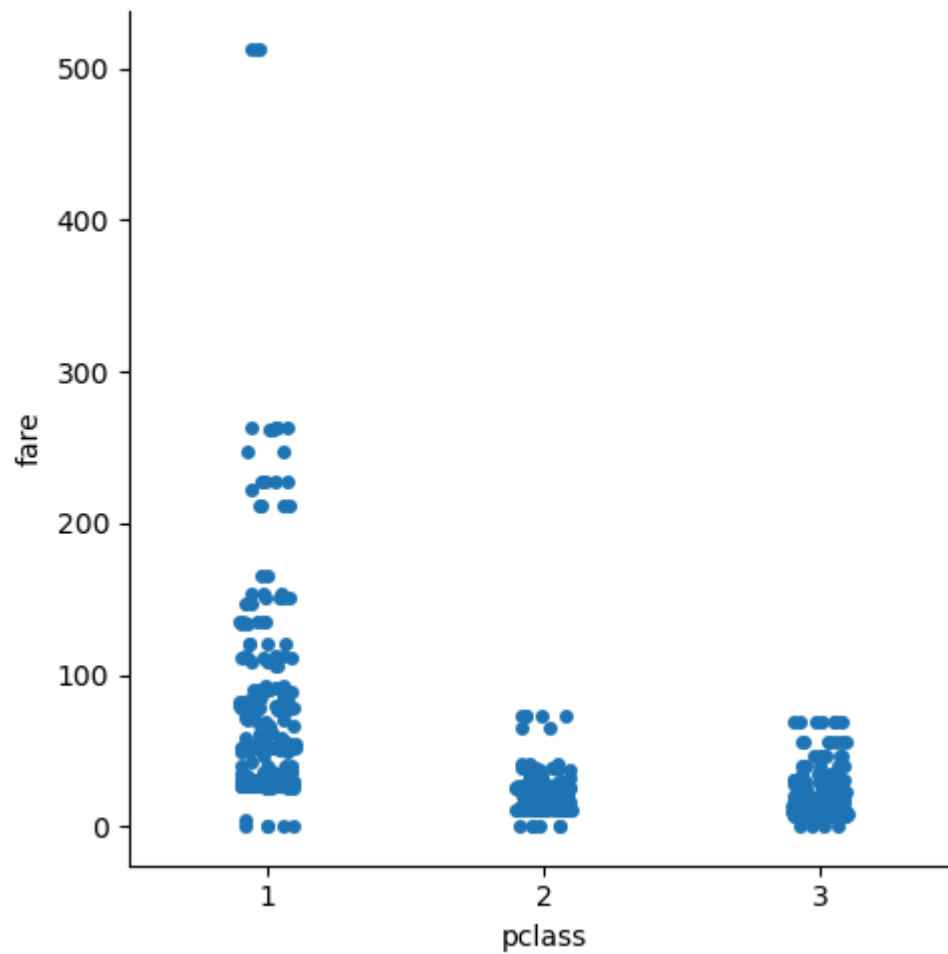

```
In [18]: sns.catplot(x='sex', y='fare', data=titanic)
```

C:\Users\alisu\anaconda3\Lib\site-packages\seaborn\axisgrid.py:118: UserWarning: The figure layout has changed to tight
self._figure.tight_layout(*args, **kwargs)


```
Out[18]: <seaborn.axisgrid.FacetGrid at 0x200f8a02f90>
```

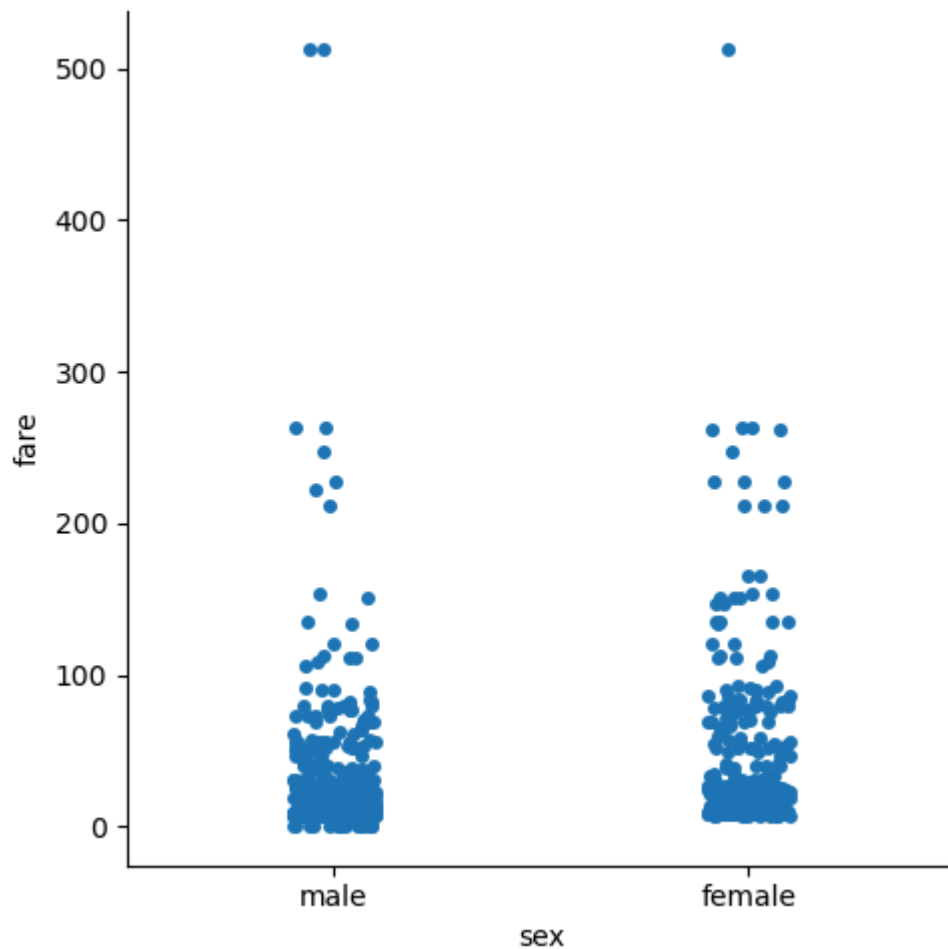

```
In [19]: sns.catplot(x='age', y='sex', data=titanic)
```

C:\Users\alisu\anaconda3\Lib\site-packages\seaborn\axisgrid.py:118: UserWarning: The figure layout has changed to tight
self._figure.tight_layout(*args, **kwargs)


```
Out[19]: <seaborn.axisgrid.FacetGrid at 0x200f9285050>
```

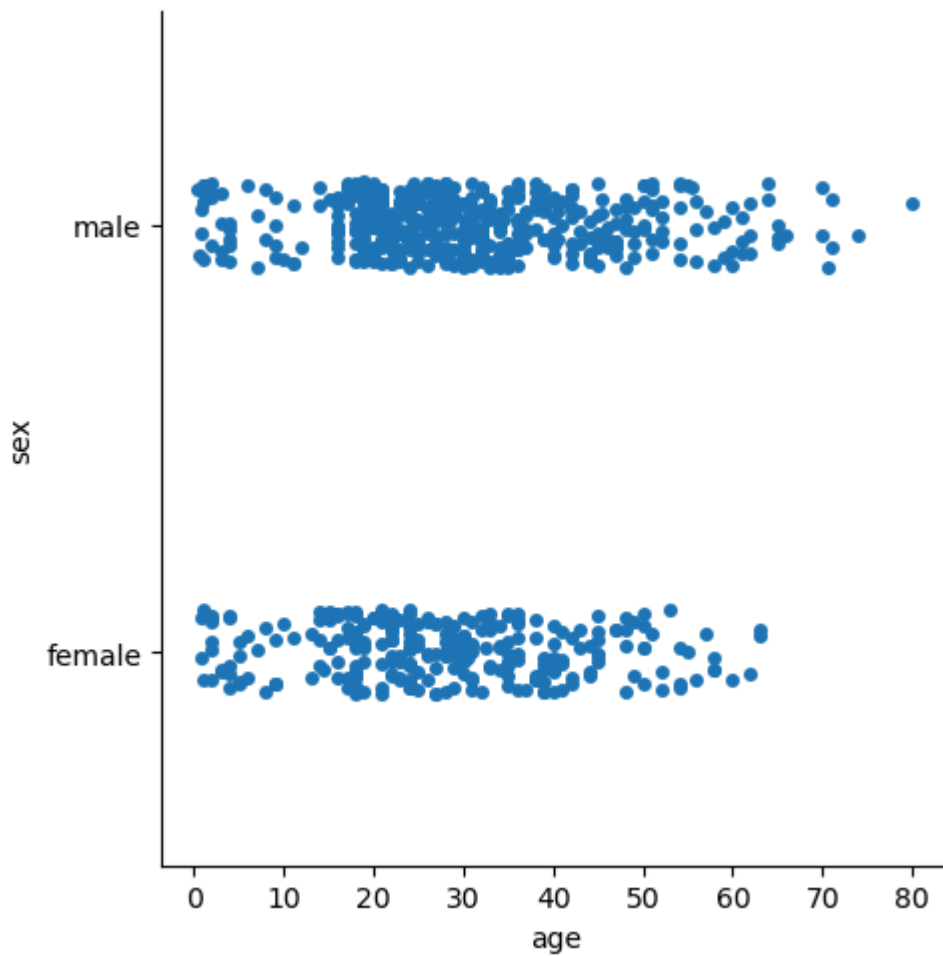

```
In [20]: sns.pairplot(titanic)
```


```
<_array_function__ internals>:200: RuntimeWarning: Converting input from
bool to <class 'numpy.uint8'> for compatibility.
<_array_function__ internals>:200: RuntimeWarning: Converting input from
bool to <class 'numpy.uint8'> for compatibility.
C:\Users\alishu\anaconda3\Lib\site-packages\seaborn\axisgrid.py:118: UserW
arning: The figure layout has changed to tight
self._figure.tight_layout(*args, **kwargs)
```

```
Out[20]: <seaborn.axisgrid.PairGrid at 0x200fa5a1250>
```

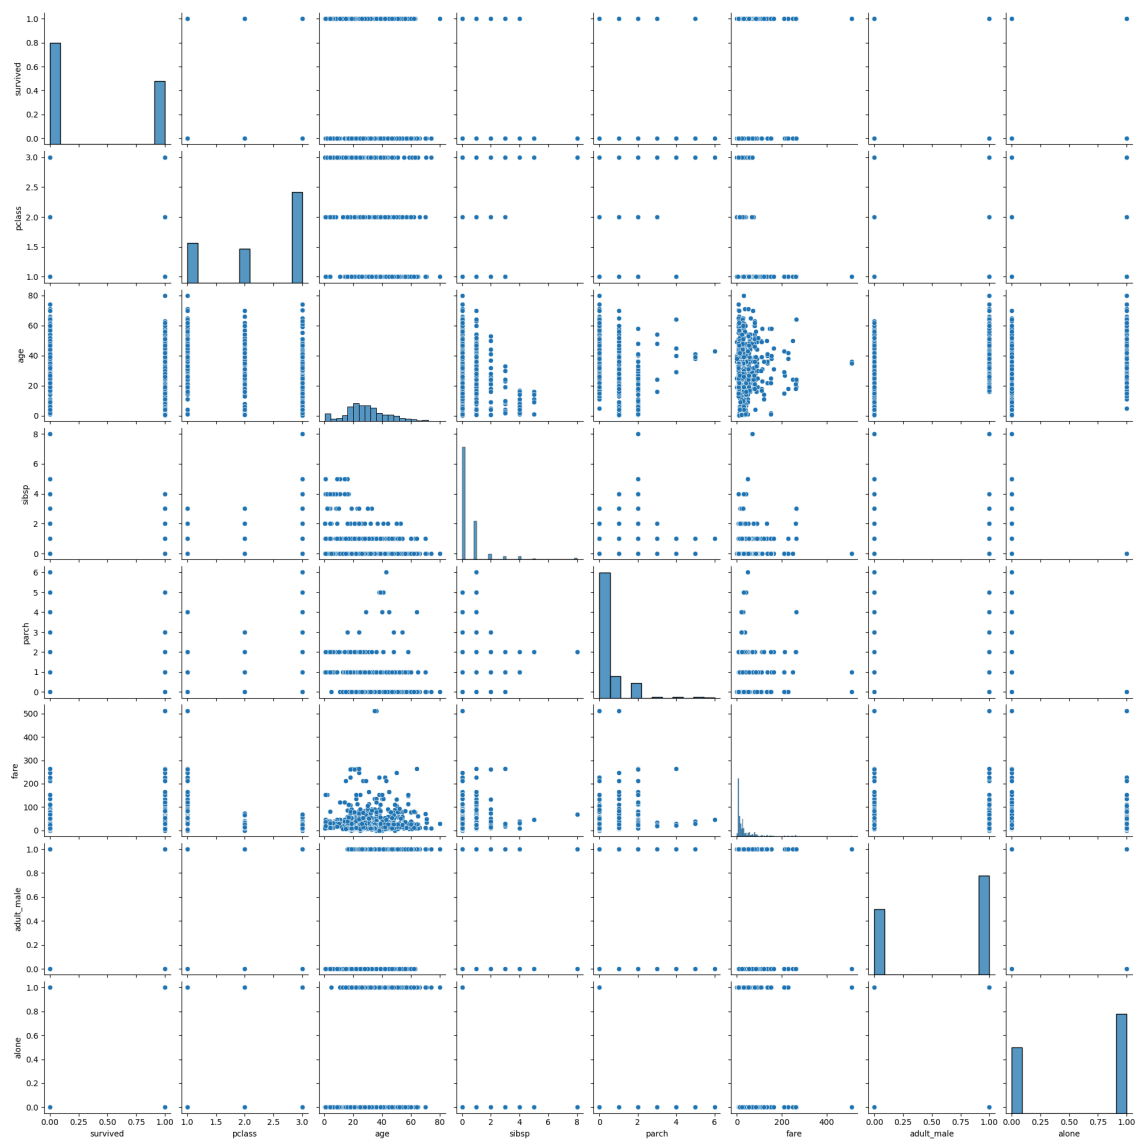

```
In [21]: sns.scatterplot(x='fare',y='pclass', data = titanic,hue= 'survived')
```

```
Out[21]: <Axes: xlabel='fare', ylabel='pclass'>
```

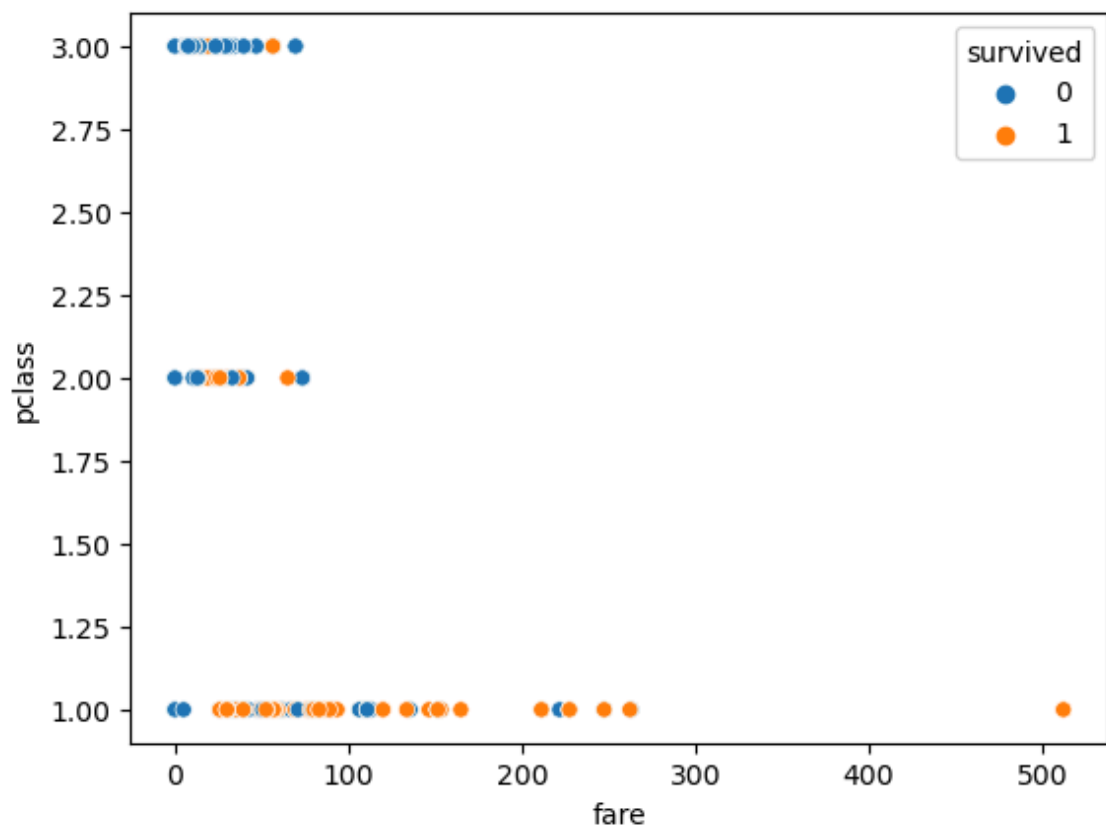

```
In [22]: sns.distplot(titanic.fare)
```

C:\Users\alisku\AppData\Local\Temp\ipykernel_10124\3635634896.py:1: UserWarning:


`distplot` is a deprecated function and will be removed in seaborn v0.14.0.

Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

For a guide to updating your code to use the new functions, please see <https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751> (<http://s://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751>)

```
sns.distplot(titanic.fare)
```

Out[22]: <Axes: xlabel='fare', ylabel='Density'>

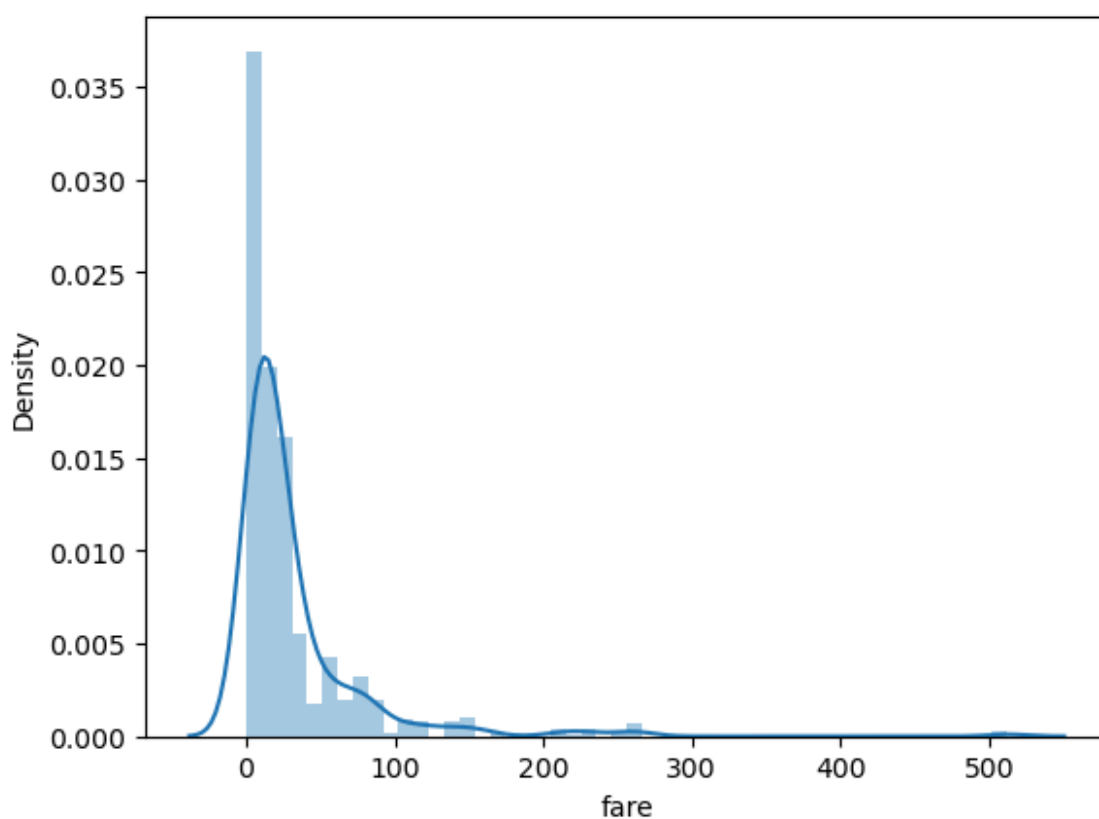

```
In [23]: sns.distplot(titanic.age)
```

C:\Users\alisu\AppData\Local\Temp\ipykernel_10124\3497382289.py:1: UserWarning:


`distplot` is a deprecated function and will be removed in seaborn v0.14.0.

Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

For a guide to updating your code to use the new functions, please see <https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751> (<http://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751>)


```
sns.distplot(titanic.age)
```

Out[23]: <Axes: xlabel='age', ylabel='Density'>

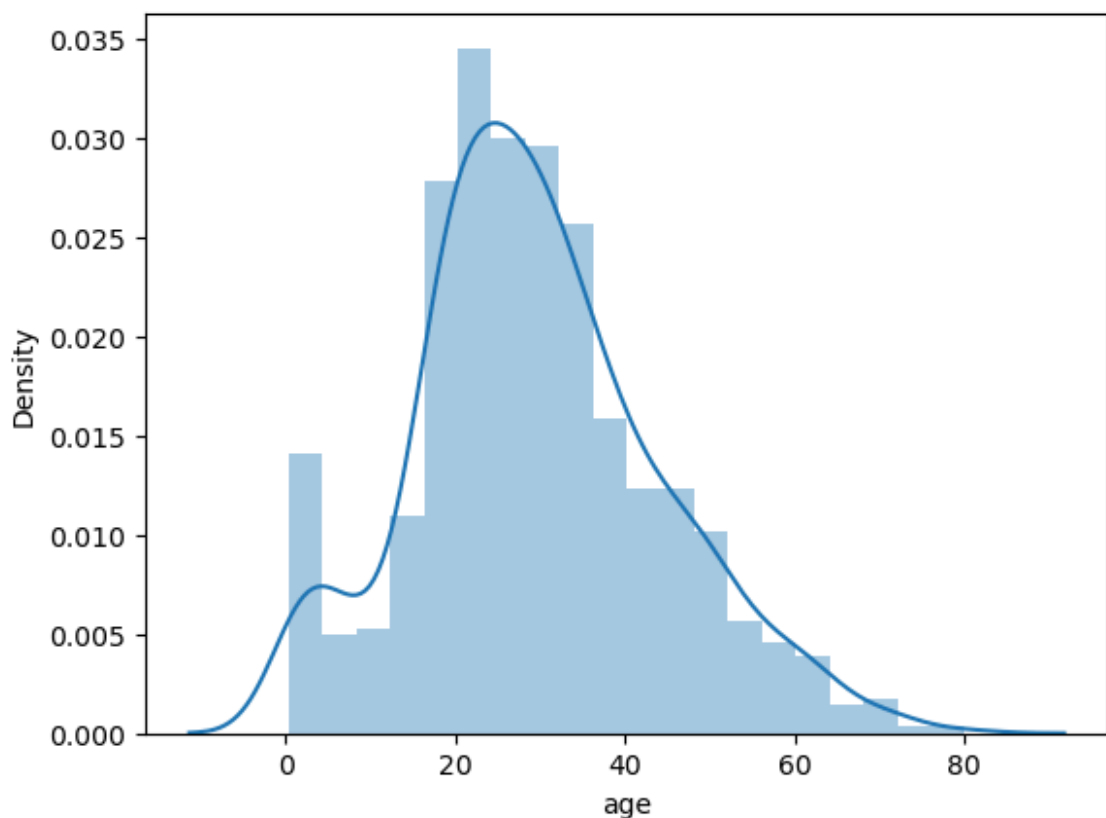



```
In [24]: sns.boxplot(titanic.age)
```

```
Out[24]: <Axes: >
```

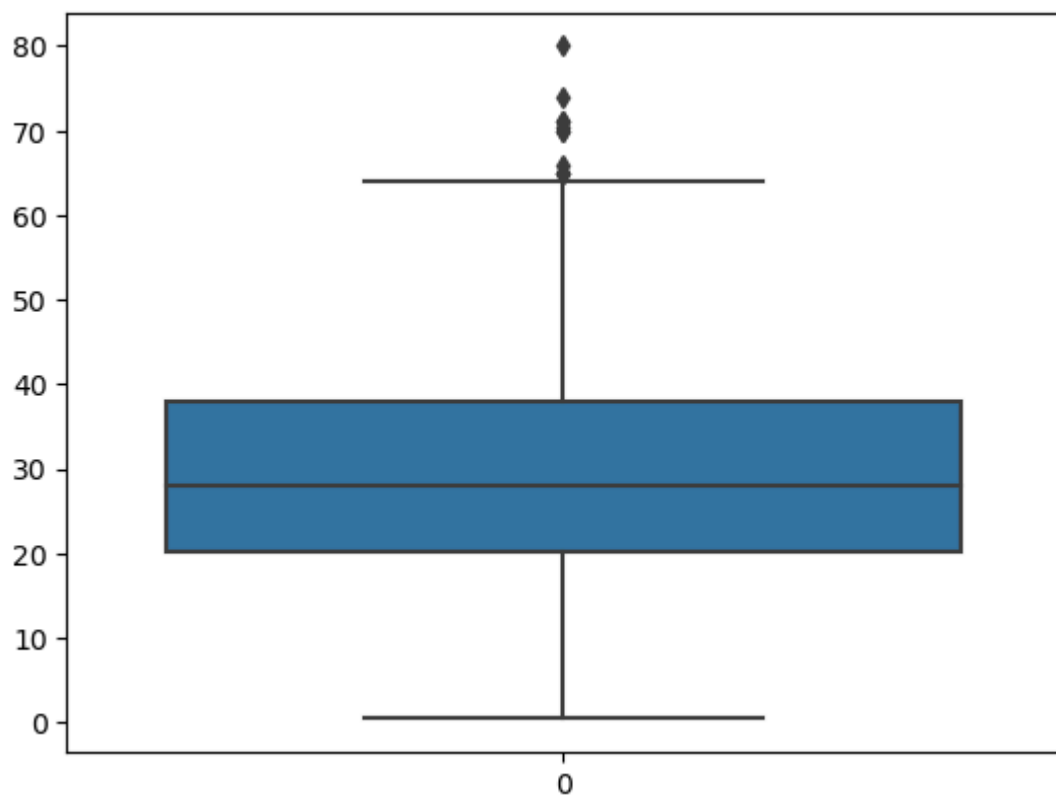


```
In [25]: sns.boxplot(titanic.fare)
```

```
Out[25]: <Axes: >
```

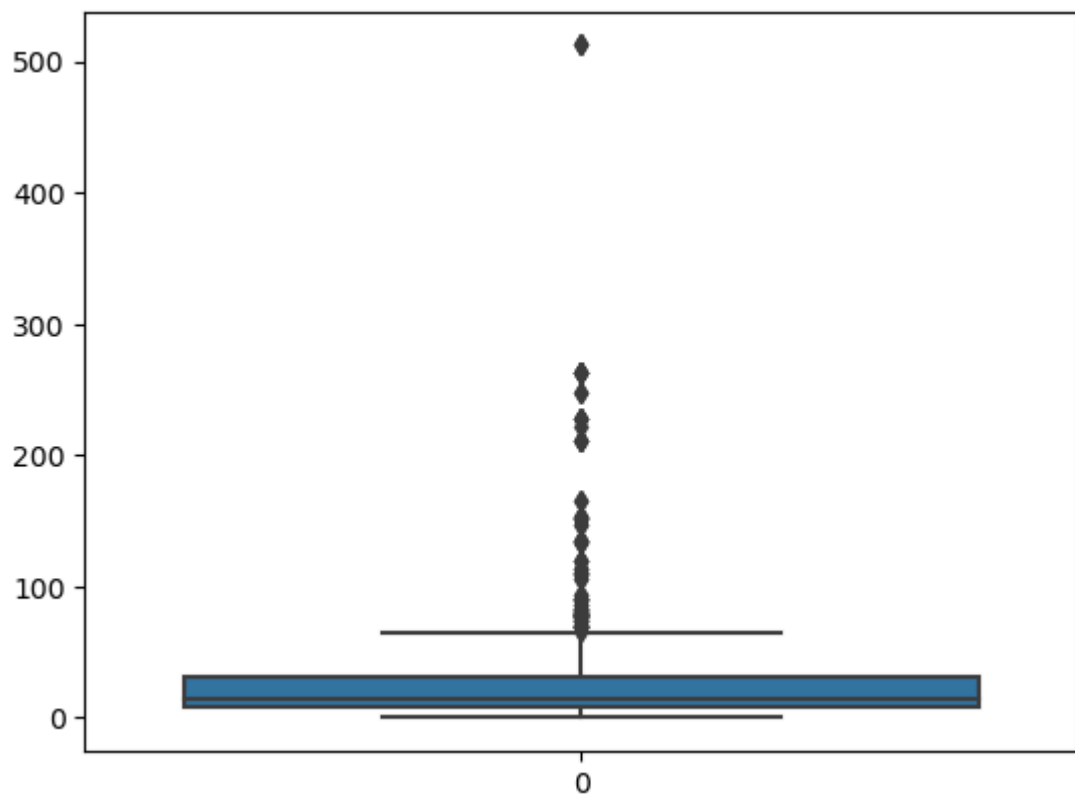


```
In [26]: sns.boxplot(data = titanic , x= "sex" ,y = "age" )
```

```
Out[26]: <Axes: xlabel='sex', ylabel='age'>
```

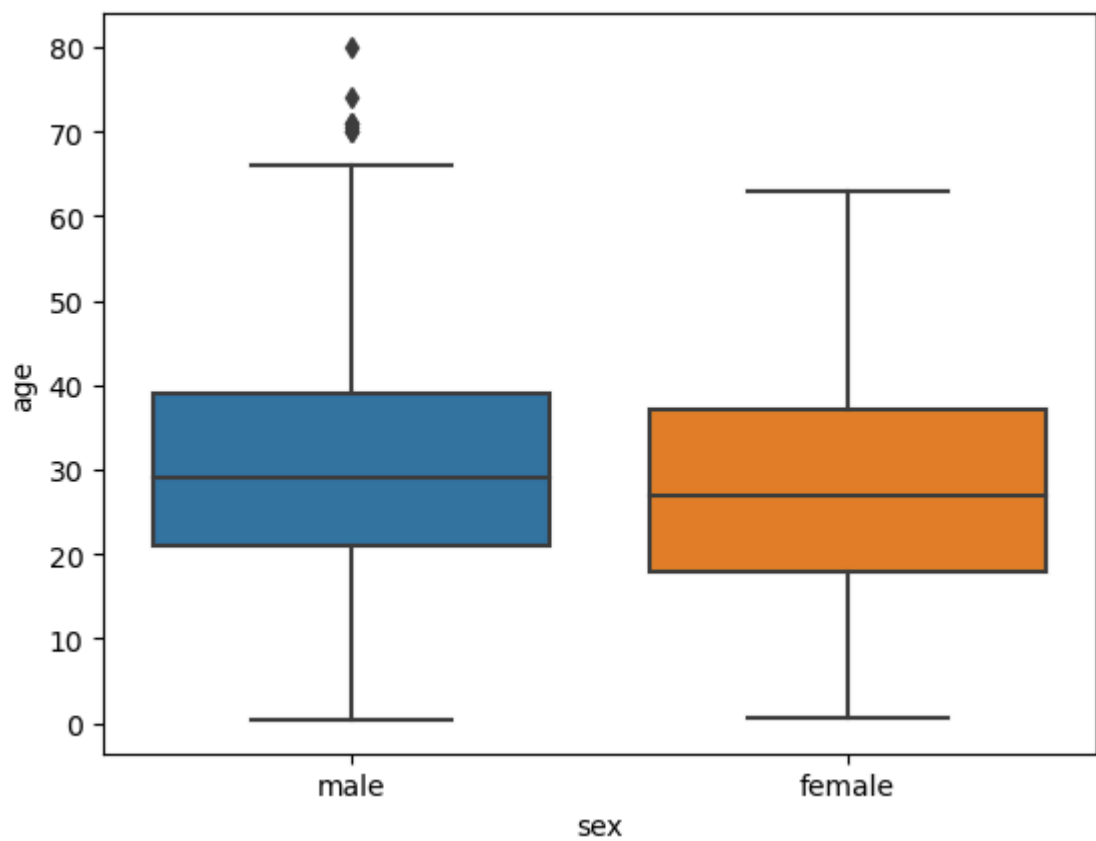


```
In [27]: sns.boxplot(data = titanic , x= "pclass" ,y = "fare" )
```

```
Out[27]: <Axes: xlabel='pclass', ylabel='fare'>
```

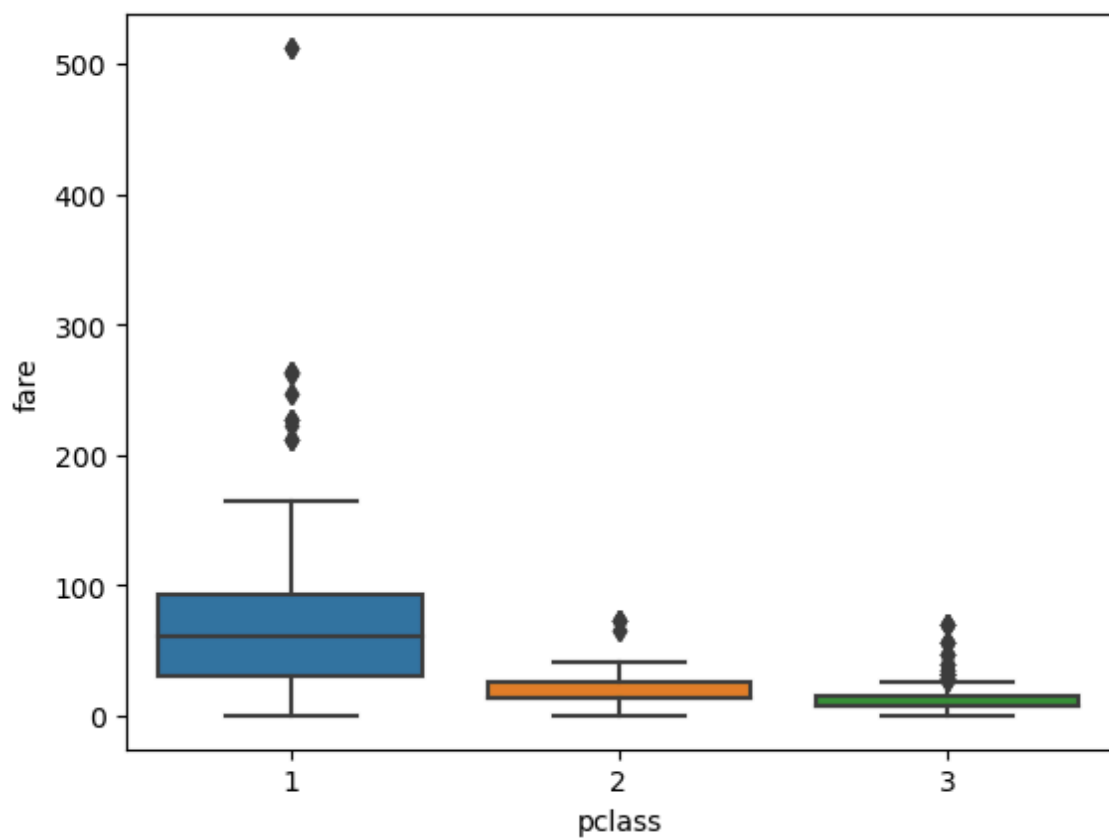

```
In [28]: sns.histplot(titanic.fare ,bins=10)
```

```
Out[28]: <Axes: xlabel='fare', ylabel='Count'>
```

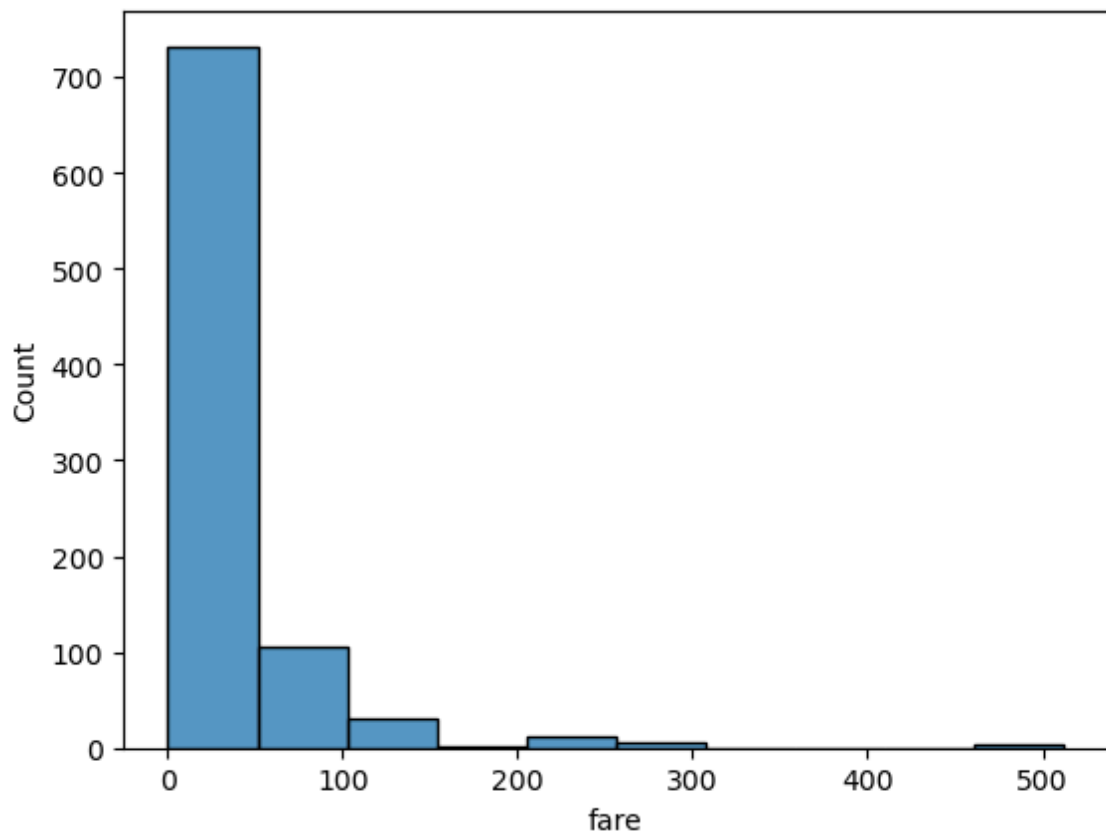

```
In [29]: sns.distplot(titanic.age)
```

C:\Users\alisu\AppData\Local\Temp\ipykernel_10124\3497382289.py:1: UserWarning:


`distplot` is a deprecated function and will be removed in seaborn v0.14.0.

Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

For a guide to updating your code to use the new functions, please see <https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751> (<http://s://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751>)

```
sns.distplot(titanic.age)
```

Out[29]: <Axes: xlabel='age', ylabel='Density'>

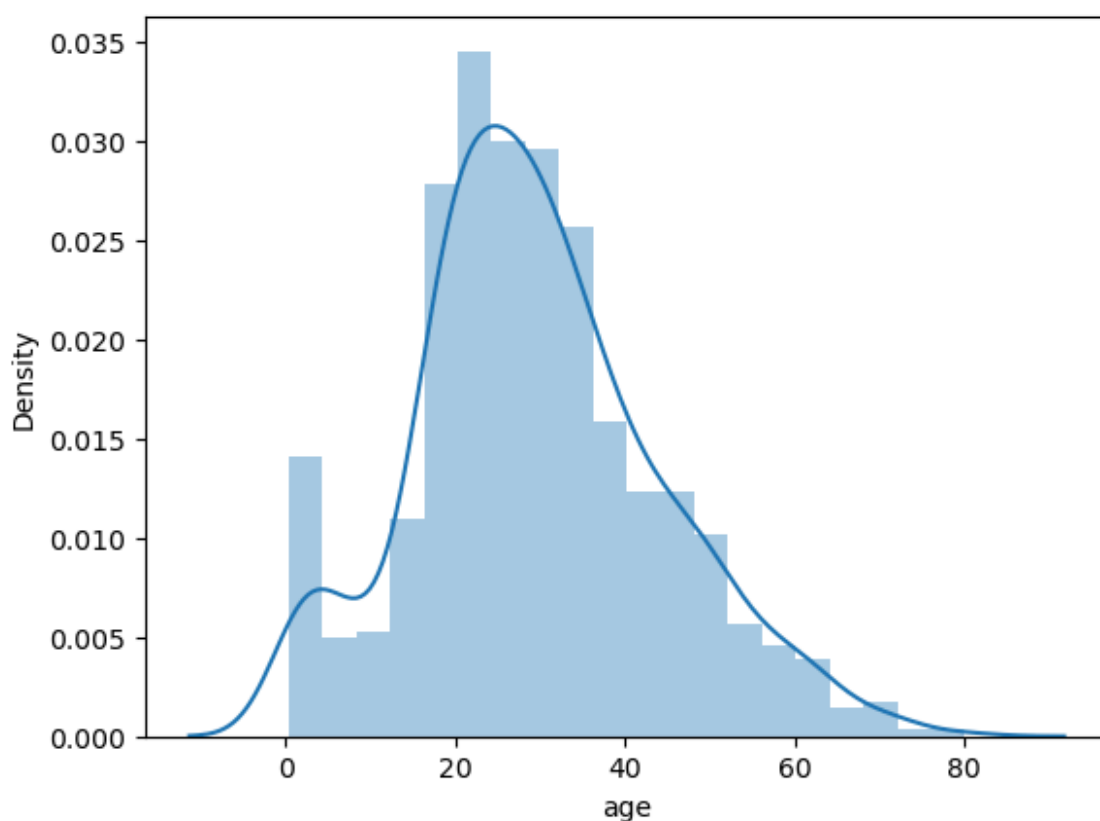

```
In [30]: sns.distplot(titanic.fare)
```

C:\Users\alisku\AppData\Local\Temp\ipykernel_10124\3635634896.py:1: UserWarning:


`distplot` is a deprecated function and will be removed in seaborn v0.14.0.

Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

For a guide to updating your code to use the new functions, please see <https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751> (<http://s://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751>)


```
sns.distplot(titanic.fare)
```

Out[30]: <Axes: xlabel='fare', ylabel='Density'>

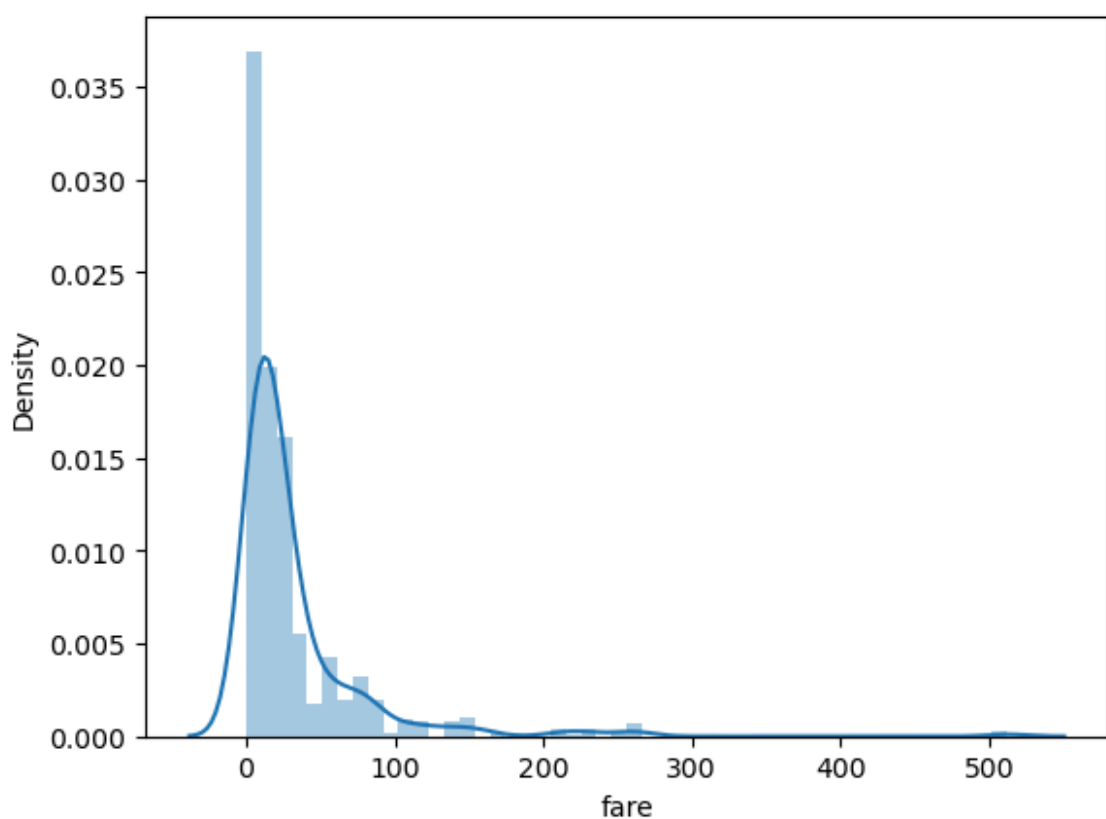


```
In [31]: sns.barplot(x = 'pclass', y = 'fare', data = titanic ,hue = 'sex' )
```

```
Out[31]: <Axes: xlabel='pclass', ylabel='fare'>
```

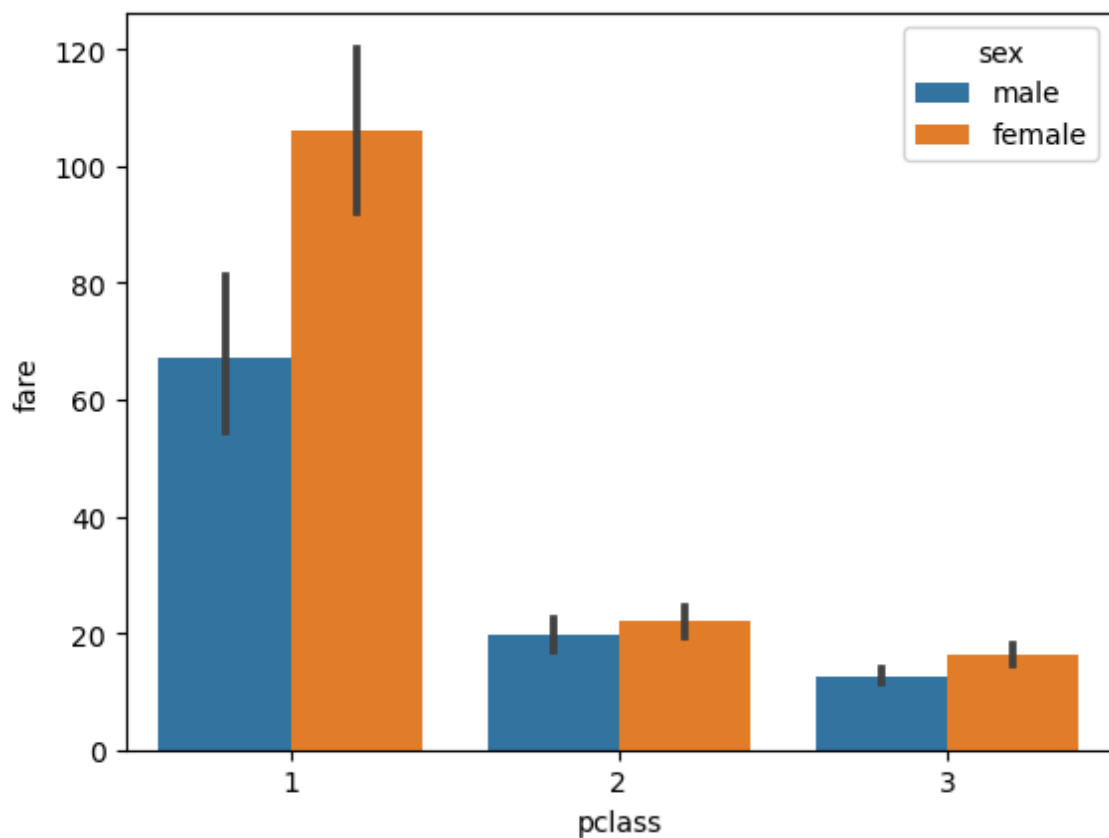

```
In [32]: sns.barplot(x = 'pclass', y = 'fare', data = titanic ,hue = 'survived' )
```

```
Out[32]: <Axes: xlabel='pclass', ylabel='fare'>
```

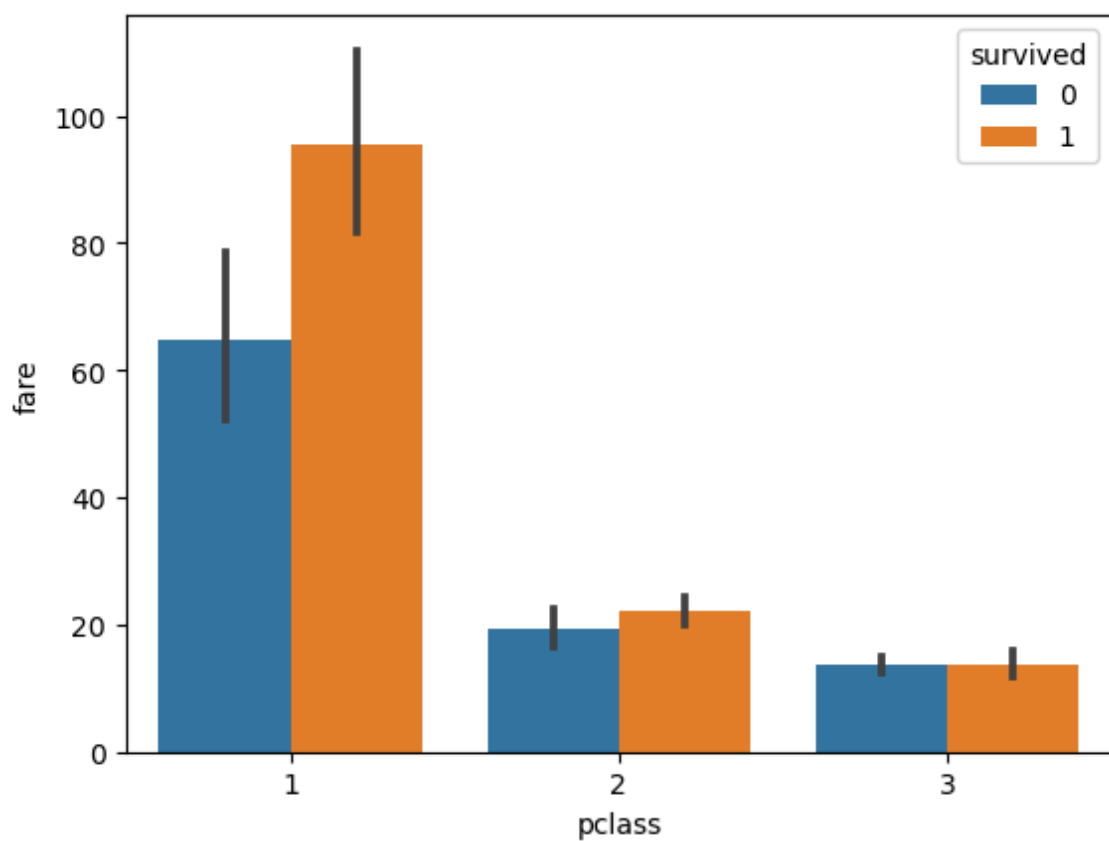

##Conclusion:

1. There are more passengers in first than in lower class
2. Age normally distributed
3. Fare is almost left skewed towards towards
4. The number of old male passenger is more than female passengers
5. There are more young females on ship
6. The females have paid medium to higher ranges of fare.

In []: