Created a DNS enumeration tool. The script should create a text file with all the active subdomains (in scope: example.com).

Bash Script:-

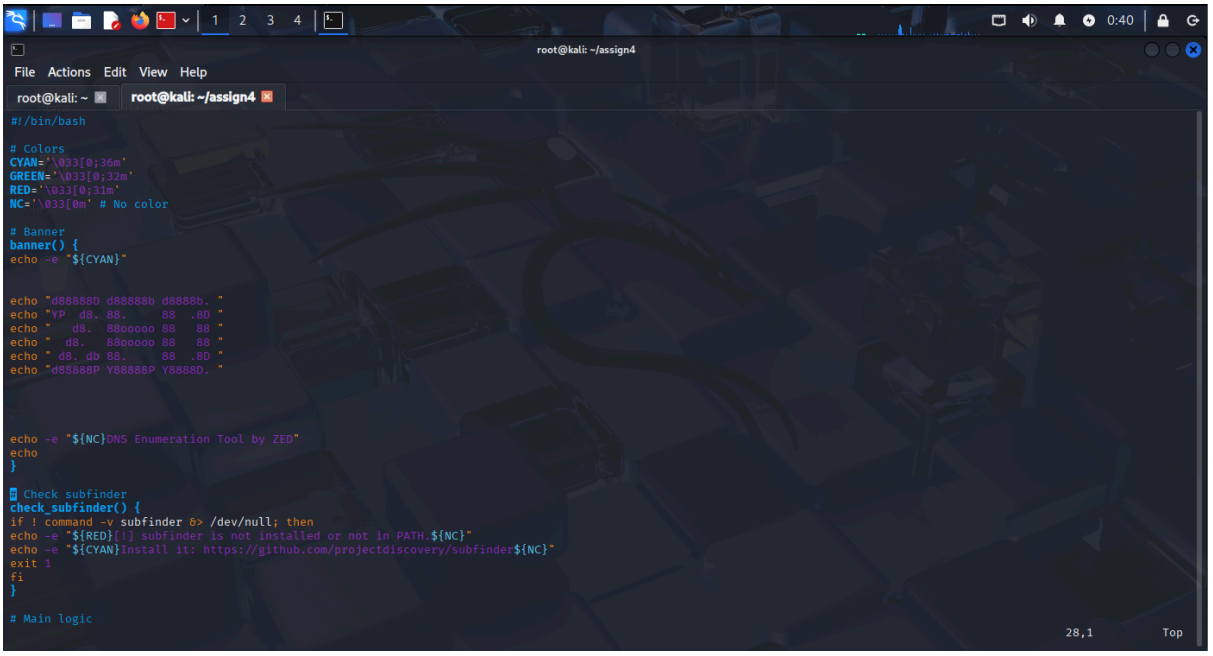

```
# Main logic
main() {
banner
check_subfinder

# Ask for domain
read -p "$(echo -e ${GREEN}Enter target domain:${NC} )" domain
if [ -z "$domain" ]; then
echo -e "${RED}[!] No domain entered. Exiting.${NC}"
exit 1
fi

# Ask for output file or use default
read -p "$(echo -e ${GREEN}Enter output file name [default: ${domain}_subs.txt]:${NC} )" output
if [ -z "$output" ]; then
output="${domain}_subs.txt"
fi

echo -e "${GREEN}[*] Running subfinder on: $domain${NC}"
echo -e "${GREEN}[*] Output will be saved to: $output${NC}"

subfinder -d "$domain" -silent -o "$output"

count=$(wc -l < "$output")
echo -e "${GREEN}[*] Enumeration complete. Found $count subdomains.${NC}"
echo -e "${GREEN}[*] Results saved in $output${NC}"
}

main
~
~
~
~
~
~
~
~
                                                    48,0-1        Bot
```

## Executed  the Script & output :

```
Enter target domain:^Z
zsh: suspended  bash Zed_1.sh

┌──(root㉿kali)-[~/assign4]
└─# chmod +x Zed_1.sh

┌──(root㉿kali)-[~/assign4]
└─# ./Zed_1.sh

d88888D d88888b d8888b.
YP  d8. 88.     88  .8D
   d8.  88ooooo 88   88
  d8.   88ooooo 88   88
 d8. db 88.     88  .8D
d88888P Y88888P Y8888D.
DNS Enumeration Tool by ZED

Enter target domain:example.com
Enter output file name [default: example.com_subs.txt]:output.txt
[*] Running subfinder on: example.com
[*] Output will be saved to: output.txt
www.example.com
_dmarc.example.com
k2._domainkey.example.com
m.example.com
dev.example.com
products.example.com
support.example.com
[*] Enumeration complete. Found 7 subdomains.
[*] Results saved in output.txt

┌──(root㉿kali)-[~/assign4]
└─# cat output.txt
_dmarc.example.com
k2._domainkey.example.com
m.example.com
dev.example.com
products.example.com
```