



Centurion
UNIVERSITY
*Shaping Lives...
Empowering Communities...*

School: Campus:

Academic Year: Subject Name: Subject Code:

Semester: Program: Branch: Specialization:

Date:

Applied and Action Learning (Learning by Doing and Discovery)

Name of the Experiment : Frontend Connect – Web3.js Integration

Coding Phase : Pseudo Code/Flow Chart/Algorithm

1. Start React project using `npx create-react-app`.
2. Install web3 library.
3. Create `.env` file with:
4. In `app.js`:
 - Import Web3 and connect to MetaMask.
 - Load contract using ABI & address from `.env`.
 - Fetch `storedData` using `contract.methods.get().call()`.
 - Send transaction using `contract.methods.set(value).send()`.
5. Test the frontend by setting and getting values.

Apparatus/Software Used:

- Node.js & npm
- React.js
- Web3.js
- MetaMask
- **Network:** Sepolia Testnet


```
import React, { useEffect, useState } from "react";
import Web3 from "web3";

// Load contract address from .env file
const CONTRACT_ADDRESS = process.env.REACT_APP_CONTRACT_ADDRESS;

// ABI for the contract
const ABI = [
  {
    inputs: [{ internalType: "uint256", name: "x", type: "uint256" }],
    name: "set",
    outputs: [],
    stateMutability: "nonpayable",
    type: "function",
  },
  {
    inputs: [
      { internalType: "uint256", name: "_data", type: "uint256" }
    ],
    stateMutability: "nonpayable",
    type: "constructor"
  },
  {
    inputs: [],
    name: "get",
    outputs: [{ internalType: "uint256", name: "", type: "uint256" }],
    stateMutability: "view",
    type: "function",
  },
  {
    inputs: [],
    name: "storedData",
    outputs: [{ internalType: "uint256", name: "", type: "uint256" }],
    stateMutability: "view",
    type: "function",
  },
];
```

```
function App() {
  const [account, setAccount] = useState("");
  const [contract, setContract] = useState(null);
  const [web3, setWeb3] = useState(null);
  const [inputValue, setInputValue] = useState("");
  const [storedValue, setStoredValue] = useState(null);

  useEffect(() => {
    const init = async () => {
      // Check for MetaMask
      if (window.ethereum) {
        const web3Instance = new Web3(window.ethereum);
        await window.ethereum.request({ method: "eth_requestAccounts" });
        const accounts = await web3Instance.eth.getAccounts();
        const contractInstance = new web3Instance.eth.Contract(ABI, CONTRACT_ADDRESS);
        setWeb3(web3Instance);
        setAccount(accounts[0]);
        setContract(contractInstance);
      } catch (error) {
        console.error("Wallet connection failed:", error);
      }
    } else {
      alert("Please install MetaMask to use this app.");
    }
  }, []);

  init();
  // Handle Set
  const handleSet = async () => {
    if (contract && account) {
      try {
        await contract.methods.set(inputValue).send({ from: account });
        alert("Value set successfully!");
      } catch (err) {
        console.error("Error setting value:", err);
      }
    }
  };

  // Handle Get
  const handleGet = async () => {
    if (contract) {
      try {
        const value = await contract.methods.get().call();
        setStoredValue(value);
      } catch (err) {
        console.error("Error reading value:", err);
      }
    }
  };
}
```

```
return (
  <div style={{ padding: "2rem", fontFamily: "Arial, sans-serif" }}>
    <h1> DAPP using web3</h1>

    <p><strong>Connected Account:</strong> {account || "Not connected"}</p>

    <div style={{ marginTop: "1rem" }}>
      <input
        type="number"
        placeholder="Enter a number"
        value={inputValue}
        onChange={(e) => setInputValue(e.target.value)}
        style={{ padding: "0.5rem", width: "200px", marginRight: "10px" }}
      />
      <button onClick={handleSet} style={{ padding: "0.5rem 1rem" }}>
        Set Value
      </button>
    </div>

    <div style={{ marginTop: "2rem" }}>
      <button onClick={handleGet} style={{ padding: "0.5rem 1rem" }}>
        Get Stored Value
      </button>

      {storedValue !== null && (
        <p style={{ marginTop: "1rem", fontSize: "1.2rem" }}>
          <strong>Stored Value:</strong> {storedValue}
        </p>
      )}
    </div>
  </div>
);

export default App;
```

Step 5: Run the App

- In terminal: `npm start`


Step 6: After run this open React app at <http://localhost:3000>.

Simple Storage DApp

Connected Account: 0x754eFC74C822E070E4FB82Ec51ccf11DE73dE931

Stored Value:

- Then Enter some value and set value .
- Then connect the meta mask.

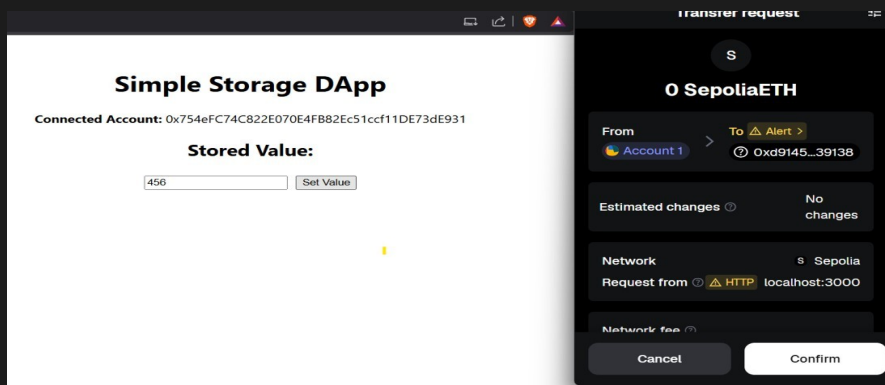

Observations

- Web3.js successfully connected frontend to blockchain.
- MetaMask allowed account access and transaction confirmation.
- Updating values from frontend reflected immediately on blockchain

ASSESSMENT

Rubrics	Full Mark	Marks Obtained	Remarks
Concept	10		
Planning and Execution/ Practical Simulation/ Programming	10		
Result and Interpretation	10		
Record of Applied and Action Learning	10		
Viva	10		
Total	50		

Signature of the Student:

Name :

Regn. No. :

Signature of the Faculty:

Page No.....

** As applicable according to the experiment.
Two sheets per experiment (10-20) to be used.*

