

Technical Contribution – Security and Access Engineer

Project: Serverless Attendance System with Face Recognition

➤ *Overview*

As the **Security & Access Engineer** in **Team 1**, I was responsible for implementing the authentication and authorization layer of the Employee Document Vault. My work focused on identity management, role-based access control (RBAC), and secure API integration to ensure that employees, managers, and HR_Admis could only access the documents they were authorized to view.

➤ *Responsibilities*

- **Configured AWS Cognito** User Pools and Groups for Employees, Managers, and HR_Admin roles
- **Created IAM Roles & Policies** designed for least-privilege access to S3 and DynamoDB
- **Implemented manager_mapping Table** in DynamoDB to enforce RBAC between managers and employees
- **Integrated JWT Validation** in API Gateway + Lambda for secure request authentication
- **Developed Authorization Logic** to enforce role-based rules:
 - Employees → access their own documents
 - Managers → access direct reports' documents
 - HR_Admin → access all documents
- **Secured API Gateway Endpoints** (GET /files, GET /download/{doc_id}, DELETE /files/{doc_id}) with Cognito Authorizer and RBAC enforcement

AWS Cognito Service

Amazon Cognito

Set up resources for your application

User pools

Identity pools

Define your application

Choose an application type and give it a name.

Application type

Choose the type of application that you're developing. We will show example code for application like yours.

☒ Traditional web application

☐ Single-page application (SPA)

☐ Mobile app

☐ Machine-to-machine application

Name your application

EmployeeDocumentVault

Configure options

You must make a few initial choices about the user pool that supports your application. To change these settings later, you must create a new user pool.

Options for sign-in identifiers

Choose sign-in attributes. Usernames can be an email address, phone number, or a user-selected username. When you select only email and phone, users must select either email or phone as their username type. When username is an option, users can sign in with any options you select if they have provided a value for that option.

☐ Email

☐ Phone number

☒ Username

Self-registration

If you enable user sign-up in your user pool, anyone on the internet can sign up for an account and sign in to your apps. Don't enable self-registration in your user pool until you want to open your app to public sign-up. [Learn more](#)

☐ Enable self-registration

Required attributes for sign-up

Choose any attributes that you want to require users to provide. With username alone, you must set email address or phone number as a required attribute.

Select attributes

email

Amazon Cognito

User pools

EmployeeDocumentVaultPool

Overview

Current user pool

EmployeeDocumentVault...

Overview

Applications

User management

Overview: EmployeeDocumentVaultPool

Rename

Delete user pool

User pool information

User pool name

EmployeeDocumentVaultPool

User pool ID

ap-south-2_ipOM3vm96

ARN

arn:aws:cognito-idp:ap-south-2:382863077225:userpool/ap-south-2_ipOM3vm96

Estimated number of users

0

OpenID Connect configuration URL

https://cognito-idp.ap-south-2.amazonaws.com/ap-south-2_ipOM3vm96/.well-known/openid-configuration

Token signing key URL

[https://cognito-idp.ap-south-2_ipOM3vm96/.well-known/jwks.json](https://cognito-idp.ap-south-2.amazonaws.com/ap-south-2_ipOM3vm96/.well-known/jwks.json)

Feature plan

Essentials

Created time

June 26, 2026 at 13:47 GMT+5:30

Last updated time

June 26, 2026 at 13:51 GMT+5:30

Amazon Cognito

User pools

EmployeeDocumentVaultPool

Groups

Create group

Current user pool

EmployeeDocumentVault...

Overview

Applications

User management

Groups

Authentication

Create group

Group name

Employee

This group's name can't be changed after you create it.

Description - optional

Employee users

Precedence - optional

Enter a precedence value

IAM role - optional

Select an IAM role

Create IAM role

aws

Search

[Alt+S]

Asia Pacific (Hyderabad)

mtnishanth11@gmail.com (382863077225)

Documentproject

Amazon Cognito

User pools

EmployeeDocumentVaultPool

Groups

Create group

Amazon Cognito

Current user pool

EmployeeDocumentVault...

Overview

Applications

User management

Authentication

Security

Create group

Info

Use groups to create collections of users, to manage their permissions, or to represent different types of users.

Group information

Configure group details and the permissions that users will inherit.

Group name

Enter a friendly name for your group.

Manager

The group name must contain between 1 and 128 non-space characters.

This group's name can't be changed after you create it.

Description - optional

Enter a description for your group.

Manager users

The group description must be 2048 characters or fewer.

Precedence - optional

Set precedence for this group. Precedence is a priority level used for users who are members of multiple groups. Permissions from the group with the lowest precedence are applied to users.

Enter a precedence value

The precedence value must be a non-negative whole number.

IAM role - optional

aws

Search

[Alt+S]

Ask Amazon Q

Asia Pacific (Hyderabad)

mtnishanth11@gmail.com (382863077225)

Documentproject

Amazon Cognito

User pools

EmployeeDocumentVaultPool

Groups

Create group

Amazon Cognito

Current user pool

EmployeeDocumentVault...

Overview

Applications

User management

Authentication

Security

Create group

Info

Use groups to create collections of users, to manage their permissions, or to represent different types of users.

Group information

Configure group details and the permissions that users will inherit.

Group name

Enter a friendly name for your group.

HR_Admin

The group name must contain between 1 and 128 non-space characters.

This group's name can't be changed after you create it.

Description - optional

Enter a description for your group.

HR Administrator

The group description must be 2048 characters or fewer.

Precedence - optional

Set precedence for this group. Precedence is a priority level used for users who are members of multiple groups. Permissions from the group with the lowest precedence are applied to users.

Enter a precedence value

The precedence value must be a non-negative whole number.

IAM role - optional

Select an existing role, or create a new role.

Select an IAM role

aws

Search

[Alt+S]

Ask Amazon Q

Asia Pacific (Hyderabad)

mtnishanth11@gmail.com (382863077225)

Documentproject

Amazon Cognito

User pools

EmployeeDocumentVaultPool

Sign-up

Add custom attributes

Amazon Cognito

Current user pool

EmployeeDocumentVault...

Overview

Applications

User management

Authentication

Add custom attributes

Info

Go beyond the standard Amazon Cognito attributes by adding your own custom attributes.

Custom attributes

Personalize the sign-up experience by adding up to 50 custom attributes. Custom attribute names can't be changed after a user pool has been created.

Name	Type	Min - optional	Max - optional	Mutable	
employee_id	String	1	30	☒	Remove
role	String	1	30	☒	Remove

Name must be 20 characters or fewer. Length must be 2048 bytes or fewer. Length must be 2048 bytes or fewer.

Add another

You can add 48 more custom attributes

Custom attributes can't be renamed or deleted after you create them. Amazon Cognito prepends "custom:" to custom attribute names.

Cancel Save changes

Search

[Alt+S]

Asia Pacific (Hyderabad)

Documentproject

ognito > User pools > EmployeeDocumentVaultPool > Users > Create user

Create user

▶ User pool sign-in and security requirements

Review the user pool security configuration that will be enforced when you create this user.

User information

Configure this user's verification and sign-in options.

Invitation message

Configure invitation message templates in the [Message templates menu](#).

☒ Don't send an invitation

☐ Send an email invitation

User name

User name is an required attribute based on your user pool and above configurations.

EMP001

Email address - optional

Enter this user's email address. A user's email address can be used for sign-in, account recovery, and account confirmation.

swagatasinha2108@gmail.com

☒ Mark email address as verified

Phone number - optional

Enter the user's phone number, including country code. The phone number is not a required attribute based on your selections and user pool configuration.

Enter a phone number

☐ Mark phone number as verified

Temporary password

Amazon Cognito will send the password you generate to the user in an email message.

☒ Set a password

☐ Generate a password

Password

Enter a temporary password for this user. The temporary password will be sent to the user in their invitation message.

Search

[Alt+S]

Asia Pacific (Hyderabad)

Documentproject

Amazon Cognito > User pools > EmployeeDocumentVaultPool > Users > User: emp001 > Edit user

A user can sign in to user pool apps and generate tokens. Users have standard and custom attributes that can be passed to your app in the ID token. You can also require specific standard attributes.

Required attributes

Configure this user's required attributes.

sub

You cannot update an immutable attribute.

44c65488-4021-7018-c553-de35e0789730

email

swagatasinha2108@gmail.com

☒ Mark email address as verified

Optional attributes

Configure this user's optional attributes. You can change values for existing attributes, or add new attributes.

phone_number

Enter a phone number, including + and the country code, for example +12065551212.

☐ Mark phone number as verified

Additional attributes

Add more user attributes. You can select from standard Cognito attributes, or assign the custom attributes that you have configured in [Sign-up experience](#).

Attribute name	Value	
custom:employee_id	EMP001	Remove
custom:role	Employee	Remove

[Alt+S]

Asia Pacific (Hyderabad)

Documentproject

pool > Users > User: emp001

User: emp001

Actions

User information

User ID (Sub)
44c65488-4021-7018-c553-de33e0789730

Alias attributes used to sign in
User name

MFA setting
MFA inactive

MFA methods
-

Account status
Enabled

Confirmation status
Force change password

Created time
June 26, 2026 at 14:09 GMT+5:30

Last updated time
June 26, 2026 at 14:12 GMT+5:30

User attributes (4)

Edit

View and edit this user's attributes.

Filter by property or value

Attribute name	Value	Type
custom:employee_id	EMP001	Optional
custom:role	Employee	Optional
email	swagatasinha2108@gmail.com	Required
sub	44c65488-4021-7018-c553-de33e0789730	Required

Group memberships (1)

Remove user from group

Add user to group

View and edit this user's group memberships.

Filter groups by property or value

Group name	Description	Group created time
Employee	Employee users	21 minutes ago

Amazon Cognito

Asia Pacific (Hyderabad)

Documentproject

ognito > User pools > EmployeeDocumentVaultPool > Users > Create user

Create user

User pool sign-in and security requirements

Review the user pool security configuration that will be enforced when you create this user.

User information

Configure this user's verification and sign-in options.

Invitation message

Configure invitation message templates in the Message templates menu

Don't send an invitation

Send an email invitation

User name

User name is an required attribute based on your user pool and above configurations.

EMP002

Email address - optional

Enter this user's email address. A user's email address can be used for sign-in, account recovery, and account confirmation.

swagatasinha2108@gmail.com

Mark email address as verified

Phone number - optional

Enter the user's phone number, including country code. The phone number is not a required attribute based on your selections and user pool configuration.

Enter a phone number

Mark phone number as verified

Temporary password

Amazon Cognito will send the password you generate to the user in an email message.

Set a password

Generate a password

Password

Enter a temporary password for this user. The temporary password will be sent to the user in their invitation message.

Amazon Cognito

Asia Pacific (Hyderabad)

Documentproject

ognito > User pools > EmployeeDocumentVaultPool > Users > Create user

Create user

User information

Configure this user's verification and sign-in options.

Invitation message

Configure invitation message templates in the Message templates menu

Don't send an invitation

Send an email invitation

User name

User name is an required attribute based on your user pool and above configurations.

MGR001

Email address - optional

Enter this user's email address. A user's email address can be used for sign-in, account recovery, and account confirmation.

swagatasinha2108@gmail.com

Mark email address as verified

Phone number - optional

Enter the user's phone number, including country code. The phone number is not a required attribute based on your selections and user pool configuration.

Enter a phone number

Mark phone number as verified

Temporary password

Amazon Cognito will send the password you generate to the user in an email message.

Set a password

Generate a password

Password

Enter a temporary password for this user. The temporary password will be sent to the user in their invitation message.

aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Hyderabad)

Documentproject

Amazon Cognito > User pools > EmployeeDocumentVaultPool > Users > Create user

1

User information

Configure this user's verification and sign-in options.

Invitation message

Info

Configure invitation message templates in the [Message templates menu](#).

☒ Don't send an invitation

☐ Send an email invitation

User name

User name is a required attribute based on your user pool and above configurations.

HR001

Email address - optional

Enter this user's email address. A user's email address can be used for sign-in, account recovery, and account confirmation.

swagatasinha2108@gmail.com

☒ Mark email address as verified

Phone number - optional

Enter the user's phone number, including country code. The phone number is not a required attribute based on your selections and user pool configuration.

Enter a phone number

☐ Mark phone number as verified

Temporary password

Amazon Cognito will send the password you generate to the user in an email message.

☒ Set a password

☐ Generate a password

Password

[Alt+S] Ask Amazon Q

Asia Pacific (Hyderabad)

Documentproject

EmployeeDocumentVaultPool > Users > User: hr001

1

User information

User ID (Sub)
5436a408-7041-70f7-495e-d020d16743d1

Alias attributes used to sign in
User name

MFA setting
MFA inactive

MFA methods
-

Account status
Enabled

Confirmation status
[Force change password](#)

Created time
June 26, 2026 at 14:52 GMT+5:30

Last updated time
June 26, 2026 at 14:53 GMT+5:30

User attributes (4)

Info

View and edit this user's attributes.

Filter by property or value

< 1 >

Attribute name	Value	Type
custom:employee_id	HR001	Optional
custom:role	HR_Admin	Optional
email	swagatasinha2108@gmail.com	Required
sub	5436a408-7041-70f7-495e-d020d16743d1	Required

Group memberships (1)

Info

View and edit this user's group memberships.

Filter groups by property or value

< 1 >

Group name	Description	Group created time
HR_Admin	HR Administrator	1 hour ago

[Remove user from group](#)

[Add user to group](#)

AWS Dynamo DB Service

aws

Search

[Alt+S]

Asia Pacific (Hyderabad)

Documentproject

DynamoDB

Tables

Create table

Table details

Info

DynamoDB is a schemaless database that requires only a table name and a primary key when you create the table.

Table name
This will be used to identify your table.

manager_mapping

Between 3 and 255 characters, containing only letters, numbers, underscores (_), hyphens (-), and periods (.).

Partition key
The partition key is part of the table's primary key. It is a hash value that is used to retrieve items from your table and allocate data across hosts for scalability and availability.

manager_id

String

1 to 255 characters and case sensitive.

Sort key - optional
You can use a sort key as the second part of a table's primary key. The sort key allows you to sort or search among all items sharing the same partition key.

employee_id

String

1 to 255 characters and case sensitive.

Table settings

☒ Default settings
The fastest way to create your table. You can modify most of these settings after your table has been created. To modify these settings now, choose "Customize settings".

☐ Customize settings
Use these advanced features to make DynamoDB work better for your needs.

aws

Search

[Alt+S]

Asia Pacific (Hyderabad)

Documentproject

DynamoDB

Tables

Create table

Default table settings

Info

These are the default settings for your new table. You can change some of these settings after creating the table.

Setting	Value	Editable after creation
Table class	DynamoDB Standard	Yes
Capacity mode	On-demand	Yes
Maximum read capacity units	-	Yes
Maximum write capacity units	-	Yes
Local secondary indexes	-	No
Global secondary indexes	-	Yes
Encryption key management	AWS owned key	Yes
Deletion protection	Off	Yes
Resource-based policy	Not active	Yes

Tags

Info

Tags are pairs of keys and optional values, that you can assign to AWS resources. You can use tags to control access to your resources or track your AWS spending.

No tags are associated with the resource.

aws

Search

[Alt+S]

Asia Pacific (Hyderabad)

Documentproject

DynamoDB

Explore items: manager_mapping

Create item

Create item

Form

JSON view

You can add, remove, or edit the attributes of an item. You can nest attributes inside other attributes up to 32 levels deep. [Learn more](#)

Attributes

Add new attribute

Attribute name	Value	Type	Remove
manager_id - Partition key	MGR001	String	
employee_id - Sort key	EMP001	String	

Cancel

Create item

AWS IAM Service

IAM > Roles > Create role

Step 1
Select trusted entity

Step 2
Add permissions

Step 3
Name, review, and create

Select trusted entity

Trusted entity type

☒ **AWS service**
Allow AWS services like EC2, Lambda, or others to perform actions in this account.

☐ **AWS account**
Allow entities in other AWS accounts belonging to you or a 3rd party to perform actions in this account.

☐ **Web identity**
Allows users federated by the specified external web identity provider to assume this role to perform actions in this account.

☐ **SAML 2.0 federation**
Allow users federated with SAML 2.0 from a corporate directory to perform actions in this account.

☐ **Custom trust policy**
Create a custom trust policy to enable others to perform actions in this account.

Use case
Allow an AWS service like EC2, Lambda, or others to perform actions in this account.
Service or use case

Lambda

Choose a use case for the specified service.
Use case

☒ **Lambda**
Allows Lambda functions to call AWS services on your behalf.

☐ **AWSServiceRoleForLambda**

[Alt+S] Ask Amazon Q

Global

Permissions policies (1/1175)

Choose one or more policies to attach to your new role.

Q AWSLambdaBasicExecutionRole

Filter by Type

All types 8 matches

	Policy name	Type	Description
☒	AWSLambdaBasicExecutionRole	AWS managed	Provides write permissions to CloudWa...
☐	AWSLambdaBasicExecutionRole-2346d99f-3f3d...	Customer managed	-
☐	AWSLambdaBasicExecutionRole-243daf1c-01e0...	Customer managed	-
☐	AWSLambdaBasicExecutionRole-4ff62b5b-d6b1...	Customer managed	-
☐	AWSLambdaBasicExecutionRole-6306073e-10e...	Customer managed	-
☐	AWSLambdaBasicExecutionRole-abfa67bb-0e5...	Customer managed	-
☐	AWSLambdaBasicExecutionRole-ad96b187-46d...	Customer managed	-
☐	AWSLambdaBasicExecutionRole-f9c2df22-7d77...	Customer managed	-

► Set permissions boundary - optional

Cancel

Previous

Next

AWS API Gateway Service

aws

Search

[Alt+S]

Ask Amazon Q

Asia Pacific (Hyderabad)

mtnishanth11@gmail.com (382863077225)

Documentproject

API Gateway > APIs > Create API

Works with the following:
Lambda, HTTP, AWS Services

Build

REST API

Develop a REST API where you gain complete control over the request and response along with API management capabilities.

Works with the following:
Lambda, HTTP, AWS Services

Import Build

aws

Search

[Alt+S]

Ask Amazon Q

Asia Pacific (Hyderabad)

mtnishanth11@gmail.com (382863077225)

Documentproject

API Gateway > APIs > Create API > Create REST API

API details

☒ New API
Create a new REST API.

☐ Clone existing API
Create a copy of an API in this AWS account.

☐ Import API
Import an API from an OpenAPI definition.

☐ Example API
Learn about API Gateway with an example API.

API name

EmployeeDocumentVaultAPI

Description - optional

Employee Document Vault REST API

API endpoint type

Regional APIs are deployed in the current AWS Region. Edge-optimized APIs route requests to the nearest CloudFront Point of Presence. Private APIs are only accessible from VPCs.

Regional

Security policy - new | Info

Transport Layer Security (TLS) protects data in transit between a client and server. The security policy also determines the cipher suite options that clients can use with your API.

SecurityPolicy_TLS13_1_2_2021_06

aws

Search

[Alt+S]

Ask Amazon Q

Asia Pacific (Hyderabad)

mtnishanth11@gmail.com (382863077225)

Documentproject

API Gateway > APIs > Create API > Create REST API

API endpoint type

Regional APIs are deployed in the current AWS Region. Edge-optimized APIs route requests to the nearest CloudFront Point of Presence. Private APIs are only accessible from VPCs.

Regional

Security policy - new | Info

Transport Layer Security (TLS) protects data in transit between a client and server. The security policy also determines the cipher suite options that clients can use with your API.

SecurityPolicy_TLS13_1_2_2021_06

Endpoint access mode - new | Info

Provide additional governance for your APIs.

☒ Basic
Allow all clients to access the API

☐ Strict (recommended)
Enforce Server Name Indication (SNI) validation

IP address type | Info

Select the type of IP addresses that can invoke the default endpoint for your API.

☒ IPv4
Supports only edge-optimized and Regional API endpoint types.

☐ Dualstack
Supports all API endpoint types.

Cancel

Create API

aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Hyderabad)

Documentproject

API Gateway

APIs

Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb)

Create resource

Create resource

Resource details

☒ Proxy resource [Info](#)
Proxy resources handle requests to all sub-resources. To create a proxy resource use a path parameter that ends with a plus sign, for example {proxy+}.

Resource path

/

Resource name

upload

☐ CORS (Cross Origin Resource Sharing) [Info](#)
Create an OPTIONS method that allows all origins, all methods, and several common headers.

Cancel

Create resource

aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Hyderabad)

Documentproject

API Gateway

APIs

Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb)

Create resource

Create resource

Resource details

☒ Proxy resource [Info](#)
Proxy resources handle requests to all sub-resources. To create a proxy resource use a path parameter that ends with a plus sign, for example {proxy+}.

Resource path

/

Resource name

files

☐ CORS (Cross Origin Resource Sharing) [Info](#)
Create an OPTIONS method that allows all origins, all methods, and several common headers.

Cancel

Create resource

API Gateway

APIs

Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb)

gateway

in domain names

in name access associations

tasks

EmployeeDocumentVaultAPI

resources

Successfully created resource '/download'

Create resource

/

/download

/files

/upload

Resource details

Path
/download

Resource ID
m34vuu

API actions

Deploy API

Delete

Update documentation

Enable CORS

Methods (0)

Delete

Create method

aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Hyderabad)

Documentproject

API Gateway

APIs

Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb)

Create resource

Create resource

Resource details

☒ Proxy resource [Info](#)
Proxy resources handle requests to all sub-resources. To create a proxy resource use a path parameter that ends with a plus sign, for example {proxy+}.

Resource path

/download/

Resource name

{doc_id}

☐ CORS (Cross Origin Resource Sharing) [Info](#)
Create an OPTIONS method that allows all origins, all methods, and several common headers.

Cancel

Create resource

aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Hyderabad)

Documentproject

API Gateway > APIs > Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb) > Create resource

1

Create resource

Resource details

☐ Proxy resource [Info](#)

Proxy resources handle requests to all sub-resources. To create a proxy resource use a path parameter that ends with a plus sign, for example {proxy+}.

Resource path

/files/

Resource name

{doc_id}

☐ CORS (Cross Origin Resource Sharing) [Info](#)

Create an OPTIONS method that allows all origins, all methods, and several common headers.

Cancel

Create resource

aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Hyderabad)

Documentproject

API Gateway > APIs > Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb)

API Gateway

APIs

Custom domain names

Domain name access associations

VPC links

▼ API: EmployeeDocumentVaultAPI

Resources

Stages

Authorizers

Gateway responses

Resources

Create resource

/

/download

/{doc_id}

/files

/{doc_id}

/upload

API actions

Deploy API

Resource details

Path

/

Resource ID

jaat03v2af

Update documentation

Enable CORS

Methods (0)

Delete

Create method

Method type	Integration type	Authorization	API key
No methods			
No methods defined.			

aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Hyderabad)

Documentproject

API Gateway > APIs > EmployeeDocumentVaultAPI (jmsb4sd8mb) > Authorizers > Create authorizer

1

Create authorizer [Info](#)

Authorizer details

Authorizer name

EmployeeVaultAuthorizer

Authorizer type [Info](#)

Choose to authorize your API calls using one of your Lambda functions or a Cognito User Pool.

☐ Lambda

☒ Cognito

Cognito user pool

Select the Cognito user pool that will authenticate requests to your API.

ap-south-2

EmployeeDocumentVaultPool

Token source

Enter the header that contains the authorization token. The prefix method.request.header. will be automatically prepended.

method.request.header.

Authorization

Token validation - optional

Enter a regular expression to validate the aud field of the identity token.

Cancel

Create authorizer

aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Hyderabad)

mtnishanth11@gmail.com (382863077225)

Documentproject

API Gateway

APIs

Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb)

Create method

Create method

Method details

Method type

GET

Integration type

☐ Lambda function
Integrate your API with a Lambda function.


☐ HTTP
Integrate with an existing HTTP endpoint.


☒ Mock
Generate a response based on API Gateway mappings and transformations.


☐ AWS service
Integrate with an AWS Service.


☐ VPC link
Integrate with a resource that isn't accessible over the public internet.


aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Hyderabad)

mtnishanth11@gmail.com (382863077225)

Documentproject

API Gateway

APIs

Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb)

Create method

Create method

Method details

Method type

GET

Integration type

☐ Lambda function
Integrate your API with a Lambda function.


☐ HTTP
Integrate with an existing HTTP endpoint.


☒ Mock
Generate a response based on API Gateway mappings and transformations.


☐ AWS service
Integrate with an AWS Service.


☐ VPC link
Integrate with a resource that isn't accessible over the public internet.


aws

Search

[Alt+S] Ask Amazon Q

Asia Pacific (Hyderabad)

mtnishanth11@gmail.com (382863077225)

Documentproject

API Gateway

APIs

Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb)

Create method

Create method

Method details

Method type

DELETE

Integration type

☐ Lambda function
Integrate your API with a Lambda function.


☐ HTTP
Integrate with an existing HTTP endpoint.


☒ Mock
Generate a response based on API Gateway mappings and transformations.


☐ AWS service
Integrate with an AWS Service.


☐ VPC link
Integrate with a resource that isn't accessible over the public internet.


aws

Search

[Alt+S]

Asia Pacific (Hyderabad)

Documentproject

API Gateway

APIs

Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb)

Edit method request

Edit method request

Method request settings

Authorization

EmployeeVaultAuthorizer

Authorization scopes

Add a scope

Add

Request validator

None

☐ API key required

Operation name - optional

GetPets

aws

Search

[Alt+S]

Ask Amazon

Asia Pacific (Hyderabad)

Documentproject

API Gateway

APIs

Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb)

Enable CORS

Enable CORS

CORS settings [Info](#)

To allow requests from scripts running in the browser, configure cross-origin resource sharing (CORS) for your API. When you save your configuration, API Gateway replaces any existing CORS settings with your new configuration.

Gateway responses

API Gateway will configure CORS for the selected gateway responses.

☐ Default 4XX

☐ Default 5XX

Access-Control-Allow-Methods

☐ GET

☒ OPTIONS

Access-Control-Allow-Headers

API Gateway will configure CORS for the selected gateway responses.

Content-Type,X-Amz-Date,Authorization,X-Api-Key,X-Amz-Security-Token

Access-Control-Allow-Origin

Enter an origin that can access the resource. Use a wildcard "*" to allow any origin to access the resource.

*

aws

Search

[Alt+S]

Asia Pacific (Hyderabad)

Documentproject

API Gateway

APIs

Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb)

Edit integration request

Edit integration request

Method details

Integration type

☒ **Lambda function**

Integrate your API with a Lambda function.



☐ **HTTP**

Integrate with an existing HTTP endpoint.



☐ **Mock**

Generate a response based on API Gateway mappings and transformations.



☐ **AWS service**

Integrate with an AWS Service.



☐ **VPC link**

Integrate with a resource that isn't accessible over the public internet.



 **Different integration type**

If you switch the integration type, you will overwrite the existing configuration. This action cannot be undone.

☒ **Lambda proxy integration**

Send the request to your Lambda function as a structured event.

Response transfer mode [Info](#)

☒ **Buffered**

Wait to receive the complete response before beginning transmission.

☐ **Stream**

Send portions of the response without waiting for the complete response.

Lambda function

Provide the Lambda function name or alias. You can also provide an ARN from another account.

ap-south-2

arn:aws:lambda:ap-south-2:392863077225:function:ListFilesFunction

API Gateway > APIs > Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb) > Edit integration request

Stream

Send portions of the response without waiting for the complete response.

Lambda function

Provide the Lambda function name or alias. You can also provide an ARN from another account.

ap-south-2

arn:aws:lambda:ap-south-2:382863077225:function:ListFilesFunction

Execution role

arn:aws:iam::myAccount:role/myRole

Credential cache

Do not add caller credentials to cache key

Integration timeout

Info

By default, you can enter an integration timeout of 50 - 29,000 milliseconds. You can use Service Quotas to raise the integration timeout to greater than 29,000 ms. When the response transfer mode is streaming, the valid range is 50 - 900,000 milliseconds and cannot be increased further.

29000

Request body passthrough

☒ When there are no templates defined (recommended)

☐ When no template matches the request content-type header

☐ Never

URL path parameters

URL query string parameters

URL request headers parameters

Cancel

Save

API Gateway > APIs > Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb) > Edit integration request

Method details

Integration type

Lambda function

Integrate your API with a Lambda function.

AWS service

Integrate with an AWS Service.

HTTP

Integrate with an existing HTTP endpoint.

VPC link

Integrate with a resource that isn't accessible over the public internet.

Mock

Generate a response based on API Gateway mappings and transformations.

⚠ Different integration type

If you switch the integration type, you will overwrite the existing configuration. This action cannot be undone.

☒ Lambda proxy integration

Send the request to your Lambda function as a structured event.

Response transfer mode

Info

☒ Buffered

Wait to receive the complete response before beginning transmission.

Stream

Send portions of the response without waiting for the complete response.

Lambda function

Provide the Lambda function name or alias. You can also provide an ARN from another account.

ap-south-2

arn:aws:lambda:ap-south-2:382863077225:function:Downlo...

Execution role

arn:aws:iam::myAccount:role/myRole

Credential cache

Do not add caller credentials to cache key

Integration timeout

Info

By default, you can enter an integration timeout of 50 - 29,000 milliseconds. You can use Service Quotas to raise the integration timeout to greater than 29,000 ms. When the response transfer mode is streaming, the valid range is 50 - 900,000 milliseconds and cannot be increased further.

29000

Request body passthrough

☒ When there are no templates defined (recommended)

☐ When no template matches the request content-type header

☐ Never

API Gateway > APIs > Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb) > Edit integration request

Response transfer mode

Info

☒ Buffered

Wait to receive the complete response before beginning transmission.

Stream

Send portions of the response without waiting for the complete response.

Lambda function

Provide the Lambda function name or alias. You can also provide an ARN from another account.

ap-south-2

arn:aws:lambda:ap-south-2:382863077225:function:Downlo...

Execution role

arn:aws:iam::myAccount:role/myRole

Credential cache

Do not add caller credentials to cache key

Integration timeout

Info

By default, you can enter an integration timeout of 50 - 29,000 milliseconds. You can use Service Quotas to raise the integration timeout to greater than 29,000 ms. When the response transfer mode is streaming, the valid range is 50 - 900,000 milliseconds and cannot be increased further.

29000

Request body passthrough

☒ When there are no templates defined (recommended)

☐ When no template matches the request content-type header

☐ Never

API Gateway > APIs > Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb) > Edit integration request

Method details

Integration type

☒ Lambda function
Integrate your API with a Lambda function.


☐ HTTP
Integrate with an existing HTTP endpoint.


☐ Mock
Generate a response based on API Gateway mappings and transformations.


☐ AWS service
Integrate with an AWS Service.


☐ VPC link
Integrate with a resource that isn't accessible over the public internet.


 **Different integration type**
If you switch the integration type, you will overwrite the existing configuration. This action cannot be undone.

☒ Lambda proxy integration
Send the request to your Lambda function as a structured event.

Response transfer mode | [Info](#)

☒ Buffered
Wait to receive the complete response before beginning transmission.
☐ Stream
Send portions of the response without waiting for the complete response.

API Gateway > APIs > Resources - EmployeeDocumentVaultAPI (jmsb4sd8mb) > Edit integration request

☒ Lambda proxy integration
Send the request to your Lambda function as a structured event.

Response transfer mode | [Info](#)

☒ Buffered
Wait to receive the complete response before beginning transmission.
☐ Stream
Send portions of the response without waiting for the complete response.

Lambda function

Provide the Lambda function name or alias. You can also provide an ARN from another account.

ap-south-2



Execution role

Credential cache

Do not add caller credentials to cache key


Integration timeout | [Info](#)

By default, you can enter an integration timeout of 50 - 29,000 milliseconds. You can use Service Quotas to raise the integration timeout to greater than 29,000 ms. When the response transfer mode is streaming, the valid range is 50 - 900,000 milliseconds and cannot be increased further.

Request body passthrough

☒ When there are no templates defined (recommended)
☐ When no template matches the request content-type header

Login Page

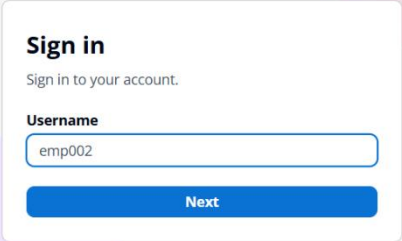


Sign in

Sign in to your account.

Username

emp002

Next

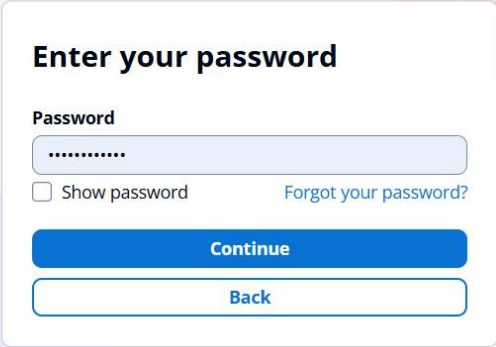

Enter your password

Password

.....

☐ Show password [Forgot your password?](#)

Continue

Back

➤ ***Outcome***

- **Secure Document Access** across all roles with strict RBAC enforcement
- **Prevented Unauthorized Access** using JWT-based validation and least-privilege IAM roles
- **Improved Compliance & Auditability** by tying access rules to DynamoDB mappings
- **Strengthened Identity Management** with Cognito-based authentication and authorization
- **Delivered a Scalable Security Backbone** ensuring the vault could grow with organizational needs

Made by:

Swagata Sinha

(AWS Cloud Intern)