EXPERIMENT 3

Name- Swaraj Patil
Class-D20A
Roll no-42

Aim: Create a Cryptocurrency using Python and perform mining in the Blockchain created.

Theory:

1. Blockchain Overview

A blockchain is a distributed, decentralized digital ledger used to record transactions securely across multiple computers (nodes). Instead of relying on a central authority, every node in the network maintains its own copy of the blockchain.
Each block in the blockchain contains:

- A list of transactions
- A timestamp
- The hash of the previous block
- Its own cryptographic hash

The blocks are linked together using hashes, forming a chain. Any attempt to modify data in a block changes its hash, which breaks the chain and makes tampering easily detectable. This property ensures data integrity, transparency, and immutability.

2. Mining

Mining is the process by which new blocks are added to the blockchain. It involves:

- Collecting pending transactions
- Creating a block header
- Solving a computationally difficult problem known as Proof-of-Work (PoW)

In Proof-of-Work, miners repeatedly change a nonce value to generate a hash that satisfies the network's difficulty requirement (such as leading zeroes). Once a valid hash is found, the block is added to the blockchain and shared with other nodes. As an incentive, miners receive a cryptocurrency reward for their computational effort.

3. Multi-Node Blockchain Network

In this experiment, a multi-node blockchain network is simulated using three nodes running on different ports (5001, 5002, and 5003).
Each node:

- Operates independently
- Maintains its own copy of the blockchain
- Communicates with peer nodes to share newly mined blocks

This setup demonstrates how blockchain achieves decentralization and synchronization without a central server.

4. Consensus Mechanism

To ensure consistency across all nodes, the Longest Chain Rule is used as the consensus mechanism.

When different versions of the blockchain exist, the node accepts the longest valid chain as the correct one. This rule ensures that all nodes eventually agree on a single transaction history, even if temporary differences arise.

5. Transactions and Mining Reward

Transactions in the cryptocurrency system include:

- Sender address
- Receiver address
- Transaction amount

When a block is mined, all pending transactions are added to the block. Additionally, a special transaction is created to reward the miner with newly generated cryptocurrency. This reward mechanism motivates miners to maintain and secure the network.

6. Chain Replacement

The chain replacement process ensures network consistency. When the /replace_chain endpoint is triggered:

- A node requests blockchain data from its peers
- Validates the received chains
- Replaces its own chain if a longer and valid chain is found.

This mechanism helps resolve conflicts and keeps all nodes synchronized.

Code:

```
# Module 2 - Create a Cryptocurrency

# ==========================
# HadCoin Blockchain Node
# ==========================
```

```
import
datetime
import
hashlib
import
json
from flask import Flask, jsonify, request
import requests
```

```
from uuid import uuid4
from urllib.parse import urlparse

# ==========================
# Blockchain Class
# ==========================
class Blockchain: def
    init_(self):
        self.chain = [] self.transactions
        = [] self.nodes = set()
        self.create_block(proof=1,
previous_hash='0')

    # ------------------------
    # Create Block
    # ------------------------
    def create_block(self, proof,
previous_hash):
        block = {
            'index': len(self.chain) + 1,
            'timestamp':
str(datetime.datetime.now()),
            'proof': proof,
            'previous_hash': previous_hash,
            'transactions': self.transactions.copy()



        }

        # 🔥 IMPORTANT FIX: Clear
transactions after adding to block
        self.transactions = []

        self.chain.append(block) return
        block


    # ----------------
    # Get Previous Block #
    def get_previous_block(self): return
        self.chain[-1]

    # ------------------------
    # Proof of
    Work #
    def proof_of_work(self, previous_proof):
        new_proof = 1
        check_proof = False

        while check_proof is False:
            hash_operation = hashlib.sha256(
                str(new_proof**2 -
previous_proof**2).encode()
            ).hexdigest()

            if hash_operation[:4] == '0000':
                check_proof = True
            else:
                new_proof += 1

        return new_proof

    # ------------------------
    # Hash Block
    # ------------------------
    def hash(self, block):
        encoded_block = json.dumps(block,
sort_keys=True).encode()
        return
hashlib.sha256(encoded_block).hexdigest()
        #
        # Check Chain
        Validity #
        ----------------------
        --
        def is_chain_valid(self, chain):
            previous_block = chain[0]
            block_index = 1

            while block_index < len(chain):
                block =
                chain[block_index]
                if
                block['previous_ha
                sh'] !=
            self.hash(previous_block):
                return False
```

```
        previous_proof =
previous_block['proof']
        proof = block['proof']

        hash_operation = hashlib.sha256(
            str(proof**2 -
previous_proof**2).encode()
        ).hexdigest()

        if hash_operation[:4] != '0000':
            return False

        previous_block = block block_index
        += 1

    return True

  # ------------------------
  # Add Transaction
  # ------------------------
  def add_transaction(self, sender, receiver,
amount):
    self.transactions.append({
        'sender': sender, 'receiver':
        receiver, 'amount': amount



    })

    previous_block =
self.get_previous_block()
    return previous_block['index'] + 1

  # - - - - - - - - - - - - - - - -
  # Add Node
  # ------------------------
  def add_node(self, address): parsed_url =
    urlparse(address)
    self.nodes.add(parsed_url.netloc)

  # ------------------------
  # Replace Chain
  # ------------------------
  def replace_chain(self):
    network = self.nodes
    longest_chain = None
    max_length =
    len(self.chain)

    for node in network:
        response =
requests.get(f'http://{node}/get_chain')

        if response.status_code == 200:
            length = response.json()['length']
            chain = response.json()['chain']

            if length > max_length and
self.is_chain_valid(chain):
                max_length = length
                longest_chain = chain

    if longest_chain:
        self.chain =
        longest_chain return
        True

    return False

# ==========================
# Flask App
# ==========================
  app = Flask(_name_)
  node_address = str(uuid4()).replace('-', '')
  blockchain = Blockchain()



    # -------------------------
    # Mine Block
    # -------------------------
    @app.route('/mine_block',
    methods=['GET']) def mine_block():

        previous_block =
    blockchain.get_previous_block()
        previous_proof =
        previous_block['proof']
```

```
    proof =
blockchain.proof_of_work(previous_proof)
    previous_hash =
blockchain.hash(previous_block)

    # Reward transaction
    blockchain.add_transaction(
        sender=node_address,
        receiver='Soham', amount=1
    )

    block = blockchain.create_block(proof,
previous_hash)

    response = {
        'message': 'Block mined successfully!',
        'block': block
    }
    return jsonify(response), 200 #

--------------------------

# Get Chain
# --------------------------
@app.route('/get_chain', methods=['GET'])
def get_chain():
    response = {
        'chain': blockchain.chain,
        'length': len(blockchain.chain)
    }
    return jsonify(response), 200

# --------------------------
# Check Validity #
  - - - - - - - - - - - - - - - - -

@app.route('/is_valid', methods=['GET'])
def is_valid():
    is_valid =
blockchain.is_chain_valid(blockchain.chain)

    if is_valid:
        response = {'message': 'Blockchain is
valid.'}
    else:
        response = {'message': 'Blockchain
is NOT valid.'}
    return jsonify(response),

200 # --------------------------

# Add Transaction
# --------------------------
@app.route('/add_transaction',
methods=['POST'])
def add_transaction():
    json_data = request.get_json()
    required_fields = ['sender', 'receiver',
'amount']

    if not all(field in json_data for field in
required_fields):
        return 'Missing values', 400

    index = blockchain.add_transaction(
        json_data['sender'],
        json_data['receiver'],
        json_data['amount']
    )

    response = {
        'message': f'Transaction will be added to
Block {index}'
    }

    return jsonify(response), 201

 #                                                --
# Connect Nodes
# --------------------------
@app.route('/connect_node',
methods=['POST'])
def connect_node():
    json_data = request.get_json()
    nodes = json_data.get('nodes')
```

```
    if nodes is None:
        return "No node", 400

    for node in nodes:
        blockchain.add_node(node)

    response = {
        'message': 'All nodes connected
successfully!',
        'total_nodes': list(blockchain.nodes)
    }
    return jsonify(response), 201 #
--------------------------
# Replace Chain
# --------------------------
@app.route('/replace_chain',
methods=['GET'])
def replace_chain():
    is_replaced = blockchain.replace_chain()

    if
        is_replac
        ed:
        response
        = {
            'message': 'Chain was replaced.',
            'new_chain': blockchain.chain
    }
else:
        response = {
            'message': 'Current chain is longest.',
            'actual_chain': blockchain.chain
        }

    return jsonify(response), 200

# ==========================
# Run App
# ==========================

if __name__ == '__main__':
    app.run(host='0.0.0.0',
    port=5001)
```

Output:

1)/get_chain

This GET request retrieves the complete blockchain from the node, showing all mined blocks and stored transactions.

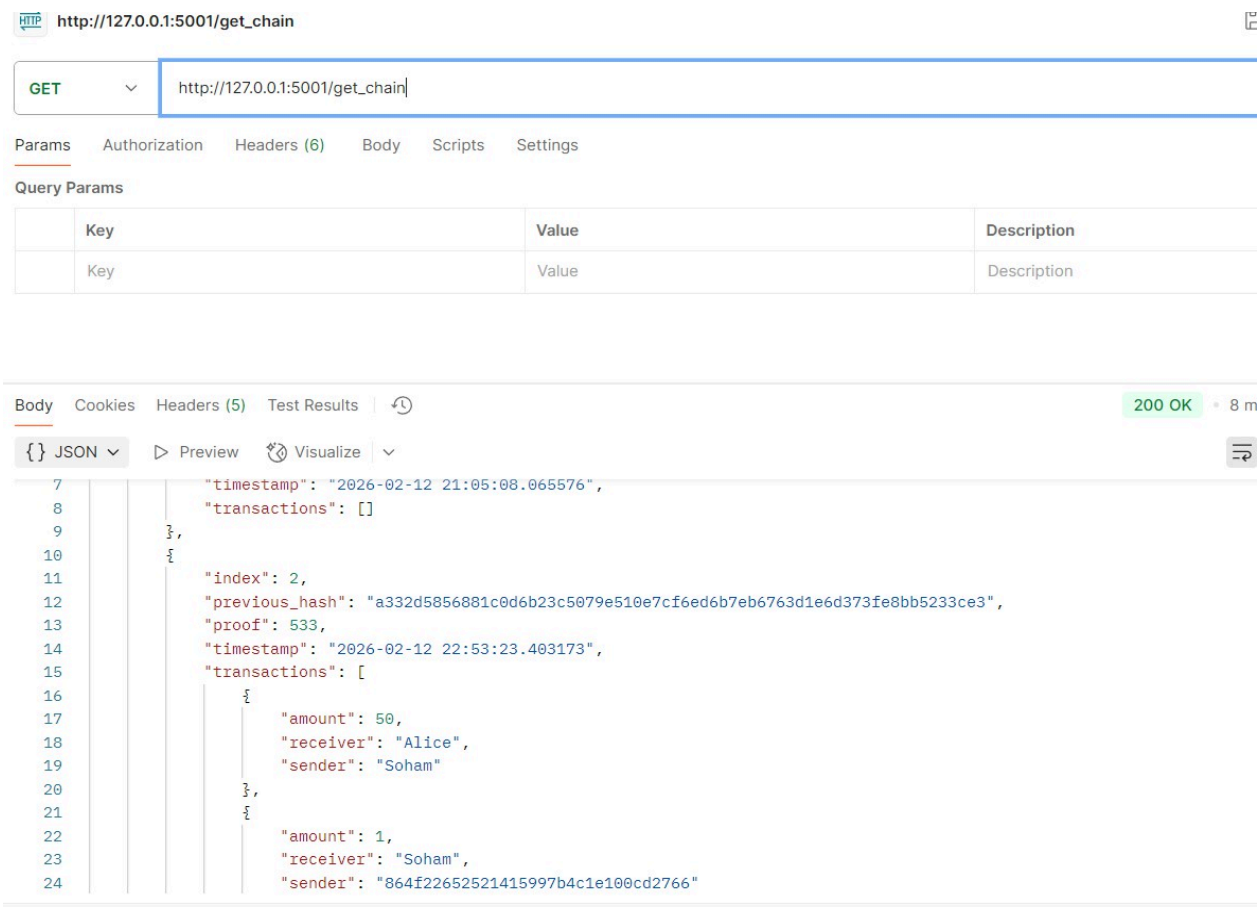

2)/mine_block

This GET request performs the mining process using Proof-of-Work and adds a new block to the blockchain.

http://127.0.0.1:5001/mine_block

Save | Share

GET http://127.0.0.1:5001/mine_block Send

Params | Authorization | Headers (6) | Body | Scripts | Settings | Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body | Cookies | Headers (5) | Test Results — 200 OK · 18 ms · 505 B

{} JSON | Preview | Visualize


```
{
    "block": {
        "index": 2,
        "previous_hash": "a332d5856881c0d6b23c5079e510e7cf6ed6b7eb6763d1e6d373fe8bb5233ce3",
        "proof": 533,
        "timestamp": "2026-02-12 22:53:23.403173",
        "transactions": [
            {
                "amount": 50,
                "receiver": "Alice",
                "sender": "Soham"
            },
            {
                "amount": 1,
                "receiver": "Soham",
                "sender": "864f22652521415997b4c1e100cd2766"
            }
```


http://127.0.0.1:5001/get_chain

GET http://127.0.0.1:5001/get_chain

Params | Authorization | Headers (6) | Body | Scripts | Settings

Query Params

Key	Value	Description
Key	Value	Description

Body | Cookies | Headers (5) | Test Results — 200 OK · 8 m

{} JSON | Preview | Visualize


```
            "timestamp": "2026-02-12 21:05:08.065576",
            "transactions": []
        },
        {
            "index": 2,
            "previous_hash": "a332d5856881c0d6b23c5079e510e7cf6ed6b7eb6763d1e6d373fe8bb5233ce3",
            "proof": 533,
            "timestamp": "2026-02-12 22:53:23.403173",
            "transactions": [
                {
                    "amount": 50,
                    "receiver": "Alice",
                    "sender": "Soham"
                },
                {
                    "amount": 1,
                    "receiver": "Soham",
                    "sender": "864f22652521415997b4c1e100cd2766"
```

3)/is_valid

This GET request checks whether the current blockchain is valid and untampered.

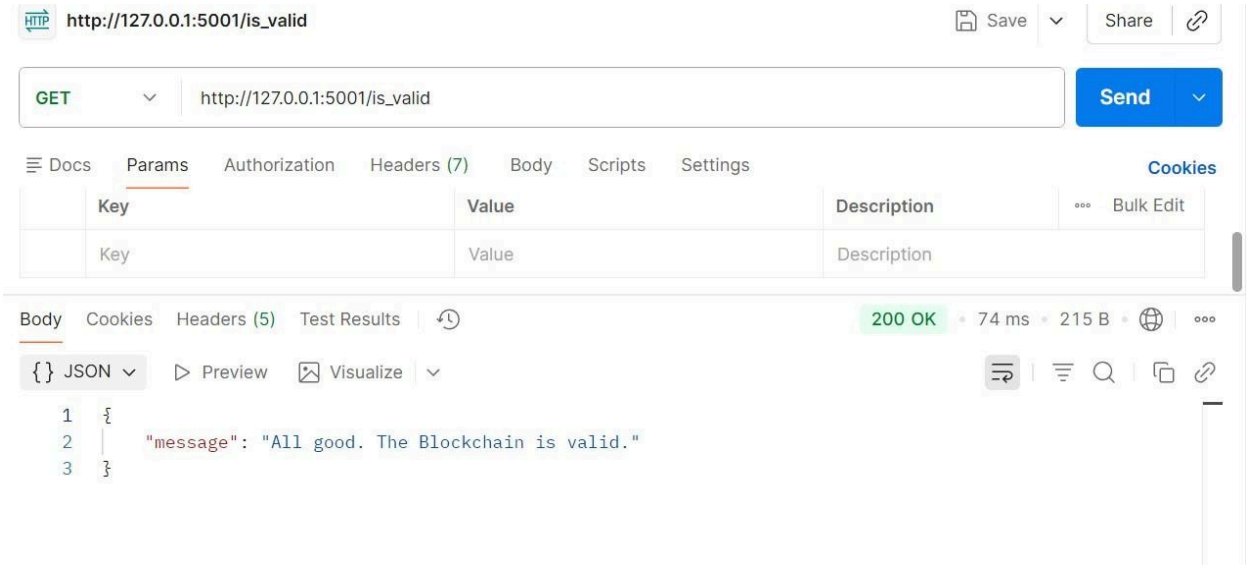

4)/add_transaction

This POST request submits a new transaction (sender, receiver, amount) to be added to the next mined block.

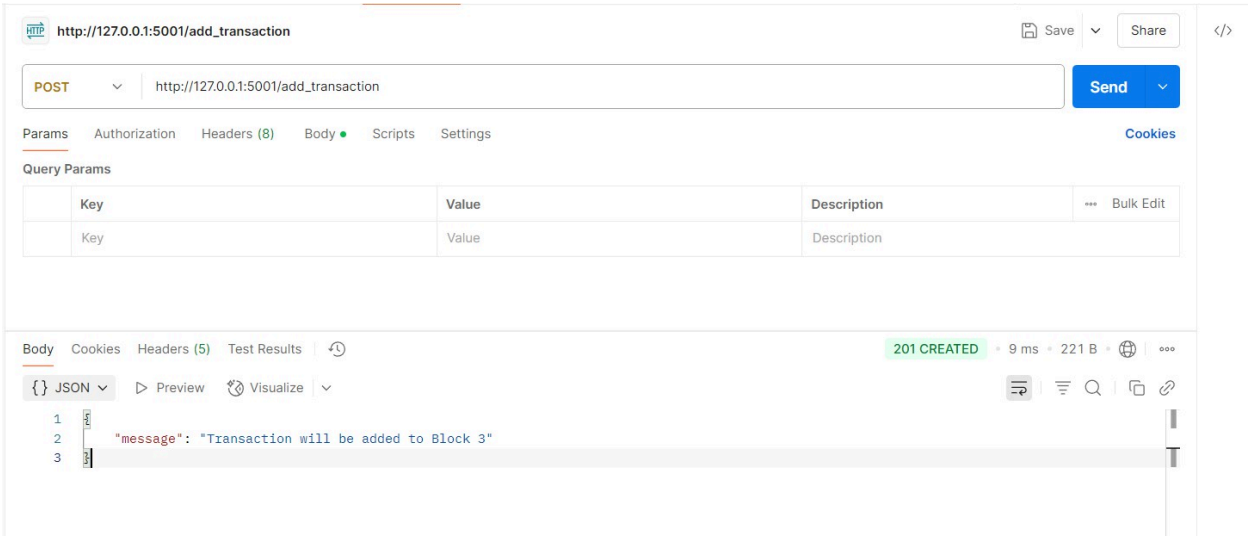

5)/connect_node

This POST request connects the current node with other peer nodes in the blockchain network.

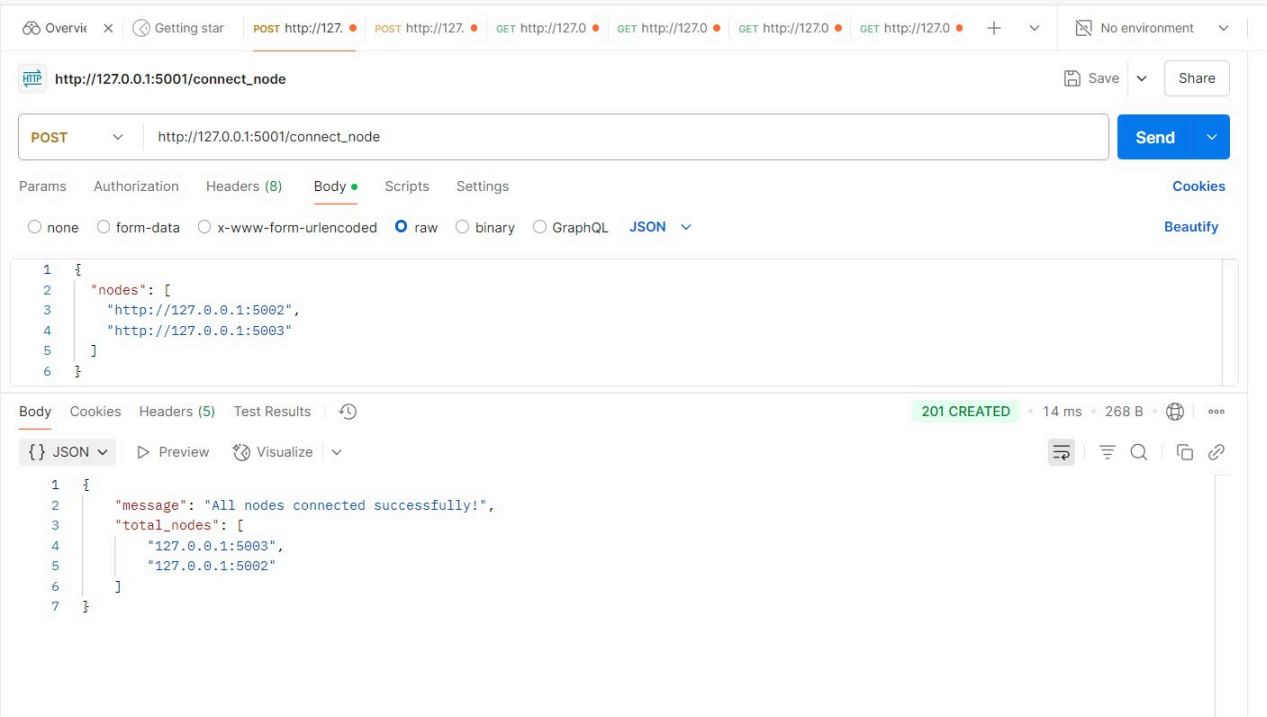

6)/replace_chain

This GET request checks all connected peer nodes and replaces the current blockchain with the longest valid chain, ensuring network-wide consistency.

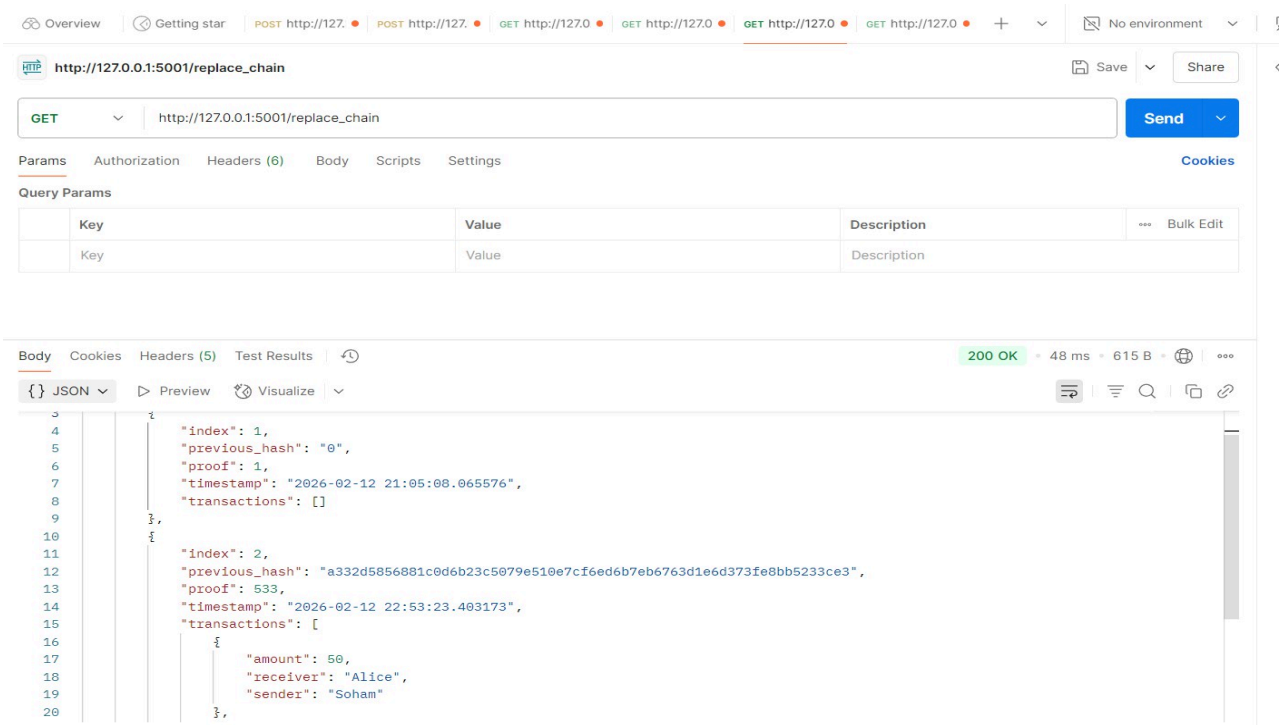

Conclusion:

In this experiment, a basic cryptocurrency system was designed and implemented using Python by applying fundamental blockchain principles such as block generation, cryptographic hashing, Proof-of-Work mining, transaction processing, and decentralized networking. A Flask-based framework was used to enable communication between multiple nodes, with each node maintaining its own copy of the blockchain ledger.

The mining process required solving the Proof-of-Work challenge, after which new blocks were added to the chain and miners received rewards. The system also supported transaction validation and inclusion of verified transactions into newly mined blocks. Through this implementation, the experiment offered hands-on insight into the functioning of blockchain technology, demonstrating how consensus, decentralization, and mining together enable the secure operation of cryptocurrencies in distributed environments.