PIZZA SALES SQL QUERIES

1 . KPI Cards :

1. Total Revenue:

```
SELECT SUM(total_price) AS Total_Revenue FROM pizza_sales;
```


Output:



2. Average Order Value :

```
SELECT (SUM(total_price) / COUNT(DISTINCT order_id)) AS Avg_order_Value
FROM pizza_sales ;
```


Output:

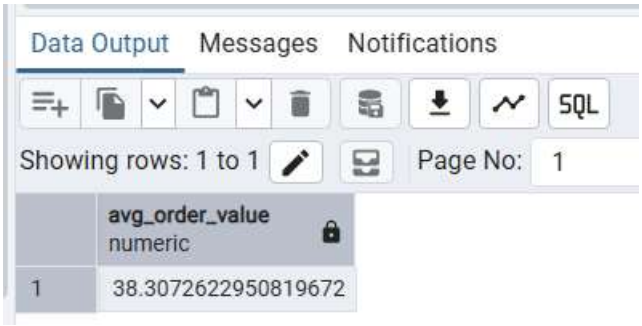

3. Total Pizzas Sold :

```
SELECT SUM(quantity) AS Total_pizza_sold FROM pizza_sales ;
```

Output:

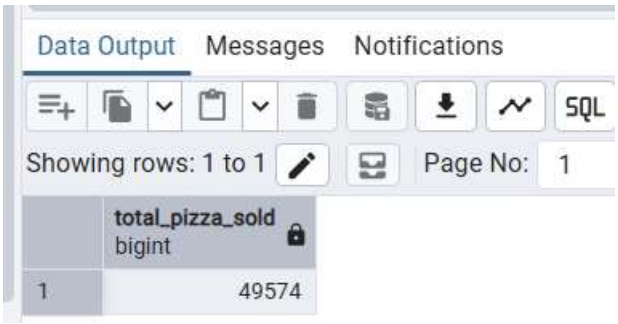

4. Total Orders :

```
SELECT COUNT(DISTINCT order_id) AS Total_Orders FROM pizza_sales ;
```

Output:



5. Average Pizzas Per Order :

```
SELECT CAST(SUM(quantity)::DECIMAL(10,2) / COUNT(DISTINCT
order_id)::DECIMAL(10,2) AS DECIMAL(10,2)) AS Avg_Pizzas_per_order
FROM pizza_sales;
```

	avg_pizzas_per_order numeric (10,2)
1	2.32

2. Daily Trend for Total Orders :

```
SELECT TO_CHAR(TO_DATE(order_date, 'DD-MM-YYYY'), 'Day') AS order_day,
       COUNT(DISTINCT order_id) AS total_orders
FROM pizza_sales
GROUP BY TO_CHAR(TO_DATE(order_date, 'DD-MM-YYYY'), 'Day'),
         EXTRACT(DOW FROM TO_DATE(order_date, 'DD-MM-YYYY'))
ORDER BY EXTRACT(DOW FROM TO_DATE(order_date, 'DD-MM-YYYY'));
```

Output:

	order_day text	total_orders bigint
1	Sunday	2624
2	Monday	2794
3	Tuesday	2973
4	Wednesday	3024
5	Thursday	3239
6	Friday	3538
7	Saturday	3158

3. Monthly Trend For Orders :

```
SELECT TO_CHAR(TO_DATE(order_date, 'DD-MM-YYYY'), 'Month') AS Month_Name,
       COUNT(DISTINCT order_id) AS Total_Orders
FROM pizza_sales
GROUP BY TO_CHAR(TO_DATE(order_date, 'DD-MM-YYYY'), 'Month'),
         EXTRACT(MONTH FROM TO_DATE(order_date, 'DD-MM-YYYY'))
ORDER BY EXTRACT(MONTH FROM TO_DATE(order_date, 'DD-MM-YYYY'));
```

Output:

	month_name text	total_orders bigint
1	January	1845
2	February	1685
3	March	1840
4	April	1799
5	May	1853
6	June	1773
7	July	1935
8	August	1841
9	September	1661
10	October	1646
11	November	1792
12	December	1680

4.% of Sales by Pizza Category :

```
SELECT pizza_category,
	CAST(SUM(total_price) AS DECIMAL(10,2)) AS total_revenue,
	CAST(SUM(total_price) * 100.0 / (SELECT SUM(total_price) FROM
pizza_sales) AS DECIMAL(10,2)) AS PCT
FROM pizza_sales
GROUP BY pizza_category;
```

Output:

	pizza_category character varying (50)	total_revenue numeric (10,2)	pct numeric (10,2)
1	Supreme	208197.00	25.46
2	Chicken	195919.50	23.96
3	Veggie	193690.45	23.68
4	Classic	220053.10	26.91

5. % of Sales by Pizza Size :

```
SELECT pizza_size,
	CAST(SUM(total_price) AS DECIMAL(10,2)) AS total_revenue,
	CAST(SUM(total_price) * 100.0 / (SELECT SUM(total_price) FROM
pizza_sales) AS DECIMAL(10,2)) AS PCT
FROM pizza_sales
GROUP BY pizza_size
ORDER BY pizza_size;
```

Output:

	pizza_size character varying (10)	total_revenue numeric (10,2)	pct numeric (10,2)
1	L	375318.70	45.89
2	M	249382.25	30.49
3	S	178076.50	21.77
4	XL	14076.00	1.72
5	XXL	1006.60	0.12

6. Total Pizzas Sold by Pizza Category :

```
SELECT pizza_category,
       SUM(quantity) AS Total_Quantity_Sold
FROM pizza_sales
WHERE EXTRACT(MONTH FROM TO_DATE(order_date, 'DD-MM-YYYY')) = 2
GROUP BY pizza_category
ORDER BY Total_Quantity_Sold DESC;
```

Output:

	pizza_category character varying (50)	total_quantity_sold bigint
1	Classic	1178
2	Supreme	964
3	Veggie	944
4	Chicken	875

7 . Top 5 Pizzas by Revenue :

```
SELECT pizza_name, SUM(total_price) AS Total_Revenue
FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Revenue DESC
LIMIT 5 ;
```

Output:

	pizza_name character varying (100)	total_revenue numeric
1	The Thai Chicken Pizza	43434.25
2	The Barbecue Chicken Piz...	42768.00
3	The California Chicken Piz...	41409.50
4	The Classic Deluxe Pizza	38180.50
5	The Spicy Italian Pizza	34831.25

8 . Bottom 5 Pizzas by Revenue :

```
SELECT pizza_name, SUM(total_price) AS Total_Revenue
```

```
FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Revenue ASC
LIMIT 5 ;
```

Output:

	pizza_name character varying (100)	total_revenue numeric
1	The Brie Carre Pizza	11588.50
2	The Green Garden Pizza	13955.75
3	The Spinach Supreme Piz...	15277.75
4	The Mediterranean Pizza	15360.50
5	The Spinach Pesto Pizza	15596.00

9. Top 5 Pizzas by Quantity :

```
SELECT pizza_name, SUM(quantity) AS Total_Pizza_Sold
FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Pizza_Sold DESC
LIMIT 5;
```

Output:

	pizza_name character varying (100)	total_pizza_sold bigint
1	The Classic Deluxe Pizza	2453
2	The Barbecue Chicken Piz...	2432
3	The Hawaiian Pizza	2422
4	The Pepperoni Pizza	2418
5	The Thai Chicken Pizza	2371

10. Bottom 5 Pizzas by Quantity :

```
SELECT pizza_name, SUM(quantity) AS Total_Pizza_Sold
FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Pizza_Sold ASC
LIMIT 5;
```

Output:

	pizza_name character varying (100)	total_pizza_sold bigint
1	The Brie Carre Pizza	490
2	The Mediterranean Pizza	934
3	The Calabrese Pizza	937
4	The Spinach Supreme Piz...	950
5	The Soppressata Pizza	961

11 . Top 5 Pizzas by Total Orders :

```
SELECT pizza_name, COUNT(DISTINCT order_id) AS Total_Orders
FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Orders DESC
LIMIT 5;
```

Output:

	pizza_name character varying (100)	total_orders bigint
1	The Classic Deluxe Pizza	2329
2	The Hawaiian Pizza	2280
3	The Pepperoni Pizza	2278
4	The Barbecue Chicken Piz...	2273
5	The Thai Chicken Pizza	2225

12 . Bottom 5 Pizzas by Total Orders :

```
SELECT pizza_name, COUNT(DISTINCT order_id) AS Total_Orders
FROM pizza_sales
GROUP BY pizza_name
ORDER BY Total_Orders ASC
LIMIT 5 ;
```

Output:

	pizza_name character varying (100)	total_orders bigint
1	The Brie Carre Pizza	480
2	The Mediterranean Pizza	912
3	The Calabrese Pizza	918
4	The Spinach Supreme Piz...	918
5	The Chicken Pesto Pizza	938