

# 02a. Environment: General Environment setup

 Page is about?

***Purpose:** This page outlines the essential tools required apart from core automation tech stack, It includes core libraries, supporting applications (like Putty, SQL Developer, WinSCP), and connectivity configuration including tunneling and database access.*

Environment Configuration & Setup [View Full Guide](#)

 **For Tunnel Access request & setup** [click here](#)

## Setup Putty for Secure Tunnels

*Putty is required for **Stage DB access** and **port forwarding** to internal Oracle environments (UIIS01, etc.).*

**Install Location:** L:\Departments\Financial Services\UII\UII\Software\putty

### Configure the Frogger Session in Putty

1. Open **Putty**
2. Go to **Session > Saved Sessions** **Select: Frogger** (hostname: gwtppsshrelay01, Port: 22) **Click Load**
3. Navigate to: Connection SSH Tunnels
4. dd the following **tunnels**:

| Source Port | Destination                                     |
|-------------|-------------------------------------------------|
| 41520       | <a href="#">orastagewt1.int.uprinv.com:1521</a> |
| 41521       | uiis01.oracle.acs529.com:1521                   |
| 11521       | racwt21.int.uprinv.com:1521                     |
| 55533       | neorastagewt1.int.uprinv.com:1521               |
| 61524       | oraconvwt1.int.uprinv.com:1521                  |

- Always **SAVE** session again under Session Frogger before exiting.

### Best Practices


*Putty is **very sensitive** to changes. If your tunnels disappear:*

- You probably **forgot to hit SAVE** after making edits.
- Always load the Frogger session, edit it, and **SAVE it again** before closing.

### Steps to Configure Frogger Session (Port Forwarding)


1. Launch **Putty**

2. Under **Session**, select the saved session Frogger, click **Load**

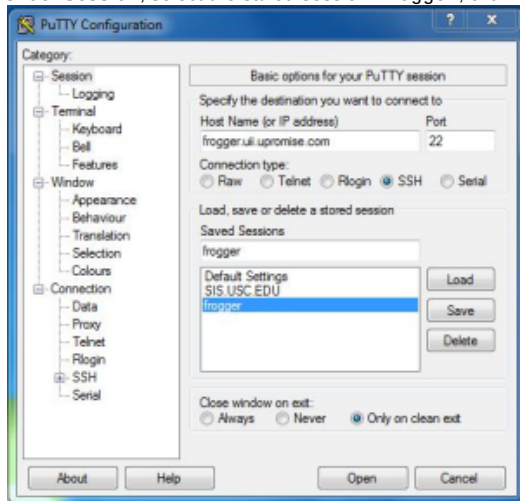


3. On the left panel, go to:

Connection SSH Tunnels

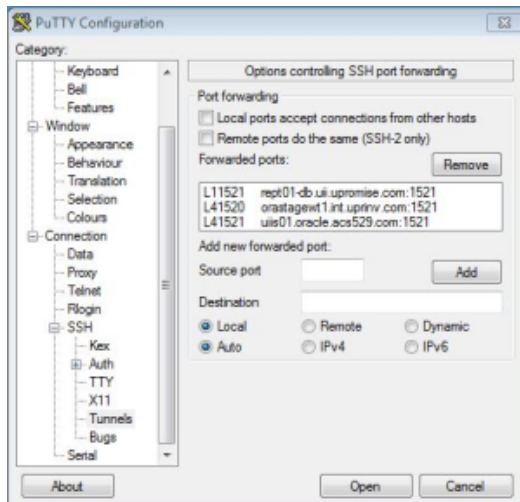

4. Forwarded Ports Setup

| Source Port | Destination                     |
|-------------|---------------------------------|
| 41520       | orastagewt1.int.uprinv.com:1521 |
| 41521       | uiis01.oracle.acs529.com:1521   |

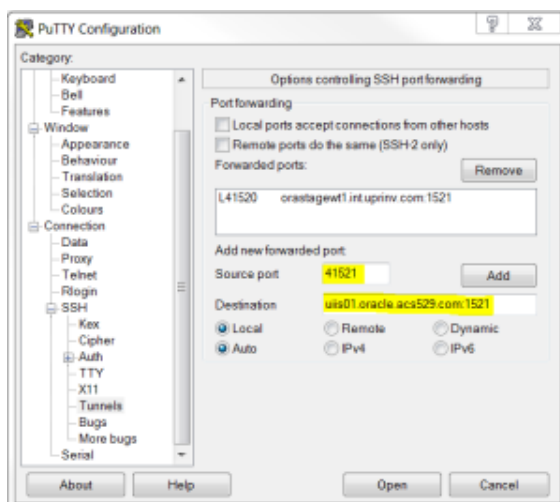

After each entry, click **Add**.

1. Navigate back to **Session**, make sure Frogger is selected click **Save**

## Final Reminders

- These settings are **required** before you open SQL Developer or connect to databases on localhost.
- If you're working on Stage1, Stage2, etc., you must **launch Putty > Load Frogger > Keep it running**.
- If connections break mid-session recheck Putty tunnel, especially after a system restart or VPN reconnect.

---

Oracle Access [Click Here](#)

## SQL Developer Setup

- Install from: L:\Departments\Financial Services\UII\UII\UII-QA\Softwares\SQL Developer.zip  
(Make sure Oracle Client is pre-installed)
- Or download version with JDK pre-bundled from [Oracle](#)
- Add Database Aliases:

### Example: QC1 Connection

| Field           | Value     |
|-----------------|-----------|
| Connection Name | QC1       |
| Username        | uii0      |
| Password        | uii0      |
| Hostname        | oradevnt1 |
| SID             | Q01       |
| Port            | 1521      |



The screenshot shows the 'New Database Connection' dialog in Oracle SQL Developer. The 'Connection Name' is 'QC1'. The 'Username' is 'uii0' and the 'Password' is masked with '\*\*\*\*'. The 'Save Password' checkbox is checked. The 'Connection Color' is set to a blue square. The 'Oracle' tab is selected. Under 'Connection Type', 'Basic' is chosen. The 'Role' is 'default'. The 'Hostname' is 'oradevnt1', 'Port' is '1521', and 'SID' is 'Q01'. The 'Service name' option is not selected. At the bottom, 'OS Authentication' and 'Kerberos Authentication' are unchecked, and an 'Advanced...' button is visible.

### Example: Stage1 Connection

| Field           | Value             |
|-----------------|-------------------|
| Connection Name | Stage1            |
| Username        | Your SQL Username |
| Password        | Your SQL Password |

|          |           |
|----------|-----------|
| Hostname | localhost |
| SID      | UIIS01    |
| Port     | 41521     |

Reminder: You **must** connect Putty (Frogger) before connecting to any localhost DBs.

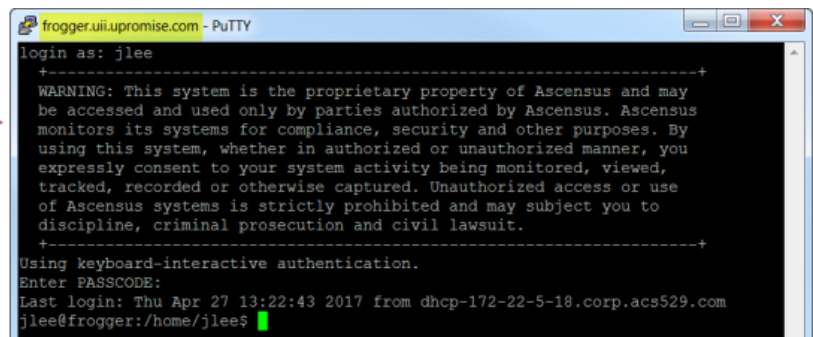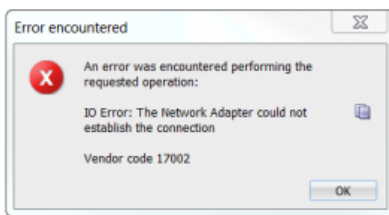

## Additional System Tools

| Tool             | Purpose                           | Install Location                                                                                            |
|------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------|
| SSH Secure Shell | Unix access for file management   | L:\Departments\Financial Services\UII\UII\UII-QA\Tools\sshSecureShellClient                                 |
| WinSCP           | Secure FTP transfer for .sh/.sql  | L:\Departments\Financial Services\UII\UII\UII-QA\Tools\winscp                                               |
| QTest            | Test case logging and sprint sync | <a href="https://ascensus.qtestnet.com/portal/loginform">https://ascensus.qtestnet.com/portal/loginform</a> |
| QA Wiki          | Department knowledgebase          | <a href="#">QA Wiki</a>                                                                                     |
| JIRA             | Ticket & Epic Tracking            | <a href="#">Jira Kanban Board</a>                                                                           |

## Setup Control-M (Remote Job Scheduler)

Control-M is used for **batch job monitoring, triggering, and validation** across environments like **529/ABLE** and **SSRP**.

## Remote Desktop Setup

*You'll need two remote sessions for redundancy:*

1. CTMTERMWT1
2. CTMERMWT2

## Steps:

1. Open **Remote Desktop** (Start > Search > Remote Desktop)
2. Expand using **Show Options**
3. Use your domain login: Use your RSD credentials
4. Logged in using 2F Authentication
5. Open "Stage - DEV - CTM-921-100" by double click on icon from desktop

**Tip:** If access to a section is missing, raise an RT to: uii-access  
*Request access to the relevant Control-M folders. mirror to "Swapnil Patil Or Nick B.)*

## Configure Control-M Environments

1. Launch either **Main** or **Failover** desktop
2. Log in and double-click the **Control-M icon**
3. From the login screen, click **Environment** dropdown
4. Use **RSD/Win Login Credentials**

### Enter the following:

| Environment Name | Naming Host                | Naming Port | Server Name          |
|------------------|----------------------------|-------------|----------------------|
| QC               | ctmemwtd1.int.acs529.com   | 8443        | Automatically Detect |
| Stage            | gwtsctmem.int.acs529.com   | 8443        | Automatically Detect |
| PROD             | gwtpctmem01.int.acs529.com | 8443        | Automatically Detect |

Repeat for additional environments as needed

## Helpful Reminders

- **Run Putty first** (Frogger Load Open) before using SQL Developer.
- Use **VPN: AGS Eastern**, NOT "Eastern" for access to protected tunnels.
- If you receive "Connection Failed" on SQL or Control-M, double-check:
  - Port Forwarding is Active
  - Your VPN is Connected
  - Saved Sessions in Putty are Updated

## Troubleshooting & Gotchas

- Always run **Putty (Frogger)** before trying to access Stage DBs
- If SQL Developer fails check if port forwarding (tunnel) is enabled
- Use **Test Connection** in SQL Developer after every setup
- Port conflicts? Reboot and re-check Putty > Tunnels