



38.1

AVL Tree (3)

38.1.1 AVL Tree: GATE CSE 2009 | Question: 37, ISRO-DEC2017-55



What is the maximum height of any AVL-tree with 7 nodes? Assume that the height of a tree with a single node is 0.

- A. 2 B. 3 C. 4 D. 5

gatecse-2009 data-structures binary-search-tree normal isrodec2017 avl-tree

Answer key

38.1.2 AVL Tree: ISRO CSE 2020 | Question: 20



The minimum height of an AVL tree with n nodes is

- A. $\text{Ceil}(\log_2(n+1))$ B. $1.44 \log_2 n$
C. $\text{Floor}(\log_2(n+1))$ D. $1.64 \log_2 n$

isro-2020 data-structures avl-tree normal

Answer key

38.1.3 AVL Tree: ISRO-2013-2



The number of rotations required to insert a sequence of elements 9, 6, 5, 8, 7, 10 into an empty *AVL* tree is?

- A. 0 B. 1 C. 2 D. 3

isro2013 data-structures avl-tree

Answer key

38.2

Array (3)

38.2.1 Array: ISRO-2013-1



Let $A(1:8, -5:5, -10:5)$ be a three dimensional array. How many elements are there in the array A ?

- A. 1200 B. 1408 C. 33 D. 1050

isro2013 array easy

Answer key

38.2.2 Array: ISRO-2013-9



In an array of $2N$ elements that is both 2-ordered and 3-ordered, what is the maximum number of positions that an element can be from its position if the array were 1-ordered?

- A. 1 B. 2 C. $N/2$ D. $2N - 1$

isro2013 array

Answer key

38.2.3 Array: ISRO-DEC2017-46



In a compact one-dimensional array representation for lower triangular matrix (all elements

above diagonal are zero) of size $n \times n$, non zero elements of each row are stored one after another, starting from first row, the index of $(i, j)^{th}$ element in this niw representation is

- A. $i + j$ B. $j + \frac{i(i-1)}{2}$ C. $i + j - 1$ D. $i + \frac{j(j-1)}{2}$

isrodec2017 array matrix

Answer key

38.3 Binary Heap (2)

38.3.1 Binary Heap: ISRO CSE 2018 | Question: 57



Given a binary-max heap. The elements are stored in an arrays as 25, 14, 16, 13, 10, 8, 12. What is the content of the array after two delete operations?

- a. 14, 13, 8, 12, 10 b. 14, 12, 13, 10, 8
c. 14, 13, 12, 8, 10 d. 14, 13, 12, 10, 8

isro2018 data-structures binary-heap

Answer key

38.3.2 Binary Heap: ISRO-DEC2017-45



Match the following and choose the correct answer in the order A, B, C

A. Heap Construction	p. $O(n \log n)$
B. Hash Table construction with linear probing	q. $O(n^2)$
C. AVL Tree Construction	r. $O(n)$

(Bounds given may or may not be asymptotically tight)

- A. $a - q, b - r, c - p$ B. $a - p, b - q, c - r$
C. $a - q, b - p, c - r$ D. $a - r, b - q, c - p$

isrodec2017 binary-heap data-structures

Answer key

38.4 Binary Search Tree (10)

38.4.1 Binary Search Tree: GATE CSE 2003 | Question: 19, ISRO2009-24



Suppose the numbers 7, 5, 1, 8, 3, 6, 0, 9, 4, 2 are inserted in that order into an initially empty binary search tree. The binary search tree uses the usual ordering on natural numbers. What is the in-order traversal sequence of the resultant tree?

- A. 7 5 1 0 3 2 4 6 8 9 B. 0 2 4 3 1 6 5 9 8 7
C. 0 1 2 3 4 5 6 7 8 9 D. 9 8 6 4 2 3 0 1 5 7

gatecse-2003 binary-search-tree easy isro2009

Answer key

38.4.2 Binary Search Tree: GATE CSE 2003 | Question: 63, ISRO2009-25



A data structure is required for storing a set of integers such that each of the following operations can be done in $O(\log n)$ time, where n is the number of elements in the set.

- I. Deletion of the smallest element

II. Insertion of an element if it is not already present in the set

Which of the following data structures can be used for this purpose?

- A. A heap can be used but not a balanced binary search tree
- B. A balanced binary search tree can be used but not a heap
- C. Both balanced binary search tree and heap can be used
- D. Neither balanced search tree nor heap can be used

gatecse-2003 data-structures easy isro2009 binary-search-tree

Answer key

38.4.3 Binary Search Tree: GATE CSE 2004 | Question: 4, ISRO2009-26



The following numbers are inserted into an empty binary search tree in the given order: 10, 1, 3, 5, 15, 12, 16. What is the height of the binary search tree (the height is the maximum distance of a leaf node from the root)?

- A. 2
- B. 3
- C. 4
- D. 6

gatecse-2004 data-structures binary-search-tree easy isro2009

Answer key

38.4.4 Binary Search Tree: ISRO CSE 2011 | Question: 11



How many distinct binary search trees can be created out of 4 distinct keys?

- A. 5
- B. 14
- C. 24
- D. 35

isro2011 data-structures binary-search-tree combinatory

Answer key

38.4.5 Binary Search Tree: ISRO CSE 2011 | Question: 62



The average depth of a binary search tree is

- A. $O(n^{0.5})$
- B. $O(n)$
- C. $O(\log n)$
- D. $O(n \log n)$


isro2011 data-structures binary-search-tree time-complexity

Answer key

38.4.6 Binary Search Tree: ISRO CSE 2014 | Question: 41



Consider the following binary search tree T given below: Which node contains the fourth smallest element in T?

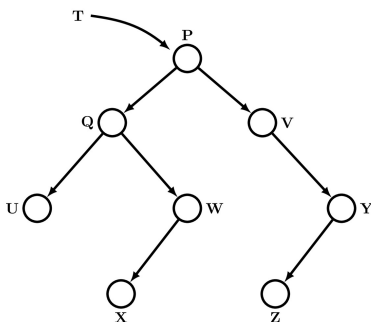

A. Q

B. V

C. W

D. X


isro2014 data-structures binary-search-tree

Answer key

38.4.7 Binary Search Tree: ISRO CSE 2020 | Question: 19



What is the in-order successor of 15 in the given binary search tree?



A. 18

B. 6

C. 17

D. 20


isro-2020 data-structures binary-search-tree easy

Answer key

38.4.8 Binary Search Tree: ISRO CSE 2023 | Question: 67



What is the Inorder predecessor of 15 in the Binary Search Tree shown below

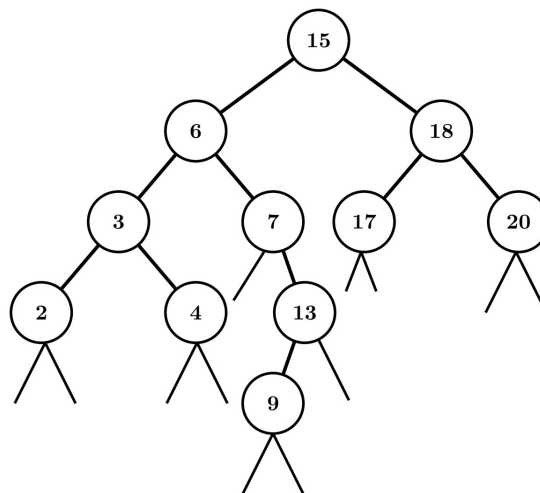

A. 18

B. 7

C. 9

D. 13

isro-cse-2023 binary-search-tree data-structures

Answer key

38.4.9 Binary Search Tree: ISRO-DEC2017-49



A binary search tree is used to locate the number 43. Which one of the following probe sequence is not possible?

A. 61, 52, 14, 17, 40, 43

B. 10, 65, 31, 48, 37, 43

C. 81, 61, 52, 14, 41, 43

D. 17, 77, 27, 66, 18, 43

isrodec2017 binary-search-tree data-structures

Answer key

38.4.10 Binary Search Tree: ISRO-DEC2017-51



Suppose the numbers 7, 5, 1, 8, 3, 6, 0, 9, 4, 2 are inserted in that order into an initially empty binary search tree. The binary search tree uses the reversal ordering on natural numbers i.e. 9 is assumed to be smallest and 0 is assumed to be largest. The *in-order* traversal of the resultant binary search tree is

- A. 9, 8, 6, 4, 2, 3, 0, 1, 5, 7
- B. 0, 1, 2, 3, 4, 5, 6, 7, 8, 9
- C. 0, 2, 4, 3, 1, 6, 5, 9, 8, 7
- D. 9, 8, 7, 6, 5, 4, 3, 2, 1, 0

isrodec2017 binary-search-tree data-structures

Answer key

38.5

Binary Tree (8)

38.5.1 Binary Tree: ISRO CSE 2008 | Question: 75



A complete binary tree with the property that the value at each node is at least as large as the values at its children is known as

- A. binary search tree
- B. AVL tree
- C. completely balanced tree
- D. Heap

isro2008 data-structures binary-tree

Answer key

38.5.2 Binary Tree: ISRO CSE 2009 | Question: 31



A full binary tree with n leaves contains

- A. n nodes
- B. $\log_2 n$ nodes
- C. $2n - 1$
- D. 2^n nodes

isro2009 data-structures binary-tree

Answer key

38.5.3 Binary Tree: ISRO CSE 2016 | Question: 30



A complete binary tree with n non-leaf nodes contains

- A. $\log_2 n$ nodes
- B. $n + 1$ nodes
- C. $2n$ nodes
- D. $2n + 1$ nodes

data-structures binary-tree isro2016

Answer key

38.5.4 Binary Tree: ISRO CSE 2023 | Question: 41



Time complexity to find the diameter of a binary tree having n nodes is

- A. $O(n^2)$
- B. $O(n)$
- C. $O(1)$
- D. $O(\log n)$

isro-cse-2023 binary-tree time-complexity data-structures

Answer key

38.5.5 Binary Tree: ISRO-2013-32



Which of the following number of nodes can form a full binary tree?

- A. 8
- B. 15
- C. 14
- D. 13

isro2013 binary-tree easy

Answer key

38.5.6 Binary Tree: ISRO-DEC2017-28



The number of structurally different possible binary trees with 4 nodes is

- A. 14 B. 12 C. 336 D. 168

isrodec2017 binary-tree data-structures

Answer key

38.5.7 Binary Tree: ISRO-DEC2017-54



A strictly binary tree with 10 leaves

- A. cannot have more than 19 nodes B. has exactly 19 nodes
C. has exactly 17 nodes D. has exactly 20 nodes

isrodec2017 binary-tree data-structures

Answer key

38.5.8 Binary Tree: ISRO-DEC2017-57



The *in-order* and *pre-order* traversal of a binary tree are $d\ b\ e\ a\ f\ c\ g$ and $a\ b\ d\ e\ c\ f\ g$ respectively. The *post-order* traversal of a binary tree is

1. $e\ d\ b\ g\ f\ c\ a$
2. $e\ d\ b\ f\ g\ c\ a$
3. $d\ e\ b\ f\ g\ c\ a$
4. $d\ e\ f\ g\ b\ c\ a$

isrodec2017 data-structures binary-tree

Answer key

38.6

Data Structures (1)

38.6.1 Data Structures: ISRO CSE 2020 | Question: 32



G is an undirected graph with vertex set $\{v_1, v_2, v_3, v_4, v_5, v_6, v_7\}$ and edge set $\{v_1v_2, v_1v_3, v_1v_4, v_2v_4, v_2v_5, v_3v_4, v_4v_5, v_4v_6, v_5v_6, v_6v_7\}$. A breadth first search of the graph is performed with v_1 as the root node. Which of the following is a tree edge?

- A. v_2v_4 B. v_1v_4 C. v_4v_5 D. v_3v_4

isro-2020 data-structures breadth-first-search normal

Answer key

38.7

Expression Evaluation (1)

38.7.1 Expression Evaluation: ISRO CSE 2023 | Question: 4



In Reverse Polish notation, expression $A * B + C * D$ is written as

- A. AB^*CD^*+ B. A^*BCD^*+
C. AB^*CD+^* D. A^*B^*CD+

isro-cse-2023 data-structures stack expression-evaluation

Answer key

38.8

Infix Prefix (5)

38.8.1 Infix Prefix: GATE CSE 2004 | Question: 38, ISRO2009-27



Assume that the operators $+$, $-$, $\times$ are left associative and $^$ is right associative. The order of precedence (from highest to lowest) is $^$, $\times$, $+$, $-$. The postfix expression corresponding to the infix expression $a + b \times c - d ^ e ^ f$ is

- A. $abc \times + def ^ ^ -$
- B. $abc \times + de ^ f ^ -$
- C. $ab + c \times d - e ^ f ^$
- D. $- + a \times bc ^ ^ def$

gatecse-2004 stack isro2009 infix-prefix

Answer key

38.8.2 Infix Prefix: GATE CSE 2007 | Question: 38, ISRO2016-27



The following postfix expression with single digit operands is evaluated using a stack:

$$8\ 2\ 3\ ^\ / \ 2\ 3\ * \ + \ 5\ 1\ * \ -$$

Note that $^$ is the exponentiation operator. The top two elements of the stack after the first $*$ is evaluated are

- A. 6, 1
- B. 5, 7
- C. 3, 2
- D. 1, 5

gatecse-2007 data-structures stack normal infix-prefix isro2016

Answer key

38.8.3 Infix Prefix: ISRO CSE 2009 | Question: 28



The infix expression $A + (B - C)^* D$ is correctly represented in prefix notation as

- A. $A + B - C^* D$
- B. $+ A^* - B C D$
- C. $A B C - D^* +$
- D. $A + B C - D^*$

isro2009 data-structures stack infix-prefix

Answer key

38.8.4 Infix Prefix: ISRO CSE 2017 | Question: 69



Choose the equivalent prefix form of the following expression

$$(a+(b-c))^*((d-e)/(f+g-h))$$

- A. $*+a-bc/-de-+fgh$
- B. $*+a-bc/-de-+fgh$
- C. $*+a-bc/-ed-+fgh$
- D. $*+ab-c/-de-+fgh$

isro2017 data-structures infix-prefix stack

Answer key

38.8.5 Infix Prefix: ISRO CSE 2020 | Question: 4



Convert the pre-fix expression to in-fix $- * + ABC^* - DE + FG$

- A. $(A - B)^* C + (D^* E) - (F + G)$ B. $(A + B)^* C - (D - E)^* (F + G)$
C. $(A + B - C)^* (D - E)^* (F + G)$ D. $(A + B)^* C - (D^* E) - (F + G)$

isro-2020 data-structures infix-prefix normal

Answer key

38.9 Linked List (9)

38.9.1 Linked List: ISRO CSE 2008 | Question: 71



The time required to search an element in a linked list of length n is

- A. $O(\log_2 n)$ B. $O(n)$ C. $O(1)$ D. $O(n^2)$

isro2008 data-structures linked-list time-complexity

Answer key

38.9.2 Linked List: ISRO CSE 2008 | Question: 72



Which of the following operations is performed more efficiently by doubly linked list than by linear linked list?

- A. Deleting a node whose location is given
B. Searching an unsorted list for a given item
C. Inserting a node after the node with a given location
D. Traversing the list to process each node

isro2008 data-structures linked-list

Answer key

38.9.3 Linked List: ISRO CSE 2008 | Question: 76



The minimum number of fields with each node of doubly linked list is

- A. 1 B. 2 C. 3 D. 4


isro2008 data-structures linked-list

Answer key

38.9.4 Linked List: ISRO CSE 2014 | Question: 49



Consider a single linked list where F and L are pointers to the first and last elements respectively of the linked list. The time for performing which of the given operations depends on the length of the linked list?



- A. Delete the first element of the list
B. Interchange the first two elements of the list
C. Delete the last element of the list
D. Add an element at the end of the list

Answer key

38.9.5 Linked List: ISRO CSE 2017 | Question: 16



Given two statements

- I. Insertion of an element should be done at the last node of the circular list
- II. Deletion of an element should be done at the last node of the circular list

- A. Both are true
- B. Both are false
- C. First is false and second is true
- D. None of the above

isro2017 data-structures linked-list bad-question

Answer key

38.9.6 Linked List: ISRO CSE 2017 | Question: 53



In a doubly linked list the number of pointers affected for an insertion operation will be

- A. 4
- B. 0
- C. 1
- D. Depends on the nodes of doubly linked list


isro2017 data-structures linked-list bad-question

Answer key

38.9.7 Linked List: ISRO CSE 2018 | Question: 63



Consider a singly linked list of the form where F is a pointer to the first element in the linked list and L is the pointer to the last element in the list. The time of which of the following operations depends on the length of the list?



- a. Delete the last element of the list
- b. Delete the first element of the list
- c. Add an element after the last element of the list
- d. Interchange the first two elements of the list

isro2018 linked-list data-structures

Answer key

38.9.8 Linked List: ISRO CSE 2018 | Question: 79



A doubly linked list is declared as:

```
struct Node {
    int Value;
    struct Node *Fwd;
    struct Node *Bwd;
};
```

Where Fwd and Bwd represent forward and backward link to the adjacent elements of the list. Which of the following segment of code deletes the node pointed to by X from the doubly linked list, if it is assumed that X points to neither the first nor the last node of the list?

- a. $X \rightarrow Bwd \rightarrow Fwd = X \rightarrow Fwd$; $X \rightarrow Fwd \rightarrow Bwd = X \rightarrow Bwd$;
- b. $X \rightarrow Bwd.Fwd = X \rightarrow Fwd$; $X.Fwd \rightarrow Bwd = X \rightarrow Bwd$;

- c. $X.Bwd \rightarrow Fwd = X.Bwd$; $x \rightarrow Fwd.Bwd = X.Bwd$;
d. $X \rightarrow Bwd \rightarrow Fwd = X \rightarrow Bwd$; $X \rightarrow Fwd \rightarrow Bwd = X \rightarrow Fwd$;

isro2018 linked-list data-structures

Answer key

38.9.9 Linked List: ISRO-2013-4



The following steps in a linked list

```
p = getnode()
info(p) = 10
next(p) = list
list = p
```

result in which type of operation?

- A. Pop operation in stack
C. Inserting a node
B. Removal of a node
D. Modifying an existing node

isro2013 linked-list

Answer key

38.10

Prefix (1)

38.10.1 Prefix: ISRO CSE 2023 | Question: 46



The prefix expression is $- + abc + d^*$ ef. Evaluate the expression for $a = 10, b = 2, c = 5, d = 3, e = 4, f = 1$

- A. 3
B. 4
C. 10
D. 6

isro-cse-2023 expression-evaluation prefix programming-in-c

Answer key

38.11

Priority Queue (2)

38.11.1 Priority Queue: ISRO CSE 2023 | Question: 69



In a priority queue, insertion and deletion can be done at

- A. Front
B. Back
C. Middle
D. Any position

isro-cse-2023 priority-queue data-structures

Answer key

38.11.2 Priority Queue: ISRO-DEC2017-52



A priority queue is implemented as a *Max-heap*. Initially, it has 5 elements. The level order traversal of the heap is 10, 8, 5, 3, 2. Two new elements 1 and 7 are inserted into the heap in that order. The level order traversal of the heap after the insertion of the elements is

1. 10, 8, 7, 5, 3, 2, 1
2. 10, 8, 7, 2, 3, 1, 5
3. 10, 8, 7, 1, 2, 3, 5

4. 10, 8, 7, 3, 2, 1, 5

isrodec2017 data-structures binary-heap priority-queue

Answer key

38.12

Queue (2)

38.12.1 Queue: ISRO CSE 2014 | Question: 36



Consider a standard Circular Queue implementation (which has the same condition for Queue Full and Queue Empty) whose size is 11 and the elements of the queue are $q[0], q[1], \dots, q[10]$.

The front and rear pointers are initialized to point at $q[2]$. In which position will the ninth element be added?

- A. $q[0]$ B. $q[1]$ C. $q[9]$ D. $q[10]$

data-structures queue isro2014

Answer key

38.12.2 Queue: ISRO-DEC2017-53



The minimum number of stacks needed to implement a queue is

- A. 3 B. 1 C. 2 D. 4

isrodec2017 data-structures stack queue

Answer key

38.13

Radix Sort (1)

38.13.1 Radix Sort: ISRO CSE 2023 | Question: 48



What is the maximum number of comparisons needed to sort 6 items using radix sort, if each number is a 3-digit decimal number?

- A. 120 B. 180 C. 210 D. 360

isro-cse-2023 radix-sort data-structures

Answer key

38.14

Stack (7)

38.14.1 Stack: ISRO CSE 2007 | Question: 16, ISRO CSE 2009 | Question: 30, ISRO CSE 2014 | Question: 43



The five items: A, B, C, D, and E are pushed in a stack, one after other starting from A. The stack is popped four items and each element is inserted in a queue. The two elements are deleted from the queue and pushed back on the stack. Now one item is popped from the stack. The popped item is

- A. A B. B C. C D. D

isro2007 stack isro2009 isro2014

Answer key

38.14.2 Stack: ISRO CSE 2008 | Question: 70



Stack A has the entries a, b, c (with a on top). Stack B is empty. An entry popped out of stack A can be printed immediately or pushed to stack B. An entry popped out of the stack B can be only be printed. In this arrangement, which of the following permutations of a, b, c are not possible?

- A. b a c B. b c a C. c a b D. a b c

isro2008 data-structures stack

Answer key

38.14.3 Stack: ISRO CSE 2017 | Question: 59



The best data structure to check whether an arithmetic expression has balanced parenthesis is a:

- A. Queue B. Stack C. Tree D. List

isro2017 data-structures stack easy

Answer key

38.14.4 Stack: ISRO CSE 2020 | Question: 72



A stack is implemented with an array of ' $A[0 \dots N - 1]$ ' and a variable ' pos '. The push and pop operations are defined by the following code.

```
push(x)
  A[pos] <- x
  pos <- pos + 1
end push
pop()
  pos <- pos - 1
  return A[pos]
end pop
```

Which of the following will initialize an empty stack with capacity N for the above implementation

- A. $pos \leftarrow -1$ B. $pos \leftarrow 0$ C. $pos \leftarrow 1$ D. $pos \leftarrow N - 1$

isro-2020 data-structures stack normal

Answer key

38.14.5 Stack: ISRO-DEC2017-47



Which of the following permutation can be obtained in the same order using a stack assuming that input is the sequence 5, 6, 7, 8, 9 in that order?

- A. 7, 8, 9, 5, 6 B. 5, 9, 6, 7, 8 C. 7, 8, 9, 6, 5 D. 9, 8, 7, 5, 6

isrodec2017 stack data-structures

Answer key

38.14.6 Stack: ISRO2015-11



If the sequence of operations - push (1), push (2), pop, push (1), push (2), pop, pop, pop, push (2), pop are performed on a stack, the sequence of popped out values

- A. 2, 2, 1, 1, 2 B. 2, 2, 1, 2, 2 C. 2, 1, 2, 2, 1 D. 2, 1, 2, 2, 2

isro2015 data-structures stack easy

Answer key

38.14.7 Stack: ISRO2015-15



The queue data structure is to be realized by using stack. The number of stacks needed would be

- A. It cannot be implemented
- B. 2 stacks
- C. 4 stacks
- D. 1 stack

isro2015 data-structures stack

Answer key

38.15

Tree (5)

38.15.1 Tree: ISRO CSE 2011 | Question: 19



If node A has three siblings and B is parent of A, what is the degree of A?

- A. 0
- B. 3
- C. 4
- D. 5

isro2011 data-structures tree

Answer key

38.15.2 Tree: ISRO CSE 2014 | Question: 73



How many different trees are there with four nodes A, B, C and D?

- A. 30
- B. 60
- C. 90
- D. 120

isro2014 data-structures tree combinatory

Answer key

38.15.3 Tree: ISRO CSE 2020 | Question: 71



Of the following, which best approximates the ratio of the number of nonterminal nodes in the total number of nodes in a complete K -ary tree of depth N ?

- A. $1/N$
- B. $N - 1/N$
- C. $1/K$
- D. $K - 1/K$

isro-2020 data-structures tree normal

Answer key

38.15.4 Tree: ISRO CSE 2023 | Question: 42



The preorder traversal of a binary search tree is (10, 5, 1, 7, 40, 50). The postorder traversal is

- A. (1, 5, 7, 10, 40, 50)
- B. (50, 40, 10, 7, 5, 1)
- C. (1, 7, 5, 10, 40, 50)
- D. (1, 5, 7, 50, 40, 10)

isro-cse-2023 binary-search-tree binary-tree tree data-structures

Answer key

38.15.5 Tree: ISRO-DEC2017-56



Which one of the following property is correct for a red-black tree?

- A. Every simple path from anode to a descendant leaf contains the same number of black nodes.
- B. If a node is red, then one children is red and another is black.
- C. If a node is red, then both its children are red.

D. Every leaf node (sentinel node) is red.

isrodec2017 data-structures binary-search-tree tree

Answer key

38.16

Tree Traversal (4)

38.16.1 Tree Traversal: ISRO CSE 2011 | Question: 26




The in-order traversal of a tree resulted in FBGADCE. Then the pre-order traversal of that tree would result in

- A. FGBDECA B. ABFGCDE C. BFGCDEA D. AFGBDEC

isro2011 data-structures tree-traversal

Answer key

38.16.2 Tree Traversal: ISRO CSE 2017 | Question: 50

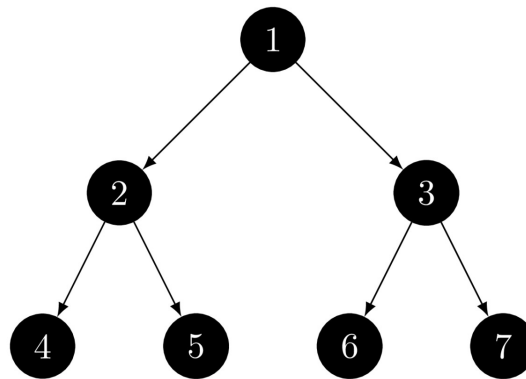

If the post order traversal gives $ab - cd * +$ then the label of the nodes 1,2,3.. will be

- A. +, -, *, a,b,c,d B. a, -,b,+,c,*,d
C. a,b,c,d,-,*,+ D. -,a,b,+,*,c,d


isro2017 data-structures binary-tree tree-traversal

Answer key

38.16.3 Tree Traversal: ISRO CSE 2018 | Question: 80



If Tree-1 and Tree-2 are the trees indicated below:

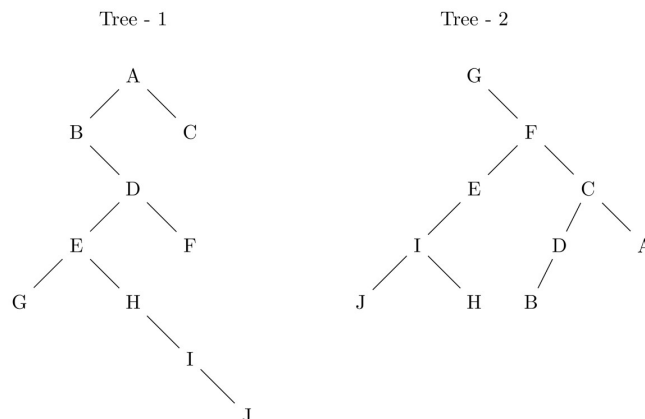

Which traversals of Tree-1 and Tree-2, respectively, will produce the same sequence?

- a. Preorder, postorder
- b. Postorder, inorder
- c. Postorder, preorder
- d. Inorder, preorder

isro2018 data-structures tree-traversal

Answer key

38.16.4 Tree Traversal: ISRO CSE 2020 | Question: 23



The post-order traversal of binary tree is ACEDBHIGF. The pre-order traversal is

- A. A B C D E F G H I
- B. F B A D C E G I H
- C. F A B C D E G H I
- D. A B D C E F G I H

isro-2020 data-structures binary-tree tree-traversal normal

Answer key

Answer Keys

38.1.1	B	38.1.2	C	38.1.3	D	38.2.1	B	38.2.2	A
38.2.3	B	38.3.1	C	38.3.2	D	38.4.1	C	38.4.2	B
38.4.3	B	38.4.4	B	38.4.5	C	38.4.6	C	38.4.7	C
38.4.8	D	38.4.9	D	38.4.10	D	38.5.1	D	38.5.2	C
38.5.3	D	38.5.4	B	38.5.5	B	38.5.6	A	38.5.7	B
38.5.8	C	38.6.1	B	38.7.1	A	38.8.1	A	38.8.2	A
38.8.3	B	38.8.4	A	38.8.5	B	38.9.1	B	38.9.2	A
38.9.3	C	38.9.4	C	38.9.5	B	38.9.6	X	38.9.7	A
38.9.8	A	38.9.9	C	38.10.1	X	38.11.1	D	38.11.2	D
38.12.1	A	38.12.2	C	38.13.1	B	38.14.1	D	38.14.2	C
38.14.3	B	38.14.4	D	38.14.5	C	38.14.6	A	38.14.7	B
38.15.1	X	38.15.2	D	38.15.3	C	38.15.4	X	38.15.5	A
38.16.1	B	38.16.2	A	38.16.3	X	38.16.4	B		