
FOREIGN TRADING SYSTEM


Swarna Anshu

192011396

Usecase diagram:

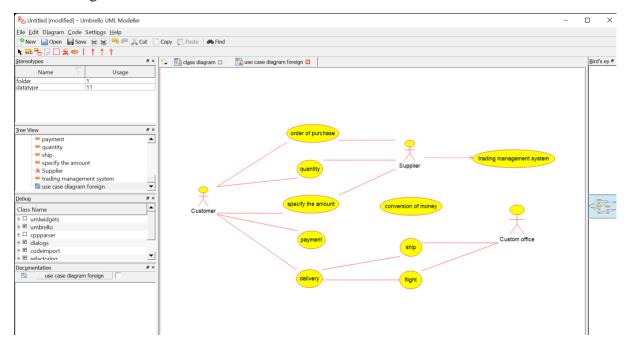

Class diagram:

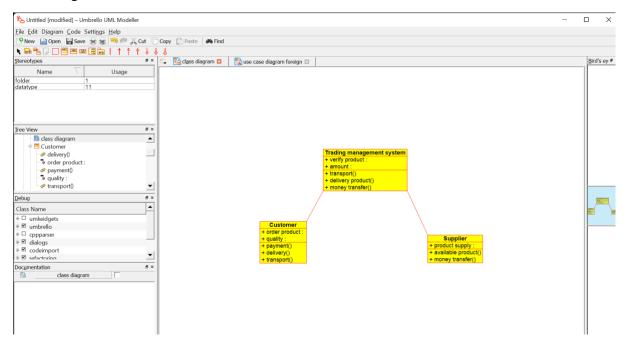

```
Code generation:
C++:
#include "Trading_management_system.h"
// Constructors/Destructors
Trading_management_system::Trading_management_system () {
initAttributes();
Trading_management_system::~Trading_management_system () { }
//
// Methods
//
// Accessor methods
//
// Other methods
//
void Trading_management_system::initAttributes () {
}
#include "Customer.h"
// Constructors/Destructors
Customer::Customer() {
initAttributes();
}
Customer::~Customer() { }
//
// Methods
//
// Accessor methods
```

```
//
// Other methods
//
void Customer::initAttributes () {
#include "Supplier.h"
// Constructors/Destructors
//
Supplier::Supplier () {
initAttributes();
}
Supplier::~Supplier() { }
//
// Methods
//
// Accessor methods
//
// Other methods
//
void Supplier::initAttributes () {
}
```