

Data

[World](#) [Counties](#) [Airports](#)


World

```
1  
2 var url = "world110.json";  
3 d3.json(url, function(err, data){  
4     console.log(url, "error", err);  
5     console.log(url, "data", data)  
6 })  
7
```

We can load world landmass boundaries as TopoJSON data from a file.

[Download](#)

Example In [Tributary](#)

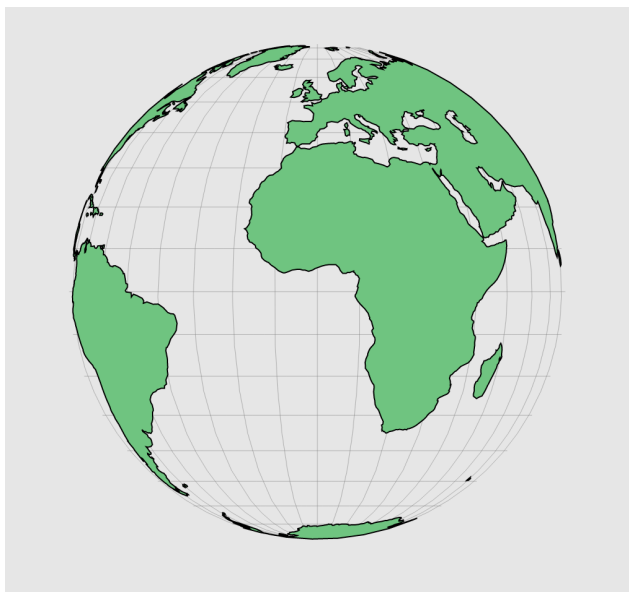

Counties

```
1  
2 var url = "californiaCounties.json";  
3 d3.json(url, function(err, data){  
4     console.log(url, "error", err);  
5     console.log(url, "data", data)  
6 })  
7
```

California county boundaries simplified in TopoJSON.

[Download.](#)

Example in [Tributary](#)



Airports

```
1  
2 var url = "airports.json";  
3 d3.json(url, function(err, data){  
4   console.log(url, "error", err);  
5   console.log(url, "data", data)  
6 })  
7
```

We can load geometry that has data associated with it.

[Download](#) (from [earthquake hackathon](#)).

Example in [Leaflet](#)



Debris (by county)

```
1  
2 var url = "debris.json";  
3 d3.json(url, function(err, data){  
4   console.log(url, "error", err);  
5   console.log(url, "data", data)  
6 })  
7
```

We can load polygon geometry that has data associated with it.

[Download](#) (from [earthquake hackathon](#)).

Example in [Leaflet](#)

[Top](#)