
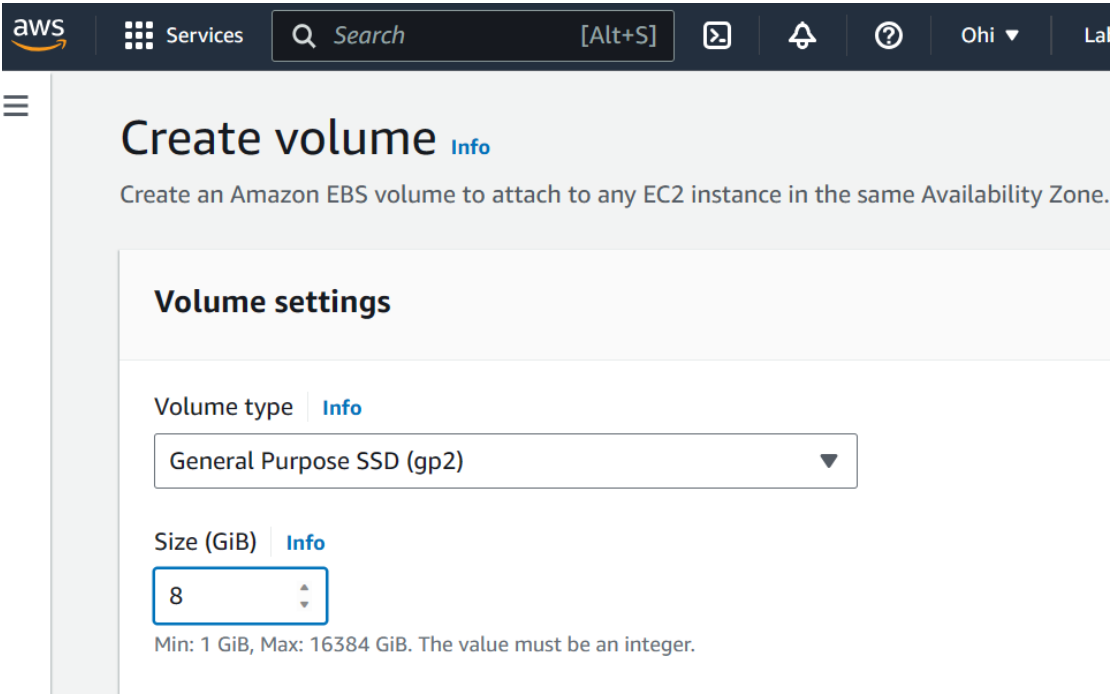


Initialize a Volume Restored from a Snapshot on Linux.:

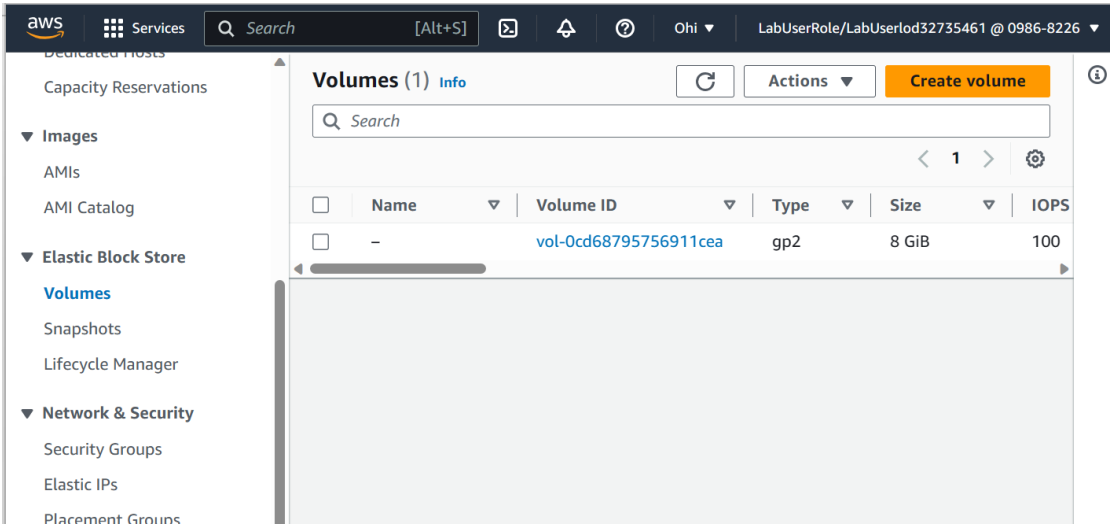

Use Amazon EBS encryption as an encryption solution for your EBS resources associated with your EC2 instances.

☐ Encrypt this volume

### Tags - optional [Info](#)

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

Value - optional

You can add 49 more tags.

EC2 Experience

ll us what you think

Dashboard

Global View

ts

inces

inces

ince Types

ich Templates

Requests

1gs Plans

rved Instances

cated Hosts

Volumes (1/2) [Info](#)

| <input type="checkbox"/>            | Name           | Volume ID             |
|-------------------------------------|----------------|-----------------------|
| <input type="checkbox"/>            | -              | vol-0cd68795756911cea |
| <input checked="" type="checkbox"/> | Volume-3273... | vol-0933063d3ac30fdbc |

Volume ID: vol-0933063d3ac30fdbc (Vol

Details

Status checks

Monitoring

Tags

Volume ID

vol-0933063d3ac30fdbc (Volume-

Size

8 GiB

Modify volume

Create snapshot

Create snapshot lifecycle policy

Delete volume

Attach volume

Detach volume

Force detach volume

Manage auto-enabled I/O

Manage tags

Fault injection

### Volume details

Volume ID

vol-0933063d3ac30fdbc (Volume-32735461)

Volume type [Info](#)

Size (GiB) [Info](#)

Min: 125 GiB, Max: 16384 GiB. The value must be an integer.

IOPS [Info](#)

Not Applicable

