

30-DAY COACHING ACADEMY EDITION

Computer Science XI

The Bilingual Teacher's Edition rebuilt as a 30-day academy batch — 90-minute classes, board work, timed drills, homework stamps, weekly chapter exams, mock paper and repair clinic.

Bilingual support: English + اردو

تیس دن کی کوچنگ اکیڈمی — نوے منٹ کلاس، بورڈ، ڈرل، ہوم ورک

01 Computer Systems

02 Computational Thinking & Algorithm

03 Programming Fundamentals

04 Data and Analysis

05 Application and Impacts of Computing

06 Digital Literacy

XI

30-day academy calendar

One 90-minute class a day. Tick the day after homework is stamped. Do not skip chapter-exam, mock, or Golden-blitz days.

روزانہ ایک نوے منٹ کی کلاس۔ باب کے امتحان، ماک اور گولڈن بلٹز نہ چھوڑیں۔

Day	Focus	Kind	★ Golden today
Week 1 · academy batch			
Day 01	Computer Systems (1/5)	Teach	Analog and Digital Signals
Day 02	Computer Systems (2/5)	Teach	Logic Gates (Basic Gates: AND, OR, NOT)
Day 03	Computer Systems (3/5)	Teach	Logic Diagrams, Karnaugh Maps (K-Maps)
Day 04	Computer Systems (4/5)	Teach	Software Development Life Cycle (SDLC), The Waterfall Model
Day 05	Computer Systems (5/5)	Chapter exam	The Agile Model, Communication Models and the OSI 7-Layer Model
Week 2 · academy batch			
Day 06	Computational Thinking & Algorithm (1/3)	Teach	Algorithm, Algorithm vs Pseudocode, Decomposition
Day 07	Computational Thinking & Algorithm (2/3)	Teach	Sorting Algorithms: Bubble Sort, Sorting Algorithms: Selection Sort
Day 08	Computational Thinking & Algorithm (3/3)	Chapter exam	Searching Algorithms: Binary Search
Day 09	Programming Fundamentals (1/5)	Teach	—
Day 10	Programming Fundamentals (2/5)	Teach	Fundamentals of Python Programming, Variables, Data Types in Python, Operators and Operands: Arithmetic and Assignment
Week 3 · academy batch			
Day 11	Programming Fundamentals (3/5)	Teach	Relational, Logical and Membership Operators, Bitwise Operators, Control Structures, Selection Statements: if and if-else

Day	Focus	Kind	★ Golden today
Day 12	Programming Fundamentals (4/5)	Teach	Selection Statements: if-elif-else and Nested if, Repetition Statements: the for Loop and range(), The while Loop, break and continue, Nested Loops and for vs while
Day 13	Programming Fundamentals (5/5)	Chapter exam	—
Day 14	Data and Analysis (1/3)	Teach	Keys and Integrity Constraints
Day 15	Data and Analysis (2/3)	Teach	Entity Relationship Model (ER-Model), Referential Integrity
Week 4 · academy batch			
Day 16	Data and Analysis (3/3)	Chapter exam	Creating Queries in MS Access
Day 17	Application and Impacts of Computing (1/3)	Teach	Artificial Intelligence (AI), Internet of Things (IoT) & Components
Day 18	Application and Impacts of Computing (2/3)	Teach	Information Sources (Primary, Secondary, Tertiary)
Day 19	Application and Impacts of Computing (3/3)	Chapter exam	Assistive Technologies
Day 20	Digital Literacy (1/4)	Teach	Types of Data, Data-Collection Strategies, Interviews and Surveys
Week 5 · academy batch			
Day 21	Digital Literacy (2/4)	Teach	Prototypes, Observation and Simulations, Primary and Secondary Data
Day 22	Digital Literacy (3/4)	Teach	Case Study: Digital Inquiry Project, Steps 1 – 3: Advanced Search and Methodology, Steps 4 – 6: Survey Preparation and Primary Data Collection
Day 23	Digital Literacy (4/4)	Chapter exam	Steps 7 – 9: Secondary Data and Spreadsheet Organisation, Steps 10 – 12: Data Analysis, Conclusion and Recommendations, The Final Digital Artefact
Day 24	★ only · Chapters 1–2	Golden blitz	14 Golden cards
Week 6 · academy batch			
Day	Focus	Kind	★ Golden today
Day 25	★ only · Chapters 3–4	Golden blitz	16 Golden cards
Day 26	★ only · Chapters 5–6	Golden blitz	15 Golden cards
Day 27	Say every chapter recap aloud, books closed	Recap	All chapters
Day 28	2 hours 30 minutes · 75 marks · no notes	Mock	Whole syllabus
Day 29	Mark to the key. List every ★ Golden the batch missed.	Mark	Missed Goldens
Day 30	Redo the Day 29 list only. Dismiss by 6 pm.	Repair	Missed Goldens only

Batch register — starter marks

Three 1-mark oral or written questions from yesterday. Stamp homework full / half / zero in the last column. Re-teach any Golden that more than a third of the batch missed.

Day	Present	Q1	Q2	Q3	Mean /10	HW stamp
Day 01						
Day 02						
Day 03						
Day 04						
Day 05						
Day 06						
Day 07						
Day 08						
Day 09						
Day 10						
Day 11						
Day 12						
Day 13						
Day 14						
Day 15						
Day 16						
Day 17						
Day 18						
Day 19						
Day 20						
Day 21						
Day 22						
Day 23						
Day 24						
Day 25						
Day 26						
Day 27						
Day 28						
Day 29						
Day 30						

حاضری، تین اسٹارٹر نمبر، اور ہوم ورک کی مہر اس جدول میں لگائیں۔

How to run this 30-Day Coaching Academy Edition

This book is the **Bilingual Teacher's Edition** rebuilt as a **30-day coaching academy batch**. It is not a 40-minute school period and not a 3-hour self-study crash. A standard academy class is **90 minutes**. The coach stands at the board. Students copy, drill, and take homework home. ★ Golden topics are never skipped.

یہ کتاب تیس دن کی کوچنگ اکیڈمی بیچ کے لیے ہے۔ ہر کلاس نوے منٹ کی ہے۔ استاد بورڈ پر پڑھاتا ہے، طلبہ کاپی کرتے ہیں، ڈرل حل کرتے ہیں، ہوم ورک گھر لے جاتے ہیں۔ گولڈن موضوع نہ چھوڑیں۔

The 30 days

- **Days 1–23 — Teach the whole grade.** Every topic from the teacher's notes appears as a board card. The last day of each chapter is a 75-mark closed-book exam in the academy hall.
- **Days 24–26 — ★ Golden blitz.** No new non-Golden topic. Error clinic on high-yield board wording.
- **Day 27 — Oral recap.** Students say each chapter recap at the board, books closed.
- **Day 28 — Mock morning.** 2 hours 30 minutes. Hall conditions. No notes, no phones.
- **Day 29 — Mark and repair list.** Mark to the sealed key. Every missed Golden goes on the list.
- **Day 30 — Repair clinic, then stop.** Redo only the list. Dismiss by 6 pm.

The 90-minute academy class (Days 1–23 teach days)

1. **0–10 min — Starter test.** Three oral or written 1-mark questions from yesterday. Marks go in the batch register in this book.
2. **10–35 min — Concept lock.** Write the definition, table and diagram on the whiteboard. Students copy. Phones in the box at the door.
3. **35–55 min — Board working.** Do the worked example. Hide it. Two students redo it on the board.
4. **55–75 min — Academy drill.** Timed. 1-mark, then 3-mark, then 5-mark. Golden days also take an 8-mark. Mark at once with the recipe.
5. **75–85 min — Error clinic.** Collect the three most common wrong answers. Correct them in one box on the board.
6. **85–90 min — Homework out.** One 5-mark (or 8-mark if Golden) + redraw the board from memory. Collect next class. Stamp full / half / zero.

Chapter-exam days

On the last day of a chapter the class is a hall paper: 75 marks · 1 hour 15 minutes · 15 MCQ + 10 short + any 3 long. Use the leftover minutes to collect scripts. Do not mark in front of the batch. Re-teach any Golden below 60% in the next starter.

باب کے آخری دن پچھتر نمبر کا پیپر ہال میں کرائیں۔ اگلی کلاس کے اسٹارٹر میں کمزور گولڈن دوبارہ پڑھائیں۔

How academy answers score marks

- **1 mark:** one exact definition or one named fact.
- **2 marks:** definition + one local example (JazzCash, school portal, NADRA, load-shedding).
- **3 marks:** definition + two clear points + example.
- **5 marks:** definition, a four-point table or explanation, example, and a labelled diagram if the topic has one.
- **8–10 marks:** 5-mark structure + full working (trace, K-map, code, ER diagram) + a one-line conclusion.

Train this wording every class: *Define. Explain. Example. Diagram. Working.* An answer with no working is a half-answer.

Batch rules

- One 90-minute class a day, six days a week, for thirty days. No extra unpaid “make-up” class unless a Golden exam mark is below 60%.
- If the batch falls behind, drop non-Golden cards that day. Never skip a chapter exam, the mock, or a Golden blitz day.
- Homework is collected. Uncollected homework is a zero in the register, not a warning.

What the extra academy boxes mean

COACH RUN-SHEET

How to run this day: starter, board, two-student redo, drill, error clinic.

FULL-MARK ANSWER RECIPE

The sentence pattern that scores 1, 3, 5 and 8 marks today.

ACADEMY DRILL

Timed class questions with answers — not for homework peeking.

BATCH HOMEWORK

What the batch takes home, and how you stamp it tomorrow.

ACADEMY CALENDAR

The 30-day calendar and the batch register.

GOLDEN TOPIC

★ **Golden** — never skip, never rush, test it every week until the board.

Chapter 1: Computer Systems

Computer Systems (1/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Discrete and Continuous Quantities · Introduction to Digital Systems · Analog and Digital Signals · Boolean Algebra

★ **Must lock:** Analog and Digital Signals

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Define the last Golden topic in one exact sentence.
2. Redraw yesterday's table or diagram with labels.
3. Give one local example (JazzCash, NADRA, school portal, load-shedding).


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.1.1 Discrete and Continuous Quantities

Everything around you that can be measured or counted is a quantity.

- Quantities come in two kinds.
- Discrete quantities are separate, countable items with specific values.
- You can count them one by one: 1, 2, 3 ... There is nothing "in between".

Discrete (counted)	Continuous (measured)
Number of students in a classroom	Temperature of water
Number of cars in a parking lot	Speed of a moving car
Has fixed, separate values	Has any value in a range

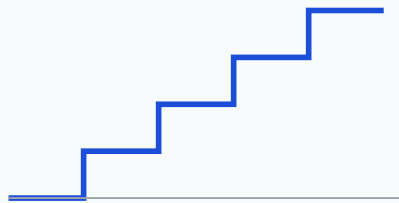

Discrete (Stairs)



Continuous (Ramp)

Stairs have fixed steps (discrete). A ramp lets you stand at any point (continuous).

Remember: Stairs vs Ramp. On stairs you can only stand on step 1, 2 or 3 — that is discrete data. On a ramp you can stand at any height — that is continuous data. Ask...

منفصل (Discrete) مقداریں وہ ہیں جنہیں ایک ایک کر کے گنا جا سکے، جیسے کلاس میں طلبہ کی تعداد۔

1.1.2 Introduction to Digital Systems

A digital system is an electronic system that uses only two values: 0 and 1.

- 0 represents OFF, LOW, or FALSE.
- 1 represents ON, HIGH, or TRUE.

Advantage	Detail
Reliable	Less affected by noise and interference.
Accurate	No loss of quality when copying data.
Easy to design	Only two states (0 and 1) to handle.
Programmable	Can be easily controlled by software.

Remember: Think of a bit as a light switch: it is either ON (1) or OFF (0). A digital system is a huge panel of such switches.


ڈیجیٹل نظام صرف دو قیمتیں استعمال کرتا ہے: 0 اور 1، جنہیں بٹ (Bit) کہتے ہیں۔

1.1.3 Analog and Digital Signals ★ Golden


A signal is a changing voltage (or other quantity) that carries information.

- Analog signals are continuous signals that change smoothly over time, like a sine wave.
- Examples: the human voice, a traditional mercury thermometer.
- Digital signals have only two levels: HIGH (1) and LOW (0).

Feature	Analog data	Digital data
Nature	Continuous flow.	Discrete, separate values (bits).
Wave shape	Sine wave (smooth curve).	Square wave (sudden jumps).
Reliability	Low (affected by noise).	High (resistant to noise).
Examples	Human voice, traditional thermometer.	Computer data.

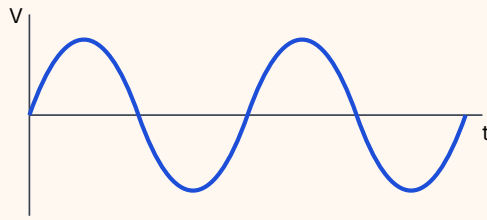

Analog Signal (Sine Wave)

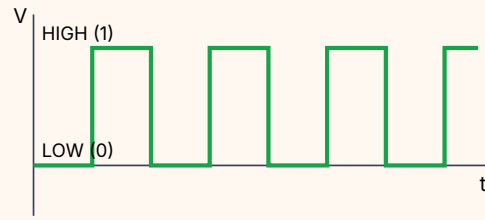

Digital Signal (Square Wave)

An analog signal changes smoothly; a digital signal jumps between only two levels.

Remember: Analog = A smooth curve. Digital = Doorsteps. Analog looks like ocean waves; digital looks like a castle wall (square teeth).

Exam: Common questions: "Differentiate between analog and digital signals" (3–4 marks) and "Draw an analog and a digital signal." Write the comparison as a table with at least...

اینا لگ سگنل وقت کے ساتھ ہموار انداز میں بدلتا ہے، جیسے سائن ویو (Sine Wave)؛ انسانی آواز اس کی مثال ہے۔

1.1.4 Boolean Algebra

Boolean algebra was developed by the English mathematician George Boole.

- It is a kind of algebra that deals with only two values: TRUE (1) and FALSE (0).
- It is the foundation of digital electronics and computer programming — every if condition in a program is a small piece of Boolean algebra.

Concept	Description	Example
Variables	Letters that hold the value 0 or 1.	A, B, C, X, Y
Operations	Actions performed on variables.	AND, OR, NOT
Expressions	Combinations of variables and operations.	A AND B, $Y = A + B$

Trap: In Boolean algebra "+" means OR, not addition.

بولین الجبرا جارج بول (George Boole) نے بنایا۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Discrete and Continuous Quantities:** Students sometimes say "money is continuous because amounts are large".
- **Analog and Digital Signals:** Do not draw a digital signal with sloping sides.
- **Boolean Algebra:** In Boolean algebra "+" means OR, not addition.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Analog and Digital Signals**. Write: A signal is a changing voltage (or other quantity) that carries information.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Analog signals are continuous signals that change smoothly over time, like a sine wave. (2) Examples: the human voice, a traditional mercury thermometer. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a fully labelled diagram copied from the board + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What shape of wave does a digital signal make?

3 marks. Explain Analog and Digital Signals with two clear points and one example.

5 marks. Common questions: "Differentiate between analog and digital signals" (3–4 marks) and "Draw an analog and a digital signal." Write the comparison as a table with at least three features (nature, wave...

8 marks. Analog and Digital Signals: 5-mark answer plus a fully labelled diagram copied from the board.

Answers: 1. A square wave 3. Analog signals are continuous signals that change smoothly over time, like a sine wave.; Examples: the human voice, a traditional mercury thermometer. 5. Use the recipe in the blue box.

Model opening: A signal is a changing voltage (or other quantity) that carries information. 8. Same 5-mark body + a fully labelled diagram copied from the board + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Analog and Digital Signals** using the recipe in this topic. Include a fully labelled diagram copied from the board. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 1: Computer Systems

Computer Systems (2/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Boolean Operations · Truth Tables · Logic Gates (Basic Gates: AND, OR, NOT) · Universal Logic Gates (NAND and NOR)

★ **Must lock:** Logic Gates (Basic Gates: AND, OR, NOT)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What shape of wave does a digital signal make?
2. Is the number of pages in a book discrete or continuous?
3. What does a 1 represent in a digital system?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.1.5 Boolean Operations

There are three basic Boolean operations. Every other operation can be made from them.

- Every other operation can be made from them.
- AND operation ($\cdot$) — gives output 1 only when ALL inputs are 1.
- Expression: $Y = A \cdot B$ (often written just AB).

Operation	Real-life analogy
AND	A door with two locks. The door opens only when both locks are unlocked.
OR	A room with two doors. You can enter if either door is open.
NOT	A room light switch. When the switch is ON the room is lit; when it is OFF the room is dark — the state is the opposite of "dark".

Remember: AND is "strict" — everyone must agree (all 1s). OR is "easy-going" — one 1 is enough. NOT is "the rebel" — it always says the opposite.

AND آپریشن تب ہی 1 دیتا ہے جب تمام ان پٹ 1 ہوں (دو تالوں والا دروازہ)۔

1.1.6 Truth Tables

A truth table shows all possible input combinations and the output for each one, for a logic gate or a circuit.

- Count the number of inputs (n).
- Calculate total rows = 2^n .
- List all input combinations in binary counting order (0, 1, 2, 3 ... in binary).
- Calculate the output for each combination.

A	B	Combination
0	0	Row 1
0	1	Row 2
1	0	Row 3
1	1	Row 4

Remember: Quick fill trick for 3 inputs: In column C write 0,1,0,1... (change every row). In column B write 0,0,1,1... (change every 2 rows). In column A write...


ٹروٹھ ٹیبل (Truth Table) کسی گیٹ یا سرکٹ کے تمام ممکنہ ان پٹ اور ان کے آؤٹ پٹ دکھاتا ہے۔

1.1.7 Logic Gates (Basic Gates: AND, OR, NOT) ★ Golden

Logic gates are electronic circuits that perform Boolean operations.

- They take one or more input bits and produce one output bit.
- They are the building blocks of all digital systems — a processor contains billions of them.
- The three basic gates match the three basic operations: the AND gate, the OR gate and the NOT gate (also called an inverter).


A	B	Y
0	0	0
0	1	0
1	0	0
1	1	1



$$\text{AND: } Y = A \cdot B$$



$$\text{OR: } Y = A + B$$



$$\text{NOT: } Y = A'$$

Symbols of the basic gates. AND has a flat back and round front ("D" shape); OR has a curved back and pointed front; NOT is a triangle with a small circle (bubble).

Remember: Shortcut: AND output is 0 if any input is 0. OR output is 1 if any input is 1. Learn just the "special row": AND is 1 only at 11; OR is 0 only at 00.

Exam: You are often asked to "draw the symbol, write the expression and truth table" of a gate (2–3 marks each). Draw neat symbols with labelled inputs A, B and output Y....

لاجک گیٹس الیکٹرانک سرکٹ ہیں جو بولین آپریشن انجام دیتے ہیں اور تمام ڈیجیٹل نظاموں کی بنیادی اینٹیں ہیں۔

1.1.7 Universal Logic Gates (NAND and NOR)


NAND means "NOT AND": it is an AND gate followed by a NOT.

- NOR means "NOT OR": an OR gate followed by a NOT.
- On the symbol, the NOT is shown as a small bubble at the output.
- NAND and NOR are called universal gates because any logic circuit in the world can be built using only NAND gates (or only NOR gates).

A	B	A·B	Y
0	0	0	1
0	1	0	1
1	0	0	1
1	1	1	0



$$\text{NAND: } Y = (A \cdot B)'$$



$$\text{NOR: } Y = (A + B)'$$

NAND = AND symbol + bubble. NOR = OR symbol + bubble.

Remember: NAND is the exact opposite of AND (0 only at 11). NOR is the exact opposite of OR (1 only at 00). Just flip the AND/OR output column.

NAND کا مطلب ہے NOT AND اور NOR کا مطلب ہے NOT OR.

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Truth Tables:** Do not list rows in a random order — you may miss or repeat a combination.
- **Logic Gates (Basic Gates: AND, OR, NOT):** Do not mix up the AND and OR symbols.
- **Universal Logic Gates (NAND and NOR):** Do not forget the bubble.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Logic Gates (Basic Gates: AND, OR, NOT)**. Write: Logic gates are electronic circuits that perform Boolean operations.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) They take one or more input bits and produce one output bit. (2) They are the building blocks of all digital systems — a processor contains billions of them. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What is the output of an OR gate when $A = 0$ and $B = 0$?

3 marks. Explain Logic Gates (Basic Gates: AND, OR, NOT) with two clear points and one example.

5 marks. You are often asked to "draw the symbol, write the expression and truth table" of a gate (2–3 marks each). Draw neat symbols with labelled inputs A, B and output Y. Write the full truth table in...

8 marks. Logic Gates (Basic Gates: AND, OR, NOT): 5-mark answer plus a complete truth table and a labelled gate / logic diagram.

Answers: 1. 0 3. They take one or more input bits and produce one output bit.; They are the building blocks of all digital systems — a processor contains billions of them. 5. Use the recipe in the blue box. Model opening: Logic gates are electronic circuits that perform Boolean operations. 8. Same 5-mark body + a complete truth table and a labelled gate / logic diagram + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Logic Gates (Basic Gates: AND, OR, NOT)** using the recipe in this topic. Include a complete truth table and a labelled gate / logic diagram. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 1: Computer Systems

Computer Systems (3/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Advanced Logic Gates (XOR and XNOR) · Logic Expressions, Minterms and Maxterms · Logic Diagrams · Karnaugh Maps (K-Maps)

★ **Must lock:** Logic Diagrams, Karnaugh Maps (K-Maps)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What is the output of an OR gate when $A = 0$ and $B = 0$?
2. What symbol is used for the OR operation?
3. How many rows does a truth table with 4 inputs have?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.1.7 Advanced Logic Gates (XOR and XNOR)


XOR (Exclusive OR) gives output 1 when the inputs are different.

- In terms of basic operations, $A \oplus B = A'B + AB'$.
- XNOR (Exclusive NOR) is XOR followed by NOT.
- It gives output 1 when the inputs are the same.

A	B	Y
0	0	0
0	1	1
1	0	1
1	1	0



$$\text{XOR: } Y = A \oplus B$$



$$\text{XNOR: } Y = (A \oplus B)'$$

XOR = OR symbol with an extra curve at the back. XNOR = XOR symbol + bubble.

Remember: Memory trick: XOR outputs 1 when inputs are "eXclusively" different. XNOR outputs 1 when inputs are the same. XNOR is sometimes called the "equality gate".

XOR گیٹ تب 1 دیتا ہے جب دونوں ان پٹ مختلف ہوں، اور XNOR گیٹ تب 1 دیتا ہے جب دونوں ان پٹ ایک جیسے ہوں۔

1.1.8 – 1.1.10 Logic Expressions, Minterms and Maxterms

A logic expression (Boolean expression) combines variables with operations, for example $Y = A + B' \cdot C$.

1. Parentheses () → 2. NOT (') → 3. AND (·) → 4. OR (+)

- To evaluate it correctly you must follow the order of precedence, just like BODMAS in maths: 1.

A	B	C	B'	B'·C	Y = A + B'·C
0	0	0	1	0	0
0	0	1	1	1	1
0	1	0	0	0	0
0	1	1	0	0	0
1	0	0	1	0	1
1	0	1	1	1	1
1	1	0	0	0	1
1	1	1	0	0	1


Remember: SOP = 1s, POS = 0s. Minterm: 0 → bar, 1 → plain. Maxterm: the reverse (1 → bar, 0 → plain). Think "Min likes 1s, Max likes 0s".

ایکسپریشن حل کرتے وقت ترتیب یہ ہے: پہلے قوسین، پھر NOT، پھر AND اور آخر میں OR.

1.1.11 Logic Diagrams ★ Golden

A logic diagram shows how logic gates are connected to create a circuit.

- It is a "picture" of a Boolean expression.
- To draw one, use the order of precedence: the operation with the highest priority is drawn first (nearest the inputs), and the last...

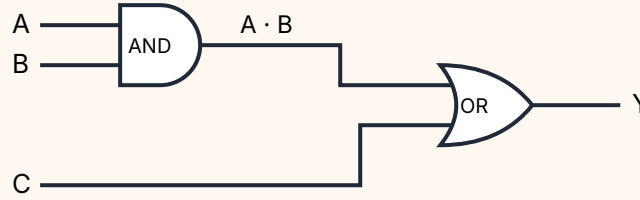

$Y = A \cdot B + C$: AND first, then OR.

Remember: Read the expression and ask "What is done last?" That gate goes on the far right, next to Y. Work backwards to the inputs. Count gates: $Y = A \cdot B + C$ needs 2...

Exam: Typical question: "Draw the logic diagram of $Y = \dots$ " and sometimes "also make its truth table" (4–5 marks). Write the precedence steps in one line, draw neat gate symbols...

لاچک ڈایاگرام دکھاتا ہے کہ گیٹس آپس میں کیسے جڑ کر سرکٹ بناتے ہیں۔

1.1.13 Karnaugh Maps (K-Maps) ★ Golden

A Karnaugh map (K-map) is a graphical tool used to simplify Boolean expressions.

- It is a grid of cells — one cell for each row of the truth table.
- The cells are arranged so that neighbouring (adjacent) cells differ by only ONE bit.
- This ordering is called Gray code.

	B = 0	B = 1
A = 0	Cell 0 ($A'B'$)	Cell 1 ($A'B$)
A = 1	Cell 2 (AB')	Cell 3 (AB)

Remember: Gray code song: "zero-zero, zero-one, one-one, one-zero" — only one bit flips at each step.

Imagine the K-map is drawn on a tube, so the left and right edges...

Exam: K-maps are a favourite long question (5–6 marks): "Simplify $F(A,B,C) = \sum m(\dots)$ using a K-map." Draw the map with labelled Gray-code headings, fill every cell (write the 0s...

کارنو میپ (K-Map) بولین ایکسپریشن کو آسان بنانے کا تصویری طریقہ ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Advanced Logic Gates (XOR and XNOR):** XOR is not the same as OR.
- **Logic Expressions, Minterms and Maxterms:** Two classic errors: (1) writing minterms for the 0-rows — minterms come only from rows where $Y = 1$; (2) forgetting precedence — in $A + B \cdot C$...
- **Logic Diagrams:** Do not draw a separate wire for a variable each time it appears and then leave one unconnected.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Logic Diagrams**. Write: A logic diagram shows how logic gates are connected to create a circuit.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) It is a "picture" of a Boolean expression. (2) To draw one, use the order of precedence: the operation with the highest priority is drawn first (nearest the inputs), and the last... — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Karnaugh Maps (K-Maps)**. Write: A Karnaugh map (K-map) is a graphical tool used to simplify Boolean expressions.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) It is a grid of cells — one cell for each row of the truth table. (2) The cells are arranged so that neighbouring (adjacent) cells differ by only ONE bit. — + example.

5 marks: 3-mark structure + table: $B = 0 / B = 1 / A = 0 / A = 1$ + the worked example from this topic.

8–10 marks: 5-mark structure + a completed K-map with legal groups (1, 2, 4 or 8) and the simplified Boolean expression + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. In $Y = A + B \cdot C$, which gate is drawn first?

3 marks. Explain Logic Diagrams with two clear points and one example.

5 marks. Typical question: "Draw the logic diagram of $Y = \dots$ " and sometimes "also make its truth table" (4–5 marks). Write the precedence steps in one line, draw neat gate symbols with labelled intermediate...

8 marks. Logic Diagrams: 5-mark answer plus a complete truth table and a labelled gate / logic diagram.

Answers: 1. The AND gate (for $B \cdot C$) 3. It is a "picture" of a Boolean expression.; To draw one, use the order of precedence: the operation with the highest priority is drawn first (nearest the inputs), and the last... 5. Use the recipe in the blue box. Model opening: A logic diagram shows how logic gates are connected to create a circuit. 8. Same 5-mark body + a complete truth table and a labelled gate / logic diagram + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Logic Diagrams** using the recipe in this topic. Include a complete truth table and a labelled gate / logic diagram. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 1: Computer Systems

Computer Systems (4/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: LogiSim Evolution: Simulation Tool · Building a Circuit in LogiSim · Software Development Life Cycle (SDLC) · The Waterfall Model

★ **Must lock:** Software Development Life Cycle (SDLC), The Waterfall Model

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. In $Y = A + B \cdot C$, which gate is drawn first?
2. In a 3-variable K-map, which column is next to $BC = 01$ on the right?
3. What is $1 \oplus 1$?


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

LogiSim Evolution: Simulation Tool

LogiSim Evolution is a free graphical tool for designing and simulating logic circuits.

- "Simulating" means the computer pretends to be the real circuit: you can switch inputs on and off and watch the output change.
- It lets you see the truth tables and Boolean expressions you learn in theory.

Area	What it does
Menu Bar (top)	File, Edit, Project, Simulate menus — open/save files and control the simulation.
Toolbar	Quick access to standard tools: Wiring, Poke, and AND, OR, NOT gates.
Explorer Panel (left)	Contains the component libraries: Gates, I/O, Wiring.
Attribute Table (bottom left)	Adjust the properties of the selected gate, e.g. Number of Inputs or Facing direction.
Drawing Canvas (right)	The dotted grid where you place and wire the gates.

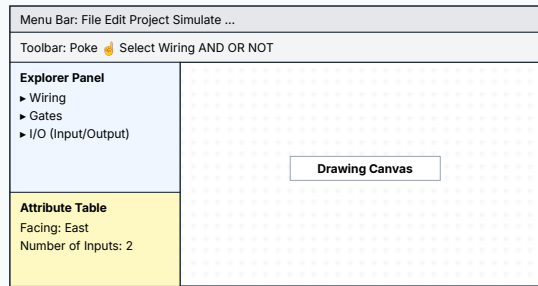


The main areas of the LogiSim Evolution window.

Remember: Colours like a traffic light: Green means "working" (bright = 1, dark = 0). Blue means "the wire is lonely — not connected". Red means "stop, something is..."

لاجی سیم ایوولوشن (LogiSim Evolution) لاجک سرکٹ بنانے اور چلا کر دیکھنے کا سافٹ ویئر ہے۔

Building a Circuit in LogiSim

Poke A	Poke B	Y shows	Output wire colour
0	0	0	Dark green
0	1	0	Dark green
1	0	0	Dark green
1	1	1	Bright green

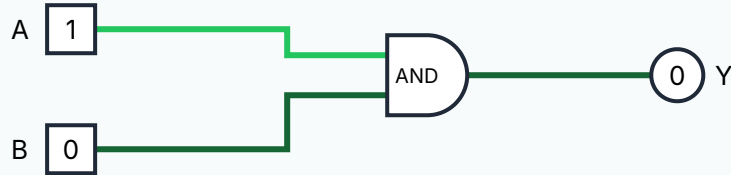

Bright green = 1, dark green = 0

Testing with the Poke Tool: A = 1 (bright green wire), B = 0 (dark green), so $Y = 1 \cdot 0 = 0$.

Remember: Input pin = square (you push it). Output pin = circle (it shows a light). Poke = finger — you "poke" inputs to change them.

لاجی سیم میں $Y = A \cdot B$ بنانے کے لیے AND گیٹ رکھیں، بائیں جانب دو ان پٹ پن (چوکور) اور دائیں جانب ایک آؤٹ پٹ پن (گول) رکھیں، پھر وائر...

1.2.1 – 1.2.3 Software Development Life Cycle (SDLC) ★ Golden

The Software Development Life Cycle (SDLC) is a structured process that guides software development from beginning to end.

1. Requirement Analysis → 2. System Design → 3. Implementation → 4. Testing → 5. Deployment → 6. Maintenance

- It ensures clear goals, better planning, risk reduction and high quality.
- Without it, teams forget features, go over budget and deliver buggy software.
- SDLC has 6 phases: 1.

Phase	Activities and details	Deliverable (what it produces)
1. Requirement Analysis	Meet clients, understand their needs, list the features. This is the most important phase — mistakes here spread to every later phase.	SRS Document (Software Requirements Specification)
2. System Design	Create the High-Level Design (overall architecture), the Low-Level Design (database, UI screens) and flowcharts.	Design Document
3. Implementation	Write the actual code in programming languages (Python, Java, etc.) based on the design documents.	Working Source Code

Remember: Remember the order with "Real Developers Implement, Test, Deploy, Maintain" (R-D-I-T-D-M). Black box = a closed box (you can't see inside). White box = a glass...

Exam: "Explain the phases of SDLC" is a very common long question (5–8 marks). Name all 6 phases in order, write 1–2 lines of activities for each, and state the deliverable of...


ایس ڈی ایل سی (SDLC) سافٹ ویئر بنانے کا منظم طریقہ ہے جس کے چھ مراحل ہیں: ضروریات کا تجزیہ، سسٹم ڈیزائن، کوڈنگ (Implementation)، ...

1.2.4 The Waterfall Model ★ Golden

The Waterfall model is a linear, sequential approach to the SDLC.

- Each phase must be completed before the next one begins, like water falling down steps.
- There is no easy way to go back to a previous phase.

Advantages (Pros)	Disadvantages (Cons)
Simple to understand and manage.	Not flexible to changes.
Well documented at every step.	Testing happens very late in the process.

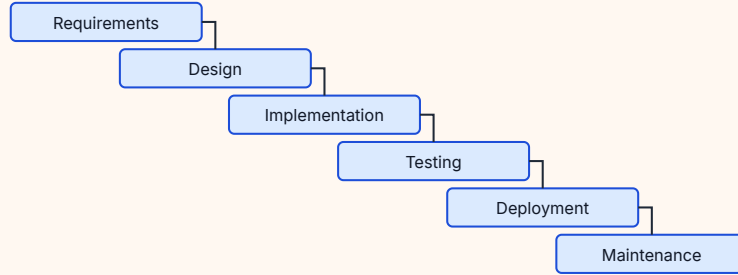

The Waterfall model: each phase "falls" into the next, in one direction only.

Remember: Waterfall = water only flows downwards. Once water has fallen it cannot climb back up — once a phase is finished you do not go back.

Exam: Expect "Explain the Waterfall model with its advantages and disadvantages" or "When should the Waterfall model be used?" Draw the step diagram, list the three "when to..."

واثر فال (آبشار) ماڈل ایک سیدھا اور ترتیب وار طریقہ ہے؛ ہر مرحلہ مکمل ہونے کے بعد ہی اگلا شروع ہوتا ہے اور پیچھے جانا مشکل ہوتا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **LogiSim Evolution: Simulation Tool:** If your output wire is blue, the circuit is not wrong in logic — a wire is simply not touching a pin.
- **Building a Circuit in LogiSim:** Students often try to poke inputs while the Wiring or Select tool is active — then clicking moves the pin instead of changing it.
- **Software Development Life Cycle (SDLC):** Do not say the SDLC ends at deployment.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Software Development Life Cycle (SDLC)**. Write: The Software Development Life Cycle (SDLC) is a structured process that guides software development from beginning to end.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) It ensures clear goals, better planning, risk reduction and high quality. (2) Without it, teams forget features, go over budget and deliver buggy software. — + example.

5 marks: 3-mark structure + table: Phase / Activities and details / Deliverable (what it produces) + the worked example from this topic.

8–10 marks: 5-mark structure + a comparison table plus a named local case (school portal / NADRA) + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **The Waterfall Model**. Write: The Waterfall model is a linear, sequential approach to the SDLC.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Each phase must be completed before the next one begins, like water falling down steps. (2) There is no easy way to go back to a previous phase. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a comparison table plus a named local case (school portal / NADRA) + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Which phase produces the SRS document?

3 marks. Explain Software Development Life Cycle (SDLC) with two clear points and one example.

5 marks. "Explain the phases of SDLC" is a very common long question (5–8 marks). Name all 6 phases in order, write 1–2 lines of activities for each, and state the deliverable of each (SRS, Design Document,...)

8 marks. Software Development Life Cycle (SDLC): 5-mark answer plus a comparison table plus a named local case (school portal / NADRA).

Answers: 1. Requirement Analysis 3. It ensures clear goals, better planning, risk reduction and high quality.; Without it, teams forget features, go over budget and deliver buggy software. 5. Use the recipe in the blue box. Model opening: The Software Development Life Cycle (SDLC) is a structured process that guides software development from beginning to end. 8. Same 5-mark body + a comparison table plus a named local case (school portal / NADRA) + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Software Development Life Cycle (SDLC)** using the recipe in this topic. Include a comparison table plus a named local case (school portal / NADRA). Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 1: Computer Systems

Computer Systems (5/5) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: The Agile Model · Waterfall vs Agile: Comparison and Case Studies · Communication Models and the OSI 7-Layer Model · TCP/IP Model vs OSI Model

★ **Must lock:** The Agile Model, Communication Models and the OSI 7-Layer Model

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Which phase produces the SRS document?
2. Why is the Waterfall model called "sequential"?
3. Where do you change the number of inputs of a gate?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.2.4 The Agile Model ★ Golden

The Agile model is an iterative approach: the software is built in small, repeated cycles called sprints (usually 2–4 weeks long).

Plan → Design → Build → Test → Review & feedback → Next sprint ↻

- Each sprint plans, builds and tests a small part of the software, and then shows it to the customer.
- Customer feedback is gathered continuously and used in the next sprint.
- Plan → Design → Build → Test → Review & feedback → Next sprint ↻

Advantages (Pros)	Disadvantages (Cons)
Highly flexible to changes.	Less documentation.
Early delivery of working software.	Unpredictable end-time and cost.

Remember: Agile = agile athlete: quick and able to change direction. Think of making a pizza where the customer tastes each slice and you adjust the next one.

Exam: Questions ask you to define Agile, explain sprints, list pros/cons, or say when to use it. Always mention the words "iterative", "sprints (2–4 weeks)" and "continuous..."

ایجائل (Agile) ماڈل میں سافٹ ویئر چھوٹے چھوٹے ادوار میں بنتا ہے جنہیں اسپرینٹ (Sprint) کہتے ہیں، جو عموماً دو سے چار ہفتے کے ہوتے ہیں۔

1.2.5 – 1.2.7 Waterfall vs Agile: Comparison and Case Studies

Both models follow the same SDLC phases. The difference is how they move through them: Waterfall goes through each phase once, in a straight line; Agile goes through all phases many times, in small loops.

- The difference is how they move through them: Waterfall goes through each phase once, in a straight line; Agile goes through all phases...

Dimension	Waterfall model	Agile model
Flexibility	Rigid. Hard to make changes later.	Very flexible. Adapts to changes easily in the next sprint.
Customer involvement	Only at the start (requirements) and the end (delivery).	Continuous throughout the project (after every sprint).
Delivery of software	Single delivery at the very end.	Frequent, partial deliveries after every sprint.
Testing	Done late, in a dedicated testing phase.	Continuous testing within every sprint.
Documentation	Heavy documentation required.	Light documentation. Focus is on working software.

Remember: One question decides it: "Will the requirements change?" No → Waterfall. Yes / not sure → Agile.

وائرفال ماڈل سخت (Rigid) ہے، گاہک صرف شروع اور آخر میں شامل ہوتا ہے، سافٹ ویئر ایک ہی بار آخر میں ملتا ہے اور دستاویزات زیادہ ہوتی ہیں۔

1.3.1 – 1.3.4 Communication Models and the OSI 7-Layer Model ★ Golden

A communication model explains how data travels from one device to another through a network.

- Because sending data is complicated, the job is split into layers; each layer does one part of the job and passes the data to the next...
- The OSI (Open Systems Interconnection) model was developed by ISO (International Organization for Standardization) in 1984.
- It divides communication into 7 layers.

Layer	Function	Protocols / examples
7. Application	Provides network services directly to user applications (browser, email program).	HTTP, HTTPS, FTP, SMTP, DNS
6. Presentation	Data translation, encryption (security) and compression.	SSL/TLS, JPEG, MP3, ASCII
5. Session	Opens, maintains and closes communication sessions.	NetBIOS, RPC
4. Transport	Reliable end-to-end delivery, error checking, port numbering.	TCP (reliable), UDP (fast)



The 7 layers of the OSI model with the mnemonic "Please Do Not Throw Sausage Pizza Away".

Remember: Mnemonic (bottom to top, 1 → 7): "Please Do Not Throw Sausage Pizza Away" = Physical, Data Link, Network, Transport, Session, Presentation, Application. (Top...

Exam: A guaranteed long question: "Explain the seven layers of the OSI model." Draw the 7-layer stack (numbered, layer 7 on top), then write one function and one or two...


کمیونیکیشن ماڈل بتاتا ہے کہ ڈیٹا نیٹ ورک کے ذریعے ایک ڈیوائس سے دوسری تک کیسے پہنچتا ہے۔

1.3.5 – 1.3.6 TCP/IP Model vs OSI Model

The OSI model is mainly a reference model used for teaching and design.

- The TCP/IP model is the practical model used on the real Internet.
- It condenses the 7 OSI layers into just 4 layers.

TCP/IP model (4 layers)	Corresponds to OSI layers
1. Application	Application, Presentation, Session (7, 6, 5)
2. Transport	Transport (4)
3. Internet	Network (3)
4. Network Access	Data Link, Physical (2, 1)

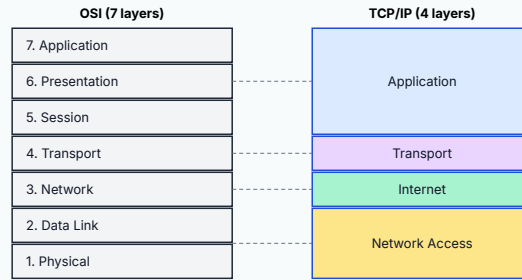

How the 7 OSI layers map onto the 4 TCP/IP layers.

Remember: Count it as 3-1-1-2: the TCP/IP Application layer takes 3 OSI layers, Transport takes 1, Internet takes 1, Network Access takes 2. Total $3+1+1+2 = 7$.

ٹی سی پی/آئی پی (TCP/IP) ماڈل حقیقی انٹرنیٹ پر استعمال ہونے والا عملی ماڈل ہے اور اس کی صرف چار تہیں ہیں۔

Computer Systems

20 single-page lessons · 8 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- Discrete quantities are counted (students, cars); continuous quantities are measured and can take any value (temperature, speed). Stairs vs ramp.
- A digital system uses only two values, 0 (OFF/LOW/FALSE) and 1 (ON/HIGH/TRUE), called bits. It is reliable, accurate, easy to design and programmable.
- Analog signals change smoothly (sine wave) and are affected by noise; digital signals jump between HIGH and LOW (square wave) and resist noise.
- Boolean algebra, by George Boole, works with only TRUE (1) and FALSE (0) using variables, operations and expressions.
- AND (·) gives 1 only when all inputs are 1; OR (+) gives 1 when any input is 1; NOT (!) inverts its single input (unary).
- A truth table lists all 2^n input combinations in binary order with their outputs.
- Logic gates are the building blocks of digital systems: AND, OR, NOT (basic); NAND, NOR (universal); XOR, XNOR (advanced).
- NAND and NOR are universal: any circuit can be built using only one of them.
- XOR gives 1 when inputs are different; XNOR gives 1 when inputs are the same.
- Order of precedence: Parentheses → NOT → AND → OR. A logic diagram is drawn in the same order.
- Minterms (SOP) come from rows with output 1; maxterms (POS) come from rows with output 0.
- K-maps use Gray code (00, 01, 11, 10); group 1s in sizes 1, 2, 4, 8, as large as possible; overlap and wrap-around are allowed; changing variables are eliminated.
- LogiSim Evolution simulates circuits: input pins are squares, output pins circles; the Poke Tool toggles inputs; bright green = 1, dark green = 0, blue = unconnected, red = error.
- SDLC has 6 phases: Requirement Analysis (SRS), Design, Implementation, Testing (black box/white box), Deployment (direct/phased/pilot), Maintenance.
- Waterfall is linear and suits fixed requirements (AI-Noor Library); Agile is iterative with 2–4 week sprints and suits changing requirements (AI-Noor Student App).
- The OSI model (ISO, 1984) has 7 layers — "Please Do Not Throw Sausage Pizza Away"; the practical TCP/IP model has 4 layers: Application, Transport, Internet, Network Access.

Key terms

Term	Meaning	اردو
Discrete quantity	A countable quantity with separate, fixed values.	منفصل مقدار
Continuous quantity	A quantity that can take any value within a range.	مسلسل مقدار
Bit	A binary digit, 0 or 1.	بائنری ہندسہ
Digital system	An electronic system that uses only the values 0 and 1.	ڈیجیٹل نظام
Analog signal	A continuous signal that changes smoothly, like a sine wave.	اینالوگ سگنل (مسلسل اشارہ)
Digital signal	A signal with only two levels, HIGH and LOW (square wave).	ڈیجیٹل سگنل
Noise	Unwanted interference that disturbs a signal.	شور (مداخلت)
Boolean algebra	Algebra of two values, TRUE (1) and FALSE (0), developed by George Boole.	بولین الجبرا
Truth table	A table of all input combinations and their outputs.	تروٹھ ٹیبل (صداقت جدول)
Logic gate	An electronic circuit that performs a Boolean operation.	منطقی گیٹ
Universal gate	A gate (NAND or NOR) from which any circuit can be built.	عالمگیر گیٹ
Unary operation	An operation with only one operand, e.g. NOT.	یک عددی عمل

Computer Systems

75 marks · 1 hour 15 minutes · no notes · no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 20 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define · Explain · Example · Diagram · Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. Which of the following is a continuous quantity?
 - a. Number of students in a class
 - b. Number of cars in a parking lot
 - c. Temperature of water
 - d. Number of books on a shelf
2. In a digital system, the value 1 represents:
 - a. OFF
 - b. LOW
 - c. FALSE
 - d. ON / HIGH / TRUE
3. A square wave represents a:
 - a. Digital signal
 - b. Analog signal
 - c. Sine wave
 - d. Noise signal
4. Boolean algebra was developed by:
 - a. Charles Babbage
 - b. George Boole
 - c. Alan Turing
 - d. Maurice Karnaugh
5. How many rows does a truth table with 4 inputs have?
 - a. 4
 - b. 8
 - c. 16
 - d. 32
6. Which gate gives output 1 only when all inputs are 1?
 - a. OR
 - b. AND
 - c. NOR
 - d. XOR
7. Which pair of gates are called universal gates?
 - a. AND and OR
 - b. XOR and XNOR
 - c. NOT and AND
 - d. NAND and NOR
8. What is the output of a NOR gate when $A = 0$ and $B = 0$?
 - a. 1
 - b. 0
 - c. Unknown
 - d. Depends on the gate size
9. An XOR gate gives output 1 when:
 - a. Both inputs are 1
 - b. Both inputs are 0
 - c. The inputs are different
 - d. The inputs are the same
10. After parentheses, which operation has the highest precedence?
 - a. OR
 - b. NOT
 - c. AND
 - d. XOR
11. The minterm for the row $A = 1, B = 0$ is:
 - a. AB'
 - b. $A'B$
 - c. $A + B'$
 - d. $A' + B$
12. The columns of a 3-variable K-map (BC) are written in the order:
 - a. 00, 01, 10, 11
 - b. 00, 10, 01, 11
 - c. 11, 10, 01, 00
 - d. 00, 01, 11, 10
13. In black box testing, the tester:
 - a. Reads the source code line by line
 - b. Does not see the code and tests inputs/outputs
 - c. Is always the developer
 - d. Tests only the internal structure
14. Which OSI layer handles logical (IP) addressing and routing?
 - a. Data Link
 - b. Transport
 - c. Network
 - d. Session
15. The TCP/IP Network Access layer corresponds to which OSI layers?
 - a. 7, 6 and 5
 - b. 4
 - c. 3
 - d. 2 and 1

Section B — Short questions (10 × 3 = 30)

1. Define discrete and continuous quantities. Give two examples of each.
2. State four advantages of digital systems.
3. Differentiate between analog and digital signals (any three points).
4. Why is NOT called a unary operation? Write its truth table.
5. How many rows are needed in a truth table for 3 inputs? List all the input combinations.
6. Why are NAND and NOR called universal gates? Show how a NAND gate can be used as a NOT gate.
7. A 2-input truth table has $Y = 1$ only for rows $A=0, B=1$ and $A=1, B=0$. Write the SOP expression and name the gate.
8. Name the deliverable of each SDLC phase.
9. Differentiate between black box testing and white box testing.
10. When should TCP be used and when should UDP be used? Give one example of each.

Section C — Long questions (attempt any 3 × 10 = 30)

1. Draw the symbol, write the Boolean expression and give the truth table for each of these gates: AND, OR, NOT, NAND, NOR, XOR and XNOR.
2. A function is given as $F(A, B, C) = \sum m(1, 3, 5, 6, 7)$. (a) Make its truth table. (b) Simplify it using a 3-variable K-map, explaining each group. (c) Draw the logic diagram of the simplified expression.
3. For $Y = A \cdot B' + C$: (a) state the order in which the operations are done; (b) make the complete truth table; (c) draw the logic diagram.
4. Explain the six phases of the Software Development Life Cycle with the activities and deliverable of each phase. Use the house-building analogy.
5. Compare the Waterfall and Agile models under five headings. Explain why the Al-Noor Library Management System used Waterfall and the Al-Noor Student Mobile Application used Agile.
6. Explain the seven layers of the OSI model with the function and one protocol/device for each layer. Then show how they map onto the four layers of the TCP/IP model.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **1.1.1 Discrete and Continuous Quantities.** Answers: 1. Discrete (you count pages). 2. Continuous (height is measured and can be any value). 3. The ramp.
2. **1.1.2 Introduction to Digital Systems.** Answers: 1. ON, HIGH or TRUE. 2. Any two of: reliable (less affected by noise), accurate (no loss when copying), easy to design (two states), programmable (controlled by software).
3. **1.1.3 Analog and Digital Signals.** Answers: 1. A square wave. 2. Analog. 3. Human voice (or a traditional thermometer reading).
4. **1.1.4 Boolean Algebra.** Answers: 1. George Boole. 2. 1 (because + means OR).
5. **1.1.5 Boolean Operations.** Answers: 1. "+". 2. Because it works on only one operand (one input). 3. $B' = 0$, so $0 + 0 = 0$.
6. **1.1.6 Truth Tables.** Answers: 1. $2^4 = 16$. 2. 101.
7. **1.1.7 Logic Gates (Basic Gates: AND, OR, NOT).** Answers: 1. 0. 2. Inverter. 3. Only $A = 1$, $B = 1$.
8. **1.1.7 Universal Logic Gates (NAND and NOR).** Answers: 1. Any logic circuit can be built using only NAND gates or only NOR gates. 2. 0. 3. Join both inputs together and feed A into them: $(A \cdot A)' = A'$.
9. **1.1.7 Advanced Logic Gates (XOR and XNOR).** Answers: 1. 0. 2. XNOR. 3. $A \oplus B = A'B + AB'$.
10. **1.1.8 – 1.1.10 Logic Expressions, Minterms and Maxterms.** Answers: 1. AND. 2. $AB'C$. 3. $A + B'$.
11. **1.1.11 Logic Diagrams.** Answers: 1. The AND gate (for $B \cdot C$). 2. Two: one NOT gate (for A') and one AND gate.
12. **1.1.13 Karnaugh Maps (K-Maps).** Answers: 1. $BC = 11$. 2. Cells 2 and 3 are the row $A = 1$; B changes $\rightarrow Y = A$. 3. The whole row $A = 1$ is a group of 4 $\rightarrow Y = A$.
13. **LogiSim Evolution: Simulation Tool.** Answers: 1. In the Attribute Table (bottom left). 2. An error or short circuit.
14. **Building a Circuit in LogiSim.** Answers: 1. Square (output pin is the circle). 2. The Poke Tool (pointing finger).
15. **1.2.1 – 1.2.3 Software Development Life Cycle (SDLC).** Answers: 1. Requirement Analysis. 2. Developers. 3. Direct, Phased and Pilot release.
16. **1.2.4 The Waterfall Model.** Answers: 1. Because each phase must be completed before the next begins, in a fixed order. 2. Because its requirements were 100% fixed before coding began.
17. **1.2.4 The Agile Model.** Answers: 1. A short development cycle that delivers a working part of the software; usually 2–4 weeks. 2. Less documentation, or unpredictable end-time and cost.
18. **1.2.5 – 1.2.7 Waterfall vs Agile: Comparison and Case Studies.** Answers: 1. Waterfall. 2. Agile. 3. Waterfall (fixed, clear requirements).
19. **1.3.1 – 1.3.4 Communication Models and the OSI 7-Layer Model.** Answers: 1. Presentation layer (6). 2. Data Link layer (2). 3. UDP, because speed matters more than perfect accuracy.
20. **1.3.5 – 1.3.6 TCP/IP Model vs OSI Model.** Answers: 1. Four. 2. Network Access. 3. Application.

Answer key

Multiple choice

1. c
2. d
3. a
4. b
5. c
6. b
7. d
8. a
9. c
10. b
11. a
12. d
13. b
14. c
15. d

Short questions — model answers

1. Discrete quantities are separate, countable items with specific values (number of students in a classroom, number of cars in a parking lot). Continuous quantities can take any value within a range and flow without breaks (temperature of water, speed of a moving car).
2. Reliable (less affected by noise and interference); accurate (no loss of quality when copying); easy to design (only two states, 0 and 1); programmable (easily controlled by software).
3. Nature: analog is a continuous flow; digital has discrete values (bits, HIGH/LOW). Shape: analog is a sine wave; digital is a square wave. Reliability: analog is low (affected by noise); digital is high (resistant to noise). Examples: human voice vs computer data.
4. NOT works on only one operand (one input), so it is unary. Truth table: $A = 0 \rightarrow Y = 1$; $A = 1 \rightarrow Y = 0$.
5. $2^3 = 8$ rows: 000, 001, 010, 011, 100, 101, 110, 111.
6. Any logic circuit can be built using only NAND gates, or only NOR gates. NAND as NOT: join both inputs and feed A: $Y = (A \cdot A)' = A'$. Check: $A = 0 \rightarrow 1$, $A = 1 \rightarrow 0$.
7. Minterms: $A'B$ (row 01) and AB' (row 10). $Y = A'B + AB'$. This is the XOR gate, $Y = A \oplus B$.
8. Requirement Analysis $\rightarrow$ SRS document; System Design $\rightarrow$ Design Document; Implementation $\rightarrow$ Working Source Code; Testing $\rightarrow$ Test Reports / bug-free software; Deployment $\rightarrow$ Live Software; Maintenance $\rightarrow$ Patches / Updated Versions.
9. Black box: tester does not see the code, tests functionality (inputs/outputs), done by dedicated testers. White box: tester can see the code, tests internal logic/structure, done by developers.
10. Use TCP when accuracy matters, e.g. web browsing or email. Use UDP when speed matters more than perfection, e.g. video streaming or online gaming.

Long questions — model answers

1. Symbols as drawn in 1.1.7 (AND = D shape; OR = curved back, pointed front; NOT = triangle + bubble; NAND = AND + bubble; NOR = OR + bubble; XOR = OR with extra back curve; XNOR = XOR + bubble). Expressions: AND $Y = A \cdot B$; OR $Y = A + B$; NOT $Y = A'$; NAND $Y = (A \cdot B)'$; NOR $Y = (A + B)'$; XOR $Y = A \oplus B$; XNOR $Y = (A \oplus B)'$. Outputs for inputs 00, 01, 10, 11: AND 0,0,0,1; OR 0,1,1,1; NAND 1,1,1,0; NOR 1,0,0,0; XOR 0,1,1,0; XNOR 1,0,0,1. NOT: 0 $\rightarrow$ 1, 1 $\rightarrow$ 0.

2. (a) Truth table ($ABC \rightarrow F$): 000 $\rightarrow$ 0, 001 $\rightarrow$ 1, 010 $\rightarrow$ 0, 011 $\rightarrow$ 1, 100 $\rightarrow$ 0, 101 $\rightarrow$ 1, 110 $\rightarrow$ 1, 111 $\rightarrow$ 1.

(b) K-map:

	BC = 00	BC = 01	BC = 11	BC = 10
A = 0	0	1	1	0
A = 1	0	1	1	1

Group 1 (size 4): the two middle columns, m_1, m_3, m_5, m_7 . A changes and B changes; C = 1 stays $\rightarrow$ C. Group 2 (size 2): m_7 and m_6 in row A = 1. C changes; A = 1, B = 1 stay $\rightarrow$ AB (m_7 is shared — overlapping is allowed). $F = C + AB$. Check: C + AB is 1 for rows 1, 3, 5, 7 (C = 1) and 6, 7 (AB = 1) = {1, 3, 5, 6, 7}. ✓

(c) Logic diagram: an AND gate with inputs A and B gives AB; an OR gate takes AB and C and gives F.

3. (a) First NOT (B'), then AND ($A \cdot B'$), then OR ($+ C$).

(b) Truth table:

A	B	C	B'	A · B'	Y
0	0	0	1	0	0
0	0	1	1	0	1
0	1	0	0	0	0
0	1	1	0	0	1
1	0	0	1	1	1
1	0	1	1	1	1
1	1	0	0	0	0
1	1	1	0	0	1

(c) Logic diagram: input B goes through a NOT gate to give B' . A and B' go into an AND gate to give $A \cdot B'$. $A \cdot B'$ and C go into an OR gate to give Y. (3 gates.)

4. Requirement Analysis: meet clients, understand needs, list features; most important phase; deliverable SRS (house: asking the family what rooms they need). System Design: high-level design (architecture), low-level design (database, UI screens), flowcharts; deliverable Design Document (architect draws blueprints). Implementation: write code in Python, Java etc. from the design; deliverable Working Source Code (builders lay bricks). Testing: find and fix bugs using black box and white box testing; deliverable Test Reports / bug-free software (inspector checks the house). Deployment: release to end-users by direct, phased or pilot release; deliverable Live Software (family moves in). Maintenance: support, updates, fixing post-release issues; deliverable Patches / Updated Versions (repairs and extensions).
5. Comparison: Flexibility — Waterfall rigid, Agile very flexible. Customer involvement — Waterfall only at start and end, Agile continuous after every sprint. Delivery — Waterfall single delivery at the end, Agile frequent partial deliveries. Testing — Waterfall late in a dedicated phase, Agile continuous in every sprint. Documentation — Waterfall heavy, Agile light. The Al-Noor Library system used Waterfall because its requirements were 100% fixed before coding began, so a simple, well-documented linear process fitted. The Al-Noor Student App used Agile because teachers, parents and students kept requesting new features, so short sprints with continuous feedback were needed.
6. OSI (ISO, 1984), top to bottom: 7 Application — network services to user applications (HTTP, HTTPS, FTP, SMTP, DNS); 6 Presentation — translation, encryption, compression (SSL/TLS, JPEG, MP3, ASCII); 5 Session — opens, maintains, closes sessions (NetBIOS, RPC); 4 Transport — reliable end-to-end delivery, error checking, port numbers (TCP, UDP); 3 Network — logical IP addressing and routing (IP, ICMP, routers); 2 Data Link — physical MAC addressing and error detection in frames (Ethernet, switches); 1 Physical — raw bits over cables/wireless (cables, hubs, Wi-Fi radio). Mnemonic bottom to top: "Please Do Not Throw Sausage Pizza Away". TCP/IP mapping: Application = OSI 7, 6, 5; Transport = 4; Internet = 3; Network Access = 2, 1.

Self-assessment: I can...

- ☐ ...tell discrete from continuous quantities and analog from digital signals, and draw both waves.
- ☐ ...evaluate AND, OR and NOT expressions and follow the order of precedence.
- ☐ ...draw all seven gate symbols and write their truth tables from memory.
- ☐ ...write the SOP (minterms) and POS (maxterms) from a truth table.
- ☐ ...simplify expressions with 2- and 3-variable K-maps, including overlap and wrap-around groups.
- ☐ ...explain the six SDLC phases and choose between Waterfall and Agile for a project.
- ☐ ...list four advantages of digital systems.
- ☐ ...build a complete truth table for 2 or 3 inputs without missing a row.
- ☐ ...explain why NAND and NOR are universal gates.
- ☐ ...draw a logic diagram from an expression.
- ☐ ...build and test a simple circuit in LogiSim and read the wire colours.
- ☐ ...name the 7 OSI layers in order, state their functions, and map them to the 4 TCP/IP layers.

Chapter 2: Computational Thinking & Algorithm

Computational Thinking & Algorithm (1/3) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Computational Thinking · Algorithm · Algorithm vs Pseudocode · Decomposition · Pattern Recognition

★ **Must lock:** Algorithm, Algorithm vs Pseudocode, Decomposition

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What is a sprint and how long does it usually last?
2. Which OSI layer is responsible for encryption and compression?
3. In which model is the customer involved only at the start and the end?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

2.1 Computational Thinking

Computational Thinking (CT) is a systematic approach to solving problems.

Problem → Decomposition → Pattern recognition → Abstraction → Algorithm → Program

- Decomposition — breaking a big problem down into smaller parts.
- Pattern recognition — identifying things that repeat or follow a rule.
- Abstraction — hiding (ignoring) details that do not matter.
- Algorithms — developing clear step-by-step instructions to solve the problem.

Remember: Remember the four parts of CT with the phrase "Don't Pick Any Apple": Decomposition, Pattern recognition, Abstraction, Algorithm.

کمپیوٹیشنل تھنکنگ (Computational Thinking) مسائل حل کرنے کا ایک منظم طریقہ ہے۔

2.2 Algorithm ★ Golden

An algorithm is a step-by-step logical procedure used to solve a problem.

- Input — the data it starts with.
- Clear steps — each step has only one meaning.
- A definite end — it must finish after a limited number of steps.
- Output — the result it produces.

Reason	What it means for you
Structured approach	Algorithms provide a structured approach to problem-solving, making complex tasks manageable.
Optimisation	They optimise time and memory usage, which is crucial for large-scale applications (for example, searching millions of records).
Reusability	They can be reused for similar problems, saving time and effort. A sorting algorithm for marks can also sort prices.
Accuracy and consistency	They ensure accuracy and consistency, reducing human error. The same steps always give the same result.
Blueprint	They act as a blueprint (a plan) before actual code implementation, just like an architect's map before building a house.

Remember: Remember the five reasons as S-O-R-A-B: Structured, Optimised, Reusable, Accurate, Blueprint.

Exam: Very common short question: "Define algorithm and write its importance." Write the definition word for word — a step-by-step logical procedure used to solve a problem;...

الگورتھم (Algorithm) کسی مسئلے کو حل کرنے کا مرحلہ وار منطقی طریقہ ہے۔

2.2.2 Algorithm vs Pseudocode ★ Golden

Both algorithms and pseudocode are used in problem-solving, but they serve different purposes in the design phase.

Problem → Algorithm (what) → Pseudocode (how) → Program (code) → Output

- The algorithm says what must be done.
- The pseudocode shows how it could be implemented, using programming-like keywords such as IF, FOR and WHILE, but it still cannot be run on...

Point	Algorithm	Pseudocode
Definition	A step-by-step logical procedure to solve a problem.	A human-readable representation of an algorithm using plain English & keywords.
Nature	Conceptual and language-independent.	Semi-formal and structured, but not executable code.
Purpose	To define what needs to be done logically.	To present how it can be implemented in a readable format.
Form	Usually described in plain steps, bullets or numbered points.	Written using structured constructs (IF, FOR, WHILE) like programming.
Focus	Focuses on the logic and steps of the problem.	Focuses on representing steps clearly before coding.
Audience	For anyone trying to understand the logic (including non-programmers).	Mainly for programmers or students preparing for coding.
Format rules	No fixed format; can be informal.	Follows standard pseudocode conventions for clarity.

Remember: Teacher's analogy: an algorithm is like a recipe ("Bake a cake at 350 degrees"). Pseudocode is like a structured kitchen manual using standard verbs (SET...

Exam: "Differentiate between algorithm and pseudocode" is a favourite 4–5 mark question. Draw a two-column table and give at least five points (definition, nature, purpose,...

الگورتھم بتاتا ہے کہ کیا کرنا ہے، جبکہ سوڈو کوڈ (Pseudocode) بتاتا ہے کہ اسے کیسے کیا جا سکتا ہے۔


2.3.1 Decomposition ★ Golden

Decomposition is a problem-solving technique in which a complex task or system is broken down into smaller, manageable parts.

Vocabulary → Grammar rules → Tenses → Sentence building

- By dividing a big problem into simpler steps, it becomes easier to understand, develop and solve.
- Each small part is called a sub-task (or sub-problem).
- You solve each sub-task separately, then join the solutions to solve the whole problem.

Sub-task	Description
Learn vocabulary	Learn the words for people, actions and things (e.g., "I", "eat", "apple").
Grammar rules	Learn the sentence structure: Subject → Verb → Object.
Learn tenses	Present, past, future (e.g., "I eat" vs. "I ate").
Sentence building	Combine words using the rules to create valid sentences: "I ate an apple."

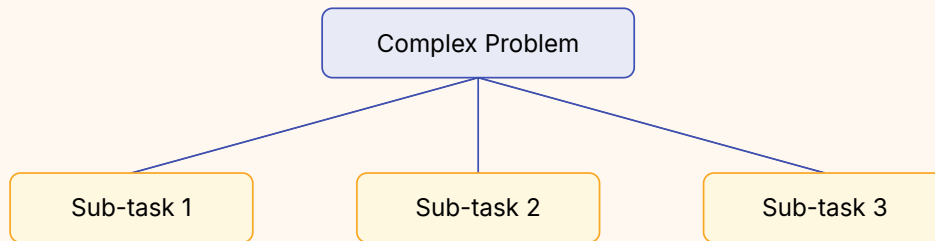

Decomposition: one complex problem is split into smaller sub-tasks.

Remember: Think of eating a big roti: you cannot eat it in one bite, so you break it into small pieces.
Decomposition = "break the roti".

Exam: Expect "Define decomposition with a real-life example" or "Explain the benefits of decomposition". Give the definition, draw the small tree (Complex Problem → Sub-task...)

ڈیکمپوزیشن (Decomposition) کا مطلب ہے کسی بڑے اور پیچیدہ مسئلے کو چھوٹے اور آسان حصوں میں تقسیم کرنا۔

2.3.2 Pattern Recognition

Pattern recognition is the process of identifying regularities, repetitions or rules in data.

- What is repeating?
- What changes in a predictable way?
- Can I generalise this (write one rule that works for every case)?

Row	Stars
1	1
2	2
3	3
...	...
N	N

```
print("*")
print("**")
print("***")
print("****")
print("*****")
```

Remember: Whenever you see "the same thing again and again, with a small change each time", think loop. Pattern recognition is the habit of spotting that.

پیٹرن ریکگنیشن (Pattern Recognition) کا مطلب ہے ڈیٹا میں دہرائی جانے والی چیزوں یا اصولوں کو پہچاننا۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Computational Thinking:** Students sometimes think computational thinking means "writing code".
- **Algorithm:** Do not write "an algorithm is a program".
- **Algorithm vs Pseudocode:** Pseudocode is not executable.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Algorithm**. Write: An algorithm is a step-by-step logical procedure used to solve a problem.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Clear steps — each step has only one meaning. (2) A definite end — it must finish after a limited number of steps. — + example.

5 marks: 3-mark structure + table: Reason / What it means for you + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Algorithm vs Pseudocode**. Write: Both algorithms and pseudocode are used in problem-solving, but they serve different purposes in the design phase.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The algorithm says what must be done. (2) The pseudocode shows how it could be implemented, using programming-like keywords such as IF, FOR and WHILE, but it still cannot be run on... — + example.

5 marks: 3-mark structure + table: Point / Algorithm / Pseudocode + the worked example from this topic.

8–10 marks: 5-mark structure + the full comparison table with every cell filled + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Decomposition**. Write: Decomposition is a problem-solving technique in which a complex task or system is broken down into smaller, manageable parts.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) By dividing a big problem into simpler steps, it becomes easier to understand, develop and solve. (2) Each small part is called a sub-task (or sub-problem). — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + the layer table with one protocol or device on each layer + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Why is an algorithm called "language-independent"?

3 marks. Explain Algorithm with two clear points and one example.

5 marks. Very common short question: "Define algorithm and write its importance." Write the definition word for word — a step-by-step logical procedure used to solve a problem; conceptual and independent of...

8 marks. Algorithm: 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. Because it describes only the logic; it is not tied to Python, C++ or any other language 3. Clear steps — each step has only one meaning.; A definite end — it must finish after a limited number of steps. 5. Use the recipe in the blue box. Model opening: An algorithm is a step-by-step logical procedure used to solve a problem. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Algorithm** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 2: Computational Thinking & Algorithm

Computational Thinking & Algorithm (2/3) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Abstraction · Sorting and Searching Algorithms · Sorting Algorithms: Bubble Sort · Sorting Algorithms: Selection Sort

★ **Must lock:** Sorting Algorithms: Bubble Sort, Sorting Algorithms: Selection Sort

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Why is an algorithm called "language-independent"?
2. Which one — algorithm or pseudocode — uses keywords like FOR and WHILE?
3. What is each smaller part of a decomposed problem called?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

2.3.3 Abstraction

Abstraction means hiding unnecessary features and focusing only on the essential ones needed to solve a problem.

Boil water → Add tea → Steep → Pour → Serve

- Necessary steps — the core logic that never changes.
- Changes based on the situation — these become variables (inputs) in the algorithm.
- Abstraction items (noise) — details you can ignore completely.

1. Necessary steps (core logic)	2. Changes based on situation (variables)	3. Abstraction items (ignore / noise)
1. Boil water 2. Add tea leaves/bag 3. Steep for a few minutes 4. Pour into cup 5. Serve	Ingredients (black, green, milk) Additions (sugar, lemon) Tools (stove vs kettle)	Brand of kettle Cup colour or design Where tea is made (kitchen, office)

Remember: Abstraction = "Keep the skeleton, drop the decoration." Ask: "If I remove this detail, does the solution still work?" If yes, it is noise.

ایبستریکشن (Abstraction) کا مطلب ہے غیر ضروری تفصیلات کو چھپا کر صرف ضروری باتوں پر توجہ دینا۔

2.4 Sorting and Searching Algorithms

Sorting and searching are both fundamental techniques of computer science.

temp = A (temp = 8) → A = B (A = 4) → B = temp (B = 8)

- They work on lists of the same data type (for example, a list of all integers or a list of all names).
- Sorting Searching Arranging a collection of items in an order.
- The order may be ascending (0–9, A–Z) or descending (9–0, Z–A).

Sorting	Searching
Arranging a collection of items in an order. The order may be ascending (0–9, A–Z) or descending (9–0, Z–A). Used to organise data.	Locating a specific element within a list to find its position or check its existence (is it there or not?).
Examples: Bubble Sort, Selection Sort	Examples: Linear Search, Binary Search
Real life: merit list arranged from highest to lowest marks.	Real life: finding your roll number in the merit list.

Trap: Position 1 in the textbook algorithm is index 0 in Python.

سارٹنگ (Sorting) کا مطلب ہے ڈیٹا کو صعودی (چھوٹے سے بڑے) یا نزولی (بڑے سے چھوٹے) ترتیب میں رکھنا۔

2.4.1 Sorting Algorithms: Bubble Sort ★ Golden

Bubble Sort is an elementary sorting algorithm that works by repeatedly comparing adjacent (side-by-side) elements and swapping them if they are in the wrong order.

Compare DATA[j] and DATA[j+1] → Left > Right? → Yes: swap → Move one step right → End of pass: largest is at the end → Repeat N-1 passes

- In each pass, the largest remaining value "bubbles up" to the end of the list, like an air bubble rising to the top of water.
- So after pass 1 the largest value is in the last place, after pass 2 the second largest is in second-last place, and so on.
- A list of N items needs N - 1 passes, and pass K makes N - K comparisons.

Comparison	Pair	Left > Right?	Action	List after
1st vs 2nd	[8, 4], 1, 9, 3	8 > 4 Yes	Swap	4, 8, 1, 9, 3
2nd vs 3rd	4, [8, 1], 9, 3	8 > 1 Yes	Swap	4, 1, 8, 9, 3
3rd vs 4th	4, 1, [8, 9], 3	8 > 9 No	No change	4, 1, 8, 9, 3
4th vs 5th	4, 1, 8, [9, 3]	9 > 3 Yes	Swap	4, 1, 8, 3, 9

Remember: Bubble = neighbours. Bubble Sort only ever compares neighbours (j and j+1). Each pass pushes the biggest bubble to the end. For descending order, just change >...

Exam: The most common question: "Sort the list ... using Bubble Sort. Show each pass." Draw one table per pass with columns Pair, Compare, Action, List after. Mark the element...

ببل سارٹ (Bubble Sort) میں ساتھ ساتھ موجود دو عناصر کا موازنہ کیا جاتا ہے اور اگر وہ غلط ترتیب میں ہوں تو ان کی جگہ بدل دی جاتی ہے۔

2.4.1 Sorting Algorithms: Selection Sort ★ Golden

Selection Sort is a simple sorting algorithm that works by repeatedly selecting the smallest element from the unsorted portion of the list and moving it to its correct position at the front.

Fix position $K \rightarrow$ Compare $DATA[K]$ with $DATA[PTR]$, $PTR = K+1 \dots N \rightarrow DATA[K] > DATA[PTR]? \text{ swap} \rightarrow$ End of pass: smallest is at $K \rightarrow K = K + 1$

- Think of it as filling seats from the front: first find who belongs in position 1, then position 2, and so on.
- In the textbook version, the element at position K is compared with every element after it; whenever a smaller one is found, the two are...
- So at the end of pass K , the K -th smallest value sits in position K .

Compare	List	Pos1 > PosX?	Action	List after
Pos1 vs Pos2	[8], [4], 1, 9, 3	$8 > 4$ Yes	Swap	4, 8, 1, 9, 3
Pos1 vs Pos3	[4], 8, [1], 9, 3	$4 > 1$ Yes	Swap	1, 8, 4, 9, 3
Pos1 vs Pos4	[1], 8, 4, [9], 3	$1 > 9$ No	No change	1, 8, 4, 9, 3
Pos1 vs Pos5	[1], 8, 4, 9, [3]	$1 > 3$ No	No change	1, 8, 4, 9, 3

Remember: Teacher's tip — spot the difference: in Selection Sort the inner loop starts at $outer + 1$ and compares with the fixed position $DATA[outer]$. In Bubble Sort the...

Exam: Typical questions: "Sort ... using Selection Sort, showing all steps", "Differentiate between Bubble Sort and Selection Sort" and "Why is Selection Sort not stable?" In...

سلیکشن سارٹ (Selection Sort) میں فہرست کے غیر ترتیب شدہ حصے سے سب سے چھوٹا عدد چن کر اسے سامنے اس کی درست جگہ پر رکھا جاتا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Abstraction:** Do not confuse abstraction with decomposition.
- **Sorting and Searching Algorithms:** Position 1 in the textbook algorithm is index 0 in Python.
- **Sorting Algorithms: Bubble Sort:** The slides say the time grows "exponentially".

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Sorting Algorithms: Bubble Sort**. Write: Bubble Sort is an elementary sorting algorithm that works by repeatedly comparing adjacent (side-by-side) elements and swapping them if they are in the wrong order.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) In each pass, the largest remaining value "bubbles up" to the end of the list, like an air bubble rising to the top of water. (2) So after pass 1 the largest value is in the last place, after pass 2 the second largest is in second-last place, and so on. — + example.

5 marks: 3-mark structure + table: Comparison / Pair / Left > Right? / Action / List after + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Sorting Algorithms: Selection Sort**. Write: Selection Sort is a simple sorting algorithm that works by repeatedly selecting the smallest element from the unsorted portion of the list and moving it to its correct position at the front.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Think of it as filling seats from the front: first find who belongs in position 1, then position 2, and so on. (2) In the textbook version, the element at position K is compared with every element after it; whenever a smaller one is found, the two are... — + example.

5 marks: 3-mark structure + table: Compare / List / Pos1 > PosX? / Action / List after + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. How many passes and comparisons does Bubble Sort need for 6 elements?

3 marks. Explain Sorting Algorithms: Bubble Sort with two clear points and one example.

5 marks. The most common question: "Sort the list ... using Bubble Sort. Show each pass." Draw one table per pass with columns Pair, Compare, Action, List after. Mark the element fixed at the end after every...

8 marks. Sorting Algorithms: Bubble Sort: 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. 5 passes; $5 + 4 + 3 + 2 + 1 = 15$ comparisons 3. In each pass, the largest remaining value "bubbles up" to the end of the list, like an air bubble rising to the top of water.; So after pass 1 the largest value is in the last place, after pass 2 the second largest is in second-last place,... 5. Use the recipe in the blue box. Model opening: Bubble Sort is an elementary sorting algorithm that works by repeatedly comparing adjacent (side-by-side) elements and swapping them if they are in the wrong... 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Sorting Algorithms: Bubble Sort** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 2: Computational Thinking & Algorithm

Computational Thinking & Algorithm (3/3) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Searching Algorithms: Linear Search · Searching Algorithms: Binary Search · Evaluation Criteria of Algorithm · How to Decide Which Algorithm to Use

★ **Must lock:** Searching Algorithms: Binary Search

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. How many passes and comparisons does Bubble Sort need for 6 elements?
2. In Selection Sort, where does the inner loop start?
3. What is "noise" in abstraction?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

2.4.2 Searching Algorithms: Linear Search

Linear Search, also known as sequential search, works by examining each element in the list one by one, from the start, until the target is found (or the list ends).

PTR = first → DATA[PTR] = FindValue? → Yes: ValueFound = 1, exit → No: PTR = PTR + 1 → List ended? print "Not Found"

- It works on both sorted and unsorted data.
- A flag variable (here ValueFound) starts at 0 and becomes 1 when the item is found.
- After the loop, the flag tells us whether to print the item or "Not Found".

Step	Element checked	Condition (== 7)	Result
1	8	8 == 7 ?	Not found
2	3	3 == 7 ?	Not found
3	6	6 == 7 ?	Not found
4	1	1 == 7 ?	Not found
5	7	7 == 7 ?	Found! (Exit loop)

Remember: Linear Search is like looking for your friend in a queue by checking every face from the front. Best case: 1 check (first person). Worst case: N checks (last...)

لینیئر سرچ (Linear Search) کو ترتیب وار تلاش (Sequential Search) بھی کہتے ہیں۔

2.4.2 Searching Algorithms: Binary Search ★ Golden

Binary Search is a highly efficient search algorithm that works by repeatedly dividing the search interval in half.

BEG = first, END = last → MID = $\text{INT}((\text{BEG} + \text{END}) / 2)$ → Item = DATA[MID]? Found → Item < DATA[MID]: END = MID-1 →
Else: BEG = MID+1 → Repeat while BEG ≤ END

- BEG (low) — first position of the current part.
- END (high) — last position of the current part.
- MID = $\text{INT}((\text{BEG} + \text{END}) / 2)$ — the middle position. INT means "drop the decimal part".
- Equal → found, stop.

Step	BEG (low)	END (high)	MID	DATA[MID]	Compare	Action
1	1	9	$\text{INT}(10/2) = 5$	5	$7 > 5$	BEG = 6 (go right)
2	6	9	$\text{INT}(15/2) = 7$	7	$7 = 7$	Found, LOC = 7

Remember: Binary Search is how you find a word in a dictionary: open the middle, decide "before or after?", and throw away half the book each time. "Sorted first, then..."

Exam: You will usually be given a sorted list and an item and asked to "search using Binary Search, showing all steps". Always draw a table with BEG, END, MID, DATA[MID],...

بائری سرچ (Binary Search) ایک تیز رفتار طریقہ ہے جو ہر قدم پر تلاش کے حصے کو آدھا کر دیتا ہے۔

2.5 Evaluation Criteria of Algorithm

Many algorithms can solve the same problem.

- To judge which is better, we evaluate them on three criteria: correctness, efficiency and clarity.

Input	Operation (divide by 2, find remainder)	Remainder == 0?	Result
3	3 / 2 (Quotient = 1, Remainder = 1)	No	Odd
6	6 / 2 (Quotient = 3, Remainder = 0)	Yes	Even
15	15 / 2 (Quotient = 7, Remainder = 1)	No	Odd

```
for number in [3, 6, 15]:
    remainder = number % 2
    if remainder == 0:
        print(number, "remainder", remainder, "→ Even")
    else:
        print(number, "remainder", remainder, "→ Odd")
```

Remember: Remember C-E-C: Correct (right answer, always finishes), Efficient (fast and light), Clear (easy to read).

کسی الگورتھم کو تین معیارات پر پرکھا جاتا ہے: درستگی (Correctness) یعنی درست نتیجہ دے، غیر معمولی صورتوں کو سنبھالے اور ہمیشہ ختم...

2.6 How to Decide Which Algorithm to Use

Before choosing an algorithm, ask three questions: What is the input size?

What is the task? → Need order? → Sorting algorithm → Need to find? Is data sorted? → No → Linear Search → Yes → Binary Search

- What is the input size? (10 items or 10 million?)
- Is the data sorted?
- Do we need speed or memory efficiency?
- If searching on unsorted data → use Linear Search.

Algorithm	Type	Best case	Worst case	Extra memory	Needs sorted data?	Stable?
Bubble Sort	Sorting	$O(N^2)$ as written; $O(N)$ with an early-stop check	$O(N^2)$	None — $O(1)$	—	Yes
Selection Sort	Sorting	$O(N^2)$	$O(N^2)$	None — $O(1)$	—	No
Linear Search	Searching	$O(1)$ (first item)	$O(N)$ (last item / absent)	None — $O(1)$	No	—
Binary Search	Searching	$O(1)$ (item at first MID)	$O(\log N)$	None — $O(1)$	Yes	—

Remember: Two keywords decide most exam answers: "sorted?" and "how big?". Unsorted or small → Linear. Sorted and big → Binary.

الگورتھم چننے سے پہلے دیکھیں کہ ڈیٹا کتنا بڑا ہے، ترتیب شدہ ہے یا نہیں، اور ہمیں رفتار چاہیے یا میموری کی بچت۔

Computational Thinking & Algorithm

13 single-page lessons · 6 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- **Computational thinking** is systematic problem solving using decomposition, pattern recognition, abstraction and algorithms.
- An **algorithm** is a step-by-step logical procedure to solve a problem; it is conceptual and language-independent.
- Algorithms give structure, optimise time and memory, are reusable, ensure accuracy and act as a blueprint for code.
- **Pseudocode** is a human-readable, structured representation of an algorithm using keywords like IF, FOR and WHILE; it is not executable.
- An algorithm defines *what* to do; pseudocode shows *how* to implement it.
- **Decomposition** breaks a big problem into smaller sub-tasks; it reduces complexity, helps debugging and promotes reusability.
- **Pattern recognition** finds repetitions and rules (Row N = N stars) and is the foundation of loops.
- **Abstraction** hides noise and keeps only essential steps; situational details become variables.
- Sorting arranges data (ascending or descending); searching locates an element's position or existence.
- **Bubble Sort** compares and swaps adjacent elements; the largest value moves to the end each pass; N – 1 passes; stable; $O(N^2)$.
- **Selection Sort** brings the smallest remaining value to the front each pass; inner loop starts at outer + 1; fewer swaps; not stable; $O(N^2)$.
- **Linear Search** checks items one by one; works on unsorted data; $O(N)$ worst case.
- **Binary Search** halves the search range using BEG, MID and END; needs sorted data; $O(\log N)$ — about 20 steps for 1 million items.
- Algorithms are evaluated on **correctness** (checked with trace tables and edge cases), **efficiency** (time and space) and **clarity**.
- Choose by asking: input size, sorted or not, speed or memory? Unsorted → Linear; sorted → Binary; needs order → sort.

Key terms

Term	Meaning	اردو
Computational thinking	A systematic approach to solving problems using decomposition, patterns, abstraction and algorithms.	کمپیوٹیشنل سوچ
Algorithm	A step-by-step logical procedure to solve a problem, independent of any language.	الگورتھم، مرحلہ وار طریقہ حل
Pseudocode	A human-readable, structured but non-executable representation of an algorithm.	سوڈو کوڈ، فرضی کوڈ
Decomposition	Breaking a complex problem into smaller, manageable parts.	تقسیم کاری
Sub-task	One small part of a decomposed problem.	ذیلی کام
Pattern recognition	Identifying regularities, repetitions or rules in data.	نمونے کی پہچان
Abstraction	Hiding unnecessary details and focusing on essentials.	تجريد، غير ضروری تفصیل چھپانا
Noise	Details that do not affect the solution and can be ignored.	فالتو تفصیلات
Sorting	Arranging items in ascending or descending order.	ترتیب دینا
Searching	Locating an element in a list to find its position or existence.	تلاش کرنا
Ascending order	Smallest to largest (0–9, A–Z).	صعودی ترتیب
Descending order	Largest to smallest (9–0, Z–A).	نزولی ترتیب

Computational Thinking & Algorithm

75 marks • 1 hour 15 minutes • no notes • no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 13 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define • Explain • Example • Diagram • Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. An algorithm is best defined as:
 - a. a programming language
 - b. a step-by-step logical procedure to solve a problem
 - c. a type of computer hardware
 - d. compiled machine code
2. Pseudocode is:
 - a. executable machine code
 - b. a symbol used in flowcharts
 - c. a Python library
 - d. a human-readable representation of an algorithm using plain English and keywords
3. Breaking a complex problem into smaller, manageable parts is called:
 - a. decomposition
 - b. abstraction
 - c. pattern recognition
 - d. compilation
4. In the "making tea" example, ignoring the brand of the kettle is an example of:
 - a. decomposition
 - b. sorting
 - c. abstraction
 - d. searching
5. Pattern recognition forms the foundation of:
 - a. variables
 - b. loops
 - c. comments
 - d. input devices
6. Bubble Sort works by comparing:
 - a. the first and last elements
 - b. every element with the middle element
 - c. adjacent elements
 - d. random pairs of elements
7. After the first pass of Bubble Sort (ascending) on 8, 4, 1, 9, 3, the list is:
 - a. 1, 3, 4, 8, 9
 - b. 4, 8, 1, 9, 3
 - c. 1, 8, 4, 9, 3
 - d. 4, 1, 8, 3, 9
8. Binary Search works only on a list that is:
 - a. sorted
 - b. unsorted
 - c. stored in a linked list
 - d. of strings only
9. Linear Search is also known as:
 - a. binary search
 - b. sequential search
 - c. bubble search
 - d. random search
10. How many passes does Bubble Sort need to sort N elements?
 - a. N
 - b. N + 1
 - c. N - 1
 - d. 2N
11. In Selection Sort pseudocode, the inner loop starts at:
 - a. 0
 - b. N - 1
 - c. outer - 1
 - d. outer + 1
12. The worst-case time complexity of Binary Search is:
 - a. $O(\log N)$
 - b. $O(N)$
 - c. $O(N^2)$
 - d. $O(1)$
13. About how many steps does Binary Search need, at most, to find an item among 1 million sorted elements?
 - a. 2
 - b. 20
 - c. 1,000
 - d. 1,000,000
14. Which sorting algorithm is NOT stable?
 - a. Bubble Sort
 - b. Both are stable
 - c. Selection Sort
 - d. Neither sorts data
15. Which of the following is NOT an evaluation criterion of an algorithm?
 - a. Correctness
 - b. Efficiency
 - c. Clarity
 - d. Popularity

Section B — Short questions (10 × 3 = 30)

1. Define computational thinking and name its four components.
2. Write any four points on the importance of algorithms.
3. Give three differences between an algorithm and pseudocode.
4. What is decomposition? Explain it with the example of learning a new language.
5. What three questions should you ask during pattern recognition? Apply them to the triangle of stars.
6. Define abstraction. In the "making tea" example, name two variables and two noise items.
7. Differentiate between sorting and searching.
8. Why does Binary Search require a sorted list? State two disadvantages of Binary Search.
9. Give two differences between Bubble Sort and Selection Sort.
10. Name the three evaluation criteria of an algorithm. What is a trace table used for?

Section C — Long questions (attempt any 3 × 10 = 30)

1. Sort the list **5, 2, 7, 1, 6** in ascending order using Bubble Sort. Show every comparison of every pass in a table, and state the total number of comparisons and swaps. Then write the Python code for Bubble Sort.
2. Sort the list **6, 2, 9, 5, 1** in ascending order using Selection Sort (textbook method). Show every comparison of every pass and count the swaps. Also state why Selection Sort is called "blind" to an already sorted list.
3. The sorted list is **3, 8, 12, 17, 23, 31, 40, 52, 66** (Python indexes 0–8). Using Binary Search, show a low / mid / high table to search for (a) 40 and (b) 20. For each, state how many comparisons Linear Search would need.
4. Write the algorithm and pseudocode for Linear Search. Dry-run it on **8, 3, 6, 1, 7, 2, 4, 5** for FindValue = 2 and for FindValue = 9, and give two advantages and two disadvantages of Linear Search.
5. A school wants a program that reads the marks of 5 subjects for every student and prints each student's total, percentage and grade. Apply decomposition, pattern recognition and abstraction to this problem, and write a short algorithm.
6. A library has 50,000 book IDs stored in sorted order, and the librarian searches it hundreds of times a day. (a) Which search algorithm should be used and why? (b) What is the maximum number of comparisons for Linear and for Binary Search? (c) Explain the three evaluation criteria you would use to judge the chosen program.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

- 2.1 Computational Thinking.** Answers: 1. Decomposition, pattern recognition, abstraction, algorithms. 2. Before coding (it is planning the solution). 3. Between human logic and machine code.
- 2.2 Algorithm.** Answers: 1. Because it describes only the logic; it is not tied to Python, C++ or any other language. 2. Any two: structured approach, optimise time/memory, reusable, accurate and consistent, blueprint before coding. 3. Step 1: Start; Step 2: Read A and B; Step 3: SUM = A + B; Step 4: Print SUM; Step 5: End.
- 2.2.2 Algorithm vs Pseudocode.** Answers: 1. Pseudocode. 2. Algorithm. 3. No; it is semi-formal and not executable.
- 2.3.1 Decomposition.** Answers: 1. A sub-task (sub-problem). 2. Example: list subjects and teachers; decide periods per subject per week; place periods in days so no teacher has two classes at once. 3. Reduces complexity, helps in debugging, promotes reusability.
- 2.3.2 Pattern Recognition.** Answers: 1. Loops. 2. 8 stars (Row N = N stars). 3. Term N = $2 \times N$ (each term adds 2).
- 2.3.3 Abstraction.** Answers: 1. Unnecessary details that do not affect the solution. 2. A variable (it changes with the situation). 3. Decomposition breaks a problem into parts; abstraction hides details that are not important.
- 2.4 Sorting and Searching Algorithms.** Answers: 1. D, C, B, A. 2. It temporarily holds one value so that two values can be swapped without losing either.
- 2.4.1 Sorting Algorithms: Bubble Sort.** Answers: 1. 5 passes; $5 + 4 + 3 + 2 + 1 = 15$ comparisons. 2. (5,1) swap $\rightarrow$ 1, 5, 4; (5,4) swap $\rightarrow$ 1, 4, 5. 3. Pass 1: 9, 4, 7, 2; Pass 2: 9, 7, 4, 2; Pass 3: 9, 7, 4, 2.
- 2.4.1 Sorting Algorithms: Selection Sort.** Answers: 1. At outer + 1 (PTR = K + 1). 2. Pos1 vs Pos2: $7 > 2$ swap $\rightarrow$ 2, 7, 5; Pos1 vs Pos3: $2 > 5$ no $\rightarrow$ 2, 7, 5. 3. Bubble Sort.
- 2.4.2 Searching Algorithms: Linear Search.** Answers: 1. Sequential search. 2. 6 comparisons (2 is in position 6). 3. It is a flag: 0 means not found yet, 1 means found; it decides what to print after the loop.
- 2.4.2 Searching Algorithms: Binary Search.** Answers: 1. The list must be sorted. 2. $\text{INT}(15/2) = 7$. 3. MID = 4 (value 4, go right, BEG = 5) $\rightarrow$ MID = $\text{INT}(13/2) = 6$ (value 6, go right, BEG = 7) $\rightarrow$ MID = $\text{INT}(15/2) = 7$ (value 7, go right, BEG = 8) $\rightarrow$ MID = 8 (value 8, found). Four comparisons.
- 2.5 Evaluation Criteria of Algorithm.** Answers: 1. Correctness, efficiency, clarity. 2. The item is not in the list (or the list is empty, or the item is the last element). 3. Time (speed) and space (memory).
- 2.6 How to Decide Which Algorithm to Use.** Answers: 1. Linear Search. 2. $O(\log N)$. 3. Selection Sort ($O(N^2)$ in both).

Answer key

Multiple choice

1. b
2. d
3. a
4. c
5. b
6. c
7. d
8. a
9. b
10. c
11. d
12. a
13. b
14. c
15. d

Short questions — model answers

1. Computational thinking is a systematic approach to solving problems. Its four components are decomposition (breaking down), pattern recognition (finding repetitions), abstraction (hiding unnecessary details) and algorithms (writing step-by-step solutions).
2. Algorithms (1) provide a structured approach that makes complex tasks manageable; (2) optimise time and memory usage, crucial for large applications; (3) can be reused for similar problems; (4) ensure accuracy and consistency, reducing human error; (5) act as a blueprint before coding. (Any four.)
3. (1) An algorithm is a step-by-step logical procedure; pseudocode is a human-readable representation of it using English and keywords. (2) An algorithm is conceptual and language-independent; pseudocode is semi-formal and structured but not executable. (3) An algorithm has no fixed format and is for anyone; pseudocode uses IF/FOR/WHILE, follows conventions and is mainly for programmers.
4. Decomposition is breaking a complex task into smaller, manageable parts. Learning a language is decomposed into: vocabulary (words like "I", "eat", "apple"), grammar rules (Subject → Verb → Object), tenses ("I eat" vs "I ate") and sentence building (combining words with rules).
5. Ask: What is repeating? What changes in a predictable way? Can I generalise this? For the star triangle: stars repeat in every row; each row has one more star than the previous; generalisation: Row N = N stars, so one loop can print it.
6. Abstraction means hiding unnecessary features and focusing on the essential ones. Variables: type of tea (black, green, milk), additions (sugar, lemon), tool (stove or kettle) — any two. Noise: brand of kettle, cup colour or design, where tea is made — any two.
7. Sorting arranges a collection of items in ascending or descending order to organise data (e.g., Bubble Sort, Selection Sort). Searching locates a specific element in a list to find its position or whether it exists (e.g., Linear Search, Binary Search).
8. Binary Search decides to go left or right by comparing with the middle value; this decision is only valid if all smaller values are on the left and larger on the right, i.e., the list is sorted. Disadvantages: needs sorted data; needs random access (arrays, not linked lists); code is more complex and prone to off-by-one errors. (Any two.)
9. (1) Bubble Sort compares adjacent elements; Selection Sort compares a fixed position with all later elements. (2) Bubble Sort moves the largest to the end each pass; Selection Sort moves the smallest to the front. Also: Bubble Sort is stable, Selection Sort is not; Selection Sort makes fewer swaps.
10. Correctness, efficiency (time and space) and clarity (readability). A trace table records the values of variables step by step during a dry run, so we can check that the output matches the expected result and so prove correctness.

Long questions — model answers

1. Bubble Sort on 5, 2, 7, 1, 6

Pass	Pair	Left > Right?	List after
1	[5, 2]	Yes, swap	2, 5, 7, 1, 6
1	[5, 7]	No	2, 5, 7, 1, 6
1	[7, 1]	Yes, swap	2, 5, 1, 7, 6
1	[7, 6]	Yes, swap	2, 5, 1, 6, 7
2	[2, 5]	No	2, 5, 1, 6, 7
2	[5, 1]	Yes, swap	2, 1, 5, 6, 7
2	[5, 6]	No	2, 1, 5, 6, 7
3	[2, 1]	Yes, swap	1, 2, 5, 6, 7
3	[2, 5]	No	1, 2, 5, 6, 7
4	[1, 2]	No	1, 2, 5, 6, 7

Total comparisons = 4 + 3 + 2 + 1 = 10; total swaps = 3 + 1 + 1 + 0 = 5. Sorted list: 1, 2, 5, 6, 7.

```
data = [5, 2, 7, 1, 6]
n = len(data)
for outer in range(n - 1):
    for inner in range(n - 1 - outer):
        if data[inner] > data[inner + 1]:
            temp = data[inner]
            data[inner] = data[inner + 1]
            data[inner + 1] = temp
print(data)
```

OUTPUT
[1, 2, 5, 6, 7]

2. Selection Sort (textbook method) on 6, 2, 9, 5, 1

Pass	Compare	Values	Action	List after
1	Pos1 vs Pos2	6 > 2	Swap	2, 6, 9, 5, 1
1	Pos1 vs Pos3	2 > 9	No	2, 6, 9, 5, 1
1	Pos1 vs Pos4	2 > 5	No	2, 6, 9, 5, 1
1	Pos1 vs Pos5	2 > 1	Swap	1, 6, 9, 5, 2
2	Pos2 vs Pos3	6 > 9	No	1, 6, 9, 5, 2
2	Pos2 vs Pos4	6 > 5	Swap	1, 5, 9, 6, 2
2	Pos2 vs Pos5	5 > 2	Swap	1, 2, 9, 6, 5
3	Pos3 vs Pos4	9 > 6	Swap	1, 2, 6, 9, 5
3	Pos3 vs Pos5	6 > 5	Swap	1, 2, 5, 9, 6
4	Pos4 vs Pos5	9 > 6	Swap	1, 2, 5, 6, 9

10 comparisons, 7 swaps. Sorted list: 1, 2, 5, 6, 9. (With the classic one-swap-per-pass method the passes give 1, 2, 9, 5, 6 → 1, 2, 9, 5, 6 → 1, 2, 5, 9, 6 → 1, 2, 5, 6, 9.)

Selection Sort is "blind" to a sorted list because its loops have fixed limits: it always makes all $N(N-1)/2$ comparisons, even if the list is already in order. It has no way to notice that no swaps were needed and stop early.

3. (a) Search for 40

Step	low	high	mid	data[mid]	Compare	Action
1	0	8	$(0+8)//2 = 4$	23	$40 > 23$	low = 5
2	5	8	$(5+8)//2 = 6$	40	$40 = 40$	Found at index 6

Binary: 2 comparisons. Linear Search: 40 is the 7th item, so 7 comparisons.

(b) Search for 20

Step	low	high	mid	data[mid]	Compare	Action
1	0	8	4	23	$20 < 23$	high = 3
2	0	3	$(0+3)//2 = 1$	8	$20 > 8$	low = 2
3	2	3	$(2+3)//2 = 2$	12	$20 > 12$	low = 3
4	3	3	3	17	$20 > 17$	low = 4
—	4	3	low > high, so the loop stops: Not Found			

Binary: 4 comparisons. Linear Search must check all 9 items before saying "Not Found".

4. Algorithm and pseudocode: as in section 2.4.2 (Start; DATA, N, FindValue, ValueFound := 0; repeat for PTR = 1 to N: if DATA[PTR] = FindValue then ValueFound = 1 and exit; after the loop print DATA[PTR] if ValueFound = 1, else "Not Found"; End).

FindValue = 2:

Step	1	2	3	4	5	6
Element	8	3	6	1	7	2
== 2?	No	No	No	No	No	Yes — exit

Found at position 6 after 6 comparisons; ValueFound = 1; prints 2.

FindValue = 9: 8, 3, 6, 1, 7, 2, 4, 5 are all checked (8 comparisons), none equals 9, ValueFound stays 0, so "Data Not Found" is printed.

Advantages: works on sorted and unsorted data; very simple code; fast for small lists; no extra space. Disadvantages: up to N checks (1 million for 1 million items); time grows linearly; inefficient if the same list is searched thousands of times. (Any two of each.)

5. **Decomposition:** (1) input a student's 5 marks; (2) calculate total; (3) calculate percentage = total ÷ 500 × 100; (4) decide grade; (5) print result; (6) repeat for the next student.

Pattern recognition: the same steps repeat for every student, and the same "add a mark" step repeats for every subject — so use a loop over students and a loop over subjects.

Abstraction: keep only roll number, marks, total, percentage and grade; ignore noise such as the student's address, uniform or the colour of the result card. The number of students can be a variable.

Algorithm: Step 1: Start. Step 2: Read number of students S. Step 3: Repeat Steps 4–8 for each student. Step 4: TOTAL = 0. Step 5: Repeat 5 times: read MARK, TOTAL = TOTAL + MARK. Step 6: PER = TOTAL / 500 × 100. Step 7: If PER ≥ 80 grade "A1", else if PER ≥ 70 "A", else if PER ≥ 60 "B", else if PER ≥ 50 "C", else "Fail" (school's own grading scale). Step 8: Print TOTAL, PER, GRADE. Step 9: End.

6. (a) **Binary Search**, because the data is already sorted, it is large (50,000 items) and it is searched many times a day, so the time saved per search adds up; Linear Search would be far slower.

(b) Linear Search worst case: 50,000 comparisons. Binary Search worst case: 16 comparisons, because $2^{15} = 32,768 < 50,000 \leq 2^{16} = 65,536$, so 16 halvings are enough to reduce 50,000 items to one.

(c) **Correctness:** it must return the right position for IDs that exist, say "Not Found" for missing IDs (edge cases: first ID, last ID, missing ID), and always stop. **Efficiency:** time $O(\log N)$ and no extra memory ($O(1)$). **Clarity:** meaningful names like low, mid, high, clear steps and good indentation so another programmer can maintain it.

Self-assessment: I can...

- ☐ define computational thinking and name its four parts.
- ☐ draw a table comparing algorithm and pseudocode on at least five points.
- ☐ find a pattern in data and turn it into a loop.
- ☐ dry-run Bubble Sort pass by pass and count comparisons and swaps.
- ☐ trace Linear Search with a step table, including the "not found" case.
- ☐ state best and worst time complexity for all four algorithms.
- ☐ define an algorithm and give five reasons it is important.
- ☐ decompose a real-life problem into sub-tasks and explain three benefits.
- ☐ separate necessary steps, variables and noise using abstraction.
- ☐ dry-run Selection Sort pass by pass and explain why it is not stable.
- ☐ trace Binary Search with a BEG / MID / END table and explain why it needs sorted data.
- ☐ evaluate an algorithm for correctness, efficiency and clarity, and choose the right algorithm for a situation.

Chapter 3: Programming Fundamentals

Programming Fundamentals (1/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Programming · Programming Language Types · Career Growth with Python · Integrated Development Environment (IDE) · Visual Studio Code (VS Code)

★ **Must lock:** none — still copy every table

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What is the crucial condition for Binary Search to work?
2. What is another name for Linear Search?
3. Name the three evaluation criteria of an algorithm.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.1 Programming

Computers are "dumb" machines. They are very fast, but they cannot think or do anything on their own.

- A set of instructions given to a computer is called a program.
- The language used to write these instructions is called a programming language.
- Writing programs is called programming, and the person who writes them is a programmer.

```
print("Hello")
```


Remember: Program = recipe, programmer = recipe writer, computer = cook who follows every line exactly. If the recipe is wrong, the food is wrong. The cook does not fix...

کمپیوٹر خود سے کچھ نہیں سوچ سکتا۔

3.1.1 Programming Language Types

Programming languages are classified into three main types, depending on how close they are to the computer's own language (binary 0s and 1s) or to human language.

Type	Description	Examples
Low level	Closest to the native language of the computer (binary 0s and 1s). Very difficult for humans to read and write.	Machine language (binary)
Mid level	Bridges the gap. It can access hardware but is easier to read than binary because it uses short words called mnemonics (e.g. MOV , ADD).	Assembly language
High level	Designed to be easy for humans to read and write. Uses English-like words.	C++, Java, Python

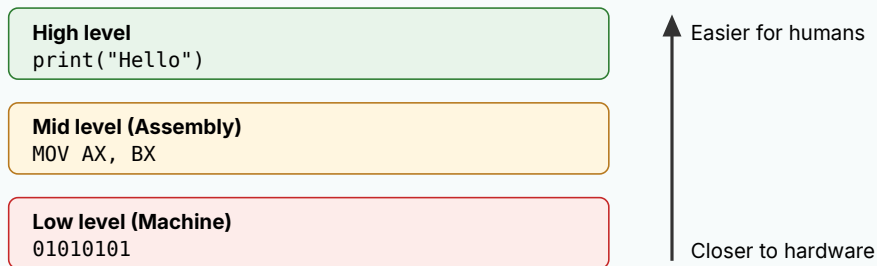

The three levels of programming languages, with a sample line from each.

Remember: "Low = Like the machine, High = Human." Mid level sits in the Middle and uses Mnemonics (both start with M).

پروگرامنگ زبانوں کی تین اقسام ہیں: لو لیول (Low Level) جو بائری 0 اور 1 میں ہوتی ہے، مڈ لیول (Mid Level) یعنی اسمبلی جو مختصر الف...

3.2 Career Growth with Python

Python is one of the most in-demand languages in the world.

- Software Development: build desktop and web applications.
- Data Science and Data Analysis: analyse data, create reports and make predictions.
- Artificial Intelligence and Machine Learning: develop intelligent systems, chatbots and recommendation algorithms (like "videos you may...").
- Web Development: use frameworks such as Django and Flask to build websites.

```
# Python
print("Hello")
```

Remember: Six careers — remember "S-D-A-W-A-C": Software, Data, AI, Web, Automation, Cybersecurity.

پائنتھن سیکھ کر آپ سافٹ ویئر ڈیولپمنٹ، ڈیٹا سائنس، مصنوعی ذہانت (AI)، ویب ڈیولپمنٹ، آٹومیشن اور سائبر سیکیورٹی جیسے شعبوں میں کیریئر بنا سکتے ہیں۔

3.3 Integrated Development Environment (IDE)

An IDE (Integrated Development Environment) is a software tool that helps programmers write, run and manage code in one place.

- Code Editor: where you write and edit code.
- Syntax Highlighting: colours different parts of the code (keywords, strings, numbers) to make it easier to read.
- Auto-completion: suggests code while you type (type pri and it offers print).
- Run/Execute Tool: runs the program with one click.

Remember: IDE features — "E-S-A-R-D": Editor, Syntax highlighting, Auto-completion, Run, Debugger.

آئی ڈی ای (IDE) ایک ایسا سافٹ ویئر ہے جس میں کوڈ لکھنا، چلانا اور غلطیاں درست کرنا ایک ہی جگہ ممکن ہوتا ہے۔

3.3.1 Visual Studio Code (VS Code)

VS Code is a free, lightweight and powerful code editor made by Microsoft and widely used for Python.

Install Python → Install VS Code → Extensions: install "Python" (Microsoft) → Explorer: new file hello.py → Type code → Click ► Run

- By default it is not a full IDE, but it becomes one when you install extensions (add-ons), such as the Python extension by Microsoft.

Element	Description
1. Top Menu Bar	Control over files, editing, navigation and workspace (File, Edit, Selection, View, Go, Run).
2. Side Bar	Contains the core tools: Explorer, Search, Source Control, Run & Debug and Extensions.
3. Explorer	Shows project files and folders. Helps you create, open and manage your Python files.
4. Search	Finds and replaces text in the open file or across the whole project.
5. Source Control	Connects with Git (a version control system) to track changes, undo mistakes and collaborate.
6. Run & Debug	Runs code, finds errors, pauses at specific lines and lets you inspect variables.
7. Extensions	Like an App Store for VS Code. Add features such as the Python extension, Prettier or Python Debugger.



A simplified VS Code window: menu bar, side bar, Explorer and the code editor.

```
print("Hello, World!")
```

Remember: Extensions are the "App Store" of VS Code: just as apps give your phone new abilities, extensions give VS Code new abilities.

وی ایس کوڈ (VS Code) ایک مفت اور ہلکا پھلکا کوڈ ایڈیٹر ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Programming:** Students often think the computer "understands" what they want.
- **Programming Language Types:** "Low level" does not mean "bad" or "weak".
- **Career Growth with Python:** Django and Flask are web frameworks (for websites), not AI tools.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

ACADEMY DRILL

Timed 10 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What is a program?

3 marks. Explain Programming with two clear points and one example.

5 marks. Write a 5-mark answer on Programming: definition, two points, a labelled diagram or table, and one example.

Answers: 1. A set of instructions given to a computer to perform a task 3. The language used to write these instructions is called a programming language.; Writing programs is called programming, and the person who writes them is a programmer. 5. Use the recipe in the blue box. Model opening: Computers are "dumb" machines.

BATCH HOMEWORK

Write a 5-mark answer on **Programming** using Define · Explain · Example · Diagram. Learn the Check yourself questions so you can answer them in 60 seconds at the start of next class.

How you will mark it tomorrow: Collect next class. Stamp full / half / zero against the 5-mark recipe.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 3: Programming Fundamentals

Programming Fundamentals (2/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Fundamentals of Python Programming · Variables · Data Types in Python · Input and Output Handling · Operators and Operands: Arithmetic and Assignment

★ **Must lock:** Fundamentals of Python Programming, Variables, Data Types in Python, Operators and Operands: Arithmetic and Assignment

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What is a program?
2. Which level is MOV AX, BX?
3. Name two Python web frameworks.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.4 Fundamentals of Python Programming ★ Golden

The basic structure of a Python program is simple and clear.

- A program takes data, processes it using statements, and finally shows output.
- Python runs the statements top to bottom, one after another (sequentially).
- A statement is one complete instruction, usually written on one line, such as `print("Hi")` or `x = 5`.

```
# This is a comment. It explains the code below.  
print("Hello, World!")  
if 5 > 2:  
    # The space before 'print' is the indentation  
    print("Five is greater than two!")
```

Remember: Think of indentation like the points and sub-points in your notebook. Sub-points are written a little to the right to show they "belong" to the main point. A...

Exam: Common questions: "What is the purpose of comments?", "Why is indentation important in Python?", "How is Python different from C++/Java in defining blocks?" Write:...

پائنتھن پروگرام اوپر سے نیچے ترتیب سے چلتا ہے۔

3.4.1 Variables ★ Golden

A variable is a named space in computer memory used to store data.

- Can contain letters, numbers and underscores (_) only — no spaces or symbols like -, @, \$.
- Must start with a letter or underscore, NOT a number (1name is invalid).
- Are case-sensitive: age and Age are two completely different variables.
- Cannot be a Python keyword (a reserved word such as if, for, while, else, True).

```
name = "Ali"  
age = 16  
my_height = 5.7  
score1 = 100
```

Remember: Choose meaningful names: total_marks is far clearer than tm or x. Use lowercase words joined by underscores (this style is called snake_case).

Exam: A favourite question: "Which of these variable names are valid? Give reasons." Check each name against all four rules and state the rule broken, e.g. "2nd_place —...

ویری ایبل (Variable) میموری میں ایک نام والی جگہ ہے جس میں ڈیٹا رکھا جاتا ہے، بالکل ایک لیبل لگے ڈیے کی طرح۔

3.4.1 Data Types in Python ★ Golden

A data type specifies the kind of data a variable holds — a whole number, a decimal, text, True/False, or a collection of items.

- The type decides what you can do with the data (you can divide numbers, but not names).
- Python has several built-in data types:

Name	Type	Description	Example
Integer	<code>int</code>	Whole numbers without decimals (positive, negative or zero).	<code>age = 16</code>
Floating point	<code>float</code>	Numbers with a decimal point.	<code>height = 5.7</code>
String	<code>str</code>	Text data, enclosed in quotes (" " or ' ').	<code>name = "Sammy" or year = "2026"</code>
Boolean	<code>bool</code>	Logical value: True or False (capital T / F).	<code>is_student = True</code>
List	<code>list</code>	Ordered, changeable collection in square brackets [] .	<code>marks = [85, 90, 75]</code>
Tuple	<code>tuple</code>	Ordered, unchangeable sequence in parentheses () .	<code>coords = (10, 20)</code>
Dictionary	<code>dict</code>	Key : value pairs in curly braces { } .	<code>student = {"name": "Ahmed", "age": 16}</code>
Set	<code>set</code>	Unordered collection of unique items (no duplicates).	<code>vowels = {'a', 'e', 'i'}</code>

Remember: Brackets decide the collection: [] List (changeable), () Tuple (locked), { } with key:value = Dictionary, { } with single items = Set (unique). Think: a list...

Exam: Expect: "Name any four data types with examples" or "Differentiate list and tuple". For a difference question, use a two-column table: list — [], changeable, e.g. marks...

ڈیٹا ٹائپ (Data Type) بتاتی ہے کہ ویری ایبل میں کس قسم کا ڈیٹا ہے۔

3.4.2 Input and Output Handling

Output — the `print()` function. A function is a named, ready-made piece of code that does a job when you call it with brackets.

- Items separated by commas are printed with one space between them.
- An f-string (a string with `f` before the quote) lets you put variables directly inside `{ }`. It is the fastest and most readable way to...

Remember: "`input()` always gives a string." If you plan to do maths, wrap it: `int(input(...))` for whole numbers, `float(input(...))` for decimals. Read it from the inside...

`print()` اسکرین پر معلومات دکھاتا ہے اور `input()` صارف سے معلومات لیتا ہے۔

3.4.3 Operators and Operands: Arithmetic and Assignment ★ Golden

An operand is the value or variable being worked on.

- An operator is the symbol that performs the action.
- Together they form an expression, which Python evaluates to a single value.
- In $10 + 20$: 10 is an operand, + is the operator, 20 is an operand, and the result is 30.

Operator	Purpose	Example	Result
+	Addition	$5 + 3$	8
-	Subtraction	$10 - 4$	6
*	Multiplication	$4 * 2$	8
/	Division (result is always a float)	$9 / 2$	4.5
//	Floor division (drops the decimal part)	$9 // 2$	4
%	Modulus (remainder)	$9 \% 2$	1
**	Exponentiation (power)	$2 ** 3$	8

```
print(5 + 3)
print(10 - 4)
print(4 * 2)
print(9 / 2)
print(9 // 2)
print(9 % 2)
print(2 ** 3)
print(8 / 2)
```

Remember: Three kinds of division: / = exact answer (float), // = quotient only ("floor"), % = remainder only. A number is even when $n \% 2 == 0$.

Exam: You will be asked to evaluate expressions such as $17 // 5$, $17 \% 5$, $2 ** 4$ or to trace compound assignment. Show each step and write the final value with its type (e.g....

آپرینڈ (Operand) وہ ویلیو ہے جس پر عمل ہوتا ہے اور آپریٹر (Operator) وہ علامت ہے جو عمل کرتی ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Fundamentals of Python Programming:** IndentationError?
- **Variables:** = is not "equals" in the maths sense.
- **Data Types in Python:** True and False must start with a capital letter.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Fundamentals of Python Programming**. Write: The basic structure of a Python program is simple and clear.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) A program takes data, processes it using statements, and finally shows output. (2) Python runs the statements top to bottom, one after another (sequentially). — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Variables**. Write: A variable is a named space in computer memory used to store data.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Must start with a letter or underscore, NOT a number (1name is invalid). (2) Are case-sensitive: age and Age are two completely different variables. — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Data Types in Python**. Write: A data type specifies the kind of data a variable holds — a whole number, a decimal, text, True/False, or a collection of items.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The type decides what you can do with the data (you can divide numbers, but not names). (2) Python has several built-in data types: — + example.

5 marks: 3-mark structure + table: Name / Type / Description / Example + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Predict the output:

3 marks. Explain Fundamentals of Python Programming with two clear points and one example.

5 marks. Common questions: "What is the purpose of comments?", "Why is indentation important in Python?", "How is Python different from C++/Java in defining blocks?" Write: comments start with # and are...

8 marks. Fundamentals of Python Programming: 5-mark answer plus a complete truth table and a labelled gate / logic diagram.

Answers: 1. B then D on separate lines (line 1 is a comment; $3 > 7$ is false so C is skipped) 3. A program takes data, processes it using statements, and finally shows output.; Python runs the statements top to bottom, one after another (sequentially). 5. Use the recipe in the blue box. Model opening: The basic structure of a Python program is simple and clear. 8. Same 5-mark body + a complete truth table and a labelled gate / logic diagram + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Fundamentals of Python Programming** using the recipe in this topic. Include a complete truth table and a labelled gate / logic diagram. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 3: Programming Fundamentals

Programming Fundamentals (3/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Relational, Logical and Membership Operators · Bitwise Operators · Control Structures · Sequence · Selection Statements: if and if-else

★ **Must lock:** Relational, Logical and Membership Operators, Bitwise Operators, Control Structures, Selection Statements: if and if-else

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Predict the output:
2. Valid or invalid? `_total`, `roll-no`, `class`, `marks2026`, `2marks`
3. What is the data type of each? `3.0`, `"3"`, `3`, `False`, `[3]`

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.4.3 Relational, Logical and Membership Operators ★ Golden

3. Relational (comparison) operators compare two values and return a Boolean (True or False).

- Relational (comparison) operators compare two values and return a Boolean (True or False).
- They are used in conditions.

Op	Description	Example (a = 10, b = 5)	Result
=	Equal to	a == b	False
≠	Not equal to	a != b	True
>	Greater than	a > b	True
<	Less than	a < b	False
≥	Greater than or equal to	a ≥ 10	True
≤	Less than or equal to	a ≤ b	False

```
a = 10
b = 5
print(a == b)
print(a != b)
print(a > b)
print(a < b)
print(a ≥ 10)
print(a ≤ b)
```

Remember: AND is strict, OR is generous. AND is like a teacher who needs both homework and attendance; OR is like a shop that accepts cash or card. Order of evaluation:...

Exam: Typical: "Evaluate a > b and b > 3 for a = 10, b = 5" or "Write the truth table of and/or". Write each sub-condition's value first, then combine. Remember: == compares,...

ریشٹل آپریٹرز (Relational Operators) دو ویلیوز کا موازنہ کر کے True یا False دیتے ہیں۔

3.4.3 Bitwise Operators ★ Golden

6. Bitwise operators treat numbers as binary digits (bits: 0s and 1s) and work on them bit by bit, column by column.

- AND (&) — gives 1 only if both bits are 1, otherwise 0.
- OR (|) — gives 1 if at least one bit is 1.
- XOR (^) — gives 1 if the bits are different, 0 if they are the same.
- NOT (~) — inverts all bits (0 → 1, 1 → 0). In Python the result is the number made negative, minus 1: $\sim x = -(x + 1)$. So ~ 10 gives -11.

Bit A	Bit B	A & B	A B	A ^ B	~A
0	0	0	0	0	1
0	1	0	1	1	1
1	0	0	1	1	0
1	1	1	1	0	0

```
a = 10
b = 6
print(bin(a), bin(b))
print(a & b)
print(a | b)
print(a ^ b)
print(~a)
```

Remember: Shortcuts: $x > n = x // 2^n$, $\sim x = -x - 1$. For AND/OR/XOR always write both numbers in binary, one under the other, with the same number of bits.

Exam: Exams ask you to "evaluate $12 \& 10$, $12 | 10$, $12 \wedge 10$, ~ 5 , $7 >> 1$ showing binary working". Marks are given for the binary conversion and column working, not just the...

بٹ وائز آپریٹرز (Bitwise Operators) اعداد کو بائری میں بدل کر ہر بٹ پر الگ الگ کام کرتے ہیں۔

3.5 Control Structures ★ Golden

Control structures decide the order in which statements are executed in a program (the "flow of control").

- Sequence — do the steps one after another, top to bottom.
- Selection — choose a path depending on a condition (if, else).
- Repetition — repeat steps (loops: for, while).

Remember: Remember "S-S-R": Sequence, Selection, Repetition — "Step, Select, Repeat".


Exam: "Name and explain the three basic control structures" is a very common short question. Give a one-line definition and a two-line Python example for each.

کنٹرول اسٹرکچرز (Control Structures) طے کرتے ہیں کہ پروگرام کی ہدایات کس ترتیب سے چلیں گی۔

3.5.1 Sequence

Sequence means statements are executed one after another, strictly from top to bottom, in the exact order they are written.

- This is the default behaviour of Python.
- No statement is skipped or repeated.



Sequence: control flows straight down from one statement to the next.

```
print("Enter two numbers")
a = int(input("Enter first number: ")) # Step 1: Input
b = int(input("Enter second number: ")) # Step 2: Input
total = a + b # Step 3: Process
print("Sum =", total) # Step 4: Output
```


Remember: Sequence is like reading a page: line 1, then line 2, then line 3. Most programs follow the pattern Input → Process → Output.

سیکوئنس (Sequence) کا مطلب ہے کہ ہدایات بالکل اسی ترتیب سے ایک کے بعد ایک اوپر سے نیچے چلتی ہیں جس ترتیب سے لکھی گئی ہیں۔

3.5.2 Selection Statements: if and if-else ★ Golden

Selection changes the flow of a program based on a condition — an expression that is either True or False.

- It helps a program respond intelligently to different situations.
- The if statement executes a block of code only if the condition is True.
- If the condition is False, the block is completely skipped.

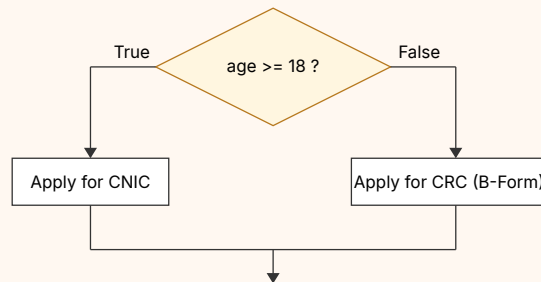

An if-else statement: one diamond (condition), two paths, then the paths join again.

```
if condition:
    statement(s)    # runs only when condition is True
```

Remember: Formatting rule: put a colon (:) after if and else, and indent the code inside the blocks. else never has a condition of its own.

Exam: Asked as: "Write a program that inputs a number and prints whether it is even or odd / positive or negative / pass or fail." Write the full program with `int(input())`,...

سلیکشن (Selection) میں پروگرام شرط کی بنیاد پر فیصلہ کرتا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Relational, Logical and Membership Operators:** Do not confuse = (assignment, "store") with == (comparison, "is it equal?").
- **Bitwise Operators:** Do not mix up the logical and bitwise operators: and/or/not work on True/False conditions, while &/|/~ work on the bits of integers.
- **Control Structures:** Selection and repetition both use conditions, but they are different: selection runs a block at most once; repetition can run a block many...

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Relational, Logical and Membership Operators**. Write: 3.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Relational (comparison) operators compare two values and return a Boolean (True or False). (2) They are used in conditions. — + example.

5 marks: 3-mark structure + table: Op / Description / Example (a = 10, b = 5) / Result + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Bitwise Operators**. Write: 6.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) OR (|) — gives 1 if at least one bit is 1. (2) XOR (^) — gives 1 if the bits are different, 0 if they are the same. — + example.

5 marks: 3-mark structure + table: Bit A / Bit B / A & B / A | B / A ^ B / ~A + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Control Structures**. Write: Control structures decide the order in which statements are executed in a program (the "flow of control").

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Selection — choose a path depending on a condition (if, else). (2) Repetition — repeat steps (loops: for, while). — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Predict the output:

3 marks. Explain Relational, Logical and Membership Operators with two clear points and one example.

5 marks. Typical: "Evaluate $a > b$ and $b > 3$ for $a = 10$, $b = 5$ " or "Write the truth table of and/or". Write each sub-condition's value first, then combine. Remember: $==$ compares, $=$ assigns.

8 marks. Relational, Logical and Membership Operators: 5-mark answer plus a complete truth table and a labelled gate / logic diagram.

Answers: 1. True and True. (True and False = False; False or True = True. not True = False; $2 == 3$. Relational (comparison) operators compare two values and return a Boolean (True or False).; They are used in conditions. 5. Use the recipe in the blue box. Model opening: 3. 8. Same 5-mark body + a complete truth table and a labelled gate / logic diagram + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Relational, Logical and Membership Operators** using the recipe in this topic. Include a complete truth table and a labelled gate / logic diagram. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 3: Programming Fundamentals

Programming Fundamentals (4/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Selection Statements: if-elif-else and Nested if · Repetition Statements: the for Loop and range() · The while Loop, break and continue · Nested Loops and for vs while · Practical Activity: Shopping Bill Calculator

★ **Must lock:** Selection Statements: if-elif-else and Nested if, Repetition Statements: the for Loop and range(), The while Loop, break and continue, Nested Loops and for vs while

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Predict the output:
2. Predict the output (show the binary working):
3. Name the three basic control structures.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.5.2 Selection Statements: if-elif-else and Nested if ★ Golden

3. The if-elif-else statement handles many conditions.

- The if-elif-else statement handles many conditions.
- (elif is short for "else if".) Python checks the conditions from top to bottom.
- As soon as it finds a True condition, it runs that block and ignores all the rest.
- If none is True, the else block runs.

marks	>= 80?	>= 70?	>= 60?	Output
92	True	(not checked)	(not checked)	A-1 Grade
75	False	True	(not checked)	A Grade
60	False	False	True	B Grade
41	False	False	False	Fail or below B

Remember: In an if-elif-else ladder, put the strictest condition first (highest marks first). Think of a ladder: you step off at the first rung that fits.

Exam: Grade-calculator programs (if-elif-else) and "largest of three numbers" are very common long questions. Check conditions in the right order, indent nested blocks...

if-elif-else میں کئی شرطیں اوپر سے نیچے ترتیب سے دیکھی جاتی ہیں، اور جو شرط سب سے پہلے درست ہو اسی کا بلاک چلتا ہے، باقی سب چھوڑ دی جاتی ہیں۔

3.5.3 Repetition Statements: the for Loop and range() ★ Golden

A repetition statement (loop) lets a block of code run again and again.

- This greatly reduces the need to write the same code many times.
- Each single run of the loop body is called an iteration.
- The for loop is used when the exact number of iterations is known.

Syntax	How it works	Example	Values produced
<code>range(stop)</code>	From 0 up to, but not including , stop.	<code>range(3)</code>	0 1 2
<code>range(start, stop)</code>	From start up to, but not including, stop.	<code>range(2, 5)</code>	2 3 4
<code>range(start, stop, step)</code>	From start towards stop, jumping by step.	<code>range(1, 6, 2)</code>	1 3 5

```
for i in range(3):  
    print(i)
```

Remember: range stops one short: `range(1, 11)` gives 1 to 10. To include a number n , write `range(..., n + 1)`.

Number of values in `range(a, b)` = $b - a$.

Exam: Expect "predict the output" questions on `range()` with a step, and programs such as "print a table", "sum of first n numbers", "even numbers from 1 to 20". Always state...


لوپ (Loop) کوڈ کے ایک بلاک کو بار بار چلاتا ہے۔

3.5.3 The while Loop, break and continue ★ Golden

2. The while loop repeats a block of code as long as a condition remains True.

- break — exits (stops) the loop entirely and immediately.
- continue — skips the rest of the current iteration and jumps to the next one.

count	count <= 3?	Printed	count after update
1	True	1	2
2	True	2	3
3	True	3	4
4	False	—	loop ends

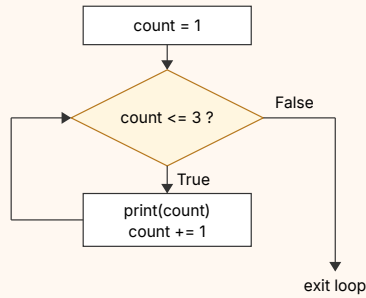

A while loop: test the condition, run the body, go back and test again.

```
count = 1
while count ≤ 3:
    print(count)
    count += 1 # VERY IMPORTANT: update the condition!
```

Remember: break = "exit the room"; continue = "skip this turn". For every while loop, check the I-T-U rule: Initialise, Test, Update.

Exam: "Differentiate break and continue with examples" and "What is an infinite loop?" are frequent. Use the two side-by-side programs above with their outputs — examiners...

while لوپ اس وقت تک چلتا رہتا ہے جب تک شرط درست (True) رہے، اور یہ تب استعمال ہوتا ہے جب پہلے سے معلوم نہ ہو کہ کتنی بار دہرانا ہے۔

3.5.3 Nested Loops and for vs while ★ Golden

A nested loop is a loop inside another loop.

- The inner loop runs completely, from start to finish, for every single iteration of the outer loop.
- If the outer loop runs 2 times and the inner loop runs 3 times, the inner body runs $2 \times 3 = 6$ times.

for loop	while loop
Used when the number of iterations is known .	Used when the number of iterations is unknown (condition-based).
Automatically updates the loop variable.	Requires a manual update of the counter (risk of an infinite loop).
Cleaner and shorter for counting tasks.	Better for dynamic situations (like "keep playing until the user says Stop").
<code>for i in range(1, 4): print(i)</code>	<code>i = 1 / while i ≤ 3: / print(i) / i += 1</code>

```
for outer in range(1, 3):      # runs 2 times (1, 2)
    for inner in range(1, 4):  # runs 3 times per outer (1, 2, 3)
        print(f"Outer: {outer}, Inner: {inner}")
```

Remember: Ask yourself: "Do I know how many times?" Yes → for. "Do I only know when to stop?" → while. Nested loops are like a clock: the minute hand (inner loop) goes...

Exam: "Differentiate between for and while loops" (give three points and an example of each) and "How many times will the inner statement run?" (multiply the counts) are...

نیسٹڈ لوپ (Nested Loop) میں ایک لوپ دوسرے لوپ کے اندر ہوتا ہے، اور باہر والے لوپ کے ہر چکر میں اندر والا لوپ شروع سے آخر تک مکمل چلتا ہے۔

Practical Activity: Shopping Bill Calculator

This program combines all three control structures: sequence (steps in order), selection (checking "done", checking the price, checking for a discount) and repetition (a while loop that keeps adding items).

- It uses a flag — a Boolean variable (shopping) that controls when the loop stops.
- `item.lower()` converts the text to lowercase so that "done", "Done" and "DONE" all work.

Step	item	price	total	count
1	Rice	3000.0	3000.0	1
2	Soap	-50.0 (invalid, not added)	3000.0	1
3	Oil	2500.0	5500.0	2
4	DONE → shopping = False	—	5500.0	2

Remember: Label the parts of any program with comments, as here: `# REPETITION`, `# SELECTION`. It helps you, your teacher and the examiner see the structure.

یہ شاپنگ بل پروگرام تینوں کنٹرول اسٹرکچرز کو ملا کر بنایا گیا ہے: `while` لوپ سے اشیاء بار بار شامل ہوتی ہیں، `if-else` سے غلط قیمت

رو...

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Selection Statements: if-elif-else and Nested if:** Wrong order gives wrong answers.
- **Repetition Statements: the for Loop and range():** Writing `range(1, 10)` to print 1 to 10 misses 10 — an "off-by-one" logical error.
- **The while Loop, break and continue:** Infinite loop — find the error: `count = 1 while count <= 5: print(count) count` is never updated, so `count <= 5` stays True and the program...

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Selection Statements: if-elif-else and Nested if**. Write: 3.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) (elif is short for "else if".) Python checks the conditions from top to bottom. (2) As soon as it finds a True condition, it runs that block and ignores all the rest. — + example.

5 marks: 3-mark structure + table: marks / `>= 80?` / `>= 70?` / `>= 60?` / Output + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Repetition Statements: the for Loop and range()**. Write: A repetition statement (loop) lets a block of code run again and again.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) This greatly reduces the need to write the same code many times. (2) Each single run of the loop body is called an iteration. — + example.

5 marks: 3-mark structure + table: Syntax / How it works / Example / Values produced + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **The while Loop, break and continue**. Write: 2.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) break — exits (stops) the loop entirely and immediately. (2) continue — skips the rest of the current iteration and jumps to the next one. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Predict the output:

3 marks. Explain Selection Statements: if-elif-else and Nested if with two clear points and one example.

5 marks. Grade-calculator programs (if-elif-else) and "largest of three numbers" are very common long questions. Check conditions in the right order, indent nested blocks carefully (8 spaces for the inner...

8 marks. Selection Statements: if-elif-else and Nested if: 5-mark answer plus a complete truth table and a labelled gate / logic diagram.

Answers: 1. Warm ($30 > 35$ is False; $30 > 25$ is True, so the rest are skipped even though $30 > 15$ is also True) 3. (elif is short for "else if".) Python checks the conditions from top to bottom.; As soon as it finds a True condition, it runs that block and ignores all the rest. 5. Use the recipe in the blue box. Model opening: 3. 8. Same 5-mark body + a complete truth table and a labelled gate / logic diagram + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Selection Statements: if-elif-else and Nested if** using the recipe in this topic. Include a complete truth table and a labelled gate / logic diagram. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 3: Programming Fundamentals

Programming Fundamentals (5/5) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Libraries in Python · Built-in Libraries · Third-Party Libraries · Debugging Code in Python

★ **Must lock:** none — still copy every table

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Predict the output:
2. Predict the output:
3. Predict the output:

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.6 Libraries in Python

A library (also called a module) is a collection of pre-written code that offers ready-made functions.

- Instead of writing a square-root algorithm from scratch, you import math and call `math.sqrt()`.
- Libraries save time, reduce bugs and let you stand on other programmers' work.
- There are five common ways to import a library.

Method	Syntax	How you call the function
1. Entire module	<code>import math</code>	<code>math.sqrt(25)</code>
2. Alias (nickname)	<code>import math as m</code>	<code>m.sqrt(16)</code>
3. Specific function	<code>from math import sqrt</code>	<code>sqrt(36)</code>
4. Several functions	<code>from math import sqrt, pi</code>	<code>sqrt(9), pi</code>
5. Everything (*)	<code>from math import *</code>	<code>sqrt(64)</code> — avoid this

Trap: `from math import *` dumps every name into your program.

لائبریری پہلے سے لکھا ہوا کوڈ ہے جسے `import` سے پروگرام میں لایا جاتا ہے۔

3.6.1 Built-in Libraries

Built-in libraries come pre-installed with Python.

- You only import them; you do not run pip.
- Three that every Class XI student must know are math, random and datetime.

```
import math
print(math.pi)
print(math.ceil(4.3))
print(math.floor(4.9))
print(math.pow(2, 4))
print(math.sqrt(81))
```

Remember: ceil always rounds up (ceiling); floor always rounds down. round() (built-in, not in math) goes to the nearest integer and is a different function.

math حساب کے لیے، random بے ترتیب عدد کے لیے اور datetime تاریخ وقت کے لیے بنی ہوئی لائبریریاں ہیں۔

3.6.2 Third-Party Libraries

Third-party libraries are written by the community.

- They are not bundled with Python, so you install them from a terminal with `pip install library_name` and then import them as usual.

Library	Primary use
NumPy	Heavy numerical computing and large arrays
Pandas	Data analysis; table-like data (CSV / Excel)
Matplotlib	Data visualisation — graphs and charts
TensorFlow / PyTorch	Artificial intelligence and machine learning

```
pip install pandas
import pandas as pd
```

Trap: `pip` is a terminal command, not a Python statement.

تھرڈ پارٹی لائبریریاں پائتھن کے ساتھ نہیں آتیں، انہیں `pip install` سے انسٹال کیا جاتا ہے۔

3.7 Debugging Code in Python

Debugging is the process of identifying, tracing and fixing bugs so a program works correctly.

- Every program you write will have bugs.
- The skill is not "never make a mistake"; it is "find the mistake quickly".
- Python errors fall into three families:

Type	When it appears	What you notice	Example
Syntax error	Before the program even starts	Python refuses to run	<code>print("Hello" — missing)</code>
Runtime error (exception)	While the program is running	It crashes with a traceback	<code>x = 10 / 0 → ZeroDivisionError</code>
Logical error	Program finishes "successfully"	The output is wrong	<code>area = length + width</code> instead of <code>*</code>

```
x = int("abc")
```

Remember: Fix syntax errors first (the program cannot start). Then run it. Then check the output against a hand-worked example to catch logical errors.

Exam: Examiners love "identify the error type" questions. Ask: (1) Does it refuse to start? → syntax. (2) Does it crash mid-run? → runtime. (3) Does it run but give a wrong...

ڈیباگنگ یعنی غلطی ڈھونڈ کر ٹھیک کرنا۔

Programming Fundamentals

24 single-page lessons · 12 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- A program is a set of instructions; programming languages are low-level (close to hardware) or high-level (close to English). Python is a high-level, interpreted, readable language.
- Python is widely used in web development, data science, AI and automation — skills that grow a career in Pakistan and abroad.
- An IDE (such as VS Code plus the Python extension) combines an editor, a terminal, a debugger and syntax highlighting.
- Variables store values; Python types are dynamic. Core types: `int`, `float`, `str`, `bool`, `list`, `dict`.
- `print()` displays output; `input()` always returns a **string** — convert with `int()` or `float()` before arithmetic.
- Operators: arithmetic (`+`, `-`, `*`, `/`, `//`, `%`, `**`), assignment (`=`, `+=`, ...), relational, logical (`and`, `or`, `not`), membership (`in`), bitwise (`&`, `|`, `^`, `~`, `<<`, `>>`).
- Control structures: sequence (top to bottom), selection (`if` / `if-else` / `if-elif-else` / nested), repetition (`for` / `while`).
- `range(stop)` goes 0 ... stop-1; `range(start, stop, step)` jumps by step. `break` leaves a loop; `continue` skips one iteration.
- Use `for` when the count is known; use `while` when you wait for a condition (and always update that condition).
- Libraries extend Python. Built-in: `math`, `random`, `datetime`. Third-party (need `pip`): NumPy, Pandas, Matplotlib, TensorFlow.
- Errors: syntax (grammar, will not run), runtime (crash, traceback), logical (runs, wrong answer).

Key terms

Term	Meaning	اردو
Program	A set of instructions a computer can follow.	پروگرام
High-level language	A language close to English (Python, Java, C++).	اعلیٰ سطحی زبان
Interpreter	Runs a program line by line without a separate compile step.	انٹرپریٹر
IDE	Software that combines editor, terminal and debugger.	انٹیگریٹڈ ڈویلپمنٹ انوائرنمنٹ
Variable	A named box that holds a value.	متغیر
Data type	The kind of value: <code>int</code> , <code>float</code> , <code>str</code> , <code>bool</code> , <code>list</code> , <code>dict</code> .	ڈیٹا کی قسم
Operator	A symbol that performs an operation on operands.	عامل
Operand	A value an operator works on.	معمول
Sequence	Instructions executed from top to bottom.	تسلسل
Selection	Choosing a path with <code>if</code> / <code>else</code> .	انتخاب
Repetition / loop	Repeating a block with <code>for</code> or <code>while</code> .	تکرار / لوپ
Nested	A structure placed inside another of the same kind.	تو در تو

Programming Fundamentals

75 marks · 1 hour 15 minutes · no notes · no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 24 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define · Explain · Example · Diagram · Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. Python is best described as a:
 - a. low-level compiled language
 - b. high-level interpreted language
 - c. machine language
 - d. hardware description language
2. `input("Age: ")` always returns a:
 - a. int
 - b. float
 - c. str
 - d. bool
3. The value of `17 // 5` is:
 - a. 3.4
 - b. 2
 - c. 3
 - d. 3.0
4. The value of `17 % 5` is:
 - a. 2
 - b. 3
 - c. 3.4
 - d. 0
5. `2 ** 3` equals:
 - a. 6
 - b. 8
 - c. 9
 - d. 5
6. Which operator is bitwise AND?
 - a. `and`
 - b. `&&`
 - c. `&`
 - d. `^`
7. `list(range(2, 5))` is:
 - a. `[2, 3, 4, 5]`
 - b. `[2, 3, 4]`
 - c. `[2, 5]`
 - d. `[0, 1, 2, 3, 4]`
8. A `while` loop is preferred when:
 - a. you know the exact number of repeats
 - b. you must wait for a condition
 - c. you never need a counter
 - d. the body must run exactly once
9. `break` inside a loop:
 - a. skips one iteration
 - b. restarts the loop
 - c. leaves the loop immediately
 - d. pauses for input
10. `from math import sqrt` lets you write:
 - a. `math.sqrt(9)` only
 - b. `sqrt(9)`
 - c. `import.sqrt(9)`
 - d. `m.sqrt(9)`
11. Which library is built-in?
 - a. Pandas
 - b. NumPy
 - c. random
 - d. Matplotlib
12. `print("Hi")` is a:
 - a. syntax error
 - b. runtime error
 - c. logical error
 - d. warning only
13. `10 / 0` is a:
 - a. syntax error
 - b. runtime error
 - c. logical error
 - d. style error
14. `area = length + width` when you meant to multiply is a:
 - a. syntax error
 - b. runtime error
 - c. logical error
 - d. import error
15. `math.ceil(4.3)` is:
 - a. 4
 - b. 4.0
 - c. 5
 - d. 4.3

Section B — Short questions (10 × 3 = 30)

1. Differentiate between a compiler and an interpreter.
2. Why must the result of `input()` often be converted with `int()` ?
3. State the difference between `/` and `//` with one example each.
4. Write the truth table of the logical operator `and` for two Boolean values.
5. Explain `if-elif-else` . Why is the order of conditions important?
6. Differentiate between a `for` loop and a `while` loop.
7. What do `break` and `continue` do?
8. Name two built-in and two third-party Python libraries and their uses.
9. Differentiate between syntax, runtime and logical errors with one example each.
10. What three pieces of information does a Python traceback give you?

Section C — Long questions (attempt any 3 × 10 = 30)

1. Write a complete Python program that reads a student's marks (0–100) and prints the grade: 80+ A-1, 70–79 A, 60–69 B, otherwise Fail. Include input conversion and a sample run.
2. Write a program that prints all even numbers from 0 to 10 using `range` , then rewrite it with a `while` loop. Dry-run both.
3. Trace this nested loop and write every line of output:

```
for o in range(1, 3):
    for i in range(1, 4):
        print(o, i)
```
4. A shop gives 20% discount if the bill is 5000 or more. Write a program that keeps reading item prices until the user types 0, prints the total, the discount and the amount to pay. Show a sample run with prices 3000, 2500, 0.
5. Classify each bug and write the corrected line:
 - (a) `print("Total is", total`
 - (b) `avg = total / 0` when there are no items
 - (c) `discount = total + 0.20` when 20% off was intended.
6. Explain how you would use `math` , `random` and `datetime` in a small "lucky student of the day" program for a class of 40. Write the code.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

- 3.1 Programming.** Answers: 1. A set of instructions given to a computer to perform a task. 2. Because they cannot think or do anything without instructions; they only follow exactly what they are told.
- 3.1.1 Programming Language Types.** Answers: 1. Mid level (assembly language). 2. Java. 3. Any one: system software, operating systems, high-performance games.
- 3.2 Career Growth with Python.** Answers: 1. Django and Flask. 2. Artificial Intelligence and Machine Learning.
- 3.3 Integrated Development Environment (IDE).** Answers: 1. Many programming tools (editor, runner, debugger) are combined in one program. 2. Auto-completion.
- 3.3.1 Visual Studio Code (VS Code).** Answers: 1. Source Control. 2. No; it becomes an IDE by installing extensions (e.g. the Python extension). 3. Explorer.
- 3.4 Fundamentals of Python Programming.** Answers: 1. B then D on separate lines (line 1 is a comment; $3 > 7$ is false so C is skipped). 2. 4 spaces (or 1 tab).
- 3.4.1 Variables.** Answers: 1. `_total` valid; `roll-no` invalid (hyphen); `class` invalid (keyword); `marks2026` valid; `2marks` invalid (starts with a digit). 2. `Karachi` — `city` and `City` are different variables.
- 3.4.1 Data Types in Python.** Answers: 1. float, str, int, bool, list. 2. 2 (the set keeps only 5 and 6). 3. str, because it contains hyphens and you never do arithmetic on it.
- 3.4.2 Input and Output Handling.** Answers: 1. 3333 then 12 (a string times a number repeats the string). 2. `input()` returns the string "21", and a string times 2 repeats it. Fix: `num = int(input("Enter a number: "))`.
- 3.4.3 Operators and Operands: Arithmetic and Assignment.** Answers: 1. 3 1 3.5 then 49. 2. 3 ($10 + 5 = 15$; $15 // 4 = 3$).
- 3.4.3 Relational, Logical and Membership Operators.** Answers: 1. True and True. (True and False = False; False or True = True. not True = False; $2 == 2.0$ is True; False or True = True.) 2. = is assignment; a comparison needs ==. Python reports `SyntaxError: invalid syntax`. Maybe you meant '=' or ':' instead of '='? Fix: `if x == 5:`
- 3.4.3 Bitwise Operators.** Answers: 1. 8 14 6 and -6 3 24. $12 = 1100$, $10 = 1010$: AND = $1000 = 8$, OR = $1110 = 14$, XOR = $0110 = 6$. $\sim 5 = -(5 + 1) = -6$. $7 = 111 \rightarrow 11 = 3$. $3 = 11 \rightarrow 11000 = 24$ (3×8). 2. `0b1101` ($8 + 4 + 1$).
- 3.5 Control Structures.** Answers: 1. Sequence, selection, repetition. 2. Repetition (a while loop).
- 3.5.1 Sequence.** Answers: 1. 10 8 — y was calculated when x was still 4; changing x later does not change y. 2. Sequence.
- 3.5.2 Selection Statements: if and if-else.** Answers: 1. Fail then Done. 2. Missing colon after `if n > 0`; else must not have a condition — write `else:`.
- 3.5.2 Selection Statements: if-elif-else and Nested if.** Answers: 1. Warm ($30 > 35$ is False; $30 > 25$ is True, so the rest are skipped even though $30 > 15$ is also True). 2. B (outer check $15 > 10$ passes; inner check $15 > 20$ fails).
- 3.5.3 Repetition Statements: the for Loop and range().** Answers: 1. 10 7 4 1. 2. 30 ($2 + 4 + 6 + 8 + 10$). 3. The body is not indented: `IndentationError`. Indent `print(i)` by 4 spaces.
- 3.5.3 The while Loop, break and continue.** Answers: 1. 27 ($n: 1 \rightarrow 3 \rightarrow 9 \rightarrow 27$; $27 < 20$ is False, so the loop stops). 2. 1 2 4 5 (3 and 6 are skipped by `continue`; at 7 the loop breaks).
- 3.5.3 Nested Loops and for vs while.** Answers: 1. 6 (3×2). 2. A while loop, because the number of inputs is not known in advance.
- Practical Activity: Shopping Bill Calculator.** Answers: 1. Final to Pay: 4000.0 (4000 is less than 5000, so no discount). 2. It is a flag that keeps the while loop running; setting it to False stops the loop.
- 3.6 Libraries in Python.** Answers: 1. `from math import ceil`. 2. The library name is long; a short nickname keeps later lines short and is a community convention.
- 3.6.1 Built-in Libraries.** Answers: 1. 4 (already an integer). 2. `print(random.randint(1, 6))` after `import random`.
- 3.6.2 Third-Party Libraries.** Answers: 1. Matplotlib. 2. No — math is built-in.
- 3.7 Debugging Code in Python.** Answers: 1. Syntax error. 2. Logical error. 3. `ValueError` (runtime).

Answer key

Multiple choice

1. b
2. c
3. c
4. a
5. b
6. c
7. b
8. b
9. c
10. b
11. c
12. a
13. b
14. c
15. c

Short questions — model answers

1. A compiler translates the whole program into machine code before it runs (C, C++). An interpreter translates and runs line by line (Python). Compiled programs often run faster; interpreted ones are easier to test.
2. `input()` always returns a string. Adding strings concatenates them (`"2"+"3"` is `"23"`), so numeric work needs `int()` or `float()`.
3. `/` is true division: `17/5` is `3.4`. `//` is integer (floor) division: `17//5` is `3`.
4. `F` and `F` $\rightarrow$ `F`; `F` and `T` $\rightarrow$ `F`; `T` and `F` $\rightarrow$ `F`; `T` and `T` $\rightarrow$ `T`. Output is `True` only when both operands are `True`.
5. Python tests conditions from the top. The first `True` block runs and the rest are skipped. If you put `marks >= 60` above `marks >= 80`, an 85 would match the weaker condition first and get the wrong grade.
6. `for`: known count, counter updates automatically, good with `range`. `while`: unknown count, you must update the condition yourself or you get an infinite loop.
7. `break` leaves the loop immediately. `continue` skips the rest of this iteration and starts the next one.
8. Built-in: `math` (roots, ceil/floor), `random` (random integers). Third-party: Pandas (tables), Matplotlib (charts). (NumPy and TensorFlow also accepted.)
9. Syntax: missing bracket, will not run. Runtime: `10/0`, crashes. Logical: `area = l + w`, runs but answer is wrong.
10. The error type (e.g. `ValueError`), the file name, and the line number that caused the crash.

Long questions — model answers

```
1. marks = int(input("Enter marks: "))
if marks ≥ 80:
    print("A-1 Grade")
elif marks ≥ 70:
    print("A Grade")
elif marks ≥ 60:
    print("B Grade")
else:
    print("Fail or below B")
```

Sample: input 85 → A-1 Grade; input 72 → A Grade; input 40 → Fail or below B.

```
2. for i in range(0, 11, 2):
    print(i)
n = 0
while n ≤ 10:
    print(n)
    n += 2
```

Both print 0, 2, 4, 6, 8, 10.

3. Output (six lines): 1 1 / 1 2 / 1 3 / 2 1 / 2 2 / 2 3. The inner loop runs fully for each value of the outer loop.

```
4. total = 0.0
while True:
    p = float(input("Price (0 to stop): "))
    if p == 0:
        break
    if p > 0:
        total += p
    discount = total * 0.20 if total ≥ 5000 else 0
    print("Total", total)
    print("Discount", discount)
    print("Pay", total - discount)
```

Sample: 3000 + 2500 = 5500; discount 1100; pay 4400.

5. (a) Syntax — add `)`: `print("Total is", total)`. (b) Runtime `ZeroDivisionError` — only divide when the count of items is not 0. (c) Logical — 20% of total is `total * 0.20`, not `total + 0.20`.

```
6. import random, datetime, math
n = random.randint(1, 40)
today = datetime.datetime.now().strftime("%d-%m-%Y")
print("Lucky roll", n, "on", today)
print("Root of roll", math.sqrt(n))
```

`random` picks the student number, `datetime` stamps the date, `math` shows a sample extra calculation.

Self-assessment: I can...

- | | |
|--|--|
| ☐ classify a language as high-level or low-level and explain why Python is popular. | ☐ declare variables and identify int, float, str, bool, list and dict values. |
| ☐ read input, convert types, and print formatted output. | ☐ evaluate arithmetic, relational, logical and bitwise expressions by hand. |
| ☐ write if, if-else, if-elif-else and nested selections. | ☐ write for and while loops, including range, break and continue. |
| ☐ import built-in libraries (math, random, datetime) in more than one style. | ☐ name pip and at least two third-party libraries. |
| ☐ classify a bug as syntax, runtime or logical and read a traceback. | ☐ combine sequence, selection and repetition in a small complete program. |

Chapter 4: Data and Analysis

Data and Analysis (1/3) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Data, Information and Database · Database Management System (DBMS) · Database Components (Tables, Records, Fields) · Keys and Integrity Constraints · Relational Database Management System (RDBMS)

★ **Must lock:** Keys and Integrity Constraints

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Write the line that lets you call ceil without writing math. in front.
2. What does math.ceil(4.0) return?
3. Which library would you choose to draw a bar chart of class marks?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

4.1.1 Data, Information and Database

Data are unprocessed facts, figures or observations.

Data → Processing → Information → Decision

- They can be quantitative (numbers: 80, 75, 90) or qualitative (descriptions: the colours of cars in a parking lot).
- Data on its own is not very useful — a list of marks does not yet tell you whether the class is strong.
- When you organise, process and interpret data, it becomes information.

Aspect	Data	Information
Definition	Raw facts and figures	Processed, meaningful data
Example	85, 90, 75	Average marks = 83.3%
Usefulness	Little, on its own	Useful for decisions

Remember: Exam line: Data is raw; information is processed data used for decision-making. Always add one pair of examples.

ڈیٹا خام حقائق ہیں، معلومات وہی حقائق ہیں جب انہیں ترتیب دے کر معنی دے دیا جائے۔

4.1.2 Database Management System (DBMS)

A DBMS is software that lets you create, manage and interact with databases.

- Less redundancy. The department name is stored once, not in every student row.
- Consistency. Change a phone number once; every screen that uses it shows the new number.
- Security. Only authorised users see sensitive fields (an admin sees marks; office staff see names).
- Integrity. Rules stop duplicate roll numbers and empty primary keys.

ڈی بی ایم ایس وہ سافٹ ویئر ہے جو صارف اور ڈیٹا بیس کے درمیان پل کا کام کرتا ہے۔

4.2 Database Components (Tables, Records, Fields)

The basic structure is a table (also called a relation): rows and columns, like a spreadsheet, holding facts about one kind of thing (Students, Teachers, Books).

- A record (row, tuple) is one complete instance — everything about Ali.
- A field (column, attribute) is one kind of fact — the whole Name column, or the whole Grade column.

Roll No	Name	Course	Grade
101	Ali	CS	A
102	Sara	IT	B+
103	Ahmed	CS	A

Remember: Memory: row = record = one person. column = field = one question on the admission form.

ٹیبل قطاروں اور کالموں میں ڈیٹا رکھتا ہے۔

4.3.1 Keys and Integrity Constraints ★ Golden

A key is a field (or a set of fields) that uniquely identifies records and links tables.

- Integrity constraints are the rules that keep those keys honest.
- Any field (or combination) that could uniquely identify a row.
- A table may have several.

Table	Field	Role
Student	RollNo	Primary key
Student	BFormNo	Alternate key
Result	RollNo	Foreign key → Student.RollNo
Result	ExamID + RollNo	Could be a composite primary key

Trap: A phone number is a bad PK: people change numbers, two siblings may share one, and some students have none (NULL).

Exam: Board questions: "Differentiate primary and foreign key" (table of 4 points) and "Why can a PK not be NULL?" Because a NULL would mean "this row has no identity", so the...

کینڈیڈیٹ کی وہ فیلڈ ہے جو ریکارڈ کی شناخت کر سکے۔

4.3 Relational Database Management System (RDBMS)

An RDBMS stores data in several tables and uses primary and foreign keys to keep relationships.

- Reduces redundancy by splitting data into related tables.
- Supports many users at once, with permissions.
- Is queried with SQL (Structured Query Language) — a standard language of SELECT, INSERT, UPDATE, DELETE.

آر ڈی بی ایم ایس کئی ٹیبلز میں ڈیٹا رکھتا ہے اور کیڑ سے ان کے تعلقات برقرار رکھتا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Data, Information and Database:** Do not call a jumble of WhatsApp numbers a database.
- **Database Components (Tables, Records, Fields):** Do not mix two entities in one table (students and library books together).
- **Keys and Integrity Constraints:** A phone number is a bad PK: people change numbers, two siblings may share one, and some students have none (NULL).

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Keys and Integrity Constraints**. Write: A key is a field (or a set of fields) that uniquely identifies records and links tables.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Integrity constraints are the rules that keep those keys honest. (2) Any field (or combination) that could uniquely identify a row. — + example.

5 marks: 3-mark structure + table: Table / Field / Role + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Can a table have two primary keys?

3 marks. Explain Keys and Integrity Constraints with two clear points and one example.

5 marks. Board questions: “Differentiate primary and foreign key” (table of 4 points) and “Why can a PK not be NULL?” Because a NULL would mean “this row has no identity”, so the DBMS could not tell rows...

8 marks. Keys and Integrity Constraints: 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. No — only one PK (it may be composite) 3. Integrity constraints are the rules that keep those keys honest.; Any field (or combination) that could uniquely identify a row. 5. Use the recipe in the blue box. Model opening: A key is a field (or a set of fields) that uniquely identifies records and links tables. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Keys and Integrity Constraints** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 4: Data and Analysis

Data and Analysis (2/3) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Entity Relationship Model (ER-Model) · Referential Integrity · Relational Schema Development · Case Study — Library Management System · Database Objects (Tables, Forms, Queries, Reports)

★ **Must lock:** Entity Relationship Model (ER-Model), Referential Integrity

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Can a table have two primary keys?
2. Is "Nadia, Class 11, 72 marks" data or information?
3. Name two DBMS programs.


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

4.4 Entity Relationship Model (ER-Model)

★ Golden

The ER model is the architect's blueprint: you draw what will be stored and how it connects before you create tables in Access.

Component	Meaning	Symbol	Example
Entity	A real-world object we store data about	Rectangle	STUDENT, TEACHER, COURSE
Attribute	A property of an entity. PK is underlined	Oval	StudentID, Name, Class
Relationship	How two entities are connected	Diamond	Enrolls, Teaches, Has



Rectangle = entity, diamond = relationship, oval = attribute. Underline the primary-key attribute.

Trap: The M:N rule.

Exam: Always state cardinality on the diagram (1 and M at the ends of the line). For M:N, the long question is "how do you resolve it?" — draw the junction entity with two...

ای آر ماڈل ڈیٹا بیس کا خاکہ ہے۔

4.5 Referential Integrity ★ Golden

Referential integrity means every foreign-key value in a child table must match an existing primary-key value in the parent — or be NULL if the design allows it.

- If Result.StudentID is a FK to Student.StudentID, you cannot type Result for student 999 if 999 is not in Student.
- You also cannot delete student 101 while results for 101 still exist — unless you first handle those child rows.

ID	Name
101	Ali
102	Sara

Trap: Cascade Delete is powerful and dangerous.

Exam: Write: definition, why it matters (no orphans), then one numbered example of Cascade Update and one of Cascade Delete. Mention parent vs child.

ریفرنشل انٹیگریٹی کا مطلب ہے بچہ ٹیبل کی فارن کی ہمیشہ والدین کی موجود پرائمری کی طرف اشارہ کرے۔

4.6 Relational Schema Development

A relational schema is the formal written design of the database: table names, fields, primary keys, foreign keys and how tables relate.

- You write it before clicking around in Access.
- It defines (1) how data is split into tables, (2) which columns each table has, (3) which fields are PK/FK, (4) the relationships.
- Benefits: less redundancy, integrity planned in advance, easier to grow later.

```
Department (DeptID PK, DeptName)
Student    (RollNo PK, Name, Class, DeptID FK → Department)
Course     (CourseID PK, Title, Credit, DeptID FK → Department)
```

Remember: Skipping the schema is like building a house without a drawing. You get messy, broken structures that are painful to repair.

ریلیشنل اسکیم ڈیٹا بیس کا لکھا ہوا نقشہ ہے: کون سے ٹیبل، کون سے فیلڈ، کون سی کیز، کون سے تعلقات۔

4.7 Case Study — Library Management System

A college library needs a database. Walk the seven steps examiners expect.

- A college library needs a database.
- Walk the seven steps examiners expect.
- A book has ID, title, author, publisher.
- A member (student/teacher) has ID, name, contact.

BorrowID	MemberID	BookID	IssueDate	ReturnDate
5001	102	B-17	2026-10-05	



Final library ER: two 1:M relationships through the BorrowRecord junction table.

```
Member      (MemberID PK, Name, ContactInfo)
Book        (BookID PK, Title, Author, Publisher)
BorrowRecord (BorrowID PK, MemberID FK, BookID FK, IssueDate, ReturnDate)
```

لائبریری میں ممبر اور کتاب کا تعلق بہت-سے-بہت-سے ہے، اس لیے بورو ریکارڈ نامی پل ٹیبل بناتے ہیں جس میں دونوں کی فارن کیز اور اجراء...

4.8 Database Objects (Tables, Forms, Queries, Reports)

Four objects you will meet in Access. Learn the one-line jobs cold:

- Learn the one-line jobs cold:

Object	Job	You ...
Table	Stores the data (foundation; every other object depends on it)	keep the actual records here
Form	Friendly screen for enter / edit / view (text boxes, drop-downs)	type data in; fewer mistakes than a raw grid
Query	Ask a question: filter, sort, calculate	e.g. "students above 80%"
Report	Formatted output for printing or sharing	read only — never type into a report

Remember: Store → Enter → Search → Print. Tables, Forms, Queries, Reports.

ٹیبل ڈیٹا رکھتی ہے، فارم سے اندراج ہوتا ہے، کوئری سوال پوچھ کر چھاننتی ہے، رپورٹ چھپائی کے لیے سنواری ہوئی پیشکش ہے — اس میں ڈیٹا بھرا نہیں جاتا۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Entity Relationship Model (ER-Model):** The M:N rule.
- **Referential Integrity:** Cascade Delete is powerful and dangerous.
- **Database Objects (Tables, Forms, Queries, Reports):** A query does not copy the table into a second storage place.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Entity Relationship Model (ER-Model)**. Write: The ER model is the architect's blueprint: you draw what will be stored and how it connects before you create tables in Access.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The ER model is the architect's blueprint: you draw what will be stored and how it connects before you create tables in Access. (2) Second distinct point (not a repeat of the definition) — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled ER diagram (rectangle / oval / diamond) or the relational schema + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Referential Integrity**. Write: Referential integrity means every foreign-key value in a child table must match an existing primary-key value in the parent — or be NULL if the design allows it.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) If Result.StudentID is a FK to Student.StudentID, you cannot type Result for student 999 if 999 is not in Student. (2) You also cannot delete student 101 while results for 101 still exist — unless you first handle those child rows. — + example.

5 marks: 3-mark structure + table: ID / Name + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled ER diagram (rectangle / oval / diamond) or the relational schema + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What symbol is used for a relationship?

3 marks. Explain Entity Relationship Model (ER-Model) with two clear points and one example.

5 marks. Always state cardinality on the diagram (1 and M at the ends of the line). For M:N, the long question is “how do you resolve it?” — draw the junction entity with two foreign keys.

8 marks. Entity Relationship Model (ER-Model): 5-mark answer plus a labelled ER diagram (rectangle / oval / diamond) or the relational schema.

Answers: 1. Diamond 3. The ER model is the architect's blueprint: you draw what will be stored and how it connects before you create tables in Access. 5. Use the recipe in the blue box. Model opening: The ER model is the architect's blueprint: you draw what will be stored and how it connects before you create tables in Access. 8. Same 5-mark body + a labelled ER diagram (rectangle / oval / diamond) or the relational schema + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Entity Relationship Model (ER-Model)** using the recipe in this topic. Include a labelled ER diagram (rectangle / oval / diamond) or the relational schema. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 4: Data and Analysis

Data and Analysis (3/3) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Creation of Tables in Microsoft Access · Designing Forms for Data Manipulation · Creating Queries in MS Access · Data Summarization and Statistical Analysis · Data Visualization in MS Access (Charts)

★ **Must lock:** Creating Queries in MS Access

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What symbol is used for a relationship?
2. What is an orphan record?
3. Name two things a schema must show.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

4.9 Creation of Tables in Microsoft Access

Plan first (4.9.1): purpose, field list, data type of each field, which field is the PK.

- Create tab → Table.
- A blank grid appears.
- Double-click Field1, Field2, ... to rename.
- Type data; Access guesses the data type.

Data type	Use it for
Short Text	Names, addresses, phone numbers (you do not add phone numbers). Up to 255 characters.
Number	Values you calculate with: Age, Marks, Quantity.
Date/Time	Date of birth, admission date, appointment time.
Currency	Fees, salary.
AutoNumber	Access fills a unique sequential number — excellent PK.

Trap: Phone numbers look numeric but are Short Text.

پہلے ٹیبل کا منصوبہ بنائیں۔

4.10 Designing Forms for Data Manipulation

A form is the screen people actually type into.

- Create tab → Form Wizard.
- Select the table (e.g. Student).
- Move fields with > (one) or >> (all).
- Choose layout. Columnar = one record at a time, best for data entry.

فارم اندراج کی سادہ اسکرین ہے۔

4.11 Creating Queries in MS Access ★ Golden

A query retrieves, filters and analyses data without changing the original tables.

- Create tab → Query Design.
- Show Table → add Student → Close.
- Double-click the fields you want; they drop into the grid.
- Red Run (!) button executes it.

Goal	Where to type	Example
Single criterion	Criteria row, one column	Department → "Computer Science"
AND (both must match)	Same Criteria row, two columns	Name "Ali" and Department "Computer Science"
OR (either may match)	Criteria row and the or: row	Department "IT" or "Computer Science"

Trap: Text criteria need quotes: "IT".

Exam: Remember: AND = same row in the grid; OR = different rows. Examiners draw a blank grid and ask you to fill Criteria and or:.

کوئری ٹیبل کو بدلے بغیر سوال پوچھتی ہے۔

4.11.4 Data Summarization and Statistical Analysis

Grouping combines rows that share a value (all CS students together) and then an aggregate calculates a number for the group.

- In Access click Totals (Σ) to reveal the Total row in the grid.

Function	What it calculates
COUNT()	How many records (students in IT)
SUM()	Total of a number field (fees collected)
AVG()	Mean
MAX() / MIN()	Highest / lowest in the group

```
SELECT Department, AVG(Marks) AS AvgOfMarks
FROM Student
GROUP BY Department;
```

گروپ بائی ایک جیسے ریکارڈ جوڑتا ہے، پھر COUNT, SUM, AVG, MAX, MIN سے خلاصہ نکلتا ہے۔

4.11.6 Data Visualization in MS Access (Charts)

Charts turn numbers into a picture so a pattern jumps out.

- Pick the chart that matches the question:

Chart	Shape	Best for
Bar (horizontal)	Bars sideways	Categories with long names (English, Mathematics, ...)
Column (vertical)	Bars standing	Side-by-side comparison (2024 / 2025 / 2026 admissions)
Pie	Slices of a circle	Parts of one whole (percent of CS vs IT vs Eng). Few slices.
Line	Dots joined	A trend over time (visitors per month)



Column = compare categories. Pie = share of a total. Line = change over time.

Exam: "Which chart?" — line for time, pie for composition, bar/column for comparing categories. Mention one reason.

بار لمبے ناموں والی اقسام، کالم سادہ موازنہ، پائی حصوں کا تناسب، لائن وقت کے ساتھ رجحان۔

Data and Analysis

15 single-page lessons · 4 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- Data = raw facts; information = processed data used for decisions; a database stores related data in a structured, updatable way.
- A DBMS is the software layer that provides less redundancy, consistency, security and integrity.
- Table = rows (records) and columns (fields). One table, one entity.
- Candidate keys could identify a row; the primary key is the one you choose (unique, not NULL); leftover candidates are alternate keys; a foreign key points at another table's PK.
- An RDBMS keeps several related tables and is queried with SQL.
- ER symbols: rectangle entity, oval attribute, diamond relationship. Cardinality 1:1, 1:M, M:N. M:N needs a junction table.
- Referential integrity forbids orphan FKs. Cascade Update copies a changed PK into children; Cascade Delete removes children with the parent.
- Write a relational schema before building. Library case: Member and Book are M:N, resolved by BorrowRecord.
- Objects: tables store, forms enter, queries search, reports print.
- Access Design View sets field names, data types and the PK. Phone numbers are Short Text; money is Currency; auto IDs are AutoNumber.
- Forms need a table/query source; Wizard + columnar layout for data entry.
- Query criteria: one value; AND on the same row; OR on two rows. Totals Σ for Group By / Count / Sum / Avg / Max / Min.
- Bar/column compare categories, pie shows parts of a whole, line shows a trend over time.

Key terms

Term	Meaning	اردو
Data	Raw facts and figures.	ڈیٹا / خام حقائق
Information	Processed data that supports a decision.	معلومات
Database	Organised collection of related data.	ڈیٹا بیس
DBMS	Software that creates and manages databases.	ڈیٹا بیس مینجمنٹ سسٹم
Table	Rows and columns about one entity.	ٹیبل
Record	One row — one instance.	ریکارڈ
Field	One column — one attribute.	فیلڈ
Primary key	Chosen unique, non-empty identifier.	پرائمری کی
Foreign key	Field that refers to another table's PK.	فارن کی
Candidate key	Any field(s) that could be the PK.	کینڈیڈیٹ کی
Alternate key	A candidate not chosen as PK.	آلٹرنیٹ کی
RDBMS	DBMS that stores related tables linked by keys.	ریلیشنل ڈی بی ایم ایس

Data and Analysis

75 marks · 1 hour 15 minutes · no notes · no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 15 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define · Explain · Example · Diagram · Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. Processed data used for a decision is called:
 - a. a field
 - b. information
 - c. a query
 - d. redundancy
2. A complete row about one student is a:
 - a. field
 - b. report
 - c. record
 - d. schema
3. A primary key cannot contain:
 - a. numbers
 - b. text
 - c. NULL
 - d. an AutoNumber
4. EmpLicense# after EmpID is chosen as PK is an:
 - a. foreign key
 - b. alternate key
 - c. orphan
 - d. report
5. A foreign key:
 - a. must be unique in the child table
 - b. may contain duplicates
 - c. cannot exist in an RDBMS
 - d. is always AutoNumber
6. The ER symbol for a relationship is a:
 - a. rectangle
 - b. oval
 - c. diamond
 - d. circle
7. The most common cardinality is:
 - a. 1:1
 - b. 1:M
 - c. M:N stored as-is
 - d. 0:0
8. M:N is stored in an RDBMS by:
 - a. duplicating both tables
 - b. a junction table
 - c. deleting one entity
 - d. using a pie chart
9. A child row whose StudentID is not in Student is:
 - a. a candidate key
 - b. an orphan record
 - c. a form
 - d. a primary key
10. Changing parent ID 101 → 201 and seeing the child follow is:
 - a. Cascade Delete
 - b. Cascade Update
 - c. a SELECT query
 - d. a pie chart
11. Which Access object is for printing a report card?
 - a. Table
 - b. Form
 - c. Query
 - d. Report
12. Phone numbers should be stored as:
 - a. Number
 - b. Currency
 - c. Short Text
 - d. Date/Time
13. AND criteria go:
 - a. on two different rows of the grid
 - b. on the same Criteria row
 - c. in a report header
 - d. only in SQL Server
14. To average marks per department you set Department to:
 - a. Sum
 - b. Where
 - c. Group By
 - d. Expression
15. The best chart for admissions in 2024, 2025, 2026 is a:
 - a. pie chart
 - b. column chart
 - c. junction table
 - d. foreign key

Section B — Short questions (10 × 3 = 30)

1. Differentiate data and information with one example each.
2. List four advantages of a DBMS.
3. Define record and field with reference to a Student table.
4. Differentiate primary key and foreign key (four points).
5. Why can a relational database not store M:N directly?
6. What is referential integrity? Give one rejected-insert example.
7. Differentiate Cascade Update and Cascade Delete.
8. State the four Access objects and the job of each in one line.
9. Why are phone numbers Short Text, not Number?
10. How do you express OR in Query Design?

Section C — Long questions (attempt any 3 × 10 = 30)

1. Draw a complete ER diagram for Student–Course enrolment (M:N). Resolve it with a junction entity. Write the relational schema with keys marked.
2. A Result table uses StudentID as a foreign key. Explain referential integrity, then show before/after tables for (a) Cascade Update of ID 101 → 201 and (b) Cascade Delete of student 102.
3. Work through the library case study: requirements, entities, attributes, relationship, cardinality, junction table, final schema. Include two sample BorrowRecord rows.
4. Write step-by-step how to create a Student table in Access Design View (fields RollNo Number PK, Name Short Text, Marks Number, Fee Currency, AdmDate Date/Time) and then a columnar form with the Wizard.
5. Write the Query Design settings and the SQL to list CS students with Marks ≥ 80, sorted by Name. Then write a totals query that shows COUNT of students and AVG(Marks) for each Department.
6. A principal wants to see (i) fee collected per class, (ii) the share of each class in total enrolment, (iii) enrolment over five years. Which chart for each, and why?

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **4.1.1 Data, Information and Database.** Answers: 1. Data (raw facts about one student). 2. It is not organised in a structured, searchable, updatable collection of related records.
2. **4.1.2 Database Management System (DBMS).** Answers: 1. MS Access, MySQL (Oracle, SQLite also). 2. Integrity (unique / primary-key constraint).
3. **4.2 Database Components (Tables, Records, Fields).** Answers: 1. 3 records, 4 fields. 2. A value stored in the Course field.
4. **4.3.1 Keys and Integrity Constraints.** Answers: 1. No — only one PK (it may be composite). 2. Yes — many child rows may point to the same parent.
5. **4.3 Relational Database Management System (RDBMS).** Answers: 1. SQL. 2. To store the department name once (less redundancy) and update it in one place.
6. **4.4 Entity Relationship Model (ER-Model).** Answers: 1. Diamond. 2. 1:M (Patient 1 — has — M Appointment).
7. **4.5 Referential Integrity.** Answers: 1. A child row whose FK value does not exist in the parent. 2. They are deleted automatically (if Cascade Delete is on).
8. **4.6 Relational Schema Development.** Answers: 1. Tables/fields and keys/relationships. 2. It reduces redundancy and mistakes (any valid benefit).
9. **4.7 Case Study — Library Management System.** Answers: 1. To break M:N into two 1:M links. 2. On BorrowRecord — they belong to a *transaction*, not to the book itself (a book is issued many times).
10. **4.8 Database Objects (Tables, Forms, Queries, Reports).** Answers: 1. Report. 2. Table.
11. **4.9 Creation of Tables in Microsoft Access.** Answers: 1. AutoNumber. 2. Currency.
12. **4.10 Designing Forms for Data Manipulation.** Answers: 1. No — it needs a data source. 2. Columnar.
13. **4.11 Creating Queries in MS Access.** Answers: 1. ≥ 80 under Marks. 2. Two rows (OR).
14. **4.11.4 Data Summarization and Statistical Analysis.** Answers: 1. Group By. 2. COUNT (of BorrowID or BookID) grouped by MemberID.
15. **4.11.6 Data Visualization in MS Access (Charts).** Answers: 1. Line. 2. Pie (two parts of a whole).

Answer key

Multiple choice

1. b
2. c
3. c
4. b
5. b
6. c
7. b
8. b
9. b
10. b
11. d
12. c
13. b
14. c
15. b

Short questions — model answers

1. Data = raw facts (80, 75, 90). Information = processed meaning ("average is 81.7%, the class is ready").
2. Less redundancy, consistency, security (authorised access), integrity (valid, unique keys). (Sharing / backup also accepted.)
3. Record = one student's full row (101, Ali, CS, A). Field = one column such as Name.
4. PK uniquely identifies a row, cannot be NULL, one per table, lives in the parent. FK refers to a PK, may duplicate, may be NULL, lives in the child, creates the relationship.
5. It would duplicate attributes of both entities. Split into two 1:M links with a junction table that holds both FKs plus extra attributes (dates).
6. Every FK must match an existing parent PK. Inserting Result.StudentID = 999 is rejected if 999 is not in Student — that would have been an orphan.
7. Cascade Update copies a changed parent PK into child FKs. Cascade Delete removes child rows when the parent is deleted.
8. Table stores; form enters; query searches/filters; report prints.
9. They are identifiers, not quantities; leading zeros would vanish; you never add two numbers of a phone.
10. Put one value on the Criteria row and the other on the or: row of the same field (or of different fields if that is the question).

Long questions — model answers

1. Entities STUDENT and COURSE, relationship Enrolls (M:N). Junction ENROLLMENT(EnrollID PK, StudentID FK, CourseID FK, Date). Schema: Student(StudentID PK, Name, Class); Course(CourseID PK, Title); Enrollment as above. Diagram: 1 — M — M — 1 through the junction.
2. (a) Parent 101 Ali → 201 Ali; child Result rows that said 101 now say 201. (b) Delete parent 102 Sara; all Result and Enrolment rows with 102 disappear. Integrity definition: FK must match a live PK; this stops orphans and keeps reports true.
3. Follow steps 1–7 in the chapter. Sample: (5001, 102, B-17, 2026-10-05, NULL); (5002, 101, B-17, 2026-10-12, 2026-10-20) — same book, two members, no duplicated titles.
4. Create → Table Design; enter the five fields and types; right-click RollNo → Primary Key; Save as Student. Create → Form Wizard → Student → >> all fields → Columnar → name Student Registration → Finish.
5. Grid: Name, Department, Marks. Criteria under Department: "CS" (or "Computer Science"); Criteria under Marks: ≥ 80 (same row = AND); Sort under Name: Ascending. SQL: `SELECT Name, Department, Marks FROM Student WHERE Department="CS" AND Marks  $\geq 80$  ORDER BY Name`; Totals query: Department Group By, StudentID Count, Marks Avg.
6. (i) Column or bar — compare categories (classes). (ii) Pie — each class is a part of one whole enrolment. (iii) Line — a trend over years.

Self-assessment: I can...

- | | |
|--|---|
| ☐ explain data vs information vs database vs DBMS. | ☐ point at records and fields in a table. |
| ☐ choose PK / FK / candidate / alternate keys correctly. | ☐ draw ER symbols and label 1:1, 1:M, M:N. |
| ☐ resolve M:N with a junction table. | ☐ explain referential integrity and both cascade operations with examples. |
| ☐ write a relational schema including the library case study. | ☐ match tables, forms, queries and reports to a task. |
| ☐ create a table in Design View and pick data types. | ☐ build a Wizard form and a criteria query (AND, OR, totals). |
| ☐ choose bar, column, pie or line for a given question. | |

Chapter 5: Application and Impacts of Computing

Application and Impacts of Computing (1/3) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Introduction to Computing Impacts · Artificial Intelligence (AI) · Internet of Things (IoT) & Components · Data Analytics & Components · Comparison: IoT vs AI vs Data Analytics

★ **Must lock:** Artificial Intelligence (AI), Internet of Things (IoT) & Components

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Criteria for marks at least 80?
2. Best data type for StudentID if you want Access to generate it?
3. Can a form exist without a table or query?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.1 Introduction to Computing Impacts

Computing means using computers and computer-based devices to store, process and share information.

- Schools and colleges — online admissions, e-books, online results of the Sindh boards.
- Hospitals — computerised patient records, digital X-rays, online appointment systems.
- Banks — ATMs, mobile banking apps, Raast instant payments, JazzCash and Easypaisa wallets.
- Farms — weather forecasts on mobile phones, soil sensors, tube-well control.

کمپیوٹنگ آج ہماری روزمرہ زندگی کا اہم حصہ بن چکی ہے۔

5.1.1 Artificial Intelligence (AI) ★ Golden

Artificial Intelligence (AI) is the ability of a computer system to perform tasks that normally need human thinking, such as recognising faces, understanding language and making decisions.

IoT (Eyes) — collects data → Analytics — sorts data → AI (Brain) — decides → Action

- Artificial — it is created by humans; it is not natural.
- Intelligence — it can perform tasks that require thinking.
- Face recognition on a mobile phone to unlock the screen.
- YouTube suggesting videos based on your interests.

Remember: Eyes – Sort – Brain – Do. IoT is the eyes, Analytics sorts, AI is the brain, and the actuator does the action. Think of a cricket fielder: his eyes see the...

Exam: Common questions: "Define AI and give two examples" (2–3 marks), and "Explain how AI, IoT and Data Analytics work together" (4–5 marks). To score full marks: (1) write...

مصنوعی ذہانت (AI) کو "مصنوعی" اس لیے کہتے ہیں کہ اسے انسانوں نے بنایا ہے، اور "ذہانت" اس لیے کہ یہ ایسے کام کر سکتی ہے جن کے لیے سوچنا پڑتا ہے۔


5.1.2 Internet of Things (IoT) & Components ★ Golden

The Internet of Things (IoT) is a system in which physical devices are connected to the Internet and can collect and share data to perform tasks automatically.

Sensor (Collects) → Wi-Fi (Connectivity) → Cloud (Processes) → Actuator (Acts) → User App (UI)

- The "things" are ordinary objects — watches, cameras, cars, fans, water pumps — that have been given sensors and an internet connection so...
- Source example: A smartwatch collects your heart-rate data and sends it to your mobile phone, where it is displayed.

#	Component	What it does	Examples
1	Sensors	Devices that collect information from the physical world. They are the "eyes and ears" of the system.	Temperature sensor, motion sensor, fingerprint sensor, smoke sensor, soil moisture sensor
2	Actuators	Devices that perform physical actions in response to system commands. They convert digital signals into physical movement.	Electric motor, switch, automatic door opener, water valve, fan controller
3	Connectivity	The connection that allows devices to send and receive data . Without it, sensors can't talk to the system.	Wi-Fi, Bluetooth, ZigBee, 4G/5G
4	Data Processing	Changing raw data into useful information . Steps: collecting, organising, analysing and deciding.	Checking if the room temperature is too hot to trigger the AC
5	Cloud Computing	Storing data and using services over the internet instead of local hard drives. Handles massive IoT data.	Google Drive, iCloud, online LMS
6	User Interface (UI)	The component that enables interaction between the user and the device . Helps users see information and give commands.	Mobile apps, touch screens, voice commands

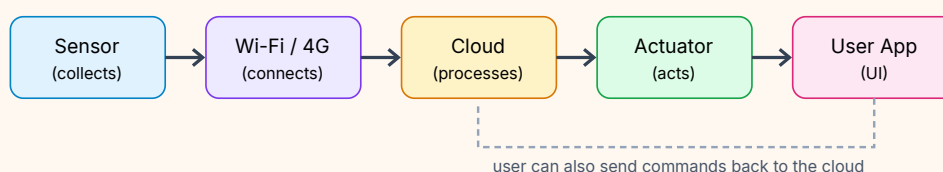

The six IoT components working as one system (data processing happens inside the cloud).

Remember: Sensor senses, Actuator acts. Both words give you the answer: sensor = see/sense (input), actuator = act (output). Remember the six components with "Some Ants..."

Exam: "Define IoT and explain its components" is one of the most frequent long questions. Write the definition with the three key ideas — physical devices, connected to the...

انٹرنیٹ آف تھنگز (IoT) ایک ایسا نظام ہے جس میں مختلف آلات (جیسے گھڑیاں، کیمرے، گاڑیاں) انٹرنیٹ سے جڑے ہوتے ہیں اور خودکار طریقے سے...

5.1.3 Data Analytics & Components

Data Analytics is the process of collecting, organising, cleaning, studying and presenting data to find useful information.

1. Collection → 2. Storage → 3. Cleaning → 4. Analysis → 5. Visualization

- It helps people make better decisions.
- Data means raw facts and figures (for example, "72, 45, 88").
- Information is data that has been processed so it has meaning ("Ali scored 72%; he passed").

Roll No	Name	Marks (raw)
1	Ayesha	42
2	Bilal	18
3	Hina	35
3	Hina	35
4	Kashif	250
5	Sana	(missing)

Remember: "Cows Sit Calmly And Vote" — Collection, Storage, Cleaning, Analysis, Visualization. Or think of cooking daal: buy the lentils (collect), keep them in a jar...

ڈیٹا اینالٹکس ڈیٹا کو جمع کرنے، ترتیب دینے، صاف کرنے، اس کا مطالعہ کرنے اور پیش کرنے کا عمل ہے تاکہ مفید معلومات حاصل ہوں اور بہتر فیصلے کیے جا سکیں۔

Comparison: IoT vs AI vs Data Analytics

These three technologies are often used together, so students mix them up.

- The table below, from the source, compares them on four aspects.

Aspect	IoT	Artificial Intelligence (AI)	Data Analytics
Definition	Network of physical devices connected to the internet.	Technology enabling machines to think and decide.	Process of examining data to find patterns.
Main purpose	Data collection and automation.	Intelligent decision making and predictions.	Extracting meaningful insights.
Type of work	Works with physical devices (hardware).	Works with smart software systems.	Works with data (numbers, records).
Output	Raw data from the environment.	Smart decisions or actions.	Reports, graphs, insights.
Role in a smart system	Eyes and hands	Brain	Organiser / reporter
Pakistani example	Safe City cameras in Lahore/Karachi capturing traffic	Software recognising a car's number plate for an e-challan	Monthly report showing which roads have the most violations

Remember: Ask "What is the output?" Raw readings → IoT. Charts and reports → Data Analytics. A decision or prediction → AI.

IoT جسمانی آلات (ہارڈویئر) کا نیٹ ورک ہے جو ماحول سے خام ڈیٹا جمع کرتا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Artificial Intelligence (AI):** Mistake: "AI means robots." Fix: Most AI is just software — YouTube suggestions, spam filters and face unlock have no robot body.
- **Internet of Things (IoT) & Components:** Mistake: Calling a fan controller or water valve a "sensor".
- **Data Analytics & Components:** Mistake: Skipping cleaning and going straight to analysis.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Artificial Intelligence (AI)**. Write: Artificial Intelligence (AI) is the ability of a computer system to perform tasks that normally need human thinking, such as recognising faces, understanding language and making decisions.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Intelligence — it can perform tasks that require thinking. (2) Face recognition on a mobile phone to unlock the screen. — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Internet of Things (IoT) & Components**. Write: The Internet of Things (IoT) is a system in which physical devices are connected to the Internet and can collect and share data to perform tasks automatically.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The "things" are ordinary objects — watches, cameras, cars, fans, water pumps — that have been given sensors and an internet connection so... (2) Source example: A smartwatch collects your heart-rate data and sends it to your mobile phone, where it is displayed. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a fully labelled diagram copied from the board + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Why is AI called "artificial"?

3 marks. Explain Artificial Intelligence (AI) with two clear points and one example.

5 marks. Common questions: "Define AI and give two examples" (2–3 marks), and "Explain how AI, IoT and Data Analytics work together" (4–5 marks). To score full marks: (1) write the two-part meaning of the...

8 marks. Artificial Intelligence (AI): 5-mark answer plus a complete truth table and a labelled gate / logic diagram.

Answers: 1. Because it is created by humans 3. Intelligence — it can perform tasks that require thinking.; Face recognition on a mobile phone to unlock the screen. 5. Use the recipe in the blue box. Model opening: Artificial Intelligence (AI) is the ability of a computer system to perform tasks that normally need human thinking, such as recognising faces, understanding... 8. Same 5-mark body + a complete truth table and a labelled gate / logic diagram + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Artificial Intelligence (AI)** using the recipe in this topic. Include a complete truth table and a labelled gate / logic diagram. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 5: Application and Impacts of Computing

Application and Impacts of Computing (2/3) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Uses of IoT in Different Areas · Scope of AI in Education in Pakistan · Career Connection in IoT and AI · Information Sources (Primary, Secondary, Tertiary)

★ **Must lock:** Information Sources (Primary, Secondary, Tertiary)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Why is AI called "artificial"?
2. Classify as sensor or actuator: (a) fingerprint scanner, (b) automatic door opener, (c) motion detector, (d) electric motor.
3. Name four places in Pakistan where computing has become vital.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.2 Uses of IoT in Different Areas

IoT improves efficiency (doing more with less effort), saves time, and enhances the overall quality of life.

Soil Sensor → Cloud AI (Needs water?) → Water Pump

- It plays a significant role in developing modern infrastructure (the basic systems of a country — roads, power, water, hospitals).
- The source lists six areas.

Remember: Remember the six areas with "CHIEF H": Cities, Health, Industry, Education, Farming, Homes.

IoT کارکردگی بہتر بناتا ہے، وقت بچاتا ہے اور زندگی کا معیار بلند کرتا ہے۔

5.2.1 Scope of AI in Education in Pakistan

Artificial Intelligence is gradually becoming an important part of Pakistan's education system, improving teaching, learning and administration (managing the school: admissions, records, timetables).

- Learning Management Systems (LMS) — online platforms (e.g. Google Classroom, Moodle) where teachers post lessons and assignments; AI...
- Automated grading and digital testing — MCQ tests marked instantly by computer.
- AI-based career counselling — software that studies a student's marks and interests and suggests suitable fields.
- Helps students learn at their own speed.

Practical uses	Benefits	Challenges
LMS	Learn at own speed	Limited rural internet
Automated grading & digital testing	Identifies students needing help	Lack of computers/devices
AI career counselling	Supports students with disabilities	Teacher training needed
—	—	Data privacy & security

Trap: Mistake: Writing that AI will replace teachers.

پاکستان کے تعلیمی نظام میں مصنوعی ذہانت آہستہ آہستہ اہم کردار ادا کر رہی ہے، جیسے لرننگ مینجمنٹ سسٹم (LMS)، خودکار جانچ اور کیریئر کونسلنگ۔

5.2.2 Career Connection in IoT and AI

Learning computing skills opens doors to many employers in Pakistan: software houses (e.g.

- IoT Engineer: designs smart systems and connected devices (e.g. a smart irrigation kit).
- Data Analyst: analyses the data generated by IoT systems and produces reports.
- Programming — Python, C++.
- Networking — Wi-Fi, protocols (rules for how devices communicate).

Remember: Skills = "PNEP": Programming, Networking, Electronics, Problem-solving. You start building the first one this year when you learn Python!


کمپیوٹنگ کی مہارتیں سیکھ کر آپ سافٹ ویئر ہاؤسز، ٹیلی کام کمپنیوں (جیسے جاز، ٹیلی نار)، بینکوں اور سرکاری آئی ٹی محکموں میں کام کر سکتے ہیں۔

5.3 Information Sources (Primary, Secondary, Tertiary) ★ Golden

Information sources are ways to find knowledge and data.

- The internet has vast information, but not all of it is accurate.
- Sources are divided into three main categories.
- Primary sources give original, firsthand information straight from people, events or official records.

Primary (firsthand)	Secondary (explained by others)	Tertiary (summarised, quick reference)
Interview with a flood victim in Dadu	Newspaper report on the 2022 floods	Encyclopedia entry "Floods in Pakistan"
Photograph taken at an event	Textbook chapter explaining the event	Wikipedia article
Personal diary or letter	Biography written by a historian	Dictionary
NADRA official records (CNIC data)	Pakistan Bureau of Statistics report analysing census data	Handbook / almanac of facts
Original survey responses	Research paper analysing the survey	Index or list of research papers
Sensor readings from an IoT weather station	TV news analysis of the weather	A school "fact sheet" on climate
Quaid-e-Azam's original speech recording	Article discussing the speech	Encyclopedia summary of his life

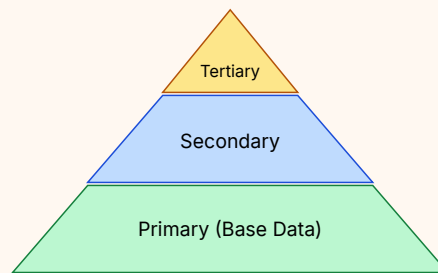

The information pyramid: primary data is the base; each higher level is built from the levels below it and is more summarised.

Remember: Rule of thumb (Author – Date – References): If an online article does not state the author's name, the date of publication, or list its references, it should...

Exam: Typical questions: "Differentiate between primary, secondary and tertiary sources with two examples each" (long/short), "Classify the following sources..." (MCQ/short),...

معلومات کے ذرائع علم اور ڈیٹا تلاش کرنے کے طریقے ہیں، جنہیں تین اقسام میں تقسیم کیا جاتا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Uses of IoT in Different Areas:** Mistake: Giving only the name of the area ("smart cities") in an exam answer.
- **Scope of AI in Education in Pakistan:** Mistake: Writing that AI will replace teachers.
- **Information Sources (Primary, Secondary, Tertiary):** Mistake: Thinking "primary" means "most important" or "tertiary" means "useless".

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Information Sources (Primary, Secondary, Tertiary)**. Write: Information sources are ways to find knowledge and data.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The internet has vast information, but not all of it is accurate. (2) Sources are divided into three main categories. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a four-row comparison table and one rewritten survey question + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. A video interview with a cricketer after a match.

3 marks. Explain Information Sources (Primary, Secondary, Tertiary) with two clear points and one example.

5 marks. Typical questions: "Differentiate between primary, secondary and tertiary sources with two examples each" (long/short), "Classify the following sources..." (MCQ/short), and "When does a source become..."

8 marks. Information Sources (Primary, Secondary, Tertiary): 5-mark answer plus a four-row comparison table and one rewritten survey question.

Answers: 1. P 3. The internet has vast information, but not all of it is accurate.; Sources are divided into three main categories. 5. Use the recipe in the blue box. Model opening: Information sources are ways to find knowledge and data. 8. Same 5-mark body + a four-row comparison table and one rewritten survey question + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Information Sources (Primary, Secondary, Tertiary)** using the recipe in this topic. Include a four-row comparison table and one rewritten survey question. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 5: Application and Impacts of Computing

Application and Impacts of Computing (3/3) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Impacts of Computing in Various Fields · Assistive Technologies · Importance of Assistive Technologies · Career Connection in Assistive Tech

★ **Must lock:** Assistive Technologies

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. A video interview with a cricketer after a match.
2. How do smart bins help waste management?
3. Give three practical uses of AI in education.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.4 Impacts of Computing in Various Fields

Computing has drastically changed society.

- It makes life faster and more connected, but it also brings challenges like privacy risks and technology addiction.
- For every field, think of both sides.

Field	Positive impact (+)	Negative impact (-)
Education	Online classes, e-books and learning apps make studying highly flexible and accessible.	Excessive screen time reduces attention spans and causes physical health issues (eye strain, back pain).
Communication	Emails and video calls allow instant, global communication at almost zero cost (e.g. a WhatsApp video call to a relative in Dubai).	People interact less in person, leading to social isolation and reduced face-to-face skills.
Business	Online shopping, digital banking and automation dramatically improve speed and efficiency.	Traditional manual jobs are lost to machines; risk of severe cyber-attacks on banks.
Healthcare	Digital patient records and telemedicine allow doctors to treat remote patients accurately.	Patient data privacy is at risk if hospital servers are hacked.
Agriculture	Smart irrigation and weather forecasting massively increase crop yields.	Poor internet access in rural areas means many farmers cannot use these tools.

Remember: For the five fields, remember "E-C-B-H-A" — Education, Communication, Business, Healthcare, Agriculture — and always write one + and one – for each.

کمپیوٹنگ نے معاشرے کو بہت بدل دیا ہے۔

5.5 Assistive Technologies ★ Golden

Assistive technologies are devices, software and systems that help people with disabilities or functional limitations (difficulty in seeing, hearing, moving, speaking, remembering, etc.).

Mobility → Sensory → Communication → Cognitive

- They allow more people to participate equally in school, work and society.
- There are four categories:

Category	Purpose	Examples
1. Mobility aids	Help people move from one place to another.	Smart wheelchairs, stair lifts
2. Sensory aids	Support vision and hearing to improve interaction.	Hearing aids, screen readers (VoiceOver), Braille displays
3. Communication aids	Assist individuals with speech difficulties to express themselves.	Speech-generating devices, text-to-speech apps
4. Cognitive / learning aids	Help people with memory, reading and understanding.	Audiobooks, spell-checkers, digital reminder apps

Remember: Four categories = "My Small Cat Cries": Mobility, Sensory, Communication, Cognitive. Link each to a body function: legs (mobility), eyes/ears (sensory), mouth...

Exam: Expect: "What are assistive technologies? Explain their categories with examples" (long), "Name two sensory aids" (short), or "A screen reader is an example of ___"...

معاون ٹیکنالوجیز (Assistive Technologies) وہ آلات، سافٹ ویئر اور نظام ہیں جو معذور افراد کی مدد کرتے ہیں تاکہ وہ اسکول، کام اور مع...

5.5.1 Importance of Assistive Technologies

Assistive technologies are important for three main reasons: Equal access to education: Screen readers allow blind students to read digital textbooks equally with their peers (classmates).

Equal Access → Independence → Inclusion

- Equal access to education: Screen readers allow blind students to read digital textbooks equally with their peers (classmates).
- Independence in daily life: Mobility aids reduce the need for constant human assistance — a person in a smart wheelchair can go to the...
- Social inclusion: They break down barriers, allowing individuals to work, study and socialise confidently.

Remember: Remember "All": Access, Independence, Inclusion.

معاون ٹیکنالوجیز کی اہمیت تین باتوں میں ہے: تعلیم تک برابر رسائی (ناہینا طلبہ اسکرین ریڈر سے کتابیں پڑھ سکتے ہیں)، روزمرہ زندگی می...

5.5.2 Career Connection in Assistive Tech

Designing assistive technology is a highly rewarding career path — you earn a living while improving people's lives.

- CareerWhat they do Assistive Software DeveloperCreates tools such as speech-to-text software (e.g. Urdu voice typing for people who cannot use a keyboard).
- Biomedical EngineerDesigns artificial limbs and hearing aids.

Career	What they do
Assistive Software Developer	Creates tools such as speech-to-text software (e.g. Urdu voice typing for people who cannot use a keyboard).
Biomedical Engineer	Designs artificial limbs and hearing aids.
UX/UI Accessibility Expert	Ensures websites are easy to navigate for visually impaired users (e.g. adding text descriptions to images so screen readers can read them).

معاون ٹیکنالوجی بنانا ایک قابلِ قدر پیشہ ہے۔

Application and Impacts of Computing

13 single-page lessons · 4 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- Computing is vital in Pakistan's schools, hospitals, banks, farms and industries; it has both positive and negative impacts.
- **AI** is "artificial" (made by humans) and "intelligent" (does tasks needing thinking); it uses data to learn, recognise patterns and make decisions.
- In smart systems, IoT is the "eyes" that gather data, Analytics sorts it, and AI is the "brain" that decides the action.
- **IoT** is a system of physical devices connected to the internet that collect and share data to perform tasks automatically.
- The six IoT components are sensors (collect), actuators (act), connectivity, data processing, cloud computing and user interface.
- **Data Analytics** is a pipeline: collection → storage → cleaning → analysis → visualization.
- Data cleaning removes duplicates, incorrect values, missing records and improper formats.
- IoT outputs raw data (hardware); AI outputs smart decisions (software); Data Analytics outputs reports, graphs and insights (data).
- IoT is used in smart cities, industrial automation, healthcare, education, home automation and smart farming.
- Smart farming (soil sensor → cloud AI → water pump) saves water and improves yields in Sindh and Punjab.
- AI in Pakistani education: LMS, automated grading, career counselling; challenges are rural internet, lack of devices, teacher training and data privacy.
- IoT/AI careers (IoT engineer, data analyst) need programming, networking, electronics and problem-solving.
- Information sources: primary (firsthand/original), secondary (collected and explained by others), tertiary (summarised for quick reference).
- Do not trust an online article that lacks an author, a publication date or references.
- Computing helps education, communication, business, healthcare and agriculture but risks screen addiction, isolation, job loss, cyber-attacks and privacy loss.
- **Assistive technologies** — mobility, sensory, communication and cognitive aids — give equal access, independence and social inclusion to people with disabilities.

Key terms

Term	Meaning	اردو
Computing	Using computers and digital devices to store, process and share information.	کمپیوٹنگ
Artificial Intelligence (AI)	Human-made technology that lets machines think, learn and decide using data.	مصنوعی ذہانت
Internet of Things (IoT)	Physical devices connected to the internet that collect and share data to work automatically.	انٹرنیٹ آف تھنگز، اشیاء کا انٹرنیٹ
Sensor	Device that collects information from the physical world.	حساس آلہ (سینسر)
Actuator	Device that performs a physical action in response to a command.	عمل کار آلہ (ایکچوایٹر)
Connectivity	The link (Wi-Fi, Bluetooth, ZigBee, 4G/5G) that lets devices send and receive data.	رابطہ کاری
Data processing	Changing raw data into useful information.	ڈیٹا کی پروسیسنگ
Cloud computing	Storing data and using services over the internet instead of local drives.	کلاؤڈ کمپیوٹنگ
User interface (UI)	The part that lets a user see information and give commands to a device.	صارف انٹرفیس
Data Analytics	Collecting, storing, cleaning, analysing and presenting data to find useful information.	ڈیٹا کا تجزیہ
Data cleaning	Finding and correcting errors such as duplicates and missing values.	ڈیٹا کی صفائی
Data visualization	Showing data as charts, plots or graphs.	ڈیٹا کی بصری پیشکش

Application and Impacts of Computing

75 marks • 1 hour 15 minutes • no notes • no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 13 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define • Explain • Example • Diagram • Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. AI is called "artificial" because it:
 - a. runs only on electricity
 - b. is created by humans
 - c. is always wrong
 - d. works without data
2. Which of the following is an actuator?
 - a. Temperature sensor
 - b. Motion sensor
 - c. Water valve
 - d. Wi-Fi router
3. ZigBee is an example of which IoT component?
 - a. Connectivity
 - b. Sensor
 - c. User interface
 - d. Actuator
4. Google Drive and iCloud are examples of:
 - a. Sensors
 - b. Data cleaning
 - c. Actuators
 - d. Cloud computing
5. Removing duplicate student records belongs to which component of Data Analytics?
 - a. Data collection
 - b. Data storage
 - c. Data cleaning
 - d. Data visualization
6. A pie chart showing pass vs fail percentage is an example of:
 - a. Data collection
 - b. Data storage
 - c. Data cleaning
 - d. Data visualization
7. According to the comparison table, the output of IoT is:
 - a. Raw data from the environment
 - b. Smart decisions
 - c. Reports and graphs
 - d. Printed documents
8. In a smart system, AI acts as the:
 - a. eyes
 - b. brain
 - c. hands
 - d. wires
9. NADRA's official records are a:
 - a. tertiary source
 - b. secondary source
 - c. primary source
 - d. unreliable source
10. Wikipedia is classified as a:
 - a. primary source
 - b. tertiary source
 - c. secondary source
 - d. firsthand record
11. Smart bins that send alerts when full are a use of IoT in:
 - a. smart farming
 - b. healthcare
 - c. home automation
 - d. smart cities
12. A system in which a soil sensor tells the cloud AI to switch on a water pump is used in:
 - a. smart farming
 - b. industrial automation
 - c. smart classrooms
 - d. traffic management
13. A screen reader such as VoiceOver is a:
 - a. mobility aid
 - b. communication aid
 - c. sensory aid
 - d. cognitive aid
14. A speech-generating device is a:
 - a. mobility aid
 - b. cognitive aid
 - c. sensory aid
 - d. communication aid
15. An online article should NOT be trusted for academic work if it lacks:
 - a. colourful pictures
 - b. the author's name, publication date or references
 - c. a long title
 - d. advertisements

Section B — Short questions (10 × 3 = 30)

1. Define Artificial Intelligence and give two examples from daily life.
2. Define the Internet of Things (IoT) with one example.
3. Differentiate between a sensor and an actuator with two examples of each.
4. What is the role of cloud computing in an IoT system?
5. List the five components of Data Analytics. What kinds of errors are removed in data cleaning?
6. Give two uses of IoT in smart cities and two in healthcare.
7. State two benefits and two challenges of AI in education in Pakistan.
8. Differentiate between primary and secondary sources with two examples each.
9. When does a secondary source become unreliable?
10. Give one positive and one negative impact of computing on (a) communication and (b) business.

Section C — Long questions (attempt any 3 × 10 = 30)

1. Define IoT. Explain its six components with an example of each. Draw a diagram showing how they connect.
2. Compare IoT, AI and Data Analytics in a table (definition, purpose, type of work, output). Then explain, with an example, how the three work together in a smart system.
3. A college in Mirpurkhas wants to find out why many students are failing Mathematics. Explain how it would use each of the five components of Data Analytics to solve this problem.
4. Explain the three types of information sources with examples. Classify the following: (i) a school textbook, (ii) a photograph of an event, (iii) an encyclopedia, (iv) an interview, (v) a Bureau of Statistics report, (vi) a dictionary. When does each type become unreliable?
5. What are assistive technologies? Explain their four categories with examples, state their importance, and name two related careers.
6. "Computing has both positive and negative impacts on society." Discuss with reference to education, healthcare and agriculture, and suggest three rules for smart and responsible use.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **5.1 Introduction to Computing Impacts.** Answers: 1. Any four of: schools, hospitals, banks, farms, industries. 2. The effect computing has on people and society — it can be positive or negative.
2. **5.1.1 Artificial Intelligence (AI).** Answers: 1. Because it is created by humans. 2. AI is the brain; IoT is the eyes. 3. Yes — it uses data (past spam emails) to decide whether a new email is spam, a task that needs "thinking".
3. **5.1.2 Internet of Things (IoT) & Components.** Answers: 1. (a) sensor, (b) actuator, (c) sensor, (d) actuator. 2. Wi-Fi, Bluetooth, ZigBee, 4G/5G. 3. Because IoT devices produce massive amounts of data; the cloud stores and processes it over the internet instead of on small local hard drives.
4. **5.1.3 Data Analytics & Components.** Answers: 1. Collection, Storage, Cleaning, Analysis, Visualization. 2. Duplicate records, incorrect values (typos), missing records, improper formats. 3. Data Visualization.
5. **Comparison: IoT vs AI vs Data Analytics.** Answers: 1. IoT. 2. Reports, graphs and insights.
6. **5.2 Uses of IoT in Different Areas.** Answers: 1. They send alerts when full, so only full bins are emptied. 2. Rural areas lack doctors; devices send patient data directly to doctors far away. 3. The water pump (its switch).
7. **5.2.1 Scope of AI in Education in Pakistan.** Answers: 1. LMS, automated grading and digital testing, AI-based career counselling. 2. Any two: limited rural internet, lack of devices, need for teacher training, data privacy and security.
8. **5.2.2 Career Connection in IoT and AI.** Answers: 1. Designs smart systems and connected devices. 2. Programming (Python, C++), networking, electronics, problem-solving.
9. **5.3 Information Sources (Primary, Secondary, Tertiary).** Answers: 1. P 2. S 3. T 4. P 5. S 6. T 7. P 8. S
10. **5.4 Impacts of Computing in Various Fields.** Answers: 1. + Digital records and telemedicine help treat remote patients; – patient data privacy is at risk if servers are hacked. 2. Poor internet access in rural areas. 3. Protect personal information/use strong passwords; do not share fake news; balance screen time with physical activity.
11. **5.5 Assistive Technologies.** Answers: 1. Sensory aids. 2. Any two: audiobooks, spell-checkers, digital reminder apps. 3. Devices, software and systems that help people with disabilities or functional limitations participate equally in school, work and society.
12. **5.5.1 Importance of Assistive Technologies.** Answers: 1. Equal access to education, independence in daily life, social inclusion. 2. They reduce the need for constant human assistance.
13. **5.5.2 Career Connection in Assistive Tech.** Answers: 1. A biomedical engineer. 2. That websites are easy to navigate for visually impaired users.

Answer key

Multiple choice

1. b
2. c
3. a
4. d
5. c
6. d
7. a
8. b
9. c
10. b
11. d
12. a
13. c
14. d
15. b

Short questions — model answers

1. AI is human-made ("artificial") technology that can perform tasks requiring thinking ("intelligence"); it uses data to make decisions. Examples: face recognition to unlock a phone; YouTube suggesting videos; chatbots answering questions.
2. IoT is a system in which physical devices are connected to the internet and can collect and share data to perform tasks automatically. Example: a smartwatch collects heart-rate data and sends it to a mobile phone for display.
3. A sensor collects information from the physical world (input; the "eyes and ears"), e.g. temperature sensor, motion sensor. An actuator performs a physical action in response to a command, converting digital signals into movement (output), e.g. electric motor, automatic door opener.
4. Cloud computing stores IoT data and provides processing services over the internet instead of local hard drives, so it can handle the massive amounts of data produced by many devices. Examples: Google Drive, iCloud, online LMS.
5. Collection, storage, cleaning, analysis, visualization. Cleaning removes duplicated records, incorrect values (typos), missing files/records, and improper formats.
6. Smart cities: sensors adjust traffic signals to reduce congestion; smart bins send alerts when full (also street lighting, parking). Healthcare: smartwatches measure heart rate and vitals; remote monitoring devices send patient data to doctors (also emergency alerts).
7. Benefits: students learn at their own speed; AI identifies students who need extra help (also supports students with disabilities). Challenges: limited internet access in rural areas; lack of computers/devices (also teacher training, data privacy).
8. Primary sources give original, firsthand information from people, events or official records (e.g. interviews, NADRA records). Secondary sources contain information already collected and explained by someone else, summarising or analysing primary data (e.g. textbooks, news reports).
9. When the information is outdated, lacks proper references/citations, or has not been verified by an expert.
10. (a) Communication: + emails and video calls give instant, global communication at almost no cost; – less in-person interaction causes social isolation. (b) Business: + online shopping, digital banking and automation improve speed and efficiency; – manual jobs are lost to machines and banks face cyber-attacks.

Long questions — model answers

1. **Definition:** IoT is a system in which physical devices are connected to the internet and collect and share data to perform tasks automatically. **Components:** (1) Sensors — collect information from the physical world, e.g. temperature, motion, fingerprint, smoke, soil moisture sensors. (2) Actuators — perform physical actions in response to commands, converting digital signals to movement, e.g. motor, switch, door opener, water valve, fan controller. (3) Connectivity — lets devices send/receive data, e.g. Wi-Fi, Bluetooth, ZigBee, 4G/5G. (4) Data processing — changes raw data into useful information through collecting, organising, analysing and deciding, e.g. checking if a room is too hot to switch on the AC. (5) Cloud computing — stores data and provides services over the internet, handles massive data, e.g. Google Drive, iCloud, LMS. (6) User interface — lets users see information and give commands, e.g. mobile apps, touch screens, voice commands. **Diagram:** Sensor (collects) → Wi-Fi → Cloud (processes) → Actuator (acts) → User App (UI).
2. **Table:** IoT — network of physical devices connected to the internet; purpose: data collection and automation; works with hardware; output: raw data from environment. AI — technology enabling machines to think and decide; purpose: intelligent decisions and predictions; works with smart software; output: smart decisions or actions. Data Analytics — process of examining data to find patterns; purpose: extracting meaningful insights; works with data (numbers, records); output: reports, graphs, insights. **Working together:** IoT is the eyes that gather data, Analytics sorts it, AI is the brain that decides. Example: a temperature sensor reads 36 °C (IoT) → recent readings are organised showing the room is heating up (Analytics) → AI decides the room is too hot (AI) → a switch turns on the AC (action).
3. (1) **Collection:** gather marks of all Maths tests, attendance and survey responses from students. (2) **Storage:** keep them safely in a spreadsheet or database, e.g. on the cloud. (3) **Cleaning:** remove duplicate records, correct typing errors (e.g. 120 out of 100), fill or mark missing records, and make formats (dates, roll numbers) consistent. (4) **Analysis:** study the clean data to find patterns — e.g. which chapters most students got wrong, whether low attendance links to failing. (5) **Visualization:** present results in bar charts or a pie chart of pass vs fail so the principal sees the problem at a glance and plans extra classes for weak chapters.
4. **Primary:** original, firsthand, highly authentic (interviews, photographs, diaries, NADRA records). **Secondary:** collected and explained by someone else, summarises/analyses primary data (textbooks, news reports, research papers, Bureau of Statistics reports). **Tertiary:** highly summarised and organised from primary and secondary sources for quick reference (encyclopedias, Wikipedia, dictionaries, handbooks). **Classification:** (i) secondary, (ii) primary, (iii) tertiary, (iv) primary, (v) secondary, (vi) tertiary. **Unreliability:** primary — incomplete, recorded incorrectly, or deliberately false; secondary — outdated, no references/citations, not verified by an expert; tertiary — unknown/unverified website, or oversimplified and missing key facts. Rule: do not trust an article without author, date or references.
5. **Definition:** devices, software and systems that help people with disabilities or functional limitations participate equally in school, work and society. **Categories:** (1) Mobility aids — help people move; smart wheelchairs, stair lifts. (2) Sensory aids — support vision and hearing; hearing aids, screen readers (VoiceOver), Braille displays. (3) Communication aids — help people with speech difficulties express themselves; speech-generating devices, text-to-speech apps. (4) Cognitive/learning aids — help with memory, reading, understanding; audiobooks, spell-checkers, reminder apps. **Importance:** equal access to education (screen readers let blind students read digital textbooks), independence in daily life (mobility aids reduce need for constant help), social inclusion (people work, study and socialise confidently). **Careers:** any two of assistive software developer (speech-to-text tools), biomedical engineer (artificial limbs, hearing aids), UX/UI accessibility expert (websites usable by visually impaired users).
6. **Introduction:** computing makes life faster and more connected but brings privacy risks and addiction. **Education:** + online classes, e-books and learning apps make study flexible and accessible; – excessive screen time reduces attention span and harms physical health. **Healthcare:** + digital patient records and telemedicine let doctors treat remote patients accurately (e.g. rural Sindh); – patient data privacy is at risk if hospital servers are hacked. **Agriculture:** + smart irrigation and weather forecasting greatly increase yields; – poor rural internet means many farmers cannot use these tools. **Responsible use:** protect personal information and use strong passwords; do not share fake news or unverified forwards; balance screen time with sports and physical activity. **Conclusion:** benefits are large if technology is used wisely.

Self-assessment: I can...

- ☐ define AI and explain why it is called "artificial intelligence".
- ☐ define IoT and name its six components with examples.
- ☐ list the five components of Data Analytics in order and describe data cleaning.
- ☐ describe IoT uses in smart cities, industry, healthcare, education, homes and farms.
- ☐ classify any source as primary, secondary or tertiary and judge its reliability.
- ☐ explain the four categories of assistive technologies and their importance.
- ☐ explain how IoT, Data Analytics and AI work together (eyes → sort → brain → action).
- ☐ tell the difference between a sensor and an actuator.
- ☐ compare IoT, AI and Data Analytics in a table.
- ☐ state uses, benefits and challenges of AI in education in Pakistan.
- ☐ discuss positive and negative impacts of computing in five fields.
- ☐ name careers linked to IoT, AI and assistive technology and the skills they need.

Chapter 6: Digital Literacy

Digital Literacy (1/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Introduction to Digital Literacy · Digital Literacy in the Information Age · Types of Data · Data-Collection Strategies · Interviews and Surveys

★ **Must lock:** Types of Data, Data-Collection Strategies, Interviews and Surveys

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Which category does a hearing aid belong to?
2. Give one positive and one negative impact of computing in healthcare.
3. State three reasons why assistive technologies are important.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.1 Introduction to Digital Literacy

Digital literacy is the ability to understand and use digital devices, the internet, and online tools in a safe, effective, and responsible manner.

Locate information → Organise it properly → Turn it into something useful → Share it responsibly

- Safe – you protect yourself and others online (for example, you do not share passwords or private details).
- Effective – you get the job done well (for example, you find the right information quickly).
- Responsible – you use information honestly and fairly (for example, you do not copy someone else's work or spread false news).
- find information,

Remember: Remember the four verbs of a digitally literate student: Locate – Organise – Create – Share ("LOCS": think of a lock that keeps your digital life safe).

ڈیجیٹل خواندگی (Digital Literacy) سے مراد ڈیجیٹل آلات، انٹرنیٹ اور آن لائن ٹولز کو محفوظ، مؤثر اور ذمہ دارانہ طریقے سے سمجھنا اور استعمال کرنا ہے۔

6.2 Digital Literacy in the Information Age

The Information Age is the period we live in now, where vast amounts of data are produced, shared and accessed instantly through the internet, mobile devices and digital platforms (websites, apps, social media).

- Simply having access to technology is not enough.
- Owning a smartphone does not make you good at using information.
- You must develop the skills to understand, manage and use information wisely.

Ability	What it means	Example
Technical	Knowing how to operate devices and software.	Creating a Google Form; using a spreadsheet.
Cognitive (thinking)	Thinking critically about information.	Checking whether a news story is true before believing it.
Social	Communicating and behaving well with others online.	Being polite in a class WhatsApp group; respecting privacy.

Remember: Three abilities = "Tech, Think, Talk": Technical, Cognitive (think), Social (talk with others).

معلوماتی دور (Information Age) میں انٹرنیٹ اور موبائل کے ذریعے بے پناہ معلومات فوراً تیار اور شیئر ہوتی ہیں۔

6.3 Types of Data ★ Golden

Data means facts, numbers, words or observations that we collect.

- The data gathered through a survey, an investigation or a classroom project can be described in two ways: qualitatively or quantitatively.
- Knowing the difference is critical, because each type is analysed in a different way.

Type of data	Nature	Examples	Best used for
Qualitative	Descriptive, non-numerical	Opinions, reasons, behaviour	Understanding why and how something happens
Quantitative	Numerical, countable or measurable	Hours, scores, percentages, totals	Comparing results and making graphs/charts

Remember: QUALitative = QUALity = words and feelings. QUANTitative = QUANTity = numbers and counts. Qualitative answers why/how; quantitative answers how many/how much.

Exam: Common questions: "Differentiate between qualitative and quantitative data" (4–5 marks) or "Classify the following data". Write the answer as a table with four rows:...

کیفیتی ڈیٹا (Qualitative Data) الفاظ پر مشتمل ہوتا ہے اور بتاتا ہے کہ لوگ کیا سوچتے، محسوس کرتے یا تجربہ کرتے ہیں، جیسے آن لائن کل...

6.4 Data-Collection Strategies ★ Golden

Digital literacy is not limited to finding information that already exists on the internet.

Interviews → Surveys → Prototypes → Observation → Simulations

- You should also learn how to gather original (new) information yourself.
- A data-collection strategy is a planned method for gathering this information.
- The five common strategies are: Interviews·Surveys·Prototypes·Observation·Simulations

Strategy	How it works (one line)	Usual data type	Best when...
Interview	Planned conversation with a person or small group	Mostly qualitative	You need deep, detailed answers from a few people
Survey	Same questions asked to many people	Quantitative and qualitative	You need answers from many people quickly
Prototype	Users test an early version and give feedback	Both	You want to improve a product or solution
Observation	Watch and record; no questions asked	Notes (qualitative) or counts (quantitative)	You want to see what people actually do
Simulation	Computer model; change variables and see what happens	Mostly quantitative	Real experiments are costly, risky or difficult

Remember: Mnemonic for the five strategies: "I S P O S" – "I Saw People On Screens": Interviews, Surveys, Prototypes, Observation, Simulations.

Exam: "List and explain the data-collection strategies" is a frequent long question. Name all five, give a one-sentence definition and one example for each, and say what type...

ڈیجیٹل خواندگی صرف موجود معلومات تلاش کرنے تک محدود نہیں، بلکہ نئی معلومات خود جمع کرنا بھی اس کا حصہ ہے۔

6.4.1 – 6.4.2 Interviews and Surveys ★ Golden

An interview is a planned conversation used to gather information directly from a person.

- It may be one-to-one (you and one person) or in a small group.
- Questions are planned in advance, so you do not forget anything important.
- Answers are usually qualitative (opinions, reasons, experiences).

Question type	What it looks like	Data it gives
Closed: Yes/No	Do you study with your phone nearby? (Yes / No)	Countable (quantitative)
Closed: Multiple choice	Which activity do you use your phone for most? (Lectures / Notes / Social media / Games)	Categories you can count
Number / scale	How many hours do you use your phone daily? ____	Quantitative
Rating scale	"My phone helps me study." 1 = Strongly disagree ... 5 = Strongly agree	Quantitative (you can average the ratings)
Open-ended	How does your phone help you in studies?	Qualitative (free text)

Remember: Interview = In-depth with few. Survey = Same questions to many. Think of a doctor talking to one patient (interview) vs a census form sent to every house...

Exam: You may be asked to "differentiate between an interview and a survey" or to "identify what is wrong with this survey question and rewrite it". For rewriting, name the...

انٹرویو ایک منصوبہ بند گفتگو ہے جس میں کسی ایک فرد یا چھوٹے گروہ سے براہ راست معلومات حاصل کی جاتی ہیں؛ اس کے جوابات عموماً کیفیتی ہوتے ہیں۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Introduction to Digital Literacy:** Mistake: "Digital literacy means knowing how to use a computer." Fix: Using a computer is only the start.
- **Digital Literacy in the Information Age:** Mistake: Thinking that "more information" automatically means "better information".
- **Types of Data:** Mistake: Thinking that any data containing a number is quantitative.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Types of Data**. Write: Data means facts, numbers, words or observations that we collect.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The data gathered through a survey, an investigation or a classroom project can be described in two ways: qualitatively or quantitatively. (2) Knowing the difference is critical, because each type is analysed in a different way. — + example.

5 marks: 3-mark structure + table: Type of data / Nature / Examples / Best used for + the worked example from this topic.

8–10 marks: 5-mark structure + a four-row comparison table and one rewritten survey question + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Data-Collection Strategies**. Write: Digital literacy is not limited to finding information that already exists on the internet.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) You should also learn how to gather original (new) information yourself. (2) A data-collection strategy is a planned method for gathering this information. — + example.

5 marks: 3-mark structure + table: Strategy / How it works (one line) / Usual data type / Best when... + the worked example from this topic.

8–10 marks: 5-mark structure + a one-page canvas: problem, user, riskiest assumption, test + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Interviews and Surveys**. Write: An interview is a planned conversation used to gather information directly from a person.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Questions are planned in advance, so you do not forget anything important. (2) Answers are usually qualitative (opinions, reasons, experiences). — + example.

5 marks: 3-mark structure + table: Question type / What it looks like / Data it gives + the worked example from this topic.

8–10 marks: 5-mark structure + a four-row comparison table and one rewritten survey question + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Is "time spent online in hours" qualitative or quantitative?

3 marks. Explain Types of Data with two clear points and one example.

5 marks. Common questions: "Differentiate between qualitative and quantitative data" (4–5 marks) or "Classify the following data". Write the answer as a table with four rows: nature, examples, best used for,...

8 marks. Types of Data: 5-mark answer plus a four-row comparison table and one rewritten survey question.

Answers: 1. Quantitative (measurable number) 3. The data gathered through a survey, an investigation or a classroom project can be described in two ways: qualitatively or quantitatively.; Knowing the difference is critical, because each type is analysed in a different way. 5. Use the recipe in the blue box. Model opening: Data means facts, numbers, words or observations that we collect. 8. Same 5-mark body + a four-row comparison table and one rewritten survey question + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Types of Data** using the recipe in this topic. Include a four-row comparison table and one rewritten survey question. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 6: Digital Literacy

Digital Literacy (2/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Prototypes, Observation and Simulations · Primary and Secondary Data · Designing a Data-Collection Approach · Presenting Data Using Digital Tools: 6.7.1 Spreadsheets and 6.7.2 Presentations

★ **Must lock:** Prototypes, Observation and Simulations, Primary and Secondary Data

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Is "time spent online in hours" qualitative or quantitative?
2. Name the five data-collection strategies.
3. Name two digital tools for creating surveys.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.4.3 – 6.4.5 Prototypes, Observation and Simulations ★ Golden

A prototype is a simple early version of a product, model or solution.

- It allows an idea to be tested before time and effort are spent on the final version.
- Users try the prototype and give feedback, and this feedback becomes useful data for improvement.
- Example: Before building a full school app, you draw the screens on paper (or make a few clickable screens in a design tool) and ask five...

Remember: Watch it → Observation. Ask it → Survey/Interview. Try it → Prototype. Model it → Simulation.

Exam: Scenario questions are popular: "Which data-collection method is most suitable for ... ? Give a reason."
Always name the method and justify it using its key feature (e.g....

پروٹوٹائپ کسی پروڈکٹ یا حل کا ابتدائی سادہ نمونہ ہے جسے صارفین آزما کر رائے دیتے ہیں تاکہ اسے بہتر بنایا جا سکے۔

6.5 Primary and Secondary Data ★ Golden

Whenever you use data, it is important to know where it came from.

- The source affects how much control the researcher had over collecting it, and how confidently the results can be used.

Aspect	Primary Data	Secondary Data
Source	Collected directly by the researcher.	Already collected by others.
Examples	Survey responses, interviews, observations.	Reports, articles, websites, databases.
Purpose	Prepared for a specific study.	Reused for a new purpose.
Control	High control over questions and collection process.	Limited control because the data already exists.

Primary Data

Fresh, direct collection

(You do the work)

Surveys · Interviews · Observation

Secondary Data

Existing archives

(Someone else did it)

Books · Reports · Databases

Primary data is collected by you; secondary data was collected by others.

Remember: Primary = "1st hand" (you collect it first). Secondary = "2nd hand" (like a second-hand book – someone else used it first).

Exam: "Differentiate between primary and secondary data" is one of the most-asked questions in this chapter. Draw the four-row table: Source, Examples, Purpose, Control. Learn...

بنیادی ڈیٹا (Primary Data) محقق خود کسی خاص مقصد کے لیے براہ راست جمع کرتا ہے، مثلاً سروے، انٹرویو یا مشاہدہ۔

6.6 Designing a Data-Collection Approach

Before collecting data, a researcher must have a plan.

Question → Data type → Method → Sample → Tools → Collect → Store + backup → Ethics

- Define the research question clearly. What exactly do you want to find out?
- Decide the type of data needed: quantitative, qualitative, or both.
- Select suitable methods (survey, interview, observation).
- Choose the sample or target group – the people who will give you data.

Remember: Remember the steps with: "Quiet Teachers Make Students Think, Check, Save Ethically" → Question, Type, Method, Sample, Tools, Collect, Store, Ethics.

ڈیٹا جمع کرنے سے پہلے منصوبہ بندی ضروری ہے: تحقیقی سوال واضح کریں، ڈیٹا کی قسم طے کریں، مناسب طریقہ چنیں، نمونہ (Sample) منتخب کریں...

6.7 Presenting Data Using Digital Tools: 6.7.1 Spreadsheets and 6.7.2 Presentations

Collecting data is only one part of the work.

Spreadsheet data → Chart / Graph → Insert → Slides

- You must also present your findings so that others can understand them quickly and easily.
- Digital tools make this much easier.
- The four main tools are spreadsheets, presentations, infographics and reports.

Formula	What it does
=SUM(B2:B4)	Adds all values in B2 to B4.
=AVERAGE(B2:B4)	Mean: sum ÷ number of values.
=MAX(B2:B4) / =MIN(B2:B4)	Largest / smallest value.
=MEDIAN(B2:B4)	Middle value when sorted.
=COUNT(B2:B4)	Counts cells containing numbers.
=COUNTA(C2:C4)	Counts cells that are not empty (text or numbers).
=COUNTIF(C2:C4, "Yes")	Counts cells that match a condition.

Remember: Presentation rule of thumb: one idea per slide, and no more than about six short bullet points. If you are reading long sentences off the slide, the slide has...

ڈیٹا جمع کرنے کے بعد اسے پیش کرنا بھی ضروری ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Prototypes, Observation and Simulations:** Mistake: Saying that observation involves asking people questions.
- **Primary and Secondary Data:** Mistake: Thinking data from a website is always primary because "I found it myself".
- **Designing a Data-Collection Approach:** Mistake: Starting to collect data before writing a clear research question.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Prototypes, Observation and Simulations**. Write: A prototype is a simple early version of a product, model or solution.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) It allows an idea to be tested before time and effort are spent on the final version. (2) Users try the prototype and give feedback, and this feedback becomes useful data for improvement. — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a one-page canvas: problem, user, riskiest assumption, test + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Primary and Secondary Data**. Write: Whenever you use data, it is important to know where it came from.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Whenever you use data, it is important to know where it came from. (2) The source affects how much control the researcher had over collecting it, and how confidently the results can be used. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a four-row comparison table and one rewritten survey question + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Why would an engineer use a simulation instead of a real test?

3 marks. Explain Prototypes, Observation and Simulations with two clear points and one example.

5 marks. Scenario questions are popular: "Which data-collection method is most suitable for ... ? Give a reason." Always name the method and justify it using its key feature (e.g. "Simulation, because a real...").

8 marks. Prototypes, Observation and Simulations: 5-mark answer plus a one-page canvas: problem, user, riskiest assumption, test.

Answers: 1. Because the real experiment may be costly, risky or difficult 3. It allows an idea to be tested before time and effort are spent on the final version.; Users try the prototype and give feedback, and this feedback becomes useful data for improvement. 5. Use the recipe in the blue box. Model opening: A prototype is a simple early version of a product, model or solution. 8. Same 5-mark body + a one-page canvas: problem, user, riskiest assumption, test + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Prototypes, Observation and Simulations** using the recipe in this topic. Include a one-page canvas: problem, user, riskiest assumption, test. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 6: Digital Literacy

Digital Literacy (3/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Infographics and Reports · Case Study: Digital Inquiry Project · Steps 1 – 3: Advanced Search and Methodology · Steps 4 – 6: Survey Preparation and Primary Data Collection

★ **Must lock:** Case Study: Digital Inquiry Project, Steps 1 – 3: Advanced Search and Methodology, Steps 4 – 6: Survey Preparation and Primary Data Collection

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Why would an engineer use a simulation instead of a real test?
2. Which type of data gives the researcher high control?
3. What is the first step in designing a data-collection approach?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.7.3 – 6.7.4 Infographics and Reports

An infographic (information + graphic) is a visual way of presenting information, facts or data so that people can understand the main idea quickly and easily.

- Simplify complex concepts.
- Highlight the most important findings and results.
- Use clear visuals, limited text and accurate information.

Situation	Best tool	Why
You must calculate the average marks of 40 students.	Spreadsheet	Formulas calculate instantly.
You will explain results to the class in assembly.	Presentation	Designed for a live audience.
You want a one-page poster for the notice board.	Infographic	Main result understood at a glance.
The principal wants the full study with method and recommendations.	Report	Detailed, structured document.

Remember: Match tool to job: Spreadsheet = Calculate, Presentation = Tell, Infographic = Show quickly, Report = Explain fully.

انفوگرافک معلومات کو تصویری انداز میں پیش کرنے کا طریقہ ہے تاکہ اصل بات جلدی سمجھ آ جائے؛ اس کے لیے کینوا (Canva) اور پاور بی آئی...

6.8 Case Study: Digital Inquiry Project ★ Golden

This case study shows how to apply all the ideas of this chapter to solve a real-world problem from start to finish.

1 Question → 2 Search → 3 Collect → 4 Analyse → 5 Create

- An inquiry is an investigation to find the answer to a question.
- Research question: "How does daily mobile phone use affect the study habits of students?" Scenario: Students notice classmates using phones...
- Some say phones help them learn; others say phones waste time.

Workflow stage	Steps
Question & Search	1 Advanced searches · 2 Identify data types · 3 Select methods
Collect	4 Prepare the survey · 5 Choose the sample · 6 Collect primary data ethically · 7 Use secondary data
Analyse	8 Organise in a spreadsheet · 9 Create charts · 10 Analyse results
Create	11 Write the conclusion · 12 Recommendations → final digital artefact

Remember: Workflow in five words: Ask → Search → Collect → Analyse → Create. Every research project you ever do will follow this pattern.

Exam: Expect a long question: "Describe the steps of a digital inquiry project using the example of mobile phone use." Write the research question first, then the 12 steps...

اس کیس اسٹڈی میں تحقیقی سوال یہ ہے: "روزانہ موبائل فون کا استعمال طلبہ کی پڑھائی کی عادات پر کیسے اثر ڈالتا ہے؟"

6.8 Steps 1– 3: Advanced Search and Methodology ★ Golden

Students first search for background information using search engines (such as Google or Bing).

- They use advanced search operators – special symbols or words typed into the search box – to narrow down results and find reliable...
- Suggested queryOperator usedWhat it does "mobile phone use" "study habits" students" " (quotes)Finds the exact phrases "mobile phone use"...
- "academic performance" filetype:pdfFinds only PDF documents (often official reports and research papers).

Suggested query	Operator used	What it does
"mobile phone use" "study habits" students	" " (quotes)	Finds the exact phrases "mobile phone use" and "study habits", not the words scattered randomly.
"academic performance" filetype:pdf	filetype:	Finds only PDF documents (often official reports and research papers).
digital distraction site:.edu	site:	Searches only educational websites (addresses ending in .edu).

Remember: Three operators, three jobs: " " = exact, filetype: = format, site: = where. Note: there is no space after the colon (site:.edu, not site: .edu).

Exam: "Explain any three advanced search operators with examples" is a likely short question. For each, write the operator, an example query, and what it does. Also learn the...

پہلے قدم میں طلبہ سرچ انجن پر جدید سرچ آپریٹرز (Advanced Search Operators) استعمال کرتے ہیں: کوٹیشن مارکس (" ") بالکل وہی جملہ تلا...

6.8 Steps 4 – 6: Survey Preparation and Primary Data Collection ★ Golden

Design clear, unbiased questions. Each question is linked to the type of data it produces: QuestionType of data
How many hours do you use your phone daily?Quantitative Which activity do you use your phone for the most?
Quantitative...

- Design clear, unbiased questions.
- Each question is linked to the type of data it produces: QuestionType of data How many hours do you use your phone daily?Quantitative Which...

Question	Type of data
How many hours do you use your phone daily?	Quantitative
Which activity do you use your phone for the most?	Quantitative (categories)
How does your phone help you in studies?	Qualitative
Suggest one way to use phones responsibly.	Qualitative

Remember: Ethics in five words: Consent, No-Sensitive, Anonymous, Private, Educational – "C-NAPE". Think: "Cover the person's nape (neck) – protect them."

Exam: Questions often ask: "What ethical guidelines should be followed when collecting data?" List all five points. Use the words consent and anonymity – examiners look for...

چوتھے قدم میں واضح اور غیر جانبدار سوالات تیار کیے جاتے ہیں۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Infographics and Reports:** Mistake: Making a chart look more dramatic than the data – for example, starting the bar-chart axis at 18 instead of 0 so that 20 looks...
- **Steps 1–3: Advanced Search and Methodology:** Mistake: Assuming the first search result is the most reliable.
- **Steps 4–6: Survey Preparation and Primary Data Collection:** Mistake: Thinking a bigger sample is always enough.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Case Study: Digital Inquiry Project**. Write: This case study shows how to apply all the ideas of this chapter to solve a real-world problem from start to finish.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) An inquiry is an investigation to find the answer to a question. (2) Research question: "How does daily mobile phone use affect the study habits of students?" Scenario: Students notice classmates using phones... — + example.

5 marks: 3-mark structure + table: Workflow stage / Steps + the worked example from this topic.

8–10 marks: 5-mark structure + the full comparison table with every cell filled + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Steps 1–3: Advanced Search and Methodology**. Write: Students first search for background information using search engines (such as Google or Bing).

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) They use advanced search operators – special symbols or words typed into the search box – to narrow down results and find reliable... (2) Suggested query/Operator used/What it does "mobile phone use" "study habits" students " (quotes) Finds the exact phrases "mobile phone use"... — + example.

5 marks: 3-mark structure + table: Suggested query / Operator used / What it does + the worked example from this topic.

8–10 marks: 5-mark structure + a four-row comparison table and one rewritten survey question + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Steps 4–6: Survey Preparation and Primary Data Collection**. Write: Design clear, unbiased questions.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Design clear, unbiased questions. (2) Each question is linked to the type of data it produces: Question/Type of data How many hours do you use your phone daily? Quantitative Which... — + example.

5 marks: 3-mark structure + table: Question / Type of data + the worked example from this topic.

8–10 marks: 5-mark structure + a four-row comparison table and one rewritten survey question + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What is the research question in the case study?

3 marks. Explain Case Study: Digital Inquiry Project with two clear points and one example.

5 marks. Expect a long question: "Describe the steps of a digital inquiry project using the example of mobile phone use." Write the research question first, then the 12 steps with one or two lines each, and...

8 marks. Case Study: Digital Inquiry Project: 5-mark answer plus the full comparison table with every cell filled.

Answers: 1. "How does daily mobile phone use affect the study habits of students?" 3. An inquiry is an investigation to find the answer to a question.; Research question: "How does daily mobile phone use affect the study habits of students?" Scenario: Students notice classmates using phones... 5. Use the recipe in the blue box. Model opening: This case study shows how to apply all the ideas of this chapter to solve a real-world problem from start to finish. 8. Same 5-mark body + the full comparison table with every cell filled + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Case Study: Digital Inquiry Project** using the recipe in this topic. Include the full comparison table with every cell filled. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 6: Digital Literacy

Digital Literacy (4/4) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Steps 7 – 9: Secondary Data and Spreadsheet Organisation · Steps 10 – 12: Data Analysis, Conclusion and Recommendations · The Final Digital Artefact · Careers in Digital Research

★ **Must lock:** Steps 7 – 9: Secondary Data and Spreadsheet Organisation, Steps 10 – 12: Data Analysis, Conclusion and Recommendations, The Final Digital Artefact

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What is the research question in the case study?
2. Write a query that finds the exact phrase "online learning" only on educational websites.
3. What is a sample?


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.8 Steps 7 – 9: Secondary Data and Spreadsheet Organisation ★ Golden

Students include a reliable online article stating that "excessive screen time lowers concentration." They will compare this secondary data with their own primary survey results.

- If both agree, the conclusion is stronger.
- If they disagree, the students must think about why (for example, a different age group or country).

Student	Hours	Study Use	Main Activity	Distracted?
1	3	Yes	Lectures	Sometimes
2	5	No	Social Media	Yes
3	2	Yes	Notes	No

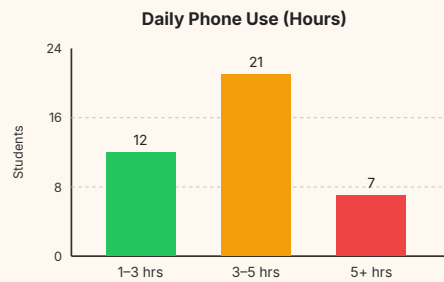

Bar chart of daily phone use for 40 students. The counts (12, 21, 7) are estimated from the bar heights in the source chart.

Remember: Chart chooser: Bar = Compare, Pie = Parts of a whole, Line = Change over time.

Exam: You may get the spreadsheet table and be asked to "write formulas to find the total and average hours" or "count students who use the phone for study". Write the full...

ساتویں قدم میں ایک قابل اعتماد آن لائن مضمون کا ثانوی ڈیٹا ("زیادہ اسکرین ٹائم توجہ کم کرتا ہے") اپنے سروے کے بنیادی ڈیٹا سے مواز...

6.8 Steps 10 – 12: Data Analysis, Conclusion and Recommendations ★ Golden

To analyse means to study the data carefully to find patterns and trends.

- Most students (the majority) use phones for 3–5 hours daily.
- Half use it for educational purposes (lectures/notes).
- A clear trend: students who use phones mostly for entertainment report much higher distraction levels than those who use them for study.

Remember: Conclusion formula: "The data shows ... However ... Therefore ..." – state the main finding, mention the other side, then give the overall answer.

Exam: You may be asked to "write a conclusion and two recommendations" for given data. Use the "shows ... however ... therefore" pattern and make sure each recommendation follows...

دسویں قدم میں چارٹس اور اسپریڈشیٹ سے رجحانات تلاش کیے جاتے ہیں: زیادہ تر طلبہ روزانہ تین سے پانچ گھنٹے فون استعمال کرتے ہیں،
نصف ا...

6.8 The Final Digital Artefact ★ Golden

A digital artefact is a final product created using digital technologies.

- Students must create one final artefact that answers the original research question.
- It is not just a decorated file; it must present evidence and conclusions.
- Artefact option Suitable digital tools Main purpose Digital Report MS Word, Google Docs Explain the full study in a structured text document.

Artefact option	Suitable digital tools	Main purpose
Digital Report	MS Word, Google Docs	Explain the full study in a structured text document.
Presentation	PowerPoint, Canva, Slides	Share key findings with a live audience.
Infographic	Canva, Adobe Express	Show the main results visually and quickly on one page.
Dashboard	Power BI, Tableau	Explore data through interactive charts and filters.

Remember: The structure follows the inquiry itself: What (title, question, intro) → How (method) → Found (primary, secondary, charts) → So what (conclusion,...)

Exam: Learn the four artefact options with tools and purpose (a table question), and the ten-part structure in order. "What is a digital artefact?" – stress that it must...

ڈیجیٹل آرٹیفیکٹ (Digital Artefact) ڈیجیٹل ٹیکنالوجی سے بنائی گئی آخری پروڈکٹ ہے جو تحقیقی سوال کا جواب ثبوت اور نتائج کے ساتھ پیش...

Careers in Digital Research

The skills in this chapter lead to real jobs: CareerWhat they doChapter skill used Market Research AnalystDesigns surveys to collect primary data to guide business decisions.Surveys, primary data UX (User Experience)...

Career	What they do	Chapter skill used
Market Research Analyst	Designs surveys to collect primary data to guide business decisions.	Surveys, primary data
UX (User Experience) Researcher	Gathers qualitative and quantitative data to improve app and website designs.	Prototypes, interviews, observation
Data Journalist	Uses advanced search skills to research stories and presents them via infographics.	Advanced search, infographics
Digital Marketing Specialist	Collects audience data and presents results through dashboards and reports.	Dashboards, reports

Remember: Link each career to one tool: Market Researcher → Survey; UX Researcher → Prototype; Data Journalist → Search + Infographic; Digital Marketer → Dashboard.

اس باب کی مہارتوں سے کئی کیریئر بنتے ہیں: مارکیٹ ریسرچ اینالسٹ کاروباری فیصلوں کے لیے سروے بناتا ہے، یو ایکس (UX) ریسرچر ایپس اور...

Digital Literacy

17 single-page lessons · 11 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- **Digital literacy** is the ability to understand and use digital devices, the internet and online tools safely, effectively and responsibly – not just using devices, but finding, evaluating and creating information.
- In the **Information Age**, access to technology is not enough; digital literacy needs technical, cognitive and social abilities.
- **Qualitative data** is descriptive and non-numerical (opinions, reasons, behaviour) and explains why/how.
- **Quantitative data** is numerical, countable or measurable (hours, scores, percentages) and is used for comparing and charting.
- The five **data-collection strategies** are interviews, surveys, prototypes, observation and simulations.
- **Interviews** are planned conversations giving mostly qualitative data; **surveys** ask the same questions to many people, on paper or with Google/Microsoft Forms.
- Good survey questions are clear, short, unbiased and ask about one thing; avoid leading, double-barrelled, vague and overlapping questions.
- A **prototype** is an early version tested for feedback; **observation** records what happens without asking questions; a **simulation** is a computer model used when real experiments are costly, risky or difficult.
- **Primary data** is collected first-hand (high control); **secondary data** was collected by others and reused (limited control).
- Designing a data-collection approach has eight steps: question, data type, method, sample, tools, collect, store with backup, and ethics (consent is mandatory).
- **Spreadsheets** organise and calculate (e.g. `=SUM()`, `=AVERAGE()`, `=COUNTIF()`); **presentations** deliver to an audience; **infographics** give quick visual summaries; **reports** give detailed structure.
- Visuals must always be accurate and based strictly on real data, never exaggerated.
- **Advanced search operators** such as `" "`, `filetype:pdf` and `site:.edu` help find reliable sources efficiently; sources must be evaluated for author, date, reliability and bias.
- **Ethics**: get consent, avoid sensitive information, keep anonymity, keep responses private, and use data only for educational purposes.
- The **digital inquiry project** follows Question → Search → Collect → Analyse → Create in 12 steps.
- A **digital artefact** (report, presentation, infographic or dashboard) answers the research question using evidence and visuals, following a ten-part structure ending in references.

Key terms

Term	Meaning	اردو
Digital literacy	Ability to understand and use digital devices, the internet and online tools safely, effectively and responsibly.	ڈیجیٹل خواندگی
Information Age	Period in which vast amounts of data are produced, shared and accessed instantly.	معلوماتی دور
Data	Facts, numbers, words or observations collected for study.	مواد / ڈیٹا
Qualitative data	Descriptive, non-numerical data about thoughts, feelings and experiences.	کیفیتی ڈیٹا
Quantitative data	Numerical data that can be counted or measured.	مقداری ڈیٹا
Interview	Planned conversation to gather information directly from a person or small group.	انٹرویو / بالمشافہ گفتگو
Survey / Questionnaire	Same set of questions asked to many people.	سروے / سوالنامہ
Prototype	Simple early version of a product used to test an idea and get feedback.	ابتدائی نمونہ
Observation	Watching and recording what happens without asking questions.	مشاہدہ
Simulation	Computer-based model of a real situation in which variables can be changed.	نقلی ماڈل (سمیولیشن)
Variable	A factor that can be changed or measured.	متغیر
Primary data	Data collected first-hand by the researcher for a specific purpose.	بنیادی ڈیٹا

Digital Literacy

75 marks • 1 hour 15 minutes • no notes • no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 17 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define • Explain • Example • Diagram • Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. Digital literacy is best described as the ability to:
 - a. type quickly on a keyboard
 - b. understand and use digital devices, the internet and online tools safely, effectively and responsibly
 - c. repair computer hardware
 - d. write computer programs
2. Which of the following is qualitative data?
 - a. Marks obtained in a test
 - b. Number of hours spent online
 - c. Students' opinions about online classes
 - d. Percentage of students using the internet
3. Which method is most suitable when the same questions must be asked to many people?
 - a. Survey
 - b. Interview
 - c. Prototype
 - d. Simulation
4. Simulations are especially useful when:
 - a. you want people's opinions
 - b. the data already exists in a report
 - c. you want to watch people without asking questions
 - d. real experiments are costly, risky or difficult
5. To find out how many cars cross an intersection at 8 AM, the best method is:
 - a. Interview
 - b. Observation
 - c. Survey
 - d. Prototype
6. Which of these is primary data?
 - a. Responses to a Google Form you created for your project
 - b. An official government report
 - c. A published research article
 - d. Web statistics from a website
7. A researcher has limited control over:
 - a. their own interviews
 - b. their own survey questions
 - c. their own observations
 - d. secondary data
8. The first step in designing a data-collection approach is to:
 - a. collect the data
 - b. choose the sample
 - c. define the research question clearly
 - d. store the data with a backup
9. Which spreadsheet formula finds the mean of cells B2 to B6?
 - a. `=AVERAGE(B2:B6)`
 - b. `=SUM(B2:B6)`
 - c. `=COUNT(B2:B6)`
 - d. `=MAX(B2:B6)`
10. The search query `digital distraction site:.edu` will:
 - a. find only PDF files
 - b. search only educational websites
 - c. find the exact phrase "digital distraction" only
 - d. exclude educational websites
11. The operator `filetype:pdf` is used to:
 - a. search for an exact phrase
 - b. search only government websites
 - c. convert a web page into PDF
 - d. find only PDF documents
12. "Do not record names unless absolutely necessary" describes the principle of:
 - a. consent
 - b. accuracy
 - c. anonymity
 - d. sampling
13. In the case study, how many Class XI students were surveyed?
 - a. 20
 - b. 40
 - c. 50
 - d. 100
14. Which tools are suggested for a dashboard artefact?
 - a. Power BI, Tableau
 - b. MS Word, Google Docs
 - c. PowerPoint, Google Slides
 - d. Google Forms, Microsoft Forms
15. A prototype is:
 - a. the final finished product
 - b. a published report
 - c. a type of survey question
 - d. a simple early version of a product used to test an idea

Section B — Short questions (10 × 3 = 30)

1. Define digital literacy. Name the three kinds of ability it involves.
2. Why is simply having access to technology not enough in the Information Age?
3. Differentiate between qualitative and quantitative data, giving two examples of each.
4. How is an interview different from a survey?
5. What is a prototype, and how does it produce useful data?
6. When is a simulation used? Give one example.
7. Compare primary and secondary data in terms of purpose and control.
8. List any four ethical guidelines to follow when collecting primary data.
9. Explain three advanced search operators with an example of each.
10. What is a digital artefact? Name its four options with one suitable tool each.

Section C — Long questions (attempt any 3 × 10 = 30)

1. Explain the eight steps of designing a data-collection approach. Apply each step to the research question: "How much water is wasted at the college taps during break time, and why?"
2. **Design a survey for** finding out how Class XI students in your college travel to college and how long the journey takes. Write a consent statement and at least six questions (mixing closed, number, rating and open-ended types), state the data type of each question, describe your sample, and explain how you will keep the data ethical.
3. Ten students recorded their daily phone use (hours) in cells B2 to B11: 2, 4, 3, 5, 6, 4, 3, 4, 1, 4. (a) Write the spreadsheet formulas and give the results for the total, mean, median, mode, maximum and minimum. (b) Write a formula to count students using the phone for more than 4 hours, and find the percentage. (c) Group the data into "1–2 hrs", "3–4 hrs" and "5+ hrs" and name a suitable chart.
4. Describe all 12 steps of the Digital Inquiry Project on the question "How does daily mobile phone use affect the study habits of students?", including the final digital artefact and its structure.
5. **Design a survey for** investigating "How do Class XI students use AI tools for homework?" Then explain which secondary sources you would search for (with advanced search queries), and which artefact you would create to present your findings to the principal, with reasons.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

- 6.1 Introduction to Digital Literacy.** Answers: 1. The ability to understand and use digital devices, the internet and online tools in a safe, effective and responsible manner. 2. Find information, communicate, produce digital content, and solve problems through technology.
- 6.2 Digital Literacy in the Information Age.** Answers: 1. A period in which vast amounts of data are produced, shared and accessed instantly through the internet, mobile devices and digital platforms. 2. Technical, cognitive and social abilities.
- 6.3 Types of Data.** Answers: 1. Quantitative (measurable number). 2. Qualitative. 3. Qualitative (an opinion in words).
- 6.4 Data-Collection Strategies.** Answers: 1. Interviews, surveys, prototypes, observation, simulations. 2. New information that you gather yourself, rather than information that already exists.
- 6.4.1 – 6.4.2 Interviews and Surveys.** Answers: 1. Google Forms and Microsoft Forms. 2. It is double-barrelled (two subjects in one question); ask about each subject separately. 3. Usually qualitative.
- 6.4.3 – 6.4.5 Prototypes, Observation and Simulations.** Answers: 1. Because the real experiment may be costly, risky or difficult. 2. Yes – for example, counting the number of cars passing a point. 3. The feedback users give after trying the prototype.
- 6.5 Primary and Secondary Data.** Answers: 1. Primary data. 2. Secondary (someone else collected it). 3. Any two: interviews, surveys, observations, experiments.
- 6.6 Designing a Data-Collection Approach.** Answers: 1. Define the research question clearly. 2. Step 8 – follow ethical practice and respect privacy. 3. Digitally, in a spreadsheet, with a backup copy.
- 6.7 Presenting Data Using Digital Tools: 6.7.1 Spreadsheets and 6.7.2 Presentations.** Answers: 1. `=AVERAGE(D2:D20)`. 2. MS Excel, Google Sheets, Apple Numbers. 3. Any two: start with a clear title and research question; use short bullet points; include tables/charts/key findings; keep design simple and readable.
- 6.7.3 – 6.7.4 Infographics and Reports.** Answers: 1. Any two: Canva, Power BI, Tableau. 2. Review it carefully for accuracy. 3. Conclusions and recommendations based on the data.
- 6.8 Case Study: Digital Inquiry Project.** Answers: 1. "How does daily mobile phone use affect the study habits of students?" 2. Question, Search, Collect, Analyse, Create.
- 6.8 Steps 1 – 3: Advanced Search and Methodology.** Answers: 1. "online learning" site:.edu. 2. Because the same questions had to be asked to many students, and a survey is the most efficient way to do that. 3. Quantitative: hours used daily (or % who feel distracted). Qualitative: opinions on why they get distracted (or suggestions for better use).
- 6.8 Steps 4 – 6: Survey Preparation and Primary Data Collection.** Answers: 1. The group of people who provide the data. 2. Not recording the names of participants (unless absolutely necessary). 3. Qualitative.
- 6.8 Steps 7 – 9: Secondary Data and Spreadsheet Organisation.** Answers: 1. A reliable online article stating "excessive screen time lowers concentration". 2. `=COUNTIF(C2:C41, "Yes")`. 3. A bar (column) chart.
- 6.8 Steps 10 – 12: Data Analysis, Conclusion and Recommendations.** Answers: 1. Students who use phones mostly for entertainment. 2. No – they should not be banned but managed wisely. 3. Any two: turn off social media notifications while studying; set daily screen-time limits; take physical breaks from screens.
- 6.8 The Final Digital Artefact.** Answers: 1. A dashboard (Power BI, Tableau). 2. References. 3. Canva and Adobe Express.
- Careers in Digital Research.** Answers: 1. Market Research Analyst. 2. User Experience.

Answer key

Multiple choice

1. b
2. c
3. a
4. d
5. b
6. a
7. d
8. c
9. a
10. b
11. d
12. c
13. b
14. a
15. d

Short questions — model answers

1. Digital literacy is the ability to understand and use digital devices, the internet and online tools in a safe, effective and responsible manner. It involves technical, cognitive and social abilities.
2. In the Information Age vast amounts of data are produced and shared instantly. Owning a device does not mean you can judge or use this information well. Users must develop skills to understand, manage and use information wisely, and to tell reliable information from unreliable.
3. Qualitative data is descriptive and non-numerical; it explains why and how (e.g. students' opinions about online classes; observation notes). Quantitative data is numerical, countable or measurable; it is used for comparing and making charts (e.g. marks in a test; hours spent online).
4. An interview is a planned conversation with one person or a small group, giving mostly qualitative, in-depth answers. A survey asks the same set of questions to many people (on paper or via Google/Microsoft Forms) and is efficient for large groups; online surveys also collect responses and make charts automatically.
5. A prototype is a simple early version of a product, model or solution. Users try it and give feedback; this feedback is data used to improve the product before time and effort are spent on the final version.
6. A simulation is used when real experiments are costly, risky or difficult. Example: a flight simulator to train pilots, or a traffic simulation to test the effect of closing a road.
7. Purpose: primary data is prepared for a specific study; secondary data is reused for a new purpose. Control: the researcher has high control over primary data (questions and process) and limited control over secondary data because it already exists.
8. Any four: ask permission (consent); avoid sensitive personal information; do not record names unless necessary (anonymity); keep responses private; use data only for educational purposes.
9. Quotes " " find an exact phrase, e.g. "study habits" students. filetype: finds a file format, e.g. "academic performance" filetype:pdf gives only PDFs. site: limits to a type of website, e.g. digital distraction site:.edu searches only educational sites.
10. A digital artefact is a final product created with digital technology that answers the research question with evidence and conclusions. Options: digital report (MS Word/Google Docs), presentation (PowerPoint/Canva/Slides), infographic (Canva/Adobe Express), dashboard (Power BI/Tableau).

Long questions — model answers

- 1. Eight steps applied to water wastage.** (1) **Define the question:** "How much water is wasted at the college taps during break time, and why?" (2) **Data type:** both – quantitative (number of taps left running, minutes running) and qualitative (students' reasons). (3) **Methods:** observation to count running taps; a short survey to learn habits and reasons. (4) **Sample:** all 12 taps observed over 5 break times; 30 students from different classes surveyed. (5) **Tools:** an observation sheet (Tap no., Time, Left running Y/N, Minutes) and a Google Form. (6) **Collect** carefully, at the same time each day, recording accurately. (7) **Store** data in Google Sheets and keep a backup copy (download or USB). (8) **Ethics:** get the principal's permission; the survey is voluntary and anonymous with a consent question; data used only for the project.
- 2. Survey on travel to college (model).** *Consent:* "This anonymous survey is for a Class XI project on travel to college. Do not write your name. Answers will be kept private and used only for this project. Do you agree to take part? Yes / No." *Questions:* Q1 How do you usually travel to college? Walk / Bus / Rickshaw / Motorbike / Car / Other – quantitative (categories). Q2 How many minutes does your journey usually take? ____ – quantitative. Q3 How many days a week are you late because of travel? 0 / 1 / 2 / 3 or more – quantitative. Q4 "My journey to college is safe." 1 (strongly disagree) to 5 (strongly agree) – quantitative (rating). Q5 Do you travel alone? Yes / No – quantitative (count). Q6 What is the biggest problem you face while travelling? – qualitative. Q7 Suggest one way the college could make travel easier. – qualitative. Questions are unbiased, ask one thing each, and options do not overlap. *Sample:* about 40 Class XI students, roughly 10 from each section, to be representative. *Ethics:* consent, no sensitive information (no home address), no names (anonymity), private storage, educational use only. Data is collected through Google Forms and exported to Google Sheets for analysis.
- 3. Spreadsheet problem.** (a) $\text{=SUM(B2:B11)} \rightarrow 2+4+3+5+6+4+3+4+1+4 = 36$. $\text{=AVERAGE(B2:B11)} \rightarrow 36 \div 10 = 3.6$ hours. Sorted: 1, 2, 3, 3, 4, 4, 4, 4, 5, 6; $\text{=MEDIAN(B2:B11)} \rightarrow (4 + 4) \div 2 = 4$. $\text{=MODE(B2:B11)} \rightarrow 4$ (appears 4 times). $\text{=MAX(B2:B11)} \rightarrow 6$; $\text{=MIN(B2:B11)} \rightarrow 1$. (b) $\text{=COUNTIF(B2:B11, ">4")}$ → values 5 and 6 → 2 students; percentage $\text{=COUNTIF(B2:B11, ">4")}/\text{COUNT(B2:B11)} \rightarrow 2 \div 10 = 20\%$. (c) 1–2 hrs: 2 students (2, 1); 3–4 hrs: 6 students (4, 3, 4, 3, 4, 4); 5+ hrs: 2 students (5, 6). Check: $2 + 6 + 2 = 10$ ✓. A **bar/column chart** is suitable for comparing the groups (or a pie chart to show 20%, 60%, 20%).
- 4. Twelve steps.** (1) Advanced searches with operators such as "mobile phone use" "study habits" students, "academic performance" filetype:pdf, digital distraction site:.edu; evaluate sources (author, recent, reliable site, facts/bias). (2) Identify data types: quantitative (hours daily, % distracted) and qualitative (reasons, suggestions). (3) Select method: survey via Google Forms/paper, because the same questions go to many students. (4) Prepare the survey: hours daily (quantitative), main activity (quantitative categories), how the phone helps (qualitative), one responsible-use suggestion (qualitative). (5) Sample: 40 Class XI students from different sections. (6) Collect ethically: consent, no sensitive data, anonymity, privacy, educational use only. (7) Secondary data: an article saying excessive screen time lowers concentration, to compare with results. (8) Organise in Excel/Google Sheets (Student, Hours, Study Use, Main Activity, Distracted?), sort, total, average. (9) Charts: bar chart of daily phone use (1–3, 3–5, 5+ hrs). (10) Analyse: majority use 3–5 hours; half use for education; entertainment users report more distraction. (11) Conclusion: phones have positive and negative effects; should be managed wisely, not banned. (12) Recommendations: turn off social media notifications, set screen-time limits, take physical breaks. **Artefact:** one of report, presentation, infographic or dashboard, structured as Title, Research Question, Introduction, Method, Primary Findings, Secondary Summary, Charts, Conclusion, Recommendations, References.
- 5. AI tools for homework (model).** *Survey:* consent statement (anonymous, voluntary, educational use only). Q1 Have you used an AI tool (e.g. ChatGPT, Gemini) for homework? Yes / No – quantitative. Q2 How many times a week? 0 / 1–2 / 3–5 / 6 or more – quantitative (non-overlapping categories). Q3 What do you use it for most? Explaining topics / Checking answers / Writing assignments / Translation / Other – quantitative (categories). Q4 "AI tools help me understand my subjects better." 1–5 rating – quantitative. Q5 Do you check AI answers against your textbook? Always / Sometimes / Never – quantitative. Q6 Describe one problem you have faced with AI answers. – qualitative. *Sample:* about 40 Class XI students from all sections. *Secondary sources:* "generative AI" students homework filetype:pdf; "AI in education" site:.edu; "artificial intelligence" policy site:.gov.pk; evaluate each for author, date, reliability and bias. *Artefact:* a **digital report** (MS Word/Google Docs) because the principal needs the full study – method, findings, charts, conclusion, recommendations and references – in a structured document; a one-page infographic could be attached as a quick summary. Charts would be made in Google Sheets from the form responses, and every visual must match the real data.

Self-assessment: I can...

- ☐ define digital literacy and explain why it matters in the Information Age.
- ☐ name and explain the five data-collection strategies and choose the right one for a scenario.
- ☐ compare primary and secondary data by source, examples, purpose and control.
- ☐ follow ethical rules: consent, anonymity, privacy and educational use.
- ☐ use advanced search operators and evaluate whether a source is reliable.
- ☐ describe the 12 steps of the digital inquiry project.
- ☐ classify data as qualitative or quantitative and explain the difference in a table.
- ☐ write clear, unbiased survey questions and fix leading, double-barrelled or vague ones.
- ☐ list the eight steps for designing a data-collection approach.
- ☐ use spreadsheet formulas such as `=SUM()` , `=AVERAGE()` and `=COUNTIF()` and calculate results correctly.
- ☐ choose a suitable tool (spreadsheet, presentation, infographic, report, dashboard) to present findings.
- ☐ plan a digital artefact using the ten-part standard structure.

Golden blitz — Chapters 1–2

★ only · Chapters 1–2 · Golden blitz

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter from yesterday's Goldens · 10–35 min lock the tables from memory · 35–55 min two students write a 5-mark Golden answer on the board · 55–75 min timed 8-mark · 75–85 min error clinic · 85–90 min homework: redraw from memory.

Board today: Analog and Digital Signals · Logic Gates (Basic Gates: AND, OR, NOT) · Logic Diagrams · Karnaugh Maps (K-Maps) · Software Development Life Cycle (SDLC) · The Waterfall Model · The Agile Model · Communication Models and the OSI 7-Layer Model

★ **Must lock:** Analog and Digital Signals, Logic Gates (Basic Gates: AND, OR, NOT), Logic Diagrams, Karnaugh Maps (K-Maps), Software Development Life Cycle (SDLC), The Waterfall Model, The Agile Model, Communication Models and the OSI 7-Layer Model, Algorithm, Algorithm vs Pseudocode, Decomposition, Sorting Algorithms: Bubble Sort, Sorting Algorithms: Selection Sort, Searching Algorithms: Binary Search

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Write every table and diagram on this day from memory on the board, then check the cards.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What is the secondary data used in Step 7?
2. According to Step 10, which group reported higher distraction?
3. Which artefact lets viewers explore data with interactive filters?


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.1.3 Analog and Digital Signals ★ Golden


A signal is a changing voltage (or other quantity) that carries information.

- Analog signals are continuous signals that change smoothly over time, like a sine wave.
- Examples: the human voice, a traditional mercury thermometer.
- Digital signals have only two levels: HIGH (1) and LOW (0).

Feature	Analog data	Digital data
Nature	Continuous flow.	Discrete, separate values (bits).
Wave shape	Sine wave (smooth curve).	Square wave (sudden jumps).
Reliability	Low (affected by noise).	High (resistant to noise).
Examples	Human voice, traditional thermometer.	Computer data.

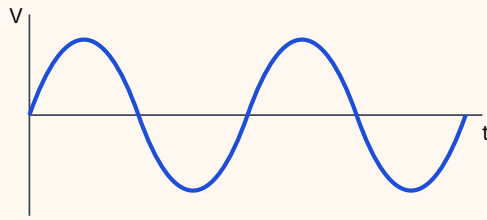

Analog Signal (Sine Wave)

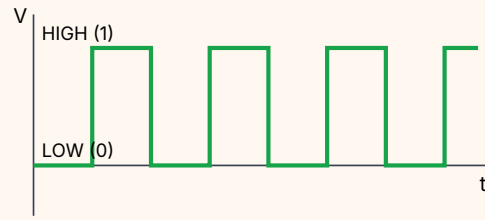

Digital Signal (Square Wave)

An analog signal changes smoothly; a digital signal jumps between only two levels.

Remember: Analog = A smooth curve. Digital = Doorsteps. Analog looks like ocean waves; digital looks like a castle wall (square teeth).

Exam: Common questions: "Differentiate between analog and digital signals" (3–4 marks) and "Draw an analog and a digital signal." Write the comparison as a table with at least...


اینا لگ سگنل وقت کے ساتھ ہموار انداز میں بدلتا ہے، جیسے سائن ویو (Sine Wave)؛ انسانی آواز اس کی مثال ہے۔

1.1.7 Logic Gates (Basic Gates: AND, OR, NOT) ★ Golden

Logic gates are electronic circuits that perform Boolean operations.

- They take one or more input bits and produce one output bit.
- They are the building blocks of all digital systems — a processor contains billions of them.
- The three basic gates match the three basic operations: the AND gate, the OR gate and the NOT gate (also called an inverter).


A	B	Y
0	0	0
0	1	0
1	0	0
1	1	1



$$\text{AND: } Y = A \cdot B$$



$$\text{OR: } Y = A + B$$



$$\text{NOT: } Y = A'$$

Symbols of the basic gates. AND has a flat back and round front ("D" shape); OR has a curved back and pointed front; NOT is a triangle with a small circle (bubble).

Remember: Shortcut: AND output is 0 if any input is 0. OR output is 1 if any input is 1. Learn just the "special row": AND is 1 only at 11; OR is 0 only at 00.


Exam: You are often asked to "draw the symbol, write the expression and truth table" of a gate (2–3 marks each). Draw neat symbols with labelled inputs A, B and output Y....

لاجک گیٹس الیکٹرانک سرکٹ ہیں جو بولین آپریشن انجام دیتے ہیں اور تمام ڈیجیٹل نظاموں کی بنیادی اینٹیں ہیں۔

1.1.11 Logic Diagrams ★ Golden

A logic diagram shows how logic gates are connected to create a circuit.

- It is a "picture" of a Boolean expression.
- To draw one, use the order of precedence: the operation with the highest priority is drawn first (nearest the inputs), and the last...

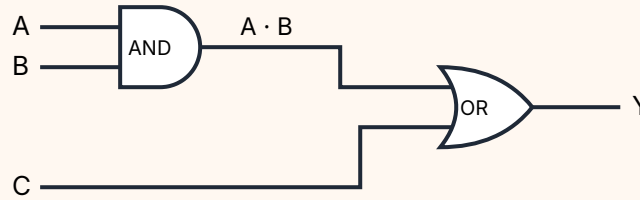

$Y = A \cdot B + C$: AND first, then OR.

Remember: Read the expression and ask "What is done last?" That gate goes on the far right, next to Y. Work backwards to the inputs. Count gates: $Y = A \cdot B + C$ needs 2...

Exam: Typical question: "Draw the logic diagram of $Y = \dots$ " and sometimes "also make its truth table" (4–5 marks). Write the precedence steps in one line, draw neat gate symbols...

لاچک ڈایاگرام دکھاتا ہے کہ گیٹس آپس میں کیسے جڑ کر سرکٹ بناتے ہیں۔

1.1.13 Karnaugh Maps (K-Maps) ★ Golden

A Karnaugh map (K-map) is a graphical tool used to simplify Boolean expressions.

- It is a grid of cells — one cell for each row of the truth table.
- The cells are arranged so that neighbouring (adjacent) cells differ by only ONE bit.
- This ordering is called Gray code.

	B = 0	B = 1
A = 0	Cell 0 ($A'B'$)	Cell 1 ($A'B$)
A = 1	Cell 2 (AB')	Cell 3 (AB)

Remember: Gray code song: "zero-zero, zero-one, one-one, one-zero" — only one bit flips at each step.

Imagine the K-map is drawn on a tube, so the left and right edges...

Exam: K-maps are a favourite long question (5–6 marks): "Simplify $F(A,B,C) = \sum m(\dots)$ using a K-map." Draw the map with labelled Gray-code headings, fill every cell (write the 0s...

کارنو میپ (K-Map) بولین ایکسپریشن کو آسان بنانے کا تصویری طریقہ ہے۔

1.2.1 – 1.2.3 Software Development Life Cycle (SDLC) ★ Golden

The Software Development Life Cycle (SDLC) is a structured process that guides software development from beginning to end.

1. Requirement Analysis → 2. System Design → 3. Implementation → 4. Testing → 5. Deployment → 6. Maintenance

- It ensures clear goals, better planning, risk reduction and high quality.
- Without it, teams forget features, go over budget and deliver buggy software.
- SDLC has 6 phases: 1.

Phase	Activities and details	Deliverable (what it produces)
1. Requirement Analysis	Meet clients, understand their needs, list the features. This is the most important phase — mistakes here spread to every later phase.	SRS Document (Software Requirements Specification)
2. System Design	Create the High-Level Design (overall architecture), the Low-Level Design (database, UI screens) and flowcharts.	Design Document
3. Implementation	Write the actual code in programming languages (Python, Java, etc.) based on the design documents.	Working Source Code

Remember: Remember the order with "Real Developers Implement, Test, Deploy, Maintain" (R-D-I-T-D-M). Black box = a closed box (you can't see inside). White box = a glass...

Exam: "Explain the phases of SDLC" is a very common long question (5–8 marks). Name all 6 phases in order, write 1–2 lines of activities for each, and state the deliverable of...


ایس ڈی ایل سی (SDLC) سافٹ ویئر بنانے کا منظم طریقہ ہے جس کے چھ مراحل ہیں: ضروریات کا تجزیہ، سسٹم ڈیزائن، کوڈنگ (Implementation)، ...

1.2.4 The Waterfall Model ★ Golden

The Waterfall model is a linear, sequential approach to the SDLC.

- Each phase must be completed before the next one begins, like water falling down steps.
- There is no easy way to go back to a previous phase.

Advantages (Pros)	Disadvantages (Cons)
Simple to understand and manage.	Not flexible to changes.
Well documented at every step.	Testing happens very late in the process.

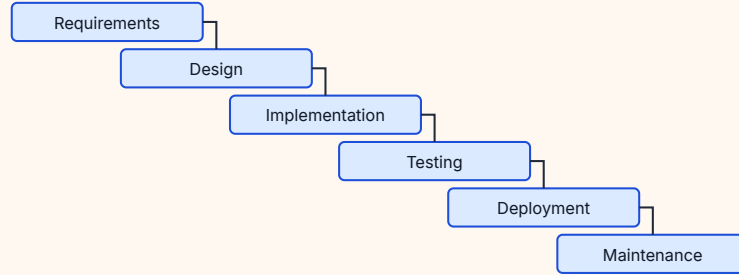

The Waterfall model: each phase "falls" into the next, in one direction only.

Remember: Waterfall = water only flows downwards. Once water has fallen it cannot climb back up — once a phase is finished you do not go back.

Exam: Expect "Explain the Waterfall model with its advantages and disadvantages" or "When should the Waterfall model be used?" Draw the step diagram, list the three "when to..."

واثر فال (آبشار) ماڈل ایک سیدھا اور ترتیب وار طریقہ ہے؛ ہر مرحلہ مکمل ہونے کے بعد ہی اگلا شروع ہوتا ہے اور پیچھے جانا مشکل ہوتا ہے۔

1.2.4 The Agile Model ★ Golden

The Agile model is an iterative approach: the software is built in small, repeated cycles called sprints (usually 2–4 weeks long).

Plan → Design → Build → Test → Review & feedback → Next sprint ↻

- Each sprint plans, builds and tests a small part of the software, and then shows it to the customer.
- Customer feedback is gathered continuously and used in the next sprint.
- Plan → Design → Build → Test → Review & feedback → Next sprint ↻

Advantages (Pros)	Disadvantages (Cons)
Highly flexible to changes.	Less documentation.
Early delivery of working software.	Unpredictable end-time and cost.

Remember: Agile = agile athlete: quick and able to change direction. Think of making a pizza where the customer tastes each slice and you adjust the next one.

Exam: Questions ask you to define Agile, explain sprints, list pros/cons, or say when to use it. Always mention the words "iterative", "sprints (2–4 weeks)" and "continuous..."

ایجائل (Agile) ماڈل میں سافٹ ویئر چھوٹے چھوٹے ادوار میں بنتا ہے جنہیں اسپرینٹ (Sprint) کہتے ہیں، جو عموماً دو سے چار ہفتے کے ہوتے ہیں۔

1.3.1 – 1.3.4 Communication Models and the OSI 7-Layer Model ★ Golden

A communication model explains how data travels from one device to another through a network.

- Because sending data is complicated, the job is split into layers; each layer does one part of the job and passes the data to the next...
- The OSI (Open Systems Interconnection) model was developed by ISO (International Organization for Standardization) in 1984.
- It divides communication into 7 layers.

Layer	Function	Protocols / examples
7. Application	Provides network services directly to user applications (browser, email program).	HTTP, HTTPS, FTP, SMTP, DNS
6. Presentation	Data translation, encryption (security) and compression.	SSL/TLS, JPEG, MP3, ASCII
5. Session	Opens, maintains and closes communication sessions.	NetBIOS, RPC
4. Transport	Reliable end-to-end delivery, error checking, port numbering.	TCP (reliable), UDP (fast)



The 7 layers of the OSI model with the mnemonic "Please Do Not Throw Sausage Pizza Away".

Remember: Mnemonic (bottom to top, 1 → 7): "Please Do Not Throw Sausage Pizza Away" = Physical, Data Link, Network, Transport, Session, Presentation, Application. (Top...

Exam: A guaranteed long question: "Explain the seven layers of the OSI model." Draw the 7-layer stack (numbered, layer 7 on top), then write one function and one or two...

کمیونیکیشن ماڈل بتاتا ہے کہ ڈیٹا نیٹ ورک کے ذریعے ایک ڈیوائس سے دوسری تک کیسے پہنچتا ہے۔

2.2 Algorithm ★ Golden

An algorithm is a step-by-step logical procedure used to solve a problem.

- Input — the data it starts with.
- Clear steps — each step has only one meaning.
- A definite end — it must finish after a limited number of steps.
- Output — the result it produces.

Reason	What it means for you
Structured approach	Algorithms provide a structured approach to problem-solving, making complex tasks manageable.
Optimisation	They optimise time and memory usage, which is crucial for large-scale applications (for example, searching millions of records).
Reusability	They can be reused for similar problems, saving time and effort. A sorting algorithm for marks can also sort prices.
Accuracy and consistency	They ensure accuracy and consistency, reducing human error. The same steps always give the same result.
Blueprint	They act as a blueprint (a plan) before actual code implementation, just like an architect's map before building a house.

Remember: Remember the five reasons as S-O-R-A-B: Structured, Optimised, Reusable, Accurate, Blueprint.

Exam: Very common short question: "Define algorithm and write its importance." Write the definition word for word — a step-by-step logical procedure used to solve a problem;...

الگورتھم (Algorithm) کسی مسئلے کو حل کرنے کا مرحلہ وار منطقی طریقہ ہے۔

2.2.2 Algorithm vs Pseudocode ★ Golden

Both algorithms and pseudocode are used in problem-solving, but they serve different purposes in the design phase.

Problem → Algorithm (what) → Pseudocode (how) → Program (code) → Output

- The algorithm says what must be done.
- The pseudocode shows how it could be implemented, using programming-like keywords such as IF, FOR and WHILE, but it still cannot be run on...

Point	Algorithm	Pseudocode
Definition	A step-by-step logical procedure to solve a problem.	A human-readable representation of an algorithm using plain English & keywords.
Nature	Conceptual and language-independent.	Semi-formal and structured, but not executable code.
Purpose	To define what needs to be done logically.	To present how it can be implemented in a readable format.
Form	Usually described in plain steps, bullets or numbered points.	Written using structured constructs (IF, FOR, WHILE) like programming.
Focus	Focuses on the logic and steps of the problem.	Focuses on representing steps clearly before coding.
Audience	For anyone trying to understand the logic (including non-programmers).	Mainly for programmers or students preparing for coding.
Format rules	No fixed format; can be informal.	Follows standard pseudocode conventions for clarity.

Remember: Teacher's analogy: an algorithm is like a recipe ("Bake a cake at 350 degrees"). Pseudocode is like a structured kitchen manual using standard verbs (SET...

Exam: "Differentiate between algorithm and pseudocode" is a favourite 4–5 mark question. Draw a two-column table and give at least five points (definition, nature, purpose,...

الگورتھم بتاتا ہے کہ کیا کرنا ہے، جبکہ سوڈو کوڈ (Pseudocode) بتاتا ہے کہ اسے کیسے کیا جا سکتا ہے۔


2.3.1 Decomposition ★ Golden

Decomposition is a problem-solving technique in which a complex task or system is broken down into smaller, manageable parts.

Vocabulary → Grammar rules → Tenses → Sentence building

- By dividing a big problem into simpler steps, it becomes easier to understand, develop and solve.
- Each small part is called a sub-task (or sub-problem).
- You solve each sub-task separately, then join the solutions to solve the whole problem.

Sub-task	Description
Learn vocabulary	Learn the words for people, actions and things (e.g., "I", "eat", "apple").
Grammar rules	Learn the sentence structure: Subject → Verb → Object.
Learn tenses	Present, past, future (e.g., "I eat" vs. "I ate").
Sentence building	Combine words using the rules to create valid sentences: "I ate an apple."

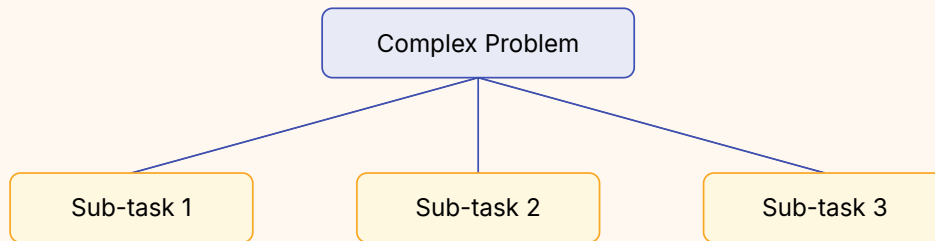

Decomposition: one complex problem is split into smaller sub-tasks.

Remember: Think of eating a big roti: you cannot eat it in one bite, so you break it into small pieces.
Decomposition = "break the roti".

Exam: Expect "Define decomposition with a real-life example" or "Explain the benefits of decomposition". Give the definition, draw the small tree (Complex Problem → Sub-task...)

ڈیکمپوزیشن (Decomposition) کا مطلب ہے کسی بڑے اور پیچیدہ مسئلے کو چھوٹے اور آسان حصوں میں تقسیم کرنا۔

2.4.1 Sorting Algorithms: Bubble Sort ★ Golden

Bubble Sort is an elementary sorting algorithm that works by repeatedly comparing adjacent (side-by-side) elements and swapping them if they are in the wrong order.

Compare DATA[j] and DATA[j+1] → Left > Right? → Yes: swap → Move one step right → End of pass: largest is at the end → Repeat N-1 passes

- In each pass, the largest remaining value "bubbles up" to the end of the list, like an air bubble rising to the top of water.
- So after pass 1 the largest value is in the last place, after pass 2 the second largest is in second-last place, and so on.
- A list of N items needs N - 1 passes, and pass K makes N - K comparisons.

Comparison	Pair	Left > Right?	Action	List after
1st vs 2nd	[8, 4], 1, 9, 3	8 > 4 Yes	Swap	4, 8, 1, 9, 3
2nd vs 3rd	4, [8, 1], 9, 3	8 > 1 Yes	Swap	4, 1, 8, 9, 3
3rd vs 4th	4, 1, [8, 9], 3	8 > 9 No	No change	4, 1, 8, 9, 3
4th vs 5th	4, 1, 8, [9, 3]	9 > 3 Yes	Swap	4, 1, 8, 3, 9

Remember: Bubble = neighbours. Bubble Sort only ever compares neighbours (j and j+1). Each pass pushes the biggest bubble to the end. For descending order, just change >...

Exam: The most common question: "Sort the list ... using Bubble Sort. Show each pass." Draw one table per pass with columns Pair, Compare, Action, List after. Mark the element...

ببل سارٹ (Bubble Sort) میں ساتھ ساتھ موجود دو عناصر کا موازنہ کیا جاتا ہے اور اگر وہ غلط ترتیب میں ہوں تو ان کی جگہ بدل دی جاتی ہے۔

2.4.1 Sorting Algorithms: Selection Sort ★ Golden

Selection Sort is a simple sorting algorithm that works by repeatedly selecting the smallest element from the unsorted portion of the list and moving it to its correct position at the front.

Fix position $K \rightarrow$ Compare $DATA[K]$ with $DATA[PTR]$, $PTR = K+1 \dots N \rightarrow DATA[K] > DATA[PTR]? \text{ swap} \rightarrow$ End of pass: smallest is at $K \rightarrow K = K + 1$

- Think of it as filling seats from the front: first find who belongs in position 1, then position 2, and so on.
- In the textbook version, the element at position K is compared with every element after it; whenever a smaller one is found, the two are...
- So at the end of pass K , the K -th smallest value sits in position K .

Compare	List	Pos1 > PosX?	Action	List after
Pos1 vs Pos2	[8], [4], 1, 9, 3	$8 > 4$ Yes	Swap	4, 8, 1, 9, 3
Pos1 vs Pos3	[4], 8, [1], 9, 3	$4 > 1$ Yes	Swap	1, 8, 4, 9, 3
Pos1 vs Pos4	[1], 8, 4, [9], 3	$1 > 9$ No	No change	1, 8, 4, 9, 3
Pos1 vs Pos5	[1], 8, 4, 9, [3]	$1 > 3$ No	No change	1, 8, 4, 9, 3

Remember: Teacher's tip — spot the difference: in Selection Sort the inner loop starts at $outer + 1$ and compares with the fixed position $DATA[outer]$. In Bubble Sort the...

Exam: Typical questions: "Sort ... using Selection Sort, showing all steps", "Differentiate between Bubble Sort and Selection Sort" and "Why is Selection Sort not stable?" In...

سلیکشن سارٹ (Selection Sort) میں فہرست کے غیر ترتیب شدہ حصے سے سب سے چھوٹا عدد چن کر اسے سامنے اس کی درست جگہ پر رکھا جاتا ہے۔

2.4.2 Searching Algorithms: Binary Search ★ Golden

Binary Search is a highly efficient search algorithm that works by repeatedly dividing the search interval in half.

BEG = first, END = last → MID = $\text{INT}((\text{BEG} + \text{END}) / 2)$ → Item = DATA[MID]? Found → Item < DATA[MID]: END = MID-1 →
Else: BEG = MID+1 → Repeat while BEG ≤ END

- BEG (low) — first position of the current part.
- END (high) — last position of the current part.
- MID = $\text{INT}((\text{BEG} + \text{END}) / 2)$ — the middle position. INT means "drop the decimal part".
- Equal → found, stop.

Step	BEG (low)	END (high)	MID	DATA[MID]	Compare	Action
1	1	9	$\text{INT}(10/2) = 5$	5	$7 > 5$	BEG = 6 (go right)
2	6	9	$\text{INT}(15/2) = 7$	7	$7 = 7$	Found, LOC = 7

Remember: Binary Search is how you find a word in a dictionary: open the middle, decide "before or after?", and throw away half the book each time. "Sorted first, then..."

Exam: You will usually be given a sorted list and an item and asked to "search using Binary Search, showing all steps". Always draw a table with BEG, END, MID, DATA[MID],...

بائری سرچ (Binary Search) ایک تیز رفتار طریقہ ہے جو ہر قدم پر تلاش کے حصے کو آدھا کر دیتا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Analog and Digital Signals:** Do not draw a digital signal with sloping sides.
- **Logic Gates (Basic Gates: AND, OR, NOT):** Do not mix up the AND and OR symbols.
- **Logic Diagrams:** Do not draw a separate wire for a variable each time it appears and then leave one unconnected.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Analog and Digital Signals**. Write: A signal is a changing voltage (or other quantity) that carries information.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Analog signals are continuous signals that change smoothly over time, like a sine wave. (2) Examples: the human voice, a traditional mercury thermometer. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a fully labelled diagram copied from the board + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Logic Gates (Basic Gates: AND, OR, NOT)**. Write: Logic gates are electronic circuits that perform Boolean operations.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) They take one or more input bits and produce one output bit. (2) They are the building blocks of all digital systems — a processor contains billions of them. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Logic Diagrams**. Write: A logic diagram shows how logic gates are connected to create a circuit.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) It is a "picture" of a Boolean expression. (2) To draw one, use the order of precedence: the operation with the highest priority is drawn first (nearest the inputs), and the last... — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What shape of wave does a digital signal make?

3 marks. Explain Analog and Digital Signals with two clear points and one example.

5 marks. Common questions: "Differentiate between analog and digital signals" (3–4 marks) and "Draw an analog and a digital signal." Write the comparison as a table with at least three features (nature, wave...

8 marks. Analog and Digital Signals: 5-mark answer plus a fully labelled diagram copied from the board.

Answers: 1. A square wave 3. Analog signals are continuous signals that change smoothly over time, like a sine wave.; Examples: the human voice, a traditional mercury thermometer. 5. Use the recipe in the blue box.

Model opening: A signal is a changing voltage (or other quantity) that carries information. 8. Same 5-mark body + a fully labelled diagram copied from the board + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Analog and Digital Signals** using the recipe in this topic. Include a fully labelled diagram copied from the board. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Golden blitz — Chapters 3–4

★ only · Chapters 3–4 · Golden blitz

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter from yesterday's Golden · 10–35 min lock the tables from memory · 35–55 min two students write a 5-mark Golden answer on the board · 55–75 min timed 8-mark · 75–85 min error clinic · 85–90 min homework: redraw from memory.

Board today: Fundamentals of Python Programming · Variables · Data Types in Python · Operators and Operands: Arithmetic and Assignment · Relational, Logical and Membership Operators · Bitwise Operators · Control Structures · Selection Statements: if and if-else

★ **Must lock:** Fundamentals of Python Programming, Variables, Data Types in Python, Operators and Operands: Arithmetic and Assignment, Relational, Logical and Membership Operators, Bitwise Operators, Control Structures, Selection Statements: if and if-else, Selection Statements: if-elif-else and Nested if, Repetition Statements: the for Loop and range(), The while Loop, break and continue, Nested Loops and for vs while, Keys and Integrity Constraints, Entity Relationship Model (ER-Model), Referential Integrity, Creating Queries in MS Access

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Write every table and diagram on this day from memory on the board, then check the cards.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What shape of wave does a digital signal make?
2. What is the output of an OR gate when $A = 0$ and $B = 0$?
3. In $Y = A + B \cdot C$, which gate is drawn first?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.4 Fundamentals of Python Programming ★ Golden

The basic structure of a Python program is simple and clear.

- A program takes data, processes it using statements, and finally shows output.
- Python runs the statements top to bottom, one after another (sequentially).
- A statement is one complete instruction, usually written on one line, such as `print("Hi")` or `x = 5`.

```
# This is a comment. It explains the code below.  
print("Hello, World!")  
if 5 > 2:  
    # The space before 'print' is the indentation  
    print("Five is greater than two!")
```

Remember: Think of indentation like the points and sub-points in your notebook. Sub-points are written a little to the right to show they "belong" to the main point. A...

Exam: Common questions: "What is the purpose of comments?", "Why is indentation important in Python?", "How is Python different from C++/Java in defining blocks?" Write:...

پائنتھن پروگرام اوپر سے نیچے ترتیب سے چلتا ہے۔

3.4.1 Variables ★ Golden

A variable is a named space in computer memory used to store data.

- Can contain letters, numbers and underscores (_) only — no spaces or symbols like -, @, \$.
- Must start with a letter or underscore, NOT a number (1name is invalid).
- Are case-sensitive: age and Age are two completely different variables.
- Cannot be a Python keyword (a reserved word such as if, for, while, else, True).

```
name = "Ali"  
age = 16  
my_height = 5.7  
score1 = 100
```

Remember: Choose meaningful names: total_marks is far clearer than tm or x. Use lowercase words joined by underscores (this style is called snake_case).

Exam: A favourite question: "Which of these variable names are valid? Give reasons." Check each name against all four rules and state the rule broken, e.g. "2nd_place —...

ویری ایبل (Variable) میموری میں ایک نام والی جگہ ہے جس میں ڈیٹا رکھا جاتا ہے، بالکل ایک لیبل لگے ڈیے کی طرح۔

3.4.1 Data Types in Python ★ Golden

A data type specifies the kind of data a variable holds — a whole number, a decimal, text, True/False, or a collection of items.

- The type decides what you can do with the data (you can divide numbers, but not names).
- Python has several built-in data types:

Name	Type	Description	Example
Integer	<code>int</code>	Whole numbers without decimals (positive, negative or zero).	<code>age = 16</code>
Floating point	<code>float</code>	Numbers with a decimal point.	<code>height = 5.7</code>
String	<code>str</code>	Text data, enclosed in quotes (" " or ' ').	<code>name = "Sammy" or year = "2026"</code>
Boolean	<code>bool</code>	Logical value: True or False (capital T / F).	<code>is_student = True</code>
List	<code>list</code>	Ordered, changeable collection in square brackets [] .	<code>marks = [85, 90, 75]</code>
Tuple	<code>tuple</code>	Ordered, unchangeable sequence in parentheses () .	<code>coords = (10, 20)</code>
Dictionary	<code>dict</code>	Key : value pairs in curly braces { } .	<code>student = {"name": "Ahmed", "age": 16}</code>
Set	<code>set</code>	Unordered collection of unique items (no duplicates).	<code>vowels = {'a', 'e', 'i'}</code>

Remember: Brackets decide the collection: [] List (changeable), () Tuple (locked), { } with key:value = Dictionary, { } with single items = Set (unique). Think: a list...

Exam: Expect: "Name any four data types with examples" or "Differentiate list and tuple". For a difference question, use a two-column table: list — [], changeable, e.g. marks...

ڈیٹا ٹائپ (Data Type) بتاتی ہے کہ ویری ایبل میں کس قسم کا ڈیٹا ہے۔

3.4.3 Operators and Operands: Arithmetic and Assignment ★ Golden

An operand is the value or variable being worked on.

- An operator is the symbol that performs the action.
- Together they form an expression, which Python evaluates to a single value.
- In $10 + 20$: 10 is an operand, + is the operator, 20 is an operand, and the result is 30.

Operator	Purpose	Example	Result
+	Addition	$5 + 3$	8
-	Subtraction	$10 - 4$	6
*	Multiplication	$4 * 2$	8
/	Division (result is always a float)	$9 / 2$	4.5
//	Floor division (drops the decimal part)	$9 // 2$	4
%	Modulus (remainder)	$9 \% 2$	1
**	Exponentiation (power)	$2 ** 3$	8

```
print(5 + 3)
print(10 - 4)
print(4 * 2)
print(9 / 2)
print(9 // 2)
print(9 % 2)
print(2 ** 3)
print(8 / 2)
```

Remember: Three kinds of division: / = exact answer (float), // = quotient only ("floor"), % = remainder only. A number is even when $n \% 2 == 0$.

Exam: You will be asked to evaluate expressions such as $17 // 5$, $17 \% 5$, $2 ** 4$ or to trace compound assignment. Show each step and write the final value with its type (e.g....

آپرینڈ (Operand) وہ ویلیو ہے جس پر عمل ہوتا ہے اور آپریٹر (Operator) وہ علامت ہے جو عمل کرتی ہے۔

3.4.3 Relational, Logical and Membership Operators ★ Golden

3. Relational (comparison) operators compare two values and return a Boolean (True or False).

- Relational (comparison) operators compare two values and return a Boolean (True or False).
- They are used in conditions.

Op	Description	Example (a = 10, b = 5)	Result
=	Equal to	a == b	False
≠	Not equal to	a != b	True
>	Greater than	a > b	True
<	Less than	a < b	False
≥	Greater than or equal to	a ≥ 10	True
≤	Less than or equal to	a ≤ b	False

```
a = 10
b = 5
print(a == b)
print(a != b)
print(a > b)
print(a < b)
print(a ≥ 10)
print(a ≤ b)
```

Remember: AND is strict, OR is generous. AND is like a teacher who needs both homework and attendance; OR is like a shop that accepts cash or card. Order of evaluation:...

Exam: Typical: "Evaluate a > b and b > 3 for a = 10, b = 5" or "Write the truth table of and/or". Write each sub-condition's value first, then combine. Remember: == compares,...

ریلیشنل آپریٹرز (Relational Operators) دو ویلیوز کا موازنہ کر کے True یا False دیتے ہیں۔

3.4.3 Bitwise Operators ★ Golden

6. Bitwise operators treat numbers as binary digits (bits: 0s and 1s) and work on them bit by bit, column by column.

- AND (&) — gives 1 only if both bits are 1, otherwise 0.
- OR (|) — gives 1 if at least one bit is 1.
- XOR (^) — gives 1 if the bits are different, 0 if they are the same.
- NOT (~) — inverts all bits (0 → 1, 1 → 0). In Python the result is the number made negative, minus 1: $\sim x = -(x + 1)$. So ~ 10 gives -11.

Bit A	Bit B	A & B	A B	A ^ B	~A
0	0	0	0	0	1
0	1	0	1	1	1
1	0	0	1	1	0
1	1	1	1	0	0

```
a = 10
b = 6
print(bin(a), bin(b))
print(a & b)
print(a | b)
print(a ^ b)
print(~a)
```

Remember: Shortcuts: $x > n = x // 2^n$, $\sim x = -x - 1$. For AND/OR/XOR always write both numbers in binary, one under the other, with the same number of bits.

Exam: Exams ask you to "evaluate $12 \& 10$, $12 | 10$, $12 \wedge 10$, ~ 5 , $7 >> 1$ showing binary working". Marks are given for the binary conversion and column working, not just the...

بٹ وائز آپریٹرز (Bitwise Operators) اعداد کو بائنری میں بدل کر ہر بٹ پر الگ الگ کام کرتے ہیں۔

3.5 Control Structures ★ Golden

Control structures decide the order in which statements are executed in a program (the "flow of control").

- Sequence — do the steps one after another, top to bottom.
- Selection — choose a path depending on a condition (if, else).
- Repetition — repeat steps (loops: for, while).

Remember: Remember "S-S-R": Sequence, Selection, Repetition — "Step, Select, Repeat".


Exam: "Name and explain the three basic control structures" is a very common short question. Give a one-line definition and a two-line Python example for each.

کنٹرول اسٹرکچرز (Control Structures) طے کرتے ہیں کہ پروگرام کی ہدایات کس ترتیب سے چلیں گی۔

3.5.2 Selection Statements: if and if-else ★ Golden

Selection changes the flow of a program based on a condition — an expression that is either True or False.

- It helps a program respond intelligently to different situations.
- The if statement executes a block of code only if the condition is True.
- If the condition is False, the block is completely skipped.

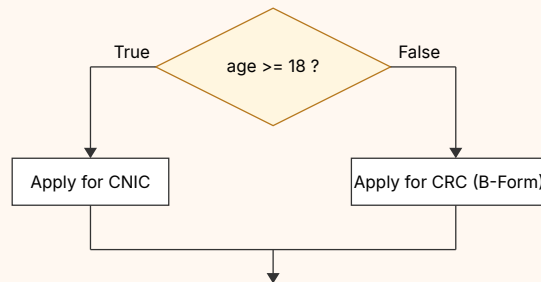

An if-else statement: one diamond (condition), two paths, then the paths join again.

```
if condition:
    statement(s)    # runs only when condition is True
```

Remember: Formatting rule: put a colon (:) after if and else, and indent the code inside the blocks. else never has a condition of its own.

Exam: Asked as: "Write a program that inputs a number and prints whether it is even or odd / positive or negative / pass or fail." Write the full program with `int(input())`,...

سلیکشن (Selection) میں پروگرام شرط کی بنیاد پر فیصلہ کرتا ہے۔

3.5.2 Selection Statements: if-elif-else and Nested if ★ Golden

3. The if-elif-else statement handles many conditions.

- The if-elif-else statement handles many conditions.
- (elif is short for "else if".) Python checks the conditions from top to bottom.
- As soon as it finds a True condition, it runs that block and ignores all the rest.
- If none is True, the else block runs.

marks	>= 80?	>= 70?	>= 60?	Output
92	True	(not checked)	(not checked)	A-1 Grade
75	False	True	(not checked)	A Grade
60	False	False	True	B Grade
41	False	False	False	Fail or below B

Remember: In an if-elif-else ladder, put the strictest condition first (highest marks first). Think of a ladder: you step off at the first rung that fits.

Exam: Grade-calculator programs (if-elif-else) and "largest of three numbers" are very common long questions. Check conditions in the right order, indent nested blocks...

if-elif-else میں کئی شرطیں اوپر سے نیچے ترتیب سے دیکھی جاتی ہیں، اور جو شرط سب سے پہلے درست ہو اسی کا بلاک چلتا ہے، باقی سب چھوڑ دی جاتی ہیں۔

3.5.3 Repetition Statements: the for Loop and range() ★ Golden

A repetition statement (loop) lets a block of code run again and again.

- This greatly reduces the need to write the same code many times.
- Each single run of the loop body is called an iteration.
- The for loop is used when the exact number of iterations is known.

Syntax	How it works	Example	Values produced
<code>range(stop)</code>	From 0 up to, but not including , stop.	<code>range(3)</code>	0 1 2
<code>range(start, stop)</code>	From start up to, but not including, stop.	<code>range(2, 5)</code>	2 3 4
<code>range(start, stop, step)</code>	From start towards stop, jumping by step.	<code>range(1, 6, 2)</code>	1 3 5

```
for i in range(3):  
    print(i)
```

Remember: range stops one short: `range(1, 11)` gives 1 to 10. To include a number n , write `range(..., n + 1)`.

Number of values in `range(a, b)` = $b - a$.

Exam: Expect "predict the output" questions on `range()` with a step, and programs such as "print a table", "sum of first n numbers", "even numbers from 1 to 20". Always state...


لوپ (Loop) کوڈ کے ایک بلاک کو بار بار چلاتا ہے۔

3.5.3 The while Loop, break and continue ★ Golden

2. The while loop repeats a block of code as long as a condition remains True.

- break — exits (stops) the loop entirely and immediately.
- continue — skips the rest of the current iteration and jumps to the next one.

count	count <= 3?	Printed	count after update
1	True	1	2
2	True	2	3
3	True	3	4
4	False	—	loop ends

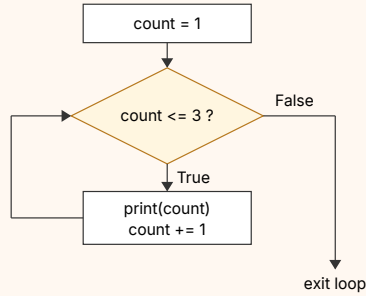

A while loop: test the condition, run the body, go back and test again.

```
count = 1
while count ≤ 3:
    print(count)
    count += 1 # VERY IMPORTANT: update the condition!
```

Remember: break = "exit the room"; continue = "skip this turn". For every while loop, check the I-T-U rule: Initialise, Test, Update.

Exam: "Differentiate break and continue with examples" and "What is an infinite loop?" are frequent. Use the two side-by-side programs above with their outputs — examiners...

while لوپ اس وقت تک چلتا رہتا ہے جب تک شرط درست (True) رہے، اور یہ تب استعمال ہوتا ہے جب پہلے سے معلوم نہ ہو کہ کتنی بار دہرانا ہے۔

3.5.3 Nested Loops and for vs while ★ Golden

A nested loop is a loop inside another loop.

- The inner loop runs completely, from start to finish, for every single iteration of the outer loop.
- If the outer loop runs 2 times and the inner loop runs 3 times, the inner body runs $2 \times 3 = 6$ times.

for loop	while loop
Used when the number of iterations is known .	Used when the number of iterations is unknown (condition-based).
Automatically updates the loop variable.	Requires a manual update of the counter (risk of an infinite loop).
Cleaner and shorter for counting tasks.	Better for dynamic situations (like "keep playing until the user says Stop").
<code>for i in range(1, 4): print(i)</code>	<code>i = 1 / while i ≤ 3: / print(i) / i += 1</code>

```
for outer in range(1, 3):      # runs 2 times (1, 2)
    for inner in range(1, 4):  # runs 3 times per outer (1, 2, 3)
        print(f"Outer: {outer}, Inner: {inner}")
```

Remember: Ask yourself: "Do I know how many times?" Yes → for. "Do I only know when to stop?" → while. Nested loops are like a clock: the minute hand (inner loop) goes...

Exam: "Differentiate between for and while loops" (give three points and an example of each) and "How many times will the inner statement run?" (multiply the counts) are...

نیسٹڈ لوپ (Nested Loop) میں ایک لوپ دوسرے لوپ کے اندر ہوتا ہے، اور باہر والے لوپ کے ہر چکر میں اندر والا لوپ شروع سے آخر تک مکمل چلتا ہے۔

4.3.1 Keys and Integrity Constraints ★ Golden

A key is a field (or a set of fields) that uniquely identifies records and links tables.

- Integrity constraints are the rules that keep those keys honest.
- Any field (or combination) that could uniquely identify a row.
- A table may have several.

Table	Field	Role
Student	RollNo	Primary key
Student	BFormNo	Alternate key
Result	RollNo	Foreign key → Student.RollNo
Result	ExamID + RollNo	Could be a composite primary key

Trap: A phone number is a bad PK: people change numbers, two siblings may share one, and some students have none (NULL).

Exam: Board questions: "Differentiate primary and foreign key" (table of 4 points) and "Why can a PK not be NULL?" Because a NULL would mean "this row has no identity", so the...


کینڈیڈیٹ کی وہ فیلڈ ہے جو ریکارڈ کی شناخت کر سکے۔

4.4 Entity Relationship Model (ER-Model)

★ Golden

The ER model is the architect's blueprint: you draw what will be stored and how it connects before you create tables in Access.

Component	Meaning	Symbol	Example
Entity	A real-world object we store data about	Rectangle	STUDENT, TEACHER, COURSE
Attribute	A property of an entity. PK is underlined	Oval	StudentID, Name, Class
Relationship	How two entities are connected	Diamond	Enrolls, Teaches, Has



Rectangle = entity, diamond = relationship, oval = attribute. Underline the primary-key attribute.

Trap: The M:N rule.

Exam: Always state cardinality on the diagram (1 and M at the ends of the line). For M:N, the long question is "how do you resolve it?" — draw the junction entity with two...

ای آر ماڈل ڈیٹا بیس کا خاکہ ہے۔

4.5 Referential Integrity ★ Golden

Referential integrity means every foreign-key value in a child table must match an existing primary-key value in the parent — or be NULL if the design allows it.

- If Result.StudentID is a FK to Student.StudentID, you cannot type Result for student 999 if 999 is not in Student.
- You also cannot delete student 101 while results for 101 still exist — unless you first handle those child rows.

ID	Name
101	Ali
102	Sara

Trap: Cascade Delete is powerful and dangerous.

Exam: Write: definition, why it matters (no orphans), then one numbered example of Cascade Update and one of Cascade Delete. Mention parent vs child.

ریفرنشل انٹیگریٹی کا مطلب ہے بچہ ٹیبل کی فارن کی ہمیشہ والدین کی موجود پرائمری کی طرف اشارہ کرے۔

4.11 Creating Queries in MS Access ★ Golden

A query retrieves, filters and analyses data without changing the original tables.

- Create tab → Query Design.
- Show Table → add Student → Close.
- Double-click the fields you want; they drop into the grid.
- Red Run (!) button executes it.

Goal	Where to type	Example
Single criterion	Criteria row, one column	Department → "Computer Science"
AND (both must match)	Same Criteria row, two columns	Name "Ali" and Department "Computer Science"
OR (either may match)	Criteria row and the or: row	Department "IT" or "Computer Science"

Trap: Text criteria need quotes: "IT".

Exam: Remember: AND = same row in the grid; OR = different rows. Examiners draw a blank grid and ask you to fill Criteria and or:.

کوئری ٹیبل کو بدلے بغیر سوال پوچھتی ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Fundamentals of Python Programming:** IndentationError?
- **Variables:** = is not "equals" in the maths sense.
- **Data Types in Python:** True and False must start with a capital letter.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Fundamentals of Python Programming**. Write: The basic structure of a Python program is simple and clear.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) A program takes data, processes it using statements, and finally shows output. (2) Python runs the statements top to bottom, one after another (sequentially). — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Variables**. Write: A variable is a named space in computer memory used to store data.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Must start with a letter or underscore, NOT a number (1name is invalid). (2) Are case-sensitive: age and Age are two completely different variables. — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Data Types in Python**. Write: A data type specifies the kind of data a variable holds — a whole number, a decimal, text, True/False, or a collection of items.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The type decides what you can do with the data (you can divide numbers, but not names). (2) Python has several built-in data types: — + example.

5 marks: 3-mark structure + table: Name / Type / Description / Example + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Predict the output:

3 marks. Explain Fundamentals of Python Programming with two clear points and one example.

5 marks. Common questions: "What is the purpose of comments?", "Why is indentation important in Python?", "How is Python different from C++/Java in defining blocks?" Write: comments start with # and are...

8 marks. Fundamentals of Python Programming: 5-mark answer plus a complete truth table and a labelled gate / logic diagram.

Answers: 1. B then D on separate lines (line 1 is a comment; $3 > 7$ is false so C is skipped) 3. A program takes data, processes it using statements, and finally shows output.; Python runs the statements top to bottom, one after another (sequentially). 5. Use the recipe in the blue box. Model opening: The basic structure of a Python program is simple and clear. 8. Same 5-mark body + a complete truth table and a labelled gate / logic diagram + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Fundamentals of Python Programming** using the recipe in this topic. Include a complete truth table and a labelled gate / logic diagram. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Golden blitz — Chapters 5–6

★ only · Chapters 5–6 · Golden blitz

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter from yesterday's Golden · 10–35 min lock the tables from memory · 35–55 min two students write a 5-mark Golden answer on the board · 55–75 min timed 8-mark · 75–85 min error clinic · 85–90 min homework: redraw from memory.

Board today: Artificial Intelligence (AI) · Internet of Things (IoT) & Components · Information Sources (Primary, Secondary, Tertiary) · Assistive Technologies · Types of Data · Data-Collection Strategies · Interviews and Surveys · Prototypes, Observation and Simulations

★ **Must lock:** Artificial Intelligence (AI), Internet of Things (IoT) & Components, Information Sources (Primary, Secondary, Tertiary), Assistive Technologies, Types of Data, Data-Collection Strategies, Interviews and Surveys, Prototypes, Observation and Simulations, Primary and Secondary Data, Case Study: Digital Inquiry Project, Steps 1 – 3: Advanced Search and Methodology, Steps 4 – 6: Survey Preparation and Primary Data Collection, Steps 7 – 9: Secondary Data and Spreadsheet Organisation, Steps 10 – 12: Data Analysis, Conclusion and Recommendations, The Final Digital Artefact

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Write every table and diagram on this day from memory on the board, then check the cards.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Predict the output:
2. Valid or invalid? _total, roll-no, class, marks2026, 2marks
3. What is the data type of each? 3.0, "3", 3, False, [3]

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.1.1 Artificial Intelligence (AI) ★ Golden

Artificial Intelligence (AI) is the ability of a computer system to perform tasks that normally need human thinking, such as recognising faces, understanding language and making decisions.

IoT (Eyes) — collects data → Analytics — sorts data → AI (Brain) — decides → Action

- Artificial — it is created by humans; it is not natural.
- Intelligence — it can perform tasks that require thinking.
- Face recognition on a mobile phone to unlock the screen.
- YouTube suggesting videos based on your interests.

Remember: Eyes – Sort – Brain – Do. IoT is the eyes, Analytics sorts, AI is the brain, and the actuator does the action. Think of a cricket fielder: his eyes see the...

Exam: Common questions: "Define AI and give two examples" (2–3 marks), and "Explain how AI, IoT and Data Analytics work together" (4–5 marks). To score full marks: (1) write...

مصنوعی ذہانت (AI) کو "مصنوعی" اس لیے کہتے ہیں کہ اسے انسانوں نے بنایا ہے، اور "ذہانت" اس لیے کہ یہ ایسے کام کر سکتی ہے جن کے لیے سوچنا پڑتا ہے۔


5.1.2 Internet of Things (IoT) & Components ★ Golden

The Internet of Things (IoT) is a system in which physical devices are connected to the Internet and can collect and share data to perform tasks automatically.

Sensor (Collects) → Wi-Fi (Connectivity) → Cloud (Processes) → Actuator (Acts) → User App (UI)

- The "things" are ordinary objects — watches, cameras, cars, fans, water pumps — that have been given sensors and an internet connection so...
- Source example: A smartwatch collects your heart-rate data and sends it to your mobile phone, where it is displayed.

#	Component	What it does	Examples
1	Sensors	Devices that collect information from the physical world. They are the "eyes and ears" of the system.	Temperature sensor, motion sensor, fingerprint sensor, smoke sensor, soil moisture sensor
2	Actuators	Devices that perform physical actions in response to system commands. They convert digital signals into physical movement.	Electric motor, switch, automatic door opener, water valve, fan controller
3	Connectivity	The connection that allows devices to send and receive data . Without it, sensors can't talk to the system.	Wi-Fi, Bluetooth, ZigBee, 4G/5G
4	Data Processing	Changing raw data into useful information . Steps: collecting, organising, analysing and deciding.	Checking if the room temperature is too hot to trigger the AC
5	Cloud Computing	Storing data and using services over the internet instead of local hard drives. Handles massive IoT data.	Google Drive, iCloud, online LMS
6	User Interface (UI)	The component that enables interaction between the user and the device . Helps users see information and give commands.	Mobile apps, touch screens, voice commands

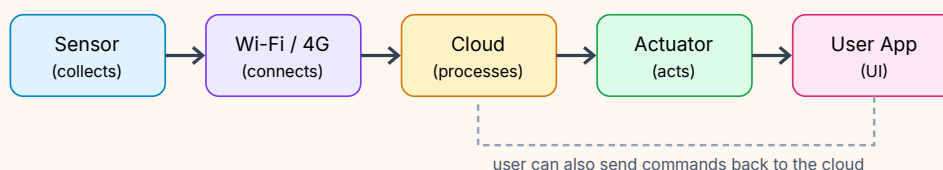

The six IoT components working as one system (data processing happens inside the cloud).

Remember: Sensor senses, Actuator acts. Both words give you the answer: sensor = see/sense (input), actuator = act (output). Remember the six components with "Some Ants..."

Exam: "Define IoT and explain its components" is one of the most frequent long questions. Write the definition with the three key ideas — physical devices, connected to the...


انٹرنیٹ آف تھنگز (IoT) ایک ایسا نظام ہے جس میں مختلف آلات (جیسے گھڑیاں، کیمرے، گاڑیاں) انٹرنیٹ سے جڑے ہوتے ہیں اور خودکار طریقے سے...

5.3 Information Sources (Primary, Secondary, Tertiary) ★ Golden

Information sources are ways to find knowledge and data.

- The internet has vast information, but not all of it is accurate.
- Sources are divided into three main categories.
- Primary sources give original, firsthand information straight from people, events or official records.

Primary (firsthand)	Secondary (explained by others)	Tertiary (summarised, quick reference)
Interview with a flood victim in Dadu	Newspaper report on the 2022 floods	Encyclopedia entry "Floods in Pakistan"
Photograph taken at an event	Textbook chapter explaining the event	Wikipedia article
Personal diary or letter	Biography written by a historian	Dictionary
NADRA official records (CNIC data)	Pakistan Bureau of Statistics report analysing census data	Handbook / almanac of facts
Original survey responses	Research paper analysing the survey	Index or list of research papers
Sensor readings from an IoT weather station	TV news analysis of the weather	A school "fact sheet" on climate
Quaid-e-Azam's original speech recording	Article discussing the speech	Encyclopedia summary of his life

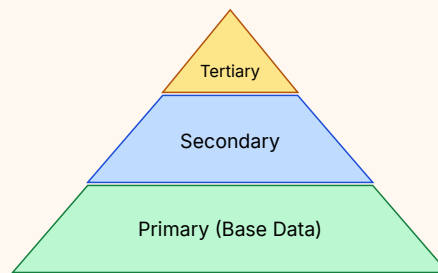

The information pyramid: primary data is the base; each higher level is built from the levels below it and is more summarised.

Remember: Rule of thumb (Author – Date – References): If an online article does not state the author's name, the date of publication, or list its references, it should...

Exam: Typical questions: "Differentiate between primary, secondary and tertiary sources with two examples each" (long/short), "Classify the following sources..." (MCQ/short),...

معلومات کے ذرائع علم اور ڈیٹا تلاش کرنے کے طریقے ہیں، جنہیں تین اقسام میں تقسیم کیا جاتا ہے۔

5.5 Assistive Technologies ★ Golden

Assistive technologies are devices, software and systems that help people with disabilities or functional limitations (difficulty in seeing, hearing, moving, speaking, remembering, etc.).

Mobility → Sensory → Communication → Cognitive

- They allow more people to participate equally in school, work and society.
- There are four categories:

Category	Purpose	Examples
1. Mobility aids	Help people move from one place to another.	Smart wheelchairs, stair lifts
2. Sensory aids	Support vision and hearing to improve interaction.	Hearing aids, screen readers (VoiceOver), Braille displays
3. Communication aids	Assist individuals with speech difficulties to express themselves.	Speech-generating devices, text-to-speech apps
4. Cognitive / learning aids	Help people with memory, reading and understanding.	Audiobooks, spell-checkers, digital reminder apps

Remember: Four categories = "My Small Cat Cries": Mobility, Sensory, Communication, Cognitive. Link each to a body function: legs (mobility), eyes/ears (sensory), mouth...

Exam: Expect: "What are assistive technologies? Explain their categories with examples" (long), "Name two sensory aids" (short), or "A screen reader is an example of ___"...

معاون ٹیکنالوجیز (Assistive Technologies) وہ آلات، سافٹ ویئر اور نظام ہیں جو معذور افراد کی مدد کرتے ہیں تاکہ وہ اسکول، کام اور مع...

6.3 Types of Data ★ Golden

Data means facts, numbers, words or observations that we collect.

- The data gathered through a survey, an investigation or a classroom project can be described in two ways: qualitatively or quantitatively.
- Knowing the difference is critical, because each type is analysed in a different way.

Type of data	Nature	Examples	Best used for
Qualitative	Descriptive, non-numerical	Opinions, reasons, behaviour	Understanding why and how something happens
Quantitative	Numerical, countable or measurable	Hours, scores, percentages, totals	Comparing results and making graphs/charts

Remember: QUALitative = QUALity = words and feelings. QUANTitative = QUANTity = numbers and counts. Qualitative answers why/how; quantitative answers how many/how much.

Exam: Common questions: "Differentiate between qualitative and quantitative data" (4–5 marks) or "Classify the following data". Write the answer as a table with four rows:...

کیفیتی ڈیٹا (Qualitative Data) الفاظ پر مشتمل ہوتا ہے اور بتاتا ہے کہ لوگ کیا سوچتے، محسوس کرتے یا تجربہ کرتے ہیں، جیسے آن لائن کل...

6.4 Data-Collection Strategies ★ Golden

Digital literacy is not limited to finding information that already exists on the internet.

Interviews → Surveys → Prototypes → Observation → Simulations

- You should also learn how to gather original (new) information yourself.
- A data-collection strategy is a planned method for gathering this information.
- The five common strategies are: Interviews·Surveys·Prototypes·Observation·Simulations

Strategy	How it works (one line)	Usual data type	Best when...
Interview	Planned conversation with a person or small group	Mostly qualitative	You need deep, detailed answers from a few people
Survey	Same questions asked to many people	Quantitative and qualitative	You need answers from many people quickly
Prototype	Users test an early version and give feedback	Both	You want to improve a product or solution
Observation	Watch and record; no questions asked	Notes (qualitative) or counts (quantitative)	You want to see what people actually do
Simulation	Computer model; change variables and see what happens	Mostly quantitative	Real experiments are costly, risky or difficult

Remember: Mnemonic for the five strategies: "I S P O S" – "I Saw People On Screens": Interviews, Surveys, Prototypes, Observation, Simulations.

Exam: "List and explain the data-collection strategies" is a frequent long question. Name all five, give a one-sentence definition and one example for each, and say what type...

ڈیجیٹل خواندگی صرف موجود معلومات تلاش کرنے تک محدود نہیں، بلکہ نئی معلومات خود جمع کرنا بھی اس کا حصہ ہے۔

6.4.1 – 6.4.2 Interviews and Surveys ★ Golden

An interview is a planned conversation used to gather information directly from a person.

- It may be one-to-one (you and one person) or in a small group.
- Questions are planned in advance, so you do not forget anything important.
- Answers are usually qualitative (opinions, reasons, experiences).

Question type	What it looks like	Data it gives
Closed: Yes/No	Do you study with your phone nearby? (Yes / No)	Countable (quantitative)
Closed: Multiple choice	Which activity do you use your phone for most? (Lectures / Notes / Social media / Games)	Categories you can count
Number / scale	How many hours do you use your phone daily? ____	Quantitative
Rating scale	"My phone helps me study." 1 = Strongly disagree ... 5 = Strongly agree	Quantitative (you can average the ratings)
Open-ended	How does your phone help you in studies?	Qualitative (free text)

Remember: Interview = In-depth with few. Survey = Same questions to many. Think of a doctor talking to one patient (interview) vs a census form sent to every house...

Exam: You may be asked to "differentiate between an interview and a survey" or to "identify what is wrong with this survey question and rewrite it". For rewriting, name the...

انٹرویو ایک منصوبہ بند گفتگو ہے جس میں کسی ایک فرد یا چھوٹے گروہ سے براہ راست معلومات حاصل کی جاتی ہیں؛ اس کے جوابات عموماً کیفیتی ہوتے ہیں۔

6.4.3 – 6.4.5 Prototypes, Observation and Simulations ★ Golden

A prototype is a simple early version of a product, model or solution.

- It allows an idea to be tested before time and effort are spent on the final version.
- Users try the prototype and give feedback, and this feedback becomes useful data for improvement.
- Example: Before building a full school app, you draw the screens on paper (or make a few clickable screens in a design tool) and ask five...

Remember: Watch it → Observation. Ask it → Survey/Interview. Try it → Prototype. Model it → Simulation.

Exam: Scenario questions are popular: "Which data-collection method is most suitable for ... ? Give a reason."
Always name the method and justify it using its key feature (e.g....

پروٹوٹائپ کسی پروڈکٹ یا حل کا ابتدائی سادہ نمونہ ہے جسے صارفین آزما کر رائے دیتے ہیں تاکہ اسے بہتر بنایا جا سکے۔

6.5 Primary and Secondary Data ★ Golden

Whenever you use data, it is important to know where it came from.

- The source affects how much control the researcher had over collecting it, and how confidently the results can be used.

Aspect	Primary Data	Secondary Data
Source	Collected directly by the researcher.	Already collected by others.
Examples	Survey responses, interviews, observations.	Reports, articles, websites, databases.
Purpose	Prepared for a specific study.	Reused for a new purpose.
Control	High control over questions and collection process.	Limited control because the data already exists.

Primary Data

Fresh, direct collection
(You do the work)
Surveys · Interviews · Observation

Secondary Data

Existing archives
(Someone else did it)
Books · Reports · Databases

Primary data is collected by you; secondary data was collected by others.

Remember: Primary = "1st hand" (you collect it first). Secondary = "2nd hand" (like a second-hand book – someone else used it first).

Exam: "Differentiate between primary and secondary data" is one of the most-asked questions in this chapter. Draw the four-row table: Source, Examples, Purpose, Control. Learn...

بنیادی ڈیٹا (Primary Data) محقق خود کسی خاص مقصد کے لیے براہ راست جمع کرتا ہے، مثلاً سروے، انٹرویو یا مشاہدہ۔

6.8 Case Study: Digital Inquiry Project ★ Golden

This case study shows how to apply all the ideas of this chapter to solve a real-world problem from start to finish.

1 Question → 2 Search → 3 Collect → 4 Analyse → 5 Create

- An inquiry is an investigation to find the answer to a question.
- Research question: "How does daily mobile phone use affect the study habits of students?" Scenario: Students notice classmates using phones...
- Some say phones help them learn; others say phones waste time.

Workflow stage	Steps
Question & Search	1 Advanced searches · 2 Identify data types · 3 Select methods
Collect	4 Prepare the survey · 5 Choose the sample · 6 Collect primary data ethically · 7 Use secondary data
Analyse	8 Organise in a spreadsheet · 9 Create charts · 10 Analyse results
Create	11 Write the conclusion · 12 Recommendations → final digital artefact

Remember: Workflow in five words: Ask → Search → Collect → Analyse → Create. Every research project you ever do will follow this pattern.

Exam: Expect a long question: "Describe the steps of a digital inquiry project using the example of mobile phone use." Write the research question first, then the 12 steps...

اس کیس اسٹڈی میں تحقیقی سوال یہ ہے: "روزانہ موبائل فون کا استعمال طلبہ کی پڑھائی کی عادات پر کیسے اثر ڈالتا ہے؟"

6.8 Steps 1– 3: Advanced Search and Methodology ★ Golden

Students first search for background information using search engines (such as Google or Bing).

- They use advanced search operators – special symbols or words typed into the search box – to narrow down results and find reliable...
- Suggested queryOperator usedWhat it does "mobile phone use" "study habits" students" " (quotes)Finds the exact phrases "mobile phone use"...
- "academic performance" filetype:pdfFinds only PDF documents (often official reports and research papers).

Suggested query	Operator used	What it does
"mobile phone use" "study habits" students	" " (quotes)	Finds the exact phrases "mobile phone use" and "study habits", not the words scattered randomly.
"academic performance" filetype:pdf	filetype:	Finds only PDF documents (often official reports and research papers).
digital distraction site:.edu	site:	Searches only educational websites (addresses ending in .edu).

Remember: Three operators, three jobs: " " = exact, filetype: = format, site: = where. Note: there is no space after the colon (site:.edu, not site: .edu).

Exam: "Explain any three advanced search operators with examples" is a likely short question. For each, write the operator, an example query, and what it does. Also learn the...

پہلے قدم میں طلبہ سرچ انجن پر جدید سرچ آپریٹرز (Advanced Search Operators) استعمال کرتے ہیں: کوٹیشن مارکس (" ") بالکل وہی جملہ تلا...

6.8 Steps 4 – 6: Survey Preparation and Primary Data Collection ★ Golden

Design clear, unbiased questions. Each question is linked to the type of data it produces: QuestionType of data
How many hours do you use your phone daily?Quantitative Which activity do you use your phone for the most?
Quantitative...

- Design clear, unbiased questions.
- Each question is linked to the type of data it produces: QuestionType of data How many hours do you use your phone daily?Quantitative Which...

Question	Type of data
How many hours do you use your phone daily?	Quantitative
Which activity do you use your phone for the most?	Quantitative (categories)
How does your phone help you in studies?	Qualitative
Suggest one way to use phones responsibly.	Qualitative

Remember: Ethics in five words: Consent, No-Sensitive, Anonymous, Private, Educational – "C-NAPE". Think: "Cover the person's nape (neck) – protect them."

Exam: Questions often ask: "What ethical guidelines should be followed when collecting data?" List all five points. Use the words consent and anonymity – examiners look for...


چوتھے قدم میں واضح اور غیر جانبدار سوالات تیار کیے جاتے ہیں۔

6.8 Steps 7 – 9: Secondary Data and Spreadsheet Organisation ★ Golden

Students include a reliable online article stating that "excessive screen time lowers concentration." They will compare this secondary data with their own primary survey results.

- If both agree, the conclusion is stronger.
- If they disagree, the students must think about why (for example, a different age group or country).

Student	Hours	Study Use	Main Activity	Distracted?
1	3	Yes	Lectures	Sometimes
2	5	No	Social Media	Yes
3	2	Yes	Notes	No

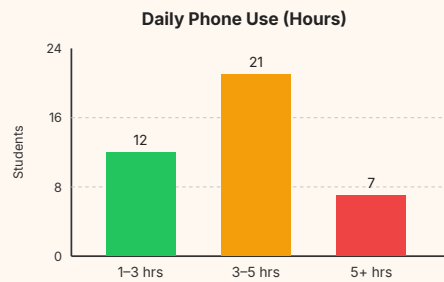

Bar chart of daily phone use for 40 students. The counts (12, 21, 7) are estimated from the bar heights in the source chart.

Remember: Chart chooser: Bar = Compare, Pie = Parts of a whole, Line = Change over time.

Exam: You may get the spreadsheet table and be asked to "write formulas to find the total and average hours" or "count students who use the phone for study". Write the full...

ساتویں قدم میں ایک قابل اعتماد آن لائن مضمون کا ثانوی ڈیٹا ("زیادہ اسکرین ٹائم توجہ کم کرتا ہے") اپنے سروے کے بنیادی ڈیٹا سے مواز...

6.8 Steps 10 – 12: Data Analysis, Conclusion and Recommendations ★ Golden

To analyse means to study the data carefully to find patterns and trends.

- Most students (the majority) use phones for 3–5 hours daily.
- Half use it for educational purposes (lectures/notes).
- A clear trend: students who use phones mostly for entertainment report much higher distraction levels than those who use them for study.

Remember: Conclusion formula: "The data shows ... However ... Therefore ..." – state the main finding, mention the other side, then give the overall answer.

Exam: You may be asked to "write a conclusion and two recommendations" for given data. Use the "shows ... however ... therefore" pattern and make sure each recommendation follows...

دسویں قدم میں چارٹس اور اسپریڈشیٹ سے رجحانات تلاش کیے جاتے ہیں: زیادہ تر طلبہ روزانہ تین سے پانچ گھنٹے فون استعمال کرتے ہیں،
نصف ا...

6.8 The Final Digital Artefact ★ Golden

A digital artefact is a final product created using digital technologies.

- Students must create one final artefact that answers the original research question.
- It is not just a decorated file; it must present evidence and conclusions.
- Artefact option Suitable digital tools Main purpose
Digital Report MS Word, Google Docs Explain the full study in a structured text document.

Artefact option	Suitable digital tools	Main purpose
Digital Report	MS Word, Google Docs	Explain the full study in a structured text document.
Presentation	PowerPoint, Canva, Slides	Share key findings with a live audience.
Infographic	Canva, Adobe Express	Show the main results visually and quickly on one page.
Dashboard	Power BI, Tableau	Explore data through interactive charts and filters.

Remember: The structure follows the inquiry itself: What (title, question, intro) → How (method) → Found (primary, secondary, charts) → So what (conclusion,...)

Exam: Learn the four artefact options with tools and purpose (a table question), and the ten-part structure in order. "What is a digital artefact?" – stress that it must...

ڈیجیٹل آرٹیفیکٹ (Digital Artefact) ڈیجیٹل ٹیکنالوجی سے بنائی گئی آخری پروڈکٹ ہے جو تحقیقی سوال کا جواب ثبوت اور نتائج کے ساتھ پیش...

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Artificial Intelligence (AI):** Mistake: "AI means robots." Fix: Most AI is just software — YouTube suggestions, spam filters and face unlock have no robot body.
- **Internet of Things (IoT) & Components:** Mistake: Calling a fan controller or water valve a "sensor".
- **Information Sources (Primary, Secondary, Tertiary):** Mistake: Thinking "primary" means "most important" or "tertiary" means "useless".

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Artificial Intelligence (AI)**. Write: Artificial Intelligence (AI) is the ability of a computer system to perform tasks that normally need human thinking, such as recognising faces, understanding language and making decisions.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Intelligence — it can perform tasks that require thinking. (2) Face recognition on a mobile phone to unlock the screen. — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Internet of Things (IoT) & Components**. Write: The Internet of Things (IoT) is a system in which physical devices are connected to the Internet and can collect and share data to perform tasks automatically.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The "things" are ordinary objects — watches, cameras, cars, fans, water pumps — that have been given sensors and an internet connection so... (2) Source example: A smartwatch collects your heart-rate data and sends it to your mobile phone, where it is displayed. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a fully labelled diagram copied from the board + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Information Sources (Primary, Secondary, Tertiary)**. Write: Information sources are ways to find knowledge and data.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The internet has vast information, but not all of it is accurate. (2) Sources are divided into three main categories. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a four-row comparison table and one rewritten survey question + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Why is AI called "artificial"?

3 marks. Explain Artificial Intelligence (AI) with two clear points and one example.

5 marks. Common questions: "Define AI and give two examples" (2–3 marks), and "Explain how AI, IoT and Data Analytics work together" (4–5 marks). To score full marks: (1) write the two-part meaning of the...

8 marks. Artificial Intelligence (AI): 5-mark answer plus a complete truth table and a labelled gate / logic diagram.

Answers: 1. Because it is created by humans 3. Intelligence — it can perform tasks that require thinking.; Face recognition on a mobile phone to unlock the screen. 5. Use the recipe in the blue box. Model opening: Artificial Intelligence (AI) is the ability of a computer system to perform tasks that normally need human thinking, such as recognising faces, understanding... 8. Same 5-mark body + a complete truth table and a labelled gate / logic diagram + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Artificial Intelligence (AI)** using the recipe in this topic. Include a complete truth table and a labelled gate / logic diagram. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Oral recap at the board

Say every chapter recap aloud, books closed · Recap

TODAY'S 90 MINUTES

90 minutes. 0–10 min settle · 10–80 min each chapter recap said aloud at the board, books closed · 80–90 min rewrite any line the batch could not say. No new topic.

Board today: Say every chapter recap aloud, books closed

★ **Must lock:** All chapters

Phones in the box at the door.

No new cards. One student per chapter at the board. The batch corrects missed lines.

Chapter 1 recap — Computer Systems

- Discrete = counted (stairs). Continuous = measured (ramp). Digital systems use bits 0 and 1; they are reliable, accurate, easy to design and programmable.
- Analog signal = smooth sine wave. Digital signal = square wave HIGH/LOW. Digital data resists noise.
- AND · output 1 only if all inputs 1. OR + output 1 if any input 1. NOT ' inverts. NAND = NOT-AND, NOR = NOT-OR (universal). XOR 1 when inputs differ. XNOR 1 when inputs same.
- Truth table rows = 2^n . SOP = sum of minterms where output is 1. POS = product of maxterms where output is 0.
- K-map: group 1, 2, 4, 8 adjacent 1s (power of 2, wrap-around allowed). Each group drops the variables that change.
- SDLC: requirement → design → implementation → testing → deployment → maintenance. Waterfall = sequential; Agile = short sprints and feedback.
- OSI 7: Physical, Data Link, Network, Transport, Session, Presentation, Application. Mnemonic: Please Do Not Throw Sausage Pizza Away. TCP/IP 4: Network Access, Internet, Transport, Application.

Chapter 2 recap — Computational Thinking & Algorithm

- CT pillars: decomposition, pattern recognition, abstraction, algorithms.
- Algorithm = finite, ordered, unambiguous steps. Pseudocode = structured English, not a programming language.
- Bubble Sort: compare neighbours, swap if out of order; largest "bubbles" to the end each pass. $O(n^2)$.
- Selection Sort: find the minimum in the unsorted part and swap it to the front. $O(n^2)$.
- Linear Search: check one by one. Works on unsorted data. $O(n)$.
- Binary Search: list MUST be sorted. Repeatedly test the middle. $O(\log n)$. Trace with low / mid / high.
- Judge an algorithm on correctness, efficiency (time and space) and clarity. Prefer binary search on large sorted lists; linear search on small or unsorted lists.

Chapter 3 recap — Programming Fundamentals

- Python: high-level, interpreted. Variables are names; types int, float, str, bool, list, dict. `input()` returns str.
- Arithmetic + - * / // % **. Relational. Logical and or not. Bitwise & | ^ ~ << >>.
- Selection: if / if-else / if-elif-else / nested. Test from the top; first True wins.
- for = known count + range. while = unknown count; always update the condition. break leaves; continue skips one.
- Libraries: import math / random / datetime. Third-party via pip: NumPy, Pandas, Matplotlib.
- Syntax = will not run. Runtime = crash + traceback. Logical = runs, wrong answer.

Chapter 4 recap — Data and Analysis

- Data = raw facts. Information = processed data used for decisions. Database = organised related data. DBMS = software that manages it (reduces redundancy, improves security, sharing, integrity).
- Table / relation; row / record / tuple; column / field / attribute. Primary key uniquely identifies a row. Foreign key refers to another table's primary key.
- ER model: entity (rectangle), attribute (oval), relationship (diamond), cardinality 1:1, 1:M, M:N.
- Referential integrity: you cannot orphan a child row. Cascade Update / Cascade Delete copy or remove matching child rows.
- Access objects: tables, forms, queries, reports. Queries filter with criteria, wildcards (*, ?), AND/OR. Totals: Count, Sum, Avg, Group By. Charts visualise the result.

Chapter 5 recap — Application and Impacts of Computing

- IoT = connected devices. Six parts: sensor, actuator, connectivity, processing, cloud, UI. AI = machines that learn and decide. Analytics = collect → store → clean → analyse → visualise.
- Together: IoT (eyes) → Analytics (sort) → AI (brain) → actuator (action).
- Sources: primary (firsthand), secondary (explained by others), tertiary (summaries). No author / date / references → do not trust.
- Assistive tech: mobility, sensory, communication, cognitive. Goal: equal access, independence, inclusion.

Chapter 6 recap — Digital Literacy

- Digital literacy = find, evaluate, create and share information with digital tools, safely.
- Qualitative = words/descriptions. Quantitative = numbers. Strategies: interview, survey, prototype, observation, simulation.
- Primary data you collect; secondary data already exists. Good survey questions are clear, single-idea, unbiased.
- Present with spreadsheets (formulas such as `=AVERAGE()`), slides, infographics and reports. Cite sources. Follow the 12-step inquiry project from question to artefact.

Mock paper — academy hall

2 hours 30 minutes · 75 marks · no notes · Mock

TODAY'S 90 MINUTES

90 minutes. Academy mock morning: sit the paper in 2 hours 30 minutes. Hall conditions — no notes, no phones, no Day 29 peeking. Use leftover time to pack scripts. Do not mark today.

Board today: 2 hours 30 minutes · 75 marks · no notes

★ **Must lock:** Whole syllabus

Phones in the box at the door.

Invigilate as the board will. No phone, no notes, no Day 29 peeking.

Mock paper — Computer Science XI

Time: 2 hours 30 minutes | Total: 75 marks | Answer all questions. Calculators allowed. Write Python with correct indentation.

Section A — Multiple choice (15 × 1 = 15)

1. Which quantity is discrete?
 - a. Room temperature
 - b. Number of desks
 - c. Car speed
 - d. Time of day
2. NAND is called universal because:
 - a. it has two inputs
 - b. any gate can be built from it
 - c. its output is always 1
 - d. it is faster than AND
3. The Boolean expression for XOR is:
 - a. $A \cdot B$
 - b. $A + B$
 - c. $A \oplus B$
 - d. $(A \cdot B)'$
4. OSI layer that chooses the best path (IP addresses) is:
 - a. Transport
 - b. Network
 - c. Data Link
 - d. Session
5. Which SDLC model delivers working software in short sprints?
 - a. Waterfall
 - b. Agile
 - c. Spiral only
 - d. Big Bang
6. Binary Search requires the list to be:
 - a. unsorted
 - b. sorted
 - c. all unique and unsorted
 - d. of even length
7. Worst-case time of Bubble Sort is:
 - a. $O(n)$
 - b. $O(\log n)$
 - c. $O(n^2)$
 - d. $O(1)$
8. `input()` in Python returns a:
 - a. int
 - b. str
 - c. float
 - d. bool
9. `17 // 5` equals:
 - a. 3.4
 - b. 3
 - c. 2
 - d. 3.0
10. A program that runs but prints the wrong total has a:
 - a. syntax error
 - b. runtime error
 - c. logical error
 - d. hardware fault
11. A field that uniquely identifies each record is a:
 - a. foreign key
 - b. primary key
 - c. composite description
 - d. query
12. An actuator in IoT:
 - a. collects temperature
 - b. opens a water valve
 - c. stores cloud files
 - d. draws a chart
13. Wikipedia is a:
 - a. primary source
 - b. secondary source
 - c. tertiary source
 - d. sensor
14. Marks out of 100 are:
 - a. qualitative data
 - b. quantitative data
 - c. tertiary data
 - d. metadata only
15. Which Access object is best for printing a formatted class list?
 - a. Table
 - b. Form
 - c. Query
 - d. Report

Section B — Short questions (10 × 3 = 30)

1. Differentiate analog and digital signals with one example of each.
2. Draw the symbol and truth table of a 2-input NOR gate.
3. List the four pillars of computational thinking in one sentence each.
4. Why can you not use Binary Search on an unsorted attendance list?
5. Write a Python `if-elif-else` that prints Pass if marks ≥ 40 , else Fail.
6. Define primary key and foreign key.
7. Name the six components of IoT.
8. Classify: (a) a photograph you took, (b) a textbook, (c) an encyclopedia.
9. Give two good and two bad survey questions about mobile-phone use in college.
10. State three advantages of a DBMS over paper files.

Section C — Long questions (3 × 10 = 30). Attempt any three.

1. Simplify $F(A,B,C) = \Sigma(1,3,5,7)$ using a 3-variable K-map. Show the grouping and the final expression. Draw the logic diagram.
2. Dry-run Bubble Sort on the list [5, 1, 4, 2]. Show every pass. Then search for 4 using Binary Search on the sorted result, with a low/mid/high table.
3. Write a complete Python program that reads n subject marks, prints the average, and prints "A" if average ≥ 80 , "B" if ≥ 70 , "C" if ≥ 60 , else "D". Include a sample run of four marks: 80, 70, 90, 60.
4. Design an ER diagram and relational schema for a school library (Student, Book, Issue). Mark keys. Write one Access/SQL query that lists all books issued to roll number 101.
5. Explain how IoT, Data Analytics and AI work together on a Sindh farm. Then discuss two positive and two negative impacts of computing on education in Pakistan.

Mark the mock · repair list

Mark to the key. List every ★ Golden the batch missed. · Mark

TODAY'S 90 MINUTES

90 minutes. 0–70 min mark the mock to the sealed key using 1 / 3 / 5 / 8–10 recipes · 70–85 min each student fills the repair list · 85–90 min one missed Golden rewritten from memory.

Board today: Mark to the key. List every ★ Golden the batch missed.

★ **Must lock:** Missed Golden

Phones in the box at the door.

An answer with no working, no diagram or no example cannot score full marks.

Mock paper — answers

Section A

1. b
2. b
3. c
4. b
5. b
6. b
7. c
8. b
9. b
10. c
11. b
12. b
13. c
14. b
15. d

Section B

1. Analog: continuous, sine wave, e.g. human voice. Digital: two levels 0/1, square wave, e.g. computer data. Digital resists noise.
2. NOR symbol: OR-gate shape with a bubble on the output. $Y = (A+B)'$. Truth: 00→1, 01→0, 10→0, 11→0.
3. Decomposition = split a problem. Pattern recognition = reuse similarities. Abstraction = ignore extra detail. Algorithms = write ordered steps.
4. Binary Search repeatedly halves a sorted range. If the list is unsorted, the middle value does not tell you which half to keep, so the method is invalid.
5. `m = int(input("Marks: "))` then `if m ≥ 40: print("Pass") else print("Fail")`.
6. Primary key: unique identifier of a row (e.g. StudentID). Foreign key: a field that refers to the primary key of another table (e.g. StudentID in Issuance).
7. Sensors, actuators, connectivity, data processing, cloud computing, user interface.
8. (a) primary (b) secondary (c) tertiary.
9. Good: "How many hours per day do you use a phone for study?" / "Which apps do you use for class notes?" Bad: "Don't you agree phones are destroying students?" (leading) / "Do you like phones and also use laptops?" (double-barrelled).
10. Less redundancy, easier search and update, better security and multi-user access, integrity constraints. (Any three.)

Section C — outline

1. K-map 1s at m1, m3, m5, m7 form one group of 4 covering B=1 (or C=1 depending on labelling — with standard ABC order the 1s are all cells where C=1). F = C. Diagram: a single wire C to output (or a buffer). Show the map with the group circled.
2. Pass 1: [1,4,2,5]; Pass 2: [1,2,4,5]; Pass 3: already sorted. Sorted [1,2,4,5]. Search 4: low=0 high=3 mid=1 (2<4) → low=2; mid=2 (4=4) found at index 2.
3. Read n, loop n times adding `float(input())`, avg = total/n, then if-elif for A/B/C/D. Sample: total 300, avg 75.0, grade B.
4. Entities Student(StudentID PK, Name, Class), Book(BookID PK, Title, Author), Issue(IssueID PK, StudentID FK, BookID FK, Date). Query: `SELECT Book.Title FROM Issue INNER JOIN Book ON Issue.BookID = Book.BookID WHERE StudentID = 101;`
5. Soil sensor (IoT) → cloud spreadsheet of moisture (Analytics) → model decides "too dry" (AI) → pump (actuator). Education +: LMS, remote classes. Education -: screen addiction, urban/rural device gap.

Sealed key. Open only after the mock is collected.

REPAIR LIST

Repair list. Copy every Golden scored 0 or half. Tomorrow the clinic redos only this list.

#	Golden topic missed	What the batch will rewrite from memory
1		
2		
3		
4		
5		
6		

Repair clinic · then stop

Redo the Day 29 list only. Dismiss by 6 pm. · Repair

TODAY'S 90 MINUTES

90 minutes. 90-minute repair clinic. Redo only the Day 29 list. Say the definition, draw the table, write one 5-mark answer. Dismiss by 6 pm. No new topic.

Board today: Redo the Day 29 list only. Dismiss by 6 pm.

★ **Must lock:** Missed Golden only

Phones in the box at the door.

No new chapter. No new non-Golden card. Each missed Golden: say the definition, draw the table, write one 5-mark answer on the board.

Dismiss by 6 pm. The batch walks into the hall with Golden wording in their heads — not in a book.

نیا باب نہ کھولیں۔ صرف چھوٹی گولڈن دہرائیں۔ شام چھ بجے کلاس ختم کریں۔

30-DAY COACHING ACADEMY EDITION

Computer Science XII

The Bilingual Teacher's Edition rebuilt as a 30-day academy batch — 90-minute classes, board work, timed drills, homework stamps, weekly chapter exams, mock paper and repair clinic.

Bilingual support: English + اردو

تیس دن کی کوچنگ اکیڈمی — نوے منٹ کلاس، بورڈ، ڈرل، ہوم ورک

01 Computer Systems (HCI)

02 Computational Thinking & Algorithms

03 Programming Fundamentals

04 Data and Analysis

05 Application and Impacts of Computing

06 Entrepreneurship in the Digital Age

XII

30-day academy calendar

One 90-minute class a day. Tick the day after homework is stamped. Do not skip chapter-exam, mock, or Golden-blitz days.

روزانہ ایک نوے منٹ کی کلاس۔ باب کے امتحان، ماک اور گولڈن بلٹز نہ چھوڑیں۔

Day	Focus	Kind	★ Golden today
Week 1 · academy batch			
Day 01	Computer Systems (HCI) (1/4)	Teach	Applications of HCI (Domains of Life)
Day 02	Computer Systems (HCI) (2/4)	Teach	Importance of HCI
Day 03	Computer Systems (HCI) (3/4)	Teach	Human-Computer Interaction Problems, User Interface Design (UI vs UX)
Day 04	Computer Systems (HCI) (4/4)	Chapter exam	Testing Methods (Usability, A/B, Automated)
Day 05	Computational Thinking & Algorithms (1/5)	Teach	Trace Tables, Comparing Trace Tables and Stepwise Reasoning
Week 2 · academy batch			
Day 06	Computational Thinking & Algorithms (2/5)	Teach	Number of Steps (Big O Notation)
Day 07	Computational Thinking & Algorithms (3/5)	Teach	Concept of Data Structure
Day 08	Computational Thinking & Algorithms (4/5)	Teach	Linear Data Structures: Stack, Linear Data Structures: Queue
Day 09	Computational Thinking & Algorithms (5/5)	Chapter exam	—
Day 10	Programming Fundamentals (1/4)	Teach	Lists (Ordered, Mutable, Methods), Tuples (Ordered, Immutable), Dictionaries (Key-Value Pairs)
Week 3 · academy batch			
Day 11	Programming Fundamentals (2/4)	Teach	Functions in Python
Day 12	Programming Fundamentals (3/4)	Teach	& 3.4 File Handling and Operations (Modes r, w, a)
Day 13	Programming Fundamentals (4/4)	Chapter exam	The with Statement (Context Manager)
Day 14	Data and Analysis (1/2)	Teach	Data Sources and Database Connection, Pandas and DataFrames, Handling Missing Values (NaN)

Day	Focus	Kind	★ Golden today
Day 15	Data and Analysis (2/2)	Chapter exam	Data Visualization and Types of Graphs, Descriptive Statistics
Week 4 · academy batch			
Day 16	Application and Impacts of Computing (1/4)	Teach	Neural Networks (NN), Components of Neural Networks
Day 17	Application and Impacts of Computing (2/4)	Teach	Secure Collaboration (Authentication, MFA, Access Control)
Day 18	Application and Impacts of Computing (3/4)	Teach	Common Security Threats (Malware, Phishing, DoS)
Day 19	Application and Impacts of Computing (4/4)	Chapter exam	Functions of Equity and Equal Access
Day 20	Entrepreneurship in the Digital Age (1/4)	Teach	Entrepreneurship in the Digital Age, Prototype
Week 5 · academy batch			
Day 21	Entrepreneurship in the Digital Age (2/4)	Teach	Prototype Development Cycle, Minimum Viable Product (MVP)
Day 22	Entrepreneurship in the Digital Age (3/4)	Teach	—
Day 23	Entrepreneurship in the Digital Age (4/4)	Chapter exam	Beachhead Market
Day 24	★ only · Chapters 1–2	Golden blitz	11 Golden cards
Week 6 · academy batch			
Day 25	★ only · Chapters 3–4	Golden blitz	11 Golden cards
Day 26	★ only · Chapters 5–6	Golden blitz	10 Golden cards
Day 27	Say every chapter recap aloud, books closed	Recap	All chapters
Day 28	2 hours 30 minutes · 75 marks · no notes	Mock	Whole syllabus
Day 29	Mark to the key. List every ★ Golden the batch missed.	Mark	Missed Goldens
Day 30	Redo the Day 29 list only. Dismiss by 6 pm.	Repair	Missed Goldens only

Batch register — starter marks

Three 1-mark oral or written questions from yesterday. Stamp homework full / half / zero in the last column. Re-teach any Golden that more than a third of the batch missed.

Day	Present	Q1	Q2	Q3	Mean /10	HW stamp
Day 01						
Day 02						
Day 03						
Day 04						
Day 05						
Day 06						
Day 07						
Day 08						
Day 09						
Day 10						
Day 11						
Day 12						
Day 13						
Day 14						
Day 15						
Day 16						
Day 17						
Day 18						
Day 19						
Day 20						
Day 21						
Day 22						
Day 23						
Day 24						
Day 25						
Day 26						
Day 27						
Day 28						
Day 29						
Day 30						

حاضری، تین اسٹارٹر نمبر، اور ہوم ورک کی مہر اس جدول میں لگائیں۔

How to run this 30-Day Coaching Academy Edition

This book is the **Bilingual Teacher's Edition** rebuilt as a **30-day coaching academy batch**. It is not a 40-minute school period and not a 3-hour self-study crash. A standard academy class is **90 minutes**. The coach stands at the board. Students copy, drill, and take homework home. ★ Golden topics are never skipped.

یہ کتاب تیس دن کی کوچنگ اکیڈمی بیچ کے لیے ہے۔ ہر کلاس نوے منٹ کی ہے۔ استاد بورڈ پر پڑھاتا ہے، طلبہ کاپی کرتے ہیں، ڈرل حل کرتے ہیں، ہوم ورک گھر لے جاتے ہیں۔ گولڈن موضوع نہ چھوڑیں۔

The 30 days

- **Days 1–23 — Teach the whole grade.** Every topic from the teacher’s notes appears as a board card. The last day of each chapter is a 75-mark closed-book exam in the academy hall.
- **Days 24–26 — ★ Golden blitz.** No new non-Golden topic. Error clinic on high-yield board wording.
- **Day 27 — Oral recap.** Students say each chapter recap at the board, books closed.
- **Day 28 — Mock morning.** 2 hours 30 minutes. Hall conditions. No notes, no phones.
- **Day 29 — Mark and repair list.** Mark to the sealed key. Every missed Golden goes on the list.
- **Day 30 — Repair clinic, then stop.** Redo only the list. Dismiss by 6 pm.

The 90-minute academy class (Days 1–23 teach days)

1. **0–10 min — Starter test.** Three oral or written 1-mark questions from yesterday. Marks go in the batch register in this book.
2. **10–35 min — Concept lock.** Write the definition, table and diagram on the whiteboard. Students copy. Phones in the box at the door.
3. **35–55 min — Board working.** Do the worked example. Hide it. Two students redo it on the board.
4. **55–75 min — Academy drill.** Timed. 1-mark, then 3-mark, then 5-mark. Golden days also take an 8-mark. Mark at once with the recipe.
5. **75–85 min — Error clinic.** Collect the three most common wrong answers. Correct them in one box on the board.
6. **85–90 min — Homework out.** One 5-mark (or 8-mark if Golden) + redraw the board from memory. Collect next class. Stamp full / half / zero.

Chapter-exam days

On the last day of a chapter the class is a hall paper: 75 marks · 1 hour 15 minutes · 15 MCQ + 10 short + any 3 long. Use the leftover minutes to collect scripts. Do not mark in front of the batch. Re-teach any Golden below 60% in the next starter.

باب کے آخری دن پچھتر نمبر کا پیپر ہال میں کرائیں۔ اگلی کلاس کے اسٹارٹر میں کمزور گولڈن دوبارہ پڑھائیں۔

How academy answers score marks

- **1 mark:** one exact definition or one named fact.
- **2 marks:** definition + one local example (JazzCash, school portal, NADRA, load-shedding).
- **3 marks:** definition + two clear points + example.
- **5 marks:** definition, a four-point table or explanation, example, and a labelled diagram if the topic has one.
- **8–10 marks:** 5-mark structure + full working (trace, K-map, code, ER diagram) + a one-line conclusion.

Train this wording every class: *Define. Explain. Example. Diagram. Working.* An answer with no working is a half-answer.

Batch rules

- One 90-minute class a day, six days a week, for thirty days. No extra unpaid “make-up” class unless a Golden exam mark is below 60%.
- If the batch falls behind, drop non-Golden cards that day. Never skip a chapter exam, the mock, or a Golden blitz day.
- Homework is collected. Uncollected homework is a zero in the register, not a warning.

What the extra academy boxes mean

COACH RUN-SHEET

How to run this day: starter, board, two-student redo, drill, error clinic.

FULL-MARK ANSWER RECIPE

The sentence pattern that scores 1, 3, 5 and 8 marks today.

ACADEMY DRILL

Timed class questions with answers — not for homework peeking.

BATCH HOMEWORK

What the batch takes home, and how you stamp it tomorrow.

ACADEMY CALENDAR

The 30-day calendar and the batch register.

GOLDEN TOPIC

★ **Golden** — never skip, never rush, test it every week until the board.

Chapter 1: Computer Systems (HCI)

Computer Systems (HCI) (1/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Fundamentals of Human-Computer Interaction · Traditional Interaction and 1.1.2 Natural Interaction · Applications of HCI (Domains of Life) · Components of HCI

★ **Must lock:** Applications of HCI (Domains of Life)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Define the last Golden topic in one exact sentence.
2. Redraw yesterday's table or diagram with labels.
3. Give one local example (JazzCash, NADRA, school portal, load-shedding).


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.1 Fundamentals of Human-Computer Interaction

Human-Computer Interaction (HCI) is the study and design of technology so that it serves people.

- An HCI system is easy to use, efficient, and responsive to human needs.
- HCI is also known as CHI (Computer-Human Interface) or MMI (Man-Machine Interaction).
- The three names mean the same idea: the meeting point of a person and a machine.

Channel	How humans use it	How computers respond
Sight (بصارت)	Look at screens, graphics or videos.	Displays visuals on monitors and screens.
Touch (چھونا)	Tap, type or swipe.	Responds with clicks or vibrations (haptics).
Hearing (سننا)	Listen to sounds or voices.	Provides audio feedback via speakers.
Voice (آواز)	Speak commands (for example, "Alexa").	Processes speech and replies.
Spatial (مکانی)	Move in physical space.	Tracks position or body movement (for example, VR).

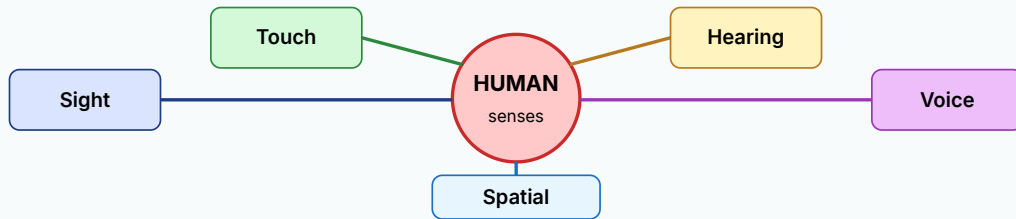

Five sensory channels meet at the human. HCI design must support the channels the user actually needs.

Remember: Remember the three names: HCI = CHI = MMI. Think "Human meets Machine." Five channels: S-T-H-V-S — Sight, Touch, Hearing, Voice, Spatial. "See The Handy Voice..."

ہیومن کمپیوٹر انٹرایکشن (HCI) کا مطلب ہے ٹیکنالوجی کو اس طرح ڈیزائن کرنا کہ وہ انسانوں کے لیے فائدہ مند، آسان اور مؤثر ہو۔

1.1.1 Traditional Interaction and 1.1.2 Natural Interaction

1.1.1 Traditional interaction is the basic way people use everyday devices.

- Computer: moving a mouse and typing on a keyboard; output via monitor and speakers.
- Smartphone (traditional use): tapping and swiping on a touchscreen; output via screen lighting and vibrations.
- Voice: speaking commands into a device (for example, "Alexa, play a song").
- Body and gesture: facial recognition to unlock a phone, or playing VR games by waving hands.

Feature	Traditional	Natural
Main input	Mouse, keyboard, keypad, simple tap/swipe	Voice, face, hand/body gesture, movement
Feels like	Operating a machine	Talking or moving as you do with people
Examples	TV remote, ATM keypad, school-portal login typed on a PC	FaceID, Siri, Kinect games, "Hey Google"
Typical output	Screen, speakers, vibration	Spoken reply, unlock, tracking of the body in VR

Remember: Test sentence: If you must press keys or tap labelled buttons, it is traditional. If the machine understands speech, face or body movement, it is natural.


روایتی تعامل (Traditional Interaction) میں ماؤس، کی بورڈ، کی پیڈ یا عام ٹیپ اور سوائپ استعمال ہوتے ہیں، جیسے اے ٹی ایم کی پیڈ۔

1.2 Applications of HCI (Domains of Life) ★ Golden

HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps.

- These are human-centred solutions built to meet user needs across many domains of life.
- A domain is an area of daily activity — health, money, school, talking to people.
- When you design for a domain, you design for that domain's users, tasks and risks.

Domain	Application examples	User benefit
Health care	Patient portals, telemedicine apps, assistive technologies	Improves access to medical services remotely
Banking	Mobile banking apps, secure ATM interfaces	Enables quick transactions and secure financial management
Education	E-learning platforms (LMS), online exam portals	Enhances teaching, learning and student engagement
Networking and communication	Social media, messaging apps (WhatsApp), Zoom	Connects people globally through collaboration tools

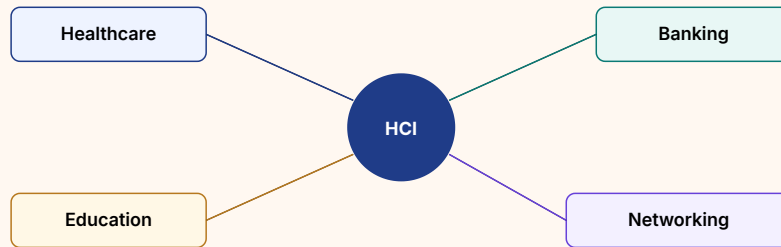

HCI sits at the centre of four everyday domains: healthcare, banking, education and networking.

Remember: Exam mnemonic H-BEN: Health, Banking, Education, Networking. For each, write: one application + one user benefit. That structure scores full marks on...

Exam: Very common 5–8 mark question: "Explain applications of HCI in different domains of life with examples." Draw a four-row table (Health care, Banking, Education,...


ایچ سی آئی کی ایپلیکیشنز صحت، بینکنگ، تعلیم اور نیٹ ورکنگ کے شعبوں میں انسانی ضروریات پوری کرتی ہیں۔

1.3 Components of HCI

HCI relies on several primary components that work together.

- If one component is weak, the whole interaction feels broken.
- The first four are the people, the machine, the conversation, and the job to be done.

	Component	Meaning
i	User (صارف)	Any individual or group that interacts with a computer system to achieve defined goals. Two categories: end users (people who directly operate the system, from beginners to experts) and stakeholders (people with an interest in the outcome, such as managers and clients).
ii	Computer system (کمپیوٹر سسٹم)	The platform where humans and computers communicate through input, output and feedback using an interface. It connects human actions with machine responses.
iii	User interaction (صارف کا تعامل)	The process through which a user communicates with a system by performing actions (clicking, tapping, typing, speaking). It transforms user intent into system responses.
iv	Task (کام)	The specific action users perform (for example, booking a ticket). It has three characteristics: task complexity (filling a form vs designing a 3D model), user knowledge (basic typing vs advanced programming), and time requirement (ATM withdrawal vs online passport application).

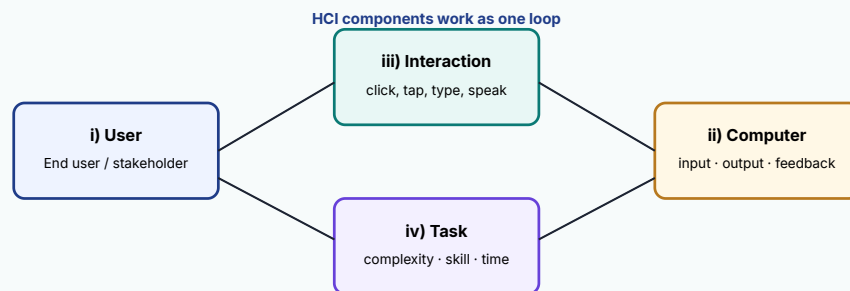

The user performs a task through interaction with a computer system. All four parts must fit together.

Remember: U-C-I-T: User, Computer system, Interaction, Task. "U Can Interact with Tasks." Then add three task questions: How hard? What skill? How long?

ایچ سی آئی کے چار بنیادی اجزاء ہیں: صارف (اینڈ یوزر جو خود سسٹم چلاتا ہے اور اسٹیک ہولڈر جس کا نتیجے میں مفاد ہے)، کمپیوٹر سسٹم (....)

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Fundamentals of Human-Computer Interaction:** Mistake: Writing "HCI is only about computer hardware" or mixing up Voice with Hearing.
- **Traditional Interaction and 1.1.2 Natural Interaction:** Mistake: "Touchscreens are always natural interaction." Fix: Ordinary tapping and swiping on a phone is still listed as traditional in this...
- **Applications of HCI (Domains of Life):** Mistake: Listing brand names only ("WhatsApp, JazzCash, Zoom") without saying the domain and the user benefit.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Applications of HCI (Domains of Life)**. Write: HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) These are human-centred solutions built to meet user needs across many domains of life. (2) A domain is an area of daily activity — health, money, school, talking to people. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Name the four domains of HCI given in the source.

3 marks. Explain Applications of HCI (Domains of Life) with two clear points and one example.

5 marks. Very common 5–8 mark question: "Explain applications of HCI in different domains of life with examples." Draw a four-row table (Health care, Banking, Education, Networking & communication). Each row:...

8 marks. Applications of HCI (Domains of Life): 5-mark answer plus a labelled wireframe and one accessibility fix.

Answers: 1. Health care, banking, education, networking and communication 3. These are human-centred solutions built to meet user needs across many domains of life.; A domain is an area of daily activity — health, money, school, talking to people. 5. Use the recipe in the blue box. Model opening: HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps. 8. Same 5-mark body + a labelled wireframe and one accessibility fix + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Applications of HCI (Domains of Life)** using the recipe in this topic. Include a labelled wireframe and one accessibility fix. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 1: Computer Systems (HCI)

Computer Systems (HCI) (2/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Types of User Interaction · Interface Types, Environment and Feedback · Importance of HCI · Accessibility Principles

★ **Must lock:** Importance of HCI

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Name the four domains of HCI given in the source.
2. Give two other names for HCI.
3. Is an ATM keypad traditional or natural?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

Types of User Interaction

User interaction can happen in many different ways depending on the technology used.

- Learn every type with one clean example — board questions often ask you to "list and explain" five or more.

Remember: Group them: hands on screen (direct, gesture, haptic) · words (command, conversational, voice) · lists and blanks (menu, form) · automatic/body (context-aware,...

تعامل کی اقسام میں براہ راست پھیری، کمانڈ، مینو، فارم، گفتگو (چیٹ بوٹ)، اشارہ، آواز، سیاق و سباق سے آگاہ نظام، بائیومیٹرک، بی...

Interface Types, Environment and Feedback

Components v–vii complete the HCI picture: the look of the controls, the place where you use them, and the signals that tell you "it worked" or "try again".

- Graphical User Interface (GUI): visual elements such as windows, icons and menus (Windows OS, Android).
- Command-Line Interface (CLI): text-based typing (MS-DOS, Linux terminal).
- Touch interface: tapping, swiping, pinching (smartphones, tablets).
- Voice User Interface (VUI): spoken commands (smart speakers).

Remember: GUI vs CLI vs NUI: GUI = pictures you click. CLI = words you type. NUI = body you move. VUI = voice you speak. Touch = fingers on glass. Feedback rule: system...

یوزر انٹرفیس وہ واسطہ ہے جس سے انسان سسٹم سے بات کرتا ہے: GUI تصاویر اور مینو، CLI لکھی کمانڈ، ٹچ، آواز (VUI) اور قدرتی اشارے (NUI).

1.4 Importance of HCI ★ Golden

HCI ensures that machines are approachable and usable, turning complex technology into everyday tools.

- Good design makes technology simple and enjoyable (touchscreens).
- Poor design causes confusion and risks (unclear buttons on medical devices).
- This is why HCI is not optional decoration.

Implication	Description
1. Enhance productivity	Well-designed interfaces help users work faster, make fewer mistakes, and achieve goals efficiently.
2. Promotes inclusivity	Accessibility features (screen readers, voice commands) empower marginalized groups and ensure equal use of technology for everyone.
3. Drives innovation	Emerging tech such as AR/VR, AI and IoT rely strictly on solid HCI principles for people to actually adopt and use them.
4. Economic impact	User-friendly products gain higher adoption rates, customer loyalty and market success, driving profits.
5. Ethical responsibility	Responsible design ensures technology respects user privacy, reduces bias and supports human well-being.

Remember: P-I-I-E-E: Productivity, Inclusivity, Innovation, Economic impact, Ethics. Sentence: "Please Include Innovative, Ethical Earnings."

Exam: Typical wording: "Why is HCI important? Discuss its implications." (8 marks) Write a short opening (good design vs poor design) then five numbered points with one...

اچھا ایچ سی آئی پیچیدہ ٹیکنالوجی کو روزمرہ کا آسان اوزار بناتا ہے؛ برا ڈیزائن الجھن اور خطرہ پیدا کرتا ہے، جیسے طبی آلے پر غیر واضح بٹن۔

1.5 Accessibility Principles

Accessibility principles are HCI guidelines that ensure digital systems are usable by all individuals, including people with diverse physical, sensory and cognitive abilities.

- They remove barriers to create equal access.
- Accessibility is not a "special extra".
- It is how you make sure a student with low vision, a shopkeeper who cannot use a mouse, or a colour-blind driver can still complete the...

Principle	What it means	Example
1. High contrast (واضح رنگ)	Make text and pictures stand out clearly against the background.	Black text on a white background in a railway app, readable in bright sunlight.
2. Readable fonts (پڑھنے میں آسان تحریر)	Clear, simple fonts with proper size and spacing.	A school website using large Calibri so homework instructions are easy to read.
3. Colour-blind friendly design (رنگوں کی پہچان)	Do not depend <i>only</i> on colours; also use symbols or text labels.	A traffic app showing a red circle with a "STOP" label, not just a red colour.
4. Inclusive navigation (آسان نیویگیشن)	Give users different ways to move around a system.	A website that lets you use the Tab key to jump between buttons if you cannot use a mouse.
5. Multimodal detection (متعدد حسی ذرائع)	Present information in different formats (sight, sound, touch).	A video with text captions, or a phone vibrating to alert a user.

Remember: C-F-C-N-M: Contrast, Fonts, Colour-blind, Navigation, Multimodal. "Can Friends Catch New Messages?"

رسائی پذیری (Accessibility) کے اصول یقینی بناتے ہیں کہ ہر انسان سسٹم استعمال کر سکے، بشمول مختلف جسمانی، حسی اور ذہنی صلاحیتوں والے افراد۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Types of User Interaction:** Mistake: Treating "voice interaction" and "conversational" as identical, or calling a dropdown menu "command-based".
- **Interface Types, Environment and Feedback:** Mistake: Mixing up system feedback with user feedback, or saying "environment" means only the software theme (dark mode).
- **Importance of HCI:** Mistake: Writing only "HCI is important because it makes apps look nice." Fix: Looks are a tiny part of UI.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Importance of HCI**. Write: HCI ensures that machines are approachable and usable, turning complex technology into everyday tools.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Good design makes technology simple and enjoyable (touchscreens). (2) Poor design causes confusion and risks (unclear buttons on medical devices). — + example.

5 marks: 3-mark structure + table: Implication / Description + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Give one example of poor design mentioned in the source.

3 marks. Explain Importance of HCI with two clear points and one example.

5 marks. Typical wording: "Why is HCI important? Discuss its implications." (8 marks) Write a short opening (good design vs poor design) then five numbered points with one example each. Local examples that...

8 marks. Importance of HCI: 5-mark answer plus a labelled wireframe and one accessibility fix.

Answers: 1. Unclear buttons on medical devices 3. Good design makes technology simple and enjoyable (touchscreens).; Poor design causes confusion and risks (unclear buttons on medical devices). 5. Use the recipe in the blue box. Model opening: HCI ensures that machines are approachable and usable, turning complex technology into everyday tools. 8. Same 5-mark body + a labelled wireframe and one accessibility fix + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Importance of HCI** using the recipe in this topic. Include a labelled wireframe and one accessibility fix. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 1: Computer Systems (HCI)

Computer Systems (HCI) (3/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Need Analysis for Interface Design · Human-Computer Interaction Problems · Methods for Improving HCI · User Interface Design (UI vs UX)

★ **Must lock:** Human-Computer Interaction Problems, User Interface Design (UI vs UX)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Give one example of poor design mentioned in the source.
2. Which type is a Linux `cd ..` command?
3. Name five types of user interface given in the source.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.6 Need Analysis for Interface Design

Need analysis is the process of identifying the gap between the existing situation and the desired outcome.

1. Identify the users → 2. Collect information → 3. Analyse needs → 4. Prioritise → 5. Develop solutions

- In HCI it is done before designing a UI, so that you understand users' goals, tasks, abilities and expectations.
- If you skip need analysis, you guess.
- Guessing is how a school portal ends up with 40 menus and no "Download date sheet" button on the home screen.

Remember: Need analysis = gap finding. Write: Existing = what hurts now. Desired = what "done" looks like.

The UI must close that gap, not decorate it.

نیڈ اینالیسس موجودہ صورتحال اور مطلوبہ نتیجے کے فرق کو یو آئی بنانے سے پہلے تلاش کرتا ہے۔

1.7 Human-Computer Interaction Problems ★ Golden

HCI problems are common difficulties that stop users from using technology smoothly.

- They happen when systems fail to meet human needs or cognitive limits.
- Cognitive limits means the mind can only hold and process so much at once — if an app asks you to remember three SMS codes at the same...
- Board answers score well when you name the problem, explain it in one line, and give a concrete example (the source examples are safe; a...

Problem	Explanation and example
Interface complexity	Too many options or a confusing layout. Example: a shopping app with so many menus you cannot find the checkout button.
Poor feedback	The system does not show if an action worked or failed. Example: clicking Submit and the screen freezes with no confirmation.
Inconsistency	Different parts of the app look or act differently. Example: a magnifying-glass icon for Search on one page, a binocular icon on another.
Accessibility gaps	Design ignores people with disabilities. Example: a video tutorial platform without captions for deaf users.
Compatibility issues	Interface fails on different devices or browsers. Example: a website that works on a laptop but crashes on a mobile browser.
Contextual neglect	The system does not adjust to the user's situation. Example: a map app with no dark mode, blinding the driver at night.
High cognitive load	Users must memorize too much or follow overly complex steps. Example: a registration system forcing you to remember three different SMS codes at once.
Trust deficiency	The system feels unsafe or hides security cues. Example: an online store asking for credit cards but lacking an SSL/HTTPS lock icon.

Remember: Eight problems in two families: (1) Screen problems — complexity, inconsistency, accessibility, compatibility, context. (2) Mind-and-trust problems — poor...

Exam: Common 8-mark question: "Describe problems of HCI with examples." Aim for at least six of the eight, each in the pattern Name → one-line meaning → example. Memorise the...

ایچ سی آئی مسائل وہ رکاوٹیں ہیں جو سسٹم کو انسانی ضرورت یا ذہنی حد کے مطابق نہ ہونے پر پیدا ہوتی ہیں۔

1.8 Methods for Improving HCI

Once you can name an HCI problem, you fix it with a matching method.

- Enhance usability: simplify navigation (a clear "Buy Now" button).
- Strengthen accessibility: support disabilities (captions on videos).
- Ensure consistency: keep layouts uniform (the same "Save" button everywhere).
- Provide clear feedback: show action results ("Payment Successful" popup).

Problem (1.7)	Method (1.8)
Cannot find "Send Money"	Enhance usability — one clear button
No captions on help video	Strengthen accessibility
Search icon changes from page to page	Ensure consistency
Submit freezes with no message	Clear feedback — "Payment Successful"
Portal crashes on mobile	Improve adaptability — responsive layout
Built features nobody asked for	UCD — interview, then pilot-test
Elderly user cannot type a long number	Multimodal — voice + touch
Complaints ignored after launch	Continuous testing and updates

Remember: Think "problem → method" as a pair. Complexity ↔ usability. No captions ↔ accessibility. Different icons ↔ consistency. Freeze ↔ feedback. Phone crash ↔...

ایچ سی آئی بہتر بنانے کے طریقے: نیویگیشن آسان کرنا، رسائی بڑھانا (کیپشن)، ایک جیسا لے آؤٹ، واضح فیڈبیک ("ادائیگی کامیاب")،
ریسپانس...

1.9 User Interface Design (UI vs UX) ★ Golden

UI design is the process of creating and organizing the visual elements of a software application so users can interact with it easily and efficiently.

- 1.9.1 Components of a user interface
ComponentRole Buttons Clickable elements that perform actions (Submit, Cancel).
- Menus Lists of options for navigating the system.
- Icons Small symbols representing tools or actions.

Component	Role
Buttons	Clickable elements that perform actions (Submit, Cancel).
Menus	Lists of options for navigating the system.
Icons	Small symbols representing tools or actions.
Text fields	Boxes where users type information (passwords, search).
Checkboxes / radio buttons	Selecting options in a form. Checkboxes allow several choices; radio buttons allow only one in a group.
Sliders	Adjusting values along a bar (volume, brightness).

Remember: Clothes vs day out. UI is the outfit (colours, buttons, icons). UX is the whole day (Did you arrive on time? Did you get wet? Were you stressed?). Examiners...

Exam: Highest-yield short question in the chapter: "Differentiate between UI and UX with an example." Write: (1) the two definitions, (2) the sentence "UI is what you see; UX..."

یو آئی ڈیزائن بصری عناصر — بٹن، مینو، آئیکن، ٹیکسٹ فیلڈ، چیک باکس/ریڈیو، سلائیڈر — کو ترتیب دینا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Need Analysis for Interface Design:** Mistake: Starting in Figma on day one, then "asking users later".
- **Human-Computer Interaction Problems:** Mistake: Writing "the app is bad" as an HCI problem, or mixing up cognitive load with compatibility.
- **Methods for Improving HCI:** Mistake: Naming methods without saying what they change ("we will improve HCI" is not an answer).

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Human-Computer Interaction Problems**. Write: HCI problems are common difficulties that stop users from using technology smoothly.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) They happen when systems fail to meet human needs or cognitive limits. (2) Cognitive limits means the mind can only hold and process so much at once — if an app asks you to remember three SMS codes at the same... — + example.

5 marks: 3-mark structure + table: Problem / Explanation and example + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **User Interface Design (UI vs UX)**. Write: UI design is the process of creating and organizing the visual elements of a software application so users can interact with it easily and efficiently.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) 1.9.1 Components of a user interface ComponentRole ButtonsClickable elements that perform actions (Submit, Cancel). (2) MenusLists of options for navigating the system. — + example.

5 marks: 3-mark structure + table: Component / Role + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Which problem is a missing HTTPS lock on a payment page?

3 marks. Explain Human-Computer Interaction Problems with two clear points and one example.

5 marks. Common 8-mark question: "Describe problems of HCI with examples." Aim for at least six of the eight, each in the pattern Name → one-line meaning → example. Memorise the source examples (checkout...

8 marks. Human-Computer Interaction Problems: 5-mark answer plus a labelled wireframe and one accessibility fix.

Answers: 1. Trust deficiency 3. They happen when systems fail to meet human needs or cognitive limits.; Cognitive limits means the mind can only hold and process so much at once — if an app asks you to remember three SMS codes at the same... 5. Use the recipe in the blue box. Model opening: HCI problems are common difficulties that stop users from using technology smoothly. 8. Same 5-mark body + a labelled wireframe and one accessibility fix + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Human-Computer Interaction Problems** using the recipe in this topic. Include a labelled wireframe and one accessibility fix. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 1: Computer Systems (HCI)

Computer Systems (HCI) (4/4) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Wireframing, Figma and Prototypes · Test and Evaluate HCI (Evaluation Methods) · Testing Methods (Usability, A/B, Automated) · Career Opportunities in UI/UX

★ **Must lock:** Testing Methods (Usability, A/B, Automated)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Which problem is a missing HTTPS lock on a payment page?
2. List six UI components from the source.
3. When in the design process is need analysis done?


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.9.3–1.9.5 Wireframing, Figma and Prototypes

1.9.3 Wireframing is creating a basic visual outline or blueprint of a user interface before the final design.

Lo-Fi sketch → Add details → Hi-Fi prototype

- It plans the structure without focusing on colours or detailed graphics.
- Low-fidelity wireframes (Lo-Fi) A simple black-and-white sketch showing basic layout (boxes and lines).
- Used early to test and share ideas quickly.

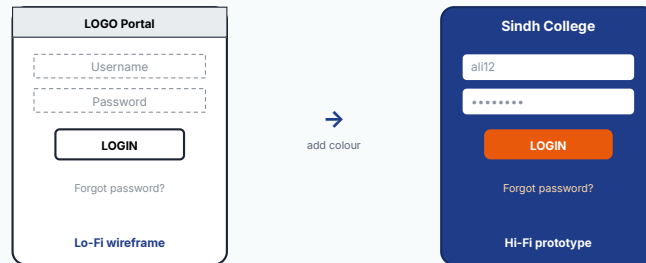

A school-portal login: Lo-Fi boxes and labels on the left; a coloured, realistic Hi-Fi prototype on the right.

Remember: Lo-Fi = boxes. Hi-Fi = almost the real app. Prototype = clickable. Figma can hold all three stages. Trigger = what the user does. Action = where the fake app...

وائر فریم یو آئی کا بنیادی خاکہ ہے، رنگوں سے پہلے۔

1.11 Test and Evaluate HCI (Evaluation Methods)

Testing checks if the product works properly (finding bugs).

- Evaluation determines whether it meets users' needs (usability).
- Together they improve the product before release.
- A school portal can be "bug-free" (testing passed) and still unusable if students cannot find the date sheet (evaluation failed).

Method	Description
SUS (System Usability Scale)	A standard 10-item questionnaire used to calculate a score for how usable a system is.
NPS (Net Promoter Score)	Asks users: "How likely are you to recommend this app to a friend?" Measures user loyalty.
Formative evaluation	Done during development to collect early feedback and improve the design continuously.
Summative evaluation	Done at the end of development to measure overall success against the original goals.
Expert reviews	Usability specialists review the app against established design standards (heuristics).

Remember: Formative = forming it (during). Summative = summing it up (end). SUS = 10 questions on usability. NPS = "Would you recommend it?" Expert = specialist vs...

ٹیسٹنگ یہ دیکھتی ہے کہ پروڈکٹ ٹھیک چلتا ہے (بگز)؛ ایویلیوایشن یہ دیکھتی ہے کہ صارف کی ضرورت پوری ہوئی۔

1.11.2 Testing Methods (Usability, A/B, Automated) ★ Golden

Testing involves observing how the system behaves under specific conditions.

- Usability testing: observing real users while they perform realistic tasks, to measure efficiency and satisfaction. If the user gets stuck,...
- Task-based testing: assigning a specific task (for example, "Find a product and add it to cart") and strictly measuring completion time,...
- Automated audits: software bots scan websites to detect technical issues such as broken links, slow loading speeds or low colour contrast.
- A/B testing: comparing two versions of an interface (A and B). Half the users see A, half see B. The one with more clicks or sign-ups wins.

Task-based "Add to cart" Time: 12 s Success: Yes	A/B test Version A Version B half / half users more clicks wins	Automated audit Bot scanning... 3 broken links Low contrast
--	---	---

Three golden testing pictures: timed tasks, A versus B, and a bot that finds broken links and weak contrast.

Remember: Task-based three numbers: Time, Success, Errors. A/B: two versions, split users, the higher clicks/sign-ups win. Bot: links, speed, contrast. Load: many users...

Exam: Golden 8-mark question: "Explain testing methods used in HCI." Write seven short paragraphs or a seven-row table. For full marks, define usability testing (observe real...

سات ٹیسٹنگ طریقے: یوزیبلٹی (حقیقی صارف کو کام کرتے دیکھنا)، ٹاسک بیسڈ (وقت، کامیابی، غلطیاں ناپنا)، خودکار آڈٹ (بوت ٹوٹے لنک،
سسٹ...

Career Opportunities in UI/UX

The same HCI skills you practised on ATMs, JazzCash and school portals are real jobs.

- Each role uses a different slice of this chapter.

Career	What the person does
UX designer	Researches user needs to ensure the app is intuitive and satisfying.
UI designer	Designs the visual layout (colours, typography, buttons) using tools such as Figma.
Interaction designer	Focuses on the flow between screens, animations and gestures.
Usability researcher	Runs SUS/NPS tests and A/B tests with real users to find flaws.
Accessibility specialist	Ensures products meet inclusive standards for people with disabilities.

Remember: UI looks; UX asks; interaction connects screens; research measures; accessibility includes everyone.

اس باب سے ملازمتیں: یو ایکس ڈیزائنر صارف کی ضرورت تحقیق کرتا ہے، یو آئی ڈیزائنر فگما میں رنگ اور بٹن بناتا ہے، انٹریکشن ڈیزائنر اس...

Computer Systems (HCI)

16 single-page lessons · 5 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- **HCI** (also CHI, MMI) designs technology to be easy, efficient and responsive to people, using five sensory channels: sight, touch (haptics), hearing, voice and spatial.
- **Traditional interaction** uses mouse, keyboard, keypad or simple tap/swipe; **natural interaction** uses voice, face or body gesture without a mouse or keyboard.
- HCI applications cover **health care, banking, education, and networking/communication**, each with a clear user benefit (remote care, quick secure money, better learning, global connection).
- Four core components: **user** (end user vs stakeholder), **computer system**, **user interaction**, and **task** (complexity, knowledge, time).
- Interaction types include direct manipulation, command-based, menu-driven, form fill, conversational, gesture, voice, context-aware, biometric, haptic and multimodal.
- Interfaces: GUI, CLI, touch, VUI, NUI. **Environment** is physical, social and technical. **System feedback** is the machine's reply; **user feedback** is what the person sends in.
- HCI matters for productivity, inclusivity, innovation, economic impact and ethical responsibility. Poor design (unclear medical buttons) creates risk.
- Five accessibility principles: high contrast, readable fonts, colour-blind friendly labels, inclusive navigation, multimodal presentation.
- **Need analysis** finds the gap before UI design: identify users, collect data, analyse, prioritise, develop solutions (banking case: FaceID, large buttons, local language).
- Eight HCI problems: complexity, poor feedback, inconsistency, accessibility gaps, compatibility, contextual neglect, high cognitive load, trust deficiency.
- Improve HCI with usability, accessibility, consistency, clear feedback, adaptability (responsive design), UCD and pilot tests, multimodal input, and continuous testing.
- **UI** is the visual components (buttons, menus, icons, fields, checkboxes, sliders); **UX** is how the whole experience feels. UI is what you see; UX is how it feels.
- Lo-Fi wireframes plan structure; Hi-Fi prototypes look real; **Figma** is a free browser tool; prototypes use Trigger (On Tap) and Action (navigate) before code.
- Evaluation (SUS, NPS, formative, summative, expert/heuristic reviews) checks needs; testing (usability, task-based, automated, A/B, compatibility, load, keyboard/screen-reader) checks behaviour under conditions.

Key terms

Term	Meaning	اردو
HCI	Human-Computer Interaction; designing technology that is easy, efficient and responsive to people. Also called CHI or MMI.	انسان اور کمپیوٹر کا باہمی تعامل
Haptics	Physical feedback you can feel, such as a vibration.	لمسی / ارتعاشی جواب
Traditional interaction	Using standard input/output such as mouse, keyboard, keypad or simple tap and swipe.	روایتی تعامل
Natural interaction	Interacting without mouse or keyboard, using voice, face or body gesture.	قدرتی تعامل
End user	A person who directly operates the system.	حتمی صارف
Stakeholder	A person or group with an interest in the system's outcome (manager, client).	فريقی مفاد
GUI	Graphical User Interface using windows, icons and menus.	تصویری صارف انٹرفیس
CLI	Command-Line Interface using typed text commands.	کمانڈ لائن انٹرفیس
NUI	Natural User Interface using gestures, body movement or immersive environments (VR, Kinect).	قدرتی صارف انٹرفیس
System feedback	The computer's response that confirms or guides an action.	نظام کا جواب
User feedback	Input the user sends to the system (Submit click, star rating).	صارف کی رائے / ان پٹ
Accessibility	Making digital systems usable by all, including people with diverse abilities.	رسائی پذیری

Computer Systems (HCI)

75 marks • 1 hour 15 minutes • no notes • no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 16 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define • Explain • Example • Diagram • Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. HCI is also known as:
 - a. CPU and ALU
 - b. CHI or MMI
 - c. HTTP or HTML
 - d. GUI only
2. Which sensory channel tracks body movement in VR?
 - a. Sight
 - b. Hearing
 - c. Spatial
 - d. Voice
3. Unlocking a phone with FaceID is an example of:
 - a. natural interaction
 - b. command-based interaction only
 - c. traditional interaction
 - d. CLI
4. Which domain of HCI includes patient portals and telemedicine?
 - a. Banking
 - b. Education
 - c. Networking
 - d. Health care
5. A bank manager who never uses the ATM but cares that it works is a:
 - a. stakeholder
 - b. end user
 - c. haptic device
 - d. wireframe
6. Typing `dir` in MS-DOS is:
 - a. menu-driven
 - b. command-based
 - c. context-aware
 - d. biometric
7. A "Message Sent!" tick mark is:
 - a. user feedback
 - b. a stakeholder
 - c. need analysis
 - d. system feedback
8. Unclear buttons on a medical device mainly show that poor HCI:
 - a. only affects game apps
 - b. is a colour preference
 - c. causes confusion and risk
 - d. improves load testing
9. Not depending only on colour, but adding a "STOP" label, is:
 - a. colour-blind friendly design
 - b. load testing
 - c. CLI design
 - d. A/B testing
10. Need analysis for a UI should be done:
 - a. after the product is sold
 - b. before designing the UI
 - c. only by programmers
 - d. instead of testing
11. An online store that asks for a credit card but shows no HTTPS lock has:
 - a. high contrast
 - b. natural interaction
 - c. summative evaluation
 - d. trust deficiency
12. "UI is what you see; UX is how it feels" means:
 - a. UI and UX are identical
 - b. UX is only the logo colour
 - c. UI is code and UX is hardware
 - d. UI is visual elements; UX is the overall experience
13. A Lo-Fi wireframe should focus on:
 - a. final photographs and brand colours
 - b. structure and flow using boxes and lines
 - c. server load of 10,000 users
 - d. writing the finished Python code
14. The System Usability Scale (SUS) is:
 - a. a 10-item questionnaire that scores usability
 - b. a bot that finds broken links
 - c. a type of ATM keypad
 - d. a Figma trigger
15. In A/B testing:
 - a. every user sees both versions at once and votes for the prettier one
 - b. only experts review heuristics
 - c. half the users see A, half see B, and the version with more clicks or sign-ups wins
 - d. the server is crashed on purpose

Section B — Short questions (10 × 3 = 30)

1. Define HCI. Give two other names for it and list the five sensory channels.
2. Differentiate traditional interaction from natural interaction with one example of each from daily Pakistani use.
3. State four domains of HCI. For each, give one application and one user benefit.
4. Name the four primary HCI components. Distinguish end user from stakeholder, and list the three characteristics of a task.
5. Define GUI, CLI, VUI and NUI, with one example of each.
6. Write five implications of the importance of HCI.
7. List the five accessibility principles with one example each.
8. What is need analysis? Write its five steps and three findings from the mobile-banking case study.
9. Differentiate UI from UX using the food-delivery example. Name six UI components.
10. What is A/B testing? How is it different from an automated audit?

Section C — Long questions (attempt any 3 × 10 = 30)

1. Explain the components of HCI (user, computer system, user interaction, task, interface types, environment, feedback). Illustrate every part with a labelled walk-through of a person withdrawing cash from an outdoor ATM in Hyderabad.
2. Describe eight HCI problems with examples. Then match each problem to a method of improving HCI. Use JazzCash or a school portal wherever it makes the example clearer.
3. "UI is what you see; UX is how it feels." Explain UI design, its six components, and UX. Then describe Lo-Fi wireframes, Hi-Fi prototypes, the steps of making a low-fidelity design in Figma, and how a Figma prototype uses a trigger and an action. Sketch a Lo-Fi school-portal login.
4. Differentiate testing from evaluation. Explain SUS, NPS, formative evaluation, summative evaluation and expert reviews. Then explain usability testing, task-based testing (including the three measurements), automated audits, A/B testing, compatibility testing, performance/load testing, and keyboard/screen-reader walkthroughs. Apply three of these methods to a college portal on result day.
5. A team is designing a JazzCash-style "Send Money" screen for elderly users in Sukkur who speak Sindhi, stand in bright sunlight, and have never used a CLI. Carry out a need analysis (five steps), list accessibility principles you will apply, choose interaction types, and say which evaluation and testing methods you will use before launch and why.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **1.1 Fundamentals of Human-Computer Interaction.** Answers: 1. CHI (Computer-Human Interface) and MMI (Man-Machine Interaction). 2. Spatial. 3. Touch / haptics.
2. **1.1.1 Traditional Interaction and 1.1.2 Natural Interaction.** Answers: 1. Traditional. 2. "Alexa, play a song" (or any spoken command). 3. Because typing a PIN is traditional, while FaceID or a voice assistant on the same phone is natural — it depends on the method, not the device.
3. **1.2 Applications of HCI (Domains of Life).** Answers: 1. Health care, banking, education, networking and communication. 2. Quick transactions and secure financial management. 3. Education: LMS or online exam portal. Networking: social media, WhatsApp or Zoom.
4. **1.3 Components of HCI.** Answers: 1. End users directly operate the system; stakeholders have an interest in the outcome (managers, clients) but may not click the buttons. 2. Task complexity, user knowledge, time requirement. 3. The principal, IT admin or board office — they care about results even if students are the end users.
5. **Types of User Interaction.** Answers: 1. Command-based. 2. Context-aware. 3. Because it combines two or more types (voice + touch) in one task.
6. **Interface Types, Environment and Feedback.** Answers: 1. GUI, CLI, Touch, VUI, NUI. 2. Physical: ATM in sunlight. Social: a quiet classroom. 3. System feedback.
7. **1.4 Importance of HCI.** Answers: 1. Unclear buttons on medical devices. 2. Promotes inclusivity. 3. User-friendly products get higher adoption, loyalty and profits.
8. **1.5 Accessibility Principles.** Answers: 1. Colour-blind users may not see the meaning if there is no symbol or "STOP" text. 2. Inclusive navigation. 3. Large Calibri on a school website for homework instructions.
9. **1.6 Need Analysis for Interface Design.** Answers: 1. Before designing the UI. 2. Identify users; collect information; analyse needs; prioritise; develop solutions. 3. Fingerprint/FaceID login; large buttons and simple navigation for elderly users; English plus local languages.
10. **1.7 Human-Computer Interaction Problems.** Answers: 1. Trust deficiency. 2. High cognitive load — users must memorize too much. 3. Compatibility issues.
11. **1.8 Methods for Improving HCI.** Answers: 1. User-Centred Design; focus on real user goals and pilot-test. 2. Improve adaptability (responsive design). 3. A "Payment Successful" popup.
12. **1.9 User Interface Design (UI vs UX).** Answers: 1. Buttons, menus, icons, text fields, checkboxes/radio buttons, sliders. 2. The app loads fast, tracking works, food arrives without frustration. 3. how it feels.
13. **1.9.3–1.9.5 Wireframing, Figma and Prototypes.** Answers: 1. Colours and detailed graphics (it is structure only). 2. Directly in a web browser. 3. The user event that starts a move between screens, e.g. "On Tap".
14. **1.11 Test and Evaluate HCI (Evaluation Methods).** Answers: 1. Testing finds bugs / checks the product works; evaluation checks it meets users' needs (usability). 2. 10. 3. At the end of development, against the original goals.
15. **1.11.2 Testing Methods (Usability, A/B, Automated).** Answers: 1. Completion time, success rate, number of errors. 2. Half of the users (the other half see B). 3. Any two of: broken links, slow loading, low colour contrast.
16. **Career Opportunities in UI/UX.** Answers: 1. Usability researcher. 2. UI designer.

Answer key

Multiple choice

1. b
2. c
3. a
4. d
5. a
6. b
7. d
8. c
9. a
10. b
11. d
12. d
13. b
14. a
15. c

Short questions — model answers

1. HCI is the design of technology to serve people; systems that are easy to use, efficient and responsive. Also called CHI (Computer-Human Interface) and MMI (Man-Machine Interaction). Channels: sight, touch, hearing, voice, spatial.
2. Traditional uses standard I/O (mouse, keyboard, keypad, simple tap/swipe), e.g. an ATM keypad or typing on a school portal. Natural lets people interact without mouse or keyboard, using voice, face or gesture, e.g. FaceID or "Alexa, play a song".
3. Health care: patient portals / telemedicine — remote access to medical services. Banking: mobile banking and ATMs — quick, secure transactions. Education: LMS and exam portals — better teaching, learning and engagement. Networking: WhatsApp, Zoom, social media — global connection and collaboration.
4. User, computer system, user interaction, task. End users directly operate the system; stakeholders (managers, clients) have an interest in the outcome. Task characteristics: complexity, user knowledge, time requirement.
5. GUI: windows, icons, menus (Windows, Android). CLI: typed commands (MS-DOS, Linux). VUI: spoken commands (smart speakers). NUI: gestures, body, immersive VR/Kinect.
6. Enhance productivity; promote inclusivity; drive innovation (AR/VR, AI, IoT need solid HCI); economic impact (adoption, loyalty, profit); ethical responsibility (privacy, less bias, well-being).
7. High contrast (black text on white in a railway app); readable fonts (large Calibri on a school site); colour-blind friendly (STOP label, not colour alone); inclusive navigation (Tab key); multimodal detection (captions or vibration).
8. Need analysis finds the gap between the existing situation and the desired outcome, before UI design. Steps: identify users; collect information (interviews, questionnaires, observation); analyse needs; prioritise; develop solutions. Banking case: Fingerprint/FaceID login; large buttons and simple navigation for elderly users; English and local languages.
9. UI is the visual elements so people can interact easily; UX is the overall smoothness, comfort and satisfaction. Food app: UI = burger pictures and red buttons; UX = fast load, working tracking, food arrives without frustration. Components: buttons, menus, icons, text fields, checkboxes/radio buttons, sliders.
10. A/B testing shows version A to half the users and version B to the other half; the version with more clicks or sign-ups wins. An automated audit uses bots to scan for technical issues such as broken links, slow loading or low contrast; it does not split users between two designs.

Long questions — model answers

1. **Components through an outdoor ATM.** User: end user = account holder; stakeholder = bank. Computer system: ATM hardware and bank software linking PIN input to cash output. Interaction: insert card, type PIN, choose Cash, confirm — intent becomes a response. Task: withdraw cash; low complexity, basic knowledge, about one minute (contrast with a long passport application). Interface: GUI on screen + keypad (traditional); possibly fingerprint (biometric). Environment: physical sunlight so contrast must be high; social queue so a privacy shield is needed; technical printer or network may fail. System feedback: "Please wait", cash, receipt/SMS. User feedback: pressing Confirm. If any part is weak (glare, no "cash coming" message), HCI fails even if the bank account is correct.
2. **Problems and methods.** Interface complexity (buried checkout / hidden Send Money) → enhance usability (clear Buy Now / Send). Poor feedback (frozen Submit) → Payment Successful popup. Inconsistency (magnifying glass vs binoculars, or Send changing colour) → same Save/Send control everywhere. Accessibility gaps (no captions) → strengthen accessibility. Compatibility (laptop-only portal) → responsive/adaptability. Contextual neglect (map with no night mode; ATM unreadable in sun) → design for environment. High cognitive load (three SMS codes) → simplify steps. Trust deficiency (no HTTPS lock on JazzCash-style payment) → show security cues. Also apply UCD with a pilot test, multimodal input (voice + touch for elderly users), and continuous testing after launch.
3. **UI, UX, wireframe, Figma, prototype.** UI design organises visual elements. Six components: buttons (Submit/Cancel), menus, icons, text fields, checkboxes/radio, sliders. UX = overall experience; UI is what you see, UX is how it feels; food-delivery pictures vs fast delivery. Lo-Fi: black-and-white boxes for structure; Hi-Fi: real colour, type, images, clickable controls for final tests. Figma: sign up in the browser; Frame tool for a phone canvas; rectangles and circles; text labels such as Sign Up; duplicate frames for the next screen. Prototype: before code, Prototype tab, Trigger = On Tap, Action = Navigate to Home. Sketch: header "LOGO / Portal", dashed Username and Password boxes, a LOGIN rectangle, "Forgot password?" — the Lo-Fi login in this chapter.
4. **Test vs evaluate, then methods.** Testing finds bugs / whether it works; evaluation checks whether it meets user needs. SUS: 10-item usability score. NPS: "recommend to a friend?" (loyalty). Formative: during development. Summative: at the end vs original goals. Expert reviews: specialists vs heuristics. Usability testing: watch real users on realistic tasks. Task-based: time, success rate, errors (e.g. Add to cart in 12 s, success yes). Automated audit: bots find broken links, slow load, low contrast. A/B: half/half, more clicks win. Compatibility: Chrome/Safari, phone/tablet/PC, OS. Load: 10,000 logins at once. Keyboard/screen-reader: Tab/Enter and assistive tech. Result-day portal: load-test the 9:00 a.m. rush; usability-test "find chemistry marks"; automated audit for broken result links and grey-on-grey contrast; optional A/B of two home-screen layouts.
5. **Send Money for elderly users in Sukkur.** Need analysis: (1) users = elderly Sindhi speakers, not teenagers; (2) collect: interviews and watch them at a JazzCash shop agent; (3) analyse: fear of wrong number, cannot read small English, glare on the phone; (4) prioritise: huge Sindhi "رقم بھیجیں", amount in words, confirm screen, high contrast; (5) solution: that UI, not a CLI. Accessibility: high contrast for sunlight, large simple fonts, not colour-only status, Tab/large targets, vibration + spoken confirm (multimodal). Interaction: menu-driven + form fill + biometric + haptic; optional voice. Evaluate formatively on paper then in Figma; expert review against heuristics; SUS and NPS before launch. Test: usability and task-based ("send Rs 100") measuring time/success/errors; A/B two button sizes; compatibility on cheap Androids; keyboard if a kiosk is used; do not skip a confirm screen — trust and feedback are the main risks.

Self-assessment: I can...

- | | |
|---|---|
| ☐ define HCI, CHI and MMI and name the five sensory channels. | ☐ tell traditional interaction from natural interaction with local examples. |
| ☐ describe HCI in health, banking, education and networking. | ☐ label user, computer system, interaction, task, UI type, environment and feedback on an ATM, JazzCash or portal. |
| ☐ name the types of user interaction and give an example of each. | ☐ explain why HCI is important using the five implications. |
| ☐ apply the five accessibility principles and carry out a need analysis. | ☐ name eight HCI problems and the methods that fix them. |
| ☐ differentiate UI from UX and list six UI components. | ☐ compare Lo-Fi, Hi-Fi, Figma steps and prototype triggers/actions. |
| ☐ choose evaluation methods (SUS, NPS, formative, summative, expert). | ☐ explain usability, task-based, automated, A/B, compatibility, load and keyboard tests. |

Chapter 2: Computational Thinking & Algorithms

Computational Thinking & Algorithms (1/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Analyze algorithms for correctness · Trace Tables · Stepwise Reasoning · Comparing Trace Tables and Stepwise Reasoning · Evaluating the Clarity of an Algorithm

★ **Must lock:** Trace Tables, Comparing Trace Tables and Stepwise Reasoning

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Name the three measurements in task-based testing.
2. What does a Lo-Fi wireframe deliberately leave out?
3. What is the difference between testing and evaluation?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

2.1 Analyze algorithms for correctness

An algorithm is correct if its output matches the expected results for a given input.

Trace tables → paper execution, line by line → Stepwise reasoning → logic blocks, overall state

- Analysing correctness means showing that the algorithm produces the intended output for all valid inputs, not just one lucky example.
- Two methods are used in this course:

Remember: Remember: runs ≠ correct. A logical error still produces output — just the wrong output. That is why we analyse correctness on paper before we trust the code.

الگورتھم تب درست (Correct) سمجھا جاتا ہے جب دیے گئے ان پٹ پر اس کا آؤٹ پٹ وہی ہو جو ہونا چاہیے۔

2.1.1 Trace Tables ★ Golden

A trace table is a technique used to monitor how the values of variables change during the execution of an algorithm.

- Dry running: execute the algorithm line by line by hand.
- Debugging: find logical errors where the algorithm runs but the output is wrong.
- Validation: check that the algorithm does what it is intended to do.
- Line / step number — which line is being executed.

```
AllHeights = [1.91, 2.01, 1.87, 1.57, 1.48]
Total = 0
for height in AllHeights:
    if height ≥ 1.57 and height ≤ 1.91:
        Total = Total + 1
print(Total)
```

Remember: How to fill a trace table without getting lost. Write a new row every time a variable changes or a condition is tested. Copy unchanged values into the new row...

Exam: Very common long question: "Dry-run the given algorithm using a trace table and state the output." Draw columns for every variable plus a condition column. Show the loop...

ٹریس ٹیبل الگورتھم کا کاغذی اجرا (Dry Run) ہے۔

2.1.2 Stepwise Reasoning

Stepwise reasoning (also called logic verification) breaks an algorithm into logical sections and checks the state of the algorithm at each stage.

- Analyse each step of the algorithm.
- Check: does it start in a valid state?
- Does it handle all possible cases?
- Are the conditions correct?

Check	What you verify
Initial state	Sum = 0 before the loop. Valid: nothing has been added yet.
Loop boundary	The loop runs exactly from $i = 1$ to $i = N$. No missing number, no extra number.
Iteration	Each i is added once: after k iterations, $\text{Sum} = 1+2+\dots+k$.
Final state	When the loop ends, Sum holds $1+2+\dots+N$, which is the required total.
Edge case $N = 0$	The loop body never runs, Sum stays 0. Correct (the sum of no numbers is 0).
Check case $N = 5$	Sum becomes 15, which matches $5 \times 6 / 2 = 15$.

```
N = 5
Sum = 0
for i in range(1, N + 1):
    Sum = Sum + i
print(Sum)
```

Remember: Think of stepwise reasoning as a teacher checking a proof, not as a cashier counting coins one by one. You ask "is this block always true?" instead of "what is..."

مرحلہ وار استدلال میں الگورتھم کو منطقی حصوں میں توڑ کر ہر مرحلے پر اس کی حالت (State) دیکھی جاتی ہے: کیا شروع درست ہے، کیا تمام ص...

2.1.3 Comparing Trace Tables and Stepwise Reasoning ★ Golden

Both methods verify correctness, but they fit different situations depending on the complexity and length of the algorithm.

Feature	Trace table	Stepwise reasoning
Best for	Small algorithm blocks, complex loops, and beginners learning to track variables.	Large systems, architectural logic, and abstract mathematical proofs.
Effort required	High. Very tedious and impractical if a loop runs 1,000 times.	Moderate. Needs strong logical deduction and abstract thinking.
Primary goal	Catching syntax misinterpretations or specific arithmetic errors line by line.	Catching conceptual or structural flaws in the overall design.
Level	Micro-level (line by line). Checks exact values.	Macro-level (logic blocks). Checks overall state.

Trace table

Micro-level
Line by line
Exact values

Stepwise reasoning

Macro-level
Logic blocks
Overall state

Trace tables zoom in on values; stepwise reasoning zooms out on design.

Remember: Micro vs macro. Trace table = microscope (every cell). Stepwise reasoning = map (whole city). Beginners start with the microscope; designers need the map.

Exam: Differentiate questions are almost guaranteed: "Compare a trace table with stepwise reasoning." Write a four-row table (best for, effort, primary goal, micro/macro). Add...

ٹریس ٹیبل خرد بینی (Micro) سطح پر کام کرتا ہے: ہر لائن اور ہر قیمت۔

2.2 Evaluating the Clarity of an Algorithm

Clarity means an algorithm is easy to read, understand and modify.

Clarity → Modularity (parts) → Readability (text and flow)

- In many cases, evaluating clarity is even more important than making the algorithm slightly faster.
- A clear algorithm is easier to maintain, debug and extend over time.
- The two key aspects of clarity are:

Remember: Ask two questions: "Can I split this into parts?" (modularity) and "Can another student read it aloud and understand it?" (readability).

وضاحت (Clarity) کا مطلب ہے الگورتھم پڑھنا، سمجھنا اور بدلنا آسان ہو۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Analyze algorithms for correctness:** Mistake: testing only one “normal” input and calling the algorithm correct.
- **Trace Tables:** Mistake 1: treating 1.57 or 1.91 as out of range.
- **Stepwise Reasoning:** Mistake: rewriting the whole trace table and calling it stepwise reasoning.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Trace Tables**. Write: A trace table is a technique used to monitor how the values of variables change during the execution of an algorithm.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Debugging: find logical errors where the algorithm runs but the output is wrong. (2) Validation: check that the algorithm does what it is intended to do. — + example.

5 marks: 3-mark structure + table: Step / Total / Height / AllHeights (input) / Height between 1.57 and 1.91? / Output + the worked example from this topic.

8–10 marks: 5-mark structure + a filled trace table with every variable on every line + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Comparing Trace Tables and Stepwise Reasoning**. Write: Both methods verify correctness, but they fit different situations depending on the complexity and length of the algorithm.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Both methods verify correctness, but they fit different situations depending on the complexity and length of the algorithm. (2) Second distinct point (not a repeat of the definition) — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a filled trace table with every variable on every line + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. List the four usual columns / components of a trace table.

3 marks. Explain Trace Tables with two clear points and one example.

5 marks. Very common long question: “Dry-run the given algorithm using a trace table and state the output.” Draw columns for every variable plus a condition column. Show the loop once per item. Boundary...

8 marks. Trace Tables: 5-mark answer plus a filled trace table with every variable on every line.

Answers: 1. Line/step number, variables, input/output, condition check 3. Debugging: find logical errors where the algorithm runs but the output is wrong.; Validation: check that the algorithm does what it is intended to do. 5. Use the recipe in the blue box. Model opening: A trace table is a technique used to monitor how the values of variables change during the execution of an algorithm. 8. Same 5-mark body + a filled trace table with every variable on every line + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Trace Tables** using the recipe in this topic. Include a filled trace table with every variable on every line. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 2: Computational Thinking & Algorithms

Computational Thinking & Algorithms (2/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Modularity · Readability · Assess Algorithm Efficiency · Number of Steps (Big O Notation) · Number of Conditions

★ **Must lock:** Number of Steps (Big O Notation)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. List the four usual columns / components of a trace table.
2. Which method is micro-level and checks exact values?
3. When is an algorithm considered correct?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

2.2.1 Modularity

Modularity means breaking an algorithm into smaller, independent parts such as functions, classes or modules.

- Single Responsibility Principle (SRP). Each module should focus on one specific task. If a function calculates a sum, prints a report and...
- Coupling. Modules should be reusable in different contexts. Good modularity means loose coupling: a change in one part does not smash the...
- Abstraction. A well-designed algorithm hides complex implementation details. You can call a sorting function without knowing whether it...

Remember: SRP in one line: one function, one job. If you cannot name the function with a short verb-phrase (CalculateSum, FindAverage), it is doing too much.

ماڈیولریتی کا مطلب الگورتھم کو آزاد حصوں (فنکشن، کلاس، ماڈیول) میں توڑنا ہے۔

2.2.2 Readability

Readability is how easily another person can understand the purpose and logic of an algorithm without running it.

Names → Self-doc → Simple flow → Consistent

- Naming conventions — consistent rules for names. Good names make an algorithm easier to search and understand. Bad: $v = d / t$ Good:...
- Self-documentation — the algorithm explains itself, so you need fewer comments. Meaningful names and clean formatting make the purpose...
- Control-flow simplicity — keep the logic straightforward. Avoid deep nesting (IF inside IF inside IF), limit extra conditions, and keep...
- Consistency — one style throughout: indentation, spacing, and casing (camelCase or snake_case). Then the logic stands out instead of the...

```
# Hard to read
d = 100
t = 4
s = 20
v = d / t
if v > s:
    if t > 0:
        print(v)
```

Remember: Remember readability as N-S-S-C: Names, Self-documentation, Simple flow, Consistency.

پڑھائی پن یہ ہے کہ دوسرا شخص الگورتھم چلائے بغیر اس کا مقصد سمجھ لے۔

2.3 Assess Algorithm Efficiency

Algorithm efficiency is measured in terms of time and space — how fast it runs and how much memory it uses.

Time (speed) → Space (memory) → Efficiency

- Number of steps (described with Big O notation).
- Number of conditions (IF decisions).
- Number of repetitions (loops).

Remember: Efficiency is always “as the input grows”. An algorithm that feels instant on 10 items can freeze on 10 million items if it is $O(n^2)$.


کارکردگی (Efficiency) وقت (رفتار) اور جگہ (میموری) سے ناپی جاتی ہے۔

2.3.1 Number of Steps (Big O Notation) ★ Golden

When we discuss efficiency we ask how performance changes as the input size n increases.

- Big O notation is a mathematical method used to describe how the running time (or memory) grows as n grows.
- We ignore small constants and keep the most important term: if an algorithm does $3n + 5$ steps we write $O(n)$.
- In computer science, $\log n$ almost always means log base 2 (how many times you can halve n until you reach 1).

Class	Name	What happens when n grows	Typical example	Grade
$O(1)$	Constant	Time stays the same for 10 items or 10 million.	Access <code>arr[0]</code> (or any known index).	Excellent
$O(\log n)$	Logarithmic	Time grows very slowly; the problem is halved each step.	Binary search on a sorted list.	Great
$O(n)$	Linear	If n doubles, time roughly doubles.	Linear search of an unsorted list.	Fair / Good
$O(n \log n)$	Linearithmic	A little worse than linear; much better than n^2 . Common in good sorting.	Merge Sort (split in half, then merge).	Good
$O(n^2)$	Quadratic	Time grows with the square of n . Nested loops. Painful for large n .	Bubble Sort; compare every item with every other item.	Poor

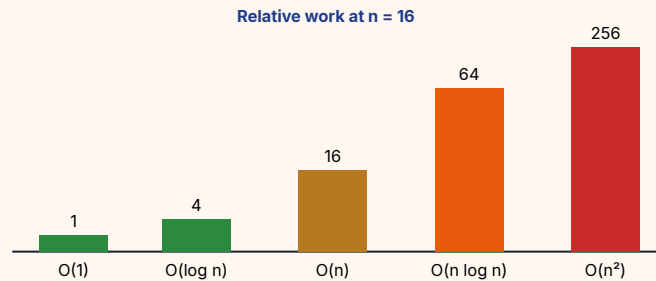

Same $n = 16$. Quadratic work is already four times $n \log n$ and sixteen times linear.

```
arr = [23, 76, 12, 90, 34, 68]
print(arr[0])
```

Remember: Order from fastest to slowest (for large n): $O(1) \rightarrow O(\log n) \rightarrow O(n) \rightarrow O(n \log n) \rightarrow O(n^2)$. Mnemonic: "Constant Logs Never Need Squares" — Constant, Logarithmic,...

Exam: Memorise the five rows of the class table (name, growth, one example, grade). Typical MCQ: "Accessing `arr[0]` is ...?" $\rightarrow O(1)$. "Binary search is ...?" $\rightarrow O(\log n)$. "Nested..."

بگ او (Big O) بتاتا ہے کہ ان پٹ n بڑھنے پر وقت یا میموری کیسے بڑھتی ہے۔

2.3.2 Number of Conditions

Conditions (IF statements) are decision points.

- Computational cost. Each IF is extra work, even if the rest of the algorithm is simple.
- Nested conditions. IF inside IF often means a brute-force approach. It hurts both readability and speed.
- Short-circuiting (the optimisation goal). Stop evaluating as soon as the result is known. In a logical AND, if the first part is False the...

```
x = 0
y = 10
if x != 0 and (y / x) > 2:
    print("ratio is large")
else:
    print("skipped safely")
```

Remember: Put the cheapest / most likely False test first in an AND, and the most likely True test first in an OR. That is short-circuiting used on purpose.

ہر IF پروسیسر سے True/False پوچھتی ہے اس لیے زیادہ شاخیں کارکردگی گھٹاتی ہیں۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Modularity:** Mistake: copying the 1-based loop for $l = 1$ to n : $total = total + A[l]$ into Python.
- **Readability:** Mistake: dumping a comment on every line ($total = total + 1$ # add one to total).
- **Assess Algorithm Efficiency:** Mistake: judging efficiency by how short the code looks.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Number of Steps (Big O Notation)**. Write: When we discuss efficiency we ask how performance changes as the input size n increases.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Big O notation is a mathematical method used to describe how the running time (or memory) grows as n grows. (2) We ignore small constants and keep the most important term: if an algorithm does $3n + 5$ steps we write $O(n)$. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Give one example each of $O(1)$, $O(\log n)$, $O(n)$ and $O(n^2)$.

3 marks. Explain Number of Steps (Big O Notation) with two clear points and one example.

5 marks. Memorise the five rows of the class table (name, growth, one example, grade). Typical MCQ: "Accessing $arr[0]$ is ...?" $\rightarrow O(1)$. "Binary search is ...?" $\rightarrow O(\log n)$. "Nested loops / Bubble Sort ...?" $\rightarrow O(n^2)$

8 marks. Number of Steps (Big O Notation): 5-mark answer plus a complete truth table and a labelled gate / logic diagram.

Answers: 1. $O(1)$ $arr[0]$; $O(\log n)$ binary search; $O(n)$ linear search; $O(n^2)$ Bubble Sort / nested loops 3. Big O notation is a mathematical method used to describe how the running time (or memory) grows as n grows.; We ignore small constants and keep the most important term: if an algorithm does $3n + 5$ steps we write $O(n)$. 5. Use the recipe in the blue box. Model opening: When we discuss efficiency we ask how performance changes as the input size n increases. 8. Same 5-mark body + a complete truth table and a labelled gate / logic diagram + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Number of Steps (Big O Notation)** using the recipe in this topic. Include a complete truth table and a labelled gate / logic diagram. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 2: Computational Thinking & Algorithms

Computational Thinking & Algorithms (3/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Number of Repetitions · The Efficiency Evaluation Framework · Refinements to improve clarity and efficiency · Concept of Data Structure · Linear Data Structures: Array

★ **Must lock:** Concept of Data Structure

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Give one example each of $O(1)$, $O(\log n)$, $O(n)$ and $O(n^2)$.
2. What does SRP say each module should do?
3. Rewrite $v = d / t$ with readable names.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

2.3.3 Number of Repetitions

Repetitions (loops) are the most significant factor in algorithm efficiency.

- The structure of the loop decides how time grows with n .

Type of repetition	Conceptual impact	Efficiency grade
Linear loop	Processes each element exactly once. Time grows in proportion to size.	Good — $O(n)$
Logarithmic repetition	Reduces the problem size by half each iteration (binary search). Huge time savings.	Excellent — $O(\log n)$
Nested loops	For each element, process all other elements. Operations explode.	Poor — $O(n^2)$

Remember: Find the deepest loop. One loop $\approx O(n)$. Loop inside a loop $\approx O(n^2)$. A loop that halves $n \approx O(\log n)$.

دہرائی (لوپ) کارکردگی کا سب سے بڑا عامل ہے۔

2.3.4 The Efficiency Evaluation Framework

To evaluate an algorithm at a conceptual level, ask three questions: Does it scale?

Does it scale? → Where is the bottleneck? → Is the extra complexity worth it?

- Does it scale? If n grows 10 times, does time jump 10 times (linear) or 100 times (quadratic)? Quadratic scaling fails for large datasets.
- What is the bottleneck? Focus on the most time-consuming section (usually the deepest loop) and try to improve that part.
- Is the cost worth it? A theoretically faster $O(\log n)$ algorithm can be too complex to code and maintain. For a list of just 50 items, a...

Situation	Scale	Bottleneck	Worth the cost?	Choice
50 unsorted class names	Tiny n	A single linear scan	Binary search needs a sort first, which is extra work and extra code	Linear search $O(n)$
1,000,000 sorted account numbers, searched all day	$n \times 10$ compared with 100,000 is already huge; quadratic would be impossible	The search loop	Yes — binary search is standard and well understood	Binary search $O(\log n)$

Remember: Framework mnemonic: S-B-W — Scale, Bottleneck, Worth it.

کارکردگی کے تین سوال: کیا الگورتھم بڑے n پر چل سکتا ہے (Scale)؟

2.4 Refinements to improve clarity and efficiency

Improving an algorithm means reviewing it step by step: simplifying logic, removing redundant work, and picking smart data structures.

- Use meaningful names. Replace vague variables with descriptive ones. Bad: $a = b / c$. Good: $\text{average} = \text{totalSum} / \text{totalItems}$.
- Break into modules. Divide a massive block into functions, for example separating `CalculateSum()` from the printing logic.
- Improve structure and indentation. Packed loops and IF statements confuse the reader. Spacing reduces mental effort.
- Add comments. Keep them short. Explain why something is done, not just what is happening, especially for tricky logic.

Remember: Clarity: N-M-I-C (Names, Modules, Indentation, Comments). Efficiency: S-A-C-D (Shrink steps, Algorithm choice, Cache, Data structure).


وضاحت بہتر کرنے کے لیے معنی خیز نام، ماڈیول، درست indentation اور مختصر تبصرے استعمال کریں۔

2.5 Concept of Data Structure ★ Golden


A data structure is a systematic way of organising, storing and managing data so that an algorithm can access, modify and process it efficiently.

- Books on a shelf are arranged in a set order, so you can find a title quickly.
- Files in folders are grouped on purpose.
- Data structures do the same job inside computer memory.

Linear (sequence)



Non-linear (branch / net)



Linear: a line of neighbours. Non-linear: a node with more than one connection.

Remember: Ask: "Does each item have at most one next item?" Yes → linear. "Can one item link to many, or can links form a net?" → non-linear.

Exam: Define data structure in full (organise, store, manage; efficient access and processing). Then split linear vs non-linear with the "one predecessor and one successor"...

ڈیٹا سٹرکچر ڈیٹا کو منظم طریقے سے رکھنے کا نظام ہے تاکہ الگورتھم اسے جلدی استعمال کر سکے۔

2.5.1 Linear Data Structures: Array

An array holds a collection of similar items (the same data type) placed next to each other in contiguous memory (one continuous block).

- Each item has a position number called an index, usually starting from 0.
- Because the address of any cell can be calculated from the index, you can jump straight to it.
- That is direct access (also called random access), and it is $O(1)$.

Array name: A

23	76	12	90	34	68
0	1	2	3	4	5

$A[3] = 90$ (index starts at 0)

Six integers in contiguous cells. Direct access: $A[3]$ jumps to 90 without walking 23, 76 and 12.

```
A = [23, 76, 12, 90, 34, 68]
print(A[3])
print(A[0])
```

Remember: Index 0 is the first shelf on the row. The third item that humans call “number 4” is index 3. Formula in your head: position from the left, minus one.

ایرے ایک جیسے عناصر کو میموری کے لگاتار بلاک میں رکھتا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Number of Repetitions:** Mistake: counting the word for and ignoring how the index moves.
- **The Efficiency Evaluation Framework:** Mistake: always choosing the theoretically fastest Big O.
- **Refinements to improve clarity and efficiency:** Mistake: “optimising” by renaming variables and thinking that is an efficiency refinement.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Concept of Data Structure**. Write: A data structure is a systematic way of organising, storing and managing data so that an algorithm can access, modify and process it efficiently.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Books on a shelf are arranged in a set order, so you can find a title quickly. (2) Files in folders are grouped on purpose. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Define data structure.

3 marks. Explain Concept of Data Structure with two clear points and one example.

5 marks. Define data structure in full (organise, store, manage; efficient access and processing). Then split linear vs non-linear with the “one predecessor and one successor” test, and list the four linear...

8 marks. Concept of Data Structure: 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. A systematic way of organising, storing and managing data for efficient access, modification and processing 3. Books on a shelf are arranged in a set order, so you can find a title quickly.; Files in folders are grouped on purpose. 5. Use the recipe in the blue box. Model opening: A data structure is a systematic way of organising, storing and managing data so that an algorithm can access, modify and process it efficiently. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Concept of Data Structure** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 2: Computational Thinking & Algorithms

Computational Thinking & Algorithms (4/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Linear Data Structures: Linked List · Linear Data Structures: Stack · Linear Data Structures: Queue · Non-Linear Data Structures: Tree · Non-Linear Data Structures: Graph

★ **Must lock:** Linear Data Structures: Stack, Linear Data Structures: Queue

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.


1. Define data structure.
2. What grade does the source give nested loops?
3. If n grows $10\times$, how much slower is a quadratic algorithm?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

Linear Data Structures: Linked List

A linked list stores data as a chain. Unlike an array, the items are not one continuous block.

- the actual data;
- a link (pointer) holding the memory address of the next node.



Follow HEAD → 23 → 76 → 12 → 90 → NULL

Four nodes. The last link is NULL, which ends the chain.

```
nodes = [23, 76, 12, 90]
for data in nodes:
    print(data, end=" → ")
print("NULL")
```

Remember: Array = row of lockers with numbers on the doors. Linked list = treasure hunt: each clue (link) tells you where the next box is.


لنکڈ لسٹ زنجیر کی طرح نوڈز پر مشتمل ہے جو میموری میں بکھرے ہو سکتے ہیں۔

Linear Data Structures: Stack ★ Golden

A stack is a linear data structure that works on the LIFO principle: Last-In, First-Out.

- PUSH — add an item to the top.
- POP — remove the item from the top.

Step	Operation	Stack (bottom → top)	TOP	Popped value
0	(empty)	[]	none	
1	PUSH Data1	[Data1]	Data1	
2	PUSH Data2	[Data1, Data2]	Data2	
3	PUSH Data3	[Data1, Data2, Data3]	Data3	
4	POP	[Data1, Data2]	Data2	Data3
5	POP	[Data1]	Data1	Data2

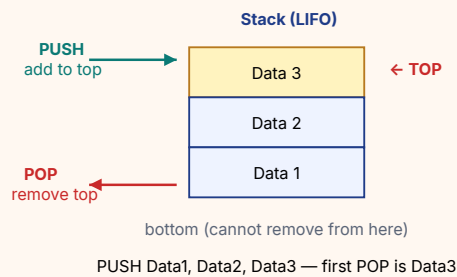

Three PUSH operations. The TOP is Data 3, so the first POP returns Data 3.

```
stack = []
stack.append("Data1")
stack.append("Data2")
stack.append("Data3")
print("after 3 PUSHes:", stack)
print("POP:", stack.pop())
print("POP:", stack.pop())
print("Left:", stack)
```

Remember: LIFO = Last In First Out = "last plate washed is first plate used" on a canteen pile. Undo, Redo, Back button and function calls are all stacks.

Exam: Define stack + LIFO, define PUSH and POP, mention TOP, give the Undo example, and draw the vertical boxes with TOP labelled. Trace questions: "Show the stack after PUSH..."

سٹیک LIFO پر چلتا ہے: جو سب سے بعد میں آیا وہ سب سے پہلے نکلے گا۔


Linear Data Structures: Queue ★ Golden

A queue organises data on the FIFO principle: First-In, First-Out.

- ENQUEUE — add an element at the Rear (back).
- DEQUEUE — remove an element from the Front.

Step	Operation	Queue (Front → Rear)	Front	Rear	Removed
0	(empty)	[]	—	—	
1	ENQUEUE 55	[55]	55	55	
2	ENQUEUE 76	[55, 76]	55	76	
3	ENQUEUE 90	[55, 76, 90]	55	90	
4	ENQUEUE D	[55, 76, 90, D]	55	D	
5	DEQUEUE	[76, 90, D]	76	D	55

Queue (FIFO)



Next ENQUEUE joins after 90. Next DEQUEUE removes 55.

Three jobs waiting. New jobs join at the rear; service always takes the front.

Remember: FIFO = First In First Out = a canteen line. Front = the person being served. Rear = the person who just joined.


Exam: Define queue + FIFO, define ENQUEUE (rear) and DEQUEUE (front), give the printer example, draw the labelled Front/Rear diagram, and trace a short sequence. Examiners mix...

کیو FIFO پر چلتی ہے: جو پہلے آیا وہ پہلے نکلے۔

2.5.2 Non-Linear Data Structures: Tree

A tree organises data in a hierarchy. Everything branches out from a single starting point called the root.

- Everything branches out from a single starting point called the root.
- It creates a strict one-to-many (parent-child) relationship.
- That is an excellent way to show how roles flow in an organisation.

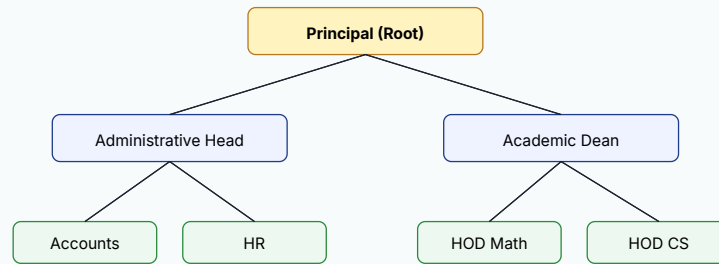

College tree: one root (Principal), then parent-child branches. No child has two parents in this model.


Remember: Tree = family / folders / organogram. One root. Branches down. Parent-child, not a web of equals.

ٹری ڈیٹا کو درجہ بندی (Hierarchy) میں رکھتی ہے جو ایک جڑ (Root) سے پھوٹتی ہے۔

Non-Linear Data Structures: Graph

A graph organises data when things connect in a flexible, complex way.

- Nodes (vertices) — the items (cities, people).
- Edges — the connections (roads, friendships).

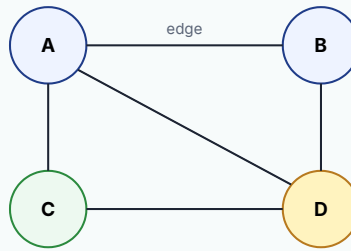

Four vertices A, B, C, D. Edges can form a cycle (A-B-D-C-A). A tree cannot do that.

Remember: Tree $\subset$ Graph in shape-talk: a tree is a special graph with one root and no cycles. If you need cycles or many-to-many links, say graph.

گراف لچکدار روابط کے لیے ہے: کوئی سخت درجہ بندی نہیں، کوئی بھی نوڈ کسی سے جڑ سکتا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Linear Data Structures: Linked List:** Mistake: writing `list[3]` and calling it linked-list access.
- **Linear Data Structures: Stack:** Mistake: POPing from the bottom, or mixing LIFO with FIFO.
- **Linear Data Structures: Queue:** Mistake: DEQUEUEing from the rear, or ENQUEUEing at the front.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Linear Data Structures: Stack**. Write: A stack is a linear data structure that works on the LIFO principle: Last-In, First-Out.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) PUSH — add an item to the top. (2) POP — remove the item from the top. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a filled trace table with every variable on every line + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Linear Data Structures: Queue**. Write: A queue organises data on the FIFO principle: First-In, First-Out.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) ENQUEUE — add an element at the Rear (back). (2) DEQUEUE — remove an element from the Front. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a filled trace table with every variable on every line + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Expand LIFO.

3 marks. Explain Linear Data Structures: Stack with two clear points and one example.

5 marks. Define stack + LIFO, define PUSH and POP, mention TOP, give the Undo example, and draw the vertical boxes with TOP labelled. Trace questions: "Show the stack after PUSH A, PUSH B, POP, PUSH C." Work...

8 marks. Linear Data Structures: Stack: 5-mark answer plus a filled trace table with every variable on every line.

Answers: 1. Last-In, First-Out 3. PUSH — add an item to the top.; POP — remove the item from the top. 5. Use the recipe in the blue box. Model opening: A stack is a linear data structure that works on the LIFO principle: Last-In, First-Out. 8. Same 5-mark body + a filled trace table with every variable on every line + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Linear Data Structures: Stack** using the recipe in this topic. Include a filled trace table with every variable on every line. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 2: Computational Thinking & Algorithms

Computational Thinking & Algorithms (5/5) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Operations on Data Structures · Identify data structures in problem scenarios · Trace data retrieval in Array, List and Queue · Career Opportunities in Algorithms

★ **Must lock:** none — still copy every table

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Expand LIFO.
2. Expand FIFO. Where is an item added, and where is it removed?
3. Name the two parts of a node.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

2.5.3 Operations on Data Structures

Whatever the shape, you keep meeting the same five operations:

Operation	Meaning	Quick picture
Insertion	Adding a new item into the structure.	PUSH on a stack; ENQUEUE on a queue; putting 40 into an array.
Deletion	Removing an item that is no longer needed.	POP; DEQUEUE; deleting a node from a list.
Traversal	Going through each item one by one.	Walking HEAD → ... → NULL; visiting every tree node.
Searching	Finding a specific item.	Linear search in an array; following links until 87 is found.
Sorting	Arranging items in a proper order (ascending or descending).	Bubble Sort on an array of marks.

Remember: Memorise I-D-T-S-S: Insert, Delete, Traverse, Search, Sort.

ہر ڈیٹا سٹرکچر پر پانچ عمل ہوتے ہیں: داخل کرنا (Insertion)، حذف کرنا (Deletion)، ایک ایک کر کے گزرنا (Traversal)، تلاش
...(Searching)

2.6 Identify data structures in problem scenarios

To pick a structure, first see how the data is organised.

- Storing student grades for a class → Array. You usually know how many students there are, and all grades are the same type. Indices give...
- Music playlist / browser history → Linked list. Every song knows what comes next. When one finishes, follow the pointer. Frequent...
- Undo or Redo → Stack (LIFO). Each typing or formatting action is PUSHed. Undo POPs the most recent action.
- Printer task scheduling → Queue (FIFO). Documents print in the exact order they were received. First-come, first-served.

If the data...	Then it is...	Recommended structure
Follows "next" or "previous" logic	Linear	Array, Linked list
Follows "parent" and "child" logic	Non-linear	Tree
Follows "first-come, first-served" logic	Linear	Queue
Follows "connections / relationships" logic	Non-linear	Graph
Needs to be accessed in the reverse order of entry	Linear	Stack

Remember: Decision order: reverse-of-entry? → stack. First-come? → queue. Parent-child? → tree. Many-to-many routes? → graph. Known list with indexes? → array. Lots of...


اگر ہر عنصر کا واضح اگلا/پچھلا ہے تو ڈھانچہ لکیری ہے؛ اگر شاخیں یا کئی روابط ہیں تو غیر لکیری۔

2.7 Trace data retrieval in Array, List and Queue

Tracing data retrieval means following the step-by-step path of how an algorithm finds or accesses data.

- Array, linked list and queue are all linear, but the effort to find an item is very different because of how they are organised inside.

Loop iteration	Index	Array access	Value
1	0	Array[0]	10
2	1	Array[1]	50
3	2	Array[2]	20



You cannot pull B until A has left.

Queue A, B, C. ENQUEUE D joins the rear. DEQUEUE must remove A, not C or B.

```
Array = [10, 50, 20, 70, 90, 30]
print("Direct Array[2] =", Array[2])
for i in range(3):
    print(i + 1, i, f"Array[{i}]", Array[i])
```

Remember: Array jumps, list walks, queue waits. If the exam asks "why is array retrieval different?", write direct access by index versus sequential links versus Front...

ایرے میں اگر انڈیکس معلوم ہو تو سیدھی چھلانگ لگتی ہے، جیسے $\text{Array}[2] = 20$.

Career Opportunities in Algorithms

The skills in this chapter — proving correctness, writing clear modules, judging Big O, and choosing data structures — are the daily tools of several computing careers.

Career	What the person does
Software Engineer	Builds and maintains software that relies on data structures and efficient algorithms to solve logic problems.
Backend Developer	Builds server-side logic where choosing the right structure (array, queue) directly affects web performance.
Algorithm Engineer	Specialises in optimising algorithms for search engines, finance or logistics.
Systems Analyst	Evaluates and improves the efficiency and clarity of existing computer systems in an organisation.
Competitive Programmer	Solves complex algorithmic problems under time limits, a common path into top tech roles.

Remember: Every career in the table uses the same three tests you learned: correct, clear, efficient — plus the right data structure.

اس باب کی مہارتیں سافٹ ویئر انجینئر، بیک اینڈ ڈیولپر، الگورتھم انجینئر، سسٹمز اینالسٹ اور کمپیٹیو پروگرامر کے کام میں روز استعمال...

Computational Thinking & Algorithms

24 single-page lessons · 6 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- **Correctness:** output matches expected results for valid inputs. Test with a trace table (manual dry run) or stepwise reasoning (logic verification).
- A **trace table** is micro-level: line, variables, I/O, conditions. Best for small loops. The soldier heights [1.91, 2.01, 1.87, 1.57, 1.48] print Total = 3.
- **Stepwise reasoning** is macro-level: valid start, all cases, correct conditions, loop stays correct. Sum 1..N starts at 0; N = 0 stays 0; N = 5 becomes 15.
- **Clarity** (read, understand, modify) often beats a tiny speed gain. It has two parts: modularity and readability.
- **Modularity:** SRP (one job), loose coupling, abstraction (call Sort without knowing Bubble vs Selection). Split CalculateSum and FindAverage.
- **Readability:** names (`velocity = distance / time`), self-documentation, simple flow, consistent style.
- **Efficiency** = time + space. Drivers: number of steps (Big O), conditions, repetitions.
- **Big O:** $O(1)$ constant (arr[0]), $O(\log n)$ binary search, $O(n)$ linear search, $O(n \log n)$ Merge Sort, $O(n^2)$ nested loops / Bubble Sort. Quadratic fails as n grows.
- **Framework:** Does it scale? What is the bottleneck (deepest loop)? Is the extra complexity worth it? For n = 50, simple $O(n)$ can beat fragile $O(\log n)$.
- **Refinements:** meaningful names, modules, indentation, why-comments; shrink Bubble Sort's inner loop; better algorithms; cache constants; pick the right structure.
- **Data structure:** systematic organising of data. Linear (one after another): array, linked list, stack, queue. Non-linear: tree, graph.
- **Array:** contiguous, index from 0, direct access $O(1)$, shifting on mid-insert. **Linked list:** nodes of data+link, HEAD to NULL, sequential access.
- **Stack LIFO:** PUSH/POP at TOP (Undo). **Queue FIFO:** ENQUEUE rear, DEQUEUE front (printer).
- **Tree:** one root, parent-child (college chart). **Graph:** vertices + edges, no strict hierarchy (GPS, friends).
- Five operations: insert, delete, traverse, search, sort. Choose by next/previous, parent/child, FIFO, relationships, or reverse-of-entry.
- **Retrieval:** array can jump to an index; a list walks from HEAD; a queue only removes the Front.

Key terms

Term	Meaning	اردو
Correctness	The algorithm's output matches the expected results for valid inputs.	درستگی
Trace table	A paper dry-run table of steps, variables, I/O and conditions.	ٹریس ٹیبل
Dry run	Executing an algorithm by hand, line by line.	دستی اجرا
Stepwise reasoning	Checking each logic block's state; also called logic verification.	مرحلہ وار استدلال
Clarity	How easy an algorithm is to read, understand and modify.	وضاحت
Modularity	Breaking work into independent functions, classes or modules.	ماڈیولریتی
Single Responsibility Principle	Each module should do one specific task.	واحد ذمہ داری کا اصول
Coupling	How tightly modules depend on each other; loose coupling is the goal.	ماڈیولز کی جڑت
Abstraction	Hiding implementation details so a caller need not know the inner method.	تجريد
Readability	How easily another person understands the logic without running it.	پڑھائی پن
Efficiency	How well an algorithm uses time (speed) and space (memory).	کارکردگی
Big O notation	A description of how running time or memory grows as n grows.	بگ او نوٹیشن

Computational Thinking & Algorithms

75 marks · 1 hour 15 minutes · no notes · no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 24 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define · Explain · Example · Diagram · Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. An algorithm is correct when:
 - a. it compiles with no syntax error
 - b. its output matches the expected results for the given input
 - c. it uses Big O notation
 - d. it has no comments
2. A trace table is best described as:
 - a. a paper execution that tracks variables line by line
 - b. a diagram of a tree
 - c. a type of graph edge
 - d. an $O(n^2)$ nested loop
3. Stepwise reasoning mainly checks:
 - a. printer ink levels
 - b. the colour of variable names
 - c. only the last printed line
 - d. the overall state of logic blocks
4. Which method is impractical if a loop runs 1,000 times?
 - a. Abstraction
 - b. A full trace table
 - c. Stepwise reasoning
 - d. Using a function
5. The Single Responsibility Principle says each module should:
 - a. focus on one specific task
 - b. print and save and calculate everything
 - c. avoid meaningful names
 - d. use nested IF only
6. Which assignment is more readable?
 - a. `v = d / t`
 - b. `x1 = a2 / b2`
 - c. `velocity = distance / time`
 - d. `a = b / c`
7. Accessing `arr[0]` is:
 - a. $O(n^2)$
 - b. $O(n \log n)$
 - c. $O(n)$
 - d. $O(1)$
8. Binary search on a sorted list is:
 - a. $O(\log n)$
 - b. $O(n^2)$
 - c. $O(1)$ always for any n
 - d. $O(n)$ because a loop exists
9. Bubble Sort and nested "compare every pair" loops are:
 - a. $O(1)$
 - b. $O(\log n)$
 - c. $O(n)$
 - d. $O(n^2)$
10. If n grows 10 times, a quadratic algorithm's time grows about:
 - a. 2 times
 - b. 10 times
 - c. 100 times
 - d. log 10 times
11. LIFO is the rule of a:
 - a. queue
 - b. graph of cities
 - c. tree root only
 - d. stack
12. ENQUEUE adds an item at the:
 - a. Front of a queue
 - b. TOP of a stack only
 - c. Rear of a queue
 - d. root of a tree
13. A college organogram with a Principal at the top is modelled as a:
 - a. tree
 - b. queue
 - c. stack
 - d. contiguous array of roads
14. GPS maps (cities and roads, many possible routes) need a:
 - a. stack of undo actions
 - b. graph
 - c. strict one-parent tree only
 - d. single array index
15. To retrieve 87 from `HEAD → 12 → 98 → 23 → 87 → 56` you must:
 - a. jump with `Array[87]`
 - b. DEQUEUE the rear
 - c. follow four nodes from HEAD until 87 matches
 - d. POP from the bottom of a stack

Section B — Short questions (10 × 3 = 30)

1. Define correctness of an algorithm. Name the two analysis methods used in this chapter.
2. List the components of a trace table. Why is a dry run useful for debugging?
3. Give four differences between a trace table and stepwise reasoning.
4. What is modularity? Explain SRP, coupling and abstraction in one sentence each.
5. State four ways to evaluate readability, with one example of a bad name and a good name.
6. Define Big O notation. Give one example each of $O(1)$, $O(\log n)$, $O(n)$, $O(n \log n)$ and $O(n^2)$.
7. Write the three questions of the efficiency evaluation framework and answer them for searching 50 unsorted names.
8. List four refinements for clarity and four for efficiency.
9. Define data structure. Distinguish linear from non-linear with examples.
10. Define stack and queue. Include LIFO/FIFO, PUSH/POP, ENQUEUE/DEQUEUE, and one real-life example of each.

Section C — Long questions (attempt any 3 × 10 = 30)

1. The soldier-eligibility algorithm uses AllHeights = [1.91, 2.01, 1.87, 1.57, 1.48] and counts heights from 1.57 to 1.91 inclusive. (a) Draw a complete trace table. (b) State the printed Total. (c) Explain in stepwise-reasoning style why the boundaries 1.57 and 1.91 are counted. (d) Write equivalent Python and its output.
2. Copy the monoblock average algorithm for A = [1, 2, 3, 4, 5] and rewrite it with CalculateSum and FindAverage. (a) Show that SRP, loose coupling and abstraction are improved. (b) Dry-run both versions to the same average. (c) Give two readability improvements you would still make to the functions.
3. Using the growth table idea, (a) fill n = 8 and n = 32 for $O(1)$, $O(\log_2 n)$, $O(n)$, $O(n \log_2 n)$ and $O(n^2)$. (b) Explain what happens if n becomes 10 times larger for $O(n)$ and for $O(n^2)$. (c) A library has 1,000,000 sorted IDs. Choose linear or binary search using the Scale / Bottleneck / Worth-it framework. (d) Show a 4-by-4 nested loop counts 16 operations in Python.
4. Draw a labelled stack and a labelled queue. Then trace: (a) PUSH Data1, PUSH Data2, PUSH Data3, POP, POP. (b) ENQUEUE 55, 76, 90, D then DEQUEUE. Include Python that matches both traces. (c) Why is Undo a stack and a printer a queue?
5. A college needs structures for: (i) 200 integer marks, (ii) a playlist with frequent insertions, (iii) Undo in the fee-office editor, (iv) photocopier jobs, (v) the Principal–Dean–HOD chart, (vi) roads between Sindh cities. Identify each structure using the decision guide, draw the tree and the graph, and then trace retrieval of 20 from Array = [10, 50, 20, 70, 90, 30] and of 87 from the linked list 12→98→23→87→56→NULL.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **2.1 Analyze algorithms for correctness.** Answers: 1. When its output matches the expected results for a given input (and does so for all valid inputs). 2. Trace tables and stepwise reasoning. 3. Because a logical error can still produce output — the wrong output.
2. **2.1.1 Trace Tables.** Answers: 1. Line/step number, variables, input/output, condition check. 2. 1.57 is the lower boundary (inclusive, so True); 1.48 is below 1.57 (False). 3. 3 is printed; Step 6 runs three times (for 1.91, 1.87 and 1.57).
3. **2.1.2 Stepwise Reasoning.** Answers: 1. Logic verification. 2. Because no numbers have been added yet, so the running total should be zero. 3. The loop does not run and Sum remains 0, which is the correct sum of no numbers.
4. **2.1.3 Comparing Trace Tables and Stepwise Reasoning.** Answers: 1. Trace table. 2. It is very tedious and impractical (too many rows). 3. Stepwise reasoning (macro-level, conceptual / structural flaws).
5. **2.2 Evaluating the Clarity of an Algorithm.** Answers: 1. The algorithm is easy to read, understand and modify. 2. Modularity and readability. 3. Because a clear algorithm is easier to maintain, debug and extend over time.
6. **2.2.1 Modularity.** Answers: 1. One specific task. 2. CalculateSum (FindAverage only divides; the main program only prints). 3. All logic is in one block, so you cannot call “just the sum” from another algorithm.
7. **2.2.2 Readability.** Answers: 1. velocity = distance / time. 2. IF inside IF inside IF (or similar); it makes the flow hard to follow. 3. Any two of: consistent indentation, spacing, and casing (camelCase or snake_case).
8. **2.3 Assess Algorithm Efficiency.** Answers: 1. Time (speed) and space (memory). 2. Number of steps (Big O), number of conditions, number of repetitions.
9. **2.3.1 Number of Steps (Big O Notation).** Answers: 1. $O(1)$ arr[0]; $O(\log n)$ binary search; $O(n)$ linear search; $O(n^2)$ Bubble Sort / nested loops. 2. 1,024. 3. It makes about $\log n$ split-levels and does about n work on each level, so $n \times \log n$.
10. **2.3.2 Number of Conditions.** Answers: 1. Each condition must be evaluated True/False by the CPU. 2. A brute-force approach (and it reduces readability and speed). 3. AND short-circuits: the first part is False, so the division is never evaluated.
11. **2.3.3 Number of Repetitions.** Answers: 1. Poor — $O(n^2)$. 2. Each iteration halves the remaining problem, so the number of iterations is about $\log n$. 3. 25.
12. **2.3.4 The Efficiency Evaluation Framework.** Answers: 1. About 100× slower (10^2). 2. The most time-consuming section, usually the deepest loop. 3. Binary search is more complex to code and maintain, and for $n = 50$ the simplicity of $O(n)$ is practically better.
13. **2.4 Refinements to improve clarity and efficiency.** Answers: 1. average = totalSum / totalItems. 2. The already-sorted largest value at the end (shrink the inner loop). 3. Once, outside the loop, then reuse C inside.
14. **2.5 Concept of Data Structure.** Answers: 1. A systematic way of organising, storing and managing data for efficient access, modification and processing. 2. Linear: array, linked list, stack, queue. Non-linear: tree, graph. 3. It has exactly one predecessor and one successor.
15. **2.5.1 Linear Data Structures: Array.** Answers: 1. The items sit in one continuous block, next to each other. 2. 12. 3. Later elements must all be shifted right to make room.
16. **Linear Data Structures: Linked List.** Answers: 1. Data, and a link/pointer to the next node. 2. NULL (no next node). 3. Back follows the pointer to the previous page-node instead of jumping by index.
17. **Linear Data Structures: Stack.** Answers: 1. Last-In, First-Out. 2. Data3. 3. Each action is PUSHed; Undo POPs the most recent action first.
18. **Linear Data Structures: Queue.** Answers: 1. First-In, First-Out; added at Rear, removed from Front. 2. 55. 3. Documents must print in the order they arrived (first received, first printed), not last-received first.
19. **2.5.2 Non-Linear Data Structures: Tree.** Answers: 1. The root. 2. One-to-many parent-child. 3. A family tree, and folders inside folders (or a college organogram).
20. **Non-Linear Data Structures: Graph.** Answers: 1. Nodes/vertices and edges. 2. Social networks (Facebook friends) and GPS mapping. 3. A tree has a hierarchy and one root; a graph has no strict hierarchy and any node may connect to any other (cycles allowed).
21. **2.5.3 Operations on Data Structures.** Answers: 1. Insertion, deletion, traversal, searching, sorting. 2. Insertion (at the rear of a queue). 3. Traversal visits every item; searching stops when the target is found (or the structure ends).
22. **2.6 Identify data structures in problem scenarios.** Answers: 1. Array — known size, same type, fast index lookup. 2. Queue, because first-come, first-served. 3. Stack.
23. **2.7 Trace data retrieval in Array, List and Queue.** Answers: 1. 20. 2. Four (12, 98, 23, 87). 3. No — a queue only DEQUEUEs the Front, so A must leave first.
24. **Career Opportunities in Algorithms.** Answers: 1. Algorithm Engineer. 2. The choice of structure (array, queue) directly affects web performance.

Answer key

Multiple choice

1. b
2. a
3. d
4. b
5. a
6. c
7. d
8. a
9. d
10. c
11. d
12. c
13. a
14. b
15. c

Short questions — model answers

1. An algorithm is correct if its output matches the expected results for a given input (and does so for all valid inputs). The two methods are trace tables and stepwise reasoning (logic verification).
2. Components: line/step number, a column per variable, input/output, and a condition-check column. A dry run acts as the computer, so you see logical errors where the program runs but the values go wrong, and you can validate that the intention is met.
3. Trace table: small blocks/complex loops/beginners; high effort (bad for 1,000 iterations); catches arithmetic/line mistakes; micro-level exact values. Stepwise reasoning: large systems and proofs; moderate effort; catches conceptual/structural flaws; macro-level overall state.
4. Modularity is breaking an algorithm into smaller independent parts (functions, classes, modules). SRP: each module does one task. Coupling: modules should be loosely coupled so a change in one does not break others. Abstraction: hide inner details (call Sort without knowing Bubble vs Selection).
5. Naming conventions, self-documentation, simple control flow, consistency of indentation/spacing/casing. Bad: `v = d / t`. Good: `velocity = distance / time`.
6. Big O describes how time or memory grows as n grows. $O(1)$: `arr[0]`; $O(\log n)$: binary search; $O(n)$: linear search; $O(n \log n)$: Merge Sort; $O(n^2)$: Bubble Sort / nested loops.
7. Does it scale? $n = 50$ is tiny, even $O(n)$ is fine. Bottleneck? A single scan of 50 names. Worth it? Binary search needs sorted data and more complex code, so linear search is practically better.
8. Clarity: meaningful names; modules; structure/indentation; short why-comments. Efficiency: reduce extra steps (shrink Bubble Sort's inner loop); better algorithms (binary vs linear on sorted millions); avoid re-computing (cache `C = A+B` outside the loop); appropriate data structures (array for direct access, tree for hierarchy).
9. A data structure is a systematic way of organising, storing and managing data for efficient access, modification and processing. Linear: sequence with one predecessor and one successor (array, linked list, stack, queue). Non-linear: hierarchical or network links (tree, graph).
10. Stack: LIFO; PUSH adds at TOP; POP removes from TOP; example Undo. Queue: FIFO; ENQUEUE adds at Rear; DEQUEUE removes from Front; example printer jobs.

Long questions — model answers

1. (a) Columns: Step, Total, Height, AllHeights, condition, output. Step 2 sets Total = 0. Step 3 stores the five heights. Then five loop cycles:

- 1.91 → True → Total 1
- 2.01 → False → Total stays 1
- 1.87 → True → Total 2
- 1.57 → True (boundary) → Total 3
- 1.48 → False → Total stays 3

(b) Printed Total = **3**.

(c) The condition is height ≥ 1.57 AND height ≤ 1.91 , so the closed interval includes both ends. 1.57 and 1.91 satisfy the inequalities; 2.01 and 1.48 do not. Initial Total = 0 is valid; each True branch adds one; False skips the add; after five items Total is the count of eligible soldiers.

(d) Python:

```
AllHeights = [1.91, 2.01, 1.87, 1.57, 1.48]
Total = 0
for height in AllHeights:
    if height ≥ 1.57 and height ≤ 1.91:
        Total = Total + 1
print(Total)
```

OUTPUT

3

2. (a) Monoblock: one sequence does the loop, the division and the print, so you cannot reuse the sum. Modular version: CalculateSum only adds; FindAverage only divides; main only prints. SRP holds. CalculateSum can be called from another program (loose coupling). Main does not see the loop (abstraction).

(b) Both compute total = 15 and avg = $15/5 = 3.0$.

```
def calculate_sum(A, n):
    total = 0
    for i in range(n):
        total = total + A[i]
    return total

def find_average(A, n):
    return calculate_sum(A, n) / n

print(find_average([1, 2, 3, 4, 5], 5))
```

OUTPUT

3.0

(c) Keep snake_case names; avoid 1-based I in Python; a one-line comment on why you divide by n (empty-list guard could be added later) is enough — do not comment every addition.

3. (a) Growth ($\log_2$):

n	$O(1)$	$O(\log n)$	$O(n)$	$O(n \log n)$	$O(n^2)$
8	1	3	8	24	64
32	1	5	32	160	1,024

(b) $O(n)$: 10× input → about 10× time. $O(n^2)$: 10× input → about 100× time, which fails for large sets.

(c) Scale: a million IDs; linear worst case is a million checks, binary about 20. Bottleneck: the search. Worth it: the IDs are already sorted and binary search is standard, so choose **binary search** $O(\log n)$.

(d)

```
n = 4
count = 0
for i in range(n):
    for j in range(n):
        count = count + 1
print(count)
```

OUTPUT
16

4. Draw the vertical stack with TOP on Data3 after three PUSHes, and the horizontal queue with FRONT on 55 and REAR on 90 (then D).

(a) Stack: [] → [Data1] → [Data1, Data2] → [Data1, Data2, Data3] → POP Data3 → POP Data2 → [Data1].

```
stack = []
stack.append("Data1")
stack.append("Data2")
stack.append("Data3")
print(stack.pop())
print(stack.pop())
print(stack)
```

OUTPUT
Data3
Data2
['Data1']

(b) Queue: [55] → [55, 76] → [55, 76, 90] → [55, 76, 90, D] → DEQUEUE 55 → [76, 90, D].

```
from collections import deque
q = deque()
q.append(55)
q.append(76)
q.append(90)
q.append("D")
print(q.popleft())
print(list(q))
```

OUTPUT
55
[76, 90, 'D']

(c) Undo must cancel the most recent action (LIFO → stack). A printer must respect arrival order (FIFO → queue).

5. (i) Array — known count, same type, index lookup. (ii) Linked list — next-pointer, cheap insert. (iii) Stack — reverse order of entry. (iv) Queue — first-come, first-served. (v) Tree — parent-child from the Principal root (Administrative Head / Academic Dean, then Accounts, HR, HOD Math, HOD CS). (vi) Graph — cities as vertices, roads as edges, alternative routes.

Array retrieval: Array[2] = 20 in one direct access (or after visiting 10 then 50 then 20 if you scan).

List retrieval: Step1 12 ≠ 87, Step2 98 ≠ 87, Step3 23 ≠ 87, Step4 87 = 87 FOUND True.

Self-assessment: I can...

- ☐ prove correctness with a full trace table, including boundary values.
- ☐ judge modularity (SRP, coupling, abstraction) and readability (N-S-S-C).
- ☐ apply the Scale / Bottleneck / Worth-it framework, including the $n = 50$ warning.
- ☐ define a data structure and classify linear vs non-linear.
- ☐ draw a tree and a graph and pick a structure from a scenario using the decision guide.
- ☐ write stepwise reasoning (start, loop, finish, edges) and compare it with a trace table.
- ☐ state $O(1)$, $O(\log n)$, $O(n)$, $O(n \log n)$ and $O(n^2)$ with examples and a growth table.
- ☐ refine an algorithm for names, modules, fewer loop steps and cached values.
- ☐ draw and trace an array, linked list, stack (PUSH/POP) and queue (ENQUEUE/DEQUEUE).
- ☐ trace retrieval: array jump, list walk from HEAD, queue Front only.

Chapter 3: Programming Fundamentals

Programming Fundamentals (1/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Data Structures in Python · Lists (Ordered, Mutable, Methods) · Tuples (Ordered, Immutable) · Sets (Unordered, Unique, Math Operations) · Dictionaries (Key-Value Pairs)

★ **Must lock:** Lists (Ordered, Mutable, Methods), Tuples (Ordered, Immutable), Dictionaries (Key-Value Pairs)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. List the five operations.
2. Which structure stores a class's grades, and why?
3. What is `Array[2]` in `[10, 50, 20, 70, 90, 30]`?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.1 Data Structures in Python

A data structure is a way of organising values in a program so you can store them, find them and change them.

- Primitive data structures — the basic types that hold one value. Examples: integers (int), floating-point numbers (float), and booleans...
- Abstract data structures — higher-level containers built from primitive types so you can hold many values and run richer operations....

Category	Description	Examples
Primitive	Basic types that represent a single value.	int, float, bool
Abstract	Higher-level structures for collections and complex operations.	Lists, tuples, sets, dictionaries

```
age = 17
height = 5.8
passed = True
marks = [80, 75, 90]
print(type(age))
print(type(height))
print(type(passed))
print(type(marks))
```

Remember: Primitive = one piece. Abstract = a box of pieces. Think of a single rupee coin (primitive) versus a wallet that can hold many coins (list, tuple, set or...


ڈیٹا سٹرکچر (Data Structure) پروگرام میں ڈیٹا کو ترتیب دینے کا طریقہ ہے۔

3.1.1 Lists (Ordered, Mutable, Methods) ★ Golden

A list is Python's most versatile built-in data structure.

- It stores an ordered collection of items in a single variable.
- Lists are mutable (you can change them after you create them) and they are written with square brackets [].
- One variable can hold thousands of values.

After this line	List in memory
create	['apple', 'banana', 'apple']
.append('grape')	['apple', 'banana', 'apple', 'grape']
.remove('apple')	['banana', 'apple', 'grape'] — only the first apple goes
.sort()	['apple', 'banana', 'grape']

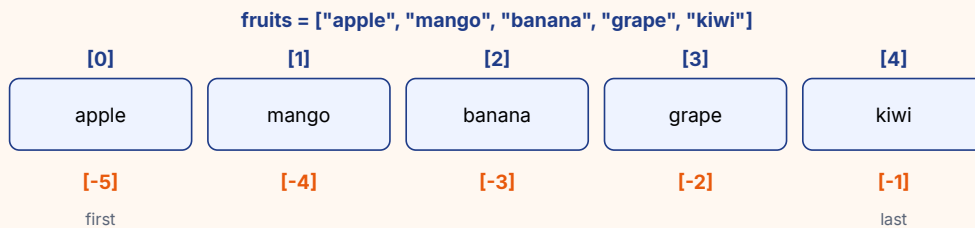

Positive indices count left to right from 0. Negative indices count right to left from -1.

```
numbers = [10, 2, 15, 14, 3, 33]      # list of integers
names = ["Hassan", "Qasim", "Malika"]  # list of strings
mixed = [1, "Python", 3.14, True]     # mixed data types
print(numbers)
print(names)
print(mixed)
```

Remember: Always remember [-1]. If a list has 10,000 items and you do not want to compute `len(list) - 1`, write `list[-1]`. It grabs the last item in one step.

Exam: Lists appear every year: "What is a list?", "List four methods with one line each", "Differentiate list and tuple", "Write a program to search an element", "Predict the..."

فہرست (List) مربع بریکٹ [] میں لکھی جاتی ہے، ترتیب برقرار رکھتی ہے اور تبدیل کی جا سکتی ہے (Mutable).

3.1.2 Tuples (Ordered, Immutable) ★ Golden

A tuple is an ordered collection that is immutable — once created, you cannot add, remove or replace items.

- Think of it as a read-only list.
- Tuples use parentheses ().
- Like lists, they allow duplicates, mixed types, and indexing from 0 (including negative indices).

Method	Meaning
<code>.count(value)</code>	How many times the value appears.
<code>.index(value)</code>	Index of the first occurrence.

List []

Can add / remove / replace

Tuple ()

LOCKED — read-only

A list is an open box you can refill. A tuple is a sealed box you may only look into.

```
t = (10, 20, 30, 40, 50)
print(t[0])
print(t[-1])
print(t[1:4])
print(t[::-1])
```

Remember: Tuple = locked lunchbox. You can see what is inside; you cannot swap the sandwich. Memory: "Tuple is Tight (immutable), written with round brackets that look..."

Exam: Expect "Differentiate list and tuple" (at least four points: brackets, mutability, methods, speed/protection), "Why use a tuple?", and "What happens if you write `t[0] = ...`"


ٹیپل (Tuple) گول بریکٹ () میں لکھا جاتا ہے، ترتیب رکھتا ہے مگر تبدیل نہیں ہو سکتا (Immutable).

3.1.3 Sets (Unordered, Unique, Math Operations)

A set stores an unordered, unindexed collection of unique elements.

- It is inspired by mathematical sets.
- You write a set with curly braces {}.
- Duplicates are removed as soon as the set is created.

Method	Description
<code>.add(value)</code>	Adds one element.
<code>.update(values)</code>	Adds many elements from a list, tuple or set.
<code>.remove(value)</code>	Removes the value. Raises <code>KeyError</code> if it is missing.
<code>.discard(value)</code>	Removes the value. Does not crash if it is missing.
<code>.clear()</code>	Removes every element. Result is <code>set()</code> .

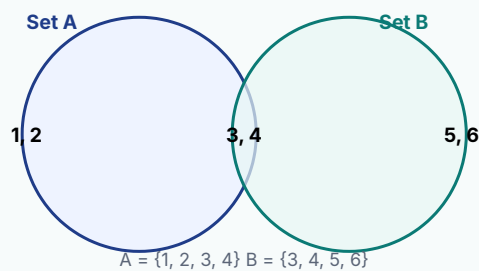

Overlap {3, 4} is the intersection. Left-only {1, 2} is A - B. Right-only {5, 6} is B - A.

```
nums = {1, 4, 3, 3, 2, 2}
print(nums)
```

Remember: SET = Same-item Eaten Twice-never. Empty set is `set()`, never `{}`. Safe delete = `discard`; angry delete = `remove`.

سیٹ (Set) منفرد عناصر کا بغیر ترتیب اور بغیر انڈیکس مجموعہ ہے، جو {} میں لکھا جاتا ہے۔

3.1.4 Dictionaries (Key-Value Pairs) ★ Golden

A dictionary stores data as key–value pairs.

- Ordered (Python 3.7+): insertion order is kept.
- Mutable: you can add, change and delete pairs.
- Keys are unique: if you repeat a key, the last value silently overwrites the earlier one. Values may repeat.

Method	Returns
<code>.keys()</code>	All keys.
<code>.values()</code>	All values.
<code>.items()</code>	Key–value pairs as tuples.



You never search a dictionary by position. You search by key.

```
d = {"name": "Alice", "age": 30}
print(d)
d["age"] = 31
print(d)
d["city"] = "NYC"
print(d)
del d["city"]
print(d)
```

Remember: Keys are unique, like roll numbers. Values are the student records and may repeat (two students can both score 80). Memory: “get is gentle, brackets can break.”

Exam: High-yield: definition of a dictionary, difference between `d[key]` and `d.get(key)`, “what if a key is repeated?”, traversal with `.items()`, and a full comparison table of...

ڈکشنری (Dictionary) کلید اور قدر (Key-Value) کے جوڑوں میں ڈیٹا رکھتی ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Data Structures in Python:** Do not call a list a “variable type” and stop there.
- **Lists (Ordered, Mutable, Methods):** Mistake 1: `.remove('apple')` deletes every apple.
- **Tuples (Ordered, Immutable):** One-item trap: `(5)` is just the integer 5 with extra parentheses.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Lists (Ordered, Mutable, Methods)**. Write: A list is Python’s most versatile built-in data structure.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) It stores an ordered collection of items in a single variable. (2) Lists are mutable (you can change them after you create them) and they are written with square brackets []. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Tuples (Ordered, Immutable)**. Write: A tuple is an ordered collection that is immutable — once created, you cannot add, remove or replace items.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Think of it as a read-only list. (2) Tuples use parentheses (). — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Dictionaries (Key-Value Pairs)**. Write: A dictionary stores data as key–value pairs.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Mutable: you can add, change and delete pairs. (2) Keys are unique: if you repeat a key, the last value silently overwrites the earlier one. Values may repeat. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What does `nums[2:6]` return if `nums = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]`?

3 marks. Explain Lists (Ordered, Mutable, Methods) with two clear points and one example.

5 marks. Lists appear every year: "What is a list?", "List four methods with one line each", "Differentiate list and tuple", "Write a program to search an element", "Predict the output of a slice." Write:...

8 marks. Lists (Ordered, Mutable, Methods): 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. `[2, 3, 4, 5]` 3. It stores an ordered collection of items in a single variable.; Lists are mutable (you can change them after you create them) and they are written with square brackets `[]`. 5. Use the recipe in the blue box. Model opening: A list is Python's most versatile built-in data structure. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Lists (Ordered, Mutable, Methods)** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 3: Programming Fundamentals

Programming Fundamentals (2/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Common Built-in Functions (min, max, len, sum) · Activity: Student Attendance System · Activity: Word Frequency Counter · Functions in Python · Types of Functions (Built-in vs User-defined)

★ **Must lock:** Functions in Python

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What does `nums[2:6]` return if `nums = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]`?
2. Name the two tuple methods.
3. What does `{"a": 1, "a": 2, "a": 3}` print?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.1.5 Common Built-in Functions (min, max, len, sum)

Several built-in functions work across lists, tuples, sets and dictionaries.

- You do not call them with a dot on the object (except when a type also has its own method, such as list.sort()).

Function	Purpose	Works on
min()	Smallest element (numeric or alphabetical)	List, tuple, set, dictionary keys
max()	Largest element	List, tuple, set, dictionary keys
len()	Number of elements (for a dict: number of keys)	List, tuple, set, dictionary
sum()	Adds numeric elements	List, tuple, set, dictionary values via sum(d.values())
sorted()	Returns a new sorted list ; original unchanged	List, tuple, set, dictionary keys

```
s = {5, 1, 9, 3, 7}
print(len(s))
print(min(s))
print(max(s))
print(sum(s))
print(sorted(s))
```

Remember: LEN-MIN-MAX-SUM — count, smallest, largest, total. For a dictionary: len/min/max/sorted use keys; sum needs .values().

len() عناصر گنتا ہے، min() سب سے چھوٹا، max() سب سے بڑا، sum() اعداد کا مجموعہ، اور sorted() نئی ترتیب شدہ فہرست دیتا ہے بغیر اصل کو بدلے ہیں۔

3.1.6 Activity: Student Attendance System

Teachers need a quick way to mark who is in class.

Store names in a list → Ask present? for each → Count yes → Print totals

- This program stores names in a list, asks about each student, counts how many said yes, and prints a summary with len().

Student	Typed answer	After <code>.lower()</code>	<code>present_count</code>
Ali	yes	yes → add 1	1
Sara	no	not yes	1
Ayesha	yes	yes → add 1	2

Remember: Counter pattern: start at 0, loop, add 1 when a condition is true. You will reuse this in the word-frequency program (add 1 per word) and the grade tracker...

حاضری کا پروگرام طلبہ کے نام ایک فہرست میں رکھتا ہے، ہر نام کے لیے پوچھتا ہے، اور yes پر شمار کار (Counter) ایک بڑھاتا ہے۔

3.1.7 Activity: Word Frequency Counter

Count how many times each word appears in a sentence.

- This is a classic use of a dictionary plus `.get()`: the word is the key, the count is the value.

After seeing	word_freq
python	<code>{'python': 1}</code>
is	<code>{'python': 1, 'is': 1}</code>
easy	<code>{'python': 1, 'is': 1, 'easy': 1}</code>
python (again)	<code>{'python': 2, 'is': 1, 'easy': 1}</code>
... end of sentence	<code>{'python': 3, 'is': 3, 'easy': 1, 'fun': 1, 'powerful': 1}</code>

Remember: The heart of every counter is one line: `d[item] = d.get(item, 0) + 1`. You can count letters, roll numbers or votes with the same pattern.

جملے کو `.split()` سے الفاظ کی فہرست بناتے ہیں، پھر ہر لفظ ڈکشنری میں کلید ہوتا ہے اور اس کی گنتی قدر۔

3.2 Functions in Python ★ Golden

When the same instructions are written again and again, that is duplicate code.

def → **name** → **parameters** → **indented body** → **return (optional)**

- Duplicate code makes a program longer, harder to read, and painful to update (you must fix every copy).
- A function lets you write the instructions once and run them whenever you call the function's name.

Benefit	Meaning
Code reusability	Write once, use anywhere.
Modularity	Break a big problem into small named tasks.
Readability	Shorter, cleaner files with meaningful names.
Maintainability	Fix a bug in one place and every call is fixed.

```
def greet():  
    print("Hello, World!")  
  
greet()  
greet()
```

Remember: DRY — Don't Repeat Yourself. If you are about to copy-paste a block, wrap it in **def**. Name functions with verbs: **greet**, **add**, **save_grades**.

Exam: Write the four benefits (reusability, modularity, readability, maintainability) as separate bullets — that is a standard short question. For long questions, define a...

فونکشن (Function) ہدایات کا وہ بلاک ہے جو ایک بار لکھا جاتا ہے اور بار بار بلایا جا سکتا ہے۔

3.2.1 Types of Functions (Built-in vs User-defined)

There are two main types of functions in Python.

- a) Built-in functions are already defined by Python.
- Examples you have already used: len(), range(), sum(), print(), input(), min(), max(), sorted(), int(), float(), type().
- b) User-defined functions are functions you create with def for tasks that no built-in covers in one step — greeting a user, dividing with...

	Built-in	User-defined
Who writes it?	The Python language	The programmer
How you start	Just call the name	First write <code>def name(...):</code>
Examples	<code>len("Ali")</code> → 3	<code>def add(a, b): return a + b</code>
Purpose	Everyday operations needed by everyone	Your program's specific jobs

```
print(len("Sindh"))

def greet_student(name):
    print("Hello,", name)

greet_student("Hassan")
greet_student("Malika")
```

Remember: If Python already has it (len, sum, max), do not rewrite it. Write a user-defined function when you are packaging your steps.

بلٹ ان فنکشن پائنتھن میں پہلے سے موجود ہوتے ہیں، جیسے len() اور print()۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Common Built-in Functions (min, max, len, sum):** `sum()` needs numbers.
- **Activity: Student Attendance System:** Only the exact string "yes" after `.lower()` counts as present.
- **Activity: Word Frequency Counter:** This program is case-sensitive and space-based.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Functions in Python**. Write: When the same instructions are written again and again, that is duplicate code.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Duplicate code makes a program longer, harder to read, and painful to update (you must fix every copy). (2) A function lets you write the instructions once and run them whenever you call the function's name. — + example.

5 marks: 3-mark structure + table: Benefit / Meaning + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What keyword starts a function definition?

3 marks. Explain Functions in Python with two clear points and one example.

5 marks. Write the four benefits (reusability, modularity, readability, maintainability) as separate bullets — that is a standard short question. For long questions, define a function, label `def`, name,...

8 marks. Functions in Python: 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. `def` 3. Duplicate code makes a program longer, harder to read, and painful to update (you must fix every copy).; A function lets you write the instructions once and run them whenever you call the function's name. 5. Use the recipe in the blue box. Model opening: When the same instructions are written again and again, that is duplicate code. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Functions in Python** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 3: Programming Fundamentals

Programming Fundamentals (3/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Functions with Return Values · Activity: Arithmetic Calculator Using Functions · Scope of Local and Global Variables · & 3.4 File Handling and Operations (Modes r, w, a)

★ **Must lock:** & 3.4 File Handling and Operations (Modes r, w, a)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What keyword starts a function definition?
2. For $s = \{5, 1, 9, 3, 7\}$, what are $\text{len}(s)$, $\text{min}(s)$, $\text{max}(s)$, $\text{sum}(s)$?
3. If all three students type no, what is printed for present and absent?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.2.2 Functions with Return Values

A function can either print a result (show it on the screen) or return a result (send it back to the caller).

- A returned value can be stored in a variable, printed later, or used in a further calculation.
- The call is replaced by the returned value, as if you had written that value in its place.

```
def multiply(a, b):  
    return a * b  
  
result = multiply(5, 3)  
print("The answer is:", result)
```

Remember: return = send back; print = show now. return also exits the function immediately. Lines after return in the same function do not run.

return نتیجہ کال کرنے والے پروگرام کو واپس بھیجتا ہے تاکہ وہ متغیر میں محفوظ ہو سکے یا آگے حساب میں لگے۔

3.2.3 Activity: Arithmetic Calculator Using Functions

Each arithmetic operation is a separate function.

- That is modularity: addition is one small task, division is another (with a guard against dividing by zero).
- The main program only asks for two numbers and calls the functions.

Remember: Four functions, four names: add, subtract, multiply, divide. The main program should look like a contents page — a sequence of calls — not a pile of formulae.

کیلکولیٹر میں ہر عمل الگ فنکشن ہے: جمع، تفریق، ضرب، تقسیم۔

3.2.4 Scope of Local and Global Variables

Scope is the region of a program where a variable can be seen and used.

- Python has two scopes you must know for this chapter.
- A local variable is created inside a function.
- It exists only while that function is running.

```
def calc():  
    secret = 50  
    print(secret)  
  
calc()  
print(secret)
```

Remember: Local = inside the room; global = in the corridor. Everyone can see the corridor. Things left in a room are gone when you leave. Prefer locals. Too many...


دائرہ کار (Scope) بتاتا ہے کہ متغیر کہاں دکھائی دیتا ہے۔

3.3 & 3.4 File Handling and Operations (Modes r, w, a) ★ Golden

File handling is a program's ability to create, read, write, update and delete files on disk.

- Variables live in RAM and vanish when the program ends.
- Files live on a hard disk or SSD and stay there — they are persistent.

Type	What it stores	Examples
Text file	Human-readable characters. You can open it in a text editor.	.txt, .csv, .py
Binary file	Raw bytes, not meant to be read as text.	.jpg, .mp3, .dat



Read copies data from disk into RAM. Write copies data from RAM onto disk.

```
new_file = open('myfile.txt', 'w')
new_file.write("The quick brown fox jumps over the lazy dog!!!\n")
new_file.close()
print("File has been created successfully.")
```

Remember: r = Read existing, w = Wipe then write, a = Add at end. Remember: write does not add a newline unless you type \n.

Exam: Define file handling, contrast RAM with disk, list modes r / w / a with one property each, and warn that w overwrites. Short programs that write one line and close the...

فائل ہینڈلنگ سے ڈیٹا ڈسک پر مستقل (Persistent) رہتا ہے، برخلاف RAM کے متغیرات کے جو پروگرام بند ہوتے ہی مٹ جاتے ہیں۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Functions with Return Values:** Writing `print(a * b)` inside `multiply` and then `result = multiply(5, 3)` stores `None` in `result`, not `15`.
- **Activity: Arithmetic Calculator Using Functions:** `input()` returns a string.
- **Scope of Local and Global Variables:** If you only read `x` inside the function, Python uses the global.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define & 3.4 File Handling and Operations (Modes `r`, `w`, `a`). Write: File handling is a program's ability to create, read, write, update and delete files on disk.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Variables live in RAM and vanish when the program ends. (2) Files live on a hard disk or SSD and stay there — they are persistent. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Which mode overwrites an existing file?

3 marks. Explain & 3.4 File Handling and Operations (Modes `r`, `w`, `a`) with two clear points and one example.

5 marks. Define file handling, contrast RAM with disk, list modes `r` / `w` / `a` with one property each, and warn that `w` overwrites. Short programs that write one line and close the file are common. Mention...

8 marks. & 3.4 File Handling and Operations (Modes `r`, `w`, `a`): 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. '`w`' 3. Variables live in RAM and vanish when the program ends.; Files live on a hard disk or SSD and stay there — they are persistent. 5. Use the recipe in the blue box. Model opening: File handling is a program's ability to create, read, write, update and delete files on disk. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on & 3.4 File Handling and Operations (Modes `r`, `w`, `a`) using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 3: Programming Fundamentals

Programming Fundamentals (4/4) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: The with Statement (Context Manager) · Errors and Exceptions (Try-Except) · Mini File Handling Project: Grade Tracker · Career Opportunities

★ **Must lock:** The with Statement (Context Manager)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Which mode overwrites an existing file?
2. What is stored in result after `result = multiply(5, 3)` with `return a * b`?
3. What does `divide(10, 0)` return in this activity?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.6 The with Statement (Context Manager) ★ Golden

It is easy to forget `.close()`. If the program crashes before `.close()` runs, the file may be incomplete or corrupted.

with `open(...)` as `f` → use `f` → block ends → file closed automatically

- It is easy to forget `.close()`.
- If the program crashes before `.close()` runs, the file may be incomplete or corrupted.
- Python's with statement is a context manager: it opens the file, runs the indented block, and always closes the file when the block ends —...

```
with open('myfile.txt', 'w') as new_file:
    new_file.write("Context managers are safe!\n")
# no .close() here – with already closed the file
```

Remember: with = "take, use, put back." Prefer with `open(...)` as `f`: in every new program. You still choose the mode: 'r', 'w' or 'a'.

Exam: Define the with statement as a context manager that guarantees close. Contrast it with manual open/close. Be ready to write a four-line program that writes with with and...

with بیان ایک کانٹیکسٹ مینیجر (Context Manager) ہے جو فائل کو بلاک کے اختتام پر خود بند کر دیتا ہے، چاہے اندر غلطی ہو جائے۔

3.8 Errors and Exceptions (Try-Except)

An exception is an error raised while the program is running — for example opening a file that is not there.

- Without handling, Python prints a traceback and stops.
- A try/except block catches the error and lets you show a clear message instead of crashing.

Error type	Meaning
FileNotFoundError	The path does not exist.
PermissionError	The operating system will not let you read or write that file.
IOError	A general input/output problem (disk full, disk disconnected).

```
try:
    with open('missing_data.txt', 'r') as f:
        content = f.read()
        print(content)
except FileNotFoundError:
    print("Error: The file does not exist. Please check the name.")
except Exception as e:
    print(f"An unexpected error occurred: {e}")
```

Remember: try = attempt; except = backup plan. Catch the specific error first (FileNotFoundError), then a general Exception if you need it. Order matters: a bare except...

ایکسپشن (Exception) چلتے پروگرام کی غلطی ہے، جیسے غیر موجود فائل کھولنا۔

3.9 Mini File Handling Project: Grade Tracker

This project uses 'w' to create a grades file, 'a' to add a student later, and 'r' to read every line and compute an average.

Write names and marks ('w') → Append a new student ('a') → Read lines ('r') → Split, total, average

- It combines file handling, string methods and arithmetic.

Remember: Same file, three modes, three with blocks. Never open the same file in 'w' when you only meant to add David — that would delete Alice, Bob and Carol.

گریڈ ٹریکر پہلے 'w' سے فائل بناتا ہے، پھر 'a' سے نیا طالب علم جوڑتا ہے، پھر 'r' سے تمام سطریں پڑھ کر اوسط نکالتا ہے۔

Career Opportunities

The skills in this chapter — data structures, functions and files — are the same skills used in many jobs.

- Python / software developer — builds applications, scripts and tools in Python, one of the most widely used languages in industry.
- Data analyst — uses lists and dictionaries, then file handling, to process, visualise and interpret data for decisions.
- Automation engineer — writes scripts that repeat file and testing tasks so humans do not have to.
- Game developer — uses functions, data structures and logic to build interactive games.

Remember: Four careers: P-D-A-G — Python developer, Data analyst, Automation engineer, Game developer.

اس باب کی مہارتیں پائتھن ڈویلپر، ڈیٹا اینالسٹ، آٹومیشن انجینئر اور گیم ڈویلپر کے کام میں روز استعمال ہوتی ہیں۔

Programming Fundamentals

18 single-page lessons · 6 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- Python programs rest on primitive types (`int`, `float`, `bool`) and abstract structures: lists, tuples, sets and dictionaries.
- A **list** is ordered and mutable, written with `[]`. Index from 0; `[-1]` is last. Slice stop is exclusive. Methods include `append`, `insert`, `remove`, `sort`, `reverse`, `clear`.
- A **tuple** is ordered and immutable, written with `()`. Item assignment raises `TypeError`. Only `count` and `index` exist as methods.
- A **set** is unordered and unique, written with `{}`. Use `|` & `-` & `^` for union, intersection, difference and symmetric difference. Prefer `discard` over `remove`.
- A **dictionary** maps unique keys to values. `d[key]` can raise `KeyError`; `d.get(key, default)` is safe. Duplicate keys keep the last value.
- `min`, `max`, `len`, `sum` and `sorted` work across structures. On a dict, `min` / `max` / `sorted` use keys; total values with `sum(d.values())`. `sorted()` returns a new list; `.sort()` changes a list in place.
- Functions written with `def` give reusability, modularity, readability and maintainability. Built-in functions already exist; user-defined functions solve your tasks.
- `return` sends a value to the caller. Without `return`, the result is `None`. Local variables live inside a function; global variables live outside all functions.
- Files persist on disk. Modes: `r` read (must exist), `w` write (overwrites), `a` append. Methods: `read`, `readlines`, `write`, `close`.
- The `with` statement is a context manager that closes the file automatically. Loop line by line to read large files safely.
- `try / except FileNotFoundError` stops a missing file from crashing the program.
- The grade tracker writes with `w`, appends with `a`, reads with `r`, splits each `Name: mark` line, and computes the mean.

Key terms

Term	Meaning	اردو
Data structure	A way of organising values so a program can store and use them.	ڈیٹا سٹرکچر
Primitive type	A basic single value: <code>int</code> , <code>float</code> , <code>bool</code> .	بنیادی قسم
List	Ordered, mutable sequence written with <code>[]</code> .	فہرست
Index	The position of an item, starting at 0 (or -1 from the end).	انڈیکس
Slicing	Copying a portion of a sequence with <code>start:stop:step</code> .	سلائسنگ
Traversal	Visiting each element in turn, usually with a loop.	گشت / تراورسل
Mutable	Can be changed after creation.	قابل تبدیلی
Immutable	Cannot be changed after creation.	ناقابل تبدیلی
Tuple	Ordered, immutable sequence written with <code>()</code> .	ٹیپل
Set	Unordered collection of unique items written with <code>{}</code> .	سیٹ
Union	All unique items from two sets (<code> </code>).	اجتماع
Intersection	Items common to both sets (<code>&</code>).	اشتراک

Programming Fundamentals

75 marks • 1 hour 15 minutes • no notes • no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 18 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define • Explain • Example • Diagram • Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. Which structure is ordered and mutable?
 - a. List
 - b. Tuple
 - c. Set
 - d. Frozen set
2. What does `nums[2:6]` return if `nums = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]`?
 - a. `[2, 3, 4, 5, 6]`
 - b. `[2, 3, 4, 5, 6, 7]`
 - c. `[2, 3, 4, 5]`
 - d. `[3, 4, 5, 6]`
3. `t = (1, 2, 3)` then `t[0] = 99` raises
 - a. `KeyError`
 - b. `TypeError`
 - c. `ValueError`
 - d. `IndexError`
4. A set is best described as
 - a. ordered with duplicates
 - b. indexed and mutable
 - c. key-value pairs
 - d. unordered with unique elements
5. If `A = {1, 2, 3, 4}` and `B = {3, 4, 5, 6}`, then `A & B` is
 - a. `{3, 4}`
 - b. `{1, 2}`
 - c. `{1, 2, 3, 4, 5, 6}`
 - d. `{1, 2, 5, 6}`
6. `{"a": 1, "a": 2, "a": 3}` prints
 - a. `{'a': 1}`
 - b. `{'a': 1, 'a': 2, 'a': 3}`
 - c. `{'a': 3}`
 - d. a `KeyError`
7. The safe way to read a possibly missing dictionary key is
 - a. `d[key]`
 - b. `d.get(key)`
 - c. `d.keys(key)`
 - d. `d.index(key)`
8. For `s = {5, 1, 9, 3, 7}`, `sum(s)` is
 - a. 5
 - b. 9
 - c. 7
 - d. 25
9. Which statement is true?
 - a. `sorted(x)` returns a new list and leaves `x` unchanged
 - b. `sorted(x)` works only on lists
 - c. `.sort()` works on tuples
 - d. `.sort()` returns a new list
10. A function is created with the keyword
 - a. `func`
 - b. `def`
 - c. `define`
 - d. `return`
11. A function that has no `return` statement returns
 - a. `0`
 - b. `False`
 - c. `None`
 - d. an empty string
12. A variable defined inside a function is
 - a. local
 - b. global
 - c. persistent
 - d. public
13. Opening a file with mode `'w'`
 - a. fails if the file already exists
 - b. adds new text at the end
 - c. is read-only
 - d. erases existing content (and creates the file if needed)
14. The `with open(...) as f:` statement is used mainly because
 - a. it makes the file binary
 - b. it closes the file automatically
 - c. it is faster than lists
 - d. it prevents `KeyError`
15. Reading a missing file in mode `'r'` without `try` raises
 - a. `TypeError`
 - b. `KeyError`
 - c. `FileNotFoundError`
 - d. `ValueError`

Section B — Short questions (10 × 3 = 30)

1. Define a data structure. Distinguish primitive from abstract data structures with one example of each.
2. What is negative indexing? Give the expression that returns the last item of a list named `fruits`.
3. State four differences between a list and a tuple.
4. Differentiate `.remove()` and `.discard()` on a set.
5. Why can a dictionary not have two identical keys? What happens if you write the same key twice?
6. Contrast `sorted()` with list `.sort()`.
7. List four benefits of using functions.
8. Define local scope and global scope.
9. Write the meaning of file modes `'r'`, `'w'` and `'a'`.
10. What is a context manager? Why is `with` safer than calling `.close()` yourself?

Section C — Long questions (attempt any 3 × 10 = 30)

1. Compare list, tuple, set and dictionary in a table (syntax, order, mutability, duplicates, how you access an item, one typical use). Then write two lines of Python that create one example of each holding the numbers 1, 2 and 2, and state what each structure actually stores.
2. Write a complete Python program that takes a sentence, counts the frequency of each word using a dictionary and `.get()`, prints a two-column table, and prints the most frequent word. Trace your program on `"python is easy python is fun python is powerful"`.
3. Write an arithmetic calculator with four user-defined functions `add`, `subtract`, `multiply` and `divide`. `divide` must not crash when the second number is 0. Explain how `return` is used and why `input` values are converted with `float`.
4. Explain file handling. Describe modes `r`, `w` and `a`, the `with` statement, and `try/except FileNotFoundError`. Include a short program that writes one line with `with` and another that reads a file that might be missing.
5. The grade tracker writes three students with `'w'`, appends David with `'a'`, then computes the class average. Write the full program, show the exact output for marks 88, 75, 92 and 81, and explain `strip`, `split(":")` and `average:.1f`.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **3.1 Data Structures in Python.** Answers: 1. Primitive: any two of int, float, bool. Abstract: any two of list, tuple, set, dictionary. 2. Because it is a higher-level container built from primitive values, holding many items and supporting operations such as append and slice.
2. **3.1.1 Lists (Ordered, Mutable, Methods).** Answers: 1. [2, 3, 4, 5]. 2. ['banana', 'apple'] (only the first apple is removed). 3. To stop scanning once the value is found, so the rest of a long list is not checked.
3. **3.1.2 Tuples (Ordered, Immutable).** Answers: 1. count and index. 2. TypeError: 'tuple' object does not support item assignment. 3. ([1, 2, 99], [3, 4]).
4. **3.1.3 Sets (Unordered, Unique, Math Operations).** Answers: 1. {1, 2, 3, 4} (duplicates removed; order may vary). 2. discard does not raise KeyError if the value is missing. 3. {1, 2, 5, 6}.
5. **3.1.4 Dictionaries (Key-Value Pairs).** Answers: 1. {'a': 3}. 2. 0. 3. A set.
6. **3.1.5 Common Built-in Functions (min, max, len, sum).** Answers: 1. 5, 1, 9, 25. 2. A list: [1, 3, 5, 7, 9]. 3. sum(d.values()) → 240.
7. **3.1.6 Activity: Student Attendance System.** Answers: 1. Present 0, Absent 3. 2. So that YES, Yes and yes all match the string "yes".
8. **3.1.7 Activity: Word Frequency Counter.** Answers: 1. Three times. 2. Because a brand-new word is not yet a key; .get returns 0 instead of raising KeyError.
9. **3.2 Functions in Python.** Answers: 1. def. 2. Twice, because greet() is called twice.
10. **3.2.1 Types of Functions (Built-in vs User-defined).** Answers: 1. Built-in. 2. def.
11. **3.2.2 Functions with Return Values.** Answers: 1. 15. 2. None.
12. **3.2.3 Activity: Arithmetic Calculator Using Functions.** Answers: 1. The string "Cannot divide by zero". 2. Because input() returns text; float() turns it into a number so + - * / do arithmetic, including decimals.
13. **3.2.4 Scope of Local and Global Variables.** Answers: 1. Inside a function. 2. 10 (the global is unchanged).
14. **3.3 & 3.4 File Handling and Operations (Modes r, w, a).** Answers: 1. 'w'. 2. 'r'. 3. Because write() does not start a new line by itself; without \n the next write continues on the same line.
15. **3.6 The with Statement (Context Manager).** Answers: 1. That the file is closed when the with block ends, even if an error occurs. 2. Because each line already ends with \n; print would otherwise add another newline and the output would look double-spaced.
16. **3.8 Errors and Exceptions (Try-Except).** Answers: 1. FileNotFoundError. 2. It prints "Error: The file does not exist. Please check the name." and continues.
17. **3.9 Mini File Handling Project: Grade Tracker.** Answers: 1. 84.0 because (88+75+92+81)/4 = 336/4 = 84.0. 2. Because "a" appends; "w" would erase the three existing students.
18. **Career Opportunities.** Answers: 1. Data analyst. 2. Any two of: Python/software developer, data analyst, automation engineer, game developer.

Answer key

Multiple choice

1. a
2. c
3. b
4. d
5. a
6. c
7. b
8. d
9. a
10. b
11. c
12. a
13. d
14. b
15. c

Short questions — model answers

1. A data structure organises values in a program. Primitive types hold one value (e.g. `int 17`). Abstract structures hold collections and richer operations (e.g. a list of marks).
2. Negative indexing counts from the right. `fruits[-1]` is the last item. `fruits[-2]` is the second last.
3. List: `[]`, mutable, many methods, slightly slower, use when data will change. Tuple: `()`, immutable, only `count / index`, slightly faster, use for protected records. Both are ordered and allow duplicates and indexing.
4. Both delete an element. `remove` raises `KeyError` if the value is absent. `discard` does nothing in that case, so it is the safer choice.
5. Each key must identify one value (like one roll number per student). A repeated key does not crash; the last assigned value overwrites the earlier one, e.g. `{"a": 3}`.
6. `sorted(x)` is a built-in function for any iterable; it returns a new list and does not change `x`. `.sort()` is a list method that sorts in place and returns `None`.
7. Reusability (write once, call many times), modularity (small named tasks), readability (shorter files), maintainability (fix one definition).
8. Local: defined inside a function; invisible outside; gone when the function ends. Global: defined outside all functions; readable throughout the program.
9. `'r'` read, error if missing. `'w'` write, create if missing, erase old content. `'a'` append at the end, create if missing, keep old content.
10. A context manager sets up a resource and cleans it up. `with open(...) as f` closes the file when the block ends, even after an exception, so you cannot forget `.close()` and you are safer if the program crashes mid-write.

Long questions — model answers

1. Use the comparison table from 3.1.4 (brackets, ordered/mutable/duplicates/access/empty/use). Examples:

```
print([1, 2, 2])
print((1, 2, 2))
print({1, 2, 2})
print({"a": 1, "b": 2, "b": 2})
```

OUTPUT

```
[1, 2, 2]
(1, 2, 2)
{1, 2}
{'a': 1, 'b': 2}
```

The list and tuple keep both 2s and an order. The set drops the extra 2. The dictionary keeps unique keys; the second "b" overwrites the first.

2. Use the program in 3.1.7. Trace: nine tokens; `python` and `is` end at 3; others at 1. Output matches the worked example, including Most Frequent: 'python' (3 times) because `max` returns the first key among ties. Heart of the loop: `word_freq[word] = word_freq.get(word, 0) + 1`.
3. Use the four functions from 3.2.3. `return` sends each result to `print` in the main program. `divide` returns the string "Cannot divide by zero" when `b == 0`. `float(input(...))` is required because `input` returns a string and "12" + "4" would concatenate. Sample 12 and 4: 16.0, 8.0, 48.0, 3.0.
4. File handling stores data on disk so it outlives the program. Modes: `r` read / must exist; `w` wipe-or-create; `a` add-or-create. `with` closes automatically. Try/except:

```
with open("note.txt", "w") as f:
    f.write("Saved\n")
try:
    with open("note.txt", "r") as f:
        print(f.read(), end="")
except FileNotFoundError:
    print("Error: The file does not exist. Please check the name.")
```

OUTPUT

```
Saved
```

If the name were wrong, the except message would print instead of a traceback.

5. Full program as in 3.9. Disk after append:

OUTPUT

```
Alice: 88
Bob: 75
Carol: 92
David: 81
```

Output of the program (exact):

OUTPUT

```
Grades file created.
New student appended.
Alice scored 88
Bob scored 75
Carol scored 92
David scored 81

Class average: 84.0
```

`strip` removes `\n`; `split(":")` separates name and mark; `int(grade)` allows the extra space; `{average:.1f}` prints one decimal. $336 \div 4 = 84.0$.

Self-assessment: I can...

- ☐ Choose list, tuple, set or dictionary for a given problem and justify the choice.
- ☐ Explain tuple immutability and the inner-list exception, and use `count / index`.
- ☐ Update a dictionary, access values with `.get()`, and loop with `.items()`.
- ☐ Write a user-defined function with parameters and a `return` value, and contrast it with a built-in.
- ☐ Open a text file in `r`, `w` or `a` using `with`, and read it line by line.
- ☐ Index, slice, traverse and update a list, including `[-1]` and the main methods.
- ☐ Build a set, drop duplicates, and compute union, intersection, difference and symmetric difference.
- ☐ Apply `min`, `max`, `len`, `sum` and `sorted` correctly, including on dictionaries.
- ☐ State whether a name is local or global and predict a `NameError`.
- ☐ Catch `FileNotFoundError` and complete the grade-tracker project with the correct average.

Chapter 4: Data and Analysis

Data and Analysis (1/2) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Concept of Data Analysis · Data Sources and Database Connection · Creating a SQLite Database in Python · Pandas and DataFrames · Handling Missing Values (NaN)

★ **Must lock:** Data Sources and Database Connection, Pandas and DataFrames, Handling Missing Values (NaN)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What does a context manager guarantee for a file?
2. Which exception is raised when `open('missing_data.txt', 'r')` cannot find the file?
3. What is the class average in the sample, and how is it calculated?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

4.1 Concept of Data Analysis

Data analysis is examining, organising and interpreting data so you can extract useful information.

- Schools study results, shops study sales, hospitals study patient records — all to make a decision, spot a trend or solve a problem.
- Python is popular for this work because it is readable, talks to files and databases, does statistics, and draws graphs.
- Five lines of Pandas often replace an hour of spreadsheet clicking.

ڈیٹا کا تجزیہ یعنی اعداد کو ترتیب دے کر ان سے فیصلے کے قابل معلومات نکالنا۔

4.1.1 – 4.1.2 Data Sources and Database Connection ★ Golden

Data sources are where information comes from: school records, websites, sensors, databases.

Python → Driver → Connection → Cursor → SQL → Database

- Connectivity is the conversation between your Python program and that source so you can read and update data.
- Five components of a database connection, in the order they actually work:

#	Component	Role
1	Database	Organised store (SQLite = one .db file; MySQL = a server for big apps)
2	Driver	Translator between Python and that DBMS (sqlite3 is built in)
3	Connection object	Opens, manages and closes the pipeline
4	Cursor object	Runs SQL and walks through result rows
5	SQL queries	CREATE, INSERT, SELECT, UPDATE, DELETE

Exam: Write the five names in order and one line each. A common trap is swapping cursor and connection: the connection is the pipe; the cursor is the messenger that travels...

خمسہ اجزاء: ڈیٹا بیس، ڈرائیور، کنکشن، کرسر، ایس کیو ایل۔

4.2 Creating a SQLite Database in Python

SQLite is built into Python. The whole database is one .db file next to your script — no password, no port, no server.

- SQLite is built into Python.
- The whole database is one .db file next to your script — no password, no port, no server.
- Nine steps you must be able to write from memory:

Step	Why it matters
connect	Creates the file if it does not exist
cursor	Vehicle that carries SQL
execute	Runs one SQL command
commit	Writes INSERT/UPDATE/DELETE to disk
fetchall	Brings SELECT results into a Python list of tuples
close	Frees memory and unlocks the file

Remember: Strings inside SQL use single quotes: 'Ali'. Python strings around the SQL use double quotes (or a triple-quoted string).

ایس کیو لائٹ پائتھن کے ساتھ آتی ہے، پورا ڈیٹا بیس ایک فائل ہے۔

4.3 Pandas and DataFrames ★ Golden

Pandas is a third-party library for tables.

- Install once: pip install pandas in the terminal (not inside the .py file).
- Convention: import pandas as pd.
- A DataFrame is a 2-D table of rows and columns, like Excel or an SQL table.

```
import pandas as pd
data = {
    "Name": ["Ali", "Sara", "Ahmed"],
    "Math": [85, 90, 78],
    "Science": [80, 88, 70],
}
df = pd.DataFrame(data)
print(df)
```

پینڈاژ ٹیبل نما ڈیٹا فریم دیتا ہے۔

4.3.3 Handling Missing Values (NaN)

★ Golden

Missing cells are NaN ("Not a Number"). Statistics crash or lie if you ignore them.

- Statistics crash or lie if you ignore them.
- Three tools: `isnull()` (True where empty), `fillna(value)` (replace), `dropna()` (delete the row).

```
import pandas as pd
df = pd.DataFrame({
    "Name": ["Ali", "Sara", "Ahmed", "Ayesha"],
    "Marks": [85.0, None, 78.0, 92.0],
    "Grade": ["A", "A", None, "A"],
})
print(df.isnull().sum())
```

Trap: Filling a salary gap with the mean of a company that includes the CEO can hide poverty (the same outlier problem as the mean).

Exam: State: identify with `isnull/sum`, fill numeric gaps with the mean, fill categories with a label, or drop rows if filling would invent a lie. Never analyse first and clean...

خالی خانے NaN ہیں۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Creating a SQLite Database in Python:** Forgetting `commit()` is the classic bug: the program prints nothing next time because the insert was never saved.
- **Handling Missing Values (NaN):** Filling a salary gap with the mean of a company that includes the CEO can hide poverty (the same outlier problem as the mean).

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Data Sources and Database Connection**. Write: Data sources are where information comes from: school records, websites, sensors, databases.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Connectivity is the conversation between your Python program and that source so you can read and update data. (2) Five components of a database connection, in the order they actually work: — + example.

5 marks: 3-mark structure + table: # / Component / Role + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Pandas and DataFrames**. Write: Pandas is a third-party library for tables.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Install once: pip install pandas in the terminal (not inside the .py file). (2) Convention: import pandas as pd. — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Handling Missing Values (NaN)**. Write: Missing cells are NaN ("Not a Number").

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Statistics crash or lie if you ignore them. (2) Three tools: `isnull()` (True where empty), `fillna(value)` (replace), `dropna()` (delete the row). — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Which object executes `SELECT *`?

3 marks. Explain Data Sources and Database Connection with two clear points and one example.

5 marks. Write the five names in order and one line each. A common trap is swapping cursor and connection: the connection is the pipe; the cursor is the messenger that travels through it.

8 marks. Data Sources and Database Connection: 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. The cursor 3. Connectivity is the conversation between your Python program and that source so you can read and update data.; Five components of a database connection, in the order they actually work: 5. Use the recipe in the blue box. Model opening: Data sources are where information comes from: school records, websites, sensors, databases. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Data Sources and Database Connection** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 4: Data and Analysis

Data and Analysis (2/2) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Data Organization and Representation · Data Visualization and Types of Graphs · Descriptive Statistics · Career Opportunities

★ **Must lock:** Data Visualization and Types of Graphs, Descriptive Statistics

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Which object executes `SELECT *`?
2. What is `pd`?
3. What does `df.isnull().sum()` return?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

4.4 Data Organization and Representation

Organised data is easier to read. Three everyday forms: Table — exact values side by side (Ali 85 Math, 80 Science).

- Table — exact values side by side (Ali 85 Math, 80 Science).
- Frequency distribution — how many items fall in each range (bin).
- Graph — a picture of a trend or comparison (next topics).

Range of marks	Frequency (students)
50–59	5
60–69	7
70–79	9
80–89	4
90–100	2



ٹیبل درست عدد دکھاتی ہے، تعدد کی جدول بتاتی ہے کتنے طلبہ کس رینج میں ہیں، گراف رجحان دکھاتا ہے۔

4.5 Data Visualization and Types of Graphs ★ Golden

Pick the graph that matches the question. Then label axes and give a title — an unlabelled chart scores zero in an exam.

- Then label axes and give a title — an unlabelled chart scores zero in an exam.

Chart	Shows	Watch out
Bar / column	Compare discrete categories (subjects, departments)	Column = vertical; bar often = horizontal
Line	Change over time (temperature, visitors)	Needs an ordered x-axis (months, years)
Pie	Parts of one whole as percentages	Bad with many or almost-equal slices
Histogram	Distribution of one numeric variable in bins	Bars touch (continuous range), unlike a bar chart
Scatter	Relationship of two numeric variables	Each dot is one pair (x, y)
Box plot	Min, Q1, median, Q3, max, and outliers	Best tool for spotting extreme values



Column compares; line shows a trend; pie shows share; the box summarises spread around the median.

```
import matplotlib.pyplot as plt
subjects = ["English", "Math", "Science", "History"]
marks = [64, 82, 71, 49]
plt.bar(subjects, marks, color="skyblue", edgecolor="black")
plt.title("Marks vs Subjects")
plt.xlabel("Subjects")
plt.ylabel("Marks out of 100")
```

Exam: "Which graph and why?" is a 3-mark gift. Write the name, what it shows, and one reason the others are worse.

بار/کالم اقسام کا موازنہ، لائن وقت کا رجحان، پائی حصے، ہسٹوگرام مسلسل تقسیم (بار آپس میں لگے)، اسکیتھر دو متغیرات کا تعلق، باکس پلا...

4.6 Descriptive Statistics ★ Golden

Descriptive statistics squeeze a long list into a few honest numbers.

- Central tendency asks "what is typical?".
- Spread asks "how mixed is the list?".

Measure	How	Use when
Mean	Sum $\div$ n. Uses every value.	Values sit close together. Example: ordinary test scores.
Median	Middle after sorting. Odd n: centre. Even n: mean of the two centre values.	Outliers would wreck the mean (CEO salary).
Mode	Most frequent value. May be none, one, or several.	Most popular choice (shoe size).

Trap: Do not report variance as if it were in "marks".

Exam: Always state whether you used n or n-1. Show the sorted list for the median. For SD, show: mean $\rightarrow$ deviations $\rightarrow$ squares $\rightarrow$ divide $\rightarrow$ square root. A box plot pictures min,...

اوسط سب کا مجموعہ تقسیم تعداد، میڈین ترتیب کے بعد بیچ، موڈ سب سے زیادہ بار آنے والا۔

Career Opportunities

The skills in this chapter map onto real jobs: data analyst (Pandas, Excel), database administrator (SQLite/MySQL), data scientist (statistics + modelling), visualisation specialist (Matplotlib, Power BI),...

یہ باب ڈیٹا اینالسٹ، ڈیٹا بیس ایڈمن، ڈیٹا سائنسدان، ویژولائزیشن اور بیک اینڈ ڈویلپر جیسے کیریئرز کی بنیاد ہے۔

Data and Analysis

9 single-page lessons · 5 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- Data analysis turns raw facts into decisions. Python reads files and databases, calculates and plots.
- Connection chain: database → driver → connection → cursor → SQL.
- SQLite: connect, cursor, execute, commit, fetchall, close. No commit means no save.
- A DataFrame is a 2-D table. Load with a dictionary, `read_csv` or `read_excel`. New columns are vectorised arithmetic.
- NaN: find (`isnull`), fill (`fillna` , often with the mean), or drop (`dropna`).
- Tables give exact values; frequency bins show how many in each range.
- Bar/column = categories; line = time; pie = parts of a whole; histogram = numeric distribution (touching bars); scatter = two variables; box = five-number summary + outliers.
- Mean uses every value and is sensitive to outliers; median is the middle; mode is the most common.
- Range = max–min. Variance = mean squared deviation ($\div n$ or $\div n-1$). SD = $\sqrt{\text{variance}}$. pandas `.std()` uses $n-1$.

Key terms

Term	Meaning	اردو
Data analysis	Examining data to extract useful information.	ڈیٹا کا تجزیہ
Connectivity	Link between a program and a data source.	رابطہ کاری
Driver	Translator between Python and a DBMS.	ڈرائیور
Connection	Open pipeline to the database.	کنکشن
Cursor	Object that executes SQL and fetches rows.	کرسر
SQLite	Built-in file-based database.	ایس کیو لائٹ
commit	Save INSERT/UPDATE/DELETE to disk.	کمیت / محفوظ کرنا
Pandas	Library for table-like data.	پینڈا
DataFrame	2-D labelled table of rows and columns.	ڈیٹا فریم
NaN	Missing value ("Not a Number").	خالی / غیر موجود قدر
Frequency	How many items fall in a class/bin.	تعدد
Histogram	Distribution chart whose bars touch.	ہسٹوگرام

Data and Analysis

75 marks · 1 hour 15 minutes · no notes · no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 09 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define · Explain · Example · Diagram · Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. The object that executes SQL is the:
 - a. driver
 - b. cursor
 - c. DataFrame
 - d. histogram
2. After INSERT you must:
 - a. close then commit
 - b. commit
 - c. drop the table
 - d. call head()
3. Pandas is installed with:
 - a. import pandas
 - b. pip install pandas
 - c. sqlite3.connect
 - d. plt.show()
4. `df.head()` shows:
 - a. the last 5 rows
 - b. the first 5 rows
 - c. only NaNs
 - d. the standard deviation
5. Missing Pandas values appear as:
 - a. NULL in every chart
 - b. NaN
 - c. 0 always
 - d. a pie slice
6. To delete every row that contains a gap:
 - a. fillna
 - b. dropna
 - c. fetchall
 - d. commit
7. A line graph is best for:
 - a. parts of a whole
 - b. a trend over months
 - c. two unrelated categories
 - d. a primary key
8. Histogram bars:
 - a. must have gaps
 - b. touch, because bins are a continuous range
 - c. always show time
 - d. replace the mean
9. Rainfall vs crop yield is a:
 - a. pie chart
 - b. scatter plot
 - c. primary key
 - d. mode
10. A box plot's inner line is the:
 - a. mean
 - b. mode
 - c. median
 - d. range
11. Mean of 70, 80, 90 is:
 - a. 70
 - b. 80
 - c. 90
 - d. 240
12. Median of 10, 15, 35, 70, 95 is:
 - a. 10
 - b. 35
 - c. 70
 - d. 45
13. Mode of 20, 25, 20, 30, 20, 25, 20 is:
 - a. 25
 - b. 30
 - c. 20
 - d. 7
14. Range of 120, 150, 180 is:
 - a. 30
 - b. 60
 - c. 150
 - d. 180
15. pandas `.std()` divides by:
 - a. n
 - b. n-1
 - c. 2n
 - d. zero

Section B — Short questions (10 × 3 = 30)

1. List the five components of a Python database connection in order.
2. Why is `conn.commit()` required after INSERT?
3. What is a DataFrame? How do you load a CSV into one?
4. Differentiate `fillna` and `dropna`.
5. When is a pie chart a poor choice?
6. Differentiate a bar chart and a histogram.
7. Why is the median better than the mean for company salaries?
8. Define range, min and max with the list 70, 80, 90, 60, 75.
9. Why do we take the square root of variance?
10. State two careers that use this chapter's skills.

Section C — Long questions (attempt any 3 × 10 = 30)

1. Write a complete Python program that creates `school.db`, a `students` table, inserts Ali 85 and Sara 90, commits, prints all rows, and closes. Number the five connection components beside the matching lines.
2. Starting from the dictionary of Ali/Sara/Ahmed marks, write Pandas code to build a DataFrame, add Total and Average columns, and print it. Show the exact output.
3. Given Marks [85, None, 78, 92] and Grade ["A","A", None, "A"], show `isnull().sum()`, then fill Marks with the mean and Grade with "Not Assigned". Compute the mean by hand.
4. For each goal pick a chart and justify in one sentence: (a) CS vs IT vs Eng enrolment, (b) website hits from Jan to Jun, (c) share of four clubs in one college, (d) distribution of 200 heights, (e) hours studied vs marks, (f) comparing spread of two classes.
5. For 4, 8, 6, 10, 2 compute mean, median, range, population variance and population SD. Show every step. Then say what pandas `.std()` would report instead.
6. Explain, with a numeric example, how an outlier distorts the mean but not the median. Link this to when you would draw a box plot.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

- 4.1 Concept of Data Analysis.** Answers: 1. Study results to improve teaching (or similar). 2. Any two: read CSV/Excel/databases, organise tables, statistics, charts.
- 4.1.1 – 4.1.2 Data Sources and Database Connection.** Answers: 1. The cursor. 2. SQLite is the database; the `sqlite3` module is the driver.
- 4.2 Creating a SQLite Database in Python.** Answers: 1. All columns. 2. `conn.commit()`.
- 4.3 Pandas and DataFrames.** Answers: 1. The usual alias for pandas. 2. It would print everything; use `df.head()`.
- 4.3.3 Handling Missing Values (NaN).** Answers: 1. Count of NaNs in each column. 2. Any **row** that contains at least one NaN.
- 4.4 Data Organization and Representation.** Answers: 1. $4 + 2 = 6$. 2. Matplotlib (pyplot).
- 4.5 Data Visualization and Types of Graphs.** Answers: 1. The x-axis is a continuous numeric range, not separate categories. 2. Scatter (two numeric variables, looking for correlation).
- 4.6 Descriptive Statistics.** Answers: 1. Sorted 2,4,6,8,10 $\rightarrow$ 6. 2. 60. 3. $n-1$ (sample).

Answer key

Multiple choice

- b
- b
- b
- b
- b
- b
- b
- b
- b
- c
- b
- b
- c
- b
- b

Short questions — model answers

- Database, driver, connection object, cursor object, SQL queries.
- Without commit the insert stays in memory and disappears when the program ends, so the next run cannot see the row.
- A 2-D table of labelled rows and columns. `df = pd.read_csv("file.csv")`.
- `fillna(v)` replaces NaN with v (the row stays). `dropna()` deletes any row that still contains a NaN.
- When there are many slices, or the values are almost equal, so the eye cannot compare them.
- Bar: separate categories, gaps between bars. Histogram: one numeric variable grouped into bins; bars touch.
- A huge CEO salary pulls the mean up; the median stays with the typical worker.
- Min 60, max 90, range 30.
- Variance is in squared units. The SD brings the spread back to the original units (marks, rupees, °C).
- Any two: data analyst, DBA, data scientist, visualisation specialist, BI analyst, backend developer.

Long questions — model answers

1. Use the nine-step listing in 4.2 with two INSERTs. Label: sqlite3 = driver, connect = connection, cursor = cursor, execute strings = SQL, school.db = database.
2. Output is the three-row table with Total 165, 178, 148 and Average 82.5, 89.0, 74.0 (see the worked example).
3. isnull sum: Marks 1, Grade 1. Mean of 85, 78, 92 = $255/3 = 85.0$. After fill: Sara Marks 85.0, Ahmed Grade "Not Assigned".
4. (a) column/bar — compare categories. (b) line — time. (c) pie — parts of a whole. (d) histogram — numeric distribution. (e) scatter — two numeric variables. (f) box — spread and outliers.
5. Sorted 2,4,6,8,10. Sum 30, mean 6, median 6, range 8. Deviations -4,-2,0,2,4. Squares 16,4,0,4,16 sum 40. $\sigma^2 = 40/5 = 8$. $\sigma = \sqrt{8} = 2.828$ (3 d.p.). pandas `.std()` uses $40/4 = 10$, $\sqrt{10} \approx 3.162$.
6. Nine salaries of 10 and one of 1000: mean 109, median 10. Draw a box plot — the 1000 appears as an outlier dot above the whisker, so the distortion is visible.

Self-assessment: I can...

- | | |
|--|--|
| ☐ name the five connection components in order. | ☐ write SQLite connect / create / insert / commit / select / close. |
| ☐ build a DataFrame and add a calculated column. | ☐ find, fill and drop missing values. |
| ☐ choose bar, line, pie, histogram, scatter or box for a problem. | ☐ compute mean, median, mode, range, variance and SD by hand. |
| ☐ state that pandas std uses $n-1$. | |

Chapter 5: Application and Impacts of Computing

Application and Impacts of Computing (1/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Machine Learning, Neural Networks and Deep Learning · Machine Learning (ML) · Neural Networks (NN) · Deep Learning (DL) · Components of Neural Networks

★ **Must lock:** Neural Networks (NN), Components of Neural Networks

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.


1. Why do histogram bars touch?
2. Median of 4, 8, 6, 10, 2?
3. How many students scored 80 or above in the table?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.1 Machine Learning, Neural Networks and Deep Learning

Machine learning (ML), neural networks (NN) and deep learning (DL) are important areas of artificial intelligence (AI).

- Face unlock on smartphones.
- Speech recognition (for example Siri, Alexa, or Urdu voice typing on a phone).
- Photo search categorisation (typing "car" in a gallery and seeing car photos).
- Medical diagnosis from X-rays and scans.

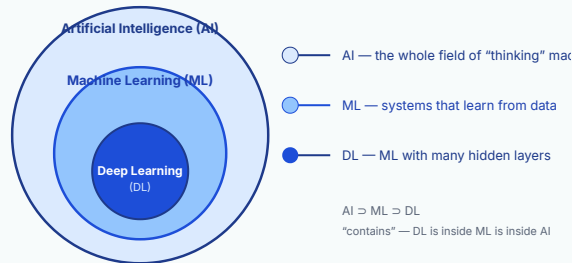

The set relationship $AI \supset ML \supset DL$. Deep learning is a method of machine learning; machine learning is a part of artificial intelligence.

Remember: Russian-doll memory trick. Picture three boxes. The outer box is AI. Inside it is a smaller box ML. Inside that is the smallest box DL. You cannot take DL out...

مصنوعی ذہانت (AI) سب سے بڑا میدان ہے۔

5.1.1 Machine Learning (ML)

A machine learning model is the system that learns from data and gives an output.

1. Data input → 2. Learning (find patterns) → 3. Prediction on new data

- Think of it as the trained brain of a computer program.
- In ordinary programming you write every rule yourself: if marks ≥ 40 then "Pass".
- In machine learning you do not list every rule.

Remember: D-L-P. Machine learning is Data in, Learn patterns, Predict. "Data Learns to Predict."

مشین لرننگ ماڈل وہ نظام ہے جو ڈیٹا سے سیکھ کر نتیجہ دیتا ہے — کمپیوٹر پروگرام کا تربیت یافتہ دماغ۔

5.1.2 Neural Networks (NN) ★ Golden

A neural network is a computer model that learns patterns from data.

Input layer → Hidden layer(s) → Output layer

- Input layer — receives the raw data (pixels of a face, samples of a sound, marks of a student).
- Hidden layer(s) — the “thinking” in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a...)
- Output layer — gives the final answer (unlock / keep locked; “this is a cat”; “pass / fail”).

Remember: I-H-O. Input receives, Hidden thinks, Output decides. “In Hidden Out.” A neural network is a brain-inspired maths machine, not a copy of a living brain.

Exam: Very common questions: “What is a neural network?” (2–3 marks), “Name its three layers and explain each with the face-unlock example” (5 marks), and “How is a neural...”

نیورل نیٹ ورک ایک کمپیوٹر ماڈل ہے جو ڈیٹا سے پیٹرن سیکھتا ہے۔

5.1.3 Deep Learning (DL)

Deep learning is a machine-learning method in which computers use multi-layer neural networks to learn complex patterns from data.

- Early layers learn simple features — edges, shapes, colours.
- Deeper layers combine those simple features to understand complex patterns — a whole face, or a specific car model (a Cultus versus a...

	Neural network (the model)	Deep learning (the method)
What it is	A system/model that has layers, nodes and connections to help it learn.	A specific method that trains neural networks containing many hidden layers .
Depth	Can be simple (shallow) with just one or two hidden layers.	Always “deep,” requiring huge amounts of data and processing power to learn complex patterns.
Role	The architecture (the “machine”).	The way we train a deep version of that machine.

Remember: Deep = many hidden layers. Shallow NN: 1–2 hidden layers. Deep NN: many hidden layers, huge data, strong computers. Simple features first, complex meaning...


ڈیپ لرننگ مشین لرننگ کا وہ طریقہ ہے جس میں کئی پوشیدہ تہوں والے نیورل نیٹ ورک استعمال ہوتے ہیں۔

5.1.4 Components of Neural Networks ★ Golden

The components of a neural network can be understood through its layered architecture.

- Data enters, gets processed, and exits, with mathematical adjustments happening inside.

#	Component	Description
1	Input layer	Receives the initial raw data (for example image pixels, sound waves, text).
2	Neurons / nodes	Small processing units that receive, calculate, and pass information forward.
3	Hidden layer(s)	The layers between input and output. They process the data and learn patterns from it.
4	Weights	Numbers that show the importance or strength of connections between neurons.
5	Bias	An extra constant value added to help the model adjust its result and improve accuracy.
6	Activation function	A mathematical gate that decides whether the information is important enough to move to the next layer.
7	Output layer	Gives the final computed result, decision or prediction (for example "This is a cat").
8	Loss function	Checks the error (how much the model's answer is wrong compared with reality) so the network can correct itself.

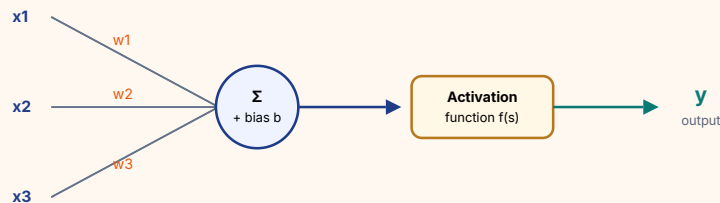

One neuron: inputs $\times$ weights are summed, bias is added, then an activation function decides the output y .

```
x1, x2 = 0.8, 0.5
w1, w2 = 0.4, 0.6
b = 0.1
s = x1 * w1 + x2 * w2 + b
y = 1 if s ≥ 0.5 else 0
print(round(s, 2))
print(y)
```

Remember: Weights = importance. Bias = extra nudge. Activation = yes/no gate. Loss = how wrong. A large weight means that input matters more. Bias shifts the sum up or...

Exam: Golden questions: "List the components of a neural network" (often 8 names + one line each), "What are weights and bias?", and a numerical neuron: given x , w , b and a ...

نیورل نیٹ ورک کے اجزاء ہیں: ان پٹ تہ، نیورون، پوشیدہ تہ، وزن (Weights)، بائیس (Bias)، ایکٹیویشن فنکشن، آؤٹ پٹ تہ اور لاس فنکشن۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Machine Learning, Neural Networks and Deep Learning:** Mistake: "AI, ML and DL are three different, separate subjects." Fix: They nest.
- **Machine Learning (ML):** Mistake: "The computer is intelligent on day one." Fix: An ML model is useful only after training on enough good data.
- **Neural Networks (NN):** Mistake: "A neural network is an actual human brain inside the computer." Fix: It is only inspired by the brain.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Neural Networks (NN)**. Write: A neural network is a computer model that learns patterns from data.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Hidden layer(s) — the "thinking" in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a... (2) Output layer — gives the final answer (unlock / keep locked; "this is a cat"; "pass / fail"). — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled ER diagram (rectangle / oval / diamond) or the relational schema + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Components of Neural Networks**. Write: The components of a neural network can be understood through its layered architecture.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The components of a neural network can be understood through its layered architecture. (2) Data enters, gets processed, and exits, with mathematical adjustments happening inside. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled network: input layer → hidden layer → output layer + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What are the small processing units of a neural network called?

3 marks. Explain Neural Networks (NN) with two clear points and one example.

5 marks. Very common questions: "What is a neural network?" (2–3 marks), "Name its three layers and explain each with the face-unlock example" (5 marks), and "How is a neural network related to the human..."

8 marks. Neural Networks (NN): 5-mark answer plus a labelled ER diagram (rectangle / oval / diamond) or the relational schema.

Answers: 1. Neurons or nodes 3. Hidden layer(s) — the "thinking" in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a...; Output layer — gives the final answer (unlock / keep locked; "this is a cat"; "pass / fail"). 5. Use the recipe in the blue box. Model opening: A neural network is a computer model that learns patterns from data. 8. Same 5-mark body + a labelled ER diagram (rectangle / oval / diamond) or the relational schema + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Neural Networks (NN)** using the recipe in this topic. Include a labelled ER diagram (rectangle / oval / diamond) or the relational schema. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 5: Application and Impacts of Computing

Application and Impacts of Computing (2/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Components of Deep Learning · Future of AI, NN and DL in Pakistan · Applications of Neural Networks and Deep Learning · Secure Collaboration (Authentication, MFA, Access Control)

★ **Must lock:** Secure Collaboration (Authentication, MFA, Access Control)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What are the small processing units of a neural network called?
2. What do weights show?
3. Which is the largest set: AI, ML or DL?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.1.5 Components of Deep Learning

Deep learning relies on specific advanced components to achieve its high accuracy.

- These components differentiate it from basic machine learning.

#	Component	What it means
1	Large input data	Deep learning is " data hungry ." It needs massive datasets (thousands or millions of records) for better learning and accuracy.
2	Many hidden layers	Uses dozens or hundreds of hidden layers to learn deeper, more intricate patterns.
3	Automatic feature learning	Unlike older models where humans had to manually highlight important features, deep learning extracts important features by itself .
4	Learning algorithm	Math routines (like backpropagation) that help the system reduce mistakes and improve learning continuously.
5	High computing power	Processing millions of data points across deep layers needs specialised, strong hardware, such as GPUs (Graphics Processing Units).
6	Training process	The model is trained again and again in loops called epochs to gradually improve its final performance.

Remember: D-L-A-L-G-T. Data (lots), Layers (many), Automatic features, Learning algorithm, GPU power, Training epochs. "Deep Learners Always Love Good Training."

ڈیپ لرننگ کو عام مشین لرننگ سے یہ چیزیں الگ کرتی ہیں: بہت بڑا ڈیٹا، بہت سی پوشیدہ تہیں، خود بخود خصوصیات نکالنا، سیکھنے کا الگورتھم...

Future of AI, NN and DL in Pakistan

Machine learning, neural networks and deep learning will play a key role in Pakistan's future.

- The National AI Policy 2025 highlights how artificial intelligence is now part of national planning, focusing on innovation,...

Sector	Potential impact in Pakistan
Education	Smart learning systems, online tutoring, automatic assessments, and finding where students need specific help.
Healthcare	Disease detection, medical image analysis, and managing hospital data. Crucial for rural areas lacking specialist doctors.
Agriculture	Monitoring crops, predicting weather, managing irrigation, and estimating yields — highly important for Pakistan's economy.
Business and banking	Fraud detection, customer support (chatbots), market forecasting, and intelligent risk analysis.
Local languages	Speech recognition, translation and text-to-speech tools for Urdu, Sindhi and other regional languages.

Remember: Five sectors: E-H-A-B-L. Education, Healthcare, Agriculture, Business/banking, Local languages.
Policy words: innovation, skills, ethics, digital growth.

قومی اے آئی پالیسی 2025 کے مطابق مصنوعی ذہانت پاکستان کی منصوبہ بندی کا حصہ ہے: جدت، مہارت، اخلاقی استعمال اور ڈیجیٹل ترقی۔

5.2 Applications of Neural Networks and Deep Learning

Neural networks and deep learning are widely used in modern life.

- Many intelligent systems use them in the background to recognise information, make predictions and support users.

#	Application	What it does	Example
1	Image recognition	Identifies objects, faces or patterns in images. Used in security cameras, photo search and biometric locks.	Unlocking a smartphone using face recognition; a camera at a Karachi plaza matching a face with a staff list.
2	Speech recognition	Converts spoken words into digital text or commands. Deep learning helps with accents, pronunciation and voice patterns.	A student speaks to Google Assistant or Alexa to set a morning alarm; Urdu voice search on a phone.
3	Natural Language Processing (NLP)	Helps computers understand, process and respond to human language grammatically and in context. Core of chatbots, translators and AI writers.	Using Google Translate to turn a difficult English paragraph into Urdu; a bank chatbot answering in Urdu.
4	Healthcare systems	Analyse complex medical images (X-rays, CT scans, MRIs) to detect diseases early and accurately.	A hospital system highlighting abnormal patterns in a lung X-ray that might indicate pneumonia or tumours — useful at a DHQ hospital that has few radiologists.
5	Recommendation systems	Analyse past behaviour and preferences to suggest content, products or services.	A student watches computer-science videos on YouTube; the platform recommends more programming tutorials.
6	Autonomous vehicles	Self-driving cars use neural networks to process real-time camera and radar data: roads, signals, pedestrians, obstacles.	A self-driving car detects a pedestrian crossing and automatically applies the brakes.
7	Fraud detection	Banks compare current activity with previous spending patterns to catch unusual transactions.	An HBL or Meezan app flags a sudden Rs 80,000 payment from a new city at 3 a.m.
8	Assistive technologies	AI supports people with disabilities.	Speech-to-text tools for users who have difficulty typing; screen readers that speak Urdu text aloud.

Remember: Eight applications: I-S-N-H-R-A-F-A. Image, Speech, NLP, Healthcare, Recommendations, Autonomous vehicles, Fraud, Assistive tech. "I See New Hospitals..."

نیورل نیٹ ورکس اور ڈیپ لرننگ کی مشہور ایپلی کیشنز یہ ہیں: تصویر کی پہچان، آواز کی پہچان، قدرتی زبان کی پروسیسنگ (NLP)، صحت کے نظام...

5.3.1 Secure Collaboration (Authentication, MFA, Access Control) ★ Golden

Digital tools allow people to share files, attend online classes, edit documents and work together from different locations.

- Collaboration is useful only when data is protected and communication remains safe.
- Secure collaboration means using digital tools to work together in a safe, controlled and responsible way.
- It depends on several key elements.

Remember: A-A-A-P-S. Authentication, Access control, Accountability, Privacy, Safe transmission. MFA = at least two different factor types (know / have / are). 2FA is...

Exam: Typical items: "Define secure collaboration", "Differentiate authentication and access control", "What is MFA/2FA?", "Explain five elements of secure collaboration with..."

محفوظ تعاون کا مطلب ہے ڈیجیٹل ٹولز سے محفوظ، کنٹرول شدہ اور ذمہ دارانہ انداز میں ساتھ کام کرنا۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Components of Deep Learning:** Mistake: "Deep learning is just 'a neural network'." Fix: Name the six extras: huge data, many hidden layers, automatic features, a...
- **Future of AI, NN and DL in Pakistan:** Mistake: Writing only "AI will make Pakistan modern" with no sector or example.
- **Applications of Neural Networks and Deep Learning:** Mistake: Mixing up speech recognition and NLP.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Secure Collaboration (Authentication, MFA, Access Control)**. Write: Digital tools allow people to share files, attend online classes, edit documents and work together from different locations.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Collaboration is useful only when data is protected and communication remains safe. (2) Secure collaboration means using digital tools to work together in a safe, controlled and responsible way. — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + named threat + one mitigation + a local example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What question does authentication answer, and what question does access control answer?

3 marks. Explain Secure Collaboration (Authentication, MFA, Access Control) with two clear points and one example.

5 marks. Typical items: "Define secure collaboration", "Differentiate authentication and access control", "What is MFA/2FA?", "Explain five elements of secure collaboration with examples." Write the five...

8 marks. Secure Collaboration (Authentication, MFA, Access Control): 5-mark answer plus named threat + one mitigation + a local example.

Answers: 1. Authentication: who are you? Access control: what may you do? 3. Collaboration is useful only when data is protected and communication remains safe.; Secure collaboration means using digital tools to work together in a safe, controlled and responsible way. 5. Use the recipe in the blue box. Model opening: Digital tools allow people to share files, attend online classes, edit documents and work together from different locations. 8. Same 5-mark body + named threat + one mitigation + a local example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Secure Collaboration (Authentication, MFA, Access Control)** using the recipe in this topic. Include named threat + one mitigation + a local example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 5: Application and Impacts of Computing

Application and Impacts of Computing (3/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Data Protection (Encryption, Passwords, Backup, Firewall) · Common Security Threats (Malware, Phishing, DoS) · Identifying Security Threats · Apply Mitigation Techniques

★ **Must lock:** Common Security Threats (Malware, Phishing, DoS)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What question does authentication answer, and what question does access control answer?
2. Why is deep learning called "data hungry"?
3. Name the national policy mentioned for AI in Pakistan.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.3.2 Data Protection (Encryption, Passwords, Backup, Firewall)

Data protection means keeping digital information safe from unauthorised access, misuse, loss, damage or accidental deletion.

3 copies → 2 media types → 1 copy off-site

Plain	S	I	N	D	H
+3	V	L	Q	G	K

Remember: Cipher = lock the message. Password = lock the door. 3-2-1 = spare keys in three places. Firewall = gate. Antivirus = indoor search. Caesar: shift letters;...

ڈیٹا پروٹیکشن کا مطلب ہے معلومات کو غیر مجاز رسائی، غلط استعمال، نقصان یا حادثاتی حذف سے بچانا۔

5.4.1 Common Security Threats (Malware, Phishing, DoS) ★ Golden

A security threat is any action, event or weakness that can harm a computer system or its data.

- Mitigation techniques are protective measures used to prevent threats or reduce their impact.
- This section names the common threats; later sections show how to spot them and how to reduce the damage.

#	Threat	What it is	Example
1	Malware	Harmful software designed to damage a computer, steal data, or gain unauthorised access. Includes viruses, worms, spyware, ransomware and Trojans .	Installing cracked software that secretly corrupts files, or a "free game" USB that encrypts a college lab's coursework (ransomware).
2	Phishing	A social-engineering trick that deceives users into sharing personal information (passwords, bank details, OTPs) using fake emails or websites that look genuine.	An SMS that looks like JazzCash or HBL asking you to "verify" by typing your OTP on a fake page.
3	Unauthorised access	Entering a system, account or file without permission. Often caused by weak passwords, shared passwords, or leaving devices unlocked.	A classmate using an unlocked lab PC to open someone else's Google Classroom.
4	Data theft / identity theft	Data theft is stealing or copying data without permission. Identity theft is using another person's stolen details (name, CNIC, bank details) to pretend to be them online and commit fraud.	A leaked list of CNICs used to open a SIM or a wallet in someone else's name.
5	Denial of Service (DoS)	A website or system is flooded with thousands of fake requests, causing it to slow down or crash, so real users cannot access the service.	Hackers flooding an online exam portal so students cannot log in on BISE result day or during an e-test.
6	Human error	Mistakes by legitimate users: accidentally deleting files, sending confidential data to the wrong email, or falling for a simple scam.	A teacher emailing the whole marksheet to the wrong parent; a student forwarding an OTP "to help the bank."

Phishing

Fake bank email / SMS
steals password or OTP

DoS attack

Flood of fake requests
server overload / crash

Identity theft

Stolen CNIC / details
fraud in your name

Three high-yield threats: phishing (fake messages), DoS (server overload), identity theft (stolen CNIC or bank details).

Remember: Malware = bad program. Phishing = fake message. DoS = flood. Identity theft = stolen 'you'. Human error = honest mistake. Cracked software and unknown USBs are...

Exam: Expect "Define a security threat", "Explain malware / phishing / DoS with examples", and "Differentiate data theft and identity theft." List all six threats if the...

سیکیورٹی خطرہ وہ عمل یا کمزوری ہے جو نظام یا ڈیٹا کو نقصان پہنچاے۔

5.4.2 Identifying Security Threats

Identifying security threats means noticing signs that data or systems may be at risk.

- Early identification helps you act before serious damage occurs.

Sign / indicator	What it likely means
Slow performance, missing files, or random pop-ups.	Malware or background unauthorised activity.
Failed login attempts or strange login locations.	Attempted unauthorised access .
Emails urging quick action, asking for an OTP, or containing bad grammar / strange links.	Classic phishing .
Unexpected deletion, copying or movement of records.	Data theft or insider misuse.
Sudden massive spike in server requests or a very slow website.	An ongoing DoS attack.

Remember: Slow/pop-ups → malware. Odd logins → unauthorised access. Urgent OTP email → phishing. Files moving → theft. Traffic spike → DoS.

خطرے کی جلد پہچان نقصان سے پہلے اقدام ممکن بناتی ہے۔

5.4.3 Apply Mitigation Techniques

Mitigation techniques are actions taken to prevent security threats or reduce their harmful effects once identified.

- Technology helps, but it cannot stop all threats if the user is careless.

#	Technique	How it helps
1	Antivirus and firewalls	Antivirus scans and removes harmful software (for example from USB drives). A firewall monitors network traffic and blocks suspicious access from the internet.
2	Strong passwords and 2FA	Complex passwords slow brute-force guessing. 2FA adds an extra layer: an OTP on your phone as well as the password.
3	Data encryption	Converts data into unreadable code during transmission. Protects passwords and sensitive data if they are intercepted.
4	Regular backups	Copies on cloud or external drives allow quick recovery after a crash, human error or ransomware.
5	User awareness (the human factor)	Training users to avoid unknown links, suspicious attachments and password sharing. The human is often the weakest link — and the strongest defence when trained.

Remember: Five shields: A-F, P-2, E, B, U. Antivirus+Firewall, Passwords+2FA, Encryption, Backups, User awareness. Ransomware is why backups matter: if files are locked,...

تحفظ کی تدابیر خطرات کو روکتی یا ان کا نقصان کم کرتی ہیں: اینٹی وائرس اور فائر وال، مضبوط پاس ورڈ اور دو عنصری تصدیق (2FA)، انکریپشن...

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Data Protection (Encryption, Passwords, Backup, Firewall):** Mistake 1: Shifting the wrong way, or forgetting wrap-around (X, Y, Z + 3 → A, B, C).
- **Common Security Threats (Malware, Phishing, DoS):** Mistake: Calling every cyber problem a “virus”, or mixing phishing with malware.
- **Identifying Security Threats:** Mistake: Ignoring early signs (“the PC is just old”) until the ransomware note appears.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Common Security Threats (Malware, Phishing, DoS)**. Write: A security threat is any action, event or weakness that can harm a computer system or its data.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Mitigation techniques are protective measures used to prevent threats or reduce their impact. (2) This section names the common threats; later sections show how to spot them and how to reduce the damage. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + named threat + one mitigation + a local example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Name five types of malware listed in the source.

3 marks. Explain Common Security Threats (Malware, Phishing, DoS) with two clear points and one example.

5 marks. Expect “Define a security threat”, “Explain malware / phishing / DoS with examples”, and “Differentiate data theft and identity theft.” List all six threats if the question says “common security...”

8 marks. Common Security Threats (Malware, Phishing, DoS): 5-mark answer plus named threat + one mitigation + a local example.

Answers: 1. Viruses, worms, spyware, ransomware, Trojans 3. Mitigation techniques are protective measures used to prevent threats or reduce their impact.; This section names the common threats; later sections show how to spot them and how to reduce the damage. 5. Use the recipe in the blue box. Model opening: A security threat is any action, event or weakness that can harm a computer system or its data. 8. Same 5-mark body + named threat + one mitigation + a local example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Common Security Threats (Malware, Phishing, DoS)** using the recipe in this topic. Include named threat + one mitigation + a local example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 5: Application and Impacts of Computing

Application and Impacts of Computing (4/4) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Equity and Equal Access in Digital Collaboration · Functions of Equity and Equal Access · Collaboration Tools · Career Opportunities

★ **Must lock:** Functions of Equity and Equal Access

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Name five types of malware listed in the source.
2. Encrypt PAK with a Caesar shift of 3.
3. Random pop-ups and missing files most likely indicate what?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.5 Equity and Equal Access in Digital Collaboration

Collaboration tools are vital for online learning and teamwork.

- To use these tools fairly, all users must participate without barriers.
- You must understand the difference between equal access and equity.

Remember: Equal = same tools. Equity = extra support for the same outcome. Same shoes for all vs a ramp for the wheelchair user.

مساوی رسائی (Equal Access) سب کو ایک جیسے اوزار دیتی ہے، جیسے ایک ہی زوم لاگ ان۔

5.5.1 Functions of Equity and Equal Access ★ Golden

Equity and equal access are not slogans. They do work in a digital classroom.

- They do work in a digital classroom.
- The source lists four functions.

Function	What it does	Pakistani example
1. Providing need-based support (equity)	Help tailored to individuals.	Audio descriptions for visually impaired students; a screen reader so a blind student in Karachi can hear a digital textbook.
2. Removing barriers	Help students in remote areas attend online classes.	Mobile-friendly, low-data apps so a student in Tharparkar or the katcha areas of Sindh can join without a fibre connection.
3. Enabling active participation	Students who miss live class can still take part.	Recorded lectures so load-shedding or an internet outage in Hyderabad does not make a student fall behind.
4. Supporting different learning needs	Offer more than one format.	Videos, text notes and audio of the same Chapter 5 topic so each student learns in the way that suits them best.

Remember: Four functions: Support, Remove, Participate, Formats. "Some Rural Pupils Fail" without them — Support (need-based), Remove barriers, Participate via...

Exam: Golden question: "Explain the functions of equity and equal access in digital collaboration" (5–8 marks). Write the four headings in order, one example each, and add the...

انصاف اور مساوی رسائی کے چار کام ہیں: ضرورت کے مطابق مدد (جیسے نابینا طالب علم کے لیے آڈیو وضاحت)، رکاوٹیں ہٹانا (دور دراز علاقوں...

5.5.2 Collaboration Tools

Digital collaboration tools are online platforms that support communication, file sharing, learning and teamwork across different locations.

Tool	Primary function and educational use
Google Docs	Write, edit, comment and share documents in real time. Excellent for group assignments.
Zoom	Online meetings, virtual classes, screen sharing and video-based communication.
Microsoft Teams	A unified workspace for online meetings, file sharing, class groups and structured teamwork.
Google Classroom / LMS	Learning Management Systems help teachers manage lectures, distribute assignments, conduct quizzes and grade student activities.
WhatsApp	Quick class announcements, urgent reminders and instant group communication. Must be used responsibly.
Email	Formal communication, official notices, submitting large attachments, and keeping a professional written record.

Remember: Docs = write together. Zoom/Teams = meet. Classroom = official class hub. WhatsApp = fast but informal. Email = formal record.

ڈیجیٹل تعاون کے اوزار مختلف مقامات سے بات چیت، فائل شیئرنگ اور ٹیم ورک چلاتے ہیں: گوگل ڈاکس مشترکہ تحریر کے لیے، زوم اور مائیکروسا...

Career Opportunities

This unit covers neural networks, deep learning, secure collaboration, data protection and digital equity.

- Mastery of these ideas opens high-demand careers in Artificial Intelligence and Cybersecurity — including in Pakistan's banks, software...

Career	What the person does
Machine Learning Engineer	Builds and trains machine-learning and neural-network models used in face recognition, NLP and recommendation systems.
Cybersecurity Analyst	Monitors systems for threats such as malware and phishing, and applies mitigation (firewalls, 2FA) to protect organisational data.
AI Researcher	Studies and develops new techniques in artificial intelligence and deep learning, often in university labs or high-tech R&D centres.
Data Privacy Officer	Ensures the organisation's data handling complies with legal privacy principles, protecting sensitive user information and secure collaboration.
Ethical Hacker	Legally tests systems and networks for vulnerabilities (penetration testing) before malicious attackers can exploit them via DoS or malware.

Remember: AI careers lean on Python, maths and ethics. Cyber careers lean on threats, 2FA, firewalls and careful testing. Both need clear communication.

اس باب سے جڑے پیشے ہیں: مشین لرننگ انجینئر، سائبر سیکیورٹی اینالسٹ، اے آئی محقق، ڈیٹا پرائیویسی آفیسر اور اخلاقی ہیکر۔

Application and Impacts of Computing

17 single-page lessons · 5 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- **ML** is a model (a trained brain) that learns from data in three steps: input, learning, prediction on new unseen data — without a hand-written rule for every case.
- **AI** $\supset$ **ML** $\supset$ **DL**: deep learning sits inside machine learning, which sits inside artificial intelligence.
- A **neural network** is a brain-inspired mathematical model of connected neurons in an input layer, hidden layer(s) and output layer (face unlock: camera $\rightarrow$ features $\rightarrow$ unlock).
- **Deep learning** trains neural networks with many hidden layers; early layers learn simple features, deeper layers learn complex patterns. It needs huge data and computing power.
- NN components: input layer, neurons, hidden layers, weights, bias, activation function, output layer, loss function. A neuron computes $s = \sum(x \times w) + b$, then an activation gate.
- DL components: large data, many hidden layers, automatic feature learning, learning algorithm (backpropagation), GPUs, training epochs. Pakistan's National AI Policy 2025 covers education, health, agriculture, banking and local languages.
- Applications: image and speech recognition, NLP, healthcare imaging, recommendations, autonomous vehicles, fraud detection, assistive tech.
- **Secure collaboration**: authentication (who), MFA/2FA (two or more factors), access control (what you may do), accountability, privacy, safe transmission.
- **Data protection**: encryption (plaintext $\rightarrow$ ciphertext; symmetric vs asymmetric; Caesar shift), strong passwords, 3-2-1 backup, firewall and antivirus.
- Threats: malware, phishing, unauthorised access, data/identity theft, DoS, human error. Spot them by pop-ups, odd logins, urgent OTP emails, missing files, traffic spikes.
- Mitigation: antivirus + firewall, strong passwords + 2FA, encryption, regular backups, user awareness.
- **Equal access** = same tools for all; **equity** = extra support for the same outcome. Functions: need-based support, removing barriers, recorded participation, multiple formats. Tools: Docs, Zoom, Teams, Classroom/LMS, WhatsApp, email.

Key terms

Term	Meaning	اردو
Artificial intelligence (AI)	The broad field in which machines perform tasks that normally need human thinking.	مصنوعی ذہانت
Machine learning (ML)	A model that learns patterns from data and then predicts on new data.	مشین لرننگ
Neural network (NN)	A brain-inspired mathematical model of connected neurons in layers.	نیورل نیٹ ورک
Deep learning (DL)	An ML method that trains neural networks with many hidden layers.	ڈیپ لرننگ
Weight	A number showing the strength or importance of a connection between neurons.	وزن (وزن تعلق)
Bias	An extra constant added to a neuron's sum to improve accuracy.	بائیس
Activation function	A gate that decides whether a signal is important enough to pass on.	ایکٹیویشن فنکشن
Loss function	A measure of how wrong the model's answer is compared with reality.	لاس فنکشن
Epoch	One full training pass through the dataset.	ایپوک (تربیتی چکر)
GPU	Graphics Processing Unit — specialised hardware used to train deep networks.	جی پی یو
NLP	Natural Language Processing — computers understanding and producing human language.	قدرتی زبان کی پروسیسنگ
Authentication	Confirming a user's identity before access (password, PIN, OTP, biometrics).	تصدیق شناخت

Application and Impacts of Computing

75 marks • 1 hour 15 minutes • no notes • no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 17 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define • Explain • Example • Diagram • Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. A machine-learning model works in which order?
 - a. Prediction, then data input, then learning
 - b. Data input, learning, then prediction on new data
 - c. Only prediction, with no data
 - d. Writing a separate rule for every case
2. A neural network is best described as:
 - a. a living human brain placed in a computer
 - b. a backup disk
 - c. a brain-inspired mathematical model of connected neurons
 - d. a type of firewall
3. The word "deep" in deep learning refers to:
 - a. several hidden layers through which data passes
 - b. very loud speakers
 - c. using only one neuron
 - d. storing data underground
4. In the relationship $AI \supset ML \supset DL$, the innermost set is:
 - a. AI
 - b. ML
 - c. equal access
 - d. DL
5. Weights in a neural network show the:
 - a. colour of the screen
 - b. importance or strength of connections between neurons
 - c. size of the hard disk
 - d. student's roll number
6. For $x_1 = 1$, $x_2 = 0$, $w_1 = 0.5$, $w_2 = 0.5$, $b = 0$ and threshold 0.4, the neuron output y is:
 - a. 1
 - b. 0
 - c. 0.4
 - d. 2
7. Which of the following is a component of deep learning (not of a tiny shallow network)?
 - a. Exactly one hidden layer and ten rows of data
 - b. Manual listing of every feature by a human, always
 - c. Many hidden layers, huge datasets and GPUs
 - d. A Caesar cipher
8. Unlocking a phone by matching facial features is mainly an example of:
 - a. a DoS attack
 - b. 3-2-1 backup
 - c. equal access
 - d. image recognition
9. Authentication means:
 - a. choosing who may edit a file
 - b. confirming a user's identity before allowing access
 - c. shifting letters in a cipher
 - d. flooding a server with requests
10. Password plus an OTP sent to a phone is an example of:
 - a. MFA / 2FA
 - b. a worm
 - c. a shallow neural network
 - d. equity captions
11. With a Caesar cipher of shift 3, the plaintext CAT becomes:
 - a. DBU
 - b. CAW
 - c. FDW
 - d. ZXQ
12. The 3-2-1 backup rule requires:
 - a. three passwords only
 - b. one copy on the same laptop twice
 - c. no off-site copy
 - d. three copies, two media types, one copy off-site
13. Phishing is:
 - a. a social-engineering trick using fake emails or sites to steal passwords or OTPs
 - b. a type of GPU
 - c. an activation function
 - d. a collaboration tool like Zoom
14. A Denial of Service (DoS) attack:
 - a. always steals a CNIC
 - b. floods a system with fake requests so it slows or crashes
 - c. is the same as a strong password
 - d. is a hidden layer
15. Turning on live captions in Zoom for a student with hearing difficulties is an example of:
 - a. malware
 - b. a DoS attack
 - c. equal access only, with no extra support
 - d. equity

Section B — Short questions (10 × 3 = 30)

1. Define a machine-learning model and state the three steps of how it works.
2. What is a neural network? Name its three kinds of layer and link them to face unlock.
3. Differentiate a neural network (the model) from deep learning (the method).
4. State the relationship $AI \supset ML \supset DL$ in words.
5. List eight components of a neural network. What do weights and bias do?
6. Name six components of deep learning.
7. Differentiate authentication, MFA and access control with one example each.
8. Encrypt SINDH using a Caesar cipher with shift 3. State whether this cipher is symmetric or asymmetric.
9. Define malware, phishing and DoS. Give one Pakistani-style example of each.
10. Differentiate equal access and equity. List four functions of equity and equal access.

Section C — Long questions (attempt any 3 × 10 = 30)

1. Explain machine learning, neural networks and deep learning. Draw and label the set diagram $AI \supset ML \supset DL$. Include the face-unlock walk-through and the photo-gallery example.
2. A neuron has inputs $x_1 = 0.8$, $x_2 = 0.5$, weights $w_1 = 0.4$, $w_2 = 0.6$, bias $b = 0.1$ and threshold 0.5. (a) Compute the weighted sum s and the output y . (b) Repeat for $x_1 = 0.2$, $x_2 = 0.3$. (c) Name all eight NN components and sketch a 3–4–2 network. (d) List the six DL components and map them onto a cotton-leaf disease detector in Sindh.
3. Describe eight applications of neural networks and deep learning with examples. Then discuss the future of AI in Pakistan with reference to the National AI Policy 2025 and five sectors.
4. What is secure collaboration? Explain authentication, MFA/2FA, access control, accountability, data privacy and safe transmission, using a Google Classroom / banking-app scenario from Pakistan.
5. Define data protection. Explain encryption (symmetric vs asymmetric) with a full Caesar-cipher working of SINDH (shift 3). Describe strong passwords, the 3-2-1 backup rule, firewall and antivirus.
6. Define a security threat. Explain malware, phishing, unauthorised access, data/identity theft, DoS and human error. Give a table of identifying signs and a matching set of mitigation techniques. End with equity versus equal access and a fair choice of collaboration tools.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **5.1 Machine Learning, Neural Networks and Deep Learning.** Answers: 1. AI ($AI \supset ML \supset DL$). 2. Yes — DL is inside ML, and ML is inside AI. 3. Any of: face unlock, speech recognition, photo search, medical diagnosis, language translation.
2. **5.1.1 Machine Learning (ML).** Answers: 1. Data input, learning, prediction. 2. The trained brain of a computer program. 3. New, unseen data.
3. **5.1.2 Neural Networks (NN).** Answers: 1. Neurons or nodes. 2. Hidden layers. 3. No — it is inspired by the brain but works as a mathematical computer system.
4. **5.1.3 Deep Learning (DL).** Answers: 1. Because data passes through several hidden layers. 2. Early: simple features (edges, shapes, colours). Deeper: complex patterns (a whole face, a car model). 3. No — that is a shallow network; DL always uses many hidden layers.
5. **5.1.4 Components of Neural Networks.** Answers: 1. The importance or strength of connections between neurons. 2. $s = 1 \times 0.5 + 0 \times 0.5 + 0 = 0.5$; $0.5 \geq 0.4$ so $y = 1$. 3. The error — how much the model's answer is wrong compared with reality.
6. **5.1.5 Components of Deep Learning.** Answers: 1. It needs massive datasets (thousands or millions of records) for accuracy. 2. One training loop — one full pass through the training data. 3. GPUs (Graphics Processing Units); backpropagation.
7. **Future of AI, NN and DL in Pakistan.** Answers: 1. National AI Policy 2025. 2. Those areas often lack specialist doctors; AI can help with disease detection and medical image analysis. 3. Any three of: programming (Python), mathematics, data analysis, problem-solving, ethical use of technology.
8. **5.2 Applications of Neural Networks and Deep Learning.** Answers: 1. Speech recognition. 2. YouTube recommending more programming tutorials after a student watches computer-science videos. 3. They process real-time camera and radar data to understand roads, traffic signals, pedestrians and obstacles (for example braking for a pedestrian).
9. **5.3.1 Secure Collaboration (Authentication, MFA, Access Control).** Answers: 1. Authentication: who are you? Access control: what may you do? 2. Two-factor / multi-factor authentication (2FA/MFA). 3. Teacher shares the document as view-only with students but gives group leaders edit permission.
10. **5.3.2 Data Protection (Encryption, Passwords, Backup, Firewall).** Answers: 1. SDN ($P \rightarrow S$, $A \rightarrow D$, $K \rightarrow N$). 2. 3 copies, 2 different media, 1 off-site copy. 3. Public key encrypts; private key decrypts.
11. **5.4.1 Common Security Threats (Malware, Phishing, DoS).** Answers: 1. Viruses, worms, spyware, ransomware, Trojans. 2. Floods it with thousands of fake requests so it slows down or crashes and real users cannot access it. 3. Data theft is stealing/copying data; identity theft is using stolen personal details (name, CNIC, bank) to pretend to be that person and commit fraud.
12. **5.4.2 Identifying Security Threats.** Answers: 1. Malware (or background unauthorised activity). 2. Phishing. 3. Unsafe downloads, cracked software, unverified websites, infected USB drives.
13. **5.4.3 Apply Mitigation Techniques.** Answers: 1. It also requires an OTP sent to your phone (a second factor). 2. You can restore a clean copy instead of losing the files (or paying). 3. Unknown links, suspicious attachments, and password sharing.
14. **5.5 Equity and Equal Access in Digital Collaboration.** Answers: 1. Giving everyone the exact same opportunity, tools and resources. 2. Giving additional, specific support so users who need it can reach the same outcome. 3. Because they are extra support for a student with hearing difficulties, not the same identical tool given to all.
15. **5.5.1 Functions of Equity and Equal Access.** Answers: 1. Need-based support; removing barriers; enabling active participation; supporting different learning needs. 2. Students who face power or internet outages can watch later and not fall behind. 3. It creates a hardware barrier for lower-income students; web-based or light apps give better access.
16. **5.5.2 Collaboration Tools.** Answers: 1. Google Docs. 2. Manage lectures, distribute assignments, conduct quizzes, grade activities. 3. Formal communication, official notices, large attachments, and a professional written record.
17. **Career Opportunities.** Answers: 1. Ethical hacker. 2. Data Privacy Officer.

Answer key

Multiple choice

1. b
2. c
3. a
4. d
5. b
6. a
7. c
8. d
9. b
10. a
11. c
12. d
13. a
14. b
15. d

Short questions — model answers

1. An ML model is the system that learns from data and gives an output — the trained brain of a program. Steps: (1) data input — massive data is given; (2) learning — it studies data and finds patterns/rules automatically; (3) prediction — after training it decides on new, unseen data.
2. A neural network is a computer model that learns patterns from data; it is inspired by the human brain but works as a mathematical system of connected neurons/nodes. Input layer receives the camera image; hidden layers study features such as eye distance and nose shape; output layer unlocks the phone if they match stored data.
3. A neural network is the model: layers, nodes and connections; it can be shallow (one or two hidden layers). Deep learning is the method of training networks that have many hidden layers, needing huge data and processing power for complex patterns.
4. Artificial intelligence is the largest set; machine learning is a part of AI; deep learning is a part of ML. All DL is ML and all ML is AI, but not all AI is ML and not all ML is DL.
5. Input layer; neurons/nodes; hidden layer(s); weights; bias; activation function; output layer; loss function. Weights show connection strength/importance. Bias is an extra constant that helps adjust the result and improve accuracy.
6. Large input data; many hidden layers; automatic feature learning; learning algorithm (e.g. backpropagation); high computing power (GPUs); training process (epochs).
7. Authentication confirms identity before access (password, PIN, OTP, biometrics — e.g. bank OTP). MFA/2FA requires two or more factor types, typically password + OTP. Access control decides what that user may do (view/edit/comment/download/share — e.g. Google Doc view-only for the class, edit for group leaders).
8. $S \rightarrow V, I \rightarrow L, N \rightarrow Q, D \rightarrow G, H \rightarrow K$ so ciphertext VLQ GK. Caesar uses the same shift key to encrypt and decrypt, so it is symmetric.
9. Malware: harmful software (viruses, worms, spyware, ransomware, Trojans) — e.g. cracked software that corrupts files. Phishing: fake genuine-looking email/SMS/site stealing passwords or OTPs — e.g. fake JazzCash OTP page. DoS: flood of fake requests that slows or crashes a service — e.g. online exam portal students cannot enter.
10. Equal access: same tools/opportunity for everyone (same Zoom login). Equity: extra specific support so people with barriers reach the same outcome (captions for hearing difficulties). Functions: need-based support; removing barriers (low-data apps for remote areas); enabling participation (recorded lectures during load-shedding); supporting different learning needs (video, text, audio).

Long questions — model answers

1. **ML**: trained-brain model; data → learn patterns → predict on unseen data; used in face unlock, speech, photo search, diagnosis, translation. **NN**: brain-inspired maths model; neurons pass information through Input, Hidden, Output; face unlock: camera (input), eye distance/nose shape (hidden), unlock (output). **DL**: ML method with multi-layer NNs; “deep” = several hidden layers; early layers: edges/shapes/colours; deeper: whole face or car model; gallery search example. **Diagram**: three nested sets labelled AI, ML, DL with AI outermost. Sentence: $DL \subset ML \subset AI$.
2. **(a)** $s = 0.8 \times 0.4 + 0.5 \times 0.6 + 0.1 = 0.32 + 0.30 + 0.1 = 0.72$; $0.72 \geq 0.5$ so $y = 1$. **(b)** $s = 0.2 \times 0.4 + 0.3 \times 0.6 + 0.1 = 0.08 + 0.18 + 0.1 = 0.36$; $0.36 < 0.5$ so $y = 0$. **(c)** Eight components as in the table; sketch three input circles, four hidden, two output, labelled layers. **(d)** Huge labelled leaf photos; many hidden layers; features learned automatically; backpropagation; GPU training; many epochs until accuracy rises — cotton pest detector for a Sindh farm.
3. Cover all eight: image recognition (face lock, cameras); speech (assistant alarm, Urdu voice); NLP (Translate, chatbots); healthcare (X-ray/CT/MRI, pneumonia); recommendations (YouTube CS videos); autonomous vehicles (brake for pedestrian); fraud (unusual bank transaction); assistive (speech-to-text). Then Policy 2025: innovation, skills, ethics, digital growth. Sectors: education (tutoring, assessments); healthcare (rural diagnosis); agriculture (crops, irrigation, yield); business/banking (fraud, chatbots); local languages (Urdu, Sindhi). Students need Python, maths, data analysis, problem-solving, ethics.
4. Secure collaboration = working together with digital tools in a safe, controlled, responsible way. Authentication: prove identity (password/PIN/OTP/biometrics); bank OTP example. MFA: two or more of know/have/are; 2FA = password + phone OTP. Access control: view/edit/comment/download/share; teacher view-only vs group-leader edit. Accountability: LMS tracks who uploaded/submitted. Privacy: protect names, marks, passwords; share only with the right people; confidentiality; legal/ethical compliance. Safe transmission: encrypted official LMS, not an open public forum. Classroom scenario: school email + MFA, role permissions, version history, no CNICs on public WhatsApp.
5. Data protection = keeping digital information safe from unauthorised access, misuse, loss, damage or accidental deletion. Encryption: plaintext → ciphertext; symmetric = same key both ways; asymmetric = public encrypt, private decrypt. Caesar shift 3: SINDH → VLQ GK; decrypt by -3; wrap-around at Z. Strong password: upper, lower, number, symbol (e.g. Zk@2026#Pass) against brute force. 3-2-1: three copies, two media, one off-site (laptop + USB + Google Drive). Firewall: barrier monitoring/blocking suspicious network traffic. Antivirus: detects/removes malware on the local machine.
6. A security threat is any action, event or weakness that can harm a system or its data. Malware (cracked software); phishing (fake bank mail); unauthorised access (unlocked PC, weak/shared passwords); data theft vs identity theft (stolen CNIC used for fraud); DoS (exam portal flood); human error (wrong email, deleting files, falling for a scam). Signs table: pop-ups/missing files → malware; odd logins → unauthorised access; urgent OTP/bad grammar → phishing; records moved → theft; traffic spike → DoS. Mitigation: antivirus+firewall; strong passwords+2FA; encryption in transit; regular backups; user awareness (no unknown links, attachments, or shared passwords). Equal access vs equity; do not require a high-end phone-only app. Tools: Docs, Zoom, Teams, Classroom/LMS, WhatsApp (responsible), email (formal record).

Self-assessment: I can...

- | | |
|--|--|
| ☐ define ML and explain data input → learning → prediction. | ☐ draw $AI \supset ML \supset DL$ and give a system that belongs in each layer. |
| ☐ describe a neural network and the face-unlock I-H-O path. | ☐ compute a neuron's weighted sum and threshold output from numbers. |
| ☐ list eight NN components and six DL components. | ☐ give eight applications of NN/DL and Pakistan's AI policy sectors. |
| ☐ explain authentication, MFA/2FA and access control with examples. | ☐ encrypt a short word with a Caesar cipher and apply the 3-2-1 backup rule. |
| ☐ identify malware, phishing and DoS from signs and name mitigations. | ☐ distinguish equal access from equity and state four functions of equity. |
| ☐ choose a fair collaboration tool (Docs, Zoom, Teams, LMS, WhatsApp, email). | |

Chapter 6: Entrepreneurship in the Digital Age

Entrepreneurship in the Digital Age (1/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Entrepreneur and Entrepreneurship · Entrepreneurship in the Digital Age · Local Examples of Digital Entrepreneurship (Table 6.1) · From Problem to Business Idea · Prototype

★ **Must lock:** Entrepreneurship in the Digital Age, Prototype

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. List the four functions of equity and equal access.
2. Define equal access in one sentence.
3. Which tool is excellent for real-time group writing?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.1 Entrepreneur and Entrepreneurship

An entrepreneur is a person who identifies a problem, thinks of a solution, and tries to change that solution into a product or service.

1. Problem → 2. Solution → 3. Product

- They observe people and listen to their needs. They notice what annoys people again and again.
- They take calculated risks. A calculated risk is a risk you take after thinking about what you could lose and how to keep that loss small....
- They improve their idea step by step. They do not expect the first attempt to be perfect.

Remember: Simple meaning. An entrepreneur asks: "What problem can I solve?" Entrepreneurship is the process of testing and improving that solution until it becomes...

کاروباری شخص (Entrepreneur) وہ ہوتا ہے جو کسی مسئلے کو پہچانتا ہے، اس کا حل سوچتا ہے اور اس حل کو کسی پراڈکٹ یا سروس میں بدلنے کی کوشش کرتا ہے۔

6.2 Entrepreneurship in the Digital Age ★ Golden

Entrepreneurship in the digital age means using digital tools to start, test, improve, and grow a business idea.

- These tools may include mobile phones, social media, websites, online forms, digital payments, maps, videos, and simple apps.
- In Pakistan you already know many of them: WhatsApp, Facebook, Instagram, TikTok, YouTube, Google Forms, Google Maps, and digital payments...

Remember: Remember "S-T-I-G": digital tools help you Start, Test, Improve and Grow. Think: "Start The Idea Growing."

Exam: Common questions: "Define entrepreneurship in the digital age", "How have digital tools changed entrepreneurship?" and "Give examples of digital entrepreneurship without..."

ڈیجیٹل دور میں انٹرپرائیورسپ کا مطلب ہے موبائل فون، سوشل میڈیا، ویب سائٹ، آن لائن فارم اور ڈیجیٹل ادائیگی جیسے ٹولز کے ذریعے کاروبار...

Local Examples of Digital Entrepreneurship (Table 6.1)

Digital entrepreneurship can begin from ordinary problems.

- The examples below are close to the context of Sindh and Pakistan, where many students, parents, and small service providers already use...

Problem	Digital Idea	Possible First Users	Urdu Context
Parents miss college notices.	WhatsApp notice and reminder service.	Parents of first-year students.	والدین تک کالج کے نوٹس پہنچانے کے لیے واٹس ایپ سروس۔
Small embroidery shop has few customers.	Simple catalogue with order form on Facebook or WhatsApp.	Customers in the same city.	کڑھائی کی دکان کے لیے واٹس ایپ کیٹلاگ۔
Students forget test dates.	Google Calendar guide or simple reminder app.	Grade XII students.	ٹیسٹ کی تاریخیں یاد دلانے والی ایپ یا کیلنڈر۔
Canteen has long queues during break.	Pre-order form for snacks.	Students and teachers.	کینٹین کے لیے پری آرڈر فارم۔

Remember: Think "Problem first, tool second." Start with the pain, not with the technology.

جدول 6.1 بتاتی ہے کہ ڈیجیٹل کاروبار عام مسائل سے شروع ہو سکتا ہے، جیسے والدین کا کالج نوٹس نہ دیکھ پانا، کڑھائی کی دکان پر کم گاہک...

6.3 From Problem to Business Idea

A good business idea usually starts from observing daily life.

Problem → Idea → Prototype → Feedback → MVP

- What problem do people face?
- Who faces this problem?
- How often does it happen?
- What do people currently do to solve it?

Step	What Students Do	Example
Observe	Notice repeated problems around home, college, or market.	Students forget practical file dates.
Ask Users	Talk to people who face the problem.	Ask five classmates how they remember deadlines.
Select One Problem	Choose one clear problem only.	Practical file reminder.
Suggest Solution	Think of a simple digital or paper-based solution.	Reminder form or app screen.
Test Early	Show the idea to users before final development.	Ask classmates if they will use it.


Remember: Mnemonic for Table 6.2: "Only Ask Simple Solutions Today": Observe, Ask users, Select one problem, Suggest solution, Test early.

اچھا کاروباری خیال روزمرہ زندگی کے مشاہدے سے شروع ہوتا ہے۔

6.4 Prototype ★ Golden

A prototype is an early model of a product, service, website, or app.

- It shows how the idea may look or work.
- It is NOT the final product.
- It is made to test the idea and collect feedback.

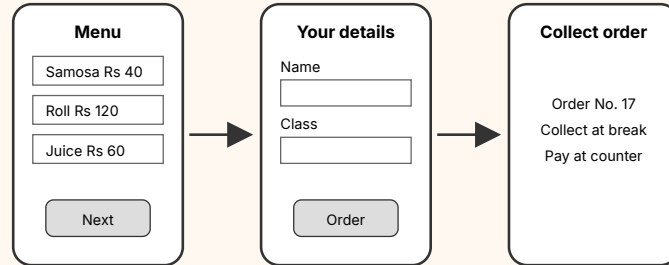

A paper prototype of a canteen pre-order system: three hand-drawn screens joined by arrows (select item → enter name → collect order).

Remember: Prototype = "practice model". It is like a rough draft of an essay: you show it, get corrections, and rewrite it before the final copy.

Exam: Expect "Define prototype and write its benefits" (3–5 marks). Write: (1) definition with the words early model, not the final product, test the idea and collect...

پروٹوٹائپ (Prototype) کسی پراڈکٹ، سروس، ویب سائٹ یا ایپ کا ابتدائی نمونہ ہوتا ہے جو دکھاتا ہے کہ خیال کیسا نظر آئے گا یا کیسے کام کرے گا۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Entrepreneur and Entrepreneurship:** Mistake: "Only rich people with big offices can be entrepreneurs." Fix: The source clearly says many entrepreneurs begin with a small idea...
- **Entrepreneurship in the Digital Age:** Mistake: "Digital entrepreneurship means building a mobile app." Fix: An app is only one option.
- **Local Examples of Digital Entrepreneurship (Table 6.1):** Important: A digital business idea should not be selected only because it sounds modern.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Entrepreneurship in the Digital Age**. Write: Entrepreneurship in the digital age means using digital tools to start, test, improve, and grow a business idea.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) These tools may include mobile phones, social media, websites, online forms, digital payments, maps, videos, and simple apps. (2) In Pakistan you already know many of them: WhatsApp, Facebook, Instagram, TikTok, YouTube, Google Forms, Google Maps, and digital payments... — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a one-page canvas: problem, user, riskiest assumption, test + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Prototype**. Write: A prototype is an early model of a product, service, website, or app.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) It shows how the idea may look or work. (2) It is NOT the final product. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a one-page canvas: problem, user, riskiest assumption, test + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. List four digital tools that the source mentions.

3 marks. Explain Entrepreneurship in the Digital Age with two clear points and one example.

5 marks. Common questions: "Define entrepreneurship in the digital age", "How have digital tools changed entrepreneurship?" and "Give examples of digital entrepreneurship without coding." Write the definition...

8 marks. Entrepreneurship in the Digital Age: 5-mark answer plus a one-page canvas: problem, user, riskiest assumption, test.

Answers: 1. Any four of: mobile phones, social media, websites, online forms, digital payments, maps, videos, simple apps 3. These tools may include mobile phones, social media, websites, online forms, digital payments, maps, videos, and simple apps.; In Pakistan you already know many of them: WhatsApp, Facebook, Instagram, TikTok, YouTube, Google Forms, Google... 5. Use the recipe in the blue box. Model opening: Entrepreneurship in the digital age means using digital tools to start, test, improve, and grow a business idea. 8. Same 5-mark body + a one-page canvas: problem, user, riskiest assumption, test + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Entrepreneurship in the Digital Age** using the recipe in this topic. Include a one-page canvas: problem, user, riskiest assumption, test. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 6: Entrepreneurship in the Digital Age

Entrepreneurship in the Digital Age (2/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Types of Prototypes · Prototype Development Cycle · Class Activity: Create a Prototype · Minimum Viable Product (MVP) · Difference between Prototype and MVP

★ **Must lock:** Prototype Development Cycle, Minimum Viable Product (MVP)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. List four digital tools that the source mentions.
2. Is a prototype the final product?
3. Is "entrepreneurship" a person or a process?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.5 Types of Prototypes

Prototypes are commonly divided into three types according to their level of detail, called fidelity.

Low-Fi (Paper) → Mid-Fi (PowerPoint) → High-Fi (Figma/HTML)

- Fidelity means how close the prototype is to the final product.
- Low fidelity = far from final; high fidelity = very close to final.

Type	Meaning	Best Use	Example
Low-Fidelity	A quick and rough model of the idea.	Very early testing.	Hand-drawn app screens for homework reminder.
Mid-Fidelity	A clearer model that shows layout and flow.	Testing navigation.	Clickable screens in PowerPoint or Figma.
High-Fidelity	A detailed model close to the final product.	Testing realistic experience.	Working demo of a small order form website.

Remember: Fidelity = "faithfulness" to the final product. Remember Paper → PowerPoint → Polished (low → mid → high).


فِڈِلِیٹی (Fidelity) کا مطلب ہے کہ پروٹوٹائپ حتمی پراڈکٹ سے کتنا ملتا جلتا ہے۔

6.6 Prototype Development Cycle ★ Golden

Prototype development is not a one-time activity.

- A prototype is created, tested, improved, and tested again.
- This repeating process is called iteration.
- The main stages are Design, Build, Test, and Iterate.

Stage	What happens
1. Design	Understand the problem and plan the solution. Decide what the prototype should show (e.g. screen flow, features).
2. Build	Create the first version (physical or digital). The aim is not beauty; the aim is to make the idea visible.
3. Test	Show the prototype to users. Observe what they understand and what they find difficult.
4. Iterate	Improve the prototype based on user feedback. Remove unnecessary parts and add missing features.

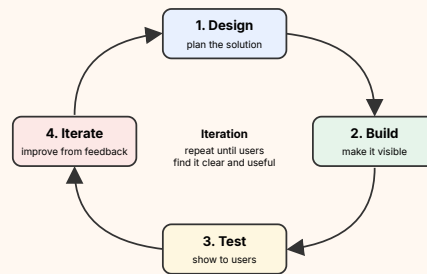

The prototype development cycle: Design → Build → Test → Iterate, then back to Design.

Remember: Mnemonic: "Do Big Things Iteratively" = Design, Build, Test, Iterate. And remember the arrow at the end goes back to Design: it is a cycle, not a line.

Exam: A favourite long question: "Explain the prototype development cycle with a diagram." Draw the four boxes in a circle with arrows, write one or two lines for each stage...

پروٹوٹائپ ایک ہی بار میں نہیں بنتا؛ اسے بنایا، آزمایا، بہتر کیا اور دوبارہ آزمایا جاتا ہے۔

6.7 Class Activity: Create a Prototype

Business idea scenario. Students often forget homework deadlines, test dates, and required class items.

1. Understand → 2. Draw low-fi → 3. Test → 4. Analyse feedback → 5. Improve

- Students often forget homework deadlines, test dates, and required class items.
- A group of students wants to design a simple "Homework Helper" or "ClassBuddy" reminder system.
- The team will not immediately build a complete mobile app.
- They will first understand the problem, draw a low-fidelity prototype, test it with classmates, and improve it.

Finding	Meaning	Design Decision
7 out of 10 forget tasks.	The problem is common.	App should show a daily task list.
Reminders needed before leaving home.	Reminder time is important.	Add morning notification option.
Students want simple apps.	Design must be simple.	Use large buttons and clear labels.

Remember: Feedback → Problem → Improvement. Every comment should be turned into a problem statement and then one clear change, exactly like the three columns of Table...

اس سرگرمی میں طلبہ "کلاس بڈی" (ClassBuddy) نامی یاد دہانی نظام بناتے ہیں۔

6.8 Minimum Viable Product (MVP) ★ Golden

A Minimum Viable Product (MVP) is the simplest working version of a product.

- Minimum: it has only the essential features. No extras.
- Viable: it is usable enough to actually solve the main problem. ("Viable" means able to work successfully.)

Complete canteen app (final product)	Canteen MVP
Login, online payment, delivery tracking, discount offers...	A simple Google Form where students select snacks before break.

Remember: Simple meaning. An MVP answers: "Will people actually use this solution?" It tests real use and behaviour, not only the visual design. Analogy: before opening...

Exam: Typical questions: "What is an MVP? Explain the words Minimum and Viable" and "Give an example of an MVP." Write the full form, the definition (simplest working version,...

ایم وی پی (Minimum Viable Product) کسی پراڈکٹ کا سب سے سادہ مگر کام کرنے والا ورژن ہے جس میں صرف ضروری خصوصیات ہوتی ہیں۔

6.9 Difference between Prototype and MVP

Prototype and MVP are related, but not the same.

- A prototype is mainly used to show and test the design of an idea.
- An MVP is used to test real use and market demand.
- Market demand means whether enough people want the product and will use (or pay for) it.

Point	Prototype	MVP
Main purpose	To show how the idea may look or work.	To test whether users will actually use the solution.
Working status	May not work; can be a sketch or model.	Must work at least in a basic way.
Users	Small group gives feedback on design.	Early real users test the product in daily life.
Cost	Very low cost.	Low cost but may need some basic development.
Example	Paper screens for a canteen order system.	Google Form used for real canteen orders for three days.

Remember: Key takeaway Prototype = "Does it look right and make sense?" MVP = "Will people actually use it and find value in it?" Memory hook: Prototype → Picture of the...

پروٹوٹائپ اور ایم وی پی آپس میں جڑے ہیں مگر ایک جیسے نہیں۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Types of Prototypes:** Mistake: Starting with a high-fidelity prototype or a full app because it "looks professional".
- **Prototype Development Cycle:** Mistake 1: Drawing the stages as a straight line that ends at "Iterate".
- **Class Activity: Create a Prototype:** Mistake: Feeling that negative feedback means the prototype "failed", or changing the design for every single comment.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Prototype Development Cycle**. Write: Prototype development is not a one-time activity.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) A prototype is created, tested, improved, and tested again. (2) This repeating process is called iteration. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a one-page canvas: problem, user, riskiest assumption, test + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Minimum Viable Product (MVP)**. Write: A Minimum Viable Product (MVP) is the simplest working version of a product.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Minimum: it has only the essential features. No extras. (2) Viable: it is usable enough to actually solve the main problem. ("Viable" means able to work successfully.) — + example.

5 marks: 3-mark structure + table: Complete canteen app (final product) / Canteen MVP + the worked example from this topic.

8–10 marks: 5-mark structure + a one-page canvas: problem, user, riskiest assumption, test + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What is iteration?

3 marks. Explain Prototype Development Cycle with two clear points and one example.

5 marks. A favourite long question: "Explain the prototype development cycle with a diagram." Draw the four boxes in a circle with arrows, write one or two lines for each stage using the source's words,...

8 marks. Prototype Development Cycle: 5-mark answer plus a one-page canvas: problem, user, riskiest assumption, test.

Answers: 1. The repeating process of creating, testing, improving and testing a prototype again 3. A prototype is created, tested, improved, and tested again.; This repeating process is called iteration. 5. Use the recipe in the blue box. Model opening: Prototype development is not a one-time activity. 8. Same 5-mark body + a one-page canvas: problem, user, riskiest assumption, test + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Prototype Development Cycle** using the recipe in this topic. Include a one-page canvas: problem, user, riskiest assumption, test. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 6: Entrepreneurship in the Digital Age

Entrepreneurship in the Digital Age (3/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Identifying the Riskiest Assumption · Developing an MVP · Case Study: MVP for a Canteen Pre-Order System · Testing an MVP

★ **Must lock:** none — still copy every table

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What is iteration?
2. Write the full form of MVP.
3. What does "fidelity" mean?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.10 Identifying the Riskiest Assumption

Every business idea is based on assumptions.

- An assumption is something we believe to be true, but have not tested yet.
- The riskiest assumption is the belief that can make the entire business fail if it turns out to be wrong.
- Entrepreneurs should identify and test the riskiest assumption early, because it saves time and money.

Business Idea	Possible Risky Assumption	How to Test It (MVP)
Online tuition finder	Students will pay for online tutoring.	Ask 20 students and offer a trial class to see if they sign up.
Canteen pre-order form	Students will order snacks before break.	Test a Google Form for one week in real time.
Ajrak online catalogue	Customers will place orders through WhatsApp.	Share catalogue with 30 customers and record actual orders.
College van update system	Parents and students will check van updates daily.	Create a trial WhatsApp broadcast group for one route.

Remember: Ask: "What would kill this idea?" The answer is usually the riskiest assumption. Test it first, cheaply, with real behaviour.

ہر کاروباری خیال کچھ مفروضوں (Assumptions) پر قائم ہوتا ہے، یعنی وہ باتیں جنہیں ہم سچ سمجھتے ہیں مگر ابھی آزمایا نہیں۔

6.11 Developing an MVP

To develop an MVP, the team must select only the essential features.

- Extra features should be avoided at the beginning.
- A common mistake is trying to build everything at once.
- This makes the product difficult, costly, and slow.

MVP Element	Question to Ask	Example Answer
Problem	What problem are we solving?	Students wait too long at canteen.
Target users	Who will use it first?	Grade XII students in one college.
Main feature	What is the ONE feature that solves it?	Pre-order snacks before break.
Basic design	What steps are needed?	Menu, name, class, order time.
Cost	What free/low-cost tools to use?	Google Form or printed slips.
Marketing	How will early users hear about it?	WhatsApp message to class group.
Feedback	How will users respond?	Short feedback form after 3 days.

Remember: Mnemonic for the 8 elements: "People Try My Bakery; Cheap Muffins Find Improvement": Problem, Target users, Main feature, Basic design, Cost, Marketing,...

ایم وی پی بناتے وقت صرف ضروری خصوصیات چنیں؛ سب کچھ ایک ساتھ بنانے سے کام مشکل، مہنگا اور سست ہو جاتا ہے۔

6.12 Case Study: MVP for a Canteen Pre-Order System

Problem: In a college, students wait in long lines at the canteen.

Paper prototype → Feedback: short menu, pay at collection → Google Form MVP → 3-day test → Improve

- Sometimes snacks finish before students reach the counter.
- A group wants to test a canteen pre-order idea.
- Goal: Their aim is NOT to create a complete app immediately.

MVP Element	Decision
Features	Menu list, student name, class, item, and quantity.
Cost & Tools	Free Google Form or printed order slips.
Marketing	Class announcement and WhatsApp group message.
Testing period	Three days.
Feedback method	Ask students if they saved time and would use it again.
Improvement	Keep only 5 items; close orders 20 minutes before break.

Remember: Remember the case study as "5 items, 3 days, 20 minutes": five menu items, a three-day test, orders closing twenty minutes before break.

ایک کالج میں طلبہ کینٹین کی لمبی قطاروں میں انتظار کرتے تھے۔

6.13 Testing an MVP

MVP testing means giving the basic working version to real users and studying their response.

- Numbers (quantitative data) show how many users tried the MVP and how many may use it again.
- Comments (qualitative data) explain what users liked, disliked, or found confusing.
- How many users will test it.
- How long the test will continue.

Type of Feedback	Question	Example Result
Number-based	How many users tried it?	40 students used the form.
Number-based	How many would use it again?	30 out of 40 said yes.
Comment-based	What was confusing?	Did not know order closing time.
Observation	Where did users face difficulty?	Forgot to enter class name.

Remember: Data skill link. Feedback is useful only when it is studied: Count the responses → Look for repeated problems → Decide which improvement comes first. Remember...

ایم وی پی کی جانچ کا مطلب ہے کہ بنیادی کام کرنے والا ورژن اصل صارفین کو دیا جائے اور ان کے ردعمل کا مطالعہ کیا جائے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Identifying the Riskiest Assumption:** Mistake: Testing easy, safe assumptions (colours, names) first and leaving the dangerous one for later.
- **Developing an MVP:** Mistake: Writing a list of ten "main features".
- **Case Study: MVP for a Canteen Pre-Order System:** Mistake: Thinking only the students' opinion matters.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

ACADEMY DRILL

Timed 10 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Define assumption.

3 marks. Explain Identifying the Riskiest Assumption with two clear points and one example.

5 marks. Write a 5-mark answer on Identifying the Riskiest Assumption: definition, two points, a labelled diagram or table, and one example.

Answers: 1. Something we believe to be true but have not tested yet 3. An assumption is something we believe to be true, but have not tested yet.; The riskiest assumption is the belief that can make the entire business fail if it turns out to be wrong. 5. Use the recipe in the blue box. Model opening: Every business idea is based on assumptions.

BATCH HOMEWORK

Write a 5-mark answer on **Identifying the Riskiest Assumption** using Define · Explain · Example · Diagram. Learn the Check yourself questions so you can answer them in 60 seconds at the start of next class.

How you will mark it tomorrow: Collect next class. Stamp full / half / zero against the 5-mark recipe.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 6: Entrepreneurship in the Digital Age

Entrepreneurship in the Digital Age (4/4) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Beachhead Market · Complete Student Project · Ethical and Safe Use of Digital Tools · Career Opportunities

★ **Must lock:** Beachhead Market

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Define assumption.
2. Why is building everything at once a mistake?
3. Which tool was used for the canteen MVP, and for how long was it tested?


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.14 Beachhead Market ★ Golden

A beachhead market is a small and focused group of first users.

- These users have a clear need and are likely to try the product early.
- Instead of trying to serve everyone, entrepreneurs first focus on one small group.
- This helps them test the MVP properly and improve it before expanding.

Business Idea	Weak First Market	Better Beachhead Market
Study app	All students in Pakistan.	Grade XII students preparing for exams in one college.
Canteen pre-order	All canteens in the city.	One college canteen during lunch break.
Ajrak catalogue	All online shoppers.	Existing customers of one local shop.
Van update system	All transport users.	Students and parents of ONE specific college van route.

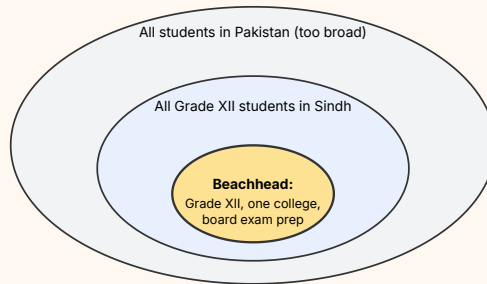

Start with the small inner circle (beachhead), learn and improve, then expand outward.

Remember: Remember S-R-U: Specific, Reachable, Urgent need. If you cannot meet your first users within a week, your market is too big.

Exam: Asked as "Define beachhead market and give its characteristics" or "Suggest a beachhead market for ...". Write the definition (small, focused group of first users with a...

بیچ ہیڈ مارکیٹ (Beachhead Market) پہلے صارفین کا ایک چھوٹا اور مخصوص گروہ ہے جسے حل کی واضح اور فوری ضرورت ہو اور جو پراڈکٹ جلد آزمانے پر تیار ہو۔

6.15 Complete Student Project

You will work in groups and complete one small entrepreneurship project.

- The project should be simple, local, and possible in the classroom.
- The purpose is to practise the complete journey: problem → prototype → feedback → MVP plan → risky assumption → beachhead market.
- Suggested project ideas: homework and test reminder system, college notice organizer, canteen pre-order system, small shop WhatsApp...

Criteria	Excellent	Satisfactory	Needs Improvement
Problem ID	Clear, local, and important.	Understandable but needs detail.	Vague or too broad.
Prototype	Shows clear flow and features.	Shows the basic idea.	Incomplete or unclear.
Feedback & Fixes	Collected properly; changes clearly based on feedback.	Collected but analysis is weak; some changes made.	No clear feedback collected; changes not explained.
MVP Plan	Essential features and clear testing plan.	Basic features but needs testing clarity.	Confused with the final product.

Remember: Use the rubric before you submit: read your project sheet row by row and ask, "Is this Excellent yet?" For "Feedback & Fixes", always write which feedback...

طلبہ گروپوں میں ایک چھوٹا، مقامی اور آسان منصوبہ مکمل کرتے ہیں جس میں مسئلے سے پروٹوٹائپ، رائے، ایم وی پی منصوبہ، سب سے خطرناک مفر...

6.16 Ethical and Safe Use of Digital Tools

Digital entrepreneurship should be responsible.

- Privacy: people's personal information belongs to them.
- Truthfulness: report results honestly; do not make up numbers or hide bad feedback.
- Fairness: treat all users equally.

Remember: Ask yourself "P-T-F-E": Is it Private, Truthful, Fair, and Equal-access?

ڈیجیٹل کاروبار ذمہ داری سے کرنا چاہیے۔

Career Opportunities

This unit covered entrepreneurship in the digital age, turning problems into business ideas, prototyping, building MVPs, and identifying beachhead markets.

- Mastery of these concepts opens the door to careers in startups and digital innovation.
- Pakistan has many incubators (for example, National Incubation Centres, NICs, in major cities) that support young founders.

Career	What the person does
Tech Entrepreneur / Startup Founder	Identifies a real-world problem and builds a digital product or service to solve it, guiding it from prototype through to MVP and market launch.
Product Manager	Guides a product's direction by identifying user needs, prioritising features, and testing ideas through prototypes and MVPs.
Business Analyst	Analyses business problems and processes to recommend digital solutions, often testing assumptions before full investment.
Innovation / Startup Consultant	Advises businesses or founders on validating ideas, building MVPs, and identifying beachhead markets.
Digital Marketing Specialist	Plans how a new product or MVP will reach its first (beachhead) market and grow its user base.
Venture / Incubator Analyst	Evaluates early-stage startup ideas and prototypes for potential investment or incubation support.

Remember: Every career in the table uses the same chapter skills: understand users, test assumptions, start small.

اس باب کی مہارتیں اسٹارٹ اپ اور ڈیجیٹل جدت کے شعبوں میں روزگار کے دروازے کھولتی ہیں، جیسے اسٹارٹ اپ بانی، پراڈکٹ مینیجر، بزنس اینا...

Entrepreneurship in the Digital Age

18 single-page lessons · 5 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- **Entrepreneur:** a person who identifies a problem, thinks of a solution, and turns it into a product or service; observes people, takes calculated risks, improves step by step.
- **Entrepreneurship:** the process of planning, starting, testing and improving a business idea until it becomes useful (Problem → Solution → Product).
- **Digital age:** entrepreneurs use accessible digital tools (social media, forms, websites, WhatsApp, digital payments) to start and test ideas quickly with low investment; often no coding is needed.
- A digital idea must solve a **real problem for real users**, not just sound modern (Table 6.1 examples: notices, embroidery shop, test dates, canteen queues).
- **Business ideas** come from observing daily life and talking directly to users: Observe → Ask Users → Select One Problem → Suggest Solution → Test Early. Start with a small, clear problem.
- **Prototype:** an early model used to show and test the design of an idea; not the final product; makes the idea visible, finds mistakes early, saves time and money.
- **Fidelity** is how close a prototype is to the final product: Low (paper), Mid (PowerPoint/Canva/Figma, tests navigation), High (realistic, Figma/HTML, only after the idea is tested).
- **Development cycle:** Design → Build → Test → Iterate, repeated (iteration). Feedback is crucial; a prototype fails only if useful feedback is ignored.
- **MVP:** the simplest working version with only essential features (Minimum) that still solves the main problem (Viable); it tests real use and market demand.
- **Prototype vs MVP:** prototype asks "Does it look right?"; MVP asks "Will people actually use it?" A prototype may not work; an MVP must.
- **Riskiest assumption:** the untested belief that, if wrong, will make the business fail; test it early with real behaviour.
- **MVP plan:** problem, target users, ONE main feature, basic design, cost, marketing, feedback, improvement plan. Do not build everything at once.
- **Canteen case study:** paper prototype → Google Form MVP with 5 items for 3 days → staff found too many items hard → kept 5 items, separate line, orders close 20 minutes before break.
- **MVP testing:** plan users, duration and data in advance; collect numbers (40 tried, 30 would return = 75%) and comments/observations; count, look for repeated problems, fix the most important first.
- **Beachhead market:** a small, focused, reachable group of first users with a strong, immediate need; win it first, then expand.
- **Ethics and equity:** respect privacy, truthfulness and fairness; collect no unnecessary data; share nothing without permission; design for weak internet, limited devices and Urdu/Sindhi speakers.

Key terms

Term	Meaning	اردو
Entrepreneur	A person who identifies a problem, thinks of a solution, and turns it into a product or service.	کاروباری شخص
Entrepreneurship	The process of planning, starting, testing and improving a business idea.	کاروبار کاری
Calculated risk	A risk taken after carefully thinking about the possible loss and keeping it small.	سوچا سمجھا خطرہ
Digital entrepreneurship	Using digital tools to start, test, improve and grow a business idea.	ڈیجیٹل کاروبار کاری
Business idea	A proposed product or service that solves a real problem for real users.	کاروباری خیال
Target users	The people who will use the product first.	ہدف صارفین
Prototype	An early model of a product, service, website or app made to test the idea and collect feedback.	ابتدائی نمونہ
Fidelity	How close a prototype is to the final product.	اصل سے مطابقت کا درجہ
Low-fidelity prototype	A quick, rough paper model showing the main idea and flow.	کم تفصیل والا نمونہ
Mid-fidelity prototype	A clearer model in PowerPoint, Canva or Figma showing layout and navigation without final graphics.	درمیانی تفصیل والا نمونہ
High-fidelity prototype	A detailed model close to the final product with realistic colours, buttons, data and working features.	زیادہ تفصیل والا نمونہ
Wireframe	A simple outline drawing of a screen showing where items go, without colours or pictures.	اسکرین کا خاکہ

Entrepreneurship in the Digital Age

75 marks • 1 hour 15 minutes • no notes • no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 18 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define • Explain • Example • Diagram • Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. An entrepreneur is best described as a person who:
 - a. only invests money in big companies
 - b. identifies a problem and tries to turn a solution into a product or service
 - c. always works from a large office
 - d. only writes computer programs
2. In prototyping, "fidelity" means:
 - a. the cost of the prototype
 - b. the number of users
 - c. how close the prototype is to the final product
 - d. the speed of the internet
3. Which of these is a low-fidelity prototype?
 - a. Hand-drawn app screens on paper
 - b. A working demo website of an order form
 - c. Clickable screens in Figma
 - d. An app published on the Play Store
4. A mid-fidelity prototype is mainly useful for testing:
 - a. online payments
 - b. screen-to-screen navigation
 - c. market demand over three days
 - d. investor interest
5. The correct order of the prototype development cycle is:
 - a. Build, Design, Iterate, Test
 - b. Test, Build, Design, Iterate
 - c. Design, Test, Build, Iterate
 - d. Design, Build, Test, Iterate
6. Creating, testing, improving and testing a prototype again is called:
 - a. iteration
 - b. incubation
 - c. marketing
 - d. assumption
7. In MVP, the letter "V" stands for:
 - a. Visual
 - b. Valuable
 - c. Viable
 - d. Virtual
8. Which is the best MVP for a canteen pre-order idea?
 - a. A full app with login, payment, delivery tracking and discounts
 - b. A Google Form used for real orders for three days
 - c. Paper sketches shown to five friends
 - d. A colourful poster of the menu
9. A prototype mainly answers which question?
 - a. Does it look right and make sense?
 - b. Will people pay for it every month?
 - c. How big is the national market?
 - d. How much profit will we make?
10. The riskiest assumption is:
 - a. the cheapest feature to build
 - b. the colour scheme of the app
 - c. the name of the company
 - d. the belief that, if wrong, can make the whole business fail
11. Which is the best beachhead market for a new study app?
 - a. All students in Pakistan
 - b. All online shoppers
 - c. Grade XII students preparing for board exams in one college
 - d. All transport users
12. Which is NOT a characteristic of a good beachhead market?
 - a. Specific and narrowly defined
 - b. Reachable by the startup team
 - c. Users have a strong, immediate need
 - d. As large as possible from the first day
13. "30 out of 40 said they would use it again" is which type of feedback?
 - a. Number-based
 - b. Comment-based
 - c. Observation
 - d. Rubric-based
14. Which is an ethical practice when collecting user feedback?
 - a. Collect CNIC numbers of all users
 - b. Share users' phone numbers in the class group
 - c. Collect only necessary information and share nothing without permission
 - d. Change results so the idea looks better
15. To support users with weak internet and language difficulty, a design should use:
 - a. heavy videos on every screen
 - b. English-only instructions
 - c. features that need the latest phone
 - d. large buttons, simple Urdu/Sindhi instructions and low data usage

Section B — Short questions (10 × 3 = 30)

1. Define entrepreneur and entrepreneurship. How are they different?
2. What is meant by entrepreneurship in the digital age? Give two local examples that need no coding.
3. Write the five questions you should ask to find a problem in daily life.
4. Why should a student choose a small problem at the start? Give one example of a too-large and one of a suitable problem.
5. Define prototype and give three reasons why it is useful.
6. Differentiate between low-, mid- and high-fidelity prototypes, with one example of each.
7. Define MVP and explain the words "Minimum" and "Viable".
8. What is the riskiest assumption? Give the risky assumption and its test for the college van update system.
9. An MVP was tried by 40 students and 30 said they would use it again. Calculate the repeat-use rate and name two other kinds of feedback to collect.
10. State the three characteristics of a good beachhead market and give one weak and one better first market for an Ajrak catalogue.

Section C — Long questions (attempt any 3 × 10 = 30)

1. Explain the prototype development cycle with a labelled diagram. Use the ClassBuddy class activity to show what happens at each stage, and explain why negative feedback does not mean the prototype has failed.
2. Compare a prototype and an MVP under five headings (purpose, working status, users, cost, example). Use the canteen pre-order system as your example and state the key question each one answers.
3. **Plan an MVP for a college van update system** for a college in Hyderabad, where students and parents often do not know when the van will arrive. Fill in all eight elements of the MVP planning checklist, and also state the riskiest assumption, how to test it, and the beachhead market.
4. **Plan an MVP for a small Sindhi topi and Ajrak shop in Hala** that wants online customers. Describe a low-fidelity prototype, the MVP, its riskiest assumption and test, the beachhead market, the marketing method, and two ethical or equity points the shop must follow.
5. A team tested a Lost and Found MVP (Google Form + WhatsApp group) in a college of 60 Grade XII students for two weeks. 45 students tried it; 36 of them said they would use it again; 12 of the users said they did not know where to collect found items; the team observed that many reports had no photo. (a) Calculate the percentage of the class who tried it, the repeat-use rate among users, and the percentage of users confused about collection. (b) Classify each piece of feedback by type. (c) Decide which improvement to make first and justify it.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **6.1 Entrepreneur and Entrepreneurship.** Answers: 1. A process (planning, starting, testing and improving a business idea). 2. Observing people and listening to their needs; taking calculated risks; improving the idea step by step. 3. A risk taken after thinking carefully about the possible loss and keeping that loss small.
2. **6.2 Entrepreneurship in the Digital Age.** Answers: 1. Any four of: mobile phones, social media, websites, online forms, digital payments, maps, videos, simple apps. 2. Because a small idea can be tested quickly and cheaply, so if users do not like it the team can change it before spending too much money. 3. Selling handmade cards through Instagram, or a WhatsApp catalogue for Ajrak.
3. **Local Examples of Digital Entrepreneurship (Table 6.1).** Answers: 1. A simple catalogue with an order form on Facebook or WhatsApp. 2. Students and teachers. 3. Because it must solve a real problem for real users; a weak problem gives a weak business idea.
4. **6.3 From Problem to Business Idea.** Answers: 1. Observe, Ask Users, Select One Problem, Suggest Solution, Test Early. 2. It is too large and unclear; small, clear problems are easier to test and improve. 3. Notes are scattered in many places (WhatsApp, email, photocopies, class groups), not that students are careless.
5. **6.4 Prototype.** Answers: 1. No. It is an early model made to test the idea and collect feedback. 2. Any four: paper sketch, cardboard model, clickable PowerPoint, Canva design, Figma wireframe, simple website layout, sample service process chart. 3. Any two: a button is hard to find, a screen has too much text, a feature is missing.
6. **6.5 Types of Prototypes.** Answers: 1. How close the prototype is to the final product. 2. Mid-fidelity (e.g. clickable screens in PowerPoint or Figma). 3. It is cheap, fast and easy to change, and it protects them from building a full app before knowing whether users need it.
7. **6.6 Prototype Development Cycle.** Answers: 1. The repeating process of creating, testing, improving and testing a prototype again. 2. The Test stage. 3. To make the idea visible (not to make it beautiful).
8. **6.7 Class Activity: Create a Prototype.** Answers: 1. 7 out of 10, which is 70%. 2. Today's classes, Add homework, Show reminder. 3. A 'Weekly View' button was added.
9. **6.8 Minimum Viable Product (MVP).** Answers: 1. Minimum Viable Product. 2. Usable enough to actually solve the main problem. 3. "Will people actually use this solution?"
10. **6.9 Difference between Prototype and MVP.** Answers: 1. The MVP. 2. Prototype: paper screens for a canteen order system. MVP: a Google Form used for real canteen orders for three days. 3. "Does it look right and make sense?"
11. **6.10 Identifying the Riskiest Assumption.** Answers: 1. Something we believe to be true but have not tested yet. 2. Customers will place orders through WhatsApp; share the catalogue with 30 customers and record actual orders. 3. Because if it is wrong the whole business fails, so testing it early saves time and money.
12. **6.11 Developing an MVP.** Answers: 1. It makes the product difficult, costly and slow. 2. Problem, target users, main feature, basic design, estimated cost, marketing method, feedback method, improvement plan. 3. A WhatsApp message to the class group.
13. **6.12 Case Study: MVP for a Canteen Pre-Order System.** Answers: 1. A Google Form, tested for three days. 2. Whether students will place orders before break, and whether the canteen can manage these orders. 3. Keeping only five items and creating a separate collection line (orders also close 20 minutes before break).
14. **6.13 Testing an MVP.** Answers: 1. Number-based, comment-based, observation. 2. $(35 \div 50) \times 100 = 70\%$. 3. How many users will test it, how long the test will continue, and what information will be collected.
15. **6.14 Beachhead Market.** Answers: 1. Specific and narrowly defined; reachable by the team; users have a strong, immediate need. 2. Students and parents of ONE specific college van route. 3. No. After learning from the first group, the idea can be improved and expanded.
16. **6.15 Complete Student Project.** Answers: 1. Any four: homework and test reminder system, college notice organizer, canteen pre-order system, small shop WhatsApp catalogue, college van update system, lost and found reporting system, study notes organizer. 2. Clear, local, and important. 3. Needs Improvement (for the MVP Plan).
17. **6.16 Ethical and Safe Use of Digital Tools.** Answers: 1. Privacy, truthfulness, fairness. 2. Collect unnecessary personal information; share phone numbers or photos without permission. 3. Large buttons, simple Urdu/Sindhi instructions, low data usage.
18. **Career Opportunities.** Answers: 1. Digital Marketing Specialist. 2. Tests assumptions (after analysing business problems and processes).

Answer key

Multiple choice

1. b
2. c
3. a
4. b
5. d
6. a
7. c
8. b
9. a
10. d
11. c
12. d
13. a
14. c
15. d

Short questions — model answers

1. An **entrepreneur** is a person who identifies a problem, thinks of a solution and tries to change that solution into a product or service. **Entrepreneurship** is the process of planning, starting, testing and improving a business idea, involving creativity, problem-solving, teamwork, communication and calculated risk. The entrepreneur is the person; entrepreneurship is the process.
2. It means using digital tools such as mobile phones, social media, websites, online forms, digital payments, maps, videos and simple apps to start, test, improve and grow a business idea. Examples: a student selling handmade cards through Instagram; a shopkeeper making a WhatsApp catalogue for Ajrak.
3. What problem do people face? Who faces this problem? How often does it happen? What do people currently do to solve it? Can technology help in a simple way?
4. Small, clear problems are easier to test and improve. Too large: "improving the whole education system". Suitable: "helping Grade XII students track practical file submission dates".
5. A prototype is an early model of a product, service, website or app that shows how the idea may look or work; it is not the final product and is made to test the idea and collect feedback. Useful because it makes the idea visible, helps find mistakes early (hard-to-find buttons, too much text, missing features), and saves time and money before final coding.
6. Low-fidelity: quick, rough paper model showing main idea and flow, e.g. hand-drawn homework-reminder screens. Mid-fidelity: clearer model in PowerPoint/Canva/Figma showing layout and navigation without final graphics, e.g. clickable PowerPoint screens. High-fidelity: detailed model close to the final product with realistic colours, buttons, sample data and working features, e.g. a working demo of a small order-form website.
7. An MVP (Minimum Viable Product) is the simplest working version of a product with only the most important features, used to test the idea with real users. Minimum: only the essential features, no extras. Viable: usable enough to actually solve the main problem.
8. It is the belief that can make the entire business fail if it turns out to be wrong. For the van update system: "Parents and students will check van updates daily." Test: create a trial WhatsApp broadcast group for one route.
9. Repeat-use rate = $(30 \div 40) \times 100 = 75\%$. Other feedback: comment-based (e.g. "What was confusing?") and observation (e.g. where users faced difficulty, such as forgetting to enter class name).
10. Specific and narrowly defined; reachable by the team; users have a strong, immediate need. Ajrak catalogue: weak = all online shoppers; better = existing customers of one local shop.

Long questions — model answers

1. **Prototype development cycle.** Draw four boxes in a loop: Design → Build → Test → Iterate → back to Design. Prototype development is not one-time; repeating the cycle is called iteration.
 - **Design:** understand the problem and plan what the prototype shows. ClassBuddy: interview 10 students; 7 of 10 forget tasks, so show a daily task list; reminders are needed before leaving home, so add a morning notification; students want simplicity, so use large buttons and clear labels.
 - **Build:** create the first version to make the idea visible (not beautiful). ClassBuddy: three paper screens (Today's classes, Add homework, Show reminder) joined by arrows.
 - **Test:** show it to users and observe. ClassBuddy: five classmates try "add one homework task" while the observer watches silently.
 - **Iterate:** improve from feedback. ClassBuddy: larger, centred Add Homework button; subject name and due date fields; a Weekly View button.

Negative feedback is information that shows what to fix; the prototype fails only if the team ignores useful feedback.

2. **Prototype vs MVP.** Purpose: prototype shows how the idea may look or work; MVP tests whether users will actually use it. Working status: prototype may not work (sketch or model); MVP must work at least in a basic way. Users: prototype, a small group giving design feedback; MVP, early real users in daily life. Cost: prototype very low; MVP low but may need basic development. Example: prototype = paper screens for a canteen order system; MVP = Google Form used for real canteen orders for three days. Key questions: prototype, "Does it look right and make sense?"; MVP, "Will people actually use it and find value in it?"

3. **MVP plan: college van update system (Hyderabad).**

- Problem: students and parents do not know when the van will arrive, so students wait outside for a long time or miss the van.
- Target users: students and parents on one van route.
- Main feature: the driver or a route monitor sends a short "Van left / 5 minutes away" message.
- Basic design: one WhatsApp broadcast message with route stop name, time and status; voice note option for parents who cannot read.
- Cost: free, using a WhatsApp broadcast list on the monitor's phone.
- Marketing: a message in the class WhatsApp group and a printed slip for parents with the number to save.
- Feedback: after one week, a 3-question Google Form or phone call: Did you check the updates daily? Did you wait less? Would you continue?
- Improvement plan: if messages arrive too late, send them earlier; if many parents do not read, switch to voice notes; then expand to a second route.
- Riskiest assumption: parents and students will check van updates daily. Test: trial broadcast group for one route for one week, counting how many people read or reply to messages each day.
- Beachhead market: students and parents of ONE specific college van route.

4. **MVP plan: topi and Ajrak shop in Hala.**

- Low-fidelity prototype: paper catalogue pages, one per product, with a sketch, price, size/type and "Message to order"; shown to 5 customers to see if information is clear.
- MVP: a WhatsApp Business catalogue with real photos and prices for 10–15 best-selling items; orders by chat; payment by cash on delivery or JazzCash/Easypaisa.
- Riskiest assumption: customers will actually place orders through WhatsApp. Test: share the catalogue with 30 existing customers and record actual orders for two weeks.
- Beachhead market: existing customers of this one shop (people who have bought before and whose numbers the shop already has with permission).
- Marketing: broadcast message to existing customers, a QR code at the shop counter, posts in local Facebook groups.
- Ethics: share no customer numbers or photos without permission; give truthful prices, sizes and photos. Equity: simple Urdu/Sindhi descriptions and compressed photos for low data use.
- Improvement plan: drop designs nobody orders, add more of the popular ones, then expand to customers in Hyderabad and Karachi.

5. **Lost and Found MVP analysis.**

- (a) Tried: $(45 \div 60) \times 100 = 75\%$ of the class. Repeat-use rate: $(36 \div 45) \times 100 = 80\%$. Confused about collection: $(12 \div 45) \times 100 = 26.7\%$ (about 27%).
- (b) "45 tried" and "36 would use again": number-based. "Did not know where to collect": comment-based (12 users said it). "Many reports had no photo": observation.
- (c) Fix the collection confusion first: it is a repeated problem (more than a quarter of users) and it stops the system's main purpose, which is returning items to owners. Add "Collect found items from the library desk" at the top of the form and pin it in the WhatsApp group. Next, make the photo field strongly encouraged (or required for found items), since photos help owners recognise items. Re-test for another week and compare the numbers.

Self-assessment: I can...

- ☐ define entrepreneur and entrepreneurship and describe an entrepreneur's habits.
- ☐ use the five questions and the steps of Table 6.2 to turn a problem into an idea.
- ☐ compare low-, mid- and high-fidelity prototypes.
- ☐ turn user feedback into problems and improvements, as in Table 6.5.
- ☐ identify the riskiest assumption of an idea and design a test for it.
- ☐ choose a specific, reachable beachhead market.
- ☐ explain how digital tools let me start and test an idea cheaply, with local examples.
- ☐ define a prototype and list its benefits and possible forms.
- ☐ draw and explain the Design–Build–Test–Iterate cycle.
- ☐ define an MVP and explain how it differs from a prototype.
- ☐ fill in an MVP plan and analyse MVP test results with percentages.
- ☐ collect feedback ethically and design for equal access.

Golden blitz — Chapters 1–2

★ only · Chapters 1–2 · Golden blitz

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter from yesterday's Goldens · 10–35 min lock the tables from memory · 35–55 min two students write a 5-mark Golden answer on the board · 55–75 min timed 8-mark · 75–85 min error clinic · 85–90 min homework: redraw from memory.

Board today: Applications of HCI (Domains of Life) · Importance of HCI · Human-Computer Interaction Problems · User Interface Design (UI vs UX) · Testing Methods (Usability, A/B, Automated) · Trace Tables · Comparing Trace Tables and Stepwise Reasoning · Number of Steps (Big O Notation)

★ **Must lock:** Applications of HCI (Domains of Life), Importance of HCI, Human-Computer Interaction Problems, User Interface Design (UI vs UX), Testing Methods (Usability, A/B, Automated), Trace Tables, Comparing Trace Tables and Stepwise Reasoning, Number of Steps (Big O Notation), Concept of Data Structure, Linear Data Structures: Stack, Linear Data Structures: Queue

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Write every table and diagram on this day from memory on the board, then check the cards.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Give the three characteristics of a good beachhead market.
2. Name four suggested project ideas.
3. Name the three values students must respect when collecting feedback.


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.2 Applications of HCI (Domains of Life) ★ Golden

HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps.

- These are human-centred solutions built to meet user needs across many domains of life.
- A domain is an area of daily activity — health, money, school, talking to people.
- When you design for a domain, you design for that domain's users, tasks and risks.

Domain	Application examples	User benefit
Health care	Patient portals, telemedicine apps, assistive technologies	Improves access to medical services remotely
Banking	Mobile banking apps, secure ATM interfaces	Enables quick transactions and secure financial management
Education	E-learning platforms (LMS), online exam portals	Enhances teaching, learning and student engagement
Networking and communication	Social media, messaging apps (WhatsApp), Zoom	Connects people globally through collaboration tools

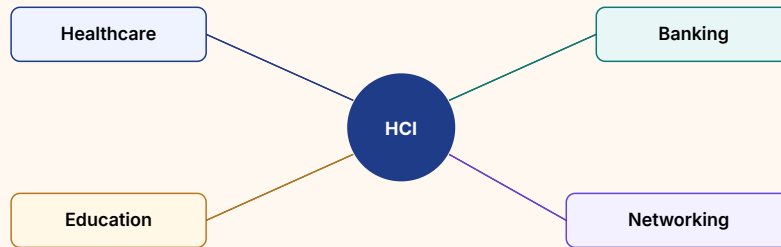

HCI sits at the centre of four everyday domains: healthcare, banking, education and networking.

Remember: Exam mnemonic H-BEN: Health, Banking, Education, Networking. For each, write: one application + one user benefit. That structure scores full marks on...

Exam: Very common 5–8 mark question: "Explain applications of HCI in different domains of life with examples." Draw a four-row table (Health care, Banking, Education,...

ایچ سی آئی کی ایپلیکیشنز صحت، بینکنگ، تعلیم اور نیٹ ورکنگ کے شعبوں میں انسانی ضروریات پوری کرتی ہیں۔

1.4 Importance of HCI ★ Golden

HCI ensures that machines are approachable and usable, turning complex technology into everyday tools.

- Good design makes technology simple and enjoyable (touchscreens).
- Poor design causes confusion and risks (unclear buttons on medical devices).
- This is why HCI is not optional decoration.

Implication	Description
1. Enhance productivity	Well-designed interfaces help users work faster, make fewer mistakes, and achieve goals efficiently.
2. Promotes inclusivity	Accessibility features (screen readers, voice commands) empower marginalized groups and ensure equal use of technology for everyone.
3. Drives innovation	Emerging tech such as AR/VR, AI and IoT rely strictly on solid HCI principles for people to actually adopt and use them.
4. Economic impact	User-friendly products gain higher adoption rates, customer loyalty and market success, driving profits.
5. Ethical responsibility	Responsible design ensures technology respects user privacy, reduces bias and supports human well-being.

Remember: P-I-I-E-E: Productivity, Inclusivity, Innovation, Economic impact, Ethics. Sentence: "Please Include Innovative, Ethical Earnings."

Exam: Typical wording: "Why is HCI important? Discuss its implications." (8 marks) Write a short opening (good design vs poor design) then five numbered points with one...

اچھا ایچ سی آئی پیچیدہ ٹیکنالوجی کو روزمرہ کا آسان اوزار بناتا ہے؛ برا ڈیزائن الجھن اور خطرہ پیدا کرتا ہے، جیسے طبی آلے پر غیر واضح بٹن۔

1.7 Human-Computer Interaction Problems ★ Golden

HCI problems are common difficulties that stop users from using technology smoothly.

- They happen when systems fail to meet human needs or cognitive limits.
- Cognitive limits means the mind can only hold and process so much at once — if an app asks you to remember three SMS codes at the same...
- Board answers score well when you name the problem, explain it in one line, and give a concrete example (the source examples are safe; a...

Problem	Explanation and example
Interface complexity	Too many options or a confusing layout. Example: a shopping app with so many menus you cannot find the checkout button.
Poor feedback	The system does not show if an action worked or failed. Example: clicking Submit and the screen freezes with no confirmation.
Inconsistency	Different parts of the app look or act differently. Example: a magnifying-glass icon for Search on one page, a binocular icon on another.
Accessibility gaps	Design ignores people with disabilities. Example: a video tutorial platform without captions for deaf users.
Compatibility issues	Interface fails on different devices or browsers. Example: a website that works on a laptop but crashes on a mobile browser.
Contextual neglect	The system does not adjust to the user's situation. Example: a map app with no dark mode, blinding the driver at night.
High cognitive load	Users must memorize too much or follow overly complex steps. Example: a registration system forcing you to remember three different SMS codes at once.
Trust deficiency	The system feels unsafe or hides security cues. Example: an online store asking for credit cards but lacking an SSL/HTTPS lock icon.

Remember: Eight problems in two families: (1) Screen problems — complexity, inconsistency, accessibility, compatibility, context. (2) Mind-and-trust problems — poor...

Exam: Common 8-mark question: "Describe problems of HCI with examples." Aim for at least six of the eight, each in the pattern Name → one-line meaning → example. Memorise the...

ایچ سی آئی مسائل وہ رکاوٹیں ہیں جو سسٹم کو انسانی ضرورت یا ذہنی حد کے مطابق نہ ہونے پر پیدا ہوتی ہیں۔

1.9 User Interface Design (UI vs UX) ★ Golden

UI design is the process of creating and organizing the visual elements of a software application so users can interact with it easily and efficiently.

- 1.9.1 Components of a user interface
ComponentRole Buttons Clickable elements that perform actions (Submit, Cancel).
- Menus Lists of options for navigating the system.
- Icons Small symbols representing tools or actions.

Component	Role
Buttons	Clickable elements that perform actions (Submit, Cancel).
Menus	Lists of options for navigating the system.
Icons	Small symbols representing tools or actions.
Text fields	Boxes where users type information (passwords, search).
Checkboxes / radio buttons	Selecting options in a form. Checkboxes allow several choices; radio buttons allow only one in a group.
Sliders	Adjusting values along a bar (volume, brightness).

Remember: Clothes vs day out. UI is the outfit (colours, buttons, icons). UX is the whole day (Did you arrive on time? Did you get wet? Were you stressed?). Examiners...

Exam: Highest-yield short question in the chapter: "Differentiate between UI and UX with an example." Write: (1) the two definitions, (2) the sentence "UI is what you see; UX..."

یو آئی ڈیزائن بصری عناصر — بٹن، مینو، آئیکن، ٹیکسٹ فیلڈ، چیک باکس/ریڈیو، سلائیڈر — کو ترتیب دینا ہے۔

1.11.2 Testing Methods (Usability, A/B, Automated) ★ Golden

Testing involves observing how the system behaves under specific conditions.

- Usability testing: observing real users while they perform realistic tasks, to measure efficiency and satisfaction. If the user gets stuck,...
- Task-based testing: assigning a specific task (for example, "Find a product and add it to cart") and strictly measuring completion time,...
- Automated audits: software bots scan websites to detect technical issues such as broken links, slow loading speeds or low colour contrast.
- A/B testing: comparing two versions of an interface (A and B). Half the users see A, half see B. The one with more clicks or sign-ups wins.

Task-based	A/B test	Automated audit
"Add to cart"	Version A Version B	Bot scanning...
Time: 12 s	half / half users	3 broken links
Success: Yes	more clicks wins	Low contrast

Three golden testing pictures: timed tasks, A versus B, and a bot that finds broken links and weak contrast.

Remember: Task-based three numbers: Time, Success, Errors. A/B: two versions, split users, the higher clicks/sign-ups win. Bot: links, speed, contrast. Load: many users...

Exam: Golden 8-mark question: "Explain testing methods used in HCI." Write seven short paragraphs or a seven-row table. For full marks, define usability testing (observe real...

سات ٹیسٹنگ طریقے: یوزیبلٹی (حقیقی صارف کو کام کرتے دیکھنا)، ٹاسک بیسڈ (وقت، کامیابی، غلطیاں ناپنا)، خودکار آڈٹ (بوت ٹوٹے لنک،
سسٹ...

2.1.1 Trace Tables ★ Golden

A trace table is a technique used to monitor how the values of variables change during the execution of an algorithm.

- Dry running: execute the algorithm line by line by hand.
- Debugging: find logical errors where the algorithm runs but the output is wrong.
- Validation: check that the algorithm does what it is intended to do.
- Line / step number — which line is being executed.

```
AllHeights = [1.91, 2.01, 1.87, 1.57, 1.48]
Total = 0
for height in AllHeights:
    if height ≥ 1.57 and height ≤ 1.91:
        Total = Total + 1
print(Total)
```

Remember: How to fill a trace table without getting lost. Write a new row every time a variable changes or a condition is tested. Copy unchanged values into the new row...

Exam: Very common long question: "Dry-run the given algorithm using a trace table and state the output." Draw columns for every variable plus a condition column. Show the loop...

ٹریس ٹیبل الگورتھم کا کاغذی اجرا (Dry Run) ہے۔

2.1.3 Comparing Trace Tables and Stepwise Reasoning ★ Golden

Both methods verify correctness, but they fit different situations depending on the complexity and length of the algorithm.

Feature	Trace table	Stepwise reasoning
Best for	Small algorithm blocks, complex loops, and beginners learning to track variables.	Large systems, architectural logic, and abstract mathematical proofs.
Effort required	High. Very tedious and impractical if a loop runs 1,000 times.	Moderate. Needs strong logical deduction and abstract thinking.
Primary goal	Catching syntax misinterpretations or specific arithmetic errors line by line.	Catching conceptual or structural flaws in the overall design.
Level	Micro-level (line by line). Checks exact values.	Macro-level (logic blocks). Checks overall state.

Trace table

Micro-level
Line by line
Exact values

Stepwise reasoning

Macro-level
Logic blocks
Overall state

Trace tables zoom in on values; stepwise reasoning zooms out on design.

Remember: Micro vs macro. Trace table = microscope (every cell). Stepwise reasoning = map (whole city). Beginners start with the microscope; designers need the map.

Exam: Differentiate questions are almost guaranteed: "Compare a trace table with stepwise reasoning." Write a four-row table (best for, effort, primary goal, micro/macro). Add...


ٹریس ٹیبل خرد بینی (Micro) سطح پر کام کرتا ہے: ہر لائن اور ہر قیمت۔

2.3.1 Number of Steps (Big O Notation) ★ Golden

When we discuss efficiency we ask how performance changes as the input size n increases.

- Big O notation is a mathematical method used to describe how the running time (or memory) grows as n grows.
- We ignore small constants and keep the most important term: if an algorithm does $3n + 5$ steps we write $O(n)$.
- In computer science, $\log n$ almost always means log base 2 (how many times you can halve n until you reach 1).

Class	Name	What happens when n grows	Typical example	Grade
$O(1)$	Constant	Time stays the same for 10 items or 10 million.	Access <code>arr[0]</code> (or any known index).	Excellent
$O(\log n)$	Logarithmic	Time grows very slowly; the problem is halved each step.	Binary search on a sorted list.	Great
$O(n)$	Linear	If n doubles, time roughly doubles.	Linear search of an unsorted list.	Fair / Good
$O(n \log n)$	Linearithmic	A little worse than linear; much better than n^2 . Common in good sorting.	Merge Sort (split in half, then merge).	Good
$O(n^2)$	Quadratic	Time grows with the square of n . Nested loops. Painful for large n .	Bubble Sort; compare every item with every other item.	Poor

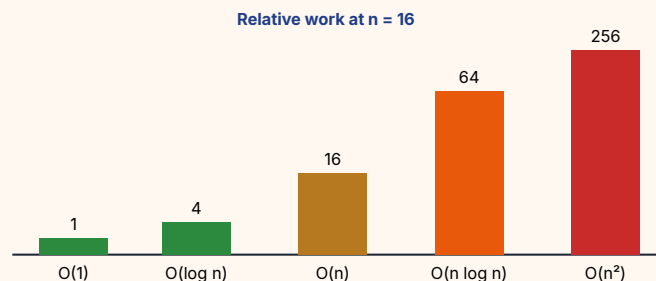

Same $n = 16$. Quadratic work is already four times $n \log n$ and sixteen times linear.

```
arr = [23, 76, 12, 90, 34, 68]
print(arr[0])
```

Remember: Order from fastest to slowest (for large n): $O(1) \rightarrow O(\log n) \rightarrow O(n) \rightarrow O(n \log n) \rightarrow O(n^2)$. Mnemonic: "Constant Logs Never Need Squares" — Constant, Logarithmic,...

Exam: Memorise the five rows of the class table (name, growth, one example, grade). Typical MCQ: "Accessing `arr[0]` is ...?" $\rightarrow O(1)$. "Binary search is ...?" $\rightarrow O(\log n)$. "Nested..."


بگ او (Big O) بتاتا ہے کہ ان پٹ n بڑھنے پر وقت یا میموری کیسے بڑھتی ہے۔

2.5 Concept of Data Structure ★ Golden


A data structure is a systematic way of organising, storing and managing data so that an algorithm can access, modify and process it efficiently.

- Books on a shelf are arranged in a set order, so you can find a title quickly.
- Files in folders are grouped on purpose.
- Data structures do the same job inside computer memory.

Linear (sequence)



Non-linear (branch / net)



Linear: a line of neighbours. Non-linear: a node with more than one connection.

Remember: Ask: "Does each item have at most one next item?" Yes → linear. "Can one item link to many, or can links form a net?" → non-linear.

Exam: Define data structure in full (organise, store, manage; efficient access and processing). Then split linear vs non-linear with the "one predecessor and one successor"...


ڈیٹا سٹرکچر ڈیٹا کو منظم طریقے سے رکھنے کا نظام ہے تاکہ الگورتھم اسے جلدی استعمال کر سکے۔

Linear Data Structures: Stack ★ Golden

A stack is a linear data structure that works on the LIFO principle: Last-In, First-Out.

- PUSH — add an item to the top.
- POP — remove the item from the top.

Step	Operation	Stack (bottom → top)	TOP	Popped value
0	(empty)	[]	none	
1	PUSH Data1	[Data1]	Data1	
2	PUSH Data2	[Data1, Data2]	Data2	
3	PUSH Data3	[Data1, Data2, Data3]	Data3	
4	POP	[Data1, Data2]	Data2	Data3
5	POP	[Data1]	Data1	Data2

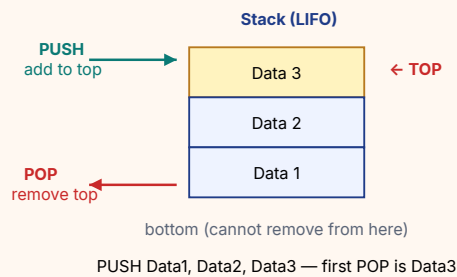

Three PUSH operations. The TOP is Data 3, so the first POP returns Data 3.

```
stack = []
stack.append("Data1")
stack.append("Data2")
stack.append("Data3")
print("after 3 PUSHes:", stack)
print("POP:", stack.pop())
print("POP:", stack.pop())
print("Left:", stack)
```

Remember: LIFO = Last In First Out = "last plate washed is first plate used" on a canteen pile. Undo, Redo, Back button and function calls are all stacks.

Exam: Define stack + LIFO, define PUSH and POP, mention TOP, give the Undo example, and draw the vertical boxes with TOP labelled. Trace questions: "Show the stack after PUSH..."

سٹیک LIFO پر چلتا ہے: جو سب سے بعد میں آیا وہ سب سے پہلے نکلے گا۔


Linear Data Structures: Queue ★ Golden

A queue organises data on the FIFO principle: First-In, First-Out.

- ENQUEUE — add an element at the Rear (back).
- DEQUEUE — remove an element from the Front.

Step	Operation	Queue (Front → Rear)	Front	Rear	Removed
0	(empty)	[]	—	—	
1	ENQUEUE 55	[55]	55	55	
2	ENQUEUE 76	[55, 76]	55	76	
3	ENQUEUE 90	[55, 76, 90]	55	90	
4	ENQUEUE D	[55, 76, 90, D]	55	D	
5	DEQUEUE	[76, 90, D]	76	D	55

Queue (FIFO)



Next ENQUEUE joins after 90. Next DEQUEUE removes 55.

Three jobs waiting. New jobs join at the rear; service always takes the front.

Remember: FIFO = First In First Out = a canteen line. Front = the person being served. Rear = the person who just joined.

Exam: Define queue + FIFO, define ENQUEUE (rear) and DEQUEUE (front), give the printer example, draw the labelled Front/Rear diagram, and trace a short sequence. Examiners mix...

کیو FIFO پر چلتی ہے: جو پہلے آیا وہ پہلے نکلے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Applications of HCI (Domains of Life):** Mistake: Listing brand names only ("WhatsApp, JazzCash, Zoom") without saying the domain and the user benefit.
- **Importance of HCI:** Mistake: Writing only "HCI is important because it makes apps look nice." Fix: Looks are a tiny part of UI.
- **Human-Computer Interaction Problems:** Mistake: Writing "the app is bad" as an HCI problem, or mixing up cognitive load with compatibility.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Applications of HCI (Domains of Life)**. Write: HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) These are human-centred solutions built to meet user needs across many domains of life. (2) A domain is an area of daily activity — health, money, school, talking to people. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Importance of HCI**. Write: HCI ensures that machines are approachable and usable, turning complex technology into everyday tools.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Good design makes technology simple and enjoyable (touchscreens). (2) Poor design causes confusion and risks (unclear buttons on medical devices). — + example.

5 marks: 3-mark structure + table: Implication / Description + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Human-Computer Interaction Problems**. Write: HCI problems are common difficulties that stop users from using technology smoothly.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) They happen when systems fail to meet human needs or cognitive limits. (2) Cognitive limits means the mind can only hold and process so much at once — if an app asks you to remember three SMS codes at the same... — + example.

5 marks: 3-mark structure + table: Problem / Explanation and example + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Name the four domains of HCI given in the source.

3 marks. Explain Applications of HCI (Domains of Life) with two clear points and one example.

5 marks. Very common 5–8 mark question: "Explain applications of HCI in different domains of life with examples." Draw a four-row table (Health care, Banking, Education, Networking & communication). Each row:...

8 marks. Applications of HCI (Domains of Life): 5-mark answer plus a labelled wireframe and one accessibility fix.

Answers: 1. Health care, banking, education, networking and communication 3. These are human-centred solutions built to meet user needs across many domains of life.; A domain is an area of daily activity — health, money, school, talking to people. 5. Use the recipe in the blue box. Model opening: HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps. 8. Same 5-mark body + a labelled wireframe and one accessibility fix + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Applications of HCI (Domains of Life)** using the recipe in this topic. Include a labelled wireframe and one accessibility fix. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Golden blitz — Chapters 3–4

★ only · Chapters 3–4 · Golden blitz

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter from yesterday's Golden · 10–35 min lock the tables from memory · 35–55 min two students write a 5-mark Golden answer on the board · 55–75 min timed 8-mark · 75–85 min error clinic · 85–90 min homework: redraw from memory.

Board today: Lists (Ordered, Mutable, Methods) · Tuples (Ordered, Immutable) · Dictionaries (Key-Value Pairs) · Functions in Python · & 3.4 File Handling and Operations (Modes r, w, a) · The with Statement (Context Manager) · Data Sources and Database Connection · Pandas and DataFrames

★ **Must lock:** Lists (Ordered, Mutable, Methods), Tuples (Ordered, Immutable), Dictionaries (Key-Value Pairs), Functions in Python, & 3.4 File Handling and Operations (Modes r, w, a), The with Statement (Context Manager), Data Sources and Database Connection, Pandas and DataFrames, Handling Missing Values (NaN), Data Visualization and Types of Graphs, Descriptive Statistics

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Write every table and diagram on this day from memory on the board, then check the cards.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Name the four domains of HCI given in the source.
2. Give one example of poor design mentioned in the source.
3. Which problem is a missing HTTPS lock on a payment page?


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.1.1 Lists (Ordered, Mutable, Methods) ★ Golden

A list is Python's most versatile built-in data structure.

- It stores an ordered collection of items in a single variable.
- Lists are mutable (you can change them after you create them) and they are written with square brackets [].
- One variable can hold thousands of values.

After this line	List in memory
create	['apple', 'banana', 'apple']
.append('grape')	['apple', 'banana', 'apple', 'grape']
.remove('apple')	['banana', 'apple', 'grape'] — only the first apple goes
.sort()	['apple', 'banana', 'grape']

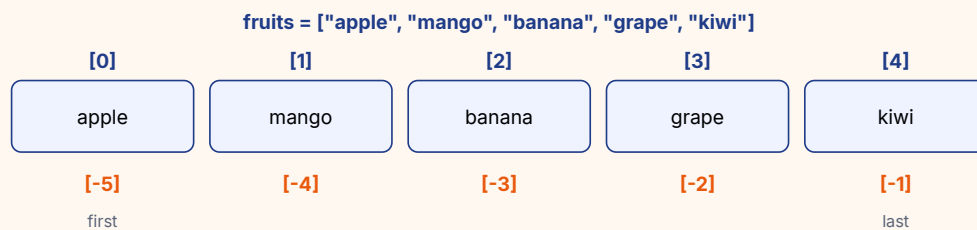

Positive indices count left to right from 0. Negative indices count right to left from -1.

```
numbers = [10, 2, 15, 14, 3, 33]      # list of integers
names = ["Hassan", "Qasim", "Malika"]  # list of strings
mixed = [1, "Python", 3.14, True]     # mixed data types
print(numbers)
print(names)
print(mixed)
```

Remember: Always remember [-1]. If a list has 10,000 items and you do not want to compute `len(list) - 1`, write `list[-1]`. It grabs the last item in one step.

Exam: Lists appear every year: "What is a list?", "List four methods with one line each", "Differentiate list and tuple", "Write a program to search an element", "Predict the..."

فہرست (List) مربع بریکٹ [] میں لکھی جاتی ہے، ترتیب برقرار رکھتی ہے اور تبدیل کی جا سکتی ہے (Mutable).

3.1.2 Tuples (Ordered, Immutable) ★ Golden

A tuple is an ordered collection that is immutable — once created, you cannot add, remove or replace items.

- Think of it as a read-only list.
- Tuples use parentheses ().
- Like lists, they allow duplicates, mixed types, and indexing from 0 (including negative indices).

Method	Meaning
<code>.count(value)</code>	How many times the value appears.
<code>.index(value)</code>	Index of the first occurrence.

List []

Can add / remove / replace

Tuple ()

LOCKED — read-only

A list is an open box you can refill. A tuple is a sealed box you may only look into.

```
t = (10, 20, 30, 40, 50)
print(t[0])
print(t[-1])
print(t[1:4])
print(t[::-1])
```

Remember: Tuple = locked lunchbox. You can see what is inside; you cannot swap the sandwich. Memory: "Tuple is Tight (immutable), written with round brackets that look..."

Exam: Expect "Differentiate list and tuple" (at least four points: brackets, mutability, methods, speed/protection), "Why use a tuple?", and "What happens if you write `t[0] = ...`"

ٹیپل (Tuple) گول بریکٹ () میں لکھا جاتا ہے، ترتیب رکھتا ہے مگر تبدیل نہیں ہو سکتا (Immutable).

3.1.4 Dictionaries (Key-Value Pairs) ★ Golden

A dictionary stores data as key–value pairs.

- Ordered (Python 3.7+): insertion order is kept.
- Mutable: you can add, change and delete pairs.
- Keys are unique: if you repeat a key, the last value silently overwrites the earlier one. Values may repeat.

Method	Returns
<code>.keys()</code>	All keys.
<code>.values()</code>	All values.
<code>.items()</code>	Key–value pairs as tuples.



You never search a dictionary by position. You search by key.

```
d = {"name": "Alice", "age": 30}
print(d)
d["age"] = 31
print(d)
d["city"] = "NYC"
print(d)
del d["city"]
print(d)
```

Remember: Keys are unique, like roll numbers. Values are the student records and may repeat (two students can both score 80). Memory: “get is gentle, brackets can break.”

Exam: High-yield: definition of a dictionary, difference between `d[key]` and `d.get(key)`, “what if a key is repeated?”, traversal with `.items()`, and a full comparison table of...

ڈکشنری (Dictionary) کلید اور قدر (Key-Value) کے جوڑوں میں ڈیٹا رکھتی ہے۔

3.2 Functions in Python ★ Golden

When the same instructions are written again and again, that is duplicate code.

def → **name** → **parameters** → **indented body** → **return (optional)**

- Duplicate code makes a program longer, harder to read, and painful to update (you must fix every copy).
- A function lets you write the instructions once and run them whenever you call the function's name.

Benefit	Meaning
Code reusability	Write once, use anywhere.
Modularity	Break a big problem into small named tasks.
Readability	Shorter, cleaner files with meaningful names.
Maintainability	Fix a bug in one place and every call is fixed.

```
def greet():  
    print("Hello, World!")  
  
greet()  
greet()
```

Remember: DRY — Don't Repeat Yourself. If you are about to copy-paste a block, wrap it in **def**. Name functions with verbs: **greet**, **add**, **save_grades**.

Exam: Write the four benefits (reusability, modularity, readability, maintainability) as separate bullets — that is a standard short question. For long questions, define a...


فونکشن (Function) ہدایات کا وہ بلاک ہے جو ایک بار لکھا جاتا ہے اور بار بار بلایا جا سکتا ہے۔

3.3 & 3.4 File Handling and Operations (Modes r, w, a) ★ Golden

File handling is a program's ability to create, read, write, update and delete files on disk.

- Variables live in RAM and vanish when the program ends.
- Files live on a hard disk or SSD and stay there — they are persistent.

Type	What it stores	Examples
Text file	Human-readable characters. You can open it in a text editor.	.txt, .csv, .py
Binary file	Raw bytes, not meant to be read as text.	.jpg, .mp3, .dat



Read copies data from disk into RAM. Write copies data from RAM onto disk.

```
new_file = open('myfile.txt', 'w')
new_file.write("The quick brown fox jumps over the lazy dog!!!\n")
new_file.close()
print("File has been created successfully.")
```

Remember: r = Read existing, w = Wipe then write, a = Add at end. Remember: write does not add a newline unless you type \n.

Exam: Define file handling, contrast RAM with disk, list modes r / w / a with one property each, and warn that w overwrites. Short programs that write one line and close the...

فائل ہینڈلنگ سے ڈیٹا ڈسک پر مستقل (Persistent) رہتا ہے، برخلاف RAM کے متغیرات کے جو پروگرام بند ہوتے ہی مٹ جاتے ہیں۔

3.6 The with Statement (Context Manager) ★ Golden

It is easy to forget `.close()`. If the program crashes before `.close()` runs, the file may be incomplete or corrupted.

with `open(...)` as `f` → use `f` → block ends → file closed automatically

- It is easy to forget `.close()`.
- If the program crashes before `.close()` runs, the file may be incomplete or corrupted.
- Python's with statement is a context manager: it opens the file, runs the indented block, and always closes the file when the block ends —...

```
with open('myfile.txt', 'w') as new_file:
    new_file.write("Context managers are safe!\n")
# no .close() here – with already closed the file
```

Remember: with = "take, use, put back." Prefer with `open(...)` as `f`: in every new program. You still choose the mode: 'r', 'w' or 'a'.

Exam: Define the with statement as a context manager that guarantees close. Contrast it with manual open/close. Be ready to write a four-line program that writes with with and...

with بیان ایک کانٹیکسٹ مینیجر (Context Manager) ہے جو فائل کو بلاک کے اختتام پر خود بند کر دیتا ہے، چاہے اندر غلطی ہو جائے۔

4.1.1 – 4.1.2 Data Sources and Database Connection ★ Golden

Data sources are where information comes from: school records, websites, sensors, databases.

Python → Driver → Connection → Cursor → SQL → Database

- Connectivity is the conversation between your Python program and that source so you can read and update data.
- Five components of a database connection, in the order they actually work:

#	Component	Role
1	Database	Organised store (SQLite = one .db file; MySQL = a server for big apps)
2	Driver	Translator between Python and that DBMS (sqlite3 is built in)
3	Connection object	Opens, manages and closes the pipeline
4	Cursor object	Runs SQL and walks through result rows
5	SQL queries	CREATE, INSERT, SELECT, UPDATE, DELETE

Exam: Write the five names in order and one line each. A common trap is swapping cursor and connection: the connection is the pipe; the cursor is the messenger that travels...

خمسہ اجزاء: ڈیٹا بیس، ڈرائیور، کنکشن، کرسر، ایس کیو ایل۔

4.3 Pandas and DataFrames ★ Golden

Pandas is a third-party library for tables.

- Install once: pip install pandas in the terminal (not inside the .py file).
- Convention: import pandas as pd.
- A DataFrame is a 2-D table of rows and columns, like Excel or an SQL table.

```
import pandas as pd
data = {
    "Name": ["Ali", "Sara", "Ahmed"],
    "Math": [85, 90, 78],
    "Science": [80, 88, 70],
}
df = pd.DataFrame(data)
print(df)
```

پینڈاز ٹیبل نما ڈیٹا فریم دیتا ہے۔

4.3.3 Handling Missing Values (NaN)

★ Golden

Missing cells are NaN ("Not a Number"). Statistics crash or lie if you ignore them.

- Statistics crash or lie if you ignore them.
- Three tools: `isnull()` (True where empty), `fillna(value)` (replace), `dropna()` (delete the row).

```
import pandas as pd
df = pd.DataFrame({
    "Name": ["Ali", "Sara", "Ahmed", "Ayesha"],
    "Marks": [85.0, None, 78.0, 92.0],
    "Grade": ["A", "A", None, "A"],
})
print(df.isnull().sum())
```

Trap: Filling a salary gap with the mean of a company that includes the CEO can hide poverty (the same outlier problem as the mean).

Exam: State: identify with `isnull/sum`, fill numeric gaps with the mean, fill categories with a label, or drop rows if filling would invent a lie. Never analyse first and clean...



خالی خانے NaN ہیں۔

4.5 Data Visualization and Types of Graphs ★ Golden

Pick the graph that matches the question. Then label axes and give a title — an unlabelled chart scores zero in an exam.

- Then label axes and give a title — an unlabelled chart scores zero in an exam.

Chart	Shows	Watch out
Bar / column	Compare discrete categories (subjects, departments)	Column = vertical; bar often = horizontal
Line	Change over time (temperature, visitors)	Needs an ordered x-axis (months, years)
Pie	Parts of one whole as percentages	Bad with many or almost-equal slices
Histogram	Distribution of one numeric variable in bins	Bars touch (continuous range), unlike a bar chart
Scatter	Relationship of two numeric variables	Each dot is one pair (x, y)
Box plot	Min, Q1, median, Q3, max, and outliers	Best tool for spotting extreme values



Column compares; line shows a trend; pie shows share; the box summarises spread around the median.

```
import matplotlib.pyplot as plt
subjects = ["English", "Math", "Science", "History"]
marks = [64, 82, 71, 49]
plt.bar(subjects, marks, color="skyblue", edgecolor="black")
plt.title("Marks vs Subjects")
plt.xlabel("Subjects")
plt.ylabel("Marks out of 100")
```

Exam: "Which graph and why?" is a 3-mark gift. Write the name, what it shows, and one reason the others are worse.

بار/کالم اقسام کا موازنہ، لائن وقت کا رجحان، پائی حصے، ہسٹوگرام مسلسل تقسیم (بار آپس میں لگے)، اسکیتھر دو متغیرات کا تعلق، باکس پلا...

4.6 Descriptive Statistics ★ Golden

Descriptive statistics squeeze a long list into a few honest numbers.

- Central tendency asks "what is typical?".
- Spread asks "how mixed is the list?".

Measure	How	Use when
Mean	Sum $\div$ n. Uses every value.	Values sit close together. Example: ordinary test scores.
Median	Middle after sorting. Odd n: centre. Even n: mean of the two centre values.	Outliers would wreck the mean (CEO salary).
Mode	Most frequent value. May be none, one, or several.	Most popular choice (shoe size).

Trap: Do not report variance as if it were in "marks".

Exam: Always state whether you used n or n-1. Show the sorted list for the median. For SD, show: mean $\rightarrow$ deviations $\rightarrow$ squares $\rightarrow$ divide $\rightarrow$ square root. A box plot pictures min,...

اوسط سب کا مجموعہ تقسیم تعداد، میڈین ترتیب کے بعد بیچ، موڈ سب سے زیادہ بار آنے والا۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Lists (Ordered, Mutable, Methods):** Mistake 1: `.remove('apple')` deletes every apple.
- **Tuples (Ordered, Immutable):** One-item trap: `(5)` is just the integer 5 with extra parentheses.
- **Dictionaries (Key-Value Pairs):** Older notes (and the chapter summary in some slides) still call dictionaries “unordered.” From Python 3.7 onwards insertion order is...

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Lists (Ordered, Mutable, Methods)**. Write: A list is Python's most versatile built-in data structure.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) It stores an ordered collection of items in a single variable. (2) Lists are mutable (you can change them after you create them) and they are written with square brackets `[]`. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Tuples (Ordered, Immutable)**. Write: A tuple is an ordered collection that is immutable — once created, you cannot add, remove or replace items.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Think of it as a read-only list. (2) Tuples use parentheses `()`. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Dictionaries (Key-Value Pairs)**. Write: A dictionary stores data as key-value pairs.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Mutable: you can add, change and delete pairs. (2) Keys are unique: if you repeat a key, the last value silently overwrites the earlier one. Values may repeat. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What does `nums[2:6]` return if `nums = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]`?

3 marks. Explain Lists (Ordered, Mutable, Methods) with two clear points and one example.

5 marks. Lists appear every year: "What is a list?", "List four methods with one line each", "Differentiate list and tuple", "Write a program to search an element", "Predict the output of a slice." Write:...

8 marks. Lists (Ordered, Mutable, Methods): 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. `[2, 3, 4, 5]` 3. It stores an ordered collection of items in a single variable.; Lists are mutable (you can change them after you create them) and they are written with square brackets `[]`. 5. Use the recipe in the blue box. Model opening: A list is Python's most versatile built-in data structure. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Lists (Ordered, Mutable, Methods)** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Golden blitz — Chapters 5–6

★ only · Chapters 5–6 · Golden blitz

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter from yesterday's Goldens · 10–35 min lock the tables from memory · 35–55 min two students write a 5-mark Golden answer on the board · 55–75 min timed 8-mark · 75–85 min error clinic · 85–90 min homework: redraw from memory.

Board today: Neural Networks (NN) · Components of Neural Networks · Secure Collaboration (Authentication, MFA, Access Control) · Common Security Threats (Malware, Phishing, DoS) · Functions of Equity and Equal Access · Entrepreneurship in the Digital Age · Prototype · Prototype Development Cycle

★ **Must lock:** Neural Networks (NN), Components of Neural Networks, Secure Collaboration (Authentication, MFA, Access Control), Common Security Threats (Malware, Phishing, DoS), Functions of Equity and Equal Access, Entrepreneurship in the Digital Age, Prototype, Prototype Development Cycle, Minimum Viable Product (MVP), Beachhead Market

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Write every table and diagram on this day from memory on the board, then check the cards.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What does `nums[2:6]` return if `nums = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]`?
2. Name the two tuple methods.
3. What does `{"a": 1, "a": 2, "a": 3}` print?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.1.2 Neural Networks (NN) ★ Golden

A neural network is a computer model that learns patterns from data.

Input layer → Hidden layer(s) → Output layer

- Input layer — receives the raw data (pixels of a face, samples of a sound, marks of a student).
- Hidden layer(s) — the “thinking” in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a...)
- Output layer — gives the final answer (unlock / keep locked; “this is a cat”; “pass / fail”).

Remember: I-H-O. Input receives, Hidden thinks, Output decides. “In Hidden Out.” A neural network is a brain-inspired maths machine, not a copy of a living brain.

Exam: Very common questions: “What is a neural network?” (2–3 marks), “Name its three layers and explain each with the face-unlock example” (5 marks), and “How is a neural...”


نیورل نیٹ ورک ایک کمپیوٹر ماڈل ہے جو ڈیٹا سے پیٹرن سیکھتا ہے۔

5.1.4 Components of Neural Networks ★ Golden

The components of a neural network can be understood through its layered architecture.

- Data enters, gets processed, and exits, with mathematical adjustments happening inside.

#	Component	Description
1	Input layer	Receives the initial raw data (for example image pixels, sound waves, text).
2	Neurons / nodes	Small processing units that receive, calculate, and pass information forward.
3	Hidden layer(s)	The layers between input and output. They process the data and learn patterns from it.
4	Weights	Numbers that show the importance or strength of connections between neurons.
5	Bias	An extra constant value added to help the model adjust its result and improve accuracy.
6	Activation function	A mathematical gate that decides whether the information is important enough to move to the next layer.
7	Output layer	Gives the final computed result, decision or prediction (for example "This is a cat").
8	Loss function	Checks the error (how much the model's answer is wrong compared with reality) so the network can correct itself.

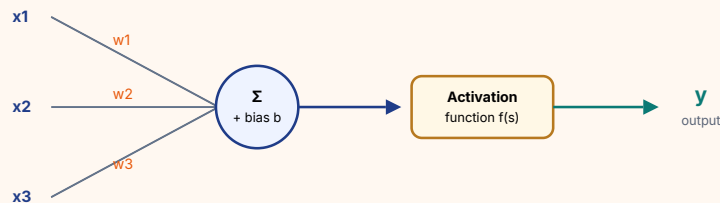

One neuron: inputs $\times$ weights are summed, bias is added, then an activation function decides the output y .

```
x1, x2 = 0.8, 0.5
w1, w2 = 0.4, 0.6
b = 0.1
s = x1 * w1 + x2 * w2 + b
y = 1 if s ≥ 0.5 else 0
print(round(s, 2))
print(y)
```

Remember: Weights = importance. Bias = extra nudge. Activation = yes/no gate. Loss = how wrong. A large weight means that input matters more. Bias shifts the sum up or...

Exam: Golden questions: "List the components of a neural network" (often 8 names + one line each), "What are weights and bias?", and a numerical neuron: given x , w , b and a ...

نیورل نیٹ ورک کے اجزاء ہیں: ان پٹ تہ، نیورون، پوشیدہ تہ، وزن (Weights)، بائیس (Bias)، ایکٹیویشن فنکشن، آؤٹ پٹ تہ اور لاس فنکشن۔

5.3.1 Secure Collaboration (Authentication, MFA, Access Control) ★ Golden

Digital tools allow people to share files, attend online classes, edit documents and work together from different locations.

- Collaboration is useful only when data is protected and communication remains safe.
- Secure collaboration means using digital tools to work together in a safe, controlled and responsible way.
- It depends on several key elements.

Remember: A-A-A-P-S. Authentication, Access control, Accountability, Privacy, Safe transmission. MFA = at least two different factor types (know / have / are). 2FA is...

Exam: Typical items: "Define secure collaboration", "Differentiate authentication and access control", "What is MFA/2FA?", "Explain five elements of secure collaboration with..."

محفوظ تعاون کا مطلب ہے ڈیجیٹل ٹولز سے محفوظ، کنٹرول شدہ اور ذمہ دارانہ انداز میں ساتھ کام کرنا۔

5.4.1 Common Security Threats (Malware, Phishing, DoS) ★ Golden

A security threat is any action, event or weakness that can harm a computer system or its data.

- Mitigation techniques are protective measures used to prevent threats or reduce their impact.
- This section names the common threats; later sections show how to spot them and how to reduce the damage.

#	Threat	What it is	Example
1	Malware	Harmful software designed to damage a computer, steal data, or gain unauthorised access. Includes viruses, worms, spyware, ransomware and Trojans .	Installing cracked software that secretly corrupts files, or a "free game" USB that encrypts a college lab's coursework (ransomware).
2	Phishing	A social-engineering trick that deceives users into sharing personal information (passwords, bank details, OTPs) using fake emails or websites that look genuine.	An SMS that looks like JazzCash or HBL asking you to "verify" by typing your OTP on a fake page.
3	Unauthorised access	Entering a system, account or file without permission. Often caused by weak passwords, shared passwords, or leaving devices unlocked.	A classmate using an unlocked lab PC to open someone else's Google Classroom.
4	Data theft / identity theft	Data theft is stealing or copying data without permission. Identity theft is using another person's stolen details (name, CNIC, bank details) to pretend to be them online and commit fraud.	A leaked list of CNICs used to open a SIM or a wallet in someone else's name.
5	Denial of Service (DoS)	A website or system is flooded with thousands of fake requests, causing it to slow down or crash, so real users cannot access the service.	Hackers flooding an online exam portal so students cannot log in on BISE result day or during an e-test.
6	Human error	Mistakes by legitimate users: accidentally deleting files, sending confidential data to the wrong email, or falling for a simple scam.	A teacher emailing the whole marksheet to the wrong parent; a student forwarding an OTP "to help the bank."

Phishing

Fake bank email / SMS
steals password or OTP

DoS attack

Flood of fake requests
server overload / crash

Identity theft

Stolen CNIC / details
fraud in your name

Three high-yield threats: phishing (fake messages), DoS (server overload), identity theft (stolen CNIC or bank details).

Remember: Malware = bad program. Phishing = fake message. DoS = flood. Identity theft = stolen 'you'. Human error = honest mistake. Cracked software and unknown USBs are...

Exam: Expect "Define a security threat", "Explain malware / phishing / DoS with examples", and "Differentiate data theft and identity theft." List all six threats if the...

سیکیورٹی خطرہ وہ عمل یا کمزوری ہے جو نظام یا ڈیٹا کو نقصان پہنچاے۔

5.5.1 Functions of Equity and Equal Access ★ Golden

Equity and equal access are not slogans. They do work in a digital classroom.

- They do work in a digital classroom.
- The source lists four functions.

Function	What it does	Pakistani example
1. Providing need-based support (equity)	Help tailored to individuals.	Audio descriptions for visually impaired students; a screen reader so a blind student in Karachi can hear a digital textbook.
2. Removing barriers	Help students in remote areas attend online classes.	Mobile-friendly, low-data apps so a student in Tharparkar or the katcha areas of Sindh can join without a fibre connection.
3. Enabling active participation	Students who miss live class can still take part.	Recorded lectures so load-shedding or an internet outage in Hyderabad does not make a student fall behind.
4. Supporting different learning needs	Offer more than one format.	Videos, text notes and audio of the same Chapter 5 topic so each student learns in the way that suits them best.

Remember: Four functions: Support, Remove, Participate, Formats. "Some Rural Pupils Fail" without them — Support (need-based), Remove barriers, Participate via...

Exam: Golden question: "Explain the functions of equity and equal access in digital collaboration" (5–8 marks). Write the four headings in order, one example each, and add the...

انصاف اور مساوی رسائی کے چار کام ہیں: ضرورت کے مطابق مدد (جیسے نابینا طالب علم کے لیے آڈیو وضاحت)، رکاوٹیں ہٹانا (دور دراز علاقوں...

6.2 Entrepreneurship in the Digital Age ★ Golden

Entrepreneurship in the digital age means using digital tools to start, test, improve, and grow a business idea.

- These tools may include mobile phones, social media, websites, online forms, digital payments, maps, videos, and simple apps.
- In Pakistan you already know many of them: WhatsApp, Facebook, Instagram, TikTok, YouTube, Google Forms, Google Maps, and digital payments...

Remember: Remember "S-T-I-G": digital tools help you Start, Test, Improve and Grow. Think: "Start The Idea Growing."


Exam: Common questions: "Define entrepreneurship in the digital age", "How have digital tools changed entrepreneurship?" and "Give examples of digital entrepreneurship without..."

ڈیجیٹل دور میں انٹرپرائیورسپ کا مطلب ہے موبائل فون، سوشل میڈیا، ویب سائٹ، آن لائن فارم اور ڈیجیٹل ادائیگی جیسے ٹولز کے ذریعے کاروبار...

6.4 Prototype ★ Golden

A prototype is an early model of a product, service, website, or app.

- It shows how the idea may look or work.
- It is NOT the final product.
- It is made to test the idea and collect feedback.

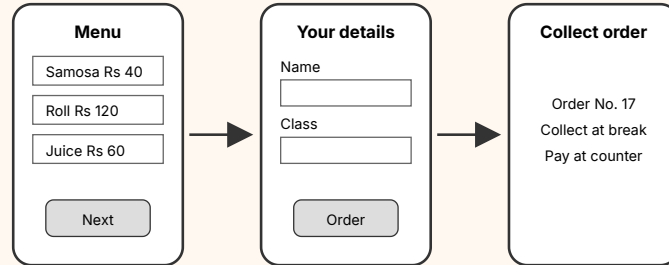

A paper prototype of a canteen pre-order system: three hand-drawn screens joined by arrows (select item → enter name → collect order).

Remember: Prototype = "practice model". It is like a rough draft of an essay: you show it, get corrections, and rewrite it before the final copy.

Exam: Expect "Define prototype and write its benefits" (3–5 marks). Write: (1) definition with the words early model, not the final product, test the idea and collect...


پروٹوٹائپ (Prototype) کسی پراڈکٹ، سروس، ویب سائٹ یا ایپ کا ابتدائی نمونہ ہوتا ہے جو دکھاتا ہے کہ خیال کیسا نظر آئے گا یا کیسے کام کرے گا۔

6.6 Prototype Development Cycle ★ Golden

Prototype development is not a one-time activity.

- A prototype is created, tested, improved, and tested again.
- This repeating process is called iteration.
- The main stages are Design, Build, Test, and Iterate.

Stage	What happens
1. Design	Understand the problem and plan the solution. Decide what the prototype should show (e.g. screen flow, features).
2. Build	Create the first version (physical or digital). The aim is not beauty; the aim is to make the idea visible.
3. Test	Show the prototype to users. Observe what they understand and what they find difficult.
4. Iterate	Improve the prototype based on user feedback. Remove unnecessary parts and add missing features.

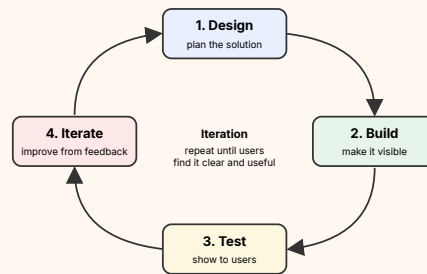

The prototype development cycle: Design → Build → Test → Iterate, then back to Design.

Remember: Mnemonic: "Do Big Things Iteratively" = Design, Build, Test, Iterate. And remember the arrow at the end goes back to Design: it is a cycle, not a line.

Exam: A favourite long question: "Explain the prototype development cycle with a diagram." Draw the four boxes in a circle with arrows, write one or two lines for each stage...

پروٹوٹائپ ایک ہی بار میں نہیں بنتا؛ اسے بنایا، آزمایا، بہتر کیا اور دوبارہ آزمایا جاتا ہے۔

6.8 Minimum Viable Product (MVP) ★ Golden

A Minimum Viable Product (MVP) is the simplest working version of a product.

- Minimum: it has only the essential features. No extras.
- Viable: it is usable enough to actually solve the main problem. ("Viable" means able to work successfully.)

Complete canteen app (final product)	Canteen MVP
Login, online payment, delivery tracking, discount offers...	A simple Google Form where students select snacks before break.

Remember: Simple meaning. An MVP answers: "Will people actually use this solution?" It tests real use and behaviour, not only the visual design. Analogy: before opening...

Exam: Typical questions: "What is an MVP? Explain the words Minimum and Viable" and "Give an example of an MVP." Write the full form, the definition (simplest working version,...


ایم وی پی (Minimum Viable Product) کسی پراڈکٹ کا سب سے سادہ مگر کام کرنے والا ورژن ہے جس میں صرف ضروری خصوصیات ہوتی ہیں۔

6.14 Beachhead Market ★ Golden

A beachhead market is a small and focused group of first users.

- These users have a clear need and are likely to try the product early.
- Instead of trying to serve everyone, entrepreneurs first focus on one small group.
- This helps them test the MVP properly and improve it before expanding.

Business Idea	Weak First Market	Better Beachhead Market
Study app	All students in Pakistan.	Grade XII students preparing for exams in one college.
Canteen pre-order	All canteens in the city.	One college canteen during lunch break.
Ajrak catalogue	All online shoppers.	Existing customers of one local shop.
Van update system	All transport users.	Students and parents of ONE specific college van route.

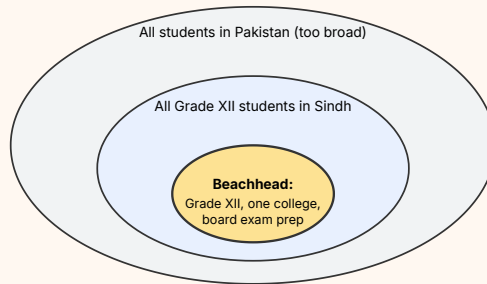

Start with the small inner circle (beachhead), learn and improve, then expand outward.

Remember: Remember S-R-U: Specific, Reachable, Urgent need. If you cannot meet your first users within a week, your market is too big.

Exam: Asked as "Define beachhead market and give its characteristics" or "Suggest a beachhead market for ...". Write the definition (small, focused group of first users with a...

بیچ ہیڈ مارکیٹ (Beachhead Market) پہلے صارفین کا ایک چھوٹا اور مخصوص گروہ ہے جسے حل کی واضح اور فوری ضرورت ہو اور جو پراڈکٹ جلد آزمانے پر تیار ہو۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Neural Networks (NN):** Mistake: “A neural network is an actual human brain inside the computer.” Fix: It is only inspired by the brain.
- **Components of Neural Networks:** Mistake: Forgetting to add the bias, or multiplying instead of adding after the products.
- **Secure Collaboration (Authentication, MFA, Access Control):** Mistake: Treating authentication and access control as the same thing.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Neural Networks (NN)**. Write: A neural network is a computer model that learns patterns from data.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Hidden layer(s) — the “thinking” in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a... (2) Output layer — gives the final answer (unlock / keep locked; “this is a cat”; “pass / fail”). — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled ER diagram (rectangle / oval / diamond) or the relational schema + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Components of Neural Networks**. Write: The components of a neural network can be understood through its layered architecture.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The components of a neural network can be understood through its layered architecture. (2) Data enters, gets processed, and exits, with mathematical adjustments happening inside. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled network: input layer → hidden layer → output layer + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Secure Collaboration (Authentication, MFA, Access Control)**. Write: Digital tools allow people to share files, attend online classes, edit documents and work together from different locations.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Collaboration is useful only when data is protected and communication remains safe. (2) Secure collaboration means using digital tools to work together in a safe, controlled and responsible way. — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + named threat + one mitigation + a local example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What are the small processing units of a neural network called?

3 marks. Explain Neural Networks (NN) with two clear points and one example.

5 marks. Very common questions: "What is a neural network?" (2–3 marks), "Name its three layers and explain each with the face-unlock example" (5 marks), and "How is a neural network related to the human..."

8 marks. Neural Networks (NN): 5-mark answer plus a labelled ER diagram (rectangle / oval / diamond) or the relational schema.

Answers: 1. Neurons or nodes 3. Hidden layer(s) — the "thinking" in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a...; Output layer — gives the final answer (unlock / keep locked; "this is a cat"; "pass / fail"). 5. Use the recipe in the blue box. Model opening: A neural network is a computer model that learns patterns from data. 8. Same 5-mark body + a labelled ER diagram (rectangle / oval / diamond) or the relational schema + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Neural Networks (NN)** using the recipe in this topic. Include a labelled ER diagram (rectangle / oval / diamond) or the relational schema. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Oral recap at the board

Say every chapter recap aloud, books closed · Recap

TODAY'S 90 MINUTES

90 minutes. 0–10 min settle · 10–80 min each chapter recap said aloud at the board, books closed · 80–90 min rewrite any line the batch could not say. No new topic.

Board today: Say every chapter recap aloud, books closed

★ **Must lock:** All chapters

Phones in the box at the door.

No new cards. One student per chapter at the board. The batch corrects missed lines.

Chapter 1 recap — Human Computer Interaction

- HCI = study of how people and computers work together so systems are usable, useful and satisfying.
- Traditional interaction = keyboard, mouse, menus. Natural interaction = touch, voice, gesture, gaze.
- Components: user, computer, interaction (input + output + feedback) inside an environment.
- UI = how it looks and the controls. UX = how the whole experience feels. Wireframe → prototype (Figma) → test.
- Evaluate with usability tests, heuristic evaluation, A/B tests and automated checks. Golden: accessibility, HCI problems, UI vs UX, testing methods.

Chapter 2 recap — Algorithms and Data Structures

- Correctness: trace table (variable values after every step) or stepwise reasoning.
- Clarity: modularity (small named parts) and readability (names, comments, indentation).
- Efficiency: count steps, conditions, repetitions. Big O: $O(1)$ constant, $O(\log n)$ binary search, $O(n)$ linear, $O(n \log n)$ good sorts, $O(n^2)$ nested loops.
- Linear DS: array, linked list, stack (LIFO, push/pop), queue (FIFO, enqueue/dequeue). Non-linear: tree (one root, parent-child), graph (nodes + edges).
- Pick the structure from the problem: undo → stack; printer jobs → queue; hierarchy → tree; maps → graph; fast index → array.

Chapter 3 recap — Python Data Structures, Functions and Files

- list [] ordered, mutable. tuple () ordered, immutable. set {} unordered, unique. dict {k:v} key-value, mutable.
- Functions: def, parameters, return. Local vs global scope. Built-in vs user-defined.
- Files: "r" read, "w" overwrite, "a" append. Always prefer with open(...) as f so the file closes itself.
- Exceptions: try / except / else / finally. Catch specific errors (ValueError, FileNotFoundError).

Chapter 4 recap — Data and Analysis

- SQLite in Python: connect → cursor → execute → commit → close. Always commit writes.
- Pandas DataFrame = table. load CSV/Excel, isnull, dropna, fillna, sort, filter, groupby.
- Charts: bar (categories), line (trend over time), pie (parts of a whole, few slices), histogram (distribution), scatter (relationship of two variables), box (spread and outliers).
- Mean = average. Median = middle after sorting. Mode = most frequent. Range = max–min. Variance / std-dev measure spread. pandas .std() uses sample n–1.

Chapter 5 recap — AI, Security and Collaboration

- AI $\supset$ Machine Learning $\supset$ Deep Learning. A neuron: weighted sum + bias, then an activation function. Deep = many hidden layers.
- Secure collaboration: authentication (passwords, MFA), access control (who may do what).
- Protect data: encryption, strong passwords, 3-2-1 backup, firewall. Threats: malware, phishing, DoS/DDoS, social engineering.
- Equity: everyone can take part (devices, language, disability, bandwidth). Tools: shared docs, video, LMS, versioning.

Chapter 6 recap — Entrepreneurship in the Digital Age

- Entrepreneur = person who turns a problem into a venture, taking risk. Digital tools make testing cheap (WhatsApp, Forms, a Facebook page).
- Prototype = experimental model. Low / mid / high fidelity. Cycle: Design $\rightarrow$ Build $\rightarrow$ Test $\rightarrow$ Iterate.
- MVP = smallest product that tests the riskiest assumption with real users. Prototype $\neq$ MVP (MVP is used in the real market).
- Beachhead market = the first, narrow group you can win. Measure retention, not only sign-ups. Use data ethically.

Mock paper — academy hall

2 hours 30 minutes · 75 marks · no notes · Mock

TODAY'S 90 MINUTES

90 minutes. Academy mock morning: sit the paper in 2 hours 30 minutes. Hall conditions — no notes, no phones, no Day 29 peeking. Use leftover time to pack scripts. Do not mark today.

Board today: 2 hours 30 minutes · 75 marks · no notes

★ **Must lock:** Whole syllabus

Phones in the box at the door.

Invigilate as the board will. No phone, no notes, no Day 29 peeking.

Mock paper — Computer Science XII

Time: 2 hours 30 minutes | Total: 75 marks | Answer all of A and B; attempt three from C.

Section A — Multiple choice (15 × 1 = 15)

1. HCI stands for:
 - a. Human Computer Interaction
 - b. High Code Interface
 - c. Hardware Control Input
 - d. Hybrid Computing Internet
2. A wireframe is:
 - a. the final coloured UI
 - b. a simple layout sketch of screens
 - c. a compiled program
 - d. an encryption key
3. Which is $O(\log n)$?
 - a. Linear search
 - b. Nested for-loops
 - c. Binary search
 - d. Reading one array cell
4. A stack is:
 - a. FIFO
 - b. LIFO
 - c. random access only
 - d. unordered unique items
5. Which Python type is immutable?
 - a. list
 - b. dict
 - c. set
 - d. tuple
6. The file mode that overwrites an existing file is:
 - a. r
 - b. a
 - c. w
 - d. x+
7. `with open("t.txt") as f` is useful because:
 - a. it encrypts the file
 - b. it closes the file automatically
 - c. it creates a DataFrame
 - d. it skips exceptions
8. After INSERT in sqlite3 you must:
 - a. rollback always
 - b. commit
 - c. drop the table
 - d. print the cursor
9. A pie chart is a poor choice when:
 - a. you have 3 parts of a total
 - b. you have 20 tiny slices
 - c. you show percentages of a whole
 - d. you label each slice
10. `pandas df['x'].std()` uses:
 - a. population n
 - b. sample n-1
 - c. median
 - d. mode
11. Deep Learning is a subset of:
 - a. only statistics
 - b. Machine Learning
 - c. only HCI
 - d. only networking
12. MFA means:
 - a. Many File Archives
 - b. Multi-Factor Authentication
 - c. Main Firewall Access
 - d. Minimum Function API
13. A Caesar cipher is a form of:
 - a. phishing
 - b. encryption
 - c. a firewall
 - d. a prototype
14. An MVP is:
 - a. the most polished version of a product
 - b. the smallest product that tests the riskiest assumption
 - c. a paper sketch only
 - d. a full company registration
15. A printer job list is best modelled as a:
 - a. stack
 - b. queue
 - c. binary tree
 - d. set

Section B — Short questions (10 × 3 = 30)

1. Differentiate UI and UX with one example.
2. What is a trace table? Why is it better than "it looks right"?
3. Draw a 3-node stack after push 10, push 20, pop. Label TOS.
4. Write one difference each: list vs tuple vs set vs dictionary.
5. Write a Python function `area(l, w)` that returns $l*w$, and a call that prints it.
6. Name the five steps of a database connection in Python.
7. When would you draw a scatter plot rather than a line graph?
8. Compute mean, median and range of 4, 8, 6, 10, 2.
9. List three signs of a phishing message.
10. Differentiate a prototype and an MVP.

Section C — Long questions (3 × 10 = 30). Attempt any three.

1. A college wants a new student-portal. Describe need analysis, a low-fidelity wireframe of the login + timetable screens, three accessibility principles you would apply, and one usability test you would run.
2. Trace this algorithm with a table for $n = 5$: `total=0; for i in 1..n: total = total + i; return total`. State its Big O and rewrite it as a formula that is $O(1)$.
3. Write a Python program that reads a text file of lines "name,marks", stores results in a dictionary, and writes "name: grade" to an output file using `with`. Grade A if marks ≥ 80 else B. Include exception handling if the file is missing.
4. Using the dataset 12, 18, 12, 20, 15, compute mean, median, mode, range, population variance and population standard deviation, showing every step. Then state which chart you would use to show the distribution and why.
5. A Karachi canteen wants a pre-order app. Identify the problem, the riskiest assumption, an MVP, a beachhead market, two test metrics, and one ethical rule for student data.

Mark the mock · repair list

Mark to the key. List every ★ Golden the batch missed. · Mark

TODAY'S 90 MINUTES

90 minutes. 0–70 min mark the mock to the sealed key using 1 / 3 / 5 / 8–10 recipes · 70–85 min each student fills the repair list · 85–90 min one missed Golden rewritten from memory.

Board today: Mark to the key. List every ★ Golden the batch missed.

★ **Must lock:** Missed Golden

Phones in the box at the door.

An answer with no working, no diagram or no example cannot score full marks.

Mock paper — answers

Section A

1. a
2. b
3. c
4. b
5. d
6. c
7. b
8. b
9. b
10. b
11. b
12. b
13. b
14. b
15. b

Section B

1. UI is the screens and controls (buttons, colours). UX is the whole journey (time to complete a task, frustration, trust).
Example: a JazzCash send-money screen (UI) vs how safe and quick the payment felt (UX).
2. A trace table lists each variable after every instruction. It proves correctness on a chosen input; "it looks right" misses off-by-one and uninitialised variables.
3. After push 10, TOS=10. After push 20, TOS=20 (10 below). After pop, 20 removed, TOS=10.
4. list: ordered mutable. tuple: ordered immutable. set: unordered unique. dict: keyed pairs.
5. `def area(l, w): return l * w` then `print(area(3, 4))` → 12.
6. connect, cursor, execute, commit, close.
7. Scatter: two measured variables (height vs marks) with no single time axis. Line: one quantity changing over an ordered time or sequence.
8. Sorted: 2,4,6,8,10. Mean = $30/5 = 6$. Median = 6. Range = $10 - 2 = 8$.
9. Unknown sender, urgent threat ("account will close today"), a link that does not match the real bank, request for OTP/password, poor Urdu/English, unexpected attachment.
10. A prototype is a model used to learn (often internal). An MVP is a real, usable product with just enough features to test the riskiest assumption with actual customers.

Section C — outline

1. Need analysis: who (students, teachers), tasks (view timetable, submit leave), constraints (mobile, slow internet). Wireframe: simple boxes for logo, fields, button, a second screen with a 5-day table. Accessibility: large tap targets, colour not the only signal, Urdu/English labels, screen-reader names. Test: five students think-aloud while logging in; record errors and time.
2. $i=1$ total=1; $i=2$ total=3; $i=3$ total=6; $i=4$ total=10; $i=5$ total=15. Loop body runs n times $\rightarrow O(n)$. Formula $n \times (n+1)/2$ is $O(1)$.
3. try: with open(path) as f: for line in f: name, m = line.strip().split(","); d[name]=int(m) except FileNotFoundError: print("missing"). Then with open(out,"w") as g: write grades. Show one sample dictionary.
4. Sorted 12,12,15,18,20. Mean $77/5=15.4$. Median 15. Mode 12. Range 8. Population variance: deviations $-3.4, -3.4, -0.4, 2.6, 4.6$; squares 11.56, 11.56, 0.16, 6.76, 21.16; sum 51.2; $/5 = 10.24$. std = 3.2. Histogram to show distribution (or bar of frequencies).
5. Problem: long canteen queues between periods. Riskiest assumption: students will pre-order 10 minutes before break. MVP: WhatsApp number + Google Form, pickup tokens, no app. Beachhead: one shift of first-year students. Metrics: % of orders picked up, time-to-collect, repeat use. Ethical: do not publish phone numbers; delete form responses after the term.

Sealed key. Open only after the mock is collected.

REPAIR LIST

Repair list. Copy every Golden scored 0 or half. Tomorrow the clinic redos only this list.

#	Golden topic missed	What the batch will rewrite from memory
1		
2		
3		
4		
5		
6		

Repair clinic · then stop

Redo the Day 29 list only. Dismiss by 6 pm. · Repair

TODAY'S 90 MINUTES

90 minutes. 90-minute repair clinic. Redo only the Day 29 list. Say the definition, draw the table, write one 5-mark answer. Dismiss by 6 pm. No new topic.

Board today: Redo the Day 29 list only. Dismiss by 6 pm.

★ **Must lock:** Missed Golden only

Phones in the box at the door.

No new chapter. No new non-Golden card. Each missed Golden: say the definition, draw the table, write one 5-mark answer on the board.

Dismiss by 6 pm. The batch walks into the hall with Golden wording in their heads — not in a book.

نیا باب نہ کھولیں۔ صرف چھوٹی گولڈن دہرائیں۔ شام چھ بجے کلاس ختم کریں۔