

30-DAY COACHING ACADEMY EDITION

Computer Science XII

The Bilingual Teacher's Edition rebuilt as a 30-day academy batch — 90-minute classes, board work, timed drills, homework stamps, weekly chapter exams, mock paper and repair clinic.

Bilingual support: English + اردو

تیس دن کی کوچنگ اکیڈمی — نوے منٹ کلاس، بورڈ، ڈرل، ہوم ورک

01 Computer Systems (HCI)

02 Computational Thinking & Algorithms

03 Programming Fundamentals

04 Data and Analysis

05 Application and Impacts of Computing

06 Entrepreneurship in the Digital Age

XII

30-day academy calendar

One 90-minute class a day. Tick the day after homework is stamped. Do not skip chapter-exam, mock, or Golden-blitz days.

روزانہ ایک نوے منٹ کی کلاس۔ باب کے امتحان، ماک اور گولڈن بلٹز نہ چھوڑیں۔

Day	Focus	Kind	★ Golden today
Week 1 · academy batch			
Day 01	Computer Systems (HCI) (1/4)	Teach	Applications of HCI (Domains of Life)
Day 02	Computer Systems (HCI) (2/4)	Teach	Importance of HCI
Day 03	Computer Systems (HCI) (3/4)	Teach	Human-Computer Interaction Problems, User Interface Design (UI vs UX)
Day 04	Computer Systems (HCI) (4/4)	Chapter exam	Testing Methods (Usability, A/B, Automated)
Day 05	Computational Thinking & Algorithms (1/5)	Teach	Trace Tables, Comparing Trace Tables and Stepwise Reasoning
Week 2 · academy batch			
Day 06	Computational Thinking & Algorithms (2/5)	Teach	Number of Steps (Big O Notation)
Day 07	Computational Thinking & Algorithms (3/5)	Teach	Concept of Data Structure
Day 08	Computational Thinking & Algorithms (4/5)	Teach	Linear Data Structures: Stack, Linear Data Structures: Queue
Day 09	Computational Thinking & Algorithms (5/5)	Chapter exam	—
Day 10	Programming Fundamentals (1/4)	Teach	Lists (Ordered, Mutable, Methods), Tuples (Ordered, Immutable), Dictionaries (Key-Value Pairs)
Week 3 · academy batch			
Day 11	Programming Fundamentals (2/4)	Teach	Functions in Python
Day 12	Programming Fundamentals (3/4)	Teach	& 3.4 File Handling and Operations (Modes r, w, a)
Day 13	Programming Fundamentals (4/4)	Chapter exam	The with Statement (Context Manager)
Day 14	Data and Analysis (1/2)	Teach	Data Sources and Database Connection, Pandas and DataFrames, Handling Missing Values (NaN)

Day	Focus	Kind	★ Golden today
Day 15	Data and Analysis (2/2)	Chapter exam	Data Visualization and Types of Graphs, Descriptive Statistics
Week 4 · academy batch			
Day 16	Application and Impacts of Computing (1/4)	Teach	Neural Networks (NN), Components of Neural Networks
Day 17	Application and Impacts of Computing (2/4)	Teach	Secure Collaboration (Authentication, MFA, Access Control)
Day 18	Application and Impacts of Computing (3/4)	Teach	Common Security Threats (Malware, Phishing, DoS)
Day 19	Application and Impacts of Computing (4/4)	Chapter exam	Functions of Equity and Equal Access
Day 20	Entrepreneurship in the Digital Age (1/4)	Teach	Entrepreneurship in the Digital Age, Prototype
Week 5 · academy batch			
Day 21	Entrepreneurship in the Digital Age (2/4)	Teach	Prototype Development Cycle, Minimum Viable Product (MVP)
Day 22	Entrepreneurship in the Digital Age (3/4)	Teach	—
Day 23	Entrepreneurship in the Digital Age (4/4)	Chapter exam	Beachhead Market
Day 24	★ only · Chapters 1–2	Golden blitz	11 Golden cards
Week 6 · academy batch			
Day 25	★ only · Chapters 3–4	Golden blitz	11 Golden cards
Day 26	★ only · Chapters 5–6	Golden blitz	10 Golden cards
Day 27	Say every chapter recap aloud, books closed	Recap	All chapters
Day 28	2 hours 30 minutes · 75 marks · no notes	Mock	Whole syllabus
Day 29	Mark to the key. List every ★ Golden the batch missed.	Mark	Missed Goldens
Day 30	Redo the Day 29 list only. Dismiss by 6 pm.	Repair	Missed Goldens only

Batch register — starter marks

Three 1-mark oral or written questions from yesterday. Stamp homework full / half / zero in the last column. Re-teach any Golden that more than a third of the batch missed.

Day	Present	Q1	Q2	Q3	Mean /10	HW stamp
Day 01						
Day 02						
Day 03						
Day 04						
Day 05						
Day 06						
Day 07						
Day 08						
Day 09						
Day 10						
Day 11						
Day 12						
Day 13						
Day 14						
Day 15						
Day 16						
Day 17						
Day 18						
Day 19						
Day 20						
Day 21						
Day 22						
Day 23						
Day 24						
Day 25						
Day 26						
Day 27						
Day 28						
Day 29						
Day 30						

حاضری، تین اسٹارٹر نمبر، اور ہوم ورک کی مہر اس جدول میں لگائیں۔

How to run this 30-Day Coaching Academy Edition

This book is the **Bilingual Teacher's Edition** rebuilt as a **30-day coaching academy batch**. It is not a 40-minute school period and not a 3-hour self-study crash. A standard academy class is **90 minutes**. The coach stands at the board. Students copy, drill, and take homework home. ★ Golden topics are never skipped.

یہ کتاب تیس دن کی کوچنگ اکیڈمی بیچ کے لیے ہے۔ ہر کلاس نوے منٹ کی ہے۔ استاد بورڈ پر پڑھاتا ہے، طلبہ کاپی کرتے ہیں، ڈرل حل کرتے ہیں، ہوم ورک گھر لے جاتے ہیں۔ گولڈن موضوع نہ چھوڑیں۔

The 30 days

- **Days 1–23 — Teach the whole grade.** Every topic from the teacher’s notes appears as a board card. The last day of each chapter is a 75-mark closed-book exam in the academy hall.
- **Days 24–26 — ★ Golden blitz.** No new non-Golden topic. Error clinic on high-yield board wording.
- **Day 27 — Oral recap.** Students say each chapter recap at the board, books closed.
- **Day 28 — Mock morning.** 2 hours 30 minutes. Hall conditions. No notes, no phones.
- **Day 29 — Mark and repair list.** Mark to the sealed key. Every missed Golden goes on the list.
- **Day 30 — Repair clinic, then stop.** Redo only the list. Dismiss by 6 pm.

The 90-minute academy class (Days 1–23 teach days)

1. **0–10 min — Starter test.** Three oral or written 1-mark questions from yesterday. Marks go in the batch register in this book.
2. **10–35 min — Concept lock.** Write the definition, table and diagram on the whiteboard. Students copy. Phones in the box at the door.
3. **35–55 min — Board working.** Do the worked example. Hide it. Two students redo it on the board.
4. **55–75 min — Academy drill.** Timed. 1-mark, then 3-mark, then 5-mark. Golden days also take an 8-mark. Mark at once with the recipe.
5. **75–85 min — Error clinic.** Collect the three most common wrong answers. Correct them in one box on the board.
6. **85–90 min — Homework out.** One 5-mark (or 8-mark if Golden) + redraw the board from memory. Collect next class. Stamp full / half / zero.

Chapter-exam days

On the last day of a chapter the class is a hall paper: 75 marks · 1 hour 15 minutes · 15 MCQ + 10 short + any 3 long. Use the leftover minutes to collect scripts. Do not mark in front of the batch. Re-teach any Golden below 60% in the next starter.

باب کے آخری دن پچھتر نمبر کا پیپر ہال میں کرائیں۔ اگلی کلاس کے اسٹارٹر میں کمزور گولڈن دوبارہ پڑھائیں۔

How academy answers score marks

- **1 mark:** one exact definition or one named fact.
- **2 marks:** definition + one local example (JazzCash, school portal, NADRA, load-shedding).
- **3 marks:** definition + two clear points + example.
- **5 marks:** definition, a four-point table or explanation, example, and a labelled diagram if the topic has one.
- **8–10 marks:** 5-mark structure + full working (trace, K-map, code, ER diagram) + a one-line conclusion.

Train this wording every class: *Define. Explain. Example. Diagram. Working.* An answer with no working is a half-answer.

Batch rules

- One 90-minute class a day, six days a week, for thirty days. No extra unpaid “make-up” class unless a Golden exam mark is below 60%.
- If the batch falls behind, drop non-Golden cards that day. Never skip a chapter exam, the mock, or a Golden blitz day.
- Homework is collected. Uncollected homework is a zero in the register, not a warning.

What the extra academy boxes mean

COACH RUN-SHEET

How to run this day: starter, board, two-student redo, drill, error clinic.

FULL-MARK ANSWER RECIPE

The sentence pattern that scores 1, 3, 5 and 8 marks today.

ACADEMY DRILL

Timed class questions with answers — not for homework peeking.

BATCH HOMEWORK

What the batch takes home, and how you stamp it tomorrow.

ACADEMY CALENDAR

The 30-day calendar and the batch register.

GOLDEN TOPIC

★ **Golden** — never skip, never rush, test it every week until the board.

Chapter 1: Computer Systems (HCI)

Computer Systems (HCI) (1/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Fundamentals of Human-Computer Interaction · Traditional Interaction and 1.1.2 Natural Interaction · Applications of HCI (Domains of Life) · Components of HCI

★ **Must lock:** Applications of HCI (Domains of Life)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Define the last Golden topic in one exact sentence.
2. Redraw yesterday's table or diagram with labels.
3. Give one local example (JazzCash, NADRA, school portal, load-shedding).


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.1 Fundamentals of Human-Computer Interaction

Human-Computer Interaction (HCI) is the study and design of technology so that it serves people.

- An HCI system is easy to use, efficient, and responsive to human needs.
- HCI is also known as CHI (Computer-Human Interface) or MMI (Man-Machine Interaction).
- The three names mean the same idea: the meeting point of a person and a machine.

Channel	How humans use it	How computers respond
Sight (بصارت)	Look at screens, graphics or videos.	Displays visuals on monitors and screens.
Touch (چھونا)	Tap, type or swipe.	Responds with clicks or vibrations (haptics).
Hearing (سننا)	Listen to sounds or voices.	Provides audio feedback via speakers.
Voice (آواز)	Speak commands (for example, "Alexa").	Processes speech and replies.
Spatial (مکانی)	Move in physical space.	Tracks position or body movement (for example, VR).

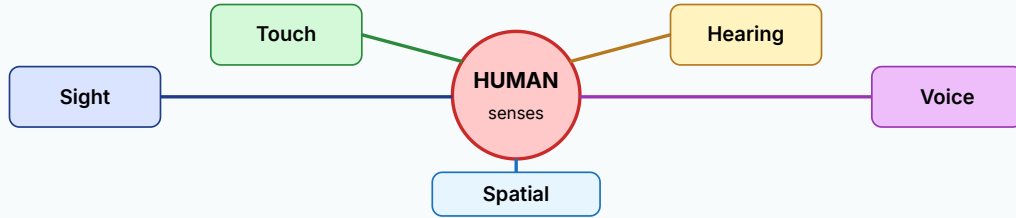

Five sensory channels meet at the human. HCI design must support the channels the user actually needs.

Remember: Remember the three names: HCI = CHI = MMI. Think "Human meets Machine." Five channels: S-T-H-V-S — Sight, Touch, Hearing, Voice, Spatial. "See The Handy Voice..."

ہیومن کمپیوٹر انٹرایکشن (HCI) کا مطلب ہے ٹیکنالوجی کو اس طرح ڈیزائن کرنا کہ وہ انسانوں کے لیے فائدہ مند، آسان اور مؤثر ہو۔

1.1.1 Traditional Interaction and 1.1.2 Natural Interaction

1.1.1 Traditional interaction is the basic way people use everyday devices.

- Computer: moving a mouse and typing on a keyboard; output via monitor and speakers.
- Smartphone (traditional use): tapping and swiping on a touchscreen; output via screen lighting and vibrations.
- Voice: speaking commands into a device (for example, "Alexa, play a song").
- Body and gesture: facial recognition to unlock a phone, or playing VR games by waving hands.

Feature	Traditional	Natural
Main input	Mouse, keyboard, keypad, simple tap/swipe	Voice, face, hand/body gesture, movement
Feels like	Operating a machine	Talking or moving as you do with people
Examples	TV remote, ATM keypad, school-portal login typed on a PC	FaceID, Siri, Kinect games, "Hey Google"
Typical output	Screen, speakers, vibration	Spoken reply, unlock, tracking of the body in VR

Remember: Test sentence: If you must press keys or tap labelled buttons, it is traditional. If the machine understands speech, face or body movement, it is natural.


روایتی تعامل (Traditional Interaction) میں ماؤس، کی بورڈ، کی پیڈ یا عام ٹیپ اور سوائپ استعمال ہوتے ہیں، جیسے اے ٹی ایم کی پیڈ۔

1.2 Applications of HCI (Domains of Life) ★ Golden

HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps.

- These are human-centred solutions built to meet user needs across many domains of life.
- A domain is an area of daily activity — health, money, school, talking to people.
- When you design for a domain, you design for that domain's users, tasks and risks.

Domain	Application examples	User benefit
Health care	Patient portals, telemedicine apps, assistive technologies	Improves access to medical services remotely
Banking	Mobile banking apps, secure ATM interfaces	Enables quick transactions and secure financial management
Education	E-learning platforms (LMS), online exam portals	Enhances teaching, learning and student engagement
Networking and communication	Social media, messaging apps (WhatsApp), Zoom	Connects people globally through collaboration tools

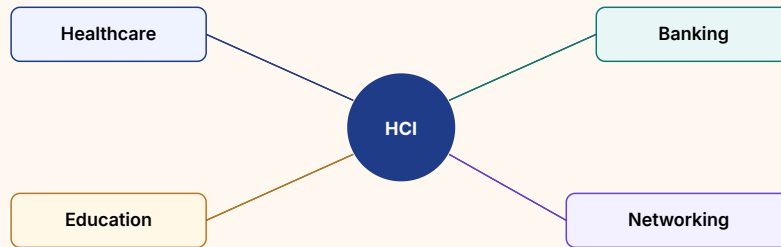

HCI sits at the centre of four everyday domains: healthcare, banking, education and networking.

Remember: Exam mnemonic H-BEN: Health, Banking, Education, Networking. For each, write: one application + one user benefit. That structure scores full marks on...

Exam: Very common 5–8 mark question: "Explain applications of HCI in different domains of life with examples." Draw a four-row table (Health care, Banking, Education,...


ایچ سی آئی کی ایپلیکیشنز صحت، بینکنگ، تعلیم اور نیٹ ورکنگ کے شعبوں میں انسانی ضروریات پوری کرتی ہیں۔

1.3 Components of HCI

HCI relies on several primary components that work together.

- If one component is weak, the whole interaction feels broken.
- The first four are the people, the machine, the conversation, and the job to be done.

	Component	Meaning
i	User (صارف)	Any individual or group that interacts with a computer system to achieve defined goals. Two categories: end users (people who directly operate the system, from beginners to experts) and stakeholders (people with an interest in the outcome, such as managers and clients).
ii	Computer system (کمپیوٹر سسٹم)	The platform where humans and computers communicate through input, output and feedback using an interface. It connects human actions with machine responses.
iii	User interaction (صارف کا تعامل)	The process through which a user communicates with a system by performing actions (clicking, tapping, typing, speaking). It transforms user intent into system responses.
iv	Task (کام)	The specific action users perform (for example, booking a ticket). It has three characteristics: task complexity (filling a form vs designing a 3D model), user knowledge (basic typing vs advanced programming), and time requirement (ATM withdrawal vs online passport application).

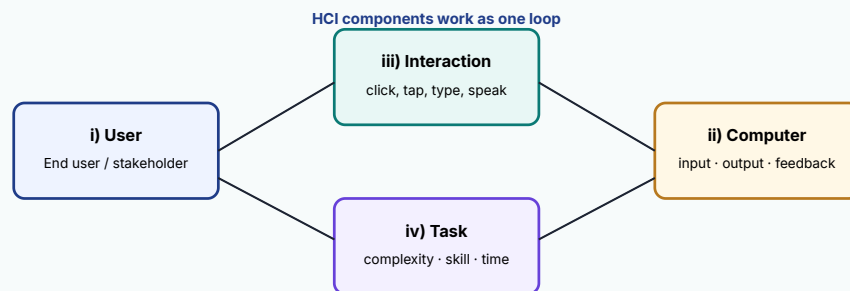

The user performs a task through interaction with a computer system. All four parts must fit together.

Remember: U-C-I-T: User, Computer system, Interaction, Task. "U Can Interact with Tasks." Then add three task questions: How hard? What skill? How long?

ایچ سی آئی کے چار بنیادی اجزاء ہیں: صارف (اینڈ یوزر جو خود سسٹم چلاتا ہے اور اسٹیک ہولڈر جس کا نتیجے میں مفاد ہے)، کمپیوٹر سسٹم (....)

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Fundamentals of Human-Computer Interaction:** Mistake: Writing "HCI is only about computer hardware" or mixing up Voice with Hearing.
- **Traditional Interaction and 1.1.2 Natural Interaction:** Mistake: "Touchscreens are always natural interaction." Fix: Ordinary tapping and swiping on a phone is still listed as traditional in this...
- **Applications of HCI (Domains of Life):** Mistake: Listing brand names only ("WhatsApp, JazzCash, Zoom") without saying the domain and the user benefit.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Applications of HCI (Domains of Life)**. Write: HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) These are human-centred solutions built to meet user needs across many domains of life. (2) A domain is an area of daily activity — health, money, school, talking to people. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Name the four domains of HCI given in the source.

3 marks. Explain Applications of HCI (Domains of Life) with two clear points and one example.

5 marks. Very common 5–8 mark question: "Explain applications of HCI in different domains of life with examples." Draw a four-row table (Health care, Banking, Education, Networking & communication). Each row:...

8 marks. Applications of HCI (Domains of Life): 5-mark answer plus a labelled wireframe and one accessibility fix.

Answers: 1. Health care, banking, education, networking and communication 3. These are human-centred solutions built to meet user needs across many domains of life.; A domain is an area of daily activity — health, money, school, talking to people. 5. Use the recipe in the blue box. Model opening: HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps. 8. Same 5-mark body + a labelled wireframe and one accessibility fix + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Applications of HCI (Domains of Life)** using the recipe in this topic. Include a labelled wireframe and one accessibility fix. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 1: Computer Systems (HCI)

Computer Systems (HCI) (2/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Types of User Interaction · Interface Types, Environment and Feedback · Importance of HCI · Accessibility Principles

★ **Must lock:** Importance of HCI

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Name the four domains of HCI given in the source.
2. Give two other names for HCI.
3. Is an ATM keypad traditional or natural?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

Types of User Interaction

User interaction can happen in many different ways depending on the technology used.

- Learn every type with one clean example — board questions often ask you to "list and explain" five or more.

Remember: Group them: hands on screen (direct, gesture, haptic) · words (command, conversational, voice) · lists and blanks (menu, form) · automatic/body (context-aware,...

تعامل کی اقسام میں براہ راست پھیری، کمانڈ، مینو، فارم، گفتگو (چیٹ بوٹ)، اشارہ، آواز، سیاق و سباق سے آگاہ نظام، بائیومیٹرک، بی...

Interface Types, Environment and Feedback

Components v–vii complete the HCI picture: the look of the controls, the place where you use them, and the signals that tell you "it worked" or "try again".

- Graphical User Interface (GUI): visual elements such as windows, icons and menus (Windows OS, Android).
- Command-Line Interface (CLI): text-based typing (MS-DOS, Linux terminal).
- Touch interface: tapping, swiping, pinching (smartphones, tablets).
- Voice User Interface (VUI): spoken commands (smart speakers).

Remember: GUI vs CLI vs NUI: GUI = pictures you click. CLI = words you type. NUI = body you move. VUI = voice you speak. Touch = fingers on glass. Feedback rule: system...

یوزر انٹرفیس وہ واسطہ ہے جس سے انسان سسٹم سے بات کرتا ہے: GUI تصاویر اور مینو، CLI لکھی کمانڈ، ٹچ، آواز (VUI) اور قدرتی اشارے (NUI).

1.4 Importance of HCI ★ Golden

HCI ensures that machines are approachable and usable, turning complex technology into everyday tools.

- Good design makes technology simple and enjoyable (touchscreens).
- Poor design causes confusion and risks (unclear buttons on medical devices).
- This is why HCI is not optional decoration.

Implication	Description
1. Enhance productivity	Well-designed interfaces help users work faster, make fewer mistakes, and achieve goals efficiently.
2. Promotes inclusivity	Accessibility features (screen readers, voice commands) empower marginalized groups and ensure equal use of technology for everyone.
3. Drives innovation	Emerging tech such as AR/VR, AI and IoT rely strictly on solid HCI principles for people to actually adopt and use them.
4. Economic impact	User-friendly products gain higher adoption rates, customer loyalty and market success, driving profits.
5. Ethical responsibility	Responsible design ensures technology respects user privacy, reduces bias and supports human well-being.

Remember: P-I-I-E-E: Productivity, Inclusivity, Innovation, Economic impact, Ethics. Sentence: "Please Include Innovative, Ethical Earnings."

Exam: Typical wording: "Why is HCI important? Discuss its implications." (8 marks) Write a short opening (good design vs poor design) then five numbered points with one...

اچھا ایچ سی آئی پیچیدہ ٹیکنالوجی کو روزمرہ کا آسان اوزار بناتا ہے؛ برا ڈیزائن الجھن اور خطرہ پیدا کرتا ہے، جیسے طبی آلے پر غیر واضح بٹن۔

1.5 Accessibility Principles

Accessibility principles are HCI guidelines that ensure digital systems are usable by all individuals, including people with diverse physical, sensory and cognitive abilities.

- They remove barriers to create equal access.
- Accessibility is not a "special extra".
- It is how you make sure a student with low vision, a shopkeeper who cannot use a mouse, or a colour-blind driver can still complete the...

Principle	What it means	Example
1. High contrast (واضح رنگ)	Make text and pictures stand out clearly against the background.	Black text on a white background in a railway app, readable in bright sunlight.
2. Readable fonts (پڑھنے میں آسان تحریر)	Clear, simple fonts with proper size and spacing.	A school website using large Calibri so homework instructions are easy to read.
3. Colour-blind friendly design (رنگوں کی پہچان)	Do not depend <i>only</i> on colours; also use symbols or text labels.	A traffic app showing a red circle with a "STOP" label, not just a red colour.
4. Inclusive navigation (آسان نیویگیشن)	Give users different ways to move around a system.	A website that lets you use the Tab key to jump between buttons if you cannot use a mouse.
5. Multimodal detection (متعدد حسی ذرائع)	Present information in different formats (sight, sound, touch).	A video with text captions, or a phone vibrating to alert a user.

Remember: C-F-C-N-M: Contrast, Fonts, Colour-blind, Navigation, Multimodal. "Can Friends Catch New Messages?"

رسائی پذیری (Accessibility) کے اصول یقینی بناتے ہیں کہ ہر انسان سسٹم استعمال کر سکے، بشمول مختلف جسمانی، حسی اور ذہنی صلاحیتوں والے افراد۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Types of User Interaction:** Mistake: Treating "voice interaction" and "conversational" as identical, or calling a dropdown menu "command-based".
- **Interface Types, Environment and Feedback:** Mistake: Mixing up system feedback with user feedback, or saying "environment" means only the software theme (dark mode).
- **Importance of HCI:** Mistake: Writing only "HCI is important because it makes apps look nice." Fix: Looks are a tiny part of UI.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Importance of HCI**. Write: HCI ensures that machines are approachable and usable, turning complex technology into everyday tools.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Good design makes technology simple and enjoyable (touchscreens). (2) Poor design causes confusion and risks (unclear buttons on medical devices). — + example.

5 marks: 3-mark structure + table: Implication / Description + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Give one example of poor design mentioned in the source.

3 marks. Explain Importance of HCI with two clear points and one example.

5 marks. Typical wording: "Why is HCI important? Discuss its implications." (8 marks) Write a short opening (good design vs poor design) then five numbered points with one example each. Local examples that...

8 marks. Importance of HCI: 5-mark answer plus a labelled wireframe and one accessibility fix.

Answers: 1. Unclear buttons on medical devices 3. Good design makes technology simple and enjoyable (touchscreens).; Poor design causes confusion and risks (unclear buttons on medical devices). 5. Use the recipe in the blue box. Model opening: HCI ensures that machines are approachable and usable, turning complex technology into everyday tools. 8. Same 5-mark body + a labelled wireframe and one accessibility fix + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Importance of HCI** using the recipe in this topic. Include a labelled wireframe and one accessibility fix. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 1: Computer Systems (HCI)

Computer Systems (HCI) (3/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Need Analysis for Interface Design · Human-Computer Interaction Problems · Methods for Improving HCI · User Interface Design (UI vs UX)

★ **Must lock:** Human-Computer Interaction Problems, User Interface Design (UI vs UX)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Give one example of poor design mentioned in the source.
2. Which type is a Linux `cd ..` command?
3. Name five types of user interface given in the source.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.6 Need Analysis for Interface Design

Need analysis is the process of identifying the gap between the existing situation and the desired outcome.

1. Identify the users → 2. Collect information → 3. Analyse needs → 4. Prioritise → 5. Develop solutions

- In HCI it is done before designing a UI, so that you understand users' goals, tasks, abilities and expectations.
- If you skip need analysis, you guess.
- Guessing is how a school portal ends up with 40 menus and no "Download date sheet" button on the home screen.

Remember: Need analysis = gap finding. Write: Existing = what hurts now. Desired = what "done" looks like.

The UI must close that gap, not decorate it.

نیڈ اینالیسس موجودہ صورتحال اور مطلوبہ نتیجے کے فرق کو یو آئی بنانے سے پہلے تلاش کرتا ہے۔

1.7 Human-Computer Interaction Problems ★ Golden

HCI problems are common difficulties that stop users from using technology smoothly.

- They happen when systems fail to meet human needs or cognitive limits.
- Cognitive limits means the mind can only hold and process so much at once — if an app asks you to remember three SMS codes at the same...
- Board answers score well when you name the problem, explain it in one line, and give a concrete example (the source examples are safe; a...

Problem	Explanation and example
Interface complexity	Too many options or a confusing layout. Example: a shopping app with so many menus you cannot find the checkout button.
Poor feedback	The system does not show if an action worked or failed. Example: clicking Submit and the screen freezes with no confirmation.
Inconsistency	Different parts of the app look or act differently. Example: a magnifying-glass icon for Search on one page, a binocular icon on another.
Accessibility gaps	Design ignores people with disabilities. Example: a video tutorial platform without captions for deaf users.
Compatibility issues	Interface fails on different devices or browsers. Example: a website that works on a laptop but crashes on a mobile browser.
Contextual neglect	The system does not adjust to the user's situation. Example: a map app with no dark mode, blinding the driver at night.
High cognitive load	Users must memorize too much or follow overly complex steps. Example: a registration system forcing you to remember three different SMS codes at once.
Trust deficiency	The system feels unsafe or hides security cues. Example: an online store asking for credit cards but lacking an SSL/HTTPS lock icon.

Remember: Eight problems in two families: (1) Screen problems — complexity, inconsistency, accessibility, compatibility, context. (2) Mind-and-trust problems — poor...

Exam: Common 8-mark question: "Describe problems of HCI with examples." Aim for at least six of the eight, each in the pattern Name → one-line meaning → example. Memorise the...

ایچ سی آئی مسائل وہ رکاوٹیں ہیں جو سسٹم کو انسانی ضرورت یا ذہنی حد کے مطابق نہ ہونے پر پیدا ہوتی ہیں۔

1.8 Methods for Improving HCI

Once you can name an HCI problem, you fix it with a matching method.

- Enhance usability: simplify navigation (a clear "Buy Now" button).
- Strengthen accessibility: support disabilities (captions on videos).
- Ensure consistency: keep layouts uniform (the same "Save" button everywhere).
- Provide clear feedback: show action results ("Payment Successful" popup).

Problem (1.7)	Method (1.8)
Cannot find "Send Money"	Enhance usability — one clear button
No captions on help video	Strengthen accessibility
Search icon changes from page to page	Ensure consistency
Submit freezes with no message	Clear feedback — "Payment Successful"
Portal crashes on mobile	Improve adaptability — responsive layout
Built features nobody asked for	UCD — interview, then pilot-test
Elderly user cannot type a long number	Multimodal — voice + touch
Complaints ignored after launch	Continuous testing and updates

Remember: Think "problem → method" as a pair. Complexity ↔ usability. No captions ↔ accessibility. Different icons ↔ consistency. Freeze ↔ feedback. Phone crash ↔...

ایچ سی آئی بہتر بنانے کے طریقے: نیویگیشن آسان کرنا، رسائی بڑھانا (کیپشن)، ایک جیسا لے آؤٹ، واضح فیڈبیک ("ادائیگی کامیاب")،
ریسپانس...

1.9 User Interface Design (UI vs UX) ★ Golden

UI design is the process of creating and organizing the visual elements of a software application so users can interact with it easily and efficiently.

- 1.9.1 Components of a user interface
ComponentRole Buttons Clickable elements that perform actions (Submit, Cancel).
- Menus Lists of options for navigating the system.
- Icons Small symbols representing tools or actions.

Component	Role
Buttons	Clickable elements that perform actions (Submit, Cancel).
Menus	Lists of options for navigating the system.
Icons	Small symbols representing tools or actions.
Text fields	Boxes where users type information (passwords, search).
Checkboxes / radio buttons	Selecting options in a form. Checkboxes allow several choices; radio buttons allow only one in a group.
Sliders	Adjusting values along a bar (volume, brightness).

Remember: Clothes vs day out. UI is the outfit (colours, buttons, icons). UX is the whole day (Did you arrive on time? Did you get wet? Were you stressed?). Examiners...

Exam: Highest-yield short question in the chapter: "Differentiate between UI and UX with an example." Write: (1) the two definitions, (2) the sentence "UI is what you see; UX..."

یو آئی ڈیزائن بصری عناصر — بٹن، مینو، آئیکن، ٹیکسٹ فیلڈ، چیک باکس/ریڈیو، سلائیڈر — کو ترتیب دینا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Need Analysis for Interface Design:** Mistake: Starting in Figma on day one, then "asking users later".
- **Human-Computer Interaction Problems:** Mistake: Writing "the app is bad" as an HCI problem, or mixing up cognitive load with compatibility.
- **Methods for Improving HCI:** Mistake: Naming methods without saying what they change ("we will improve HCI" is not an answer).

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Human-Computer Interaction Problems**. Write: HCI problems are common difficulties that stop users from using technology smoothly.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) They happen when systems fail to meet human needs or cognitive limits. (2) Cognitive limits means the mind can only hold and process so much at once — if an app asks you to remember three SMS codes at the same... — + example.

5 marks: 3-mark structure + table: Problem / Explanation and example + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **User Interface Design (UI vs UX)**. Write: UI design is the process of creating and organizing the visual elements of a software application so users can interact with it easily and efficiently.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) 1.9.1 Components of a user interface ComponentRole ButtonsClickable elements that perform actions (Submit, Cancel). (2) MenusLists of options for navigating the system. — + example.

5 marks: 3-mark structure + table: Component / Role + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Which problem is a missing HTTPS lock on a payment page?

3 marks. Explain Human-Computer Interaction Problems with two clear points and one example.

5 marks. Common 8-mark question: "Describe problems of HCI with examples." Aim for at least six of the eight, each in the pattern Name → one-line meaning → example. Memorise the source examples (checkout...

8 marks. Human-Computer Interaction Problems: 5-mark answer plus a labelled wireframe and one accessibility fix.

Answers: 1. Trust deficiency 3. They happen when systems fail to meet human needs or cognitive limits.; Cognitive limits means the mind can only hold and process so much at once — if an app asks you to remember three SMS codes at the same... 5. Use the recipe in the blue box. Model opening: HCI problems are common difficulties that stop users from using technology smoothly. 8. Same 5-mark body + a labelled wireframe and one accessibility fix + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Human-Computer Interaction Problems** using the recipe in this topic. Include a labelled wireframe and one accessibility fix. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 1: Computer Systems (HCI)

Computer Systems (HCI) (4/4) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Wireframing, Figma and Prototypes · Test and Evaluate HCI (Evaluation Methods) · Testing Methods (Usability, A/B, Automated) · Career Opportunities in UI/UX

★ **Must lock:** Testing Methods (Usability, A/B, Automated)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Which problem is a missing HTTPS lock on a payment page?
2. List six UI components from the source.
3. When in the design process is need analysis done?


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.9.3–1.9.5 Wireframing, Figma and Prototypes

1.9.3 Wireframing is creating a basic visual outline or blueprint of a user interface before the final design.

Lo-Fi sketch → Add details → Hi-Fi prototype

- It plans the structure without focusing on colours or detailed graphics.
- Low-fidelity wireframes (Lo-Fi) A simple black-and-white sketch showing basic layout (boxes and lines).
- Used early to test and share ideas quickly.

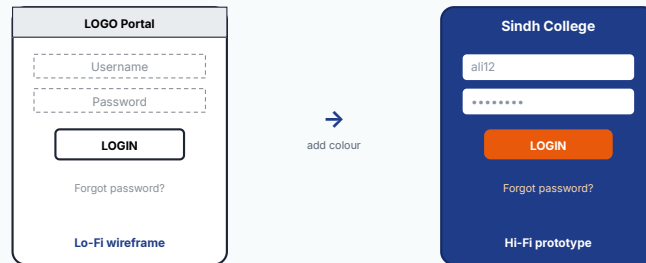

A school-portal login: Lo-Fi boxes and labels on the left; a coloured, realistic Hi-Fi prototype on the right.

Remember: Lo-Fi = boxes. Hi-Fi = almost the real app. Prototype = clickable. Figma can hold all three stages. Trigger = what the user does. Action = where the fake app...

وائر فریم یو آئی کا بنیادی خاکہ ہے، رنگوں سے پہلے۔

1.11 Test and Evaluate HCI (Evaluation Methods)

Testing checks if the product works properly (finding bugs).

- Evaluation determines whether it meets users' needs (usability).
- Together they improve the product before release.
- A school portal can be "bug-free" (testing passed) and still unusable if students cannot find the date sheet (evaluation failed).

Method	Description
SUS (System Usability Scale)	A standard 10-item questionnaire used to calculate a score for how usable a system is.
NPS (Net Promoter Score)	Asks users: "How likely are you to recommend this app to a friend?" Measures user loyalty.
Formative evaluation	Done during development to collect early feedback and improve the design continuously.
Summative evaluation	Done at the end of development to measure overall success against the original goals.
Expert reviews	Usability specialists review the app against established design standards (heuristics).

Remember: Formative = forming it (during). Summative = summing it up (end). SUS = 10 questions on usability. NPS = "Would you recommend it?" Expert = specialist vs...

ٹیسٹنگ یہ دیکھتی ہے کہ پروڈکٹ ٹھیک چلتا ہے (بگز)؛ ایویلیوایشن یہ دیکھتی ہے کہ صارف کی ضرورت پوری ہوئی۔

1.11.2 Testing Methods (Usability, A/B, Automated) ★ Golden

Testing involves observing how the system behaves under specific conditions.

- Usability testing: observing real users while they perform realistic tasks, to measure efficiency and satisfaction. If the user gets stuck,...
- Task-based testing: assigning a specific task (for example, "Find a product and add it to cart") and strictly measuring completion time,...
- Automated audits: software bots scan websites to detect technical issues such as broken links, slow loading speeds or low colour contrast.
- A/B testing: comparing two versions of an interface (A and B). Half the users see A, half see B. The one with more clicks or sign-ups wins.

Task-based	A/B test	Automated audit
"Add to cart"	Version A Version B	Bot scanning...
Time: 12 s	half / half users	3 broken links
Success: Yes	more clicks wins	Low contrast

Three golden testing pictures: timed tasks, A versus B, and a bot that finds broken links and weak contrast.

Remember: Task-based three numbers: Time, Success, Errors. A/B: two versions, split users, the higher clicks/sign-ups win. Bot: links, speed, contrast. Load: many users...

Exam: Golden 8-mark question: "Explain testing methods used in HCI." Write seven short paragraphs or a seven-row table. For full marks, define usability testing (observe real...

سات ٹیسٹنگ طریقے: یوزیبلٹی (حقیقی صارف کو کام کرتے دیکھنا)، ٹاسک بیسڈ (وقت، کامیابی، غلطیاں ناپنا)، خودکار آڈٹ (بوت ٹوٹے لنک،
سسٹ...

Career Opportunities in UI/UX

The same HCI skills you practised on ATMs, JazzCash and school portals are real jobs.

- Each role uses a different slice of this chapter.

Career	What the person does
UX designer	Researches user needs to ensure the app is intuitive and satisfying.
UI designer	Designs the visual layout (colours, typography, buttons) using tools such as Figma.
Interaction designer	Focuses on the flow between screens, animations and gestures.
Usability researcher	Runs SUS/NPS tests and A/B tests with real users to find flaws.
Accessibility specialist	Ensures products meet inclusive standards for people with disabilities.

Remember: UI looks; UX asks; interaction connects screens; research measures; accessibility includes everyone.

اس باب سے ملازمتیں: یو ایکس ڈیزائنر صارف کی ضرورت تحقیق کرتا ہے، یو آئی ڈیزائنر فگما میں رنگ اور بٹن بناتا ہے، انٹریکشن ڈیزائنر اس...

Computer Systems (HCI)

16 single-page lessons · 5 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- **HCI** (also CHI, MMI) designs technology to be easy, efficient and responsive to people, using five sensory channels: sight, touch (haptics), hearing, voice and spatial.
- **Traditional interaction** uses mouse, keyboard, keypad or simple tap/swipe; **natural interaction** uses voice, face or body gesture without a mouse or keyboard.
- HCI applications cover **health care, banking, education, and networking/communication**, each with a clear user benefit (remote care, quick secure money, better learning, global connection).
- Four core components: **user** (end user vs stakeholder), **computer system**, **user interaction**, and **task** (complexity, knowledge, time).
- Interaction types include direct manipulation, command-based, menu-driven, form fill, conversational, gesture, voice, context-aware, biometric, haptic and multimodal.
- Interfaces: GUI, CLI, touch, VUI, NUI. **Environment** is physical, social and technical. **System feedback** is the machine's reply; **user feedback** is what the person sends in.
- HCI matters for productivity, inclusivity, innovation, economic impact and ethical responsibility. Poor design (unclear medical buttons) creates risk.
- Five accessibility principles: high contrast, readable fonts, colour-blind friendly labels, inclusive navigation, multimodal presentation.
- **Need analysis** finds the gap before UI design: identify users, collect data, analyse, prioritise, develop solutions (banking case: FaceID, large buttons, local language).
- Eight HCI problems: complexity, poor feedback, inconsistency, accessibility gaps, compatibility, contextual neglect, high cognitive load, trust deficiency.
- Improve HCI with usability, accessibility, consistency, clear feedback, adaptability (responsive design), UCD and pilot tests, multimodal input, and continuous testing.
- **UI** is the visual components (buttons, menus, icons, fields, checkboxes, sliders); **UX** is how the whole experience feels. UI is what you see; UX is how it feels.
- Lo-Fi wireframes plan structure; Hi-Fi prototypes look real; **Figma** is a free browser tool; prototypes use Trigger (On Tap) and Action (navigate) before code.
- Evaluation (SUS, NPS, formative, summative, expert/heuristic reviews) checks needs; testing (usability, task-based, automated, A/B, compatibility, load, keyboard/screen-reader) checks behaviour under conditions.

Key terms

Term	Meaning	اردو
HCI	Human-Computer Interaction; designing technology that is easy, efficient and responsive to people. Also called CHI or MMI.	انسان اور کمپیوٹر کا باہمی تعامل
Haptics	Physical feedback you can feel, such as a vibration.	لمسی / ارتعاشی جواب
Traditional interaction	Using standard input/output such as mouse, keyboard, keypad or simple tap and swipe.	روایتی تعامل
Natural interaction	Interacting without mouse or keyboard, using voice, face or body gesture.	قدرتی تعامل
End user	A person who directly operates the system.	حتمی صارف
Stakeholder	A person or group with an interest in the system's outcome (manager, client).	فريقی مفاد
GUI	Graphical User Interface using windows, icons and menus.	تصویری صارف انٹرفیس
CLI	Command-Line Interface using typed text commands.	کمانڈ لائن انٹرفیس
NUI	Natural User Interface using gestures, body movement or immersive environments (VR, Kinect).	قدرتی صارف انٹرفیس
System feedback	The computer's response that confirms or guides an action.	نظام کا جواب
User feedback	Input the user sends to the system (Submit click, star rating).	صارف کی رائے / ان پٹ
Accessibility	Making digital systems usable by all, including people with diverse abilities.	رسائی پذیری

Computer Systems (HCI)

75 marks · 1 hour 15 minutes · no notes · no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 16 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define · Explain · Example · Diagram · Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. HCI is also known as:
 - a. CPU and ALU
 - b. CHI or MMI
 - c. HTTP or HTML
 - d. GUI only
2. Which sensory channel tracks body movement in VR?
 - a. Sight
 - b. Hearing
 - c. Spatial
 - d. Voice
3. Unlocking a phone with FaceID is an example of:
 - a. natural interaction
 - b. command-based interaction only
 - c. traditional interaction
 - d. CLI
4. Which domain of HCI includes patient portals and telemedicine?
 - a. Banking
 - b. Education
 - c. Networking
 - d. Health care
5. A bank manager who never uses the ATM but cares that it works is a:
 - a. stakeholder
 - b. end user
 - c. haptic device
 - d. wireframe
6. Typing `dir` in MS-DOS is:
 - a. menu-driven
 - b. command-based
 - c. context-aware
 - d. biometric
7. A "Message Sent!" tick mark is:
 - a. user feedback
 - b. a stakeholder
 - c. need analysis
 - d. system feedback
8. Unclear buttons on a medical device mainly show that poor HCI:
 - a. only affects game apps
 - b. is a colour preference
 - c. causes confusion and risk
 - d. improves load testing
9. Not depending only on colour, but adding a "STOP" label, is:
 - a. colour-blind friendly design
 - b. load testing
 - c. CLI design
 - d. A/B testing
10. Need analysis for a UI should be done:
 - a. after the product is sold
 - b. before designing the UI
 - c. only by programmers
 - d. instead of testing
11. An online store that asks for a credit card but shows no HTTPS lock has:
 - a. high contrast
 - b. natural interaction
 - c. summative evaluation
 - d. trust deficiency
12. "UI is what you see; UX is how it feels" means:
 - a. UI and UX are identical
 - b. UX is only the logo colour
 - c. UI is code and UX is hardware
 - d. UI is visual elements; UX is the overall experience
13. A Lo-Fi wireframe should focus on:
 - a. final photographs and brand colours
 - b. structure and flow using boxes and lines
 - c. server load of 10,000 users
 - d. writing the finished Python code
14. The System Usability Scale (SUS) is:
 - a. a 10-item questionnaire that scores usability
 - b. a bot that finds broken links
 - c. a type of ATM keypad
 - d. a Figma trigger
15. In A/B testing:
 - a. every user sees both versions at once and votes for the prettier one
 - b. only experts review heuristics
 - c. half the users see A, half see B, and the version with more clicks or sign-ups wins
 - d. the server is crashed on purpose

Section B — Short questions (10 × 3 = 30)

1. Define HCI. Give two other names for it and list the five sensory channels.
2. Differentiate traditional interaction from natural interaction with one example of each from daily Pakistani use.
3. State four domains of HCI. For each, give one application and one user benefit.
4. Name the four primary HCI components. Distinguish end user from stakeholder, and list the three characteristics of a task.
5. Define GUI, CLI, VUI and NUI, with one example of each.
6. Write five implications of the importance of HCI.
7. List the five accessibility principles with one example each.
8. What is need analysis? Write its five steps and three findings from the mobile-banking case study.
9. Differentiate UI from UX using the food-delivery example. Name six UI components.
10. What is A/B testing? How is it different from an automated audit?

Section C — Long questions (attempt any 3 × 10 = 30)

1. Explain the components of HCI (user, computer system, user interaction, task, interface types, environment, feedback). Illustrate every part with a labelled walk-through of a person withdrawing cash from an outdoor ATM in Hyderabad.
2. Describe eight HCI problems with examples. Then match each problem to a method of improving HCI. Use JazzCash or a school portal wherever it makes the example clearer.
3. "UI is what you see; UX is how it feels." Explain UI design, its six components, and UX. Then describe Lo-Fi wireframes, Hi-Fi prototypes, the steps of making a low-fidelity design in Figma, and how a Figma prototype uses a trigger and an action. Sketch a Lo-Fi school-portal login.
4. Differentiate testing from evaluation. Explain SUS, NPS, formative evaluation, summative evaluation and expert reviews. Then explain usability testing, task-based testing (including the three measurements), automated audits, A/B testing, compatibility testing, performance/load testing, and keyboard/screen-reader walkthroughs. Apply three of these methods to a college portal on result day.
5. A team is designing a JazzCash-style "Send Money" screen for elderly users in Sukkur who speak Sindhi, stand in bright sunlight, and have never used a CLI. Carry out a need analysis (five steps), list accessibility principles you will apply, choose interaction types, and say which evaluation and testing methods you will use before launch and why.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **1.1 Fundamentals of Human-Computer Interaction.** Answers: 1. CHI (Computer-Human Interface) and MMI (Man-Machine Interaction). 2. Spatial. 3. Touch / haptics.
2. **1.1.1 Traditional Interaction and 1.1.2 Natural Interaction.** Answers: 1. Traditional. 2. "Alexa, play a song" (or any spoken command). 3. Because typing a PIN is traditional, while FaceID or a voice assistant on the same phone is natural — it depends on the method, not the device.
3. **1.2 Applications of HCI (Domains of Life).** Answers: 1. Health care, banking, education, networking and communication. 2. Quick transactions and secure financial management. 3. Education: LMS or online exam portal. Networking: social media, WhatsApp or Zoom.
4. **1.3 Components of HCI.** Answers: 1. End users directly operate the system; stakeholders have an interest in the outcome (managers, clients) but may not click the buttons. 2. Task complexity, user knowledge, time requirement. 3. The principal, IT admin or board office — they care about results even if students are the end users.
5. **Types of User Interaction.** Answers: 1. Command-based. 2. Context-aware. 3. Because it combines two or more types (voice + touch) in one task.
6. **Interface Types, Environment and Feedback.** Answers: 1. GUI, CLI, Touch, VUI, NUI. 2. Physical: ATM in sunlight. Social: a quiet classroom. 3. System feedback.
7. **1.4 Importance of HCI.** Answers: 1. Unclear buttons on medical devices. 2. Promotes inclusivity. 3. User-friendly products get higher adoption, loyalty and profits.
8. **1.5 Accessibility Principles.** Answers: 1. Colour-blind users may not see the meaning if there is no symbol or "STOP" text. 2. Inclusive navigation. 3. Large Calibri on a school website for homework instructions.
9. **1.6 Need Analysis for Interface Design.** Answers: 1. Before designing the UI. 2. Identify users; collect information; analyse needs; prioritise; develop solutions. 3. Fingerprint/FaceID login; large buttons and simple navigation for elderly users; English plus local languages.
10. **1.7 Human-Computer Interaction Problems.** Answers: 1. Trust deficiency. 2. High cognitive load — users must memorize too much. 3. Compatibility issues.
11. **1.8 Methods for Improving HCI.** Answers: 1. User-Centred Design; focus on real user goals and pilot-test. 2. Improve adaptability (responsive design). 3. A "Payment Successful" popup.
12. **1.9 User Interface Design (UI vs UX).** Answers: 1. Buttons, menus, icons, text fields, checkboxes/radio buttons, sliders. 2. The app loads fast, tracking works, food arrives without frustration. 3. how it feels.
13. **1.9.3–1.9.5 Wireframing, Figma and Prototypes.** Answers: 1. Colours and detailed graphics (it is structure only). 2. Directly in a web browser. 3. The user event that starts a move between screens, e.g. "On Tap".
14. **1.11 Test and Evaluate HCI (Evaluation Methods).** Answers: 1. Testing finds bugs / checks the product works; evaluation checks it meets users' needs (usability). 2. 10. 3. At the end of development, against the original goals.
15. **1.11.2 Testing Methods (Usability, A/B, Automated).** Answers: 1. Completion time, success rate, number of errors. 2. Half of the users (the other half see B). 3. Any two of: broken links, slow loading, low colour contrast.
16. **Career Opportunities in UI/UX.** Answers: 1. Usability researcher. 2. UI designer.

Answer key

Multiple choice

1. b
2. c
3. a
4. d
5. a
6. b
7. d
8. c
9. a
10. b
11. d
12. d
13. b
14. a
15. c

Short questions — model answers

1. HCI is the design of technology to serve people; systems that are easy to use, efficient and responsive. Also called CHI (Computer-Human Interface) and MMI (Man-Machine Interaction). Channels: sight, touch, hearing, voice, spatial.
2. Traditional uses standard I/O (mouse, keyboard, keypad, simple tap/swipe), e.g. an ATM keypad or typing on a school portal. Natural lets people interact without mouse or keyboard, using voice, face or gesture, e.g. FaceID or "Alexa, play a song".
3. Health care: patient portals / telemedicine — remote access to medical services. Banking: mobile banking and ATMs — quick, secure transactions. Education: LMS and exam portals — better teaching, learning and engagement. Networking: WhatsApp, Zoom, social media — global connection and collaboration.
4. User, computer system, user interaction, task. End users directly operate the system; stakeholders (managers, clients) have an interest in the outcome. Task characteristics: complexity, user knowledge, time requirement.
5. GUI: windows, icons, menus (Windows, Android). CLI: typed commands (MS-DOS, Linux). VUI: spoken commands (smart speakers). NUI: gestures, body, immersive VR/Kinect.
6. Enhance productivity; promote inclusivity; drive innovation (AR/VR, AI, IoT need solid HCI); economic impact (adoption, loyalty, profit); ethical responsibility (privacy, less bias, well-being).
7. High contrast (black text on white in a railway app); readable fonts (large Calibri on a school site); colour-blind friendly (STOP label, not colour alone); inclusive navigation (Tab key); multimodal detection (captions or vibration).
8. Need analysis finds the gap between the existing situation and the desired outcome, before UI design. Steps: identify users; collect information (interviews, questionnaires, observation); analyse needs; prioritise; develop solutions. Banking case: Fingerprint/FaceID login; large buttons and simple navigation for elderly users; English and local languages.
9. UI is the visual elements so people can interact easily; UX is the overall smoothness, comfort and satisfaction. Food app: UI = burger pictures and red buttons; UX = fast load, working tracking, food arrives without frustration. Components: buttons, menus, icons, text fields, checkboxes/radio buttons, sliders.
10. A/B testing shows version A to half the users and version B to the other half; the version with more clicks or sign-ups wins. An automated audit uses bots to scan for technical issues such as broken links, slow loading or low contrast; it does not split users between two designs.

Long questions — model answers

- 1. Components through an outdoor ATM.** User: end user = account holder; stakeholder = bank. Computer system: ATM hardware and bank software linking PIN input to cash output. Interaction: insert card, type PIN, choose Cash, confirm — intent becomes a response. Task: withdraw cash; low complexity, basic knowledge, about one minute (contrast with a long passport application). Interface: GUI on screen + keypad (traditional); possibly fingerprint (biometric). Environment: physical sunlight so contrast must be high; social queue so a privacy shield is needed; technical printer or network may fail. System feedback: "Please wait", cash, receipt/SMS. User feedback: pressing Confirm. If any part is weak (glare, no "cash coming" message), HCI fails even if the bank account is correct.
- 2. Problems and methods.** Interface complexity (buried checkout / hidden Send Money) → enhance usability (clear Buy Now / Send). Poor feedback (frozen Submit) → Payment Successful popup. Inconsistency (magnifying glass vs binoculars, or Send changing colour) → same Save/Send control everywhere. Accessibility gaps (no captions) → strengthen accessibility. Compatibility (laptop-only portal) → responsive/adaptability. Contextual neglect (map with no night mode; ATM unreadable in sun) → design for environment. High cognitive load (three SMS codes) → simplify steps. Trust deficiency (no HTTPS lock on JazzCash-style payment) → show security cues. Also apply UCD with a pilot test, multimodal input (voice + touch for elderly users), and continuous testing after launch.
- 3. UI, UX, wireframe, Figma, prototype.** UI design organises visual elements. Six components: buttons (Submit/Cancel), menus, icons, text fields, checkboxes/radio, sliders. UX = overall experience; UI is what you see, UX is how it feels; food-delivery pictures vs fast delivery. Lo-Fi: black-and-white boxes for structure; Hi-Fi: real colour, type, images, clickable controls for final tests. Figma: sign up in the browser; Frame tool for a phone canvas; rectangles and circles; text labels such as Sign Up; duplicate frames for the next screen. Prototype: before code, Prototype tab, Trigger = On Tap, Action = Navigate to Home. Sketch: header "LOGO / Portal", dashed Username and Password boxes, a LOGIN rectangle, "Forgot password?" — the Lo-Fi login in this chapter.
- 4. Test vs evaluate, then methods.** Testing finds bugs / whether it works; evaluation checks whether it meets user needs. SUS: 10-item usability score. NPS: "recommend to a friend?" (loyalty). Formative: during development. Summative: at the end vs original goals. Expert reviews: specialists vs heuristics. Usability testing: watch real users on realistic tasks. Task-based: time, success rate, errors (e.g. Add to cart in 12 s, success yes). Automated audit: bots find broken links, slow load, low contrast. A/B: half/half, more clicks win. Compatibility: Chrome/Safari, phone/tablet/PC, OS. Load: 10,000 logins at once. Keyboard/screen-reader: Tab/Enter and assistive tech. Result-day portal: load-test the 9:00 a.m. rush; usability-test "find chemistry marks"; automated audit for broken result links and grey-on-grey contrast; optional A/B of two home-screen layouts.
- 5. Send Money for elderly users in Sukkur.** Need analysis: (1) users = elderly Sindhi speakers, not teenagers; (2) collect: interviews and watch them at a JazzCash shop agent; (3) analyse: fear of wrong number, cannot read small English, glare on the phone; (4) prioritise: huge Sindhi "رقم بھیجیں", amount in words, confirm screen, high contrast; (5) solution: that UI, not a CLI. Accessibility: high contrast for sunlight, large simple fonts, not colour-only status, Tab/large targets, vibration + spoken confirm (multimodal). Interaction: menu-driven + form fill + biometric + haptic; optional voice. Evaluate formatively on paper then in Figma; expert review against heuristics; SUS and NPS before launch. Test: usability and task-based ("send Rs 100") measuring time/success/errors; A/B two button sizes; compatibility on cheap Androids; keyboard if a kiosk is used; do not skip a confirm screen — trust and feedback are the main risks.

Self-assessment: I can...

- | | |
|---|---|
| ☐ define HCI, CHI and MMI and name the five sensory channels. | ☐ tell traditional interaction from natural interaction with local examples. |
| ☐ describe HCI in health, banking, education and networking. | ☐ label user, computer system, interaction, task, UI type, environment and feedback on an ATM, JazzCash or portal. |
| ☐ name the types of user interaction and give an example of each. | ☐ explain why HCI is important using the five implications. |
| ☐ apply the five accessibility principles and carry out a need analysis. | ☐ name eight HCI problems and the methods that fix them. |
| ☐ differentiate UI from UX and list six UI components. | ☐ compare Lo-Fi, Hi-Fi, Figma steps and prototype triggers/actions. |
| ☐ choose evaluation methods (SUS, NPS, formative, summative, expert). | ☐ explain usability, task-based, automated, A/B, compatibility, load and keyboard tests. |

Chapter 2: Computational Thinking & Algorithms

Computational Thinking & Algorithms (1/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Analyze algorithms for correctness · Trace Tables · Stepwise Reasoning · Comparing Trace Tables and Stepwise Reasoning · Evaluating the Clarity of an Algorithm

★ **Must lock:** Trace Tables, Comparing Trace Tables and Stepwise Reasoning

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Name the three measurements in task-based testing.
2. What does a Lo-Fi wireframe deliberately leave out?
3. What is the difference between testing and evaluation?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

2.1 Analyze algorithms for correctness

An algorithm is correct if its output matches the expected results for a given input.

Trace tables → paper execution, line by line → Stepwise reasoning → logic blocks, overall state

- Analysing correctness means showing that the algorithm produces the intended output for all valid inputs, not just one lucky example.
- Two methods are used in this course:

Remember: Remember: runs ≠ correct. A logical error still produces output — just the wrong output. That is why we analyse correctness on paper before we trust the code.

الگورتھم تب درست (Correct) سمجھا جاتا ہے جب دیے گئے ان پٹ پر اس کا آؤٹ پٹ وہی ہو جو ہونا چاہیے۔

2.1.1 Trace Tables ★ Golden

A trace table is a technique used to monitor how the values of variables change during the execution of an algorithm.

- Dry running: execute the algorithm line by line by hand.
- Debugging: find logical errors where the algorithm runs but the output is wrong.
- Validation: check that the algorithm does what it is intended to do.
- Line / step number — which line is being executed.

```
AllHeights = [1.91, 2.01, 1.87, 1.57, 1.48]
Total = 0
for height in AllHeights:
    if height ≥ 1.57 and height ≤ 1.91:
        Total = Total + 1
print(Total)
```

Remember: How to fill a trace table without getting lost. Write a new row every time a variable changes or a condition is tested. Copy unchanged values into the new row...

Exam: Very common long question: "Dry-run the given algorithm using a trace table and state the output." Draw columns for every variable plus a condition column. Show the loop...

ٹریس ٹیبل الگورتھم کا کاغذی اجرا (Dry Run) ہے۔

2.1.2 Stepwise Reasoning

Stepwise reasoning (also called logic verification) breaks an algorithm into logical sections and checks the state of the algorithm at each stage.

- Analyse each step of the algorithm.
- Check: does it start in a valid state?
- Does it handle all possible cases?
- Are the conditions correct?

Check	What you verify
Initial state	Sum = 0 before the loop. Valid: nothing has been added yet.
Loop boundary	The loop runs exactly from $i = 1$ to $i = N$. No missing number, no extra number.
Iteration	Each i is added once: after k iterations, $\text{Sum} = 1+2+\dots+k$.
Final state	When the loop ends, Sum holds $1+2+\dots+N$, which is the required total.
Edge case $N = 0$	The loop body never runs, Sum stays 0. Correct (the sum of no numbers is 0).
Check case $N = 5$	Sum becomes 15, which matches $5 \times 6 / 2 = 15$.

```
N = 5
Sum = 0
for i in range(1, N + 1):
    Sum = Sum + i
print(Sum)
```

Remember: Think of stepwise reasoning as a teacher checking a proof, not as a cashier counting coins one by one. You ask "is this block always true?" instead of "what is..."

مرحلہ وار استدلال میں الگورتھم کو منطقی حصوں میں توڑ کر ہر مرحلے پر اس کی حالت (State) دیکھی جاتی ہے: کیا شروع درست ہے، کیا تمام ص...

2.1.3 Comparing Trace Tables and Stepwise Reasoning ★ Golden

Both methods verify correctness, but they fit different situations depending on the complexity and length of the algorithm.

Feature	Trace table	Stepwise reasoning
Best for	Small algorithm blocks, complex loops, and beginners learning to track variables.	Large systems, architectural logic, and abstract mathematical proofs.
Effort required	High. Very tedious and impractical if a loop runs 1,000 times.	Moderate. Needs strong logical deduction and abstract thinking.
Primary goal	Catching syntax misinterpretations or specific arithmetic errors line by line.	Catching conceptual or structural flaws in the overall design.
Level	Micro-level (line by line). Checks exact values.	Macro-level (logic blocks). Checks overall state.

Trace table

Micro-level
Line by line
Exact values

Stepwise reasoning

Macro-level
Logic blocks
Overall state

Trace tables zoom in on values; stepwise reasoning zooms out on design.

Remember: Micro vs macro. Trace table = microscope (every cell). Stepwise reasoning = map (whole city). Beginners start with the microscope; designers need the map.

Exam: Differentiate questions are almost guaranteed: "Compare a trace table with stepwise reasoning." Write a four-row table (best for, effort, primary goal, micro/macro). Add...

ٹریس ٹیبل خرد بینی (Micro) سطح پر کام کرتا ہے: ہر لائن اور ہر قیمت۔

2.2 Evaluating the Clarity of an Algorithm

Clarity means an algorithm is easy to read, understand and modify.

Clarity → Modularity (parts) → Readability (text and flow)

- In many cases, evaluating clarity is even more important than making the algorithm slightly faster.
- A clear algorithm is easier to maintain, debug and extend over time.
- The two key aspects of clarity are:

Remember: Ask two questions: "Can I split this into parts?" (modularity) and "Can another student read it aloud and understand it?" (readability).

وضاحت (Clarity) کا مطلب ہے الگورتھم پڑھنا، سمجھنا اور بدلنا آسان ہو۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Analyze algorithms for correctness:** Mistake: testing only one “normal” input and calling the algorithm correct.
- **Trace Tables:** Mistake 1: treating 1.57 or 1.91 as out of range.
- **Stepwise Reasoning:** Mistake: rewriting the whole trace table and calling it stepwise reasoning.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Trace Tables**. Write: A trace table is a technique used to monitor how the values of variables change during the execution of an algorithm.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Debugging: find logical errors where the algorithm runs but the output is wrong. (2) Validation: check that the algorithm does what it is intended to do. — + example.

5 marks: 3-mark structure + table: Step / Total / Height / AllHeights (input) / Height between 1.57 and 1.91? / Output + the worked example from this topic.

8–10 marks: 5-mark structure + a filled trace table with every variable on every line + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Comparing Trace Tables and Stepwise Reasoning**. Write: Both methods verify correctness, but they fit different situations depending on the complexity and length of the algorithm.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Both methods verify correctness, but they fit different situations depending on the complexity and length of the algorithm. (2) Second distinct point (not a repeat of the definition) — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a filled trace table with every variable on every line + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. List the four usual columns / components of a trace table.

3 marks. Explain Trace Tables with two clear points and one example.

5 marks. Very common long question: “Dry-run the given algorithm using a trace table and state the output.” Draw columns for every variable plus a condition column. Show the loop once per item. Boundary...

8 marks. Trace Tables: 5-mark answer plus a filled trace table with every variable on every line.

Answers: 1. Line/step number, variables, input/output, condition check 3. Debugging: find logical errors where the algorithm runs but the output is wrong.; Validation: check that the algorithm does what it is intended to do. 5. Use the recipe in the blue box. Model opening: A trace table is a technique used to monitor how the values of variables change during the execution of an algorithm. 8. Same 5-mark body + a filled trace table with every variable on every line + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Trace Tables** using the recipe in this topic. Include a filled trace table with every variable on every line. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 2: Computational Thinking & Algorithms

Computational Thinking & Algorithms (2/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Modularity · Readability · Assess Algorithm Efficiency · Number of Steps (Big O Notation) · Number of Conditions

★ **Must lock:** Number of Steps (Big O Notation)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. List the four usual columns / components of a trace table.
2. Which method is micro-level and checks exact values?
3. When is an algorithm considered correct?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

2.2.1 Modularity

Modularity means breaking an algorithm into smaller, independent parts such as functions, classes or modules.

- Single Responsibility Principle (SRP). Each module should focus on one specific task. If a function calculates a sum, prints a report and...
- Coupling. Modules should be reusable in different contexts. Good modularity means loose coupling: a change in one part does not smash the...
- Abstraction. A well-designed algorithm hides complex implementation details. You can call a sorting function without knowing whether it...

Remember: SRP in one line: one function, one job. If you cannot name the function with a short verb-phrase (CalculateSum, FindAverage), it is doing too much.

ماڈیولریتی کا مطلب الگورتھم کو آزاد حصوں (فنکشن، کلاس، ماڈیول) میں توڑنا ہے۔

2.2.2 Readability

Readability is how easily another person can understand the purpose and logic of an algorithm without running it.

Names → Self-doc → Simple flow → Consistent

- Naming conventions — consistent rules for names. Good names make an algorithm easier to search and understand. Bad: $v = d / t$ Good:...
- Self-documentation — the algorithm explains itself, so you need fewer comments. Meaningful names and clean formatting make the purpose...
- Control-flow simplicity — keep the logic straightforward. Avoid deep nesting (IF inside IF inside IF), limit extra conditions, and keep...
- Consistency — one style throughout: indentation, spacing, and casing (camelCase or snake_case). Then the logic stands out instead of the...

```
# Hard to read
d = 100
t = 4
s = 20
v = d / t
if v > s:
    if t > 0:
        print(v)
```

Remember: Remember readability as N-S-S-C: Names, Self-documentation, Simple flow, Consistency.

پڑھائی پن یہ ہے کہ دوسرا شخص الگورتھم چلائے بغیر اس کا مقصد سمجھ لے۔

2.3 Assess Algorithm Efficiency

Algorithm efficiency is measured in terms of time and space — how fast it runs and how much memory it uses.

Time (speed) → Space (memory) → Efficiency

- Number of steps (described with Big O notation).
- Number of conditions (IF decisions).
- Number of repetitions (loops).

Remember: Efficiency is always “as the input grows”. An algorithm that feels instant on 10 items can freeze on 10 million items if it is $O(n^2)$.


کارکردگی (Efficiency) وقت (رفتار) اور جگہ (میموری) سے ناپی جاتی ہے۔

2.3.1 Number of Steps (Big O Notation) ★ Golden

When we discuss efficiency we ask how performance changes as the input size n increases.

- Big O notation is a mathematical method used to describe how the running time (or memory) grows as n grows.
- We ignore small constants and keep the most important term: if an algorithm does $3n + 5$ steps we write $O(n)$.
- In computer science, $\log n$ almost always means log base 2 (how many times you can halve n until you reach 1).

Class	Name	What happens when n grows	Typical example	Grade
$O(1)$	Constant	Time stays the same for 10 items or 10 million.	Access <code>arr[0]</code> (or any known index).	Excellent
$O(\log n)$	Logarithmic	Time grows very slowly; the problem is halved each step.	Binary search on a sorted list.	Great
$O(n)$	Linear	If n doubles, time roughly doubles.	Linear search of an unsorted list.	Fair / Good
$O(n \log n)$	Linearithmic	A little worse than linear; much better than n^2 . Common in good sorting.	Merge Sort (split in half, then merge).	Good
$O(n^2)$	Quadratic	Time grows with the square of n . Nested loops. Painful for large n .	Bubble Sort; compare every item with every other item.	Poor

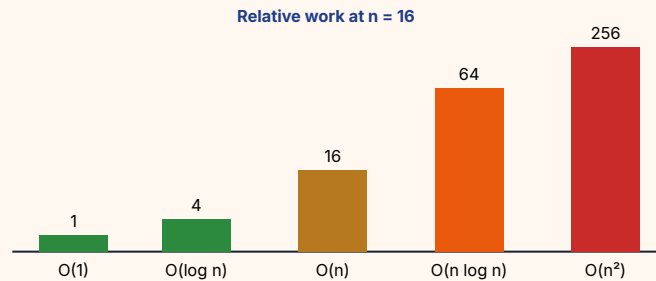

Same $n = 16$. Quadratic work is already four times $n \log n$ and sixteen times linear.

```
arr = [23, 76, 12, 90, 34, 68]
print(arr[0])
```

Remember: Order from fastest to slowest (for large n): $O(1) \rightarrow O(\log n) \rightarrow O(n) \rightarrow O(n \log n) \rightarrow O(n^2)$. Mnemonic: "Constant Logs Never Need Squares" — Constant, Logarithmic,...

Exam: Memorise the five rows of the class table (name, growth, one example, grade). Typical MCQ: "Accessing `arr[0]` is ...?" $\rightarrow O(1)$. "Binary search is ...?" $\rightarrow O(\log n)$. "Nested..."

بگ او (Big O) بتاتا ہے کہ ان پٹ n بڑھنے پر وقت یا میموری کیسے بڑھتی ہے۔

2.3.2 Number of Conditions

Conditions (IF statements) are decision points.

- Computational cost. Each IF is extra work, even if the rest of the algorithm is simple.
- Nested conditions. IF inside IF often means a brute-force approach. It hurts both readability and speed.
- Short-circuiting (the optimisation goal). Stop evaluating as soon as the result is known. In a logical AND, if the first part is False the...

```
x = 0
y = 10
if x != 0 and (y / x) > 2:
    print("ratio is large")
else:
    print("skipped safely")
```

Remember: Put the cheapest / most likely False test first in an AND, and the most likely True test first in an OR. That is short-circuiting used on purpose.

ہر IF پروسیسر سے True/False پوچھتی ہے اس لیے زیادہ شاخیں کارکردگی گھٹاتی ہیں۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Modularity:** Mistake: copying the 1-based loop for $l = 1$ to n : $total = total + A[l]$ into Python.
- **Readability:** Mistake: dumping a comment on every line ($total = total + 1$ # add one to total).
- **Assess Algorithm Efficiency:** Mistake: judging efficiency by how short the code looks.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Number of Steps (Big O Notation)**. Write: When we discuss efficiency we ask how performance changes as the input size n increases.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Big O notation is a mathematical method used to describe how the running time (or memory) grows as n grows. (2) We ignore small constants and keep the most important term: if an algorithm does $3n + 5$ steps we write $O(n)$. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Give one example each of $O(1)$, $O(\log n)$, $O(n)$ and $O(n^2)$.

3 marks. Explain Number of Steps (Big O Notation) with two clear points and one example.

5 marks. Memorise the five rows of the class table (name, growth, one example, grade). Typical MCQ: "Accessing $arr[0]$ is ...?" $\rightarrow O(1)$. "Binary search is ...?" $\rightarrow O(\log n)$. "Nested loops / Bubble Sort ...?" $\rightarrow O(n^2)$

8 marks. Number of Steps (Big O Notation): 5-mark answer plus a complete truth table and a labelled gate / logic diagram.

Answers: 1. $O(1)$ $arr[0]$; $O(\log n)$ binary search; $O(n)$ linear search; $O(n^2)$ Bubble Sort / nested loops 3. Big O notation is a mathematical method used to describe how the running time (or memory) grows as n grows.; We ignore small constants and keep the most important term: if an algorithm does $3n + 5$ steps we write $O(n)$. 5. Use the recipe in the blue box. Model opening: When we discuss efficiency we ask how performance changes as the input size n increases. 8. Same 5-mark body + a complete truth table and a labelled gate / logic diagram + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Number of Steps (Big O Notation)** using the recipe in this topic. Include a complete truth table and a labelled gate / logic diagram. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 2: Computational Thinking & Algorithms

Computational Thinking & Algorithms (3/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Number of Repetitions · The Efficiency Evaluation Framework · Refinements to improve clarity and efficiency · Concept of Data Structure · Linear Data Structures: Array

★ **Must lock:** Concept of Data Structure

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Give one example each of $O(1)$, $O(\log n)$, $O(n)$ and $O(n^2)$.
2. What does SRP say each module should do?
3. Rewrite $v = d / t$ with readable names.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

2.3.3 Number of Repetitions

Repetitions (loops) are the most significant factor in algorithm efficiency.

- The structure of the loop decides how time grows with n .

Type of repetition	Conceptual impact	Efficiency grade
Linear loop	Processes each element exactly once. Time grows in proportion to size.	Good — $O(n)$
Logarithmic repetition	Reduces the problem size by half each iteration (binary search). Huge time savings.	Excellent — $O(\log n)$
Nested loops	For each element, process all other elements. Operations explode.	Poor — $O(n^2)$

Remember: Find the deepest loop. One loop $\approx O(n)$. Loop inside a loop $\approx O(n^2)$. A loop that halves $n \approx O(\log n)$.

دہرائی (لوپ) کارکردگی کا سب سے بڑا عامل ہے۔

2.3.4 The Efficiency Evaluation Framework

To evaluate an algorithm at a conceptual level, ask three questions: Does it scale?

Does it scale? → Where is the bottleneck? → Is the extra complexity worth it?

- Does it scale? If n grows 10 times, does time jump 10 times (linear) or 100 times (quadratic)? Quadratic scaling fails for large datasets.
- What is the bottleneck? Focus on the most time-consuming section (usually the deepest loop) and try to improve that part.
- Is the cost worth it? A theoretically faster $O(\log n)$ algorithm can be too complex to code and maintain. For a list of just 50 items, a...

Situation	Scale	Bottleneck	Worth the cost?	Choice
50 unsorted class names	Tiny n	A single linear scan	Binary search needs a sort first, which is extra work and extra code	Linear search $O(n)$
1,000,000 sorted account numbers, searched all day	$n \times 10$ compared with 100,000 is already huge; quadratic would be impossible	The search loop	Yes — binary search is standard and well understood	Binary search $O(\log n)$

Remember: Framework mnemonic: S-B-W — Scale, Bottleneck, Worth it.

کارکردگی کے تین سوال: کیا الگورتھم بڑے n پر چل سکتا ہے (Scale)؟

2.4 Refinements to improve clarity and efficiency

Improving an algorithm means reviewing it step by step: simplifying logic, removing redundant work, and picking smart data structures.

- Use meaningful names. Replace vague variables with descriptive ones. Bad: $a = b / c$. Good: $\text{average} = \text{totalSum} / \text{totalItems}$.
- Break into modules. Divide a massive block into functions, for example separating `CalculateSum()` from the printing logic.
- Improve structure and indentation. Packed loops and IF statements confuse the reader. Spacing reduces mental effort.
- Add comments. Keep them short. Explain why something is done, not just what is happening, especially for tricky logic.

Remember: Clarity: N-M-I-C (Names, Modules, Indentation, Comments). Efficiency: S-A-C-D (Shrink steps, Algorithm choice, Cache, Data structure).


وضاحت بہتر کرنے کے لیے معنی خیز نام، ماڈیول، درست indentation اور مختصر تبصرے استعمال کریں۔

2.5 Concept of Data Structure ★ Golden


A data structure is a systematic way of organising, storing and managing data so that an algorithm can access, modify and process it efficiently.

- Books on a shelf are arranged in a set order, so you can find a title quickly.
- Files in folders are grouped on purpose.
- Data structures do the same job inside computer memory.

Linear (sequence)



Non-linear (branch / net)



Linear: a line of neighbours. Non-linear: a node with more than one connection.

Remember: Ask: "Does each item have at most one next item?" Yes → linear. "Can one item link to many, or can links form a net?" → non-linear.

Exam: Define data structure in full (organise, store, manage; efficient access and processing). Then split linear vs non-linear with the "one predecessor and one successor"...

ڈیٹا سٹرکچر ڈیٹا کو منظم طریقے سے رکھنے کا نظام ہے تاکہ الگورتھم اسے جلدی استعمال کر سکے۔

2.5.1 Linear Data Structures: Array

An array holds a collection of similar items (the same data type) placed next to each other in contiguous memory (one continuous block).

- Each item has a position number called an index, usually starting from 0.
- Because the address of any cell can be calculated from the index, you can jump straight to it.
- That is direct access (also called random access), and it is $O(1)$.

Array name: A

23	76	12	90	34	68
0	1	2	3	4	5

$A[3] = 90$ (index starts at 0)

Six integers in contiguous cells. Direct access: $A[3]$ jumps to 90 without walking 23, 76 and 12.

```
A = [23, 76, 12, 90, 34, 68]
print(A[3])
print(A[0])
```

Remember: Index 0 is the first shelf on the row. The third item that humans call “number 4” is index 3. Formula in your head: position from the left, minus one.

ایرے ایک جیسے عناصر کو میموری کے لگاتار بلاک میں رکھتا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Number of Repetitions:** Mistake: counting the word for and ignoring how the index moves.
- **The Efficiency Evaluation Framework:** Mistake: always choosing the theoretically fastest Big O.
- **Refinements to improve clarity and efficiency:** Mistake: “optimising” by renaming variables and thinking that is an efficiency refinement.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Concept of Data Structure**. Write: A data structure is a systematic way of organising, storing and managing data so that an algorithm can access, modify and process it efficiently.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Books on a shelf are arranged in a set order, so you can find a title quickly. (2) Files in folders are grouped on purpose. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Define data structure.

3 marks. Explain Concept of Data Structure with two clear points and one example.

5 marks. Define data structure in full (organise, store, manage; efficient access and processing). Then split linear vs non-linear with the “one predecessor and one successor” test, and list the four linear...

8 marks. Concept of Data Structure: 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. A systematic way of organising, storing and managing data for efficient access, modification and processing 3. Books on a shelf are arranged in a set order, so you can find a title quickly.; Files in folders are grouped on purpose. 5. Use the recipe in the blue box. Model opening: A data structure is a systematic way of organising, storing and managing data so that an algorithm can access, modify and process it efficiently. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Concept of Data Structure** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 2: Computational Thinking & Algorithms

Computational Thinking & Algorithms (4/5) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Linear Data Structures: Linked List · Linear Data Structures: Stack · Linear Data Structures: Queue · Non-Linear Data Structures: Tree · Non-Linear Data Structures: Graph

★ **Must lock:** Linear Data Structures: Stack, Linear Data Structures: Queue

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.


1. Define data structure.
2. What grade does the source give nested loops?
3. If n grows $10\times$, how much slower is a quadratic algorithm?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

Linear Data Structures: Linked List

A linked list stores data as a chain. Unlike an array, the items are not one continuous block.

- the actual data;
- a link (pointer) holding the memory address of the next node.



Follow HEAD → 23 → 76 → 12 → 90 → NULL

Four nodes. The last link is NULL, which ends the chain.

```
nodes = [23, 76, 12, 90]
for data in nodes:
    print(data, end=" → ")
print("NULL")
```

Remember: Array = row of lockers with numbers on the doors. Linked list = treasure hunt: each clue (link) tells you where the next box is.


لنکڈ لسٹ زنجیر کی طرح نوڈز پر مشتمل ہے جو میموری میں بکھرے ہو سکتے ہیں۔

Linear Data Structures: Stack ★ Golden

A stack is a linear data structure that works on the LIFO principle: Last-In, First-Out.

- PUSH — add an item to the top.
- POP — remove the item from the top.

Step	Operation	Stack (bottom → top)	TOP	Popped value
0	(empty)	[]	none	
1	PUSH Data1	[Data1]	Data1	
2	PUSH Data2	[Data1, Data2]	Data2	
3	PUSH Data3	[Data1, Data2, Data3]	Data3	
4	POP	[Data1, Data2]	Data2	Data3
5	POP	[Data1]	Data1	Data2

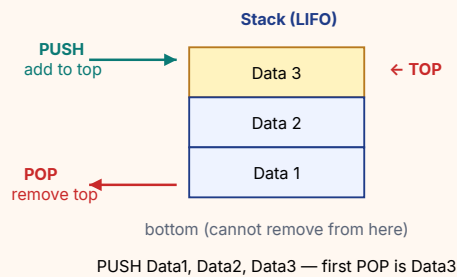

Three PUSH operations. The TOP is Data 3, so the first POP returns Data 3.

```
stack = []
stack.append("Data1")
stack.append("Data2")
stack.append("Data3")
print("after 3 PUSHes:", stack)
print("POP:", stack.pop())
print("POP:", stack.pop())
print("Left:", stack)
```

Remember: LIFO = Last In First Out = "last plate washed is first plate used" on a canteen pile. Undo, Redo, Back button and function calls are all stacks.

Exam: Define stack + LIFO, define PUSH and POP, mention TOP, give the Undo example, and draw the vertical boxes with TOP labelled. Trace questions: "Show the stack after PUSH..."

سٹیک LIFO پر چلتا ہے: جو سب سے بعد میں آیا وہ سب سے پہلے نکلے گا۔


Linear Data Structures: Queue ★ Golden

A queue organises data on the FIFO principle: First-In, First-Out.

- ENQUEUE — add an element at the Rear (back).
- DEQUEUE — remove an element from the Front.

Step	Operation	Queue (Front → Rear)	Front	Rear	Removed
0	(empty)	[]	—	—	
1	ENQUEUE 55	[55]	55	55	
2	ENQUEUE 76	[55, 76]	55	76	
3	ENQUEUE 90	[55, 76, 90]	55	90	
4	ENQUEUE D	[55, 76, 90, D]	55	D	
5	DEQUEUE	[76, 90, D]	76	D	55

Queue (FIFO)



Next ENQUEUE joins after 90. Next DEQUEUE removes 55.

Three jobs waiting. New jobs join at the rear; service always takes the front.

Remember: FIFO = First In First Out = a canteen line. Front = the person being served. Rear = the person who just joined.


Exam: Define queue + FIFO, define ENQUEUE (rear) and DEQUEUE (front), give the printer example, draw the labelled Front/Rear diagram, and trace a short sequence. Examiners mix...

کیو FIFO پر چلتی ہے: جو پہلے آیا وہ پہلے نکلے۔

2.5.2 Non-Linear Data Structures: Tree

A tree organises data in a hierarchy. Everything branches out from a single starting point called the root.

- Everything branches out from a single starting point called the root.
- It creates a strict one-to-many (parent-child) relationship.
- That is an excellent way to show how roles flow in an organisation.

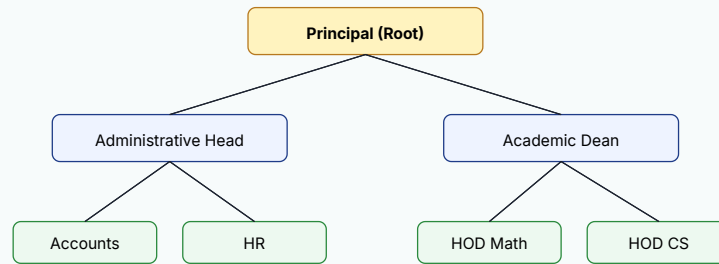

College tree: one root (Principal), then parent-child branches. No child has two parents in this model.


Remember: Tree = family / folders / organogram. One root. Branches down. Parent-child, not a web of equals.

ٹری ڈیٹا کو درجہ بندی (Hierarchy) میں رکھتی ہے جو ایک جڑ (Root) سے پھوٹتی ہے۔

Non-Linear Data Structures: Graph

A graph organises data when things connect in a flexible, complex way.

- Nodes (vertices) — the items (cities, people).
- Edges — the connections (roads, friendships).



Four vertices A, B, C, D. Edges can form a cycle (A-B-D-C-A). A tree cannot do that.

Remember: Tree $\subset$ Graph in shape-talk: a tree is a special graph with one root and no cycles. If you need cycles or many-to-many links, say graph.

گراف لچکدار روابط کے لیے ہے: کوئی سخت درجہ بندی نہیں، کوئی بھی نوڈ کسی سے جڑ سکتا ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Linear Data Structures: Linked List:** Mistake: writing `list[3]` and calling it linked-list access.
- **Linear Data Structures: Stack:** Mistake: POPing from the bottom, or mixing LIFO with FIFO.
- **Linear Data Structures: Queue:** Mistake: DEQUEUEing from the rear, or ENQUEUEing at the front.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Linear Data Structures: Stack**. Write: A stack is a linear data structure that works on the LIFO principle: Last-In, First-Out.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) PUSH — add an item to the top. (2) POP — remove the item from the top. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a filled trace table with every variable on every line + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Linear Data Structures: Queue**. Write: A queue organises data on the FIFO principle: First-In, First-Out.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) ENQUEUE — add an element at the Rear (back). (2) DEQUEUE — remove an element from the Front. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a filled trace table with every variable on every line + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Expand LIFO.

3 marks. Explain Linear Data Structures: Stack with two clear points and one example.

5 marks. Define stack + LIFO, define PUSH and POP, mention TOP, give the Undo example, and draw the vertical boxes with TOP labelled. Trace questions: "Show the stack after PUSH A, PUSH B, POP, PUSH C." Work...

8 marks. Linear Data Structures: Stack: 5-mark answer plus a filled trace table with every variable on every line.

Answers: 1. Last-In, First-Out 3. PUSH — add an item to the top.; POP — remove the item from the top. 5. Use the recipe in the blue box. Model opening: A stack is a linear data structure that works on the LIFO principle: Last-In, First-Out. 8. Same 5-mark body + a filled trace table with every variable on every line + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Linear Data Structures: Stack** using the recipe in this topic. Include a filled trace table with every variable on every line. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 2: Computational Thinking & Algorithms

Computational Thinking & Algorithms (5/5) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Operations on Data Structures · Identify data structures in problem scenarios · Trace data retrieval in Array, List and Queue · Career Opportunities in Algorithms

★ **Must lock:** none — still copy every table

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Expand LIFO.
2. Expand FIFO. Where is an item added, and where is it removed?
3. Name the two parts of a node.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

2.5.3 Operations on Data Structures

Whatever the shape, you keep meeting the same five operations:

Operation	Meaning	Quick picture
Insertion	Adding a new item into the structure.	PUSH on a stack; ENQUEUE on a queue; putting 40 into an array.
Deletion	Removing an item that is no longer needed.	POP; DEQUEUE; deleting a node from a list.
Traversal	Going through each item one by one.	Walking HEAD → ... → NULL; visiting every tree node.
Searching	Finding a specific item.	Linear search in an array; following links until 87 is found.
Sorting	Arranging items in a proper order (ascending or descending).	Bubble Sort on an array of marks.

Remember: Memorise I-D-T-S-S: Insert, Delete, Traverse, Search, Sort.

ہر ڈیٹا سٹرکچر پر پانچ عمل ہوتے ہیں: داخل کرنا (Insertion)، حذف کرنا (Deletion)، ایک ایک کر کے گزرنا (Traversal)، تلاش (Searching)...

2.6 Identify data structures in problem scenarios

To pick a structure, first see how the data is organised.

- Storing student grades for a class → Array. You usually know how many students there are, and all grades are the same type. Indices give...
- Music playlist / browser history → Linked list. Every song knows what comes next. When one finishes, follow the pointer. Frequent...
- Undo or Redo → Stack (LIFO). Each typing or formatting action is PUSHed. Undo POPs the most recent action.
- Printer task scheduling → Queue (FIFO). Documents print in the exact order they were received. First-come, first-served.

If the data...	Then it is...	Recommended structure
Follows "next" or "previous" logic	Linear	Array, Linked list
Follows "parent" and "child" logic	Non-linear	Tree
Follows "first-come, first-served" logic	Linear	Queue
Follows "connections / relationships" logic	Non-linear	Graph
Needs to be accessed in the reverse order of entry	Linear	Stack

Remember: Decision order: reverse-of-entry? → stack. First-come? → queue. Parent-child? → tree. Many-to-many routes? → graph. Known list with indexes? → array. Lots of...


اگر ہر عنصر کا واضح اگلا/پچھلا ہے تو ڈھانچہ لکیری ہے؛ اگر شاخیں یا کئی روابط ہیں تو غیر لکیری۔

2.7 Trace data retrieval in Array, List and Queue

Tracing data retrieval means following the step-by-step path of how an algorithm finds or accesses data.

- Array, linked list and queue are all linear, but the effort to find an item is very different because of how they are organised inside.

Loop iteration	Index	Array access	Value
1	0	Array[0]	10
2	1	Array[1]	50
3	2	Array[2]	20



You cannot pull B until A has left.

Queue A, B, C. ENQUEUE D joins the rear. DEQUEUE must remove A, not C or B.

```
Array = [10, 50, 20, 70, 90, 30]
print("Direct Array[2] =", Array[2])
for i in range(3):
    print(i + 1, i, f"Array[{i}]", Array[i])
```

Remember: Array jumps, list walks, queue waits. If the exam asks "why is array retrieval different?", write direct access by index versus sequential links versus Front...

ایرے میں اگر انڈیکس معلوم ہو تو سیدھی چھلانگ لگتی ہے، جیسے $\text{Array}[2] = 20$.

Career Opportunities in Algorithms

The skills in this chapter — proving correctness, writing clear modules, judging Big O, and choosing data structures — are the daily tools of several computing careers.

Career	What the person does
Software Engineer	Builds and maintains software that relies on data structures and efficient algorithms to solve logic problems.
Backend Developer	Builds server-side logic where choosing the right structure (array, queue) directly affects web performance.
Algorithm Engineer	Specialises in optimising algorithms for search engines, finance or logistics.
Systems Analyst	Evaluates and improves the efficiency and clarity of existing computer systems in an organisation.
Competitive Programmer	Solves complex algorithmic problems under time limits, a common path into top tech roles.

Remember: Every career in the table uses the same three tests you learned: correct, clear, efficient — plus the right data structure.

اس باب کی مہارتیں سافٹ ویئر انجینئر، بیک اینڈ ڈیولپر، الگورتھم انجینئر، سسٹمز اینالسٹ اور کمپیٹیو پروگرامر کے کام میں روز استعمال...

Computational Thinking & Algorithms

24 single-page lessons · 6 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- **Correctness:** output matches expected results for valid inputs. Test with a trace table (manual dry run) or stepwise reasoning (logic verification).
- A **trace table** is micro-level: line, variables, I/O, conditions. Best for small loops. The soldier heights [1.91, 2.01, 1.87, 1.57, 1.48] print Total = 3.
- **Stepwise reasoning** is macro-level: valid start, all cases, correct conditions, loop stays correct. Sum 1..N starts at 0; N = 0 stays 0; N = 5 becomes 15.
- **Clarity** (read, understand, modify) often beats a tiny speed gain. It has two parts: modularity and readability.
- **Modularity:** SRP (one job), loose coupling, abstraction (call Sort without knowing Bubble vs Selection). Split CalculateSum and FindAverage.
- **Readability:** names (`velocity = distance / time`), self-documentation, simple flow, consistent style.
- **Efficiency** = time + space. Drivers: number of steps (Big O), conditions, repetitions.
- **Big O:** $O(1)$ constant (arr[0]), $O(\log n)$ binary search, $O(n)$ linear search, $O(n \log n)$ Merge Sort, $O(n^2)$ nested loops / Bubble Sort. Quadratic fails as n grows.
- **Framework:** Does it scale? What is the bottleneck (deepest loop)? Is the extra complexity worth it? For n = 50, simple $O(n)$ can beat fragile $O(\log n)$.
- **Refinements:** meaningful names, modules, indentation, why-comments; shrink Bubble Sort's inner loop; better algorithms; cache constants; pick the right structure.
- **Data structure:** systematic organising of data. Linear (one after another): array, linked list, stack, queue. Non-linear: tree, graph.
- **Array:** contiguous, index from 0, direct access $O(1)$, shifting on mid-insert. **Linked list:** nodes of data+link, HEAD to NULL, sequential access.
- **Stack LIFO:** PUSH/POP at TOP (Undo). **Queue FIFO:** ENQUEUE rear, DEQUEUE front (printer).
- **Tree:** one root, parent-child (college chart). **Graph:** vertices + edges, no strict hierarchy (GPS, friends).
- Five operations: insert, delete, traverse, search, sort. Choose by next/previous, parent/child, FIFO, relationships, or reverse-of-entry.
- **Retrieval:** array can jump to an index; a list walks from HEAD; a queue only removes the Front.

Key terms

Term	Meaning	اردو
Correctness	The algorithm's output matches the expected results for valid inputs.	درستگی
Trace table	A paper dry-run table of steps, variables, I/O and conditions.	ٹریس ٹیبل
Dry run	Executing an algorithm by hand, line by line.	دستی اجرا
Stepwise reasoning	Checking each logic block's state; also called logic verification.	مرحلہ وار استدلال
Clarity	How easy an algorithm is to read, understand and modify.	وضاحت
Modularity	Breaking work into independent functions, classes or modules.	ماڈیولریتی
Single Responsibility Principle	Each module should do one specific task.	واحد ذمہ داری کا اصول
Coupling	How tightly modules depend on each other; loose coupling is the goal.	ماڈیولز کی جڑت
Abstraction	Hiding implementation details so a caller need not know the inner method.	تجريد
Readability	How easily another person understands the logic without running it.	پڑھائی پن
Efficiency	How well an algorithm uses time (speed) and space (memory).	کارکردگی
Big O notation	A description of how running time or memory grows as n grows.	بگ او نوٹیشن

Computational Thinking & Algorithms

75 marks · 1 hour 15 minutes · no notes · no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 24 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define · Explain · Example · Diagram · Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. An algorithm is correct when:
 - a. it compiles with no syntax error
 - b. its output matches the expected results for the given input
 - c. it uses Big O notation
 - d. it has no comments
2. A trace table is best described as:
 - a. a paper execution that tracks variables line by line
 - b. a diagram of a tree
 - c. a type of graph edge
 - d. an $O(n^2)$ nested loop
3. Stepwise reasoning mainly checks:
 - a. printer ink levels
 - b. the colour of variable names
 - c. only the last printed line
 - d. the overall state of logic blocks
4. Which method is impractical if a loop runs 1,000 times?
 - a. Abstraction
 - b. A full trace table
 - c. Stepwise reasoning
 - d. Using a function
5. The Single Responsibility Principle says each module should:
 - a. focus on one specific task
 - b. print and save and calculate everything
 - c. avoid meaningful names
 - d. use nested IF only
6. Which assignment is more readable?
 - a. `v = d / t`
 - b. `x1 = a2 / b2`
 - c. `velocity = distance / time`
 - d. `a = b / c`
7. Accessing `arr[0]` is:
 - a. $O(n^2)$
 - b. $O(n \log n)$
 - c. $O(n)$
 - d. $O(1)$
8. Binary search on a sorted list is:
 - a. $O(\log n)$
 - b. $O(n^2)$
 - c. $O(1)$ always for any n
 - d. $O(n)$ because a loop exists
9. Bubble Sort and nested "compare every pair" loops are:
 - a. $O(1)$
 - b. $O(\log n)$
 - c. $O(n)$
 - d. $O(n^2)$
10. If n grows 10 times, a quadratic algorithm's time grows about:
 - a. 2 times
 - b. 10 times
 - c. 100 times
 - d. log 10 times
11. LIFO is the rule of a:
 - a. queue
 - b. graph of cities
 - c. tree root only
 - d. stack
12. ENQUEUE adds an item at the:
 - a. Front of a queue
 - b. TOP of a stack only
 - c. Rear of a queue
 - d. root of a tree
13. A college organogram with a Principal at the top is modelled as a:
 - a. tree
 - b. queue
 - c. stack
 - d. contiguous array of roads
14. GPS maps (cities and roads, many possible routes) need a:
 - a. stack of undo actions
 - b. graph
 - c. strict one-parent tree only
 - d. single array index
15. To retrieve 87 from `HEAD → 12 → 98 → 23 → 87 → 56` you must:
 - a. jump with `Array[87]`
 - b. DEQUEUE the rear
 - c. follow four nodes from HEAD until 87 matches
 - d. POP from the bottom of a stack

Section B — Short questions (10 × 3 = 30)

1. Define correctness of an algorithm. Name the two analysis methods used in this chapter.
2. List the components of a trace table. Why is a dry run useful for debugging?
3. Give four differences between a trace table and stepwise reasoning.
4. What is modularity? Explain SRP, coupling and abstraction in one sentence each.
5. State four ways to evaluate readability, with one example of a bad name and a good name.
6. Define Big O notation. Give one example each of $O(1)$, $O(\log n)$, $O(n)$, $O(n \log n)$ and $O(n^2)$.
7. Write the three questions of the efficiency evaluation framework and answer them for searching 50 unsorted names.
8. List four refinements for clarity and four for efficiency.
9. Define data structure. Distinguish linear from non-linear with examples.
10. Define stack and queue. Include LIFO/FIFO, PUSH/POP, ENQUEUE/DEQUEUE, and one real-life example of each.

Section C — Long questions (attempt any 3 × 10 = 30)

1. The soldier-eligibility algorithm uses AllHeights = [1.91, 2.01, 1.87, 1.57, 1.48] and counts heights from 1.57 to 1.91 inclusive. (a) Draw a complete trace table. (b) State the printed Total. (c) Explain in stepwise-reasoning style why the boundaries 1.57 and 1.91 are counted. (d) Write equivalent Python and its output.
2. Copy the monoblock average algorithm for A = [1, 2, 3, 4, 5] and rewrite it with CalculateSum and FindAverage. (a) Show that SRP, loose coupling and abstraction are improved. (b) Dry-run both versions to the same average. (c) Give two readability improvements you would still make to the functions.
3. Using the growth table idea, (a) fill n = 8 and n = 32 for $O(1)$, $O(\log_2 n)$, $O(n)$, $O(n \log_2 n)$ and $O(n^2)$. (b) Explain what happens if n becomes 10 times larger for $O(n)$ and for $O(n^2)$. (c) A library has 1,000,000 sorted IDs. Choose linear or binary search using the Scale / Bottleneck / Worth-it framework. (d) Show a 4-by-4 nested loop counts 16 operations in Python.
4. Draw a labelled stack and a labelled queue. Then trace: (a) PUSH Data1, PUSH Data2, PUSH Data3, POP, POP. (b) ENQUEUE 55, 76, 90, D then DEQUEUE. Include Python that matches both traces. (c) Why is Undo a stack and a printer a queue?
5. A college needs structures for: (i) 200 integer marks, (ii) a playlist with frequent insertions, (iii) Undo in the fee-office editor, (iv) photocopier jobs, (v) the Principal–Dean–HOD chart, (vi) roads between Sindh cities. Identify each structure using the decision guide, draw the tree and the graph, and then trace retrieval of 20 from Array = [10, 50, 20, 70, 90, 30] and of 87 from the linked list 12→98→23→87→56→NULL.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **2.1 Analyze algorithms for correctness.** Answers: 1. When its output matches the expected results for a given input (and does so for all valid inputs). 2. Trace tables and stepwise reasoning. 3. Because a logical error can still produce output — the wrong output.
2. **2.1.1 Trace Tables.** Answers: 1. Line/step number, variables, input/output, condition check. 2. 1.57 is the lower boundary (inclusive, so True); 1.48 is below 1.57 (False). 3. 3 is printed; Step 6 runs three times (for 1.91, 1.87 and 1.57).
3. **2.1.2 Stepwise Reasoning.** Answers: 1. Logic verification. 2. Because no numbers have been added yet, so the running total should be zero. 3. The loop does not run and Sum remains 0, which is the correct sum of no numbers.
4. **2.1.3 Comparing Trace Tables and Stepwise Reasoning.** Answers: 1. Trace table. 2. It is very tedious and impractical (too many rows). 3. Stepwise reasoning (macro-level, conceptual / structural flaws).
5. **2.2 Evaluating the Clarity of an Algorithm.** Answers: 1. The algorithm is easy to read, understand and modify. 2. Modularity and readability. 3. Because a clear algorithm is easier to maintain, debug and extend over time.
6. **2.2.1 Modularity.** Answers: 1. One specific task. 2. CalculateSum (FindAverage only divides; the main program only prints). 3. All logic is in one block, so you cannot call “just the sum” from another algorithm.
7. **2.2.2 Readability.** Answers: 1. velocity = distance / time. 2. IF inside IF inside IF (or similar); it makes the flow hard to follow. 3. Any two of: consistent indentation, spacing, and casing (camelCase or snake_case).
8. **2.3 Assess Algorithm Efficiency.** Answers: 1. Time (speed) and space (memory). 2. Number of steps (Big O), number of conditions, number of repetitions.
9. **2.3.1 Number of Steps (Big O Notation).** Answers: 1. $O(1)$ arr[0]; $O(\log n)$ binary search; $O(n)$ linear search; $O(n^2)$ Bubble Sort / nested loops. 2. 1,024. 3. It makes about $\log n$ split-levels and does about n work on each level, so $n \times \log n$.
10. **2.3.2 Number of Conditions.** Answers: 1. Each condition must be evaluated True/False by the CPU. 2. A brute-force approach (and it reduces readability and speed). 3. AND short-circuits: the first part is False, so the division is never evaluated.
11. **2.3.3 Number of Repetitions.** Answers: 1. Poor — $O(n^2)$. 2. Each iteration halves the remaining problem, so the number of iterations is about $\log n$. 3. 25.
12. **2.3.4 The Efficiency Evaluation Framework.** Answers: 1. About 100× slower (10^2). 2. The most time-consuming section, usually the deepest loop. 3. Binary search is more complex to code and maintain, and for $n = 50$ the simplicity of $O(n)$ is practically better.
13. **2.4 Refinements to improve clarity and efficiency.** Answers: 1. average = totalSum / totalItems. 2. The already-sorted largest value at the end (shrink the inner loop). 3. Once, outside the loop, then reuse C inside.
14. **2.5 Concept of Data Structure.** Answers: 1. A systematic way of organising, storing and managing data for efficient access, modification and processing. 2. Linear: array, linked list, stack, queue. Non-linear: tree, graph. 3. It has exactly one predecessor and one successor.
15. **2.5.1 Linear Data Structures: Array.** Answers: 1. The items sit in one continuous block, next to each other. 2. 12. 3. Later elements must all be shifted right to make room.
16. **Linear Data Structures: Linked List.** Answers: 1. Data, and a link/pointer to the next node. 2. NULL (no next node). 3. Back follows the pointer to the previous page-node instead of jumping by index.
17. **Linear Data Structures: Stack.** Answers: 1. Last-In, First-Out. 2. Data3. 3. Each action is PUSHed; Undo POPs the most recent action first.
18. **Linear Data Structures: Queue.** Answers: 1. First-In, First-Out; added at Rear, removed from Front. 2. 55. 3. Documents must print in the order they arrived (first received, first printed), not last-received first.
19. **2.5.2 Non-Linear Data Structures: Tree.** Answers: 1. The root. 2. One-to-many parent-child. 3. A family tree, and folders inside folders (or a college organogram).
20. **Non-Linear Data Structures: Graph.** Answers: 1. Nodes/vertices and edges. 2. Social networks (Facebook friends) and GPS mapping. 3. A tree has a hierarchy and one root; a graph has no strict hierarchy and any node may connect to any other (cycles allowed).
21. **2.5.3 Operations on Data Structures.** Answers: 1. Insertion, deletion, traversal, searching, sorting. 2. Insertion (at the rear of a queue). 3. Traversal visits every item; searching stops when the target is found (or the structure ends).
22. **2.6 Identify data structures in problem scenarios.** Answers: 1. Array — known size, same type, fast index lookup. 2. Queue, because first-come, first-served. 3. Stack.
23. **2.7 Trace data retrieval in Array, List and Queue.** Answers: 1. 20. 2. Four (12, 98, 23, 87). 3. No — a queue only DEQUEUEs the Front, so A must leave first.
24. **Career Opportunities in Algorithms.** Answers: 1. Algorithm Engineer. 2. The choice of structure (array, queue) directly affects web performance.

Answer key

Multiple choice

1. b
2. a
3. d
4. b
5. a
6. c
7. d
8. a
9. d
10. c
11. d
12. c
13. a
14. b
15. c

Short questions — model answers

1. An algorithm is correct if its output matches the expected results for a given input (and does so for all valid inputs). The two methods are trace tables and stepwise reasoning (logic verification).
2. Components: line/step number, a column per variable, input/output, and a condition-check column. A dry run acts as the computer, so you see logical errors where the program runs but the values go wrong, and you can validate that the intention is met.
3. Trace table: small blocks/complex loops/beginners; high effort (bad for 1,000 iterations); catches arithmetic/line mistakes; micro-level exact values. Stepwise reasoning: large systems and proofs; moderate effort; catches conceptual/structural flaws; macro-level overall state.
4. Modularity is breaking an algorithm into smaller independent parts (functions, classes, modules). SRP: each module does one task. Coupling: modules should be loosely coupled so a change in one does not break others. Abstraction: hide inner details (call Sort without knowing Bubble vs Selection).
5. Naming conventions, self-documentation, simple control flow, consistency of indentation/spacing/casing. Bad: `v = d / t`. Good: `velocity = distance / time`.
6. Big O describes how time or memory grows as n grows. $O(1)$: `arr[0]`; $O(\log n)$: binary search; $O(n)$: linear search; $O(n \log n)$: Merge Sort; $O(n^2)$: Bubble Sort / nested loops.
7. Does it scale? $n = 50$ is tiny, even $O(n)$ is fine. Bottleneck? A single scan of 50 names. Worth it? Binary search needs sorted data and more complex code, so linear search is practically better.
8. Clarity: meaningful names; modules; structure/indentation; short why-comments. Efficiency: reduce extra steps (shrink Bubble Sort's inner loop); better algorithms (binary vs linear on sorted millions); avoid re-computing (cache `C = A+B` outside the loop); appropriate data structures (array for direct access, tree for hierarchy).
9. A data structure is a systematic way of organising, storing and managing data for efficient access, modification and processing. Linear: sequence with one predecessor and one successor (array, linked list, stack, queue). Non-linear: hierarchical or network links (tree, graph).
10. Stack: LIFO; PUSH adds at TOP; POP removes from TOP; example Undo. Queue: FIFO; ENQUEUE adds at Rear; DEQUEUE removes from Front; example printer jobs.

Long questions — model answers

1. (a) Columns: Step, Total, Height, AllHeights, condition, output. Step 2 sets Total = 0. Step 3 stores the five heights. Then five loop cycles:

- 1.91 → True → Total 1
- 2.01 → False → Total stays 1
- 1.87 → True → Total 2
- 1.57 → True (boundary) → Total 3
- 1.48 → False → Total stays 3

(b) Printed Total = **3**.

(c) The condition is height ≥ 1.57 AND height ≤ 1.91 , so the closed interval includes both ends. 1.57 and 1.91 satisfy the inequalities; 2.01 and 1.48 do not. Initial Total = 0 is valid; each True branch adds one; False skips the add; after five items Total is the count of eligible soldiers.

(d) Python:

```
AllHeights = [1.91, 2.01, 1.87, 1.57, 1.48]
Total = 0
for height in AllHeights:
    if height ≥ 1.57 and height ≤ 1.91:
        Total = Total + 1
print(Total)
```

OUTPUT

3

2. (a) Monoblock: one sequence does the loop, the division and the print, so you cannot reuse the sum. Modular version: CalculateSum only adds; FindAverage only divides; main only prints. SRP holds. CalculateSum can be called from another program (loose coupling). Main does not see the loop (abstraction).

(b) Both compute total = 15 and avg = $15/5 = 3.0$.

```
def calculate_sum(A, n):
    total = 0
    for i in range(n):
        total = total + A[i]
    return total

def find_average(A, n):
    return calculate_sum(A, n) / n

print(find_average([1, 2, 3, 4, 5], 5))
```

OUTPUT

3.0

(c) Keep snake_case names; avoid 1-based I in Python; a one-line comment on why you divide by n (empty-list guard could be added later) is enough — do not comment every addition.

3. (a) Growth ($\log_2$):

n	$O(1)$	$O(\log n)$	$O(n)$	$O(n \log n)$	$O(n^2)$
8	1	3	8	24	64
32	1	5	32	160	1,024

(b) $O(n)$: 10× input → about 10× time. $O(n^2)$: 10× input → about 100× time, which fails for large sets.

(c) Scale: a million IDs; linear worst case is a million checks, binary about 20. Bottleneck: the search. Worth it: the IDs are already sorted and binary search is standard, so choose **binary search** $O(\log n)$.

(d)

```
n = 4
count = 0
for i in range(n):
    for j in range(n):
        count = count + 1
print(count)
```

```
OUTPUT
16
```

4. Draw the vertical stack with TOP on Data3 after three PUSHes, and the horizontal queue with FRONT on 55 and REAR on 90 (then D).

(a) Stack: [] → [Data1] → [Data1, Data2] → [Data1, Data2, Data3] → POP Data3 → POP Data2 → [Data1].

```
stack = []
stack.append("Data1")
stack.append("Data2")
stack.append("Data3")
print(stack.pop())
print(stack.pop())
print(stack)
```

```
OUTPUT
Data3
Data2
['Data1']
```

(b) Queue: [55] → [55, 76] → [55, 76, 90] → [55, 76, 90, D] → DEQUEUE 55 → [76, 90, D].

```
from collections import deque
q = deque()
q.append(55)
q.append(76)
q.append(90)
q.append("D")
print(q.popleft())
print(list(q))
```

```
OUTPUT
55
[76, 90, 'D']
```

(c) Undo must cancel the most recent action (LIFO → stack). A printer must respect arrival order (FIFO → queue).

5. (i) Array — known count, same type, index lookup. (ii) Linked list — next-pointer, cheap insert. (iii) Stack — reverse order of entry. (iv) Queue — first-come, first-served. (v) Tree — parent-child from the Principal root (Administrative Head / Academic Dean, then Accounts, HR, HOD Math, HOD CS). (vi) Graph — cities as vertices, roads as edges, alternative routes.

Array retrieval: Array[2] = 20 in one direct access (or after visiting 10 then 50 then 20 if you scan).

List retrieval: Step1 12 ≠ 87, Step2 98 ≠ 87, Step3 23 ≠ 87, Step4 87 = 87 FOUND True.

Self-assessment: I can...

- ☐ prove correctness with a full trace table, including boundary values.
- ☐ judge modularity (SRP, coupling, abstraction) and readability (N-S-S-C).
- ☐ apply the Scale / Bottleneck / Worth-it framework, including the $n = 50$ warning.
- ☐ define a data structure and classify linear vs non-linear.
- ☐ draw a tree and a graph and pick a structure from a scenario using the decision guide.
- ☐ write stepwise reasoning (start, loop, finish, edges) and compare it with a trace table.
- ☐ state $O(1)$, $O(\log n)$, $O(n)$, $O(n \log n)$ and $O(n^2)$ with examples and a growth table.
- ☐ refine an algorithm for names, modules, fewer loop steps and cached values.
- ☐ draw and trace an array, linked list, stack (PUSH/POP) and queue (ENQUEUE/DEQUEUE).
- ☐ trace retrieval: array jump, list walk from HEAD, queue Front only.

Chapter 3: Programming Fundamentals

Programming Fundamentals (1/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Data Structures in Python · Lists (Ordered, Mutable, Methods) · Tuples (Ordered, Immutable) · Sets (Unordered, Unique, Math Operations) · Dictionaries (Key-Value Pairs)

★ **Must lock:** Lists (Ordered, Mutable, Methods), Tuples (Ordered, Immutable), Dictionaries (Key-Value Pairs)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. List the five operations.
2. Which structure stores a class's grades, and why?
3. What is `Array[2]` in `[10, 50, 20, 70, 90, 30]`?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.1 Data Structures in Python

A data structure is a way of organising values in a program so you can store them, find them and change them.

- Primitive data structures — the basic types that hold one value. Examples: integers (int), floating-point numbers (float), and booleans...
- Abstract data structures — higher-level containers built from primitive types so you can hold many values and run richer operations....

Category	Description	Examples
Primitive	Basic types that represent a single value.	int, float, bool
Abstract	Higher-level structures for collections and complex operations.	Lists, tuples, sets, dictionaries

```
age = 17
height = 5.8
passed = True
marks = [80, 75, 90]
print(type(age))
print(type(height))
print(type(passed))
print(type(marks))
```

Remember: Primitive = one piece. Abstract = a box of pieces. Think of a single rupee coin (primitive) versus a wallet that can hold many coins (list, tuple, set or...


ڈیٹا سٹرکچر (Data Structure) پروگرام میں ڈیٹا کو ترتیب دینے کا طریقہ ہے۔

3.1.1 Lists (Ordered, Mutable, Methods) ★ Golden

A list is Python's most versatile built-in data structure.

- It stores an ordered collection of items in a single variable.
- Lists are mutable (you can change them after you create them) and they are written with square brackets [].
- One variable can hold thousands of values.

After this line	List in memory
create	['apple', 'banana', 'apple']
.append('grape')	['apple', 'banana', 'apple', 'grape']
.remove('apple')	['banana', 'apple', 'grape'] — only the first apple goes
.sort()	['apple', 'banana', 'grape']

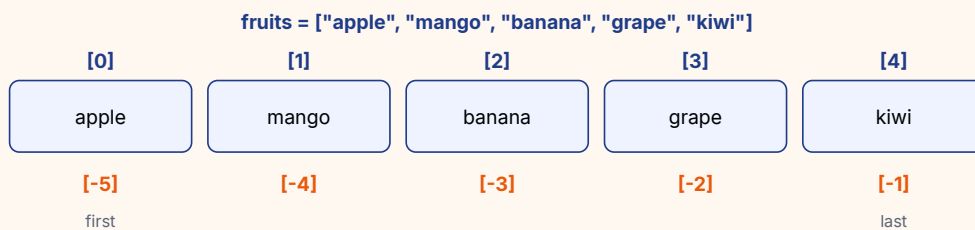

Positive indices count left to right from 0. Negative indices count right to left from -1.

```
numbers = [10, 2, 15, 14, 3, 33]      # list of integers
names = ["Hassan", "Qasim", "Malika"]  # list of strings
mixed = [1, "Python", 3.14, True]     # mixed data types
print(numbers)
print(names)
print(mixed)
```

Remember: Always remember [-1]. If a list has 10,000 items and you do not want to compute len(list) - 1, write list[-1]. It grabs the last item in one step.

Exam: Lists appear every year: "What is a list?", "List four methods with one line each", "Differentiate list and tuple", "Write a program to search an element", "Predict the..."

فہرست (List) مربع بریکٹ [] میں لکھی جاتی ہے، ترتیب برقرار رکھتی ہے اور تبدیل کی جا سکتی ہے (Mutable).

3.1.2 Tuples (Ordered, Immutable) ★ Golden

A tuple is an ordered collection that is immutable — once created, you cannot add, remove or replace items.

- Think of it as a read-only list.
- Tuples use parentheses ().
- Like lists, they allow duplicates, mixed types, and indexing from 0 (including negative indices).

Method	Meaning
<code>.count(value)</code>	How many times the value appears.
<code>.index(value)</code>	Index of the first occurrence.

List []

Can add / remove / replace

Tuple ()

LOCKED — read-only

A list is an open box you can refill. A tuple is a sealed box you may only look into.

```
t = (10, 20, 30, 40, 50)
print(t[0])
print(t[-1])
print(t[1:4])
print(t[::-1])
```

Remember: Tuple = locked lunchbox. You can see what is inside; you cannot swap the sandwich. Memory: "Tuple is Tight (immutable), written with round brackets that look..."

Exam: Expect "Differentiate list and tuple" (at least four points: brackets, mutability, methods, speed/protection), "Why use a tuple?", and "What happens if you write `t[0] = ...`"


ٹیپل (Tuple) گول بریکٹ () میں لکھا جاتا ہے، ترتیب رکھتا ہے مگر تبدیل نہیں ہو سکتا (Immutable).

3.1.3 Sets (Unordered, Unique, Math Operations)

A set stores an unordered, unindexed collection of unique elements.

- It is inspired by mathematical sets.
- You write a set with curly braces {}.
- Duplicates are removed as soon as the set is created.

Method	Description
<code>.add(value)</code>	Adds one element.
<code>.update(values)</code>	Adds many elements from a list, tuple or set.
<code>.remove(value)</code>	Removes the value. Raises <code>KeyError</code> if it is missing.
<code>.discard(value)</code>	Removes the value. Does not crash if it is missing.
<code>.clear()</code>	Removes every element. Result is <code>set()</code> .

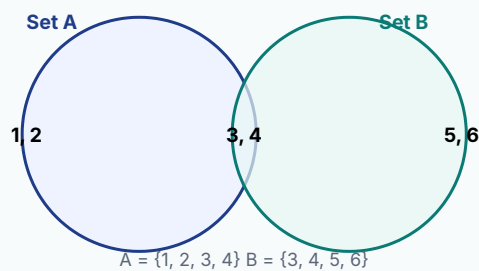

Overlap {3, 4} is the intersection. Left-only {1, 2} is A - B. Right-only {5, 6} is B - A.

```
nums = {1, 4, 3, 3, 2, 2}
print(nums)
```

Remember: SET = Same-item Eaten Twice-never. Empty set is `set()`, never `{}`. Safe delete = `discard`; angry delete = `remove`.

سیٹ (Set) منفرد عناصر کا بغیر ترتیب اور بغیر انڈیکس مجموعہ ہے، جو {} میں لکھا جاتا ہے۔

3.1.4 Dictionaries (Key-Value Pairs) ★ Golden

A dictionary stores data as key–value pairs.

- Ordered (Python 3.7+): insertion order is kept.
- Mutable: you can add, change and delete pairs.
- Keys are unique: if you repeat a key, the last value silently overwrites the earlier one. Values may repeat.

Method	Returns
<code>.keys()</code>	All keys.
<code>.values()</code>	All values.
<code>.items()</code>	Key–value pairs as tuples.



You never search a dictionary by position. You search by key.

```
d = {"name": "Alice", "age": 30}
print(d)
d["age"] = 31
print(d)
d["city"] = "NYC"
print(d)
del d["city"]
print(d)
```

Remember: Keys are unique, like roll numbers. Values are the student records and may repeat (two students can both score 80). Memory: “get is gentle, brackets can break.”

Exam: High-yield: definition of a dictionary, difference between `d[key]` and `d.get(key)`, “what if a key is repeated?”, traversal with `.items()`, and a full comparison table of...

ڈکشنری (Dictionary) کلید اور قدر (Key-Value) کے جوڑوں میں ڈیٹا رکھتی ہے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Data Structures in Python:** Do not call a list a “variable type” and stop there.
- **Lists (Ordered, Mutable, Methods):** Mistake 1: `.remove('apple')` deletes every apple.
- **Tuples (Ordered, Immutable):** One-item trap: `(5)` is just the integer 5 with extra parentheses.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Lists (Ordered, Mutable, Methods)**. Write: A list is Python’s most versatile built-in data structure.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) It stores an ordered collection of items in a single variable. (2) Lists are mutable (you can change them after you create them) and they are written with square brackets []. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Tuples (Ordered, Immutable)**. Write: A tuple is an ordered collection that is immutable — once created, you cannot add, remove or replace items.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Think of it as a read-only list. (2) Tuples use parentheses (). — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Dictionaries (Key-Value Pairs)**. Write: A dictionary stores data as key–value pairs.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Mutable: you can add, change and delete pairs. (2) Keys are unique: if you repeat a key, the last value silently overwrites the earlier one. Values may repeat. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What does `nums[2:6]` return if `nums = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]`?

3 marks. Explain Lists (Ordered, Mutable, Methods) with two clear points and one example.

5 marks. Lists appear every year: "What is a list?", "List four methods with one line each", "Differentiate list and tuple", "Write a program to search an element", "Predict the output of a slice." Write:...

8 marks. Lists (Ordered, Mutable, Methods): 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. `[2, 3, 4, 5]` 3. It stores an ordered collection of items in a single variable.; Lists are mutable (you can change them after you create them) and they are written with square brackets `[]`. 5. Use the recipe in the blue box. Model opening: A list is Python's most versatile built-in data structure. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Lists (Ordered, Mutable, Methods)** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 3: Programming Fundamentals

Programming Fundamentals (2/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Common Built-in Functions (min, max, len, sum) · Activity: Student Attendance System · Activity: Word Frequency Counter · Functions in Python · Types of Functions (Built-in vs User-defined)

★ **Must lock:** Functions in Python

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What does `nums[2:6]` return if `nums = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]`?
2. Name the two tuple methods.
3. What does `{"a": 1, "a": 2, "a": 3}` print?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.1.5 Common Built-in Functions (min, max, len, sum)

Several built-in functions work across lists, tuples, sets and dictionaries.

- You do not call them with a dot on the object (except when a type also has its own method, such as list.sort()).

Function	Purpose	Works on
min()	Smallest element (numeric or alphabetical)	List, tuple, set, dictionary keys
max()	Largest element	List, tuple, set, dictionary keys
len()	Number of elements (for a dict: number of keys)	List, tuple, set, dictionary
sum()	Adds numeric elements	List, tuple, set, dictionary values via sum(d.values())
sorted()	Returns a new sorted list ; original unchanged	List, tuple, set, dictionary keys

```
s = {5, 1, 9, 3, 7}
print(len(s))
print(min(s))
print(max(s))
print(sum(s))
print(sorted(s))
```

Remember: LEN-MIN-MAX-SUM — count, smallest, largest, total. For a dictionary: len/min/max/sorted use keys; sum needs .values().

len() عناصر گنتا ہے، min() سب سے چھوٹا، max() سب سے بڑا، sum() اعداد کا مجموعہ، اور sorted() نئی ترتیب شدہ فہرست دیتا ہے بغیر اصل کو بدلے ہیں۔

3.1.6 Activity: Student Attendance System

Teachers need a quick way to mark who is in class.

Store names in a list → Ask present? for each → Count yes → Print totals

- This program stores names in a list, asks about each student, counts how many said yes, and prints a summary with len().

Student	Typed answer	After <code>.lower()</code>	<code>present_count</code>
Ali	yes	yes → add 1	1
Sara	no	not yes	1
Ayesha	yes	yes → add 1	2

Remember: Counter pattern: start at 0, loop, add 1 when a condition is true. You will reuse this in the word-frequency program (add 1 per word) and the grade tracker...

حاضری کا پروگرام طلبہ کے نام ایک فہرست میں رکھتا ہے، ہر نام کے لیے پوچھتا ہے، اور yes پر شمار کار (Counter) ایک بڑھاتا ہے۔

3.1.7 Activity: Word Frequency Counter

Count how many times each word appears in a sentence.

- This is a classic use of a dictionary plus `.get()`: the word is the key, the count is the value.

After seeing	word_freq
python	<code>{'python': 1}</code>
is	<code>{'python': 1, 'is': 1}</code>
easy	<code>{'python': 1, 'is': 1, 'easy': 1}</code>
python (again)	<code>{'python': 2, 'is': 1, 'easy': 1}</code>
... end of sentence	<code>{'python': 3, 'is': 3, 'easy': 1, 'fun': 1, 'powerful': 1}</code>

Remember: The heart of every counter is one line: `d[item] = d.get(item, 0) + 1`. You can count letters, roll numbers or votes with the same pattern.

جملے کو `.split()` سے الفاظ کی فہرست بناتے ہیں، پھر ہر لفظ ڈکشنری میں کلید ہوتا ہے اور اس کی گنتی قدر۔

3.2 Functions in Python ★ Golden

When the same instructions are written again and again, that is duplicate code.

def → **name** → **parameters** → **indented body** → **return (optional)**

- Duplicate code makes a program longer, harder to read, and painful to update (you must fix every copy).
- A function lets you write the instructions once and run them whenever you call the function's name.

Benefit	Meaning
Code reusability	Write once, use anywhere.
Modularity	Break a big problem into small named tasks.
Readability	Shorter, cleaner files with meaningful names.
Maintainability	Fix a bug in one place and every call is fixed.

```
def greet():  
    print("Hello, World!")  
  
greet()  
greet()
```

Remember: DRY — Don't Repeat Yourself. If you are about to copy-paste a block, wrap it in **def**. Name functions with verbs: **greet**, **add**, **save_grades**.

Exam: Write the four benefits (reusability, modularity, readability, maintainability) as separate bullets — that is a standard short question. For long questions, define a...

فونکشن (Function) ہدایات کا وہ بلاک ہے جو ایک بار لکھا جاتا ہے اور بار بار بلایا جا سکتا ہے۔

3.2.1 Types of Functions (Built-in vs User-defined)

There are two main types of functions in Python.

- a) Built-in functions are already defined by Python.
- Examples you have already used: len(), range(), sum(), print(), input(), min(), max(), sorted(), int(), float(), type().
- b) User-defined functions are functions you create with def for tasks that no built-in covers in one step — greeting a user, dividing with...

	Built-in	User-defined
Who writes it?	The Python language	The programmer
How you start	Just call the name	First write <code>def name(...):</code>
Examples	<code>len("Ali")</code> → 3	<code>def add(a, b): return a + b</code>
Purpose	Everyday operations needed by everyone	Your program's specific jobs

```
print(len("Sindh"))

def greet_student(name):
    print("Hello,", name)

greet_student("Hassan")
greet_student("Malika")
```

Remember: If Python already has it (len, sum, max), do not rewrite it. Write a user-defined function when you are packaging your steps.

بلٹ ان فنکشن پائنتھن میں پہلے سے موجود ہوتے ہیں، جیسے len() اور print()۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Common Built-in Functions (min, max, len, sum):** sum() needs numbers.
- **Activity: Student Attendance System:** Only the exact string "yes" after .lower() counts as present.
- **Activity: Word Frequency Counter:** This program is case-sensitive and space-based.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Functions in Python**. Write: When the same instructions are written again and again, that is duplicate code.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Duplicate code makes a program longer, harder to read, and painful to update (you must fix every copy). (2) A function lets you write the instructions once and run them whenever you call the function's name. — + example.

5 marks: 3-mark structure + table: Benefit / Meaning + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What keyword starts a function definition?

3 marks. Explain Functions in Python with two clear points and one example.

5 marks. Write the four benefits (reusability, modularity, readability, maintainability) as separate bullets — that is a standard short question. For long questions, define a function, label def, name,...

8 marks. Functions in Python: 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. def 3. Duplicate code makes a program longer, harder to read, and painful to update (you must fix every copy).; A function lets you write the instructions once and run them whenever you call the function's name. 5. Use the recipe in the blue box. Model opening: When the same instructions are written again and again, that is duplicate code. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Functions in Python** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 3: Programming Fundamentals

Programming Fundamentals (3/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Functions with Return Values · Activity: Arithmetic Calculator Using Functions · Scope of Local and Global Variables · & 3.4 File Handling and Operations (Modes r, w, a)

★ **Must lock:** & 3.4 File Handling and Operations (Modes r, w, a)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What keyword starts a function definition?
2. For $s = \{5, 1, 9, 3, 7\}$, what are $\text{len}(s)$, $\text{min}(s)$, $\text{max}(s)$, $\text{sum}(s)$?
3. If all three students type no, what is printed for present and absent?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.2.2 Functions with Return Values

A function can either print a result (show it on the screen) or return a result (send it back to the caller).

- A returned value can be stored in a variable, printed later, or used in a further calculation.
- The call is replaced by the returned value, as if you had written that value in its place.

```
def multiply(a, b):  
    return a * b  
  
result = multiply(5, 3)  
print("The answer is:", result)
```

Remember: return = send back; print = show now. return also exits the function immediately. Lines after return in the same function do not run.

return نتیجہ کال کرنے والے پروگرام کو واپس بھیجتا ہے تاکہ وہ متغیر میں محفوظ ہو سکے یا آگے حساب میں لگے۔

3.2.3 Activity: Arithmetic Calculator Using Functions

Each arithmetic operation is a separate function.

- That is modularity: addition is one small task, division is another (with a guard against dividing by zero).
- The main program only asks for two numbers and calls the functions.

Remember: Four functions, four names: add, subtract, multiply, divide. The main program should look like a contents page — a sequence of calls — not a pile of formulae.

کیلکولیٹر میں ہر عمل الگ فنکشن ہے: جمع، تفریق، ضرب، تقسیم۔

3.2.4 Scope of Local and Global Variables

Scope is the region of a program where a variable can be seen and used.

- Python has two scopes you must know for this chapter.
- A local variable is created inside a function.
- It exists only while that function is running.

```
def calc():  
    secret = 50  
    print(secret)  
  
calc()  
print(secret)
```

Remember: Local = inside the room; global = in the corridor. Everyone can see the corridor. Things left in a room are gone when you leave. Prefer locals. Too many...


دائرہ کار (Scope) بتاتا ہے کہ متغیر کہاں دکھائی دیتا ہے۔

3.3 & 3.4 File Handling and Operations (Modes r, w, a) ★ Golden

File handling is a program's ability to create, read, write, update and delete files on disk.

- Variables live in RAM and vanish when the program ends.
- Files live on a hard disk or SSD and stay there — they are persistent.

Type	What it stores	Examples
Text file	Human-readable characters. You can open it in a text editor.	.txt, .csv, .py
Binary file	Raw bytes, not meant to be read as text.	.jpg, .mp3, .dat



Read copies data from disk into RAM. Write copies data from RAM onto disk.

```
new_file = open('myfile.txt', 'w')
new_file.write("The quick brown fox jumps over the lazy dog!!!\n")
new_file.close()
print("File has been created successfully.")
```

Remember: r = Read existing, w = Wipe then write, a = Add at end. Remember: write does not add a newline unless you type \n.

Exam: Define file handling, contrast RAM with disk, list modes r / w / a with one property each, and warn that w overwrites. Short programs that write one line and close the...

فائل ہینڈلنگ سے ڈیٹا ڈسک پر مستقل (Persistent) رہتا ہے، برخلاف RAM کے متغیرات کے جو پروگرام بند ہوتے ہی مٹ جاتے ہیں۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Functions with Return Values:** Writing `print(a * b)` inside `multiply` and then `result = multiply(5, 3)` stores `None` in `result`, not `15`.
- **Activity: Arithmetic Calculator Using Functions:** `input()` returns a string.
- **Scope of Local and Global Variables:** If you only read `x` inside the function, Python uses the global.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define & 3.4 File Handling and Operations (Modes `r`, `w`, `a`). Write: File handling is a program's ability to create, read, write, update and delete files on disk.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Variables live in RAM and vanish when the program ends. (2) Files live on a hard disk or SSD and stay there — they are persistent. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Which mode overwrites an existing file?

3 marks. Explain & 3.4 File Handling and Operations (Modes `r`, `w`, `a`) with two clear points and one example.

5 marks. Define file handling, contrast RAM with disk, list modes `r` / `w` / `a` with one property each, and warn that `w` overwrites. Short programs that write one line and close the file are common. Mention...

8 marks. & 3.4 File Handling and Operations (Modes `r`, `w`, `a`): 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. '`w`' 3. Variables live in RAM and vanish when the program ends.; Files live on a hard disk or SSD and stay there — they are persistent. 5. Use the recipe in the blue box. Model opening: File handling is a program's ability to create, read, write, update and delete files on disk. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on & 3.4 File Handling and Operations (Modes `r`, `w`, `a`) using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 3: Programming Fundamentals

Programming Fundamentals (4/4) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: The with Statement (Context Manager) · Errors and Exceptions (Try-Except) · Mini File Handling Project: Grade Tracker · Career Opportunities

★ **Must lock:** The with Statement (Context Manager)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Which mode overwrites an existing file?
2. What is stored in result after `result = multiply(5, 3)` with `return a * b`?
3. What does `divide(10, 0)` return in this activity?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.6 The with Statement (Context Manager) ★ Golden

It is easy to forget `.close()`. If the program crashes before `.close()` runs, the file may be incomplete or corrupted.

with `open(...)` as `f` → use `f` → block ends → file closed automatically

- It is easy to forget `.close()`.
- If the program crashes before `.close()` runs, the file may be incomplete or corrupted.
- Python's with statement is a context manager: it opens the file, runs the indented block, and always closes the file when the block ends —...

```
with open('myfile.txt', 'w') as new_file:
    new_file.write("Context managers are safe!\n")
# no .close() here – with already closed the file
```

Remember: with = "take, use, put back." Prefer with `open(...)` as `f`: in every new program. You still choose the mode: 'r', 'w' or 'a'.

Exam: Define the with statement as a context manager that guarantees close. Contrast it with manual open/close. Be ready to write a four-line program that writes with with and...

with بیان ایک کانٹیکسٹ مینیجر (Context Manager) ہے جو فائل کو بلاک کے اختتام پر خود بند کر دیتا ہے، چاہے اندر غلطی ہو جائے۔

3.8 Errors and Exceptions (Try-Except)

An exception is an error raised while the program is running — for example opening a file that is not there.

- Without handling, Python prints a traceback and stops.
- A try/except block catches the error and lets you show a clear message instead of crashing.

Error type	Meaning
FileNotFoundError	The path does not exist.
PermissionError	The operating system will not let you read or write that file.
IOError	A general input/output problem (disk full, disk disconnected).

```
try:
    with open('missing_data.txt', 'r') as f:
        content = f.read()
        print(content)
except FileNotFoundError:
    print("Error: The file does not exist. Please check the name.")
except Exception as e:
    print(f"An unexpected error occurred: {e}")
```

Remember: try = attempt; except = backup plan. Catch the specific error first (FileNotFoundError), then a general Exception if you need it. Order matters: a bare except...

ایکسپشن (Exception) چلتے پروگرام کی غلطی ہے، جیسے غیر موجود فائل کھولنا۔

3.9 Mini File Handling Project: Grade Tracker

This project uses 'w' to create a grades file, 'a' to add a student later, and 'r' to read every line and compute an average.

Write names and marks ('w') → Append a new student ('a') → Read lines ('r') → Split, total, average

- It combines file handling, string methods and arithmetic.

Remember: Same file, three modes, three with blocks. Never open the same file in 'w' when you only meant to add David — that would delete Alice, Bob and Carol.

گریڈ ٹریکر پہلے 'w' سے فائل بناتا ہے، پھر 'a' سے نیا طالب علم جوڑتا ہے، پھر 'r' سے تمام سطریں پڑھ کر اوسط نکالتا ہے۔

Career Opportunities

The skills in this chapter — data structures, functions and files — are the same skills used in many jobs.

- Python / software developer — builds applications, scripts and tools in Python, one of the most widely used languages in industry.
- Data analyst — uses lists and dictionaries, then file handling, to process, visualise and interpret data for decisions.
- Automation engineer — writes scripts that repeat file and testing tasks so humans do not have to.
- Game developer — uses functions, data structures and logic to build interactive games.

Remember: Four careers: P-D-A-G — Python developer, Data analyst, Automation engineer, Game developer.

اس باب کی مہارتیں پائتھن ڈویلپر، ڈیٹا اینالسٹ، آٹومیشن انجینئر اور گیم ڈویلپر کے کام میں روز استعمال ہوتی ہیں۔

Programming Fundamentals

18 single-page lessons · 6 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- Python programs rest on primitive types (`int`, `float`, `bool`) and abstract structures: lists, tuples, sets and dictionaries.
- A **list** is ordered and mutable, written with `[]`. Index from 0; `[-1]` is last. Slice stop is exclusive. Methods include `append`, `insert`, `remove`, `sort`, `reverse`, `clear`.
- A **tuple** is ordered and immutable, written with `()`. Item assignment raises `TypeError`. Only `count` and `index` exist as methods.
- A **set** is unordered and unique, written with `{}`. Use `|` & `-` & `^` for union, intersection, difference and symmetric difference. Prefer `discard` over `remove`.
- A **dictionary** maps unique keys to values. `d[key]` can raise `KeyError`; `d.get(key, default)` is safe. Duplicate keys keep the last value.
- `min`, `max`, `len`, `sum` and `sorted` work across structures. On a dict, `min` / `max` / `sorted` use keys; total values with `sum(d.values())`. `sorted()` returns a new list; `.sort()` changes a list in place.
- Functions written with `def` give reusability, modularity, readability and maintainability. Built-in functions already exist; user-defined functions solve your tasks.
- `return` sends a value to the caller. Without `return`, the result is `None`. Local variables live inside a function; global variables live outside all functions.
- Files persist on disk. Modes: `r` read (must exist), `w` write (overwrites), `a` append. Methods: `read`, `readlines`, `write`, `close`.
- The `with` statement is a context manager that closes the file automatically. Loop line by line to read large files safely.
- `try / except FileNotFoundError` stops a missing file from crashing the program.
- The grade tracker writes with `w`, appends with `a`, reads with `r`, splits each `Name: mark` line, and computes the mean.

Key terms

Term	Meaning	اردو
Data structure	A way of organising values so a program can store and use them.	ڈیٹا سٹرکچر
Primitive type	A basic single value: <code>int</code> , <code>float</code> , <code>bool</code> .	بنیادی قسم
List	Ordered, mutable sequence written with <code>[]</code> .	فہرست
Index	The position of an item, starting at 0 (or -1 from the end).	انڈیکس
Slicing	Copying a portion of a sequence with <code>start:stop:step</code> .	سلائسنگ
Traversal	Visiting each element in turn, usually with a loop.	گشت / تراورسل
Mutable	Can be changed after creation.	قابل تبدیلی
Immutable	Cannot be changed after creation.	ناقابل تبدیلی
Tuple	Ordered, immutable sequence written with <code>()</code> .	ٹیپل
Set	Unordered collection of unique items written with <code>{}</code> .	سیٹ
Union	All unique items from two sets (<code> </code>).	اجتماع
Intersection	Items common to both sets (<code>&</code>).	اشتراک

Programming Fundamentals

75 marks • 1 hour 15 minutes • no notes • no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 18 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define • Explain • Example • Diagram • Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. Which structure is ordered and mutable?
 - a. List
 - b. Tuple
 - c. Set
 - d. Frozen set
2. What does `nums[2:6]` return if `nums = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]`?
 - a. `[2, 3, 4, 5, 6]`
 - b. `[2, 3, 4, 5, 6, 7]`
 - c. `[2, 3, 4, 5]`
 - d. `[3, 4, 5, 6]`
3. `t = (1, 2, 3)` then `t[0] = 99` raises
 - a. `KeyError`
 - b. `TypeError`
 - c. `ValueError`
 - d. `IndexError`
4. A set is best described as
 - a. ordered with duplicates
 - b. indexed and mutable
 - c. key-value pairs
 - d. unordered with unique elements
5. If `A = {1, 2, 3, 4}` and `B = {3, 4, 5, 6}`, then `A & B` is
 - a. `{3, 4}`
 - b. `{1, 2}`
 - c. `{1, 2, 3, 4, 5, 6}`
 - d. `{1, 2, 5, 6}`
6. `{"a": 1, "a": 2, "a": 3}` prints
 - a. `{'a': 1}`
 - b. `{'a': 1, 'a': 2, 'a': 3}`
 - c. `{'a': 3}`
 - d. a `KeyError`
7. The safe way to read a possibly missing dictionary key is
 - a. `d[key]`
 - b. `d.get(key)`
 - c. `d.keys(key)`
 - d. `d.index(key)`
8. For `s = {5, 1, 9, 3, 7}`, `sum(s)` is
 - a. 5
 - b. 9
 - c. 7
 - d. 25
9. Which statement is true?
 - a. `sorted(x)` returns a new list and leaves `x` unchanged
 - b. `sorted(x)` works only on lists
 - c. `.sort()` works on tuples
 - d. `.sort()` returns a new list
10. A function is created with the keyword
 - a. `func`
 - b. `def`
 - c. `define`
 - d. `return`
11. A function that has no `return` statement returns
 - a. `0`
 - b. `False`
 - c. `None`
 - d. an empty string
12. A variable defined inside a function is
 - a. local
 - b. global
 - c. persistent
 - d. public
13. Opening a file with mode `'w'`
 - a. fails if the file already exists
 - b. adds new text at the end
 - c. is read-only
 - d. erases existing content (and creates the file if needed)
14. The `with open(...) as f:` statement is used mainly because
 - a. it makes the file binary
 - b. it closes the file automatically
 - c. it is faster than lists
 - d. it prevents `KeyError`
15. Reading a missing file in mode `'r'` without `try` raises
 - a. `TypeError`
 - b. `KeyError`
 - c. `FileNotFoundError`
 - d. `ValueError`

Section B — Short questions (10 × 3 = 30)

1. Define a data structure. Distinguish primitive from abstract data structures with one example of each.
2. What is negative indexing? Give the expression that returns the last item of a list named `fruits`.
3. State four differences between a list and a tuple.
4. Differentiate `.remove()` and `.discard()` on a set.
5. Why can a dictionary not have two identical keys? What happens if you write the same key twice?
6. Contrast `sorted()` with list `.sort()`.
7. List four benefits of using functions.
8. Define local scope and global scope.
9. Write the meaning of file modes `'r'`, `'w'` and `'a'`.
10. What is a context manager? Why is `with` safer than calling `.close()` yourself?

Section C — Long questions (attempt any 3 × 10 = 30)

1. Compare list, tuple, set and dictionary in a table (syntax, order, mutability, duplicates, how you access an item, one typical use). Then write two lines of Python that create one example of each holding the numbers 1, 2 and 2, and state what each structure actually stores.
2. Write a complete Python program that takes a sentence, counts the frequency of each word using a dictionary and `.get()`, prints a two-column table, and prints the most frequent word. Trace your program on `"python is easy python is fun python is powerful"`.
3. Write an arithmetic calculator with four user-defined functions `add`, `subtract`, `multiply` and `divide`. `divide` must not crash when the second number is 0. Explain how `return` is used and why `input` values are converted with `float`.
4. Explain file handling. Describe modes `r`, `w` and `a`, the `with` statement, and `try/except FileNotFoundError`. Include a short program that writes one line with `with` and another that reads a file that might be missing.
5. The grade tracker writes three students with `'w'`, appends David with `'a'`, then computes the class average. Write the full program, show the exact output for marks 88, 75, 92 and 81, and explain `strip`, `split(":")` and `average:.1f`.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **3.1 Data Structures in Python.** Answers: 1. Primitive: any two of int, float, bool. Abstract: any two of list, tuple, set, dictionary. 2. Because it is a higher-level container built from primitive values, holding many items and supporting operations such as append and slice.
2. **3.1.1 Lists (Ordered, Mutable, Methods).** Answers: 1. [2, 3, 4, 5]. 2. ['banana', 'apple'] (only the first apple is removed). 3. To stop scanning once the value is found, so the rest of a long list is not checked.
3. **3.1.2 Tuples (Ordered, Immutable).** Answers: 1. count and index. 2. TypeError: 'tuple' object does not support item assignment. 3. ([1, 2, 99], [3, 4]).
4. **3.1.3 Sets (Unordered, Unique, Math Operations).** Answers: 1. {1, 2, 3, 4} (duplicates removed; order may vary). 2. discard does not raise KeyError if the value is missing. 3. {1, 2, 5, 6}.
5. **3.1.4 Dictionaries (Key-Value Pairs).** Answers: 1. {'a': 3}. 2. 0. 3. A set.
6. **3.1.5 Common Built-in Functions (min, max, len, sum).** Answers: 1. 5, 1, 9, 25. 2. A list: [1, 3, 5, 7, 9]. 3. sum(d.values()) → 240.
7. **3.1.6 Activity: Student Attendance System.** Answers: 1. Present 0, Absent 3. 2. So that YES, Yes and yes all match the string "yes".
8. **3.1.7 Activity: Word Frequency Counter.** Answers: 1. Three times. 2. Because a brand-new word is not yet a key; .get returns 0 instead of raising KeyError.
9. **3.2 Functions in Python.** Answers: 1. def. 2. Twice, because greet() is called twice.
10. **3.2.1 Types of Functions (Built-in vs User-defined).** Answers: 1. Built-in. 2. def.
11. **3.2.2 Functions with Return Values.** Answers: 1. 15. 2. None.
12. **3.2.3 Activity: Arithmetic Calculator Using Functions.** Answers: 1. The string "Cannot divide by zero". 2. Because input() returns text; float() turns it into a number so + - * / do arithmetic, including decimals.
13. **3.2.4 Scope of Local and Global Variables.** Answers: 1. Inside a function. 2. 10 (the global is unchanged).
14. **3.3 & 3.4 File Handling and Operations (Modes r, w, a).** Answers: 1. 'w'. 2. 'r'. 3. Because write() does not start a new line by itself; without \n the next write continues on the same line.
15. **3.6 The with Statement (Context Manager).** Answers: 1. That the file is closed when the with block ends, even if an error occurs. 2. Because each line already ends with \n; print would otherwise add another newline and the output would look double-spaced.
16. **3.8 Errors and Exceptions (Try-Except).** Answers: 1. FileNotFoundError. 2. It prints "Error: The file does not exist. Please check the name." and continues.
17. **3.9 Mini File Handling Project: Grade Tracker.** Answers: 1. 84.0 because (88+75+92+81)/4 = 336/4 = 84.0. 2. Because "a" appends; "w" would erase the three existing students.
18. **Career Opportunities.** Answers: 1. Data analyst. 2. Any two of: Python/software developer, data analyst, automation engineer, game developer.

Answer key

Multiple choice

1. a
2. c
3. b
4. d
5. a
6. c
7. b
8. d
9. a
10. b
11. c
12. a
13. d
14. b
15. c

Short questions — model answers

1. A data structure organises values in a program. Primitive types hold one value (e.g. `int 17`). Abstract structures hold collections and richer operations (e.g. a list of marks).
2. Negative indexing counts from the right. `fruits[-1]` is the last item. `fruits[-2]` is the second last.
3. List: `[]`, mutable, many methods, slightly slower, use when data will change. Tuple: `()`, immutable, only `count / index`, slightly faster, use for protected records. Both are ordered and allow duplicates and indexing.
4. Both delete an element. `remove` raises `KeyError` if the value is absent. `discard` does nothing in that case, so it is the safer choice.
5. Each key must identify one value (like one roll number per student). A repeated key does not crash; the last assigned value overwrites the earlier one, e.g. `{"a": 3}`.
6. `sorted(x)` is a built-in function for any iterable; it returns a new list and does not change `x`. `.sort()` is a list method that sorts in place and returns `None`.
7. Reusability (write once, call many times), modularity (small named tasks), readability (shorter files), maintainability (fix one definition).
8. Local: defined inside a function; invisible outside; gone when the function ends. Global: defined outside all functions; readable throughout the program.
9. `'r'` read, error if missing. `'w'` write, create if missing, erase old content. `'a'` append at the end, create if missing, keep old content.
10. A context manager sets up a resource and cleans it up. `with open(...) as f` closes the file when the block ends, even after an exception, so you cannot forget `.close()` and you are safer if the program crashes mid-write.

Long questions — model answers

1. Use the comparison table from 3.1.4 (brackets, ordered/mutable/duplicates/access/empty/use). Examples:

```
print([1, 2, 2])
print((1, 2, 2))
print({1, 2, 2})
print({"a": 1, "b": 2, "b": 2})
```

OUTPUT

```
[1, 2, 2]
(1, 2, 2)
{1, 2}
{'a': 1, 'b': 2}
```

The list and tuple keep both 2s and an order. The set drops the extra 2. The dictionary keeps unique keys; the second "b" overwrites the first.

2. Use the program in 3.1.7. Trace: nine tokens; `python` and `is` end at 3; others at 1. Output matches the worked example, including Most Frequent: 'python' (3 times) because `max` returns the first key among ties. Heart of the loop:
`word_freq[word] = word_freq.get(word, 0) + 1.`
3. Use the four functions from 3.2.3. `return` sends each result to `print` in the main program. `divide` returns the string "Cannot divide by zero" when `b == 0`. `float(input(...))` is required because `input` returns a string and "12" + "4" would concatenate. Sample 12 and 4: 16.0, 8.0, 48.0, 3.0.
4. File handling stores data on disk so it outlives the program. Modes: `r` read / must exist; `w` wipe-or-create; `a` add-or-create. `with` closes automatically. Try/except:

```
with open("note.txt", "w") as f:
    f.write("Saved\n")
try:
    with open("note.txt", "r") as f:
        print(f.read(), end="")
except FileNotFoundError:
    print("Error: The file does not exist. Please check the name.")
```

OUTPUT

```
Saved
```

If the name were wrong, the except message would print instead of a traceback.

5. Full program as in 3.9. Disk after append:

OUTPUT

```
Alice: 88
Bob: 75
Carol: 92
David: 81
```

Output of the program (exact):

OUTPUT

```
Grades file created.
New student appended.
Alice scored 88
Bob scored 75
Carol scored 92
David scored 81

Class average: 84.0
```

`strip` removes `\n`; `split(":")` separates name and mark; `int(grade)` allows the extra space; `{average:.1f}` prints one decimal. $336 \div 4 = 84.0$.

Self-assessment: I can...

- ☐ Choose list, tuple, set or dictionary for a given problem and justify the choice.
- ☐ Explain tuple immutability and the inner-list exception, and use `count / index`.
- ☐ Update a dictionary, access values with `.get()`, and loop with `.items()`.
- ☐ Write a user-defined function with parameters and a `return` value, and contrast it with a built-in.
- ☐ Open a text file in `r`, `w` or `a` using `with`, and read it line by line.
- ☐ Index, slice, traverse and update a list, including `[-1]` and the main methods.
- ☐ Build a set, drop duplicates, and compute union, intersection, difference and symmetric difference.
- ☐ Apply `min`, `max`, `len`, `sum` and `sorted` correctly, including on dictionaries.
- ☐ State whether a name is local or global and predict a `NameError`.
- ☐ Catch `FileNotFoundError` and complete the grade-tracker project with the correct average.

Chapter 4: Data and Analysis

Data and Analysis (1/2) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Concept of Data Analysis · Data Sources and Database Connection · Creating a SQLite Database in Python · Pandas and DataFrames · Handling Missing Values (NaN)

★ **Must lock:** Data Sources and Database Connection, Pandas and DataFrames, Handling Missing Values (NaN)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What does a context manager guarantee for a file?
2. Which exception is raised when `open('missing_data.txt', 'r')` cannot find the file?
3. What is the class average in the sample, and how is it calculated?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

4.1 Concept of Data Analysis

Data analysis is examining, organising and interpreting data so you can extract useful information.

- Schools study results, shops study sales, hospitals study patient records — all to make a decision, spot a trend or solve a problem.
- Python is popular for this work because it is readable, talks to files and databases, does statistics, and draws graphs.
- Five lines of Pandas often replace an hour of spreadsheet clicking.

ڈیٹا کا تجزیہ یعنی اعداد کو ترتیب دے کر ان سے فیصلے کے قابل معلومات نکالنا۔

4.1.1 – 4.1.2 Data Sources and Database Connection ★ Golden

Data sources are where information comes from: school records, websites, sensors, databases.

Python → Driver → Connection → Cursor → SQL → Database

- Connectivity is the conversation between your Python program and that source so you can read and update data.
- Five components of a database connection, in the order they actually work:

#	Component	Role
1	Database	Organised store (SQLite = one .db file; MySQL = a server for big apps)
2	Driver	Translator between Python and that DBMS (sqlite3 is built in)
3	Connection object	Opens, manages and closes the pipeline
4	Cursor object	Runs SQL and walks through result rows
5	SQL queries	CREATE, INSERT, SELECT, UPDATE, DELETE

Exam: Write the five names in order and one line each. A common trap is swapping cursor and connection: the connection is the pipe; the cursor is the messenger that travels...

خمسہ اجزاء: ڈیٹا بیس، ڈرائیور، کنکشن، کرسر، ایس کیو ایل۔

4.2 Creating a SQLite Database in Python

SQLite is built into Python. The whole database is one .db file next to your script — no password, no port, no server.

- SQLite is built into Python.
- The whole database is one .db file next to your script — no password, no port, no server.
- Nine steps you must be able to write from memory:

Step	Why it matters
connect	Creates the file if it does not exist
cursor	Vehicle that carries SQL
execute	Runs one SQL command
commit	Writes INSERT/UPDATE/DELETE to disk
fetchall	Brings SELECT results into a Python list of tuples
close	Frees memory and unlocks the file

Remember: Strings inside SQL use single quotes: 'Ali'. Python strings around the SQL use double quotes (or a triple-quoted string).

ایس کیو لائٹ پائتھن کے ساتھ آتی ہے، پورا ڈیٹا بیس ایک فائل ہے۔

4.3 Pandas and DataFrames ★ Golden

Pandas is a third-party library for tables.

- Install once: pip install pandas in the terminal (not inside the .py file).
- Convention: import pandas as pd.
- A DataFrame is a 2-D table of rows and columns, like Excel or an SQL table.

```
import pandas as pd
data = {
    "Name": ["Ali", "Sara", "Ahmed"],
    "Math": [85, 90, 78],
    "Science": [80, 88, 70],
}
df = pd.DataFrame(data)
print(df)
```

پینڈاز ٹیبل نما ڈیٹا فریم دیتا ہے۔

4.3.3 Handling Missing Values (NaN)

★ Golden

Missing cells are NaN ("Not a Number"). Statistics crash or lie if you ignore them.

- Statistics crash or lie if you ignore them.
- Three tools: `isnull()` (True where empty), `fillna(value)` (replace), `dropna()` (delete the row).

```
import pandas as pd
df = pd.DataFrame({
    "Name": ["Ali", "Sara", "Ahmed", "Ayesha"],
    "Marks": [85.0, None, 78.0, 92.0],
    "Grade": ["A", "A", None, "A"],
})
print(df.isnull().sum())
```

Trap: Filling a salary gap with the mean of a company that includes the CEO can hide poverty (the same outlier problem as the mean).

Exam: State: identify with `isnull/sum`, fill numeric gaps with the mean, fill categories with a label, or drop rows if filling would invent a lie. Never analyse first and clean...

خالی خانے NaN ہیں۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Creating a SQLite Database in Python:** Forgetting `commit()` is the classic bug: the program prints nothing next time because the insert was never saved.
- **Handling Missing Values (NaN):** Filling a salary gap with the mean of a company that includes the CEO can hide poverty (the same outlier problem as the mean).

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Data Sources and Database Connection**. Write: Data sources are where information comes from: school records, websites, sensors, databases.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Connectivity is the conversation between your Python program and that source so you can read and update data. (2) Five components of a database connection, in the order they actually work: — + example.

5 marks: 3-mark structure + table: # / Component / Role + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Pandas and DataFrames**. Write: Pandas is a third-party library for tables.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Install once: pip install pandas in the terminal (not inside the .py file). (2) Convention: import pandas as pd. — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Handling Missing Values (NaN)**. Write: Missing cells are NaN ("Not a Number").

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Statistics crash or lie if you ignore them. (2) Three tools: `isnull()` (True where empty), `fillna(value)` (replace), `dropna()` (delete the row). — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a complete truth table and a labelled gate / logic diagram + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Which object executes `SELECT *`?

3 marks. Explain Data Sources and Database Connection with two clear points and one example.

5 marks. Write the five names in order and one line each. A common trap is swapping cursor and connection: the connection is the pipe; the cursor is the messenger that travels through it.

8 marks. Data Sources and Database Connection: 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. The cursor 3. Connectivity is the conversation between your Python program and that source so you can read and update data.; Five components of a database connection, in the order they actually work: 5. Use the recipe in the blue box. Model opening: Data sources are where information comes from: school records, websites, sensors, databases. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Data Sources and Database Connection** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 4: Data and Analysis

Data and Analysis (2/2) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Data Organization and Representation · Data Visualization and Types of Graphs · Descriptive Statistics · Career Opportunities

★ **Must lock:** Data Visualization and Types of Graphs, Descriptive Statistics

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Which object executes `SELECT *`?
2. What is `pd`?
3. What does `df.isnull().sum()` return?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

4.4 Data Organization and Representation

Organised data is easier to read. Three everyday forms: Table — exact values side by side (Ali 85 Math, 80 Science).

- Table — exact values side by side (Ali 85 Math, 80 Science).
- Frequency distribution — how many items fall in each range (bin).
- Graph — a picture of a trend or comparison (next topics).

Range of marks	Frequency (students)
50–59	5
60–69	7
70–79	9
80–89	4
90–100	2



ٹیبل درست عدد دکھاتی ہے، تعدد کی جدول بتاتی ہے کتنے طلبہ کس رینج میں ہیں، گراف رجحان دکھاتا ہے۔

4.5 Data Visualization and Types of Graphs ★ Golden

Pick the graph that matches the question. Then label axes and give a title — an unlabelled chart scores zero in an exam.

- Then label axes and give a title — an unlabelled chart scores zero in an exam.

Chart	Shows	Watch out
Bar / column	Compare discrete categories (subjects, departments)	Column = vertical; bar often = horizontal
Line	Change over time (temperature, visitors)	Needs an ordered x-axis (months, years)
Pie	Parts of one whole as percentages	Bad with many or almost-equal slices
Histogram	Distribution of one numeric variable in bins	Bars touch (continuous range), unlike a bar chart
Scatter	Relationship of two numeric variables	Each dot is one pair (x, y)
Box plot	Min, Q1, median, Q3, max, and outliers	Best tool for spotting extreme values



Column compares; line shows a trend; pie shows share; the box summarises spread around the median.

```
import matplotlib.pyplot as plt
subjects = ["English", "Math", "Science", "History"]
marks = [64, 82, 71, 49]
plt.bar(subjects, marks, color="skyblue", edgecolor="black")
plt.title("Marks vs Subjects")
plt.xlabel("Subjects")
plt.ylabel("Marks out of 100")
```

Exam: "Which graph and why?" is a 3-mark gift. Write the name, what it shows, and one reason the others are worse.

بار/کالم اقسام کا موازنہ، لائن وقت کا رجحان، پائی حصے، ہسٹوگرام مسلسل تقسیم (بار آپس میں لگے)، اسکیتھر دو متغیرات کا تعلق، باکس پلا...

4.6 Descriptive Statistics ★ Golden

Descriptive statistics squeeze a long list into a few honest numbers.

- Central tendency asks "what is typical?".
- Spread asks "how mixed is the list?".

Measure	How	Use when
Mean	Sum $\div$ n. Uses every value.	Values sit close together. Example: ordinary test scores.
Median	Middle after sorting. Odd n: centre. Even n: mean of the two centre values.	Outliers would wreck the mean (CEO salary).
Mode	Most frequent value. May be none, one, or several.	Most popular choice (shoe size).

Trap: Do not report variance as if it were in "marks".

Exam: Always state whether you used n or n-1. Show the sorted list for the median. For SD, show: mean $\rightarrow$ deviations $\rightarrow$ squares $\rightarrow$ divide $\rightarrow$ square root. A box plot pictures min,...

اوسط سب کا مجموعہ تقسیم تعداد، میڈین ترتیب کے بعد بیچ، موڈ سب سے زیادہ بار آنے والا۔

Career Opportunities

The skills in this chapter map onto real jobs: data analyst (Pandas, Excel), database administrator (SQLite/MySQL), data scientist (statistics + modelling), visualisation specialist (Matplotlib, Power BI),...

یہ باب ڈیٹا اینالسٹ، ڈیٹا بیس ایڈمن، ڈیٹا سائنسدان، ویژولائزیشن اور بیک اینڈ ڈویلپر جیسے کیریئرز کی بنیاد ہے۔

Data and Analysis

9 single-page lessons · 5 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- Data analysis turns raw facts into decisions. Python reads files and databases, calculates and plots.
- Connection chain: database → driver → connection → cursor → SQL.
- SQLite: connect, cursor, execute, commit, fetchall, close. No commit means no save.
- A DataFrame is a 2-D table. Load with a dictionary, `read_csv` or `read_excel`. New columns are vectorised arithmetic.
- NaN: find (`isnull`), fill (`fillna` , often with the mean), or drop (`dropna`).
- Tables give exact values; frequency bins show how many in each range.
- Bar/column = categories; line = time; pie = parts of a whole; histogram = numeric distribution (touching bars); scatter = two variables; box = five-number summary + outliers.
- Mean uses every value and is sensitive to outliers; median is the middle; mode is the most common.
- Range = max–min. Variance = mean squared deviation ($\div n$ or $\div n-1$). SD = $\sqrt{\text{variance}}$. pandas `.std()` uses $n-1$.

Key terms

Term	Meaning	اردو
Data analysis	Examining data to extract useful information.	ڈیٹا کا تجزیہ
Connectivity	Link between a program and a data source.	رابطہ کاری
Driver	Translator between Python and a DBMS.	ڈرائیور
Connection	Open pipeline to the database.	کنکشن
Cursor	Object that executes SQL and fetches rows.	کرسر
SQLite	Built-in file-based database.	ایس کیو لائٹ
commit	Save INSERT/UPDATE/DELETE to disk.	کمیت / محفوظ کرنا
Pandas	Library for table-like data.	پینڈا
DataFrame	2-D labelled table of rows and columns.	ڈیٹا فریم
NaN	Missing value ("Not a Number").	خالی / غیر موجود قدر
Frequency	How many items fall in a class/bin.	تعدد
Histogram	Distribution chart whose bars touch.	ہسٹوگرام

Data and Analysis

75 marks · 1 hour 15 minutes · no notes · no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 09 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define · Explain · Example · Diagram · Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. The object that executes SQL is the:
 - a. driver
 - b. cursor
 - c. DataFrame
 - d. histogram
2. After INSERT you must:
 - a. close then commit
 - b. commit
 - c. drop the table
 - d. call head()
3. Pandas is installed with:
 - a. import pandas
 - b. pip install pandas
 - c. sqlite3.connect
 - d. plt.show()
4. `df.head()` shows:
 - a. the last 5 rows
 - b. the first 5 rows
 - c. only NaNs
 - d. the standard deviation
5. Missing Pandas values appear as:
 - a. NULL in every chart
 - b. NaN
 - c. 0 always
 - d. a pie slice
6. To delete every row that contains a gap:
 - a. fillna
 - b. dropna
 - c. fetchall
 - d. commit
7. A line graph is best for:
 - a. parts of a whole
 - b. a trend over months
 - c. two unrelated categories
 - d. a primary key
8. Histogram bars:
 - a. must have gaps
 - b. touch, because bins are a continuous range
 - c. always show time
 - d. replace the mean
9. Rainfall vs crop yield is a:
 - a. pie chart
 - b. scatter plot
 - c. primary key
 - d. mode
10. A box plot's inner line is the:
 - a. mean
 - b. mode
 - c. median
 - d. range
11. Mean of 70, 80, 90 is:
 - a. 70
 - b. 80
 - c. 90
 - d. 240
12. Median of 10, 15, 35, 70, 95 is:
 - a. 10
 - b. 35
 - c. 70
 - d. 45
13. Mode of 20, 25, 20, 30, 20, 25, 20 is:
 - a. 25
 - b. 30
 - c. 20
 - d. 7
14. Range of 120, 150, 180 is:
 - a. 30
 - b. 60
 - c. 150
 - d. 180
15. pandas `.std()` divides by:
 - a. n
 - b. n-1
 - c. 2n
 - d. zero

Section B — Short questions (10 × 3 = 30)

1. List the five components of a Python database connection in order.
2. Why is `conn.commit()` required after INSERT?
3. What is a DataFrame? How do you load a CSV into one?
4. Differentiate `fillna` and `dropna`.
5. When is a pie chart a poor choice?
6. Differentiate a bar chart and a histogram.
7. Why is the median better than the mean for company salaries?
8. Define range, min and max with the list 70, 80, 90, 60, 75.
9. Why do we take the square root of variance?
10. State two careers that use this chapter's skills.

Section C — Long questions (attempt any 3 × 10 = 30)

1. Write a complete Python program that creates `school.db`, a `students` table, inserts Ali 85 and Sara 90, commits, prints all rows, and closes. Number the five connection components beside the matching lines.
2. Starting from the dictionary of Ali/Sara/Ahmed marks, write Pandas code to build a DataFrame, add Total and Average columns, and print it. Show the exact output.
3. Given Marks [85, None, 78, 92] and Grade ["A","A", None, "A"], show `isnull().sum()`, then fill Marks with the mean and Grade with "Not Assigned". Compute the mean by hand.
4. For each goal pick a chart and justify in one sentence: (a) CS vs IT vs Eng enrolment, (b) website hits from Jan to Jun, (c) share of four clubs in one college, (d) distribution of 200 heights, (e) hours studied vs marks, (f) comparing spread of two classes.
5. For 4, 8, 6, 10, 2 compute mean, median, range, population variance and population SD. Show every step. Then say what pandas `.std()` would report instead.
6. Explain, with a numeric example, how an outlier distorts the mean but not the median. Link this to when you would draw a box plot.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

- 4.1 Concept of Data Analysis.** Answers: 1. Study results to improve teaching (or similar). 2. Any two: read CSV/Excel/databases, organise tables, statistics, charts.
- 4.1.1 – 4.1.2 Data Sources and Database Connection.** Answers: 1. The cursor. 2. SQLite is the database; the `sqlite3` module is the driver.
- 4.2 Creating a SQLite Database in Python.** Answers: 1. All columns. 2. `conn.commit()`.
- 4.3 Pandas and DataFrames.** Answers: 1. The usual alias for pandas. 2. It would print everything; use `df.head()`.
- 4.3.3 Handling Missing Values (NaN).** Answers: 1. Count of NaNs in each column. 2. Any **row** that contains at least one NaN.
- 4.4 Data Organization and Representation.** Answers: 1. $4 + 2 = 6$. 2. Matplotlib (pyplot).
- 4.5 Data Visualization and Types of Graphs.** Answers: 1. The x-axis is a continuous numeric range, not separate categories. 2. Scatter (two numeric variables, looking for correlation).
- 4.6 Descriptive Statistics.** Answers: 1. Sorted 2,4,6,8,10 $\rightarrow$ 6. 2. 60. 3. $n-1$ (sample).

Answer key

Multiple choice

- b
- b
- b
- b
- b
- b
- b
- b
- b
- c
- b
- b
- c
- b
- b

Short questions — model answers

- Database, driver, connection object, cursor object, SQL queries.
- Without commit the insert stays in memory and disappears when the program ends, so the next run cannot see the row.
- A 2-D table of labelled rows and columns. `df = pd.read_csv("file.csv")`.
- `fillna(v)` replaces NaN with v (the row stays). `dropna()` deletes any row that still contains a NaN.
- When there are many slices, or the values are almost equal, so the eye cannot compare them.
- Bar: separate categories, gaps between bars. Histogram: one numeric variable grouped into bins; bars touch.
- A huge CEO salary pulls the mean up; the median stays with the typical worker.
- Min 60, max 90, range 30.
- Variance is in squared units. The SD brings the spread back to the original units (marks, rupees, °C).
- Any two: data analyst, DBA, data scientist, visualisation specialist, BI analyst, backend developer.

Long questions — model answers

1. Use the nine-step listing in 4.2 with two INSERTs. Label: sqlite3 = driver, connect = connection, cursor = cursor, execute strings = SQL, school.db = database.
2. Output is the three-row table with Total 165, 178, 148 and Average 82.5, 89.0, 74.0 (see the worked example).
3. isnull sum: Marks 1, Grade 1. Mean of 85, 78, 92 = $255/3 = 85.0$. After fill: Sara Marks 85.0, Ahmed Grade "Not Assigned".
4. (a) column/bar — compare categories. (b) line — time. (c) pie — parts of a whole. (d) histogram — numeric distribution. (e) scatter — two numeric variables. (f) box — spread and outliers.
5. Sorted 2,4,6,8,10. Sum 30, mean 6, median 6, range 8. Deviations -4,-2,0,2,4. Squares 16,4,0,4,16 sum 40. $\sigma^2 = 40/5 = 8$. $\sigma = \sqrt{8} = 2.828$ (3 d.p.). pandas `.std()` uses $40/4 = 10$, $\sqrt{10} \approx 3.162$.
6. Nine salaries of 10 and one of 1000: mean 109, median 10. Draw a box plot — the 1000 appears as an outlier dot above the whisker, so the distortion is visible.

Self-assessment: I can...

- | | |
|--|--|
| ☐ name the five connection components in order. | ☐ write SQLite connect / create / insert / commit / select / close. |
| ☐ build a DataFrame and add a calculated column. | ☐ find, fill and drop missing values. |
| ☐ choose bar, line, pie, histogram, scatter or box for a problem. | ☐ compute mean, median, mode, range, variance and SD by hand. |
| ☐ state that pandas std uses $n-1$. | |

Chapter 5: Application and Impacts of Computing

Application and Impacts of Computing (1/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Machine Learning, Neural Networks and Deep Learning · Machine Learning (ML) · Neural Networks (NN) · Deep Learning (DL) · Components of Neural Networks

★ **Must lock:** Neural Networks (NN), Components of Neural Networks

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.


1. Why do histogram bars touch?
2. Median of 4, 8, 6, 10, 2?
3. How many students scored 80 or above in the table?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.1 Machine Learning, Neural Networks and Deep Learning

Machine learning (ML), neural networks (NN) and deep learning (DL) are important areas of artificial intelligence (AI).

- Face unlock on smartphones.
- Speech recognition (for example Siri, Alexa, or Urdu voice typing on a phone).
- Photo search categorisation (typing "car" in a gallery and seeing car photos).
- Medical diagnosis from X-rays and scans.

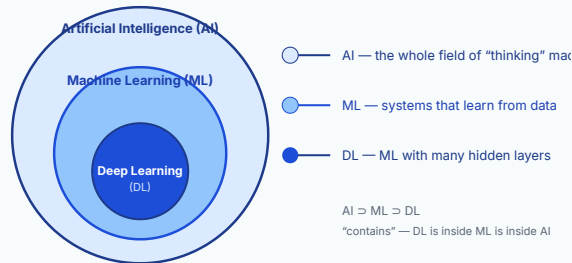

The set relationship $AI \supset ML \supset DL$. Deep learning is a method of machine learning; machine learning is a part of artificial intelligence.

Remember: Russian-doll memory trick. Picture three boxes. The outer box is AI. Inside it is a smaller box ML. Inside that is the smallest box DL. You cannot take DL out...

مصنوعی ذہانت (AI) سب سے بڑا میدان ہے۔

5.1.1 Machine Learning (ML)

A machine learning model is the system that learns from data and gives an output.

1. Data input → 2. Learning (find patterns) → 3. Prediction on new data

- Think of it as the trained brain of a computer program.
- In ordinary programming you write every rule yourself: if marks ≥ 40 then "Pass".
- In machine learning you do not list every rule.

Remember: D-L-P. Machine learning is Data in, Learn patterns, Predict. "Data Learns to Predict."

مشین لرننگ ماڈل وہ نظام ہے جو ڈیٹا سے سیکھ کر نتیجہ دیتا ہے — کمپیوٹر پروگرام کا تربیت یافتہ دماغ۔

5.1.2 Neural Networks (NN) ★ Golden

A neural network is a computer model that learns patterns from data.

Input layer → Hidden layer(s) → Output layer

- Input layer — receives the raw data (pixels of a face, samples of a sound, marks of a student).
- Hidden layer(s) — the “thinking” in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a...)
- Output layer — gives the final answer (unlock / keep locked; “this is a cat”; “pass / fail”).

Remember: I-H-O. Input receives, Hidden thinks, Output decides. “In Hidden Out.” A neural network is a brain-inspired maths machine, not a copy of a living brain.

Exam: Very common questions: “What is a neural network?” (2–3 marks), “Name its three layers and explain each with the face-unlock example” (5 marks), and “How is a neural...”

نیورل نیٹ ورک ایک کمپیوٹر ماڈل ہے جو ڈیٹا سے پیٹرن سیکھتا ہے۔

5.1.3 Deep Learning (DL)

Deep learning is a machine-learning method in which computers use multi-layer neural networks to learn complex patterns from data.

- Early layers learn simple features — edges, shapes, colours.
- Deeper layers combine those simple features to understand complex patterns — a whole face, or a specific car model (a Cultus versus a...

	Neural network (the model)	Deep learning (the method)
What it is	A system/model that has layers, nodes and connections to help it learn.	A specific method that trains neural networks containing many hidden layers .
Depth	Can be simple (shallow) with just one or two hidden layers.	Always “deep,” requiring huge amounts of data and processing power to learn complex patterns.
Role	The architecture (the “machine”).	The way we train a deep version of that machine.

Remember: Deep = many hidden layers. Shallow NN: 1–2 hidden layers. Deep NN: many hidden layers, huge data, strong computers. Simple features first, complex meaning...


ڈیپ لرننگ مشین لرننگ کا وہ طریقہ ہے جس میں کئی پوشیدہ تہوں والے نیورل نیٹ ورک استعمال ہوتے ہیں۔

5.1.4 Components of Neural Networks ★ Golden

The components of a neural network can be understood through its layered architecture.

- Data enters, gets processed, and exits, with mathematical adjustments happening inside.

#	Component	Description
1	Input layer	Receives the initial raw data (for example image pixels, sound waves, text).
2	Neurons / nodes	Small processing units that receive, calculate, and pass information forward.
3	Hidden layer(s)	The layers between input and output. They process the data and learn patterns from it.
4	Weights	Numbers that show the importance or strength of connections between neurons.
5	Bias	An extra constant value added to help the model adjust its result and improve accuracy.
6	Activation function	A mathematical gate that decides whether the information is important enough to move to the next layer.
7	Output layer	Gives the final computed result, decision or prediction (for example "This is a cat").
8	Loss function	Checks the error (how much the model's answer is wrong compared with reality) so the network can correct itself.

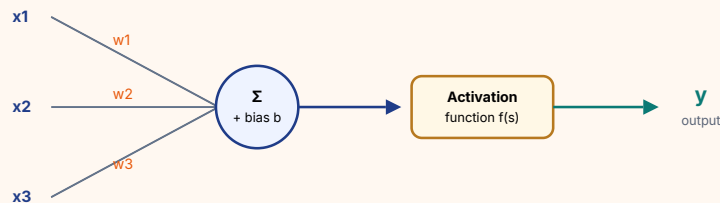

One neuron: inputs $\times$ weights are summed, bias is added, then an activation function decides the output y .

```
x1, x2 = 0.8, 0.5
w1, w2 = 0.4, 0.6
b = 0.1
s = x1 * w1 + x2 * w2 + b
y = 1 if s ≥ 0.5 else 0
print(round(s, 2))
print(y)
```

Remember: Weights = importance. Bias = extra nudge. Activation = yes/no gate. Loss = how wrong. A large weight means that input matters more. Bias shifts the sum up or...

Exam: Golden questions: "List the components of a neural network" (often 8 names + one line each), "What are weights and bias?", and a numerical neuron: given x , w , b and a ...

نیورل نیٹ ورک کے اجزاء ہیں: ان پٹ تہ، نیورون، پوشیدہ تہ، وزن (Weights)، بائیس (Bias)، ایکٹیویشن فنکشن، آؤٹ پٹ تہ اور لاس فنکشن۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Machine Learning, Neural Networks and Deep Learning:** Mistake: "AI, ML and DL are three different, separate subjects." Fix: They nest.
- **Machine Learning (ML):** Mistake: "The computer is intelligent on day one." Fix: An ML model is useful only after training on enough good data.
- **Neural Networks (NN):** Mistake: "A neural network is an actual human brain inside the computer." Fix: It is only inspired by the brain.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Neural Networks (NN)**. Write: A neural network is a computer model that learns patterns from data.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Hidden layer(s) — the "thinking" in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a... (2) Output layer — gives the final answer (unlock / keep locked; "this is a cat"; "pass / fail"). — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled ER diagram (rectangle / oval / diamond) or the relational schema + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Components of Neural Networks**. Write: The components of a neural network can be understood through its layered architecture.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The components of a neural network can be understood through its layered architecture. (2) Data enters, gets processed, and exits, with mathematical adjustments happening inside. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled network: input layer → hidden layer → output layer + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What are the small processing units of a neural network called?

3 marks. Explain Neural Networks (NN) with two clear points and one example.

5 marks. Very common questions: "What is a neural network?" (2–3 marks), "Name its three layers and explain each with the face-unlock example" (5 marks), and "How is a neural network related to the human..."

8 marks. Neural Networks (NN): 5-mark answer plus a labelled ER diagram (rectangle / oval / diamond) or the relational schema.

Answers: 1. Neurons or nodes 3. Hidden layer(s) — the "thinking" in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a...; Output layer — gives the final answer (unlock / keep locked; "this is a cat"; "pass / fail"). 5. Use the recipe in the blue box. Model opening: A neural network is a computer model that learns patterns from data. 8. Same 5-mark body + a labelled ER diagram (rectangle / oval / diamond) or the relational schema + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Neural Networks (NN)** using the recipe in this topic. Include a labelled ER diagram (rectangle / oval / diamond) or the relational schema. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 5: Application and Impacts of Computing

Application and Impacts of Computing (2/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Components of Deep Learning · Future of AI, NN and DL in Pakistan · Applications of Neural Networks and Deep Learning · Secure Collaboration (Authentication, MFA, Access Control)

★ **Must lock:** Secure Collaboration (Authentication, MFA, Access Control)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What are the small processing units of a neural network called?
2. What do weights show?
3. Which is the largest set: AI, ML or DL?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.1.5 Components of Deep Learning

Deep learning relies on specific advanced components to achieve its high accuracy.

- These components differentiate it from basic machine learning.

#	Component	What it means
1	Large input data	Deep learning is " data hungry ." It needs massive datasets (thousands or millions of records) for better learning and accuracy.
2	Many hidden layers	Uses dozens or hundreds of hidden layers to learn deeper, more intricate patterns.
3	Automatic feature learning	Unlike older models where humans had to manually highlight important features, deep learning extracts important features by itself .
4	Learning algorithm	Math routines (like backpropagation) that help the system reduce mistakes and improve learning continuously.
5	High computing power	Processing millions of data points across deep layers needs specialised, strong hardware, such as GPUs (Graphics Processing Units).
6	Training process	The model is trained again and again in loops called epochs to gradually improve its final performance.

Remember: D-L-A-L-G-T. Data (lots), Layers (many), Automatic features, Learning algorithm, GPU power, Training epochs. "Deep Learners Always Love Good Training."

ڈیپ لرننگ کو عام مشین لرننگ سے یہ چیزیں الگ کرتی ہیں: بہت بڑا ڈیٹا، بہت سی پوشیدہ تہیں، خود بخود خصوصیات نکالنا، سیکھنے کا الگورتھ...

Future of AI, NN and DL in Pakistan

Machine learning, neural networks and deep learning will play a key role in Pakistan's future.

- The National AI Policy 2025 highlights how artificial intelligence is now part of national planning, focusing on innovation,...

Sector	Potential impact in Pakistan
Education	Smart learning systems, online tutoring, automatic assessments, and finding where students need specific help.
Healthcare	Disease detection, medical image analysis, and managing hospital data. Crucial for rural areas lacking specialist doctors.
Agriculture	Monitoring crops, predicting weather, managing irrigation, and estimating yields — highly important for Pakistan's economy.
Business and banking	Fraud detection, customer support (chatbots), market forecasting, and intelligent risk analysis.
Local languages	Speech recognition, translation and text-to-speech tools for Urdu, Sindhi and other regional languages.

Remember: Five sectors: E-H-A-B-L. Education, Healthcare, Agriculture, Business/banking, Local languages.
Policy words: innovation, skills, ethics, digital growth.

قومی اے آئی پالیسی 2025 کے مطابق مصنوعی ذہانت پاکستان کی منصوبہ بندی کا حصہ ہے: جدت، مہارت، اخلاقی استعمال اور ڈیجیٹل ترقی۔

5.2 Applications of Neural Networks and Deep Learning

Neural networks and deep learning are widely used in modern life.

- Many intelligent systems use them in the background to recognise information, make predictions and support users.

#	Application	What it does	Example
1	Image recognition	Identifies objects, faces or patterns in images. Used in security cameras, photo search and biometric locks.	Unlocking a smartphone using face recognition; a camera at a Karachi plaza matching a face with a staff list.
2	Speech recognition	Converts spoken words into digital text or commands. Deep learning helps with accents, pronunciation and voice patterns.	A student speaks to Google Assistant or Alexa to set a morning alarm; Urdu voice search on a phone.
3	Natural Language Processing (NLP)	Helps computers understand, process and respond to human language grammatically and in context. Core of chatbots, translators and AI writers.	Using Google Translate to turn a difficult English paragraph into Urdu; a bank chatbot answering in Urdu.
4	Healthcare systems	Analyse complex medical images (X-rays, CT scans, MRIs) to detect diseases early and accurately.	A hospital system highlighting abnormal patterns in a lung X-ray that might indicate pneumonia or tumours — useful at a DHQ hospital that has few radiologists.
5	Recommendation systems	Analyse past behaviour and preferences to suggest content, products or services.	A student watches computer-science videos on YouTube; the platform recommends more programming tutorials.
6	Autonomous vehicles	Self-driving cars use neural networks to process real-time camera and radar data: roads, signals, pedestrians, obstacles.	A self-driving car detects a pedestrian crossing and automatically applies the brakes.
7	Fraud detection	Banks compare current activity with previous spending patterns to catch unusual transactions.	An HBL or Meezan app flags a sudden Rs 80,000 payment from a new city at 3 a.m.
8	Assistive technologies	AI supports people with disabilities.	Speech-to-text tools for users who have difficulty typing; screen readers that speak Urdu text aloud.

Remember: Eight applications: I-S-N-H-R-A-F-A. Image, Speech, NLP, Healthcare, Recommendations, Autonomous vehicles, Fraud, Assistive tech. "I See New Hospitals..."

نیورل نیٹ ورکس اور ڈیپ لرننگ کی مشہور ایپلی کیشنز یہ ہیں: تصویر کی پہچان، آواز کی پہچان، قدرتی زبان کی پروسیسنگ (NLP)، صحت کے نظام...

5.3.1 Secure Collaboration (Authentication, MFA, Access Control) ★ Golden

Digital tools allow people to share files, attend online classes, edit documents and work together from different locations.

- Collaboration is useful only when data is protected and communication remains safe.
- Secure collaboration means using digital tools to work together in a safe, controlled and responsible way.
- It depends on several key elements.

Remember: A-A-A-P-S. Authentication, Access control, Accountability, Privacy, Safe transmission. MFA = at least two different factor types (know / have / are). 2FA is...

Exam: Typical items: "Define secure collaboration", "Differentiate authentication and access control", "What is MFA/2FA?", "Explain five elements of secure collaboration with..."

محفوظ تعاون کا مطلب ہے ڈیجیٹل ٹولز سے محفوظ، کنٹرول شدہ اور ذمہ دارانہ انداز میں ساتھ کام کرنا۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Components of Deep Learning:** Mistake: "Deep learning is just 'a neural network'." Fix: Name the six extras: huge data, many hidden layers, automatic features, a...
- **Future of AI, NN and DL in Pakistan:** Mistake: Writing only "AI will make Pakistan modern" with no sector or example.
- **Applications of Neural Networks and Deep Learning:** Mistake: Mixing up speech recognition and NLP.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Secure Collaboration (Authentication, MFA, Access Control)**. Write: Digital tools allow people to share files, attend online classes, edit documents and work together from different locations.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Collaboration is useful only when data is protected and communication remains safe. (2) Secure collaboration means using digital tools to work together in a safe, controlled and responsible way. — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + named threat + one mitigation + a local example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What question does authentication answer, and what question does access control answer?

3 marks. Explain Secure Collaboration (Authentication, MFA, Access Control) with two clear points and one example.

5 marks. Typical items: "Define secure collaboration", "Differentiate authentication and access control", "What is MFA/2FA?", "Explain five elements of secure collaboration with examples." Write the five...

8 marks. Secure Collaboration (Authentication, MFA, Access Control): 5-mark answer plus named threat + one mitigation + a local example.

Answers: 1. Authentication: who are you? Access control: what may you do? 3. Collaboration is useful only when data is protected and communication remains safe.; Secure collaboration means using digital tools to work together in a safe, controlled and responsible way. 5. Use the recipe in the blue box. Model opening: Digital tools allow people to share files, attend online classes, edit documents and work together from different locations. 8. Same 5-mark body + named threat + one mitigation + a local example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Secure Collaboration (Authentication, MFA, Access Control)** using the recipe in this topic. Include named threat + one mitigation + a local example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 5: Application and Impacts of Computing

Application and Impacts of Computing (3/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Data Protection (Encryption, Passwords, Backup, Firewall) · Common Security Threats (Malware, Phishing, DoS) · Identifying Security Threats · Apply Mitigation Techniques

★ **Must lock:** Common Security Threats (Malware, Phishing, DoS)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What question does authentication answer, and what question does access control answer?
2. Why is deep learning called "data hungry"?
3. Name the national policy mentioned for AI in Pakistan.

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.3.2 Data Protection (Encryption, Passwords, Backup, Firewall)

Data protection means keeping digital information safe from unauthorised access, misuse, loss, damage or accidental deletion.

3 copies → 2 media types → 1 copy off-site

Plain	S	I	N	D	H
+3	V	L	Q	G	K

Remember: Cipher = lock the message. Password = lock the door. 3-2-1 = spare keys in three places. Firewall = gate. Antivirus = indoor search. Caesar: shift letters;...

ڈیٹا پروٹیکشن کا مطلب ہے معلومات کو غیر مجاز رسائی، غلط استعمال، نقصان یا حادثاتی حذف سے بچانا۔

5.4.1 Common Security Threats (Malware, Phishing, DoS) ★ Golden

A security threat is any action, event or weakness that can harm a computer system or its data.

- Mitigation techniques are protective measures used to prevent threats or reduce their impact.
- This section names the common threats; later sections show how to spot them and how to reduce the damage.

#	Threat	What it is	Example
1	Malware	Harmful software designed to damage a computer, steal data, or gain unauthorised access. Includes viruses, worms, spyware, ransomware and Trojans .	Installing cracked software that secretly corrupts files, or a "free game" USB that encrypts a college lab's coursework (ransomware).
2	Phishing	A social-engineering trick that deceives users into sharing personal information (passwords, bank details, OTPs) using fake emails or websites that look genuine.	An SMS that looks like JazzCash or HBL asking you to "verify" by typing your OTP on a fake page.
3	Unauthorised access	Entering a system, account or file without permission. Often caused by weak passwords, shared passwords, or leaving devices unlocked.	A classmate using an unlocked lab PC to open someone else's Google Classroom.
4	Data theft / identity theft	Data theft is stealing or copying data without permission. Identity theft is using another person's stolen details (name, CNIC, bank details) to pretend to be them online and commit fraud.	A leaked list of CNICs used to open a SIM or a wallet in someone else's name.
5	Denial of Service (DoS)	A website or system is flooded with thousands of fake requests, causing it to slow down or crash, so real users cannot access the service.	Hackers flooding an online exam portal so students cannot log in on BISE result day or during an e-test.
6	Human error	Mistakes by legitimate users: accidentally deleting files, sending confidential data to the wrong email, or falling for a simple scam.	A teacher emailing the whole marksheet to the wrong parent; a student forwarding an OTP "to help the bank."

Phishing

Fake bank email / SMS
steals password or OTP

DoS attack

Flood of fake requests
server overload / crash

Identity theft

Stolen CNIC / details
fraud in your name

Three high-yield threats: phishing (fake messages), DoS (server overload), identity theft (stolen CNIC or bank details).

Remember: Malware = bad program. Phishing = fake message. DoS = flood. Identity theft = stolen 'you'. Human error = honest mistake. Cracked software and unknown USBs are...

Exam: Expect "Define a security threat", "Explain malware / phishing / DoS with examples", and "Differentiate data theft and identity theft." List all six threats if the...

سیکیورٹی خطرہ وہ عمل یا کمزوری ہے جو نظام یا ڈیٹا کو نقصان پہنچاے۔

5.4.2 Identifying Security Threats

Identifying security threats means noticing signs that data or systems may be at risk.

- Early identification helps you act before serious damage occurs.

Sign / indicator	What it likely means
Slow performance, missing files, or random pop-ups.	Malware or background unauthorised activity.
Failed login attempts or strange login locations.	Attempted unauthorised access .
Emails urging quick action, asking for an OTP, or containing bad grammar / strange links.	Classic phishing .
Unexpected deletion, copying or movement of records.	Data theft or insider misuse.
Sudden massive spike in server requests or a very slow website.	An ongoing DoS attack.

Remember: Slow/pop-ups → malware. Odd logins → unauthorised access. Urgent OTP email → phishing. Files moving → theft. Traffic spike → DoS.

خطرے کی جلد پہچان نقصان سے پہلے اقدام ممکن بناتی ہے۔

5.4.3 Apply Mitigation Techniques

Mitigation techniques are actions taken to prevent security threats or reduce their harmful effects once identified.

- Technology helps, but it cannot stop all threats if the user is careless.

#	Technique	How it helps
1	Antivirus and firewalls	Antivirus scans and removes harmful software (for example from USB drives). A firewall monitors network traffic and blocks suspicious access from the internet.
2	Strong passwords and 2FA	Complex passwords slow brute-force guessing. 2FA adds an extra layer: an OTP on your phone as well as the password.
3	Data encryption	Converts data into unreadable code during transmission. Protects passwords and sensitive data if they are intercepted.
4	Regular backups	Copies on cloud or external drives allow quick recovery after a crash, human error or ransomware.
5	User awareness (the human factor)	Training users to avoid unknown links, suspicious attachments and password sharing. The human is often the weakest link — and the strongest defence when trained.

Remember: Five shields: A-F, P-2, E, B, U. Antivirus+Firewall, Passwords+2FA, Encryption, Backups, User awareness. Ransomware is why backups matter: if files are locked,...

تحفظ کی تدابیر خطرات کو روکتی یا ان کا نقصان کم کرتی ہیں: اینٹی وائرس اور فائر وال، مضبوط پاس ورڈ اور دو عنصری تصدیق (2FA)، انکریپشن...

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Data Protection (Encryption, Passwords, Backup, Firewall):** Mistake 1: Shifting the wrong way, or forgetting wrap-around (X, Y, Z + 3 → A, B, C).
- **Common Security Threats (Malware, Phishing, DoS):** Mistake: Calling every cyber problem a “virus”, or mixing phishing with malware.
- **Identifying Security Threats:** Mistake: Ignoring early signs (“the PC is just old”) until the ransomware note appears.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Common Security Threats (Malware, Phishing, DoS)**. Write: A security threat is any action, event or weakness that can harm a computer system or its data.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Mitigation techniques are protective measures used to prevent threats or reduce their impact. (2) This section names the common threats; later sections show how to spot them and how to reduce the damage. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + named threat + one mitigation + a local example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Name five types of malware listed in the source.

3 marks. Explain Common Security Threats (Malware, Phishing, DoS) with two clear points and one example.

5 marks. Expect “Define a security threat”, “Explain malware / phishing / DoS with examples”, and “Differentiate data theft and identity theft.” List all six threats if the question says “common security...”

8 marks. Common Security Threats (Malware, Phishing, DoS): 5-mark answer plus named threat + one mitigation + a local example.

Answers: 1. Viruses, worms, spyware, ransomware, Trojans 3. Mitigation techniques are protective measures used to prevent threats or reduce their impact.; This section names the common threats; later sections show how to spot them and how to reduce the damage. 5. Use the recipe in the blue box. Model opening: A security threat is any action, event or weakness that can harm a computer system or its data. 8. Same 5-mark body + named threat + one mitigation + a local example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Common Security Threats (Malware, Phishing, DoS)** using the recipe in this topic. Include named threat + one mitigation + a local example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 5: Application and Impacts of Computing

Application and Impacts of Computing (4/4) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Equity and Equal Access in Digital Collaboration · Functions of Equity and Equal Access · Collaboration Tools · Career Opportunities

★ **Must lock:** Functions of Equity and Equal Access

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Name five types of malware listed in the source.
2. Encrypt PAK with a Caesar shift of 3.
3. Random pop-ups and missing files most likely indicate what?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.5 Equity and Equal Access in Digital Collaboration

Collaboration tools are vital for online learning and teamwork.

- To use these tools fairly, all users must participate without barriers.
- You must understand the difference between equal access and equity.

Remember: Equal = same tools. Equity = extra support for the same outcome. Same shoes for all vs a ramp for the wheelchair user.

مساوی رسائی (Equal Access) سب کو ایک جیسے اوزار دیتی ہے، جیسے ایک ہی زوم لاگ ان۔

5.5.1 Functions of Equity and Equal Access ★ Golden

Equity and equal access are not slogans. They do work in a digital classroom.

- They do work in a digital classroom.
- The source lists four functions.

Function	What it does	Pakistani example
1. Providing need-based support (equity)	Help tailored to individuals.	Audio descriptions for visually impaired students; a screen reader so a blind student in Karachi can hear a digital textbook.
2. Removing barriers	Help students in remote areas attend online classes.	Mobile-friendly, low-data apps so a student in Tharparkar or the katcha areas of Sindh can join without a fibre connection.
3. Enabling active participation	Students who miss live class can still take part.	Recorded lectures so load-shedding or an internet outage in Hyderabad does not make a student fall behind.
4. Supporting different learning needs	Offer more than one format.	Videos, text notes and audio of the same Chapter 5 topic so each student learns in the way that suits them best.

Remember: Four functions: Support, Remove, Participate, Formats. "Some Rural Pupils Fail" without them — Support (need-based), Remove barriers, Participate via...

Exam: Golden question: "Explain the functions of equity and equal access in digital collaboration" (5–8 marks). Write the four headings in order, one example each, and add the...

انصاف اور مساوی رسائی کے چار کام ہیں: ضرورت کے مطابق مدد (جیسے نابینا طالب علم کے لیے آڈیو وضاحت)، رکاوٹیں ہٹانا (دور دراز علاقوں...

5.5.2 Collaboration Tools

Digital collaboration tools are online platforms that support communication, file sharing, learning and teamwork across different locations.

Tool	Primary function and educational use
Google Docs	Write, edit, comment and share documents in real time. Excellent for group assignments.
Zoom	Online meetings, virtual classes, screen sharing and video-based communication.
Microsoft Teams	A unified workspace for online meetings, file sharing, class groups and structured teamwork.
Google Classroom / LMS	Learning Management Systems help teachers manage lectures, distribute assignments, conduct quizzes and grade student activities.
WhatsApp	Quick class announcements, urgent reminders and instant group communication. Must be used responsibly.
Email	Formal communication, official notices, submitting large attachments, and keeping a professional written record.

Remember: Docs = write together. Zoom/Teams = meet. Classroom = official class hub. WhatsApp = fast but informal. Email = formal record.

ڈیجیٹل تعاون کے اوزار مختلف مقامات سے بات چیت، فائل شیئرنگ اور ٹیم ورک چلاتے ہیں: گوگل ڈاکس مشترکہ تحریر کے لیے، زوم اور مائیکروسا...

Career Opportunities

This unit covers neural networks, deep learning, secure collaboration, data protection and digital equity.

- Mastery of these ideas opens high-demand careers in Artificial Intelligence and Cybersecurity — including in Pakistan's banks, software...

Career	What the person does
Machine Learning Engineer	Builds and trains machine-learning and neural-network models used in face recognition, NLP and recommendation systems.
Cybersecurity Analyst	Monitors systems for threats such as malware and phishing, and applies mitigation (firewalls, 2FA) to protect organisational data.
AI Researcher	Studies and develops new techniques in artificial intelligence and deep learning, often in university labs or high-tech R&D centres.
Data Privacy Officer	Ensures the organisation's data handling complies with legal privacy principles, protecting sensitive user information and secure collaboration.
Ethical Hacker	Legally tests systems and networks for vulnerabilities (penetration testing) before malicious attackers can exploit them via DoS or malware.

Remember: AI careers lean on Python, maths and ethics. Cyber careers lean on threats, 2FA, firewalls and careful testing. Both need clear communication.

اس باب سے جڑے پیشے ہیں: مشین لرننگ انجینئر، سائبر سیکیورٹی اینالسٹ، اے آئی محقق، ڈیٹا پرائیویسی آفیسر اور اخلاقی ہیکر۔

Application and Impacts of Computing

17 single-page lessons · 5 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- **ML** is a model (a trained brain) that learns from data in three steps: input, learning, prediction on new unseen data — without a hand-written rule for every case.
- **AI** $\supset$ **ML** $\supset$ **DL**: deep learning sits inside machine learning, which sits inside artificial intelligence.
- A **neural network** is a brain-inspired mathematical model of connected neurons in an input layer, hidden layer(s) and output layer (face unlock: camera $\rightarrow$ features $\rightarrow$ unlock).
- **Deep learning** trains neural networks with many hidden layers; early layers learn simple features, deeper layers learn complex patterns. It needs huge data and computing power.
- NN components: input layer, neurons, hidden layers, weights, bias, activation function, output layer, loss function. A neuron computes $s = \sum(x \times w) + b$, then an activation gate.
- DL components: large data, many hidden layers, automatic feature learning, learning algorithm (backpropagation), GPUs, training epochs. Pakistan's National AI Policy 2025 covers education, health, agriculture, banking and local languages.
- Applications: image and speech recognition, NLP, healthcare imaging, recommendations, autonomous vehicles, fraud detection, assistive tech.
- **Secure collaboration**: authentication (who), MFA/2FA (two or more factors), access control (what you may do), accountability, privacy, safe transmission.
- **Data protection**: encryption (plaintext $\rightarrow$ ciphertext; symmetric vs asymmetric; Caesar shift), strong passwords, 3-2-1 backup, firewall and antivirus.
- Threats: malware, phishing, unauthorised access, data/identity theft, DoS, human error. Spot them by pop-ups, odd logins, urgent OTP emails, missing files, traffic spikes.
- Mitigation: antivirus + firewall, strong passwords + 2FA, encryption, regular backups, user awareness.
- **Equal access** = same tools for all; **equity** = extra support for the same outcome. Functions: need-based support, removing barriers, recorded participation, multiple formats. Tools: Docs, Zoom, Teams, Classroom/LMS, WhatsApp, email.

Key terms

Term	Meaning	اردو
Artificial intelligence (AI)	The broad field in which machines perform tasks that normally need human thinking.	مصنوعی ذہانت
Machine learning (ML)	A model that learns patterns from data and then predicts on new data.	مشین لرننگ
Neural network (NN)	A brain-inspired mathematical model of connected neurons in layers.	نیورل نیٹ ورک
Deep learning (DL)	An ML method that trains neural networks with many hidden layers.	ڈیپ لرننگ
Weight	A number showing the strength or importance of a connection between neurons.	وزن (وزن تعلق)
Bias	An extra constant added to a neuron's sum to improve accuracy.	بائیس
Activation function	A gate that decides whether a signal is important enough to pass on.	ایکٹیویشن فنکشن
Loss function	A measure of how wrong the model's answer is compared with reality.	لاس فنکشن
Epoch	One full training pass through the dataset.	ایپوک (تربیتی چکر)
GPU	Graphics Processing Unit — specialised hardware used to train deep networks.	جی پی یو
NLP	Natural Language Processing — computers understanding and producing human language.	قدرتی زبان کی پروسیسنگ
Authentication	Confirming a user's identity before access (password, PIN, OTP, biometrics).	تصدیق شناخت

Application and Impacts of Computing

75 marks • 1 hour 15 minutes • no notes • no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 17 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define • Explain • Example • Diagram • Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. A machine-learning model works in which order?
 - a. Prediction, then data input, then learning
 - b. Data input, learning, then prediction on new data
 - c. Only prediction, with no data
 - d. Writing a separate rule for every case
2. A neural network is best described as:
 - a. a living human brain placed in a computer
 - b. a backup disk
 - c. a brain-inspired mathematical model of connected neurons
 - d. a type of firewall
3. The word "deep" in deep learning refers to:
 - a. several hidden layers through which data passes
 - b. very loud speakers
 - c. using only one neuron
 - d. storing data underground
4. In the relationship $AI \supset ML \supset DL$, the innermost set is:
 - a. AI
 - b. ML
 - c. equal access
 - d. DL
5. Weights in a neural network show the:
 - a. colour of the screen
 - b. importance or strength of connections between neurons
 - c. size of the hard disk
 - d. student's roll number
6. For $x_1 = 1$, $x_2 = 0$, $w_1 = 0.5$, $w_2 = 0.5$, $b = 0$ and threshold 0.4, the neuron output y is:
 - a. 1
 - b. 0
 - c. 0.4
 - d. 2
7. Which of the following is a component of deep learning (not of a tiny shallow network)?
 - a. Exactly one hidden layer and ten rows of data
 - b. Manual listing of every feature by a human, always
 - c. Many hidden layers, huge datasets and GPUs
 - d. A Caesar cipher
8. Unlocking a phone by matching facial features is mainly an example of:
 - a. a DoS attack
 - b. 3-2-1 backup
 - c. equal access
 - d. image recognition
9. Authentication means:
 - a. choosing who may edit a file
 - b. confirming a user's identity before allowing access
 - c. shifting letters in a cipher
 - d. flooding a server with requests
10. Password plus an OTP sent to a phone is an example of:
 - a. MFA / 2FA
 - b. a worm
 - c. a shallow neural network
 - d. equity captions
11. With a Caesar cipher of shift 3, the plaintext CAT becomes:
 - a. DBU
 - b. CAW
 - c. FDW
 - d. ZXQ
12. The 3-2-1 backup rule requires:
 - a. three passwords only
 - b. one copy on the same laptop twice
 - c. no off-site copy
 - d. three copies, two media types, one copy off-site
13. Phishing is:
 - a. a social-engineering trick using fake emails or sites to steal passwords or OTPs
 - b. a type of GPU
 - c. an activation function
 - d. a collaboration tool like Zoom
14. A Denial of Service (DoS) attack:
 - a. always steals a CNIC
 - b. floods a system with fake requests so it slows or crashes
 - c. is the same as a strong password
 - d. is a hidden layer
15. Turning on live captions in Zoom for a student with hearing difficulties is an example of:
 - a. malware
 - b. a DoS attack
 - c. equal access only, with no extra support
 - d. equity

Section B — Short questions (10 × 3 = 30)

1. Define a machine-learning model and state the three steps of how it works.
2. What is a neural network? Name its three kinds of layer and link them to face unlock.
3. Differentiate a neural network (the model) from deep learning (the method).
4. State the relationship $AI \supset ML \supset DL$ in words.
5. List eight components of a neural network. What do weights and bias do?
6. Name six components of deep learning.
7. Differentiate authentication, MFA and access control with one example each.
8. Encrypt SINDH using a Caesar cipher with shift 3. State whether this cipher is symmetric or asymmetric.
9. Define malware, phishing and DoS. Give one Pakistani-style example of each.
10. Differentiate equal access and equity. List four functions of equity and equal access.

Section C — Long questions (attempt any 3 × 10 = 30)

1. Explain machine learning, neural networks and deep learning. Draw and label the set diagram $AI \supset ML \supset DL$. Include the face-unlock walk-through and the photo-gallery example.
2. A neuron has inputs $x_1 = 0.8$, $x_2 = 0.5$, weights $w_1 = 0.4$, $w_2 = 0.6$, bias $b = 0.1$ and threshold 0.5. (a) Compute the weighted sum s and the output y . (b) Repeat for $x_1 = 0.2$, $x_2 = 0.3$. (c) Name all eight NN components and sketch a 3–4–2 network. (d) List the six DL components and map them onto a cotton-leaf disease detector in Sindh.
3. Describe eight applications of neural networks and deep learning with examples. Then discuss the future of AI in Pakistan with reference to the National AI Policy 2025 and five sectors.
4. What is secure collaboration? Explain authentication, MFA/2FA, access control, accountability, data privacy and safe transmission, using a Google Classroom / banking-app scenario from Pakistan.
5. Define data protection. Explain encryption (symmetric vs asymmetric) with a full Caesar-cipher working of SINDH (shift 3). Describe strong passwords, the 3-2-1 backup rule, firewall and antivirus.
6. Define a security threat. Explain malware, phishing, unauthorised access, data/identity theft, DoS and human error. Give a table of identifying signs and a matching set of mitigation techniques. End with equity versus equal access and a fair choice of collaboration tools.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **5.1 Machine Learning, Neural Networks and Deep Learning.** Answers: 1. AI ($AI \supset ML \supset DL$). 2. Yes — DL is inside ML, and ML is inside AI. 3. Any of: face unlock, speech recognition, photo search, medical diagnosis, language translation.
2. **5.1.1 Machine Learning (ML).** Answers: 1. Data input, learning, prediction. 2. The trained brain of a computer program. 3. New, unseen data.
3. **5.1.2 Neural Networks (NN).** Answers: 1. Neurons or nodes. 2. Hidden layers. 3. No — it is inspired by the brain but works as a mathematical computer system.
4. **5.1.3 Deep Learning (DL).** Answers: 1. Because data passes through several hidden layers. 2. Early: simple features (edges, shapes, colours). Deeper: complex patterns (a whole face, a car model). 3. No — that is a shallow network; DL always uses many hidden layers.
5. **5.1.4 Components of Neural Networks.** Answers: 1. The importance or strength of connections between neurons. 2. $s = 1 \times 0.5 + 0 \times 0.5 + 0 = 0.5$; $0.5 \geq 0.4$ so $y = 1$. 3. The error — how much the model's answer is wrong compared with reality.
6. **5.1.5 Components of Deep Learning.** Answers: 1. It needs massive datasets (thousands or millions of records) for accuracy. 2. One training loop — one full pass through the training data. 3. GPUs (Graphics Processing Units); backpropagation.
7. **Future of AI, NN and DL in Pakistan.** Answers: 1. National AI Policy 2025. 2. Those areas often lack specialist doctors; AI can help with disease detection and medical image analysis. 3. Any three of: programming (Python), mathematics, data analysis, problem-solving, ethical use of technology.
8. **5.2 Applications of Neural Networks and Deep Learning.** Answers: 1. Speech recognition. 2. YouTube recommending more programming tutorials after a student watches computer-science videos. 3. They process real-time camera and radar data to understand roads, traffic signals, pedestrians and obstacles (for example braking for a pedestrian).
9. **5.3.1 Secure Collaboration (Authentication, MFA, Access Control).** Answers: 1. Authentication: who are you? Access control: what may you do? 2. Two-factor / multi-factor authentication (2FA/MFA). 3. Teacher shares the document as view-only with students but gives group leaders edit permission.
10. **5.3.2 Data Protection (Encryption, Passwords, Backup, Firewall).** Answers: 1. SDN ($P \rightarrow S$, $A \rightarrow D$, $K \rightarrow N$). 2. 3 copies, 2 different media, 1 off-site copy. 3. Public key encrypts; private key decrypts.
11. **5.4.1 Common Security Threats (Malware, Phishing, DoS).** Answers: 1. Viruses, worms, spyware, ransomware, Trojans. 2. Floods it with thousands of fake requests so it slows down or crashes and real users cannot access it. 3. Data theft is stealing/copying data; identity theft is using stolen personal details (name, CNIC, bank) to pretend to be that person and commit fraud.
12. **5.4.2 Identifying Security Threats.** Answers: 1. Malware (or background unauthorised activity). 2. Phishing. 3. Unsafe downloads, cracked software, unverified websites, infected USB drives.
13. **5.4.3 Apply Mitigation Techniques.** Answers: 1. It also requires an OTP sent to your phone (a second factor). 2. You can restore a clean copy instead of losing the files (or paying). 3. Unknown links, suspicious attachments, and password sharing.
14. **5.5 Equity and Equal Access in Digital Collaboration.** Answers: 1. Giving everyone the exact same opportunity, tools and resources. 2. Giving additional, specific support so users who need it can reach the same outcome. 3. Because they are extra support for a student with hearing difficulties, not the same identical tool given to all.
15. **5.5.1 Functions of Equity and Equal Access.** Answers: 1. Need-based support; removing barriers; enabling active participation; supporting different learning needs. 2. Students who face power or internet outages can watch later and not fall behind. 3. It creates a hardware barrier for lower-income students; web-based or light apps give better access.
16. **5.5.2 Collaboration Tools.** Answers: 1. Google Docs. 2. Manage lectures, distribute assignments, conduct quizzes, grade activities. 3. Formal communication, official notices, large attachments, and a professional written record.
17. **Career Opportunities.** Answers: 1. Ethical hacker. 2. Data Privacy Officer.

Answer key

Multiple choice

1. b
2. c
3. a
4. d
5. b
6. a
7. c
8. d
9. b
10. a
11. c
12. d
13. a
14. b
15. d

Short questions — model answers

1. An ML model is the system that learns from data and gives an output — the trained brain of a program. Steps: (1) data input — massive data is given; (2) learning — it studies data and finds patterns/rules automatically; (3) prediction — after training it decides on new, unseen data.
2. A neural network is a computer model that learns patterns from data; it is inspired by the human brain but works as a mathematical system of connected neurons/nodes. Input layer receives the camera image; hidden layers study features such as eye distance and nose shape; output layer unlocks the phone if they match stored data.
3. A neural network is the model: layers, nodes and connections; it can be shallow (one or two hidden layers). Deep learning is the method of training networks that have many hidden layers, needing huge data and processing power for complex patterns.
4. Artificial intelligence is the largest set; machine learning is a part of AI; deep learning is a part of ML. All DL is ML and all ML is AI, but not all AI is ML and not all ML is DL.
5. Input layer; neurons/nodes; hidden layer(s); weights; bias; activation function; output layer; loss function. Weights show connection strength/importance. Bias is an extra constant that helps adjust the result and improve accuracy.
6. Large input data; many hidden layers; automatic feature learning; learning algorithm (e.g. backpropagation); high computing power (GPUs); training process (epochs).
7. Authentication confirms identity before access (password, PIN, OTP, biometrics — e.g. bank OTP). MFA/2FA requires two or more factor types, typically password + OTP. Access control decides what that user may do (view/edit/comment/download/share — e.g. Google Doc view-only for the class, edit for group leaders).
8. $S \rightarrow V, I \rightarrow L, N \rightarrow Q, D \rightarrow G, H \rightarrow K$ so ciphertext VLQ GK. Caesar uses the same shift key to encrypt and decrypt, so it is symmetric.
9. Malware: harmful software (viruses, worms, spyware, ransomware, Trojans) — e.g. cracked software that corrupts files. Phishing: fake genuine-looking email/SMS/site stealing passwords or OTPs — e.g. fake JazzCash OTP page. DoS: flood of fake requests that slows or crashes a service — e.g. online exam portal students cannot enter.
10. Equal access: same tools/opportunity for everyone (same Zoom login). Equity: extra specific support so people with barriers reach the same outcome (captions for hearing difficulties). Functions: need-based support; removing barriers (low-data apps for remote areas); enabling participation (recorded lectures during load-shedding); supporting different learning needs (video, text, audio).

Long questions — model answers

1. **ML**: trained-brain model; data → learn patterns → predict on unseen data; used in face unlock, speech, photo search, diagnosis, translation. **NN**: brain-inspired maths model; neurons pass information through Input, Hidden, Output; face unlock: camera (input), eye distance/nose shape (hidden), unlock (output). **DL**: ML method with multi-layer NNs; “deep” = several hidden layers; early layers: edges/shapes/colours; deeper: whole face or car model; gallery search example. **Diagram**: three nested sets labelled AI, ML, DL with AI outermost. Sentence: $DL \subset ML \subset AI$.
2. **(a)** $s = 0.8 \times 0.4 + 0.5 \times 0.6 + 0.1 = 0.32 + 0.30 + 0.1 = 0.72$; $0.72 \geq 0.5$ so $y = 1$. **(b)** $s = 0.2 \times 0.4 + 0.3 \times 0.6 + 0.1 = 0.08 + 0.18 + 0.1 = 0.36$; $0.36 < 0.5$ so $y = 0$. **(c)** Eight components as in the table; sketch three input circles, four hidden, two output, labelled layers. **(d)** Huge labelled leaf photos; many hidden layers; features learned automatically; backpropagation; GPU training; many epochs until accuracy rises — cotton pest detector for a Sindh farm.
3. Cover all eight: image recognition (face lock, cameras); speech (assistant alarm, Urdu voice); NLP (Translate, chatbots); healthcare (X-ray/CT/MRI, pneumonia); recommendations (YouTube CS videos); autonomous vehicles (brake for pedestrian); fraud (unusual bank transaction); assistive (speech-to-text). Then Policy 2025: innovation, skills, ethics, digital growth. Sectors: education (tutoring, assessments); healthcare (rural diagnosis); agriculture (crops, irrigation, yield); business/banking (fraud, chatbots); local languages (Urdu, Sindhi). Students need Python, maths, data analysis, problem-solving, ethics.
4. Secure collaboration = working together with digital tools in a safe, controlled, responsible way. Authentication: prove identity (password/PIN/OTP/biometrics); bank OTP example. MFA: two or more of know/have/are; 2FA = password + phone OTP. Access control: view/edit/comment/download/share; teacher view-only vs group-leader edit. Accountability: LMS tracks who uploaded/submitted. Privacy: protect names, marks, passwords; share only with the right people; confidentiality; legal/ethical compliance. Safe transmission: encrypted official LMS, not an open public forum. Classroom scenario: school email + MFA, role permissions, version history, no CNICs on public WhatsApp.
5. Data protection = keeping digital information safe from unauthorised access, misuse, loss, damage or accidental deletion. Encryption: plaintext → ciphertext; symmetric = same key both ways; asymmetric = public encrypt, private decrypt. Caesar shift 3: SINDH → VLQ GK; decrypt by -3; wrap-around at Z. Strong password: upper, lower, number, symbol (e.g. Zk@2026#Pass) against brute force. 3-2-1: three copies, two media, one off-site (laptop + USB + Google Drive). Firewall: barrier monitoring/blocking suspicious network traffic. Antivirus: detects/removes malware on the local machine.
6. A security threat is any action, event or weakness that can harm a system or its data. Malware (cracked software); phishing (fake bank mail); unauthorised access (unlocked PC, weak/shared passwords); data theft vs identity theft (stolen CNIC used for fraud); DoS (exam portal flood); human error (wrong email, deleting files, falling for a scam). Signs table: pop-ups/missing files → malware; odd logins → unauthorised access; urgent OTP/bad grammar → phishing; records moved → theft; traffic spike → DoS. Mitigation: antivirus+firewall; strong passwords+2FA; encryption in transit; regular backups; user awareness (no unknown links, attachments, or shared passwords). Equal access vs equity; do not require a high-end phone-only app. Tools: Docs, Zoom, Teams, Classroom/LMS, WhatsApp (responsible), email (formal record).

Self-assessment: I can...

- | | |
|--|--|
| ☐ define ML and explain data input → learning → prediction. | ☐ draw $AI \supset ML \supset DL$ and give a system that belongs in each layer. |
| ☐ describe a neural network and the face-unlock I-H-O path. | ☐ compute a neuron's weighted sum and threshold output from numbers. |
| ☐ list eight NN components and six DL components. | ☐ give eight applications of NN/DL and Pakistan's AI policy sectors. |
| ☐ explain authentication, MFA/2FA and access control with examples. | ☐ encrypt a short word with a Caesar cipher and apply the 3-2-1 backup rule. |
| ☐ identify malware, phishing and DoS from signs and name mitigations. | ☐ distinguish equal access from equity and state four functions of equity. |
| ☐ choose a fair collaboration tool (Docs, Zoom, Teams, LMS, WhatsApp, email). | |

Chapter 6: Entrepreneurship in the Digital Age

Entrepreneurship in the Digital Age (1/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Entrepreneur and Entrepreneurship · Entrepreneurship in the Digital Age · Local Examples of Digital Entrepreneurship (Table 6.1) · From Problem to Business Idea · Prototype

★ **Must lock:** Entrepreneurship in the Digital Age, Prototype

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. List the four functions of equity and equal access.
2. Define equal access in one sentence.
3. Which tool is excellent for real-time group writing?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.1 Entrepreneur and Entrepreneurship

An entrepreneur is a person who identifies a problem, thinks of a solution, and tries to change that solution into a product or service.

1. Problem → 2. Solution → 3. Product

- They observe people and listen to their needs. They notice what annoys people again and again.
- They take calculated risks. A calculated risk is a risk you take after thinking about what you could lose and how to keep that loss small....
- They improve their idea step by step. They do not expect the first attempt to be perfect.

Remember: Simple meaning. An entrepreneur asks: "What problem can I solve?" Entrepreneurship is the process of testing and improving that solution until it becomes...

کاروباری شخص (Entrepreneur) وہ ہوتا ہے جو کسی مسئلے کو پہچانتا ہے، اس کا حل سوچتا ہے اور اس حل کو کسی پراڈکٹ یا سروس میں بدلنے کی کوشش کرتا ہے۔

6.2 Entrepreneurship in the Digital Age ★ Golden

Entrepreneurship in the digital age means using digital tools to start, test, improve, and grow a business idea.

- These tools may include mobile phones, social media, websites, online forms, digital payments, maps, videos, and simple apps.
- In Pakistan you already know many of them: WhatsApp, Facebook, Instagram, TikTok, YouTube, Google Forms, Google Maps, and digital payments...

Remember: Remember "S-T-I-G": digital tools help you Start, Test, Improve and Grow. Think: "Start The Idea Growing."

Exam: Common questions: "Define entrepreneurship in the digital age", "How have digital tools changed entrepreneurship?" and "Give examples of digital entrepreneurship without..."

ڈیجیٹل دور میں انٹرپرائیورسپ کا مطلب ہے موبائل فون، سوشل میڈیا، ویب سائٹ، آن لائن فارم اور ڈیجیٹل ادائیگی جیسے ٹولز کے ذریعے کاروبار...

Local Examples of Digital Entrepreneurship (Table 6.1)

Digital entrepreneurship can begin from ordinary problems.

- The examples below are close to the context of Sindh and Pakistan, where many students, parents, and small service providers already use...

Problem	Digital Idea	Possible First Users	Urdu Context
Parents miss college notices.	WhatsApp notice and reminder service.	Parents of first-year students.	والدین تک کالج کے نوٹس پہنچانے کے لیے واٹس ایپ سروس۔
Small embroidery shop has few customers.	Simple catalogue with order form on Facebook or WhatsApp.	Customers in the same city.	کڑھائی کی دکان کے لیے واٹس ایپ کیٹلاگ۔
Students forget test dates.	Google Calendar guide or simple reminder app.	Grade XII students.	ٹیسٹ کی تاریخیں یاد دلانے والی ایپ یا کیلنڈر۔
Canteen has long queues during break.	Pre-order form for snacks.	Students and teachers.	کینٹین کے لیے پری آرڈر فارم۔

Remember: Think "Problem first, tool second." Start with the pain, not with the technology.

جدول 6.1 بتاتی ہے کہ ڈیجیٹل کاروبار عام مسائل سے شروع ہو سکتا ہے، جیسے والدین کا کالج نوٹس نہ دیکھ پانا، کڑھائی کی دکان پر کم گاہک...

6.3 From Problem to Business Idea

A good business idea usually starts from observing daily life.

Problem → Idea → Prototype → Feedback → MVP

- What problem do people face?
- Who faces this problem?
- How often does it happen?
- What do people currently do to solve it?

Step	What Students Do	Example
Observe	Notice repeated problems around home, college, or market.	Students forget practical file dates.
Ask Users	Talk to people who face the problem.	Ask five classmates how they remember deadlines.
Select One Problem	Choose one clear problem only.	Practical file reminder.
Suggest Solution	Think of a simple digital or paper-based solution.	Reminder form or app screen.
Test Early	Show the idea to users before final development.	Ask classmates if they will use it.


Remember: Mnemonic for Table 6.2: "Only Ask Simple Solutions Today": Observe, Ask users, Select one problem, Suggest solution, Test early.

اچھا کاروباری خیال روزمرہ زندگی کے مشاہدے سے شروع ہوتا ہے۔

6.4 Prototype ★ Golden

A prototype is an early model of a product, service, website, or app.

- It shows how the idea may look or work.
- It is NOT the final product.
- It is made to test the idea and collect feedback.

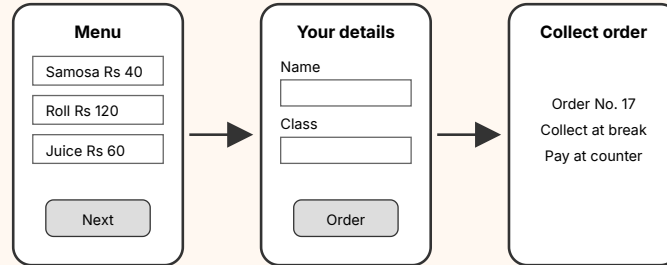

A paper prototype of a canteen pre-order system: three hand-drawn screens joined by arrows (select item → enter name → collect order).

Remember: Prototype = "practice model". It is like a rough draft of an essay: you show it, get corrections, and rewrite it before the final copy.

Exam: Expect "Define prototype and write its benefits" (3–5 marks). Write: (1) definition with the words early model, not the final product, test the idea and collect...

پروٹوٹائپ (Prototype) کسی پراڈکٹ، سروس، ویب سائٹ یا ایپ کا ابتدائی نمونہ ہوتا ہے جو دکھاتا ہے کہ خیال کیسا نظر آئے گا یا کیسے کام کرے گا۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Entrepreneur and Entrepreneurship:** Mistake: "Only rich people with big offices can be entrepreneurs." Fix: The source clearly says many entrepreneurs begin with a small idea...
- **Entrepreneurship in the Digital Age:** Mistake: "Digital entrepreneurship means building a mobile app." Fix: An app is only one option.
- **Local Examples of Digital Entrepreneurship (Table 6.1):** Important: A digital business idea should not be selected only because it sounds modern.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Entrepreneurship in the Digital Age**. Write: Entrepreneurship in the digital age means using digital tools to start, test, improve, and grow a business idea.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) These tools may include mobile phones, social media, websites, online forms, digital payments, maps, videos, and simple apps. (2) In Pakistan you already know many of them: WhatsApp, Facebook, Instagram, TikTok, YouTube, Google Forms, Google Maps, and digital payments... — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a one-page canvas: problem, user, riskiest assumption, test + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Prototype**. Write: A prototype is an early model of a product, service, website, or app.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) It shows how the idea may look or work. (2) It is NOT the final product. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a one-page canvas: problem, user, riskiest assumption, test + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. List four digital tools that the source mentions.

3 marks. Explain Entrepreneurship in the Digital Age with two clear points and one example.

5 marks. Common questions: "Define entrepreneurship in the digital age", "How have digital tools changed entrepreneurship?" and "Give examples of digital entrepreneurship without coding." Write the definition...

8 marks. Entrepreneurship in the Digital Age: 5-mark answer plus a one-page canvas: problem, user, riskiest assumption, test.

Answers: 1. Any four of: mobile phones, social media, websites, online forms, digital payments, maps, videos, simple apps 3. These tools may include mobile phones, social media, websites, online forms, digital payments, maps, videos, and simple apps.; In Pakistan you already know many of them: WhatsApp, Facebook, Instagram, TikTok, YouTube, Google Forms, Google... 5. Use the recipe in the blue box. Model opening: Entrepreneurship in the digital age means using digital tools to start, test, improve, and grow a business idea. 8. Same 5-mark body + a one-page canvas: problem, user, riskiest assumption, test + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Entrepreneurship in the Digital Age** using the recipe in this topic. Include a one-page canvas: problem, user, riskiest assumption, test. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 6: Entrepreneurship in the Digital Age

Entrepreneurship in the Digital Age (2/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Types of Prototypes · Prototype Development Cycle · Class Activity: Create a Prototype · Minimum Viable Product (MVP) · Difference between Prototype and MVP

★ **Must lock:** Prototype Development Cycle, Minimum Viable Product (MVP)

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. List four digital tools that the source mentions.
2. Is a prototype the final product?
3. Is "entrepreneurship" a person or a process?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.5 Types of Prototypes

Prototypes are commonly divided into three types according to their level of detail, called fidelity.

Low-Fi (Paper) → Mid-Fi (PowerPoint) → High-Fi (Figma/HTML)

- Fidelity means how close the prototype is to the final product.
- Low fidelity = far from final; high fidelity = very close to final.

Type	Meaning	Best Use	Example
Low-Fidelity	A quick and rough model of the idea.	Very early testing.	Hand-drawn app screens for homework reminder.
Mid-Fidelity	A clearer model that shows layout and flow.	Testing navigation.	Clickable screens in PowerPoint or Figma.
High-Fidelity	A detailed model close to the final product.	Testing realistic experience.	Working demo of a small order form website.

Remember: Fidelity = "faithfulness" to the final product. Remember Paper → PowerPoint → Polished (low → mid → high).


فِڈِلِیٹی (Fidelity) کا مطلب ہے کہ پروٹوٹائپ حتمی پراڈکٹ سے کتنا ملتا جلتا ہے۔

6.6 Prototype Development Cycle ★ Golden

Prototype development is not a one-time activity.

- A prototype is created, tested, improved, and tested again.
- This repeating process is called iteration.
- The main stages are Design, Build, Test, and Iterate.

Stage	What happens
1. Design	Understand the problem and plan the solution. Decide what the prototype should show (e.g. screen flow, features).
2. Build	Create the first version (physical or digital). The aim is not beauty; the aim is to make the idea visible.
3. Test	Show the prototype to users. Observe what they understand and what they find difficult.
4. Iterate	Improve the prototype based on user feedback. Remove unnecessary parts and add missing features.

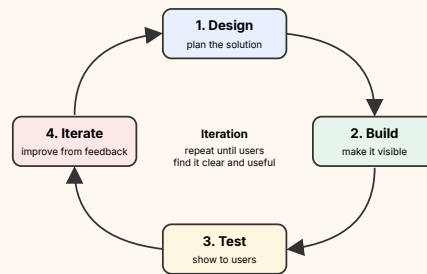

The prototype development cycle: Design → Build → Test → Iterate, then back to Design.

Remember: Mnemonic: "Do Big Things Iteratively" = Design, Build, Test, Iterate. And remember the arrow at the end goes back to Design: it is a cycle, not a line.

Exam: A favourite long question: "Explain the prototype development cycle with a diagram." Draw the four boxes in a circle with arrows, write one or two lines for each stage...

پروٹوٹائپ ایک ہی بار میں نہیں بنتا؛ اسے بنایا، آزمایا، بہتر کیا اور دوبارہ آزمایا جاتا ہے۔

6.7 Class Activity: Create a Prototype

Business idea scenario. Students often forget homework deadlines, test dates, and required class items.

1. Understand → 2. Draw low-fi → 3. Test → 4. Analyse feedback → 5. Improve

- Students often forget homework deadlines, test dates, and required class items.
- A group of students wants to design a simple "Homework Helper" or "ClassBuddy" reminder system.
- The team will not immediately build a complete mobile app.
- They will first understand the problem, draw a low-fidelity prototype, test it with classmates, and improve it.

Finding	Meaning	Design Decision
7 out of 10 forget tasks.	The problem is common.	App should show a daily task list.
Reminders needed before leaving home.	Reminder time is important.	Add morning notification option.
Students want simple apps.	Design must be simple.	Use large buttons and clear labels.

Remember: Feedback → Problem → Improvement. Every comment should be turned into a problem statement and then one clear change, exactly like the three columns of Table...

اس سرگرمی میں طلبہ "کلاس بڈی" (ClassBuddy) نامی یاد دہانی نظام بناتے ہیں۔

6.8 Minimum Viable Product (MVP) ★ Golden

A Minimum Viable Product (MVP) is the simplest working version of a product.

- Minimum: it has only the essential features. No extras.
- Viable: it is usable enough to actually solve the main problem. ("Viable" means able to work successfully.)

Complete canteen app (final product)	Canteen MVP
Login, online payment, delivery tracking, discount offers...	A simple Google Form where students select snacks before break.

Remember: Simple meaning. An MVP answers: "Will people actually use this solution?" It tests real use and behaviour, not only the visual design. Analogy: before opening...

Exam: Typical questions: "What is an MVP? Explain the words Minimum and Viable" and "Give an example of an MVP." Write the full form, the definition (simplest working version,...

ایم وی پی (Minimum Viable Product) کسی پراڈکٹ کا سب سے سادہ مگر کام کرنے والا ورژن ہے جس میں صرف ضروری خصوصیات ہوتی ہیں۔

6.9 Difference between Prototype and MVP

Prototype and MVP are related, but not the same.

- A prototype is mainly used to show and test the design of an idea.
- An MVP is used to test real use and market demand.
- Market demand means whether enough people want the product and will use (or pay for) it.

Point	Prototype	MVP
Main purpose	To show how the idea may look or work.	To test whether users will actually use the solution.
Working status	May not work; can be a sketch or model.	Must work at least in a basic way.
Users	Small group gives feedback on design.	Early real users test the product in daily life.
Cost	Very low cost.	Low cost but may need some basic development.
Example	Paper screens for a canteen order system.	Google Form used for real canteen orders for three days.

Remember: Key takeaway Prototype = "Does it look right and make sense?" MVP = "Will people actually use it and find value in it?" Memory hook: Prototype → Picture of the...

پروٹوٹائپ اور ایم وی پی آپس میں جڑے ہیں مگر ایک جیسے نہیں۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Types of Prototypes:** Mistake: Starting with a high-fidelity prototype or a full app because it "looks professional".
- **Prototype Development Cycle:** Mistake 1: Drawing the stages as a straight line that ends at "Iterate".
- **Class Activity: Create a Prototype:** Mistake: Feeling that negative feedback means the prototype "failed", or changing the design for every single comment.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Prototype Development Cycle**. Write: Prototype development is not a one-time activity.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) A prototype is created, tested, improved, and tested again. (2) This repeating process is called iteration. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a one-page canvas: problem, user, riskiest assumption, test + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Minimum Viable Product (MVP)**. Write: A Minimum Viable Product (MVP) is the simplest working version of a product.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Minimum: it has only the essential features. No extras. (2) Viable: it is usable enough to actually solve the main problem. ("Viable" means able to work successfully.) — + example.

5 marks: 3-mark structure + table: Complete canteen app (final product) / Canteen MVP + the worked example from this topic.

8–10 marks: 5-mark structure + a one-page canvas: problem, user, riskiest assumption, test + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What is iteration?

3 marks. Explain Prototype Development Cycle with two clear points and one example.

5 marks. A favourite long question: "Explain the prototype development cycle with a diagram." Draw the four boxes in a circle with arrows, write one or two lines for each stage using the source's words,...

8 marks. Prototype Development Cycle: 5-mark answer plus a one-page canvas: problem, user, riskiest assumption, test.

Answers: 1. The repeating process of creating, testing, improving and testing a prototype again 3. A prototype is created, tested, improved, and tested again.; This repeating process is called iteration. 5. Use the recipe in the blue box. Model opening: Prototype development is not a one-time activity. 8. Same 5-mark body + a one-page canvas: problem, user, riskiest assumption, test + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Prototype Development Cycle** using the recipe in this topic. Include a one-page canvas: problem, user, riskiest assumption, test. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 6: Entrepreneurship in the Digital Age

Entrepreneurship in the Digital Age (3/4) · Teach

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter · 10–35 min concept lock · 35–55 min board working · 55–75 min academy drill · 75–85 min error clinic · 85–90 min homework out.

Board today: Identifying the Riskiest Assumption · Developing an MVP · Case Study: MVP for a Canteen Pre-Order System · Testing an MVP

★ **Must lock:** none — still copy every table

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Two students redo the worked example on the board after you hide it.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What is iteration?
2. Write the full form of MVP.
3. What does "fidelity" mean?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.10 Identifying the Riskiest Assumption

Every business idea is based on assumptions.

- An assumption is something we believe to be true, but have not tested yet.
- The riskiest assumption is the belief that can make the entire business fail if it turns out to be wrong.
- Entrepreneurs should identify and test the riskiest assumption early, because it saves time and money.

Business Idea	Possible Risky Assumption	How to Test It (MVP)
Online tuition finder	Students will pay for online tutoring.	Ask 20 students and offer a trial class to see if they sign up.
Canteen pre-order form	Students will order snacks before break.	Test a Google Form for one week in real time.
Ajrak online catalogue	Customers will place orders through WhatsApp.	Share catalogue with 30 customers and record actual orders.
College van update system	Parents and students will check van updates daily.	Create a trial WhatsApp broadcast group for one route.

Remember: Ask: "What would kill this idea?" The answer is usually the riskiest assumption. Test it first, cheaply, with real behaviour.

ہر کاروباری خیال کچھ مفروضوں (Assumptions) پر قائم ہوتا ہے، یعنی وہ باتیں جنہیں ہم سچ سمجھتے ہیں مگر ابھی آزمایا نہیں۔

6.11 Developing an MVP

To develop an MVP, the team must select only the essential features.

- Extra features should be avoided at the beginning.
- A common mistake is trying to build everything at once.
- This makes the product difficult, costly, and slow.

MVP Element	Question to Ask	Example Answer
Problem	What problem are we solving?	Students wait too long at canteen.
Target users	Who will use it first?	Grade XII students in one college.
Main feature	What is the ONE feature that solves it?	Pre-order snacks before break.
Basic design	What steps are needed?	Menu, name, class, order time.
Cost	What free/low-cost tools to use?	Google Form or printed slips.
Marketing	How will early users hear about it?	WhatsApp message to class group.
Feedback	How will users respond?	Short feedback form after 3 days.

Remember: Mnemonic for the 8 elements: "People Try My Bakery; Cheap Muffins Find Improvement": Problem, Target users, Main feature, Basic design, Cost, Marketing,...

ایم وی پی بناتے وقت صرف ضروری خصوصیات چنیں؛ سب کچھ ایک ساتھ بنانے سے کام مشکل، مہنگا اور سست ہو جاتا ہے۔

6.12 Case Study: MVP for a Canteen Pre-Order System

Problem: In a college, students wait in long lines at the canteen.

Paper prototype → Feedback: short menu, pay at collection → Google Form MVP → 3-day test → Improve

- Sometimes snacks finish before students reach the counter.
- A group wants to test a canteen pre-order idea.
- Goal: Their aim is NOT to create a complete app immediately.

MVP Element	Decision
Features	Menu list, student name, class, item, and quantity.
Cost & Tools	Free Google Form or printed order slips.
Marketing	Class announcement and WhatsApp group message.
Testing period	Three days.
Feedback method	Ask students if they saved time and would use it again.
Improvement	Keep only 5 items; close orders 20 minutes before break.

Remember: Remember the case study as "5 items, 3 days, 20 minutes": five menu items, a three-day test, orders closing twenty minutes before break.

ایک کالج میں طلبہ کینٹین کی لمبی قطاروں میں انتظار کرتے تھے۔

6.13 Testing an MVP

MVP testing means giving the basic working version to real users and studying their response.

- Numbers (quantitative data) show how many users tried the MVP and how many may use it again.
- Comments (qualitative data) explain what users liked, disliked, or found confusing.
- How many users will test it.
- How long the test will continue.

Type of Feedback	Question	Example Result
Number-based	How many users tried it?	40 students used the form.
Number-based	How many would use it again?	30 out of 40 said yes.
Comment-based	What was confusing?	Did not know order closing time.
Observation	Where did users face difficulty?	Forgot to enter class name.

Remember: Data skill link. Feedback is useful only when it is studied: Count the responses → Look for repeated problems → Decide which improvement comes first. Remember...

ایم وی پی کی جانچ کا مطلب ہے کہ بنیادی کام کرنے والا ورژن اصل صارفین کو دیا جائے اور ان کے ردعمل کا مطالعہ کیا جائے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Identifying the Riskiest Assumption:** Mistake: Testing easy, safe assumptions (colours, names) first and leaving the dangerous one for later.
- **Developing an MVP:** Mistake: Writing a list of ten "main features".
- **Case Study: MVP for a Canteen Pre-Order System:** Mistake: Thinking only the students' opinion matters.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

ACADEMY DRILL

Timed 10 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Define assumption.

3 marks. Explain Identifying the Riskiest Assumption with two clear points and one example.

5 marks. Write a 5-mark answer on Identifying the Riskiest Assumption: definition, two points, a labelled diagram or table, and one example.

Answers: 1. Something we believe to be true but have not tested yet 3. An assumption is something we believe to be true, but have not tested yet.; The riskiest assumption is the belief that can make the entire business fail if it turns out to be wrong. 5. Use the recipe in the blue box. Model opening: Every business idea is based on assumptions.

BATCH HOMEWORK

Write a 5-mark answer on **Identifying the Riskiest Assumption** using Define · Explain · Example · Diagram. Learn the Check yourself questions so you can answer them in 60 seconds at the start of next class.

How you will mark it tomorrow: Collect next class. Stamp full / half / zero against the 5-mark recipe.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Chapter 6: Entrepreneurship in the Digital Age

Entrepreneurship in the Digital Age (4/4) · Chapter exam

TODAY'S 90 MINUTES

90 minutes. 0–10 min recap yesterday ★ on the board · 10–85 min sit the 75-mark chapter exam (1 h 15 min, hall conditions) · 85–90 min collect scripts. Do not mark in front of the batch.

Board today: Beachhead Market · Complete Student Project · Ethical and Safe Use of Digital Tools · Career Opportunities

★ **Must lock:** Beachhead Market

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Hall paper today. Recap the cards for ten minutes, then scripts out. Re-teach any Golden below 60% in tomorrow's starter.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Define assumption.
2. Why is building everything at once a mistake?
3. Which tool was used for the canteen MVP, and for how long was it tested?


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

6.14 Beachhead Market ★ Golden

A beachhead market is a small and focused group of first users.

- These users have a clear need and are likely to try the product early.
- Instead of trying to serve everyone, entrepreneurs first focus on one small group.
- This helps them test the MVP properly and improve it before expanding.

Business Idea	Weak First Market	Better Beachhead Market
Study app	All students in Pakistan.	Grade XII students preparing for exams in one college.
Canteen pre-order	All canteens in the city.	One college canteen during lunch break.
Ajrak catalogue	All online shoppers.	Existing customers of one local shop.
Van update system	All transport users.	Students and parents of ONE specific college van route.

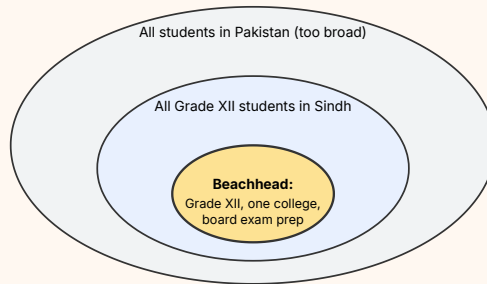

Start with the small inner circle (beachhead), learn and improve, then expand outward.

Remember: Remember S-R-U: Specific, Reachable, Urgent need. If you cannot meet your first users within a week, your market is too big.

Exam: Asked as "Define beachhead market and give its characteristics" or "Suggest a beachhead market for ...". Write the definition (small, focused group of first users with a...

بیچ ہیڈ مارکیٹ (Beachhead Market) پہلے صارفین کا ایک چھوٹا اور مخصوص گروہ ہے جسے حل کی واضح اور فوری ضرورت ہو اور جو پراڈکٹ جلد آزمانے پر تیار ہو۔

6.15 Complete Student Project

You will work in groups and complete one small entrepreneurship project.

- The project should be simple, local, and possible in the classroom.
- The purpose is to practise the complete journey: problem → prototype → feedback → MVP plan → risky assumption → beachhead market.
- Suggested project ideas: homework and test reminder system, college notice organizer, canteen pre-order system, small shop WhatsApp...

Criteria	Excellent	Satisfactory	Needs Improvement
Problem ID	Clear, local, and important.	Understandable but needs detail.	Vague or too broad.
Prototype	Shows clear flow and features.	Shows the basic idea.	Incomplete or unclear.
Feedback & Fixes	Collected properly; changes clearly based on feedback.	Collected but analysis is weak; some changes made.	No clear feedback collected; changes not explained.
MVP Plan	Essential features and clear testing plan.	Basic features but needs testing clarity.	Confused with the final product.

Remember: Use the rubric before you submit: read your project sheet row by row and ask, "Is this Excellent yet?" For "Feedback & Fixes", always write which feedback...

طلبہ گروپوں میں ایک چھوٹا، مقامی اور آسان منصوبہ مکمل کرتے ہیں جس میں مسئلے سے پروٹوٹائپ، رائے، ایم وی پی منصوبہ، سب سے خطرناک مفر...

6.16 Ethical and Safe Use of Digital Tools

Digital entrepreneurship should be responsible.

- Privacy: people's personal information belongs to them.
- Truthfulness: report results honestly; do not make up numbers or hide bad feedback.
- Fairness: treat all users equally.

Remember: Ask yourself "P-T-F-E": Is it Private, Truthful, Fair, and Equal-access?

ڈیجیٹل کاروبار ذمہ داری سے کرنا چاہیے۔

Career Opportunities

This unit covered entrepreneurship in the digital age, turning problems into business ideas, prototyping, building MVPs, and identifying beachhead markets.

- Mastery of these concepts opens the door to careers in startups and digital innovation.
- Pakistan has many incubators (for example, National Incubation Centres, NICs, in major cities) that support young founders.

Career	What the person does
Tech Entrepreneur / Startup Founder	Identifies a real-world problem and builds a digital product or service to solve it, guiding it from prototype through to MVP and market launch.
Product Manager	Guides a product's direction by identifying user needs, prioritising features, and testing ideas through prototypes and MVPs.
Business Analyst	Analyses business problems and processes to recommend digital solutions, often testing assumptions before full investment.
Innovation / Startup Consultant	Advises businesses or founders on validating ideas, building MVPs, and identifying beachhead markets.
Digital Marketing Specialist	Plans how a new product or MVP will reach its first (beachhead) market and grow its user base.
Venture / Incubator Analyst	Evaluates early-stage startup ideas and prototypes for potential investment or incubation support.

Remember: Every career in the table uses the same chapter skills: understand users, test assumptions, start small.

اس باب کی مہارتیں اسٹارٹ اپ اور ڈیجیٹل جدت کے شعبوں میں روزگار کے دروازے کھولتی ہیں، جیسے اسٹارٹ اپ بانی، پراڈکٹ مینیجر، بزنس اینا...

Entrepreneurship in the Digital Age

18 single-page lessons · 5 Golden · read, close, say aloud, then sit the exam

Chapter in one look

- **Entrepreneur:** a person who identifies a problem, thinks of a solution, and turns it into a product or service; observes people, takes calculated risks, improves step by step.
- **Entrepreneurship:** the process of planning, starting, testing and improving a business idea until it becomes useful (Problem → Solution → Product).
- **Digital age:** entrepreneurs use accessible digital tools (social media, forms, websites, WhatsApp, digital payments) to start and test ideas quickly with low investment; often no coding is needed.
- A digital idea must solve a **real problem for real users**, not just sound modern (Table 6.1 examples: notices, embroidery shop, test dates, canteen queues).
- **Business ideas** come from observing daily life and talking directly to users: Observe → Ask Users → Select One Problem → Suggest Solution → Test Early. Start with a small, clear problem.
- **Prototype:** an early model used to show and test the design of an idea; not the final product; makes the idea visible, finds mistakes early, saves time and money.
- **Fidelity** is how close a prototype is to the final product: Low (paper), Mid (PowerPoint/Canva/Figma, tests navigation), High (realistic, Figma/HTML, only after the idea is tested).
- **Development cycle:** Design → Build → Test → Iterate, repeated (iteration). Feedback is crucial; a prototype fails only if useful feedback is ignored.
- **MVP:** the simplest working version with only essential features (Minimum) that still solves the main problem (Viable); it tests real use and market demand.
- **Prototype vs MVP:** prototype asks "Does it look right?"; MVP asks "Will people actually use it?" A prototype may not work; an MVP must.
- **Riskiest assumption:** the untested belief that, if wrong, will make the business fail; test it early with real behaviour.
- **MVP plan:** problem, target users, ONE main feature, basic design, cost, marketing, feedback, improvement plan. Do not build everything at once.
- **Canteen case study:** paper prototype → Google Form MVP with 5 items for 3 days → staff found too many items hard → kept 5 items, separate line, orders close 20 minutes before break.
- **MVP testing:** plan users, duration and data in advance; collect numbers (40 tried, 30 would return = 75%) and comments/observations; count, look for repeated problems, fix the most important first.
- **Beachhead market:** a small, focused, reachable group of first users with a strong, immediate need; win it first, then expand.
- **Ethics and equity:** respect privacy, truthfulness and fairness; collect no unnecessary data; share nothing without permission; design for weak internet, limited devices and Urdu/Sindhi speakers.

Key terms

Term	Meaning	اردو
Entrepreneur	A person who identifies a problem, thinks of a solution, and turns it into a product or service.	کاروباری شخص
Entrepreneurship	The process of planning, starting, testing and improving a business idea.	کاروبار کاری
Calculated risk	A risk taken after carefully thinking about the possible loss and keeping it small.	سوچا سمجھا خطرہ
Digital entrepreneurship	Using digital tools to start, test, improve and grow a business idea.	ڈیجیٹل کاروبار کاری
Business idea	A proposed product or service that solves a real problem for real users.	کاروباری خیال
Target users	The people who will use the product first.	ہدف صارفین
Prototype	An early model of a product, service, website or app made to test the idea and collect feedback.	ابتدائی نمونہ
Fidelity	How close a prototype is to the final product.	اصل سے مطابقت کا درجہ
Low-fidelity prototype	A quick, rough paper model showing the main idea and flow.	کم تفصیل والا نمونہ
Mid-fidelity prototype	A clearer model in PowerPoint, Canva or Figma showing layout and navigation without final graphics.	درمیانی تفصیل والا نمونہ
High-fidelity prototype	A detailed model close to the final product with realistic colours, buttons, data and working features.	زیادہ تفصیل والا نمونہ
Wireframe	A simple outline drawing of a screen showing where items go, without colours or pictures.	اسکرین کا خاکہ

Entrepreneurship in the Digital Age

75 marks • 1 hour 15 minutes • no notes • no phones

CHAPTER EXAM RULES

Instructions. Sit this exam after Lesson 18 and the recap. **Section A** — all 15 MCQs (1 mark). **Section B** — all 10 short questions (3 marks). **Section C** — attempt any **three** long questions (10 marks). At least one Section C answer must be a ★ Golden topic. Write in your notebook. Do not open the key until time is up.

Marks. $15 + 30 + 30 = 75$. A 5-mark / 10-mark answer needs Define • Explain • Example • Diagram • Working.

سبق اور خلاصے کے بعد یہ امتحان بغیر نوٹس کے حل کریں۔ وقت پورا ہونے پر کلید کھولیں۔

Section A — Multiple choice (15 × 1 = 15)

1. An entrepreneur is best described as a person who:
 - a. only invests money in big companies
 - b. identifies a problem and tries to turn a solution into a product or service
 - c. always works from a large office
 - d. only writes computer programs
2. In prototyping, "fidelity" means:
 - a. the cost of the prototype
 - b. the number of users
 - c. how close the prototype is to the final product
 - d. the speed of the internet
3. Which of these is a low-fidelity prototype?
 - a. Hand-drawn app screens on paper
 - b. A working demo website of an order form
 - c. Clickable screens in Figma
 - d. An app published on the Play Store
4. A mid-fidelity prototype is mainly useful for testing:
 - a. online payments
 - b. screen-to-screen navigation
 - c. market demand over three days
 - d. investor interest
5. The correct order of the prototype development cycle is:
 - a. Build, Design, Iterate, Test
 - b. Test, Build, Design, Iterate
 - c. Design, Test, Build, Iterate
 - d. Design, Build, Test, Iterate
6. Creating, testing, improving and testing a prototype again is called:
 - a. iteration
 - b. incubation
 - c. marketing
 - d. assumption
7. In MVP, the letter "V" stands for:
 - a. Visual
 - b. Valuable
 - c. Viable
 - d. Virtual
8. Which is the best MVP for a canteen pre-order idea?
 - a. A full app with login, payment, delivery tracking and discounts
 - b. A Google Form used for real orders for three days
 - c. Paper sketches shown to five friends
 - d. A colourful poster of the menu
9. A prototype mainly answers which question?
 - a. Does it look right and make sense?
 - b. Will people pay for it every month?
 - c. How big is the national market?
 - d. How much profit will we make?
10. The riskiest assumption is:
 - a. the cheapest feature to build
 - b. the colour scheme of the app
 - c. the name of the company
 - d. the belief that, if wrong, can make the whole business fail
11. Which is the best beachhead market for a new study app?
 - a. All students in Pakistan
 - b. All online shoppers
 - c. Grade XII students preparing for board exams in one college
 - d. All transport users
12. Which is NOT a characteristic of a good beachhead market?
 - a. Specific and narrowly defined
 - b. Reachable by the startup team
 - c. Users have a strong, immediate need
 - d. As large as possible from the first day
13. "30 out of 40 said they would use it again" is which type of feedback?
 - a. Number-based
 - b. Comment-based
 - c. Observation
 - d. Rubric-based
14. Which is an ethical practice when collecting user feedback?
 - a. Collect CNIC numbers of all users
 - b. Share users' phone numbers in the class group
 - c. Collect only necessary information and share nothing without permission
 - d. Change results so the idea looks better
15. To support users with weak internet and language difficulty, a design should use:
 - a. heavy videos on every screen
 - b. English-only instructions
 - c. features that need the latest phone
 - d. large buttons, simple Urdu/Sindhi instructions and low data usage

Section B — Short questions (10 × 3 = 30)

1. Define entrepreneur and entrepreneurship. How are they different?
2. What is meant by entrepreneurship in the digital age? Give two local examples that need no coding.
3. Write the five questions you should ask to find a problem in daily life.
4. Why should a student choose a small problem at the start? Give one example of a too-large and one of a suitable problem.
5. Define prototype and give three reasons why it is useful.
6. Differentiate between low-, mid- and high-fidelity prototypes, with one example of each.
7. Define MVP and explain the words "Minimum" and "Viable".
8. What is the riskiest assumption? Give the risky assumption and its test for the college van update system.
9. An MVP was tried by 40 students and 30 said they would use it again. Calculate the repeat-use rate and name two other kinds of feedback to collect.
10. State the three characteristics of a good beachhead market and give one weak and one better first market for an Ajrak catalogue.

Section C — Long questions (attempt any 3 × 10 = 30)

1. Explain the prototype development cycle with a labelled diagram. Use the ClassBuddy class activity to show what happens at each stage, and explain why negative feedback does not mean the prototype has failed.
2. Compare a prototype and an MVP under five headings (purpose, working status, users, cost, example). Use the canteen pre-order system as your example and state the key question each one answers.
3. **Plan an MVP for a college van update system** for a college in Hyderabad, where students and parents often do not know when the van will arrive. Fill in all eight elements of the MVP planning checklist, and also state the riskiest assumption, how to test it, and the beachhead market.
4. **Plan an MVP for a small Sindhi topi and Ajrak shop in Hala** that wants online customers. Describe a low-fidelity prototype, the MVP, its riskiest assumption and test, the beachhead market, the marketing method, and two ethical or equity points the shop must follow.
5. A team tested a Lost and Found MVP (Google Form + WhatsApp group) in a college of 60 Grade XII students for two weeks. 45 students tried it; 36 of them said they would use it again; 12 of the users said they did not know where to collect found items; the team observed that many reports had no photo. (a) Calculate the percentage of the class who tried it, the repeat-use rate among users, and the percentage of users confused about collection. (b) Classify each piece of feedback by type. (c) Decide which improvement to make first and justify it.

Answer key. Finish the Chapter Exam first, then mark. Do not peek while the clock is running.

پہلے امتحان مکمل کریں، پھر اس کلید سے نمبر لگائیں۔

Check yourself — answers

1. **6.1 Entrepreneur and Entrepreneurship.** Answers: 1. A process (planning, starting, testing and improving a business idea). 2. Observing people and listening to their needs; taking calculated risks; improving the idea step by step. 3. A risk taken after thinking carefully about the possible loss and keeping that loss small.
2. **6.2 Entrepreneurship in the Digital Age.** Answers: 1. Any four of: mobile phones, social media, websites, online forms, digital payments, maps, videos, simple apps. 2. Because a small idea can be tested quickly and cheaply, so if users do not like it the team can change it before spending too much money. 3. Selling handmade cards through Instagram, or a WhatsApp catalogue for Ajrak.
3. **Local Examples of Digital Entrepreneurship (Table 6.1).** Answers: 1. A simple catalogue with an order form on Facebook or WhatsApp. 2. Students and teachers. 3. Because it must solve a real problem for real users; a weak problem gives a weak business idea.
4. **6.3 From Problem to Business Idea.** Answers: 1. Observe, Ask Users, Select One Problem, Suggest Solution, Test Early. 2. It is too large and unclear; small, clear problems are easier to test and improve. 3. Notes are scattered in many places (WhatsApp, email, photocopies, class groups), not that students are careless.
5. **6.4 Prototype.** Answers: 1. No. It is an early model made to test the idea and collect feedback. 2. Any four: paper sketch, cardboard model, clickable PowerPoint, Canva design, Figma wireframe, simple website layout, sample service process chart. 3. Any two: a button is hard to find, a screen has too much text, a feature is missing.
6. **6.5 Types of Prototypes.** Answers: 1. How close the prototype is to the final product. 2. Mid-fidelity (e.g. clickable screens in PowerPoint or Figma). 3. It is cheap, fast and easy to change, and it protects them from building a full app before knowing whether users need it.
7. **6.6 Prototype Development Cycle.** Answers: 1. The repeating process of creating, testing, improving and testing a prototype again. 2. The Test stage. 3. To make the idea visible (not to make it beautiful).
8. **6.7 Class Activity: Create a Prototype.** Answers: 1. 7 out of 10, which is 70%. 2. Today's classes, Add homework, Show reminder. 3. A 'Weekly View' button was added.
9. **6.8 Minimum Viable Product (MVP).** Answers: 1. Minimum Viable Product. 2. Usable enough to actually solve the main problem. 3. "Will people actually use this solution?"
10. **6.9 Difference between Prototype and MVP.** Answers: 1. The MVP. 2. Prototype: paper screens for a canteen order system. MVP: a Google Form used for real canteen orders for three days. 3. "Does it look right and make sense?"
11. **6.10 Identifying the Riskiest Assumption.** Answers: 1. Something we believe to be true but have not tested yet. 2. Customers will place orders through WhatsApp; share the catalogue with 30 customers and record actual orders. 3. Because if it is wrong the whole business fails, so testing it early saves time and money.
12. **6.11 Developing an MVP.** Answers: 1. It makes the product difficult, costly and slow. 2. Problem, target users, main feature, basic design, estimated cost, marketing method, feedback method, improvement plan. 3. A WhatsApp message to the class group.
13. **6.12 Case Study: MVP for a Canteen Pre-Order System.** Answers: 1. A Google Form, tested for three days. 2. Whether students will place orders before break, and whether the canteen can manage these orders. 3. Keeping only five items and creating a separate collection line (orders also close 20 minutes before break).
14. **6.13 Testing an MVP.** Answers: 1. Number-based, comment-based, observation. 2. $(35 \div 50) \times 100 = 70\%$. 3. How many users will test it, how long the test will continue, and what information will be collected.
15. **6.14 Beachhead Market.** Answers: 1. Specific and narrowly defined; reachable by the team; users have a strong, immediate need. 2. Students and parents of ONE specific college van route. 3. No. After learning from the first group, the idea can be improved and expanded.
16. **6.15 Complete Student Project.** Answers: 1. Any four: homework and test reminder system, college notice organizer, canteen pre-order system, small shop WhatsApp catalogue, college van update system, lost and found reporting system, study notes organizer. 2. Clear, local, and important. 3. Needs Improvement (for the MVP Plan).
17. **6.16 Ethical and Safe Use of Digital Tools.** Answers: 1. Privacy, truthfulness, fairness. 2. Collect unnecessary personal information; share phone numbers or photos without permission. 3. Large buttons, simple Urdu/Sindhi instructions, low data usage.
18. **Career Opportunities.** Answers: 1. Digital Marketing Specialist. 2. Tests assumptions (after analysing business problems and processes).

Answer key

Multiple choice

1. b
2. c
3. a
4. b
5. d
6. a
7. c
8. b
9. a
10. d
11. c
12. d
13. a
14. c
15. d

Short questions — model answers

1. An **entrepreneur** is a person who identifies a problem, thinks of a solution and tries to change that solution into a product or service. **Entrepreneurship** is the process of planning, starting, testing and improving a business idea, involving creativity, problem-solving, teamwork, communication and calculated risk. The entrepreneur is the person; entrepreneurship is the process.
2. It means using digital tools such as mobile phones, social media, websites, online forms, digital payments, maps, videos and simple apps to start, test, improve and grow a business idea. Examples: a student selling handmade cards through Instagram; a shopkeeper making a WhatsApp catalogue for Ajrak.
3. What problem do people face? Who faces this problem? How often does it happen? What do people currently do to solve it? Can technology help in a simple way?
4. Small, clear problems are easier to test and improve. Too large: "improving the whole education system". Suitable: "helping Grade XII students track practical file submission dates".
5. A prototype is an early model of a product, service, website or app that shows how the idea may look or work; it is not the final product and is made to test the idea and collect feedback. Useful because it makes the idea visible, helps find mistakes early (hard-to-find buttons, too much text, missing features), and saves time and money before final coding.
6. Low-fidelity: quick, rough paper model showing main idea and flow, e.g. hand-drawn homework-reminder screens. Mid-fidelity: clearer model in PowerPoint/Canva/Figma showing layout and navigation without final graphics, e.g. clickable PowerPoint screens. High-fidelity: detailed model close to the final product with realistic colours, buttons, sample data and working features, e.g. a working demo of a small order-form website.
7. An MVP (Minimum Viable Product) is the simplest working version of a product with only the most important features, used to test the idea with real users. Minimum: only the essential features, no extras. Viable: usable enough to actually solve the main problem.
8. It is the belief that can make the entire business fail if it turns out to be wrong. For the van update system: "Parents and students will check van updates daily." Test: create a trial WhatsApp broadcast group for one route.
9. Repeat-use rate = $(30 \div 40) \times 100 = 75\%$. Other feedback: comment-based (e.g. "What was confusing?") and observation (e.g. where users faced difficulty, such as forgetting to enter class name).
10. Specific and narrowly defined; reachable by the team; users have a strong, immediate need. Ajrak catalogue: weak = all online shoppers; better = existing customers of one local shop.

Long questions — model answers

1. **Prototype development cycle.** Draw four boxes in a loop: Design → Build → Test → Iterate → back to Design. Prototype development is not one-time; repeating the cycle is called iteration.
 - **Design:** understand the problem and plan what the prototype shows. ClassBuddy: interview 10 students; 7 of 10 forget tasks, so show a daily task list; reminders are needed before leaving home, so add a morning notification; students want simplicity, so use large buttons and clear labels.
 - **Build:** create the first version to make the idea visible (not beautiful). ClassBuddy: three paper screens (Today's classes, Add homework, Show reminder) joined by arrows.
 - **Test:** show it to users and observe. ClassBuddy: five classmates try "add one homework task" while the observer watches silently.
 - **Iterate:** improve from feedback. ClassBuddy: larger, centred Add Homework button; subject name and due date fields; a Weekly View button.

Negative feedback is information that shows what to fix; the prototype fails only if the team ignores useful feedback.

2. **Prototype vs MVP.** Purpose: prototype shows how the idea may look or work; MVP tests whether users will actually use it. Working status: prototype may not work (sketch or model); MVP must work at least in a basic way. Users: prototype, a small group giving design feedback; MVP, early real users in daily life. Cost: prototype very low; MVP low but may need basic development. Example: prototype = paper screens for a canteen order system; MVP = Google Form used for real canteen orders for three days. Key questions: prototype, "Does it look right and make sense?"; MVP, "Will people actually use it and find value in it?"

3. **MVP plan: college van update system (Hyderabad).**

- Problem: students and parents do not know when the van will arrive, so students wait outside for a long time or miss the van.
- Target users: students and parents on one van route.
- Main feature: the driver or a route monitor sends a short "Van left / 5 minutes away" message.
- Basic design: one WhatsApp broadcast message with route stop name, time and status; voice note option for parents who cannot read.
- Cost: free, using a WhatsApp broadcast list on the monitor's phone.
- Marketing: a message in the class WhatsApp group and a printed slip for parents with the number to save.
- Feedback: after one week, a 3-question Google Form or phone call: Did you check the updates daily? Did you wait less? Would you continue?
- Improvement plan: if messages arrive too late, send them earlier; if many parents do not read, switch to voice notes; then expand to a second route.
- Riskiest assumption: parents and students will check van updates daily. Test: trial broadcast group for one route for one week, counting how many people read or reply to messages each day.
- Beachhead market: students and parents of ONE specific college van route.

4. **MVP plan: topi and Ajrak shop in Hala.**

- Low-fidelity prototype: paper catalogue pages, one per product, with a sketch, price, size/type and "Message to order"; shown to 5 customers to see if information is clear.
- MVP: a WhatsApp Business catalogue with real photos and prices for 10–15 best-selling items; orders by chat; payment by cash on delivery or JazzCash/Easypaisa.
- Riskiest assumption: customers will actually place orders through WhatsApp. Test: share the catalogue with 30 existing customers and record actual orders for two weeks.
- Beachhead market: existing customers of this one shop (people who have bought before and whose numbers the shop already has with permission).
- Marketing: broadcast message to existing customers, a QR code at the shop counter, posts in local Facebook groups.
- Ethics: share no customer numbers or photos without permission; give truthful prices, sizes and photos. Equity: simple Urdu/Sindhi descriptions and compressed photos for low data use.
- Improvement plan: drop designs nobody orders, add more of the popular ones, then expand to customers in Hyderabad and Karachi.

5. **Lost and Found MVP analysis.**

- (a) Tried: $(45 \div 60) \times 100 = 75\%$ of the class. Repeat-use rate: $(36 \div 45) \times 100 = 80\%$. Confused about collection: $(12 \div 45) \times 100 = 26.7\%$ (about 27%).
- (b) "45 tried" and "36 would use again": number-based. "Did not know where to collect": comment-based (12 users said it). "Many reports had no photo": observation.
- (c) Fix the collection confusion first: it is a repeated problem (more than a quarter of users) and it stops the system's main purpose, which is returning items to owners. Add "Collect found items from the library desk" at the top of the form and pin it in the WhatsApp group. Next, make the photo field strongly encouraged (or required for found items), since photos help owners recognise items. Re-test for another week and compare the numbers.

Self-assessment: I can...

- ☐ define entrepreneur and entrepreneurship and describe an entrepreneur's habits.
- ☐ use the five questions and the steps of Table 6.2 to turn a problem into an idea.
- ☐ compare low-, mid- and high-fidelity prototypes.
- ☐ turn user feedback into problems and improvements, as in Table 6.5.
- ☐ identify the riskiest assumption of an idea and design a test for it.
- ☐ choose a specific, reachable beachhead market.
- ☐ explain how digital tools let me start and test an idea cheaply, with local examples.
- ☐ define a prototype and list its benefits and possible forms.
- ☐ draw and explain the Design–Build–Test–Iterate cycle.
- ☐ define an MVP and explain how it differs from a prototype.
- ☐ fill in an MVP plan and analyse MVP test results with percentages.
- ☐ collect feedback ethically and design for equal access.

Golden blitz — Chapters 1–2

★ only · Chapters 1–2 · Golden blitz

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter from yesterday's Goldens · 10–35 min lock the tables from memory · 35–55 min two students write a 5-mark Golden answer on the board · 55–75 min timed 8-mark · 75–85 min error clinic · 85–90 min homework: redraw from memory.

Board today: Applications of HCI (Domains of Life) · Importance of HCI · Human-Computer Interaction Problems · User Interface Design (UI vs UX) · Testing Methods (Usability, A/B, Automated) · Trace Tables · Comparing Trace Tables and Stepwise Reasoning · Number of Steps (Big O Notation)

★ **Must lock:** Applications of HCI (Domains of Life), Importance of HCI, Human-Computer Interaction Problems, User Interface Design (UI vs UX), Testing Methods (Usability, A/B, Automated), Trace Tables, Comparing Trace Tables and Stepwise Reasoning, Number of Steps (Big O Notation), Concept of Data Structure, Linear Data Structures: Stack, Linear Data Structures: Queue

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Write every table and diagram on this day from memory on the board, then check the cards.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Give the three characteristics of a good beachhead market.
2. Name four suggested project ideas.
3. Name the three values students must respect when collecting feedback.


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

1.2 Applications of HCI (Domains of Life) ★ Golden

HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps.

- These are human-centred solutions built to meet user needs across many domains of life.
- A domain is an area of daily activity — health, money, school, talking to people.
- When you design for a domain, you design for that domain's users, tasks and risks.

Domain	Application examples	User benefit
Health care	Patient portals, telemedicine apps, assistive technologies	Improves access to medical services remotely
Banking	Mobile banking apps, secure ATM interfaces	Enables quick transactions and secure financial management
Education	E-learning platforms (LMS), online exam portals	Enhances teaching, learning and student engagement
Networking and communication	Social media, messaging apps (WhatsApp), Zoom	Connects people globally through collaboration tools

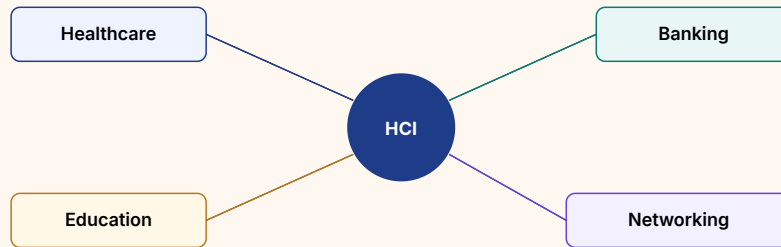

HCI sits at the centre of four everyday domains: healthcare, banking, education and networking.

Remember: Exam mnemonic H-BEN: Health, Banking, Education, Networking. For each, write: one application + one user benefit. That structure scores full marks on...

Exam: Very common 5–8 mark question: "Explain applications of HCI in different domains of life with examples." Draw a four-row table (Health care, Banking, Education,...

ایچ سی آئی کی ایپلیکیشنز صحت، بینکنگ، تعلیم اور نیٹ ورکنگ کے شعبوں میں انسانی ضروریات پوری کرتی ہیں۔

1.4 Importance of HCI ★ Golden

HCI ensures that machines are approachable and usable, turning complex technology into everyday tools.

- Good design makes technology simple and enjoyable (touchscreens).
- Poor design causes confusion and risks (unclear buttons on medical devices).
- This is why HCI is not optional decoration.

Implication	Description
1. Enhance productivity	Well-designed interfaces help users work faster, make fewer mistakes, and achieve goals efficiently.
2. Promotes inclusivity	Accessibility features (screen readers, voice commands) empower marginalized groups and ensure equal use of technology for everyone.
3. Drives innovation	Emerging tech such as AR/VR, AI and IoT rely strictly on solid HCI principles for people to actually adopt and use them.
4. Economic impact	User-friendly products gain higher adoption rates, customer loyalty and market success, driving profits.
5. Ethical responsibility	Responsible design ensures technology respects user privacy, reduces bias and supports human well-being.

Remember: P-I-I-E-E: Productivity, Inclusivity, Innovation, Economic impact, Ethics. Sentence: "Please Include Innovative, Ethical Earnings."

Exam: Typical wording: "Why is HCI important? Discuss its implications." (8 marks) Write a short opening (good design vs poor design) then five numbered points with one...

اچھا ایچ سی آئی پیچیدہ ٹیکنالوجی کو روزمرہ کا آسان اوزار بناتا ہے؛ برا ڈیزائن الجھن اور خطرہ پیدا کرتا ہے، جیسے طبی آلے پر غیر واضح بٹن۔

1.7 Human-Computer Interaction Problems ★ Golden

HCI problems are common difficulties that stop users from using technology smoothly.

- They happen when systems fail to meet human needs or cognitive limits.
- Cognitive limits means the mind can only hold and process so much at once — if an app asks you to remember three SMS codes at the same...
- Board answers score well when you name the problem, explain it in one line, and give a concrete example (the source examples are safe; a...

Problem	Explanation and example
Interface complexity	Too many options or a confusing layout. Example: a shopping app with so many menus you cannot find the checkout button.
Poor feedback	The system does not show if an action worked or failed. Example: clicking Submit and the screen freezes with no confirmation.
Inconsistency	Different parts of the app look or act differently. Example: a magnifying-glass icon for Search on one page, a binocular icon on another.
Accessibility gaps	Design ignores people with disabilities. Example: a video tutorial platform without captions for deaf users.
Compatibility issues	Interface fails on different devices or browsers. Example: a website that works on a laptop but crashes on a mobile browser.
Contextual neglect	The system does not adjust to the user's situation. Example: a map app with no dark mode, blinding the driver at night.
High cognitive load	Users must memorize too much or follow overly complex steps. Example: a registration system forcing you to remember three different SMS codes at once.
Trust deficiency	The system feels unsafe or hides security cues. Example: an online store asking for credit cards but lacking an SSL/HTTPS lock icon.

Remember: Eight problems in two families: (1) Screen problems — complexity, inconsistency, accessibility, compatibility, context. (2) Mind-and-trust problems — poor...

Exam: Common 8-mark question: "Describe problems of HCI with examples." Aim for at least six of the eight, each in the pattern Name → one-line meaning → example. Memorise the...

ایچ سی آئی مسائل وہ رکاوٹیں ہیں جو سسٹم کو انسانی ضرورت یا ذہنی حد کے مطابق نہ ہونے پر پیدا ہوتی ہیں۔

1.9 User Interface Design (UI vs UX) ★ Golden

UI design is the process of creating and organizing the visual elements of a software application so users can interact with it easily and efficiently.

- 1.9.1 Components of a user interface
ComponentRole Buttons Clickable elements that perform actions (Submit, Cancel).
- Menus Lists of options for navigating the system.
- Icons Small symbols representing tools or actions.

Component	Role
Buttons	Clickable elements that perform actions (Submit, Cancel).
Menus	Lists of options for navigating the system.
Icons	Small symbols representing tools or actions.
Text fields	Boxes where users type information (passwords, search).
Checkboxes / radio buttons	Selecting options in a form. Checkboxes allow several choices; radio buttons allow only one in a group.
Sliders	Adjusting values along a bar (volume, brightness).

Remember: Clothes vs day out. UI is the outfit (colours, buttons, icons). UX is the whole day (Did you arrive on time? Did you get wet? Were you stressed?). Examiners...

Exam: Highest-yield short question in the chapter: "Differentiate between UI and UX with an example." Write: (1) the two definitions, (2) the sentence "UI is what you see; UX..."

یو آئی ڈیزائن بصری عناصر — بٹن، مینو، آئیکن، ٹیکسٹ فیلڈ، چیک باکس/ریڈیو، سلائیڈر — کو ترتیب دینا ہے۔

1.11.2 Testing Methods (Usability, A/B, Automated) ★ Golden

Testing involves observing how the system behaves under specific conditions.

- Usability testing: observing real users while they perform realistic tasks, to measure efficiency and satisfaction. If the user gets stuck,...
- Task-based testing: assigning a specific task (for example, "Find a product and add it to cart") and strictly measuring completion time,...
- Automated audits: software bots scan websites to detect technical issues such as broken links, slow loading speeds or low colour contrast.
- A/B testing: comparing two versions of an interface (A and B). Half the users see A, half see B. The one with more clicks or sign-ups wins.

Task-based "Add to cart" Time: 12 s Success: Yes	A/B test Version A Version B half / half users more clicks wins	Automated audit Bot scanning... 3 broken links Low contrast
--	---	---

Three golden testing pictures: timed tasks, A versus B, and a bot that finds broken links and weak contrast.

Remember: Task-based three numbers: Time, Success, Errors. A/B: two versions, split users, the higher clicks/sign-ups win. Bot: links, speed, contrast. Load: many users...

Exam: Golden 8-mark question: "Explain testing methods used in HCI." Write seven short paragraphs or a seven-row table. For full marks, define usability testing (observe real...

سات ٹیسٹنگ طریقے: یوزیبلٹی (حقیقی صارف کو کام کرتے دیکھنا)، ٹاسک بیسڈ (وقت، کامیابی، غلطیاں ناپنا)، خودکار آڈٹ (بوت ٹوٹے لنک،
سسٹ...

2.1.1 Trace Tables ★ Golden

A trace table is a technique used to monitor how the values of variables change during the execution of an algorithm.

- Dry running: execute the algorithm line by line by hand.
- Debugging: find logical errors where the algorithm runs but the output is wrong.
- Validation: check that the algorithm does what it is intended to do.
- Line / step number — which line is being executed.

```
AllHeights = [1.91, 2.01, 1.87, 1.57, 1.48]
Total = 0
for height in AllHeights:
    if height ≥ 1.57 and height ≤ 1.91:
        Total = Total + 1
print(Total)
```

Remember: How to fill a trace table without getting lost. Write a new row every time a variable changes or a condition is tested. Copy unchanged values into the new row...

Exam: Very common long question: "Dry-run the given algorithm using a trace table and state the output." Draw columns for every variable plus a condition column. Show the loop...

ٹریس ٹیبل الگورتھم کا کاغذی اجرا (Dry Run) ہے۔

2.1.3 Comparing Trace Tables and Stepwise Reasoning ★ Golden

Both methods verify correctness, but they fit different situations depending on the complexity and length of the algorithm.

Feature	Trace table	Stepwise reasoning
Best for	Small algorithm blocks, complex loops, and beginners learning to track variables.	Large systems, architectural logic, and abstract mathematical proofs.
Effort required	High. Very tedious and impractical if a loop runs 1,000 times.	Moderate. Needs strong logical deduction and abstract thinking.
Primary goal	Catching syntax misinterpretations or specific arithmetic errors line by line.	Catching conceptual or structural flaws in the overall design.
Level	Micro-level (line by line). Checks exact values.	Macro-level (logic blocks). Checks overall state.

Trace table

Micro-level
Line by line
Exact values

Stepwise reasoning

Macro-level
Logic blocks
Overall state

Trace tables zoom in on values; stepwise reasoning zooms out on design.

Remember: Micro vs macro. Trace table = microscope (every cell). Stepwise reasoning = map (whole city). Beginners start with the microscope; designers need the map.

Exam: Differentiate questions are almost guaranteed: "Compare a trace table with stepwise reasoning." Write a four-row table (best for, effort, primary goal, micro/macro). Add...

ٹریس ٹیبل خرد بینی (Micro) سطح پر کام کرتا ہے: ہر لائن اور ہر قیمت۔


2.3.1 Number of Steps (Big O Notation) ★ Golden

When we discuss efficiency we ask how performance changes as the input size n increases.

- Big O notation is a mathematical method used to describe how the running time (or memory) grows as n grows.
- We ignore small constants and keep the most important term: if an algorithm does $3n + 5$ steps we write $O(n)$.
- In computer science, $\log n$ almost always means log base 2 (how many times you can halve n until you reach 1).

Class	Name	What happens when n grows	Typical example	Grade
$O(1)$	Constant	Time stays the same for 10 items or 10 million.	Access <code>arr[0]</code> (or any known index).	Excellent
$O(\log n)$	Logarithmic	Time grows very slowly; the problem is halved each step.	Binary search on a sorted list.	Great
$O(n)$	Linear	If n doubles, time roughly doubles.	Linear search of an unsorted list.	Fair / Good
$O(n \log n)$	Linearithmic	A little worse than linear; much better than n^2 . Common in good sorting.	Merge Sort (split in half, then merge).	Good
$O(n^2)$	Quadratic	Time grows with the square of n . Nested loops. Painful for large n .	Bubble Sort; compare every item with every other item.	Poor

Relative work at $n = 16$

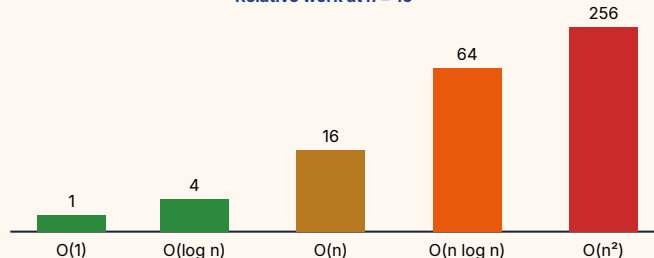

Same $n = 16$. Quadratic work is already four times $n \log n$ and sixteen times linear.

```
arr = [23, 76, 12, 90, 34, 68]
print(arr[0])
```

Remember: Order from fastest to slowest (for large n): $O(1) \rightarrow O(\log n) \rightarrow O(n) \rightarrow O(n \log n) \rightarrow O(n^2)$. Mnemonic: "Constant Logs Never Need Squares" — Constant, Logarithmic,...

Exam: Memorise the five rows of the class table (name, growth, one example, grade). Typical MCQ: "Accessing `arr[0]` is ...?" $\rightarrow O(1)$. "Binary search is ...?" $\rightarrow O(\log n)$. "Nested..."


بگ او (Big O) بتاتا ہے کہ ان پٹ n بڑھنے پر وقت یا میموری کیسے بڑھتی ہے۔

2.5 Concept of Data Structure ★ Golden


A data structure is a systematic way of organising, storing and managing data so that an algorithm can access, modify and process it efficiently.

- Books on a shelf are arranged in a set order, so you can find a title quickly.
- Files in folders are grouped on purpose.
- Data structures do the same job inside computer memory.

Linear (sequence)



Non-linear (branch / net)



Linear: a line of neighbours. Non-linear: a node with more than one connection.

Remember: Ask: "Does each item have at most one next item?" Yes → linear. "Can one item link to many, or can links form a net?" → non-linear.

Exam: Define data structure in full (organise, store, manage; efficient access and processing). Then split linear vs non-linear with the "one predecessor and one successor"...


ڈیٹا سٹرکچر ڈیٹا کو منظم طریقے سے رکھنے کا نظام ہے تاکہ الگورتھم اسے جلدی استعمال کر سکے۔

Linear Data Structures: Stack ★ Golden

A stack is a linear data structure that works on the LIFO principle: Last-In, First-Out.

- PUSH — add an item to the top.
- POP — remove the item from the top.

Step	Operation	Stack (bottom → top)	TOP	Popped value
0	(empty)	[]	none	
1	PUSH Data1	[Data1]	Data1	
2	PUSH Data2	[Data1, Data2]	Data2	
3	PUSH Data3	[Data1, Data2, Data3]	Data3	
4	POP	[Data1, Data2]	Data2	Data3
5	POP	[Data1]	Data1	Data2

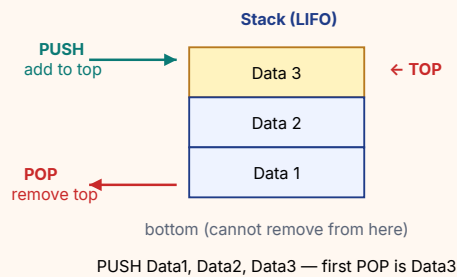

Three PUSH operations. The TOP is Data 3, so the first POP returns Data 3.

```
stack = []
stack.append("Data1")
stack.append("Data2")
stack.append("Data3")
print("after 3 PUSHes:", stack)
print("POP:", stack.pop())
print("POP:", stack.pop())
print("Left:", stack)
```

Remember: LIFO = Last In First Out = "last plate washed is first plate used" on a canteen pile. Undo, Redo, Back button and function calls are all stacks.

Exam: Define stack + LIFO, define PUSH and POP, mention TOP, give the Undo example, and draw the vertical boxes with TOP labelled. Trace questions: "Show the stack after PUSH..."

سٹیک LIFO پر چلتا ہے: جو سب سے بعد میں آیا وہ سب سے پہلے نکلے گا۔


Linear Data Structures: Queue ★ Golden

A queue organises data on the FIFO principle: First-In, First-Out.

- ENQUEUE — add an element at the Rear (back).
- DEQUEUE — remove an element from the Front.

Step	Operation	Queue (Front → Rear)	Front	Rear	Removed
0	(empty)	[]	—	—	
1	ENQUEUE 55	[55]	55	55	
2	ENQUEUE 76	[55, 76]	55	76	
3	ENQUEUE 90	[55, 76, 90]	55	90	
4	ENQUEUE D	[55, 76, 90, D]	55	D	
5	DEQUEUE	[76, 90, D]	76	D	55

Queue (FIFO)



Next ENQUEUE joins after 90. Next DEQUEUE removes 55.

Three jobs waiting. New jobs join at the rear; service always takes the front.

Remember: FIFO = First In First Out = a canteen line. Front = the person being served. Rear = the person who just joined.

Exam: Define queue + FIFO, define ENQUEUE (rear) and DEQUEUE (front), give the printer example, draw the labelled Front/Rear diagram, and trace a short sequence. Examiners mix...

کیو FIFO پر چلتی ہے: جو پہلے آیا وہ پہلے نکلے۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Applications of HCI (Domains of Life):** Mistake: Listing brand names only ("WhatsApp, JazzCash, Zoom") without saying the domain and the user benefit.
- **Importance of HCI:** Mistake: Writing only "HCI is important because it makes apps look nice." Fix: Looks are a tiny part of UI.
- **Human-Computer Interaction Problems:** Mistake: Writing "the app is bad" as an HCI problem, or mixing up cognitive load with compatibility.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Applications of HCI (Domains of Life)**. Write: HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) These are human-centred solutions built to meet user needs across many domains of life. (2) A domain is an area of daily activity — health, money, school, talking to people. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Importance of HCI**. Write: HCI ensures that machines are approachable and usable, turning complex technology into everyday tools.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Good design makes technology simple and enjoyable (touchscreens). (2) Poor design causes confusion and risks (unclear buttons on medical devices). — + example.

5 marks: 3-mark structure + table: Implication / Description + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Human-Computer Interaction Problems**. Write: HCI problems are common difficulties that stop users from using technology smoothly.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) They happen when systems fail to meet human needs or cognitive limits. (2) Cognitive limits means the mind can only hold and process so much at once — if an app asks you to remember three SMS codes at the same... — + example.

5 marks: 3-mark structure + table: Problem / Explanation and example + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled wireframe and one accessibility fix + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. Name the four domains of HCI given in the source.

3 marks. Explain Applications of HCI (Domains of Life) with two clear points and one example.

5 marks. Very common 5–8 mark question: "Explain applications of HCI in different domains of life with examples." Draw a four-row table (Health care, Banking, Education, Networking & communication). Each row:...

8 marks. Applications of HCI (Domains of Life): 5-mark answer plus a labelled wireframe and one accessibility fix.

Answers: 1. Health care, banking, education, networking and communication 3. These are human-centred solutions built to meet user needs across many domains of life.; A domain is an area of daily activity — health, money, school, talking to people. 5. Use the recipe in the blue box. Model opening: HCI is used to design and develop interactive systems such as desktop applications, websites and mobile apps. 8. Same 5-mark body + a labelled wireframe and one accessibility fix + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Applications of HCI (Domains of Life)** using the recipe in this topic. Include a labelled wireframe and one accessibility fix. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Golden blitz — Chapters 3–4

★ only · Chapters 3–4 · Golden blitz

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter from yesterday's Golden · 10–35 min lock the tables from memory · 35–55 min two students write a 5-mark Golden answer on the board · 55–75 min timed 8-mark · 75–85 min error clinic · 85–90 min homework: redraw from memory.

Board today: Lists (Ordered, Mutable, Methods) · Tuples (Ordered, Immutable) · Dictionaries (Key-Value Pairs) · Functions in Python · & 3.4 File Handling and Operations (Modes r, w, a) · The with Statement (Context Manager) · Data Sources and Database Connection · Pandas and DataFrames

★ **Must lock:** Lists (Ordered, Mutable, Methods), Tuples (Ordered, Immutable), Dictionaries (Key-Value Pairs), Functions in Python, & 3.4 File Handling and Operations (Modes r, w, a), The with Statement (Context Manager), Data Sources and Database Connection, Pandas and DataFrames, Handling Missing Values (NaN), Data Visualization and Types of Graphs, Descriptive Statistics

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Write every table and diagram on this day from memory on the board, then check the cards.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. Name the four domains of HCI given in the source.
2. Give one example of poor design mentioned in the source.
3. Which problem is a missing HTTPS lock on a payment page?


کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

3.1.1 Lists (Ordered, Mutable, Methods) ★ Golden

A list is Python's most versatile built-in data structure.

- It stores an ordered collection of items in a single variable.
- Lists are mutable (you can change them after you create them) and they are written with square brackets [].
- One variable can hold thousands of values.

After this line	List in memory
create	['apple', 'banana', 'apple']
.append('grape')	['apple', 'banana', 'apple', 'grape']
.remove('apple')	['banana', 'apple', 'grape'] — only the first apple goes
.sort()	['apple', 'banana', 'grape']

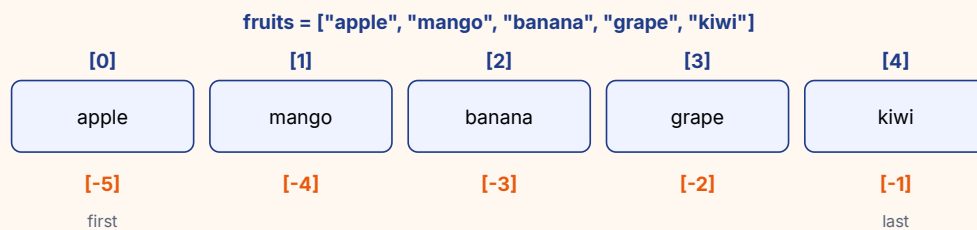

Positive indices count left to right from 0. Negative indices count right to left from -1.

```
numbers = [10, 2, 15, 14, 3, 33]      # list of integers
names = ["Hassan", "Qasim", "Malika"]  # list of strings
mixed = [1, "Python", 3.14, True]      # mixed data types
print(numbers)
print(names)
print(mixed)
```

Remember: Always remember [-1]. If a list has 10,000 items and you do not want to compute len(list) - 1, write list[-1]. It grabs the last item in one step.

Exam: Lists appear every year: "What is a list?", "List four methods with one line each", "Differentiate list and tuple", "Write a program to search an element", "Predict the..."

فہرست (List) مربع بریکٹ [] میں لکھی جاتی ہے، ترتیب برقرار رکھتی ہے اور تبدیل کی جا سکتی ہے (Mutable).

3.1.2 Tuples (Ordered, Immutable) ★ Golden

A tuple is an ordered collection that is immutable — once created, you cannot add, remove or replace items.

- Think of it as a read-only list.
- Tuples use parentheses ().
- Like lists, they allow duplicates, mixed types, and indexing from 0 (including negative indices).

Method	Meaning
<code>.count(value)</code>	How many times the value appears.
<code>.index(value)</code>	Index of the first occurrence.

List []

Can add / remove / replace

Tuple ()

LOCKED — read-only

A list is an open box you can refill. A tuple is a sealed box you may only look into.

```
t = (10, 20, 30, 40, 50)
print(t[0])
print(t[-1])
print(t[1:4])
print(t[::-1])
```

Remember: Tuple = locked lunchbox. You can see what is inside; you cannot swap the sandwich. Memory: "Tuple is Tight (immutable), written with round brackets that look..."

Exam: Expect "Differentiate list and tuple" (at least four points: brackets, mutability, methods, speed/protection), "Why use a tuple?", and "What happens if you write `t[0] = ...`"

ٹیپل (Tuple) گول بریکٹ () میں لکھا جاتا ہے، ترتیب رکھتا ہے مگر تبدیل نہیں ہو سکتا (Immutable).

3.1.4 Dictionaries (Key-Value Pairs) ★ Golden

A dictionary stores data as key–value pairs.

- Ordered (Python 3.7+): insertion order is kept.
- Mutable: you can add, change and delete pairs.
- Keys are unique: if you repeat a key, the last value silently overwrites the earlier one. Values may repeat.

Method	Returns
<code>.keys()</code>	All keys.
<code>.values()</code>	All values.
<code>.items()</code>	Key–value pairs as tuples.



You never search a dictionary by position. You search by key.

```
d = {"name": "Alice", "age": 30}
print(d)
d["age"] = 31
print(d)
d["city"] = "NYC"
print(d)
del d["city"]
print(d)
```

Remember: Keys are unique, like roll numbers. Values are the student records and may repeat (two students can both score 80). Memory: “get is gentle, brackets can break.”

Exam: High-yield: definition of a dictionary, difference between `d[key]` and `d.get(key)`, “what if a key is repeated?”, traversal with `.items()`, and a full comparison table of...

ڈکشنری (Dictionary) کلید اور قدر (Key-Value) کے جوڑوں میں ڈیٹا رکھتی ہے۔

3.2 Functions in Python ★ Golden

When the same instructions are written again and again, that is duplicate code.

def → **name** → **parameters** → **indented body** → **return (optional)**

- Duplicate code makes a program longer, harder to read, and painful to update (you must fix every copy).
- A function lets you write the instructions once and run them whenever you call the function's name.

Benefit	Meaning
Code reusability	Write once, use anywhere.
Modularity	Break a big problem into small named tasks.
Readability	Shorter, cleaner files with meaningful names.
Maintainability	Fix a bug in one place and every call is fixed.

```
def greet():  
    print("Hello, World!")  
  
greet()  
greet()
```

Remember: DRY — Don't Repeat Yourself. If you are about to copy-paste a block, wrap it in **def**. Name functions with verbs: **greet**, **add**, **save_grades**.

Exam: Write the four benefits (reusability, modularity, readability, maintainability) as separate bullets — that is a standard short question. For long questions, define a...


فونکشن (Function) ہدایات کا وہ بلاک ہے جو ایک بار لکھا جاتا ہے اور بار بار بلایا جا سکتا ہے۔

3.3 & 3.4 File Handling and Operations (Modes r, w, a) ★ Golden

File handling is a program's ability to create, read, write, update and delete files on disk.

- Variables live in RAM and vanish when the program ends.
- Files live on a hard disk or SSD and stay there — they are persistent.

Type	What it stores	Examples
Text file	Human-readable characters. You can open it in a text editor.	.txt, .csv, .py
Binary file	Raw bytes, not meant to be read as text.	.jpg, .mp3, .dat



Read copies data from disk into RAM. Write copies data from RAM onto disk.

```
new_file = open('myfile.txt', 'w')
new_file.write("The quick brown fox jumps over the lazy dog!!!\n")
new_file.close()
print("File has been created successfully.")
```

Remember: r = Read existing, w = Wipe then write, a = Add at end. Remember: write does not add a newline unless you type \n.

Exam: Define file handling, contrast RAM with disk, list modes r / w / a with one property each, and warn that w overwrites. Short programs that write one line and close the...

فائل ہینڈلنگ سے ڈیٹا ڈسک پر مستقل (Persistent) رہتا ہے، برخلاف RAM کے متغیرات کے جو پروگرام بند ہوتے ہی مٹ جاتے ہیں۔

3.6 The with Statement (Context Manager) ★ Golden

It is easy to forget `.close()`. If the program crashes before `.close()` runs, the file may be incomplete or corrupted.

with `open(...)` as `f` → use `f` → block ends → file closed automatically

- It is easy to forget `.close()`.
- If the program crashes before `.close()` runs, the file may be incomplete or corrupted.
- Python's with statement is a context manager: it opens the file, runs the indented block, and always closes the file when the block ends —...

```
with open('myfile.txt', 'w') as new_file:
    new_file.write("Context managers are safe!\n")
# no .close() here – with already closed the file
```

Remember: with = "take, use, put back." Prefer with `open(...)` as `f`: in every new program. You still choose the mode: 'r', 'w' or 'a'.

Exam: Define the with statement as a context manager that guarantees close. Contrast it with manual open/close. Be ready to write a four-line program that writes with with and...

with بیان ایک کانٹیکسٹ مینیجر (Context Manager) ہے جو فائل کو بلاک کے اختتام پر خود بند کر دیتا ہے، چاہے اندر غلطی ہو جائے۔

4.1.1 – 4.1.2 Data Sources and Database Connection ★ Golden

Data sources are where information comes from: school records, websites, sensors, databases.

Python → Driver → Connection → Cursor → SQL → Database

- Connectivity is the conversation between your Python program and that source so you can read and update data.
- Five components of a database connection, in the order they actually work:

#	Component	Role
1	Database	Organised store (SQLite = one .db file; MySQL = a server for big apps)
2	Driver	Translator between Python and that DBMS (sqlite3 is built in)
3	Connection object	Opens, manages and closes the pipeline
4	Cursor object	Runs SQL and walks through result rows
5	SQL queries	CREATE, INSERT, SELECT, UPDATE, DELETE

Exam: Write the five names in order and one line each. A common trap is swapping cursor and connection: the connection is the pipe; the cursor is the messenger that travels...

خمسہ اجزاء: ڈیٹا بیس، ڈرائیور، کنکشن، کرسر، ایس کیو ایل۔

4.3 Pandas and DataFrames ★ Golden

Pandas is a third-party library for tables.

- Install once: pip install pandas in the terminal (not inside the .py file).
- Convention: import pandas as pd.
- A DataFrame is a 2-D table of rows and columns, like Excel or an SQL table.

```
import pandas as pd
data = {
    "Name": ["Ali", "Sara", "Ahmed"],
    "Math": [85, 90, 78],
    "Science": [80, 88, 70],
}
df = pd.DataFrame(data)
print(df)
```

پینڈاز ٹیبل نما ڈیٹا فریم دیتا ہے۔

4.3.3 Handling Missing Values (NaN)

★ Golden

Missing cells are NaN ("Not a Number"). Statistics crash or lie if you ignore them.

- Statistics crash or lie if you ignore them.
- Three tools: `isnull()` (True where empty), `fillna(value)` (replace), `dropna()` (delete the row).

```
import pandas as pd
df = pd.DataFrame({
    "Name": ["Ali", "Sara", "Ahmed", "Ayesha"],
    "Marks": [85.0, None, 78.0, 92.0],
    "Grade": ["A", "A", None, "A"],
})
print(df.isnull().sum())
```

Trap: Filling a salary gap with the mean of a company that includes the CEO can hide poverty (the same outlier problem as the mean).

Exam: State: identify with `isnull/sum`, fill numeric gaps with the mean, fill categories with a label, or drop rows if filling would invent a lie. Never analyse first and clean...



خالی خانے NaN ہیں۔

4.5 Data Visualization and Types of Graphs ★ Golden

Pick the graph that matches the question. Then label axes and give a title — an unlabelled chart scores zero in an exam.

- Then label axes and give a title — an unlabelled chart scores zero in an exam.

Chart	Shows	Watch out
Bar / column	Compare discrete categories (subjects, departments)	Column = vertical; bar often = horizontal
Line	Change over time (temperature, visitors)	Needs an ordered x-axis (months, years)
Pie	Parts of one whole as percentages	Bad with many or almost-equal slices
Histogram	Distribution of one numeric variable in bins	Bars touch (continuous range), unlike a bar chart
Scatter	Relationship of two numeric variables	Each dot is one pair (x, y)
Box plot	Min, Q1, median, Q3, max, and outliers	Best tool for spotting extreme values



Column compares; line shows a trend; pie shows share; the box summarises spread around the median.

```
import matplotlib.pyplot as plt
subjects = ["English", "Math", "Science", "History"]
marks = [64, 82, 71, 49]
plt.bar(subjects, marks, color="skyblue", edgecolor="black")
plt.title("Marks vs Subjects")
plt.xlabel("Subjects")
plt.ylabel("Marks out of 100")
```

Exam: "Which graph and why?" is a 3-mark gift. Write the name, what it shows, and one reason the others are worse.

بار/کالم اقسام کا موازنہ، لائن وقت کا رجحان، پائی حصے، ہسٹوگرام مسلسل تقسیم (بار آپس میں لگے)، اسکیتھر دو متغیرات کا تعلق، باکس پلا...

4.6 Descriptive Statistics ★ Golden

Descriptive statistics squeeze a long list into a few honest numbers.

- Central tendency asks "what is typical?".
- Spread asks "how mixed is the list?".

Measure	How	Use when
Mean	Sum $\div$ n. Uses every value.	Values sit close together. Example: ordinary test scores.
Median	Middle after sorting. Odd n: centre. Even n: mean of the two centre values.	Outliers would wreck the mean (CEO salary).
Mode	Most frequent value. May be none, one, or several.	Most popular choice (shoe size).

Trap: Do not report variance as if it were in "marks".

Exam: Always state whether you used n or n-1. Show the sorted list for the median. For SD, show: mean $\rightarrow$ deviations $\rightarrow$ squares $\rightarrow$ divide $\rightarrow$ square root. A box plot pictures min,...

اوسط سب کا مجموعہ تقسیم تعداد، میڈین ترتیب کے بعد بیچ، موڈ سب سے زیادہ بار آنے والا۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Lists (Ordered, Mutable, Methods):** Mistake 1: `.remove('apple')` deletes every apple.
- **Tuples (Ordered, Immutable):** One-item trap: `(5)` is just the integer 5 with extra parentheses.
- **Dictionaries (Key-Value Pairs):** Older notes (and the chapter summary in some slides) still call dictionaries “unordered.” From Python 3.7 onwards insertion order is...

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Lists (Ordered, Mutable, Methods)**. Write: A list is Python's most versatile built-in data structure.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) It stores an ordered collection of items in a single variable. (2) Lists are mutable (you can change them after you create them) and they are written with square brackets `[]`. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Tuples (Ordered, Immutable)**. Write: A tuple is an ordered collection that is immutable — once created, you cannot add, remove or replace items.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Think of it as a read-only list. (2) Tuples use parentheses `()`. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Dictionaries (Key-Value Pairs)**. Write: A dictionary stores data as key-value pairs.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Mutable: you can add, change and delete pairs. (2) Keys are unique: if you repeat a key, the last value silently overwrites the earlier one. Values may repeat. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + working code with correct indentation and a short trace of one example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What does `nums[2:6]` return if `nums = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]`?

3 marks. Explain Lists (Ordered, Mutable, Methods) with two clear points and one example.

5 marks. Lists appear every year: "What is a list?", "List four methods with one line each", "Differentiate list and tuple", "Write a program to search an element", "Predict the output of a slice." Write:...

8 marks. Lists (Ordered, Mutable, Methods): 5-mark answer plus working code with correct indentation and a short trace of one example.

Answers: 1. `[2, 3, 4, 5]` 3. It stores an ordered collection of items in a single variable.; Lists are mutable (you can change them after you create them) and they are written with square brackets `[]`. 5. Use the recipe in the blue box. Model opening: A list is Python's most versatile built-in data structure. 8. Same 5-mark body + working code with correct indentation and a short trace of one example + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Lists (Ordered, Mutable, Methods)** using the recipe in this topic. Include working code with correct indentation and a short trace of one example. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Golden blitz — Chapters 5–6

★ only · Chapters 5–6 · Golden blitz

TODAY'S 90 MINUTES

90 minutes. 0–10 min starter from yesterday's Goldens · 10–35 min lock the tables from memory · 35–55 min two students write a 5-mark Golden answer on the board · 55–75 min timed 8-mark · 75–85 min error clinic · 85–90 min homework: redraw from memory.

Board today: Neural Networks (NN) · Components of Neural Networks · Secure Collaboration (Authentication, MFA, Access Control) · Common Security Threats (Malware, Phishing, DoS) · Functions of Equity and Equal Access · Entrepreneurship in the Digital Age · Prototype · Prototype Development Cycle

★ **Must lock:** Neural Networks (NN), Components of Neural Networks, Secure Collaboration (Authentication, MFA, Access Control), Common Security Threats (Malware, Phishing, DoS), Functions of Equity and Equal Access, Entrepreneurship in the Digital Age, Prototype, Prototype Development Cycle, Minimum Viable Product (MVP), Beachhead Market

If the batch is behind, drop non-Golden cards. Never skip a Golden or an exam day.

Write every table and diagram on this day from memory on the board, then check the cards.

STARTER TEST

0–10 min. Books closed. Three 1-mark questions from yesterday. Marks go in the batch register.

1. What does `nums[2:6]` return if `nums = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]`?
2. Name the two tuple methods.
3. What does `{"a": 1, "a": 2, "a": 3}` print?

کل کے گولڈن سے تین سوال زبانی پوچھیں؛ نمبر رجسٹر میں لکھیں۔

5.1.2 Neural Networks (NN) ★ Golden

A neural network is a computer model that learns patterns from data.

Input layer → Hidden layer(s) → Output layer

- Input layer — receives the raw data (pixels of a face, samples of a sound, marks of a student).
- Hidden layer(s) — the “thinking” in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a...)
- Output layer — gives the final answer (unlock / keep locked; “this is a cat”; “pass / fail”).

Remember: I-H-O. Input receives, Hidden thinks, Output decides. “In Hidden Out.” A neural network is a brain-inspired maths machine, not a copy of a living brain.

Exam: Very common questions: “What is a neural network?” (2–3 marks), “Name its three layers and explain each with the face-unlock example” (5 marks), and “How is a neural...”


نیورل نیٹ ورک ایک کمپیوٹر ماڈل ہے جو ڈیٹا سے پیٹرن سیکھتا ہے۔

5.1.4 Components of Neural Networks ★ Golden

The components of a neural network can be understood through its layered architecture.

- Data enters, gets processed, and exits, with mathematical adjustments happening inside.

#	Component	Description
1	Input layer	Receives the initial raw data (for example image pixels, sound waves, text).
2	Neurons / nodes	Small processing units that receive, calculate, and pass information forward.
3	Hidden layer(s)	The layers between input and output. They process the data and learn patterns from it.
4	Weights	Numbers that show the importance or strength of connections between neurons.
5	Bias	An extra constant value added to help the model adjust its result and improve accuracy.
6	Activation function	A mathematical gate that decides whether the information is important enough to move to the next layer.
7	Output layer	Gives the final computed result, decision or prediction (for example "This is a cat").
8	Loss function	Checks the error (how much the model's answer is wrong compared with reality) so the network can correct itself.

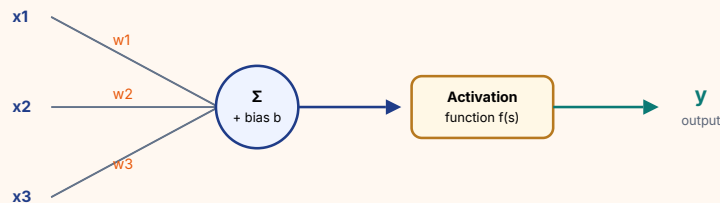

One neuron: inputs $\times$ weights are summed, bias is added, then an activation function decides the output y .

```
x1, x2 = 0.8, 0.5
w1, w2 = 0.4, 0.6
b = 0.1
s = x1 * w1 + x2 * w2 + b
y = 1 if s ≥ 0.5 else 0
print(round(s, 2))
print(y)
```

Remember: Weights = importance. Bias = extra nudge. Activation = yes/no gate. Loss = how wrong. A large weight means that input matters more. Bias shifts the sum up or...

Exam: Golden questions: "List the components of a neural network" (often 8 names + one line each), "What are weights and bias?", and a numerical neuron: given x , w , b and a ...

نیورل نیٹ ورک کے اجزاء ہیں: ان پٹ تہ، نیورون، پوشیدہ تہ، وزن (Weights)، بائیس (Bias)، ایکٹیویشن فنکشن، آؤٹ پٹ تہ اور لاس فنکشن۔

5.3.1 Secure Collaboration (Authentication, MFA, Access Control) ★ Golden

Digital tools allow people to share files, attend online classes, edit documents and work together from different locations.

- Collaboration is useful only when data is protected and communication remains safe.
- Secure collaboration means using digital tools to work together in a safe, controlled and responsible way.
- It depends on several key elements.

Remember: A-A-A-P-S. Authentication, Access control, Accountability, Privacy, Safe transmission. MFA = at least two different factor types (know / have / are). 2FA is...

Exam: Typical items: "Define secure collaboration", "Differentiate authentication and access control", "What is MFA/2FA?", "Explain five elements of secure collaboration with..."

محفوظ تعاون کا مطلب ہے ڈیجیٹل ٹولز سے محفوظ، کنٹرول شدہ اور ذمہ دارانہ انداز میں ساتھ کام کرنا۔

5.4.1 Common Security Threats (Malware, Phishing, DoS) ★ Golden

A security threat is any action, event or weakness that can harm a computer system or its data.

- Mitigation techniques are protective measures used to prevent threats or reduce their impact.
- This section names the common threats; later sections show how to spot them and how to reduce the damage.

#	Threat	What it is	Example
1	Malware	Harmful software designed to damage a computer, steal data, or gain unauthorised access. Includes viruses, worms, spyware, ransomware and Trojans .	Installing cracked software that secretly corrupts files, or a "free game" USB that encrypts a college lab's coursework (ransomware).
2	Phishing	A social-engineering trick that deceives users into sharing personal information (passwords, bank details, OTPs) using fake emails or websites that look genuine.	An SMS that looks like JazzCash or HBL asking you to "verify" by typing your OTP on a fake page.
3	Unauthorised access	Entering a system, account or file without permission. Often caused by weak passwords, shared passwords, or leaving devices unlocked.	A classmate using an unlocked lab PC to open someone else's Google Classroom.
4	Data theft / identity theft	Data theft is stealing or copying data without permission. Identity theft is using another person's stolen details (name, CNIC, bank details) to pretend to be them online and commit fraud.	A leaked list of CNICs used to open a SIM or a wallet in someone else's name.
5	Denial of Service (DoS)	A website or system is flooded with thousands of fake requests, causing it to slow down or crash, so real users cannot access the service.	Hackers flooding an online exam portal so students cannot log in on BISE result day or during an e-test.
6	Human error	Mistakes by legitimate users: accidentally deleting files, sending confidential data to the wrong email, or falling for a simple scam.	A teacher emailing the whole marksheet to the wrong parent; a student forwarding an OTP "to help the bank."

Phishing

Fake bank email / SMS
steals password or OTP

DoS attack

Flood of fake requests
server overload / crash

Identity theft

Stolen CNIC / details
fraud in your name

Three high-yield threats: phishing (fake messages), DoS (server overload), identity theft (stolen CNIC or bank details).

Remember: Malware = bad program. Phishing = fake message. DoS = flood. Identity theft = stolen 'you'. Human error = honest mistake. Cracked software and unknown USBs are...

Exam: Expect "Define a security threat", "Explain malware / phishing / DoS with examples", and "Differentiate data theft and identity theft." List all six threats if the...

سیکیورٹی خطرہ وہ عمل یا کمزوری ہے جو نظام یا ڈیٹا کو نقصان پہنچاے۔

5.5.1 Functions of Equity and Equal Access ★ Golden

Equity and equal access are not slogans. They do work in a digital classroom.

- They do work in a digital classroom.
- The source lists four functions.

Function	What it does	Pakistani example
1. Providing need-based support (equity)	Help tailored to individuals.	Audio descriptions for visually impaired students; a screen reader so a blind student in Karachi can hear a digital textbook.
2. Removing barriers	Help students in remote areas attend online classes.	Mobile-friendly, low-data apps so a student in Tharparkar or the katcha areas of Sindh can join without a fibre connection.
3. Enabling active participation	Students who miss live class can still take part.	Recorded lectures so load-shedding or an internet outage in Hyderabad does not make a student fall behind.
4. Supporting different learning needs	Offer more than one format.	Videos, text notes and audio of the same Chapter 5 topic so each student learns in the way that suits them best.

Remember: Four functions: Support, Remove, Participate, Formats. "Some Rural Pupils Fail" without them — Support (need-based), Remove barriers, Participate via...

Exam: Golden question: "Explain the functions of equity and equal access in digital collaboration" (5–8 marks). Write the four headings in order, one example each, and add the...

انصاف اور مساوی رسائی کے چار کام ہیں: ضرورت کے مطابق مدد (جیسے نابینا طالب علم کے لیے آڈیو وضاحت)، رکاوٹیں ہٹانا (دور دراز علاقوں...

6.2 Entrepreneurship in the Digital Age ★ Golden

Entrepreneurship in the digital age means using digital tools to start, test, improve, and grow a business idea.

- These tools may include mobile phones, social media, websites, online forms, digital payments, maps, videos, and simple apps.
- In Pakistan you already know many of them: WhatsApp, Facebook, Instagram, TikTok, YouTube, Google Forms, Google Maps, and digital payments...

Remember: Remember "S-T-I-G": digital tools help you Start, Test, Improve and Grow. Think: "Start The Idea Growing."


Exam: Common questions: "Define entrepreneurship in the digital age", "How have digital tools changed entrepreneurship?" and "Give examples of digital entrepreneurship without..."

ڈیجیٹل دور میں انٹرپرائیورسپ کا مطلب ہے موبائل فون، سوشل میڈیا، ویب سائٹ، آن لائن فارم اور ڈیجیٹل ادائیگی جیسے ٹولز کے ذریعے کاروبار...

6.4 Prototype ★ Golden

A prototype is an early model of a product, service, website, or app.

- It shows how the idea may look or work.
- It is NOT the final product.
- It is made to test the idea and collect feedback.

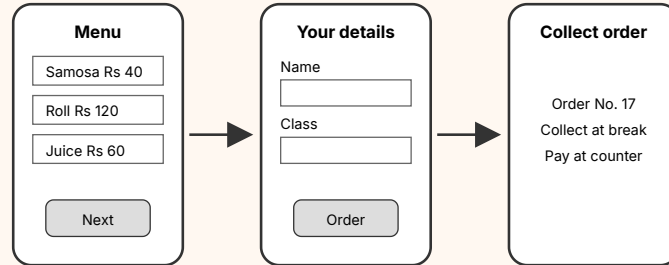

A paper prototype of a canteen pre-order system: three hand-drawn screens joined by arrows (select item → enter name → collect order).

Remember: Prototype = "practice model". It is like a rough draft of an essay: you show it, get corrections, and rewrite it before the final copy.

Exam: Expect "Define prototype and write its benefits" (3–5 marks). Write: (1) definition with the words early model, not the final product, test the idea and collect...


پروٹوٹائپ (Prototype) کسی پراڈکٹ، سروس، ویب سائٹ یا ایپ کا ابتدائی نمونہ ہوتا ہے جو دکھاتا ہے کہ خیال کیسا نظر آئے گا یا کیسے کام کرے گا۔

6.6 Prototype Development Cycle ★ Golden

Prototype development is not a one-time activity.

- A prototype is created, tested, improved, and tested again.
- This repeating process is called iteration.
- The main stages are Design, Build, Test, and Iterate.

Stage	What happens
1. Design	Understand the problem and plan the solution. Decide what the prototype should show (e.g. screen flow, features).
2. Build	Create the first version (physical or digital). The aim is not beauty; the aim is to make the idea visible.
3. Test	Show the prototype to users. Observe what they understand and what they find difficult.
4. Iterate	Improve the prototype based on user feedback. Remove unnecessary parts and add missing features.

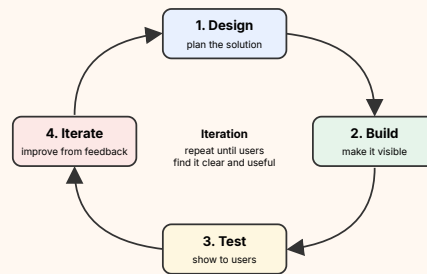

The prototype development cycle: Design → Build → Test → Iterate, then back to Design.

Remember: Mnemonic: "Do Big Things Iteratively" = Design, Build, Test, Iterate. And remember the arrow at the end goes back to Design: it is a cycle, not a line.

Exam: A favourite long question: "Explain the prototype development cycle with a diagram." Draw the four boxes in a circle with arrows, write one or two lines for each stage...

پروٹوٹائپ ایک ہی بار میں نہیں بنتا؛ اسے بنایا، آزمایا، بہتر کیا اور دوبارہ آزمایا جاتا ہے۔

6.8 Minimum Viable Product (MVP) ★ Golden

A Minimum Viable Product (MVP) is the simplest working version of a product.

- Minimum: it has only the essential features. No extras.
- Viable: it is usable enough to actually solve the main problem. ("Viable" means able to work successfully.)

Complete canteen app (final product)	Canteen MVP
Login, online payment, delivery tracking, discount offers...	A simple Google Form where students select snacks before break.

Remember: Simple meaning. An MVP answers: "Will people actually use this solution?" It tests real use and behaviour, not only the visual design. Analogy: before opening...

Exam: Typical questions: "What is an MVP? Explain the words Minimum and Viable" and "Give an example of an MVP." Write the full form, the definition (simplest working version,...


ایم وی پی (Minimum Viable Product) کسی پراڈکٹ کا سب سے سادہ مگر کام کرنے والا ورژن ہے جس میں صرف ضروری خصوصیات ہوتی ہیں۔

6.14 Beachhead Market ★ Golden

A beachhead market is a small and focused group of first users.

- These users have a clear need and are likely to try the product early.
- Instead of trying to serve everyone, entrepreneurs first focus on one small group.
- This helps them test the MVP properly and improve it before expanding.

Business Idea	Weak First Market	Better Beachhead Market
Study app	All students in Pakistan.	Grade XII students preparing for exams in one college.
Canteen pre-order	All canteens in the city.	One college canteen during lunch break.
Ajrak catalogue	All online shoppers.	Existing customers of one local shop.
Van update system	All transport users.	Students and parents of ONE specific college van route.

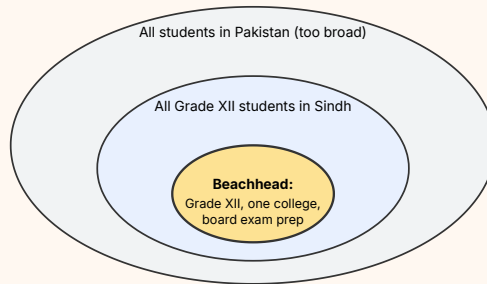

Start with the small inner circle (beachhead), learn and improve, then expand outward.

Remember: Remember S-R-U: Specific, Reachable, Urgent need. If you cannot meet your first users within a week, your market is too big.

Exam: Asked as "Define beachhead market and give its characteristics" or "Suggest a beachhead market for ...". Write the definition (small, focused group of first users with a...

بیچ ہیڈ مارکیٹ (Beachhead Market) پہلے صارفین کا ایک چھوٹا اور مخصوص گروہ ہے جسے حل کی واضح اور فوری ضرورت ہو اور جو پراڈکٹ جلد آزمانے پر تیار ہو۔

ERROR CLINIC

75–85 min. Collect the three most common wrong answers. Correct them in one box on the board.

- **Neural Networks (NN):** Mistake: “A neural network is an actual human brain inside the computer.” Fix: It is only inspired by the brain.
- **Components of Neural Networks:** Mistake: Forgetting to add the bias, or multiplying instead of adding after the products.
- **Secure Collaboration (Authentication, MFA, Access Control):** Mistake: Treating authentication and access control as the same thing.

تین عام غلطیاں بورڈ کے ایک خانے میں درست کریں۔

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Neural Networks (NN)**. Write: A neural network is a computer model that learns patterns from data.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Hidden layer(s) — the “thinking” in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a... (2) Output layer — gives the final answer (unlock / keep locked; “this is a cat”; “pass / fail”). — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled ER diagram (rectangle / oval / diamond) or the relational schema + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Components of Neural Networks**. Write: The components of a neural network can be understood through its layered architecture.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) The components of a neural network can be understood through its layered architecture. (2) Data enters, gets processed, and exits, with mathematical adjustments happening inside. — + example.

5 marks: 3-mark structure + labelled diagram + the worked example from this topic.

8–10 marks: 5-mark structure + a labelled network: input layer → hidden layer → output layer + a one-line conclusion. Method marks are awarded for working.

FULL-MARK ANSWER RECIPE

Train this wording every class: *Define. Explain. Example. Diagram. Working.*

1 mark: Define **Secure Collaboration (Authentication, MFA, Access Control)**. Write: Digital tools allow people to share files, attend online classes, edit documents and work together from different locations.

2 marks: definition + one local example (JazzCash, school portal, NADRA, load-shedding).

3 marks: definition + two points — (1) Collaboration is useful only when data is protected and communication remains safe. (2) Secure collaboration means using digital tools to work together in a safe, controlled and responsible way. — + example.

5 marks: 3-mark structure + four-point explanation + the worked example from this topic.

8–10 marks: 5-mark structure + named threat + one mitigation + a local example + a one-line conclusion. Method marks are awarded for working.

ACADEMY DRILL

Timed 20 minutes. Books closed. Mark at once with the answers in this box — this is class work, not homework.

1 mark. What are the small processing units of a neural network called?

3 marks. Explain Neural Networks (NN) with two clear points and one example.

5 marks. Very common questions: "What is a neural network?" (2–3 marks), "Name its three layers and explain each with the face-unlock example" (5 marks), and "How is a neural network related to the human..."

8 marks. Neural Networks (NN): 5-mark answer plus a labelled ER diagram (rectangle / oval / diamond) or the relational schema.

Answers: 1. Neurons or nodes 3. Hidden layer(s) — the "thinking" in the middle. Nodes here combine the inputs and learn features (eye distance, nose shape, an edge in a...; Output layer — gives the final answer (unlock / keep locked; "this is a cat"; "pass / fail"). 5. Use the recipe in the blue box. Model opening: A neural network is a computer model that learns patterns from data. 8. Same 5-mark body + a labelled ER diagram (rectangle / oval / diamond) or the relational schema + one-line conclusion.

BATCH HOMEWORK

Write an 8-mark answer on **Neural Networks (NN)** using the recipe in this topic. Include a labelled ER diagram (rectangle / oval / diamond) or the relational schema. Then redraw the board work from memory on a fresh page — no notes.

How you will mark it tomorrow: Mark to the 8–10 mark recipe. Any answer with no working is half marks.

کل جمع کرائیں؛ بغیر ورکنگ کے جواب آدھے نمبر ہیں۔

Oral recap at the board

Say every chapter recap aloud, books closed · Recap

TODAY'S 90 MINUTES

90 minutes. 0–10 min settle · 10–80 min each chapter recap said aloud at the board, books closed · 80–90 min rewrite any line the batch could not say. No new topic.

Board today: Say every chapter recap aloud, books closed

★ **Must lock:** All chapters

Phones in the box at the door.

No new cards. One student per chapter at the board. The batch corrects missed lines.

Chapter 1 recap — Human Computer Interaction

- HCI = study of how people and computers work together so systems are usable, useful and satisfying.
- Traditional interaction = keyboard, mouse, menus. Natural interaction = touch, voice, gesture, gaze.
- Components: user, computer, interaction (input + output + feedback) inside an environment.
- UI = how it looks and the controls. UX = how the whole experience feels. Wireframe → prototype (Figma) → test.
- Evaluate with usability tests, heuristic evaluation, A/B tests and automated checks. Golden: accessibility, HCI problems, UI vs UX, testing methods.

Chapter 2 recap — Algorithms and Data Structures

- Correctness: trace table (variable values after every step) or stepwise reasoning.
- Clarity: modularity (small named parts) and readability (names, comments, indentation).
- Efficiency: count steps, conditions, repetitions. Big O: $O(1)$ constant, $O(\log n)$ binary search, $O(n)$ linear, $O(n \log n)$ good sorts, $O(n^2)$ nested loops.
- Linear DS: array, linked list, stack (LIFO, push/pop), queue (FIFO, enqueue/dequeue). Non-linear: tree (one root, parent-child), graph (nodes + edges).
- Pick the structure from the problem: undo → stack; printer jobs → queue; hierarchy → tree; maps → graph; fast index → array.

Chapter 3 recap — Python Data Structures, Functions and Files

- list [] ordered, mutable. tuple () ordered, immutable. set {} unordered, unique. dict {k:v} key-value, mutable.
- Functions: def, parameters, return. Local vs global scope. Built-in vs user-defined.
- Files: "r" read, "w" overwrite, "a" append. Always prefer with open(...) as f so the file closes itself.
- Exceptions: try / except / else / finally. Catch specific errors (ValueError, FileNotFoundError).

Chapter 4 recap — Data and Analysis

- SQLite in Python: connect → cursor → execute → commit → close. Always commit writes.
- Pandas DataFrame = table. load CSV/Excel, isnull, dropna, fillna, sort, filter, groupby.
- Charts: bar (categories), line (trend over time), pie (parts of a whole, few slices), histogram (distribution), scatter (relationship of two variables), box (spread and outliers).
- Mean = average. Median = middle after sorting. Mode = most frequent. Range = max–min. Variance / std-dev measure spread. pandas .std() uses sample n–1.

Chapter 5 recap — AI, Security and Collaboration

- AI $\supset$ Machine Learning $\supset$ Deep Learning. A neuron: weighted sum + bias, then an activation function. Deep = many hidden layers.
- Secure collaboration: authentication (passwords, MFA), access control (who may do what).
- Protect data: encryption, strong passwords, 3-2-1 backup, firewall. Threats: malware, phishing, DoS/DDoS, social engineering.
- Equity: everyone can take part (devices, language, disability, bandwidth). Tools: shared docs, video, LMS, versioning.

Chapter 6 recap — Entrepreneurship in the Digital Age

- Entrepreneur = person who turns a problem into a venture, taking risk. Digital tools make testing cheap (WhatsApp, Forms, a Facebook page).
- Prototype = experimental model. Low / mid / high fidelity. Cycle: Design $\rightarrow$ Build $\rightarrow$ Test $\rightarrow$ Iterate.
- MVP = smallest product that tests the riskiest assumption with real users. Prototype $\neq$ MVP (MVP is used in the real market).
- Beachhead market = the first, narrow group you can win. Measure retention, not only sign-ups. Use data ethically.

Mock paper — academy hall

2 hours 30 minutes · 75 marks · no notes · Mock

TODAY'S 90 MINUTES

90 minutes. Academy mock morning: sit the paper in 2 hours 30 minutes. Hall conditions — no notes, no phones, no Day 29 peeking. Use leftover time to pack scripts. Do not mark today.

Board today: 2 hours 30 minutes · 75 marks · no notes

★ **Must lock:** Whole syllabus

Phones in the box at the door.

Invigilate as the board will. No phone, no notes, no Day 29 peeking.

Mock paper — Computer Science XII

Time: 2 hours 30 minutes | Total: 75 marks | Answer all of A and B; attempt three from C.

Section A — Multiple choice (15 × 1 = 15)

1. HCI stands for:
 - a. Human Computer Interaction
 - b. High Code Interface
 - c. Hardware Control Input
 - d. Hybrid Computing Internet
2. A wireframe is:
 - a. the final coloured UI
 - b. a simple layout sketch of screens
 - c. a compiled program
 - d. an encryption key
3. Which is $O(\log n)$?
 - a. Linear search
 - b. Nested for-loops
 - c. Binary search
 - d. Reading one array cell
4. A stack is:
 - a. FIFO
 - b. LIFO
 - c. random access only
 - d. unordered unique items
5. Which Python type is immutable?
 - a. list
 - b. dict
 - c. set
 - d. tuple
6. The file mode that overwrites an existing file is:
 - a. r
 - b. a
 - c. w
 - d. x+
7. `with open("t.txt") as f` is useful because:
 - a. it encrypts the file
 - b. it closes the file automatically
 - c. it creates a DataFrame
 - d. it skips exceptions
8. After INSERT in sqlite3 you must:
 - a. rollback always
 - b. commit
 - c. drop the table
 - d. print the cursor
9. A pie chart is a poor choice when:
 - a. you have 3 parts of a total
 - b. you have 20 tiny slices
 - c. you show percentages of a whole
 - d. you label each slice
10. `pandas df['x'].std()` uses:
 - a. population n
 - b. sample n-1
 - c. median
 - d. mode
11. Deep Learning is a subset of:
 - a. only statistics
 - b. Machine Learning
 - c. only HCI
 - d. only networking
12. MFA means:
 - a. Many File Archives
 - b. Multi-Factor Authentication
 - c. Main Firewall Access
 - d. Minimum Function API
13. A Caesar cipher is a form of:
 - a. phishing
 - b. encryption
 - c. a firewall
 - d. a prototype
14. An MVP is:
 - a. the most polished version of a product
 - b. the smallest product that tests the riskiest assumption
 - c. a paper sketch only
 - d. a full company registration
15. A printer job list is best modelled as a:
 - a. stack
 - b. queue
 - c. binary tree
 - d. set

Section B — Short questions (10 × 3 = 30)

1. Differentiate UI and UX with one example.
2. What is a trace table? Why is it better than "it looks right"?
3. Draw a 3-node stack after push 10, push 20, pop. Label TOS.
4. Write one difference each: list vs tuple vs set vs dictionary.
5. Write a Python function `area(l, w)` that returns $l*w$, and a call that prints it.
6. Name the five steps of a database connection in Python.
7. When would you draw a scatter plot rather than a line graph?
8. Compute mean, median and range of 4, 8, 6, 10, 2.
9. List three signs of a phishing message.
10. Differentiate a prototype and an MVP.

Section C — Long questions (3 × 10 = 30). Attempt any three.

1. A college wants a new student-portal. Describe need analysis, a low-fidelity wireframe of the login + timetable screens, three accessibility principles you would apply, and one usability test you would run.
2. Trace this algorithm with a table for $n = 5$: `total=0; for i in 1..n: total = total + i; return total`. State its Big O and rewrite it as a formula that is $O(1)$.
3. Write a Python program that reads a text file of lines "name,marks", stores results in a dictionary, and writes "name: grade" to an output file using `with`. Grade A if marks ≥ 80 else B. Include exception handling if the file is missing.
4. Using the dataset 12, 18, 12, 20, 15, compute mean, median, mode, range, population variance and population standard deviation, showing every step. Then state which chart you would use to show the distribution and why.
5. A Karachi canteen wants a pre-order app. Identify the problem, the riskiest assumption, an MVP, a beachhead market, two test metrics, and one ethical rule for student data.

Mark the mock · repair list

Mark to the key. List every ★ Golden the batch missed. · Mark

TODAY'S 90 MINUTES

90 minutes. 0–70 min mark the mock to the sealed key using 1 / 3 / 5 / 8–10 recipes · 70–85 min each student fills the repair list · 85–90 min one missed Golden rewritten from memory.

Board today: Mark to the key. List every ★ Golden the batch missed.

★ **Must lock:** Missed Golden

Phones in the box at the door.

An answer with no working, no diagram or no example cannot score full marks.

Mock paper — answers

Section A

1. a
2. b
3. c
4. b
5. d
6. c
7. b
8. b
9. b
10. b
11. b
12. b
13. b
14. b
15. b

Section B

1. UI is the screens and controls (buttons, colours). UX is the whole journey (time to complete a task, frustration, trust).
Example: a JazzCash send-money screen (UI) vs how safe and quick the payment felt (UX).
2. A trace table lists each variable after every instruction. It proves correctness on a chosen input; "it looks right" misses off-by-one and uninitialised variables.
3. After push 10, TOS=10. After push 20, TOS=20 (10 below). After pop, 20 removed, TOS=10.
4. list: ordered mutable. tuple: ordered immutable. set: unordered unique. dict: keyed pairs.
5. `def area(l, w): return l * w` then `print(area(3, 4))` → 12.
6. connect, cursor, execute, commit, close.
7. Scatter: two measured variables (height vs marks) with no single time axis. Line: one quantity changing over an ordered time or sequence.
8. Sorted: 2,4,6,8,10. Mean = $30/5 = 6$. Median = 6. Range = $10-2 = 8$.
9. Unknown sender, urgent threat ("account will close today"), a link that does not match the real bank, request for OTP/password, poor Urdu/English, unexpected attachment.
10. A prototype is a model used to learn (often internal). An MVP is a real, usable product with just enough features to test the riskiest assumption with actual customers.

Section C — outline

1. Need analysis: who (students, teachers), tasks (view timetable, submit leave), constraints (mobile, slow internet). Wireframe: simple boxes for logo, fields, button, a second screen with a 5-day table. Accessibility: large tap targets, colour not the only signal, Urdu/English labels, screen-reader names. Test: five students think-aloud while logging in; record errors and time.
2. $i=1$ total=1; $i=2$ total=3; $i=3$ total=6; $i=4$ total=10; $i=5$ total=15. Loop body runs n times $\rightarrow O(n)$. Formula $n \times (n+1)/2$ is $O(1)$.
3. try: with open(path) as f: for line in f: name, m = line.strip().split(","); d[name]=int(m) except FileNotFoundError: print("missing"). Then with open(out,"w") as g: write grades. Show one sample dictionary.
4. Sorted 12,12,15,18,20. Mean $77/5=15.4$. Median 15. Mode 12. Range 8. Population variance: deviations $-3.4, -3.4, -0.4, 2.6, 4.6$; squares 11.56, 11.56, 0.16, 6.76, 21.16; sum 51.2; $/5 = 10.24$. std = 3.2. Histogram to show distribution (or bar of frequencies).
5. Problem: long canteen queues between periods. Riskiest assumption: students will pre-order 10 minutes before break. MVP: WhatsApp number + Google Form, pickup tokens, no app. Beachhead: one shift of first-year students. Metrics: % of orders picked up, time-to-collect, repeat use. Ethical: do not publish phone numbers; delete form responses after the term.

Sealed key. Open only after the mock is collected.

REPAIR LIST

Repair list. Copy every Golden scored 0 or half. Tomorrow the clinic redos only this list.

#	Golden topic missed	What the batch will rewrite from memory
1		
2		
3		
4		
5		
6		

Repair clinic · then stop

Redo the Day 29 list only. Dismiss by 6 pm. · Repair

TODAY'S 90 MINUTES

90 minutes. 90-minute repair clinic. Redo only the Day 29 list. Say the definition, draw the table, write one 5-mark answer. Dismiss by 6 pm. No new topic.

Board today: Redo the Day 29 list only. Dismiss by 6 pm.

★ **Must lock:** Missed Golden only

Phones in the box at the door.

No new chapter. No new non-Golden card. Each missed Golden: say the definition, draw the table, write one 5-mark answer on the board.

Dismiss by 6 pm. The batch walks into the hall with Golden wording in their heads — not in a book.

نیا باب نہ کھولیں۔ صرف چھوٹی گولڈن دہرائیں۔ شام چھ بجے کلاس ختم کریں۔