

STUDENT SUBMISSION DETAILS

Name:	Syeda Maimoona Fatima
Roll No / ID:	26k-3092
Class / Section: D	BSE-1C
Date of Submission:	26/09/2026

TASK # 01 — Temperature Status *(if-else)*

CODE:

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    float temperature;
```

```
    printf("Enter Temperature in Celsius ");
```

```
    scanf("%f", &temperature);
```

```
    if (temperature<15)
```

```
    {
```

```
        printf("Cold");
```

```
    }else if (temperature>30)
```

```
    {
```

```
        printf("Hot");
```

```
    }else
```

```
    {
```

```
        printf("Normal");
```

```
}
```

return 0;

}

main.c	Run ▶	Output
<pre>1 - 2 3 #include <stdio.h> 4 int main() 5 { 6 float temperature; 7 printf("Enter Temperature in Celsius "); 8 scanf("%f", &temperature); 9 if (temperature<15) 10 { 11 printf("Cold"); 12 }else if (temperature>30) 13 { 14 printf("Hot"); 15 }else 16 { 17 printf("Normal"); 18 } 19 return 0; 20 }</pre>		<pre>Enter Temperature in Celsius 7 Cold</pre>

<pre>1 - 2 3 #include <stdio.h> 4 int main() 5 { 6 float temperature; 7 printf("Enter Temperature in Celsius "); 8 scanf("%f", &temperature); 9 if (temperature<15) 10 { 11 printf("Cold"); 12 }else if (temperature>30) 13 { 14 printf("Hot"); 15 }else 16 { 17 printf("Normal"); 18 } 19 return 0; 20 }</pre>		<pre>Enter Temperature in Celsius 23.65 Normal</pre>

```

3 #include <stdio.h>
4 int main()
5 {
6     float temperature;
7     printf("Enter Temperature in Celsius ");
8     scanf("%f", &temperature);
9     if (temperature<15)
10    {
11        printf("Cold");
12    }else if (temperature>30)
13    {
14        printf("Hot");
15    }else
16    {
17        printf("Normal");
18    }
19    return 0;
20 }

```

Enter Temperature in Celsius 35
Hot

TASK # 02 — Mobile Data Package *(if-else)*

CODE:

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    int balance;
```

```
    printf("Enter Remaining balance ");
```

```
    scanf("%d", &balance);
```

```
    if (balance<500)
```

```
    {
```

```
        printf("Low Balance");
```


```
    }else if (balance>2000)
```

```
    {
```

```
        printf("Premium Balance");
```

```
    }else
```

```
{  
    printf("Sufficeint Balance");  
}  
  
return 0;  
}
```

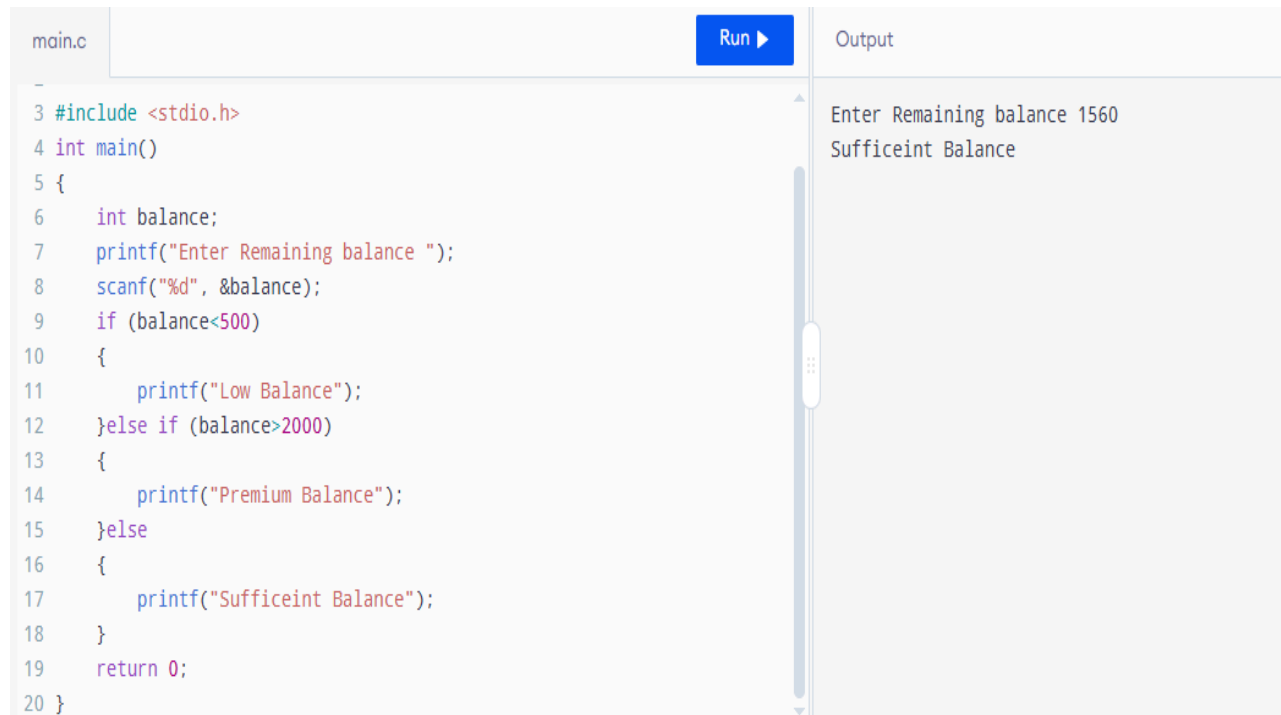

```
main.c Run ▶ Output  
-  
3 #include <stdio.h>  
4 int main()  
5 {  
6     int balance;  
7     printf("Enter Remaining balance ");  
8     scanf("%d", &balance);  
9     if (balance<500)  
10    {  
11        printf("Low Balance");  
12    }else if (balance>2000)  
13    {  
14        printf("Premium Balance");  
15    }else  
16    {  
17        printf("Sufficeint Balance");  
18    }  
19    return 0;  
20 }
```

Enter Remaining balance 1560
Sufficeint Balance

main.c	Run ▶	Output
<pre>3 #include <stdio.h> 4 int main() 5 { 6 int balance; 7 printf("Enter Remaining balance "); 8 scanf("%d", &balance); 9 if (balance<500) 10 { 11 printf("Low Balance"); 12 }else if (balance>2000) 13 { 14 printf("Premium Balance"); 15 }else 16 { 17 printf("Sufficeint Balance"); 18 } 19 return 0; 20 }</pre>		<pre>Enter Remaining balance 3000 Premium Balance</pre>

main.c	Run ▶	Output
<pre>3 #include <stdio.h> 4 int main() 5 { 6 int balance; 7 printf("Enter Remaining balance "); 8 scanf("%d", &balance); 9 if (balance<500) 10 { 11 printf("Low Balance"); 12 }else if (balance>2000) 13 { 14 printf("Premium Balance"); 15 }else 16 { 17 printf("Sufficeint Balance"); 18 } 19 return 0; 20 }</pre>		<pre>Enter Remaining balance 250 Low Balance</pre>

TASK # 03 — Hospital Appointment *(nested if-else)*

CODE:

```
#include <stdio.h>

int main()

{

    int appointment, doctorAvailable, registrationCompleted;

    printf("Do you have an appointment? (1=Yes, 0=No) ");

    scanf("%d",&appointment);

    printf("Is the Doctor available? (1=Yes, 0=No) ");

    scanf("%d",&doctorAvailable);

    printf("Is Registration completed? (1=Yes, 0=No) ");

    scanf("%d", &registrationCompleted);

    if (appointment==1)

    {

        if (doctorAvailable==1)

        {

            if (registrationCompleted==1)

            {

                printf("Can meet the doctor");

            }

            else

            {

                printf("registration incomplete");

            }

        }

    }

}
```

```

else

{

    printf("doctor not available");

}

}

else

{

    printf("appointment not made");

}

return 0;

}

```

main.c	Run ▶	Output
<pre> 3 #include <stdio.h> 4 int main() 5 { 6 int appointment, doctorAvailable, registrationCompleted; 7 printf("Do you have an appointment? (1=Yes, 0=No) "); 8 scanf("%d",&appointment); 9 printf("Is the Doctor available? (1=Yes, 0=No) "); 10 scanf("%d",&doctorAvailable); 11 printf("Is Registration completed? (1=Yes, 0=No) "); 12 scanf("%d", &registrationCompleted); 13 if (appointment==1) 14 { 15 if (doctorAvailable==1) 16 { 17 if (registrationCompleted==1) 18 { 19 printf("Can meet the doctor"); 20 } 21 else 22 { 23 printf("registration incomplete"); 24 } 25 } 26 else 27 </pre>		<pre> Do you have an appointment? (1=Yes, 0=No) 1 Is the Doctor available? (1=Yes, 0=No) 0 Is Registration completed? (1=Yes, 0=No) 1 doctor not available </pre>

main.c	Run ▶	Output
<pre>12 return 0; // registration completed; 13 if (appointment==1) 14 { 15 if (doctorAvailable==1) 16 { 17 if (registrationCompleted==1) 18 { 19 printf("Can meet the doctor"); 20 } 21 else 22 { 23 printf("registration incomplete"); 24 } 25 } 26 else 27 { 28 printf("doctor not available"); 29 } 30 } 31 else 32 { 33 printf("appointment not made"); 34 } 35 return 0; 36 }</pre>		Do you have an appointment? (1=Yes, 0=No) 0 Is the Doctor available? (1=Yes, 0=No) 1 Is Registration completed? (1=Yes, 0=No) 1 appointment not made

main.c	Run ▶	Output
<pre>12 return 0; // registration completed; 13 if (appointment==1) 14 { 15 if (doctorAvailable==1) 16 { 17 if (registrationCompleted==1) 18 { 19 printf("Can meet the doctor"); 20 } 21 else 22 { 23 printf("registration incomplete"); 24 } 25 } 26 else 27 { 28 printf("doctor not available"); 29 } 30 } 31 else 32 { 33 printf("appointment not made"); 34 } 35 return 0; 36 }</pre>		Do you have an appointment? (1=Yes, 0=No) 1 Is the Doctor available? (1=Yes, 0=No) 1 Is Registration completed? (1=Yes, 0=No) 0 registration incomplete

main.c	Run ▶	Output
<pre>12 scanf("%d", &registrationCompleted); 13 if (appointment==1) 14 { 15 if (doctorAvailable==1) 16 { 17 if (registrationCompleted==1) 18 { 19 printf("Can meet the doctor"); 20 } 21 else 22 { 23 printf("registration incomplete"); 24 } 25 } 26 else 27 { 28 printf("doctor not available"); 29 } 30 } 31 else 32 { 33 printf("appointment not made"); 34 } 35 return 0; 36 }</pre>		<pre>Do you have an appointment? (1=Yes, 0=No) 1 Is the Doctor available? (1=Yes, 0=No) 1 Is Registration completed? (1=Yes, 0=No) 1 Can meet the doctor</pre>

TASK # 04 — Online Food Order (*nested if-else*)

CODE:

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    int restaurantOpen, itemAvailable, balanceSufficient;
```

```
    printf("Is restaurant Open? (1=Yes, 0=No) ");
```

```
    scanf("%d",&restaurantOpen);
```

```
    printf("Is the item available? (1=Yes, 0=No) ");
```

```
    scanf("%d",&itemAvailable);
```

```
    printf("Is Balance Sufficient? (1=Yes, 0=No) ");
```

```
    scanf("%d", &balanceSufficient);
```

```
if (restaurantOpen==1)
{
    if (itemAvailable==1)
    {
        if (balanceSufficient==1)
        {
            printf("Can Order");
        }
        else
        {
            printf("Insufficient Balance");
        }
    }
    else
    {
        printf("Item not available");
    }
}
else
{
    printf("Restaurant Not open");
}

return 0;
```

}

main.c	Run ▶	Output
<pre>3 #include <stdio.h> 4 int main() 5 { 6 int restaurantOpen, itemAvailable, balanceSufficient; 7 printf("Is restaurant Open? (1=Yes, 0=No) "); 8 scanf("%d",&restaurantOpen); 9 printf("Is the item available? (1=Yes, 0=No) "); 10 scanf("%d",&itemAvailable); 11 printf("Is Balance Sufficient? (1=Yes, 0=No) "); 12 scanf("%d", &balanceSufficient); 13 if (restaurantOpen==1) 14 { 15 if (itemAvailable==1) 16 { 17 if (balanceSufficient==1) 18 { 19 printf("Can Order"); 20 } 21 else 22 { 23 printf("Insufficient Balance"); 24 } 25 } 26 else 27 {</pre>		<pre>Is restaurant Open? (1=Yes, 0=No) 1 Is the item available? (1=Yes, 0=No) 1 Is Balance Sufficient? (1=Yes, 0=No) 1 Can Order</pre>

main.c	Run ▶	Output
<pre>12 scanf("%d", &balanceSufficient); 13 if (restaurantOpen==1) 14 { 15 if (itemAvailable==1) 16 { 17 if (balanceSufficient==1) 18 { 19 printf("Can Order"); 20 } 21 else 22 { 23 printf("Insufficient Balance"); 24 } 25 } 26 else 27 { 28 printf("Item not available"); 29 } 30 } 31 else 32 { 33 printf("Restaurant Not open"); 34 } 35 return 0; 36 }</pre>		<pre>Is restaurant Open? (1=Yes, 0=No) 0 Is the item available? (1=Yes, 0=No) 1 Is Balance Sufficient? (1=Yes, 0=No) 1 Restaurant Not open</pre>

main.c	Run ▶	Output
<pre>1 // Online C compiler (editor) 2 3 #include <stdio.h> 4 int main() 5 { 6 int restaurantOpen, itemAvailable, balanceSufficient; 7 printf("Is restaurant Open? (1=Yes, 0=No) "); 8 scanf("%d",&restaurantOpen); 9 printf("Is the item available? (1=Yes, 0=No) "); 10 scanf("%d",&itemAvailable); 11 printf("Is Balance Sufficient? (1=Yes, 0=No) "); 12 scanf("%d", &balanceSufficient); 13 if (restaurantOpen==1) 14 { 15 if (itemAvailable==1) 16 { 17 if (balanceSufficient==1) 18 { 19 printf("Can Order"); 20 } 21 else 22 { 23 printf("Insufficient Balance"); 24 } 25 } 26 } 27 }</pre>		<pre>Is restaurant Open? (1=Yes, 0=No) 1 Is the item available? (1=Yes, 0=No) 0 Is Balance Sufficient? (1=Yes, 0=No) 1 Item not available</pre>

main.c	Run ▶	Output
<pre>12 scanf("%d", &balanceSufficient); 13 if (restaurantOpen==1) 14 { 15 if (itemAvailable==1) 16 { 17 if (balanceSufficient==1) 18 { 19 printf("Can Order"); 20 } 21 else 22 { 23 printf("Insufficient Balance"); 24 } 25 } 26 else 27 { 28 printf("Item not available"); 29 } 30 } 31 else 32 { 33 printf("Restaurant Not open"); 34 } 35 return 0; 36 }</pre>		<pre>Is restaurant Open? (1=Yes, 0=No) 1 Is the item available? (1=Yes, 0=No) 1 Is Balance Sufficient? (1=Yes, 0=No) 0 Insufficient Balance</pre>