

Boundary effect RSA (updata 2023/11/1)

This updata mainly focus on the influence of boundary conditions on the following two aspects

1. obj2seq
2. hippocampus wavlet

Parameter Setting


```
subject = 'Group';
plot_window=[1 25 1920 1080];
home_dir = '/bigvault/Projects/seeg_pointing';
group_dir = '/bigvault/Projects/seeg_pointing/results/memory_group/';

index = [7,13,25,31,43,49];
bd_id = [index,index+18*6];
non_bd_id = [index+18*3,index+18*9];
```


obj2sequence: boundary vs boundary

```
% load data
load(([group_dir, 'rsa_obj2seq_bd.mat']))
% condition
obj2seq_bd_all = squeeze(mean(cell2matrix(cellmerge(rsa_group.bd,2)),3));
obj2seq_non_bd_all = squeeze(mean(cell2matrix(cellmerge(rsa_group.non_bd,2)),3));
% position
obj2seq_bd = squeeze(mean(cell2matrix(cellmerge(rsa_group.bd(:,[7,13]),2)),3));
obj2seq_non_bd = squeeze(mean(cell2matrix(cellmerge(rsa_group.non_bd(:,[7,13]),2)),3));
obj2seq_bd_pre = squeeze(mean(cell2matrix(cellmerge(rsa_group.bd(:,[6,12]),2)),3));
obj2seq_non_bd_pre = squeeze(mean(cell2matrix(cellmerge(rsa_group.non_bd(:,[6,12]),2)),3));


% plot obj2seq RSA in Boundary-non Boundary condition
plt_rsa_sd(obj2seq_bd_all,obj2seq_non_bd_all,'obj2seq')
subplot(2,2,1);title([subject, ': Boundary RSA'])
subplot(2,2,2);title([subject, ': non Boundary RSA'])
subplot(2,2,3);title([subject, ': Boundary - non Boundary RSA'])
sgtitle('obj2seq RSA (all 18)')
```

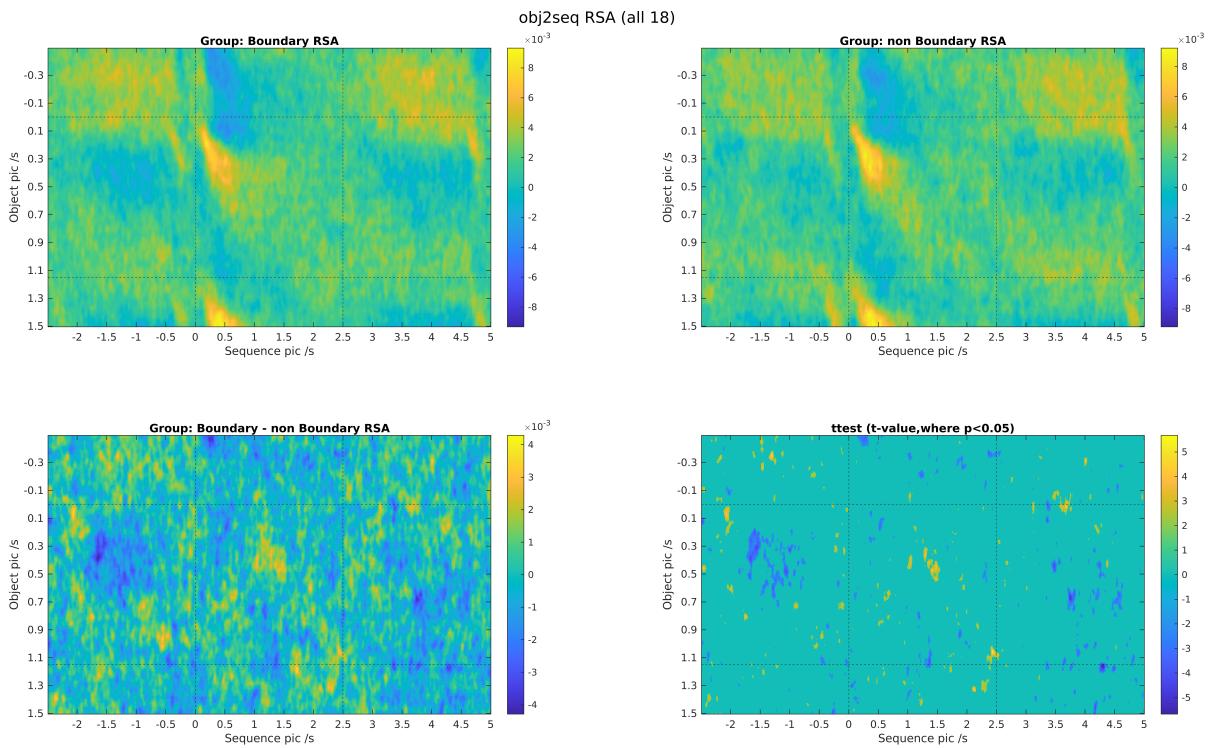

```
% plot obj2seq RSA in Boundary-non Boundary position
plt_rsa_sd(obj2seq_bd,obj2seq_non_bd,'obj2seq')
subplot(2,2,1);title([subject,: Boundary RSA'])
subplot(2,2,2);title([subject,: non Boundary RSA'])
subplot(2,2,3);title([subject,: Boundary - non Boundary RSA'])
sgtitle('obj2seq RSA (position)')
```

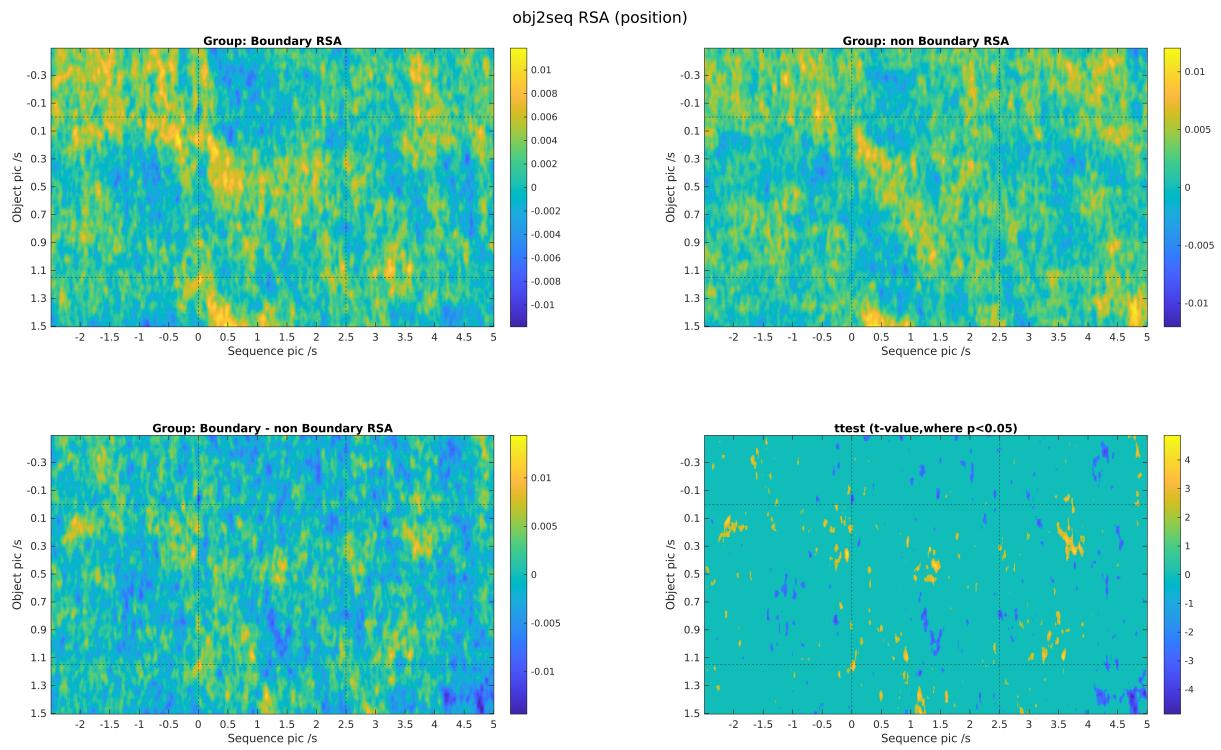


```
% calculate ttest and mask(ttest) position
[h_ttest,p_ttest,t_ttest]=ttest_2d(obj2seq_bd,obj2seq_non_bd);
figure;plt_imagesc(h_ttest,'obj2seq')
```

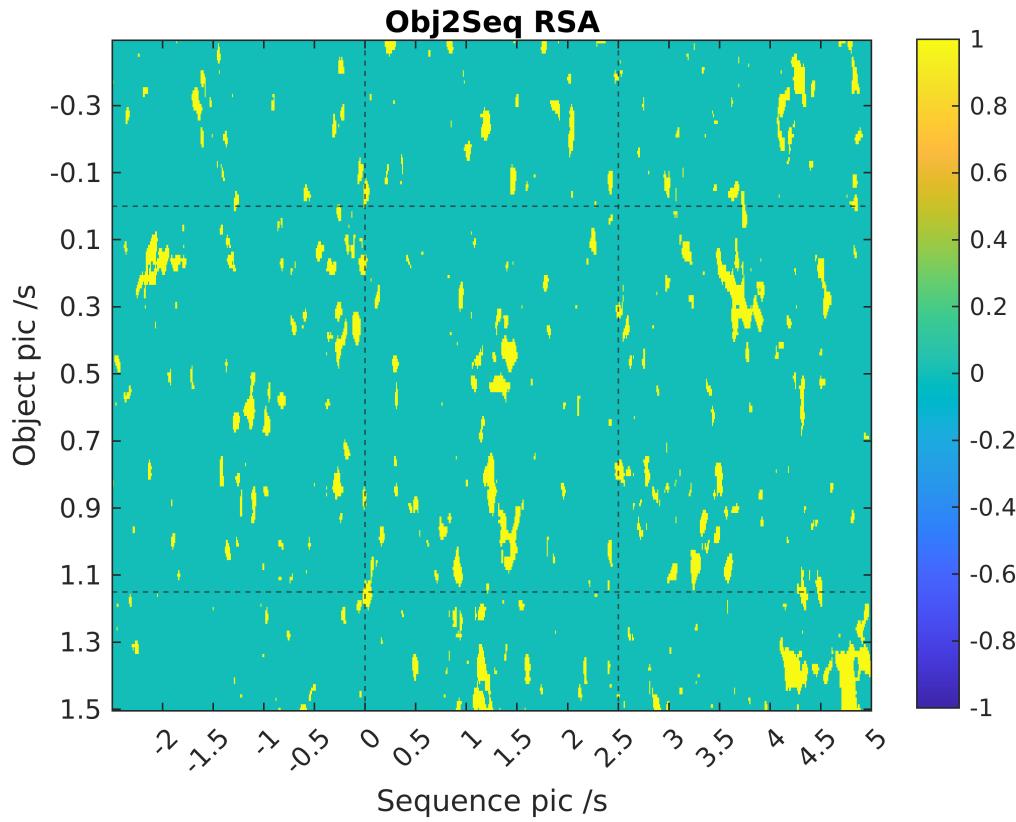

```
ans = 1
```

```
CC = bwconncomp(h_ttest);
cc_size=[];
for i=1:length(CC.PixelIdxList)
    cc_size(i)=length(CC.PixelIdxList{1, i});
end
[cc_sort,cc_idx] = sort(cc_size,'descend');
mask = NaN(size(h_ttest));
mask(CC.PixelIdxList{1, cc_idx(2)}) = 1;
figure;imagesc(mask)
```

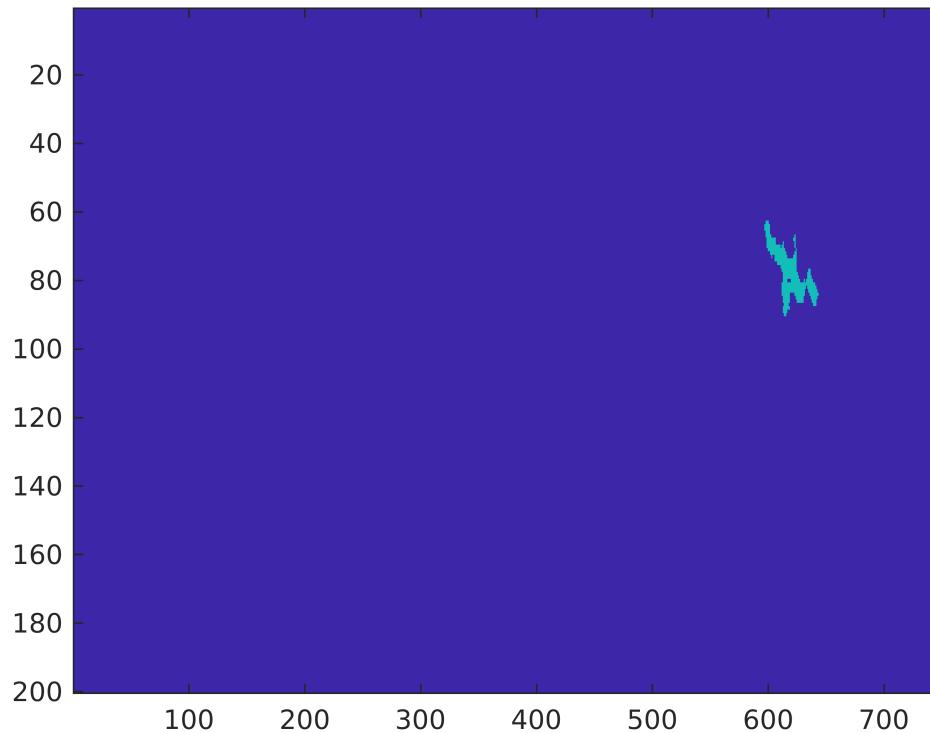


```
mask(isnan(mask)) = 0;
mask_ttest = mask;
```


```
% permute test position
tic
[clusters_perm, p_perm, t_sums_perm, permutation_distribution] = permute test(obj2seq_bd,
toc
```

Elapsed time is 476.234940 seconds.

```
% permute test p=0.05
mask = NaN(size(obj2seq_bd(:,:,1)));
mask(clusters_perm{1, 1}) = 1;
figure; imagesc(mask)
title(['Obj2Seq Boundary and non Boundary Cluster-based Permutation (largest cluster,
set(gcf, 'Position', [1 25 1920 1080]);
```

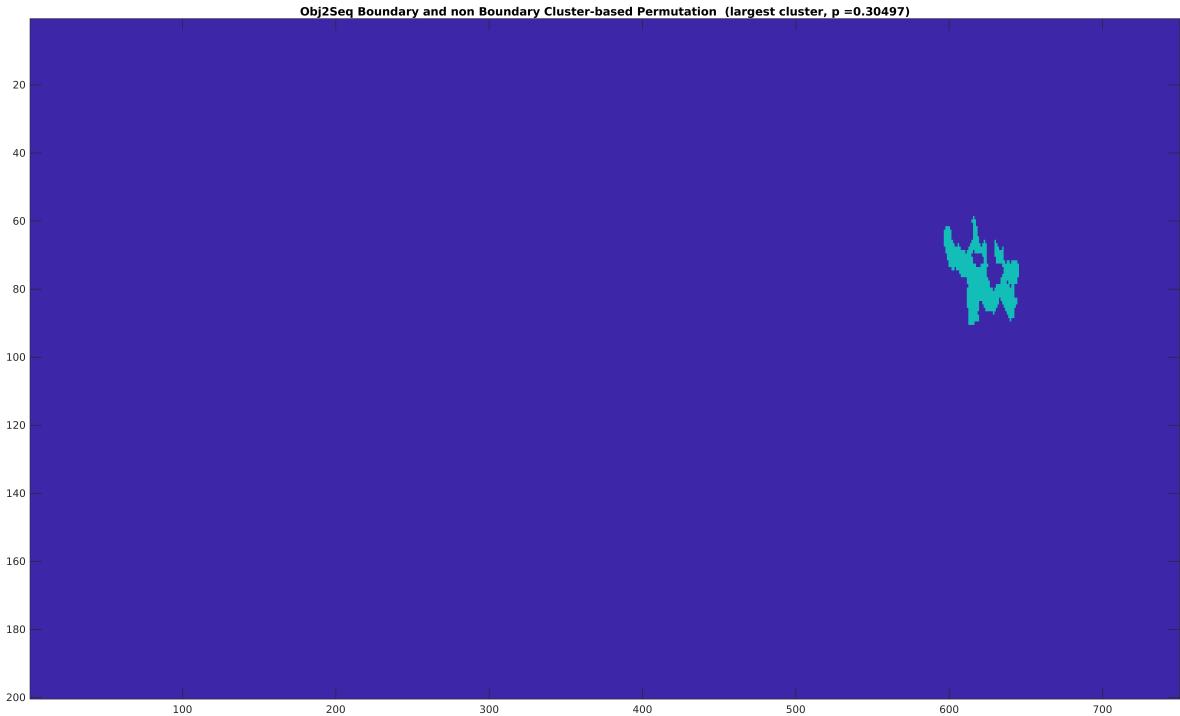


```
% plot mean value in each mask condition ttest
obj2seq_bd_mask = obj2seq_bd.*mask_ttest;
obj2seq_non_bd_mask = obj2seq_non_bd.*mask_ttest;
mask_bd = squeeze(mean(obj2seq_bd_mask, [1 2], 'omitnan'));
mask_non_bd = squeeze(mean(obj2seq_non_bd_mask, [1 2], 'omitnan'));
figure
clim = [-0.008,0.008];
subplot(2,2,1)
imagesc(mean(obj2seq_bd_mask(60:100,590:650,:),3))
title('Boundary in mask')
caxis(clim)
colorbar()
subplot(2,2,2)
imagesc(mean(obj2seq_non_bd_mask (60:100,590:650,:),3))
title('non Boundary in mask')
caxis(clim)
colorbar()
subplot(2,2,3)
plt_box_line([mask_bd,mask_non_bd],{'boundary','non boundary'})
title('Mask')
subplot(2,2,4)
plt_imagesc(mask,'obj2seq')
title('Mask')
sgtitle('obj2seq mask')
```

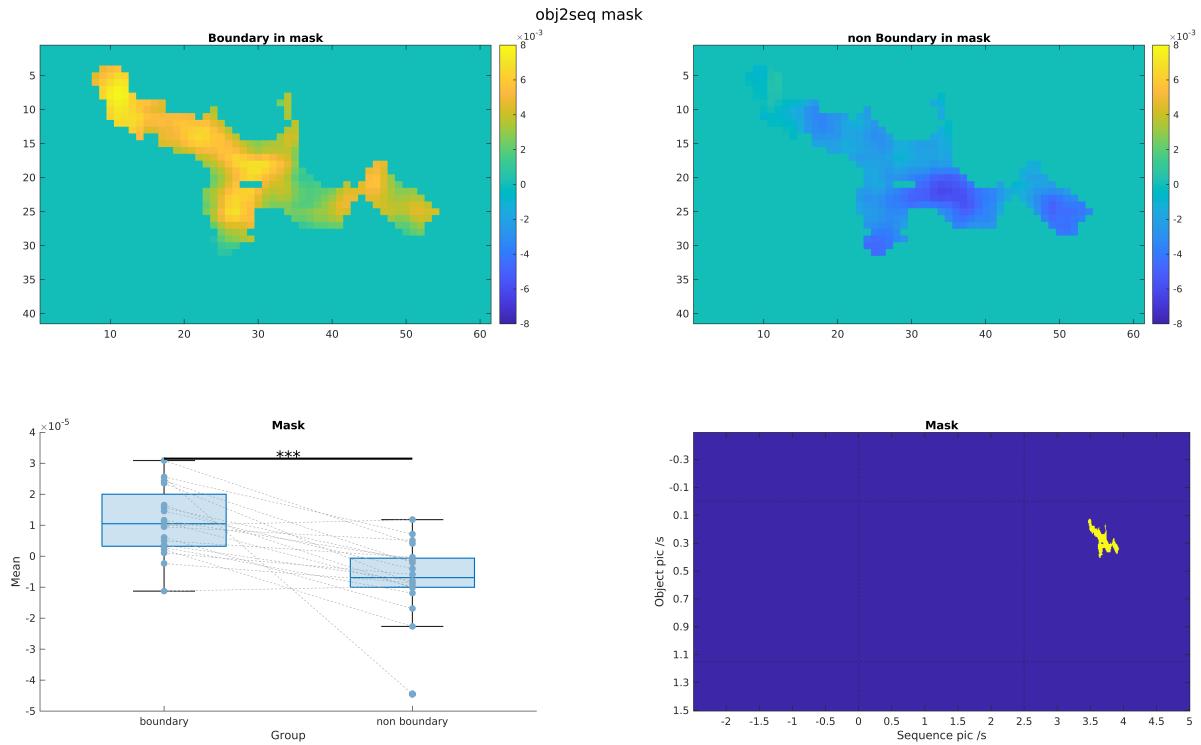


```
% anova position(2,[boundary, non_boundary])*position(2,[pre,bd])
obj2seq = cat(3, obj2seq_bd,obj2seq_bd_pre,obj2seq_non_bd,obj2seq_non_bd_pre);
condition = reshape(repmat([1,1,2,2], 20, 1),[],1);
position = reshape(repmat([1,2,1,2], 20, 1),[],1);
p2=[];
for i = 1:size(obj2seq,1)
    for j=1:size(obj2seq,2)
        p2(i,j,:)= anovan(squeeze(obj2seq(i,j,:))),{condition position}, 'model', 'interaction'
    end
end
```


```
% mask combain ttest and anova
p=p2;
a = p; a(a<0.05)=-1; a(a>=0.05)=0; a=abs(a);
anova_condition = a(:,:,1);
CC = bwconncomp(anova_condition);
BW_ttest = bwperim(mask_ttest);
cc_size=[];
for i=1:length(CC.PixelIdxList)
    cc_size(i)=length(CC.PixelIdxList{1, i});
end
[cc_sort,cc_idx] = sort(cc_size,'descend');
mask = zeros(size(anova_condition));
mask(CC.PixelIdxList{1, cc_idx(4)}) = 1;
figure;imagesc(max(mask,double(BW_ttest)*2))
title(' ttest and anovan in same mask' )
```

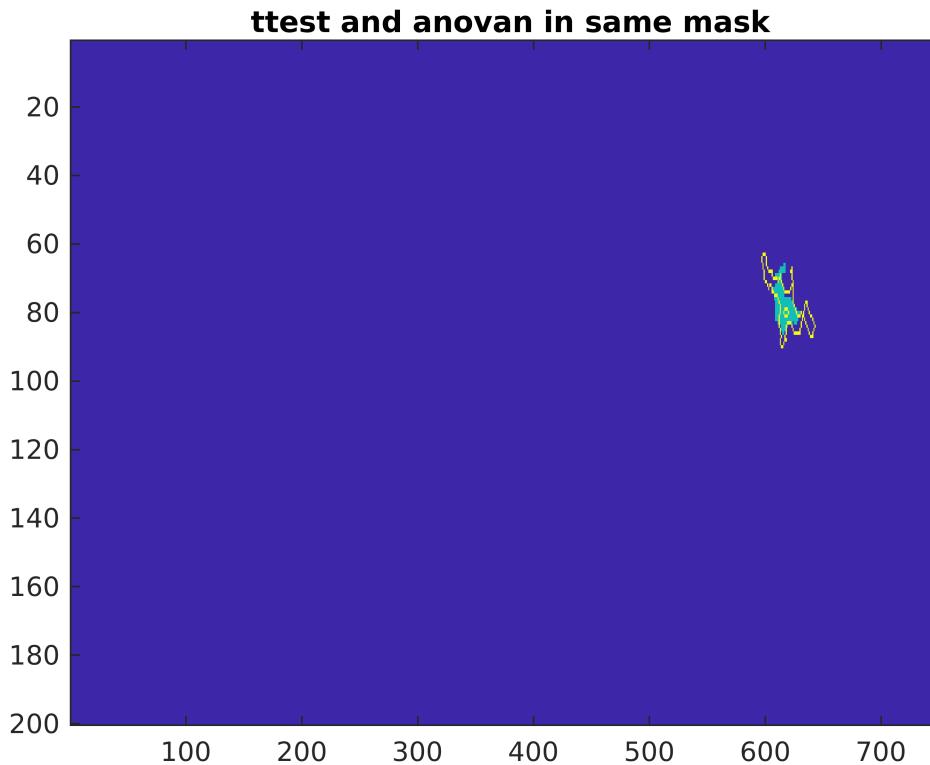

```
% plot anova result condition
p=p2;
a = p; a(a<0.05)=-1; a(a>=0.05)=0; a=abs(a);
BW_ttest = bwperim(mask_ttest);
anovan_name = {'condition','position','condition*position'};
figure
for i= 1:4
    subplot(2,2,i)
    if i<4
        plt_imagemsc(max(a(:,:,i)),double(BW_ttest)*2,'obj2seq');
        title(['anova: ',anovan_name{i}])
    else
        plt_imagemsc(max(mask,double(BW_ttest)*2), 'obj2seq');
        title('Mask')
    end
end
sgtitle('anova position(2)*position(2)')
set(gcf, 'Position', [1 25 1920 1080]);
```

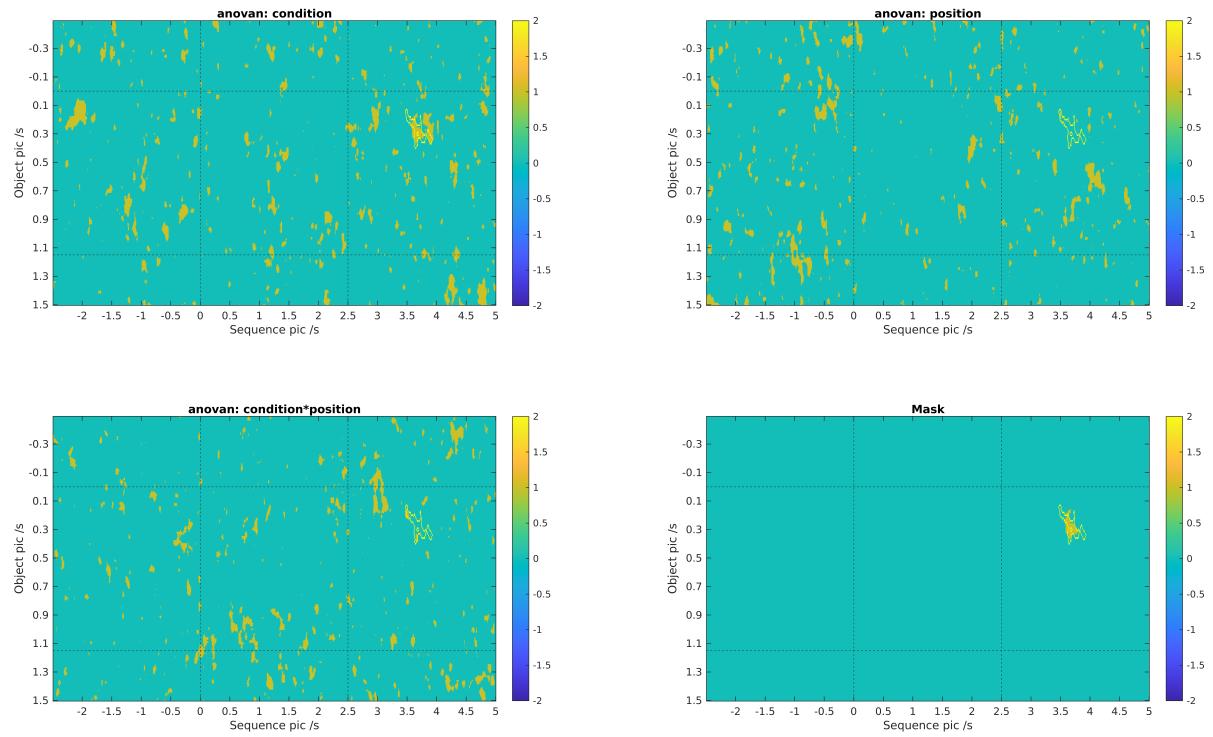

```
% plot anova result condition(anova 2*2, mask ttest)
data = [ ];
data(1,1,:) = squeeze(mean(mean(obj2seq_bd.*mask_ttest,1),2));
data(1,2,:) = squeeze(mean(mean(obj2seq_bd_pre.*mask_ttest,1),2));
data(2,1,:) = squeeze(mean(mean(obj2seq_non_bd.*mask_ttest,1),2));
data(2,2,:) = squeeze(mean(mean(obj2seq_non_bd_pre.*mask_ttest,1),2));
figure
plt_bar_group(data,{'Boundary','non Boundary'}) % no ttest for each bins
title('mean in mask(ttest) position(2)*position(2)')
```

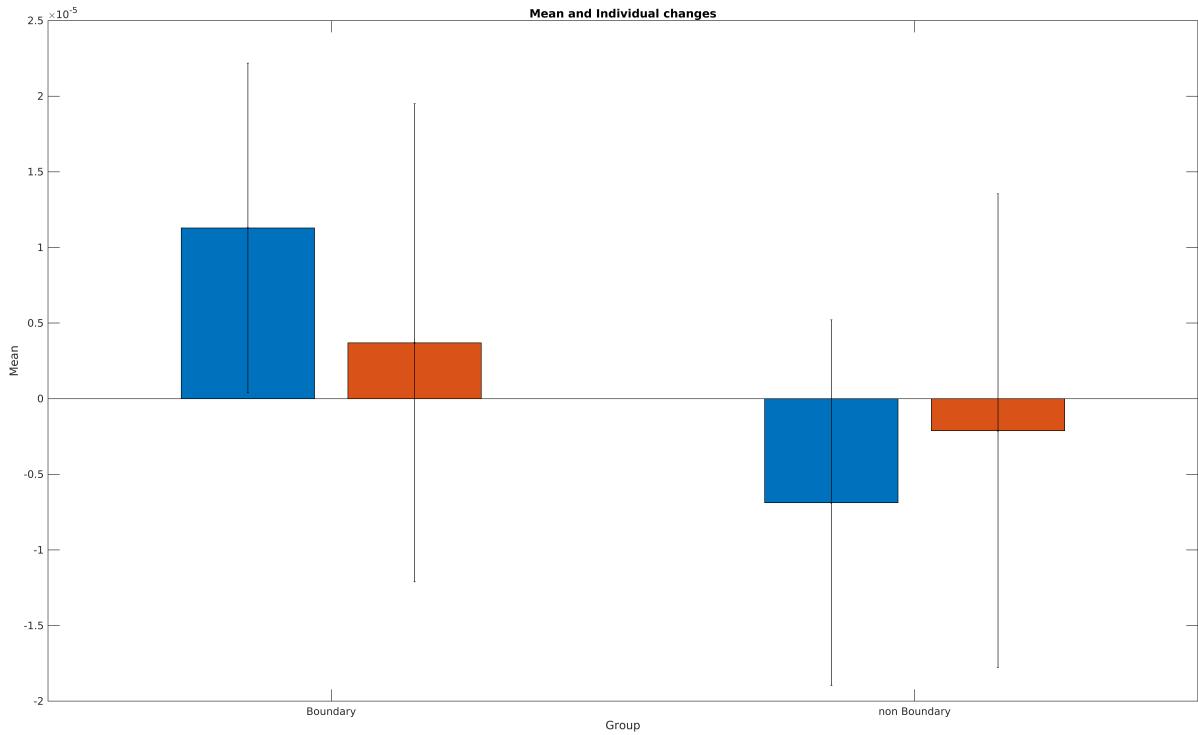

```
% anova    position(2,[boundary, non_boundary])*position(18,[1:18])
obj2seq=[];
for pici =1:18
obj2seq = cat(3, obj2seq,cell2matrix(rsa_group.bd(:,pici)));
end
for pici =1:18
obj2seq = cat(3, obj2seq,cell2matrix(rsa_group.non_bd(:,pici)));
end
condition = reshape(repmat([1,2], 20*18, 1),[],1);
position = reshape(repmat([1:18,1:18], 20, 1),[],1);


p18=[];
for i = 1:size(obj2seq,1)
    for j=1:size(obj2seq,2)
        p18(i,j,:)= anovan(squeeze(obj2seq(i,j,:)),{condition position}, 'model', 'inter');
    end
end
```

```
p=p18;
a = p; a(a<0.05)=-1; a(a>=0.05)=0; a=abs(a);
BW_ttest = bwperim(mask_ttest);
anovan_name = {'condition','position','condition*position'};
figure
for i= 1:4
    subplot(2,2,i)
    if i<4
```


```

    plt_imagesc(max(a(:,:,i),double(BW_ttest)*2), 'obj2seq');
    title(['anova: ', anovan_name{i}])
else
    plt_imagesc(max(mask,double(BW_ttest)*2), 'obj2seq');
    title('Mask')
end
end
sgtitle('anova position(2)*position(18)')
set(gcf, 'Position', [1 25 1920 1080]);

```

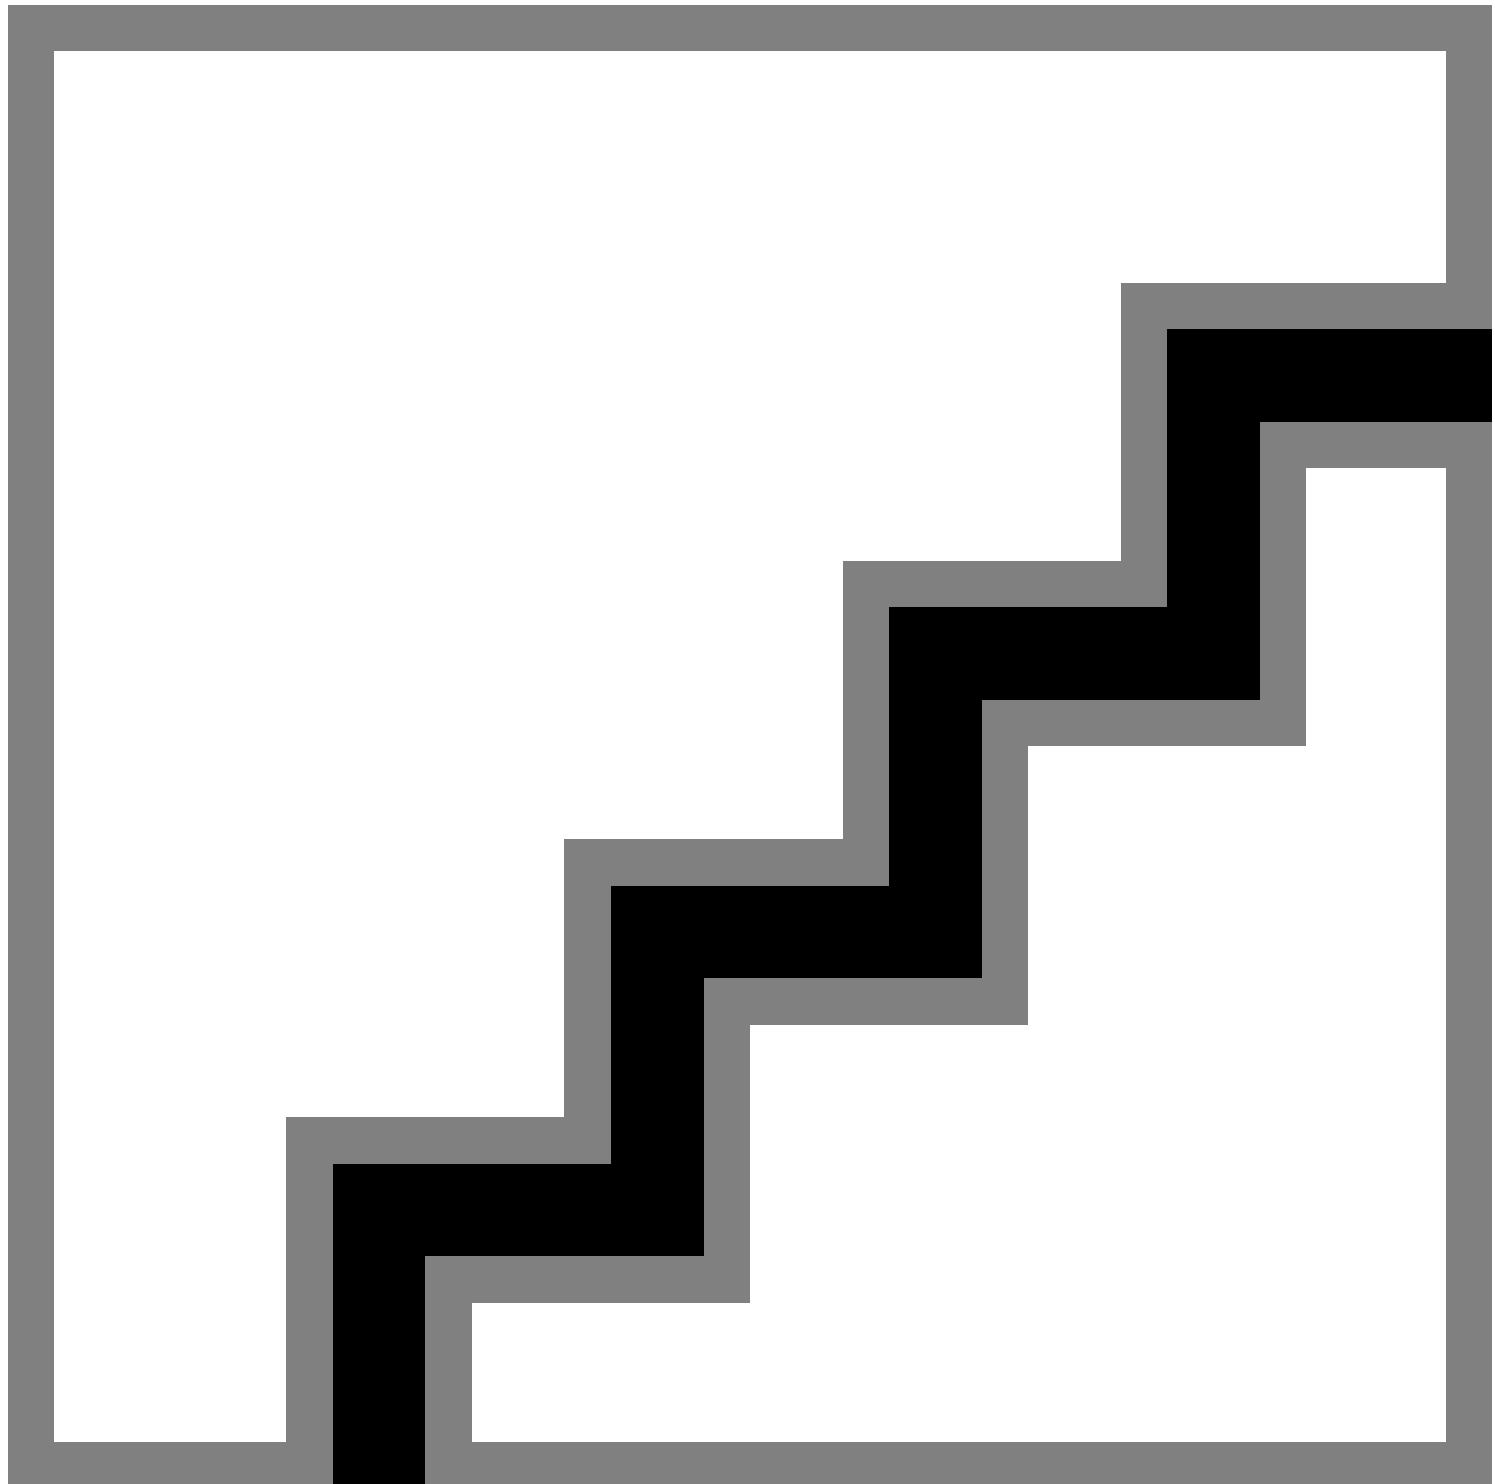

```
% plot anova result condition(anova 2*18, mask ttest)
data = [];
for pici=1:18
    data(1,pici,:) = squeeze(mean(mean(cell2matrix(rsa_group.bd(:,pici)).*mask_ttest,1)));
    data(2,pici,:) = squeeze(mean(mean(cell2matrix(rsa_group.non_bd(:,pici)).*mask_ttest,1)));
end
figure
plt_bar_group(data,{ 'Boundary','non Boundary'}) % no ttest for each bins
title('meann in mask(ttest) position(2)*position(18)')
```

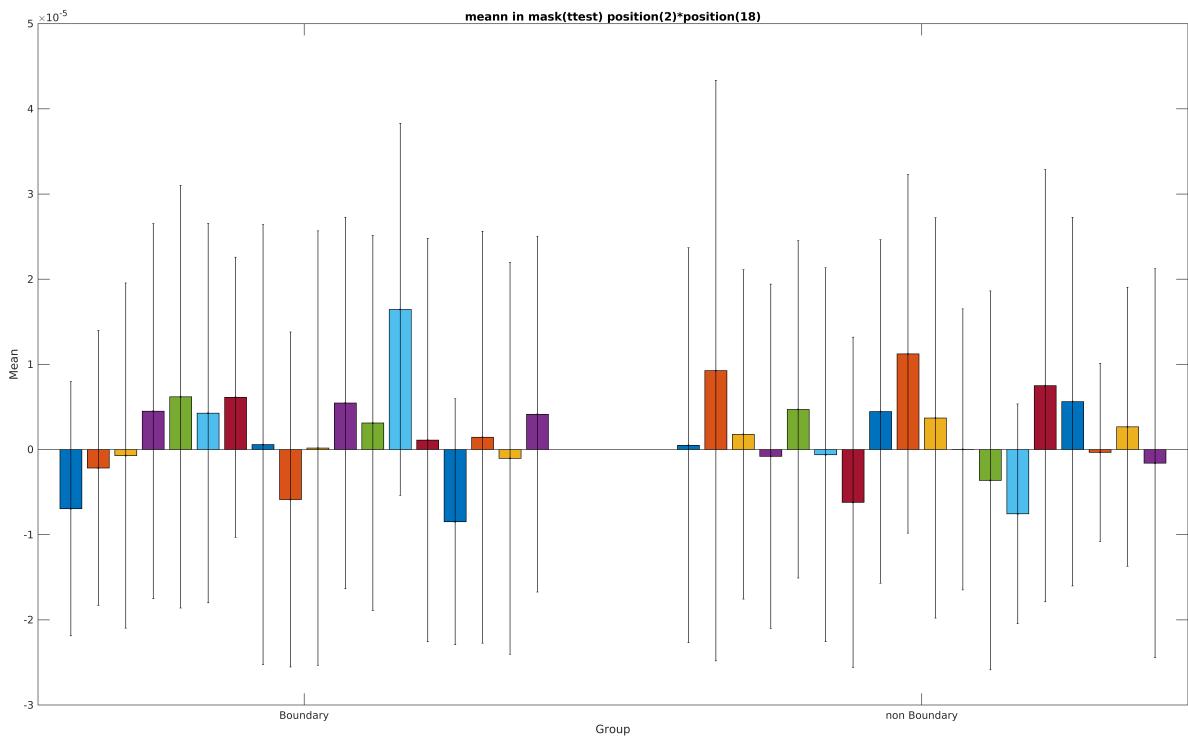


```
% anova position(2,[boundary, non_boundary])*position(6,[1:6])
obj2seq=[];
for pici =1:6
obj2seq = cat(3, obj2seq,cell2matrix(rsa_group.bd(:,[pici,pici+6,pici+12])));
end
for pici =1:6
obj2seq = cat(3, obj2seq,cell2matrix(rsa_group.non_bd(:,[pici,pici+6,pici+12])));
end
condition = reshape(repmat([1,2], 20*6, 1),[],1);
position = reshape(repmat([1:6,1:6], 20, 1),[],1);

p6=[];
for i = 1:size(obj2seq,1)
    for j=1:size(obj2seq,2)
        p6(i,j,:)= anovan(squeeze(obj2seq(i,j,:)),{condition position}, 'model', 'interaction');
    end
end
```

```
end
```

```
p=p6;
a = p; a(a<0.05)=-1; a(a>=0.05)=0; a=abs(a);
BW_ttest = bwperim(mask_ttest);
anovan_name = {'condition','position','condition*position'};
figure
for i= 1:4
    subplot(2,2,i)
    if i<4
        plt_imagesc(max(a(:,:,i)),double(BW_ttest)*2), 'obj2seq');
        title(['anovan: ',anovan_name{i}])
    else
        plt_imagesc(max(mask,double(BW_ttest)*2), 'obj2seq');
        title('Mask')
    end
end
sgtitle('anova position(2)*position(6)')
set(gcf, 'Position', [1 25 1920 1080]);
```

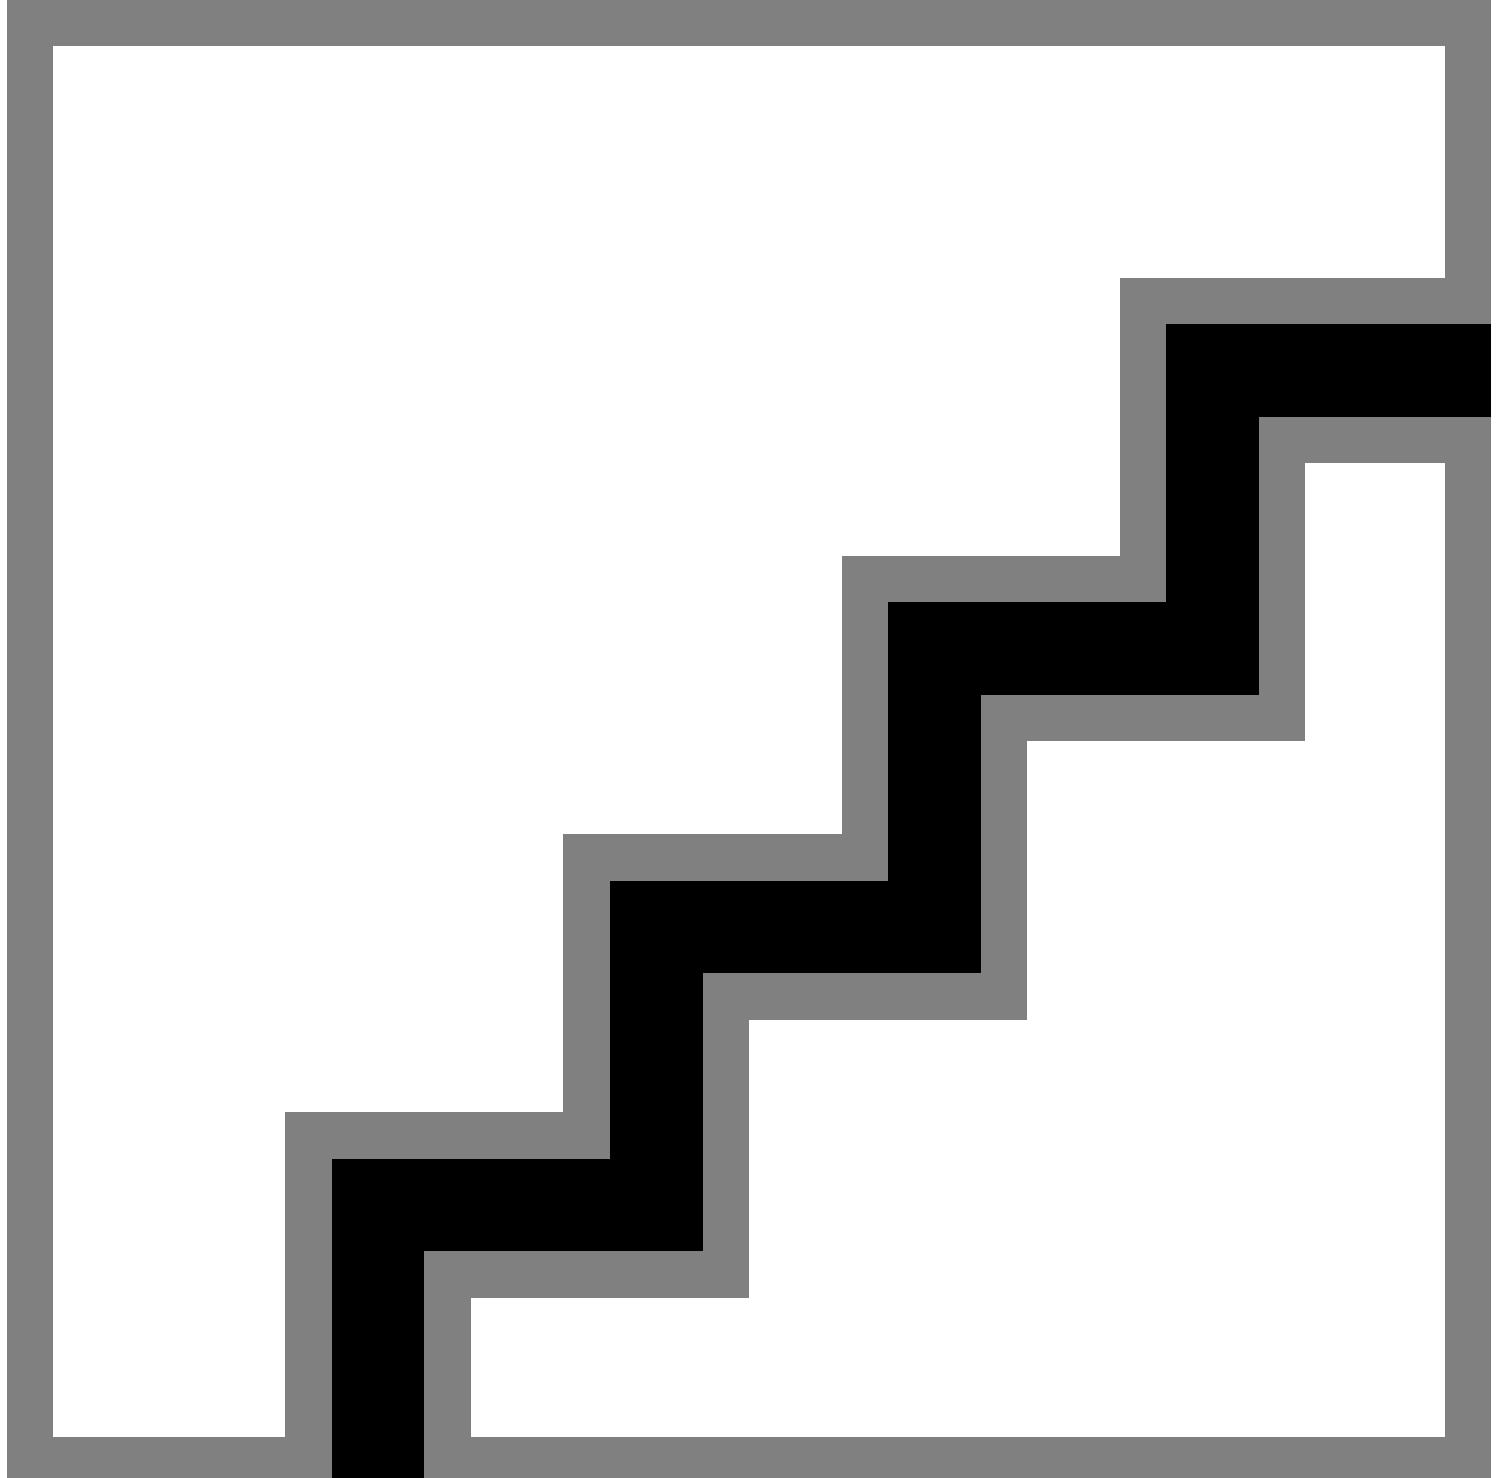

```
% plot anova result condition(anova 2*6, mask ttest)
data = [];
for pici=1:6
    data(1,pici,:) = squeeze(mean(mean(cell2matrix(rsa_group.bd(:,[pici,pici+6,pici+12])))));
    data(2,pici,:) = squeeze(mean(mean(cell2matrix(rsa_group.non_bd(:,[pici,pici+6,pici+12])))));
end
figure
plt_bar_group(data,{'Boundary','non Boundary'}) % no ttest for each bins
```

```
title('meann in mask(ttest) position(2)*position(6)')
```

