

D2.1a - VISHNU User Management System Package Design



COLLABORATORS

	<i>TITLE :</i> D2.1a - VISHNU User Management System Package Design		
<i>ACTION</i>	<i>NAME</i>	<i>DATE</i>	<i>SIGNATURE</i>
WRITTEN BY	Benjamin Isnard, Daouda Traoré, Eugène Pamba Capo-Chichi, Kevin Coulomb, and Ibrahima Cissé	October 7, 2013	

REVISION HISTORY

NUMBER	DATE	DESCRIPTION	NAME
1	25/01/2011	Deliverable version	SysFera
2	24/02/2011	Modified addUser and addMachine signature.	SysFera
3	16/12/2011	Replace all Oracle occurrences by MySQL	SysFera
4	27/01/2012	Added LDAP support. Modified UserList (added structure ListUsersOptions) Added Services: SystemAuthenticationCreate, SystemAuthenticationUpdate, SystemAuthenticationDelete, SystemAuthenticationList, AccountAuthCreate, AccountAuthUpdate, AccountAuthDelete, AccountAuthList.	SysFera
5	21/08/2012	Added Version object on Services: sessionConnect, sessionReconnect, userPasswordChange.	SysFera

Contents

1	Document presentation	1
1.1	Document objectives	1
1.2	Document structure	1
1.3	References	1
1.4	Acronyms	1
1.5	Glossary	2
2	System Architecture	3
2.1	Overview of the UMS software infrastructure	3
2.2	Deployment aspects of UMS	3
2.3	Architecture diagrams	4
2.3.1	UMS Deployment Diagram	4
2.3.2	UMS client-side components	4
2.3.3	UMS server-side components	5
2.3.4	SysFera-DS Bus Details	6
3	Internal API specification	7
3.1	Generic definition formats presentation	7
3.1.1	Service definition format	7
3.2	Definition of the services of the package	8
3.2.1	Service commandList	8
3.2.2	Service sessionConnect	8
3.2.3	Service sessionReconnect	9
3.2.4	Service sessionClose	10
3.2.5	Service sessionList	11
3.2.6	Service userCreate	12
3.2.7	Service userUpdate	12
3.2.8	Service userDelete	13
3.2.9	Service userList	14
3.2.10	Service userPasswordChange	14
3.2.11	Service userPasswordReset	15

3.2.12	Service localAccountCreate	16
3.2.13	Service localAccountUpdate	17
3.2.14	Service localAccountDelete	17
3.2.15	Service localAccountList	18
3.2.16	Service configurationSave	19
3.2.17	Service configurationRestore	19
3.2.18	Service machineCreate	20
3.2.19	Service machineUpdate	21
3.2.20	Service machineDelete	22
3.2.21	Service machineList	22
3.2.22	Service optionValueList	23
3.2.23	Service optionValueSet	24
3.2.24	Service optionValueSetDefault	24
3.2.25	Service authSystemCreate	25
3.2.26	Service authSystemUpdate	26
3.2.27	Service authSystemDelete	27
3.2.28	Service authSystemList	27
3.2.29	Service authAccountCreate	28
3.2.30	Service authAccountUpdate	29
3.2.31	Service authAccountDelete	29
3.2.32	Service authAccountList	30
3.2.33	Service int_defineUserIdentifier	31
3.2.34	Service int_defineMachineIdentifier	32
3.2.35	Service int_defineJobIdentifier	32
3.2.36	Service int_defineTransferIdentifier	33
3.2.37	Service int_defineAuthIdentifier	33

4	Internal class and data structures	34
4.1	Introduction	34
4.2	UMS client modelization	34
4.2.1	Class diagrams	34
4.2.1.1	UMS Client Class Diagram	34
4.3	UMS server modelization	36
4.3.1	Class diagrams	36
4.3.1.1	UMS Server Class Diagram	36
4.4	UMS data modelization	38
4.4.1	Class diagrams	38
4.4.1.1	UMS Data Class Diagram	38
4.5	Vishnu core functions modelization	39

4.5.1	Introduction	39
4.5.2	Tables relationships	39
4.5.3	Relational model	42
4.5.4	The modelization	43
4.5.4.1	The database classes	43
4.5.4.2	The exception classes	43
4.5.5	Class diagrams	43
4.5.5.1	DB class diagram	43
4.5.5.2	exception	44

List of Figures

2.1	UMS Deployment Diagram	4
2.2	UMS client-side components	5
2.3	UMS server-side components	5
2.4	SysFera-DS Bus Details	6
4.1	UMS Client Class Diagram	35
4.2	UMS Server Class Diagram	37
4.3	UMS Data Class Diagram	38
4.4	Relational model	42
4.5	DB class diagram	43
4.6	exception	44

Chapter 1

Document presentation

1.1 Document objectives

This document presents the detailed internal design of the Users Management System (UMS) package. The purpose of this package is to handle all aspects of user management and session management within the VISHNU system. The functional and non-functional requirements for this package are those described in the referenced specification documents. The current document is part of the design phase of the software and therefore its main goal is to define the main components of the system architecture and their relationships.

1.2 Document structure

- Chapter 1 contains a brief overview of the document content.
- Chapter 2 contains a high-level overview of the system architecture.
- Chapter 3 describes the internal API used for remote procedure calls through SysFera-DS.
- Chapter 4 describes the internal class and data structures

1.3 References

- [D1.1a]: VISHNU General specifications
- [D1.1b]: VISHNU Spécifications techniques des besoins
- [D1.1c]: VISHNU API Detailed specifications

1.4 Acronyms

- **API**: Application programming interface
 - **CLI**: Command line interface
 - **DB**: DataBase
 - **n/a**: Not Applicable (used for serializable capability in function descriptions)
 - **SeD**: A Server Daemon is a SysFera-DS agent that provides services through the SysFera-DS API.
 - **UMS**: Users management system
 - **WS**: Web services
-

1.5 Glossary

- **Components:** the software components represents a library or an executable program that provides a given interface to other components or to end-users.
- **Serialized type:** this is a class of data (C++ Class) which instances can be serialized in a XML string before being sent over an API (to or from the API). The data is deserialized on the other side of the channel in order to re-build the same instance of the class.
- **SysFera-DS:** open-source middleware developed by SysFera.

Chapter 2

System Architecture

2.1 Overview of the UMS software infrastructure

We present in this section a detailed description of the UMS package architecture in terms of software components. In addition we show the dependencies between components to highlight their reuse. These components follow a client/server model. We present the different software layers from services (provided directly to the user) to the external dependencies (databases or LDAP used by the server). The UMS client server package has been split into eight different interrelated components. The diagrams shown in section 2.3 describe the relationships between these components. The definitions of the components are the following:

- **External API** contains precisely the services provided to the user as defined in the detailed specifications. We're on the client side.
- **Internal API** is the middle layer of the server side. The services announced previously are performed here by combining a set of classes defined in the two following components.
- **UMS Client** contains intermediate (proxy) classes providing remote access to the business objects of **UMS Server**.
- **UMS Server** contains all classes implementing business objects by encapsulating the processing provided through the internal API.
- **Sysfera-DS Client API** is the C++ client API provided by the SysFera-DS toolbox.
- **Sysfera-DS Server API** is the C++ server API provided by the SysFera-DS toolbox.
- **UMS Monitor Daemon** which the only role is to keep an eye on the session inactivity by checking the `TIME_OUT` parameter in the **Vishnu Database**.
- **Vishnu Database** stores all data manipulated by the UMS Server.
- **LDAP** is an external component used for authentication. It can be used in order to extend the UMS database authentication. A user authentication can be achieved using the UMS database only, LDAP systems only, or a combination of the UMS database and one or several LDAPs.

2.2 Deployment aspects of UMS

We explain here how the UMS package will be deployed in a physical hardware as illustrated in figure 2.1 where each cube represents an environment in which a component or a set of components execute. The UMS consists of:

- **Main UMS Server** is the provider of all UMS services. It consists of the UMS Monitor component and what we called the UMS SeD (UMS Server daemon) which gathers all UMS services published.
- **Secondary UMS Server** is optional and contains only the UMS SeD allowing to make a UMS service request.

- **Client host** is UMS service requester. It contains all components allowing to make a UMS service request.
- **SysFera-DS Bus** is the specific software layer that ensures the communication between client hosts and server hosts.
- **Vishnu database**: this component represents a unique instance of MySQL or PostgreSQL database.
- **LDAP**: this component represents a running LDAP system.

It is important to note that we can have several Secondary UMS servers (where an UMS Sed is running in each) but only one instance of UMS Monitor daemon running in the Main UMS Server as we can see in figure 2.1.

2.3 Architecture diagrams

2.3.1 UMS Deployment Diagram

This diagram shows the classes of entities that must be deployed for the Vishnu UMS application to work. One Main UMS Server contains both a UMS SeD component and a UMS Monitor Daemon component. The Secondary UMS Server entity is optional and can be duplicated to improve performance and robustness. All UMS Server entities connect to the same Vishnu database. It is important to note that the different classes are here shown on different nodes but they can also be deployed on the same node.

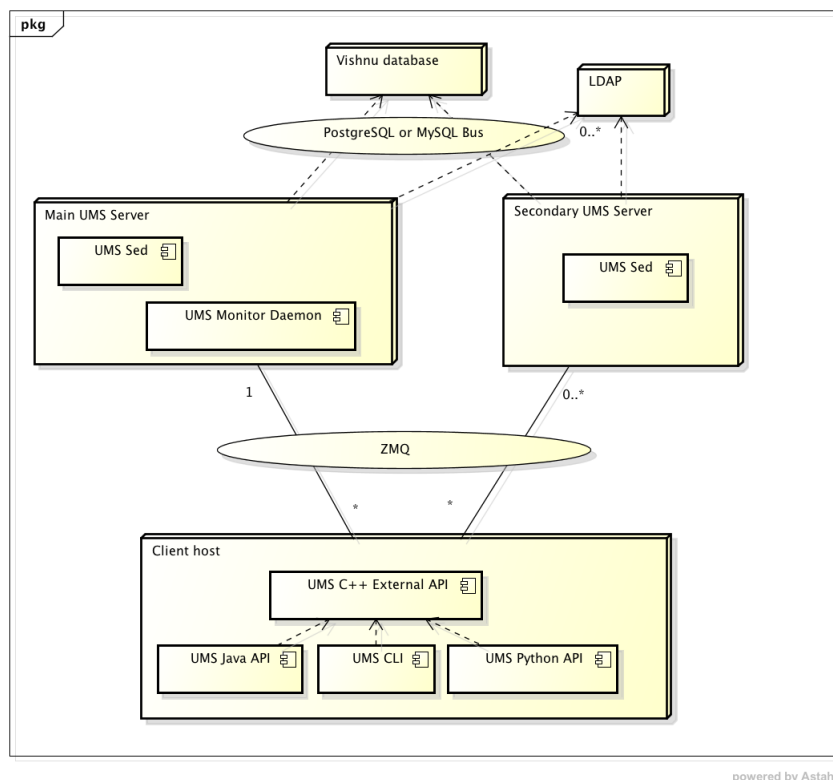


Figure 2.1: UMS Deployment Diagram

2.3.2 UMS client-side components

This diagram shows the components that compose the client side of the Vishnu UMS system and their interfaces. Two services among all the services of the UMS external API (see ref. D1.1c) are shown here for example. These services are consumed by several user interfaces: command-line, web services and Python. All the interfaces of the UMS Client component are shown.

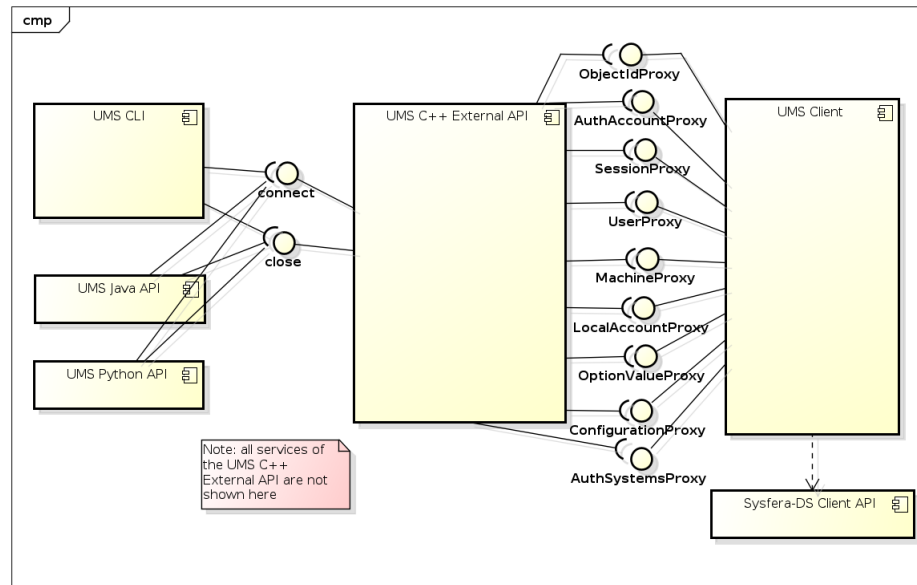


Figure 2.2: UMS client-side components

2.3.3 UMS server-side components

This diagram shows the components that compose the server side of the Vishnu UMS system and their interfaces. Two services among all the services of the UMS internal API are shown here for example. These services are consumed by the UMS Client component through the SysFera-DS API. All the interfaces of the UMS Server component are shown.

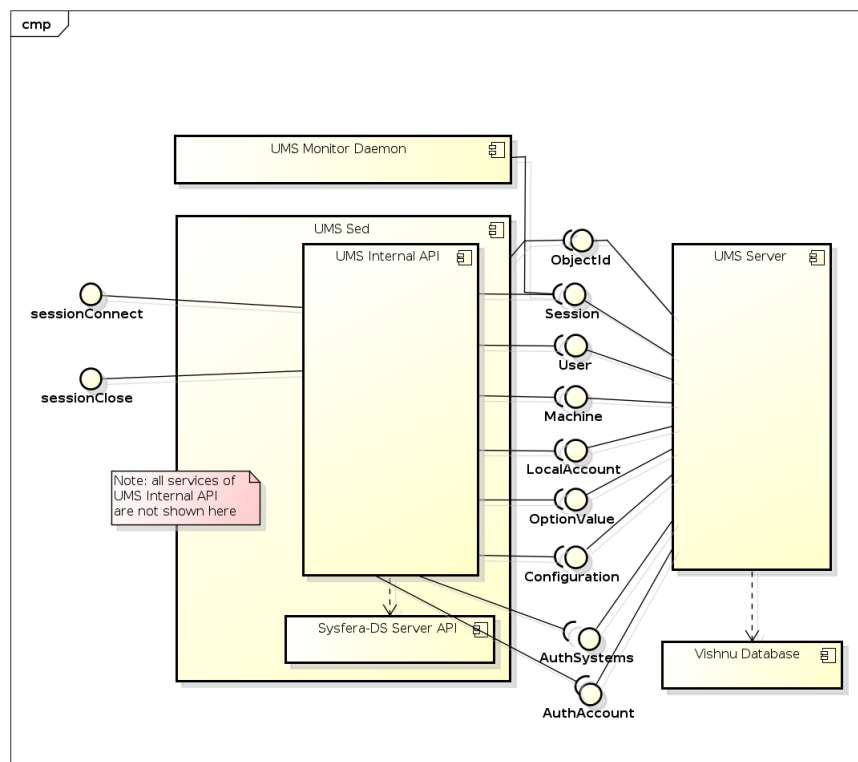


Figure 2.3: UMS server-side components

2.3.4 SysFera-DS Bus Details

This diagram shows the communication paths between the Client host and the UMS Main and Secondary server using the SysFera-DS Bus. The SysFera-DS MasterAgent is a SysFera-DS agent that can be executed on a dedicated host or on the same host as the UMS Server. All the communications between the entities here are done using the CORBA IIOP (Internet Inter-ORB) protocol and the communications can be tunneled through SSH tunnels if necessary. The MasterAgent entity is involved in the choice of one UMS Server in the case of several available UMS servers. The choice will be transparent to the user as all UMS Servers connect to the same database. The diagram shows here all the communication paths in the case where the Main UMS Server is chosen by the MasterAgent.

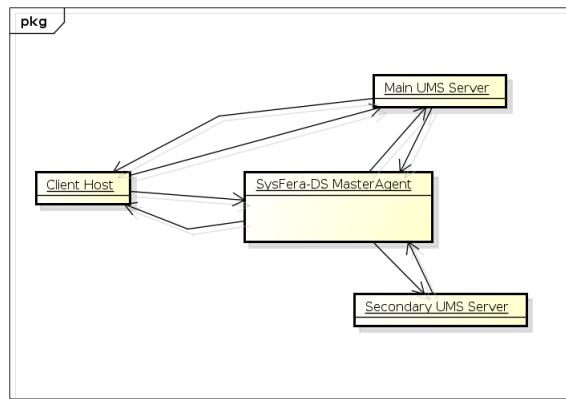


Figure 2.4: SysFera-DS Bus Details

Chapter 3

Internal API specification

3.1 Generic definition formats presentation

This section presents the formats used in this chapter to describe the services provided by the internal API.

3.1.1 Service definition format

Access

Here is detailed the access level of the service 'myService' (i.e. the privilege required to use it)

Parameters

The following table contains all the input and output parameters of the service, along with their type and description.

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	This is an example of a required string input parameter	IN
listOfJobs	string	ListJobs	This is an example of an object output parameter that is serialized as a string	OUT

Description

Here is detailed the purpose of the service 'myService'

Return Value

Here are detailed the different return codes provided by the service.

Name	Description
VISHNU_OK	The service has been performed successfully.
TMS_UNKNOWN_MACHINE	This is the human-readable generic message that will be available to the user of the API.

Used by this(these) API function(s):

This shows the list of functions from the external Vishnu API (see [D1_1c]) that use this service.

3.2 Definition of the services of the package

3.2.1 Service commandList

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
options	string	ListCmdOptions	allows the user to list commands by using several optional criteria: a period, specific session and for admin to list all commands of all VISHNU users or commands from a specific user	IN
listCommands	string	ListCommands	listCommands is the list of commands	OUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The commandList() function lists the commands

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::listHistoryCmd

3.2.2 Service sessionConnect

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
userId	string	n/a	userId represents the VISHNU user identifier	IN
password	string	n/a	password represents the password of the user	IN
clientKey	string	n/a	The SSH key that identifies the client host	IN
clientHostname	string	n/a	The full DNS name of the client host	IN

Parameter	Type	Serialized type	Description	Mode
options	string	ConnectOptions	options is an object which encapsulates the options available for the connect method. It allows the user to choose the way for closing the session automatically on TIMEOUT or on DISCONNECT and the possibility for an admin to open a session as if he/she was a specific user	IN
version	string	Version	is an object which encapsulates the version's information	IN
session	string	Session	An object which encapsulates session information such as the sessionKey	OUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The sessionConnect() function opens a session

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_UNKNOWN_USER	The user is unknown or the password is wrong
ERRCODE_UNKNOWN_CLOSURE_MODE	The closure policy is unknown
ERRCODE_INCORRECT_TIMEOUT	The value of the timeout is incorrect
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_USER_LOCKED	The user is locked
ERRCODE_AUTHENTERR	Vishnu not available (Authenticator error)
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::connect

3.2.3 Service sessionReconnect

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
userId	string	n/a	userId represents the VISHNU user identifier	IN
password	string	n/a	password represents the password of the user	IN
clientKey	string	n/a	The SSH key that identifies the client host	IN
clientHostname	string	n/a	The full DNS name of the client host	IN
sessionId	string	n/a	sessionId is the identifier of the session defined in the database	IN
version	string	Version	is an object which encapsulates the version's information	IN
session	string	n/a	An object which encapsulates session information such as the sessionKey	OUT

Parameter	Type	Serialized type	Description	Mode
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The sessionReconnect() function returns the sessionKey of a session from which the user was disconnected previously without closing it

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_UNKNOWN_USER	The user is unknown or the password is wrong
ERRCODE_USER_LOCKED	The user is locked
ERRCODE_UNUSABLE_MACHINE	The machine does not exist or it is locked
ERRCODE_UNKNOWN_SESSION_ID	The session Id is unknown
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_AUTHENTERR	Vishnu not available (Authenticator error)
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::reconnect

3.2.4 Service sessionClose

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The sessionClose() function closes the session identified by the session key

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_COMMAND_RUNNING	Commands are running
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized

Name	Description
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::close

3.2.5 Service sessionList

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
listsession	string	ListSessions	listsession is the list of sessions	OUT
options	string	ListSessionOptions	allows the user to list sessions using several optional criteria such as: the state of sessions (active or inactive, by default, all sessions are listed), a period, a specific session or for admin to list all sessions of all users or sessions of a specific user	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The sessionList() function lists all sessions of the user

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_UNKNOWN_CLOSURE_MODE	The closure policy is unknown
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::listSessions

3.2.6 Service userCreate

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
user	string	User	The user object	INOUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The userCreate() function adds a new VISHNU user

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_USER_LOCKED	The user is locked
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_USERID_EXISTING	The userId already exists in the database
ERRCODE_INVALID_MAIL_ADRESS	The mail address is invalid
ERRCODE_MACHINE_LOCKED	The machine is locked
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::addUser

3.2.7 Service userUpdate

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
user	string	User	The user object	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The userUpdate() function updates the user information except the userId and the password

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_INVALID_MAIL_ADRESS	The mail adress is invalid
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_USER_LOCKED	The user is locked
ERRCODE_USER_ALREADY_LOCKED	Trying to lock a user account that is already locked
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::updateUser

3.2.8 Service userDelete

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
userId	string	n/a	userId represents the VISHNU user identifier of the user who will be deleted from VISHNU	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The userDelete() function removes a user from VISHNU

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_USER_LOCKED	The user is locked
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)

Name	Description
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::deleteUser

3.2.9 Service userList

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the identifier of the session generated by VISHNU	IN
options	string	ListUsersOptions	allows an admin to get information about a specific user identified by his/her userId or to get information about users authenticated by a specific user-authentication system	IN
listuser	string	ListUsers	listuser is the list of users	OUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The userList() function lists VISHNU users

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::listUsers

3.2.10 Service userPasswordChange

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
userId	string	n/a	userId represents the VISHNU user identifier	IN
password	string	n/a	password represents the password of the user	IN
passwordNew	string	n/a	passwordNew represents the new password of the user	IN
version	string	Version	is an object which encapsulates the version's information	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The userPasswordChange() function changes the password

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_UNKNOWN_USER	The user is unknown or the password is wrong
ERRCODE_USER_LOCKED	The user is locked
ERRCODE_READONLY_ACCOUNT	You can modify information. This account is read-only
ERRCODE_AUTHENTERR	Vishnu not available (Authenticator error)
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::changePassword

3.2.11 Service userPasswordReset

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
userId	string	n/a	userId represents the VISHNU user identifier of the user whose password will be reset	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The userPasswordReset() function resets the password of a user

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully

Name	Description
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_USER_LOCKED	The user is locked
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::resetPassword

3.2.12 Service localAccountCreate

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
newAccount	string	LocalAccount	newAccount is the object which encapsulates the new local user configuration	IN
sshPublicKey	string	n/a	The SSH public key generated by VISHNU for accessing a local account	OUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The localAccountCreate() function adds a new local user configuration

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_LOCAL_ACCOUNT_EXIST	The local account already exists
ERRCODE_MACHINE_LOCKED	The machine is locked
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_UNKNOWN_MACHINE	The machine id is unknown
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_LOGIN_ALREADY_USED	The system account login is already used by another vishnu user
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception
ERRCODE_UNUSABLE_MACHINE	The machine does not exist or it is locked

Used by this(these) API function(s):

UMS::addLocalAccount

3.2.13 Service localAccountUpdate

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
LocalAccUpd	string	LocalAccount	is an object which encapsulates the local user configuration changes except the machineId and the userId	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The localAccountUpdate() function updates a local user configuration

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_UNKNOWN_MACHINE	The machine id is unknown
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_UNKNOWN_LOCAL_ACCOUNT	The local account is unknown
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception
ERRCODE_LOGIN_ALREADY_USED	The system account login is already used by another vishnu user

Used by this(these) API function(s):

UMS::updateLocalAccount

3.2.14 Service localAccountDelete

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN

Parameter	Type	Serialized type	Description	Mode
userId	string	n/a	userId represents the VISHNU user identifier of the user whose local configuration will be deleted for the given machine	IN
machineId	string	n/a	machineId represents the identifier of the machine whose local configuration will be deleted for the given user	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The localAccountDelete() function removes a local user configuration (for a given user on a given machine) from VISHNU

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_UNKNOWN_LOCAL_ACCOUNT	The local account is unknown
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::deleteLocalAccount

3.2.15 Service localAccountList

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
listLocalAcct	string	ListLocalAccounts	listLocalAccount is the list of the local user configurations	OUT
options	string	ListLocalAccOptions	allows an admin to list all local configurations of all users or a simple user to list his/her local user configurations on a specific machine	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The localAccountList() function lists the local user configurations

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::listLocalAccounts

3.2.16 Service configurationSave

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
configuration	string	Configuration	The configuration is an object which encapsulates the configuration description	OUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The configurationSave() function saves the configuration of VISHNU

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_SAVE_CONFIG_ERROR	A problem occurs during the configuration saving
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::saveConfiguration

3.2.17 Service configurationRestore

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
configuration	string	Configuration	The configuration is the object which encapsulates the configuration information	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The configurationRestore() function restores the configuration of VISHNU

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_RESTORE_CONFIG_ERROR	A problem occurs during the configuration restoring
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::restoreConfiguration

3.2.18 Service machineCreate

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
machine	string	Machine	Machine information	INOUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The machineCreate() function adds a new machine in VISHNU

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully

Name	Description
ERRCODE_MACHINE_EXISTING	The machineId already exists in the database
ERRCODE_UNKNOWN_CLOSURE_MODE	The closure policy is unknown
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::addMachine

3.2.19 Service machineUpdate

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
machine	string	Machine	existing machine information	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The machineUpdate() function updates a machine description

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_UNKNOWN_CLOSURE_MODE	The closure policy is unknown
ERRCODE_UNKNOWN_MACHINE	The machine id is unknown
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::updateMachine

3.2.20 Service machineDelete

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
machineId	string	n/a	machineId represents the identifier of the machine	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The machineDelete() function removes a machine from VISHNU

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_UNKNOWN_MACHINE	The machine id is unknown
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::deleteMachine

3.2.21 Service machineList

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
options	string	ListMachineOptions	allows a user to list all VISHNU machines or information about a specific machine and an admin to list machines used by a specific user	IN
listMachine	string	ListMachines	is the list of machines	OUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The machineList() function lists the machines in which the local user configurations are defined for the given user

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::listMachines

3.2.22 Service optionValueList

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the identifier of the session generated by VISHNU	IN
options	string	ListOptOptions	allows to list a specific option or all default options values or for an admin to list options of a specific user	IN
listOptValues	string	ListOptionsValues	listOptValues is an object which encapsulates the list of options	OUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The optionValueList() function lists the options of the user

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_UNKNOWN_OPTION	The name of the user option is unknown
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::listOptions

3.2.23 Service optionValueSet**Access**

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
optionValue	string	OptionValue	The optionValue is an object which encapsulates the option information	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The optionValueSet() function configures an option of the user

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_UNKNOWN_OPTION	The name of the user option is unknown
ERRCODE_UNKNOWN_CLOSURE_MODE	The closure policy is unknown
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_INCORRECT_TIMEOUT	The value of the timeout is incorrect
ERRCODE_INCORRECT_TRANSFER_CMD	The value of the transfer command is incorrect
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::configureOption

3.2.24 Service optionValueSetDefault**Access**

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
optionValue	string	OptionValue	The optionValue is an object which encapsulates the option information	IN

Parameter	Type	Serialized type	Description	Mode
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The optionValueSetDefault() function configures a default option value

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_UNKNOWN_OPTION	The name of the user option is unknown
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_INCORRECT_TIMEOUT	The value of the timeout is incorrect
ERRCODE_INCORRECT_TRANSFER_CMD	The value of the transfer command is incorrect
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::configureDefaultOption

3.2.25 Service authSystemCreate**Access**

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
newAuthSys	string	AuthSystem	is an object which encapsulates the information of the user-authentication system which will be added in VISHNU	INOUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The authSystemCreate() function adds a new user-authentication system in VISHNU

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator

Name	Description
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_UNKNOWN_ENCRYPTION_METHOD	The encryption method is unknown
ERRCODE_AUTH_SYSTEM_ALREADY_EXIST	The identifier of the user-authentication system already exists
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::addAuthSystem

3.2.26 Service authSystemUpdate

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
newAuthSys	string	AuthSystem	is an object which encapsulates the information of the user-authentication system which will be added in VISHNU	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The authSystemUpdate() function updates a user-authentication system in VISHNU

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_UNKNOWN_AUTH_SYSTEM	The user-authentication system is unknown or locked
ERRCODE_UNKNOWN_ENCRYPTION_METHOD	The encryption method is unknown
ERRCODE_AUTH_SYSTEM_ALREADY_LOCKED	The user-authentication system is already locked
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::updateAuthSystem

3.2.27 Service authSystemDelete

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
authSystemId	string	n/a	is the identifier of the user-authentication system to remove	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The authSystemDelete() function remove a user-authentication system from VISHNU

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_UNKNOWN_AUTH_SYSTEM	The user-authentication system is unknown or locked
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::deleteAuthSystem

3.2.28 Service authSystemList

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
options	string	ListAuthSysOptions	allows an admin to list all user-authentication systems used by a specific user or a user to list all user-authentication systems declared in VISHNU (and not only those where a local user-authentication configs are defined). It also allows to list a specific user-authentication system	IN
listAuthSys	string	ListAuthSystems	is the list of the user-authentication systems	OUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The authSystemList() function remove a user-authentication system from VISHNU

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_UNKNOWN_AUTH_SYSTEM_TYPE	The type of the user-authentication system is unknown
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::listAuthSystems

3.2.29 Service authAccountCreate

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
authAccount	string	AuthAccount	is an object which encapsulates the information of the local user-authentication configuration which will be added in VISHNU	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The authAccountCreate() function adds a new local user-authentication configuration

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_USER_LOCKED	The user is locked
ERRCODE_UNKNOWN_AUTH_SYSTEM	The user-authentication system is unknown or locked
ERRCODE_AUTH_ACCOUNT_EXIST	The user-authentication account already exists
ERRCODE_DIET	Vishnu not available (Service bus failure)

Name	Description
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::addAuthAccount

3.2.30 Service authAccountUpdate

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
authAccount	string	AuthAccount	is an object which encapsulates the information of the local user-authentication configuration which will be added in VISHNU	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The authAccountUpdate() function updates a local user-authentication configuration

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_USER_LOCKED	The user is locked
ERRCODE_UNKNOWN_AUTH_SYSTEM	The user-authentication system is unknown or locked
ERRCODE_UNKNOWN_AUTH_ACCOUNT	The user-authentication account is unknown
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::updateAuthAccount

3.2.31 Service authAccountDelete

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
authSystemId	string	n/a	is the identifier of the user-authentication system to remove	IN
userId	string	n/a	is an admin option which represents the VISHNU identifier of the user whose local user-authentication configuration will be deleted	IN
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The authAccountDelete() function removes a local user-authentication configuration from VISHNU

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_USER_LOCKED	The user is locked
ERRCODE_UNKNOWN_AUTH_SYSTEM	The user-authentication system is unknown or locked
ERRCODE_UNKNOWN_AUTH_ACCOUNT	The user-authentication account is unknown
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::deleteAuthAccount

3.2.32 Service authAccountList

Access

This service can be used by any VISHNU user

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The sessionKey is the encrypted identifier of the session generated by VISHNU	IN
options	string	n/a	allows an admin to list all local user-authentication configurations or to list local user-authentication configurations of a specific user or for a user to list local user-authentication configuration defined for a specific user-authentication system	IN

Parameter	Type	Serialized type	Description	Mode
listAuthAccounts	string	ListAuthAccounts	is the list of the local user-authentication configurations	OUT
errorInfo	string	n/a	Additional information provided when an error code is returned	OUT

Description

The authAccountList() function lists local user-authentication configurations

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_NO_ADMIN	The user is not an administrator
ERRCODE_SESSIONKEY_NOT_FOUND	The session key is unrecognized
ERRCODE_SESSIONKEY_EXPIRED	The sessionKey is expired. The session is closed.
ERRCODE_UNKNOWN_USERID	The userId is unknown
ERRCODE_USER_LOCKED	The user is locked
ERRCODE_UNKNOWN_AUTH_SYSTEM	The user-authentication system is unknown or locked
ERRCODE_UNKNOWN_AUTH_ACCOUNT	The user-authentication account is unknown
ERRCODE_DIET	Vishnu not available (Service bus failure)
ERRCODE_DBERR	Vishnu not available (Database error)
ERRCODE_DBCONN	Vishnu not available (Database connection)
ERRCODE_SYSTEM	Vishnu not available (System)
ERRCODE_UNDEFINED	Internal Error: Undefined exception

Used by this(these) API function(s):

UMS::listAuthAccounts

3.2.33 Service int_defineUserIdentifier

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The session key	IN
format	string	n/a	The new format to use	IN

Description

The int_defineUserIdentifier() function defines the shape of the identifiers automatically generated for the users

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_DBERR	Vishnu not available (Database error)

Used by this(these) API function(s):

UMS::setSshKey

3.2.34 Service int_defineMachineIdentifier

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The session key	IN
format	string	n/a	The new format to use	IN

Description

The int_defineMachineIdentifier() function defines the shape of the identifiers automatically generated for the machines

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_DBERR	Vishnu not available (Database error)

Used by this(these) API function(s):

UMS::defineUserIdentifier

3.2.35 Service int_defineJobIdentifier

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The session key	IN
format	string	n/a	The new format to use	IN

Description

The int_defineJobIdentifier() function defines the shape of the identifiers automatically generated for the jobs

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_DBERR	Vishnu not available (Database error)

Used by this(these) API function(s):

UMS::defineMachineIdentifier

3.2.36 Service int_defineTransferIdentifier

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The session key	IN
format	string	n/a	The new format to use	IN

Description

The int_defineTransferIdentifier() function defines the shape of the identifiers automatically generated for the file transfers

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_DBERR	Vishnu not available (Database error)

Used by this(these) API function(s):

UMS::defineJobIdentifier

3.2.37 Service int_defineAuthIdentifier

Access

This service can be used by ADMIN users only

Parameters

Parameter	Type	Serialized type	Description	Mode
sessionKey	string	n/a	The session key	IN
format	string	n/a	The new format to use	IN

Description

The int_defineAuthIdentifier() function defines the shape of the identifiers automatically generated for the authentication systems

Return Value

An error code is returned when an error occurs during the execution of the service

Name	Description
VISHNU_OK	The service was performed successfully
ERRCODE_DBERR	Vishnu not available (Database error)

Used by this(these) API function(s):

UMS::defineTransferIdentifier

Chapter 4

Internal class and data structures

4.1 Introduction

This chapter introduces the details of the implementation of the different components described in chapter 2 (Architecture). It is composed of three sections:

- **Client modelization:** describes the classes used to implement the *UMS Client* component.
- **Server modelization:** describes the classes used to implement the *UMS Server* component.
- **Data modelization:** describes the data structure used to implement the *UMS Client* component and the *UMS Server* component.
- **Vishnu core functions modelization:** describes the classes and data structures used to implement the the VISHNU cross-modules components (components that are used by UMS and other VISHNU modules).

4.2 UMS client modelization

4.2.1 Class diagrams

4.2.1.1 UMS Client Class Diagram

This diagram describes all classes used to communicate with VISHNU System. Each class proxy contains the corresponding data class illustrated on the UMS Data modelization section and the methods usable by the UMS Client component. A QueryProxy class implements a generic model to list objects of VISHNU.

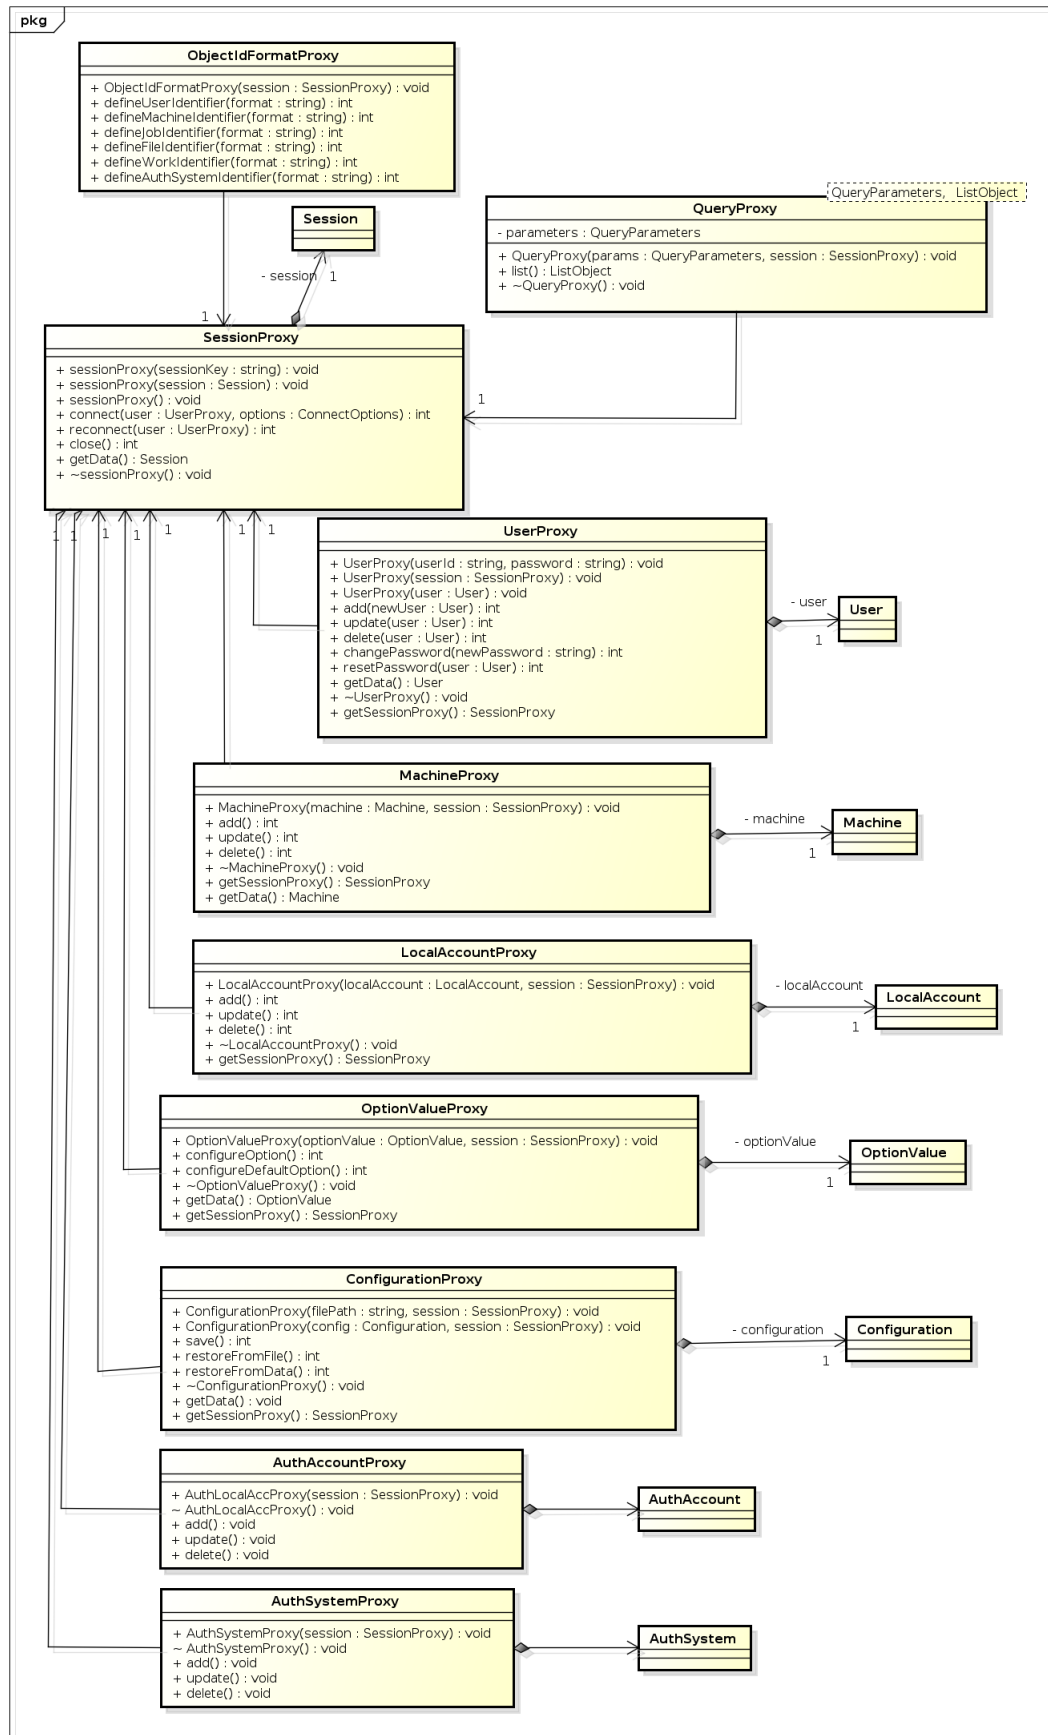



Figure 4.1: UMS Client Class Diagram

4.3 UMS server modelization

4.3.1 Class diagrams

4.3.1.1 UMS Server Class Diagram

This diagram presents the main objects used by UMS server component to process the UMS Client component requests. Each object that can be listed have a static method list with the corresponding options.

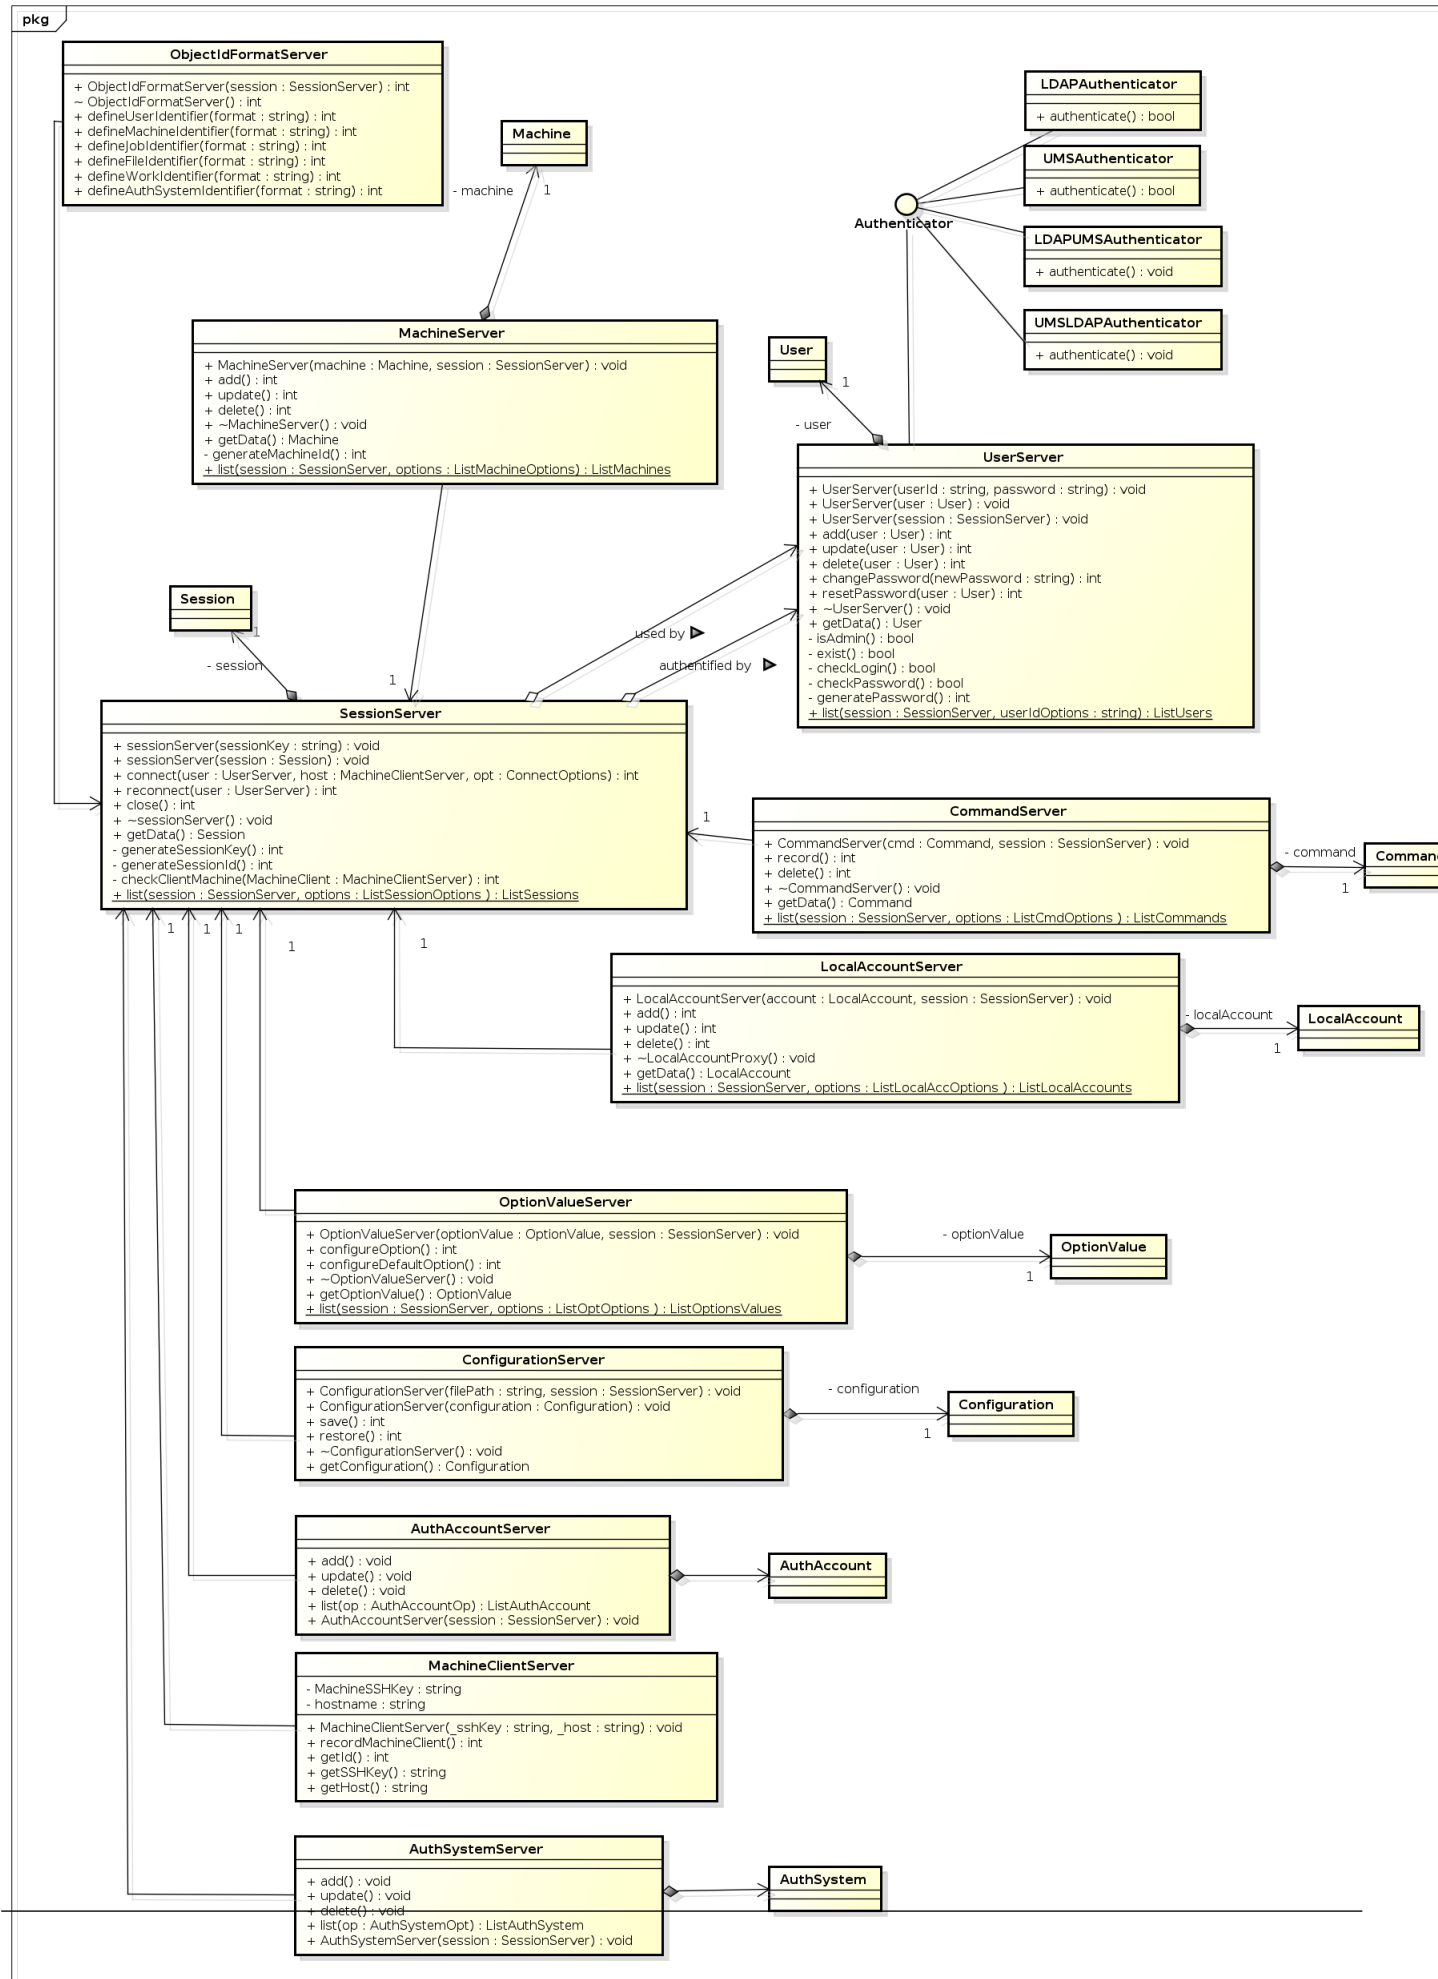

4.4 UMS data modelization

4.4.1 Class diagrams

4.4.1.1 UMS Data Class Diagram

This diagram illustrates the structure and the relationship between data manipulated by the components Client and Server.

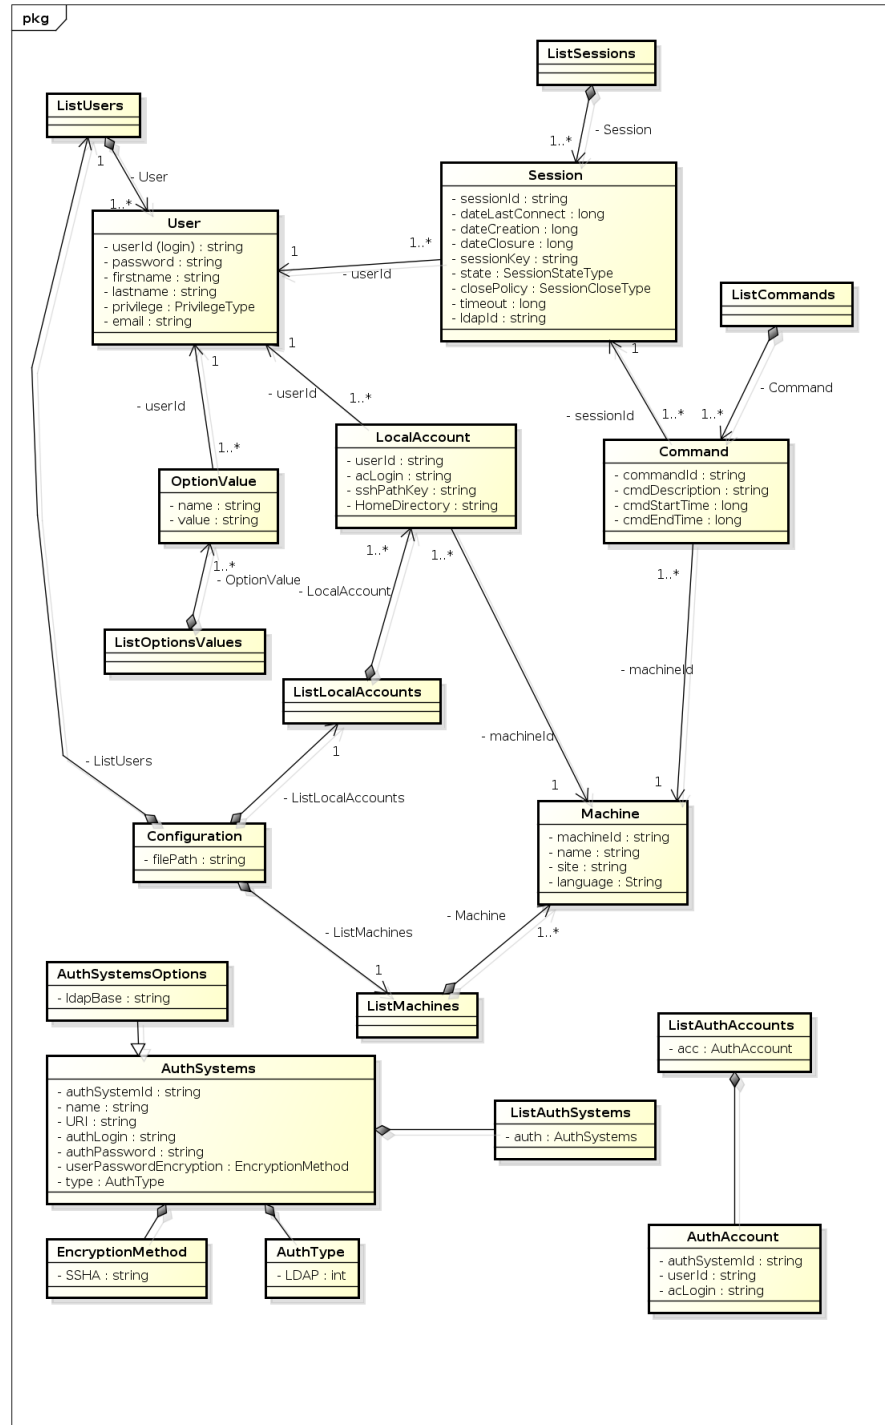


Figure 4.3: UMS Data Class Diagram

4.5 Vishnu core functions modelization

4.5.1 Introduction

The following elements describe the core classes (i.e. the classes that will be used by each module such as the exceptions and the databases). The modelization diagrams are given with some explanations about them.

4.5.2 Tables relationships

In order to have a coherent System, we have designed a relational model for the database. We need only one database that can contain all the Vishnu tables. The model is represented in figure 4.4. The rectangles are the tables and the lines represent the links between the tables.

The links between the tables are based on the following rules:

- – The *VISHNU* table has one or more *MACHINE*
 - A *MACHINE* is in one and only one *VISHNU* infrastructure
- – The *VISHNU* table has one or more *AUTHSYSTEM*
 - A *AUTHSYSTEM* is in one and only one *VISHNU* infrastructure
- – The *AUTHSYSTEM* table is extended one or more *LDAPAUTHSYST*
 - A *LDAPAUTHSYST* is in one and only one *AUTHSYSTEM*
- – The *AUTHSYSTEM* table has one or more *AUTHACCOUNT*
 - A *AUTHACCOUNT* is in one and only one *AUTHSYSTEM*
- – The *USERS* has one or more *AUTHACCOUNT*
 - A *AUTHACCOUNT* is for one and only one *USERS*
- – A *MACHINE* has one or more *CPU*
 - A *CPU* is in one and only one *MACHINE*
- – A *MACHINE* has one or more *DESCRIPTION*
 - A *DESCRIPTION* is for one and only one *MACHINE*
- – A *MACHINE* has one or more *THRESHOLD*
 - A *THRESHOLD* is for one and only one *MACHINE*
- – A *MACHINE* has one or more *ACCOUNT*
 - An *ACCOUNT* is for one and only one *MACHINE*
- – The *VISHNU* table has one or more *USER*
 - An *USER* is in one and only one *VISHNU* infrastructure
- – An *USER* has one or more *ACCOUNT*
 - An *ACCOUNT* is for one and only one *USER*
- – An *USER* has one or more *FILE TRANSFER*
 - A *FILE TRANSFER* is for one and only one *USER*
- – An *USER* has one or more *OPTION VALUE*
 - An *OPTION VALUE* is for one and only one *USER*
- – An *USER* sets one or more *THRESHOLD*
 - A *THRESHOLD* is set by one and only one *USER*

- – An *OPTION* has one or more *OPTION VALUE*
 - An *OPTION VALUE* is for one and only one *OPTION*
- – An *USER* has one or more *SESSION*
 - A *SESSION* is for one and only one *USER*
- – A *SESSION* has one or more *COMMAND*
 - A *COMMAND* is for one and only one *SESSION*
- – A *CLIENT MACHINE* has one or more *SESSION*
 - A *SESSION* is for one and only one *CLIENT MACHINE*
- – A *MACHINE* has one or more *STATE*
 - A *STATE* is for one and only one *MACHINE*
- – A *COMMAND* can have one or more *JOB*
 - A *JOB* is for one and only one *COMMAND*
- – A *COMMAND* can have one or more *FILE*
 - A *FILE* is for one and only one *COMMAND*



4.5.3 Relational model

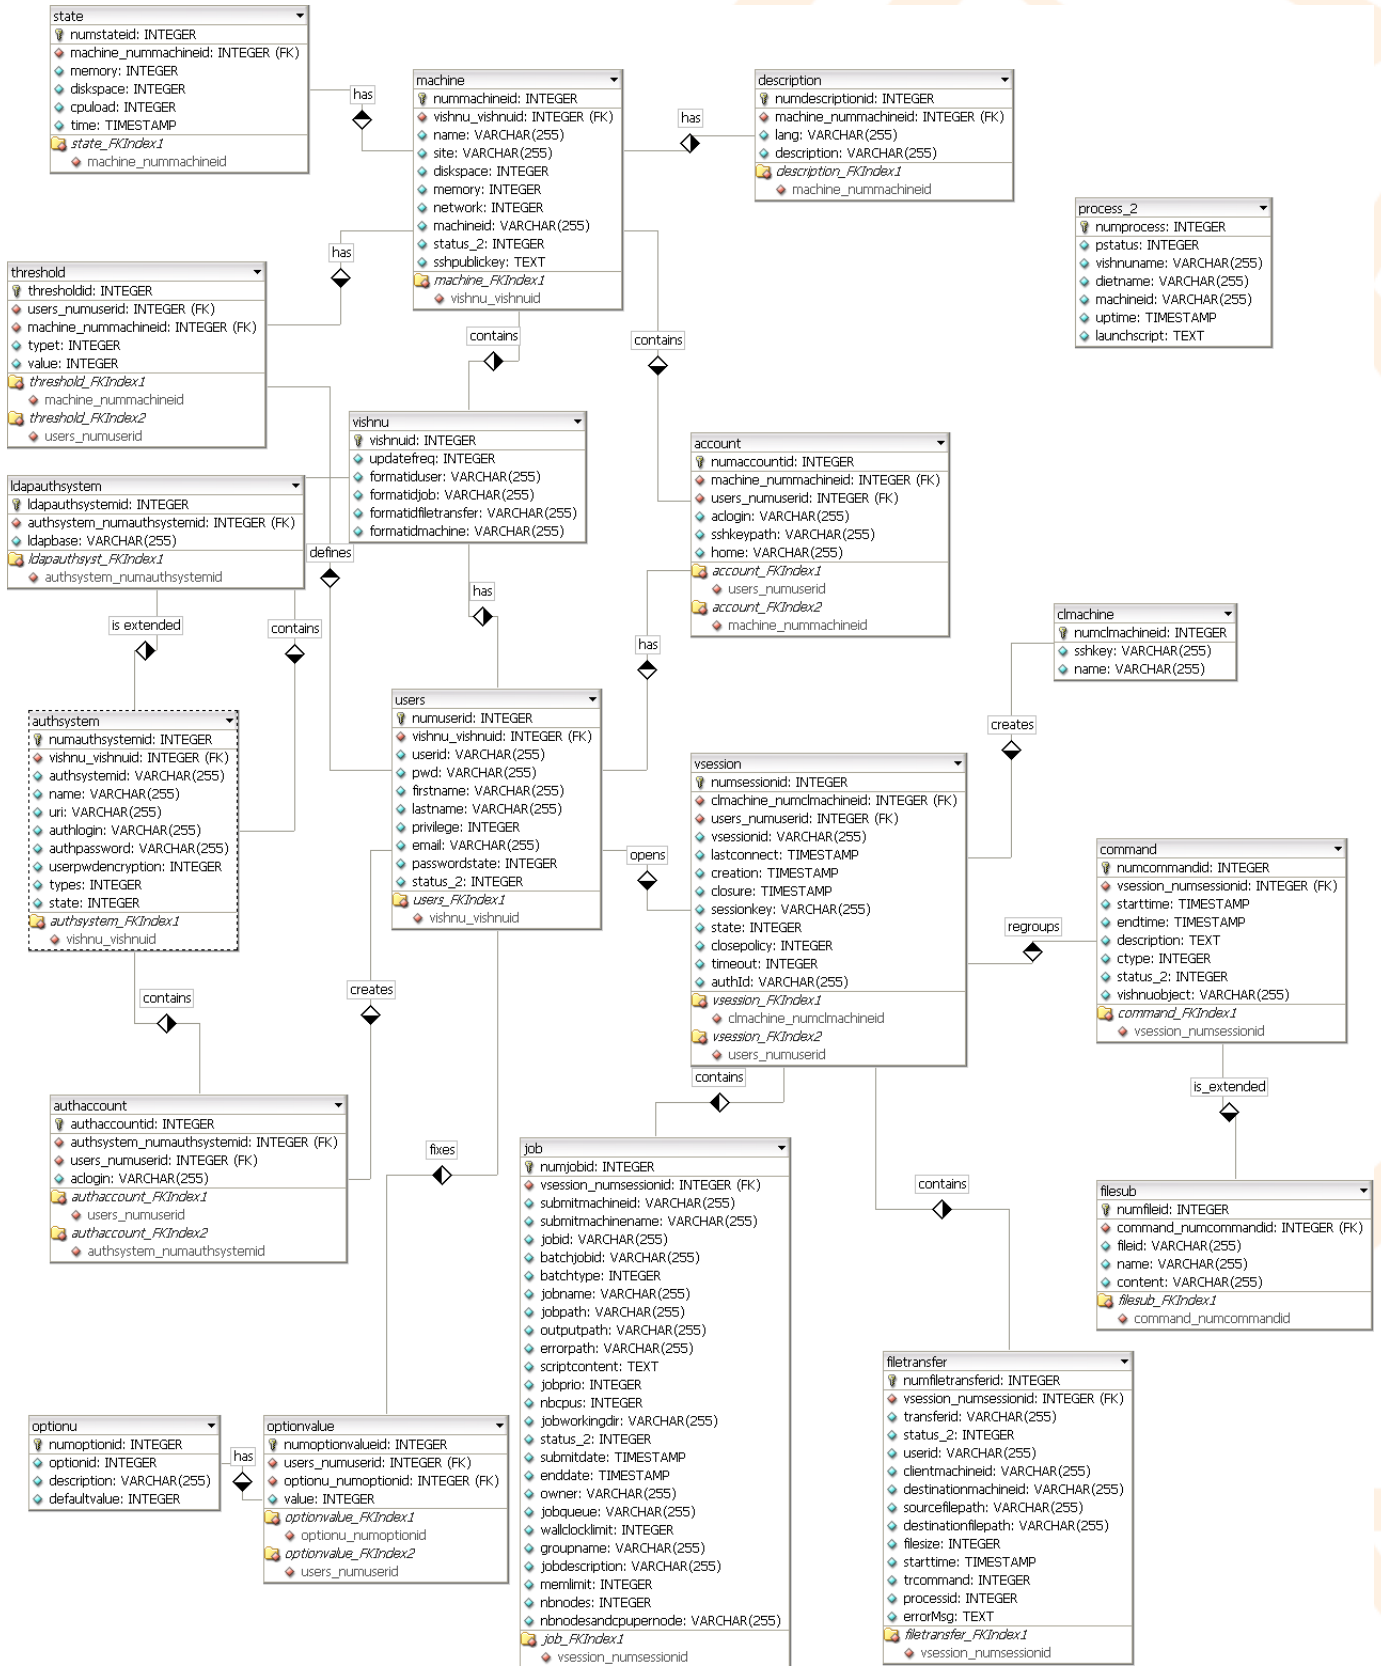


Figure 4.4: Relational model

4.5.4 The modelization

4.5.4.1 The database classes

The database class diagram is very simple. There is a database interface that defines a set of public operations that can be done over a database:

- commit
- rollback
- execute a query
- connect
- disconnect ...

And there are two examples of classes that implement the database. There is also a factory that can create the databases. See the diagram 4.5.

4.5.4.2 The exception classes

The exception class diagram defines a generic exception class, *VishnuException* that represents a generic exception that can be raised by a Vishnu function. This class has two subclasses, the *SystemException* that represents an exception due to a system problem and the *UserException* that represents an exception due to the user of the function (bad parameters typically). Both the server and clients have this way of building the exceptions. The *SystemException* has more specific subclasses depending on the modules that raises them. A key function is the append one, that allows to add a message to an existing vishnu exception. Thus, crossing the various level of the call can append information messages to specify the context of the exception. See the diagram 4.6.

4.5.5 Class diagrams

4.5.5.1 DB class diagram

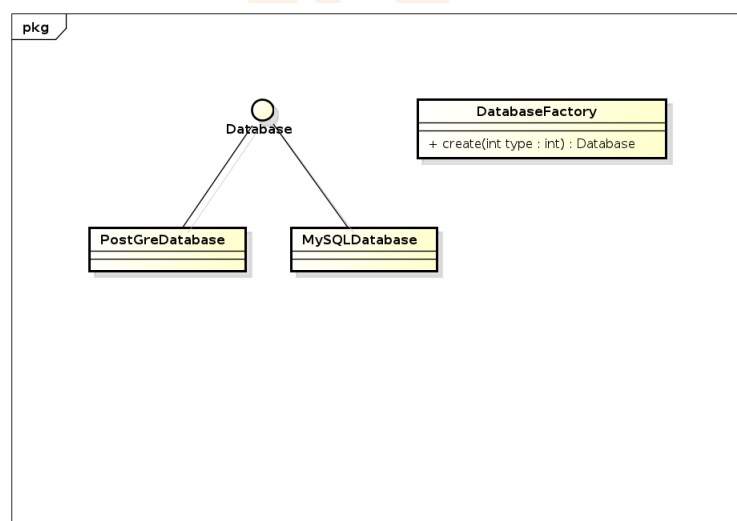


Figure 4.5: DB class diagram

4.5.5.2 exception

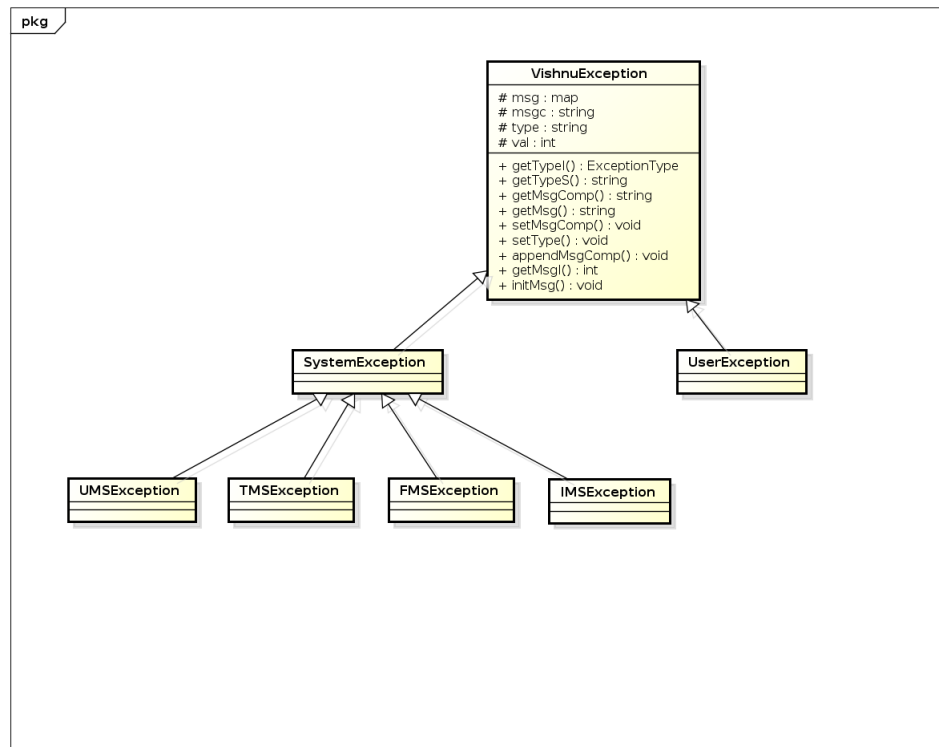


Figure 4.6: exception