



Draftable Comparison Export

This document is an exported comparison with limited functionality, generated by Draftable Desktop. To access full functionality, use Draftable's powerful comparison viewer in any of our products.

Left document: 2a-OMG_Systems_Modeling_Language_Beta_2_compressed.pdf

Right document: 2a-OMG_Systems_Modeling_Language_compressed.pdf

What is this document?

This is a comparison of two documents. The two documents are interleaved such that the left document is displayed on even pages and the right document is displayed on odd pages.

Is there a specific way I should view this file?

This document is intended to be viewed in Two Page Continuous mode (or sometimes called 'Two Page Scrolling'). It should open in this mode by default when using Adobe Acrobat and most popular PDF readers.

If the document opens in a different view, you can often change this in the settings. In Adobe Acrobat, go to **View > Page Display > Two Page Scrolling**.

Why are there blank pages?

Blank pages are inserted to keep both documents as aligned as possible.

How do I read the changes?

Text deleted from the left document and, hence, not in right document is highlighted red. Text added to the right document and, hence, not in left document is highlighted green.

Tip for printing

When printing this document, we recommend printing double-sided and include this first page. This will result in the matching text being displayed on different pages and easily readable, much like a book.

For more information

Draftable offers powerful document comparison solutions for all use-cases. To view our products, please visit our website: draftable.com.



OMG Systems Modeling Language™ (SysML®)

Version 2.0 Beta 2
(Release 2024-02)

Part 1: Language Specification

OMG Document Number: None

Date: February 2024

Standard document URL: <https://www.omg.org/spec/SysML/2.0/Language/>

Machine Readable File(s): <https://www.omg.org/spec/SysML/20240201/>

Normative:

<https://www.omg.org/spec/SysML/20240201/SysML.xmi>
<https://www.omg.org/spec/SysML/20240201/Systems-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Analysis-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Cause-and-Effect-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Geometry-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Metadata-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Quantities-and-Units-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Requirement-Derivation-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/SysML.json>

Non-normative:

<https://www.omg.org/spec/SysML/20240201/SimpleVehicleModel.sysml>



An OMG® Systems Modeling Publication



OMG Systems Modeling Language™ (SysML®)

Version 2.0 Beta 2.3
(Release 2024-11)

Part 1: Language Specification

OMG Document Number: None

Date: December 2024

Standard document URL: <https://www.omg.org/spec/SysML/2.0/Language/>

Machine Readable File(s): <https://www.omg.org/spec/SysML/20240201/>

Normative:

<https://www.omg.org/spec/SysML/20240201/SysML.xmi>
<https://www.omg.org/spec/SysML/20240201/Systems-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Analysis-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Cause-and-Effect-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Geometry-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Metadata-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Quantities-and-Units-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/Requirement-Derivation-Domain-Library.kpar>
<https://www.omg.org/spec/SysML/20240201/SysML.json>

Non-normative:

<https://www.omg.org/spec/SysML/20240201/SimpleVehicleModel.sysml>

Copyright © 2019-2024, 88solutions Corporation
Copyright © 2019-2024, Airbus
Copyright © 2019-2024, Aras Corporation
Copyright © 2019-2024, Association of Universities for Research in Astronomy (AURA)
Copyright © 2019-2024, BigLever Software
Copyright © 2019-2024, Boeing
Copyright © 2022-2024, Budapest University of Technology and Economics
Copyright © 2021-2024, Commissariat à l'énergie atomique et aux énergies alternatives (CEA)
Copyright © 2019-2024, Contact Software GmbH
Copyright © 2019-2024, Dassault Systèmes (No Magic)
Copyright © 2019-2024, DSC Corporation
Copyright © 2020-2024, DEKonsult
Copyright © 2020-2024, Delligatti Associates LLC
Copyright © 2019-2024, The Charles Stark Draper Laboratory, Inc.
Copyright © 2020-2024, ESTACA
Copyright © 2023-2024, Galois, Inc.
Copyright © 2019-2024, GfSE e.V.
Copyright © 2019-2024, George Mason University
Copyright © 2019-2024, IBM
Copyright © 2019-2024, Idaho National Laboratory
Copyright © 2019-2024, INCOSE
Copyright © 2019-2024, Intercax LLC
Copyright © 2019-2024, Jet Propulsion Laboratory (California Institute of Technology)
Copyright © 2019-2024, Kenntnis LLC
Copyright © 2020-2024, Kungliga Tekniska högskolan (KTH)
Copyright © 2019-2024, LightStreet Consulting LLC
Copyright © 2019-2024, Lockheed Martin Corporation
Copyright © 2019-2024, Maplesoft
Copyright © 2021-2024, MID GmbH
Copyright © 2020-2024, MITRE
Copyright © 2019-2024, Model Alchemy Consulting
Copyright © 2019-2024, Model Driven Solutions, Inc.
Copyright © 2019-2024, Model Foundry Pty. Ltd.
Copyright © 2023-2024, Object Management Group, Inc.
Copyright © 2019-2024, On-Line Application Research Corporation (OAC)
Copyright © 2019-2024, oose Innovative Informatik eG
Copyright © 2019-2024, Østfold University College
Copyright © 2019-2024, PTC
Copyright © 2020-2024, Qualtech Systems, Inc.
Copyright © 2019-2024, SAF Consulting
Copyright © 2019-2024, Simula Research Laboratory AS
Copyright © 2019-2024, System Strategy, Inc.
Copyright © 2019-2024, Thematix Partners, LLC
Copyright © 2019-2024, Tom Sawyer
Copyright © 2023-2024, Tucson Embedded Systems, Inc.
Copyright © 2019-2024, Universidad de Cantabria
Copyright © 2019-2024, University of Alabama in Huntsville
Copyright © 2019-2024, University of Detroit Mercy
Copyright © 2019-2024, University of Kaiserslauten
Copyright © 2020-2024, Willert Software Tools GmbH (SodiusWillert)

Copyright © 2019-2024, 88solutions Corporation
Copyright © 2019-2024, Airbus
Copyright © 2019-2024, Aras Corporation
Copyright © 2019-2024, Association of Universities for Research in Astronomy (AURA)
Copyright © 2019-2024, BigLever Software
Copyright © 2019-2024, Boeing
Copyright © 2022-2024, Budapest University of Technology and Economics
Copyright © 2021-2024, Commissariat à l'énergie atomique et aux énergies alternatives (CEA)
Copyright © 2019-2024, Contact Software GmbH
Copyright © 2019-2024, Dassault Systèmes (No Magic)
Copyright © 2019-2024, DSC Corporation
Copyright © 2020-2024, DEKonsult
Copyright © 2020-2024, Delligatti Associates LLC
Copyright © 2019-2024, The Charles Stark Draper Laboratory, Inc.
Copyright © 2020-2024, ESTACA
Copyright © 2023-2024, Galois, Inc.
Copyright © 2019-2024, GfSE e.V.
Copyright © 2019-2024, George Mason University
Copyright © 2019-2024, IBM
Copyright © 2019-2024, Idaho National Laboratory
Copyright © 2019-2024, INCOSE
Copyright © 2019-2024, Intercax LLC
Copyright © 2019-2024, Jet Propulsion Laboratory (California Institute of Technology)
Copyright © 2019-2024, Kenntnis LLC
Copyright © 2020-2024, Kungliga Tekniska högskolan (KTH)
Copyright © 2019-2024, LightStreet Consulting LLC
Copyright © 2019-2024, Lockheed Martin Corporation
Copyright © 2019-2024, Maplesoft
Copyright © 2021-2024, MID GmbH
Copyright © 2020-2024, MITRE
Copyright © 2019-2024, Model Alchemy Consulting
Copyright © 2019-2024, Model Driven Solutions, Inc.
Copyright © 2019-2024, Model Foundry Pty. Ltd.
Copyright © 2023-2024, Object Management Group, Inc.
Copyright © 2019-2024, On-Line Application Research Corporation (OAC)
Copyright © 2019-2024, oose Innovative Informatik eG
Copyright © 2019-2024, Østfold University College
Copyright © 2019-2024, PTC
Copyright © 2020-2024, Qualtech Systems, Inc.
Copyright © 2019-2024, SAF Consulting
Copyright © 2019-2024, Simula Research Laboratory AS
Copyright © 2019-2024, System Strategy, Inc.
Copyright © 2019-2024, Thematix Partners, LLC
Copyright © 2019-2024, Tom Sawyer
Copyright © 2023-2024, Tucson Embedded Systems, Inc.
Copyright © 2019-2024, Universidad de Cantabria
Copyright © 2019-2024, University of Alabama in Huntsville
Copyright © 2019-2024, University of Detroit Mercy
Copyright © 2019-2024, University of Kaiserslauten
Copyright © 2020-2024, Willert Software Tools GmbH (SodiusWillert)

USE OF SPECIFICATION - TERMS, CONDITIONS & NOTICES

The material in this document details an Object Management Group specification in accordance with the terms, conditions and notices set forth below. This document does not represent a commitment to implement any portion of this specification in any company's products. The information contained in this document is subject to change without notice.

LICENSES

The companies listed above have granted to the Object Management Group, Inc. (OMG) a nonexclusive, royalty-free, paid up, worldwide license to copy and distribute this document and to modify this document and distribute copies of the modified version. Each of the copyright holders listed above has agreed that no person shall be deemed to have infringed the copyright in the included material of any such copyright holder by reason of having used the specification set forth herein or having conformed any computer software to the specification.

Subject to all of the terms and conditions below, the owners of the copyright in this specification hereby grant you a fully-paid up, non-exclusive, nontransferable, perpetual, worldwide license (without the right to sublicense), to use this specification to create and distribute software and special purpose specifications that are based upon this specification, and to use, copy, and distribute this specification as provided under the Copyright Act; provided that: (1) both the copyright notice identified above and this permission notice appear on any copies of this specification; (2) the use of the specifications is for informational purposes and will not be copied or posted on any network computer or broadcast in any media and will not be otherwise resold or transferred for commercial purposes; and (3) no modifications are made to this specification. This limited permission automatically terminates without notice if you breach any of these terms or conditions. Upon termination, you will destroy immediately any copies of the specifications in your possession or control.

PATENTS

The attention of adopters is directed to the possibility that compliance with or adoption of OMG specifications may require use of an invention covered by patent rights. OMG shall not be responsible for identifying patents for which a license may be required by any OMG specification, or for conducting legal inquiries into the legal validity or scope of those patents that are brought to its attention. OMG specifications are prospective and advisory only. Prospective users are responsible for protecting themselves against liability for infringement of patents.

GENERAL USE RESTRICTIONS

Any unauthorized use of this specification may violate copyright laws, trademark laws, and communications regulations and statutes. This document contains information which is protected by copyright. All Rights Reserved. No part of this work covered by copyright herein may be reproduced or used in any form or by any means--graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems--without permission of the copyright owner.

DISCLAIMER OF WARRANTY

WHILE THIS PUBLICATION IS BELIEVED TO BE ACCURATE, IT IS PROVIDED "AS IS" AND MAY CONTAIN ERRORS OR MISPRINTS. THE OBJECT MANAGEMENT GROUP AND THE COMPANIES LISTED ABOVE MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS PUBLICATION, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF TITLE OR

USE OF SPECIFICATION - TERMS, CONDITIONS & NOTICES

The material in this document details an Object Management Group specification in accordance with the terms, conditions and notices set forth below. This document does not represent a commitment to implement any portion of this specification in any companies products. The information contained in this document is subject to change without notice.

LICENSES

The companies listed above have granted to the Object Management Group, Inc. (OMG) a nonexclusive, royalty-free, paid up, worldwide license to copy and distribute this document and to modify this document and distribute copies of the modified version. Each of the copyright holders listed above has agreed that no person shall be deemed to have infringed the copyright in the included material of any such copyright holder by reason of having used the specification set forth herein or having conformed any computer software to the specification.

Subject to all of the terms and conditions below, the owners of the copyright in this specification hereby grant you a fully-paid up, non-exclusive, nontransferable, perpetual, worldwide license (without the right to sublicense), to use this specification to create and distribute software and special purpose specifications that are based upon this specification, and to use, copy, and distribute this specification as provided under the Copyright Act; provided that: (1) both the copyright notice identified above and this permission notice appear on any copies of this specification; (2) the use of the specifications is for informational purposes and will not be copied or posted on any network computer or broadcast in any media and will not be otherwise resold or transferred for commercial purposes; and (3) no modifications are made to this specification. This limited permission automatically terminates without notice if you breach any of these terms or conditions. Upon termination, you will destroy immediately any copies of the specifications in your possession or control.

PATENTS

The attention of adopters is directed to the possibility that compliance with or adoption of OMG specifications may require use of an invention covered by patent rights. OMG shall not be responsible for identifying patents for which a license may be required by any OMG specification, or for conducting legal inquiries into the legal validity or scope of those patents that are brought to its attention. OMG specifications are prospective and advisory only. Prospective users are responsible for protecting themselves against liability for infringement of patents.

GENERAL USE RESTRICTIONS

Any unauthorized use of this specification may violate copyright laws, trademark laws, and communications regulations and statutes. This document contains information which is protected by copyright. All Rights Reserved. No part of this work covered by copyright herein may be reproduced or used in any form or by any means--graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems--without permission of the copyright owner.

DISCLAIMER OF WARRANTY

WHILE THIS PUBLICATION IS BELIEVED TO BE ACCURATE, IT IS PROVIDED "AS IS" AND MAY CONTAIN ERRORS OR MISPRINTS. THE OBJECT MANAGEMENT GROUP AND THE COMPANIES LISTED ABOVE MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS PUBLICATION, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF TITLE OR

OWNERSHIP, IMPLIED WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR USE. IN NO EVENT SHALL THE OBJECT MANAGEMENT GROUP OR ANY OF THE COMPANIES LISTED ABOVE BE LIABLE FOR ERRORS CONTAINED HEREIN OR FOR DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL, RELIANCE OR COVER DAMAGES, INCLUDING LOSS OF PROFITS, REVENUE, DATA OR USE, INCURRED BY ANY USER OR ANY THIRD PARTY IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS MATERIAL, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

The entire risk as to the quality and performance of software developed using this specification is borne by you. This disclaimer of warranty constitutes an essential part of the license granted to you to use this specification.

RESTRICTED RIGHTS LEGEND

Use, duplication or disclosure by the U.S. Government is subject to the restrictions set forth in subparagraph (c) (1) (ii) of The Rights in Technical Data and Computer Software Clause at DFARS 252.227-7013 or in subparagraph (c)(1) and (2) of the Commercial Computer Software - Restricted Rights clauses at 48 C.F.R. 52.227-19 or as specified in 48 C.F.R. 227-7202-2 of the DoD F.A.R. Supplement and its successors, or as specified in 48 C.F.R. 12.212 of the Federal Acquisition Regulations and its successors, as applicable. The specification copyright owners are as indicated above and may be contacted through the Object Management Group, 9C Medway Road, PMB 274, Milford, MA 01757, U.S.A.

TRADEMARKS

CORBA®, CORBA logos®, FIBO®, Financial Industry Business Ontology®, Financial Instrument Global Identifier®, IIOP®, IMM®, Model Driven Architecture®, MDA®, Object Management Group®, OMG®, OMG Logo®, SoaML®, SOAML®, SysML®, UAF®, Unified Modeling Language™, UML®, UML Cube Logo®, VSIPL®, and XMI® are registered trademarks of the Object Management Group, Inc.

For a complete list of trademarks, see: https://www.omg.org/legal/tm_list.htm. All other products or company names mentioned are used for identification purposes only, and may be trademarks of their respective owners.

COMPLIANCE

The copyright holders listed above acknowledge that the Object Management Group (acting itself or through its designees) is and shall at all times be the sole entity that may authorize developers, suppliers and sellers of computer software to use certification marks, trademarks or other special designations to indicate compliance with these materials.

Software developed under the terms of this license may claim compliance or conformance with this specification if and only if the software compliance is of a nature fully matching the applicable compliance points as stated in the specification. Software developed only partially matching the applicable compliance points may claim only that the software was based on this specification, but may not claim compliance or conformance with this specification. In the event that testing suites are implemented or approved by Object Management Group, Inc., software developed using this specification may claim compliance or conformance with the specification only if the software satisfactorily completes the testing suites.

OWNERSHIP, IMPLIED WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR USE. IN NO EVENT SHALL THE OBJECT MANAGEMENT GROUP OR ANY OF THE COMPANIES LISTED ABOVE BE LIABLE FOR ERRORS CONTAINED HEREIN OR FOR DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL, RELIANCE OR COVER DAMAGES, INCLUDING LOSS OF PROFITS, REVENUE, DATA OR USE, INCURRED BY ANY USER OR ANY THIRD PARTY IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS MATERIAL, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

The entire risk as to the quality and performance of software developed using this specification is borne by you. This disclaimer of warranty constitutes an essential part of the license granted to you to use this specification.

RESTRICTED RIGHTS LEGEND

Use, duplication or disclosure by the U.S. Government is subject to the restrictions set forth in subparagraph (c) (1) (ii) of The Rights in Technical Data and Computer Software Clause at DFARS 252.227-7013 or in subparagraph (c)(1) and (2) of the Commercial Computer Software - Restricted Rights clauses at 48 C.F.R. 52.227-19 or as specified in 48 C.F.R. 227-7202-2 of the DoD F.A.R. Supplement and its successors, or as specified in 48 C.F.R. 12.212 of the Federal Acquisition Regulations and its successors, as applicable. The specification copyright owners are as indicated above and may be contacted through the Object Management Group, 9C Medway Road, PMB 274, Milford, MA 01757, U.S.A.

TRADEMARKS

CORBA[®], CORBA logos[®], FIBO[®], Financial Industry Business Ontology[®], Financial Instrument Global Identifier[®], IIOP[®], IMM[®], Model Driven Architecture[®], MDA[®], Object Management Group[®], OMG[®], OMG Logo[®], SoaML[®], SOAML[®], SysML[®], UAF[®], Unified Modeling Language[™], UML[®], UML Cube Logo[®], VSIP[®], and XMI[®] are registered trademarks of the Object Management Group, Inc.

For a complete list of trademarks, see: https://www.omg.org/legal/tm_list.htm. All other products or company names mentioned are used for identification purposes only, and may be trademarks of their respective owners.

COMPLIANCE

The copyright holders listed above acknowledge that the Object Management Group (acting itself or through its designees) is and shall at all times be the sole entity that may authorize developers, suppliers and sellers of computer software to use certification marks, trademarks or other special designations to indicate compliance with these materials.

Software developed under the terms of this license may claim compliance or conformance with this specification if and only if the software compliance is of a nature fully matching the applicable compliance points as stated in the specification. Software developed only partially matching the applicable compliance points may claim only that the software was based on this specification, but may not claim compliance or conformance with this specification. In the event that testing suites are implemented or approved by Object Management Group, Inc., software developed using this specification may claim compliance or conformance with the specification only if the software satisfactorily completes the testing suites.

OMG'S ISSUE REPORTING PROCEDURE

All OMG specifications are subject to continuous review and improvement. As part of this process we encourage readers to report any ambiguities, inconsistencies, or inaccuracies they may find by completing the Issue Reporting Form listed on the main web page <https://www.omg.org>, under Documents, Report a Bug/Issue.

OMG'S ISSUE REPORTING PROCEDURE

All OMG specifications are subject to continuous review and improvement. As part of this process we encourage readers to report any ambiguities, inconsistencies, or inaccuracies they may find by completing the Issue Reporting Form listed on the main web page <https://www.omg.org>, under Documents, Report a Bug/Issue.

Table of Contents

0 Preface.....	23
1 Scope.....	1
2 Conformance.....	3
3 Normative References.....	5
4 Terms and Definitions.....	7
5 Symbols	9
6 Introduction.....	11
6.1 Document Overview	11
6.2 Document Organization	12
6.3 Acknowledgements	13
7 Language Description	15
7.1 Language Overview	15
7.2 Elements and Relationships	16
7.2.1 Elements and Relationships Overview.....	16
7.2.2 Elements.....	17
7.2.3 Relationships.....	18
7.3 Dependencies	18
7.3.1 Dependencies Overview.....	18
7.3.2 Dependency Declaration	19
7.4 Annotations	19
7.4.1 Annotations Overview	20
7.4.2 Comments and Documentation	22
7.4.3 Textual Representation.....	22
7.5 Namespaces and Packages	23
7.5.1 Namespaces Overview	23
7.5.2 Owned Members and Aliases.....	27
7.5.3 Imports	28
7.5.4 Import Filtering	29
7.5.5 Root Namespaces	31
7.6 Definition and Usage	31
7.6.1 Definition and Usage Overview	31
7.6.2 Definitions.....	41
7.6.3 Usages	42
7.6.4 Reference Usages	44
7.6.5 Effective Names	44
7.6.6 Feature Chains.....	45
7.6.7 Variations and Variants.....	45
7.6.8 Implicit Specialization	46
7.7 Attributes.....	46
7.7.1 Attributes Overview	46
7.7.2 Attribute Definitions and Usages	48
7.8 Enumerations	49
7.8.1 Enumerations Overview	49
7.8.2 Enumeration Definitions and Usages	50
7.9 Occurrences	51
7.9.1 Occurrences Overview	51
7.9.2 Occurrence Definitions and Usages	56
7.9.3 Time Slices and Snapshots.....	56
7.9.4 Individual Definitions and Usages	57
7.9.5 Event Occurrence Usages	57

Table of Contents

0 Preface	23
1 Scope	1
2 Conformance	3
3 Normative References	5
4 Terms and Definitions	7
5 Symbols	9
6 Introduction	11
6.1 Document Overview	11
6.2 Document Organization	12
6.3 Acknowledgements	13
7 Language Description	15
7.1 Language Overview	15
7.2 Elements and Relationships	16
7.2.1 Elements and Relationships Overview	16
7.2.2 Elements	17
7.2.3 Relationships	18
7.3 Dependencies	18
7.3.1 Dependencies Overview	18
7.3.2 Dependency Declaration	19
7.4 Annotations	19
7.4.1 Annotations Overview	19
7.4.2 Comments and Documentation	21
7.4.3 Textual Representation	22
7.5 Namespaces and Packages	23
7.5.1 Namespaces Overview	23
7.5.2 Owned Members and Aliases	26
7.5.3 Imports	28
7.5.4 Import Filtering	29
7.5.5 Root Namespaces	30
7.6 Definition and Usage	31
7.6.1 Definition and Usage Overview	31
7.6.2 Definitions	39
7.6.3 Usages	40
7.6.4 Reference Usages	42
7.6.5 Effective Names	42
7.6.6 Feature Chains	43
7.6.7 Variations and Variants	43
7.6.8 Implicit Specialization	44
7.7 Attributes	44
7.7.1 Attributes Overview	45
7.7.2 Attribute Definitions and Usages	46
7.8 Enumerations	47
7.8.1 Enumerations Overview	47
7.8.2 Enumeration Definitions and Usages	48
7.9 Occurrences	49
7.9.1 Occurrences Overview	49
7.9.2 Occurrence Definitions and Usages	53
7.9.3 Time Slices and Snapshots	53
7.9.4 Individual Definitions and Usages	54
7.9.5 Event Occurrence Usages	55
7.10 Items	55
7.10.1 Items Overview	55
7.10.2 Item Definitions and Usages	56

7.10 Items.....	57
7.10.1 Items Overview	58
7.10.2 Item Definitions and Usages	59
7.11 Parts.....	59
7.11.1 Parts Overview	59
7.11.2 Part Definitions and Usages	62
7.12 Ports	63
7.12.1 Ports Overview	63
7.12.2 Port Definitions and Usages	64
7.12.3 Conjugated Port Definitions and Usages	65
7.13 Connections.....	65
7.13.1 Connections Overview	65
7.13.2 Connection Definitions and Usages	72
7.13.3 Bindings as Usages	74
7.13.4 Feature Values.....	74
7.13.5 Successions as Usages.....	75
7.13.6 Flow Connection Usages and Messages	76
7.14 Interfaces.....	77
7.14.1 Interfaces Overview	77
7.14.2 Interface Definitions and Usages	80
7.15 Allocations	81
7.15.1 Allocations Overview	81
7.15.2 Allocation Definitions and Usages.....	82
7.16 Actions	83
7.16.1 Actions Overview	83
7.16.2 Action Definitions and Usages.....	95
7.16.3 Control Nodes	97
7.16.4 Succession Shorthands	98
7.16.5 Conditional Successions.....	99
7.16.6 Perform Action Usages	100
7.16.7 Send Action Usages	101
7.16.8 Accept Action Usages	102
7.16.9 Assignment Action Usages	105
7.16.10 If Action Usages.....	106
7.16.11 Loop Action Usages	106
7.17 States	108
7.17.1 States Overview	108
7.17.2 State Definitions and Usages	112
7.17.3 Transition Usages.....	113
7.17.4 Exhibit State Usages	116
7.18 Calculations.....	116
7.18.1 Calculations Overview	116
7.18.2 Calculation Definitions and Usages	118
7.19 Constraints	119
7.19.1 Constraints Overview	119
7.19.2 Constraint Definitions and Usages	121
7.19.3 Assert Constraint Usages	122
7.20 Requirements	122
7.20.1 Requirements Overview	123
7.20.2 Requirement Definition and Usage	126
7.20.3 Concern Definitions and Usages	128
7.20.4 Satisfy Requirement Usages	129
7.21 Cases	130
7.21.1 Cases Overview	130

7.11 Parts	57
7.11.1 Parts Overview	57
7.11.2 Part Definitions and Usages	59
7.12 Ports	60
7.12.1 Ports Overview	60
7.12.2 Port Definitions and Usages	61
7.12.3 Conjugated Port Definitions and Usages	62
7.13 Connections	62
7.13.1 Connections Overview	62
7.13.2 Connection Definitions and Usages	68
7.13.3 Bindings as Usages	70
7.13.4 Feature Values	71
7.13.5 Successions as Usages	72
7.13.6 Flow Connection Usages and Messages	72
7.14 Interfaces	74
7.14.1 Interfaces Overview	74
7.14.2 Interface Definitions and Usages	77
7.15 Allocations	78
7.15.1 Allocations Overview	78
7.15.2 Allocation Definitions and Usages	79
7.16 Actions	80
7.16.1 Actions Overview	80
7.16.2 Action Definitions and Usages	95
7.16.3 Control Nodes	97
7.16.4 Succession Shorthands	98
7.16.5 Conditional Successions	99
7.16.6 Perform Action Usages	100
7.16.7 Send Action Usages	101
7.16.8 Accept Action Usages	102
7.16.9 Assignment Action Usages	104
7.16.10 Terminate Action Usages	105
7.16.11 If Action Usages	106
7.16.12 Loop Action Usages	107
7.17 States	108
7.17.1 States Overview	108
7.17.2 State Definitions and Usages	112
7.17.3 Transition Usages	113
7.17.4 Exhibit State Usages	116
7.18 Calculations	116
7.18.1 Calculations Overview	116
7.18.2 Calculation Definitions and Usages	118
7.19 Constraints	119
7.19.1 Constraints Overview	119
7.19.2 Constraint Definitions and Usages	121
7.19.3 Assert Constraint Usages	122
7.20 Requirements	122
7.20.1 Requirements Overview	122
7.20.2 Requirement Definition and Usage	126
7.20.3 Concern Definitions and Usages	128
7.20.4 Satisfy Requirement Usages	129
7.21 Cases	130
7.21.1 Cases Overview	130
7.21.2 Case Definitions and Usages	130
7.22 Analysis Cases	131
7.22.1 Analysis Cases Overview	131
7.22.2 Analysis Case Definitions and Usages	133

7.21.2 Case Definitions and Usages.....	131
7.22 Analysis Cases	131
7.22.1 Analysis Cases Overview.....	131
7.22.2 Analysis Case Definitions and Usages.....	133
7.22.3 Trade-Off Analyses.....	134
7.23 Verification Cases	135
7.23.1 Verification Cases Overview	135
7.23.2 Verification Case Definitions and Usages	137
7.24 Use Cases	138
7.24.1 Use Cases Overview	138
7.24.2 Use Case Definitions and Usages	141
7.24.3 Include Use Case Usages	142
7.25 Views and Viewpoints	142
7.25.1 Views and Viewpoints Overview.....	142
7.25.2 View Definitions and Usages.....	145
7.25.3 Viewpoint Definitions and Usages.....	146
7.25.4 Rendering Definitions and Usages.....	147
7.25.5 Diagrams	147
7.26 Metadata.....	149
7.26.1 Metadata Overview	149
7.26.2 Metadata Definitions and Usages.....	151
7.26.3 Semantic Metadata	152
7.26.4 User-Defined Keywords.....	153
8 Metamodel	155
8.1 Metamodel Overview.....	155
8.2 Concrete Syntax	155
8.2.1 Concrete Syntax Overview	155
8.2.2 Textual Notation.....	155
8.2.2.1 Textual Notation Overview	155
8.2.2.1.1 EBNF Conventions	156
8.2.2.1.2 Lexical Structure	157
8.2.2.2 Elements and Relationships Textual Notation	157
8.2.2.3 Dependencies Textual Notation	158
8.2.2.4 Annotations Textual Notation	158
8.2.2.4.1 Annotations	158
8.2.2.4.2 Comments and Documentation	158
8.2.2.4.3 Textual Representation.....	158
8.2.2.5 Namespaces and Packages Textual Notation	158
8.2.2.5.1 Packages	159
8.2.2.5.2 Package Elements.....	160
8.2.2.6 Definition and Usage Textual Notation	160
8.2.2.6.1 Definitions	160
8.2.2.6.2 Usages	161
8.2.2.6.3 Reference Usages	162
8.2.2.6.4 Body Elements	162
8.2.2.6.5 Specialization	163
8.2.2.6.6 Multiplicity	165
8.2.2.7 Attributes Textual Notation.....	165
8.2.2.8 Enumerations Textual Notation	165
8.2.2.9 Occurrences Textual Notation.....	165
8.2.2.9.1 Occurrence Definitions.....	165
8.2.2.9.2 Occurrence Usages	166
8.2.2.9.3 Occurrence Successions	166
8.2.2.10 Items Textual Notation	166

7.22.3 Trade-Off Analyses	133
7.23 Verification Cases	134
7.23.1 Verification Cases Overview	134
7.23.2 Verification Case Definitions and Usages	137
7.24 Use Cases	138
7.24.1 Use Cases Overview	138
7.24.2 Use Case Definitions and Usages	140
7.24.3 Include Use Case Usages	141
7.25 Views and Viewpoints	141
7.25.1 Views and Viewpoints Overview	142
7.25.2 View Definitions and Usages	145
7.25.3 Viewpoint Definitions and Usages	146
7.25.4 Rendering Definitions and Usages	147
7.25.5 Compartments and Diagrams as View Usages	147
7.26 Metadata	149
7.26.1 Metadata Overview	150
7.26.2 Metadata Definitions and Usages	152
7.26.3 Semantic Metadata	153
7.26.4 User-Defined Keywords	154
8 Metamodel	157
8.1 Metamodel Overview	157
8.2 Concrete Syntax	157
8.2.1 Concrete Syntax Overview	157
8.2.2 Textual Notation	157
8.2.2.1 Textual Notation Overview	157
8.2.2.1.1 EBNF Conventions	157
8.2.2.1.2 Lexical Structure	159
8.2.2.2 Elements and Relationships Textual Notation	160
8.2.2.3 Dependencies Textual Notation	160
8.2.2.4 Annotations Textual Notation	160
8.2.2.4.1 Annotations	160
8.2.2.4.2 Comments and Documentation	160
8.2.2.4.3 Textual Representation	161
8.2.2.5 Namespaces and Packages Textual Notation	161
8.2.2.5.1 Packages	161
8.2.2.5.2 Package Elements	162
8.2.2.6 Definition and Usage Textual Notation	162
8.2.2.6.1 Definitions	162
8.2.2.6.2 Usages	163
8.2.2.6.3 Reference Usages	164
8.2.2.6.4 Body Elements	164
8.2.2.6.5 Specialization	165
8.2.2.6.6 Multiplicity	166
8.2.2.7 Attributes Textual Notation	167
8.2.2.8 Enumerations Textual Notation	167
8.2.2.9 Occurrences Textual Notation	167
8.2.2.9.1 Occurrence Definitions	167
8.2.2.9.2 Occurrence Usages	167
8.2.2.9.3 Occurrence Successions	168
8.2.2.10 Items Textual Notation	168
8.2.2.11 Parts Textual Notation	168
8.2.2.12 Ports Textual Notation	168
8.2.2.13 Connections Textual Notation	169
8.2.2.13.1 Connection Definition and Usage	169
8.2.2.13.2 Binding Connectors	170
8.2.2.13.3 Successions	170

8.2.2.11 Parts Textual Notation.....	167
8.2.2.12 Ports Textual Notation	167
8.2.2.13 Connections Textual Notation.....	167
8.2.2.13.1 Connection Definition and Usage	167
8.2.2.13.2 Binding Connectors	168
8.2.2.13.3 Successions.....	168
8.2.2.13.4 Messages and Flow Connections	168
8.2.2.14 Interfaces Textual Notation.....	170
8.2.2.14.1 Interface Definitions.....	170
8.2.2.14.2 Interface Usages	171
8.2.2.15 Allocations Textual Notation	171
8.2.2.16 Actions Textual Notation	171
8.2.2.16.1 Action Definitions	171
8.2.2.16.2 Action Usages.....	172
8.2.2.16.3 Control Nodes.....	173
8.2.2.16.4 Send and Accept Action Usages	173
8.2.2.16.5 Assignment Action Usages	175
8.2.2.16.6 Structured Control Action Usages.....	175
8.2.2.16.7 Action Successions.....	176
8.2.2.17 States Textual Notation	176
8.2.2.17.1 State Definitions.....	176
8.2.2.17.2 State Usages	177
8.2.2.17.3 Transition Usages	178
8.2.2.18 Calculations Textual Notation.....	179
8.2.2.19 Constraints Textual Notation	179
8.2.2.20 Requirements Textual Notation	180
8.2.2.20.1 Requirement Definitions	180
8.2.2.20.2 Requirement Usages.....	181
8.2.2.20.3 Concerns.....	181
8.2.2.21 Cases Textual Notation	181
8.2.2.22 Analysis Cases Textual Notation	182
8.2.2.23 Verification Cases Textual Notation	182
8.2.2.24 Use Cases Textual Notation	182
8.2.2.25 Views and Viewpoints Textual Notation	183
8.2.2.25.1 View Definitions	183
8.2.2.25.2 View Usages.....	183
8.2.2.25.3 Viewpoints.....	183
8.2.2.25.4 Renderings	184
8.2.2.26 Metadata Textual Notation.....	184
8.2.3 Graphical Notation.....	185
8.2.3.1 Graphical Notation Overview	185
8.2.3.2 Elements and Relationships Graphical Notation.....	186
8.2.3.3 Dependencies Graphical Notation.....	186
8.2.3.4 Annotations Graphical Notation.....	187
8.2.3.5 Namespaces and Packages Graphical Notation	188
8.2.3.6 Definition and Usage Graphical Notation	191
8.2.3.7 Attributes Graphical Notation	193
8.2.3.8 Enumerations Graphical Notation.....	194
8.2.3.9 Occurrences Graphical Notation	195
8.2.3.10 Items Graphical Notation	199
8.2.3.11 Parts Graphical Notation	200
8.2.3.12 Ports Graphical Notation	202
8.2.3.13 Connections Graphical Notation	205
8.2.3.14 Interfaces Graphical Notation	210

8.2.2.13.4 Messages and Flow Connections	170
8.2.2.14 Interfaces Textual Notation	171
8.2.2.14.1 Interface Definitions.....	171
8.2.2.14.2 Interface Usages	172
8.2.2.15 Allocations Textual Notation	173
8.2.2.16 Actions Textual Notation	173
8.2.2.16.1 Action Definitions	173
8.2.2.16.2 Action Usages.....	174
8.2.2.16.3 Control Nodes.....	174
8.2.2.16.4 Send and Accept Action Usages	175
8.2.2.16.5 Assignment Action Usages	176
8.2.2.16.6 Terminate Action Usages	176
8.2.2.16.7 Structured Control Action Usages.....	177
8.2.2.16.8 Action Successions.....	177
8.2.2.17 States Textual Notation	178
8.2.2.17.1 State Definitions	178
8.2.2.17.2 State Usages	179
8.2.2.17.3 Transition Usages	179
8.2.2.18 Calculations Textual Notation.....	180
8.2.2.19 Constraints Textual Notation	181
8.2.2.20 Requirements Textual Notation	181
8.2.2.20.1 Requirement Definitions	181
8.2.2.20.2 Requirement Usages.....	182
8.2.2.20.3 Concerns	182
8.2.2.21 Cases Textual Notation	183
8.2.2.22 Analysis Cases Textual Notation	183
8.2.2.23 Verification Cases Textual Notation	183
8.2.2.24 Use Cases Textual Notation	184
8.2.2.25 Views and Viewpoints Textual Notation	184
8.2.2.25.1 View Definitions	184
8.2.2.25.2 View Usages.....	184
8.2.2.25.3 Viewpoints.....	185
8.2.2.25.4 Renderings.....	185
8.2.2.26 Metadata Textual Notation.....	185
8.2.3 Graphical Notation	186
8.2.3.1 Graphical Notation Overview	186
8.2.3.2 Elements and Relationships Graphical Notation.....	187
8.2.3.3 Dependencies Graphical Notation.....	188
8.2.3.4 Annotations Graphical Notation.....	189
8.2.3.5 Namespaces and Packages Graphical Notation	190
8.2.3.6 Definition and Usage Graphical Notation.....	192
8.2.3.7 Attributes Graphical Notation	195
8.2.3.8 Enumerations Graphical Notation	196
8.2.3.9 Occurrences Graphical Notation	196
8.2.3.10 Items Graphical Notation	200
8.2.3.11 Parts Graphical Notation	201
8.2.3.12 Ports Graphical Notation	203
8.2.3.13 Connections Graphical Notation	207
8.2.3.14 Interfaces Graphical Notation	211
8.2.3.15 Allocations Graphical Notation.....	213
8.2.3.16 Actions Graphical Notation.....	214
8.2.3.17 States Graphical Notation	223
8.2.3.18 Calculations Graphical Notation	225
8.2.3.19 Constraints Graphical Notation	227
8.2.3.20 Requirements Graphical Notation	229
8.2.3.21 Cases Graphical Notation.....	234

8.2.3.15 Allocations Graphical Notation.....	211
8.2.3.16 Actions Graphical Notation.....	212
8.2.3.17 States Graphical Notation.....	220
8.2.3.18 Calculations Graphical Notation	223
8.2.3.19 Constraints Graphical Notation	224
8.2.3.20 Requirements Graphical Notation	226
8.2.3.21 Cases Graphical Notation.....	231
8.2.3.22 Analysis Cases Graphical Notation.....	232
8.2.3.23 Verification Cases Graphical Notation	233
8.2.3.24 Use Cases Graphical Notation.....	234
8.2.3.25 Views and Viewpoints Graphical Notation.....	236
8.2.3.26 Metadata Graphical Notation	239
8.3 Abstract Syntax	240
8.3.1 Abstract Syntax Overview	240
8.3.2 Elements and Relationships Abstract Syntax.....	241
8.3.3 Dependencies Abstract Syntax.....	241
8.3.4 Annotations Abstract Syntax.....	242
8.3.5 Namespaces and Packages Abstract Syntax	242
8.3.6 Definition and Usage Abstract Syntax	244
8.3.6.1 Overview	245
8.3.6.2 Definition	245
8.3.6.3 ReferenceUsage.....	252
8.3.6.4 Usage	253
8.3.6.5 VariantMembership.....	260
8.3.7 Attributes Abstract Syntax	261
8.3.7.1 Overview	261
8.3.7.2 AttributeDefinition	261
8.3.7.3 AttributeUsage	262
8.3.8 Enumerations Abstract Syntax	263
8.3.8.1 Overview	263
8.3.8.2 EnumerationDefinition.....	263
8.3.8.3 EnumerationUsage	264
8.3.9 Occurrences Abstract Syntax	264
8.3.9.1 Overview	265
8.3.9.2 EventOccurrenceUsage	265
8.3.9.3 LifeClass.....	266
8.3.9.4 OccurrenceDefinition	267
8.3.9.5 OccurrenceUsage	268
8.3.9.6 PortionKind	270
8.3.10 Items Abstract Syntax	271
8.3.10.1 Overview	271
8.3.10.2 ItemDefinition	271
8.3.10.3 ItemUsage.....	272
8.3.11 Parts Abstract Syntax	272
8.3.11.1 Overview	273
8.3.11.2 PartDefinition	273
8.3.11.3 PartUsage	273
8.3.12 Ports Abstract Syntax	275
8.3.12.1 Overview	275
8.3.12.2 ConjugatedPortDefinition	276
8.3.12.3 ConjugatedPortTyping	277
8.3.12.4 PortConjugation	277
8.3.12.5 PortDefinition	278
8.3.12.6 PortUsage	279

8.2.3.22 Analysis Cases Graphical Notation.....	234
8.2.3.23 Verification Cases Graphical Notation	235
8.2.3.24 Use Cases Graphical Notation.....	237
8.2.3.25 Views and Viewpoints Graphical Notation.....	239
8.2.3.26 Metadata Graphical Notation	242
8.3 Abstract Syntax	243
8.3.1 Abstract Syntax Overview	243
8.3.2 Elements and Relationships Abstract Syntax.....	243
8.3.3 Dependencies Abstract Syntax.....	243
8.3.4 Annotations Abstract Syntax.....	244
8.3.5 Namespaces and Packages Abstract Syntax	244
8.3.6 Definition and Usage Abstract Syntax	246
8.3.6.1 Overview	246
8.3.6.2 Definition	247
8.3.6.3 ReferenceUsage.....	254
8.3.6.4 Usage	255
8.3.6.5 VariantMembership.....	262
8.3.7 Attributes Abstract Syntax	263
8.3.7.1 Overview	263
8.3.7.2 AttributeDefinition	263
8.3.7.3 AttributeUsage	264
8.3.8 Enumerations Abstract Syntax	264
8.3.8.1 Overview	265
8.3.8.2 EnumerationDefinition.....	265
8.3.8.3 EnumerationUsage	266
8.3.9 Occurrences Abstract Syntax	266
8.3.9.1 Overview	266
8.3.9.2 EventOccurrenceUsage	267
8.3.9.3 LifeClass.....	268
8.3.9.4 OccurrenceDefinition	269
8.3.9.5 OccurrenceUsage	270
8.3.9.6 PortionKind	272
8.3.10 Items Abstract Syntax	272
8.3.10.1 Overview	272
8.3.10.2 ItemDefinition	272
8.3.10.3 ItemUsage	273
8.3.11 Parts Abstract Syntax	274
8.3.11.1 Overview	274
8.3.11.2 PartDefinition	274
8.3.11.3 PartUsage	275
8.3.12 Ports Abstract Syntax	276
8.3.12.1 Overview	276
8.3.12.2 ConjugatedPortDefinition	277
8.3.12.3 ConjugatedPortTyping	278
8.3.12.4 PortConjugation	278
8.3.12.5 PortDefinition.....	279
8.3.12.6 PortUsage	280
8.3.13 Connections Abstract Syntax	281
8.3.13.1 Overview	281
8.3.13.2 BindingConnectorAsUsage	282
8.3.13.3 ConnectionDefinition	283
8.3.13.4 ConnectionUsage	283
8.3.13.5 ConnectorAsUsage	284
8.3.13.6 FlowConnectionDefinition	285
8.3.13.7 FlowConnectionUsage	285
8.3.13.8 SuccessionAsUsage	286

8.3.13 Connections Abstract Syntax	280
8.3.13.1 Overview	281
8.3.13.2 BindingConnectorAsUsage	282
8.3.13.3 ConnectionDefinition	282
8.3.13.4 ConnectionUsage	283
8.3.13.5 ConnectorAsUsage	284
8.3.13.6 FlowConnectionDefinition	284
8.3.13.7 FlowConnectionUsage	285
8.3.13.8 SuccessionAsUsage	286
8.3.13.9 SuccessionFlowConnectionUsage	286
8.3.14 Interfaces Abstract Syntax	286
8.3.14.1 Overview	287
8.3.14.2 InterfaceDefinition	287
8.3.14.3 InterfaceUsage	288
8.3.15 Allocations Abstract Syntax	288
8.3.15.1 Overview	289
8.3.15.2 AllocationDefinition	289
8.3.15.3 AllocationUsage	290
8.3.16 Actions Abstract Syntax	290
8.3.16.1 Overview	291
8.3.16.2 AcceptActionUsage	293
8.3.16.3 ActionDefinition	295
8.3.16.4 ActionUsage	296
8.3.16.5 AssignmentActionUsage	298
8.3.16.6 ControlNode	300
8.3.16.7 DecisionNode	301
8.3.16.8 ForkNode	302
8.3.16.9 ForLoopActionUsage	303
8.3.16.10 IfActionUsage	304
8.3.16.11 JoinNode	306
8.3.16.12 LoopActionUsage	307
8.3.16.13 MergeNode	307
8.3.16.14 PerformActionUsage	308
8.3.16.15 SendActionUsage	309
8.3.16.16 TriggerInvocationExpression	310
8.3.16.17 TriggerKind	312
8.3.16.18 WhileLoopActionUsage	312
8.3.17 States Abstract Syntax	314
8.3.17.1 Overview	314
8.3.17.2 ExhibitStateUsage	316
8.3.17.3 StateSubactionKind	317
8.3.17.4 StateSubactionMembership	317
8.3.17.5 StateDefinition	318
8.3.17.6 StateUsage	320
8.3.17.7 TransitionFeatureKind	323
8.3.17.8 TransitionFeatureMembership	323
8.3.17.9 TransitionUsage	324
8.3.18 Calculations Abstract Syntax	329
8.3.18.1 Overview	329
8.3.18.2 CalculationDefinition	329
8.3.18.3 CalculationUsage	330
8.3.19 Constraints Abstract Syntax	330
8.3.19.1 Overview	331
8.3.19.2 AssertConstraintUsage	331

8.3.13.9 SuccessionFlowConnectionUsage	286
8.3.14 Interfaces Abstract Syntax	287
8.3.14.1 Overview	287
8.3.14.2 InterfaceDefinition	287
8.3.14.3 InterfaceUsage	288
8.3.15 Allocations Abstract Syntax	289
8.3.15.1 Overview	289
8.3.15.2 AllocationDefinition	289
8.3.15.3 AllocationUsage	290
8.3.16 Actions Abstract Syntax	291
8.3.16.1 Overview	291
8.3.16.2 AcceptActionUsage	293
8.3.16.3 ActionDefinition	295
8.3.16.4 ActionUsage	296
8.3.16.5 AssignmentActionUsage	298
8.3.16.6 ControlNode	300
8.3.16.7 DecisionNode	301
8.3.16.8 ForkNode	302
8.3.16.9 ForLoopActionUsage	302
8.3.16.10 IfActionUsage	304
8.3.16.11 JoinNode	306
8.3.16.12 LoopActionUsage	306
8.3.16.13 MergeNode	307
8.3.16.14 PerformActionUsage	308
8.3.16.15 SendActionUsage	309
8.3.16.16 TerminateActionUsage	310
8.3.16.17 TriggerInvocationExpression	311
8.3.16.18 TriggerKind	312
8.3.16.19 WhileLoopActionUsage	313
8.3.17 States Abstract Syntax	314
8.3.17.1 Overview	314
8.3.17.2 ExhibitStateUsage	316
8.3.17.3 StateSubactionKind	317
8.3.17.4 StateSubactionMembership	318
8.3.17.5 StateDefinition	318
8.3.17.6 StateUsage	320
8.3.17.7 TransitionFeatureKind	323
8.3.17.8 TransitionFeatureMembership	323
8.3.17.9 TransitionUsage	324
8.3.18 Calculations Abstract Syntax	329
8.3.18.1 Overview	329
8.3.18.2 CalculationDefinition	329
8.3.18.3 CalculationUsage	330
8.3.19 Constraints Abstract Syntax	330
8.3.19.1 Overview	330
8.3.19.2 AssertConstraintUsage	331
8.3.19.3 ConstraintDefinition	332
8.3.19.4 ConstraintUsage	333
8.3.20 Requirements Abstract Syntax	334
8.3.20.1 Overview	334
8.3.20.2 ActorMembership	336
8.3.20.3 ConcernDefinition	337
8.3.20.4 ConcernUsage	337
8.3.20.5 FramedConcernMembership	338
8.3.20.6 RequirementConstraintKind	339
8.3.20.7 RequirementConstraintMembership	339

8.3.19.3 ConstraintDefinition.....	332
8.3.19.4 ConstraintUsage	333
8.3.20 Requirements Abstract Syntax	334
8.3.20.1 Overview	335
8.3.20.2 ActorMembership.....	337
8.3.20.3 ConcernDefinition	337
8.3.20.4 ConcernUsage	338
8.3.20.5 FramedConcernMembership.....	339
8.3.20.6 RequirementConstraintKind.....	339
8.3.20.7 RequirementConstraintMembership	340
8.3.20.8 RequirementDefinition	341
8.3.20.9 RequirementUsage	344
8.3.20.10 SatisfyRequirementUsage	347
8.3.20.11 SubjectMembership.....	348
8.3.20.12 StakeholderMembership.....	349
8.3.21 Cases Abstract Syntax	349
8.3.21.1 Overview	350
8.3.21.2 CaseDefinition.....	351
8.3.21.3 CaseUsage	352
8.3.21.4 ObjectiveMembership	354
8.3.22 Analysis Cases Abstract Syntax	355
8.3.22.1 Overview	355
8.3.22.2 AnalysisCaseDefinition.....	355
8.3.22.3 AnalysisCaseUsage	356
8.3.23 Verification Cases Abstract Syntax	358
8.3.23.1 Overview	358
8.3.23.2 RequirementVerificationMembership.....	359
8.3.23.3 VerificationCaseDefinition	360
8.3.23.4 VerificationCaseUsage	361
8.3.24 Use Cases Abstract Syntax	362
8.3.24.1 Overview	362
8.3.24.2 IncludeUseCaseUsage.....	362
8.3.24.3 UseCaseDefinition	363
8.3.24.4 UseCaseUsage	364
8.3.25 Views and Viewpoints Abstract Syntax	365
8.3.25.1 Overview	365
8.3.25.2 Expose	367
8.3.25.3 MembershipExpose	368
8.3.25.4 NamespaceExpose	368
8.3.25.5 RenderingDefinition	369
8.3.25.6 RenderingUsage	370
8.3.25.7 ViewDefinition	370
8.3.25.8 ViewpointDefinition	372
8.3.25.9 ViewpointUsage	373
8.3.25.10 ViewRenderingMembership	374
8.3.25.11 ViewUsage	375
8.3.26 Metadata Abstract Syntax	377
8.3.26.1 Overview	377
8.3.26.2 MetadataDefinition	377
8.3.26.3 MetadataUsage	378
8.4 Semantics	378
8.4.1 Semantics Overview	379
8.4.2 Definition and Usage Semantics	386
8.4.2.1 Definitions	386

8.3.20.8 RequirementDefinition.....	340
8.3.20.9 RequirementUsage	343
8.3.20.10 SatisfyRequirementUsage	346
8.3.20.11 SubjectMembership.....	347
8.3.20.12 StakeholderMembership.....	348
8.3.21 Cases Abstract Syntax.....	348
8.3.21.1 Overview	348
8.3.21.2 CaseDefinition.....	349
8.3.21.3 CaseUsage	351
8.3.21.4 ObjectiveMembership	353
8.3.22 Analysis Cases Abstract Syntax.....	354
8.3.22.1 Overview	354
8.3.22.2 AnalysisCaseDefinition.....	354
8.3.22.3 AnalysisCaseUsage	355
8.3.23 Verification Cases Abstract Syntax	356
8.3.23.1 Overview	356
8.3.23.2 RequirementVerificationMembership.....	357
8.3.23.3 VerificationCaseDefinition	358
8.3.23.4 VerificationCaseUsage	359
8.3.24 Use Cases Abstract Syntax.....	360
8.3.24.1 Overview	360
8.3.24.2 IncludeUseCaseUsage	361
8.3.24.3 UseCaseDefinition	362
8.3.24.4 UseCaseUsage	363
8.3.25 Views and Viewpoints Abstract Syntax.....	364
8.3.25.1 Overview	364
8.3.25.2 Expose	366
8.3.25.3 MembershipExpose	367
8.3.25.4 NamespaceExpose	368
8.3.25.5 RenderingDefinition	368
8.3.25.6 RenderingUsage	369
8.3.25.7 ViewDefinition	370
8.3.25.8 ViewpointDefinition	371
8.3.25.9 ViewpointUsage	372
8.3.25.10 ViewRenderingMembership	373
8.3.25.11 ViewUsage	374
8.3.26 Metadata Abstract Syntax	376
8.3.26.1 Overview	376
8.3.26.2 MetadataDefinition.....	376
8.3.26.3 MetadataUsage	377
8.4 Semantics	377
8.4.1 Semantics Overview.....	377
8.4.2 Definition and Usage Semantics	385
8.4.2.1 Definitions	385
8.4.2.2 Usages	385
8.4.2.3 Variation Definitions and Usages	385
8.4.3 Attributes Semantics	386
8.4.3.1 Attribute Definitions	386
8.4.3.2 Attribute Usages	386
8.4.4 Enumerations Semantics	387
8.4.5 Occurrences Semantics	387
8.4.5.1 Occurrence Definitions	387
8.4.5.2 Occurrence Usages	388
8.4.5.3 Event Occurrence Usages	389
8.4.6 Items Semantics	390
8.4.6.1 Item Definitions	390

8.4.2.2 Usages	386
8.4.2.3 Variation Definitions and Usages	386
8.4.3 Attributes Semantics	387
8.4.3.1 Attribute Definitions	388
8.4.3.2 Attribute Usages	388
8.4.4 Enumerations Semantics	388
8.4.5 Occurrences Semantics	389
8.4.5.1 Occurrence Definitions	389
8.4.5.2 Occurrence Usages	390
8.4.5.3 Event Occurrence Usages	391
8.4.6 Items Semantics	392
8.4.6.1 Item Definitions	392
8.4.6.2 Item Usages	392
8.4.7 Parts Semantics	392
8.4.7.1 Part Definitions	393
8.4.7.2 Part Usages	393
8.4.8 Ports Semantics	393
8.4.8.1 Port Definitions	394
8.4.8.2 Port Usages	395
8.4.9 Connections Semantics	395
8.4.9.1 Connection Definitions	395
8.4.9.2 Connection Usages	396
8.4.9.3 Binding Connectors As Usages	397
8.4.9.4 Successions As Usages	398
8.4.9.5 Flow Connection Definitions	398
8.4.9.6 Flow Connection Usages	399
8.4.9.7 Succession Flow Connection Usage	401
8.4.10 Interfaces Semantics	401
8.4.10.1 Interface Definitions	401
8.4.10.2 Interface Usages	402
8.4.11 Allocations Semantics	403
8.4.11.1 Allocation Definitions	403
8.4.11.2 Allocation Usages	403
8.4.12 Actions Semantics	403
8.4.12.1 Action Definitions	403
8.4.12.2 Action Usages	404
8.4.12.3 Decision Transition Usages	406
8.4.12.4 Control Nodes	407
8.4.12.5 Send Action Usages	412
8.4.12.6 Accept Action Usages	413
8.4.12.7 Assignment Action Usages	416
8.4.12.8 If Action Usages	417
8.4.12.9 Loop Action Usages	418
8.4.12.10 Perform Action Usages	420
8.4.13 States Semantics	421
8.4.13.1 State Definitions	421
8.4.13.2 State Usages	422
8.4.13.3 Transition Usages	423
8.4.13.4 Exhibit State Usages	426
8.4.14 Calculations Semantics	426
8.4.14.1 Calculation Definitions	427
8.4.14.2 Calculation Usages	427
8.4.15 Constraints Semantics	428
8.4.15.1 Constraint Definitions	428

8.4.6.2 Item Usages	390
8.4.7 Parts Semantics	391
8.4.7.1 Part Definitions	391
8.4.7.2 Part Usages	391
8.4.8 Ports Semantics	392
8.4.8.1 Port Definitions	392
8.4.8.2 Port Usages	393
8.4.9 Connections Semantics	393
8.4.9.1 Connection Definitions	393
8.4.9.2 Connection Usages	394
8.4.9.3 Binding Connectors As Usages	395
8.4.9.4 Successions As Usages	396
8.4.9.5 Flow Connection Definitions	396
8.4.9.6 Flow Connection Usages	397
8.4.9.7 Succession Flow Connection Usage	399
8.4.10 Interfaces Semantics	399
8.4.10.1 Interface Definitions	399
8.4.10.2 Interface Usages	400
8.4.11 Allocations Semantics	400
8.4.11.1 Allocation Definitions	400
8.4.11.2 Allocation Usages	401
8.4.12 Actions Semantics	401
8.4.12.1 Action Definitions	401
8.4.12.2 Action Usages	402
8.4.12.3 Decision Transition Usages	403
8.4.12.4 Control Nodes	404
8.4.12.5 Send Action Usages	409
8.4.12.6 Accept Action Usages	410
8.4.12.7 Assignment Action Usages	413
8.4.12.8 Terminate Action Usages	414
8.4.12.9 If Action Usages	415
8.4.12.10 Loop Action Usages	416
8.4.12.11 Perform Action Usages	418
8.4.13 States Semantics	419
8.4.13.1 State Definitions	419
8.4.13.2 State Usages	420
8.4.13.3 Transition Usages	421
8.4.13.4 Exhibit State Usages	423
8.4.14 Calculations Semantics	424
8.4.14.1 Calculation Definitions	424
8.4.14.2 Calculation Usages	425
8.4.15 Constraints Semantics	426
8.4.15.1 Constraint Definitions	426
8.4.15.2 Constraint Usages	426
8.4.15.3 Assert Constraint Usages	427
8.4.16 Requirements Semantics	428
8.4.16.1 Requirement Definitions	428
8.4.16.2 Requirement Usages	429
8.4.16.3 Satisfy Requirement Usages	430
8.4.16.4 Concern Definitions	431
8.4.16.5 Concern Usages	431
8.4.17 Cases Semantics	431
8.4.17.1 Case Definitions	431
8.4.17.2 Case Usages	432
8.4.18 Analysis Cases Semantics	433
8.4.18.1 Analysis Case Definitions	433

8.4.15.2 Constraint Usages.....	429
8.4.15.3 Assert Constraint Usages	430
8.4.16 Requirements Semantics	430
8.4.16.1 Requirement Definitions	430
8.4.16.2 Requirement Usages.....	432
8.4.16.3 Satisfy Requirement Usages.....	433
8.4.16.4 Concern Definitions	434
8.4.16.5 Concern Usages.....	434
8.4.17 Cases Semantics	434
8.4.17.1 Case Definitions	434
8.4.17.2 Case Usages.....	435
8.4.18 Analysis Cases Semantics	436
8.4.18.1 Analysis Case Definitions	436
8.4.18.2 Analysis Case Usages.....	437
8.4.19 Verification Cases Semantics.....	438
8.4.19.1 Verification Case Definitions.....	438
8.4.19.2 Verification Case Usages	439
8.4.20 Use Cases Semantics.....	439
8.4.20.1 Use Case Definitions	439
8.4.20.2 Use Case Usages	440
8.4.20.3 Include Use Case Usages	440
8.4.21 Views and Viewpoints Semantics	441
8.4.21.1 View Definitions	441
8.4.21.2 View Usages.....	441
8.4.21.3 Viewpoint Definitions	441
8.4.21.4 Viewpoint Usages	442
8.4.21.5 Rendering Definitions	442
8.4.21.6 Rendering Usages.....	442
8.4.22 Metadata Semantics	443
8.4.22.1 Metadata Definitions	443
8.4.22.2 Metadata Usages	443
9 Model Libraries.....	445
9.1 Model Libraries Overview	445
9.2 Systems Model Library	445
9.2.1 Systems Model Library Overview	446
9.2.2 Attributes.....	446
9.2.2.1 Attributes Overview	446
9.2.2.2 Elements	446
9.2.2.2.1 AttributeValue	446
9.2.2.2.2 attributeValues.....	446
9.2.2.3 Items	447
9.2.3.1 Items Overview	447
9.2.3.2 Elements	447
9.2.3.2.1 Item.....	447
9.2.3.2.2 items	448
9.2.3.2.3 Touches	448
9.2.4 Parts	449
9.2.4.1 Parts Overview	449
9.2.4.2 Elements	449
9.2.4.2.1 Part.....	449
9.2.4.2.2 parts	450
9.2.5 Ports	450
9.2.5.1 Ports Overview	450

8.4.18.2 Analysis Case Usages.....	434
8.4.19 Verification Cases Semantics.....	434
8.4.19.1 Verification Case Definitions.....	434
8.4.19.2 Verification Case Usages	435
8.4.20 Use Cases Semantics	436
8.4.20.1 Use Case Definitions.....	436
8.4.20.2 Use Case Usages	436
8.4.20.3 Include Use Case Usages	437
8.4.21 Views and Viewpoints Semantics	438
8.4.21.1 View Definitions	438
8.4.21.2 View Usages.....	438
8.4.21.3 Viewpoint Definitions	438
8.4.21.4 Viewpoint Usages	438
8.4.21.5 Rendering Definitions	439
8.4.21.6 Rendering Usages.....	439
8.4.22 Metadata Semantics	440
8.4.22.1 Metadata Definitions	440
8.4.22.2 Metadata Usages	440
9 Model Libraries.....	441
9.1 Model Libraries Overview	441
9.2 Systems Model Library	441
9.2.1 Systems Model Library Overview	441
9.2.2 Attributes.....	442
9.2.2.1 Attributes Overview	442
9.2.2.2 Elements	442
9.2.2.2.1 AttributeValue	442
9.2.2.2.2 attributeValues.....	442
9.2.2.3 Items	443
9.2.3.1 Items Overview	443
9.2.3.2 Elements	443
9.2.3.2.1 Item.....	443
9.2.3.2.2 items	444
9.2.3.2.3 Touches	444
9.2.4 Parts.....	445
9.2.4.1 Parts Overview	445
9.2.4.2 Elements	445
9.2.4.2.1 Part.....	445
9.2.4.2.2 parts	446
9.2.5 Ports	446
9.2.5.1 Ports Overview	446
9.2.5.2 Elements	446
9.2.5.2.1 Port	446
9.2.5.2.2 ports	446
9.2.6 Connections.....	447
9.2.6.1 Connections Overview	447
9.2.6.2 Elements	447
9.2.6.2.1 BinaryConnection.....	447
9.2.6.2.2 binaryConnections	448
9.2.6.2.3 Connection.....	448
9.2.6.2.4 connections	448
9.2.6.2.5 FlowConnection	449
9.2.6.2.6 flowConnections	449
9.2.6.2.7 MessageConnection.....	450
9.2.6.2.8 messageConnections	450
9.2.6.2.9 SuccessionFlowConnection.....	451
9.2.6.2.10 successionFlowConnections	451

9.2.5.2 Elements	450
9.2.5.2.1 Port	450
9.2.5.2.2 ports	451
9.2.6 Connections.....	451
9.2.6.1 Connections Overview	451
9.2.6.2 Elements	451
9.2.6.2.1 BinaryConnection.....	451
9.2.6.2.2 binaryConnections.....	452
9.2.6.2.3 Connection.....	452
9.2.6.2.4 connections.....	453
9.2.6.2.5 FlowConnection	453
9.2.6.2.6 flowConnections.....	453
9.2.6.2.7 MessageConnection.....	454
9.2.6.2.8 messageConnections	455
9.2.6.2.9 SuccessionFlowConnection.....	455
9.2.6.2.10 successionFlowConnections.....	456
9.2.7 Interfaces	456
9.2.7.1 Interfaces Overview	456
9.2.7.2 Elements	456
9.2.7.2.1 BinaryInterface.....	456
9.2.7.2.2 binaryInterfaces.....	457
9.2.7.2.3 Interface.....	457
9.2.7.2.4 interfaces	458
9.2.8 Allocations	458
9.2.8.1 Allocations Overview.....	458
9.2.8.2 Elements	458
9.2.8.2.1 Allocation	458
9.2.8.2.2 allocations.....	459
9.2.9 Actions	459
9.2.9.1 Actions Overview.....	459
9.2.9.2 Elements	459
9.2.9.2.1 AcceptAction.....	459
9.2.9.2.2 acceptActions	460
9.2.9.2.3 AcceptMessageAction.....	460
9.2.9.2.4 Action	461
9.2.9.2.5 actions.....	462
9.2.9.2.6 AssignmentAction	463
9.2.9.2.7 assignmentActions.....	463
9.2.9.2.8 ControlAction.....	464
9.2.9.2.9 DecisionAction.....	464
9.2.9.2.10 DecisionTransitionAction	465
9.2.9.2.11 ForkAction.....	465
9.2.9.2.12 ForLoopAction	465
9.2.9.2.13 forLoopActions	466
9.2.9.2.14 IfThenAction	467
9.2.9.2.15 ifThenActions	467
9.2.9.2.16 IfThenElseAction	468
9.2.9.2.17 ifThenElseActions	468
9.2.9.2.18 JoinAction	469
9.2.9.2.19 LoopAction.....	469
9.2.9.2.20 loopActions	470
9.2.9.2.21 MergeAction	470
9.2.9.2.22 SendAction	470
9.2.9.2.23 sendActions	471

9.2.7 Interfaces	452
9.2.7.1 Interfaces Overview	452
9.2.7.2 Elements	452
9.2.7.2.1 BinaryInterface	452
9.2.7.2.2 binaryInterfaces	452
9.2.7.2.3 Interface	453
9.2.7.2.4 interfaces	453
9.2.8 Allocations	454
9.2.8.1 Allocations Overview.....	454
9.2.8.2 Elements	454
9.2.8.2.1 Allocation	454
9.2.8.2.2 allocations.....	454
9.2.9 Actions	455
9.2.9.1 Actions Overview.....	455
9.2.9.2 Elements	455
9.2.9.2.1 AcceptAction.....	455
9.2.9.2.2 acceptActions	455
9.2.9.2.3 AcceptMessageAction.....	456
9.2.9.2.4 Action	456
9.2.9.2.5 actions.....	458
9.2.9.2.6 AssignmentAction	458
9.2.9.2.7 assignmentActions.....	459
9.2.9.2.8 ControlAction	459
9.2.9.2.9 DecisionAction	460
9.2.9.2.10 DecisionTransitionAction	460
9.2.9.2.11 ForkAction.....	461
9.2.9.2.12 ForLoopAction	461
9.2.9.2.13 forLoopActions	462
9.2.9.2.14 IfThenAction	462
9.2.9.2.15 ifThenActions	463
9.2.9.2.16 IfThenElseAction	463
9.2.9.2.17 ifThenElseActions	464
9.2.9.2.18 JoinAction	464
9.2.9.2.19 LoopAction.....	465
9.2.9.2.20 loopActions	465
9.2.9.2.21 MergeAction	466
9.2.9.2.22 SendAction	466
9.2.9.2.23 sendActions	467
9.2.9.2.24 TerminateAction	467
9.2.9.2.25 terminateActions	467
9.2.9.2.26 TransitionAction	468
9.2.9.2.27 transitionActions	468
9.2.9.2.28 WhileLoopAction	469
9.2.9.2.29 whileLoopActions	470
9.2.10 States	470
9.2.10.1 States Overview.....	470
9.2.10.2 Elements	470
9.2.10.2.1 StateAction	470
9.2.10.2.2 stateActions	471
9.2.10.2.3 StateTransitionAction.....	471
9.2.11 Calculations.....	472
9.2.11.1 Calculations Overview	472
9.2.11.2 Elements	472
9.2.11.2.1 Calculation	472
9.2.11.2.2 calculations	473

9.2.9.2.24 TransitionAction.....	471
9.2.9.2.25 transitionActions	472
9.2.9.2.26 WhileLoopAction.....	472
9.2.9.2.27 whileLoopActions	473
9.2.10 States	474
9.2.10.1 States Overview.....	474
9.2.10.2 Elements	474
9.2.10.2.1 StateAction.....	474
9.2.10.2.2 stateActions	474
9.2.10.2.3 StateTransitionAction.....	475
9.2.11 Calculations.....	475
9.2.11.1 Calculations Overview	475
9.2.11.2 Elements	476
9.2.11.2.1 Calculation.....	476
9.2.11.2.2 calculations.....	476
9.2.12 Constraints	477
9.2.12.1 Constraints Overview	477
9.2.12.2 Elements	477
9.2.12.2.1 assertedConstraintChecks.....	477
9.2.12.2.2 ConstraintCheck	477
9.2.12.2.3 constraintChecks	478
9.2.12.2.4 negatedConstraintChecks	478
9.2.13 Requirements.....	478
9.2.13.1 Requirements Overview	478
9.2.13.2 Elements	479
9.2.13.2.1 ConcernCheck	479
9.2.13.2.2 concernChecks	479
9.2.13.2.3 DesignConstraintCheck	479
9.2.13.2.4 FunctionalRequirementCheck	480
9.2.13.2.5 InterfaceRequirementCheck	480
9.2.13.2.6 PerformanceRequirementCheck	481
9.2.13.2.7 PhysicalRequirementCheck	481
9.2.13.2.8 RequirementCheck	481
9.2.13.2.9 requirementChecks	482
9.2.14 Cases	483
9.2.14.1 Cases Overview	483
9.2.14.2 Elements	483
9.2.14.2.1 Case	483
9.2.14.2.2 cases	484
9.2.15 Analysis Cases	484
9.2.15.1 Analysis Cases Overview	484
9.2.15.2 Elements	484
9.2.15.2.1 AnalysisAction	484
9.2.15.2.2 AnalysisCase	485
9.2.15.2.3 analysisCases	485
9.2.16 Verification Cases	485
9.2.16.1 Verification Cases Overview	486
9.2.16.2 Elements	486
9.2.16.2.1 PassIf	486
9.2.16.2.2 VerdictKind	486
9.2.16.2.3 VerificationCase	487
9.2.16.2.4 verificationCases	487
9.2.16.2.5 VerificationCheck	488
9.2.16.2.6 VerificationMethod	488

9.2.12 Constraints	473
9.2.12.1 Constraints Overview	473
9.2.12.2 Elements	473
9.2.12.2.1 assertedConstraintChecks	473
9.2.12.2.2 ConstraintCheck	474
9.2.12.2.3 constraintChecks	474
9.2.12.2.4 negatedConstraintChecks	474
9.2.13 Requirements	475
9.2.13.1 Requirements Overview	475
9.2.13.2 Elements	475
9.2.13.2.1 ConcernCheck	475
9.2.13.2.2 concernChecks	475
9.2.13.2.3 DesignConstraintCheck	476
9.2.13.2.4 FunctionalRequirementCheck	476
9.2.13.2.5 InterfaceRequirementCheck	477
9.2.13.2.6 PerformanceRequirementCheck	477
9.2.13.2.7 PhysicalRequirementCheck	477
9.2.13.2.8 RequirementCheck	478
9.2.13.2.9 requirementChecks	479
9.2.14 Cases	479
9.2.14.1 Cases Overview	479
9.2.14.2 Elements	479
9.2.14.2.1 Case	479
9.2.14.2.2 cases	480
9.2.15 Analysis Cases	480
9.2.15.1 Analysis Cases Overview	480
9.2.15.2 Elements	480
9.2.15.2.1 AnalysisCase	480
9.2.15.2.2 analysisCases	481
9.2.16 Verification Cases	481
9.2.16.1 Verification Cases Overview	481
9.2.16.2 Elements	481
9.2.16.2.1 PassIf	481
9.2.16.2.2 VerdictKind	482
9.2.16.2.3 VerificationCase	482
9.2.16.2.4 verificationCases	483
9.2.16.2.5 VerificationCheck	484
9.2.16.2.6 VerificationMethod	484
9.2.16.2.7 VerificationMethodKind	485
9.2.17 Use Cases	485
9.2.17.1 Use Cases Overview	485
9.2.17.2 Elements	485
9.2.17.2.1 UseCase	485
9.2.17.2.2 useCases	486
9.2.18 Views	486
9.2.18.1 Views Overview	486
9.2.18.2 Elements	486
9.2.18.2.1 asElementTable	486
9.2.18.2.2 asInterconnectionDiagram	487
9.2.18.2.3 asTextualNotation	487
9.2.18.2.4 asTreeDiagram	487
9.2.18.2.5 GraphicalRendering	488
9.2.18.2.6 Rendering	488
9.2.18.2.7 renderings	489
9.2.18.2.8 TabularRendering	489
9.2.18.2.9 TextualRendering	490

9.2.16.2.7 VerificationMethodKind	489
9.2.17 Use Cases	489
9.2.17.1 Use Cases Overview.....	489
9.2.17.2 Elements	489
9.2.17.2.1 UseCase	489
9.2.17.2.2 useCases	490
9.2.18 Views.....	490
9.2.18.1 Views Overview	490
9.2.18.2 Elements	490
9.2.18.2.1 asElementTable	490
9.2.18.2.2 asInterconnectionDiagram.....	491
9.2.18.2.3 asTextualNotation	491
9.2.18.2.4 asTreeDiagram	492
9.2.18.2.5 GraphicalRendering	492
9.2.18.2.6 Rendering	493
9.2.18.2.7 renderings	493
9.2.18.2.8 TabularRendering.....	493
9.2.18.2.9 TextualRendering	494
9.2.18.2.10 View	494
9.2.18.2.11 ViewpointCheck	495
9.2.18.2.12 viewpointChecks	495
9.2.18.2.13 viewpointConformance	496
9.2.18.2.14 views.....	496
9.2.19 Standard View Definitions	497
9.2.19.1 Standard View Definitions Overview	497
9.2.19.2 Elements	498
9.2.19.2.1 ActionFlowView	498
9.2.19.2.2 BrowserView	498
9.2.19.2.3 GeneralView.....	499
9.2.19.2.4 GeometryView	499
9.2.19.2.5 GridView	500
9.2.19.2.6 InterconnectionView	501
9.2.19.2.7 SequenceView	501
9.2.19.2.8 StateTransitionView	502
9.2.20 Metadata	502
9.2.20.1 Metadata Overview	502
9.2.20.2 Elements	502
9.2.20.2.1 MetadataItem	502
9.2.20.2.2 metadataItems	503
9.2.21 SysML	503
9.3 Metadata Domain Library	504
9.3.1 Metadata Domain Library Overview	504
9.3.2 Modeling Metadata	504
9.3.2.1 Modeling Metadata Overview	504
9.3.2.2 Elements	504
9.3.2.2.1 Issue	504
9.3.2.2.2 Rationale	505
9.3.2.2.3 Refinement	505
9.3.2.2.4 StatusInfo	506
9.3.2.2.5 StatusKind	507
9.3.3 Risk Metadata	507
9.3.3.1 Risk Metadata Overview	507
9.3.3.2 Elements	507
9.3.3.2.1 Level	507

9.2.18.2.10 View	490
9.2.18.2.11 ViewpointCheck	491
9.2.18.2.12 viewpointChecks	491
9.2.18.2.13 viewpointConformance	491
9.2.18.2.14 views	492
9.2.19 Standard View Definitions	492
9.2.19.1 Standard View Definitions Overview	492
9.2.19.2 Elements	493
9.2.19.2.1 ActionFlowView	493
9.2.19.2.2 BrowserView	494
9.2.19.2.3 GeneralView	494
9.2.19.2.4 GeometryView	495
9.2.19.2.5 GridView	496
9.2.19.2.6 InterconnectionView	496
9.2.19.2.7 SequenceView	497
9.2.19.2.8 StateTransitionView	497
9.2.20 Metadata	498
9.2.20.1 Metadata Overview	498
9.2.20.2 Elements	498
9.2.20.2.1 MetadataItem	498
9.2.20.2.2 metadataItems	498
9.2.21 SysML	499
9.3 Metadata Domain Library	500
9.3.1 Metadata Domain Library Overview	500
9.3.2 Modeling Metadata	500
9.3.2.1 Modeling Metadata Overview	500
9.3.2.2 Elements	500
9.3.2.2.1 Issue	500
9.3.2.2.2 Rationale	500
9.3.2.2.3 Refinement	501
9.3.2.2.4 StatusInfo	501
9.3.2.2.5 StatusKind	502
9.3.2.3 Risk Metadata	503
9.3.3.1 Risk Metadata Overview	503
9.3.3.2 Elements	503
9.3.3.2.1 Level	503
9.3.3.2.2 LevelEnum	503
9.3.3.2.3 Risk	504
9.3.3.2.4 RiskLevel	505
9.3.3.2.5 RiskLevelEnum	505
9.3.3.4 Parameters of Interest Metadata	506
9.3.4.1 Parameters of Interest Metadata Overview	506
9.3.4.2 Elements	506
9.3.4.2.1 MeasureOfEffectiveness	506
9.3.4.2.2 MeasureOfPerformance	506
9.3.4.2.3 measuresOfEffectiveness	507
9.3.4.2.4 measuresOfPerformance	507
9.3.5.5 Image Metadata	508
9.3.5.1 Image Metadata Overview	508
9.3.5.2 Elements	508
9.3.5.2.1 Icon	508
9.3.5.2.2 Image	508
9.4 Analysis Domain Library	509
9.4.1 Analysis Domain Library Overview	509
9.4.2 Analysis Tooling	509
9.4.2.1 Analysis Tooling Overview	509

9.3.3.2.2 LevelEnum	508
9.3.3.2.3 Risk.....	509
9.3.3.2.4 RiskLevel.....	509
9.3.3.2.5 RiskLevelEnum.....	510
9.3.4 Parameters of Interest Metadata	510
9.3.4.1 Parameters of Interest Metadata Overview	510
9.3.4.2 Elements	510
9.3.4.2.1 MeasureOfEffectiveness	510
9.3.4.2.2 MeasureOfPerformance.....	511
9.3.4.2.3 measuresOfEffectiveness	511
9.3.4.2.4 measuresOfPerformance	512
9.3.5 Image Metadata	512
9.3.5.1 Image Metadata Overview	512
9.3.5.2 Elements	512
9.3.5.2.1 Icon.....	512
9.3.5.2.2 Image.....	513
9.4 Analysis Domain Library	514
9.4.1 Analysis Domain Library Overview	514
9.4.2 Analysis Tooling	514
9.4.2.1 Analysis Tooling Overview	514
9.4.2.2 Elements	514
9.4.2.2.1 ToolExecution	514
9.4.2.2.2 ToolVariable.....	514
9.4.3 Sampled Functions	515
9.4.3.1 Sampled Functions Overview	515
9.4.3.2 Elements	515
9.4.3.2.1 Domain	515
9.4.3.2.2 Interpolate.....	516
9.4.3.2.3 interpolateLinear	516
9.4.3.2.4 Range.....	517
9.4.3.2.5 Sample	517
9.4.3.2.6 SampledFunction.....	518
9.4.3.2.7 SamplePair.....	519
9.4.4 State Space Representation	519
9.4.4.1 State Space Representation Overview	519
9.4.4.2 Elements	519
9.4.5 Trade Studies.....	520
9.4.5.1 Trade Studies Overview	520
9.4.5.2 Elements	521
9.4.5.2.1 EvaluationFunction	521
9.4.5.2.2 MaximizeObjective	521
9.4.5.2.3 MinimizeObjective.....	522
9.4.5.2.4 TradeStudy	522
9.4.5.2.5 TradeStudyObjective	523
9.5 Cause and Effect Domain Library	524
9.5.1 Cause and Effect Domain Library Overview	524
9.5.2 Causation Connections	524
9.5.2.1 Causation Connections Overview	524
9.5.2.2 Elements	524
9.5.2.2.1 Causation	524
9.5.2.2.2 causations	525
9.5.2.2.3 causes.....	525
9.5.2.2.4 effects	525
9.5.2.2.5 Multicausation	526

9.4.2.2 Elements	509
9.4.2.2.1 ToolExecution	509
9.4.2.2.2 ToolVariable.....	510
9.4.3 Sampled Functions	510
9.4.3.1 Sampled Functions Overview	510
9.4.3.2 Elements	510
9.4.3.2.1 Domain	510
9.4.3.2.2 Interpolate.....	511
9.4.3.2.3 interpolateLinear	511
9.4.3.2.4 Range.....	512
9.4.3.2.5 Sample	512
9.4.3.2.6 SampledFunction.....	513
9.4.3.2.7 SamplePair.....	514
9.4.4 State Space Representation	514
9.4.4.1 State Space Representation Overview	514
9.4.4.2 Elements	515
9.4.5 Trade Studies.....	515
9.4.5.1 Trade Studies Overview	516
9.4.5.2 Elements	516
9.4.5.2.1 EvaluationFunction	516
9.4.5.2.2 MaximizeObjective	516
9.4.5.2.3 MinimizeObjective	517
9.4.5.2.4 TradeStudy	517
9.4.5.2.5 TradeStudyObjective	518
9.5 Cause and Effect Domain Library	519
9.5.1 Cause and Effect Domain Library Overview	519
9.5.2 Causation Connections	519
9.5.2.1 Causation Connections Overview	519
9.5.2.2 Elements	519
9.5.2.2.1 Causation	519
9.5.2.2.2 causations	520
9.5.2.2.3 causes.....	520
9.5.2.2.4 effects	520
9.5.2.2.5 Multicausation	521
9.5.2.2.6 multicausations	521
9.5.2.3 Cause and Effect	522
9.5.3.1 Cause and Effect Overview	522
9.5.3.2 Elements	522
9.5.3.2.1 CausationMetadata	522
9.5.3.2.2 CausationSemanticMetadata	523
9.5.3.2.3 CauseMetadata	523
9.5.3.2.4 EffectMetadata	524
9.5.3.2.5 MulticausationSemanticMetadata	524
9.6 Requirement Derivation Domain Library	525
9.6.1 Requirement Derivation Domain Library Overview	525
9.6.2 Derivation Connections.....	525
9.6.2.1 Derivation Connections Overview	525
9.6.2.2 Elements	525
9.6.2.2.1 Derivation	525
9.6.2.2.2 derivations	526
9.6.2.2.3 derivedRequirements	526
9.6.2.2.4 originalRequirements	527
9.6.3 Requirement Derivation	527
9.6.3.1 Requirement Derivation Overview	527
9.6.3.2 Elements	527
9.6.3.2.1 DerivationMetadata	527

9.5.2.2.6 multicausations	527
9.5.3 Cause and Effect	527
9.5.3.1 Cause and Effect Overview	527
9.5.3.2 Elements	527
9.5.3.2.1 CausationMetadata	527
9.5.3.2.2 CausationSemanticMetadata	528
9.5.3.2.3 CauseMetadata	528
9.5.3.2.4 EffectMetadata	529
9.5.3.2.5 MulticausationSemanticMetadata	529
9.6 Requirement Derivation Domain Library	530
9.6.1 Requirement Derivation Domain Library Overview	530
9.6.2 Derivation Connections	530
9.6.2.1 Derivation Connections Overview	530
9.6.2.2 Elements	530
9.6.2.2.1 Derivation	530
9.6.2.2.2 derivations	531
9.6.2.2.3 derivedRequirements	531
9.6.2.2.4 originalRequirements	532
9.6.3 Requirement Derivation	532
9.6.3.1 Requirement Derivation Overview	532
9.6.3.2 Elements	532
9.6.3.2.1 DerivationMetadata	532
9.6.3.2.2 DerivedRequirementMetadata	533
9.6.3.2.3 OriginalRequirementMetadata	533
9.7 Geometry Domain Library	534
9.7.1 Geometry Domain Library Overview	534
9.7.2 Spatial Items	534
9.7.2.1 Spatial Items Overview	534
9.7.2.2 Elements	534
9.7.2.2.1 CurrentDisplacementOf	534
9.7.2.2.2 CurrentPositionOf	535
9.7.2.2.3 DisplacementOf	535
9.7.2.2.4 PositionOf	536
9.7.2.2.5 SpatialItem	537
9.7.3 Shape Items	538
9.7.3.1 Shape Items Overview	538
9.7.3.2 Elements	538
9.7.3.2.1 Circle	538
9.7.3.2.2 CircularCone	538
9.7.3.2.3 CircularCylinder	539
9.7.3.2.4 CircularDisc	539
9.7.3.2.5 Cone	540
9.7.3.2.6 ConeOrCylinder	540
9.7.3.2.7 ConicSection	541
9.7.3.2.8 ConicSurface	542
9.7.3.2.9 Cuboid	542
9.7.3.2.10 CuboidOrTriangularPrism	543
9.7.3.2.11 Cylinder	544
9.7.3.2.12 Disc	545
9.7.3.2.13 EccentricCone	545
9.7.3.2.14 EccentricCylinder	546
9.7.3.2.15 Ellipse	546
9.7.3.2.16 Ellipsoid	546
9.7.3.2.17 Hyperbola	547

9.6.3.2.2 DerivedRequirementMetadata.....	528
9.6.3.2.3 OriginalRequirementMetadata.....	528
9.7 Geometry Domain Library.....	529
9.7.1 Geometry Domain Library Overview	529
9.7.2 Spatial Items	529
9.7.2.1 Spatial Items Overview	529
9.7.2.2 Elements	529
9.7.2.2.1 CurrentDisplacementOf.....	529
9.7.2.2.2 CurrentPositionOf.....	529
9.7.2.2.3 DisplacementOf.....	530
9.7.2.2.4 PositionOf.....	531
9.7.2.2.5 SpatialItem.....	531
9.7.2.3 Shape Items	532
9.7.3.1 Shape Items Overview	532
9.7.3.2 Elements	533
9.7.3.2.1 Circle	533
9.7.3.2.2 CircularCone	533
9.7.3.2.3 CircularCylinder.....	533
9.7.3.2.4 CircularDisc.....	534
9.7.3.2.5 Cone.....	534
9.7.3.2.6 ConeOrCylinder	535
9.7.3.2.7 ConicSection	536
9.7.3.2.8 ConicSurface	536
9.7.3.2.9 Cuboid	537
9.7.3.2.10 CuboidOrTriangularPrism.....	537
9.7.3.2.11 Cylinder	539
9.7.3.2.12 Disc.....	539
9.7.3.2.13 EccentricCone	540
9.7.3.2.14 EccentricCylinder.....	540
9.7.3.2.15 Ellipse.....	540
9.7.3.2.16 Ellipsoid	541
9.7.3.2.17 Hyperbola	541
9.7.3.2.18 Hyperboloid.....	542
9.7.3.2.19 Line.....	542
9.7.3.2.20 Parabola	543
9.7.3.2.21 Paraboloid.....	543
9.7.3.2.22 Path.....	543
9.7.3.2.23 PlanarCurve	544
9.7.3.2.24 PlanarSurface.....	544
9.7.3.2.25 Polygon.....	545
9.7.3.2.26 Polyhedron.....	545
9.7.3.2.27 Pyramid	546
9.7.3.2.28 Quadrilateral.....	547
9.7.3.2.29 Rectangle	547
9.7.3.2.30 RectangularCuboid	548
9.7.3.2.31 RectangularPyramid	548
9.7.3.2.32 RectangularToroid	549
9.7.3.2.33 RightCircularCone	549
9.7.3.2.34 RightCircularCylinder	550
9.7.3.2.35 RightTriangle.....	550
9.7.3.2.36 RightTriangularPrism	550
9.7.3.2.37 Shell.....	551
9.7.3.2.38 Sphere	552
9.7.3.2.39 Tetrahedron	552
9.7.3.2.40 Toriod	552
9.7.3.2.41 Torus.....	553

9.7.3.2.18 Hyperboloid.....	547
9.7.3.2.19 Line.....	548
9.7.3.2.20 Parabola	548
9.7.3.2.21 Paraboloid.....	549
9.7.3.2.22 Path.....	549
9.7.3.2.23 PlanarCurve	550
9.7.3.2.24 PlanarSurface.....	550
9.7.3.2.25 Polygon.....	551
9.7.3.2.26 Polyhedron.....	551
9.7.3.2.27 Pyramid	552
9.7.3.2.28 Quadrilateral	552
9.7.3.2.29 Rectangle	553
9.7.3.2.30 RectangularCuboid	553
9.7.3.2.31 RectangularPyramid	554
9.7.3.2.32 RectangularToroid	555
9.7.3.2.33 RightCircularCone	555
9.7.3.2.34 RightCircularCylinder	555
9.7.3.2.35 RightTriangle	556
9.7.3.2.36 RightTriangularPrism	556
9.7.3.2.37 Shell	557
9.7.3.2.38 Sphere	557
9.7.3.2.39 Tetrahedron	558
9.7.3.2.40 Toriod	558
9.7.3.2.41 Torus	559
9.7.3.2.42 Triangle	559
9.7.3.2.43 TriangularPrism	560
9.8 Quantities and Units Domain Library	561
9.8.1 Quantities and Units Domain Library Overview	561
9.8.2 Quantities	561
9.8.2.1 Quantities Overview	562
9.8.2.2 Elements	563
9.8.2.2.1 3dVectorQuantityValue	563
9.8.2.2.2 QuantityDimension	563
9.8.2.2.3 QuantityPowerFactor	564
9.8.2.2.4 scalarQuantities	564
9.8.2.2.5 ScalarQuantityValue	565
9.8.2.2.6 SystemOfQuantities	565
9.8.2.2.7 tensorQuantities	566
9.8.2.2.8 TensorQuantityValue	566
9.8.2.2.9 vectorQuantities	567
9.8.2.2.10 VectorQuantityValue	568
9.8.2.3 Measurement References	569
9.8.3.1 Measurement References Overview	569
9.8.3.2 Elements	569
9.8.3.2.1 3dCoordinateFrame	569
9.8.3.2.2 AffineTransformMatrix3d	569
9.8.3.2.3 ConversionByConvention	570
9.8.3.2.4 ConversionByPrefix	571
9.8.3.2.5 CoordinateFrame	571
9.8.3.2.6 CoordinateFramePlacement	572
9.8.3.2.7 CoordinateTransformation	573
9.8.3.2.8 countQuantities	573
9.8.3.2.9 CountValue	574
9.8.3.2.10 CyclicRatioScale	574

9.7.3.2.42 Triangle	553
9.7.3.2.43 TriangularPrism.....	554
9.8 Quantities and Units Domain Library	555
9.8.1 Quantities and Units Domain Library Overview	555
9.8.2 Quantities	555
9.8.2.1 Quantities Overview.....	555
9.8.2.2 Elements	557
9.8.2.2.1 3dVectorQuantityValue.....	557
9.8.2.2.2 QuantityDimension	557
9.8.2.2.3 QuantityPowerFactor.....	557
9.8.2.2.4 scalarQuantities	558
9.8.2.2.5 ScalarQuantityValue	558
9.8.2.2.6 SystemOfQuantities.....	559
9.8.2.2.7 tensorQuantities.....	559
9.8.2.2.8 TensorQuantityValue	560
9.8.2.2.9 vectorQuantities.....	561
9.8.2.2.10 VectorQuantityValue.....	562
9.8.2.3 Measurement References	562
9.8.3.1 Measurement References Overview.....	562
9.8.3.2 Elements	563
9.8.3.2.1 3dCoordinateFrame	563
9.8.3.2.2 AffineTransformMatrix3d.....	563
9.8.3.2.3 ConversionByConvention	564
9.8.3.2.4 ConversionByPrefix	564
9.8.3.2.5 CoordinateFrame	565
9.8.3.2.6 CoordinateFramePlacement	566
9.8.3.2.7 CoordinateTransformation	566
9.8.3.2.8 countQuantities.....	567
9.8.3.2.9 CountValue.....	567
9.8.3.2.10 CyclicRatioScale	568
9.8.3.2.11 DefinitionalQuantityValue	568
9.8.3.2.12 DerivedUnit	569
9.8.3.2.13 dimensionOneQuantities	569
9.8.3.2.14 DimensionOneUnit.....	570
9.8.3.2.15 DimensionOneValue	570
9.8.3.2.16 IntervalScale	570
9.8.3.2.17 LogarithmicScale.....	571
9.8.3.2.18 MeasurementScale.....	572
9.8.3.2.19 MeasurementUnit	572
9.8.3.2.20 NullTransformation	573
9.8.3.2.21 nullTransformation	574
9.8.3.2.22 one	574
9.8.3.2.23 OrdinalScale	574
9.8.3.2.24 QuantityValueMapping	575
9.8.3.2.25 Rotation	575
9.8.3.2.26 ScalarMeasurementReference	576
9.8.3.2.27 SimpleUnit	577
9.8.3.2.28 SystemOfUnits	577
9.8.3.2.29 TensorMeasurementReference	578
9.8.3.2.30 Translation.....	579
9.8.3.2.31 TranslationOrRotation.....	579
9.8.3.2.32 TranslationRotationSequence	580
9.8.3.2.33 UnitConversion	580
9.8.3.2.34 UnitPowerFactor	581
9.8.3.2.35 UnitPrefix	581
9.8.3.2.36 VectorMeasurementReference	582

9.8.3.2.11 DefinitionalQuantityValue	575
9.8.3.2.12 DerivedUnit	575
9.8.3.2.13 dimensionOneQuantities	576
9.8.3.2.14 DimensionOneUnit	576
9.8.3.2.15 DimensionOneValue	576
9.8.3.2.16 IntervalScale	577
9.8.3.2.17 LogarithmicScale	577
9.8.3.2.18 MeasurementScale	578
9.8.3.2.19 MeasurementUnit	579
9.8.3.2.20 NullTransformation	579
9.8.3.2.21 nullTransformation	580
9.8.3.2.22 one	580
9.8.3.2.23 OrdinalScale	581
9.8.3.2.24 QuantityValueMapping	581
9.8.3.2.25 Rotation	582
9.8.3.2.26 ScalarMeasurementReference	583
9.8.3.2.27 SimpleUnit	583
9.8.3.2.28 SystemOfUnits	584
9.8.3.2.29 TensorMeasurementReference	585
9.8.3.2.30 Translation	585
9.8.3.2.31 TranslationOrRotation	586
9.8.3.2.32 TranslationRotationSequence	586
9.8.3.2.33 UnitConversion	587
9.8.3.2.34 UnitPowerFactor	587
9.8.3.2.35 UnitPrefix	588
9.8.3.2.36 VectorMeasurementReference	589
9.8.4 ISQ	589
9.8.4.1 ISQ Overview	589
9.8.4.2 Elements	590
9.8.4.2.1 amountOfSubstance	590
9.8.4.2.2 AmountOfSubstanceUnit	590
9.8.4.2.3 AmountOfSubstanceValue	591
9.8.4.2.4 AngularMeasureValue	591
9.8.4.2.5 Cartesian3dSpatialCoordinateFrame	591
9.8.4.2.6 Displacement3dVector	592
9.8.4.2.7 duration	592
9.8.4.2.8 DurationUnit	593
9.8.4.2.9 DurationValue	593
9.8.4.2.10 electricCurrent	593
9.8.4.2.11 ElectricCurrentUnit	594
9.8.4.2.12 ElectricCurrentValue	594
9.8.4.2.13 length	595
9.8.4.2.14 LengthUnit	595
9.8.4.2.15 LengthValue	595
9.8.4.2.16 luminousIntensity	596
9.8.4.2.17 LuminousIntensityUnit	596
9.8.4.2.18 LuminousIntensityValue	596
9.8.4.2.19 mass	597
9.8.4.2.20 MassUnit	597
9.8.4.2.21 MassValue	598
9.8.4.2.22 Position3dVector	598
9.8.4.2.23 Spatial3dCoordinateFrame	598
9.8.4.2.24 thermodynamicTemperature	599
9.8.4.2.25 ThermodynamicTemperatureUnit	599

9.8.4 ISQ	583
9.8.4.1 ISQ Overview	583
9.8.4.2 Elements	583
9.8.4.2.1 amountOfSubstance	583
9.8.4.2.2 AmountOfSubstanceUnit	584
9.8.4.2.3 AmountOfSubstanceValue	584
9.8.4.2.4 AngularMeasureValue	584
9.8.4.2.5 Cartesian3dSpatialCoordinateFrame	585
9.8.4.2.6 Displacement3dVector	585
9.8.4.2.7 duration	585
9.8.4.2.8 DurationUnit	586
9.8.4.2.9 DurationValue	586
9.8.4.2.10 electricCurrent	587
9.8.4.2.11 ElectricCurrentUnit	587
9.8.4.2.12 ElectricCurrentValue	587
9.8.4.2.13 length	588
9.8.4.2.14 LengthUnit	588
9.8.4.2.15 LengthValue	588
9.8.4.2.16 luminousIntensity	589
9.8.4.2.17 LuminousIntensityUnit	589
9.8.4.2.18 LuminousIntensityValue	590
9.8.4.2.19 mass	590
9.8.4.2.20 MassUnit	590
9.8.4.2.21 MassValue	591
9.8.4.2.22 Position3dVector	591
9.8.4.2.23 Spatial3dCoordinateFrame	591
9.8.4.2.24 thermodynamicTemperature	592
9.8.4.2.25 ThermodynamicTemperatureUnit	592
9.8.4.2.26 ThermodynamicTemperatureValue	592
9.8.4.2.27 universalCartesianSpatial3dCoordinateFrame	593
9.8.5 SI Prefixes	593
9.8.5.1 SI Prefixes Overview	593
9.8.5.2 Elements	595
9.8.6 SI	595
9.8.6.1 SI Overview	595
9.8.6.2 Elements	595
9.8.7 US Customary Units	595
9.8.7.1 US Customary Units Overview	595
9.8.7.2 Elements	595
9.8.8 Time	595
9.8.8.1 Time Overview	595
9.8.8.2 Elements	595
9.8.8.2.1 Clock	595
9.8.8.2.2 Date	596
9.8.8.2.3 DateTime	596
9.8.8.2.4 DurationOf	596
9.8.8.2.5 Iso8601DateTime	597
9.8.8.2.6 Iso8601DateTimeEncoding	597
9.8.8.2.7 Iso8601DateTimeStructure	598
9.8.8.2.8 timeInstant	598
9.8.8.2.9 TimeInstantValue	599
9.8.8.2.10 TimeOf	599
9.8.8.2.11 TimeOfDay	600
9.8.8.2.12 TimeScale	600
9.8.8.2.13 universalClock	601
9.8.8.2.14 UTC	601

9.8.4.2.26 ThermodynamicTemperatureValue.....	599
9.8.4.2.27 universalCartesianSpatial3dCoordinateFrame	600
9.8.5 SI Prefixes	600
9.8.5.1 SI Prefixes Overview	601
9.8.5.2 Elements	602
9.8.6 SI	602
9.8.6.1 SI Overview.....	602
9.8.6.2 Elements	602
9.8.7 US Customary Units	602
9.8.7.1 US Customary Units Overview.....	602
9.8.7.2 Elements	602
9.8.8 Time	602
9.8.8.1 Time Overview.....	602
9.8.8.2 Elements	602
9.8.8.2.1 Clock	602
9.8.8.2.2 Date	603
9.8.8.2.3 DateTime	603
9.8.8.2.4 DurationOf.....	604
9.8.8.2.5 Iso8601DateTime	604
9.8.8.2.6 Iso8601DateTimeEncoding.....	605
9.8.8.2.7 Iso8601DateTimeStructure	605
9.8.8.2.8 timeInstant	606
9.8.8.2.9 TimeInstantValue	606
9.8.8.2.10 TimeOf	607
9.8.8.2.11 TimeOfDay.....	607
9.8.8.2.12 TimeScale.....	608
9.8.8.2.13 universalClock	608
9.8.8.2.14 UTC	609
9.8.8.2.15 utcTimeInstant	609
9.8.8.2.16 UtcTimeInstantValue	610
9.8.9 Quantity Calculations.....	610
9.8.9.1 Quantity Calculations Overview	610
9.8.9.2 Elements	613
9.8.10 Vector Calculations.....	613
9.8.10.1 Vector Calculations Overview	613
9.8.10.2 Elements	616
9.8.11 Tensor Calculations.....	616
9.8.11.1 Tensor Calculations Overview	616
9.8.11.2 Elements	617
9.8.12 Measurement Ref Calculations	617
9.8.12.1 Measurement Ref Calculations Overview.....	617
9.8.12.2 Elements	618
A Annex: Example Model	619
A.1 Introduction	619
A.2 Model Organization	619
A.3 Definitions	620
A.4 Parts	624
A.5 Parts Interconnection.....	627
A.6 Actions	630
A.7 States	632
A.8 Requirements.....	635
A.9 Analysis.....	637
A.10 Verification	638
A.11 View and Viewpoint	640

9.8.8.2.15 utcTimeInstant.....	602
9.8.8.2.16 UtcTimeInstantValue	602
9.8.9 Quantity Calculations.....	603
9.8.9.1 Quantity Calculations Overview	603
9.8.9.2 Elements	606
9.8.10 Vector Calculations.....	606
9.8.10.1 Vector Calculations Overview	606
9.8.10.2 Elements	610
9.8.11 Tensor Calculations.....	610
9.8.11.1 Tensor Calculations Overview	610
9.8.11.2 Elements	611
9.8.12 Measurement Ref Calculations	611
9.8.12.1 Measurement Ref Calculations Overview.....	611
9.8.12.2 Elements	612
A Annex: Example Model	613
A.1 Introduction.....	613
A.2 Model Organization	613
A.3 Definitions.....	614
A.4 Parts.....	618
A.5 Parts Interconnection.....	621
A.6 Actions	624
A.7 States	626
A.8 Requirements.....	629
A.9 Analysis.....	631
A.10 Verification	632
A.11 View and Viewpoint	634
A.12 Variability	635
A.13 Individuals.....	636

A.12 Variability	641
A.13 Individuals.....	642

List of Tables

1. Dependencies – Representative Notation	19
2. Annotations – Representative Notation	20
3. Packages – Representative Notation.....	24
4. Definition and Usage – Representative Notation.....	34
5. Attributes – Representative Notation.....	45
6. Enumerations – Representative Notation.....	47
7. Occurrences – Representative Notation.....	51
8. Items – Representative Notation.....	56
9. Parts – Representative Notation.....	57
10. Ports – Representative Notation.....	60
11. Connections – Representative Notation.....	64
12. Interfaces – Representative Notation.....	74
13. Allocations – Representative Notation	78
14. Actions – Representative Notation	82
15. Control Node Definitions.....	97
16. States – Representative Notation	110
17. Calculations – Representative Notation.....	117
18. Constraints – Representative Notation.....	120
19. Requirements – Representative Notation.....	124
20. Analysis Cases - Representative Notation	132
21. Verification Cases – Representative Notation	135
22. Use Cases – Representative Notation	138
23. Views and Viewpoints – Representative Notation	142
24. Diagrams – Representative Examples	148
25. Metadata – Representative Notation.....	150
26. EBNF Notation Conventions	158
27. Abstract Syntax Synthesis Notation.....	158
28. Grammar Production Definitions.....	158
29. Graphical BNF Conventions	186
30. Other Implied Relationships	377
31. Implied Usage Subsetting Relationships	379
32. Implied Definition Subclassification Relationships.....	382
33. Standard View Definitions.....	493

List of Tables

1. Dependencies – Representative Notation	19
2. Annotations – Representative Notation	20
3. Packages – Representative Notation.....	24
4. Definition and Usage – Representative Notation.....	34
5. Attributes – Representative Notation.....	47
6. Enumerations – Representative Notation.....	50
7. Occurrences – Representative Notation.....	53
8. Items – Representative Notation.....	58
9. Parts – Representative Notation.....	60
10. Ports – Representative Notation.....	63
11. Connections – Representative Notation.....	67
12. Interfaces – Representative Notation.....	78
13. Allocations – Representative Notation	81
14. Actions – Representative Notation	85
15. Control Node Definitions.....	97
16. States – Representative Notation	109
17. Calculations – Representative Notation.....	117
18. Constraints – Representative Notation.....	120
19. Requirements – Representative Notation.....	125
20. Analysis Cases - Representative Notation	132
21. Verification Cases – Representative Notation	136
22. Use Cases – Representative Notation	139
23. Views and Viewpoints – Representative Notation	143
24. Diagrams – Representative Examples	148
25. Metadata – Representative Notation	150
26. EBNF Notation Conventions	156
27. Abstract Syntax Synthesis Notation.....	156
28. Grammar Production Definitions.....	157
29. Graphical BNF Conventions	185
30. Implied Definition Subclassification Relationships.....	380
31. Implied Usage Subsetting Relationships	381
32. Other Implied Relationships	385
33. Standard View Definitions.....	497

List of Figures

1. SysML Language Architecture	12
2. Elements	241
3. Dependencies	242
4. Annotation	242
5. Namespaces	243
6. Imports	244
7. Packages	244
8. Definition and Usage	245
9. Variant Membership	245
10. Attribute Definition and Usage	261
11. Enumeration Definition and Usage	263
12. Occurrence Definition and Usage	265
13. Event Occurrences	265
14. Item Definition and Usage	271
15. Part Definition and Usage	273
16. Port Definition and Usage	275
17. Port Conjugation	276
18. Connectors as Usages	281
19. Connection Definition and Usage	281
20. Flow Connections	282
21. Interface Definition and Usage	287
22. Allocation Definition and Usage	289
23. Action Definition and Usage	291
24. Control Nodes	291
25. Performed Actions	291
26. Send and Accept Actions	292
27. Assignment Actions	292
28. Structured Control Actions	293
29. State Definition and Usage	314
30. State Membership	315
31. Exhibited States	315
32. Transition Usage	316
33. Calculation Definition and Usage	329
34. Constraint Definition and Usage	331
35. Asserted Constraints	331
36. Requirement Definition and Usage	335
37. Satisfied Requirements	335
38. Concern Definition and Usage	336
39. Requirement Constraint Membership	336
40. Requirement Parameter Memberships	337
41. Case Definition and Usage	350
42. Case Membership	350
43. Analysis Case Definition and Usage	355
44. Verification Case Definition and Usage	358
45. Verification Membership	359
46. Use Case Definition and Usage	362
47. Included Use Case	362
48. View Definition and Usage	365
49. Viewpoint Definition and Usage	366
50. Rendering Definition and Usage	366
51. Expose Relationship	367

List of Figures

1. SysML Language Architecture	12
2. Elements.....	243
3. Dependencies	244
4. Annotation.....	244
5. Namespaces.....	245
6. Imports	246
7. Packages.....	246
8. Definition and Usage	247
9. Variant Membership	247
10. Attribute Definition and Usage	263
11. Enumeration Definition and Usage	265
12. Occurrence Definition and Usage	266
13. Event Occurrences	267
14. Item Definition and Usage	272
15. Part Definition and Usage	274
16. Port Definition and Usage	276
17. Port Conjugation	277
18. Connectors as Usages	281
19. Connection Definition and Usage	282
20. Flow Connections	282
21. Interface Definition and Usage	287
22. Allocation Definition and Usage	289
23. Action Definition and Usage	291
24. Control Nodes	291
25. Performed Actions	292
26. Send and Accept Actions	292
27. Assignment Actions	292
28. Terminate Actions.....	293
29. Structured Control Actions	293
30. State Definition and Usage	315
31. State Membership	315
32. Exhibited States	316
33. Transition Usage	316
34. Calculation Definition and Usage	329
35. Constraint Definition and Usage	331
36. Asserted Constraints	331
37. Requirement Definition and Usage	334
38. Satisfied Requirements	335
39. Concern Definition and Usage	335
40. Requirement Constraint Membership	336
41. Requirement Parameter Memberships	336
42. Case Definition and Usage	349
43. Case Membership.....	349
44. Analysis Case Definition and Usage	354
45. Verification Case Definition and Usage	357
46. Verification Membership	357
47. Use Case Definition and Usage	361
48. Included Use Case.....	361
49. View Definition and Usage	364
50. Viewpoint Definition and Usage	365
51. Rendering Definition and Usage	365
52. Expose Relationship.....	366
53. View Rendering Membership	366
54. Metadata Definition and Usage	376

52. View Rendering Membership	367
53. Metadata Definition and Usage	377
54. State Space Representation action and calculation definitions	520
55. Model Organization for SimpleVehicleModel	619
56. Part Definition for Vehicle	621
57. Part Definition for FuelTank Referencing Fuel it Stores	622
58. Axle and its Subclass FrontAxe	623
59. Example Definition Elements	623
60. Part Usage for vehicle_b	625
61. Parts Tree for vehicle_b	626
62. Variant engine4Cyl	627
63. Parts Interconnection for vehicle_b	628
64. Action providePower	630
65. Action flow for providePower	630
66. Action flow for transportPassenger	631
67. Vehicle States	633
68. Requirement Definition MassRequirement	635
69. Requirements Group vehicleSpecification	636
70. Analysis Case fuelEconomyAnalysis	637
71. Vehicle Mass Verification Test	639
72. Vehicle Safety View	640
73. Rendering of view vehiclePartsTree_Safety	641
74. Variability Model for vehicleFamily	641
75. Vehicle Individuals and Snapshots	643

55. State Space Representation action and calculation definitions	515
56. Model Organization for SimpleVehicleModel	613
57. Part Definition for Vehicle.....	615
58. Part Definition for FuelTank Referencing Fuel it Stores.....	616
59. Axle and its Subclass FrontAxe.....	617
60. Example Definition Elements	617
61. Part Usage for vehicle_b.....	619
62. Parts Tree for vehicle_b	620
63. Variant engine4Cyl	621
64. Parts Interconnection for vehicle_b	622
65. Action providePower	624
66. Action flow for providePower	624
67. Action flow for transportPassenger	625
68. Vehicle States.....	627
69. Requirement Definition MassRequirement	629
70. Requirements Group vehicleSpecification	630
71. Analysis Case fuelEconomyAnalysis	632
72. Vehicle Mass Verification Test	633
73. Vehicle Safety View	634
74. Rendering of view vehiclePartsTree_Safety.....	635
75. Variability Model for vehicleFamily	635
76. Vehicle Individuals and Snapshots	637

0 Preface

OMG

Founded in 1989, the Object Management Group, Inc. (OMG) is an open membership, not-for-profit computer industry standards consortium that produces and maintains computer industry specifications for interoperable, portable, and reusable enterprise applications in distributed, heterogeneous environments. Membership includes Information Technology vendors, end users, government agencies, and academia.

OMG member companies write, adopt, and maintain its specifications following a mature, open process. OMG's specifications implement the Model Driven Architecture® (MDA®), maximizing ROI through a full-lifecycle approach to enterprise integration that covers multiple operating systems, programming languages, middleware and networking infrastructures, and software development environments. OMG's specifications include: UML® (Unified Modeling Language™); CORBA® (Common Object Request Broker Architecture); CWM™ (Common Warehouse Metamodel); and industry-specific standards for dozens of vertical markets.

More information on the OMG is available at <https://www.omg.org/>.

OMG Specifications

As noted, OMG specifications address middleware, modeling, and vertical domain frameworks. All OMG Specifications are available from the OMG website at: <https://www.omg.org/spec>

All of OMG's formal specifications may be downloaded without charge from our website. (Products implementing OMG specifications are available from individual suppliers.) Copies of specifications, available in PostScript and PDF format, may be obtained from the Specifications Catalog cited above or by contacting the Object Management Group, Inc. at:

OMG Headquarters
9C Medway Road, PMB 274
Milford, MA 01757
USA
Tel: +1-781-444-0404
Fax: +1-781-444-0320

Email: pubs@omg.org

Certain OMG specifications are also available as ISO standards. Please consult <https://www.iso.org>

Issues

All OMG specifications are subject to continuous review and improvement. As part of this process we encourage readers to report any ambiguities, inconsistencies, or inaccuracies they may find by completing the Issue Reporting Form listed on the main web page <https://www.omg.org>, under Specifications, Report an Issue.

0 Preface

OMG

Founded in 1989, the Object Management Group, Inc. (OMG) is an open membership, not-for-profit computer industry standards consortium that produces and maintains computer industry specifications for interoperable, portable, and reusable enterprise applications in distributed, heterogeneous environments. Membership includes Information Technology vendors, end users, government agencies, and academia.

OMG member companies write, adopt, and maintain its specifications following a mature, open process. OMG's specifications implement the Model Driven Architecture® (MDA®), maximizing ROI through a full-lifecycle approach to enterprise integration that covers multiple operating systems, programming languages, middleware and networking infrastructures, and software development environments. OMG's specifications include: UML® (Unified Modeling Language™); CORBA® (Common Object Request Broker Architecture); CWM™ (Common Warehouse Metamodel); and industry-specific standards for dozens of vertical markets.

More information on the OMG is available at <https://www.omg.org/>.

OMG Specifications

As noted, OMG specifications address middleware, modeling, and vertical domain frameworks. All OMG Specifications are available from the OMG website at: <https://www.omg.org/spec>

All of OMG's formal specifications may be downloaded without charge from our website. (Products implementing OMG specifications are available from individual suppliers.) Copies of specifications, available in PostScript and PDF format, may be obtained from the Specifications Catalog cited above or by contacting the Object Management Group, Inc. at:

OMG Headquarters
9C Medway Road, PMB 274
Milford, MA 01757
USA
Tel: +1-781-444-0404
Fax: +1-781-444-0320

Email: pubs@omg.org

Certain OMG specifications are also available as ISO standards. Please consult <https://www.iso.org>

Issues

All OMG specifications are subject to continuous review and improvement. As part of this process we encourage readers to report any ambiguities, inconsistencies, or inaccuracies they may find by completing the Issue Reporting Form listed on the main web page <https://www.omg.org>, under Specifications, Report an Issue.

1 Scope

The purpose of this standard is to specify the Systems Modeling Language™ (SysML), to guide the implementation of conformant modeling tools, and to provide the basis for the development of material and other resources to train users in the application of SysML.

SysML is a general-purpose modeling language for modeling systems that is intended to facilitate a model-based systems engineering (MBSE) approach to engineer systems. It provides the capability to create and visualize models that represent many different aspects of a system. This includes representing the requirements, structure, and behavior of the system, and the specification of analysis cases and verification cases used to analyze and verify the system. The language is intended to support multiple systems engineering methods and practices. The specific methods and practices may impose additional constraints on how the language is used.

SysML is defined as an extension of the Kernel Modeling Language (KerML), which provides a common, domain-independent language for building semantically rich and interoperable modeling languages. SysML also provides a capability to provide further language extensions. It is anticipated that SysML will be customized using this language extension mechanism to model more specialized domain-specific applications, such as automotive, aerospace, healthcare, and information systems, as well as discipline specific extensions such as safety and reliability.

Note. Definitions of *system* and *systems engineering* can be found in *ISO/IEC 15288 Systems and Software Engineering – System Life Cycle Process*.

1 Scope

The purpose of this standard is to specify the Systems Modeling Language™ (SysML), to guide the implementation of conformant modeling tools, and to provide the basis for the development of material and other resources to train users in the application of SysML.

SysML is a general-purpose modeling language for modeling systems that is intended to facilitate a model-based systems engineering (MBSE) approach to engineer systems. It provides the capability to create and visualize models that represent many different aspects of a system. This includes representing the requirements, structure, and behavior of the system, and the specification of analysis cases and verification cases used to analyze and verify the system. The language is intended to support multiple systems engineering methods and practices. The specific methods and practices may impose additional constraints on how the language is used.

SysML is defined as an extension of the Kernel Modeling Language (KerML), which provides a common, domain-independent language for building semantically rich and interoperable modeling languages. SysML also provides a capability to provide further language extensions. It is anticipated that SysML will be customized using this language extension mechanism to model more specialized domain-specific applications, such as automotive, aerospace, healthcare, and information systems, as well as discipline specific extensions such as safety and reliability.

Note. Definitions of *system* and *systems engineering* can be found in *ISO/IEC 15288 Systems and Software Engineering – System Life Cycle Process*.

2 Conformance

This specification defines the Systems Modeling Language (SysML), a language used to construct *models* of systems (whether they are real, planned or imagined). The specification comprises this document together with the content of the machine-readable files listed on the cover page. If there are any conflicts between this document and the machine-readable files, the machine-readable files take precedence.

A *SysML model* shall conform to this specification only if it can be represented according to the syntactic requirements specified in [Clause 8](#). The model may be represented in a form consistent with the requirements for the SysML concrete syntax (which includes both textual and graphical notation), in which case it can be parsed (as specified in [8.2](#)) into an abstract syntax form, or it may be represented directly in an abstract syntax form.

A *SysML modeling tool* is a software application that creates, manages, analyzes, visualizes, executes or performs other services on SysML models. A tool can conform to this specification in one or more of the following ways.

1. *Abstract Syntax Conformance*. A tool demonstrating Abstract Syntax Conformance provides a user interface and/or API that enables instances of SysML abstract syntax metaclasses to be created, read, updated, and deleted. The tool must also provide a way to validate the well-formedness of models that corresponds to the constraints defined in the SysML metamodel. A well-formed model represented according to the abstract syntax is syntactically conformant to SysML as defined above. (See [8.3](#).)
2. *Concrete Syntax Conformance*. A tool demonstrating Concrete Syntax Conformance provides a user interface and/or API that enables instances of SysML concrete syntax notation to be created, read, updated, and deleted. Note that a conforming tool may also provide the ability to create, read, update and delete additional notational elements that are not defined in SysML. Concrete Syntax Conformance implies Abstract Syntax Conformance, in that creating models in the concrete syntax acts as a user interface for the abstract syntax. However, a tool demonstrating Concrete Syntax Conformance need not represent a model internally in exactly the form modeled for the abstract syntax in this specification. (See [8.2](#).)

There are two variants of Concrete Syntax Conformance:

- a. *Textual Notation Conformance*. A tool demonstrating Textual Notation Conformance provides Concrete Syntax Conformance for the SysML textual notation. (See [8.2.2](#))
 - b. *Graphical Notation Conformance*. A tool demonstrating Graphical Notation Conformance provides Concrete Syntax Conformance for the SysML graphical notation. As part of this, the tool shall also support the textual notation at least to the extent necessary to properly render text in the graphical notation, and may also fully support the textual notation in conjunction with the graphical notation. (See [8.2.3](#).)
3. *Semantic Conformance*. A tool demonstrating Semantic Conformance provides a demonstrable way to interpret a syntactically conformant model (as defined above) according to the SysML semantics, e.g., via semantic model analysis or model execution. Semantic Conformance implies Abstract Syntax Conformance, in that the semantics for SysML are only defined on well-formed models represented in the abstract syntax. (See [8.4](#) and [9.2](#).)
 4. *Model Interchange Conformance*. A tool demonstrating model interchange conformance can import and/or export syntactically conformant SysML models (as defined above) as a *project interchange file* as specified in [KerML, Clause 10], with the following further conditions:
 - The project interchange file shall use the standard .kpar (KerML Project Archive) extension.

2 Conformance

This specification defines the Systems Modeling Language (SysML), a language used to construct *models* of systems (whether they are real, planned or imagined). The specification comprises this document together with the content of the machine-readable files listed on the cover page. If there are any conflicts between this document and the machine-readable files, the machine-readable files take precedence.

A *SysML model* shall conform to this specification only if it can be represented according to the syntactic requirements specified in [Clause 8](#). The model may be represented in a form consistent with the requirements for the SysML concrete syntax (which includes both textual and graphical notation), in which case it can be parsed (as specified in [8.2](#)) into an abstract syntax form, or it may be represented directly in an abstract syntax form.

A *SysML modeling tool* is a software application that creates, manages, analyzes, visualizes, executes or performs other services on SysML models. A tool can conform to this specification in one or more of the following ways.

1. *Abstract Syntax Conformance*. A tool demonstrating Abstract Syntax Conformance provides a user interface and/or API that enables instances of SysML abstract syntax metaclasses to be created, read, updated, and deleted. The tool must also provide a way to validate the well-formedness of models that corresponds to the constraints defined in the SysML metamodel. A well-formed model represented according to the abstract syntax is syntactically conformant to SysML as defined above. (See [8.3](#).)
2. *Concrete Syntax Conformance*. A tool demonstrating Concrete Syntax Conformance provides a user interface and/or API that enables instances of SysML concrete syntax notation to be created, read, updated, and deleted. Note that a conforming tool may also provide the ability to create, read, update and delete additional notational elements that are not defined in SysML. Concrete Syntax Conformance implies Abstract Syntax Conformance, in that creating models in the concrete syntax acts as a user interface for the abstract syntax. However, a tool demonstrating Concrete Syntax Conformance need not represent a model internally in exactly the form modeled for the abstract syntax in this specification. (See [8.2](#).)

There are two variants of Concrete Syntax Conformance:

- a. *Textual Notation Conformance*. A tool demonstrating Textual Notation Conformance provides Concrete Syntax Conformance for the SysML textual notation. (See [8.2.2](#))
 - b. *Graphical Notation Conformance*. A tool demonstrating Graphical Notation Conformance provides Concrete Syntax Conformance for the SysML graphical notation. As part of this, the tool shall also support the textual notation at least to the extent necessary to properly render text in the graphical notation, and may also fully support the textual notation in conjunction with the graphical notation. (See [8.2.3](#))
3. *Semantic Conformance*. A tool demonstrating Semantic Conformance provides a demonstrable way to interpret a syntactically conformant model (as defined above) according to the SysML semantics, e.g., via semantic model analysis or model execution. Semantic Conformance implies Abstract Syntax Conformance, in that the semantics for SysML are only defined on well-formed models represented in the abstract syntax. (See [8.4](#) and [9.2](#).)
 4. *Model Interchange Conformance*. A tool demonstrating model interchange conformance can import and/or export syntactically conformant SysML models (as defined above) as a *project interchange file* as specified in [KerML, Clause 10], with the following further conditions:
 - The project interchange file shall use the standard `.kpar` (KerML Project Archive) extension.
 - All model interchange files in the project interchange file shall be SysML models. Textual notation files shall use the extension `.sysml`.

- All model interchange files in the project interchange file shall be SysML models. Textual notation files shall use the extension .sysml.
- The metadata for the project interchange file shall identify the metamodel using the normative SysML metamodel URI as given for this specification (i.e., <https://www.omg.org/spec/SysML/yymmnn>, where *yymmnn* is the current date-based version identifier).

5. *Domain Library Support.* In addition to the Systems Model Library, a conformant tool may provide one or more of the domain model libraries specified in [Clause 9](#).

Every conformant SysML modeling tool shall demonstrate at least Abstract Syntax Conformance and Model Interchange Conformance. In addition, such a tool may demonstrate Concrete Syntax Conformance and/or Semantic Conformance, both of which are dependent on Abstract Syntax Conformance. The tool may also provide Domain Library Support.

- The metadata for the project interchange file shall identify the metamodel using the normative SysML metamodel URI as given for this specification (i.e., <https://www.omg.org/spec/SysML/yymmnn>, where *yymmnn* is the current date-based version identifier).
5. *Domain Library Support.* In addition to the Systems Model Library, a conformant tool may provide one or more of the domain model libraries specified in [Clause 9](#).

Every conformant SysML modeling tool shall demonstrate at least Abstract Syntax Conformance and Model Interchange Conformance. In addition, such a tool may demonstrate Concrete Syntax Conformance and/or Semantic Conformance, both of which are dependent on Abstract Syntax Conformance. The tool may also provide Domain Library Support.

3 Normative References

The following normative documents contain provisions which, through reference in this text, constitute provisions of this specification.

[ISO15897] *ISO/IEC 15897:2011 Information technology – User interfaces – Procedures for the registration of cultural elements*

<https://www.iso.org/standard/50707.html>

[KerML] *Kernel Modeling Language (KerML)*, Version 1.0

<https://www.omg.org/spec/KerML/1.0>

[MOF] *Meta Object Facility*, Version 2.5.1

<https://www.omg.org/spec/MOF/2.5.1>

[OCL] *Object Constraint Language*, Version 2.4

<https://www.omg.org/spec/OCL/2.4>

[SMOF] *MOF Support for Semantic Structures*, Version 1.0

<https://www.omg.org/spec/SMOF/1.0>

[SysML v1] *OMG Systems Modeling Language (SysML)*, Version 1.7

<https://www.omg.org/spec/SysML/1.7>

[SysML v1 to v2] *OMG Systems Modeling Language (SysML)*, Version 2.0

Part 2: SysML v1 to SysML v2 Transformation

<https://www.omg.org/spec/SYSML/2.0/Transformation>

[UML] *Unified Modeling Language (UML)*, Version 2.5.1

<https://www.omg.org/spec/UML/2.5.1>

The following references were used in the definition of the Quantities and Units model library (see [9.8](#)):

[GUM] *JCGM 100:2008 and ISO/IEC Guide 98-3, Evaluation of measurement data - Guide to the expression of uncertainty in measurement*

<https://www.bipm.org/en/publications/guides/#gum>

[ISO 80000-1] *ISO 80000-1:2009, Quantities and units - Part 1: General*

<https://www.iso.org/obp/ui/#iso:std:iso:80000:-1:ed-1:v1:en>

[ISO 80000-2] *ISO 80000-2:2019, Quantities and units - Part 2: Mathematical signs and symbols to be used in the natural sciences and technology*

<https://www.iso.org/obp/ui/#iso:std:iso:80000:-2:ed-2:v1:en>

[ISO 80000-3] *ISO 80000-3:2019, Quantities and units - Part 3: Space and Time*

<https://www.iso.org/obp/ui/#iso:std:iso:80000:-3:ed-2:v1:en>

[ISO 80000-4] *ISO 80000-4:2019, Quantities and units - Part 4: Mechanics*

<https://www.iso.org/obp/ui/#iso:std:iso:80000:-4:ed-2:v1:en>

[ISO 80000-5] *ISO 80000-5:2019, Quantities and units - Part 5: Thermodynamics*

<https://www.iso.org/obp/ui/#iso:std:iso:80000:-5:ed-2:v1:en>

3 Normative References

The following normative documents contain provisions which, through reference in this text, constitute provisions of this specification.

[ISO15897] *ISO/IEC 15897:2011 Information technology – User interfaces – Procedures for the registration of cultural elements*

<https://www.iso.org/standard/50707.html>

[KerML] *Kernel Modeling Language (KerML)*, Version 1.0

<https://www.omg.org/spec/KerML/1.0>

[MOF] *Meta Object Facility*, Version 2.5.1

<https://www.omg.org/spec/MOF/2.5.1>

[OCL] *Object Constraint Language*, Version 2.4

<https://www.omg.org/spec/OCL/2.4>

[SMOF] *MOF Support for Semantic Structures*, Version 1.0

<https://www.omg.org/spec/SMOF/1.0>

[SysML v1] *OMG Systems Modeling Language (SysML)*, Version 1.7

<https://www.omg.org/spec/SysML/1.7>

[SysML v1 to v2] *OMG Systems Modeling Language (SysML)*, Version 2.0

Part 2: SysML v1 to SysML v2 Transformation

<https://www.omg.org/spec/SYSML/2.0/Transformation>

[UML] *Unified Modeling Language (UML)*, Version 2.5.1

<https://www.omg.org/spec/UML/2.5.1>

The following references were used in the definition of the Quantities and Units model library (see [9.8](#)):

[GUM] *JCGM 100:2008 and ISO/IEC Guide 98-3, Evaluation of measurement data - Guide to the expression of uncertainty in measurement*

<https://www.bipm.org/en/publications/guides/#gum>

[ISO 80000-1] *ISO 80000-1:2009, Quantities and units - Part 1: General*

<https://www.iso.org/obp/ui/#iso:std:iso:80000:-1:ed-1:v1:en>

[ISO 80000-2] *ISO 80000-2:2019, Quantities and units - Part 2: Mathematical signs and symbols to be used in the natural sciences and technology*

<https://www.iso.org/obp/ui/#iso:std:iso:80000:-2:ed-2:v1:en>

[ISO 80000-3] *ISO 80000-3:2019, Quantities and units - Part 3: Space and Time*

<https://www.iso.org/obp/ui/#iso:std:iso:80000:-3:ed-2:v1:en>

[ISO 80000-4] *ISO 80000-4:2019, Quantities and units - Part 4: Mechanics*

<https://www.iso.org/obp/ui/#iso:std:iso:80000:-4:ed-2:v1:en>

[ISO 80000-5] *ISO 80000-5:2019, Quantities and units - Part 5: Thermodynamics*

<https://www.iso.org/obp/ui/#iso:std:iso:80000:-5:ed-2:v1:en>

[IEC 80000-6] *IEC 80000-6:2008, Quantities and units - Part 6: Electromagnetism*

<https://www.iso.org/obp/ui/#iso:std:iec:80000:-6:ed-1:v1:fr>

[IEC 80000-6] *IEC 80000-6:2008, Quantities and units - Part 6: Electromagnetism*
<https://www.iso.org/obp/ui/#iso:std:iec:80000:-6:ed-1:v1:en,fr>

[ISO 80000-7] *ISO 80000-7:2019, Quantities and units - Part 7: Light*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-7:ed-2:v1:en>

[ISO 80000-8] *ISO 80000-8:2020, Quantities and units - Part 8: Acoustics*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-8:ed-2:v1:en>

[ISO 80000-9] *ISO 80000-9:2019, Quantities and units - Part 9: Physical chemistry and molecular physics*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-9:ed-2:v1:en>

[ISO 80000-10] *ISO 80000-10:2019, Quantities and units - Part 10: Atomic and nuclear physics*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-10:ed-2:v1:en>

[ISO 80000-11] *ISO 80000-11:2019, Quantities and units - Part 11: Characteristic numbers*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-11:ed-2:v1:en>

[ISO 80000-12] *ISO 80000-12:2019, Quantities and units - Part 12: Solid state physics*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-12:ed-2:v1:en>

[IEC 80000-13] *IEC 80000-13:2008, Quantities and units - Part 13: Information science and technology*
<https://www.iso.org/obp/ui/#iso:std:iec:80000:-13:ed-1:v1:en>

[IEC 80000-14] *IEC 80000-14:2008, Quantities and units - Part 14: Telebiometrics related to human physiology*
<https://www.iso.org/obp/ui/#iso:std:iec:80000:-14:ed-1:v1:en>

[NIST SP-811] *NIST Special Publication 811, The NIST Guide for the use of the International System of Units*
(In particular its Appendix B "Conversion Factors")
<https://www.nist.gov/pml/special-publication-811>

[VIM] *JCGM 200:2012 and ISO/IEC Guide 99, International vocabulary of metrology - Basic and general concepts and associated terms (VIM)*
<https://www.bipm.org/en/publications/guides/#vim>

[ISO 8601-1] *ISO 8601-1:2019 (First edition) Date and time — Representations for information interchange — Part 1: Basic rules*
<https://www.iso.org/standard/70907.html>

[ISO 80000-7] ISO 80000-7:2019, *Quantities and units - Part 7: Light*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-7:ed-2:v1:en>

[ISO 80000-8] ISO 80000-8:2020, *Quantities and units - Part 8: Acoustics*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-8:ed-2:v1:en>

[ISO 80000-9] ISO 80000-9:2019, *Quantities and units - Part 9: Physical chemistry and molecular physics*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-9:ed-2:v1:en>

[ISO 80000-10] ISO 80000-10:2019, *Quantities and units - Part 10: Atomic and nuclear physics*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-10:ed-2:v1:en>

[ISO 80000-11] ISO 80000-11:2019, *Quantities and units - Part 11: Characteristic numbers*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-11:ed-2:v1:en>

[ISO 80000-12] ISO 80000-12:2019, *Quantities and units - Part 12: Solid state physics*
<https://www.iso.org/obp/ui/#iso:std:iso:80000:-12:ed-2:v1:en>

[IEC 80000-13] IEC 80000-13:2008, *Quantities and units - Part 13: Information science and technology*
<https://www.iso.org/obp/ui/#iso:std:iec:80000:-13:ed-1:v1:en>

[IEC 80000-14] IEC 80000-14:2008, *Quantities and units - Part 14: Telebiometrics related to human physiology*
<https://www.iso.org/obp/ui/#iso:std:iec:80000:-14:ed-1:v1:en>

[NIST SP-811] NIST Special Publication 811, *The NIST Guide for the use of the International System of Units*
(In particular its Appendix B "Conversion Factors")
<https://www.nist.gov/pml/special-publication-811>

[VIM] JCGM 200:2012 and ISO/IEC Guide 99, *International vocabulary of metrology - Basic and general concepts and associated terms (VIM)*
<https://www.bipm.org/en/publications/guides/#vim>

[ISO 8601-1] ISO 8601-1:2019 (First edition) *Date and time — Representations for information interchange — Part 1: Basic rules*
<https://www.iso.org/standard/70907.html>

4 Terms and Definitions

Various terms and definitions are specified throughout the body of this specification.

4 Terms and Definitions

Various terms and definitions are specified throughout the body of this specification.

5 Symbols

A concrete syntax for SysML is specified in subclause 8.2 of this specification.

5 Symbols

A concrete syntax for SysML is specified in subclause 8.2 of this specification.

6 Introduction

6.1 Document Overview

The Systems Modeling Language (SysML) is a general-purpose modeling language for modeling systems that is intended to facilitate a model-based systems engineering (MBSE) approach to engineer systems. This document provides the standard specification for SysML Version 2 (SysML v2). SysML v2 is intended to enhance the precision, expressiveness, interoperability, and the consistency and integration of the language relative to SysML Versions 1.0 to 1.7 [SysML v1].

SysML v1 was specified as a profile of the Unified Modeling Language v2 [UML]. SysML v2, on the other hand, is specified as a metamodel extending the Kernel metamodel from the Kernel Modeling Language [KerML]. In order to facilitate the transition from SysML v1 to SysML v2, this standard also specifies a formal transformation from models using the SysML v1.7 profile of UML to models using the SysML v2 metamodel [SysML v1 to v2].

This document specifies the textual and graphical concrete syntax, abstract syntax, and semantics for SysML v2. The SysML v2 textual notation (see [8.2.2](#)) and the SysML v2 graphical notation (see [8.2.3](#)) provide the concrete syntax representation of the SysML v2 abstract syntax (see [8.3](#)). The SysML v2 abstract syntax extends the Kernel abstract syntax, providing specialized constructs for modeling systems (as shown in [Fig. 1](#)). Further, the Systems Library (see [9.2](#)) is a model library that extends the Kernel Library to provide the semantic specification for SysML v2 (see [8.4](#); see also [KerML] on the use of model libraries for semantic specification). Finally, SysML v2 provides an additional set of Domain Libraries (see [9.4](#) and following) to provide a set of reference models in various domains important to systems modeling (such as Analysis and Quantities and Units).

6 Introduction

6.1 Document Overview

The Systems Modeling Language (SysML) is a general-purpose modeling language for modeling systems that is intended to facilitate a model-based systems engineering (MBSE) approach to engineer systems. This document provides the standard specification for SysML Version 2 (SysML v2). SysML v2 is intended to enhance the precision, expressiveness, interoperability, and the consistency and integration of the language relative to SysML Versions 1.0 to 1.7 [SysML v1].

SysML v1 was specified as a profile of the Unified Modeling Language v2 [UML]. SysML v2, on the other hand, is specified as a metamodel extending the Kernel metamodel from the Kernel Modeling Language [KerML]. In order to facilitate the transition from SysML v1 to SysML v2, this standard also specifies a formal transformation from models using the SysML v1.7 profile of UML to models using the SysML v2 metamodel [SysML v1 to v2].

This document specifies the textual and graphical concrete syntax, abstract syntax, and semantics for SysML v2. The SysML v2 textual notation (see [8.2.2](#)) and the SysML v2 graphical notation (see [8.2.3](#)) provide the concrete syntax representation of the SysML v2 abstract syntax (see [8.3](#)). The SysML v2 abstract syntax extends the Kernel abstract syntax, providing specialized constructs for modeling systems (as shown in [Fig. 1](#)). Further, the Systems Library (see [9.2](#)) is a model library that extends the Kernel Library to provide the semantic specification for SysML v2 (see [8.4](#); see also [KerML] on the use of model libraries for semantic specification). Finally, SysML v2 provides an additional set of Domain Libraries (see [9.4](#) and following) to provide a set of reference models in various domains important to systems modeling (such as Analysis and Quantities and Units).

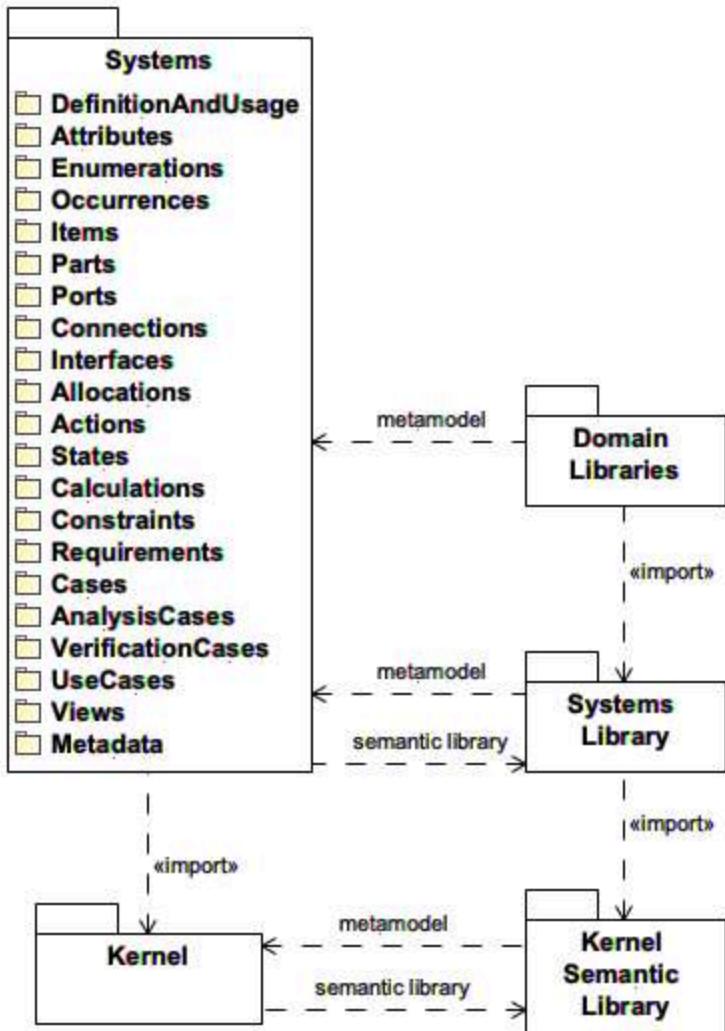


Figure 1. SysML Language Architecture

6.2 Document Organization

The rest of this document is organized into three major clauses.

- [Clause 7](#) describes SysML from a user point of view. Its subclauses describe the modeling constructs in SysML, including for each a general overview, related abstract syntax diagrams and a description of the textual and graphical notation. The overviews in this clause should be considered informative. The abstract syntax and notation subclauses, however, are normative, including descriptions of the processing of the textual notation and its relationship to the graphical notation and the abstract syntax.
- [Clause 8](#) provides the normative specification of the metamodel that defines the SysML language. This includes the concrete syntax (textual and graphical notations), the abstract syntax and the semantics for the language. The SysML abstract syntax and semantics are formally extensions of the Kernel abstract syntax and semantics provided by KerML (as discussed in [6.1](#)). However, this clause does not cover details of the Kernel metamodel, which are included by normative reference to the KerML specification [KerML].
- [Clause 9](#) specifies a set of model libraries defined in SysML itself. The Systems Library extends the Kernel Library from [KerML] in order to provide systems-modeling-specific semantics to SysML language constructs. The Domain Libraries provide domain-specific models on which users can draw

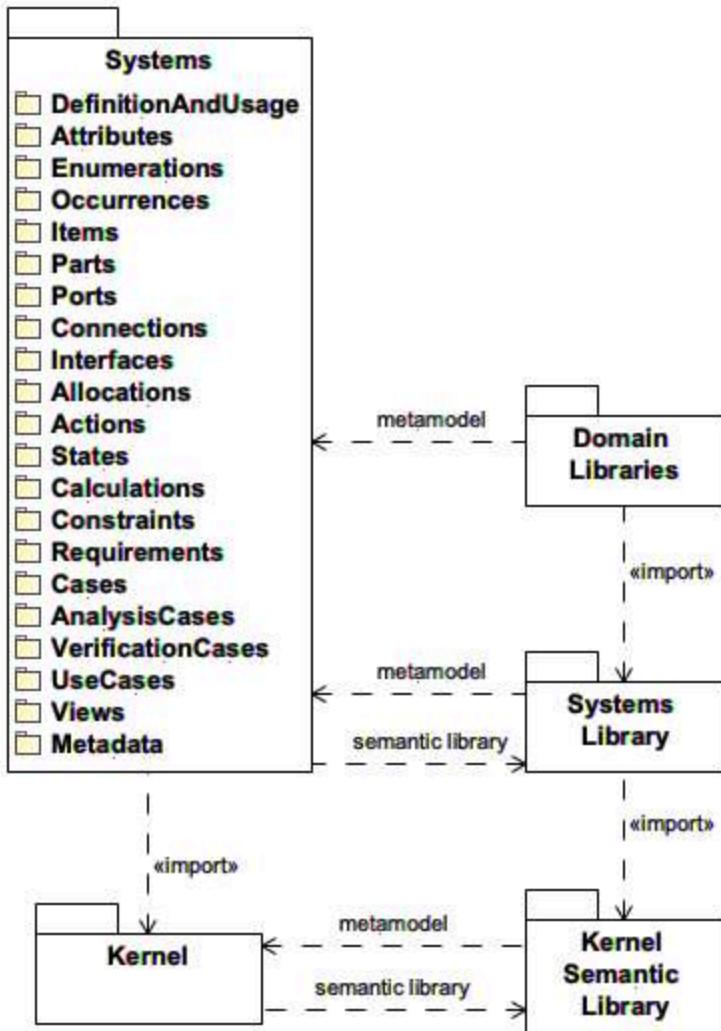


Figure 1. SysML Language Architecture

6.2 Document Organization

The rest of this document is organized into three major clauses.

- [Clause 7](#) describes SysML from a user point of view. Its subclauses describe the modeling constructs in SysML, including for each a general overview, related abstract syntax diagrams and a description of the textual and graphical notation. The overviews in this clause should be considered informative. The abstract syntax and notation subclauses, however, are normative, including descriptions of the processing of the textual notation and its relationship to the graphical notation and the abstract syntax.
- [Clause 8](#) provides the normative specification of the metamodel that defines the SysML language. This includes the concrete syntax (textual and graphical notations), the abstract syntax and the semantics for the language. The SysML abstract syntax and semantics are formally extensions of the Kernel abstract syntax and semantics provided by KerML (as discussed in [6.1](#)). However, this clause does not cover details of the Kernel metamodel, which are included by normative reference to the KerML specification [KerML].
- [Clause 9](#) specifies a set of model libraries defined in SysML itself. The Systems Library extends the Kernel Library from [KerML] in order to provide systems-modeling-specific semantics to SysML language constructs. The Domain Libraries provide domain-specific models on which users can draw

when creating their own models. Each model library is described with a set of subclauses that covers each of the top-level packages in the model library, referred to as its *library models*.

These clauses are followed by informative [Annex A](#), which presents an example model using the SysML language as defined in this specification to illustrate how the language features can be used to model a system.

In addition, Clause 10 of [KerML] on Model Interchange is included by reference as a normative part of this specification in order to define allowable methods for interchanging SysML models.

6.3 Acknowledgements

The primary authors of this specification document and the syntactic and semantic models defined in it are:

- Sanford Friedenthal, SAF Consulting
- Ed Seidewitz, Model Driven Solutions
- Roger Burkhart, Thematix Partners
- Eran Gery, IBM
- Hisashi Miyashita, Mgnite
- Hans Peter de Koning, DEKonsult

Other contributors include:

- Oystein Haugen, Østfold University College
- Tomas Juknevicius, Dassault Systèmes
- Charles Krueger, BigLever Software

The specification was formally submitted for standardization by the following organizations:

- 88Solutions Corporation
- Dassault Systèmes
- GfSE e.V.
- IBM
- INCOSE
- Intercax LLC
- Lockheed Martin Corporation
- MITRE
- Model Driven Solutions, Inc.
- PTC
- Simula Research Laboratory AS
- Thematix Partners LLC

However, work on the specification was also supported by over 200 people in over 80 organizations that participated in the SysML v2 Submission Team (SST), by contributing use cases, providing critical review and comment, and validating the language design. The following individuals had leadership roles in the SST:

- Manas Bajaj, Intercax LLC (API and services development lead)
- Yves Bernard, Airbus (v1 to v2 transformation co-lead)
- Bjorn Cole, Lockheed Martin Corporation (metamodel development co-lead)
- Sanford Friedenthal, SAF Consulting (SST co-lead, requirements V&V lead)
- Charles Galey, Lockheed Martin Corporation (metamodel development co-lead)
- Karen Ryan, Siemens (metamodel development co-lead)
- Ed Seidewitz, Model Driven Solutions (SST co-lead, pilot implementation lead)
- Tim Weilkiens, oose (v1 to v2 transformation co-lead)

when creating their own models. Each model library is described with a set of subclauses that covers each of the top-level packages in the model library, referred to as its *library models*.

These clauses are followed by informative [Annex A](#), which presents an example model using the SysML language as defined in this specification to illustrate how the language features can be used to model a system.

In addition, Clause 10 of [KerML] on Model Interchange is included by reference as a normative part of this specification in order to define allowable methods for interchanging SysML models.

6.3 Acknowledgements

The primary authors of this specification document and the syntactic and semantic models defined in it are:

- Sanford Friedenthal, SAF Consulting
- Ed Seidewitz, Model Driven Solutions
- Roger Burkhart, Thematix Partners
- Eran Gery, IBM
- Hisashi Miyashita, Mgnite
- Hans Peter de Koning, DEKonsult

Other contributors include:

- Oystein Haugen, Østfold University College
- Tomas Juknevicius, Dassault Systèmes
- Charles Krueger, BigLever Software

The specification was formally submitted for standardization by the following organizations:

- 88Solutions Corporation
- Dassault Systèmes
- GfSE e.V.
- IBM
- INCOSE
- Intercax LLC
- Lockheed Martin Corporation
- MITRE
- Model Driven Solutions, Inc.
- PTC
- Simula Research Laboratory AS
- Thematix Partners LLC

However, work on the specification was also supported by over 200 people in over 80 organizations that participated in the SysML v2 Submission Team (SST), by contributing use cases, providing critical review and comment, and validating the language design. The following individuals had leadership roles in the SST:

- Manas Bajaj, Intercax LLC (API and services development lead)
- Yves Bernard, Airbus (v1 to v2 transformation co-lead)
- Bjorn Cole, Lockheed Martin Corporation (metamodel development co-lead)
- Sanford Friedenthal, SAF Consulting (SST co-lead, requirements V&V lead)
- Charles Galey, Lockheed Martin Corporation (metamodel development co-lead)
- Karen Ryan, Siemens (metamodel development co-lead)
- Ed Seidewitz, Model Driven Solutions (SST co-lead, pilot implementation lead)
- Tim Weilkiens, oose (v1 to v2 transformation co-lead)

The specification was prepared using CATIA No Magic modeling tools and the OpenMBEE system for model publication (<http://www.openmbee.org>), with the invaluable support of the following individuals:

The specification was prepared using CATIA No Magic modeling tools and the OpenMBEE system for model publication (<http://www.openmbee.org>), with the invaluable support of the following individuals:

- Tyler Anderson, No Magic/Dassault Systèmes
- Christopher Delp, Jet Propulsion Laboratory
- Ivan Gomes, Twingineer
- Doris Lam, Jet Propulsion Laboratory
- Robert Karban, Jet Propulsion Laboratory
- Christopher Klotz, No Magic/Dassault Systèmes
- John Watson, Lightstreet Consulting

The following individuals made significant contributions to the SysML v2 pilot implementation developed by the SST in conjunction with the development of this specification:

- Ivan Gomes, Twingineer
- Hisashi Miyashita, Mgnite
- Miyako Wilson, Georgia Institute of Technology
- Santiago Leon, Tom Sawyer
- William Piers, Obeo
- Tilo Schreiber, Siemens
- Zoltán Ujhelyi, IncQuery Labs

- Tyler Anderson, No Magic/Dassault Systèmes
- Christopher Delp, Jet Propulsion Laboratory
- Ivan Gomes, Twingineer
- Doris Lam, Jet Propulsion Laboratory
- Robert Karban, Jet Propulsion Laboratory
- Christopher Klotz, No Magic/Dassault Systèmes
- John Watson, Lightstreet Consulting

The following individuals made significant contributions to the SysML v2 pilot implementation developed by the SST in conjunction with the development of this specification:

- Ivan Gomes, Twingineer
- Hisashi Miyashita, Mgnite
- Miyako Wilson, Georgia Institute of Technology
- Santiago Leon, Tom Sawyer
- William Piers, Obeo
- Tilo Schreiber, Siemens
- Zoltán Ujhelyi, IncQuery Labs

7 Language Description

(Informative)

7.1 Language Overview

The System Modeling Language (SysML) contains concepts that are used to model systems, their components, and the external environment in a context. It extends the Kernel Modeling Language (KerML) as specified in the KerML specification [KerML]. SysML directly uses some elements of KerML, but most SysML elements are specializations of KerML elements.

This clause provides an informative description of all these language concepts in their context of use in SysML. [Clause 8](#) gives the full definition of the SysML metamodel, which is the normative specification for implementing the language. In contrast, the description in this clause focuses on how the various constructs of the language are used, along with the Systems Model Library (see [9.2](#)), to construct models. While non-normative, it is intended to be precise and consistent with the normative specification of the language.

SysML directly uses the following concepts from KerML:

- *Elements* and *relationships* that define the basic graph structure of a model (see [7.2](#)).
- *Dependencies* between modeling elements (see [7.3](#)).
- *Annotations* for attaching metadata to a model, including comments and textual representations (see [7.4](#)).
- *Namespaces* that contain and name elements, and, particularly, *packages* used to organize the elements in a model (see [7.5](#)).
- *Specialization* of elements that specify types, including subclassification, subsetting, redefinition and feature typing (see [7.6](#)).
- *Expressions* can be used to specify calculations, case results, constraints and formal requirements. The full KerML expression sub-language is available in SysML, as described in the KerML specification. The description of this sub-language is not repeated in the SysML specification document.

The modeling constructs specific to SysML, as specified in subclauses [7.6](#) through [7.26](#), are built on the KerML foundation, and cover the following areas:

- Fundamental aspects of constructing a model, including:
 - The general pattern of *definition* and *usage*, which is applied to many of the SysML language constructs (see [7.6](#)). The pattern of definition and usage elements facilitates model reuse, such that a concept can be defined once and then used in many different contexts. A usage element can be further specialized for its specific context.
 - The modeling of *variability*, which includes the definition of *variation points* within a model where choices can be made to select a specific *variant*, and the selection of a particular variant may constrain the allowable choices at other variation points. A system can be *configured* by making appropriate choices at each of the variation points of a variability model, consistent with specified constraints. Variation points can be defined in any of the specific modeling areas listed below, so the ability to model variability is built into the base syntax of definitions and usages (see [7.6](#)).
- The modeling of attributive information about things, including:
 - *Attributes* that specify characteristics of something that can be defined by simple or compound data types, and dimensional quantities such as mass, length, etc. (see [7.7](#)).
 - *Enumerations* that are attributes restricted to a specified set of enumerated values (see [7.8](#)).
- The modeling of *occurrences* with temporal and spatial extent. Temporal extent enables an occurrence to be represented at specific points in time, over a duration in time, or over an entire lifetime. Spatial extent enables an occurrence to be represented at a position and orientation with respect to a coordinate frame, and to have a shape and size (see [7.9](#)).

7 Language Description

(Informative)

7.1 Language Overview

The System Modeling Language (SysML) contains concepts that are used to model systems, their components, and the external environment in a context. It extends the Kernel Modeling Language (KerML) as specified in the KerML specification [KerML]. SysML directly uses some elements of KerML, but most SysML elements are specializations of KerML elements.

This clause provides an informative description of all these language concepts in their context of use in SysML. [Clause 8](#) gives the full definition of the SysML metamodel, which is the normative specification for implementing the language. In contrast, the description in this clause focuses on how the various constructs of the language are used, along with the Systems Model Library (see [9.2](#)), to construct models. While non-normative, it is intended to be precise and consistent with the normative specification of the language.

SysML directly uses the following concepts from KerML:

- *Elements* and *relationships* that define the basic graph structure of a model (see [7.2](#)).
- *Dependencies* between modeling elements (see [7.3](#)).
- *Annotations* for attaching metadata to a model, including comments and textual representations (see [7.4](#)).
- *Namespaces* that contain and name elements, and, particularly, *packages* used to organize the elements in a model (see [7.5](#)).
- *Specialization* of elements that specify types, including subclassification, subsetting, redefinition and feature typing (see [7.6](#)).
- *Expressions* can be used to specify calculations, case results, constraints and formal requirements. The full KerML expression sub-language is available in SysML, as described in the KerML specification. The description of this sub-language is not repeated in the SysML specification document.

The modeling constructs specific to SysML, as specified in subclauses [7.6](#) through [7.26](#), are built on the KerML foundation, and cover the following areas:

- Fundamental aspects of constructing a model, including:
 - The general pattern of *definition* and *usage*, which is applied to many of the SysML language constructs (see [7.6](#)). The pattern of definition and usage elements facilitates model reuse, such that a concept can be defined once and then used in many different contexts. A usage element can be further specialized for its specific context.
 - The modeling of *variability*, which includes the definition of *variation* points within a model where choices can be made to select a specific *variant*, and the selection of a particular variant may constrain the allowable choices at other variation points. A system can be *configured* by making appropriate choices at each of the variation points of a variability model, consistent with specified constraints. Variation points can be defined in any of the specific modeling areas listed below, so the ability to model variability is built into the base syntax of definitions and usages (see [7.6](#)).
- The modeling of attributive information about things, including:
 - *Attributes* that specify characteristics of something that can be defined by simple or compound data types, and dimensional quantities such as mass, length, etc. (see [7.7](#)).
 - *Enumerations* that are attributes restricted to a specified set of enumerated values (see [7.8](#)).
- The modeling of *occurrences* with temporal and spatial extent. Temporal extent enables an occurrence to be represented at specific points in time, over a duration in time, or over an entire lifetime. Spatial extent enables an occurrence to be represented at a position and orientation with respect to a coordinate frame, and to have a shape and size (see [7.9](#)).
- The modeling of *individuals* with specific identities (see [7.9](#)).

- The modeling of *individuals* with specific identities (see [7.9](#)).
- The modeling of *structure* to represent how parts are decomposed, interconnected and classified, and includes:
 - *Items* that may flow through a process or system or be stored by a system (see [7.10](#)).
 - *Parts* that are the foundational units of structure, which can be composed and interconnected, to form composite parts and entire systems (see [7.11](#)).
 - *Ports* that define connection points on parts that enable interactions between parts (see [7.12](#)).
 - *Connections* (see [7.13](#)) and *interfaces* (see [7.14](#)) that define how parts and ports are interconnected.
 - *Allocations* that assign responsibility for realizing the features of one element by another element (see [7.15](#)).
- The modeling of *behavior*, which specifies how parts interact and includes:
 - *Actions* performed by a part, including their temporal ordering, and the flows of items between them (see [7.16](#)).
 - *States* exhibited by a part, the allowable *transitions* between those states, and the actions enabled in a state or during a transition (see [7.17](#)).
- The modeling of *calculations* that are parameterized expressions that can be evaluated to produce specific results (see [7.18](#)).
- The modeling of *constraints*, which specify conditions that can be evaluated as true or false, or asserted to be true or false (see [7.19](#)).
- The modeling of *requirements*, which is a special kind of constraint that a *subject* must satisfy to be a valid solution (see [7.20](#)).
- The modeling of *cases*, which define the steps required to produce a desired result relative to a *subject*, possibly also involving external *actors*, to achieve a specific *objective* (see [7.21](#)), including:
 - *Analysis cases*, whose steps are the *actions* necessary to analyze a subject (see [7.22](#)).
 - *Verification cases*, whose objective is to verify how a requirement is satisfied by the subject (see [7.23](#)).
 - *Use cases*, that specify required behavior of the subject with the objective of providing a measurable benefit to one or more external actors (see [7.24](#)).
- The modeling of *viewpoints* that specify information of interest by a set of stakeholders, and *views* that specify a query of the model, and a rendering of the query results, that is intended to satisfy a particular viewpoint (see [7.25](#)).
- The modeling of user-defined *metadata* that allows for both simple tagging of elements with additional model-level information and more sophisticated semantic extension of the SysML language. In a similar way that SysML extends KerML, modelers can use this metadata capability to build domain and user-specific extensions of SysML, both syntactically and semantically. This allows SysML to be highly adaptable for specific application domains and user needs, while maintaining a high level of underlying standardization and tool interoperability. (See [7.26](#).)

It should be noted that SysML does not contain specific language constructs called system, subsystem, assembly, component, and many other commonly used terms. An entity with structure and behavior in SysML is represented simply as a part (see [7.11](#)). The language provides straightforward extension mechanisms to specify terminology that is appropriate for the domain of interest.

7.2 Elements and Relationships

7.2.1 Elements and Relationships Overview

Metamodel references:

- *Textual notation*, [8.2.2.2](#)
- *Graphical notation*, [8.2.3.2](#)
- *Abstract syntax*, [8.3.2](#)
- *Semantics*, none

- The modeling of *structure* to represent how parts are decomposed, interconnected and classified, and includes:
 - *Items* that may flow through a process or system or be stored by a system (see [7.10](#)).
 - *Parts* that are the foundational units of structure, which can be composed and interconnected, to form composite parts and entire systems (see [7.11](#)).
 - *Ports* that define connection points on parts that enable interactions between parts (see [7.12](#)).
 - *Connections* (see [7.13](#)) and *interfaces* (see [7.14](#)) that define how parts and ports are interconnected.
 - *Allocations* that assign responsibility for realizing the features of one element by another element (see [7.15](#)).
- The modeling of *behavior*, which specifies how parts interact and includes:
 - *Actions* performed by a part, including their temporal ordering, and the flows of items between them (see [7.16](#)).
 - *States* exhibited by a part, the allowable *transitions* between those states, and the actions enabled in a state or during a transition (see [7.17](#)).
- The modeling of *calculations* that are parameterized expressions that can be evaluated to produce specific results (see [7.18](#)).
- The modeling of *constraints*, which specify conditions that can be evaluated as true or false, or asserted to be true or false (see [7.19](#)).
- The modeling of *requirements*, which is a special kind of constraint that a *subject* must satisfy to be a valid solution (see [7.20](#)).
- The modeling of *cases*, which define the steps required to produce a desired result relative to a *subject*, possibly also involving external *actors*, to achieve a specific *objective* (see [7.21](#)), including:
 - *Analysis cases*, whose steps are the *actions* necessary to analyze a subject (see [7.22](#)).
 - *Verification cases*, whose objective is to verify how a requirement is satisfied by the subject (see [7.23](#)).
 - *Use cases*, that specify required behavior of the subject with the objective of providing a measurable benefit to one or more external actors (see [7.24](#)).
- The modeling of *viewpoints* that specify information of interest by a set of stakeholders, and *views* that specify a query of the model, and a rendering of the query results, that is intended to satisfy a particular viewpoint (see [7.25](#)).
- The modeling of user-defined *metadata* that allows for both simple tagging of elements with additional model-level information and more sophisticated semantic extension of the SysML language. In a similar way that SysML extends KerML, modelers can use this metadata capability to build domain and user-specific extensions of SysML, both syntactically and semantically. This allows SysML to be highly adaptable for specific application domains and user needs, while maintaining a high level of underlying standardization and tool interoperability. (See [7.26](#).)

It should be noted that SysML does not contain specific language constructs called system, subsystem, assembly, component, and many other commonly used terms. An entity with structure and behavior in SysML is represented simply as a part (see [7.11](#)). The language provides straightforward extension mechanisms to specify terminology that is appropriate for the domain of interest.

7.2 Elements and Relationships

7.2.1 Elements and Relationships Overview

Metamodel references:

- *Textual notation*, [8.2.2.2](#)
- *Graphical notation*, [8.2.3.2](#)
- *Abstract syntax*, [8.3.2](#)
- *Semantics*, *none*

Elements are the constituents of a model. Some elements represent *relationships* between other elements, known as the *related elements* of the relationship. One of the related elements of a relationship may be the *owning* related

Elements are the constituents of a model. Some elements represent *relationships* between other elements, known as the *related elements* of the relationship. One of the related elements of a relationship may be the *owning* related element of the relationship. If the owning related element of a relationship is deleted from a model, then the relationship is also deleted. Some of the related elements of a relationship (distinct from the owning related element, if any) may be *owned* related elements. If a relationship has owned related elements, then, if the relationship is deleted from a model, all its owned related elements are also deleted.

The *owned relationships* of an element are all those relationships for which the element is the owning related element. The *owned elements* of an element are all those elements that are owned related elements of the owned relationships of the element (notice the extra level of indirection through the owned relationships). The *owning relationship* of an element (if any) is the relationship for which the element is an owned related element (of which the element can have at most one). The *owner* of an element (if any) is the owning related element of the owning relationship of the element (again, notice the extra level of indirection through the owning relationship).

The deletion rules for relationships imply that, if an element is deleted from a model, then all its owned relationships are also deleted and, therefore, all its owned elements. This may result in a further cascade of deletions until all deletion rules are satisfied. An element that has no owner acts as the *root element* of an *ownership tree structure*, such that all elements and relationships in the structure are deleted if the root element is deleted. Deleting any element other than the root element results in the deletion of the entire subtree rooted in that element.

Graphically, non-relationship elements are generally represented using a box-like shape or other icon, while relationships are shown using lines connecting the symbols for the related elements. However, in some cases, additional shapes may be attached to relationship lines in order to present additional information. The specific conventions for such graphical notations are covered in subsequent subclauses.

7.2.2 Elements

Various specific kinds of model elements in SysML are described in subsequent subclauses. However, there are certain concepts that apply to all model elements.

Every element has a unique identifier known as its *element ID*. The properties of an element can change over its lifetime, but its element ID does not change after the element is created. An element may also have additional identifiers, its *alias IDs*, which may be assigned for tool-specific purposes. The SysML notation, however, does not have any provision for specifying element or alias IDs, since these are expected to be managed by the underlying modeling tooling. Instead, an element can be given a *name* and/or a *short name*, and it can also have any number of alias names relative to one or more namespaces (see [7.5](#)).

In most cases, an element is *declared* using a keyword indicating the *kind* of element it is (e.g., **part def** or **attribute**). The declaration of an element may also specify a short name and/or name for it, in that order. The short name is distinguished by being surrounded by the delimiting characters < and >.

```
part <'1.2.4'> myName;
```

While the language makes no formal distinction between names and short names, the intent is that the name of an element should be fully descriptive, particularly in the context of the definition of the element, while the short name, if given, should be an abbreviated name useful for referring to the element. Note also that it is not required to specify either a name or a short name for an element. However, unless at least one of these is given, it is not possible to reference the element using the textual notation (though it is still possible to show it in relationships on graphical diagrams).

Names and short names can contain essentially any printable characters (and certain control characters). However, when written in the textual notation, they must be represented with a specific lexical structure, which has two variants.

element of the relationship. If the owning related element of a relationship is deleted from a model, then the relationship is also deleted. Some of the related elements of a relationship (distinct from the owning related element, if any) may be *owned* related elements. If a relationship has owned related elements, then, if the relationship is deleted from a model, all its owned related elements are also deleted.

The *owned relationships* of an element are all those relationships for which the element is the owning related element. The *owned elements* of an element are all those elements that are owned related elements of the owned relationships of the element (notice the extra level of indirection through the owned relationships). The *owning relationship* of an element (if any) is the relationship for which the element is an owned related element (of which the element can have at most one). The *owner* of an element (if any) is the owning related element of the owning relationship of the element (again, notice the extra level of indirection through the owning relationship).

The deletion rules for relationships imply that, if an element is deleted from a model, then all its owned relationships are also deleted and, therefore, all its owned elements. This may result in a further cascade of deletions until all deletion rules are satisfied. An element that has no owner acts as the *root element* of an *ownership tree structure*, such that all elements and relationships in the structure are deleted if the root element is deleted. Deleting any element other than the root element results in the deletion of the entire subtree rooted in that element.

Graphically, non-relationship elements are generally represented using a box-like shape or other icon, while relationships are shown using lines connecting the symbols for the related elements. However, in some cases, additional shapes may be attached to relationship lines in order to present additional information. The specific conventions for such graphical notations are covered in subsequent subclauses.

7.2.2 Elements

Various specific kinds of model elements in SysML are described in subsequent subclauses. However, there are certain concepts that apply to all model elements.

Every element has a unique identifier known as its *element ID*. The properties of an element can change over its lifetime, but its element ID does not change after the element is created. An element may also have additional identifiers, its *alias IDs*, which may be assigned for tool-specific purposes. The SysML notation, however, does not have any provision for specifying element or alias IDs, since these are expected to be managed by the underlying modeling tooling. Instead, an element can be given a *name* and/or a *short name*, and it can also have any number of alias names relative to one or more namespaces (see [7.5](#)).

In most cases, an element is *declared* using a keyword indicating the *kind* of element it is (e.g., **part def** or **attribute**). The declaration of an element may also specify a short name and/or name for it, in that order. The short name is distinguished by being surrounded by the delimiting characters < and >.

```
part <'1.2.4'> myName;
```

While the language makes no formal distinction between names and short names, the intent is that the name of an element should be fully descriptive, particularly in the context of the definition of the element, while the short name, if given, should be an abbreviated name useful for referring to the element. Note also that it is not required to specify either a name or a short name for an element. However, unless at least one of these is given, it is not possible to reference the element using the textual notation (though it is still possible to show it in relationships on graphical diagrams).

Names and short names can contain essentially any printable characters (and certain control characters). However, when written in the textual notation, they must be represented with a specific lexical structure, which has two variants.

1. A *basic name* is one that can be lexically distinguished in itself from other parts of the textual notation. The initial character of a basic name must be a lowercase letter, an uppercase letter or an underscore. The remaining characters of a basic name can be any character allowed as an initial character or any digit.

1. A *basic name* is one that can be lexically distinguished in itself from other parts of the textual notation. The initial character of a basic name must be a lowercase letter, an uppercase letter or an underscore. The remaining characters of a basic name can be any character allowed as an initial character or any digit. However, a reserved word may not be used as a name, even though it has the form of a basic name (see [8.2.2.1.2](#) for the list of the reserved words in SysML).

```
Vehicle
power_line
```

2. An *unrestricted name* provides a way to represent a name that contains any character. It is represented as a non-empty sequence of characters surrounded by single quotes. The name consists of the characters *within* the single quotes – the single quotes are *not* included as part of the represented name. The characters within the single quotes may not include non-printable characters (including backspace, tab and newline). However, these characters may be included as part of the name itself through use of an escape sequence. In addition, the single quote character or the backslash character may only be included within the name by using an escape sequence.

```
'+'  
'circuits in line'  
'On/Off Switch'  
'Ångström'
```

An *escape sequence* is a sequence of two text characters starting with a backslash as an escape character, which actually denotes only a single character (except for the newline escape sequence, which represents however many characters is necessary to represent an end of line in a specific implementation). See [KerML, 8.2.2.3] for a complete description of unrestricted names and escape sequences.

In addition to its declaration, the representation for an element may also list other elements *owned* by the containing element. In the textual notation, such owned elements are shown represented as a *body* delimited by curly braces { ... }, particularly when the owning element is a namespace (see [7.5](#)). In the graphical notation, owned elements may be shown in *compartments* within the symbol representing the owning element, particularly when the owning element is a package, definition or usage (see [7.5](#) and [7.6.1](#)).

7.2.3 Relationships

A relationship is a kind of element that relates two or more other elements. Some relationships are constrained to have exactly two related elements (i.e., *binary* relationships) while others may have more. The related elements of relationships are ordered. A relationship may designate certain of its related elements as *sources* with the rest being *targets*. In this case, the relationship is said to be *directed* from the sources to the targets. An *undirected* relationship simply designates all its related elements to be targets, with no source elements.

A relationship may also be the source or target of other relationships. In particular, a relationship may be annotated by being the target of an annotation relationship (see [7.4](#)). In some cases, the annotating element may be owned by the annotated relationship via the annotation relationship, particularly in the case of a documentation comment (see [8.2.2.4.2](#)).

7.3 Dependencies

7.3.1 Dependencies Overview

Metamodel references:

- *Textual notation*, [8.2.2.3](#)
- *Graphical notation*, [8.2.3.3](#)
- *Abstract syntax*, [8.3.3](#)

However, a reserved word may not be used as a name, even though it has the form of a basic name (see [8.2.2.1.2](#) for the list of the reserved words in SysML).

```
Vehicle  
power_line
```

2. An *unrestricted name* provides a way to represent a name that contains any character. It is represented as a non-empty sequence of characters surrounded by single quotes. The name consists of the characters *within* the single quotes – the single quotes are *not* included as part of the represented name. The characters within the single quotes may not include non-printable characters (including backspace, tab and newline). However, these characters may be included as part of the name itself through use of an escape sequence. In addition, the single quote character or the backslash character may only be included within the name by using an escape sequence.

```
'+'  
'circuits in line'  
'On/Off Switch'  
'Ångström'
```

An *escape sequence* is a sequence of two text characters starting with a backslash as an escape character, which actually denotes only a single character (except for the newline escape sequence, which represents however many characters is necessary to represent an end of line in a specific implementation). See [KerML, 8.2.2.3] for a complete description of unrestricted names and escape sequences.

In addition to its declaration, the representation for an element may also list other elements *owned* by the containing element. In the textual notation, such owned elements are shown represented as a *body* delimited by curly braces { ... }, particularly when the owning element is a namespace (see [7.5](#)). In the graphical notation, owned elements may be shown in *compartments* within the symbol representing the owning element, particularly when the owning element is a package, definition or usage (see [7.5](#) and [7.6.1](#)).

7.2.3 Relationships

A relationship is a kind of element that relates two or more other elements. Some relationships are constrained to have exactly two related elements (i.e., *binary* relationships) while others may have more. The related elements of relationships are ordered. A relationship may designate certain of its related elements as *sources* with the rest being *targets*. In this case, the relationship is said to be *directed* from the sources to the targets. An *undirected* relationship simply designates all its related elements to be targets, with no source elements.

A relationship may also be the source or target of other relationships. In particular, a relationship may be annotated by being the target of an annotation relationship (see [7.4](#)). In some cases, the annotating element may be owned by the annotated relationship via the annotation relationship, particularly in the case of a documentation comment (see [8.2.2.4.2](#)).

7.3 Dependencies

7.3.1 Dependencies Overview

Metamodel references:

- *Textual notation*, [8.2.2.3](#)
- *Graphical notation*, [8.2.3.3](#)
- *Abstract syntax*, [8.3.3](#)
- *Semantics, none*

A *dependency* is a kind of relationship between any number of client (source) and supplier (target) elements. This implies that a change to a supplier element may result in a change to a client element. Dependencies can be useful for representing relationships between elements in an abstract way. For example, a dependency can be used to

- *Semantics, none*

A *dependency* is a kind of relationship between any number of client (source) and supplier (target) elements. This implies that a change to a supplier element may result in a change to a client element. Dependencies can be useful for representing relationships between elements in an abstract way. For example, a dependency can be used to represent that an upper layer of an architecture stack may depend on a lower layer of the stack. A dependency can also be extended to reflect more specialized relationships, such as refinement (e.g., by using user-defined keywords, see [7.26](#)).

Table 1. Dependencies – Representative Notation

Element	Graphical Notation	Textual Notation
Dependency		dependency Package2 to Package1;
Dependency - nary		dependency Package1, Package2 to Package3, Package4;

7.3.2 Dependency Declaration

A dependency is declared textually using the keyword **dependency**. The client elements of the dependency are then given as a comma-separated list of qualified names following the keyword **from**, followed by a similar list of the supplier elements after the keyword **to**. If no short name or name is given for the dependency, then the keyword **from** may be omitted.

```

dependency Use
  from 'Application Layer' to 'Service Layer';

  // 'Service Layer' is the client of this dependency, not its name.
  dependency 'Service Layer'
    to 'Data Layer', 'External Interface Layer';

```

A dependency declaration may also optionally have a body containing any annotating elements owned by the dependency via annotation relationships (see [7.4](#)).

```

dependency 'Service Layer'
  to 'Data Layer', 'External Interface Layer' {
    /* 'Service Layer' is the client of this dependency,
     * not its name. */
  }

```

7.4 Annotations

represent that an upper layer of an architecture stack may depend on a lower layer of the stack. A dependency can also be extended to reflect more specialized relationships, such as refinement (e.g., by using user-defined keywords, see [7.26](#)).

Table 1. Dependencies – Representative Notation

Element	Graphical Notation	Textual Notation
Dependency	<pre> graph LR P2[Package2] --> P1[Package1] </pre>	dependency Package2 to Package1;
Dependency - nary	<pre> graph LR P1[Package1] --> P3[Package3] P2[Package2] --> P4[Package4] </pre>	dependency Package1, Package2 to Package3, Package4;

7.3.2 Dependency Declaration

A dependency is declared textually using the keyword **dependency**. The client elements of the dependency are then given as a comma-separated list of qualified names following the keyword **from**, followed by a similar list of the supplier elements after the keyword **to**. If no short name or name is given for the dependency, then the keyword **from** may be omitted.

```

dependency Use
  from 'Application Layer' to 'Service Layer';

  // 'Service Layer' is the client of this dependency, not its name.
  dependency 'Service Layer'
    to 'Data Layer', 'External Interface Layer';
  
```

A dependency declaration may also optionally have a body containing any annotating elements owned by the dependency via annotation relationships (see [7.4](#)).

```

dependency 'Service Layer'
  to 'Data Layer', 'External Interface Layer' {
    /* 'Service Layer' is the client of this dependency,
     * not its name. */
  }
  
```

7.4 Annotations

7.4.1 Annotations Overview

Metamodel references:

- *Textual notation*, [8.2.2.4](#)
- *Graphical notation*, [8.2.3.4](#)
- *Abstract syntax*, [8.3.4](#)

7.4.1 Annotations Overview

Metamodel references:

- *Textual notation*, [8.2.2.4](#)
- *Graphical notation*, [8.2.3.4](#)
- *Abstract syntax*, [8.3.4](#)
- *Semantics*, *none*

An *annotating element* is an element that is used to provide additional information about other elements. An annotation is a relationship between an annotating element and an annotated element that is being described. An annotating element can annotate multiple annotated elements, and each element can have multiple annotations.

A *comment* is one kind of annotating element that is used to provide textual descriptions about other elements. Comments can be members of namespaces and, therefore, can be named. Such member comments may be about the namespace that owns them, or they may be about different elements. *Documentation* is a distinguished kind of comment used to document the annotated element. Documentation comments always annotate a single element, which is their owning element.

A *textual representation* is an annotating element whose textual body provides a representation of the annotated element in a specifically named language. This representation may be in the SysML textual notation or it may be in another language. If the named language is machine-parsable, then the body text should be legal input text as defined for that language. In particular, annotating a SysML model element with a textual annotation in a language other than SysML can be used as a semantically "opaque" element specified in the other language.

It is also possible to annotate elements with user-defined *metadata*, allowing both syntactic and semantic extension of SysML. This capability is described in [7.26](#).

Table 2. Annotations – Representative Notation

Element	Graphical Notation	Textual Notation
Comment		<code>/*This is a comment.*/</code>
Comment		<code>comment Comment1</code> <code>/*This is a comment.*/</code>
Documentation		<code>doc /*This is documentation.*/</code>
Documentation		<code>doc Document1</code> <code>/*This is documentation.*/</code>

- *Semantics, none*

An *annotating element* is an element that is used to provide additional information about other elements. An annotation is a relationship between an annotating element and an annotated element that is being described. An annotating element can annotate multiple annotated elements, and each element can have multiple annotations.







A *comment* is one kind of annotating element that is used to provide textual descriptions about other elements. Comments can be members of namespaces and, therefore, can be named. Such member comments may be about the namespace that owns them, or they may be about different elements. *Documentation* is a distinguished kind of comment used to document the annotated element. Documentation comments always annotate a single element, which is their owning element.





A *textual representation* is an annotating element whose textual body provides a representation of the annotated element in a specifically named language. This representation may be in the SysML textual notation or it may be in another language. If the named language is machine-parsable, then the body text should be legal input text as defined for that language. In particular, annotating a SysML model element with a textual annotation in a language other than SysML can be used as a semantically "opaque" element specified in the other language.

It is also possible to annotate elements with user-defined *metadata*, allowing both syntactic and semantic extension of SysML. This capability is described in [7.26](#).

Table 2. Annotations – Representative Notation

Element	Graphical Notation	Textual Notation
Comment		<code>/*This is a comment.*/</code>
Comment		<code>comment Comment1</code> <code>/*This is a comment.*/</code>
Documentation		<code>doc /*This is documentation.*/</code>
Documentation		<code>doc Document1</code> <code>/*This is documentation.*/</code>
Documentation with locale (in French, region Belgium)		<code>doc locale "fr_BE"</code> <code>/* Ceci n'est pas une pipe. */</code>

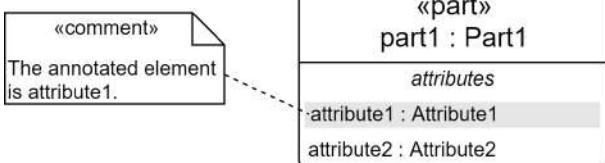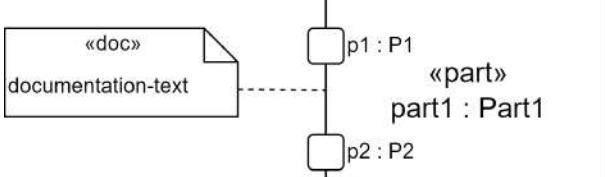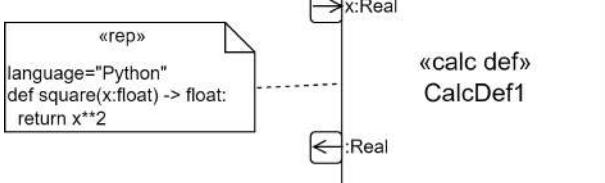Element	Graphical Notation	Textual Notation
Documentation with locale (in French, region Belgium)		<pre>doc locale "fr_BE" /* Ceci n'est pas une pipe. */</pre>
Textual Representation		<pre>rep language "language1" /* body1 */ or language "language1" /* body1 */</pre>
Annotation		<pre>comment about part1::attribute1 /* The annotated element * is attribute1. */</pre>
Annotation-Documentation		<pre>part part1 : Part1 { doc /* documentation-text */ port p1 : P1; port p2 : P2; }</pre>
Annotation-Textual Representation		<pre>calc def square { in attribute x : ScalarValues::Real; return :ScalarValues::Real; rep square language "Python" /* * def square(x:float) -> float: * return x**2 */</pre>
Documentation Compartment		<pre>doc /*This is a documentation *compartment.*/</pre>

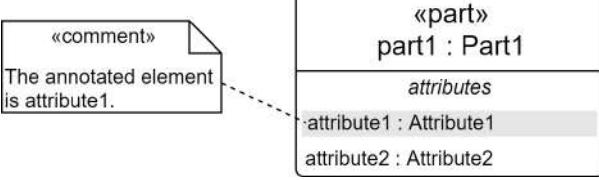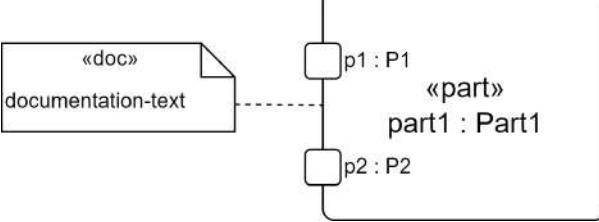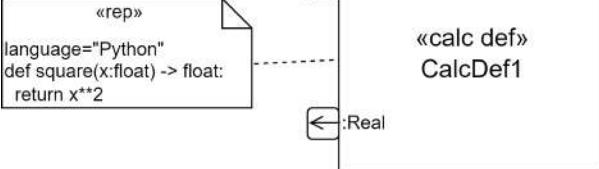Element	Graphical Notation	Textual Notation
Textual Representation		<pre data-bbox="1067 291 1416 340">rep language "language1" /* body1 */ or language "language1" /* body1 */</pre>
Annotation		<pre data-bbox="1067 572 1416 688">comment about part1::attribute1 /* The annotated element * is attribute1. */</pre>
Annotation-Documentation		<pre data-bbox="1067 804 1372 963">part part1 : Part1 { doc /* documentation-text */ port p1 : P1; port p2 : P2; }</pre>
Annotation-Textual Representation		<pre data-bbox="1067 1068 1388 1406">calc def square { in attribute x : ScalarValues::Real; return :ScalarValues::Real; rep square language "Python" /* def square(x:float) -> float: * return x**2 */</pre>
Documentation Compartment		<pre data-bbox="1067 1480 1307 1586">doc /*This is a documentation *compartment.*/</pre>

7.4.2 Comments and Documentation

The full declaration of a comment begins with the keyword **comment**, optionally followed by a short name and/or name (see [7.2](#)). One or more qualified names of annotated elements for the comment, separated by commas, are then given after the keyword **about**, indicating that the comment has annotation relationships to each of the identified elements. The **body** of the comment is written lexically as text between `/*` and `*/` delimiters.

7.4.2 Comments and Documentation

The full declaration of a comment begins with the keyword **comment**, optionally followed by a short name and/or name (see [7.2](#)). One or more qualified names of annotated elements for the comment, separated by commas, are then given after the keyword **about**, indicating that the comment has annotation relationships to each of the identified elements. The body of the comment is written lexically as text between /* and */ delimiters.

```
item A;
part B;
comment Comment1 about A, B
    /* This is the comment body text. */
```

If the comment is an owned member of a namespace (see [7.5](#)), then the explicit identification of annotated elements can be omitted, in which case the annotated element is implicitly the containing namespace. Further, in this case, if no short name or name is given for the comment, then the **comment** keyword can also be omitted.

```
package P {
    comment C /* This is a comment about P. */

    /* This is also a comment about P. */
}
```

A *locale* can also be specified for a comment, using the keyword **locale** followed by the locale string, placed immediately before the comment body (whether or not the **comment** keyword is used). The locale identifies the language of the body text and, optionally, the region and/or encoding. The format is language[_territory][.codeset][@modifier] (conformant to [ISO15897]).

```
comment C_US_English locale "en_US"
    /* This is US English comment text */
```

A documentation comment is notated similarly to a regular comment, but using the keyword **doc** rather than **comment**. The documenting element of documentation is always the owning element of the documentation.

```
part X {
    doc X_Comment
        /* This is a documentation comment about X. */
    doc /* This is more documentation about X. */
}
```

When a comment is written in the textual notation, the actual **body** text of the comment is extracted from the lexical comment body according to the rules given in the KerML specification [KerML, 8.2.3.3.2]. The body text of a comment can include markup information (such as HTML), and a tool may graphically display such text as rendered according to the markup. However, marked up "rich text" for a comment is stored in the comment body in plain text including all mark up text, with all line terminators and white space included as entered, other than what is removed according to the rules referenced above.

7.4.3 Textual Representation

A textual representation is notated similarly to a regular comment, but with the keyword **rep** used instead of **comment**. As for documentation, a textual representation is always owned by its represented element. In particular, if the textual representation is an owned member of a namespace (see [7.5](#)), then the represented element is the containing namespace. A textual representation declaration must also specify the **language** as a literal string following the keyword **language**. If the textual representation has no short name or name, then the **rep** keyword can also be omitted.

```

item A;
part B;
comment Comment1 about A, B
    /* This is the comment body text. */

```

If the comment is an owned member of a namespace (see [7.5](#)), then the explicit identification of annotated elements can be omitted, in which case the annotated element is implicitly the containing namespace. Further, in this case, if no short name or name is given for the comment, then the **comment** keyword can also be omitted.

```

package P {
    comment C /* This is a comment about P. */

    /* This is also a comment about P. */
}

```

A *locale* can also be specified for a comment, using the keyword **locale** followed by the locale string, placed immediately before the comment body (whether or not the **comment** keyword is used). The locale identifies the language of the body text and, optionally, the region and/or encoding. The format is `language[_territory] [.codeset] [@modifier]` (conformant to [ISO15897]).

```

comment C_US_English locale "en_US"
    /* This is US English comment text */

```

A documentation comment is notated similarly to a regular comment, but using the keyword **doc** rather than **comment**. The documenting element of documentation is always the owning element of the documentation.

```

part X {
    doc X_Comment
        /* This is a documentation comment about X. */
    doc /* This is more documentation about X. */
}

```

When a comment is written in the textual notation, the actual body text of the comment is extracted from the lexical comment body according to the rules given in the KerML specification [KerML, 8.2.3.3.2]. The body text of a comment can include markup information (such as HTML), and a tool may graphically display such text as rendered according to the markup. However, marked up "rich text" for a comment is stored in the comment body in plain text including all mark up text, with all line terminators and white space included as entered, other than what is removed according to the rules referenced above.

7.4.3 Textual Representation

A textual representation is notated similarly to a regular comment, but with the keyword **rep** used instead of **comment**. As for documentation, a textual representation is always owned by its represented element. In particular, if the textual representation is an owned member of a namespace (see [7.5](#)), then the represented element is the containing namespace. A textual representation declaration must also specify the `language` as a literal string following the keyword **language**. If the textual representation has no short name or name, then the **rep** keyword can also be omitted.

```

part def C {
    attribute x: Real;
    assert x_constraint {
        rep inOCL language "ocl"
        /* self.x > 0.0 */
    }
}
action def setX(c : C, newX : Real) {
    language "alf"
    /* c.x = newX;
    * WriteLine("Set new x"); */
}

```

```

part def C {
    attribute x: Real;
    assert x_constraint {
        rep inOCL language "ocl"
        /* self.x > 0.0 */
    }
}
action def setX(c : C, newX : Real) {
    language "alf"
    /* c.x = newX;
     * WriteLine("Set new x");
     */
}

```

The lexical comment text given for a textual representation is processed as for regular comment text, and it is the result after such processing that is the textual representation `body` expected to conform to the named language.

Note. Since the lexical form of a comment is used to specify the textual representation `body`, it is not possible to include comments of a similar form in the `body` text.

The language name in a textual representation is case insensitive. The name can be of a natural language, but will often be for a machine-parsable language. In particular, there are recognized standard language names.

If the language is "`sysml`", then the body of the textual representation must be a legal representation of the represented element in the SysML textual notation. A tool can use such a textual representation to record the original SysML notation text from which an element is parsed. Other standard language names that can be used in a textual representation include "`kerml`", "`ocl`", and "`alf`", in which case the body of the textual representation must be written in the Kernel Modeling Language [KerML], Object Constraint Language [OCL] or the Action Language for fUML [Alf], respectively. (This is the same set of standard language names as in [KerML, 7.2.4.3, 8.3.2.3], with the addition of "`sysml`".)

However, for any other language than "`sysml`", the SysML specification does not define how the body text is to be semantically interpreted as part of the model being represented. An element with no other definition than a textual representation in a language other than SysML is essentially a semantically "opaque" element specified in the other language. Nevertheless, a conforming SysML tool may (but is not required to) interpret such an element consistently with the specification of the named language.

7.5 Namespaces and Packages

7.5.1 Namespaces Overview

Metamodel references:

- *Textual notation*, [8.2.2.5](#)
- *Graphical notation*, [8.2.3.5](#)
- *Abstract syntax*, [8.3.5](#)
- *Semantics, none*

A *namespace* is a kind of element that can contain other elements and provide names for them. The elements contained in a namespace are referred to as its *member elements*. *Membership* is a kind of relationship that relates a namespace to its members. A membership relationship can specify the name by which its member element is known relative to the containing namespace and whether the element membership is visible outside the namespace or not (see [7.5.2](#)).

```
* /  
}
```

The lexical comment text given for a textual representation is processed as for regular comment text, and it is the result after such processing that is the textual representation `body` expected to conform to the named language.

Note. Since the lexical form of a comment is used to specify the textual representation `body`, it is not possible to include comments of a similar form in the `body` text.

The language name in a textual representation is case insensitive. The name can be of a natural language, but will often be for a machine-parsable language. In particular, there are recognized standard language names.

If the language is "`sysml`", then the body of the textual representation must be a legal representation of the represented element in the SysML textual notation. A tool can use such a textual representation to record the original SysML notation text from which an element is parsed. Other standard language names that can be used in a textual representation include "`kerml`", "`ocl`", and "`alf`", in which case the body of the textual representation must be written in the Kernel Modeling Language [KerML], Object Constraint Language [OCL] or the Action Language for fUML [Alf], respectively. (This is the same set of standard language names as in [KerML, 7.2.4.3, 8.3.2.3], with the addition of "`sysml`".)

However, for any other language than "`sysml`", the SysML specification does not define how the body text is to be semantically interpreted as part of the model being represented. An element with no other definition than a textual representation in a language other than SysML is essentially a semantically "opaque" element specified in the other language. Nevertheless, a conforming SysML tool may (but is not required to) interpret such an element consistently with the specification of the named language.

7.5 Namespaces and Packages

7.5.1 Namespaces Overview

SYSML2 -207: Update language description and concrete syntax related to imports

SYSML2 -280: Header description of unowned elements does not align with textual notation

Metamodel references:

- *Textual notation*, [8.2.2.5](#)
- *Graphical notation*, [8.2.3.5](#)
- *Abstract syntax*, [8.3.5](#)
- *Semantics, none*

A *namespace* is a kind of element that can contain other elements and provide names for them. The elements contained in a namespace are referred to as its *member elements*. *Membership* is a kind of relationship that relates a namespace to its members. A membership relationship can specify the name by which its member element is known relative to the containing namespace and whether the element membership is visible outside the namespace or not (see [7.5.2](#)).

An element may be *owned* via its membership in a namespace. When a namespace is deleted, all such owned members will also be deleted. An element may also have a membership in a namespace without being owned by the namespace. In this case, the membership may introduce an *alias* name for the element relative to the namespace. Note that it is possible for an element to have both owning and non-owning memberships with the same namespace, but it can have at most one owning membership across all namespaces.

An *import* relationship allows one namespace to import memberships from another namespace (see [7.5.3](#)). The member elements from imported memberships become (unowned) members of the importing namespace in addition to being members of the imported namespace. In particular, this allows members of the imported namespace to be referenced in textual notations within the scope of the importing namespace without having to qualify the member

An element may be *owned* via its membership in a namespace. When a namespace is deleted, all such owned members will also be deleted. An element may also have a membership in a namespace without being owned by the namespace. In this case, the membership may introduce an *alias* name for the element relative to the namespace. Note that it is possible for an element to have both owning and non-owning memberships with the same namespace, but it can have at most one owning membership across all namespaces.

An *import* relationship allows one namespace to import memberships from another namespace (see [7.5.3](#)). The member elements from imported memberships become (unowned) members of the importing namespace in addition to being members of the imported namespace. In particular, this allows members of the imported namespace to be referenced in textual notations within the scope of the importing namespace without having to qualify the member names with the name of the imported namespace. An import can also be *recursive*, which means that, in addition to importing members of the referenced namespace itself, all namespaces that are owned members of the imported package are also recursively imported.


A *package* is a kind of namespace that is used solely as a container for other elements to organize the model. In addition, a package has the capability to *filter* imported elements based on certain conditions (see [7.5.4](#)), usually defined in terms of the metadata provided by annotations of those elements (see [7.4](#) and [7.26](#)). Only elements that meet all filter conditions actually become imported members of the package. Together, recursive import and filtering provide a general capability for specifying that a package automatically contain a set of elements identified from across a model by their metadata.

In addition to packages, all kinds of SysML *definitions* and *usages* are also namespaces (see [7.6](#) and following subclauses). All rules discussed generically for namespaces in this subclause [7.5](#) apply generically to packages, definitions and usages (even though the examples in this subclause are given using packages).

In general, an element may have different names in different namespaces, and the same name may identify different elements relative to different namespaces. Therefore, to unambiguously identify an element by name, the element name must be *qualified* by the namespace relative to which the element name is to be resolved. Such a *qualified name* is notated by specifying a name to identify the namespace, followed by the symbol `:`, followed by the element name. Since the namespace name may also be qualified, a qualified name is most generally a sequence of *segment names* separated by `:` punctuation, of which all but the last must identify namespaces. An *unqualified name* can be considered the degenerate case of a qualified name with just one element name in its sequence, for which the namespace to be used is implicit.

Note that qualified names do not appear in the abstract syntax. Instead, the abstract syntax representation contains actual references to the identified elements. *Name resolution* is the process of determining the element that is identified by a qualified name. An unqualified name used within the body of a namespace is resolved in the context of that namespace and, potentially, other namespaces in which the first namespace is lexically nested, taking into account imported (see [7.5.3](#)) and inherited (see [7.6](#)) memberships. A qualified name with more than one segment is resolved by recursively resolving the name of the qualifying namespace and then resolving the element name in that context. The full name resolution process is specified in [KerML, 8.2.3.5].

Table 3. Packages – Representative Notation

Element	Graphical Notation	Textual Notation
Package (name in body)		<code>package Package1;</code>

names with the name of the imported namespace. An import can also be *recursive*, which means that, in addition to importing members of the referenced namespace itself, all namespaces that are owned members of the imported package are also recursively imported.




A *package* is a kind of namespace that is used solely as a container for other elements to organize the model. In addition, a package has the capability to *filter* imported elements based on certain conditions (see [7.5.4](#)), usually defined in terms of the metadata provided by annotations of those elements (see [7.4](#) and [7.26](#)). Only elements that meet all filter conditions actually become imported members of the package. Together, recursive import and filtering provide a general capability for specifying that a package automatically contain a set of elements identified from across a model by their metadata.





In addition to packages, all kinds of SysML *definitions* and *usages* are also namespaces (see [7.6](#) and following subclauses). All rules discussed generically for namespaces in this subclause [7.5](#) apply generically to packages, definitions and usages (even though the examples in this subclause are given using packages).





In general, an element may have different names in different namespaces, and the same name may identify different elements relative to different namespaces. Therefore, to unambiguously identify an element by name, the element name must be *qualified* by the namespace relative to which the element name is to be resolved. Such a *qualified name* is notated by specifying a name to identify the namespace, followed by the symbol `:`, followed by the element name. Since the namespace name may also be qualified, a qualified name is most generally a sequence of *segment names* separated by `:` punctuation, of which all but the last must identify namespaces. An *unqualified name* can be considered the degenerate case of a qualified name with just one element name in its sequence, for which the namespace to be used is implicit.





Note that qualified names do not appear in the abstract syntax. Instead, the abstract syntax representation contains actual references to the identified elements. *Name resolution* is the process of determining the element that is identified by a qualified name. An unqualified name used within the body of a namespace is resolved in the context of that namespace and, potentially, other namespaces in which the first namespace is lexically nested, taking into account imported (see [7.5.3](#)) and inherited (see [7.6](#)) memberships. A qualified name with more than one segment is resolved by recursively resolving the name of the qualifying namespace and then resolving the element name in that context. The full name resolution process is specified in [KerML, 8.2.3.5].





Table 3. Packages – Representative Notation

Element	Graphical Notation	Textual Notation
Package (name in body)		<code>package Package1;</code>
Package (name in tab)		<code>package Package1;</code>
Package with owned package		<code>package Package1 { package Package2; }</code>

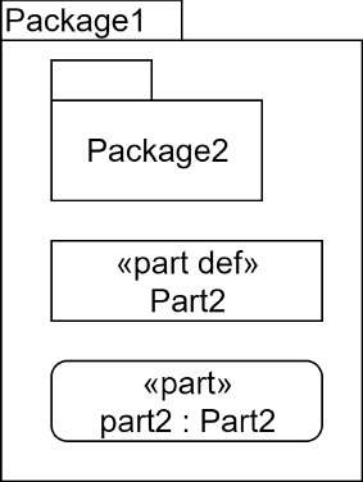Element	Graphical Notation	Textual Notation
Package (name in tab)		<pre>package Package1;</pre>
Package with owned package		<pre>package Package1 { package Package2; }</pre>
Package with owned members		<pre>package Package1 { package Package2; part def Part2; part part2 : Part2; }</pre>
Package with alias member (unowned)		<pre>package Package1 { package Package2; alias Package2Alias for Package2; }</pre>
Package with alias member (owned)		<pre>package Package1 { package Package2; alias Package2Alias for Package2; }</pre>

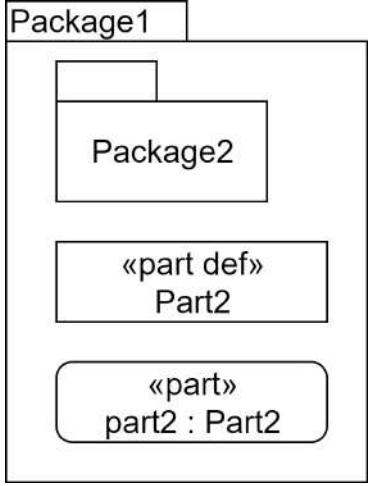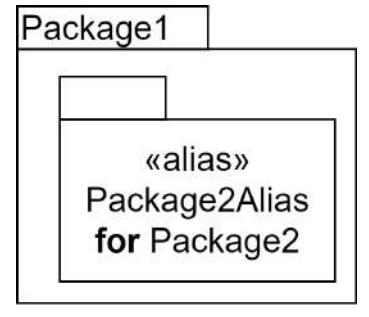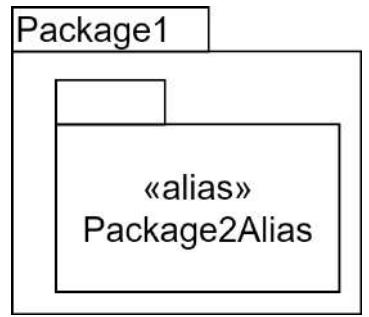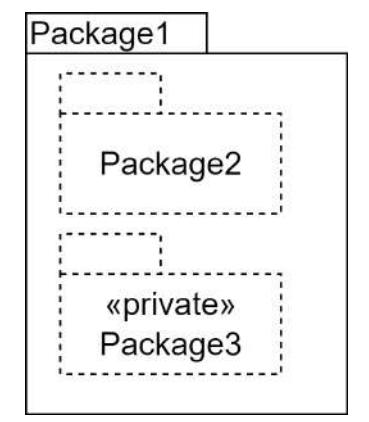Element	Graphical Notation	Textual Notation
Package with owned members	 <pre> classDiagram package Package1 { package Package2 { <<part def>> Part2 <<part>> part2 : Part2 } } </pre>	<pre> package Package1 { package Package2; part def Part2; part part2 : Part2; } </pre>
Package with alias member (unowned)	 <pre> classDiagram package Package1 { <<alias>> Package2Alias for Package2 } </pre>	<pre> package Package1 { alias Package2Alias for Package2; } package Package2; </pre>
Package with alias member (unowned)	 <pre> classDiagram package Package1 { <<alias>> Package2Alias } </pre>	<pre> package Package1 { alias Package2Alias for Package2; } package Package2; </pre>
Package with imported package (nested notation)	 <pre> classDiagram package Package1 { package Package2 { <<private>> Package3 } } </pre>	<pre> package Package1 { public import Package2::*; private import Package3::*; } </pre>

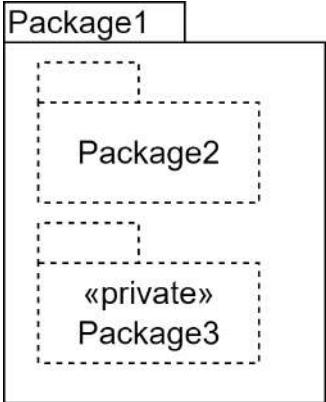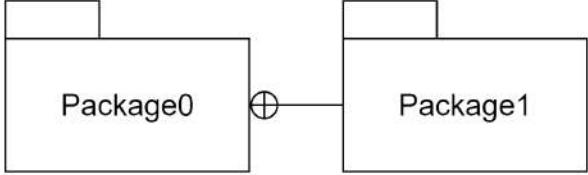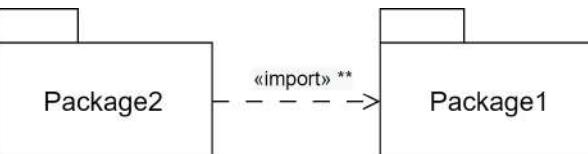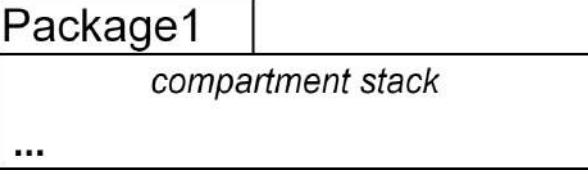Element	Graphical Notation	Textual Notation
Package with imported package (nested notation)	 <pre data-bbox="589 261 915 663"> classDiagram package Package1 { package Package2 package "«private» Package3" } </pre>	<pre data-bbox="1073 397 1383 536"> package Package1 { import Package2::*; private import Package3::*; } </pre>
Membership (owned member)	 <pre data-bbox="458 720 1046 895"> classDiagram package Package0 { package Package1 } </pre>	<pre data-bbox="1073 768 1356 840"> package Package0 { package Package1; } </pre>
Membership (unowned member with alias name)	 <pre data-bbox="458 973 1046 1106"> classDiagram package Package0 { package Package1 "Package1Alias" } </pre>	<pre data-bbox="1073 967 1388 1085"> package Package0 { package Package1; alias Package1Alias for Package1; } </pre>
Import (recursive) Note: - no star is element import - single star is package import (content of package) - double star is recursive including outer package	 <pre data-bbox="458 1248 1046 1402"> classDiagram package Package2 { <<import>> ** --> Package1 } </pre>	<pre data-bbox="1073 1275 1400 1381"> package Package2 { import Package0::Package1::*; } </pre>
Package with compartment	 <pre data-bbox="458 1529 1046 1704"> classDiagram package Package1 { compartment stack ... } </pre>	<pre data-bbox="1073 1564 1334 1649"> package Package1 { /* members */ } </pre>

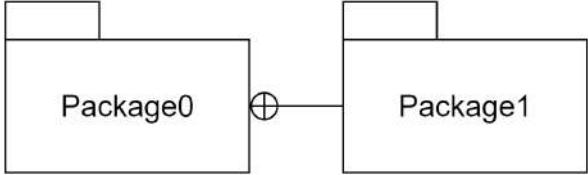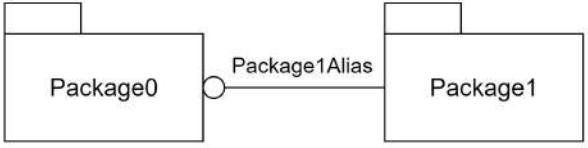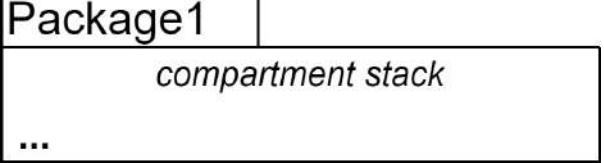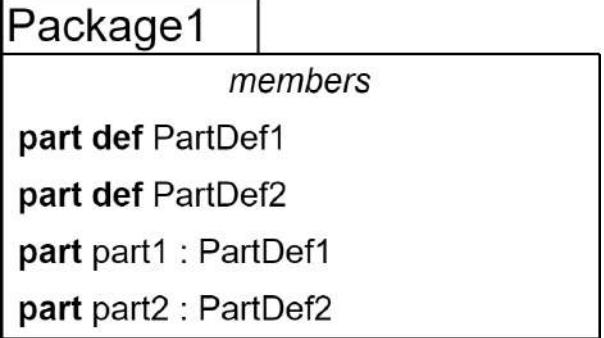Element	Graphical Notation	Textual Notation
Membership (owned member)		<pre>package Package0 { package Package1; }</pre>
Membership (unowned member with alias name)		<pre>package Package0 { alias Package1Alias for Package1; } package Package1;</pre>
Import (recursive) Note: - no star is element import - single star is package import (content of package) - double star is recursive including outer package		<pre>package Package2 { private import Package0::Package1::**; }</pre>
Package with compartment		<pre>package Package1 { /* members */ }</pre>
Package with members compartment		<pre>package Package1 { part def PartDef1; part def PartDef2; part part1 : PartDef1; part part2 : PartDef2; }</pre>

7.5.2 Owned Members and Aliases

[SYSML2 -281: Error in textual notation on this page \("comment Comment 2"\)](#)

A package is declared using the keyword **package**, with the *owned members* of the package listed in its body.

```
package Configurations {
    attribute def ConfigEntry {
        attribute key: String;
```

Element	Graphical Notation	Textual Notation
Package with members compartment	<pre> graph TD Package1[Package1] --- membersComp[members] membersComp --- PartDef1[part def PartDef1] membersComp --- PartDef2[part def PartDef2] membersComp --- part1["part part1 : PartDef1"] membersComp --- part2["part part2 : PartDef2"] </pre>	<pre> package Package1 { part def PartDef1; part def PartDef2; part part1 : PartDef1; part part2 : PartDef2; } </pre>

7.5.2 Owned Members and Aliases

A package is declared using the keyword **package**, with the *owned members* of the package listed in its body.

```

package Configurations {
    attribute def ConfigEntry {
        attribute key: String;
        attribute value: String;
    }
    item ConfigData {
        attribute entries[*]: ConfigEntry;
    }
}
  
```

In general, declaring an element within the body of a namespace denotes that the element is an owned member of the namespace—that is, that there is an *owning membership* relationship between the namespace and the member element. The *visibility* of the membership can be specified by placing one of the keywords **public**, **protected** or **private** before the public element declaration. If the membership is **public** (the default), then it is visible outside of the namespace. If it is **private**, then it is not visible. For namespaces other than definitions and usages, **protected** visibility is equivalent to **private**. For definitions and usages, **protected** visibility has a special meaning relating to member inheritance (see [7.6](#)).

```

package P {
    public part def A;
    private attribute def B;
    part a : A; // public by default
}
  
```

An *alias* for an element is a non-owning membership of the element in a namespace, which may or may not be the same namespace that owns the element. An alias name or short name is determined only relative to its membership in the namespace, and can therefore be different than the name or short name defined on the element itself. Note that the same element may be related to a namespace by multiple alias memberships, allowing the element to have multiple, different names relative to that namespace.

An alias is declared using the keyword **alias** followed by the alias short name and/or name, with a qualified name identifying the element given after the keyword **for**. An alias declaration may also optionally have a body containing annotating elements for the alias (see [8.2.2.4.1](#)). The visibility of the alias membership can be specified as for an owned member.

```

package P1 {
    item A;
}
  
```

```

        attribute value: String;
    }
    item ConfigData {
        attribute entries[*]: ConfigEntry;
    }
}

```

In general, declaring an element within the body of a namespace denotes that the element is an owned member of the namespace—that is, that there is an *owning membership* relationship between the namespace and the member element. The *visibility* of the membership can be specified by placing one of the keywords **public**, **protected** or **private** before the public element declaration. If the membership is **public** (the default), then it is visible outside of the namespace. If it is **private**, then it is not visible. For namespaces other than definitions and usages, **protected** visibility is equivalent to **private**. For definitions and usages, **protected** visibility has a special meaning relating to member inheritance (see [7.6](#)).

```

package P {
    public part def A;
    private attribute def B;
    part a : A; // public by default
}

```

An *alias* for an element is a non-owning membership of the element in a namespace, which may or may not be the same namespace that owns the element. An alias name or short name is determined only relative to its membership in the namespace, and can therefore be different than the name or short name defined on the element itself. Note that the same element may be related to a namespace by multiple alias memberships, allowing the element to have multiple, different names relative to that namespace.

An alias is declared using the keyword **alias** followed by the alias short name and/or name, with a qualified name identifying the element given after the keyword **for**. An alias declaration may also optionally have a body containing annotating elements for the alias (see [8.2.2.4.1](#)). The visibility of the alias membership can be specified as for an owned member.

```

package P1 {
    item A;
    item B;
    alias <C> CCC for B {
        doc /* Documentation of the alias. */
    }
    private alias D for B;
}

```

A comment (see [7.4](#)), including documentation, declared within a namespace body also becomes an owned member of the namespace. If no annotated elements are specified for the comment (with an **about** clause), then, by default, the comment is considered to be about the containing namespace.

```

package P9 {
    item A;
    comment Comment1 about A
        /* This is a comment about item A. */

    comment Comment2
        /* This is a comment about package P9. */

    /* This is also a comment about package P9. */

    doc P9_Doc
        /* This is documentation about package P9. */
}

```

```

item B;
alias <C> CCC for B {
    doc /* Documentation of the alias. */
}
private alias D for B;
}

```

A comment (see [7.4](#)), including documentation, declared within a namespace body also becomes an owned member of the namespace. If no annotated elements are specified for the comment (with an **about** clause), then, by default, the comment is considered to be about the containing namespace.

```

package P9 {
    item A;
    comment Comment1 about A
        /* This is a comment about item A. */

    comment Comment2
        /* This is a comment about package P9. */

    /* This is also a comment about package P9. */

    doc P9_Doc
        /* This is documentation about package P9. */
}

```

7.5.3 Imports

An owned *import* of a Namespace is denoted using the keyword **import** followed by a qualified name, optionally suffixed by "`::*`" and/or "`::::**`".

If the qualified name in an **import** does *not* have any suffix, then this specifies a *membership import* whose imported membership is identified by the qualified name. Such an import results in the identified membership becoming an *imported membership* of the namespace owning the import. That is, the member element of this membership becomes an *imported member* of the importing namespace. Note that the imported membership may be an alias membership (see [7.5.2](#)), in which case the element is imported with that alias name.

```

package P2 {
    import P1::A;
    import P1::C; // Imported with name "C".
    package Q {
        import C; // "C" is re-imported from P2 into Q.
    }
}

```

If the qualified name in an **import** is further suffixed by "`::*`", then this specifies a *namespace import* in which the qualified name identifies the *imported namespace*. In this case, all visible memberships of the imported namespace of the import become imported memberships of the importing namespace.

```

package P3 {
    // Memberships A, B and C are all imported from P1.
    import P1::::*;
}

```

If the declaration of either a membership or namespace import is further suffixed by "`::**`", then the import is *recursive*. Such an import is equivalent to importing memberships as described above for either an imported membership or namespace, followed by further recursively importing from each imported member that is itself a namespace.

7.5.3 Imports

SYSML2 -207: Update language description and concrete syntax related to imports

An owned *import* of a Namespace is denoted using the keyword **import** followed by a qualified name, optionally suffixed by "`::*`" and/or "`::**`".

If the qualified name in an **import** does *not* have any suffix, then this specifies a *membership import* whose imported membership is identified by the qualified name. Such an import results in the identified membership becoming an *imported membership* of the namespace owning the import. That is, the member element of this membership becomes an *imported member* of the importing namespace. Note that the imported membership may be an alias membership (see [7.5.2](#)), in which case the element is imported with that alias name.

```
package P2 {
    private import P1::A;
    private import P1::C; // Imported with name "C".
    package Q {
        import C; // "C" is re-imported from P2 into Q.
    }
}
```

If the qualified name in an **import** is further suffixed by "`::*`", then this specifies a *namespace import* in which the qualified name identifies the *imported namespace*. In this case, all visible memberships of the imported namespace of the import become imported memberships of the importing namespace.

```
package P3 {
    // Memberships A, B and C are all imported from P1.
    private import P1::.*;
}
```

If the declaration of either a membership or namespace import is further suffixed by "`::**`", then the import is *recursive*. Such an import is equivalent to importing memberships as described above for either an imported membership or namespace, followed by further recursively importing from each imported member that is itself a namespace, with the following limitations:

1. Recursive import only continues with a namespace that is either the imported element of an original recursive membership import or an owned member of an imported namespace.
2. Memberships inherited via implicit specializations (of any kind) are not imported by recursive imports (see also [7.6.8 on Implicit Specialization](#)).

```
package P4 {
    item A;
    item B;
    package Q {
        item C;
    }
}
package P5 {
    private import P4::**;
    // The above recursive import is equivalent to all
    // of the following taken together:
    //     private import P4;
    //     private import P4::*;
    //     private import P4::Q::*;
}
package P6 {
    private import P4::*::*;
    // The above recursive import is equivalent to all
    // of the following taken together:
```

```

package P4 {
    item A;
    item B;
    package Q {
        item C;
    }
}
package P5 {
    import P4::**;
    // The above recursive import is equivalent to all
    // of the following taken together:
    //     import P4;
    //     import P4::*;
    //     import P4::Q::*;
}
package P6 {
    import P4::*::**;
    // The above recursive import is equivalent to all
    // of the following taken together:
    //     import P4::*;
    //     import P4::Q::*;
    // (Note that P4 itself is not imported.)
}

```

The *visibility* of an import can be specified by placing the keyword **public** or **private** before the import declaration. If the import is **public** (the default), then all the imported memberships become public for the importing namespace. If import is **private**, then the imported memberships become private relative to the importing namespace. An import declaration may also optionally have a body containing annotating element owned by the import (see [8.2.2.4.1](#)).

```

package P7 {
    public import P1::A {
        /* The imported membership is visible outside P7. */
    }

    private import P4::* {
        doc /* None of the imported memberships are visible
               * outside of P7. */
    }
}

```

7.5.4 Import Filtering

A package may also contain *filter conditions* that filter the imports for the package. A filter condition is a Boolean-valued, model-level evaluable expression (see [KerML. 7.4.9]) declared using the keyword **filter** followed by a Boolean-valued, model-level evaluable expression (see [KerML. 7.4.9]). The filter conditions of a package are evaluated on the member elements of all memberships that are potentially to be imported into the package (see [7.5.3](#)). Only those memberships that for which all the filter conditions evaluate to true are actually imported.

Filter conditions can, for example, be used to select which elements to import into a package based on *metadata* applied to those elements (see also [7.26](#) on metadata).

```

package ApprovalMetadata {
    metadata def Approval {
        attribute approved : Boolean;
        attribute approver : String;
        attribute level : Natural;
    }
}

```

```

//      private import P4::*;
//      private import P4::Q::*;
// (Note that P4 itself is not imported.)
}

```

The *visibility* of an import is always shown explicitly by placing the keyword **private**, **protected**, or **public** before the import declaration. If the import is **private** (which is the default in the abstract syntax), then the imported memberships become private relative to the importing namespace. A visibility of **protected** is the same as **private**, unless the importing namespace is a definition or usage, in which case the imported memberships are also visible in all specializations of the definition or usage (see also [7.6](#) on inheritance). If the import is **public**, then all the imported memberships become public for the importing namespace. An import declaration may also optionally have a body containing annotating elements owned by the import (see [8.2.2.4.1](#)).

```

package P7 {
    public import P1::A {
        /* The imported membership is visible outside P7. */
    }

    private import P4::*;
    doc /* None of the imported memberships are visible
        * outside of P7. */
}

```

7.5.4 Import Filtering

[SYSML2 -207: Update language description and concrete syntax related to imports](#)

[SYSML2 -282: P8 import textual notation may have errors](#)

A package may also contain *filter conditions* that filter the imports for the package. A filter condition is a Boolean-valued, model-level evaluable expression (see [KerML. 7.4.9]) declared using the keyword **filter** followed by a Boolean-valued, model-level evaluable expression (see [KerML. 7.4.9]). The filter conditions of a package are evaluated on the member elements of all memberships that are potentially to be imported into the package (see [7.5.3](#)). Only those memberships that for which all the filter conditions evaluate to true are actually imported.

Filter conditions can, for example, be used to select which elements to import into a package based on *metadata* applied to those elements (see also [7.26](#) on metadata).

```

package ApprovalMetadata {
    metadata def Approval {
        attribute approved : Boolean;
        attribute approver : String;
        attribute level : Natural;
    }
    ...
}

package DesignModel {
    public import ApprovalMetadata::*;
    part System {
        @Approval {
            approved = true;
            approver = "John Smith";
            level = 2;
        }
    }
    ...
}

package UpperLevelApprovals {

```

```

    ...
}

package DesignModel {
    import ApprovalMetadata::.*;
    part System {
        @Approval {
            approved = true;
            approver = "John Smith";
            level = 2;
        }
    }
    ...
}

package UpperLevelApprovals {
    // This package imports all direct or indirect members
    // of the DesignModel package that have been approved
    // at a level greater than 1.
    import DesignModel::**;
    filter @ApprovalMetadata::Approval and
        ApprovalMetadata::Approval::approved and
        ApprovalMetadata::Approval::level > 1;
}

```

Note that a filter condition in a package will filter *all* imports of that package. That is why full qualification is used for `ApprovalMetadata::Approval` in the example above, since an imported element of the `ApprovalMetadata` package would be filtered out by the very filter condition in which the elements are intended to be used. This may be avoided by combining one or more filter conditions with a *specific* import in a *filter import* declaration.

A filter import includes one or more filter conditions in the import declaration, listed after the imported membership or namespace specification, each surrounded by square brackets [...]. For such a filtered import, memberships are imported, from that specific import, if and only if they satisfy all the given filter conditions.

```

package P8 {
    import Annotations::*;

    // Only import elements of NA that are annotated as Approved.
    import NA::*[@Approved];
}

package UpperLevelApprovals {
    // Recursively import all annotation data types and all
    // features of those types.
    import ApprovalMetadata::*;

    // The filter condition for this import applies only to
    // elements imported from the DesignModel package.
    import DesignModel::**[@Approval and approved and level > 1];
}

```

The `SysML` package from the Systems Model Library (see [9.2.21](#)) contains a complete model of the `SysML` abstract syntax represented in `SysML` itself, and it publicly imports the `KerML` package from the Kernel Library containing the Kernel abstract syntax model (see [[KerML](#), 9.2.17]). When a filter condition is evaluated on an element, abstract syntax metadata for the element can be tested as if the element had an implicit metadata usage (see [7.26](#)) defined by the definition from the `SysML` package corresponding to the abstract syntax metaclass of the element.

```

// This package imports all direct or indirect members
// of the DesignModel package that have been approved
// at a level greater than 1.
public import DesignModel::**;
filter @ApprovalMetadata::Approval and
    ApprovalMetadata::Approval::approved and
    ApprovalMetadata::Approval::level > 1;
}

```

Note that a filter condition in a package will filter *all* imports of that package. That is why full qualification is used for `ApprovalMetadata::Approval` in the example above, since an imported element of the `ApprovalMetadata` package would be filtered out by the very filter condition in which the elements are intended to be used. This may be avoided by combining one or more filter conditions with a *specific* import in a *filter import* declaration.

A filter import includes one or more filter conditions in the import declaration, listed after the imported membership or namespace specification, each surrounded by square brackets [...]. For such a filtered import, memberships are imported, from that specific import, if and only if they satisfy all the given filter conditions.

```

package UpperLevelApprovals {
    // Recursively import all annotation data types and all
    // features of those types.
    private import ApprovalMetadata::**;

    // The filter condition for this import applies only to
    // elements imported from the DesignModel package.
    public import DesignModel::**[@Approval and approved and level > 1];
}

```

The `SysML` package from the Systems Model Library (see [9.2.21](#)) contains a complete model of the `SysML` abstract syntax represented in `SysML` itself, and it publicly imports the `KerML` package from the Kernel Library containing the Kernel abstract syntax model (see [KerML, 9.2.17]). When a filter condition is evaluated on an element, abstract syntax metadata for the element can be tested as if the element had an implicit metadata usage (see [7.26](#)) defined by the definition from the `SysML` package corresponding to the abstract syntax metaclass of the element.

```

package PackageApprovals {
    private import ApprovalMetadata::.*;
    private import SysML::*;

    // This imports all part definitions from the DesignModel that have
    // at least one owned part usage and have been marked as approved.
    public import DesignModel::**[@PartDefinition and
        @PartDefinition::ownedPart != null and
        @Approval and
        Approval::approved];
}

```

Note. Namespaces other than packages cannot have filter conditions (except for their special use in view definitions and usages – see [7.25](#)). However, any kind of namespaces may have filtered imports.

7.5.5 Root Namespaces

SYSML2_-207: Update language description and concrete syntax related to imports

A *root namespace* is a namespace that has no owner. The owned members of a root namespace are known as *top-level elements*. Any element that is not a root namespace has an owner and, therefore, must be in the ownership tree of a top-level element of some root namespace.

```

package PackageApprovals {
    import ApprovalMetadata::.*;
    import SysML::*;

    // This imports all part definitions from the DesignModel that have
    // at least one owned part usage and have been marked as approved.
    import DesignModel::**[@PartDefinition and
        @PartDefinition::ownedPart != null and
        @Approval and
        Approval::approved];
}

```

Note. Namespaces other than packages cannot have filter conditions (except for their special use in view definitions and usages – see [7.25](#)). However, any kind of namespaces may have filtered imports.

7.5.5 Root Namespaces

A *root namespace* is a namespace that has no owner. The owned members of a root namespace are known as *top-level elements*. Any element that is not a root namespace has an owner and, therefore, must be in the ownership tree of a top-level element of some root namespace.

The declaration of a root namespace is implicit and no identification of it is provided in the SysML notation. Instead, the content of a root namespace is given simply by the list of its top-level elements. For the purposes of model interchange (see [KerML, Clause 10]), a single *project* may contain one or more root namespace, though there is no syntax for defining a project in the SysML syntax.

```

doc /* This is a model notated in SysML textual notation. */
item def I;
attribute def A;
item i: I;
package P;

```

While a root namespace has no explicit owner, it is considered to be within the scope of a single *global namespace*. This global namespace may contain several root namespaces (such as those being managed as a project), and always contains at least all of the KerML and SysML model libraries (see [KerML, Clause 9] and [Clause 9](#)). Any root namespace within the global namespace may refer to the name of a top-level element of any other root namespace using an unqualified name (since root namespaces are themselves never named).

7.6 Definition and Usage

7.6.1 Definition and Usage Overview

Metamodel references:

- *Textual notation*, [8.2.2.6](#)
- *Graphical notation*, [8.2.3.6](#)
- *Abstract syntax*, [8.3.6](#)
- *Semantics*, [8.4.2](#)

Definitions and Usages

The modeling capabilities of SysML facilitate reuse in different contexts. Definition and usage elements provide a consistent foundation for many SysML language constructs to provide this capability, including attributes, occurrences, items, parts, ports, connections, interfaces, allocations, actions, states, calculations, constraints, requirements, concerns, cases, analysis cases, verification cases, use cases, views, viewpoints and renderings.

The declaration of a root namespace is implicit and no identification of it is provided in the SysML notation. Instead, the content of a root namespace is given simply by the list of its top-level elements. For the purposes of model interchange (see [KerML, Clause 10]), a single *project* may contain one or more root namespaces, though there is no syntax for defining a project in the SysML syntax.

```
doc /* This is a model notated in SysML textual notation. */
item def I;
attribute def A;
item i: I;
package P;
```

While a root namespace has no explicit owner, it is considered to be within the scope of a single *global namespace*. This global namespace may contain several root namespaces (such as those being managed as a project), and always contains at least all of the KerML and SysML model libraries (see [KerML, Clause 9] and [Clause 9](#)). Any root namespace within the global namespace may refer to the name of a top-level element of any other root namespace using an unqualified name (since root namespaces are themselves never named).

If an import is owned by a root namespace, then the memberships imported by it are visible to and within all the top-level elements of the root namespace. However, an import owned by a root namespace is required to be **private**, so none of the imported memberships become globally visible outside of the root namespace. (This rule disallows the "re-export" of the same element from multiple different root namespaces, which would cause ambiguity that could complicate the resolution of unqualified, globally-visible names.)

7.6 Definition and Usage

7.6.1 Definition and Usage Overview

Metamodel references:

- *Textual notation*, [8.2.2.6](#)
- *Graphical notation*, [8.2.3.6](#)
- *Abstract syntax*, [8.3.6](#)
- *Semantics*, [8.4.2](#)

Definitions and Usages

The modeling capabilities of SysML facilitate reuse in different contexts. Definition and usage elements provide a consistent foundation for many SysML language constructs to provide this capability, including attributes, occurrences, items, parts, ports, connections, interfaces, allocations, actions, states, calculations, constraints, requirements, concerns, cases, analysis cases, verification cases, use cases, views, viewpoints and renderings.

In general, a *definition* element classifies a certain kind of element (e.g., a classification of attributes, parts, actions, etc.). A *usage* element is a usage of a definition element in a certain context. A usage must always be defined by at least one definition element that corresponds to its usage kind. For example, a part usage is defined by a part definition, and an action usage is defined by an action definition. If no definition is specified explicitly, then the usage is defined implicitly by the most general definition of the appropriate kind from the Systems Library (see [9.2](#)). For example, a part usage is implicitly defined by the most general part definition `Part` from the model library package `Parts`.

Features

A definition may have owned usage elements nested in it, referred to as its *features*. A usage may also have nested usage elements as features. In this case, the context for the nested usages is the containing usage. A simple example is illustrated by a parts tree that is defined by a hierarchy of part usages. A `Vehicle` usage defined by `Vehicle` could contain part usages for `engine`, `transmission`, `frontAxle`, and `rearAxle`. Each part usage has its own (implicit or explicit) part definition.

In general, a *definition* element classifies a certain kind of element (e.g., a classification of attributes, parts, actions, etc.). A *usage* element is a usage of a definition element in a certain context. A usage must always be defined by at least one definition element that corresponds to its usage kind. For example, a part usage is defined by a part definition, and an action usage is defined by an action definition. If no definition is specified explicitly, then the usage is defined implicitly by the most general definition of the appropriate kind from the Systems Library (see [9.2](#)). For example, a part usage is implicitly defined by the most general part definition `Part` from the model library package `Parts`.

Features

A definition may have owned usage elements nested in it, referred to as its *features*. A usage may also have nested usage elements as features. In this case, the context for the nested usages is the containing usage. A simple example is illustrated by a parts tree that is defined by a hierarchy of part usages. A `Vehicle` usage defined by `Vehicle` could contain part usages for `engine`, `transmission`, `frontAxle`, and `rearAxle`. Each part usage has its own (implicit or explicit) part definition.

A feature relates instances of its featuring definition or usage to instances of its definition. For example, a `mass` feature with definition `MassValue`, featured by the definition `Vehicle`, relates each specific instance of `Vehicle` to the specific `MassValue` for that vehicle, known as the *value* of the `mass` feature of the vehicle.

A usage can also be contained directly in an owning package. In this case, the usage element is considered to be an implicit feature of the most general kernel type `Anything`. That is, a package-level usage is essentially a generic feature that can be applied in any context, or further specialized in specific contexts (as described under Specialization below).

A usage may have a *multiplicity* that constrains its cardinality, that is, the allowed number of values it may have for any instance of its featuring definition or usage. The multiplicity is specified as a range, giving the lower and upper bound expressions that are evaluated to determine the lower and upper bounds of the specified range. The bounds must be natural numbers. The lower bound must be finite, but the upper bound may also have the infinite value `*`. An upper bound value of `*` indicates that the range is unbounded, that is, it includes all numbers greater than or equal to the lower bound value. If a lower bound is not given, then the lower bound is taken to be the same as the upper bound, unless the upper bound is `*`, in which case the lower bound is taken to be 0. For example, a `Vehicle` definition could include a usage element called `wheels` with multiplicity `4`, meaning each `Vehicle` has exactly four `wheels`. A less restrictive constraint, such as a multiplicity of `4..8`, means each `Vehicle` can have 4 to 8 wheels.

A usage may be *referential* or *composite*. A referential usage represents a simple reference between a featuring instance and one or more values. A composite usage, on the other hand, indicates that the related instance is integral to the structure of the containing instance. As such, if the containing instance is destroyed, then any instances related to it by composite usages are also destroyed. For example, a `Vehicle` would have a composite usage of its `wheels`, but only a referential usage of the `road` on which it is driving.

Note. The concept of composition only applies to occurrences that exist over time and can be created and destroyed (see [7.9](#)). Attribute usages are always referential and any nested features of attributes definitions and usages are also always referential (see [7.7](#)).

Specialization

Definition and usage elements can be specialized using several different kinds of *specialization* relationships.

A definition is specialized using the *subclassification* relationship. The specialized definition inherits the features of the more general definition element and can add other features. For example, if `Vehicle` has a feature called `fuel`, that is defined by `Fuel`, and `Truck` is a specialized kind of `Vehicle`, then `Truck` inherits the feature `fuel`. An inherited feature can be subsetted or redefined as described below. The `Truck` definition can also add its own features such as `cargoSize`.

A feature relates instances of its featuring definition or usage to instances of its definition. For example, a `mass` feature with definition `MassValue`, featured by the definition `Vehicle`, relates each specific instance of `Vehicle` to the specific `MassValue` for that vehicle, known as the *value* of the `mass` feature of the vehicle.

A usage can also be contained directly in an owning package. In this case, the usage element is considered to be an implicit feature of the most general kernel type `Anything`. That is, a package-level usage is essentially a generic feature that can be applied in any context, or further specialized in specific contexts (as described under Specialization below).

A usage may have a *multiplicity* that constrains its cardinality, that is, the allowed number of values it may have for any instance of its featuring definition or usage. The multiplicity is specified as a range, giving the lower and upper bound expressions that are evaluated to determine the lower and upper bounds of the specified range. The bounds must be natural numbers. The lower bound must be finite, but the upper bound may also have the infinite value `*`. An upper bound value of `*` indicates that the range is unbounded, that is, it includes all numbers greater than or equal to the lower bound value. If a lower bound is not given, then the lower bound is taken to be the same as the upper bound, unless the upper bound is `*`, in which case the lower bound is taken to be 0. For example, a `Vehicle` definition could include a usage element called `wheels` with multiplicity `4`, meaning each `Vehicle` has exactly four `wheels`. A less restrictive constraint, such as a multiplicity of `4..8`, means each `Vehicle` can have 4 to 8 wheels.

A usage may be *referential* or *composite*. A referential usage represents a simple reference between a featuring instance and one or more values. A composite usage, on the other hand, indicates that the related instance is integral to the structure of the containing instance. As such, if the containing instance is destroyed, then any instances related to it by composite usages are also destroyed. For example, a `Vehicle` would have a composite usage of its `wheels`, but only a referential usage of the `road` on which it is driving.

Note. The concept of composition only applies to occurrences that exist over time and can be created and destroyed (see [7.9](#)). Attribute usages are always referential and any nested features of attributes definitions and usages are also always referential (see [7.7](#)).

Specialization

Definition and usage elements can be specialized using several different kinds of *specialization* relationships.

A definition is specialized using the *subclassification* relationship. The specialized definition inherits the features of the more general definition element and can add other features. For example, if `Vehicle` has a feature called `fuel`, that is defined by `Fuel`, and `Truck` is a specialized kind of `Vehicle`, then `Truck` inherits the feature `fuel`. An inherited feature can be subsetted or redefined as described below. The `Truck` definition can also add its own features such as `cargosize`.

A definition can specialize more than one other definition, in which case the definition inherits the features from each of the definitions it specializes. All inherited features must have names that are distinct from each other and any owned features of the specializing definition. Name conflicts can be resolved by redefining one or more of the otherwise conflicting inherited features (see below).

A usage inherits the features from its definition in the same way that a specialized definition inherits from a more general definition element. For example, if a part usage `vehicle` is defined by a part definition `Vehicle`, and `Vehicle` has a `mass` defined by `MassValue`, then `vehicle` inherits the feature `mass`. In some cases, a usage may have more than one definition element, in which case the usage inherits the features from each of its definition elements, with the same rules for conflicting names as described above for subclassification. A usage can also add its own features, and subset or redefine its inherited features. This enables each usage to be modified for its context.

A usage can be specialized using the *subsetting* relationship. A subsetting usage has a subset of the values of the subsetted usage. The subsetting usage may further constrain its definition and multiplicity. For the example above, `Truck` inherits the feature `wheels` with multiplicity `4..8` from `Vehicle`. The part usage `truck` further inherits `wheels` with multiplicity `4..8` from `Truck`. The part usage `truck` can subset `wheels` by defining `frontLeftWheel`, `frontRightWheel`, `rearLeftwheel1`, and `rearRightWheel1`, each with multiplicity `1..1`,

A definition can specialize more than one other definition, in which case the definition inherits the features from each of the definitions it specializes. All inherited features must have names that are distinct from each other and any owned features of the specializing definition. Name conflicts can be resolved by redefining one or more of the otherwise conflicting inherited features (see below).

A usage inherits the features from its definition in the same way that a specialized definition inherits from a more general definition element. For example, if a part usage `vehicle` is defined by a part definition `Vehicle`, and `Vehicle` has a `mass` defined by `MassValue`, then `vehicle` inherits the feature `mass`. In some cases, a usage may have more than one definition element, in which case the usage inherits the features from each of its definition elements, with the same rules for conflicting names as described above for subclassification. A usage can also add its own features, and subset or redefine its inherited features. This enables each usage to be modified for its context.

A usage can be specialized using the *subsetting* relationship. A subsetting usage has a subset of the values of the subsetted usage. The subsetting usage may further constrain its definition and multiplicity. For the example above, `Truck` inherits the feature `wheels` with multiplicity `4..8` from `Vehicle`. The part usage `truck` further inherits `wheels` with multiplicity `4..8` from `Truck`. The part usage `truck` can subset `wheels` by defining `frontLeftWheel`, `frontRightWheel`, `rearLeftwheel1`, and `rearRightWheel1`, each with multiplicity `1..1`, together giving the minimum total multiplicity of `4`. The `truck` usage can then define additional subsets of `wheels`, such as `rearLeftwheel2`, and `rearRightwheel2`, with multiplicity `0..1`, indicating they are optional.

Redefinition is a kind of subsetting. While, in general, a subsetting usage is an additional feature to the subsetted usage, a redefining usage *replaces* the redefined usage in the context of redefining usage. For the example above, `Vehicle` contains a feature called `fuel` that is defined by `Fuel`. `Truck` inherits `fuel` from `Vehicle`. The part usage `truck` would then normally inherit `fuel` as defined by `Fuel` from `Truck`. However, `truck` can instead redefine `fuel` to restrict its definition to `DieselFuel`, a subclassification of `Fuel`. In this case, the new redefining feature replaces the `fuel` feature that would otherwise be inherited, meaning that the `fuel` of the `truck` part must be defined by `DieselFuel`.

A usage, particularly one with nested usages, can be reused by subsetting it. For example, subsetting the part usage `vehicle` is analogous to specializing the part definition `Vehicle`. Suppose `vehicle1` is a part usage that subsets `vehicle`, with the parts-tree decomposition described above. This enables `vehicle1` to inherit the features and structure of `vehicle`. The part usage `vehicle1` can be further specialized by adding other part usages to it, such as a `body` and `chassis`, and it can redefine parts from `vehicle` as needed. For example, `vehicle1` may redefine `engine` to be a `4-cylinder engine`. The original part `vehicle` remains unchanged, but `vehicle1` is a unique design configuration that specializes `vehicle`. Other part usages, such as `vehicle2`, could be created in a similar way to represent other design configurations.

Note. If the part definition `Vehicle` is modified, the modification will propagate down through the specializations described above. However, it is expected that if `Vehicle` is baselined in a configuration management tool, then a change to `Vehicle` is a new revision, and it is up to the modelers to determine whether to retain the previous version of `Vehicle` or move to the next revision.

Variability

Variation and *variant* are used to model variability typically associated with a family of design configurations. A variation (sometimes referred to as a *variation point*) identifies an element in a model that can vary from one design configuration to another. One example of a variation is an engine in a vehicle. For each variation, there are design choices called variants. For this example, where the `engine` feature is designated as a point of variation, the design choices are a `4-cylinder engine` variant or a `6-cylinder engine` variant.

Variation can apply to any kind of definition or usage in the model (except for enumeration, see [7.8](#)). The variation element then specifies all possible variants (i.e., choices) for that variation point. For example, the specified variants for the `engine` variation are the `4-cylinder engine` and the `6-cylinder engine`.

together giving the minimum total multiplicity of 4. The `truck` usage can then define additional subsets of `wheels`, such as `rearLeftwheel2`, and `rearRightwheel2`, with multiplicity 0..1, indicating they are optional.

Redefinition is a kind of subsetting. While, in general, a subsetting usage is an additional feature to the subsetted usage, a redefining usage *replaces* the redefined usage in the context of redefining usage. For the example above, `Vehicle` contains a feature called `fuel` that is defined by `Fuel`. `Truck` inherits `fuel` from `Vehicle`. The part usage `truck` would then normally inherit `fuel` as defined by `Fuel` from `Truck`. However, `truck` can instead redefine `fuel` to restrict its definition to `DieselFuel`, a subclassification of `Fuel`. In this case, the new redefining feature replaces the `fuel` feature that would otherwise be inherited, meaning that the `fuel` of the `truck` part must be defined by `DieselFuel`.

A usage, particularly one with nested usages, can be reused by subsetting it. For example, subsetting the part usage `vehicle` is analogous to specializing the part definition `Vehicle`. Suppose `vehicle1` is a part usage that subsets `vehicle`, with the parts-tree decomposition described above. This enables `vehicle1` to inherit the features and structure of `vehicle`. The part usage `vehicle1` can be further specialized by adding other part usages to it, such as a `body` and `chassis`, and it can redefine parts from `vehicle` as needed. For example, `vehicle1` may redefine `engine` to be a 4-cylinder engine. The original part `vehicle` remains unchanged, but `vehicle1` is a unique design configuration that specializes `vehicle`. Other part usages, such as `vehicle2`, could be created in a similar way to represent other design configurations.

Note. If the part definition `Vehicle` is modified, the modification will propagate down through the specializations described above. However, it is expected that if `Vehicle` is baselined in a configuration management tool, then a change to `Vehicle` is a new revision, and it is up to the modelers to determine whether to retain the previous version of `Vehicle` or move to the next revision.

Variability

Variation and *variant* are used to model variability typically associated with a family of design configurations. A variation (sometimes referred to as a *variation point*) identifies an element in a model that can vary from one design configuration to another. One example of a variation is an engine in a vehicle. For each variation, there are design choices called variants. For this example, where the `engine` feature is designated as a point of variation, the design choices are a 4-cylinder engine variant or a 6-cylinder engine variant.

Variation can apply to any kind of definition or usage in the model (except for enumeration, see [7.8](#)). The variation element then specifies all possible variants (i.e., choices) for that variation point. For example, the specified variants for the `engine` variation are the 4-cylinder engine and the 6-cylinder engine.

Variants are usage elements. If the containing variation is a definition, then each of its variants is implicitly defined by the variation definition. If the containing variation is a usage, then each of its variants implicitly subsets the variation usage. For example, the 4-cylinder engine and the 6-cylinder engine are subsets of all possible engines.

Variations can be nested within other variations, to any level of nesting. For example, the 6-cylinder engine variant may in turn contain cylinders with a variation for `bore diameter` that includes variants for small-bore diameter and large-bore diameter. Alternatively, the `bore diameter` variation could be applied more generally to the cylinder of `engine`, enabling both the 4-cylinder engine and the 6-cylinder engine to have this variation point.

A model with variability can be quite complex since the variation can extend to many other aspects of the model including its structure, behavior, requirements, analysis, and verification. Also, the selection of a particular variant often impacts many other design choices that include other parts, connections, actions, states, and attributes. Constraints can be used to constrain the available choices for a given variant. For example, the choice of a 6-cylinder engine may constrain the choice of `transmission` to be an automatic transmission, whereas the choice of a 4-cylinder engine may allow for both an automatic transmission or a manual transmission.

Variants are usage elements. If the containing variation is a definition, then each of its variants is implicitly defined by the variation definition. If the containing variation is a usage, then each of its variants implicitly subsets the variation usage. For example, the 4-cylinder engine and the 6-cylinder engine are subsets of all possible engines.

Variations can be nested within other variations, to any level of nesting. For example, the 6-cylinder engine variant may in turn contain cylinders with a variation for bore diameter that includes variants for small-bore diameter and large-bore diameter. Alternatively, the bore diameter variation could be applied more generally to the cylinder of `engine`, enabling both the 4-cylinder engine and the 6-cylinder engine to have this variation point.

A model with variability can be quite complex since the variation can extend to many other aspects of the model including its structure, behavior, requirements, analysis, and verification. Also, the selection of a particular variant often impacts many other design choices that include other parts, connections, actions, states, and attributes. Constraints can be used to constrain the available choices for a given variant. For example, the choice of a 6-cylinder engine may constrain the choice of `transmission` to be an automatic transmission, whereas the choice of a 4-cylinder engine may allow for both an automatic transmission or a manual transmission.


Variations and variants are used to construct a model that is sometimes referred to as a superset model, which includes the variants to configure all possible design configurations. A particular configuration is selected by selecting a variant for each variation. SysML provides validation rules that can evaluate whether a particular configuration is a valid configuration based on the choices and constraints provided in the superset model. Variability modeling in SysML can augment other external variability modeling applications, which provide robust capabilities for managing variability across multiple kinds of models such as CAD, CAE, and analysis models, and auto-generating the variant design configurations based on the selections.

Note. The approach to variability modeling in SysML is intended to align with industry standards such as *ISO/IEC 26580:2021 Software and systems engineering — Methods and tools for the feature-based approach to software and systems product line engineering*.

Graphical Compartments

The graphical notation for a definition or usage may include one or more *compartments*, which show member elements (if any) using textual or graphical notation. In the graphical symbols in all Representative Notation tables in [Clause 7](#), the term *compartment stack* is a placeholder for any valid compartment for the model element.

Table 4. Definition and Usage – Representative Notation

Element	Graphical Notation	Textual Notation
Name Compartment - Definition (without and with short name)		<pre>part def PartDef1; part def <PD2> PartDef2;</pre>




Variations and variants are used to construct a model that is sometimes referred to as a superset model, which includes the variants to configure all possible design configurations. A particular configuration is selected by selecting a variant for each variation. SysML provides validation rules that can evaluate whether a particular configuration is a valid configuration based on the choices and constraints provided in the superset model. Variability modeling in SysML can augment other external variability modeling applications, which provide robust capabilities for managing variability across multiple kinds of models such as CAD, CAE, and analysis models, and auto-generating the variant design configurations based on the selections.






Note. The approach to variability modeling in SysML is intended to align with industry standards such as *ISO/IEC 26580:2021 Software and systems engineering — Methods and tools for the feature-based approach to software and systems product line engineering*.

Graphical Compartments





The graphical notation for a definition or usage may include one or more *compartments*, which show member elements (if any) using textual or graphical notation. In the graphical symbols in all Representative Notation tables in [Clause 7](#), the term *compartment stack* is a placeholder for any valid compartment for the model element.



Table 4. Definition and Usage – Representative Notation

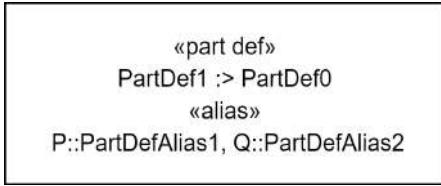Element	Graphical Notation	Textual Notation
Name Compartment - Definition (without and with short name)		<pre>part def PartDef1; part def <PD2> PartDef2;</pre>
Name Compartment - Definition		<pre>abstract part def PartDef1 :> PartDef0; package P { alias PartDefAlias1 for PartDef1; } package Q { alias PartDefAlias2 for PartDef1; }</pre>
Name Compartment - Definition (qualified name)		<pre>package Package1 { package Package2 { part def PartDef3; } }</pre>
Name Compartment - Definition (abstract)		<pre>abstract part def PartDef1;</pre>



Element	Graphical Notation	Textual Notation
Name Compartment - Definition		<pre> abstract part def PartDef1 :> PartDef0; package P { alias PartDefAlias1 for PartDef1; } package Q { alias PartDefAlias2 for PartDef1; } </pre>
Name Compartment - Definition (qualified name)		<pre> package Package1 { package Package2 { part def PartDef3; } } </pre>
Name Compartment - Definition (abstract)		<pre> abstract part def PartDef1; </pre>
Name Compartment - Definition (variation)		<pre> variation part def PartDef1; </pre>
Name Compartment - Usage (without and with short name)		<pre> part part1 : PartDef1; part <'p#2'> part2 : PartDef2; </pre>
Name Compartment - Usage		<pre> part part1 { part part2 { part part3 : PartDef3; } } </pre>



Element	Graphical Notation	Textual Notation
Name Compartment - Definition (variation)	<div style="border: 1px solid black; padding: 5px;">«variation part def» PartDef1</div>	variation part def PartDef1;
Name Compartment - Usage (without and with short name)	<div style="border: 1px solid black; padding: 5px;">«part» part1 : PartDef1</div> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;">«part» <'p#2'> part2 : PartDef2</div>	part part1 : PartDef1; part <'p#2'> part2 : PartDef2;
Name Compartment - Usage	<div style="border: 1px solid black; padding: 5px; margin-top: 10px;">«part» part1::part2::part3 : PartDef3</div>	part part1 { part part2 { part part3 : PartDef3; } }
Name Compartment - Usage (abstract)	<div style="border: 1px solid black; padding: 5px; margin-top: 10px;">«abstract part» part1 : PartDef1 «alias» P::partAlias1, Q::partAlias2</div>	abstract part part1 : PartDef1; package P { alias partAlias1 for part1; } package Q { alias partAlias2 for part1; }
Name Compartment - Usage (variation)	<div style="border: 1px solid black; padding: 5px;">«variation part» part1 : PartDef1</div>	variation part part1 : PartDef1;
Name Compartment - Usage (variant)	<div style="border: 1px solid black; padding: 5px;">«variant part» part1:PartDef1</div>	variant part part1 : PartDef1;
Name Compartment - Inherited Usage	<div style="border: 1px solid black; padding: 5px;">«part» ^part1 : PartDef1</div>	No textual notation.
Name Compartment - Subsetted Usage	<div style="border: 1px solid black; padding: 5px;">«part» part1S : PartDef1S [m] subsets part1</div>	part part1S : PartDef1S [m] subsets part1;

Element	Graphical Notation	Textual Notation
Name Compartment - Usage (abstract)	 <pre data-bbox="612 333 894 481"> «abstract» «part» part1 : PartDef1 «alias» P::partAlias1, Q::partAlias2 </pre>	<pre data-bbox="1067 291 1372 530"> abstract part part1 : PartDef1; package P { alias partAlias1 for part1; } package Q { alias partAlias2 for part1; } </pre>
Name Compartment - Usage (variation)	 <pre data-bbox="665 595 833 677"> «variation» «part» part1 : PartDef1 </pre>	<pre data-bbox="1067 614 1388 667"> variation part part1 : PartDef1; </pre>
Name Compartment - Usage (variant)	 <pre data-bbox="698 728 833 811"> «variant» «part» part1:PartDef1 </pre>	<pre data-bbox="1067 747 1364 800"> variant part part1 : PartDef1; </pre>
Name Compartment - Inherited Usage	 <pre data-bbox="654 876 833 931"> «part» ^part1 : PartDef1 </pre>	No textual notation.
Name Compartment - Subsetted Usage	 <pre data-bbox="621 1024 866 1106"> «part» part1S : PartDef1S [m] subsets part1 </pre>	<pre data-bbox="1067 1022 1405 1100"> part part1S : PartDef1S [m] subsets part1; </pre>
Name Compartment - Redefined Usage (with binding)	 <pre data-bbox="621 1199 866 1281"> «part» part1R : PartDef1R[m] redefines part1 = part2 </pre>	<pre data-bbox="1067 1197 1405 1296"> part part1R : PartDef1R [m] redefines part1 = part2; </pre>

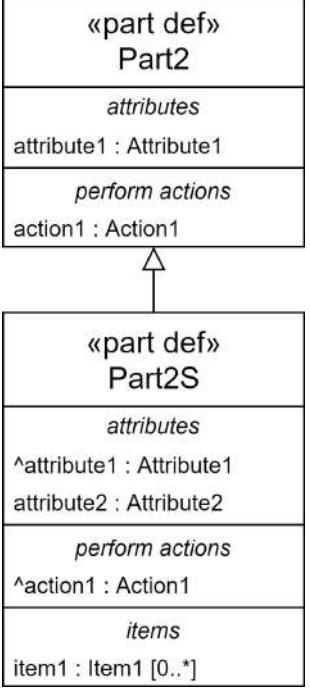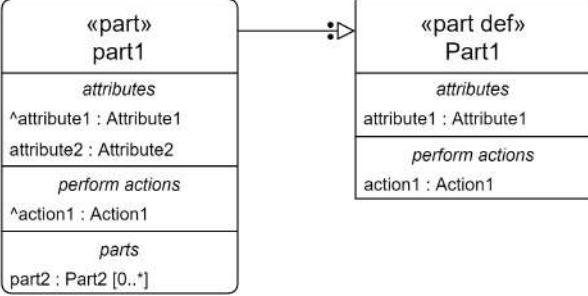Element	Graphical Notation	Textual Notation
Subclassification	 <pre> <<part def>> Part2 ----- attributes attribute1 : Attribute1 ----- perform actions action1 : Action1 △ <<part def>> Part2S ----- attributes ^attribute1 : Attribute1 attribute2 : Attribute2 ----- perform actions ^action1 : Action1 ----- items item1 : Item1 [0..*] </pre>	<pre> part def Part2 { attribute attribute1 : Attribute1; perform action action1 : Action1; } part def Part2S :> Part2 { attribute attribute2 : Attribute2; item item1 : Item1 [0..*]; } or part def Part2S specializes Part2 { ... } </pre>
Part defined by Part Definition	 <pre> <<part>> part1 ----- attributes ^attribute1 : Attribute1 attribute2 : Attribute2 ----- perform actions ^action1 : Action1 ----- parts part2 : Part2 [0..*] <<part def>> Part1 ----- attributes attribute1 : Attribute1 ----- perform actions action1 : Action1 </pre>	<pre> part def Part1 { attribute attribute1 : Attribute1; perform action action1 : Action1; } part part1 : Part1 { attribute attribute2 : Attribute2; part part2 : Part2 [0..*]; } or part part1 defined by Part1 { ... } </pre>



Element	Graphical Notation	Textual Notation
Name Compartment - Redefined Usage (with binding)	<pre>«part» part1R : PartDef1R[m] redefines part1 = part2</pre>	<pre>part part1R : PartDef1R [m] redefines part1 = part2;</pre>
Subclassification	<pre>«part def» Part2 +attributes attribute1 : Attribute1 +perform actions action1 : Action1 +items item1 : Item1 [0..*] «part def» Part2S +attributes ^attribute1 : Attribute1 attribute2 : Attribute2 +perform actions ^action1 : Action1 +items item1 : Item1 [0..*]</pre>	<pre>part def Part2 { attribute attribute1 : Attribute1; perform action action1 : Action1; } part def Part2S :> Part2 { attribute attribute2 : Attribute2; item item1 : Item1 [0..*]; } or part def Part2S specializes Part2 { ... }</pre>
Part defined by Part Definition	<pre>«part» part1 +attributes ^attribute1 : Attribute1 attribute2 : Attribute2 +perform actions ^action1 : Action1 +parts part2 : Part2 [0..*] «part def» Part1 +attributes attribute1 : Attribute1 +perform actions action1 : Action1</pre>	<pre>part def Part1 { attribute attribute1 : Attribute1; perform action action1 : Action1; } part part1 : Part1 { attribute attribute2 : Attribute2; part part2 : Part2 [0..*]; } or part part1 defined by Part1 { ... }</pre>

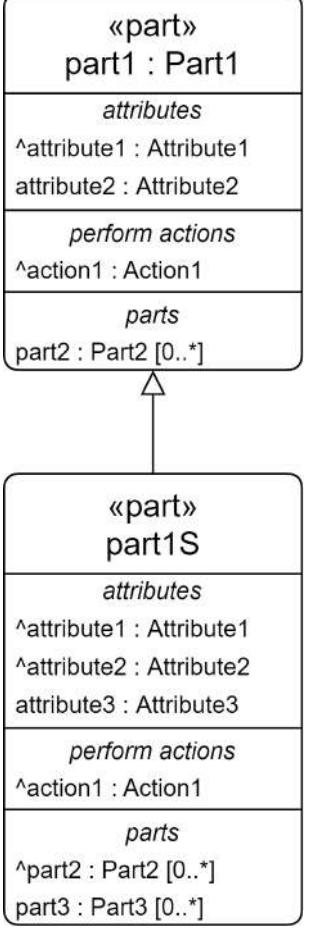
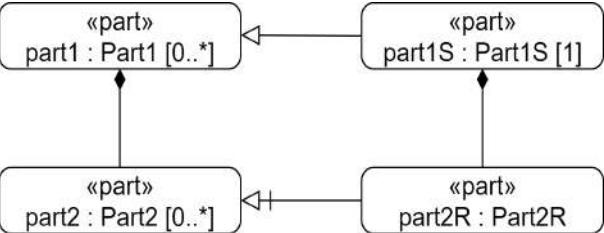
Element	Graphical Notation	Textual Notation
Subsetting	 <pre> <<part>> part1 : Part1 attributes ^attribute1 : Attribute1 attribute2 : Attribute2 perform actions ^action1 : Action1 parts part2 : Part2 [0..*] part3 : Part3 [0..*] <<part>> part1S : Part1S attributes ^attribute1 : Attribute1 ^attribute2 : Attribute2 attribute3 : Attribute3 perform actions ^action1 : Action1 parts ^part2 : Part2 [0..*] part3 : Part3 [0..*] </pre>	<pre> part part1 : Part1 { attribute attribute2 : Attribute2; part part2 : Part2 [0..*]; } part part1S :> part1 { attribute attribute3 : Attribute3; part part3 : Part3 [0..*]; } or part part1S subsets part1 { ... } </pre>
Redefinition	 <pre> <<part>> part1 : Part1 [0..*] <--> part1S : Part1S [1] <<part>> part2 : Part2 [0..*] <--> part2R : Part2R </pre>	<pre> part part1 : Part1 [0..*] { part part2 : Part2 [0..*]; } part part1S : Part1S [1] >: part1 { part part2R : Part2R :>> part2; } or part part1S : Part1S [1] subsets part1 { part part2R : Part2R redefines part2; } </pre>

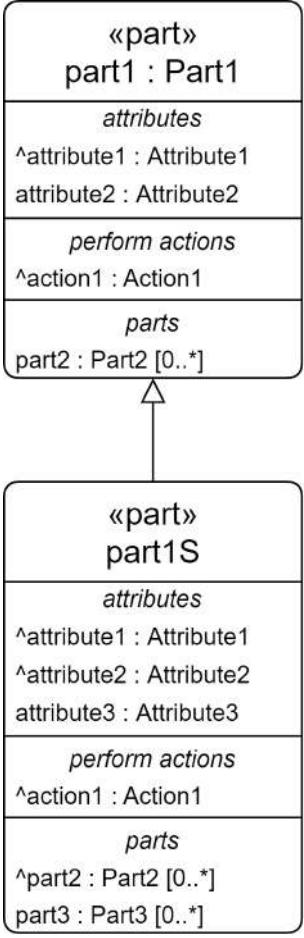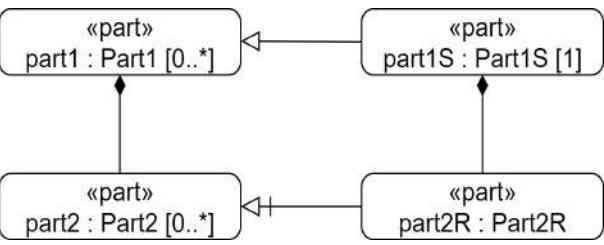Element	Graphical Notation	Textual Notation
Subsetting	 <pre> classDiagram class part1 { attributes ^attribute1 : Attribute1 attribute2 : Attribute2 } class part1S { attributes ^attribute1 : Attribute1 ^attribute2 : Attribute2 attribute3 : Attribute3 } part1 < -- part1S part1 "1..*" part1S "0..1" part1 "0..1" part1S "0..1" part1 "0..1" part1S "0..1" </pre>	<pre> part part1 : Part1 { attribute attribute2 : Attribute2; part part2 : Part2 [0..*]; } part part1S :> part1 { attribute attribute3 : Attribute3; part part3 : Part3 [0..*]; } or part part1S subsets part1 { ... } </pre>
Redefinition	 <pre> classDiagram class part1 { "0..1" } class part1S { "1..1" } class part2 { "0..1" } class part2R { "1..1" } part1 < -- part1S part2 < -- part2R part1 "0..1" part1S "0..1" part2 "0..1" part2R "0..1" part1S "0..1" part2R "0..1" </pre>	<pre> part part1 : Part1 [0..*] { part part2 : Part2 [0..*]; } part part1S : Part1S[1] :> part1 { part part2R : Part2R :>> part2; } or part part1S : Part1S[1] subsets part1 { part part2R : Part2R redefines part2; } </pre>

Element	Graphical Notation	Textual Notation
Feature Membership (isComposite=true)	<pre> graph TD PD["«part def» PartDef1"] --> P["«part» part2 : Part2 [0..*]"] </pre>	<pre> part def PartDef1 { part part2 : Part2 [0..*]; } </pre>
Feature Membership (isComposite=true)	<pre> graph TD P1["«part» part1 : Part1 [0..1]"] --> P2["«part» part2 : Part2 [0..*]"] </pre>	<pre> part part1 : Part1 [0..1] { part part2 : Part2 [0..*]; } </pre>
Feature Membership (isComposite=false)	<pre> graph TD P1["«part» part1 : Part1 [0..1]"] <--> P2["«part» part2 : Part2 [0..*]"] </pre>	<pre> part part1 : Part1 [0..1] { ref part part2 : Part2 [0..*]; } </pre>

Element	Graphical Notation	Textual Notation
Feature Membership (isComposite=true)	<pre> graph TD PD[«part def» PartDef1] --> P[«part» part2 : Part2 [0..*]] </pre>	<pre> part def PartDef1 { part part2 : Part2 [0..*]; } </pre>
Feature Membership (isComposite=true)	<pre> graph TD P1[«part» part1 : Part1 [0..1]] --> P2[«part» part2 : Part2 [0..*]] </pre>	<pre> part part1 : Part1 [0..1] { part part2 : Part2 [0..*]; } </pre>
Feature Membership (isComposite=false)	<pre> graph TD P1[«part» part1 : Part1 [0..1]] <--> P2[«part» part2 : Part2 [0..*]] </pre>	<pre> part part1 : Part1 [0..1] { ref part part2 : Part2 [0..*]; } </pre>
Variant Membership	<pre> graph TD VP[«variation part» part1 : Part1] +--> VP1[«variant part» part1a : Part1a] VP +--> VP2[«variant part» part1b : Part1b] </pre>	<pre> variation part part1 : Part1 { variant part part1a : Part1a; variant part part1b : Part1b; } </pre>

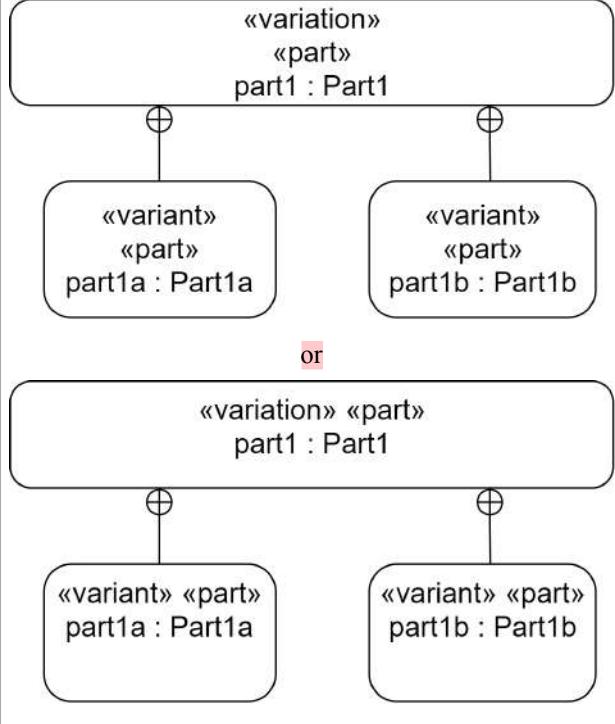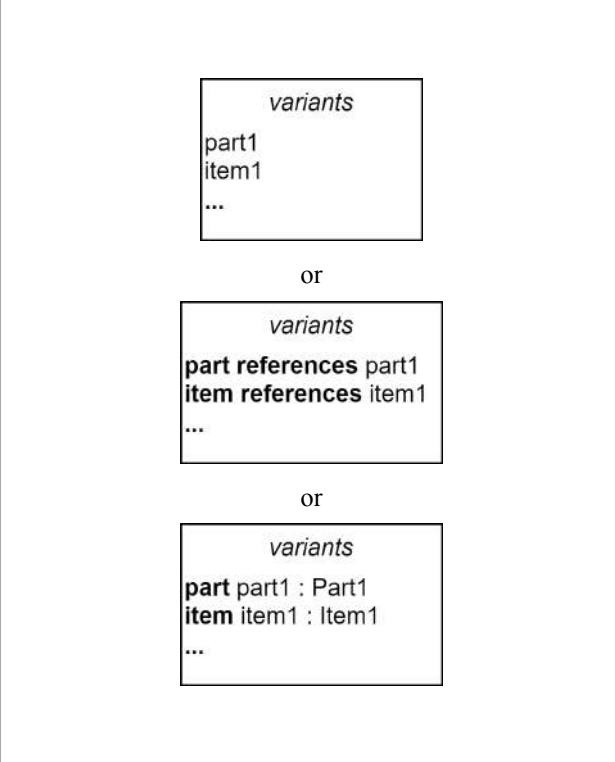Element	Graphical Notation	Textual Notation
Variant Membership	 <p>The diagram illustrates two graphical representations of Variant Membership:</p> <ul style="list-style-type: none"> Top Representation: A large rounded rectangle labeled «variation» contains the text «part» and «part1 : Part1». Below it, two smaller rounded rectangles, each labeled with a plus sign (⊕), contain the text «variant», «part», and either «part1a : Part1a» or «part1b : Part1b». Bottom Representation: A large rounded rectangle labeled «variation» contains the text «part» and «part1 : Part1». Below it, two smaller rounded rectangles, each labeled with a plus sign (⊕), contain the text «variant», «part», and either «part1a : Part1a» or «part1b : Part1b». <p>A small red rectangular box labeled "or" is positioned between the two representations.</p>	<pre>variation part part1 : Part1 { variant part part1a; variant part part1b; }</pre>
Variants Compartment	 <p>The diagram illustrates three graphical representations of Variants Compartment:</p> <ul style="list-style-type: none"> Top Representation: A rounded rectangle labeled «variants» contains the text «part1» and «item1». Ellipses (...) are also present. Middle Representation: A rounded rectangle labeled «variants» contains the text «part references part1» and «item references item1». Ellipses (...) are also present. Bottom Representation: A rounded rectangle labeled «variants» contains the text «part part1 : Part1» and «item item1 : Item1». Ellipses (...) are also present. <p>Three small red rectangular boxes labeled "or" are positioned between the three representations.</p>	<pre>variation item itemChoice : ItemDef { variant part; variant item; } variation item itemChoice : ItemDef { variant part references part1; variant item references item1; } variation item itemChoice : ItemDef { variant part part1 : Part1; variant item item1 : Item1; }</pre>

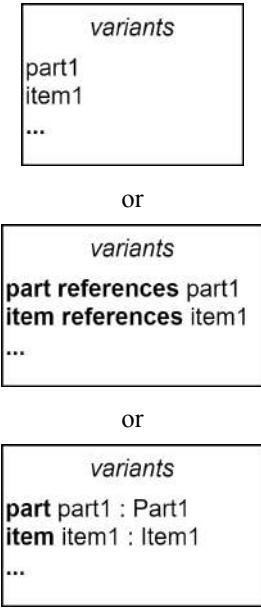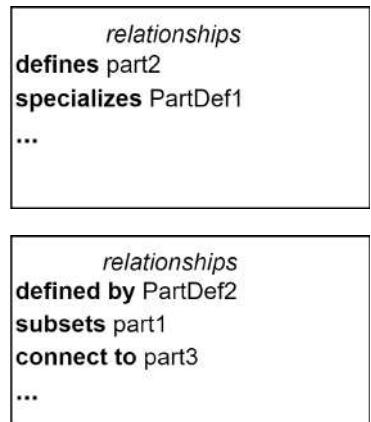Element	Graphical Notation	Textual Notation
Variants Compartment	 <p>The diagram shows three rectangular boxes representing different ways to define variants:</p> <ul style="list-style-type: none"> The first box contains the word "variants" followed by "part1", "item1", and an ellipsis. The second box contains "variants", "part references part1", "item references item1", and an ellipsis. The third box contains "variants", "part part1 : Part1", "item item1 : Item1", and an ellipsis. <p>Each box is preceded by the word "or".</p>	<pre>variation item itemChoice : ItemDef { variant part1; variant item1; } or variation item itemChoice : ItemDef { variant part references part1; variant item references item1; } or variation item itemChoice : ItemDef { variant part part1 : Part1; variant item item1 : Item1; }</pre>
Variant Parts Compartment	 <p>The diagram shows a single rectangular box representing variant parts:</p> <ul style="list-style-type: none"> The box contains the words "variant parts", "part1 : PartDef1", "part2 : PartDef2", and an ellipsis. 	<pre>variation part partChoice : PartDef { variant part part1 : PartDef1; variant part part2 : PartDef2; }</pre>
Relationships Compartment	 <p>The diagram shows two rectangular boxes representing relationships:</p> <ul style="list-style-type: none"> The top box contains "relationships", "defines part2", "specializes PartDef1", and an ellipsis. The bottom box contains "relationships", "defined by PartDef2", "subsets part1", "connect to part3", and an ellipsis. 	<pre>part def PartDef1; part def PartDef2 :> PartDef1; part part1 : PartDef1; part part2 : PartDef2 :> part1; connect part2 to part3; part part3;</pre>

7.6.2 Definitions

There is a basic common notation for all kinds of definitions, as described here in subclause 7.6, with additional special notations for certain kinds of definitions described in the later subclauses specifically related to those kinds

Element	Graphical Notation	Textual Notation
Variant Parts Compartment	<div style="border: 1px solid black; padding: 10px; width: fit-content;"> <p style="text-align: center;"><i>variant parts</i></p> <pre>part1 : PartDef1 part2 : PartDef2 ...</pre> </div>	variation part <pre>partChoice : PartDef { variant part part1 : PartDef1; variant part part2 : PartDef2; }</pre>
Relationships Compartment	<div style="border: 1px solid black; padding: 10px; width: fit-content;"> <p style="text-align: center;"><i>relationships</i></p> <pre>defines part2 specializes PartDef1 ...</pre> </div> <div style="border: 1px solid black; padding: 10px; width: fit-content; margin-top: 10px;"> <p style="text-align: center;"><i>relationships</i></p> <pre>defined by PartDef2 subsets part1 connect to part3 ...</pre> </div>	<pre>part def PartDef1; part def PartDef2 :> PartDef1; part part1 : PartDef1; part part2 : PartDef2 :> part1; connect part2 to part3; part part3;</pre>

7.6.2 Definitions

There is a basic common notation for all kinds of definitions, as described here in subclause [7.6](#), with additional special notations for certain kinds of definitions described in the later subclauses specifically related to those kinds of definitions. As a kind of Namespace (see [7.5](#)), the representation of a definition includes a *declaration* and a *body*.

A definition is declared using a keyword specific to the kind of definition (e.g., **item**, **part**, **action**, etc.) followed by the keyword **def**. One or more owned subclassifications may also optionally be included in the declaration of a definition by giving a comma-separated list of qualified names of the general definitions after the keyword **specializes** (or the symbol **:>**). A definition is specified as *abstract* by placing the keyword **abstract** before its kind keyword.

```
abstract part def Vehicle;
part def Automobile specializes Vehicle;
part def Truck :> Vehicle;
```

A definition that is not abstract is called a *concrete* definition. Declaring a definition to be abstract means that all instances of the definition must also be instances of at least one concrete definition or usage that directly or indirectly specializes the abstract definition.

The body of a definition is specified generically as for any namespace. In the textual notation, this is done by listing the members and imports between curly braces `{...}` (see [7.5](#)), or alternatively by a semicolon ; if the definition has no members or imports. Usages declared within the body of a definition are owned usages that specify *features* of the Definition.

```
item def Super {
  private package N {
```

of definitions. As a kind of Namespace (see [7.5](#)), the representation of a definition includes a *declaration* and a *body*.

A definition is declared using a keyword specific to the kind of definition (e.g., **item**, **part**, **action**, etc.) followed by the keyword **def**. One or more owned subclassifications may also optionally be included in the declaration of a definition by giving a comma-separated list of qualified names of the general definitions after the keyword **specializes** (or the symbol `:>`). A definition is specified as *abstract* by placing the keyword **abstract** before its kind keyword.

```
abstract part def Vehicle;
part def Automobile specializes Vehicle;
part def Truck :> Vehicle;
```

A definition that is not abstract is called a *concrete* definition. Declaring a definition to be abstract means that all instances of the definition must also be instances of at least one concrete definition or usage that directly or indirectly specializes the abstract definition.

The body of a definition is specified generically as for any namespace. In the textual notation, this is done by listing the members and imports between curly braces `{ ... }` (see [7.5](#)), or alternatively by a semicolon `;` if the definition has no members or imports. Usages declared within the body of a definition are owned usages that specify *features* of the Definition.

```
item def Super {
    private package N {
        item def Sub specializes Super;
    }
    item f : N::Sub;
}
```

7.6.3 Usages

There is a basic common notation for all kinds of usages, as described here in subclause [7.6](#), with additional special notations for certain kinds of usage described in the later subclauses specifically related to those kinds of usages. As a kind of namespace (see [7.5](#)), the representation of a usage includes a *declaration* and a *body*.

A usage is declared using a keyword specific to the kind of usage (e.g., **item**, **part**, **action**, etc.). One or more owned specializations may also optionally be included in the declaration of a usage. There are three kinds of specializations relevant to usages:

1. *Feature typings* specify the definitions of a usage (also known as its *types*). Textually, they are declared by giving a comma-separated list of the qualified names of the definition elements after the keyword **defined by** (or the symbol `:`). The definitions given must be consistent with the kind of usage being defined.
2. *Subsettings* specify other usages subsetted by the owning usage. Textually, they are declared by giving a comma-separated list of the qualified names of the subsetted usages after the keyword **subsets** (or the symbol `:>`).
3. *Redefinitions* specify other usages redefined by the owning usage. Textually, they are declared by giving a comma-separated list of the qualified names of the redefined usages after the keyword **redefines** (or the symbol `:>>`). (Note that redefinition is a kind of subsetting, so the owned redefinitions of a usage will be a subset of the owned subsettings in the abstract syntax.)

```
item x : A, B :> f :>> g;

// Equivalent declaration:
item x defined by A defined by B subsets f redefines g;
```

```

    item def Sub specializes Super;
}
item f : N::Sub;
}

```

7.6.3 Usages

There is a basic common notation for all kinds of usages, as described here in subclause [7.6](#), with additional special notations for certain kinds of usage described in the later subclauses specifically related to those kinds of usages. As a kind of namespace (see [7.5](#)), the representation of a usage includes a *declaration* and a *body*.

A usage is declared using a keyword specific to the kind of usage (e.g., `item`, `part`, `action`, etc.). One or more owned specializations may also optionally be included in the declaration of a usage. There are three kinds of specializations relevant to usages:

1. *Feature typings* specify the definitions of a usage (also known as its *types*). Textually, they are declared by giving a comma-separated list of the qualified names of the definition elements after the keyword `defined by` (or the symbol `:`). The definitions given must be consistent with the kind of usage being defined.
2. *Subsettings* specify other usages subsetted by the owning usage. Textually, they are declared by giving a comma-separated list of the qualified names of the subsetted usages after the keyword `subsets` (or the symbol `:>`).
3. *Redefinitions* specify other usages redefined by the owning usage. Textually, they are declared by giving a comma-separated list of the qualified names of the redefined usages after the keyword `redefines` (or the symbol `:>>`). (Note that redefinition is a kind of subsetting, so the owned redefinitions of a usage will be a subset of the owned subsettings in the abstract syntax.)

```

item x : A, B :> f :>> g;

// Equivalent declaration:
item x defined by A defined by B subsets f redefines g;

```

The *multiplicity* of a usage can be given in square brackets [...] after the name part of the declaration of a usage (if it is named) or after one of the owned specialization clauses in the declaration (but, in all cases, only one multiplicity may be specified). (This allows for a notation style consistent with previous modeling languages, in which the multiplicity is always placed after the declared type.)

A *multiplicity range* is written in the form `[lowerBound..upperBound]`, where each of `lowerBound` and `upperBound` is either a literal or the identification of a usage. Literals can be used to specify a multiplicity range with fixed lower and/or upper bounds. The values of the bounds of a multiplicity range must be natural numbers. If only a single bound is given, then the value of that bound is used as both the lower and upper bound of the range, unless the result is the infinite value `*`, in which case the lower bound is taken to be 0. If two bounds are given, and the value of the first bound is `*`, then the meaning of the multiplicity range is not defined.

```

item def Person {
    ref item parent[2] : Person;
    ref item mother : Person[1..1] subsets parent;
    attribute numberofchildren : Natural;
    ref item children[0..numberofchildren] : Person;
}
item def ChildlessPerson specializes Person {
    ref item redefines children[0];
}

```

The *multiplicity* of a usage can be given in square brackets [...] after the name part of the declaration of a usage (if it is named) or after one of the owned specialization clauses in the declaration (but, in all cases, only one multiplicity may be specified). (This allows for a notation style consistent with previous modeling languages, in which the multiplicity is always placed after the declared type.)

A *multiplicity range* is written in the form [lowerBound..upperBound], where each of *lowerBound* and *upperBound* is either a literal or the identification of a usage. Literals can be used to specify a multiplicity range with fixed lower and/or upper bounds. The values of the bounds of a multiplicity range must be natural numbers. If only a single bound is given, then the value of that bound is used as both the lower and upper bound of the range, unless the result is the infinite value *, in which case the lower bound is taken to be 0. If two bounds are given, and the value of the first bound is *, then the meaning of the multiplicity range is not defined.

```
item def Person {
    ref item parent[2] : Person;
    ref item mother : Person[1..1] subsets parent;
    attribute numberOfChildren : Natural;
    ref item children[0..numberOfChildren] : Person;
}
item def ChildlessPerson specializes Person {
    ref item redefines children[0];
}
```

A multiplicity may be optionally followed by one or both of the following keywords (in either order), or they can be used without giving an explicit multiplicity, at any place in the declaration a multiplicity would be allowed.

- **nonunique** – If a usage is *non-unique*, then the same value may appear more than once as a value of the usage. The default is that the usage is *unique*, meaning that no two values of the usage may be the same.
- **ordered** – If a usage is *ordered*, then the values of the usage can be placed in order, indexed from 1 to the number of values. The default is that the feature is *unordered*.

If a multiplicity is not declared for a usage, then the usage inherits the multiplicity constraints of any other usages it subsets or redefines. If no tighter constraint is inherited, the effective default is the most general multiplicity [0..*]. However, a tighter default of [1..1] is implicitly declared for the usage if all of the following conditions hold:

1. The usage is an attribute usage, an item usage (including a part usage, except if it is a connection usage), or a port usage.
2. The usage is owned by a definition or another usage (not a package).
3. The usage does not have any *explicit* owned subsetsettings or owned redefinitions.

There are a number of additional properties of a usage that can be flagged by adding specific keywords to its declaration. If present these are always specified in the following order, before the kind keyword in the usage declaration.

1. **in, out, inout** – Specifies a *directed usage* with the indicated *direction*, which determines what things are allowed to change its values relative to its featuring instance.
 - **in** – Things "outside" the featuring instance. These usages identify things input to an instance.
 - **out** – The featuring instance itself or things "inside" it. These usages identify things output by an instance.
 - **inout** – Both things "outside" and "inside" the featuring instance. These usages identify things that are both input to and output by an instance.
2. **abstract** – Specifies that the usage is *abstract*. A usage that is not abstract is called a *concrete* usage. Similarly to an abstract definition (see [7.6.2](#)), declaring a usage to be abstract means that any value of the usage must also be a value of some concrete usage that directly or indirectly specializes (subsets or redefines) the abstract usage.
3. **readonly** – Specifies that the usage is *read only*. Values of read only usage are the same during the entire existence of that featuring instance.

A multiplicity may be optionally followed by one or both of the following keywords (in either order), or they can be used without giving an explicit multiplicity, at any place in the declaration a multiplicity would be allowed.

- **nonunique** – If a usage is *non-unique*, then the same value may appear more than once as a value of the usage. The default is that the usage is *unique*, meaning that no two values of the usage may be the same.
- **ordered** – If a usage is *ordered*, then the values of the usage can be placed in order, indexed from 1 to the number of values. The default is that the feature is *unordered*.

If a multiplicity is not declared for a usage, then the usage inherits the multiplicity constraints of any other usages it subsets or redefines. If no tighter constraint is inherited, the effective default is the most general multiplicity $[0..*$]. However, a tighter default of $[1..1]$ is implicitly declared for the usage if all of the following conditions hold:

1. The usage is an attribute usage, an item usage (including a part usage, except if it is a connection usage), or a port usage.
2. The usage is owned by a definition or another usage (not a package).
3. The usage does not have any *explicit* owned subsettings or owned redefinitions.

There are a number of additional properties of a usage that can be flagged by adding specific keywords to its declaration. If present these are always specified in the following order, before the kind keyword in the usage declaration.

1. **in, out, inout** – Specifies a *directed usage* with the indicated *direction*, which determines what things are allowed to change its values relative to its featuring instance.
 - **in** – Things "outside" the featuring instance. These usages identify things input to an instance.
 - **out** – The featuring instance itself or things "inside" it. These usages identify things output by an instance.
 - **inout** – Both things "outside" and "inside" the featuring instance. These usages identify things that are both input to and output by an instance.
2. **abstract** – Specifies that the usage is *abstract*. A usage that is not abstract is called a *concrete* usage. Similarly to an abstract definition (see [7.6.2](#)), declaring a usage to be abstract means that any value of the usage must also be a value of some concrete usage that directly or indirectly specializes (subsets or redefines) the abstract usage.
3. **readonly** – Specifies that the usage is *read only*. Values of read only usage are the same during the entire existence of that featuring instance.
4. **derived** – Specifies that the usage is *derived*. Such a feature is typically expected to have a bound value expression that completely determines its value at all times (see also [7.13.3](#) on binding a usage to a value).
5. **end** – Specifies that the usage is an *end feature* of its owning definition or usage. See [9.2.6](#) for further discussion on end features of connection definitions and usages.
6. **ref** – Specifies that the usage is *referential*. A usage that is not referential is *composite*. Values of a composite usage, for each featuring instance, cannot exist after the featuring instance ceases to exist. This only applies to values at the time the instance goes out of existence, not to other things that may have been values of the usage before that, but are not any longer. (Note also that a directed usage is always referential, whether or not the keyword **ref** is also given explicitly in its declaration.)

```
abstract part def Container {
    abstract ref item content;
}

part def Tank :> Container {
    in item fuelFlow : Fuel;
    ref item fuel : Fuel :>> content;
}
```

4. **derived** – Specifies that the usage is *derived*. Such a feature is typically expected to have a bound value expression that completely determines its value at all times (see also [7.13.3](#) on binding a usage to a value).
5. **end** – Specifies that the usage is an *end feature* of its owning definition or usage. See [9.2.6](#) for further discussion on end features of connection definitions and usages.
6. **ref** – Specifies that the usage is *referential*. A usage that is not referential is *composite*. Values of a composite usage, for each featuring instance, cannot exist after the featuring instance ceases to exist. This only applies to values at the time the instance goes out of existence, not to other things that may have been values of the usage before that, but are not any longer. (Note also that a directed usage is always referential, whether or not the keyword **ref** is also given explicitly in its declaration.)

```
abstract part def Container {
    abstract ref item content;
}
part def Tank :> Container {
    in item fuelFlow : Fuel;
    ref item fuel : Fuel :>> content;
}
```

The body of a usage is specified generically as for any namespace. In the textual notation, this is done by listing the members and imports between curly braces { ... } (see [7.5](#)), or alternatively by a semicolon ; if it has no members or imports. Usages declared within the body of another Usage are owned (*nested*) usages that specify *features* of the owning usage.

```
part vehicle : Vehicle {
    part wheelAssembly[2] {
        part axle : Axle;
        part wheel : Wheel;
    }
}
```

7.6.4 Reference Usages

A *reference usage* is a usage that is declared without any kind keyword. Unlike other kinds of usages, the definitions (types) of a reference usage are not restricted to be of a particular kind. The declaration of a reference usage may, but is not required, to include the **ref** keyword. However, a reference usage is always, by definition, referential. A reference usage is otherwise declared like any other usage, as given above.

```
abstract part def Container {
    abstract ref content : Base::Anything;
}
part def OrderedContainer {
    // By default, the following is a reference usage.
    orderedContent ordered :>> content;
}
```

7.6.5 Effective Names

If a name and/or short name are declared for an element, these are used in the name resolution process to identify the element (as discussed in [7.6.1](#)). However, if neither a name or a short name are given in the declaration of a usage with an owned redefinition, then its *effective* name and short name are implicitly determined by the name and short name of the redefining usage of its first owned redefinition (which may itself be an implicit name, if the redefined usage is itself a redefining usage). This is useful when redefining a usage in order to constrain it, while maintaining the same naming as for the original usage.

```
part def Engine {
    part cylinders : Cylinder[2..*];
}
```

The body of a usage is specified generically as for any namespace. In the textual notation, this is done by listing the members and imports between curly braces { ... } (see [7.5](#)), or alternatively by a semicolon ; if it has no members or imports. Usages declared within the body of another Usage are owned (*nested*) usages that specify *features* of the owning usage.

```
part vehicle : Vehicle {
    part wheelAssembly[2] {
        part axle : Axle;
        part wheel : Wheel;
    }
}
```

7.6.4 Reference Usages

A *reference usage* is a usage that is declared without any kind keyword. Unlike other kinds of usages, the definitions (types) of a reference usage are not restricted to be of a particular kind. The declaration of a reference usage may, but is not required, to include the **ref** keyword. However, a reference usage is always, by definition, referential. A reference usage is otherwise declared like any other usage, as given above.

```
abstract part def Container {
    abstract ref content : Base::Anything;
}
part def OrderedContainer {
    // By default, the following is a reference usage.
    orderedContent ordered :>> content;
}
```

7.6.5 Effective Names

If a name and/or short name are declared for an element, these are used in the name resolution process to identify the element (as discussed in [7.6.1](#)). However, if neither a name or a short name are given in the declaration of a usage with an owned redefinition, then its *effective* name and short name are implicitly determined by the name and short name of the redefining usage of its first owned redefinition (which may itself be an implicit name, if the redefined usage is itself a redefining usage). This is useful when redefining a usage in order to constrain it, while maintaining the same naming as for the original usage.

```
part def Engine {
    part cylinders : Cylinder[2..*];
}
part def FourCylinderEngine :> Engine {
    // This redefines Engine::cylinders with a
    // new usage, restricting the multiplicity
    // to 4. It's declared name is empty,
    // but its effective name is "cylinders".
    part redefines cylinders[4];
}
part def SixCylinderEngine :> Engine {
    part redefines cylinders[6];
}
```

Certain other kinds of usages (such as perform action usages) specify an alternate effective name rule, as described in the subclauses relevant to those usages (e.g., [7.16.6](#) describes the rule for perform action usages).

```

part def FourCylinderEngine :> Engine {
    // This redefines Engine::cylinders with a
    // new usage, restricting the multiplicity
    // to 4. It's declared name is empty,
    // but its effective name is "cylinders".
    part redefines cylinders[4];
}
part def SixCylinderEngine :> Engine {
    part redefines cylinders[6];
}

```

Certain other kinds of usages (such as perform action usages) specify an alternate effective name rule, as described in the subclauses relevant to those usages (e.g., [7.16.6](#) describes the rule for perform action usages).

7.6.6 Feature Chains

A *feature chain* is a textual notation specified as a sequence of two or more qualified names separated by dot (.) symbols. Each qualified name in a feature chain must resolve to a Usage (or, more generally, a KerML Feature). The first qualified name in a feature chain is resolved in the local namespace as usual (see [7.6.1](#)). Subsequent qualified names are then resolved using the previously resolved usage (feature) as the context namespace, but considering only public memberships.

A feature chain is similar to a qualified name but, unlike a qualified name, the path of usages (features) in the chain is recorded in the abstract syntax, not just the reference to the final usages. This means that different paths to the same usage can be distinguished in the abstract syntax representation of a model. Feature chains can be used to specify the target for most kinds of relationships involving usages, including subsetting and redefinition. However, their use is particularly important when specifying the related features of a connection usage that are more deeply nested than the connection usage itself (see [7.13](#)). (See also [KerML, 7.3.4.6].)

```

item uncles subsets parents.siblings;
item cousins redefines parents.siblings.children;
connect vehicle.wheelAssembly.wheels to vehicle.road;

```

In general, when a textual notation is described as including the *identification* of a usage, this can be done by using either a qualified name or a feature chain.

7.6.7 Variations and Variants

A definition or usage is specified as a *variation* by placing the keyword **variation** before its kind keyword. A variation is always abstract, so the **abstract** keyword is not used on a variation.

All usages declared within the body of a variation definition or usage are declared as *variant* usages by placing the keyword **variant** at the beginning of their declarations. Variant usages may only be declared within a variation. The kind of a variant usage must be consistent with the kind of its owning variation.

```

variation part def TransmissionChoices :> Transmission {
    variant part manual : ManualTransmission;
    variant part automatic : AutomaticTransmission;
}

```

A non-variant usage can also be declared to act as a variant of a variation by not including a kind keyword in the variant declaration and, instead, following the **variant** keyword with the identification of a separately declared usage. Such a variant declaration may also optionally further constrain the variant usage by including a multiplicity and/or further specializations.

```

// These are non-variant usages.
part smallEngine : FourCylinderEngine;
part bigEngine : SixCylinderEngine;

```

7.6.6 Feature Chains

A *feature chain* is a textual notation specified as a sequence of two or more qualified names separated by dot (.) symbols. Each qualified name in a feature chain must resolve to a Usage (or, more generally, a KerML Feature). The first qualified name in a feature chain is resolved in the local namespace as usual (see [7.6.1](#)). Subsequent qualified names are then resolved using the previously resolved usage (feature) as the context namespace, but considering only public memberships.

A feature chain is similar to a qualified name but, unlike a qualified name, the path of usages (features) in the chain is recorded in the abstract syntax, not just the reference to the final usages. This means that different paths to the same usage can be distinguished in the abstract syntax representation of a model. Feature chains can be used to specify the target for most kinds of relationships involving usages, including subsetting and redefinition. However, their use is particularly important when specifying the related features of a connection usage that are more deeply nested than the connection usage itself (see [7.13](#)). (See also [KerML, 7.3.4.6].)

```
item uncles subsets parents.siblings;
item cousins redefines parents.siblings.children;
connect vehicle.wheelAssembly.wheels to vehicle.road;
```

In general, when a textual notation is described as including the *identification* of a usage, this can be done by using either a qualified name or a feature chain.

7.6.7 Variations and Variants

A definition or usage is specified as a *variation* by placing the keyword **variation** before its kind keyword. A variation is always abstract, so the **abstract** keyword is not used on a variation.

All usages declared within the body of a variation definition or usage are declared as *variant* usages by placing the keyword **variant** at the beginning of their declarations. Variant usages may only be declared within a variation. The kind of a variant usage must be consistent with the kind of its owning variation.

```
variation part def TransmissionChoices :> Transmission {
    variant part manual : ManualTransmission;
    variant part automatic : AutomaticTransmission;
}
```

A non-variant usage can also be declared to act as a variant of a variation by not including a kind keyword in the variant declaration and, instead, following the **variant** keyword with the identification of a separately declared usage. Such a variant declaration may also optionally further constrain the variant usage by including a multiplicity and/or further specializations.

```
// These are non-variant usages.
part smallEngine : FourCylinderEngine;
part bigEngine : SixCylinderEngine;

part def Vehicle {
    variation part engine : Engine {
        // These are variant usages within the variation part "engine",
        // based on the referenced non-variant usages.
        variant smallEngine;
        variant bigEngine;
    }
}
```

```

part def Vehicle {
    variation part engine : Engine {
        // These are variant usages within the variation part "engine",
        // based on the referenced non-variant usages.
        variant smallEngine;
        variant bigEngine;
    }
}

```

7.6.8 Implicit Specialization

The meaning or *semantics* of a definition is given by what things it classifies relative to the system being modeled. Specific kinds of definitions are already restricted to classifying specific kinds of things. E.g., an attribute definition classifies attributive values, a part definition classifies systems and parts of systems, etc.

The Systems Model Library (see [9.2](#)), which is based on the KerML Kernel Semantic Library (see [KerML, 9.2]) is a set of *ontological* SysML models that define the basic kinds of things relevant for systems modeling. The semantics of definition elements in SysML is given by requiring that each such element (directly or indirectly) specialize the corresponding *base definition* from the Systems Model Library (or base classifier from the Kernel Semantic Library) corresponding to its kind.

At the highest level, every definition element must directly or indirectly specialize the most general classifier `Anything` from the `Base` model in the Kernel Semantic Library (see [KerML, 9.2.2]). Specific kinds of definition then have more specific requirements for what more specific base definition they must specialize. For example, an attribute definition must specialize the base attribute definition `AttributeValue` from the `Attributes` model in the Systems Model Library, while a part definition must specialize the base part definition `Part` from the `Parts` model.

The Systems Model Library also includes a parallel hierarchy of *base usages* (or base features in the Kernel Semantic Library). So, every usage element must directly or indirectly specialize (subset) the most general feature `things` from the `Base` model in the Kernel Semantic Library. And specific kinds of usage then also have more specific requirements for what more specific base usage they must specialize. For example, an attribute usage must subset the base attribute usage `attributeValues` from the `Attributes` model in the Systems Model Library, while a part usage must subset the base part usage `parts` from the `Parts` model. In general, each base usage is defined by the corresponding base definition. E.g., the base usage `parts` is defined by the base definition `Part`, so that every part usage is ultimately a direct or indirect usage of `Part`.

These and other *semantic constraints* are fully described in [8.4](#). However, it is not generally necessary for a modeler to explicitly satisfy these constraints when constructing a model. Rather, the violation of a semantic constraint *implies* the need for a specific relationship, which may then be added to the model automatically by tooling (see also [KerML, 8.4.2]). In particular, if a definition or usage, as explicitly declared, does not directly or indirectly specialize the required base definition or usage, then the declaration is considered to include an *implicit* subclassification or subsetting of the appropriate base definition or usage.

```

attribute def A;      // Implicitly subclasses Attributes::AttributeValue.
part def P {          // Implicitly subclasses Parts::Part.
    ref x;            // Implicitly subsets Base::things.
    attribute a : A; // Implicitly subsets Attributes::attributeValues.
    part p;           // Implicitly subsets Parts::parts.
    part q :> p;     // No implicit specialization.
}
part def Q :> P;      // No implicit specialization.

```

7.7 Attributes

7.6.8 Implicit Specialization

The meaning or *semantics* of a definition is given by what things it classifies relative to the system being modeled. Specific kinds of definitions are already restricted to classifying specific kinds of things. E.g., an attribute definition classifies attributive values, a part definition classifies systems and parts of systems, etc.

The Systems Model Library (see [9.2](#)), which is based on the KerML Kernel Semantic Library (see [KerML, 9.2]) is a set of *ontological* SysML models that define the basic kinds of things relevant for systems modeling. The semantics of definition elements in SysML is given by requiring that each such element (directly or indirectly) specialize the corresponding *base definition* from the Systems Model Library (or base classifier from the Kernel Semantic Library) corresponding to its kind.

At the highest level, every definition element must directly or indirectly specialize the most general classifier `Anything` from the `Base` model in the Kernel Semantic Library (see [KerML, 9.2.2]). Specific kinds of definition then have more specific requirements for what more specific base definition they must specialize. For example, an attribute definition must specialize the base attribute definition `AttributeValue` from the `Attributes` model in the Systems Model Library, while a part definition must specialize the base part definition `Part` from the `Parts` model.

The Systems Model Library also includes a parallel hierarchy of *base usages* (or base features in the Kernel Semantic Library). So, every usage element must directly or indirectly specialize (subset) the most general feature `things` from the `Base` model in the Kernel Semantic Library. And specific kinds of usage then also have more specific requirements for what more specific base usage they must specialize. For example, an attribute usage must subset the base attribute usage `attributeValues` from the `Attributes` model in the Systems Model Library, while a part usage must subset the base part usage `parts` from the `Parts` model. In general, each base usage is defined by the corresponding base definition. E.g., the base usage `parts` is defined by the base definition `Part`, so that every part usage is ultimately a direct or indirect usage of `Part`.

These and other *semantic constraints* are fully described in [8.4](#). However, it is not generally necessary for a modeler to explicitly satisfy these constraints when constructing a model. Rather, the violation of a semantic constraint *implies* the need for a specific relationship, which may then be added to the model automatically by tooling (see also [KerML, 8.4.2]). In particular, if a definition or usage, as explicitly declared, does not directly or indirectly specialize the required base definition or usage, then the declaration is considered to include an *implicit* subclassification or subsetting of the appropriate base definition or usage.

```
attribute def A;      // Implicitly subclasses Attributes::AttributeValue.
part def P {           // Implicitly subclasses Parts::Part.
    ref x;             // Implicitly subsets Base::things.
    attribute a : A;   // Implicitly subsets Attributes::attributeValues.
    part p;            // Implicitly subsets Parts::parts.
    part q :> p;      // No implicit specialization.
}
part def Q :> P;      // No implicit specialization.
```

7.7 Attributes

7.7.1 Attributes Overview

Metamodel references:

- *Textual notation*, [8.2.2.7](#)
- *Graphical notation*, [8.2.3.7](#)
- *Abstract syntax*, [8.3.7](#)
- *Semantics*, [8.4.3](#)

7.7.1 Attributes Overview

SYSML2 -283: Table 5 Attributes Compartment Graphical Notation and Textual Notation does not match

Metamodel references:

- *Textual notation*, [8.2.2.7](#)
- *Graphical notation*, [8.2.3.7](#)
- *Abstract syntax*, [8.3.7](#)
- *Semantics*, [8.4.3](#)

An *attribute definition* defines a set of data values, such as numbers, quantitative values with units, qualitative values such as text strings, or data structures of such values. An *attribute usage* is a usage of an attribute definition. An attribute usage is always referential and any nested features of an attribute definition or usage must also be referential (see also [7.6](#) on referential and composite usages).

The data values of an attribute usage are constrained to be in the range specified by its definition. The range of data values for an attribute definition can be further restricted using constraints (see [7.19](#)). An enumeration definition is a specialized kind of attribute definition that further restricts the values of the data type to a discrete set of data values (see [7.8](#)).

Attribute usages can be defined by KerML data types as well as SysML attribute definitions. This allows them to be typed by primitive data types from the Kernel Data Type Library (see [KerML, 9.3]), such as `String`, `Boolean`, and numeric types including `Integer`, `Rational`, `Real` and `Complex`. The Kernel Data Type Library also includes basic structured data types for collections.

Attribute usages representing quantities with units are defined using the SysML Quantities and Units Domain Library or extensions of the elements in this library (see [9.8](#)). The library provides base attribute definitions for scalar, vector and tensor quantity values, along with other models that specify the full set of international standard quantity kinds and units. Fundamental to this approach is the principle that only the kind of unit (e.g., `MassUnit`, `LengthUnit`, `TimeUnit`, etc.) is associated with an attribute definition, while a specific unit (e.g., `kg`, `m`, `s`, etc.) is only given with an actual quantity value. This means that an attribute usage for a quantity value is independent of the specific units used, allowing for automatic conversion and interoperability between different units of the same kind (e.g., kilograms and pounds mass, meters and feet, etc.).

The values of an attribute usage are data values, whether primitive values like integers or structured values with nested attributes, that do not themselves change over time. However, the owner of an attribute usage may be an occurrence definition or usage (or a specialized kind of occurrence, such as an item, part or action). In this case, the value of the attribute usage may vary over the lifetime of its owning occurrence, in the sense that it can have different values at different points in time, reflecting the changing condition of the occurrence over time. (See also the discussion in [7.9](#).)

An *attribute definition* defines a set of data values, such as numbers, quantitative values with units, qualitative values such as text strings, or data structures of such values. An *attribute usage* is a usage of an attribute definition. An attribute usage is always referential and any nested features of an attribute definition or usage must also be referential (see also [7.6](#) on referential and composite usages).

The data values of an attribute usage are constrained to be in the range specified by its definition. The range of data values for an attribute definition can be further restricted using constraints (see [7.19](#)). An enumeration definition is a specialized kind of attribute definition that further restricts the values of the data type to a discrete set of data values (see [7.8](#)).

Attribute usages can be defined by KerML data types as well as SysML attribute definitions. This allows them to be typed by primitive data types from the Kernel Data Type Library (see [KerML, 9.3]), such as `String`, `Boolean`, and numeric types including `Integer`, `Rational`, `Real` and `Complex`. The Kernel Data Type Library also includes basic structured data types for collections.

Attribute usages representing quantities with units are defined using the SysML Quantities and Units Domain Library or extensions of the elements in this library (see [9.8](#)). The library provides base attribute definitions for scalar, vector and tensor quantity values, along with other models that specify the full set of international standard quantity kinds and units. Fundamental to this approach is the principle that only the kind of unit (e.g., `MassUnit`, `LengthUnit`, `TimeUnit`, etc.) is associated with an attribute definition, while a specific unit (e.g., `kg`, `m`, `s`, etc.) is only given with an actual quantity value. This means that an attribute usage for a quantity value is independent of the specific units used, allowing for automatic conversion and interoperability between different units of the same kind (e.g., kilograms and pounds mass, meters and feet, etc.).

The values of an attribute usage are data values, whether primitive values like integers or structured values with nested attributes, that do not themselves change over time. However, the owner of an attribute usage may be an occurrence definition or usage (or a specialized kind of occurrence, such as an item, part or action). In this case, the value of the attribute usage may vary over the lifetime of its owning occurrence, in the sense that it can have different values at different points in time, reflecting the changing condition of the occurrence over time. (See also the discussion in [7.9](#).)

Table 5. Attributes – Representative Notation

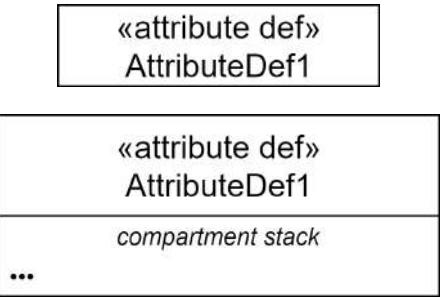
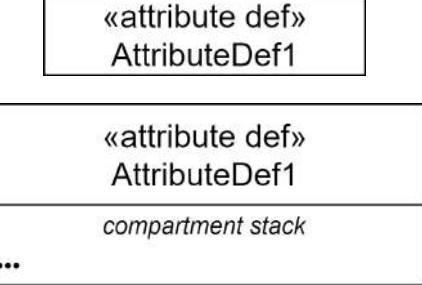
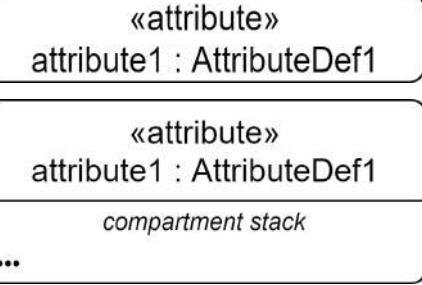
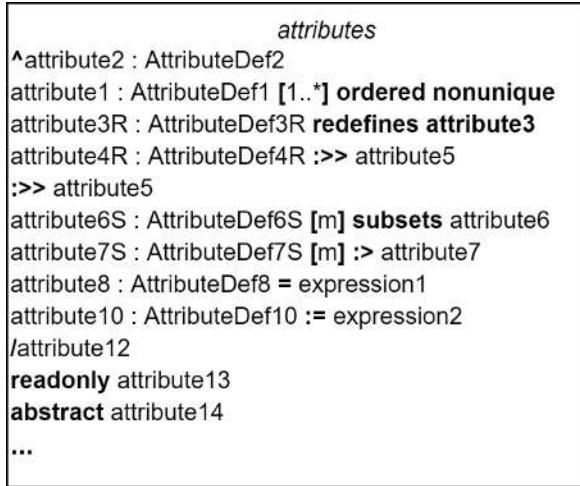
Element	Graphical Notation	Textual Notation
Attribute Definition		<pre>attribute def AttributeName1; attribute def AttributeName1 { /* members */ }</pre>



Table 5. Attributes – Representative Notation

Element	Graphical Notation	Textual Notation
Attribute Definition		<pre>attribute def AttributeDef1; attribute def AttributeDef1 { /* members */ }</pre>
Attribute		<pre>attribute attribute1 : AttributeDef1; attribute attribute1 : AttributeDef1 { /* members */ }</pre>
Attributes Compartment		<pre>{ attribute attribute1: AttributeDef1 [1..*] ordered nonunique; /* ... */ }</pre>

7.7.2 Attribute Definitions and Usages

An attribute definition is declared as described in [7.6.2](#), using the kind keyword **attribute**. An attribute definition may only specialize other attribute definitions (including enumeration definitions) or KerML data types (see [KerML, 7.4.2]). An attribute usage may be declared as described in [7.6.3](#), using the kind keyword **attribute**. An attribute usage may only be defined by attribute definitions or KerML data types. (See also [7.8](#) on enumeration definitions and enumeration usages.)

An attribute usage is always referential, whether or not the **ref** keyword (see [7.6.3](#)) is used explicitly in its declaration. The default multiplicity of an attribute usage is $[1..1]$, under the conditions described in [7.6.3](#). In general, any kind of usage may be declared in the body of an attribute definition or attribute usage, but all such usages shall be referential. (There are further restrictions on what can be nested in an enumeration definition – see [7.8](#).)

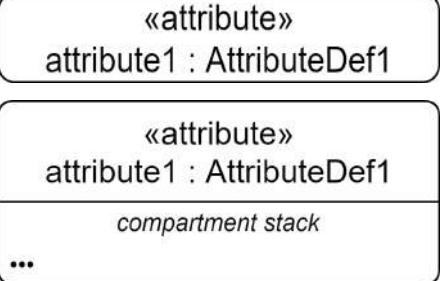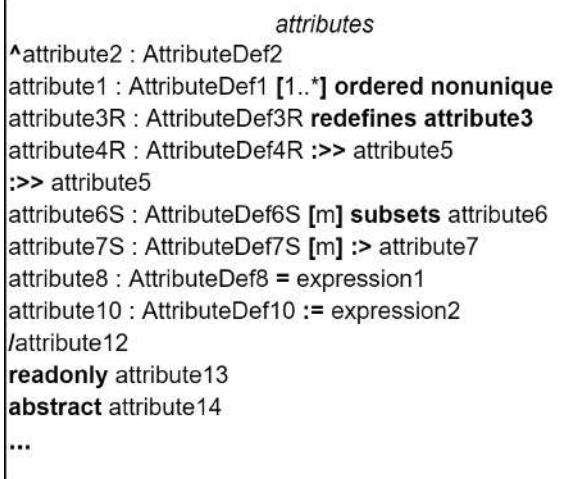Element	Graphical Notation	Textual Notation
Attribute		<pre data-bbox="1067 312 1383 365">attribute attribute1 : AttributeDef1;</pre> <pre data-bbox="1067 397 1383 502">attribute attribute1 : AttributeDef1 { /* members */ }</pre>
Attributes Compartment		<pre data-bbox="1067 713 1393 931">{ attribute attribute1 : Attribute1Def [1..*] ordered nonunique; /* ... */ }</pre>

7.7.2 Attribute Definitions and Usages

An attribute definition is declared as described in [7.6.2](#), using the kind keyword **attribute**. An attribute definition may only specialize other attribute definitions (including enumeration definitions) or KerML data types (see [KerML, 7.4.2]). An attribute usage may be declared as described in [7.6.3](#), using the kind keyword **attribute**. An attribute usage may only be defined by attribute definitions or KerML data types. (See also [7.8](#) on enumeration definitions and enumeration usages.)

An attribute usage is always referential, whether or not the **ref** keyword (see [7.6.3](#)) is used explicitly in its declaration. The default multiplicity of an attribute usage is [\[1..1\]](#), under the conditions described in [7.6.3](#). In general, any kind of usage may be declared in the body of an attribute definition or attribute usage, but all such usages shall be referential. (There are further restrictions on what can be nested in an enumeration definition – see [7.8](#).)

```
attribute def SensorRecord {  
    ref part sensor : Sensor;  
    attribute reading : Real;  
}
```

The base attribute definition is `AttributeValue` from the `Attributes` library model (see [9.2.2](#)), which is simply an alias for the data type `DataValue` from the KerML Base library model (see [KerML, 9.2.2]). The base attribute usage is `attributeValues` from the `Attributes` library model, which is simply an alias for the feature `dataValues` from the KerML Base library model.

```

attribute def SensorRecord {
    ref part sensor : Sensor;
    attribute reading : Real;
}

```

The base attribute definition is `AttributeValue` from the `Attributes` library model (see [9.2.2](#)), which is simply an alias for the data type `DataValue` from the KerML Base library model (see [KerML, 9.2.2]). The base attribute usage is `attributeValues` from the `Attributes` library model, which is simply an alias for the feature `dataValues` from the KerML Base library model.

7.8 Enumerations

7.8.1 Enumerations Overview

Metamodel references:

- *Textual notation*, [8.2.2.8](#)
- *Graphical notation*, [8.2.3.8](#)
- *Abstract syntax*, [8.3.8](#)
- *Semantics*, [8.4.4](#)

An enumeration definition is a kind of attribute definition (see [7.7](#)) whose instances are limited to specific set of *enumerated values*. An *enumeration usage* is an attribute usage that is required to have a single definition that is an enumeration definition.

An enumeration usage is restricted to only the set of enumerated values specified in its definition. Since an enumeration definition is a kind of attribute definition, it can also be used to define a regular attribute usage. Even if the attribute usage is not syntactically an enumeration usage, it is still semantically restricted to take on only the values allowed by its enumeration definition.

An enumeration definition can specialize an attribute definition that is not itself an enumeration definition. In this case, the enumerated values of the enumeration definition will be a subset of the attribute values of the specialized attribute definition. Which enumerated values correspond to which attribute values may be specified by binding the enumerated values to expressions that evaluate to the desired values of the specialized attributed definition (see also [7.13](#) on binding usages to values). In this case, the results of all the expressions must be distinct (typically they will just be literals).

For example, an enumeration definition `DiameterChoices` may specialize the attribute definition `LengthValue`. `DiameterChoices` may include literals that are equal to 60 mm, 80 mm, and 100 mm. An attribute usage called `cylinderDiameter` can be defined by `DiameterChoices`, and its value can equal one of the three enumerated values.

An enumeration definition may not contain anything other than the declaration of its enumerated values. However, if the enumeration definition specializes an attribute definition with nested usages, then those nested usages will be inherited by the enumeration definition, and they may be bound to specific values within each enumerated value of the enumeration definition.

An enumeration definition may not specialize another enumeration definition. This is because the semantics of specialization require that the set of instances classified by a definition be a subset of the instances of classified by any definition it specializes. The enumerated values defined in an enumeration definition, however, would *add* to the set of enumerated values allowed by any enumeration definition it specialized, which is inconsistent with the semantics of specialization.

7.8 Enumerations

7.8.1 Enumerations Overview

Metamodel references:

- *Textual notation*, [8.2.2.8](#)
- *Graphical notation*, [8.2.3.8](#)
- *Abstract syntax*, [8.3.8](#)
- *Semantics*, [8.4.4](#)

An enumeration definition is a kind of attribute definition (see [7.7](#)) whose instances are limited to specific set of *enumerated values*. An *enumeration usage* is an attribute usage that is required to have a single definition that is an enumeration definition.

An enumeration usage is restricted to only the set of enumerated values specified in its definition. Since an enumeration definition is a kind of attribute definition, it can also be used to define a regular attribute usage. Even if the attribute usage is not syntactically an enumeration usage, it is still semantically restricted to take on only the values allowed by its enumeration definition.

An enumeration definition can specialize an attribute definition that is not itself an enumeration definition. In this case, the enumerated values of the enumeration definition will be a subset of the attribute values of the specialized attribute definition. Which enumerated values correspond to which attribute values may be specified by binding the enumerated values to expressions that evaluate to the desired values of the specialized attributed definition (see also [7.13](#) on binding usages to values). In this case, the results of all the expressions must be distinct (typically they will just be literals).

For example, an enumeration definition `DiameterChoices` may specialize the attribute definition `LengthValue`. `DiameterChoices` may include literals that are equal to 60 mm, 80 mm, and 100 mm. An attribute usage called `cylinderDiameter` can be defined by `DiameterChoices`, and its value can equal one of the three enumerated values.

An enumeration definition may not contain anything other than the declaration of its enumerated values. However, if the enumeration definition specializes an attribute definition with nested usages, then those nested usages will be inherited by the enumeration definition, and they may be bound to specific values within each enumerated value of the enumeration definition.

An enumeration definition may not specialize another enumeration definition. This is because the semantics of specialization require that the set of instances classified by a definition be a subset of the instances of classified by any definition it specializes. The enumerated values defined in an enumeration definition, however, would *add* to the set of enumerated values allowed by any enumeration definition it specialized, which is inconsistent with the semantics of specialization.

Table 6. Enumerations – Representative Notation




Element	Graphical Notation	Textual Notation
Enumeration Definition	<p>The graphical notation shows two stacked rectangles. The top rectangle is labeled «enumeration def» and contains the text 'EnumerationDef1'. The bottom rectangle is labeled 'compartment stack' and contains the text '...'. Both rectangles have a thin black border.</p>	<pre>enum def EnumerationDef1; enum def EnumerationDef1 { /* members */ }</pre>
Enums Compartment	<p>The graphical notation shows a single rectangle labeled 'enums' which contains 'enum1', 'enum2', and '...'. The rectangle has a thin black border.</p>	<pre>enum def EnumerationDef1 { enum1; enum2; } or enum def EnumerationDef1 { enum1; enum2; }</pre>
Enums Compartment	<p>The graphical notation shows a single rectangle labeled 'enums' which contains '= value1 [unit1]', '= value2 [unit2]', and '...'. The rectangle has a thin black border.</p>	<pre>enum def EnumerationDef1 { enum = value1 [unit1]; enum = value2 [unit2]; } or enum def EnumerationDef1 { = value1 [unit1]; = value2 [unit2]; }</pre>

7.8.2 Enumeration Definitions and Usages

An enumeration definition is declared as described in [7.6.2](#), using the kind keyword **enum**, with the additional restrictions described below. As a kind of attribute definition, an enumeration definition may generally subclassify other attribute definitions or KerML data types. However, an enumeration definition must not subclassify another enumeration definition. An enumeration usage is declared as described in [7.6.3](#), using the kind keyword **enum**.

Any owned members declared in the body of an enumeration definition must be enumeration usages, which are the *enumerated values* of the enumeration definition. An enumeration definition is always considered to be a variation and its enumerated values are its variants. The keywords **abstract** and **variation** may not be used with an enumeration definition. The declaration of an enumeration usage as an enumerated value of an enumeration

Table 6. Enumerations – Representative Notation

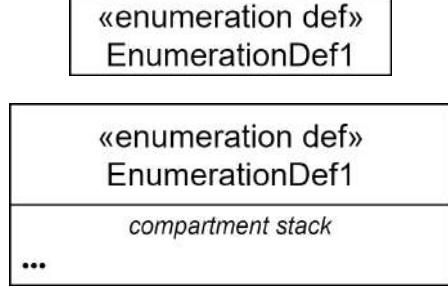Element	Graphical Notation	Textual Notation
Enumeration Definition		<pre>enum def EnumerationDef1; enum def EnumerationDef1 { /* members */ }</pre>
Enums Compartment		<pre>enum def EnumerationDef1 { enum enum1; enum enum2; } or enum def EnumerationDef1 { enum1; enum2; }</pre>
Enums Compartment		<pre>enum def EnumerationDef1 { enum = value1 [unit1]; enum = value2 [unit2]; } or enum def EnumerationDef1 { = value1 [unit1]; = value2 [unit2]; }</pre>

7.8.2 Enumeration Definitions and Usages

SYSML2 -189: Incorrect enumeration example

An enumeration definition is declared as described in [7.6.2](#), using the kind keyword `enum`, with the additional restrictions described below. As a kind of attribute definition, an enumeration definition may generally subclassify other attribute definitions or KerML data types. However, an enumeration definition must not subclassify another enumeration definition. An enumeration usage is declared as described in [7.6.3](#), using the kind keyword `enum`.

Any owned members declared in the body of an enumeration definition must be enumeration usages, which are the *enumerated values* of the enumeration definition. An enumeration definition is always considered to be a variation and its enumerated values are its variants. The keywords `abstract` and `variation` may not be used with an enumeration definition. The declaration of an enumeration usage as an enumerated value of an enumeration

definition may not include the keyword **variant** nor any of the other property keywords given in [7.6.3](#) (i.e, any direction keywords, **abstract**, **derived**, etc.).

Since the body of an enumeration definition may only declare enumeration usages, the declaration of an enumerated value may omit the **enum** keyword. An enumerated usage declared as an enumerated value is considered to be implicitly defined by its owning enumeration definition and, therefore, may not have any explicitly declared definition other than that enumeration definition (and need not have any explicitly declared definition at all).

```
enum def ConditionColor { red; green; yellow; }
attribute def ConditionLevel {
    attribute color : ConditionColor;
}
enum def RiskLevel :> ConditionLevel {
    enum low { color = ConditionColor::green; }
    enum medium { color = ConditionColor::yellow; }
    enum high { color = ConditionColor::red; }
}
```

There are no special restrictions on the declaration of an enumeration usage outside the body of an enumeration definition, other than as for an attribute usage in general (see [9.2.2](#)), except that such an enumeration usage must be explicitly defined by a single enumeration definition. As a kind of attribute usage, an enumeration usage is always referential, whether or not **ref** is included in its declaration, and all the nested usages of an enumeration usage must also be referential.

```
enum assessedRisk : RiskLevel {
    // The following feature is added for this usage.
    // It is legal, since all attribute usages are
    // referential.
    attribute assessment : String;
}
```

7.9 Occurrences

7.9.1 Occurrences Overview

Metamodel references:

- *Textual notation*, [8.2.2.9](#)
- *Graphical notation*, [8.2.3.9](#)
- *Abstract syntax*, [8.3.9](#)
- *Semantics*, [8.4.5](#)

Occurrences

An *occurrence definition* is a definition of a class of occurrences that have an extent in time and may have spatial extent. An *occurrence usage* is a usage of an occurrence definition.

The extent of an occurrence in time is known as its *lifetime*, which covers the period in time from the occurrence's creation to its destruction. An occurrence maintains its identity over its lifetime, while the values of its features may change over time. The lifetime of an occurrence begins when the identity of the occurrence is established, and the lifetime ends when the occurrence loses its identity. For example, the lifetime of a car could begin when it leaves the production-line, or when a vehicle identification number is assigned to the car. Similarly, the lifetime of a car could end when the car is disassembled or demolished.

definition may not include the keyword **variant** nor any of the other property keywords given in [7.6.3](#) (i.e, any direction keywords, **abstract**, **derived**, etc.).

Since the body of an enumeration definition may only declare enumeration usages, the declaration of an enumerated value may omit the **enum** keyword. An enumerated usage declared as an enumerated value is considered to be implicitly defined by its owning enumeration definition and, therefore, may not have any explicitly declared definition other than that enumeration definition (and need not have any explicitly declared definition at all).

```
enum def ConditionColor { red; green; yellow; }
attribute def ConditionLevel {
    attribute color : ConditionColor;
}
enum def RiskLevel :> ConditionLevel {
    enum low { :>> color = ConditionColor::green; }
    enum medium { :>> color = ConditionColor::yellow; }
    enum high { :>> color = ConditionColor::red; }
}
```

There are no special restrictions on the declaration of an enumeration usage outside the body of an enumeration definition, other than as for an attribute usage in general (see [9.2.2](#)), except that such an enumeration usage must be explicitly defined by a single enumeration definition. As a kind of attribute usage, an enumeration usage is always referential, whether or not **ref** is included in its declaration, and all the nested usages of an enumeration usage must also be referential.

```
enum assessedRisk : RiskLevel {
    // The following feature is added for this usage.
    // It is legal, since all attribute usages are
    // referential.
    attribute assessment : String;
}
```

7.9 Occurrences

7.9.1 Occurrences Overview

Metamodel references:

- *Textual notation, [8.2.2.9](#)*
- *Graphical notation, [8.2.3.9](#)*
- *Abstract syntax, [8.3.9](#)*
- *Semantics, [8.4.5](#)*

Occurrences

An *occurrence definition* is a definition of a class of occurrences that have an extent in time and may have spatial extent. An *occurrence usage* is a usage of an occurrence definition.

The extent of an occurrence in time is known as its *lifetime*, which covers the period in time from the occurrence's creation to its destruction. An occurrence maintains its identity over its lifetime, while the values of its features may change over time. The lifetime of an occurrence begins when the identity of the occurrence is established, and the lifetime ends when the occurrence loses its identity. For example, the lifetime of a car could begin when it leaves the production-line, or when a vehicle identification number is assigned to the car. Similarly, the lifetime of a car could end when the car is disassembled or demolished.

The performance of a behavior is also an occurrence that takes place over time. The lifetime of a behavior performance begins at the start of the performance and ends when the performance is completed. Structural and behavioral occurrences are often related. For example, a machine on an automobile assembly line, during its

The performance of a behavior is also an occurrence that takes place over time. The lifetime of a behavior performance begins at the start of the performance and ends when the performance is completed. Structural and behavioral occurrences are often related. For example, a machine on an automobile assembly line, during its lifetime, will repeatedly perform a behavioral task, each performance of which has its own respective lifetime, which then affects the construction of some car being assembled on the line.

If an occurrence definition or usage has nested composite features, then those features must also be usages of occurrence definitions (including the various specialized kinds of occurrences, such as parts, items and actions). If an occurrence has values for any composite features at the end of its lifetime, then the lifetime of those composite values must also end. However, if a composite suboccurrence is removed from its containing occurrence before the end of the lifetime of the containing occurrence, then the former suboccurrence can continue to exist. For example, if a wheel is attached to a car when the car is destroyed, then the wheel is also destroyed. However, if the wheel is removed before the car is destroyed, then the wheel can continue to exist even after the car is destroyed. (See also [7.6](#) on referential and composite usages.)

Time Slices and Snapshots

The lifetime of an occurrence can be partitioned into *time slices* which correspond to some duration of time. These time slices represent periods or phases of a lifetime, such as the deployment or operational phase. Time slices can be further partitioned into other time slices. For example, the lifetime of a car might be divided into time slices corresponding to its assembly, being in inventory before being sold, and then sequential periods of ownership with different owners.

A time slice with zero duration is a *snapshot*. Start, end and intermediate snapshots can be defined for any time slice to represent particular instants of time in an occurrence's lifetime. For example, the start snapshot of each ownership time slice of a car corresponds to the sale of the car to a new owner, which happens at the same time as the end snapshot of the previous ownership (or inventory) time slice.

Individuals

Any kind of occurrence definition can be restricted to define a class that represents an *individual*, that is, a single real or perceived object with a unique identity. For example, consider the part definition `Car` modeling the class of all cars (parts are kinds of items which are kinds of occurrences, see [7.11](#)). An individual car called `Car1` with a unique vehicle identification number can then be modeled as an individual part definition that is a subclassification of the general part definition `Car`. As such, `Car1` inherits all the features of `Car` (such as its parts `engine`, `transmission`, `chassis`, `wheels`, etc.), but has individual values for each of those features (individual `engine`, individual `transmission`, individual `chassis`, four individual `wheels`, etc.), each of which is itself a uniquely identifiable subclassification of a more general part definition (`Engine`, `Transmission`, `Chassis`, `Wheel`, etc.).

An occurrence usage can also be restricted to be the usage of a single individual. In this case, exactly one of the definitions of the occurrence usage must be an occurrence definition for that individual. Such an individual usage can be used to model a role that an individual plays for some period of time. For example, the individual part definition `Car1` can be used in different contexts, such as the usage of `Car1` when it is in for service and the usage of `Car1` when it is used for normal operations. Let `car1InService` be the usage of `Car1` when it is in for service to have its tires rotated. For this usage, `car1InService` has four `wheels` that play different roles, including front-left, front-right, rear-left, and rear-right. The four wheels of `Car1` are individual `Wheel` usages defined by the individual definitions `Wheel1`, `Wheel2`, `Wheel3`, and `Wheel4`. Each of these individual definitions is a subclassification of `Wheel`. When `car1InService` enters the shop, the front-left `wheel` individual usage is initially defined by the individual definition `Wheel1`, but after the tires are rotated, the front-left `wheel` is defined by the individual definition `Wheel2`.

The lifetime of an individual and any of its time slices can be actual or projected. For example, the individual car `Car1` may be purchased as a used car. `Car1` has had an actual lifetime up to that time. A mechanic may perform diagnostics and obtain some measurements, and may estimate the remaining life of the car or its parts based

lifetime, will repeatedly perform a behavioral task, each performance of which has its own respective lifetime, which then affects the construction of some car being assembled on the line.

If an occurrence definition or usage has nested composite features, then those features must also be usages of occurrence definitions (including the various specialized kinds of occurrences, such as parts, items and actions). If an occurrence has values for any composite features at the end of its lifetime, then the lifetime of those composite values must also end. However, if a composite suboccurrence is removed from its containing occurrence before the end of the lifetime of the containing occurrence, then the former suboccurrence can continue to exist. For example, if a wheel is attached to a car when the car is destroyed, then the wheel is also destroyed. However, if the wheel is removed before the car is destroyed, then the wheel can continue to exist even after the car is destroyed. (See also [7.6](#) on referential and composite usages.)

Time Slices and Snapshots

The lifetime of an occurrence can be partitioned into *time slices* which correspond to some duration of time. These time slices represent periods or phases of a lifetime, such as the deployment or operational phase. Time slices can be further partitioned into other time slices. For example, the lifetime of a car might be divided into time slices corresponding to its assembly, being in inventory before being sold, and then sequential periods of ownership with different owners.

A time slice with zero duration is a *snapshot*. Start, end and intermediate snapshots can be defined for any time slice to represent particular instants of time in an occurrence's lifetime. For example, the start snapshot of each ownership time slice of a car corresponds to the sale of the car to a new owner, which happens at the same time as the end snapshot of the previous ownership (or inventory) time slice.

Individuals

Any kind of occurrence definition can be restricted to define a class that represents an *individual*, that is, a single real or perceived object with a unique identity. For example, consider the part definition `Car` modeling the class of all cars (parts are kinds of items which are kinds of occurrences, see [7.11](#)). An individual car called `Car1` with a unique vehicle identification number can then be modeled as an individual part definition that is a subclassification of the general part definition `Car`. As such, `Car1` inherits all the features of `Car` (such as its parts `engine`, `transmission`, `chassis`, `wheels`, etc.), but has individual values for each of those features (individual `engine`, individual `transmission`, individual `chassis`, four individual `wheels`, etc.), each of which is itself a uniquely identifiable subclassification of a more general part definition (`Engine`, `Transmission`, `Chassis`, `Wheel`, etc.).

An occurrence usage can also be restricted to be the usage of a single individual. In this case, exactly one of the definitions of the occurrence usage must be an occurrence definition for that individual. Such an individual usage can be used to model a role that an individual plays for some period of time. For example, the individual part definition `Car1` can be used in different contexts, such as the usage of `Car1` when it is in for service and the usage of `Car1` when it is used for normal operations. Let `car1InService` be the usage of `Car1` when it is in for service to have its tires rotated. For this usage, `car1InService` has four `wheels` that play different roles, including front-left, front-right, rear-left, and rear-right. The four wheels of `Car1` are individual `Wheel` usages defined by the individual definitions `Wheel1`, `Wheel2`, `Wheel3`, and `Wheel4`. Each of these individual definitions is a subclassification of `Wheel`. When `car1InService` enters the shop, the front-left `wheel` individual usage is initially defined by the individual definition `Wheel1`, but after the tires are rotated, the front-left `wheel` is defined by the individual definition `Wheel2`.

The lifetime of an individual and any of its time slices can be actual or projected. For example, the individual car `Car1` may be purchased as a used car. `Car1` has had an actual lifetime up to that time. A mechanic may perform diagnostics and obtain some measurements, and may estimate the remaining life of the car or its parts based on the measurements. For example, the mechanic may estimate the remaining lifetime of the tires, based on the tread measurements and the estimated tire wear rate.

At a given point in time, the condition of an individual (sometimes called its "state", which should not be confused with a behavioral state usage, as described in [7.17](#)) can be specified by the values of its attributes. As an example,

on the measurements. For example, the mechanic may estimate the remaining lifetime of the tires, based on the tread measurements and the estimated tire wear rate.

At a given point in time, the condition of an individual (sometimes called its "state", which should not be confused with a behavioral state usage, as described in [7.17](#)) can be specified by the values of its attributes. As an example, the condition of `car1inOperation` at different points in time can be specified in terms of its `acceleration`, `velocity`, and `position`. In addition, its finite (i.e., discrete) state (in the sense that can be modeled with state definitions and usages, see [7.17](#)) can be specified at different points in time as `off` or `on`, and any nested state such as `forward` or `reverse`. The condition of the car can continue to change over its lifetime, and can be specified as a function of discrete and/or continuous time.

Events

An *event* is a reference from one occurrence to another occurrence that represents some relevant happening during the lifetime of the first occurrence. Such an event model makes no commitment as to how the event actually happens. Different specializations of the containing occurrence may realize the modeled event in different ways.

In particular, occurrences may collaborate by transferring information between each other via *messages* (see [7.13](#)). The sending of such a message is an event in the lifetime of the sending occurrence, while the receipt of such a message is an event in the lifetime of the receiving occurrence. These events can possibly be realized as the performance of a send action and corresponding accept action, respectively, with the message being the resulting transfer between them (see [7.16](#)). However, it could also be realized as the start and end of an explicitly modeled flow connection (see [7.13](#) on flow connections and messages).

Table 7. Occurrences – Representative Notation

Element	Graphical Notation	Textual Notation
Occurrence Definition	<div style="border: 1px solid black; padding: 10px;"> <p>«occurrence def»</p> <p>OccurrenceDef1</p> </div> <div style="border: 1px solid black; padding: 10px;"> <p>«occurrence def»</p> <p>OccurrenceDef1</p> <p>compartment stack</p> <p>...</p> </div>	<pre>occurrence def OccurrenceDef1; occurrence def OccurrenceDef1 { /* members */ }</pre>
Occurrence	<div style="border: 1px solid black; padding: 10px;"> <p>«occurrence»</p> <p>occurrence1 : OccurrenceDef1</p> </div> <div style="border: 1px solid black; padding: 10px;"> <p>«occurrence»</p> <p>occurrence1 : OccurrenceDef1</p> <p>compartment stack</p> <p>...</p> </div>	<pre>occurrence occurrence1 : OccurrenceDef1; occurrence occurrence1 : OccurrenceDef1 { /* members */ }</pre>




the condition of `car1inOperation` at different points in time can be specified in terms of its `acceleration`, `velocity`, and `position`. In addition, its finite (i.e., discrete) state (in the sense that can be modeled with state definitions and usages, see [7.17](#)) can be specified at different points in time as `off` or `on`, and any nested state such as `forward` or `reverse`. The condition of the car can continue to change over its lifetime, and can be specified as a function of discrete and/or continuous time.






Events

An *event* is a reference from one occurrence to another occurrence that represents some relevant happening during the lifetime of the first occurrence. Such an event model makes no commitment as to how the event actually happens. Different specializations of the containing occurrence may realize the modeled event in different ways.

In particular, occurrences may collaborate by transferring information between each other via *messages* (see [7.13](#)). The sending of such a message is an event in the lifetime of the sending occurrence, while the receipt of such a message is an event in the lifetime of the receiving occurrence. These events can possibly be realized as the performance of a send action and corresponding accept action, respectively, with the message being the resulting transfer between them (see [7.16](#)). However, it could also be realized as the start and end of an explicitly modeled flow connection (see [7.13](#) on flow connections and messages).

Table 7. Occurrences – Representative Notation

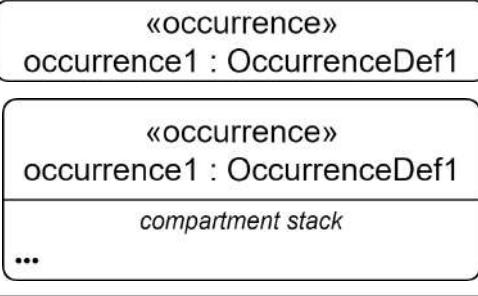Element	Graphical Notation	Textual Notation
Occurrence Definition		<pre>occurrence def OccurrenceDef1; occurrence def OccurrenceDef1 { /* members */ }</pre>
Occurrence		<pre>occurrence occurrence1 : OccurrenceDef1; occurrence occurrence1 : OccurrenceDef1 { /* members */ }</pre>
Individual Occurrence Definition		<pre>individual def 'OccurrenceDef1-1' :> OccurrenceDef1;</pre>

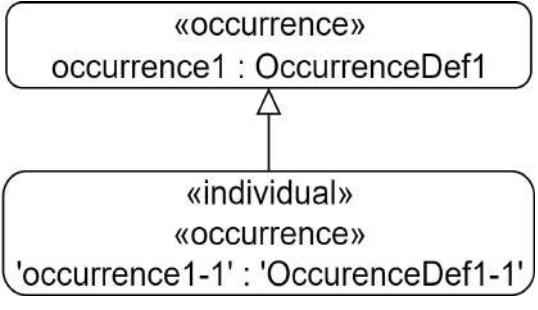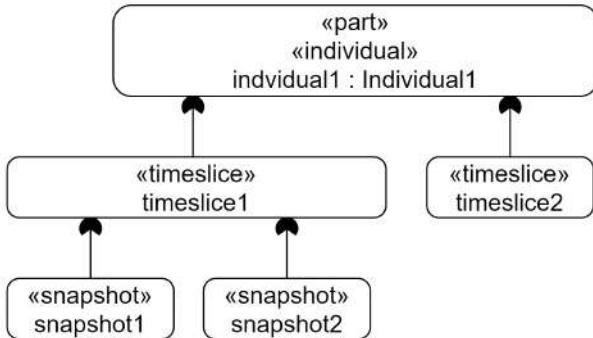Element	Graphical Notation	Textual Notation
Individual Occurrence Definition	 <pre> classDiagram class OccurrenceDef1 { <<occurrence def>> } class OccurrenceDef1-1 { <<individual>> <<occurrence def>> } OccurrenceDef1 < -- OccurrenceDef1-1 </pre>	<pre> individual def 'OccurrenceDef1-1' :> OccurrenceDef1; </pre>
Individual Occurrence	 <pre> classDiagram class occurrence1 { <<occurrence>> } class occurrence1-1 { <<individual>> <<occurrence>> } occurrence1 < -- occurrence1-1 </pre>	<pre> individual occurrence1 : OccurrenceDef1; individual def 'OccurrenceDef1-1' :> OccurrenceDef1; individual 'occurrence1-1' : 'OccurrenceDef1-1' :> occurrence1; </pre>
Timeslice	 <pre> classDiagram class timeslice1 { <<timeslice>> } class timesliceDef1 { <<occurrence def>> } timeslice1 < -- timesliceDef1 </pre>	<pre> timeslice timeslice1 : OccurrenceDef1; </pre>
Snapshot	 <pre> classDiagram class snapshot1 { <<snapshot>> } class timesliceDef1 { <<occurrence def>> } snapshot1 < -- timesliceDef1 </pre>	<pre> snapshot snapshot1 : OccurrenceDef1; </pre>
Portion Membership	 <pre> classDiagram class individual1 { <<individual>> } class timeslice1 { <<timeslice>> } class timeslice2 { <<timeslice>> } class snapshot1 { <<snapshot>> } class snapshot2 { <<snapshot>> } individual1 < -- timeslice1 individual1 < -- timeslice2 snapshot1 --> timeslice1 snapshot2 --> timeslice2 </pre>	<pre> individual part individual1 : Individual1 { timeslice timeslice1 { snapshot snapshot1; snapshot snapshot2; } timeslice timeslice2; } </pre>

Element	Graphical Notation	Textual Notation
Individual Occurrence	<pre> classDiagram class occurrence1 { <<occurrence>> occurrence1 : OccurrenceDef1 } class occurrence1 { <<individual>> <<occurrence>> 'occurrence1-1' : 'OccurrenceDef1-1' } occurrence1 --> occurrence1 </pre>	<pre> individual occurrence1 : OccurrenceDef1; individual def 'OccurrenceDef1-1' :> OccurrenceDef1; individual 'occurrence1-1' : 'OccurrenceDef1-1' :> occurrence1; </pre>
Timeslice	<pre> classDiagram class timeslice1 { <<timeslice>> timeslice1 : OccurrenceDef1 } </pre>	<pre> timeslice timeslice1 : OccurrenceDef1; </pre>
Snapshot	<pre> classDiagram class snapshot1 { <<snapshot>> snapshot1 : OccurrenceDef1 } </pre>	<pre> snapshot snapshot1 : OccurrenceDef1; </pre>
Portion Membership	<pre> classDiagram class individual1 { <<part>> <<individual>> individual1 : Individual1 } class timeslice1 { <<timeslice>> timeslice1 } class timeslice2 { <<timeslice>> timeslice2 } class snapshot1 { <<snapshot>> snapshot1 } class snapshot2 { <<snapshot>> snapshot2 } individual1 --> timeslice1 individual1 --> timeslice2 timeslice1 --> snapshot1 timeslice2 --> snapshot2 </pre>	<pre> individual part individual1 : Individual1 { timeslice timeslice1 { snapshot snapshot1; snapshot snapshot2; } timeslice timeslice2; } </pre>
Occurrences Compartment	<pre> occurrences ^occur2 : OccurDef2 occur1 : OccurDef1 [1..*] ordered nonunique occur3R : OccurDef3R redefines occur3 occur4R : OccurDef4R :>> occur4 :>> occur5 occur6S : OccurDef6S [m] subsets occur6 occur7S : OccurDef7S [m] :> occur7 occur8R = occur8 ref occur9 : OccurDef9 occur10 /occur11 readonly occur12 abstract occur13 ... </pre>	<pre> { occurrence occur1 : OccurDef [1..*] ordered nonunique; /* ... */ } </pre>

Element	Graphical Notation	Textual Notation
Occurrences Compartment	<pre> <i>occurrences</i> ^occur2 : OccurDef2 occur1 : OccurDef1 [1..*] ordered nonunique occur3R : OccurDef3R redefines occur3 occur4R : OccurDef4R :>> occur4 :>> occur5 occur6S : OccurDef6S [m] subsets occur6 occur7S : OccurDef7S [m] :> occur7 occur8R = occur8 ref occur9 : OccurDef9 occur10 /occur11 readonly occur12 abstract occur13 ... </pre>	<pre> { occurrence occur1 : OccurDef [1..*] ordered nonunique; /* ... */ } </pre>
Individuals Compartment (parts)	<pre> <i>individual parts</i> ^part2 : PartDef2_1 part1 : PartDef1_1 [1..*] ordered nonunique part3R : PartDef3R_1 redefines part3 part4R : PartDef4R_1 :>> part4 :>> part5 part6S : PartDef6S_1 [m] subsets part6 part7S : PartDef7S_1 [m] :> part7 part8R_1 = part8 ref part9 : PartDef9_1 part10 ... </pre>	<pre> { individual part part1 : PartDef1_1 [1..*] ordered nonunique; /* ... */ } </pre>
Timeslices Compartment	<div style="border: 1px solid black; padding: 5px; width: fit-content;"> <i>timeslices</i> phase1 phase2 ... </div>	<pre> part part1 { timeslice phase1; timeslice phase2; /* ... */ } </pre>
Snapshots Compartment	<div style="border: 1px solid black; padding: 5px; width: fit-content;"> <i>snapshots</i> snapshot1; snapshot2; snapshot3; ... </div>	<pre> part part1 { snapshot snapshot1; snapshot snapshot2; snapshot snapshot3; /* ... */ } </pre>

Element	Graphical Notation	Textual Notation
Individuals Compartment (parts)	<pre style="border: 1px solid black; padding: 10px;"> <i>individual parts</i> ^part2 : PartDef2_1 part1 : PartDef1_1 [1..*] ordered nonunique part3R : PartDef3R_1 redefines part3 part4R : PartDef4R_1 >> part4 :>> part5 part6S : PartDef6S_1 [m] subsets part6 part7S : PartDef7S_1 [m] >> part7 part8R_1 = part8 ref part9 : PartDef9_1 part10 ... </pre>	<pre>{ individual part part1 : PartDef1_1 [1..*] ordered nonunique; /* ... */ }</pre>
Timeslices Compartment	<pre style="border: 1px solid black; padding: 10px;"> <i>timeslices</i> phase1 phase2 ... </pre>	<pre> part part1 { timeslice phase1; timeslice phase2; /* ... */ }</pre>
Snapshots Compartment	<pre style="border: 1px solid black; padding: 10px;"> <i>snapshots</i> snapshot1; snapshot2; snapshot3; ... </pre>	<pre> part part1 { snapshot snapshot1; snapshot snapshot2; snapshot snapshot3; /* ... */ }</pre>

7.9.2 Occurrence Definitions and Usages

An occurrence definition or usage (that is not of a more specialized kind) can be declared as described in [7.6.2](#) and [7.6.3](#), using the kind keyword **occurrence**. An occurrence usage may only be defined by occurrence definitions (of any kind) or KerML classes (see [KerML, 7.4.3]).

```

occurrence def Flight {
  ref part aircraft : Aircraft;
}

```

The base definition for occurrence definitions is the class `Occurrence` from the `Occurrences` model in the Kernel Semantic Library (see [KerML, 9.2.4]). The base usage for occurrence usages is the feature `occurrences` from the `Occurrences` model.

7.9.3 Time Slices and Snapshots

An occurrence usage (of any kind) can be declared as a *time slice* or a *snapshot* using the keyword **timeslice** or **snapshot**, respectively, placed immediately before the kind keyword of the declaration (after any of the other usage property keywords described in [7.6.3](#)). Alternatively, **timeslice** or **snapshot** may be used in place of the

7.9.2 Occurrence Definitions and Usages

An occurrence definition or usage (that is not of a more specialized kind) can be declared as described in [7.6.2](#) and [7.6.3](#), using the kind keyword **occurrence**. An occurrence usage may only be defined by occurrence definitions (of any kind) or KerML classes (see [KerML, 7.4.3]).

```
occurrence def Flight {  
    ref part aircraft : Aircraft;  
}
```

The base definition for occurrence definitions is the class `Occurrence` from the `Occurrences` model in the Kernel Semantic Library (see [KerML, 9.2.4]). The base usage for occurrence usages is the feature `occurrences` from the `Occurrences` model.

7.9.3 Time Slices and Snapshots

An occurrence usage (of any kind) can be declared as a *time slice* or a *snapshot* using the keyword **timeslice** or **snapshot**, respectively, placed immediately before the kind keyword of the declaration (after any of the other usage property keywords described in [7.6.3](#)). Alternatively, **timeslice** or **snapshot** may be used in place of the kind keyword, in which case the declaration is equivalent to **timeslice occurrence** or **snapshot occurrence** (that is, an occurrence usage not of a more specialized kind, but declared as a time slice or snapshot, respectively).

```
occurrence def Flight {  
    ref part aircraft : Aircraft;  
}  
// The following are time slices of Flight.  
timeslice preflight : Flight;  
timeslice inflight : Flight;  
timeslice postflight : Flight;  
  
part aircraft : Aircraft;  
// The following are snapshots of the part aircraft.  
snapshot part aircraftTakeOff :> aircraft;  
snapshot part aircraftLanding :> aircraft;
```

A time slice or snapshot is normally considered to represent a portion of the lifetime of instances of its defining occurrence definition(s). However, if such an occurrence usage has no explicitly declared definition, but is declared in the body of an occurrence definition, then it is considered to implicitly represent a portion of instances of the containing occurrence definition. If it is declared in the body of another occurrence usage, then it is considered to implicitly represent a portion of the instances of the definition(s) of that containing occurrence usage.

```
occurrence def Flight {  
    ref part aircraft : Aircraft;  
    // The following are time slices of Flight.  
    timeslice preflight;  
    timeslice inflight;  
    timeslice postflight;  
}  
  
part aircraft : Aircraft {  
    // The following are snapshots of the part aircraft.  
    snapshot part aircraftTakeOff;  
    snapshot part aircraftLanding;  
}
```

kind keyword, in which case the declaration is equivalent to **timeslice occurrence** or **snapshot occurrence** (that is, an occurrence usage not of a more specialized kind, but declared as a time slice or snapshot, respectively).

```
occurrence def Flight {
    ref part aircraft : Aircraft;
}
// The following are time slices of Flight.
timeslice preflight : Flight;
timeslice inflight : Flight;
timeslice postflight : Flight;

part aircraft : Aircraft;
// The following are snapshots of the part aircraft.
snapshot part aircraftTakeOff :> aircraft;
snapshot part aircraftLanding :> aircraft;
```

A time slice or snapshot is normally considered to represent a portion of the lifetime of instances of its defining occurrence definition(s). However, if such an occurrence usage has no explicitly declared definition, but is declared in the body of an occurrence definition, then it is considered to implicitly represent a portion of instances of the containing occurrence definition. If it is declared in the body of another occurrence usage, then it is considered to implicitly represent a portion of the instances of the definition(s) of that containing occurrence usage.

```
occurrence def Flight {
    ref part aircraft : Aircraft;
    // The following are time slices of Flight.
    timeslice preflight;
    timeslice inflight;
    timeslice postflight;
}

part aircraft : Aircraft {
    // The following are snapshots of the part aircraft.
    snapshot part aircraftTakeOff;
    snapshot part aircraftLanding;
}
```

7.9.4 Individual Definitions and Usages

An occurrence definition (of any kind) can be declared as an *individual definition* using the keyword **individual**, placed immediately before the kind keyword of the declaration. Alternatively, **individual** may be used in place of the kind keyword, in which case the declaration is equivalent to **individual occurrence** (that is, an occurrence usage not of a more specialized kind, but representing an individual).

```
individual def Flight_248 :> Flight;
individual part def TestPlane_1 :> Aircraft;
```

An occurrence usage (of any kind) is considered to be an *individual usage* if it has a definition that is an individual definition. An occurrence usage must not have more than one definition that is an individual definition. An occurrence usage may also be explicitly declared to be an individual usage using the keyword **individual**, placed after any of the other usage property keywords described in [7.6.3](#), but before a **timeslice** or **snapshot** keyword (if any). In this case, the occurrence usage must have exactly one definition that is an individual definition. If the declaration of an occurrence usage includes the the keyword **individual** (and, possibly, **timeslice** or **snapshot**), but no kind keyword, then this is equivalent to having included the **occurrence** keyword (that is, an occurrence isage not of a more specialized kind, but representing an individual, and, possibly, a time slice or snapshot).

```
individual flightRecord : Flight_248 {
    individual part redefines aircraft : TestPlane_1;
    individual timeslice redefines preflight;
```

7.9.4 Individual Definitions and Usages

An occurrence definition (of any kind) can be declared as an *individual definition* using the keyword **individual**, placed immediately before the kind keyword of the declaration. Alternatively, **individual** may be used in place of the kind keyword, in which case the declaration is equivalent to **individual occurrence** (that is, an occurrence usage not of a more specialized kind, but representing an individual).

```
individual def Flight_248 :> Flight;
individual part def TestPlane_1 :> Aircraft;
```

An occurrence usage (of any kind) is considered to be an *individual usage* if it has a definition that is an individual definition. An occurrence usage must not have more than one definition that is an individual definition. An occurrence usage may also be explicitly declared to be an individual usage using the keyword **individual**, placed after any of the other usage property keywords described in [7.6.3](#), but before a **timeslice** or **snapshot** keyword (if any). In this case, the occurrence usage must have exactly one definition that is an individual definition. If the declaration of an occurrence usage includes the keyword **individual** (and, possibly, **timeslice** or **snapshot**), but no kind keyword, then this is equivalent to having included the **occurrence** keyword (that is, an occurrence usage not of a more specialized kind, but representing an individual, and, possibly, a time slice or snapshot).

```
individual flightRecord : Flight_248 {
    individual part redefines aircraft : TestPlane_1;
    individual timeslice redefines preflight;
    individual timeslice redefines inflight;
    individual timeslice redefines postflight;
}
```

7.9.5 Event Occurrence Usages

An *event occurrence usage* is declared like an occurrence usage, as described in [7.9.2](#), [7.9.3](#), and [7.9.4](#), but using the kind keyword **event occurrence** instead of just **occurrence**. It is related to another occurrence usage, representing the occurring event, by a *reference subsetting* relationship, which is a special kind of subsetting relationship specified using the keyword **references** or the symbol `::>`. Or, if the event occurrence usage has no such reference subsetting, then the referenced event occurrence is the event occurrence usage itself.

```
part client {
    event occurrence request[1] references subscriptionMessage.source;
    event occurrence delivery[*] ::> publicationMessage.target;
}
```

An event occurrence usage may also be declared using just the keyword **event** instead of **event occurrence**. In this case, the declaration does not include either a name or a short name. Instead, the referenced event occurrence of the event occurrence usage is identified by giving a qualified name or feature chain immediately after the **event** keyword.

```
part client {
    event subscriptionMessage.source[1];
    event publicationMessage.target[*];
}
```

The **ref** keyword may be used in the declaration of an event occurrence usage, but an event occurrence usage is always referential, whether or not **ref** is included in its declaration.

7.10 Items

```

individual timeslice redefines inflight;
individual timeslice redefines postflight;
}

```

7.9.5 Event Occurrence Usages

An *event occurrence usage* is declared like an occurrence usage, as described in [7.9.2](#), [7.9.3](#), and [7.9.4](#), but using the kind keyword **event occurrence** instead of just **occurrence**. It is related to another occurrence usage, representing the occurring event, by a *reference subsetting* relationship, which is a special kind of subsetting relationship specified using the keyword **references** or the symbol `::>`. Or, if the event occurrence usage has no such reference subsetting, then the referenced event occurrence is the event occurrence usage itself.

```

part client {
    event occurrence request[1] references subscriptionMessage.source;
    event occurrence delivery[*] ::> publicationMessage.target;
}

```

An event occurrence usage may also be declared using just the keyword **event** instead of **event occurrence**. In this case, the declaration does not include either a name or a short name. Instead, the referenced event occurrence of the event occurrence usage is identified by giving a qualified name or feature chain immediately after the **event** keyword.

```

part client {
    event subscriptionMessage.source[1];
    event publicationMessage.target[*];
}

```

The **ref** keyword may be used in the declaration of an event occurrence usage, but an event occurrence usage is always referential, whether or not **ref** is included in its declaration.

7.10 Items

7.10.1 Items Overview

Metamodel references:

- *Textual notation*, [8.2.2.10](#)
- *Graphical notation*, [8.2.3.10](#)
- *Abstract syntax*, [8.3.10](#)
- *Semantics*, [8.4.6](#)

An *item definition* is a kind of occurrence definition (see [7.9](#)) that defines a class of identifiable objects that may be acted on over time, but which do not necessarily perform actions themselves. An *item usage* is a usage of one or more item definitions.

Item usages can be used to represent inputs and outputs to actions such as water, fuel, electrical signals and data. Item usages, such as fuel, may flow through a system and be stored by a system. An item may have attributes (see [7.7](#)), states (see [7.17](#)), and nested item usages.

An item that performs actions is normally modeled as a part (see [7.11](#)). All parts are items, but not all items are necessarily parts. An item may also be considered to be a part during some time slices of its lifetime but not others. For instance, an engine being assembled can be modeled as an item moving along an assembly line. However, once the engine assembly is completed, the engine can be considered to be a part that may be installed into a car, where it is expected to perform the action providing power to propel the car. But later it may be removed from the car and again be considered only an inactive item in a junkyard.

7.10.1 Items Overview

Metamodel references:

- *Textual notation*, [8.2.2.10](#)
- *Graphical notation*, [8.2.3.10](#)
- *Abstract syntax*, [8.3.10](#)
- *Semantics*, [8.4.6](#)

An *item definition* is a kind of occurrence definition (see [7.9](#)) that defines a class of identifiable objects that may be acted on over time, but which do not necessarily perform actions themselves. An *item usage* is a usage of one or more item definitions.

Item usages can be used to represent inputs and outputs to actions such as water, fuel, electrical signals and data. Item usages, such as fuel, may flow through a system and be stored by a system. An item may have attributes (see [7.7](#)), states (see [7.17](#)), and nested item usages.

An item that performs actions is normally modeled as a part (see [7.11](#)). All parts are items, but not all items are necessarily parts. An item may also be considered to be a part during some time slices of its lifetime but not others. For instance, an engine being assembled can be modeled as an item moving along an assembly line. However, once the engine assembly is completed, the engine can be considered to be a part that may be installed into a car, where it is expected to perform the action providing power to propel the car. But later it may be removed from the car and again be considered only an inactive item in a junkyard.

Items may also have an extent in space as well as time. The *shape* of an item is its boundary in three-dimensional space. Items without shapes are *closed* enabling them to be boundaries of other items (for example, a two-dimensional sphere has no boundary, but it is the shape of a three-dimensional ball). The Geometry Domain Library (see [9.7](#)) includes a model of basic kinds of geometric shapes that can be composed to construct compound spatial items.

An item can also identify other items as *enveloping* shapes, which are closed items that are the boundary of a hypothetical item occupying the same or larger space as the enveloped item. Some of these can be *bounding* shapes, which overlap the bounded item on all sides. The spatial boundaries of items can break into separate closed items, such as the inside and outside of an egg shell. These inner boundaries can be the boundary of a hypothetical item, the interior of which is a *void* of the item. Items with no voids are *solid*.

Table 8. Items – Representative Notation

Element	Graphical Notation	Textual Notation
Item Definition	<div style="border: 1px solid black; padding: 10px;"><p>«item def» ItemDef1</p><p>«item def» ItemDef1</p><div style="border: 1px solid black; padding: 5px; margin-top: 5px;"><p>compartment stack</p><p>...</p></div></div>	<pre>item def ItemDef1;</pre> <pre>item def ItemDef1 { /* members */ }</pre>



Items may also have an extent in space as well as time. The *shape* of an item is its boundary in three-dimensional space. Items without shapes are *closed* enabling them to be boundaries of other items (for example, a two-dimensional sphere has no boundary, but it is the shape of a three-dimensional ball). The Geometry Domain Library (see [9.7](#)) includes a model of basic kinds of geometric shapes that can be composed to construct compound spatial items.

An item can also identify other items as *enveloping* shapes, which are closed items that are the boundary of a hypothetical item occupying the same or larger space as the enveloped item. Some of these can be *bounding* shapes, which overlap the bounded item on all sides. The spatial boundaries of items can break into separate closed items, such as the inside and outside of an egg shell. These inner boundaries can be the boundary of a hypothetical item, the interior of which is a *void* of the item. Items with no voids are *solid*.

Table 8. Items – Representative Notation

Element	Graphical Notation	Textual Notation
Item Definition	<pre> «item def» ItemDef1 ... </pre>	<pre> item def ItemDef1; item def ItemDef1 { /* members */ } </pre>
Item	<pre> «item» item1 : ItemDef1 ... </pre>	<pre> item item1 : ItemDef1; item item1 : ItemDef1 { /* members */ } </pre>
Items Compartment	<pre> items ^item2 : ItemDef2 item1 : ItemDef1 [1..*] ordered nonunique item3R : ItemDef3R redefines item3 item4R : ItemDef4R >> item4 >> item5 item6S : ItemDef6S [m] subsets item6 item7S : ItemDef7S [m] > item7 item8R = item8 ref item9 : itemDef9 item10 ... </pre>	<pre> { item item1 : ItemDef1 [1..*] ordered nonunique; /* ... */ } </pre>

7.10.2 Item Definitions and Usages

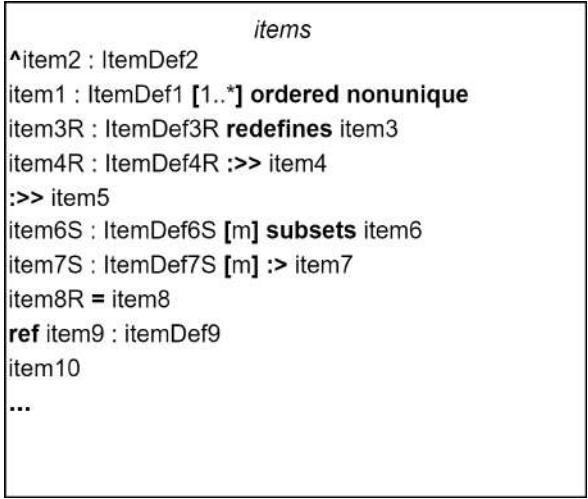Element	Graphical Notation	Textual Notation
Item	 <pre> classDiagram class item1 { <<item>> item1 : ItemDef1 } item1 "1..>" item1 item1 "1..>" compartment stack compartment stack "1..>" ... </pre>	<pre> item item1 : ItemDef1; item item1 : ItemDef1 { /* members */ } </pre>
Items Compartment	 <pre> classDiagram class items { ^item2 : ItemDef2 item1 : ItemDef1 [1..*] ordered nonunique item3R : ItemDef3R redefines item3 item4R : ItemDef4R >> item4 >> item5 item6S : ItemDef6S [m] subsets item6 item7S : ItemDef7S [m] > item7 item8R = item8 ref item9 : itemDef9 item10 ... } </pre>	<pre> { item item1 : ItemDef1 [1..*] ordered nonunique; /* ... */ } </pre>

7.10.2 Item Definitions and Usages

An item definition or usage (that is not of a more specialized kind) is declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the kind keyword `item`. An item usage must only be defined by item definitions (of any kind) or KerML structures (see [KerML, 7.4.4]). The default multiplicity of an item usage is `[1..1]`, under the conditions described in [7.6.3](#).

```

item def Fuel {
    attribute pressure : PressureValue;
    ref item impurities[0..*] : Material;
}
  
```

The base item definition and usage are `Item` and `items` from the `Items` library model (see [9.2.3](#)). (For other semantic constraints on item usages, see [8.4.6](#)).

7.11 Parts

7.11.1 Parts Overview

Metamodel references:

- *Textual notation, [8.2.2.11](#)*
- *Graphical notation, [8.2.3.11](#)*
- *Abstract syntax, [8.3.11](#)*
- *Semantics, [8.4.7](#)*

An item definition or usage (that is not of a more specialized kind) is declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the keyword **item**. An item usage must only be defined by item definitions (of any kind) or KerML structures (see [KerML, 7.4.4]). The default multiplicity of an item usage is `[1..1]`, under the conditions described in [7.6.3](#).

```
item def Fuel {
    attribute pressure : PressureValue;
    ref item impurities[0..*] : Material;
}
```

The base item definition and usage are `Item` and `Items` from the `Items` library model (see [9.2.3](#)). (For other semantic constraints on item usages, see [8.4.6](#)).

7.11 Parts

7.11.1 Parts Overview

Metamodel references:


- *Textual notation*, [8.2.2.11](#)
- *Graphical notation*, [8.2.3.11](#)
- *Abstract syntax*, [8.3.11](#)
- *Semantics*, [8.4.7](#)

A *part definition* represents a modular unit of structure such as a system, system component, or external entity that may directly or indirectly interact with the system. A part definition is a kind of item definition (see [7.10](#)) and, as such, defines a class of part objects that are occurrences with temporal (and possibly spatial) extent. A part usage is a kind of item usage that is a usage of one or more part definitions, but may also be a usage of item definitions that are not part definitions. This allows a part to be treated like an item in some cases (e.g., when an engine under assembly flows through an assembly line) and as a part in other cases (e.g., when an assembled engine is installed in a vehicle).

A system is modeled as a composite part, and its part usages may themselves have further composite structure. The parts of a system may have attributes (see [7.7](#)) that represent different performance, physical and other quality characteristics. The parts may have ports (see [7.12](#)) that define the points at which those parts may be interconnected (see [7.13](#) and [7.14](#)). Parts may also *perform* actions (see [7.16](#)) resulting in items flowing across the connections between them, and *exhibit* states (see [7.17](#)) that enable different actions.

A part can represent any level of abstraction, such as a purely logical component without implementation constraints, or a physical component with a part number, or some intermediate abstraction. Parts can also be used to represent different kinds of system components such as hardware components, software components, facilities, organizations, or users of a system.

Table 9. Parts – Representative Notation



Element	Graphical Notation	Textual Notation
Part Definition		<pre>part def PartDef1; part def PartDef1 { /* members */ }</pre>





A *part definition* represents a modular unit of structure such as a system, system component, or external entity that may directly or indirectly interact with the system. A part definition is a kind of item definition (see [7.10](#)) and, as such, defines a class of part objects that are occurrences with temporal (and possibly spatial) extent. A part usage is a kind of item usage that is a usage of one or more part definitions, but may also be a usage of item definitions that are not part definitions. This allows a part to be treated like an item in some cases (e.g., when an engine under assembly flows through an assembly line) and as a part in other cases (e.g., when an assembled engine is installed in a vehicle).





A system is modeled as a composite part, and its part usages may themselves have further composite structure. The parts of a system may have attributes (see [7.7](#)) that represent different performance, physical and other quality characteristics. The parts may have ports (see [7.12](#)) that define the points at which those parts may be interconnected (see [7.13](#) and [7.14](#)). Parts may also *perform* actions (see [7.16](#)) resulting in items flowing across the connections between them, and *exhibit* states (see [7.17](#)) that enable different actions.



A part can represent any level of abstraction, such as a purely logical component without implementation constraints, or a physical component with a part number, or some intermediate abstraction. Parts can also be used to represent different kinds of system components such as hardware components, software components, facilities, organizations, or users of a system.

Table 9. Parts – Representative Notation

Element	Graphical Notation	Textual Notation
Part Definition		<pre>part def PartDef1; part def PartDef1 { /* members */ }</pre>
Part		<pre>part part1 : PartDef1; part part1 : PartDef1 { /* members */ }</pre>

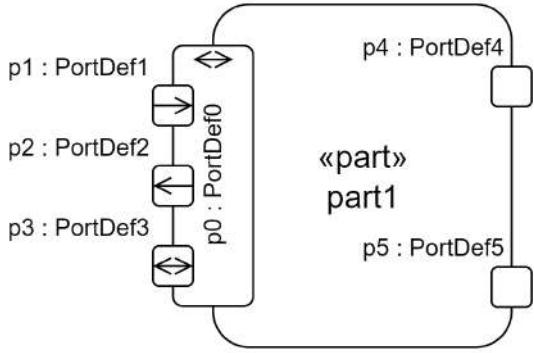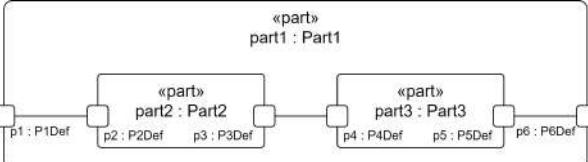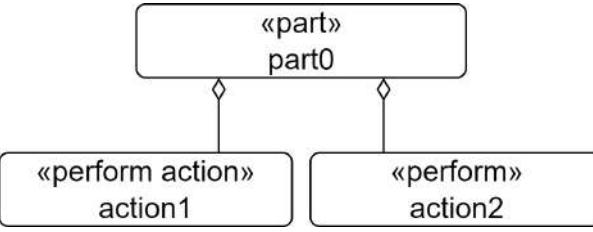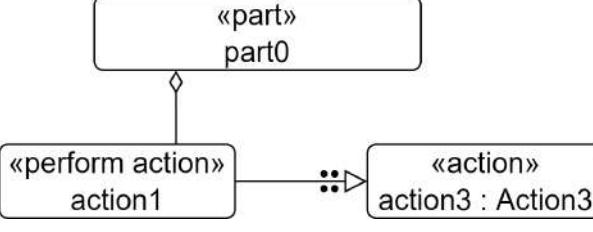Element	Graphical Notation	Textual Notation
Part with Ports		<pre> part part1 { port p0 : PortDef0 { port p1 : PortDef1; port p2 : PortDef2; port p3 : PortDef3; } port p4 : PortDef4; port p5 : PortDef5; } </pre>
Part with Graphical Compartment showing a standard interconnection view of part1.		<pre> part part1 : Part1{ port p1 : P1Def; port p6 : P6Def; part part2:Part2; part part3:Part3; bind p1 = part2.p2; connect part2.p3 to part3.p4; bind part2.p5 = p6; } </pre>
Part performs a reference action (action1) that can subset or bind to another action, and an anonymous reference action (action2) that subsets another action.		<pre> part part0 { perform action action1; perform action2; } action action2; </pre>
Part performs a reference action (action1) that reference-subsets another action (action3)		<pre> action action3 : Action3; part part0 { perform action action1 references action3; } </pre>

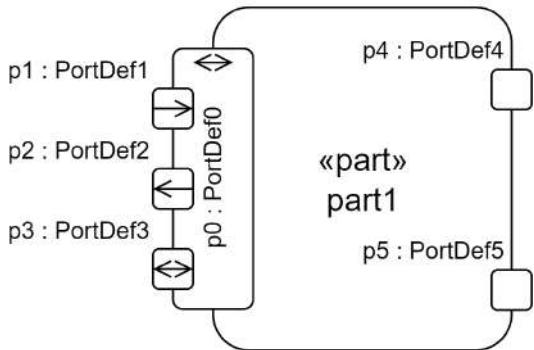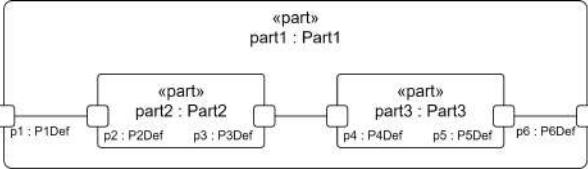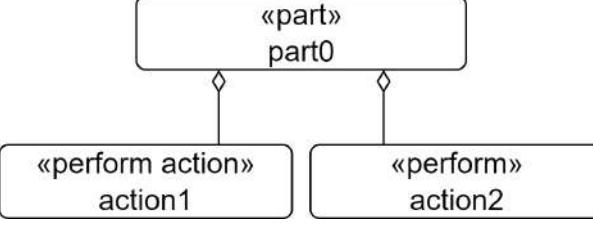Element	Graphical Notation	Textual Notation
Part		<pre>part part1 : PartDef1; part part1 : PartDef1 { /* members */ }</pre>
Part with Ports		<pre>part part1 { port p0 : PortDef0 { port p1 : PortDef1; port p2 : PortDef2; port p3 : PortDef3; } port p4 : PortDef4; port p5 : PortDef5; }</pre>
Part with Graphical Compartment showing a standard interconnection view of part1.		<pre>part part1 : Part1{ port p1 : P1Def; port p6 : P6Def; part part2:Part2; part part3:Part3; bind p1 = part2.p2; connect part2.p3 to part3.p4; bind part2.p5 = p6; }</pre>
Part performs a reference action (action1) that can subset or bind to another action, and an anonymous reference action (action2) that subsets another action.		<pre>part part0 { perform action action1; perform action2; } action action2;</pre>

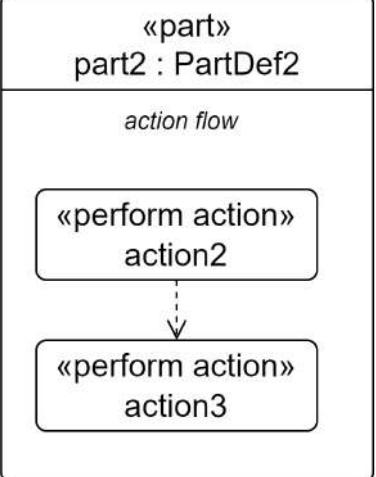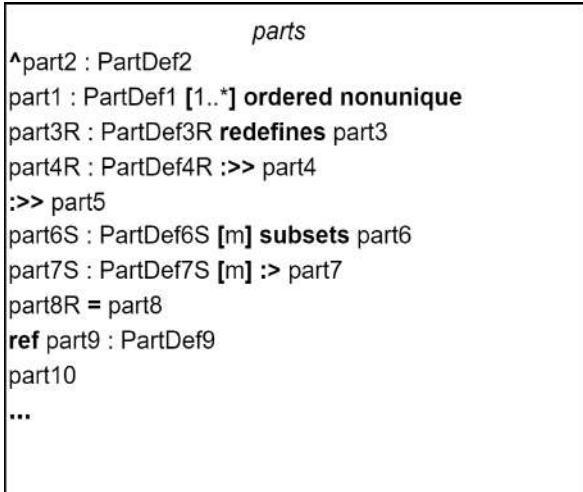Element	Graphical Notation	Textual Notation
Part with Graphical Compartment with perform actions and flows between them. This is informally referred to as a swim lane.		<pre data-bbox="1064 430 1400 593">part part2 : PartDef2 { perform action action2; then perform action action3; }</pre>
Parts Compartment	 <pre data-bbox="458 840 926 1205"> parts ^part2 : PartDef2 part1 : PartDef1 [1..*] ordered nonunique part3R : PartDef3R redefines part3 part4R : PartDef4R :>> part4 :>> part5 part6S : PartDef6S [m] subsets part6 part7S : PartDef7S [m] :> part7 part8R = part8 ref part9 : PartDef9 part10 ... </pre>	<pre data-bbox="1064 952 1416 1157">{ part part1 : PartDef1 [1..*] ordered nonunique; /* ... */ }</pre>

7.11.2 Part Definitions and Usages



A part definition or usage (that is not of a more specialized kind) is declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the kind keyword **part**. As a kind of item usage (see [7.10](#)), a part usage must only be defined by item definitions (including part definitions) or KerML structures (see [KerML, 7.4.4]). The default multiplicity of a part usage is `[1..1]`, under the conditions described in [7.6.3](#).

```

item def Person;
part def Vehicle {
    ref part driver[0..1] : Person;
    part engine : Engine;
    part wheels[4] : Wheel;
}

```

The base part definition and usage are `Part` and `parts` from the `Parts` library model (see [9.2.4](#)). (For other semantic constraints on part usages, see [8.4.7](#)).

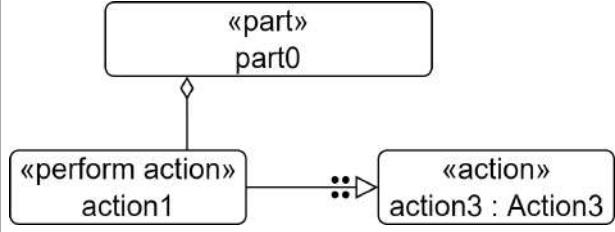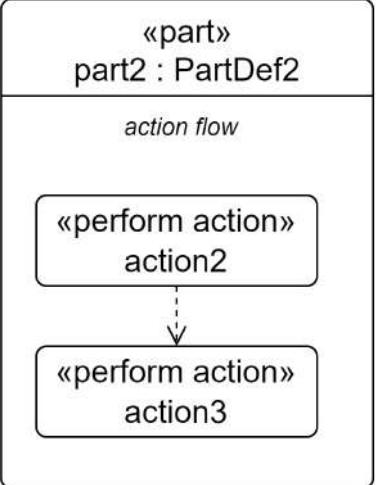Element	Graphical Notation	Textual Notation
Part performs a reference action (action1) that reference-subsets another action (action3)	 <pre> graph TD part0["«part» part0"] --> action1["«perform action» action1"] action1 -- "::>" --> action3["«action» action3 : Action3"] </pre>	<pre> action action3 : Action3; part part0 { perform action action1 references action3; } </pre>
Part with Graphical Compartment with perform actions and flows between them. This is informally referred to as a swim lane.	 <pre> graph TD part2["«part» part2 : PartDef2"] part2 --- actionFlow["action flow"] actionFlow --- action2["«perform action» action2"] action2 --- action3["«perform action» action3"] </pre>	<pre> part part2 : PartDef2 { perform action action2; then perform action action3; } </pre>
Parts Compartment	<pre> parts ^part2 : PartDef2 part1 : PartDef1 [1..*] ordered nonunique part3R : PartDef3R redefines part3 part4R : PartDef4R :>> part4 :>> part5 part6S : PartDef6S [m] subsets part6 part7S : PartDef7S [m] :>> part7 part8R = part8 ref part9 : PartDef9 part10 ... </pre>	<pre> { part part1 : PartDef1 [1..*] ordered nonunique; /* ... */ } </pre>

7.11.2 Part Definitions and Usages

A part definition or usage (that is not of a more specialized kind) is declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the keyword **part**. As a kind of item usage (see [7.10](#)), a part usage must only be defined by item definitions (including part definitions) or KerML structures (see [KerML, 7.4.4]). The default multiplicity of a part usage is `[1..1]`, under the conditions described in [7.6.3](#).

```

item def Person;
part def Vehicle {
  
```

Note. Because the base usage of a part usage is the part usage `parts` defined by the base part definition `Part`, every part usage is always directly or indirectly defined by at least one part definition, implicitly if not explicitly, in addition to any other item definitions.

7.12 Ports

7.12.1 Ports Overview

Metamodel references:

- *Textual notation*, [8.2.2.12](#)
- *Graphical notation*, [8.2.3.12](#)
- *Abstract syntax*, [8.3.12](#)
- *Semantics*, [8.4.8](#)

A *port definition* is a kind of occurrence definition (see [7.9](#)) that defines a connection point to enable interactions between occurrences (most commonly parts). A *port usage* is a kind of occurrence usage definition that is a usage of a port definition.

A port usage may be connected to one or more other port usages (see [7.14](#)). Such connections enable interactions between the occurrences that own the ports. The features of the port usages (whether inherited from its definition or declared locally for the usage) specify what can be exchanged in such interactions. Since ports are themselves kinds of occurrences, port definitions and usages can contain nested port usages.

A feature of a port may be *directed*, with one of the *directions* `in`, `out`, or `inout` (see also [7.6.3](#)). Connected ports must *conform*: each feature of a port at one end of a connection must have a matching feature on a port at the other end of the connection. Two features match if they have conforming definitions and either both have no direction or they have conjugate directions. The *conjugate* of direction `in` is `out` and vice versa, while direction `inout` is its own conjugate. A transfer can occur from the `out` features of one port usage to the matching `in` features of connected port usages. Transfers can occur in both directions between matching `inout` features.

Each port definition has a *conjugated* port definition whose directed features are conjugate to those of the original port definition. A conjugated port usage is a usage of a conjugated port definition. A conjugated port usage automatically conforms to a usage of the corresponding original port definition.

Table 10. Ports – Representative Notation

Element	Graphical Notation	Textual Notation
Port Definition	<div style="border: 1px solid black; padding: 10px; width: fit-content;"> <div style="border: 1px solid black; padding: 2px;">«port def»</div> <div style="border: 1px solid black; padding: 2px;">PortDef1</div> <div style="border: 1px solid black; padding: 2px;">«port def»</div> <div style="border: 1px solid black; padding: 2px;">PortDef1</div> <div style="border: 1px solid black; padding: 2px; height: 40px;">compartment stack</div> <div style="border: 1px solid black; padding: 2px; height: 10px;">...</div> </div>	<pre>port def PortDef1; port def PortDef1 { /* members */ }</pre>

```

ref part driver[0..1] : Person;
part engine : Engine;
part wheels[4] : Wheel;
}

```

The base part definition and usage are `Part` and `parts` from the `Parts` library model (see [9.2.4](#)). (For other semantic constraints on part usages, see [8.4.7](#)).

Note. Because the base usage of a part usage is the part usage `parts` defined by the base part definition `Part`, every part usage is always directly or indirectly defined by at least one part definition, implicitly if not explicitly, in addition to any other item definitions.

7.12 Ports

7.12.1 Ports Overview

Metamodel references:

- *Textual notation*, [8.2.2.12](#)
- *Graphical notation*, [8.2.3.12](#)
- *Abstract syntax*, [8.3.12](#)
- *Semantics*, [8.4.8](#)

A *port definition* is a kind of occurrence definition (see [7.9](#)) that defines a connection point to enable interactions between occurrences (most commonly parts). A *port usage* is a kind of occurrence usage definition that is a usage of a port definition.




A port usage may be connected to one or more other port usages (see [7.14](#)). Such connections enable interactions between the occurrences that own the ports. The features of the port usages (whether inherited from its definition or declared locally for the usage) specify what can be exchanged in such interactions. Since ports are themselves kinds of occurrences, port definitions and usages can contain nested port usages.

A feature of a port may be *directed*, with one of the *directions* `in`, `out`, or `inout` (see also [7.6.3](#)). Connected ports must *conform*: each feature of a port at one end of a connection must have a matching feature on a port at the other end of the connection. Two features match if they have conforming definitions and either both have no direction or they have conjugate directions. The *conjugate* of direction `in` is `out` and vice versa, while direction `inout` is its own conjugate. A transfer can occur from the `out` features of one port usage to the matching `in` features of connected port usages. Transfers can occur in both directions between matching `inout` features.

Each port definition has a *conjugated* port definition whose directed features are conjugate to those of the original port definition. A conjugated port usage is a usage of a conjugated port definition. A conjugated port usage automatically conforms to a usage of the corresponding original port definition.

Table 10. Ports – Representative Notation




Element	Graphical Notation	Textual Notation
Port Definition	<div style="border: 1px solid black; padding: 10px; width: fit-content;"> <div style="border: 1px solid black; padding: 2px;">«port def»</div> <div style="border: 1px solid black; padding: 2px;">PortDef1</div> </div> <div style="border: 1px solid black; padding: 10px; width: fit-content;"> <div style="border: 1px solid black; padding: 2px;">«port def»</div> <div style="border: 1px solid black; padding: 2px;">PortDef1</div> <div style="border: 1px solid black; padding: 2px; background-color: #f0f0f0;">compartment stack</div> <div style="border: 1px solid black; padding: 2px;">...</div> </div>	<pre> port def PortDef1; port def PortDef1 { /* members */ } </pre>

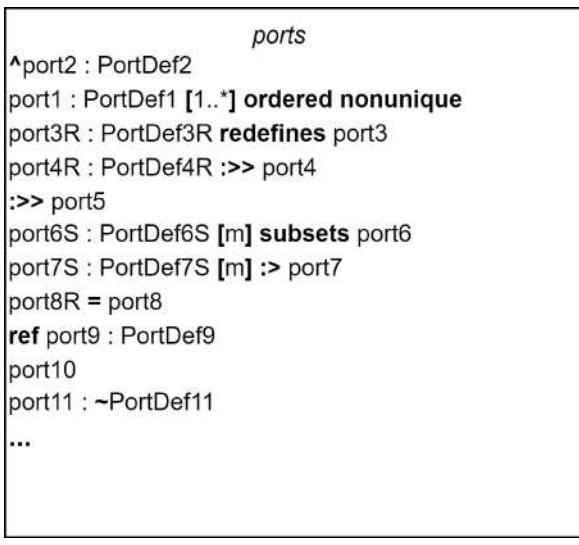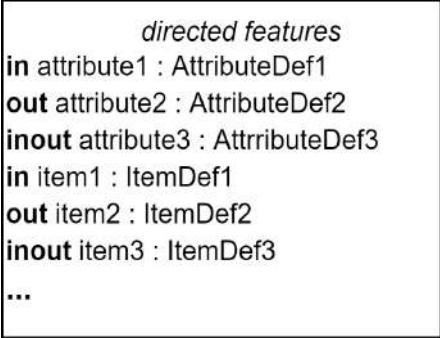Element	Graphical Notation	Textual Notation
Port		<pre>port port1 : PortDef1; port port1 : PortDef1 { /* members */ }</pre>
Ports Compartment		<pre>{ port port1 : PortDef1 [1..*] ordered nonunique; /* ... */ }</pre>
Directed Features Compartment		<pre>{ in attribute1 : AttributeDef1; out attribute2 : AttributeDef2; inout attribute3 : AttributeDef3; in item1 : ItemDef1; out item2 : ItemDef2; inout item3 : ItemDef3; }</pre>

7.12.2 Port Definitions and Usages

A port definition or usage is declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the kind keyword **port**. A port usage must only be defined by port definitions. The default multiplicity of a port usage is `[1..1]`, under the conditions described in [7.6.3](#). All the features of a port definition or port usage, other than any nested port usages, must be referential (non-composite).

```
port def FuelingPort {
    attribute flowRate : Real;
    out fuelOut : Fuel;
```

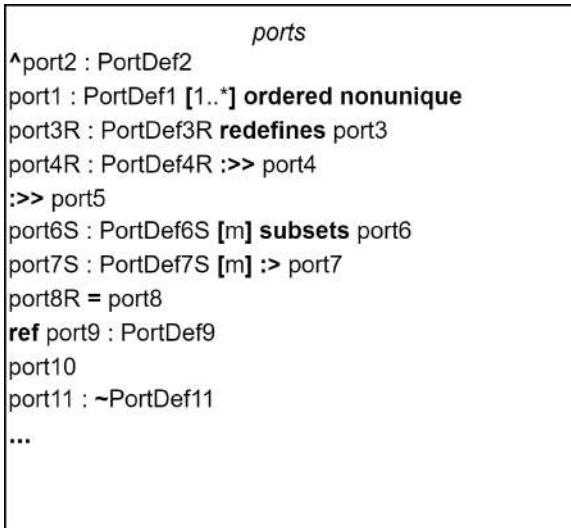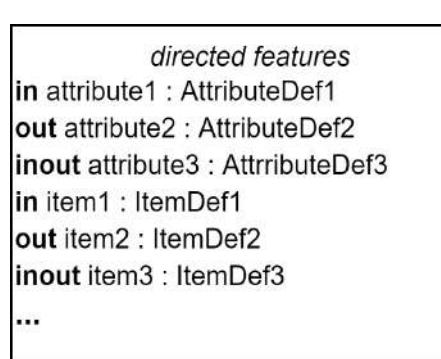Element	Graphical Notation	Textual Notation
Port		<pre>port port1 : PortDef1; port port1 : PortDef1 { /* members */ }</pre>
Ports Compartment	 <pre> ^port2 : PortDef2 port1 : PortDef1 [1..*] ordered nonunique port3R : PortDef3R redefines port3 port4R : PortDef4R :> port4 :> port5 port6S : PortDef6S [m] subsets port6 port7S : PortDef7S [m] :> port7 port8R = port8 ref port9 : PortDef9 port10 port11 : ~PortDef11 ... </pre>	<pre>{ port port1 : PortDef1 [1..*] ordered nonunique; /* ... */ }</pre>
Directed Features Compartment	 <pre> in attribute1 : AttributeDef1 out attribute2 : AttributeDef2 inout attribute3 : AttributeDef3 in item1 : ItemDef1 out item2 : ItemDef2 inout item3 : ItemDef3 ... </pre>	<pre>{ in attribute1 : AttributeDef1; out attribute2 : AttributeDef2; inout attribute3 : AttributeDef3; in item1 : ItemDef1; out item2 : ItemDef2; inout item3 : ItemDef3; }</pre>

7.12.2 Port Definitions and Usages

A port definition or usage is declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the kind keyword **port**. A port usage must only be defined by port definitions. The default multiplicity of a port usage is **[1..1]**, under the conditions described in [7.6.3](#). All the features of a port definition or port usage, other than any nested port usages, must be referential (non-composite).

```
port def FuelingPort {
  attribute flowRate : Real;
  out fuelOut : Fuel;
  in fuelReturn : Fuel;
```

```

    in fuelReturn : Fuel;
}
part def FuelTank {
    port fuelOutPort : FuelingPort;
}

```

The base port definition and usage are `Port` and `ports` from the `Ports` library model (see [9.2.5](#)). (For other semantic constraints on port usages, see [8.4.8](#).)

7.12.3 Conjugated Port Definitions and Usages

Every port definition also implicitly declares a single, nested *conjugated port definition*, which has the same features as its original port definition, except that any directed features have conjugated directions (i.e., `in` and `out` are reversed, with `inout` unchanged). The name of the conjugated port definition is always given by the name of the original port definition with the character `~` prepended, in the namespace of the original port definition. For example, if a port definition has the name `P`, then its conjugated port definition has the name `P::'~P'`.

A *conjugated port usage* is a shorthand for declaring a port usage defined by a conjugated port definition. With this shorthand, rather than using the actual name of the conjugated port definition, the name of the original port definition can be used, preceded by the symbol `~`. For example,

```
port p : ~P;
```

is equivalent to

```
port p : P::'~P';
```

Since the symbol `~` is *not* considered part of a name when used in a conjugated port usage, it does not have to be placed within quotes, while quotes *do* have to be used to represent the actual name of the conjugated port definition as a lexical unrestricted name (see [7.2.2](#)). Note that, if the original port definition itself has a name that is itself lexically represented as an unrestricted name, such as `'P-1'`, then its conjugated port definition has the (qualified) name `'P-1'::'~P-1'`, but the corresponding conjugated port usage is

```
port p1 : '~P-1'
```

where the `~` is *not* placed inside the quotes.

7.13 Connections

7.13.1 Connections Overview

Metamodel references:

- *Textual notation*, [8.2.2.13](#)
- *Graphical notation*, [8.2.3.13](#)
- *Abstract syntax*, [8.3.13](#)
- *Semantics*, [8.4.9](#)

Connection Definition and Usage

A *connection definition* is both a relationship and a kind of part definition (see [7.11](#)) that classifies connections between related things, such as items and parts. At least two of the owned features of a connection definition must be *connection ends*, which specify the things that are related by the connection definition. Connection definitions with exactly two connection ends are called *binary connection definitions*, and they classify *binary connections*.

```

}
part def FuelTank {
    port fuelOutPort : FuelingPort;
}

```

The base port definition and usage are `Port` and `ports` from the `Ports` library model (see [9.2.5](#)). (For other semantic constraints on port usages, see [8.4.8](#).)

7.12.3 Conjugated Port Definitions and Usages

Every port definition also implicitly declares a single, nested *conjugated port definition*, which has the same features as its original port definition, except that any directed features have conjugated directions (i.e., `in` and `out` are reversed, with `inout` unchanged). The name of the conjugated port definition is always given by the name of the original port definition with the character `~` prepended, in the namespace of the original port definition. For example, if a port definition has the name `P`, then its conjugated port definition has the name `P::'~P'`.

A *conjugated port usage* is a shorthand for declaring a port usage defined by a conjugated port definition. With this shorthand, rather than using the actual name of the conjugated port definition, the name of the original port definition can be used, preceded by the symbol `~`. For example,

```
port p : ~P;
```

is equivalent to

```
port p : P::'~P';
```

Since the symbol `~` is *not* considered part of a name when used in a conjugated port usage, it does not have to be placed within quotes, while quotes *do* have to be used to represent the actual name of the conjugated port definition as a lexical unrestricted name (see [7.2.2](#)). Note that, if the original port definition itself has a name that is itself lexically represented as an unrestricted name, such as `'P-1'`, then its conjugated port definition has the (qualified) name `'P-1'::'~P-1'`, but the corresponding conjugated port usage is

```
port p1 : ~'P-1'
```

where the `~` is *not* placed inside the quotes.

7.13 Connections

7.13.1 Connections Overview

SYSML2 -177: *Guillemets should not be used on keywords in textual notation snippets used in the graphical notation*

SYSML2 -25: *Source and target on binary ConnectionDefinition symbol missing*

Metamodel references:

- *Textual notation*, [8.2.2.13](#)
- *Graphical notation*, [8.2.3.13](#)
- *Abstract syntax*, [8.3.13](#)
- *Semantics*, [8.4.9](#)

Connection Definition and Usage

A *connection definition* is both a relationship and a kind of part definition (see [7.11](#)) that classifies connections between related things, such as items and parts. At least two of the owned features of a connection definition must

The features of a connection definition that are not connection ends characterize connections separately from the connected things. Since a connection is a part, values of these non-end features can potentially change over the lifetime of the connection. However, the values of connection ends (i.e., the things that are actually connected) do not change over time (though they can potentially be occurrences that themselves have features whose values change over time).

A connection usage is a part usage (see [7.11](#)) that is a usage of a connection definition, connecting usage elements such as item and part usages. A connection usage redefines the connection ends from its definition, associating those ends with the specific usage elements that are to be connected. For example, a connection definition could have connection ends that are part usages defined by part definitions `Pump` and `Tank`. A usage of this connection definition would then associate corresponding connection ends with specific `pump` and `tank` part usages. Supposing that the `pump` and `tank` part usages have multiplicity 1, then this means that the single value of the `pump` usage is to be connected to the single value of the `tank` usage.

A connection usage that connects parts is often a logical connection that abstracts away details of how the parts are connected. For example, plumbing that includes pipes and fittings may be used to connect a pump and a tank. It is sometimes desired to model the connection of the pump to the tank at a more abstract level without including the plumbing. This is viewed as a logical connection between the pump and the tank.

Alternatively, the plumbing can be modeled as a part (informally referred to as an *interface medium*) where the pump connects to the plumbing, and the plumbing connects to the tank. As a part itself, a connection can contain the plumbing either as a composite feature, or as a reference to the plumbing that is owned by a higher level pump-tank system context. In this way, the logical connection without structure can be transformed into a physical connection.

Bindings and Successions

Bindings and successions are special kinds of connections. They are usages, but, unlike regular connection usages, they are *not* part usages. The connections specified by bindings and successions are not occurrences and are not created and destroyed. Rather, they assert specific relationships between the features that they connect, which must be true at all times.

A *binding* is a binary connection that requires its two related usages to have the same values. A binding can also be used to bind a referential feature in one context to a composite feature in another context to assert they are the same thing. For example, the steering wheel in a car may be considered part of the interior of the car, while at the same time it is considered part of the steering subsystem. The steering wheel can be a composite part usage of the interior, and a reference part usage of the steering subsystem, and these two usages can be bound together to assert that they are the same part.

A *feature value* is a shorthand for initializing or binding a usage to the result of an *expression* (see [7.18](#)) as part of the declaration of the usage. There are two types of feature value binding.

- A *fixed* feature value establishes the binding of the usage to the result of evaluating the given expression at the point of declaration of the usage. Such a binding cannot be overridden in a redefinition of the usage because, once asserted, a binding must be true for all instances of the usage.
- A *default* feature value also includes an expression, but it does not immediately establish the binding of the usage. Instead, the evaluation of the expression and the binding of the usage is delayed until the instantiation of a definition or usage that features the original usage. Unlike a fixed feature value, a default feature value can be overridden in a redefinition of its original feature with a new feature value (fixed or default). In this case, the new overriding feature value is used instead of the original feature value for binding the redefining usage.

A *succession* is a binary connection that requires its two related usages to have values that are occurrences that happen completely separated in time, with the first occurrence happening before the second. Successions can be

be *connection ends*, which specify the things that are related by the connection definition. Connection definitions with exactly two connection ends are called *binary connection definitions*, and they classify *binary connections*.

The features of a connection definition that are not connection ends characterize connections separately from the connected things. Since a connection is a part, values of these non-end features can potentially change over the lifetime of the connection. However, the values of connection ends (i.e., the things that are actually connected) do not change over time (though they can potentially be occurrences that themselves have features whose values change over time).

A connection usage is a part usage (see [7.11](#)) that is a usage of a connection definition, connecting usage elements such as item and part usages. A connection usage redefines the connection ends from its definition, associating those ends with the specific usage elements that are to be connected. For example, a connection definition could have connection ends that are part usages defined by part definitions `Pump` and `Tank`. A usage of this connection definition would then associate corresponding connection ends with specific `pump` and `tank` part usages. Supposing that the `pump` and `tank` part usages have multiplicity 1, then this means that the single value of the `pump` usage is to be connected to the single value of the `tank` usage.

A connection usage that connects parts is often a logical connection that abstracts away details of how the parts are connected. For example, plumbing that includes pipes and fittings may be used to connect a pump and a tank. It is sometimes desired to model the connection of the pump to the tank at a more abstract level without including the plumbing. This is viewed as a logical connection between the pump and the tank.

Alternatively, the plumbing can be modeled as a part (informally referred to as an *interface medium*) where the pump connects to the plumbing, and the plumbing connects to the tank. As a part itself, a connection can contain the plumbing either as a composite feature, or as a reference to the plumbing that is owned by a higher level pump-tank system context. In this way, the logical connection without structure can be transformed into a physical connection.

Bindings and Successions

Bindings and successions are special kinds of connections. They are usages, but, unlike regular connection usages, they are *not* part usages. The connections specified by bindings and successions are not occurrences and are not created and destroyed. Rather, they assert specific relationships between the features that they connect, which must be true at all times.

A *binding* is a binary connection that requires its two related usages to have the same values. A binding can also be used to bind a referential feature in one context to a composite feature in another context to assert they are the same thing. For example, the steering wheel in a car may be considered part of the interior of the car, while at the same time it is considered part of the steering subsystem. The steering wheel can be a composite part usage of the interior, and a reference part usage of the steering subsystem, and these two usages can be bound together to assert that they are the same part.

A *feature value* is a shorthand for initializing or binding a usage to the result of an *expression* (see [7.18](#)) as part of the declaration of the usage. There are two types of feature value binding.

- A *fixed* feature value establishes the binding of the usage to the result of evaluating the given expression at the point of declaration of the usage. Such a binding cannot be overridden in a redefinition of the usage because, once asserted, a binding must be true for all instances of the usage.
- A *default* feature value also includes an expression, but it does not immediately establish the binding of the usage. Instead, the evaluation of the expression and the binding of the usage is delayed until the instantiation of a definition or usage that features the original usage. Unlike a fixed feature value, a default feature value can be overridden in a redefinition of its original feature with a new feature value (fixed or default). In this case, the new overriding feature value is used instead of the original feature value for binding the redefining usage.

A *succession* is a binary connection that requires its two related usages to have values that are occurrences that happen completely separated in time, with the first occurrence happening before the second. Successions can be

used to assert the ordering of any kind of occurrences in time, but are particularly useful for event occurrences (see [7.9](#)) and performances of actions (see [7.16](#)).




Flow Connection Usages

A *flow connection usage* is a connection usage that also represents the performance of a *transfer* of some *payload* between the values of connected usages, which must be occurrences. The transferred payload can be anything (attribute value, item, part, etc.). The transfer is directed from the first connection end (the *source*) to the second connection end (the *target*). There are three kinds of flow connections.

1. A *message* is modeled as a flow connection usage that specifies that some transfer happens between the source and target ends, and can define the *payload* that is to be transferred. However, a message does not specify how the payload is to be obtained from the source or delivered to the target.
2. A *streaming flow connection* is modeled as a flow connection usage that not only specifies the source and target of a transfer (and, optionally, the payload), but also identifies the *source output* feature of the source usage from which the payload is obtained and the *target input* feature of the target usage to which the payload is to be delivered.
3. A *succession flow connection* is modeled as a *succession flow connection usage*, which is both a connection usage and a succession. A succession flow connection is specified in the same way as a streaming flow connection, but it adds the further constraint that the transfer source must complete before the transfer starts, and the transfer must complete before the target can start.

Messages are typically used to model abstract logical interaction between part usages in a certain context, which may be realized in a more detailed model using streaming or succession flow connections (or transfers from send actions to accept actions, see [7.16](#)).

Table 11. Connections – Representative Notation

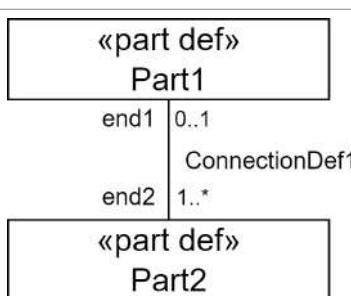Element	Graphical Notation	Textual Notation
Connection Definition	 	<pre>connection def ConnectionDef1 { end end1 : Part1; end end2 : Part2; }</pre> <pre>connection def ConnectionDef1 { /* members */ }</pre>
Connection Definition		<pre>connection def ConnectionDef1 { end end1 : Part1[0..1]; end end2 : Part2[1..*]; }</pre>

used to assert the ordering of any kind of occurrences in time, but are particularly useful for event occurrences (see [7.9](#)) and performances of actions (see [7.16](#)).

Flow Connection Usages






A *flow connection usage* is a connection usage that also represents the performance of a *transfer* of some *payload* between the values of connected usages, which must be occurrences. The transferred payload can be anything (attribute value, item, part, etc.). The transfer is directed from the first connection end (the *source*) to the second connection end (the *target*). There are three kinds of flow connections.






1. A *message* is modeled as a flow connection usage that specifies that some transfer happens between the source and target ends, and can define the *payload* that is to be transferred. However, a message does not specify how the payload is to be obtained from the source or delivered to the target.
2. A *streaming flow connection* is modeled as a flow connection usage that not only specifies the source and target of a transfer (and, optionally, the payload), but also identifies the *source output* feature of the source usage from which the payload is obtained and the *target input* feature of the target usage to which the payload is to be delivered.
3. A *succession flow connection* is modeled as a *succession flow connection usage*, which is both a connection usage and a succession. A succession flow connection is specified in the same way as a streaming flow connection, but it adds the further constraint that the transfer source must complete before the transfer starts, and the transfer must complete before the target can start.




Messages are typically used to model abstract logical interaction between part usages in a certain context, which may be realized in a more detailed model using streaming or succession flow connections (or transfers from send actions to accept actions, see [7.16](#)).




Table 11. Connections – Representative Notation




Element	Graphical Notation	Textual Notation
Connection Definition	<div style="border: 1px solid black; padding: 10px; width: fit-content;"> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> «connection def» ConnectionDef1 </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <i>ends</i> end1 : Part1 end2 : Part2 </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> «connection def» ConnectionDef1 </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <i>compartment stack</i> ... </div> </div>	<pre>connection def ConnectionDef1 { end end1 : Part1; end end2 : Part2; }</pre> <pre>connection def ConnectionDef1 { /* members */ }</pre>
Connection Definition	<div style="border: 1px solid black; padding: 10px; width: fit-content;"> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> «part def» Part1 </div> <div style="display: flex; justify-content: space-between; align-items: center;"> end1 0..1 ConnectionDef1 </div> <div style="display: flex; justify-content: space-between; align-items: center;"> end2 1..* </div> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> «part def» Part2 </div> </div>	<pre>connection def ConnectionDef1 { end end1 : Part1[0..1]; end end2 : Part2[1..*]; }</pre>

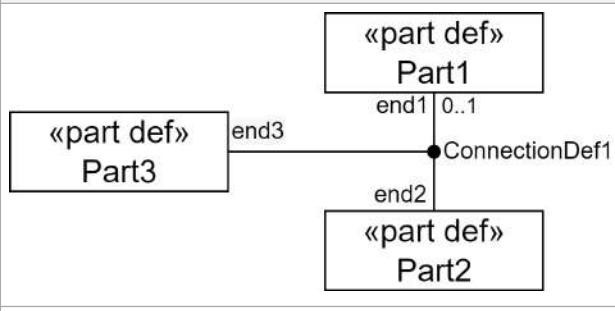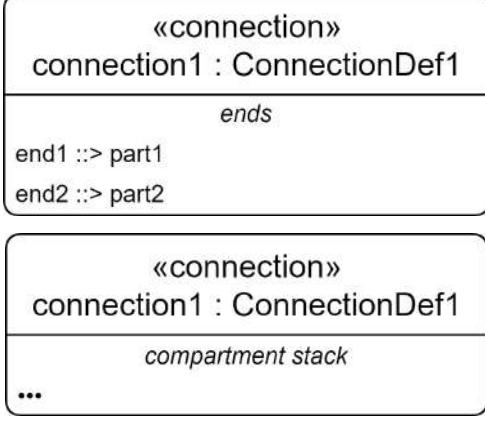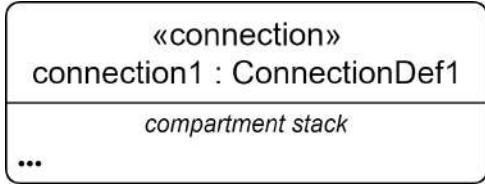
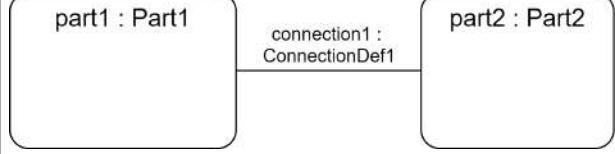
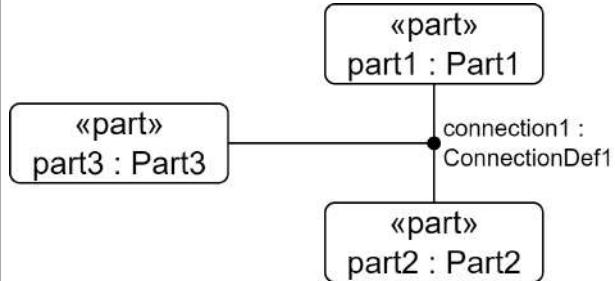
Element	Graphical Notation	Textual Notation
Connection Definition (n-ary with 3 ends)	 <pre> classDiagram class ConnectionDef1 { <<part def>> Part1 end1 0..1 Part2 end2 Part3 end3 } </pre>	<pre> connection def ConnectionDef1 { end end1 : Part1[0..1]; end end2 : Part2; end end3 : Part3; } </pre>
Connection	 <pre> classDiagram class Connection { <<connection>> connection1 : ConnectionDef1 ends end1 ::> part1 end2 ::> part2 } </pre>  <pre> classDiagram class Connection { <<connection>> connection1 : ConnectionDef1 compartment stack ... } </pre>	<pre> connection connection1 : ConnectionDef1 { end end1 ::> part1; end end2 ::> part2; } connection connection1 : ConnectionDef1 { /* members */ } </pre>
Connection	 <pre> classDiagram class Connection { part1 : Part1 connection1 : ConnectionDef1 part2 : Part2 } </pre>	<pre> connection connection1 : ConnectionDef1 connect part1 to part2; </pre>
Connection (n-ary with 3 ends)	 <pre> classDiagram class Connection { part1 : Part1 connection1 : ConnectionDef1 part3 : Part3 part2 : Part2 } </pre>	<pre> connection connection1 : ConnectionDef1 connect (part1, part2, part3); </pre>

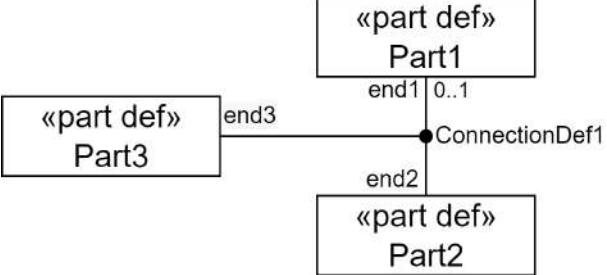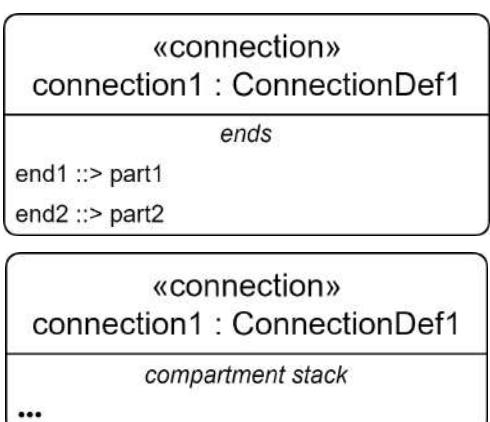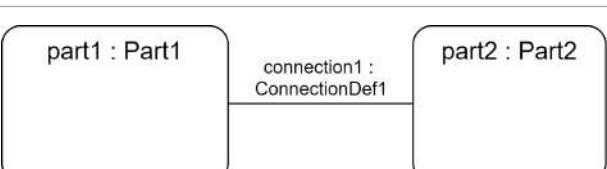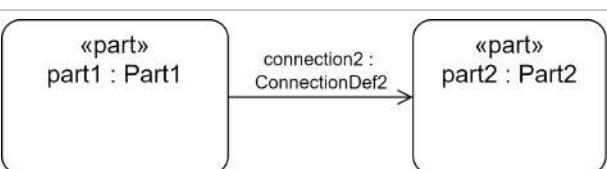
Element	Graphical Notation	Textual Notation
Connection Definition (with direction indication)	 <pre data-bbox="1078 333 1328 508"> connection def ConnectionDef2 { end sourceEnd : Part1[1..1]; end targetEnd : Part2[1..*]; } </pre>	
Connection Definition (n-ary with 3 ends)	 <pre data-bbox="1078 656 1356 846"> connection def ConnectionDef1 { end end1 : Part1[0..1]; end end2 : Part2; end end3 : Part3; } </pre>	
Connection	 <pre data-bbox="1078 994 1416 1136"> connection connection1 : ConnectionDef1 { ends end1 ::> part1 end2 ::> part2 } connection connection1 : ConnectionDef1 { /* members */ } </pre>	
Connection	 <pre data-bbox="1078 1396 1416 1516"> connection connection1 : ConnectionDef1 connect part1 to part2; </pre>	
Connection (with direction indication)	 <pre data-bbox="1078 1586 1416 1706"> connection connection2 : ConnectionDef2 connect part1 to part2; </pre>	

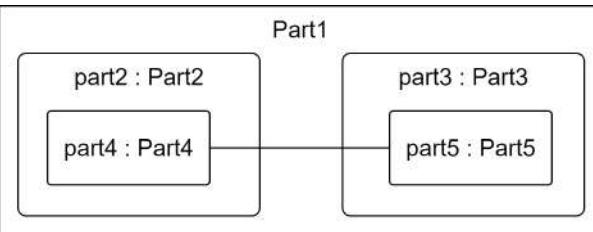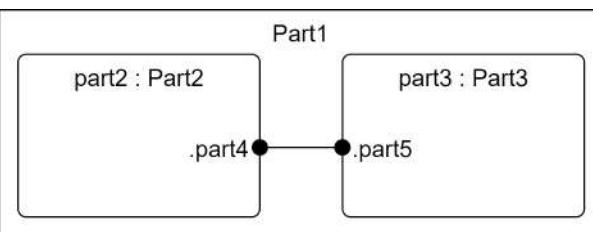
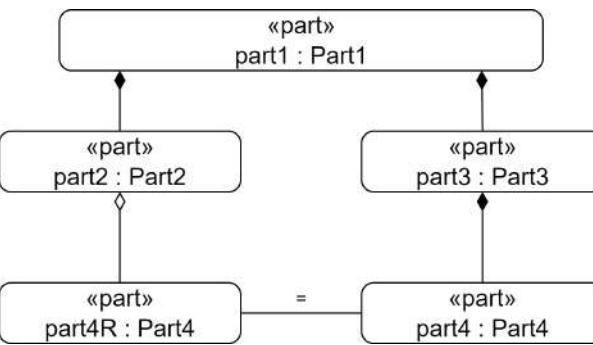
Element	Graphical Notation	Textual Notation
Nested Connection		<pre> part def Part1 { part part2 : Part2 { part part4 : Part4; } part part3 : Part3 { part part5 : Part5; } connection connection1 : ConnectionDef1 connect part2.part4 to part3.part5; } </pre>
Proxy Connection		<pre> part def Part1 { part part2 : Part2 { part part4 : Part4; } part part3 : Part3 { part part5 : Part5; } connection connection1 : ConnectionDef1 connect part2.part4 to part3.part5; } </pre>
Connections Compartment		
Binding Connection		<pre> part part1 : Part1 { part part2 : Part2 { ref part part4R : Part4; } part part3 : Part3 { part part4 : Part4; } bind part2.part4R = part3.part4; } </pre>

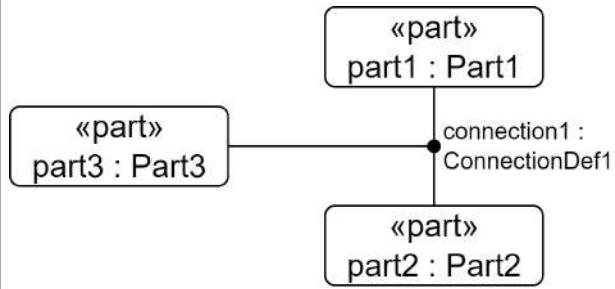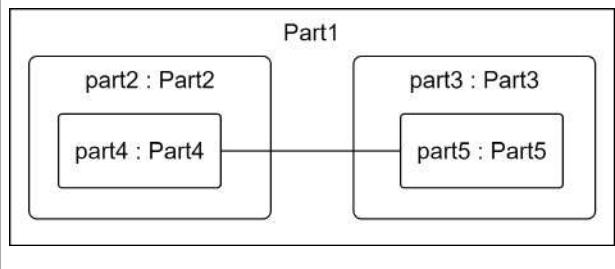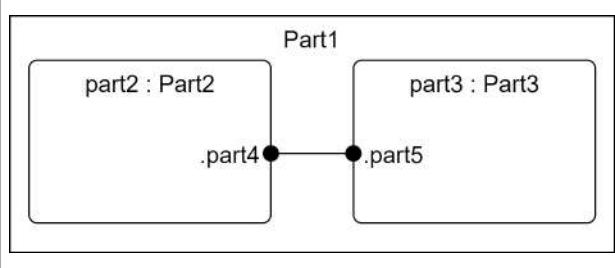Element	Graphical Notation	Textual Notation
Connection (n-ary with 3 ends)	 <pre data-bbox="442 255 1057 544"> graph TD part1["«part» part1 : Part1"] --- connection1((connection1)) part2["«part» part2 : Part2"] --- connection1 part3["«part» part3 : Part3"] --- connection1 </pre>	<pre data-bbox="1057 255 1442 544"> connection connection1 : ConnectionDef1 connect (part1, part2, part3); </pre>
Nested Connection	 <pre data-bbox="442 677 1057 946"> graph TD subgraph Part1 [Part1] part2["part2 : Part2"] part3["part3 : Part3"] part2 --- part4["part4 : Part4"] part3 --- part5["part5 : Part5"] end </pre>	<pre data-bbox="1057 593 1442 1051"> part def Part1 { part part2 : Part2 { part part4 : Part4; } part part3 : Part3 { part part5 : Part5; } connection connection1 : ConnectionDef1 connect part2.part4 to part3.part5; } </pre>
Proxy Connection	 <pre data-bbox="442 1163 1057 1431"> graph TD subgraph Part1 [Part1] part2["part2 : Part2"] part3["part3 : Part3"] part2 --- proxy1((.part4)) part3 --- proxy2((.part5)) proxy1 --- proxy2 end </pre>	<pre data-bbox="1057 1079 1442 1543"> part def Part1 { part part2 : Part2 { part part4 : Part4; } part part3 : Part3 { part part5 : Part5; } connection connection1 : ConnectionDef1 connect part2.part4 to part3.part5; } </pre>
Connections Compartment		

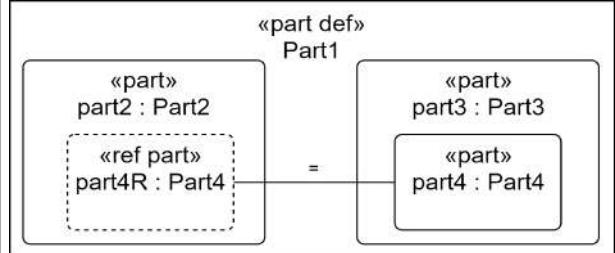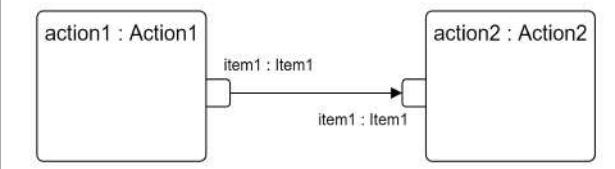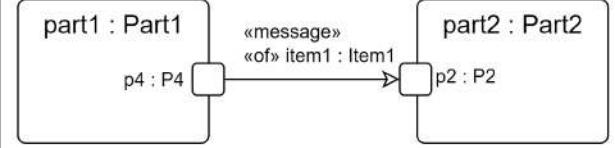
Element	Graphical Notation	Textual Notation
Binding Connection	 <pre data-bbox="442 559 1057 629"> «part def» Part1 «part» part2 : Part2 «ref part» part4R : Part4 = «part» part3 : Part3 «part» part4 : Part4 </pre>	<pre data-bbox="1057 285 1395 601"> part def Part1 { part part2:part2 { ref part part4R:Part4; } part part3:part3 { part part4:Part4; } bind part2.part4R = part3.part4; } </pre>
Flow	 <pre data-bbox="442 707 1057 876"> action1 : Action1 item1 : Item1 action2 : Action2 item1 : Item1 </pre>	<pre data-bbox="1057 665 1419 897"> action action1:Action1 { out item1:Item1; } action action2:Action2 { in item1:Item1; } flow action1.item1 to action2.item1; </pre>
Message	 <pre data-bbox="442 1066 1057 1214"> part1 : Part1 p4 : P4 «message» «of» item1 : Item1 part2 : Part2 p2 : P2 </pre>	<pre data-bbox="1057 1003 1395 1256"> part part1:Part1 { port p4:P4; } part part2:Part2 { port p2:P2; } message of item1:Item1 from part1.p4 to part2.p2; </pre>

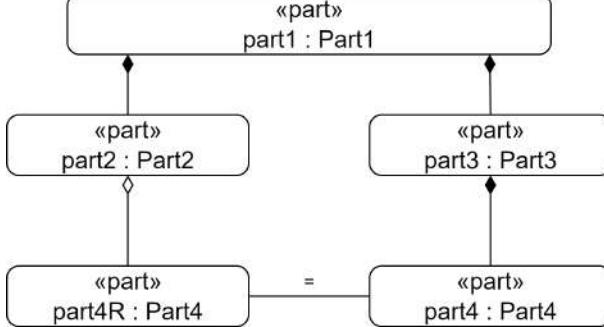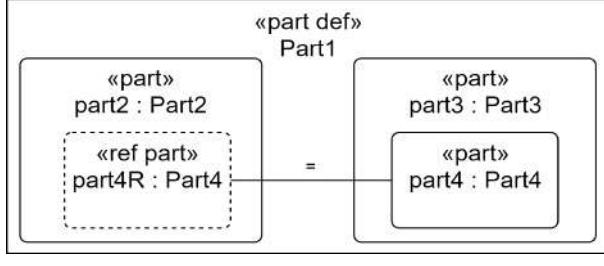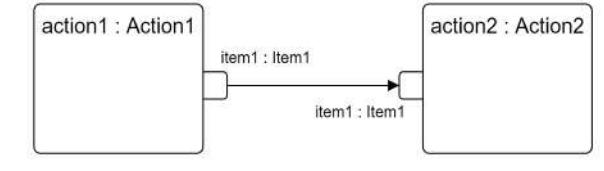Element	Graphical Notation	Textual Notation
Binding Connection	 <p>The diagram illustrates a binding connection between four parts. Part1 is connected to Part2, and Part3 is connected to Part4. The connection between Part2 and Part4 is explicitly labeled with an equals sign (=) on the connecting line.</p>	<pre> part part1 : Part1 { part part2 : Part2 { ref part part4R : Part4; } part part3 : Part3 { part part4 : Part4; } bind part2.part4R = part3.part4; } </pre>
Binding Connection	 <p>The diagram shows a part definition named Part1. Inside Part1, there is a part2 and a reference to part4R. Part3 is also shown, containing part4. The binding is indicated by an equals sign (=) connecting part4R and part4.</p>	<pre> part def Part1 { part part2:part2 { ref part part4R:Part4; } part part3:part3 { part part4:Part4; } bind part2.part4R = part3.part4; } </pre>
Flow	 <p>The diagram shows a flow from action1 to action2, with item1 being passed as a parameter.</p>	<pre> action action1:Action1 { out item1:Item1; } action action2:Action2 { in item1:Item1; } flow action1.item1 to action2.item1; </pre>
Message	 <p>The diagram shows a message from part1 to part2, where item1 is the message payload.</p>	<pre> part part1:Part1 { port p4:P4; } part part2:Part2 { port p2:P2; } message of item1:Item1 from part1.p4 to part2.p2; </pre>

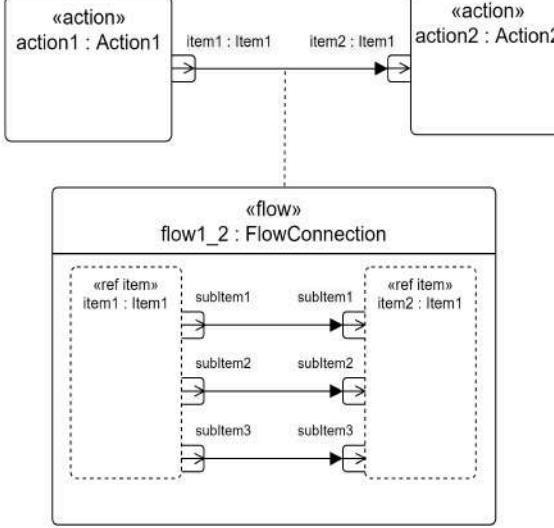Element	Graphical Notation	Textual Notation
Flow as Node		<pre> item def Item1 { item subItem1; item subItem2; item subItem3; } action action1 : Action1 { out item1 : Item1; } action action2 : Action2 { in item2 : Item1; } flow flow1_2 from action1.item1 to action2.item2 { flow source.item1.subItem1 to target.item2.subItem1; flow source.item1.subItem2 to target.item2.subItem2; flow source.item1.subItem3 to target.item2.subItem3; } </pre>
Flows Compartment		<pre> { flow action1.output to action2.input; succession flow action1.output to action2.input; /* ... */ } </pre>

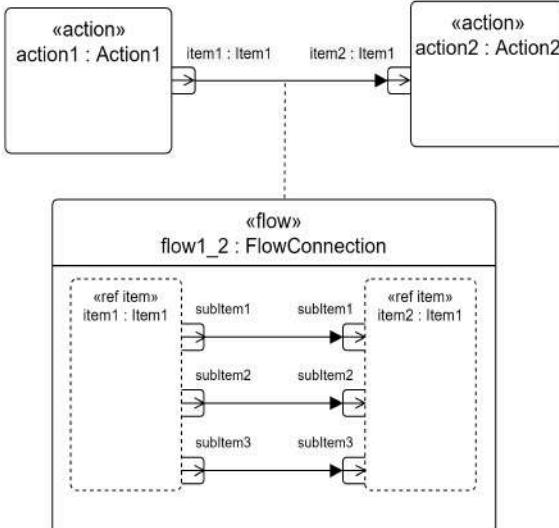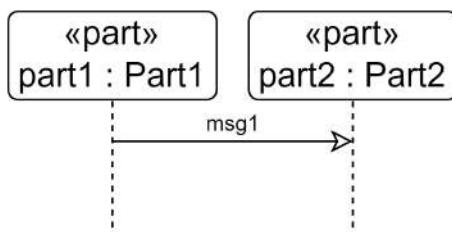Element	Graphical Notation	Textual Notation
Flow as Node	 <pre> graph LR A["<action> action1 : Action1"] -- item1 : Item1 --> B["<action> action2 : Action2"] B -- item2 : Item1 --> C["<flow> flow1_2 : FlowConnection"] subgraph flow1_2 [flow1_2 : FlowConnection] direction TB S1["<ref item> item1 : Item1"] S2["<ref item> item2 : Item1"] S1 -- subitem1 --> T1["<ref item> subItem1"] S1 -- subitem2 --> T2["<ref item> subItem2"] S1 -- subitem3 --> T3["<ref item> subItem3"] T1 --> S2 T2 --> S2 T3 --> S2 end </pre>	<pre> item def Item1 { item subItem1; item subItem2; item subItem3; } action action1 : Action1 { out item1 : Item1; } action action2 : Action2 { in item2 : Item1; } flow flow1_2 from action1.item1 to action2.item2 { flow source.item1.subItem1 to target.item2.subItem1; flow source.item1.subItem2 to target.item2.subItem2; flow source.item1.subItem3 to target.item2.subItem3; } </pre>
Flows Compartment		<pre> { flow action1.output to action2.input; succession flow action1.output to action2.input; /* ... */ } </pre>
Message	 <pre> graph LR P1["<part> part1 : Part1"] --- M1["msg1"] M1 --- P2["<part> part2 : Part2"] </pre>	<pre> occurrence { part part1 : Part1 { event occurrence ev1; } part part2 : Part2 { event occurrence ev2; } message msg1 from part1.ev1 to part2.ev2; } </pre>

7.13.2 Connection Definitions and Usages

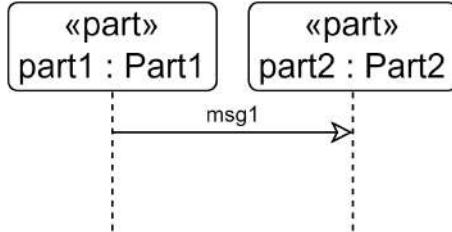Element	Graphical Notation	Textual Notation
Message	 <pre> graph LR part1["«part» part1 : Part1"] -- msg1 --> part2["«part» part2 : Part2"] </pre>	<pre> occurrence { part part1 : Part1 { event occurrence ev1; } part part2 : Part2 { event occurrence ev2; } message msg1 from part1.ev1 to part2.ev2; } </pre>

7.13.2 Connection Definitions and Usages

A connection definition or usage (that is not of a more specialized kind) is declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the kind keyword **connection**. A connection usage must only be defined by connection definitions (of any kind) or KerML association structures (see [KerML, 7.4.5]).

Unless it is abstract, a connection definition or usage must have at least two end features (which may be owned or inherited). A *binary* connection definition or usage is one that has exactly two end features. The end features of a connection definition or usage are always considered referential (non-composite), whether or not their declaration explicitly includes the **ref** keyword. (See also [7.6.3](#) on the notation for end features.)

Connection definitions and usages are also relationships. For a connection definition, its related elements are given by the definitions of its end features. For a connection usage, its related elements are the features associated to each of its end features via *reference subsetting* relationships, whose textual notation is the keyword **references** or the equivalent symbol `::>`. (See also [7.2](#) on Relationships.)

```

// The related elements of this connection definition
// are the part definitions Hub and Device.
connection def DeviceConnection {
  end part hub : Hub[1];
  end part devices : Device[0..*];

  // This is a non-end feature of the connection definition.
  attribute bandwidth : Real;
}

// The related elements of this connection usage
// are the part usages mainSwitch and sensorFeed.
connection connection1 : DeviceConnection {
  end part hub ::> mainSwitch[1];
  end part device ::> sensorFeed[1];
}
  
```

There are two shorthand textual notations for connection usages.

Rather than using explicit end feature declarations in the body of a connection usage, the related features of the connection usage may be identified in a comma-separated list, between parentheses (...), preceded by the keyword **connect**, placed after the connection usage declaration and before its body. The identification of a related feature may optionally be preceded by an end feature name followed by the keyword **references** or the symbol `::>`, and/

A connection definition or usage (that is not of a more specialized kind) is declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the keyword **connection**. A connection usage must only be defined by connection definitions (of any kind) or KerML association structures (see [KerML, 7.4.5]).

Unless it is abstract, a connection definition or usage must have at least two end features (which may be owned or inherited). A *binary* connection definition or usage is one that has exactly two end features. The end features of a connection definition or usage are always considered referential (non-composite), whether or not their declaration explicitly includes the **ref** keyword. (See also [7.6.3](#) on the notation for end features.)

Connection definitions and usages are also relationships. For a connection definition, its related elements are given by the definitions of its end features. For a connection usage, its related elements are the features associated to each of its end features via *reference subsetting* relationships, whose textual notation is the keyword **references** or the equivalent symbol `::>`. (See also [7.2](#) on Relationships.)

```
// The related elements of this connection definition
// are the part definitions Hub and Device.
connection def DeviceConnection {
    end part hub : Hub[1];
    end part devices : Device[0..*];

    // This is a non-end feature of the connection definition.
    attribute bandwidth : Real;
}

// The related elements of this connection usage
// are the part usages mainSwitch and sensorFeed.
connection connection1 : DeviceConnection {
    end part hub ::> mainSwitch[1];
    end part device ::> sensorFeed[1];
}
```

There are two shorthand textual notations for connection usages.

Rather than using explicit end feature declarations in the body of a connection usage, the related features of the connection usage may be identified in a comma-separated list, between parentheses (...), preceded by the keyword **connect**, placed after the connection usage declaration and before its body. The identification of a related feature may optionally be preceded by an end feature name followed by the keyword **references** or the symbol `::>`, and/or followed by a multiplicity. If the declaration part of the connection usage is empty when using this notation, then the keyword **connection** may be omitted.

```
connection connection1 : DeviceConnection connect (
    hub ::> mainSwitch[1], device ::> sensorFeed[1]
);

// This is a ternary connection.
// It is equivalent to "connection connect (item1, item2, item3);"
connect (axle, wheel1, wheel2);
```

If the connection usage is binary, then a further special notation may be used in which the source related feature is identified directly after the keyword **connect** and the target related feature is identified after the keyword **to**. As above, if the declaration part of the connection usage is empty, then the keyword **connection** may be omitted.

```
connection connection1 : DeviceConnection
    connect hub ::> mainSwitch[1] to device ::> sensorFeed[1];

    connect leftWheel to leftHalfAxe;
```

or followed by a multiplicity. If the declaration part of the connection usage is empty when using this notation, then the keyword **connection** may be omitted.

```
connection connection1 : DeviceConnection connect (
    hub ::> mainSwitch[1], device ::> sensorFeed[1]
);

// This is a ternary connection.
// It is equivalent to "connection connect (item1, item2, item3);"
connect (axle, wheel1, wheel2);
```

If the connection usage is binary, then a further special notation may be used in which the source related feature is identified directly after the keyword **connect** and the target related feature is identified after the keyword **to**. As above, if the declaration part of the connection usage is empty, then the keyword **connection** may be omitted.

```
connection connection1 : DeviceConnection
    connect hub ::> mainSwitch[1] to device ::> sensorFeed[1];

connect leftWheel to leftHalfAxle;
```

The base connection definition and usage are `Connection` and `connections` from the `Connections` library (see [9.2.6](#)). For a binary connection definition or usage, the base definition and usage are further restricted to `BinaryConnection` and `binaryConnections`, which enforce that the connection has exactly two ends.

If a connection definition has a single owned superclassification relationship with another connection definition, it may inherit end features from this general connection definition. However, if it declares any owned end features, then each of these must redefine an end feature of the general connection definition, in order, up to the number of end features of the general connection definition. If no redefinition is given explicitly for an owned end feature, then it is considered to implicitly redefine the end feature at the same position, in order, of the general connection definition, if any.

```
// Implicitly specializes Connections::BinaryConnection by default.
connection def Ownership {
    attribute valuationOnPurchase : MonetaryValue;
    end item owner[1..*] : LegalEntity; // Implicitly redefines BinaryConnection::source.
    end item ownedAsset[*] : Asset; // Implicitly redefines BinaryConnection::target.
}
connection def SoleOwnership specializes Ownership {
    end item owner[1]; // Implicitly redefines Ownership::owner.
    // ownedAsset is inherited.
}
```

Note that any specialization of a binary connection definition must also be binary. That is, it can inherit or redefine the two end features from the general connection definition, but it cannot add more end features than two.

If a connection definition has more than one owned superclassification with other connection definitions, then it *must* declare a number of owned end features at least equal to the maximum number of end features of any of the general connection definitions. Each of these owned end features must then redefine the corresponding end feature (if any) at the same position, in order, of each of the general connections, either explicitly or implicitly.

Similar rules hold for the end features of a connection usage that is defined by one or more connection definitions and/or subsets or redefines one or more connection usages.

```
connection connection1 : DeviceConnection {
    end part hub ::> mainSwitch[1]; // Implicitly redefines DeviceConnection::hub.
    end part device ::> sensorFeed[1]; // Implicitly redefines DeviceConnection::device.
}
```

The base connection definition and usage are Connection and connections from the Connections library (see [9.2.6](#)). For a binary connection definition or usage, the base definition and usage are further restricted to BinaryConnection and binaryConnections, which enforce that the connection has exactly two ends.

If a connection definition has a single owned superclassification relationship with another connection definition, it may inherit end features from this general connection definition. However, if it declares any owned end features, then each of these must redefine an end feature of the general connection definition, in order, up to the number of end features of the general connection definition. If no redefinition is given explicitly for an owned end feature, then it is considered to implicitly redefine the end feature at the same position, in order, of the general connection definition, if any.

```
// Implicitly specializes Connections::BinaryConnection by default.
connection def Ownership {
    attribute valuationOnPurchase : MonetaryValue;
    end item owner[1..*] : LegalEntity; // Implicitly redefines BinaryConnection::source.
    end item ownedAsset[*] : Asset; // Implicitly redefines BinaryConnection::target.
}
connection def SoleOwnership specializes Ownership {
    end item owner[1]; // Implicitly redefines Ownership::owner.
    // ownedAsset is inherited.
}
```

Note that any specialization of a binary connection definition must also be binary. That is, it can inherit or redefine the two end features from the general connection definition, but it cannot add more end features than two.

If a connection definition has more than one owned superclassification with other connection definitions, then it *must* declare a number of owned end features at least equal to the maximum number of end features of any of the general connection definitions. Each of these owned end features must then redefine the corresponding end feature (if any) at the same position, in order, of each of the general connections, either explicitly or implicitly.

Similar rules hold for the end features of a connection usage that is defined by one or more connection definitions and/or subsets or redefines one or more connection usages.

```
connection connection1 : DeviceConnection {
    end part hub ::> mainSwitch[1]; // Implicitly redefines DeviceConnection::hub.
    end part device ::> sensorFeed[1]; // Implicitly redefines DeviceConnection::device.
}
```

7.13.3 Bindings as Usages

A binding can be declared as a usage as described in [7.6.3](#), using the kind keyword **binding**. Note that a binding is not a kind of occurrence usage (unlike a regular connection usage), so the notations for time slices, snapshots and individuals (described in [7.9](#)) do *not* apply to it. Further, the two related features of a binding are specified using a special notation.

The two related features of a binding are identified after its declaration part and before its body, following the keyword **bind** and separated by the symbol =. If the declaration part is empty, then the keyword **binding** may be omitted. The end features of a binding always have multiplicity [1..1].

```
part def Vehicle {
    part fuelTank {
        out fuelFlowOut : Fuel;
    }
    part engine {
        in fuelFlowIn : Fuel;
    }
    binding fuelFlowBinding
        bind fuelTank.fuelFlowOut = engine.fuelFlowIn;
```

7.13.3 Bindings as Usages

A binding can be declared as a usage as described in [7.6.3](#), using the kind keyword **binding**. Note that a binding is not a kind of occurrence usage (unlike a regular connection usage), so the notations for time slices, snapshots and individuals (described in [7.9](#)) do *not* apply to it. Further, the two related features of a binding are specified using a special notation.

The two related features of a binding are identified after its declaration part and before its body, following the keyword **bind** and separated by the symbol `=`. If the declaration part is empty, then the keyword **binding** may be omitted. The end features of a binding always have multiplicity `[1..1]`.

```
part def Vehicle {
    part fuelTank {
        out fuelFlowOut : Fuel;
    }
    part engine {
        in fuelFlowIn : Fuel;
    }
    binding fuelFlowBinding
        bind fuelTank.fuelFlowOut = engine.fuelFlowIn;

        // The following is equivalent to the above, but
        // without the name.
        bind fuelTank.fuelFlowOut = engine.fuelFlowIn;
}
```

The base usage for a binding is the the KerML feature `selfLinks` from the `Links` model in the Kernel Semantic Library (see [KerML, 9.2.3]).

7.13.4 Feature Values

A *feature value* is a relationship between an owning usage and a *value expression*, whose result provides values for the feature. The feature value relationship is specified as either *bound* or *initial*, and as either *fixed* or *default*. A usage can have at most one feature value relationship.

A fixed, bound feature value relationship is declared using the symbol `=` followed by a representation of the value expression (using the expression notation from [KerML, 7.4.9]). This notation is appended to the declaration of the usage being bound by the feature value. Usages that have a feature value relationship of this form implicitly have a nested binding between the feature and the result of the value expression.

```
attribute monthsInYear : Natural = 12;
item def TestRecord {
    attribute scores[1...*] : Integer;
    derived attribute averageScore[1] : Rational = sum(scores)/size(scores);
    attribute cutoff : Integer default = 0.75 * averageScore;
}
```

Note. The semantics of binding mean that such a feature value asserts that a feature is *equivalent* to the result of the value expression. To highlight this, a feature with such a feature value can be flagged as **derived** (though this is not required, nor is it required that the value of a **derived** feature be computed using a feature value – see also [7.6.3](#)).

A fixed, initial feature value relationship is declared as above but using the symbol `:=` instead of `=`. In this case, the usage also has an implicit nested binding, but the binding only applies to the *starting snapshot* of the owning definition or usage of the bound usage (which means that the owner must be a kind of occurrence definition or usage, see [7.9](#)). That is, the result of the value expression gives the initial values of the declared feature but, unlike in the case of a bound value, these initial values may subsequently change.

```

// The following is equivalent to the above, but
// without the name.
bind fuelTank.fuelFlowOut = engine.fuelFlowIn;
}

```

The base usage for a binding is the the KerML feature `selfLinks` from the `Links` model in the Kernel Semantic Library (see [KerML, 9.2.3]).

7.13.4 Feature Values

A *feature value* is a relationship between an owning usage and a *value expression*, whose result provides values for the feature. The feature value relationship is specified as either *bound* or *initial*, and as either *fixed* or *default*. A usage can have at most one feature value relationship.

A fixed, bound feature value relationship is declared using the symbol `=` followed by a representation of the value expression (using the expression notation from [KerML, 7.4.9]). This notation is appended to the declaration of the usage being bound by the feature value. Usages that have a feature value relationship of this form implicitly have a nested binding between the feature and the result of the value expression.

```

attribute monthsInYear : Natural = 12;
item def TestRecord {
    attribute scores[1...*] : Integer;
    derived attribute averageScore[1] : Rational = sum(scores)/size(scores);
    attribute cutoff : Integer default = 0.75 * averageScore;
}

```

Note. The semantics of binding mean that such a feature value asserts that a feature is *equivalent* to the result of the value expression. To highlight this, a feature with such a feature value can be flagged as `derived` (though this is not required, nor is it required that the value of a `derived` feature be computed using a feature value – see also [7.6.3](#)).

A fixed, initial feature value relationship is declared as above but using the symbol `:=` instead of `=`. In this case, the usage also has an implicit nested binding, but the binding only applies to the *starting snapshot* of the owning definition or usage of the bound usage (which means that the owner must be a kind of occurrence definition or usage, see [7.9](#)). That is, the result of the value expression gives the initial values of the declared feature but, unlike in the case of a bound value, these initial values may subsequently change.

```

part def Counter {
    attribute count[1] : Natural := 0;
}

```

A default feature value relationship is declared similarly to the above, but with the keyword `default` preceding the symbol `=` or `:=`, depending on whether it is bound or initial. However, for a default, bound feature value, the symbol `=` may be elided.

```

part def Vehicle {
    attribute mass : Real default 1500.0;
    feature engine[1] : Engine default := standardEngine;
}

item def TestWithCutoff :> TestRecord {
    attribute cutoff : Rational default = 0.75 * averageScore;
}

```

For a default feature value relationship, no implicit binding is added to the usage declaration, but the default will apply when an instance of the owning definition or usage is constructed, if no other explicit values are given for the defaulted usage.

```

part def Counter {
    attribute count[1] : Natural := 0;
}

```

A default feature value relationship is declared similarly to the above, but with the keyword **default** preceding the symbol = or :=, depending on whether it is bound or initial. However, for a default, bound feature value, the symbol = may be elided.

```

part def Vehicle {
    attribute mass : Real default 1500.0;
    feature engine[1] : Engine default := standardEngine;
}

item def TestWithCutoff :> TestRecord {
    attribute cutoff : Rational default = 0.75 * averageScore;
}

```

For a default feature value relationship, no implicit binding is added to the usage declaration, but the default will apply when an instance of the owning definition or usage is constructed, if no other explicit values are given for the defaulted usage.

7.13.5 Successions as Usages

A succession can be declared as a usage as described in [7.6.3](#), using the kind keyword **succession**. Note that a succession is not a kind of occurrence usage (unlike a regular connection usage), so the notations for time slices, snapshots and individuals (described in [7.9](#)) do *not* apply to it. Further, the two related features of a succession are specified using a special notation.

The two related features of a succession are identified after its declaration part and before its body, following the keyword **succession** and separated by the keyword **then**. If the declaration part is empty, then the keyword **succession** may be omitted. The related features of a succession must be occurrence usages. As for regular connection usages, constraining multiplicities can also be defined on the end features of a succession.

```

part def Camera {
    action focus[*] : Focus;
    action shoot[*] : Shoot;
    // Each focus may be preceded by a previous focus.
    succession multiFocusing
        first focus[0..1] then focus[0..1];
    // Each shoot must follow a focus.
    first focus[1] then shoot[0..1];
    // The Camera can be focused after shooting.
    first shoot[0..1] then focus;
}

```

If a succession is placed lexically directly between the two occurrence usages that are its related elements, then the declaration of the succession can be shortened to just the keyword **then**, prepended to the declaration of the second occurrence usage. A multiplicity for the source end of the succession can optionally be placed directly after the **then** keyword.

```

occurrence def Flight {
    timeslice preflight[1];
    then timeslice inflight[1];
    then timeslice postflight[1];
}

// The above is equivalent to the following.

```

7.13.5 Successions as Usages

A succession can be declared as a usage as described in [7.6.3](#), using the kind keyword **succession**. Note that a succession is not a kind of occurrence usage (unlike a regular connection usage), so the notations for time slices, snapshots and individuals (described in [7.9](#)) do *not* apply to it. Further, the two related features of a succession are specified using a special notation.

The two related features of a succession are identified after its declaration part and before its body, following the keyword **succession** and separated by the keyword **then**. If the declaration part is empty, then the keyword **succession** may be omitted. The related features of a succession must be occurrence usages. As for regular connection usages, constraining multiplicities can also be defined on the end features of a succession.

```
part def Camera {
    action focus[*] : Focus;
    action shoot[*] : Shoot;
    // Each focus may be preceded by a previous focus.
    succession multiFocusing
        first focus[0..1] then focus[0..1];
    // Each shoot must follow a focus.
    first focus[1] then shoot[0..1];
    // The Camera can be focused after shooting.
    first shoot[0..1] then focus;
}
```

If a succession is placed lexically directly between the two occurrence usages that are its related elements, then the declaration of the succession can be shortened to just the keyword **then**, prepended to the declaration of the second occurrence usage. A multiplicity for the source end of the succession can optionally be placed directly after the **then** keyword.

```
occurrence def Flight {
    timeslice preflight[1];
    then timeslice inflight[1];
    then timeslice postflight[1];
}

// The above is equivalent to the following.
occurrence def Flight {
    timeslice preflight[1];
    first preflight then inflight;
    timeslice inflight[1];
    first inflight then postflight;
    timeslice postflight[1];
}
```

Note. There are additional shorthands for the use of successions within the bodies of action definitions and usages (see [7.16.4](#)).

The base usage for a succession is the KerML feature `happensBeforeLinks` from the `Occurrences` model in the Kernel Semantic Library (see [KerML, 9.2.4]).

7.13.6 Flow Connection Usages and Messages

A flow connection usage may be declared as either a message, a streaming flow or a succession flow.

A flow connection usage is declared as a message similarly to a regular connection usage (see [7.13.2](#)), but with the kind keyword **message**. In addition, the declaration of a message may also optionally include an explicit specification of the name, type (definition) and/or multiplicity of the payload of the message, after the keyword **of**. The payload name is followed by the keyword **defined by** (or the symbol `:`), but this keyword (or the symbol) is

```

occurrence def Flight {
    timeslice preflight[1];
    first preflight then inflight;
    timeslice inflight[1];
    first inflight then postflight;
    timeslice postflight[1];
}

```

Note. There are additional shorthands for the use of successions within the bodies of action definitions and usages (see [7.16.4](#)).

The base usage for a succession is the KerML feature `happensBeforeLinks` from the Occurrences model in the Kernel Semantic Library (see [KerML, 9.2.4]).

7.13.6 Flow Connection Usages and Messages

A flow connection usage may be declared as either a message, a streaming flow or a succession flow.

A flow connection usage is declared as a message similarly to a regular connection usage (see [7.13.2](#)), but with the kind keyword `message`. In addition, the declaration of a message may also optionally include an explicit specification of the name, type (definition) and/or multiplicity of the payload of the message, after the keyword `of`. The payload name is followed by the keyword `defined by` (or the symbol `:`), but this keyword (or the symbol) is omitted if the name is omitted. In the absence of a payload specification, the message declaration does not constrain what kinds of values may be transferred between the source and target of the message.

A message is always abstract (whether or not the `abstract` keyword is included explicitly in its declaration), so its declaration may or may not include identification of source and target related features. If they are included, then they follow the payload specification (if any), with the source related feature identified after the keyword `from`, followed by the target related feature after the keyword `to`. Alternative, if the source and target identification is *not* included, then the message declaration may include a feature value (see [7.13.4](#)) to provide a value for the message.

```

part def Vehicle {
    attribute def ControlSignal;

    part controller;
    part engine;

    message of ControlSignal from controller to engine;
}

```

A streaming flow is declared similarly to a message, but with the kind keyword `flow`. However, instead of identifying the source and target features of the flow, such a flow declaration must identify (after the keyword `from`) the output feature of the source from which the flow receives its payload and (after the keyword `to`) the input feature of the target to which the flow delivers the payload. This is done by giving a feature chain with at least two features, the last of which identifies the output or input feature, with the preceding part of the chain identifying the source or target of the flow. If no declaration part or payload specification is included in the flow declaration, then the `from` keyword may also be omitted.

```

part def Vehicle {
    part fuelTank {
        out fuelOut : Fuel;
    }
    part engine {
        in fuelIn : Fuel;
    }
    // This flow connection usage actually connects the fuelTank to the

```

omitted if the name is omitted. In the absence of a payload specification, the message declaration does not constrain what kinds of values may be transferred between the source and target of the message.

A message is always abstract (whether or not the **abstract** keyword is included explicitly in its declaration), so its declaration may or may not include identification of source and target related features. If they are included, then they follow the payload specification (if any), with the source related feature identified after the keyword **from**, followed by the target related feature after the keyword **to**. Alternative, if the source and target identification is *not* included, then the message declaration may include a feature value (see [7.13.4](#)) to provide a value for the message.

```
part def Vehicle {
    attribute def ControlSignal;

    part controller;
    part engine;

    message of ControlSignal from controller to engine;
}
```

A streaming flow is declared similarly to a message, but with the kind keyword **flow**. However, instead of identifying the source and target features of the flow, such a flow declaration must identify (after the keyword **from**) the output feature of the source from which the flow receives its payload and (after the keyword **to**) the input feature of the target to which the flow delivers the payload. This is done by giving a feature chain with at least two features, the last of which identifies the output or input feature, with the preceding part of the chain identifying the source or target of the flow. If no declaration part or payload specification is included in the flow declaration, then the **from** keyword may also be omitted.

```
part def Vehicle {
    part fuelTank {
        out fuelOut : Fuel;
    }
    part engine {
        in fuelIn : Fuel;
    }
    // This flow connection usage actually connects the fuelTank to the
    // engine. The transfer moves Fuel from fuelOut to fuelIn.
    flow fuelFlow of flowingFuel : Fuel
        from fuelTank.fuelOut to engine.fuelIn;

    // The following is equivalent to the above, except without
    // the name and leaving the payload implicit.
    flow fuelTank.fuelOut to engine.fuelIn;
}
```

A succession flow is declared like a flow declaration above, but using the keyword **succession flow**.

```
action def TakePicture {
    action focus : Focus {
        out image : Image;
    }
    action shoot : Shoot {
        in image : Image;
    }
    // The use of a succession flow connection usage means that focus must
    // complete before the image is transferred, after which shoot can begin.
    succession flow focus.image to shoot.image;
}
```

The base flow connection usages are from the Connections library model (see [7.13](#)):

- messageConnections for a message.

```

// engine. The transfer moves Fuel from fuelOut to fuelIn.
flow fuelFlow of flowingFuel : Fuel
    from fuelTank.fuelOut to engine.fuelIn;

// The following is equivalent to the above, except without
// the name and leaving the payload implicit.
flow fuelTank.fuelOut to engine.fuelIn;
}

```

A succession flow is declared like a flow declaration above, but using the keyword **succession flow**.

```

action def TakePicture {
    action focus : Focus {
        out image : Image;
    }
    action shoot : Shoot {
        in image : Image;
    }
    // The use of a succession flow connection usage means that focus must
    // complete before the image is transferred, after which shoot can begin.
    succession flow focus.image to shoot.image;
}

```

The base flow connection usages are from the Connections library model (see [7.13](#)):

- `messageConnections` for a message.
- `flowConnections` for a streaming flow.
- `successionFlowConnections` for a succession flow.

7.14 Interfaces

7.14.1 Interfaces Overview

Metamodel references:

- *Textual notation*, [8.2.2.14](#)
- *Graphical notation*, [8.2.3.14](#)
- *Abstract syntax*, [8.3.14](#)
- *Semantics*, [8.4.10](#)

An *interface definition* is a kind of connection definition (see [7.13](#)) whose ends are restricted to be port definitions (see [7.12](#)). An *interface usage* is a kind of connection that is usage of an interface definition. The ends of an interface usage are restricted to be port usages.

An interface is simply a connection all of whose ends are ports. As such, an interface facilitates the specification and reuse of compatible connections between parts. For example, consider a *Power* interface definition between an *Appliance* and *Wall Power*. The *power* port on one end of the interface represents the *Appliance* connection point, and the *outlet* port on the other end represents the *Wall Power* connection point. This interface can then be used for connecting many different appliances to wall power.

When modeling physical interactions, an interface definition or usage can contain constraints (see [7.19](#)) to constrain the values of the features of the ports on its ends. For example, such features may be *across* and *through* variables, which are constrained by conservation laws across the interface (e.g., Kirchhoff's Laws). When specifying an interface between electrical components, the across and through variables are port features defined as *Voltage* and *Current* quantities, respectively. The feature values on either port are constrained such that the voltages must be equal, and the sum of the currents must equal zero.

- `flowConnections` for a streaming flow.
- `successionFlowConnections` for a succession flow.

7.14 Interfaces

7.14.1 Interfaces Overview

Metamodel references:

- *Textual notation*, [8.2.2.14](#)
- *Graphical notation*, [8.2.3.14](#)
- *Abstract syntax*, [8.3.14](#)
- *Semantics*, [8.4.10](#)

An *interface definition* is a kind of connection definition (see [7.13](#)) whose ends are restricted to be port definitions (see [7.12](#)). An *interface usage* is a kind of connection that is usage of an interface definition. The ends of an interface usage are restricted to be port usages.

An interface is simply a connection all of whose ends are ports. As such, an interface facilitates the specification and reuse of compatible connections between parts. For example, consider a *Power* interface definition between an *Appliance* and *Wall Power*. The *power* port on one end of the interface represents the *Appliance* connection point, and the *outlet* port on the other end represents the *Wall Power* connection point. This interface can then be used for connecting many different appliances to wall power.

When modeling physical interactions, an interface definition or usage can contain constraints (see [7.19](#)) to constrain the values of the features of the ports on its ends. For example, such features may be *across* and *through* variables, which are constrained by conservation laws across the interface (e.g., Kirchhoff's Laws). When specifying an interface between electrical components, the across and through variables are port features defined as *voltage* and *current* quantities, respectively. The feature values on either port are constrained such that the voltages must be equal, and the sum of the currents must equal zero.

Table 12. Interfaces – Representative Notation

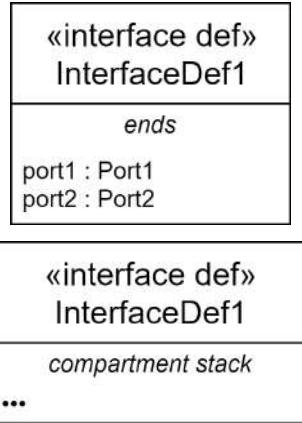


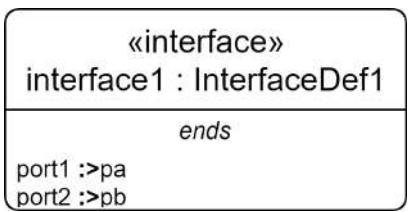
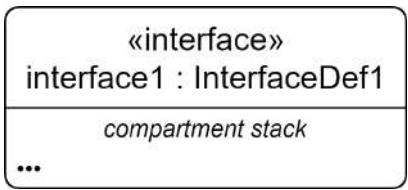
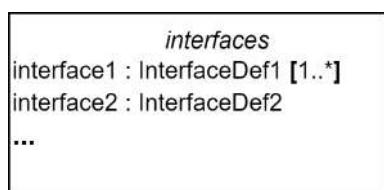
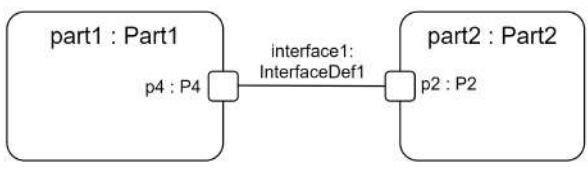
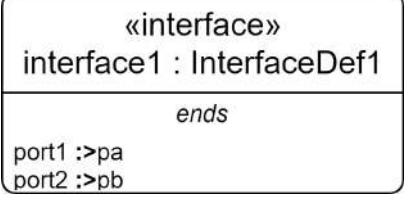
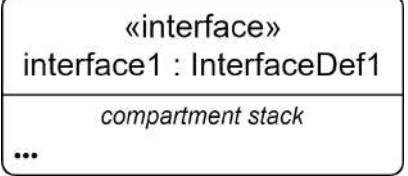
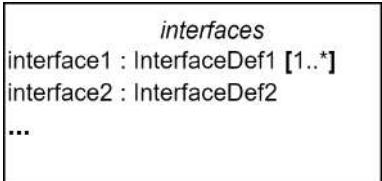

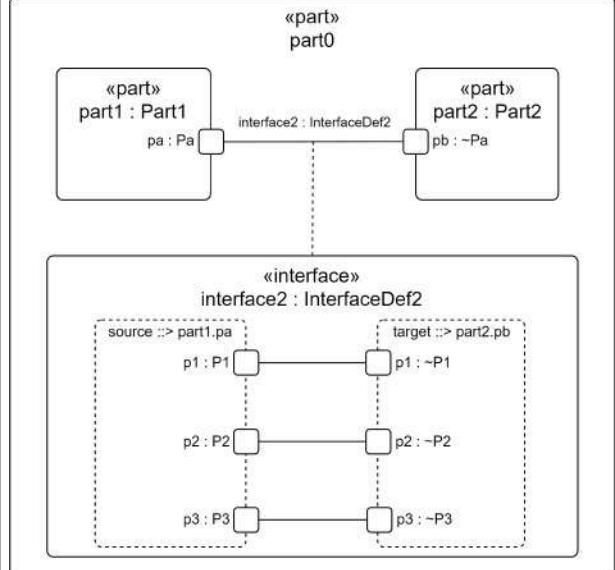
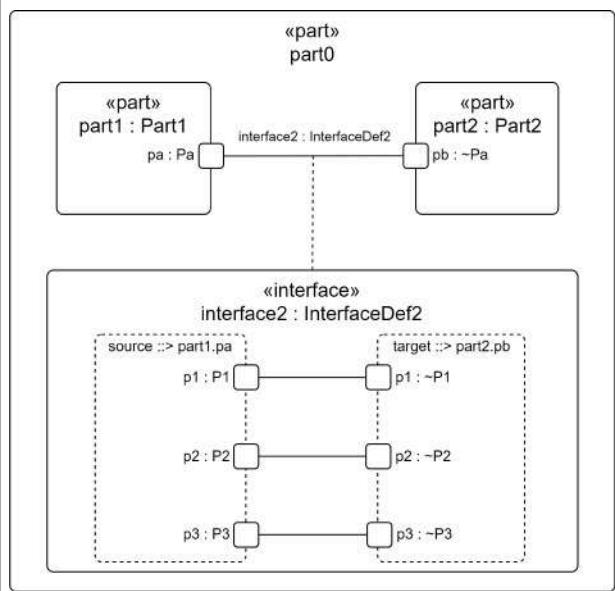
Element	Graphical Notation	Textual Notation
Interface Definition		<pre>interface def InterfaceDef1 { end port1:Port1; end port2:Port2; } interface def InterfaceDef1 { /* members */ }</pre>


Table 12. Interfaces – Representative Notation

Element	Graphical Notation	Textual Notation
Interface Definition	 	<pre data-bbox="1065 375 1348 508">interface def InterfaceDef1 { end port1:Port1; end port2:Port2; }</pre> <pre data-bbox="1065 540 1290 656">interface def InterfaceDef1 { /* members */ }</pre>
Interface	 	<pre data-bbox="1065 819 1383 952">interface interface1 : InterfaceDef1 { end port1 :> pa; end port2 :> pb; }</pre> <pre data-bbox="1065 984 1383 1100">interface interface1 : InterfaceDef1 { /* members */ }</pre>
Interfaces Compartment		<pre data-bbox="1065 1216 1400 1406">{ interface interface1 : InterfaceDef1 [1..*]; interface interface2 : InterfaceDef2; /* ... */ }</pre>
Interface		<pre data-bbox="1065 1480 1383 1765">part part1:Part1 { port p4:P4; } part part2:Part2 { port p2:P2; } interface interface1 : InterfaceDef1 connect part1.p4 to part2.p2;</pre>

Element	Graphical Notation	Textual Notation
Interface	 <pre> <<interface>> interface1 : InterfaceDef1 ends port1 :>pa port2 :>pb </pre>  <pre> <<interface>> interface1 : InterfaceDef1 compartment stack ... </pre>	<pre> interface interface1 : InterfaceDef1 { end port1 :> pa; end port2 :> pb; } interface interface1 : InterfaceDef1 { /* members */ } </pre>
Interfaces Compartment	 <pre> interfaces interface1 : InterfaceDef1 [1..*] interface2 : InterfaceDef2 ... </pre>	<pre> { interface interface1 : InterfaceDef1 [1..*]; interface interface2 : InterfaceDef2; /* ... */ } </pre>
Interface	 <pre> part1 : Part1 p4 : P4 --- interface1: InterfaceDef1 --- part2 : Part2 p2 : P2 </pre>	<pre> part part1:Part1 { port p4:P4; } part part2:Part2 { port p2:P2; } interface interface1 : InterfaceDef1 connect part1.p4 to part2.p2; </pre>

Element	Graphical Notation	Textual Notation
Interface as Node	 <pre> graph TD subgraph "part" part1[part1 : Part1] part0[part0] part2[part2 : Part2] end subgraph "interface" interfaceDef2[interface2 : InterfaceDef2] subgraph source part1pa[part1.pa] end subgraph target part2pb[part2.pb] end p1[p1 : P1] p2[p2 : P2] p3[p3 : P3] p1p1[p1 : ~P1] p2p2[p2 : ~P2] p3p3[p3 : ~P3] end part1 --- part0 part0 --- part2 part1pa --- interfaceDef2 part2pb --- interfaceDef2 interfaceDef2 --- p1 interfaceDef2 --- p2 interfaceDef2 --- p3 p1 --- p1p1 p2 --- p2p2 p3 --- p3p3 </pre>	<pre> port def Pa { port p1 : P1; port p2 : P2; port p3 : P3; } part def Part1 { port pa : Pa; } part def Part2 { port pb : ~Pa; } interface def InterfaceDef2 { end :>> source : Pa; end :>> target : ~Pa; } part part0 { part part1 : Part1; part part2 : Part2; interface interface2 : InterfaceDef2 connect source :::> part1.pa to target :::> part2.pb { interface source.p1 to target.p1; interface source.p2 to target.p2; interface source.p3 to target.p3; } } </pre>

Element	Graphical Notation	Textual Notation
Interface as Node	 <pre> graph TD subgraph InterfaceDef2 [interfaceDef2] direction TB subgraph Source [source] p1p1[p1 : P1] --- p1p1neg[p1 : ~P1] p2p2[p2 : P2] --- p2p2neg[p2 : ~P2] p3p3[p3 : P3] --- p3p3neg[p3 : ~P3] end subgraph Target [target] p1p1neg --- p1t1[p1 : P1] p2p2neg --- p2t1[p2 : P2] p3p3neg --- p3t1[p3 : ~P3] end end </pre>	<pre> port def Pa { port p1 : P1; port p2 : P2; port p3 : P3; } part def Part1 { port pa : Pa; } part def Part2 { port pb : ~Pa; } interface def InterfaceDef2 { end :>> source : Pa; end :>> target : ~Pa; } part part0 { part part1 : Part1; part part2 : Part2; interface interface2 : InterfaceDef2 connect source ::> part1.pa to target ::> part2.pb { interface source.p1 to target.p1; interface source.p2 to target.p2; interface source.p3 to target.p3; } } </pre>

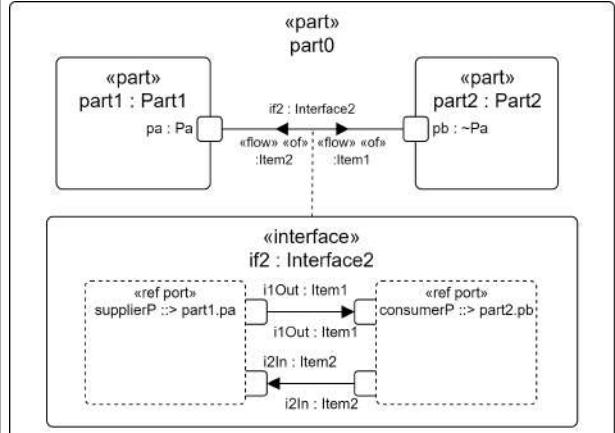Element	Graphical Notation	Textual Notation
Interface as Node (with flow)	 <pre> graph TD part0["«part» part0"] part1["«part» part1 : Part1 pa : Pa"] part2["«part» part2 : Part2 pb : ~Pa"] if2[if2 : Interface2] part0 --- if2 part1 --- if2 part2 --- if2 if2 -- "flows «of» :item2" --> part1 if2 -- "flows «of» :item1" --> part2 subgraph "«interface» if2 : Interface2" supplierP["ref port supplierP ::> part1.pa"] consumerP["ref port consumerP ::> part2.pb"] supplierP -- "i1Out : Item1" --> consumerP consumerP -- "i1Out : Item1" --> supplierP consumerP -- "i2In : Item2" --> supplierP supplierP -- "i2In : Item2" --> consumerP end </pre>	<pre> port def Pa { out item i1Out : Item1; in item i2In : Item2; } interface def Interface2 { end supplierP : Pa; end consumerP : ~Pa; flow supplierP.i1Out to consumerP.i1Out; flow consumerP.i2In to supplierP.i2In; } part part0 { part part1 : Part1 { port pa : Pa; } part part2 : Part2 { port pb : ~Pa; } interface if2 : Interface2 connect part1.pa to part2.pb; } </pre>

7.14.2 Interface Definitions and Usages

An interface definition or usage is declared like a connection definition or usage (see [7.13.2](#)), but using the kind keyword **interface**. An interface usage must only be defined by interface definitions. All the end features of an interface definition or usage must be port usages, so the use of the **port** keyword is optional on such end features.


The shorthand notations for connection usages described in (see [7.13.2](#)) may also be used for interface usages. However, if the declaration part of an interface usage is empty, then the **interface** keyword is still included, but the **connect** keyword may be omitted.

```

port def FuelingPort {
    out fuel : Fuel;
}
interface def FuelingInterface {
    end fuelOutPort : FuelingPort;
    end fuelInPort : ~FuelingPort;
}
interface fuelLine : FuelingInterface
    connect fuelTank.fuelingPort to engine.fuelingPort;
// The following is equivalent to the above, except
// for not using a specialized interface definition.
interface fuelTank.fuelingPort to engine.fuelingPort;

```

The base interface definition and usage are **Interface** and **interfaces** from the **Interfaces** library (see [9.2.7](#)). For a binary interface definition or usage, the base definition and usage are further restricted to **BinaryInterface** and **binaryInterfaces**, which enforce that the interface has exactly two ends.

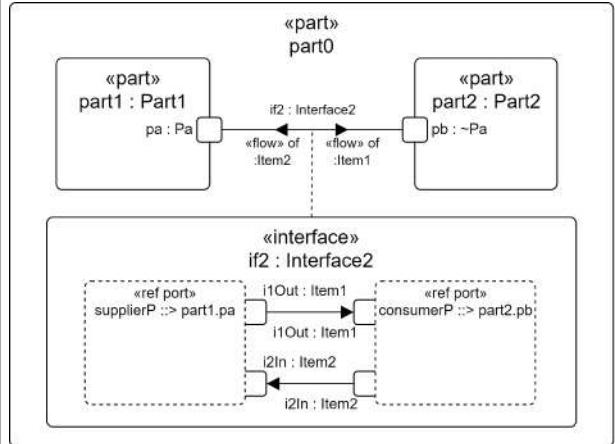Element	Graphical Notation	Textual Notation
Interface as Node (with flow)		<pre> port def Pa { out item i1Out : Item1; in item i2In : Item2; } interface def Interface2 { end supplierP : Pa; end consumerP : ~Pa; flow supplierP.i1Out to consumerP.i2In; flow consumerP.i1Out to supplierP.i2In; } part part0 { part part1 : Part1 { port pa : Pa; } part part2 : Part2 { port pb : ~Pa; } interface if2 : Interface2 connect part1.pa to part2.pb; } </pre>

SYSML2 -177: Guillemets should not be used on keywords in textual notation snippets used in the graphical notation

7.14.2 Interface Definitions and Usages

An interface definition or usage is declared like a connection definition or usage (see [7.13.2](#)), but using the kind keyword **interface**. An interface usage must only be defined by interface definitions. All the end features of an interface definition or usage must be port usages, so the use of the **port** keyword is optional on such end features.

The shorthand notations for connection usages described in (see [7.13.2](#)) may also be used for interface usages. However, if the declaration part of an interface usage is empty, then the **interface** keyword is still included, but the **connect** keyword may be omitted.

```

port def FuelingPort {
  out fuel : Fuel;
}
interface def FuelingInterface {
  end fuelOutPort : FuelingPort;
  end fuelInPort : ~FuelingPort;
}
interface fuelLine : FuelingInterface
  connect fuelTank.fuelingPort to engine.fuelingPort;
// The following is equivalent to the above, except
// for not using a specialized interface definition.
interface fuelTank.fuelingPort to engine.fuelingPort;

```

The base interface definition and usage are **Interface** and **interfaces** from the **Interfaces** library (see [9.2.7](#)). For a binary interface definition or usage, the base definition and usage are further restricted to **BinaryInterface** and **binaryInterfaces**, which enforce that the interface has exactly two ends.

7.15 Allocations

7.15.1 Allocations Overview

Metamodel references:



- *Textual notation*, [8.2.2.15](#)
- *Graphical notation*, [8.2.3.15](#)
- *Abstract syntax*, [8.3.15](#)
- *Semantics*, [8.4.11](#)

An *allocation definition* is a *connection definition* (see [7.13](#)) that specifies that a target element is responsible for realizing some or all of the intent of the source element. An *allocation usage* is a usage of one or more allocation definitions. An allocation definition or usage can be further refined using nested allocation usages that provide a finer-grained decomposition of the containing allocation.

As used by systems engineers, an allocation denotes a "mapping" across the various structures and hierarchies of a system model. This concept of "allocation" requires flexibility suitable for abstract system specification, rather than a particular constrained method of system or software design. System modelers often associate various elements in a user model in abstract, preliminary, and sometimes tentative ways. Allocations can be used early in the design as a precursor to more detailed rigorous specifications and implementations.

Allocations can provide an effective means for navigating a model by establishing cross relationships and ensuring that various parts of the model are properly integrated. Since these relationships are instantiable connections, they can also be semantically related to other such relationships, including satisfying requirements (see [7.20](#)), performing actions (see [7.16](#)) and exhibiting states (see [7.17](#)). Modelers can also create specialized allocation definitions to reflect conventions for allocation on specific projects or within certain system models.

Table 13. Allocations – Representative Notation

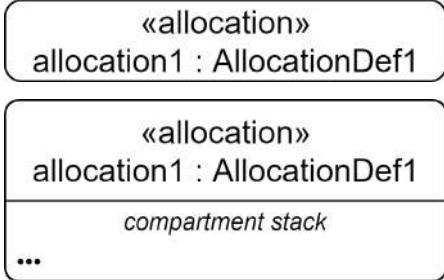Element	Graphical Notation	Textual Notation
Allocation Definition		<pre>allocation def AllocationDef1; allocation def AllocationDef1 { /* members */ }</pre>
Allocation		<pre>allocation allocation1 : AllocationDef1; allocation allocation1 : AllocationDef1 { /* members */ }</pre>

7.15 Allocations

7.15.1 Allocations Overview

Metamodel references:




- *Textual notation*, [8.2.2.15](#)
- *Graphical notation*, [8.2.3.15](#)
- *Abstract syntax*, [8.3.15](#)
- *Semantics*, [8.4.11](#)




An *allocation definition* is a *connection definition* (see [7.13](#)) that specifies that a target element is responsible for realizing some or all of the intent of the source element. An *allocation usage* is a usage of one or more allocation definitions. An allocation definition or usage can be further refined using nested allocation usages that provide a finer-grained decomposition of the containing allocation.

As used by systems engineers, an allocation denotes a "mapping" across the various structures and hierarchies of a system model. This concept of "allocation" requires flexibility suitable for abstract system specification, rather than a particular constrained method of system or software design. System modelers often associate various elements in a user model in abstract, preliminary, and sometimes tentative ways. Allocations can be used early in the design as a precursor to more detailed rigorous specifications and implementations.

Allocations can provide an effective means for navigating a model by establishing cross relationships and ensuring that various parts of the model are properly integrated. Since these relationships are instantiable connections, they can also be semantically related to other such relationships, including satisfying requirements (see [7.20](#)), performing actions (see [7.16](#)) and exhibiting states (see [7.17](#)). Modelers can also create specialized allocation definitions to reflect conventions for allocation on specific projects or within certain system models.

Table 13. Allocations – Representative Notation

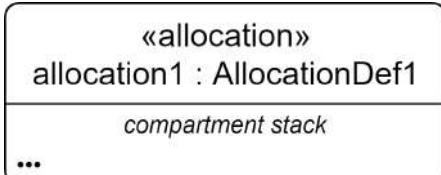Element	Graphical Notation	Textual Notation
Allocation Definition	 	<pre>allocation def AllocationDef1; allocation def AllocationDef1 { /* members */ }</pre>
Allocation	 	<pre>allocation allocation1 : AllocationDef1; allocation allocation1 : AllocationDef1 { /* members */ }</pre>

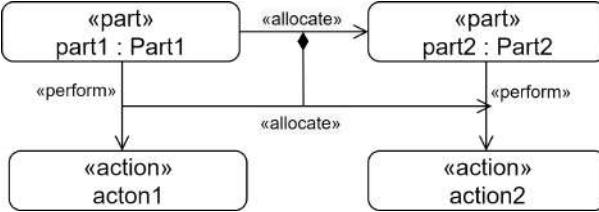Element	Graphical Notation	Textual Notation
Allocated Compartment		<pre data-bbox="1065 287 1367 445">part part3 { allocate part1 to part3; allocate part3 to part2; }</pre>
Allocation		<pre data-bbox="1065 530 1416 604">part part1 : Part1; part part2 : Part2; allocate part1 to part2;</pre>
Allocation (with sub allocation)		<pre data-bbox="1065 709 1405 1047">part part1 : Part1 { perform action1; } part part2 : Part2 { perform action2; } allocate part1 to part2 { allocate part1.action1 to part2.action2; }</pre>

7.15.2 Allocation Definitions and Usages




An allocation definition or usage is declared like a connection definition or usage (see [7.13.2](#)), but using the kind keyword **allocation**. An allocation usage must only be defined by allocation definitions. Allocation definitions and usages are always binary, having exactly two end features, even if abstract.

Shorthand notations similar to those for connection usages, as described in see [7.13.2](#), may also be used for allocation usages, but using the keyword **allocate** instead of **connect**. If the declaration part of the allocation usage is empty when using this notation, then the keyword **allocation** may be omitted.

```

part def LogicalSystem {
  part component : LogicalComponent;
}
part def PhysicalDevice {
  part assembly : PhysicalAssembly;
}
allocation def LogicalToPhysicalAllocation {
  end part logical : LogicalSystem;
  end part physical : PhysicalDevice;

  // This is a nested sub-allocation.
  allocate logical.component to physical.assembly;
}
part system : LogicalSystem;
part device : PhysicalDevice;
```

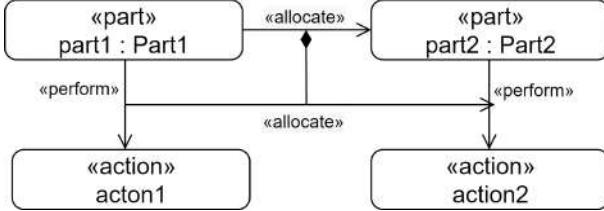Element	Graphical Notation	Textual Notation
Allocated Compartment		<pre>part part3 { allocate part1 to part3; allocate part3 to part2; }</pre>
Allocation		<pre>part part1 : Part1; part part2 : Part2; allocate part1 to part2;</pre>
Allocation (with sub allocation)		<pre>part part1 : Part1 { perform action1; } part part2 : Part2 { perform action2; } allocate part1 to part2 { allocate part1.action1 to part2.action2; }</pre>

7.15.2 Allocation Definitions and Usages

An allocation definition or usage is declared like a connection definition or usage (see [7.13.2](#)), but using the kind keyword **allocation**. An allocation usage must only be defined by allocation definitions. Allocation definitions and usages are always binary, having exactly two end features, even if abstract.

Shorthand notations similar to those for connection usages, as described in see [7.13.2](#), may also be used for allocation usages, but using the keyword **allocate** instead of **connect**. If the declaration part of the allocation usage is empty when using this notation, then the keyword **allocation** may be omitted.

```
part def LogicalSystem {
    part component : LogicalComponent;
}
part def PhysicalDevice {
    part assembly : PhysicalAssembly;
}
allocation def LogicalToPhysicalAllocation {
    end part logical : LogicalSystem;
    end part physical : PhysicalDevice;

    // This is a nested sub-allocation.
    allocate logical.component to physical.assembly;
}

part system : LogicalSystem;
part device : PhysicalDevice;
allocation systemToDevice : LogicalToPhysicalAllocation
    allocate logical ::> system to physical ::> device;
```

```

allocation systemToDevice : LogicalToPhysicalAllocation
    allocate logical ::> system to physical ::> device;

```

The base allocation definition and usage are **Allocation** and **allocations** from the **Allocations** library model (see [9.2.8](#)).

7.16 Actions

7.16.1 Actions Overview

Metamodel references:

- *Textual notation*, [8.2.2.16](#)
- *Graphical notation*, [8.2.3.16](#)
- *Abstract syntax*, [8.3.16](#)
- *Semantics*, [8.4.12](#)

Action Definition and Usage

An *action definition* is a kind of occurrence definition (see [7.9](#)) that classifies action performances. An *action usage* is a kind of occurrence usage that is a usage of one or more action definitions.

An action definition may have features with directions **in**, **out** or **inout** that act as the *parameters* of the action. Features with direction **in** or **inout** are input parameters, and features with direction **out** or **inout** are output parameters. An action usage inherits the parameters of its definitions, if any, and it can also define its own parameters to augment or redefine those of its definitions.

Actions are occurrences over time that can coordinate the performance of other actions and generate effects on items and parts involved in the performance (including those items' existence and relation to other things). The features of an action definition or usage that are themselves action usages specify the performance of the action in terms of the performances of each of the subactions. If an action has parameters, then it may also transform the values of its input parameters into values of its output parameters.

Action definitions and usages follow the same patterns that apply to structural elements (see [7.6](#)). Action definitions and action usages can be decomposed into lower-level action usages to create an action tree, and action usages can be referenced by other actions. In addition, an action definition can be subclassified, and an action usage can be subsetted or redefined. This provides enhanced flexibility to modify a hierarchy of action usages to adapt to its context.

Performed Actions

A *perform action usage* is an action usage that specifies that an action is performed by the owner of the performed action usage. A perform action usage is referential, which allows the performed action behavior to be defined in a different context than that of the performer (perhaps by an action usage in a functionally decomposed action tree). However, if the owner of the perform action usage is an occurrence, then the referenced action performance must be carried out entirely within the lifetime of the performing occurrence.

In particular, a perform action usage can be a feature of a part definition or usage, specifying that the referenced action is performed by the containing part during its lifetime. A perform action usage can also be a feature of an action definition or usage. In this case, the perform action usage represents a "call" from the containing action to the performed action.

The base allocation definition and usage are Allocation and allocations from the Allocations library model (see [9.2.8](#)).

7.16 Actions

7.16.1 Actions Overview

SYSML2 -177: Guillemets should not be used on keywords in textual notation snippets used in the graphical notation

SYSML2 -44: Transformation of UML4SysML::ActivityFinalNode is not specified yet

SYSML2 -200: Structured actions not properly covered by GBNF and notation tables

SYSML2 -230: Inconsistent graphical notation for view frame

Metamodel references:

- *Textual notation*, [8.2.2.16](#)
- *Graphical notation*, [8.2.3.16](#)
- *Abstract syntax*, [8.3.16](#)
- *Semantics*, [8.4.12](#)

Action Definition and Usage

An *action definition* is a kind of occurrence definition (see [7.9](#)) that classifies action performances. An *action usage* is a kind of occurrence usage that is a usage of one or more action definitions.

An action definition may have features with directions **in**, **out** or **inout** that act as the *parameters* of the action. Features with direction **in** or **inout** are input parameters, and features with direction **out** or **inout** are output parameters. An action usage inherits the parameters of its definitions, if any, and it can also define its own parameters to augment or redefine those of its definitions.

Actions are occurrences over time that can coordinate the performance of other actions and generate effects on items and parts involved in the performance (including those items' existence and relation to other things). The features of an action definition or usage that are themselves action usages specify the performance of the action in terms of the performances of each of the subactions. If an action has parameters, then it may also transform the values of its input parameters into values of its output parameters.

Action definitions and usages follow the same patterns that apply to structural elements (see [7.6](#)). Action definitions and action usages can be decomposed into lower-level action usages to create an action tree, and action usages can be referenced by other actions. In addition, an action definition can be subclassified, and an action usage can be subsetted or redefined. This provides enhanced flexibility to modify a hierarchy of action usages to adapt to its context.

Performed Actions

A *perform action usage* is an action usage that specifies that an action is performed by the owner of the performed action usage. A perform action usage is referential, which allows the performed action behavior to be defined in a different context than that of the performer (perhaps by an action usage in a functionally decomposed action tree). However, if the owner of the perform action usage is an occurrence, then the referenced action performance must be carried out entirely within the lifetime of the performing occurrence.

In particular, a perform action usage can be a feature of a part definition or usage, specifying that the referenced action is performed by the containing part during its lifetime. A perform action usage can also be a feature of an action definition or usage. In this case, the perform action usage represents a "call" from the containing action to the performed action.

Sequencing of Actions

Since action usages are kinds of occurrence usages, their ordering can be specified using successions (see [7.13](#)). However, a succession between action usages may, additionally, have a *guard condition*, represented as a Boolean expression (see [7.18](#)). If the succession has a guard, then the time ordering of the source and target of the succession is only asserted when the guard condition evaluates to `true`.

The sequencing of action usages may be further controlled using *control nodes*, which are special kinds of action usages that impose additional constraints on action sequencing. Control nodes are always connected to other actions usages by incoming and outgoing successions (with or without guards). The kinds of control nodes include the following.

- A *fork node* has one incoming succession and one or more outgoing successions. The actions connected to the outgoing successions cannot start until the action connected to the incoming succession has completed.
- A *join node* has one or more incoming successions and one outgoing succession. The action connected to the outgoing succession cannot start until all the actions connected to the incoming successions have completed.
- A *decision node* has one incoming succession and one or more outgoing successions. Exactly one of the actions connected to an outgoing succession can start after the action connected to the incoming succession has completed. Which of the downstream actions is performed can be controlled by placing guards on the outgoing successions.
- A *merge node* has one or more incoming successions and one outgoing succession. The action connected to the outgoing succession cannot start until any one of the actions connected to an incoming succession has completed.

Bindings and Flows Between Actions

An output parameter of one action usage may be *bound* to the input parameter of another action usage (see [7.13](#) on binding). Such a binding indicates that the values of the target input parameter will always be the same as the values of the source output parameter. If the two actions are performed concurrently, then this equivalence will be maintained over time throughout their performances. An input parameter of an action definition or usage can also be bound to the input parameter of a nested action usage, passing the values of the input parameter into the nested action, and an output parameter of a nested action usage can be bound an output parameter of a containing action definition or usage, passing the values of the output parameter out.

The binding of action parameters, however, does not model the case when there is an actual *transfer* of items between the actions that may itself take time or have other modeled properties. Such a transfer can be more properly modeled using a flow connection between the two action usages (see [7.13](#)), in which the transfer source output is an output parameter of the source action usage and the transfer target input is the input parameter of the target action usage. A streaming flow connection represents a flow in which the transfer can be ongoing while both the source and target action are being performed. A succession flow connection represents a flow that imposes the additional succession constraint that the transfer cannot begin until the source action completes and the target action cannot start until the transfer has completed.

Transfers can also be performed using *send and accept action usages*. In this case, the source and target of the transfer do not have to be explicitly connected with a flow. Instead, the source of the transfer is specified using a send action usage contained in some source part or action, while the target is given by an accept action usage in some destination part or action (which may be the same as or different than the source). A send action usage includes an expression that is evaluated to provide the values to be transferred, and it specifies the destination to which those values are to be sent (possibly delegated through a port and across one or more interfaces – see also [7.12](#) and [7.14](#) on interfaces between ports). An accept action usage specifies the type of values that can be received by the action. When a send action performed in the source is matched with a compatible accept action performed in the destination, then the transfer of values from the origin to the destination can be completed.

Sequencing of Actions

Since action usages are kinds of occurrence usages, their ordering can be specified using successions (see [7.13](#)). However, a succession between action usages may, additionally, have a *guard condition*, represented as a Boolean expression (see [7.18](#)). If the succession has a guard, then the time ordering of the source and target of the succession is only asserted when the guard condition evaluates to `true`.

The sequencing of action usages may be further controlled using *control nodes*, which are special kinds of action usages that impose additional constraints on action sequencing. Control nodes are always connected to other actions usages by incoming and outgoing successions (with or without guards). The kinds of control nodes include the following.

- A *fork node* has one incoming succession and one or more outgoing successions. The actions connected to the outgoing successions cannot start until the action connected to the incoming succession has completed.
- A *join node* has one or more incoming successions and one outgoing succession. The action connected to the outgoing succession cannot start until all the actions connected to the incoming successions have completed.
- A *decision node* has one incoming succession and one or more outgoing successions. Exactly one of the actions connected to an outgoing succession can start after the action connected to the incoming succession has completed. Which of the downstream actions is performed can be controlled by placing guards on the outgoing successions.
- A *merge node* has one or more incoming successions and one outgoing succession. The action connected to the outgoing succession cannot start until any one of the actions connected to an incoming succession has completed.

Bindings and Flows Between Actions

An output parameter of one action usage may be *bound* to the input parameter of another action usage (see [7.13](#) on binding). Such a binding indicates that the values of the target input parameter will always be the same as the values of the source output parameter. If the two actions are performed concurrently, then this equivalence will be maintained over time throughout their performances. An input parameter of an action definition or usage can also be bound to the input parameter of a nested action usage, passing the values of the input parameter into the nested action, and an output parameter of a nested action usage can be bound an output parameter of a containing action definition or usage, passing the values of the output parameter out.

The binding of action parameters, however, does not model the case when there is an actual *transfer* of items between the actions that may itself take time or have other modeled properties. Such a transfer can be more properly modeled using a flow connection between the two action usages (see [7.13](#)), in which the transfer source output is an output parameter of the source action usage and the transfer target input is the input parameter of the target action usage. A streaming flow connection represents a flow in which the transfer can be ongoing while both the source and target action are being performed. A succession flow connection represents a flow that imposes the additional succession constraint that the transfer cannot begin until the source action completes and the target action cannot start until the transfer has completed.

Transfers can also be performed using *send and accept action usages*. In this case, the source and target of the transfer do not have to be explicitly connected with a flow. Instead, the source of the transfer is specified using a send action usage contained in some source part or action, while the target is given by an accept action usage in some destination part or action (which may be the same as or different than the source). A send action usage includes an expression that is evaluated to provide the values to be transferred, and it specifies the destination to which those values are to be sent (possibly delegated through a port and across one or more interfaces – see also [7.12](#) and [7.14](#) on interfaces between ports). An accept action usage specifies the type of values that can be received by the action. When a send action performed in the source is matched with a compatible accept action performed in the destination, then the transfer of values from the origin to the destination can be completed.

Assignment Actions

An *assignment action usage* is used to change the value of a *referent* feature of a *target* occurrence. The target is specified as the result of an expression and the referent is specified as a feature chain relative to that target. The new value for the feature is determined as the result of a different expression. When the assignment action usage completes, the referent feature has the new assigned value for the target occurrence.

Note that the target must be an occurrence, because the values of the features of attributes do not change over time (see also [7.7](#) on attributes and [7.9](#) on occurrences). If the referent feature has a multiplicity upper bound other than 1, then an assignment action can assign multiple values to it, consistent with the multiplicity of the feature. The values are all assigned atomically, at the same time.

A *initializing feature value* can be used as a shorthand for assigning an initial value to a usage as part of the declaration of the usage that is a feature of an occurrence definition or usage. Unlike when feature is a bound using a feature value (as described in [7.13](#)), the initial value of a feature can be later assigned a different value.

As for a binding feature value, there are two types of initializing feature value.

- A *fixed* feature value assigns the result of evaluating the given expression to a usage at the point of declaration of the usage. Such an assignment cannot be overridden in a redefinition of the usage because, once asserted, it would be indeterminate which initialization is to be used.
- A *default* feature value also includes an initial-value expression, but it does not immediately assign an initial value to the usage. Instead, the evaluation of the expression and the assignment of its result to the usage is delayed until the instantiation of a definition or usage that features the original usage. Unlike a fixed feature value, a default feature value can be overridden in a redefinition of its original feature with a new feature value (fixed or default). In this case, the new overriding feature value is used instead of the original feature value for initializing the redefining usage.

Structured Control Actions

Structured control action usages are used to control the performance of nested action usages in a structured way. There are three kinds of structured control action usages:

1. An *if action usage* evaluates a *condition expression* and then performs a *then clause* action usage if the expression evaluates to true, or, optionally, an *else clause* action usage if the expression evaluates to false.
2. A *while loop action usage* performs a *body clause* action usage iteratively, as long as its *while expression* continues to evaluate to true and its *until expression* continues to evaluate to false.
3. A *for loop action usage* performs a *body clause* action usage iteratively, assigning a *loop variable* successively for each iteration to the values resulting from the evaluation of a *sequence expression*.

Table 14. Actions – Representative Notation

Element	Graphical Notation	Textual Notation
Action Definition	<div style="border: 1px solid black; padding: 10px;"><p>«action def»</p><p>ActionDef1</p><p>«action def»</p><p>ActionDef1</p><p>compartment stack</p><p>...</p></div>	<pre>action def ActionDef1; action def ActionDef1 { /* members */ }</pre>

Assignment Actions

An *assignment action usage* is used to change the value of a *referent* feature of a *target* occurrence. The target is specified as the result of an expression and the referent is specified as a feature chain relative to that target. The new value for the feature is determined as the result of a different expression. When the assignment action usage completes, the referent feature has the new assigned value for the target occurrence.

Note that the target must be an occurrence, because the values of the features of attributes do not change over time (see also [7.7](#) on attributes and [7.9](#) on occurrences). If the referent feature has a multiplicity upper bound other than 1, then an assignment action can assign multiple values to it, consistent with the multiplicity of the feature. The values are all assigned atomically, at the same time.

A *initializing feature value* can be used as a shorthand for assigning an initial value to a usage as part of the declaration of the usage that is a feature of an occurrence definition or usage. Unlike when feature is a bound using a feature value (as described in [7.13](#)), the initial value of a feature can be later assigned a different value.

As for a binding feature value, there are two types of initializing feature value.

- A *fixed* feature value assigns the result of evaluating the given expression to a usage at the point of declaration of the usage. Such an assignment cannot be overridden in a redefinition of the usage because, once asserted, it would be indeterminate which initialization is to be used.
- A *default* feature value also includes an initial-value expression, but it does not immediately assign an initial value to the usage. Instead, the evaluation of the expression and the assignment of its result to the usage is delayed until the instantiation of a definition or usage that features the original usage. Unlike a fixed feature value, a default feature value can be overridden in a redefinition of its original feature with a new feature value (fixed or default). In this case, the new overriding feature value is used instead of the original feature value for initializing the redefining usage.

Terminate Actions

A *terminate action usage* is used to terminate the performance of some other action. The terminated action ends its performance by the completion of the terminate action usage. The terminated action may be given as an argument to the terminate action usage. If not given explicitly, by default, a terminate action usage terminates its own immediately containing action.

A terminate action usage may also be used to terminate a non-action occurrence. In this case, the lifetime of the terminated occurrence must end by the completion of the terminate action usage (see also [7.9.1](#) on occurrence lifetimes). That is, the terminate action usage effectively "destroys" the terminated occurrence.

Structured Control Actions

Structured control action usages are used to control the performance of nested action usages in a structured way. There are three kinds of structured control action usages:

1. An *if action usage* evaluates a *condition expression* and then performs a *then clause* action usage if the expression evaluates to true, or, optionally, an *else clause* action usage if the expression evaluates to false.
2. A *while loop action usage* performs a *body clause* action usage iteratively, as long as its *while expression* continues to evaluate to true and its *until expression* continues to evaluate to false.
3. A *for loop action usage* performs a *body clause* action usage iteratively, assigning a *loop variable* successively for each iteration to the values resulting from the evaluation of a *sequence expression*.


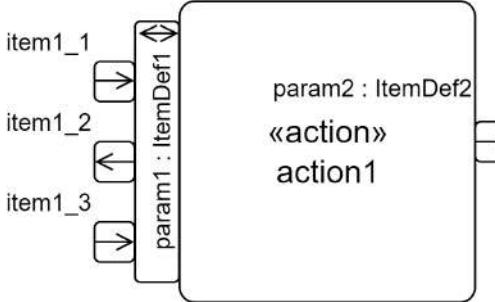
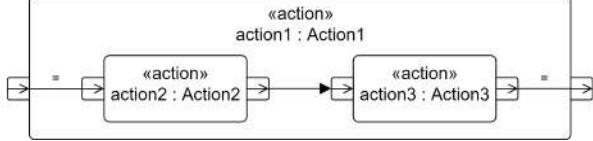


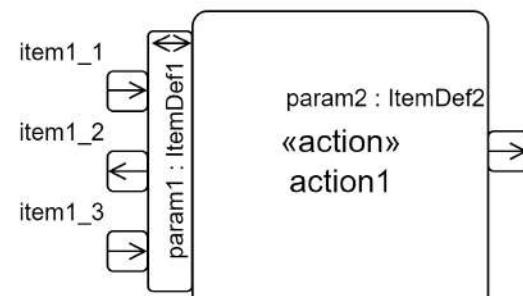

Element	Graphical Notation	Textual Notation
Action		<pre data-bbox="1065 304 1302 361">action action1 : ActionDef1;</pre> <pre data-bbox="1065 392 1302 494">action action1 : ActionDef1 { /* members */ }</pre>
Action with Parameters		<pre data-bbox="1065 608 1367 910">item def ItemDef1 { in item 'item1.1'; out item 'item1.2'; in item 'item1.3'; } action action1 { inout param1 : ItemDef1; out param2 : ItemDef2; }</pre>
Action with Graphical Compartment showing standard action flow view		<pre data-bbox="1065 1005 1405 1634">action action1 : Action1 { in input1; bind input1 = action2.input2; action action2 : Action2 { in input2; out output2; } flow action2.output2 to action3.input3; action action3 : Action3 { in input3; out output3; } bind action3.output3 = output1; out output1; }</pre>

Table 14. Actions – Representative Notation


Element	Graphical Notation	Textual Notation
Action Definition		<pre>action def ActionDef1; action def ActionDef1 { /* members */ }</pre>
Action		<pre>action action1 : ActionDef1; action action1 : ActionDef1 { /* members */ }</pre>
Action with Parameters		<pre>item def ItemDef1 { in item 'item1.1'; out item 'item1.2'; in item 'item1.3'; } action action1 { inout param1 :ItemDef1; out param2 : ItemDef2; }</pre>

Element	Graphical Notation	Textual Notation
Actions Compartment	<pre> <i>actions</i> ^action2 : ActionDef2 (in : ParamDef1, out : ParamDef2) action1 : ActionDef1 [1..*] ordered nonunique action3R : ActionDef3R redefines action3 action4R : ActionDef4R :>> action4 :>> action5 action6S : ActionDef6S [m] subsets action6 action7S : ActionDef7S [m] :> action7 action8R = action8 ref action9 : ActionDef9 perform action10 action11 ... </pre>	<pre> { action action1 : ActionDef1 [1..*] ordered nonunique; /* ... */ perform action action10; action action11 { action 'action11.1'; action 'action11.2'; } } </pre>
Perform Actions Compartment	<pre> <i>perform actions</i> ^action2 : ActionDef2 (in : ParamDef1, out : ParamDef2) action1 : ActionDef1 [1..*] ordered nonunique action3R : ActionDef3R redefines action3 action4R : ActionDef4R :>> action4 :>> action5 action6S : ActionDef6S [m] subsets action6 action7S : ActionDef7S [m] :> action7 action8R = action8 action11 ... </pre>	<pre> { perform action action1 : ActionDef1 [1..*] ordered nonunique; /* ... */ } </pre>

Element	Graphical Notation	Textual Notation
Action with Graphical Compartment showing standard action flow view		<pre> action action1 : Action1 { in input1; bind input1 = action2.input2; action action2 : Action2 { in input2; out output2; } flow action2.output2 to action3.input3; action action3 : Action3 { in input3; out output3; } bind action3.output3 = output1; out output1; } </pre>
Actions Compartment	<pre> actions ^action2 : ActionDef2 (in : ParamDef1, out : ParamDef2) action1 : ActionDef1 [1..*] ordered nonunique action3R : ActionDef3R redefines action3 action4R : ActionDef4R >> action4 :>> action5 action6S : ActionDef6S [m] subsets action6 action7S : ActionDef7S [m] >> action7 action8R = action8 ref action9 : ActionDef9 perform action10 action11 ... </pre>	<pre> { action action1 : ActionDef1 [1..*] ordered nonunique; /* ... */ perform action action10; action action11 { action ' action11.1'; action ' action11.2'; } } </pre>


Element	Graphical Notation	Textual Notation
Perform Actions Swimlanes	<p>«view» part0ActionFlowView1 : ActionFlowView</p> <pre> graph TD subgraph part0 [part0 : PartDef0] direction TB part0 --> part1[part1 : PartDef1] part0 --> part2[part2 : PartDef2] part0 --> action0["action
part0::action0"] action0 --> action1["action
action1"] action0 --> action4["action
action4"] action1 --> action2["action
action2"] action2 --> action3["action
action3"] action3 --> action4 end subgraph part1 [part1 : PartDef1] direction TB part1 --> action1 part1 --> action4 end subgraph part2 [part2 : PartDef2] direction TB part2 --> action2 part2 --> action3 end </pre> <p>«view» part0ActionFlowView2 : ActionFlowView</p> <pre> graph TD subgraph part0 [part0 : PartDef0] direction TB part0 --> part1[part1 : PartDef1] part0 --> part2[part2 : PartDef2] part0 --> action0["perform action
part0::action0"] action0 --> action1["action
action1"] action0 --> action4["action
action4"] action1 --> action2["action
action2"] action2 --> action3["action
action3"] action3 --> action4 end subgraph part1 [part1 : PartDef1] direction TB part1 --> action1 part1 --> action4 end subgraph part2 [part2 : PartDef2] direction TB part2 --> action2 part2 --> action3 end </pre> <p>Note. In View2, part0 has been elided.</p>	<pre> package SwimLanes { part def Part0; part def Part1; part def Part2; part part0 : PartDef0{ perform action0; part part1 : PartDef1 { perform action0.action1; perform action0.action4; } part part2 : PartDef2 { perform action0.action2; perform action0.action3; } } action action0 { action action1; action action2; action action3; action action4; first start then action1; first action1 then action2; first action2 then action3; first action3 then action4; first action4 then done; } } </pre>


Element	Graphical Notation	Textual Notation
Perform Actions Compartment	<pre> <i>perform actions</i> ^action2 : ActionDef2 (in : ParamDef1, out : ParamDef2) action1 : ActionDef1 [1..*] ordered nonunique action3R : ActionDef3R redefines action3 action4R : ActionDef4R :>> action4 :>> action5 action6S : ActionDef6S [m] subsets action6 action7S : ActionDef7S [m] :> action7 action8R = action8 action11 ... </pre>	<pre> { perform action action1 : ActionDef1 [1..*] ordered nonunique; /* ... */ } </pre>

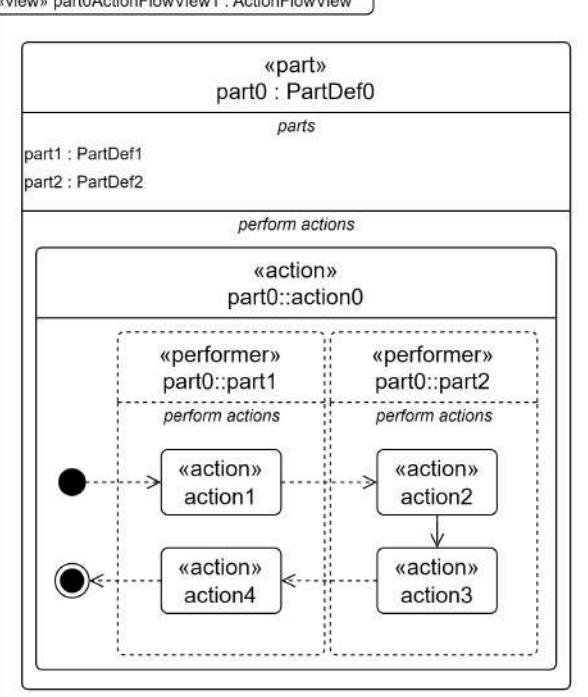
Element	Graphical Notation	Textual Notation
Perform Actions Swimlanes	<p>«view» part0ActionFlowView1 : ActionFlowView</p>  <p>«part» part0 : PartDef0</p> <p>parts</p> <p>part1 : PartDef1 part2 : PartDef2</p> <p>perform actions</p> <p>«action» part0::action0</p> <p>«performer» part0::part1 perform actions</p> <p>«performer» part0::part2 perform actions</p> <p>«action» action1</p> <p>«action» action2</p> <p>«action» action3</p> <p>«action» action4</p> <p>«action» action1</p> <p>«action» action2</p> <p>«action» action3</p> <p>«action» action4</p> <p>«action» action1</p> <p>«action» action2</p> <p>«action» action3</p> <p>«action» action4</p> <p>Note. In View2, part0 has been elided.</p>	<pre> package SwimLanes { part def Part0; part def Part1; part def Part2; part part0 : PartDef0 } { perform action0; part part1 : PartDef1 { perform action0.action1; perform action0.action4; } part part2 : PartDef2 { perform action0.action2; perform action0.action3; } } action action0 { action action1; action action2; action action3; action action4; first start then action1; first action1 then action2; first action2 then action3; first action3 then action4; first action4 then done; } } </pre>


Element	Graphical Notation	Textual Notation
Parameters Compartment	<pre> parameters ^in param5 : ParamDef5 in param1 : ParamDef1 [1..*] ordered nonunique out param2 : ParamDef2 inout param3 : ParamDef3 return param4 : ParamDef4 in param6R : ParamDef6R redefines param6 in param7R : ParamDef7R >>param7 in >> param8 in param9S : ParamDef9S [m] subsets param9 in param10S : ParamDef10S [m] >: param10 in param11 : ParamDef11 = expression1 ... </pre>	<pre> { in param1 : ParamDef [1..*] ordered nonunique; /* ... */ } </pre>
Actions with and without Conditional Succession	<pre> graph TD A["«action» action1 : Action1"] -- "[guard1]" --> B["«action» action2 : Action2"] C["«action» action1 : Action1"] --> D["«action» action2 : Action2"] </pre>	<pre> action action1 : Action1; action action2 : Action2; succession action1 if guard1 then action2; or action action1 : Action1; if guard1 then action2; action action2 : Action2; </pre>

Element	Graphical Notation	Textual Notation
Parameters Compartment	<pre> parameters ^in param5 : ParamDef5 in param1 : ParamDef1 [1..*] ordered nonunique out param2 : ParamDef2 inout param3 : ParamDef3 return param4 : ParamDef4 in param6R : ParamDef6R redefines param6 in param7R : ParamDef7R >>param7 in >> param8 in param9S : ParamDef9S [m] subsets param9 in param10S : ParamDef10S [m] >: param10 in param11 : ParamDef11 = expression1 ... </pre>	<pre> { in param1 : ParamDef [1..*] ordered nonunique; /* ... */ } </pre>
Actions with and without Conditional Succession	<pre> graph TD A["«action» action1 : Action1"] -- "[guard1]" --> B["«action» action2 : Action2"] C["«action» action1 : Action1"] --> D["«action» action2 : Action2"] </pre>	<pre> action action1 : Action1; action action2 : Action2; succession action1 if guard1 then action2; or action action1 : Action1; if guard1 then action2; action action2 : Action2; </pre>

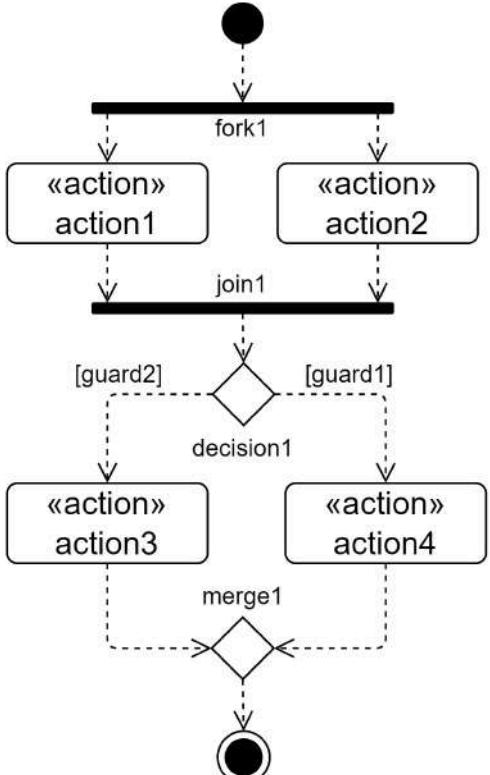
Element	Graphical Notation	Textual Notation
Actions with Control Nodes	 <pre> graph TD start(()) --> fork1[fork1] fork1 --> action1["<<action>> action1"] fork1 --> action2["<<action>> action2"] action1 --> join1[join1] action2 --> join1 join1 --> decision1{decision1} decision1 -- "[guard2]" --> action3["<<action>> action3"] decision1 -- "[guard1]" --> action4["<<action>> action4"] action3 --> merge1{merge1} action4 --> merge1 merge1 --> done((())) </pre>	<pre> first start; then fork fork1; then action1; then action2; action action1; then join1; action action2; then join1; join join1; then decide decision1; if guard2 then action3; if guard1 then action4; action action3; then merge1; action action4; then merge1; merge merge1; then done; </pre>
Performed By Compartment		No textual notation

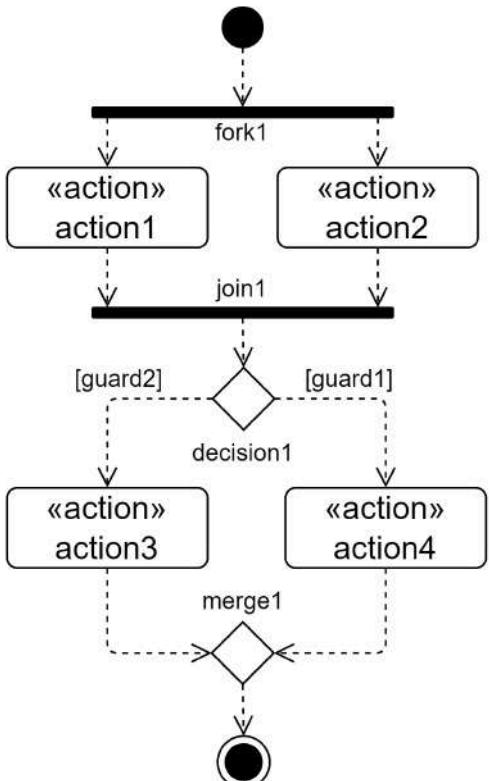
Element	Graphical Notation	Textual Notation
Actions with Control Nodes	 <pre> graph TD start(()) --> fork1[fork1] fork1 --> action1["<<action>> action1"] fork1 --> action2["<<action>> action2"] action1 --> join1[join1] action2 --> join1 join1 --> decision1{decision1} decision1 -- "[guard2]" --> action3["<<action>> action3"] decision1 -- "[guard1]" --> merge1{merge1} action3 --> merge1 merge1 --> done((())) </pre>	<pre> first start; then fork fork1; then action1; then action2; action action1; then join1; action action2; then join1; join join1; then decide decision1; if guard2 then action3; if guard1 then action4; action action3; then merge1; action action4; then merge1; merge merge1; then done; </pre>
Performed By Compartment		No textual notation

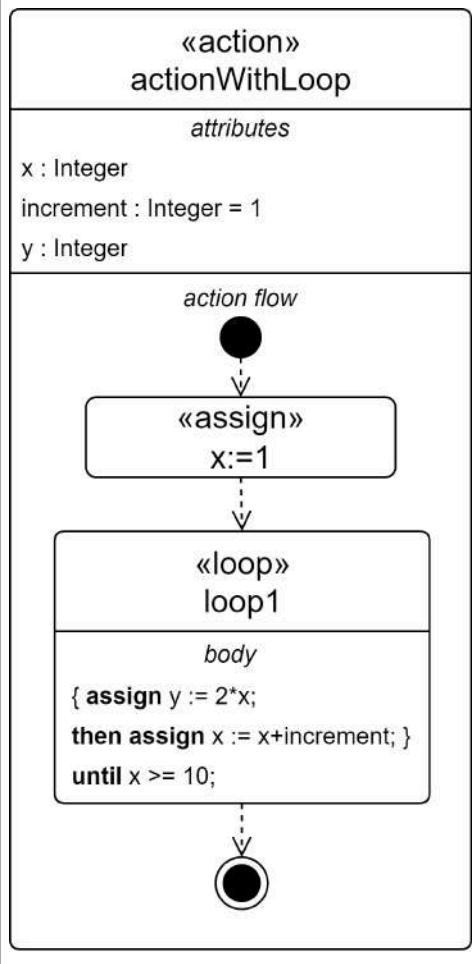
Element	Graphical Notation	Textual Notation
Action with Loop (body in textual notation)	 <pre> <<action>> actionWithLoop attributes x : Integer increment : Integer = 1 y : Integer action flow ↓ <<assign>> X:=1 ↓ <<loop>> loop1 body { assign y := 2*x; then assign x := x+increment; } until x >= 10; </pre>	<pre> package Loop { action actionWithLoop { attribute x:Integer := 1; attribute increment:Integer = 1; attribute y:Integer; loop action loop1 { assign y := 2*x; then assign x := x+increment; } until x >= 10; then done; } } </pre>

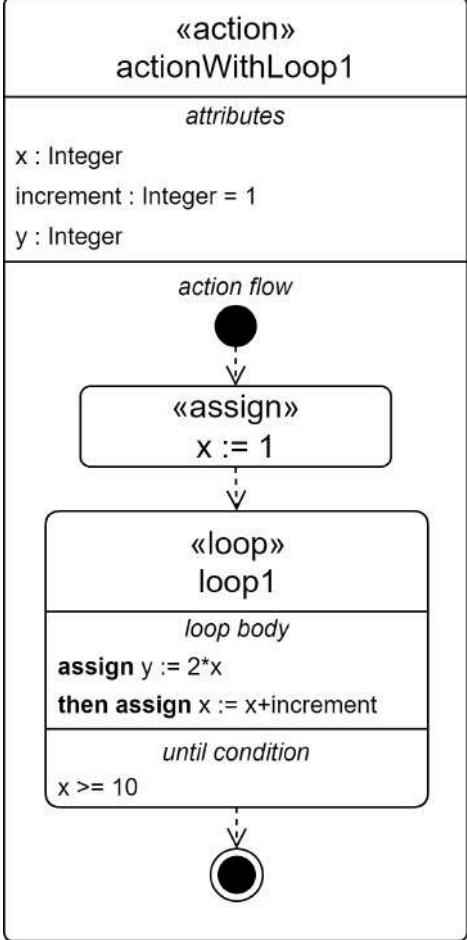
Element	Graphical Notation	Textual Notation
Action with Until Loop (body in textual notation)	 <pre> graph TD Start(()) --> Assign1["assign x := 1"] Assign1 --> Loop1["loop loop1"] Loop1 --> Condition["until condition x >= 10"] Condition --> Body["assign y := 2*x then assign x := x + increment"] Body --> End(()) </pre>	<pre> action actionWithLoop1 { attribute x:Integer; attribute increment:Integer = 1; attribute y:Integer; first start; then assign x := 1; then action loop1 loop { assign y := 2*x; then assign x := x +increment; } until x >= 10; then done; } </pre>

Element	Graphical Notation	Textual Notation
Action with Loop (body in graphical notation)	<p>«action» actionWithLoop</p> <p>attributes</p> <p>x : Integer increment : Integer = 1 y : Integer</p> <pre> graph TD Start(()) --> Assign1["<<assign>> x:=1"] Assign1 --> Loop1["<<loop>> loop1"] Loop1 -- "x <= 10" --> Decision1{ } Decision1 --> Assign2["<<assign>> y := 2*x"] Assign2 --> Assign3["<<assign>> x := x+increment"] Assign3 --> Decision2{ } Decision2 -- "[x >= 10]" --> End(()) </pre>	<pre> package Loop { action actionWithLoop { attribute x:Integer := 1; attribute increment:Integer = 1; attribute y:Integer; loop action loop1 { assign y := 2*x; then assign x := x+increment; } until x >= 10; then done; } } </pre>

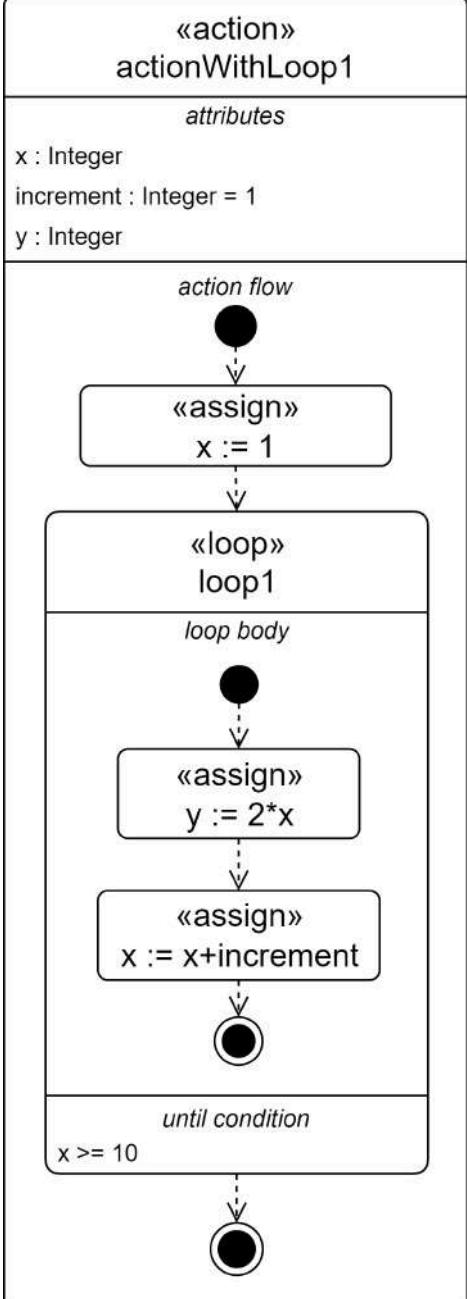Element	Graphical Notation	Textual Notation
Action with Until Loop (body in graphical notation)	 <pre> graph TD Start(()) --> AssignX[x := 1] AssignX --> Loop1{loop1} subgraph LoopBody [loop body] Loop1 --> AssignY[y := 2*x] AssignY --> AssignXplusIncrement[x := x + increment] AssignXplusIncrement --> Guard{x >= 10} end Guard --> End(()) </pre>	<pre> action actionWithLoop1 { attribute x:Integer; attribute increment:Integer = 1; attribute y:Integer; first start; then assign x := 1; then action loop1 loop { assign y := 2*x; then assign x := x +increment; } until x >= 10; then done; } </pre>

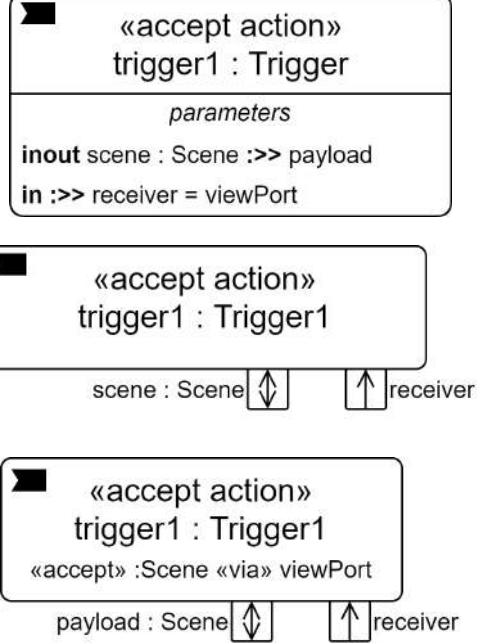Element	Graphical Notation	Textual Notation
Accept Action	 <p>The table contains three graphical representations of accept actions:</p> <ul style="list-style-type: none"> The first diagram shows an accept action named "trigger1 : Trigger" with parameters "parameters", "inout scene : Scene >> payload", and "in >> receiver = viewPort". The second diagram shows an accept action named "trigger1 : Trigger1" with parameters "scene : Scene" and "receiver". It features two ports: "scene" with a double-headed arrow and "receiver" with a single-headed arrow pointing up. The third diagram shows an accept action named "trigger1 : Trigger1" with parameters "«accept» : Scene «via» viewPort". It also features two ports: "payload : Scene" with a double-headed arrow and "receiver" with a single-headed arrow pointing up. 	<pre> port viewPort; item def Scene; action trigger1 : Trigger accept scene : Scene via viewPort; </pre>

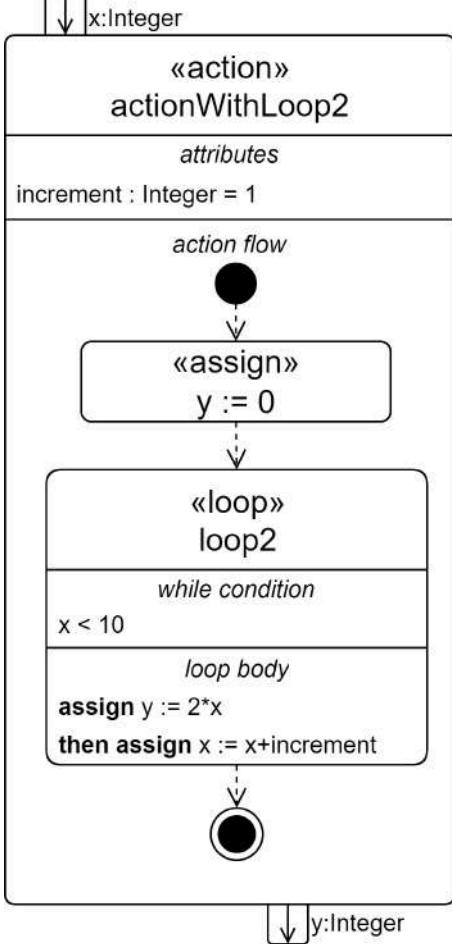
Element	Graphical Notation	Textual Notation
Action with While Loop (body in textual notation)	 <pre> graph TD Start(()) --> Action["<<action>> actionWithLoop2"] Action --> Attr["attributes increment : Integer = 1"] Attr --> Assign1["<<assign>> y := 0"] Assign1 --> Loop2["<<loop>> loop2"] Loop2 --> Cond["while condition x < 10"] Cond --> Body["loop body assign y := 2*x then assign x := x+increment"] Body --> Cond Body --> End(()) End --> Out["y:Integer"] </pre>	<pre> action actionWithLoop2 { in attribute x:Integer; out attribute y:Integer; attribute increment:Integer = 1; first start; then assign y := 0; then action loop2 while x < 10 { assign y := 2*x; then assign x := x+increment; } then done; } </pre>

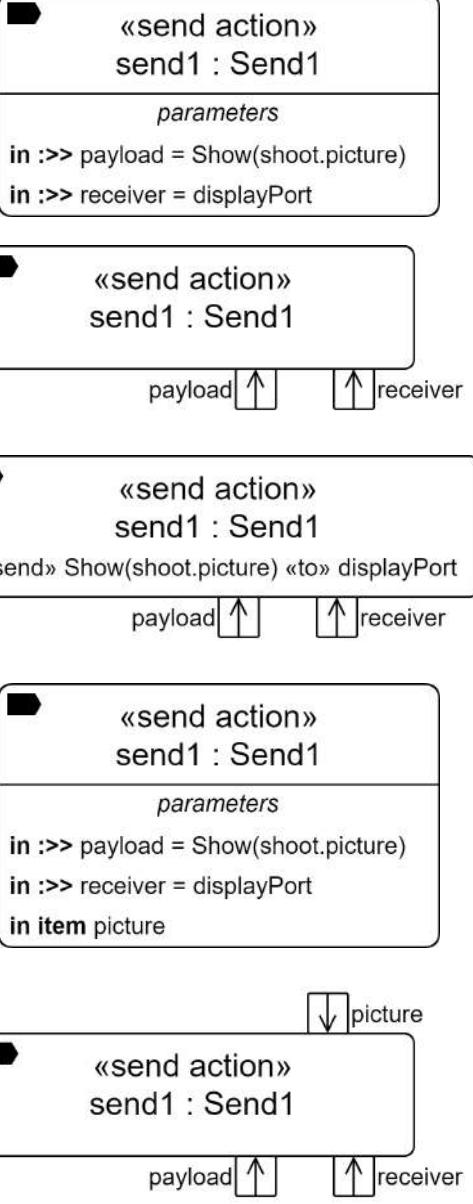Element	Graphical Notation	Textual Notation
Send Action	 <pre> «send action» send1 : Send1 parameters in >> payload = Show(shoot.picture) in >> receiver = displayPort in item picture «send action» send1 : Send1 payload ↑ ↑ receiver «send action» send1 : Send1 «send» Show(shoot.picture) «to» displayPort payload ↑ ↑ receiver «send action» send1 : Send1 parameters in >> payload = Show(shoot.picture) in >> receiver = displayPort in item picture ↓ picture «send action» send1 : Send1 payload ↑ ↑ receiver </pre>	<pre> item def Picture; item picture : Picture; port displayPort; action def Send1; action send1 : Send1 send Show(picture) via displayPort; </pre>

Element	Graphical Notation	Textual Notation
Action with For Loop	<pre> graph TD Start(()) --> Action["<<action>> actionWithLoop3"] Action --> Assign1["<<assign>> y := 0"] Assign1 --> Loop1["<<loop>> forLoop1"] Loop1 --> Iterator1["for iterator i : Integer in 1..n"] Iterator1 --> Body1["loop body assign y := y + i"] Body1 --> End1((())) </pre> <p>The diagram shows an activity diagram for an action named "actionWithLoop3". It starts with an initial node, followed by an action node. Inside the action node, there is an assign node ("y := 0"). Below that is a loop node named "forLoop1". Inside the loop node, there is a for iterator node ("i : Integer in 1..n") and a loop body node containing the assignment "assign y := y + i". The loop ends with an end node.</p>	<pre> action actionWithLoop3 { in attribute n:Integer; out attribute y:Integer; first start; then assign y := 0; then action forLoop1 for i : Integer in 1..n { assign y := y + i; } then done; } </pre>
If-Then Structured Control Action	<pre> graph TD Start(()) --> If["<<if>> ifThenAction"] If --> Condition["if condition a < 0"] Condition --> ThenBody["then body assign a := -a"] ThenBody --> End2((())) </pre> <p>The diagram shows an activity diagram for an if-then structured control action. It starts with an initial node, followed by an if node named "ifThenAction". Inside the if node, there is an if condition node ("a < 0"). Below that is a then body node containing the assignment "assign a := -a". The action ends with an end node.</p>	<pre> action { inout attribute a : Integer; action ifThenAction if a < 0 { assign a := -a; } } </pre>


Element	Graphical Notation	Textual Notation
If-Then-Else Structured Control Action		<pre> action { in attribute a : Integer; out attribute b : Integer; action ifThenElseAction if a >= 20 { assign b := 100; } else { assign b := 0; } } </pre>
Accept Action	 	<pre> port viewPort; item def Scene; action trigger1 : Trigger accept scene : Scene via viewPort; </pre>

Element	Graphical Notation	Textual Notation
Send Action	<pre> «send action» send1 : Send1 parameters in >> payload = Show(shoot.picture) in >> receiver = displayPort «send action» send1 : Send1 payload ↑ ↑ receiver «send action» send1 : Send1 send Show(shoot.picture) to displayPort payload ↑ ↑ receiver «send action» send1 : Send1 parameters in >> payload = Show(shoot.picture) in >> receiver = displayPort in item picture ↓ picture «send action» send1 : Send1 payload ↑ ↑ receiver </pre>	<pre> item def Picture; item picture : Picture; port displayPort; action def Send1; action send1 : Send1 send Show(picture) to displayPort; </pre>

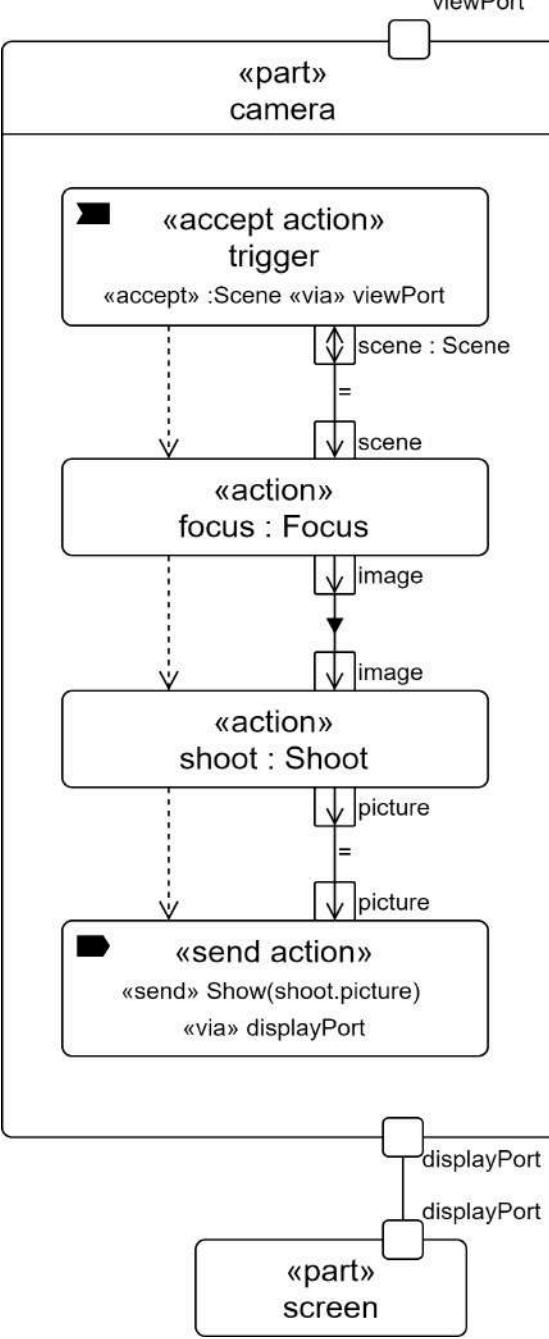Element	Graphical Notation	Textual Notation
Accept and Send Action Flow	 <pre> graph TD camera["<<part>> camera"] -- "viewPort" --> accept[«accept action» trigger] accept -- "«accept» :Scene «via» viewPort" --> scene1[scene : Scene] scene1 -- "in item scene" --> focus["«action» focus : Focus"] focus -- "out item image" --> image1[image] image1 --> shoot["«action» shoot : Shoot"] shoot -- "in item image" --> picture1[picture] picture1 -- "out item picture" --> displayPort1[displayPort] displayPort1 --> screen["<<part>> screen"] </pre>	<pre> part camera { port viewPort; port displayPort; action takePicture : TakePicture { action trigger accept scene : Scene via viewPort; then action focus : Focus { in item scene = trigger.scene; out item image; } flow from focus.image to shoot.image; then action shoot : Shoot { in item image flow from focus.image; out item picture; } then send Show(shoot.picture) via displayPort; } } part screen { port displayPort; } calc def Show { in item picture; item processedPicture; /* process picture */ */ return processedPicture; } </pre>

7.16.2 Action Definitions and Usages

An action definition or usage (that is not of a more specialized kind) can be declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the kind keyword **action**. An action usage must only be defined by action definitions (of any kind) or KerML behaviors (see [KerML, 7.4.7]).

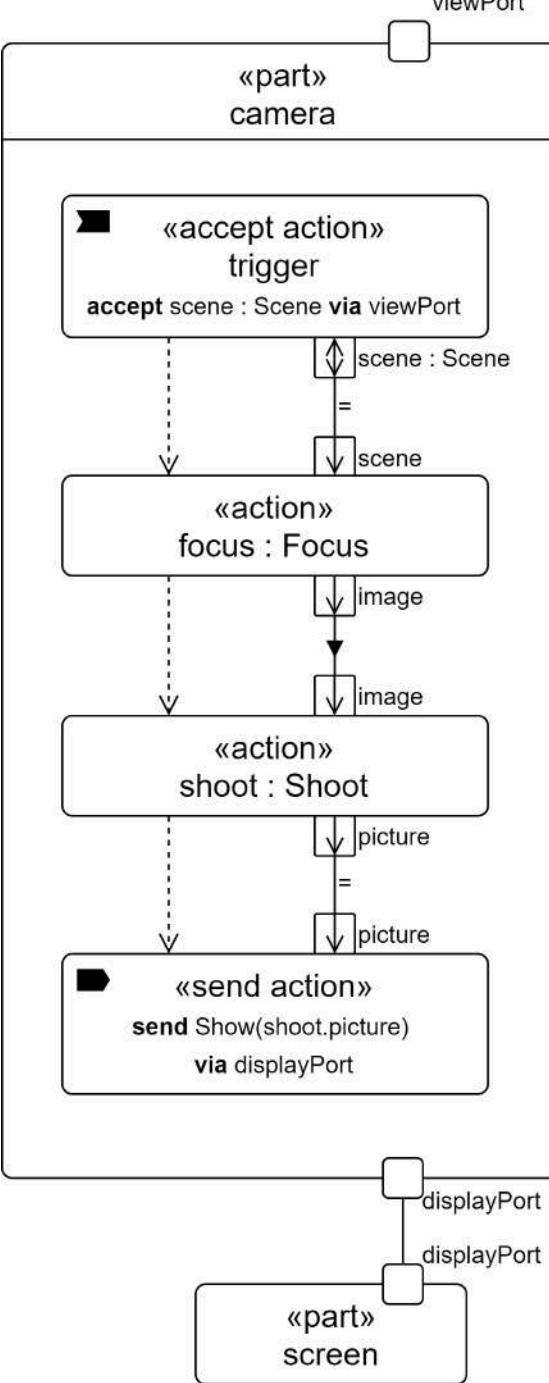Element	Graphical Notation	Textual Notation
Accept and Send Action Flow	 <pre> sequenceDiagram participant Camera as <<part>> camera participant Scene as <<action>> trigger participant Focus as <<action>> focus : Focus participant Shoot as <<action>> shoot : Shoot participant Screen as <<part>> screen Camera->>Scene: accept scene : Scene via viewPort activate Scene Scene-->>Focus: activate Focus Focus->>Shoot: image activate Shoot Shoot->>Screen: picture deactivate Shoot deactivate Focus deactivate Screen </pre>	<pre> part camera { port viewPort; port displayPort; action takePicture : TakePicture { action trigger accept scene : Scene via viewPort; then action focus : Focus { in item scene = trigger.scene; out item image; } flow from focus.image to shoot.image; then action shoot : Shoot { in item image flow from focus.image; out item picture; } then send Show(shoot.picture) via displayPort; } } part screen { port displayPort; } calc def Show { in item picture; item processedPicture; /* process picture */ return processedPicture; } </pre>

7.16.2 Action Definitions and Usages

SYSML2 -285: Multiple textual notation issues

An action definition or usage (that is not of a more specialized kind) can be declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the keyword **action**. An action usage must only be defined by action definitions (of any kind) or KerML behaviors (see [KerML, 7.4.7]).

Any directed features declared in the body of an action definition or usage are considered to be owned parameters of the action. Features with direction **in** are input parameters, those with direction **out** are output parameters, and those with direction **inout** are both input and output parameters.

```
action def TakePicture {
    // The following two features are considered parameters.
    in scene : Scene;
    out picture : Picture;

    bind focus.scene = scene;
    action focus : Focus { in scene; out image; }
    first focus then shoot;
    flow focus.image to shoot.image;
    action shoot : Shoot { in image; out picture; }
    bind picture = focus.picture;
}
```

If an action definition has superclassification relationships (implicit or explicit) with other action definitions (or KerML behaviors), then each of the owned parameters of the specialized action definition must redefine, in order, the parameter at the position of each of the general action definitions. The redefining parameters must have the same direction as the redefined parameters.

```
action def A { in a1; out a2; }
action def B { in b1, out b2; }
action def C specializes A, B {
    in c1 redefines a1 redefines b1;
    out c2 redefines a2 redefines b2;
}
```

If an action definition has a single superclassification, then the specialized action definition may declare fewer owned parameters than the general action definition, inheriting any additional parameters from the general definition (which are considered to be ordered after any owned parameters). If there is more than one superclassification, then every parameter from every general action definition must be redefined by an owned parameter of the specialized action definition. If the required redefinitions are not explicitly declared for a parameter, then the parameter is considered to implicitly have redefinitions sufficient to meet the stated requirements.

```
action def A1 :> A { in aa; } // aa redefines A::a1, A::a2 is inherited.
action def B1 :> B { in b1; out b2; inout b3; } // Redefinitions are implicit.
action def C1 :> A1, B1 { in c1; out c2; inout c3; }
```

If an action usage has any type of specialization relationship (i.e., feature typing, subsetting or redefinition, implicit or explicit) with an action definition or usage (or KerML behavior or step), the rules for the redefinition of the parameters of the general definitions and usages are the same as given for the redefinition of parameters of an action definition above.

```
action focus : Focus {
    // Parameters redefine parameters of Focus.
    in scene;
    out image;
}

action refocus subsets focus; // Parameters are inherited.
```

Binding and flow connection usages (see [7.13.3](#) and [8.4.9.6](#)) can be used to connect subactions in the body of an action definition or usage. In addition, the feature value shorthand for binding (see [7.13.4](#)) is often useful for action parameters.

Any directed features declared in the body of an action definition or usage are considered to be owned parameters of the action. Features with direction **in** are input parameters, those with direction **out** are output parameters, and those with direction **inout** are both input and output parameters.

```
action def TakePicture {
    // The following two features are considered parameters.
    in scene : Scene;
    out picture : Picture;

    bind focus.scene = scene;
    action focus : Focus { in scene; out image; }
    first focus then shoot;
    flow focus.image to shoot.image;
    action shoot : Shoot { in image; out picture; }
    bind picture = focus.picture;
}
```

If an action definition has superclassification relationships (implicit or explicit) with other action definitions (or KerML behaviors), then each of the owned parameters of the specialized action definition must redefine, in order, the parameter at the position of each of the general action definitions. The redefining parameters must have the same direction as the redefined parameters.

```
action def A { in a1; out a2; }
action def B { in b1; out b2; }
action def C specializes A, B {
    in c1 redefines a1 redefines b1;
    out c2 redefines a2 redefines b2;
}
```

If an action definition has a single superclassification, then the specialized action definition may declare fewer owned parameters than the general action definition, inheriting any additional parameters from the general definition (which are considered to be ordered after any owned parameters). If there is more than one superclassification, then every parameter from every general action definition must be redefined by an owned parameter of the specialized action definition. If the required redefinitions are not explicitly declared for a parameter, then the parameter is considered to implicitly have redefinitions sufficient to meet the stated requirements.

```
action def A1 :> A { in aa; } // aa redefines A::a1, A::a2 is inherited.
action def B1 :> B { in b1; out b2; inout b3; } // Redefinitions are implicit.
action def C1 :> A1, B1 { in c1; out c2; inout c3; }
```

If an action usage has any type of specialization relationship (i.e., feature typing, subsetting or redefinition, implicit or explicit) with an action definition or usage (or KerML behavior or step), the rules for the redefinition of the parameters of the general definitions and usages are the same as given for the redefinition of parameters of an action definition above.

```
action focus : Focus {
    // Parameters redefine parameters of Focus.
    in scene;
    out image;
}

action refocus subsets focus; // Parameters are inherited.
```

Binding and flow connection usages (see [7.13.3](#) and [8.4.9.6](#)) can be used to connect subactions in the body of an action definition or usage. In addition, the feature value shorthand for binding (see [7.13.4](#)) is often useful for action parameters.

```
action providePower : ProvidePower {
    in fuelCmd : FuelCmd;
    action generatePower : GeneratePower {
```

```

action providePower : ProvidePower {
    in fuelCmd : FuelCmd;
    action generatePower : GeneratePower {
        in fuelCmd : FuelCmd = providePower::fuelCmd;
        out generatedTorque : Torque;
    }
}

flow generatePower.generatedTorque
      to transmitPower.generatedTorque;

action transmitPower : TransmitPower {
    in generatedTorque : Torque;
    out transmittedTorque;
    // ...
}

```

The base action definition and usage are `Action` and `actions` from the `Actions` library model (see [9.2.9](#)). (For other semantic constraints on action usages, see [8.4.12](#).)

7.16.3 Control Nodes

A *control node* is a special syntactic notation for an action usage whose definition is a concrete specialization of the abstract action usage `ControlAction` from the `Actions` library model (see [9.2.9](#)). A control node is declared like a normal action usage (see [7.16.2](#)), but using one of the keywords shown in [Table 15](#) instead of the keyword `action`. A control node can only be declared in the body of an action definition or usage and implicitly subsets the action usage shown in the table corresponding to its keyword, thereby inheriting the corresponding definition. A control node is always composite, so the `ref` keyword is never used in a control node declaration. A control node declaration can have a body, but only containing annotating elements related to it via annotation relationships (see [8.2.2.4.1](#)).

Table 15. Control Node Definitions

Keyword	Subsetting	Definition
<code>merge</code>	<code>Actions::Action::merges</code>	<code>Actions::MergeAction</code>
<code>decide</code>	<code>Actions::Action::decisions</code>	<code>Actions::DecisionAction</code>
<code>join</code>	<code>Actions::Action::joins</code>	<code>Actions::JoinAction</code>
<code>fork</code>	<code>Actions::Action::forks</code>	<code>Actions::ForkAction</code>

Control nodes are used to control the sequencing of other action usages connected to them via successions. The following rules apply to these connections.

1. Incoming successions to a `merge` node must have source multiplicity 0..1 and subset the `incomingHBLINK` feature inherited by `MergeAction` from the Kernel Semantic Library Behavior `ControlPerformances::MergePerformance` (see [KerML, 9.2.9]).
2. Outgoing successions from a `decide` node must have target multiplicity 0..1 and subset the `outgoingHBLINK` feature inherited from the Kernel Library Behavior `ControlPerformances::DecisionPerformance` (see [KerML, 9.2.9]).
3. Incoming successions to a `join` node must have source multiplicity 1..1.
4. Outgoing successions from a `fork` node must have target multiplicity 1..1.

```

    in fuelCmd : FuelCmd = providePower::fuelCmd;
    out generatedTorque : Torque;
}

flow generatePower.generatedTorque
      to transmitPower.generatedTorque;

action transmitPower : TransmitPower {
    in generatedTorque : Torque;
    out transmittedTorque;
    // ...
}

```

The base action definition and usage are `Action` and `actions` from the `Actions` library model (see [9.2.9](#)). (For other semantic constraints on action usages, see [8.4.12](#).)

7.16.3 Control Nodes

A *control node* is a special syntactic notation for an action usage whose definition is a concrete specialization of the abstract action usage `ControlAction` from the `Actions` library model (see [9.2.9](#)). A control node is declared like a normal action usage (see [7.16.2](#)), but using one of the keywords shown in [Table 15](#) instead of the keyword `action`. A control node can only be declared in the body of an action definition or usage and implicitly subsets the action usage shown in the table corresponding to its keyword, thereby inheriting the corresponding definition. A control node is always composite, so the `ref` keyword is never used in a control node declaration. A control node declaration can have a body, but only containing annotating elements related to it via annotation relationships (see [8.2.2.4.1](#)).

Table 15. Control Node Definitions

Keyword	Subsetting	Definition
<code>merge</code>	<code>Actions::Action::merges</code>	<code>Actions::MergeAction</code>
<code>decide</code>	<code>Actions::Action::decisions</code>	<code>Actions::DecisionAction</code>
<code>join</code>	<code>Actions::Action::joins</code>	<code>Actions::JoinAction</code>
<code>fork</code>	<code>Actions::Action::forks</code>	<code>Actions::ForkAction</code>

Control nodes are used to control the sequencing of other action usages connected to them via successions. The following rules apply to these connections.

1. Incoming successions to a `merge` node must have source multiplicity 0..1 and subset the `incomingHBLINK` feature inherited by `MergeAction` from the Kernel Semantic Library Behavior `ControlPerformances::MergePerformance` (see [KerML, 9.2.9]).
2. Outgoing successions from a `decide` node must have target multiplicity 0..1 and subset the `outgoingHBLINK` feature inherited from the Kernel Library Behavior `ControlPerformances::DecisionPerformance` (see [KerML, 9.2.9]).
3. Incoming successions to a `join` node must have source multiplicity 1..1.
4. Outgoing successions from a `fork` node must have target multiplicity 1..1.

These rules shall be enforced in the abstract syntax, even if not shown explicitly in the concrete syntax notation for a model. (See also [8.4.12.4](#) on the semantic constraints related to control nodes.)

```

// Both action1 and action2 will proceed concurrently
// after fork1.
fork fork1;

```

These rules shall be enforced in the abstract syntax, even if not shown explicitly in the concrete syntax notation for a model. (See also [8.4.12.4](#) on the semantic constraints related to control nodes.)

```
// Both action1 and action2 will proceed concurrently
// after fork1.
fork fork1;
first fork1 then action1;
first fork1 then action2;

action action1;
action action2;

// join1 will be performed after both action1
// and action2 have completed.
first action1 then join1;
first action2 then join1;
join join1;

first join1 then decision1;

// One of action3 or action4 will be chosen
// (non-deterministically) to be performed after decision1.
decide decision1;
first decision1 then action3;
first decision1 then action4;

action action3;
action action4;

// mergel will be performed after either action3
// or action4 have completed.
first action3 then mergel;
first action4 then mergel;
merge mergel;
```

7.16.4 Succession Shorthands

The basic notation for successions (see [7.13.5](#)) may be used to specify the sequencing of action usages within the body of an action definition or usage. There are also additional textual notation shorthands that may be used *only* within the body of an action definition or usage, as described below. Further, every action inherits the features start and done from the base action definition Actions::Action, which represent the start and end snapshots of the action.

The source of a succession may be specified separately from the target by using the keyword **first** followed by a qualified name or feature chain for the source action usage. Similarly, the target of a succession may be specified separately from the source by using the keyword **then** followed by a qualified name or feature chain for the target action usage.

```
first action1;
then action2;

// The above two declarations are together
// equivalent to the following single succession.
first action1 then action2;
```

The **then** keyword may also be followed by a complete action usage declaration, rather than just the name.

```

first fork1 then action1;
first fork1 then action2;

action action1;
action action2;

// join1 will be performed after both action1
// and action2 have completed.
first action1 then join1;
first action2 then join1;
join join1;

first join1 then decision1;

// One of action3 or action4 will be chosen
// (non-deterministically) to be performed after decision1.
decide decision1;
first decision1 then action3;
first decision1 then action4;

action action3;
action action4;

// mergel will be performed after either action3
// or action4 have completed.
first action3 then mergel;
first action4 then mergel;
merge mergel;

```

7.16.4 Succession Shorthands

SYSML2 -267: Invalid use of "loop" as merge action name

The basic notation for successions (see [7.13.5](#)) may be used to specify the sequencing of action usages within the body of an action definition or usage. There are also additional textual notation shorthands that may be used *only* within the body of an action definition or usage, as described below. Further, every action inherits the features start and done from the base action definition Actions::Action, which represent the start and end snapshots of the action.

The source of a succession may be specified separately from the target by using the keyword **first** followed by a qualified name or feature chain for the source action usage. Similarly, the target of a succession may be specified separately from the source by using the keyword **then** followed by a qualified name or feature chain for the target action usage.

```

first action1;
then action2;

// The above two declarations are together
// equivalent to the following single succession.
first action1 then action2;

```

The **then** keyword may also be followed by a complete action usage declaration, rather than just the name.

```

first action1;
then action action2;

// The above two declarations are together
// equivalent to the following.
first action1 then action2;
action action2;

```

```

first action1;
then action2;

// The above two declarations are together
// equivalent to the following.
first action1 then action2;
action action2;

```

The **then** shorthand can be used lexically following any action usage, not just following a **first** declaration, with the preceding action usage becoming the source of the succession. This is particularly useful when a sequence of actions is to be performed successively or in a loop.

```

first start;
then merge loop;
then action initialize;
then action monitor;
then action finalize;
then loop;

```

The source of a succession must be an occurrence usage. Therefore, the source of a succession represented using the **then** shorthand is actually determined as the nearest occurrence lexically previous to the **then**, skipping over any intervening non-occurrence usages (and conditional successions, see [7.16.5](#)). Since a succession is not an occurrence usage, this allows several **then** successions to be placed in a sequence after a common source action usage. This is particularly useful for specifying multiple successions outgoing from **fork** and **decide** nodes.

```

// The two successions following fork1 both have
// fork1 as their source.
fork fork1;
    then action1;
    then action2;

action action1;
    then join1;

action action2;
    then join1;

join join1;

// The two successions following decision1 both have
// decision1 as their source.
then decide decision1;
    then action3;
    then action4;

action action3;
    then merge1;

action action4;
    then merge1;

merge merge1;

```

7.16.5 Conditional Successions

A succession within the body of an action definition or usage may be given a *guard* condition. A guard is given as a Boolean-valued expression preceded by the keyword **if**. It is placed in the declaration of the succession (see [7.13.5](#)) after the specification of the source of the succession and before the specification of the target.

The **then** shorthand can be used lexically following any action usage, not just following a **first** declaration, with the preceding action usage becoming the source of the succession. This is particularly useful when a sequence of actions is to be performed successively or in a loop.

```
first start;
then merge 'loop';
then action initialize;
then action monitor;
then action finalize;
then !loop!;
```

The source of a succession must be an occurrence usage. Therefore, the source of a succession represented using the **then** shorthand is actually determined as the nearest occurrence lexically previous to the **then**, skipping over any intervening non-occurrence usages (and conditional successions, see [7.16.5](#)). Since a succession is not an occurrence usage, this allows several **then** successions to be placed in a sequence after a common source action usage. This is particularly useful for specifying multiple successions outgoing from **fork** and **decide** nodes.

```
// The two successions following fork1 both have
// fork1 as their source.
fork fork1;
  then action1;
  then action2;

action action1;
  then join1;

action action2;
  then join1;

join join1;

// The two successions following decision1 both have
// decision1 as their source.
then decide decision1;
  then action3;
  then action4;

action action3;
  then merge1;

action action4;
  then merge1;

merge merge1;
```

7.16.5 Conditional Successions

SYSML2 -267: Invalid use of "loop" as merge action name

A succession within the body of an action definition or usage may be given a *guard* condition. A guard is given as a Boolean-valued expression preceded by the keyword **if**. It is placed in the declaration of the succession (see [7.13.5](#)) after the specification of the source of the succession and before the specification of the target.

```
succession conditionalOnActive
  first initialize if isActive then monitor;
```

Such a conditional succession actually declares a special transition usage (see also [7.17.3](#) on transition usages in state models), which is a kind of action usage defined by the action definition `DecisionTransitionAction` from the `Actions` model library (see [9.2.9](#)). The transition usage performs the evaluation of the guard expression and, if

```

succession conditionalOnActive
    first initialize if isActive then monitor;

```

Such a conditional succession actually declares a special transition usage (see also [7.17.3](#) on transition usages in state models), which is a kind of action usage defined by the action definition `DecisionTransitionAction` from the `Actions` model library (see [9.2.9](#)). The transition usage performs the evaluation of the guard expression and, if true, asserts the existence of the succession. (See [8.4.12.3](#) on the semantic constraints related to decision transition usages used for conditional successions.)

As usual, if the declaration part is empty, the keyword `succession` may be omitted. The source for the succession may then be further omitted, in which case the source is identified from a lexically previous action usage, as for the `then` shorthand described in [7.16.4](#). Further, the keyword `else` may be used in place of a guard expression to indicate a succession to be taken if the guards evaluate to false on all of an immediately preceding set of conditional successions. However, the target of a conditional succession *must* be specified as a qualified name or feature chain and cannot be a full action usage declaration, even when the shorthand notation is used.

The conditional succession shorthand notation is particularly useful for notating several conditional successions outgoing from a `decide` node.

```

merge loop;
action checkLevel { out level; }

decide;
    if level <= refillLevel then refill;
    if level >= maxLevel then drain;
    else continue;

    action refill;
    then loop;

    action drain;
    then loop;

    action continue;

```

7.16.6 Perform Action Usages

A *perform action usage* is declared as an action usage (see [7.16.2](#)) but using the kind keyword `perform action` instead of just `action`. A perform action usage is a kind of event occurrence usage (see [7.9.5](#)) for which the event occurrence is an action usage, known as the *performed action*. As for an event occurrence usage, the performed action is related to the perform action usage by a *reference subsetting* relationship, specified textually using the keyword `references` or the symbol `::>`. Or, if the perform action usage has no such reference subsetting, then the performed action is the perform action usage itself.

```

part def Vehicle {
    perform action powerVehicle references VehicleActions::providePower;
    abstract perform action moveVehicle; // Performed action is itself.
}

```

A perform action usage may also be declared using just the keyword `perform` instead of `perform action`. In this case, the declaration does not include either a name or short name. Instead, the performed action of the perform action usage is identified by giving a qualified name or feature chain immediately after the `perform` keyword.

```

part vehicle : Vehicle {
    // The performed action is VehicleActions::move.
}

```

true, asserts the existence of the succession. (See [8.4.12.3](#) on the semantic constraints related to decision transition usages used for conditional successions.)

As usual, if the declaration part is empty, the keyword **succession** may be omitted. The source for the succession may then be further omitted, in which case the source is identified from a lexically previous action usage, as for the **then** shorthand described in [7.16.4](#). Further, the keyword **else** may be used in place of a guard expression to indicate a succession to be taken if the guards evaluate to false on all of an immediately preceding set of conditional successions. However, the target of a conditional succession *must* be specified as a qualified name or feature chain and cannot be a full action usage declaration, even when the shorthand notation is used.

The conditional succession shorthand notation is particularly useful for notating several conditional successions outgoing from a **decide** node.

```
merge !loop!;
action checkLevel { out level; }

decide;
  if level <= refillLevel then refill;
  if level >= maxLevel then drain;
  else continue;

action refill;
then !loop!;

action drain;
then !loop!;

action continue;
```

7.16.6 Perform Action Usages

A *perform action usage* is declared as an action usage (see [7.16.2](#)) but using the kind keyword **perform action** instead of just **action**. A perform action usage is a kind of event occurrence usage (see [7.9.5](#)) for which the event occurrence is an action usage, known as the *performed action*. As for an event occurrence usage, the performed action is related to the perform action usage by a *reference subsetting* relationship, specified textually using the keyword **references** or the symbol `::>`. Or, if the perform action usage has no such reference subsetting, then the performed action is the perform action usage itself.

```
part def Vehicle {
  perform action powerVehicle references VehicleActions::providePower;
  abstract perform action moveVehicle; // Performed action is itself.
}
```

A perform action usage may also be declared using just the keyword **perform** instead of **perform action**. In this case, the declaration does not include either a name or short name. Instead, the performed action of the perform action usage is identified by giving a qualified name or feature chain immediately after the **perform** keyword.

```
part vehicle : Vehicle {
  // The performed action is VehicleActions::move.
  perform VehicleActions::move ::> Vehicle::moveVehicle;
}
```

If a perform action usage is used in the body of a part definition or usage, then the part is considered to be the *performer* of the performed action (see also [8.4.12.11](#) on the semantics of perform action usages). A perform action usage may also be used in the body of another action definition or usage, in which case it acts like a referential "call" of the performed action by the containing action.

```
action initialization {
  in item device;
```

```

perform VehicleActions::move :> Vehicle::moveVehicle;
}

```

If a perform action usage is used in the body of a part definition or usage, then the part is considered to be the *performer* of the performed action (see also [8.4.12.10](#) on the semantics of perform action usages). A perform action usage may also be used in the body of another action definition or usage, in which case it acts like a referential "call" of the performed action by the containing action.

```

action initialization {
    in item device;
    perform Utility::startUpCheck {
        in component = device;
        out status;
    }
    ...
}

```

The **ref** keyword may be used in the declaration of a performed action usage, but a perform action usage is always referential, whether or not **ref** is included in its declaration.

7.16.7 Send Action Usages

A *send action usage* is declared as an action usage (see [7.16.2](#)) implicitly defined by the action definition `SendAction` from the `Actions` library model (see [9.2.9](#)). A `SendAction` has three input parameters:

1. a set of *payload* values
2. a *sender* occurrence
3. a *receiver* occurrence

The behavior of a `SendAction` is to *transfer* the payload from the sender to the receiver.

In the textual notation for a send action usage, values for the three `SendAction` parameters are given after the action declaration part, identified by the keywords **send** (payload), **via** (sender) and **to** (receiver). If the declaration part is empty, then the **action** keyword may be omitted.

```

part monitor {
    action sendReadingTo {
        in part destination;

        perform getReading { out reading : SensorReading; }

        // Send a reading from the monitor to the destination.
        action sendReading
            send getReading.reading via monitor to destination;

        // The following send action is equivalent to the
        // one above, but without a name.
        send getReading.reading via monitor to destination;
    }
}

```

A send action usage can specify both a sender (**via**) and receiver (**to**), but it will generally give only one or the other. When a send action usage is directly or indirectly a composite feature of a part definition or usage, then the default for the sender (**via**) of the send action usage is the containing part, not the send action itself. This is known as the default *sending context*.

```

perform Utility::startUpCheck {
    in component = device;
    out status;
}
...
}

```

The **ref** keyword may be used in the declaration of a performed action usage, but a perform action usage is always referential, whether or not **ref** is included in its declaration.

7.16.7 Send Action Usages

A *send action usage* is declared as an action usage (see [7.16.2](#)) implicitly defined by the action definition `SendAction` from the `Actions` library model (see [9.2.9](#)). A `SendAction` has three input parameters:

1. a set of *payload* values
2. a *sender* occurrence
3. a *receiver* occurrence

The behavior of a `SendAction` is to *transfer* the payload from the sender to the receiver.

In the textual notation for a send action usage, values for the three `SendAction` parameters are given after the action declaration part, identified by the keywords **send** (payload), **via** (sender) and **to** (receiver). If the declaration part is empty, then the **action** keyword may be omitted.

```

part monitor {
    action sendReadingTo {
        in part destination;

        perform getReading { out reading : SensorReading; }

        // Send a reading from the monitor to the destination.
        action sendReading
            send getReading.reading via monitor to destination;

        // The following send action is equivalent to the
        // one above, but without a name.
        send getReading.reading via monitor to destination;
    }
}

```

A send action usage can specify both a sender (**via**) and receiver (**to**), but it will generally give only one or the other. When a send action usage is directly or indirectly a composite feature of a part definition or usage, then the default for the sender (**via**) of the send action usage is the containing part, not the send action itself. This is known as the default *sending context*.

```

part monitor {
    action sendReadingTo {
        in part destination;

        perform getReading { out reading : SensorReading; }

        // The sender for the following send action is, by default,
        // the sending context, which is the part "monitor".
        send getReading.reading to destination;
    }
}

```

```

part monitor {
    action sendReadingTo {
        in part destination;

        perform getReading { out reading : SensorReading; }

        // The sender for the following send action is, by default,
        // the sending context, which is the part "monitor".
        send getReading.reading to destination;
    }
}

```

If a send action usage is *not* in the composition hierarchy of a part definition or usage (or any item definition or usage), then the sending context is the highest-level containing action usage. Note that a perform action usage is always referential, so that the sending context for subactions of a perform action usage is the perform action usage itself, *not* the containing performing part.

```

part monitor {
    ref part destination;
    perform action sending {
        perform getReading { out reading : SensorReading; }

        // The sender for the following send action is, by default,
        // the sending context, which is the action "sending",
        // not the part "monitor".
        send getReading.reading to destination;
    }
}

```

When sending through a port (see [7.12](#) on ports), the port usage will usually be the sender (**via**), with the actual receiver determined by interface connections having the port usage as their source (see [7.14](#)).

```

part def MonitorDevice {
    port readingPort;
    action monitoring {
        perform getReading { out reading : SensorReading; }
        send getReading.reading via readingPort;
    }
}

```

A send action usage must be one of the following:

1. An owned feature of an action definition or usage.
2. The owned **entry**, **do** or **exit** action of a state definition or usage (see [7.17](#)).
3. The owned **effect** action of a transition usage (see [7.17](#)).

The base send action usage is `sendActions` from the `Actions` library model (see [9.2.9](#)), which is defined by `SendAction`. (See [8.4.12.5](#) for additional semantic constraints on send action usages.)

7.16.8 Accept Action Usages

An *accept action usage* is declared as an action usage (see [7.16.2](#)) implicitly defined by the action definition `AcceptAction` from the `Actions` library model (see [9.2.9](#)). An `AcceptAction` has two parameters:

1. an output parameter for a set of *payload* values
2. an input parameter giving a *receiver* occurrence

If a send action usage is *not* in the composition hierarchy of a part definition or usage (or any item definition or usage), then the sending context is the highest-level containing action usage. Note that a perform action usage is always referential, so that the sending context for subactions of a perform action usage is the perform action usage itself, *not* the containing performing part.

```
part monitor {
    ref part destination;
    perform action sending {
        perform getReading { out reading : SensorReading; }

        // The sender for the following send action is, by default,
        // the sending context, which is the action "sending",
        // not the part "monitor".
        send getReading.reading to destination;
    }
}
```

When sending through a port (see [7.12](#) on ports), the port usage will usually be the sender (**via**), with the actual receiver determined by interface connections having the port usage as their source (see [7.14](#)).

```
part def MonitorDevice {
    port readingPort;
    action monitoring {
        perform getReading { out reading : SensorReading; }
        send getReading.reading via readingPort;
    }
}
```

A send action usage must be one of the following:

1. An owned feature of an action definition or usage.
2. The owned **entry**, **do** or **exit** action of a state definition or usage (see [7.17](#)).
3. The owned **effect** action of a transition usage (see [7.17](#)).

The base send action usage is `sendActions` from the `Actions` library model (see [9.2.9](#)), which is defined by `SendAction`. (See [8.4.12.5](#) for additional semantic constraints on send action usages.)

7.16.8 Accept Action Usages

An *accept action usage* is declared as an action usage (see [7.16.2](#)) implicitly defined by the action definition `AcceptAction` from the `Actions` library model (see [9.2.9](#)). An `AcceptAction` has two parameters:

1. an output parameter for a set of *payload* values
2. an input parameter giving a *receiver* occurrence

The behavior of an `AcceptAction` is to accept the *transfer* of a payload received by the given receiver, and then output that payload.

The textual notation for an accept action usage includes special notation for declaring a usage-specific payload parameter and giving a value for the receiver parameter. The payload parameter declaration is identified by the keyword **accept**, and the expression giving the transfer receiver is identified by the keyword **via**. If the action declaration part is empty, then the **action** keyword may be omitted.

The payload parameter declaration for an accept action usage identifies the type of values accepted by the accept action. It is declared as a reference usage (see [7.6](#)), but without the **ref** keyword or any body. If the payload parameter declaration has the form of a single qualified name (and, optionally, a multiplicity), then the qualified name is interpreted as the definition (type) of the payload parameter (*not* its name).

The behavior of an `AcceptAction` is to accept the *transfer* of a payload received by the given receiver, and then output that payload.

The textual notation for an accept action usage includes special notation for declaring a usage-specific payload parameter and giving a value for the receiver parameter. The payload parameter declaration is identified by the keyword `accept`, and the expression giving the transfer receiver is identified by the keyword `via`. If the action declaration part is empty, then the `action` keyword may be omitted.

The payload parameter declaration for an accept action usage identifies the type of values accepted by the accept action. It is declared as a reference usage (see [7.6](#)), but without the `ref` keyword or any body. If the payload parameter declaration has the form of a single qualified name (and, optionally, a multiplicity), then the qualified name is interpreted as the definition (type) of the payload parameter (*not* its name).

```
part controller {
    action accepting {
        // ...
        action acceptReading
            accept reading : SensorReading via controller;

        // The following accept action is equivalent to the
        // one above, but it does not name the accept action or
        // the payload parameter.
        accept SensorReading via controller;

        // ...
    }
}
```

A payload parameter declaration can also include a feature value (see [7.13.4](#)). In this case, the accept action usage will only accept exactly the value that is the result of the feature value expression. The following special notations can also be used for the feature value of a payload parameter:

- *Change trigger*. A change trigger is notated using the keyword `when` followed by an expression whose result must be a Boolean value. A change trigger evaluates to a `ChangeSignal` (as defined in the Observation model from the Kernel Semantic Library Library [KerML, 9.2.13]) that is sent when the result of the given expression changes from `false` to `true` (or sent immediately if the expression is `true` when first evaluated).
- *Absolute time trigger*. An absolute time trigger is notated using the keyword `at` followed by an expression whose result must be a `TimeInstantValue` (see [9.8.8](#)). An absolute time trigger evaluates to a `TimeSignal` (as defined in the Trigger model from the Kernel Semantic Library Library [KerML, 9.2.14]) that is sent when the current time (relative to the `localClock`, which defaults to the `defaultClock`, see [9.8.8](#)) reaches the `TimeInstantValue` that is the result of the given expression.
- *Relative time trigger*. A relative time trigger is notated using the keyword `after` followed by an Expression whose result must be a `DurationValue` (see [9.8.8](#)). A relative time trigger evaluates to a `TimeSignal` (as defined in the Trigger model from the Kernel Semantic Library Library [KerML, 9.2.14]) that is sent when the current time (relative to the `localClock`, which defaults to the `defaultClock`, see [9.8.8](#)) reaches the `TimeInstantValue` that is computed as the result of the given expression added to the time at which the time trigger is evaluated.

```
part controller {
    in level : Real;
    attribute threshold : Real;

    action {
        // Both of the following accept actions trigger (once) when the
```

```

part controller {
    action accepting {
        // ...
        action acceptReading
            accept reading : SensorReading via controller;

        // The following accept action is equivalent to the
        // one above, but it does not name the accept action or
        // the payload parameter.
        accept SensorReading via controller;
        // ...
    }
}

```

A payload parameter declaration can also include a feature value (see [7.13.4](#)). In this case, the accept action usage will only accept exactly the value that is the result of the feature value expression. The following special notations can also be used for the feature value of a payload parameter:

- *Change trigger*. A change trigger is notated using the keyword **when** followed by an expression whose result must be a Boolean value. A change trigger evaluates to a `ChangeSignal` (as defined in the `Observation` model from the Kernel Semantic Library Library [KerML, 9.2.13]) that is sent when the result of the given expression changes from `false` to `true` (or sent immediately if the expression is `true` when first evaluated).
- *Absolute time trigger*. An absolute time trigger is notated using the keyword **at** followed by an expression whose result must be a `TimeInstantValue` (see [9.8.8](#)). An absolute time trigger evaluates to a `TimeSignal` (as defined in the `Trigger` model from the Kernel Semantic Library Library [KerML, 9.2.14]) that is sent when the current time (relative to the `localClock`, which defaults to the `defaultClock`, see [9.8.8](#)) reaches the `TimeInstantValue` that is the result of the given expression.
- *Relative time trigger*. A relative time trigger is notated using the keyword **after** followed by an Expression whose result must be a `DurationValue` (see [9.8.8](#)). A relative time trigger evaluates to a `TimeSignal` (as defined in the `Trigger` model from the Kernel Semantic Library Library [KerML, 9.2.14]) that is sent when the current time (relative to the `localClock`, which defaults to the `defaultClock`, see [9.8.8](#)) reaches the `TimeInstantValue` that is computed as the result of the given expression added to the time at which the time trigger is evaluated.

```

part controller {
    in level : Real;
    attribute threshold : Real;

    action {
        // Both of the following accept actions trigger (once) when the
        // given expression becomes true.
        accept : ChangeSignal = Triggers::triggerWhen({ level > threshold });
        accept when level > threshold;

        // The following accept action triggers at the given date and time.
        accept at Iso8601DateTime("2024-02-01T00:00:00Z");

        // The following accept action triggers 30 seconds after the evaluation
        // of its time trigger.
        accept after 30 [s];
    }
}

```

When an accept action usage is directly or indirectly a composite feature of a part definition or usage, then the default for the receiver (**via**) of the accept action usage is the containing part, not the accept action itself. This is known as the default *accepting context*.

```

    // given expression becomes true.
    accept : ChangeSignal = Triggers::triggerWhen({ level > threshold });
    accept when level > threshold;

    // The following accept action triggers at the given date and time.
    accept at Iso8601DateTime("2024-02-01T00:00:00Z");

    // The following accept action triggers 30 seconds after the evaluation
    // of its time trigger.
    accept after 30 [s];
}
}

```

When an accept action usage is directly or indirectly a composite feature of a part definition or usage, then the default for the receiver (**via**) of the accept action usage is the containing part, not the accept action itself. This is known as the default *accepting context*.

```

part controller {
    action accepting {
        // The receiver for the following accept action is, by default,
        // the accepting context, which is the part "controller".
        accept SensorReading;

        // ...
    }
}

```

If an accept action usage is *not* in the composition hierarchy of a part definition or usage (or any item definition or usage), then the accepting context is the highest-level containing action usage. Note that a perform action usage is always referential, so that the accepting context for subactions of a perform action usage is the perform action usage itself, *not* the containing performing part.

```

part controller {
    perform action accepting {
        // The receiver for the following accept action is, by default,
        // the accepting context, which is the "accepting" action,
        // not the part "controller".
        accept reading : SensorReading;

        // ...
    }
}

```

When accepting through a port (see [7.12](#) on ports), the port usage is the receiver (**via**).

```

part def ControllerDevice {
    port sensorPort;
    action control {
        accept reading : SensorReading via sensorPort;
    }
}

```

An accept action usage must be one of the following:

1. An owned feature of an action definition or usage.
2. The owned **entry**, **do** or **exit** action of a state definition or usage (see [7.17](#)).
3. The owned **effect** action or **accept** action of a transition usage (see [7.17](#)).

```

part controller {
    action accepting {
        // The receiver for the following accept action is, by default,
        // the accepting context, which is the part "controller".
        accept SensorReading;

        // ...
    }
}

```

If an accept action usage is *not* in the composition hierarchy of a part definition or usage (or any item definition or usage), then the accepting context is the highest-level containing action usage. Note that a perform action usage is always referential, so that the accepting context for subactions of a perform action usage is the perform action usage itself, *not* the containing performing part.

```

part controller {
    perform action accepting {
        // The receiver for the following accept action is, by default,
        // the accepting context, which is the "accepting" action,
        // not the part "controller".
        accept reading : SensorReading;

        // ...
    }
}

```

When accepting through a port (see [7.12](#) on ports), the port usage is the receiver (**via**).

```

part def ControllerDevice {
    port sensorPort;
    action control {
        accept reading : SensorReading via sensorPort;
    }
}

```

An accept action usage must be one of the following:

1. An owned feature of an action definition or usage.
2. The owned **entry**, **do** or **exit** action of a state definition or usage (see [7.17](#)).
3. The owned **effect** action or **accept** action of a transition usage (see [7.17](#)).

The base accept action usage is `acceptActions` from the `Actions` library model (see [9.2.9](#)), which is defined by `AcceptAction`. (See [8.4.12.6](#) for additional semantic constraints on accept action usages.)

7.16.9 Assignment Action Usages

An *assignment action usage* is declared as an action usage (see [7.16.2](#)) that is implicitly defined by the action definition `AssignmentAction` from the `Actions` model (see [9.2.9](#)). An `AssignmentAction` sets a *referent* feature of a *target* occurrence to a new *assigned value*. In the textual notation for an assignment action usage, these three things are specified in an *assignment part* between the usual action declaration part and the action body (if any). An assignment part consists of the keyword **assign** followed by an expression that evaluates to the target and a feature chain identifying the referent, separated by a dot (.), followed by the symbol `:=` and an expression whose result is the assigned value. If the declaration part is empty, then the **action** keyword may be omitted.

```

action def UpdateVehiclePosition {
    in part sim : Simulation;
    in attribute deltaT : TimeDurationValue;

    // The target of the assignment below is "sim".
}

```

The base accept action usage is `acceptActions` from the `Actions` library model (see [9.2.9](#)), which is defined by `AcceptAction`. (See [8.4.12.6](#) for additional semantic constraints on accept action usages.)

7.16.9 Assignment Action Usages

An *assignment action usage* is declared as an action usage (see [7.16.2](#)) that is implicitly defined by the action definition `AssignmentAction` from the `Actions` model (see [9.2.9](#)). An `AssignmentAction` sets a *referent* feature of a *target* occurrence to a new *assigned value*. In the textual notation for an assignment action usage, these three things are specified in an *assignment part* between the usual action declaration part and the action body (if any). An assignment part consists of the keyword `assign` followed by an expression that evaluates to the target and a feature chain identifying the referent, separated by a dot (.), followed by the symbol `:=` and an expression whose result is the assigned value. If the declaration part is empty, then the `action` keyword may be omitted.

```
action def UpdateVehiclePosition {
    in part sim : Simulation;
    in attribute deltaT : TimeDurationValue;

    // The target of the assignment below is "sim".
    // The referent feature chain is "vehicle.position".
    assign sim.vehicle.position :=
        sim.vehicle.position + sim.vehicle.velocity * deltaT;

    // After the above assignment "sim.vehicle.position" has the
    // value of the result of the assigned value expression,
    // evaluated at the time of the assignment.
}

action def RecordNames {
    in item record : Record;
    in item entries : Entry[1...*];

    // "entries.name" evaluates to the names of all entries.
    // These values are assigned to the "names" feature of "record".
    assign record.names := entries.name;
}
```

If the target expression of an assignment action usage is omitted, then the target is implicitly the occurrence owning the assignment action usage.

```
action counter {
    // This attribute is initialized using a feature value.
    attribute count : Natural := 0;

    // The target of the following assign action usage is
    // implicitly the action "counter".
    assign count := count + 1;
    // ...
}
```

Every assignment action usage must be one of the following:

1. An owned feature of an action definition or usage.
2. The owned `entry`, `do` or `exit` action of a state definition or usage (see [7.17](#)).
3. The owned `effect` of a transition usage (see [7.17](#)).

The base assignment action usage is `assignmentActions` from the `Actions` library model (see [9.2.9](#)). (See [8.4.12.7](#) for other semantic constraints on assignment action usages.)

```

// The referent feature chain is "vehicle.position".
assign sim.vehicle.position :=
    sim.vehicle.position + sim.vehicle.velocity * deltaT;

// After the above assignment "sim.vehicle.position" has the
// value of the result of the assigned value expression,
// evaluated at the time of the assignment.
}

action def RecordNames {
    in item record : Record;
    in item entries : Entry[1..*];

    // "entries.name" evaluates to the names of all entries.
    // These values are assigned to the "names" feature of "record".
    assign record.names := entries.name;
}

```

If the target expression of an assignment action usage is omitted, then the target is implicitly the occurrence owning the assignment action usage.

```

action counter {
    // This attribute is initialized using a feature value.
    attribute count : Natural := 0;

    // The target of the following assign action usage is
    // implicitly the action "counter".
    assign count := count + 1;
    // ...
}

```

Every assignment action usage must be one of the following:

1. An owned feature of an action definition or usage.
2. The owned **entry**, **do** or **exit** action of a state definition or usage (see [7.17](#)).
3. The owned **effect** of a transition usage (see [7.17](#)).

The base assignment action usage is `assignmentActions` from the Actions library model (see [9.2.9](#)). (See [8.4.12.7](#) for other semantic constraints on assignment action usages.)

7.16.10 Terminate Action Usages

SYSML2 -44: Transformation of UML4SysML::ActivityFinalNode is not specified yet

A *terminate action usage* is declared as an action usage (see [7.16.2](#)) implicitly defined by the action definition `TerminateAction` from the Actions library model (see [9.2.9](#)). A `TerminateAction` has a single parameter that identifies a *terminated occurrence*. The behavior of a `TerminateAction` is to force the lifetime of the terminated occurrence to end by the completion of the `TerminateAction` (see also [7.9.1](#) on the occurrence lifetimes). If the terminated occurrence is an action, this is equivalent to terminating the performance of the action.

```

part processor {
    private ref action process : ProcessWorkflow;
    action startProcessing {
        assign process := ProcessWorkflow();
    }
    action terminateProcessing {
        // The following terminate action has the name "terminate1".
        action terminate1 terminate process; // Terminates "process" action.

        // The following terminate action is unnamed.
    }
}

```

7.16.10 If Action Usages

An *if action usage* is an action usage that is implicitly defined by one of the action definitions `IfThenAction` or `IfThenElseAction` from the `Actions` model (see [9.2.9](#)). In the textual notation, an if action usage can have a typical action declaration (see [7.16.2](#)), but *without* the usual action body. Instead, the action declaration part is followed by the keyword `if`, which introduces a Boolean-valued *condition expression*, followed by a *then clause* and, for an `IfThenElseAction`, the keyword `else` and an *else clause*. The behavior of an if action usage is to first evaluate the condition expression. If the result is true, then the then-clause is performed, otherwise the else-clause is performed, if there is one.

Each of the then-clause and the else-clause is itself notated as an action usage, but with the body required to be given using curly braces `{ ... }`, with a semicolon not allowed for an empty body.

```
action test if speed < lowerLimit
    action increase : IncreaseSpeed { }
else
    action main : MaintainSpeed { }
```

If the if action usage does not include a declaration part, the leading `action` keyword can be omitted. If either or both of the clauses have no declaration part, then the `action` keyword can be omitted for them, too, leaving only their bodies surrounded by curly braces.

```
if selectedSensor != null {
    assign reading := selectedSensor.reading;
} else {
    assign reading := undefinedValue;
}
```

With one except, only the basic form of action declaration can be used for the clauses of an if action usage, not the special notations for perform action usages, send action usages, etc. The except is that, if the else-clause is itself an if action usage, then the special if action usage notation can be used. This allows for a typical "else if" structure for expressing the performance of a sequence of multiple tests.

```
if threat.level == high then {
    perform soundAlarm {in cause = threat;}
} else if threat.level == medium then {
    action sendNotification {in msg = threat;}
} else {
    action beginMonitoring {in target = threat;}
}
```

7.16.11 Loop Action Usages

A *loop action usage* is an action usage that is implicitly defined by one of the concrete specializations of the abstract action definition `LoopAction` from the `Actions` model (see [9.2.9](#)). There are two forms of loop action usages, the *while loop action usage* and the *for loop action usage*. In the textual notation, both kinds of loop action can have a typical action declaration (see [7.16.2](#)), but *without* the usual action body. Instead, the body is replaced with special notations specific to each kind of `LoopAction`.

While Loops

A while loop action usage is implicitly defined by the `WhileLoopAction` specialization of `LoopAction`. For a while loop action usage, the action declaration part is followed by the keyword `while`, which introduces a Boolean-valued *while expression*, followed by a *body clause*, and then, optionally, the keyword `until`, which introduces a

```

        terminate this; // Terminates "processor" part.
    }
}

```

In the textual notation for a terminate action usage, the value for the terminated occurrence parameter is given after the action declaration part, after the keyword `terminate`. If the declaration part is empty, then the `action` keyword may be omitted.

```

action def MonitoredActivity {
    merge continue;
    then action performCriticalActivity {
        perform action monitorCriticalActivity;
        perform action criticalActivity;
        then terminate; // Terminates "performCriticalActivity" even if
                        // "monitorCriticalActivity" is still ongoing.
    }
    then decide;
    if continueActivity() then continue;
    else stop;
    action stop terminate; // Terminates performance of "MonitoredActivity".
}

```

If a value is not given for the terminated occurrence parameter, then the default is to terminate the immediately containing action of the terminate action usage. Note that this means that, if the terminate action usage is in a nested action, it is that nested action that is terminated, not any containing actions of the nested action.

Alternatively, a value can be provided for the terminated occurrence parameter using a flow.

```

action def TerminateProcessByID {
    in attribute id : ProcessID;
    perform action getProcessByID {
        in processID = id;
        out process;
    }
    flow getProcessByID.process to terminateProcess.terminatedProcess;
    action terminateProcess terminate {
        in terminatedProcess;
    }
}

```

The base terminate action usage is `terminateActions` from the `Actions` library model (see 9.2.9), which is defined by `TerminateAction`. (See [8.4.12.8](#) for additional semantic constraints on terminate action usages.)

7.16.11 If Action Usages

An *if action usage* is an action usage that is implicitly defined by one of the action definitions `IfThenAction` or `IfThenElseAction` from the `Actions` model (see [9.2.9](#)). In the textual notation, an if action usage can have a typical action declaration (see [7.16.2](#)), but *without* the usual action body. Instead, the action declaration part is followed by the keyword `if`, which introduces a Boolean-valued *condition expression*, followed by a *then clause* and, for an `IfThenElseAction`, the keyword `else` and an *else clause*. The behavior of an if action usage is to first evaluate the condition expression. If the result is true, then the then-clause is performed, otherwise the else-clause is performed, if there is one.

Each of the then-clause and the else-clause is itself notated as an action usage, but with the body required to be given using curly braces `{ ... }`, with a semicolon not allowed for an empty body.

```

action test if speed < lowerLimit
    action increase : IncreaseSpeed { }

```

Boolean-valued *until expression* terminated with a semicolon. The behavior of the while loop action usage is to repeatedly perform the body clause as long as the while expression evaluates to true and the until expression (if there is one) evaluates to false. The while expression is evaluated before the first iteration of the body clause, but the until expression is not evaluated for the first time until after the first iteration of the body clause (if the while expression evaluates to true).

Similarly to the then and else clauses of an if action usage (see [7.16.10](#)), the body clause is itself notated as an action usage, but with its body required to be given using curly braces { ... }, with a semicolon not allowed for an empty body.

```
action advance while t < endTime
    action step {
        perform advanceState {
            :>> stateVector = systemState;
            :>> deltaT = dt;
        }
        then assign t := t + dt;
    } until stateVector.position >= endPosition;
```

The **action** keyword can be omitted for the while loop action usage itself and/or for the body clause, if they have no action declaration part.

```
while not ready {
    assign ready := poll(device);
}
```

The keyword **loop** may be used as a shorthand for **while true**. This is useful for a while loop that is designed to be non-terminating or will be terminated with just an until expression.

```
loop {
    assign charge := MonitorBattery();
    then if charge < 100 {
        action AddCharge;
    }
} until charge >= 100;
```

For Loops

A for loop action usage is implicitly defined by the **ForLoopAction** specialization of **LoopAction**. For a for loop action usage, the action declaration part is followed by the keyword **for**, which introduces a *loop variable declaration* followed by the keyword **in** and a *sequence expression*, and, after that, a *body clause*. The behavior of the for loop action usage is to first evaluate the sequence expression, which should result in a sequence of values. The body clause is then performed iteratively, with the loop variable assigned to each value sequentially for each iteration.

As for a while loop action usage, the body clause is itself notated as an action usage, but with its body required to be given using curly braces { ... }, with a semicolon not allowed for an empty body.

```
action dynamicScenario
    for power : PowerValue in powerProfile {
        action dynamicsStep {
            assign position := ComputeDynamics(position, power);
        }
    }
```

The **action** keyword can be omitted for the for loop action usage itself and/or for the body clause, if they have no action declaration part.

```

else
    action main : MaintainSpeed { }

```

If the if action usage does not include a declaration part, the leading **action** keyword can be omitted. If either or both of the clauses have no declaration part, then the **action** keyword can be omitted for them, too, leaving only their bodies surrounded by curly braces.

```

if selectedSensor != null {
    assign reading := selectedSensor.reading;
} else {
    assign reading := undefinedValue;
}

```

With one except, only the basic form of action declaration can be used for the clauses of an if action usage, not the special notations for perform action usages, send action usages, etc. The except is that, if the else-clause is itself an if action usage, then the special if action usage notation can be used. This allows for a typical "else if" structure for expressing the performance of a sequence of multiple tests.

```

if threat.level == high then {
    perform soundAlarm {in cause = threat;}
} else if threat.level == medium then {
    action sendNotification {in msg = threat;}
} else {
    action beginMonitoring {in target = threat;}
}

```

7.16.12 Loop Action Usages

A *loop action usage* is an action usage that is implicitly defined by one of the concrete specializations of the abstract action definition `LoopAction` from the `Actions` model (see [9.2.9](#)). There are two forms of loop action usages, the *while loop action usage* and the *for loop action usage*. In the textual notation, both kinds of loop action can have a typical action declaration (see [7.16.2](#)), but *without* the usual action body. Instead, the body is replaced with special notations specific to each kind of `LoopAction`.

While Loops

A while loop action usage is implicitly defined by the `WhileLoopAction` specialization of `LoopAction`. For a while loop action usage, the action declaration part is followed by the keyword **while**, which introduces a Boolean-valued *while expression*, followed by a *body clause*, and then, optionally, the keyword **until**, which introduces a Boolean-valued *until expression* terminated with a semicolon. The behavior of the while loop action usage is to repeatedly perform the body clause as long as the while expression evaluates to true and the until expression (if there is one) evaluates to false. The while expression is evaluated before the first iteration of the body clause, but the until expression is not evaluated for the first time until after the first iteration of the body clause (if the while expression evaluates to true).

Similarly to the then and else clauses of an if action usage (see [7.16.11](#)), the body clause is itself notated as an action usage, but with its body required to be given using curly braces `{ ... }`, with a semicolon not allowed for an empty body.

```

action advance while t < endTime
    action step {
        perform advanceState {
            :>> stateVector = systemState;
            :>> deltaT = dt;
        }
        then assign t := t + dt;
    } until stateVector.position >= endPosition;

```

```

for power : PowerValue in powerProfile {
    assign position := ComputeDynamics(position, power);
}

```

The `..` operator can be used to construct a sequence of Integer values between two bounds (inclusive), which can be useful as the sequence expression of a for loop (especially for indexing).

```

for i in 1..scenario->size() {
    assign positionList :=
        positionList->including(scenario.position#(i));
    assign velocityList :=
        velocityList->including(scenario.velocity#(i));
}

```

7.17 States

7.17.1 States Overview

Metamodel references:

- *Textual notation*, [8.2.2.17](#)
- *Graphical notation*, [8.2.3.17](#)
- *Abstract syntax*, [8.3.17](#)
- *Semantics*, [8.4.13](#)

States

A *state definition* is a kind of action definition (see [7.16](#)) that defines the conditions under which other actions can execute. A state usage is a usage of a state definition. State definitions and usages are used to describe state-based behavior, where the execution of any particular state is triggered by events.

A state definition or usage can contain specially identified action usages that are only performed while the state is activated.

- An *entry action* starts when the state is activated.
- A *do action* starts after the entry action completes and continues while the state is active.
- An *exit action* starts when the state is exited, and the state becomes inactive once the exit action is completed.

State definitions and usages follow the same patterns that apply to structural elements (see [7.6](#)). States can be decomposed into lower-level states to create a hierarchy of state usages, and states can be referenced by other states. In addition, a state definition can be specialized, and a state usage can be subsetted and redefined. This provides enhanced flexibility to modify a state hierarchy to adapt to its context.

Exhibited States

A state usage can be a feature of a part definition or a part usage, which can exhibit a state by referencing the state usage or by containing an owned state usage. Whether owned or referenced, the state usage that the part exhibits can represent a top state in a hierarchy of state usages.

An *exhibit state usage* is a state usage that specifies that a state is exhibited by the owner of the exhibit state usage. An exhibit state usage is referential, which allows the exhibited state behavior to be defined in a different context than that of the exhibitor (perhaps by a state usage in a state decomposition hierarchy). However, if the owner of the exhibit state usage is an occurrence, then the referenced state performance must be carried out entirely within the lifetime of the performing occurrence.

The **action** keyword can be omitted for the while loop action usage itself and/or for the body clause, if they have no action declaration part.

```
while not ready {  
    assign ready := poll(device);  
}
```

The keyword **loop** may be used as a shorthand for **while true**. This is useful for a while loop that is designed to be non-terminating or will be terminated with just an until expression.

```
loop {  
    assign charge := MonitorBattery();  
    then if charge < 100 {  
        action AddCharge;  
    }  
} until charge >= 100;
```

For Loops

A for loop action usage is implicitly defined by the `ForLoopAction` specialization of `LoopAction`. For a for loop action usage, the action declaration part is followed by the keyword **for**, which introduces a *loop variable declaration* followed by the keyword **in** and a *sequence expression*, and, after that, a *body clause*. The behavior of the for loop action usage is to first evaluate the sequence expression, which should result in a sequence of values. The body clause is then performed iteratively, with the loop variable assigned to each value sequentially for each iteration.

As for a while loop action usage, the body clause is itself notated as an action usage, but with its body required to be given using curly braces `{ ... }`, with a semicolon not allowed for an empty body.

```
action dynamicScenario  
    for power : PowerValue in powerProfile  
        action dynamicsStep {  
            assign position := ComputeDynamics(position, power);  
        }
```

The **action** keyword can be omitted for the for loop action usage itself and/or for the body clause, if they have no action declaration part.

```
for power : PowerValue in powerProfile {  
    assign position := ComputeDynamics(position, power);  
}
```

The `..` operator can be used to construct a sequence of Integer values between two bounds (inclusive), which can be useful as the sequence expression of a for loop (especially for indexing).

```
for i in 1..scenario->size() {  
    assign positionList :=  
        positionList->including(scenario.position#(i));  
    assign velocityList :=  
        velocityList->including(scenario.velocity#(i));  
}
```

7.17 States

7.17.1 States Overview

SYSML2 -286: Misspelling in Table 16 / graphical and textual notation do not match

In particular, an exhibit state usage can be a feature of a part definition or usage, specifying that the referenced state is exhibited by the containing part. Typically, the exhibited state and its substates will reflect conditions of the exhibiting part, such as the operating states of a vehicle. The values of the exhibit state usage are then references to occurrences of the state when the exhibiting part is "in" that state.






Transitions

State usages can be connected by *transition usages*, which can activate and deactivate the state usages. The triggering of a transition usage from its source state usage to its target state usage deactivates the source state and activates the target state. The trigger of a transition usage is an accept action usage (see 7.16), which accepts an incoming transfer. The transition usage can contain a *guard condition*, which is a Boolean expression (see 7.18) that must evaluate to `true` for the transition to occur. In addition, a transition usage may specify an *effect action usage* that starts if the transition is triggered, after the source state is deactivated, and must complete before the target state is activated. If the triggering transfer of a transition has a payload, then this payload is available for use in the guard condition and effect action of the transition, and after the transition completes.

Parallel States

A *parallel state* is one whose substates are performed concurrently. As such, no transitions are allowed between the substates of a parallel state. In contrast, if a non-parallel state has substates then, exactly one of the substates shall be active at any point in time in the lifetime of the containing state after completion of the entry action (if any).

Table 16. States – Representative Notation

Element	Graphical Notation	Textual Notation
State Definition	 	<pre>state def StateDef1; state def StateDef1 { /* members */ }</pre>
State	 	<pre>state state1 : StateDef1; state state1 : StateDef1 { /* members */ }</pre>
State with entry, do and exit actions.		<pre>state state1 { entry action1; do action2; exit action3; }</pre>

Metamodel references:

- *Textual notation*, [8.2.2.17](#)
- *Graphical notation*, [8.2.3.17](#)
- *Abstract syntax*, [8.3.17](#)
- *Semantics*, [8.4.13](#)

States

A *state definition* is a kind of action definition (see [7.16](#)) that defines the conditions under which other actions can execute. A state usage is a usage of a state definition. State definitions and usages are used to describe state-based behavior, where the execution of any particular state is triggered by events.

A state definition or usage can contain specially identified action usages that are only performed while the state is activated.

- An *entry action* starts when the state is activated.
- A *do action* starts after the entry action completes and continues while the state is active.
- An *exit action* starts when the state is exited, and the state becomes inactive once the exit action is completed.

State definitions and usages follow the same patterns that apply to structural elements (see [7.6](#)). States can be decomposed into lower-level states to create a hierarchy of state usages, and states can be referenced by other states. In addition, a state definition can be specialized, and a state usage can be subsetted and redefined. This provides enhanced flexibility to modify a state hierarchy to adapt to its context.

Exhibited States




A state usage can be a feature of a part definition or a part usage, which can exhibit a state by referencing the state usage or by containing an owned state usage. Whether owned or referenced, the state usage that the part exhibits can represent a top state in a hierarchy of state usages.

An *exhibit state usage* is a state usage that specifies that a state is exhibited by the owner of the exhibit state usage. An exhibit state usage is referential, which allows the exhibited state behavior to be defined in a different context than that of the exhibitor (perhaps by a state usage in a state decomposition hierarchy). However, if the owner of the exhibit state usage is an occurrence, then the referenced state performance must be carried out entirely within the lifetime of the performing occurrence.

In particular, an exhibit state usage can be a feature of a part definition or usage, specifying that the referenced state is exhibited by the containing part. Typically, the exhibited state and its substates will reflect conditions of the exhibiting part, such as the operating states of a vehicle. The values of the exhibit state usage are then references to occurrences of the state when the exhibiting part is "in" that state.

Transitions






State usages can be connected by *transition usages*, which can activate and deactivate the state usages. The triggering of a transition usage from its source state usage to its target state usage deactivates the source state and activates the target state. The trigger of a transition usage is an accept action usage (see [7.16](#)), which accepts an incoming transfer. The transition usage can contain a *guard condition*, which is a Boolean expression (see [7.18](#)) that must evaluate to `true` for the transition to occur. In addition, a transition usage may specify an *effect action usage* that starts if the transition is triggered, after the source state is deactivated, and must complete before the target state is activated. If the triggering transfer of a transition has a payload, then this payload is available for use in the guard condition and effect action of the transition, and after the transition completes.

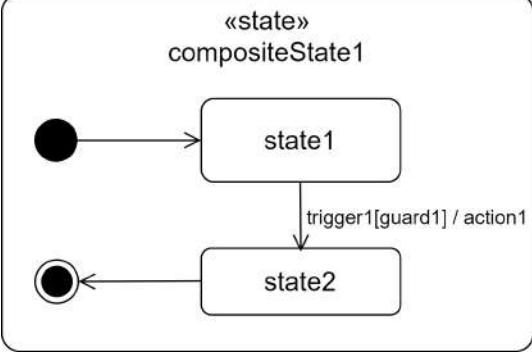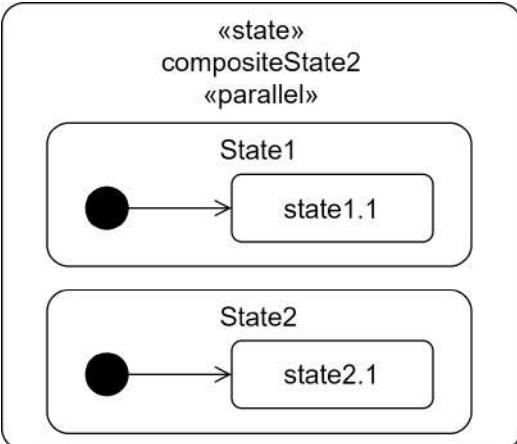
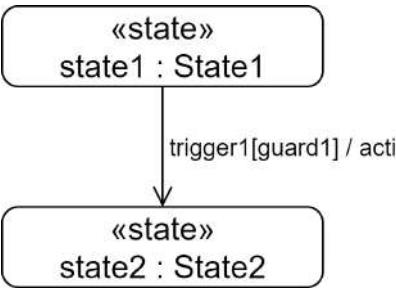
Element	Graphical Notation	Textual Notation
State with Graphical Compartment with standard state transition view (sequential states)	 <pre data-bbox="638 276 1018 629"> <<state>> compositeState1 state1 state2 trigger1[guard1] / action1 </pre>	<pre data-bbox="1067 276 1400 629"> state compositeState1 { entry; then state1; state state1; transition first state1 accept trigger1 if guard1 do action1 then state2; state state2; then done; } </pre>
State with Graphical Compartment with standard state transition view (parallel states)	 <pre data-bbox="643 677 861 1121"> <<state>> compositeState2 <<parallel>> State1 state1.1 State2 state2.1 </pre>	<pre data-bbox="1067 720 1400 1094"> state compositeState2 parallel { state state1 { entry; then 'state1.1'; state 'state1.1'; } state state2 { entry; then 'state2.1'; state 'state2.1'; } } </pre>
Transition	 <pre data-bbox="584 1305 833 1558"> <<state>> state1 : State1 trigger1[guard1] / action1 <<state>> state2 : State2 </pre>	<pre data-bbox="1067 1199 1383 1417"> state state1 : State1; state state2 : State2; transition first state1 accept trigger1 if guard1 do action1 then state2; </pre> <p data-bbox="1067 1453 1099 1474">or</p> <pre data-bbox="1067 1501 1383 1676"> state state1 : State1; accept trigger1 if guard1 do action1 then state2; state state2 : State2; </pre>





Parallel States



A *parallel state* is one whose substates are performed concurrently. As such, no transitions are allowed between the substates of a parallel state. In contrast, if a non-parallel state has substates then, exactly one of the substates shall be active at any point in time in the lifetime of the containing state after completion of the entry action (if any).

Table 16. States – Representative Notation

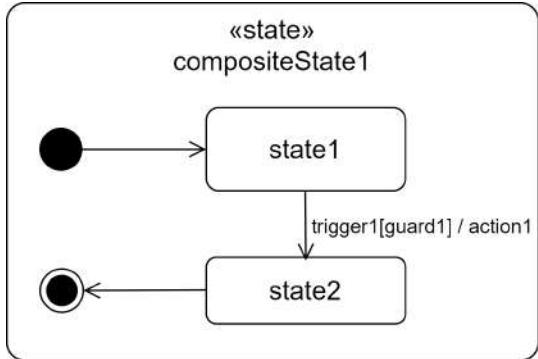Element	Graphical Notation	Textual Notation
State Definition	 	<pre>state def StateDef1; state def StateDef1 { /* members */ }</pre>
State	 	<pre>state state1 : StateDef1; state state1 : StateDef1 { /* members */ }</pre>
State with entry, do and exit actions.		<pre>state state1 : StateDef1 { entry action1; do action2; exit action3; }</pre>
State with Graphical Compartment with standard state transition view (sequential states)		<pre>state compositeState1 { entry; then state1; state state1; transition first state1 accept trigger1 if guard1 do action1 then state2; state state2; then done; }</pre>

Element	Graphical Notation	Textual Notation
Exhibit	 <pre> graph TD part1["<<part>> part1 : Part1"] -- "<<exhibit>>" --> state1["<<state>> state1 : State1"] </pre>	<pre> part part1 : Part1 { exhibit state1; } </pre>
Exhibit State	 <pre> graph TD part1["<<part>> part1 : Part1"] -- diamond --> state1["<<state>> state1 : State1"] state1 -- "<<exhibit>>" --> part1 </pre>	<pre> part part1 : Part1 { exhibit state state1 : State1; } </pre>
States Compartment	<pre> states ^state2 : StateDef2 state1 : StateDef1 [1..*] ordered nonunique state3R : StateDef3R redefines state3 state4R : StateDef4R >> state4 >> state5 state6S : StateDef6S [m] subsets state6 state7S : StateDef7S [m] >: state7 state8R = state8 ref state9 : StateDef9 exhibit state10 state11 ... </pre>	<pre> { state state1 : StateDef [1..*] ordered nonunique; /* ... */ exhibit state state10; state state11 { state 'state11.1'; state 'state11.2'; } } </pre>

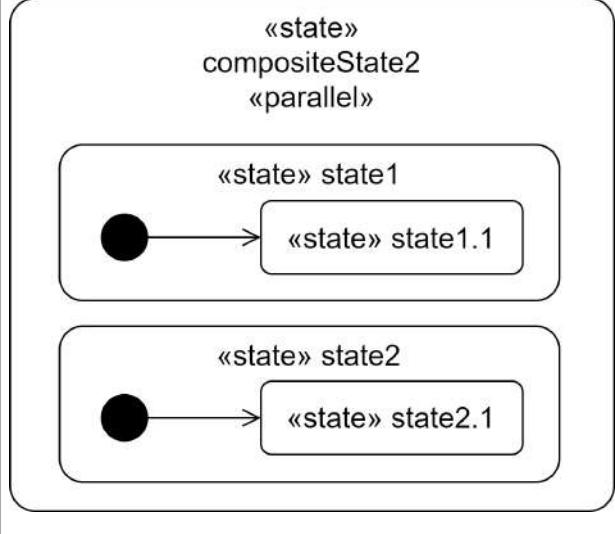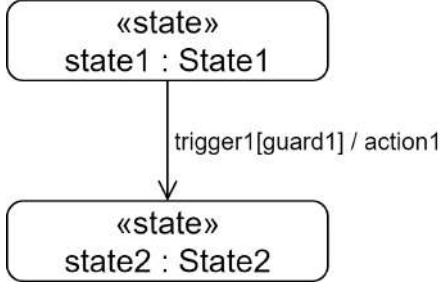Element	Graphical Notation	Textual Notation
State with Graphical Compartment with standard state transition view (parallel states)	 <pre> <<state>> compositeState2 <<parallel>> <<state>> state1 initial state1 --> state1.1 state1.1 --> state1.1 <<state>> state2 initial state2 --> state2.1 state2.1 --> state2.1 </pre>	<pre> state compositeState2 parallel { state state1 { entry; then 'state1.1'; state 'state1.1'; } state state2 { entry; then 'state2.1'; state 'state2.1'; } } </pre>
Transition	 <pre> <<state>> state1 : State1 --> <<state>> state2 : State2 </pre> <p style="text-align: center;">trigger1[guard1] / action1</p>	<pre> state state1 : State1; state state2 : State2; transition first state1 accept trigger1 if guard1 do action1 then state2; </pre> <p>or</p> <pre> state state1 : State1; accept trigger1 if guard1 do action1 then state2; state state2 : State2; </pre>
Exhibit	 <pre> <<part>> part1 : Part1 --> <<state>> state1 : State1 </pre> <p style="text-align: center;">«exhibit»</p>	<pre> part part1 : Part1 { exhibit state1; } </pre>
Exhibit State	 <pre> <<part>> part1 : Part1 diamond --> <<state>> state1 : State1 </pre> <p style="text-align: center;">«exhibit»</p>	<pre> part part1 : Part1 { exhibit state state1 : State1; } </pre>

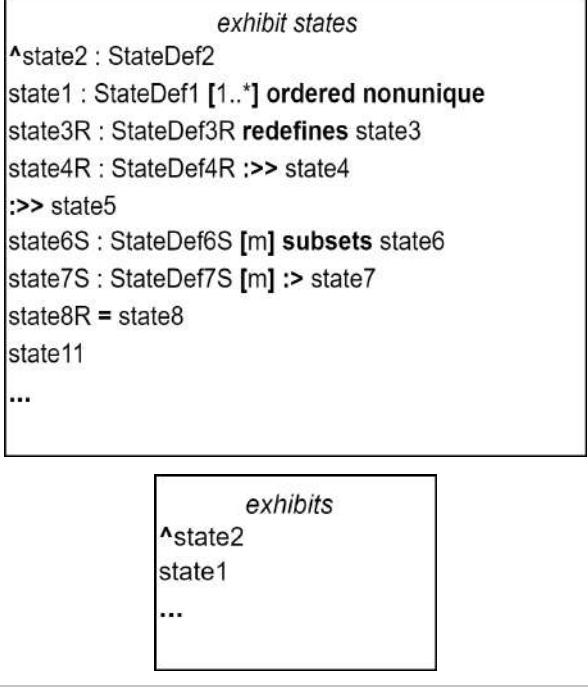Element	Graphical Notation	Textual Notation
Exhibit States Compartment	 <pre> exhibit states ^state2 : StateDef2 state1 : StateDef1 [1..*] ordered nonunique state3R : StateDef3R redefines state3 state4R : StateDef4R >> state4 :>> state5 state6S : StateDef6S [m] subsets state6 state7S : StateDef7S [m] > state7 state8R = state8 state11 ... </pre>	<pre> { exhibit state state1 : StateDef [1..*] ordered nonunique; /* ... */ } </pre>
Exhibited By Compartment	 <pre> exhibits ^state2 state1 ... </pre>	<pre> exhibited by item1 : ItemDef1 </pre>

7.17.2 State Definitions and Usages

A state definition or usage is declared as an action definition or usage (see [7.16.2](#)), but using the keyword **state** instead of **action**. In addition, entry, do and exit actions can be declared (at most one of each) in the body of a state definition or usage, using the keywords **entry action**, **do action**, and **exit action**, followed by an action declaration and body, in the usual form.

```

state def Exercising {
  entry action warmup : WarmUp;
  do action exercise : Exercise {
    action strengthTraining;
    then action cardioTraining;
  }
  exit action cooldown : Cooldown;
}

```

In addition to the generic **action** notation as above, the special notations for send action usages (see [7.16.7](#)), accept action usages (see [7.16.8](#)), and assignment action usages (see [7.16.9](#)) can be used for entry, do, and exit actions.

```

state def Operating {
  entry assign stateCode := StateCodes::Operating;
  do send ReadySignal() to Controller;
}

```

Element	Graphical Notation	Textual Notation
States Compartment	<pre> states ^state2 : StateDef2 state1 : StateDef1 [1..*] ordered nonunique state3R : StateDef3R redefines state3 state4R : StateDef4R :>> state4 :>> state5 state6S : StateDef6S [m] subsets state6 state7S : StateDef7S [m] :> state7 state8R = state8 ref state9 : StateDef9 exhibit state10 state11 ... </pre>	<pre> { state state1 : StateDef [1..*] ordered nonunique; /* ... */ exhibit state state10; state state11 { state 'state11.1'; state 'state11.2'; } }</pre>
Exhibit States Compartment	<pre> exhibit states ^state2 : StateDef2 state1 : StateDef1 [1..*] ordered nonunique state3R : StateDef3R redefines state3 state4R : StateDef4R :>> state4 :>> state5 state6S : StateDef6S [m] subsets state6 state7S : StateDef7S [m] :> state7 state8R = state8 state11 ... </pre>	<pre> { exhibit state state1 : StateDef [1..*] ordered nonunique; /* ... */ } </pre>
Exhibited By Compartment	<pre> exhibited by item1 : ItemDef1 </pre>	No textual notation

7.17.2 State Definitions and Usages

A state definition or usage is declared as an action definition or usage (see [7.16.2](#)), but using the keyword **state** instead of **action**. In addition, entry, do and exit actions can be declared (at most one of each) in the body of a state definition or usage, using the keywords **entry action**, **do action**, and **exit action**, followed by an action declaration and body, in the usual form.

The **entry**, **do**, and **exit** keywords can also be used without any **action** keyword. If the keyword is immediately followed by a semicolon ;, then they are empty actions. If they are followed by a qualified name or feature chain for an action usage, then this is a shorthand for relating the entry, do, or exit action to the identified action usage via *reference subsetting* (see also [7.13.2](#)).

```
action monitorTemperature;
state def TurnedOn {
    // This is an empty entry action.
    entry;

    // The following is equivalent to
    // do action references monitorTemperature;
    do monitorTemperature;
}
```

A state definition or usage may hierarchically contain state usages in its body. By default, these substate usages are considered to be *exclusive*, that is, their performances do not overlap in time. However, if the keyword **parallel** is added to a state definition or usage, just before the body part, then the containing state definition or usage becomes a parallel state, and its contained state usages can be performed in parallel. (However, no transitions are allowed between concurrent states; see [7.17.3](#).)

```
state def VehicleStates parallel {
    // These substates are performed concurrently.
    state OperationalStates;
    state HealthStates;
}
```

The base state definition and usage are **State** and **states** from the **States** library model (see [7.17](#)). (For other semantic constraints on state usages, see [8.4.13](#).)

7.17.3 Transition Usages

A transition usage is also a kind of action usage (see [7.16.2](#)) that can be used within non-parallel states. (A parallel state with concurrent substates is not allowed to have transitions to or from its substates.) A transition usage is implicitly defined by the action definition **StateTransitionAction** from the **States** library model (see [7.17](#)). A transition usage also relates a *source* state usage to a *target* state usage, declaring that it is possible to transition from a performance of the source state to a new performance of the target state.

In addition, a transition usage can have an entry or exit action as a source or target. Indeed, for a non-parallel state definition or usage with nested state usages, the initial state usage is indicated by a transition from the entry action to that state usage, representing that this is the state that is entered on completion of the entry action.

A transition usage is identified with the keyword **transition**. The source and target states are identified using the same keywords as for a succession (see [7.13.5](#)), **first** and **then**.

```
state def OnOff1 {
    entry action init;
    transition first init then off;

    state off;
    state on;

    transition off_on first off then on;
    transition on_off first on then off;
}
```

```

state def Exercising {
    entry action warmup : WarmUp;
    do action exercise : Exercise {
        action strengthTraining;
        then action cardioTraining;
    }
    exit action cooldown : Cooldown;
}

```

In addition to the generic **action** notation as above, the special notations for send action usages (see [7.16.7](#)), accept action usages (see [7.16.8](#)), and assignment action usages (see [7.16.9](#)) can be used for entry, do, and exit actions.

```

state def Operating {
    entry assign stateCode := StateCodes::Operating;
    do send ReadySignal() to Controller;
}

```

The **entry**, **do**, and **exit** keywords can also be used without any **action** keyword. If the keyword is immediately followed by a semicolon ;, then they are empty actions. If they are followed by a qualified name or feature chain for an action usage, then this is a shorthand for relating the entry, do, or exit action to the identified action usage via *reference subsetting* (see also [7.13.2](#)).

```

action monitorTemperature;
state def TurnedOn {
    // This is an empty entry action.
    entry;

    // The following is equivalent to
    // do action references monitorTemperature;
    do monitorTemperature;
}

```

A state definition or usage may hierarchically contain state usages in its body. By default, these substate usages are considered to be *exclusive*, that is, their performances do not overlap in time. However, if the keyword **parallel** is added to a state definition or usage, just before the body part, then the containing state definition or usage becomes a parallel state, and its contained state usages can be performed in parallel. (However, no transitions are allowed between concurrent states; see [7.17.3](#).)

```

state def VehicleStates parallel {
    // These substates are performed concurrently.
    state OperationalStates;
    state HealthStates;
}

```

The base state definition and usage are `State` and `states` from the `States` library model (see [7.17](#)). (For other semantic constraints on state usages, see [8.4.13](#).)

7.17.3 Transition Usages

A transition usage is also a kind of action usage (see [7.16.2](#)) that can be used within non-parallel states. (A parallel state with concurrent substates is not allowed to have transitions to or from its substates.) A transition usage is implicitly defined by the action definition `StateTransitionAction` from the `States` library model (see [7.17](#)). A transition usage also relates a *source* state usage to a *target* state usage, declaring that it is possible to transition from a performance of the source state to a new performance of the target state.

In addition, a transition usage can have an entry or exit action as a source or target. Indeed, for a non-parallel state definition or usage with nested state usages, the initial state usage is indicated by a transition from the entry action to that state usage, representing that this is the state that is entered on completion of the entry action.

A transition usage can also have a Boolean-valued guard expression. The guard expression is evaluated during the performance of the source, and the transition usage is only enabled to possibly cause a transition out of the source state when the guard evaluates to true. In the textual notation, the guard expression is given after the keyword **if**, between the source and target parts.

```
state def OnOff2 {
    in attribute isInitOff;
    in attribute isEnabled;

    entry action init;
    transition first init if isInitOff then off;
    transition first init if not isInitOff then on;

    state off;
    state on;

    transition off_on first off if isEnabled then on;
    transition on_off first on if isEnabled then off;
}
```

A transition usage can also have an *accepter*, which is an accept action usage use to trigger the transition. The accepter action for a transition usage is placed after the guard expression and notated using the **accept** keyword, with its payload and receiver parameters specified exactly as discussed in [7.16.8](#). Transition usages from the entry action are not allowed to have accepters.

```
item def TurnOn;
state def OnOff3 {
    in attribute isInitOff;
    in attribute isEnabled;

    port commPort;

    entry action init;
    transition first init if isInitOff then off;
    transition first init if not isInitOff then on;

    state off;
    state on;

    transition off_on
        first off
        if isEnabled
        accept TurnOn via commPort
        then on;
    transition on_off
        first on
        if isEnabled
        accept after 5[min]
        then off;
}
```

Finally, a transition usage can have an *effect action*, which is an action usage that is performed if the transition usage is triggered. An effect action is notated using the keyword **do** in the same way as a do action on a state definition or usage (see [7.17.2](#)). In the textual notation for a transition usage, it is also placed between the source and target parts, after the guard and accepter (if the transition usage has those).

```
action def PowerUp;
item def TimeoutSignal;
```

A transition usage is identified with the keyword `transition`. The source and target states are identified using the same keywords as for a succession (see [7.13.5](#)), `first` and `then`.

```
state def OnOff1 {
    entry action init;
    transition first init then off;

    state off;
    state on;

    transition off_on first off then on;
    transition on_off first on then off;
}
```

A transition usage can also have a Boolean-valued guard expression. The guard expression is evaluated during the performance of the source, and the transition usage is only enabled to possibly cause a transition out of the source state when the guard evaluates to true. In the textual notation, the guard expression is given after the keyword `if`, between the source and target parts.

```
state def OnOff2 {
    in attribute isInitOff;
    in attribute isEnabled;

    entry action init;
    transition first init if isInitOff then off;
    transition first init if not isInitOff then on;

    state off;
    state on;

    transition off_on first off if isEnabled then on;
    transition on_off first on if isEnabled then off;
}
```

A transition usage can also have an *accepter*, which is an accept action usage use to trigger the transition. The accepter action for a transition usage is placed after the guard expression and notated using the `accept` keyword, with its payload and receiver parameters specified exactly as discussed in [7.16.8](#). Transition usages from the entry action are not allowed to have accepters.

```
item def TurnOn;
state def OnOff3 {
    in attribute isInitOff;
    in attribute isEnabled;

    port commPort;

    entry action init;
    transition first init if isInitOff then off;
    transition first init if not isInitOff then on;

    state off;
    state on;

    transition off_on
        first off
        if isEnabled
        accept TurnOn via commPort
        then on;
    transition on_off
        first on
        if isEnabled
```

```

state def OnOff4 {
    in attribute isInitOff;
    in attribute isEnabled;

    port commPort;

    entry action init;
    transition first init if isInitOff then off;
    transition first init if not isInitOff then on;

    state off;
    state on;

    transition off_on
        first off
        if isEnabled
        accept TurnOn via commPort
        do action powerUp : PowerUp;
        then on;
    transition on_off
        first on
        if isEnabled
        accept after 5[min]
        do send TimeoutSignal() via commPort
        then off;
}

```

In the textual notation, there is also a shorthand for a transition usage without a declaration part, in which both the **transition** keyword *and* the source part can be omitted. In this case, the source is taken to be the closest lexically previous state usage, which means the transition usages out of a certain state usage need to be placed essentially immediately after their source states. This notation can also be used when the transition source is the entry action, which is particularly useful, because it means the entry action does not need to be named.

```

state def OnOff5 {
    in attribute isInitOff;
    in attribute isEnabled;

    port commPort;

    entry:
        if isInitOff then off;
        if not isInitOff then on;

    state off;
        if isEnabled
        accept TurnOn via commPort
        do action powerUp : PowerUp;
        then on;

    state on;
        if isEnabled
        accept after 5[min]
        do send TimeoutSignal() via commPort
        then off;
}

```

In summary, the guard and accepter of a transition action usage determine whether a transition usage is triggered:

1. A transition usage can only be triggered during a performance of its source.

```

    accept after 5[min]
    then off;
}

```

Finally, a transition usage can have an *effect action*, which is an action usage that is performed if the transition usage is triggered. An effect action is notated using the keyword **do** in the same way as a do action on a state definition or usage (see [7.17.2](#)). In the textual notation for a transition usage, it is also placed between the source and target parts, after the guard and accepter (if the transition usage has those).

```

action def PowerUp;
item def TimeoutSignal;
state def OnOff4 {
    in attribute isInitOff;
    in attribute isEnabled;

    port commPort;

    entry action init;
    transition first init if isInitOff then off;
    transition first init if not isInitOff then on;

    state off;
    state on;

    transition off_on
        first off
        if isEnabled
        accept TurnOn via commPort
        do action powerUp : PowerUp;
        then on;
    transition on_off
        first on
        if isEnabled
        accept after 5[min]
        do send TimeoutSignal() via commPort
        then off;
}

```

In the textual notation, there is also a shorthand for a transition usage without a declaration part, in which both the **transition** keyword *and* the source part can be omitted. In this case, the source is taken to be the closest lexically previous state usage, which means the transition usages out of a certain state usage need to be placed essentially immediately after their source states. This notation can also be used when the transition source is the entry action, which is particularly useful, because it means the entry action does not need to be named.

```

state def OnOff5 {
    in attribute isInitOff;
    in attribute isEnabled;

    port commPort;

    entry;
        if isInitOff then off;
        if not isInitOff then on;

    state off;
        if isEnabled
        accept TurnOn via commPort
        do action powerUp : PowerUp;
        then on;

    state on;
}

```

2. If a transition usage has a guard expression, it can only be triggered if the guard expression evaluates to true.
3. If a transition has an accepter, and it meets the above conditions, then it is triggered if the accepter can accept in incoming transfer via its receiver parameter, in which case the accepter is performed as described in [7.16.8](#) (see also [8.4.12.6](#)).

If a transition usage is triggered, then it establishes a succession relationship between the source performance and a new performance of the target, and a transition is performed as follows:

1. If the source state has a do action that is still being performed, that is interrupted.
2. Then, if the source state has an exit action, that is performed.
3. Once that completes, if the transition usage has an effect action, that is performed.
4. Once that completes, if the target state has an entry action, that is performed.
5. Once that completes, if the target state has a do action, that is performed.

7.17.4 Exhibit State Usages

An *exhibit state usage* is declared as a state usage (see [7.17.2](#)) but using the kind keyword **exhibit state** instead of just **state**. An exhibit state usage is a kind of perform action usage (see [7.16.6](#)) for which the action usage is a state usage, known as the *exhibited state*. As for a perform action usage, the exhibited state is related to the exhibit state usage by a *reference subsetting* relationship, specified textually using the keyword **references** or the symbol `::>`. Or, if the exhibit state usage has no such reference subsetting, then the exhibited state is the exhibit state usage itself.

```
part def Vehicle {
  exhibit state operatingState references VehicleStates::operating;
  abstract exhibit state monitoringState; // Exhibited state is itself.
}
```

An exhibit state usage may also be declared using just the keyword **exhibit** instead of **exhibit state**. In this case, the declaration does not include either a name or short name. Instead, the exhibited state of the exhibit state usage is identified by giving a qualified name or feature chain immediately after the **exhibit** keyword.

```
part vehicle : Vehicle {
  // The exhibited state is VehicleActions::monitoring.
  exhibit VehicleStates::monitoring ::> Vehicle::monitoringState;
}
```

If an exhibit state usage is used in the body of a part definition or usage, then the part is considered to be the *performer* of the exhibit state usage (see also [8.4.13.4](#) on the semantics of exhibit state usages). The **ref** keyword may be used in the declaration of a exhibit state usage, but a exhibit state usage is always referential, whether or not **ref** is included in its declaration.

7.18 Calculations

7.18.1 Calculations Overview

Metamodel references:

- *Textual notation*, [8.2.2.18](#)
- *Graphical notation*, [8.2.3.18](#)
- *Abstract syntax*, [8.3.18](#)
- *Semantics*, [8.4.14](#)

```

if isEnabled
accept after 5[min]
do send TimeoutSignal() via commPort
then off;
}

```

In summary, the guard and accepter of a transition action usage determine whether a transition usage is triggered:

1. A transition usage can only be triggered during a performance of its source.
2. If a transition usage has a guard expression, it can only be triggered if the guard expression evaluates to true.
3. If a transition has an accepter, and it meets the above conditions, then it is triggered if the accepter can accept in incoming transfer via its receiver parameter, in which case the accepter is performed as described in [7.16.8](#) (see also [8.4.12.6](#)).

If a transition usage is triggered, then it establishes a succession relationship between the source performance and a new performance of the target, and a transition is performed as follows:

1. If the source state has a do action that is still being performed, that is interrupted.
2. Then, if the source state has an exit action, that is performed.
3. Once that completes, if the transition usage has an effect action, that is performed.
4. Once that completes, if the target state has an entry action, that is performed.
5. Once that completes, if the target state has a do action, that is performed.

7.17.4 Exhibit State Usages

An *exhibit state usage* is declared as a state usage (see [7.17.2](#)) but using the kind keyword **exhibit state** instead of just **state**. An exhibit state usage is a kind of perform action usage (see [7.16.6](#)) for which the action usage is a state usage, known as the *exhibited state*. As for a perform action usage, the exhibited state is related to the exhibit state usage by a *reference subsetting* relationship, specified textually using the keyword **references** or the symbol `::>`. Or, if the exhibit state usage has no such reference subsetting, then the exhibited state is the exhibit state usage itself.

```

part def Vehicle {
    exhibit state operatingState references VehicleStates::operating;
    abstract exhibit state monitoringState; // Exhibited state is itself.
}

```

An exhibit state usage may also be declared using just the keyword **exhibit** instead of **exhibit state**. In this case, the declaration does not include either a name or short name. Instead, the exhibited state of the exhibit state usage is identified by giving a qualified name or feature chain immediately after the **exhibit** keyword.

```

part vehicle : Vehicle {
    // The exhibited state is VehicleActions::monitoring.
    exhibit VehicleStates::monitoring ::> Vehicle::monitoringState;
}

```

If an exhibit state usage is used in the body of a part definition or usage, then the part is considered to be the *performer* of the exhibit state usage (see also [8.4.13.4](#) on the semantics of exhibit state usages). The **ref** keyword may be used in the declaration of a exhibit state usage, but a exhibit state usage is always referential, whether or not **ref** is included in its declaration.

7.18 Calculations

7.18.1 Calculations Overview

Metamodel references:

A *calculation definition* is a kind of action definition (see [7.16](#)) that has a distinguished parameter with direction `out` called the *result* parameter (which is usually the only `out` parameter). A calculation definition specifies a reusable computation that returns a result in the result parameter. A *calculation usage* is an action usage that is a usage of a calculation definition.

In addition to its parameters, a calculation definition or usage may have features that are calculation or action usages that carry out steps in the computation of the result of the calculation. The calculation may also have other features that are used to record intermediate results in the computation. The final result is specified as an *expression* written in terms of the input parameters of the calculation and any intermediate results.


KerML includes extensive syntax for constructing expressions, including traditional operator notations for functions in the Kernel Function Library, which is adopted in its entirety into SysML. In addition, a calculation definition is also a KerML function, and a calculation usage is itself a KerML expression. This allows a calculation definition or usage to also be invoked using the notation of a KerML invocation expression. (See the KerML Specification [KerML, 7.4.9] for a complete description of the KerML expression sublanguage.)

Calculation definitions are often used to define mathematical functions, in which case the defined computation should be *pure*. A pure calculation has the following properties:

1. Two invocations of the calculation definition with the same values for the input parameters always produce the same values for the result parameter.
2. The performance of the calculation does not produce any side effects (that is, it does not effect any occurrence that is not a composite part of its performance or that of a subaction or subcalculation).

Any subcalculations or subactions of a pure calculation must also be pure, including the final expression computing the result. Further, the inputs of a pure calculation should either be attributes or the calculation should not rely on features of input occurrences that may change from one invocation of the calculation definition to another.

Table 17. Calculations – Representative Notation

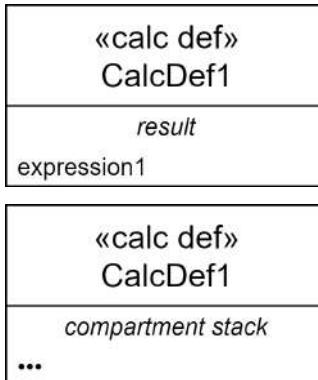Element	Graphical Notation	Textual Notation
Calc Definition		<pre>calc def CalcDef1 { expression1 } calc def CalcDef1 { /* members */ }</pre>

- *Textual notation*, [8.2.2.18](#)
- *Graphical notation*, [8.2.3.18](#)
- *Abstract syntax*, [8.3.18](#)
- *Semantics*, [8.4.14](#)

A *calculation definition* is a kind of action definition (see [7.16](#)) that has a distinguished parameter with direction **out** called the *result* parameter (which is usually the only **out** parameter). A calculation definition specifies a reusable computation that returns a result in the result parameter. A *calculation usage* is an action usage that is a usage of a calculation definition.

In addition to its parameters, a calculation definition or usage may have features that are calculation or action usages that carry out steps in the computation of the result of the calculation. The calculation may also have other features that are used to record intermediate results in the computation. The final result is specified as an *expression* written in terms of the input parameters of the calculation and any intermediate results.



KerML includes extensive syntax for constructing expressions, including traditional operator notations for functions in the Kernel Function Library, which is adopted in its entirety into SysML. In addition, a calculation definition is also a KerML function, and a calculation usage is itself a KerML expression. This allows a calculation definition or usage to also be invoked using the notation of a KerML invocation expression. (See the KerML Specification [KerML, 7.4.9] for a complete description of the KerML expression sublanguage.)


Calculation definitions are often used to define mathematical functions, in which case the defined computation should be *pure*. A pure calculation has the following properties:

1. Two invocations of the calculation definition with the same values for the input parameters always produce the same values for the result parameter.
2. The performance of the calculation does not produce any side effects (that is, it does not effect any occurrence that is not a composite part of its performance or that of a subaction or subcalculation).

Any subcalculations or subactions of a pure calculation must also be pure, including the final expression computing the result. Further, the inputs of a pure calculation should either be attributes or the calculation should not rely on features of input occurrences that may change from one invocation of the calculation definition to another.

Table 17. Calculations – Representative Notation

Element	Graphical Notation	Textual Notation
Calc Definition	 	<pre>calc def CalcDef1 { expression1 } calc def CalcDef1 { /* members */ }</pre>

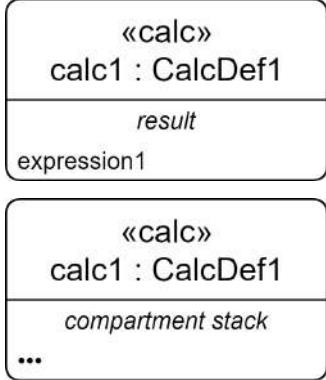Element	Graphical Notation	Textual Notation
Calc	 <pre> classDiagram class calc1 { <<calc>> calc1 : CalcDef1 result expression1 } class calc1 { <<calc>> calc1 : CalcDef1 compartment stack ... } </pre>	<pre> calc calc1 : CalcDef1 { expression1 } calc calc1 : CalcDef1 { /* members */ } </pre>

7.18.2 Calculation Definitions and Usages

A calculation definition or usage is declared as an action definition or usage (see [7.16.2](#)), but using the keyword **calc** instead of **action**. As for an action definition or usage, directed usages declared in the body of a calculation definition or usage are considered to be parameters. In addition, the result parameter for a calculation definition or usage can be declared as an out parameter using the keyword **return** instead of **out**. Note that a calculation definition or usage always has a result parameter, inherited if not owned.

```

calc def Velocity {
    in v_i : VelocityValue;
    in a : AccelerationValue;
    in dt : TimeValue;
    return v_f : VelocityValue;
}
  
```

If a calculation definition has superclassification relationships (implicit or explicit) with action definitions (or KerML behaviors), then the rules for the redefinition of the non-result parameters of the calculation definition are the same as for an action definition (see [7.16.2](#)). In addition, if a calculation definition specializes other calculation definitions (or KerML functions), then its result parameter redefines the results parameters of the calculation definitions it specializes, regardless of the positions of those parameters.


```

calc def Dynamics {
    in initialState : DynamicState;
    in time : TimeValue;
    return : DynamicState;
}
calc def VehicleDynamics specializes Dynamics {
    // Each parameter redefines the corresponding parameter of Dynamics
    in initialState : VehicleState;
    in time : TimeValue;
    return : VehicleState;
}
  
```

If a calculation usage has any type of specialization relationship (i.e., feature typing, subsetting or redefinition, implicit or explicit) with an action definition or usage (or KerML behavior or step), the rules for the redefinition of the parameters of the general definitions and usages are the same as given for the redefinition of parameters of a calculation definition above.

```

calc computation : Dynamics {
    // Parameters redefine parameters of Dynamics.
}
  
```

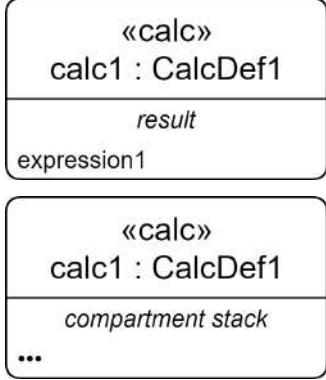Element	Graphical Notation	Textual Notation
Calc		<pre> calc calc1 : CalcDef1 { expression1 } calc calc1 : CalcDef1 { /* members */ } </pre>

7.18.2 Calculation Definitions and Usages

A calculation definition or usage is declared as an action definition or usage (see [7.16.2](#)), but using the keyword **calc** instead of **action**. As for an action definition or usage, directed usages declared in the body of a calculation definition or usage are considered to be parameters. In addition, the result parameter for a calculation definition or usage can be declared as an out parameter using the keyword **return** instead of **out**. Note that a calculation definition or usage always has a result parameter, inherited if not owned.

```

calc def Velocity {
    in v_i : VelocityValue;
    in a : AccelerationValue;
    in dt : TimeValue;
    return v_f : VelocityValue;
}

```

If a calculation definition has superclassification relationships (implicit or explicit) with action definitions (or KerML behaviors), then the rules for the redefinition of the non-result parameters of the calculation definition are the same as for an action definition (see [7.16.2](#)). In addition, if a calculation definition specializes other calculation definitions (or KerML functions), then its result parameter redefines the results parameters of the calculation definitions it specializes, regardless of the positions of those parameters.

```

calc def Dynamics {
    in initialState : DynamicState;
    in time : TimeValue;
    return : DynamicState;
}
calc def VehicleDynamics specializes Dynamics {
    // Each parameter redefines the corresponding parameter of Dynamics
    in initialState : VehicleState;
    in time : TimeValue;
    return : VehicleState;
}

```

If a calculation usage has any type of specialization relationship (i.e., feature typing, subsetting or redefinition, implicit or explicit) with an action definition or usage (or KerML behavior or step), the rules for the redefinition of the parameters of the general definitions and usages are the same as given for the redefinition of parameters of a calculation definition above.

```

calc computation : Dynamics {
    // Parameters redefine parameters of Dynamics.
    in initialState;
    in time;
}

```

```

    in initialState;
    in time;
    return result;
}
calc vehicleComputation subsets computation {
    // Input parameters are inherited, result is redefined.
    return : VehicleState;
}

```

The body of a calculation definition or usage is like the body of an action definition or usage (see [7.16.2](#)), with the optional addition of the declaration of a result expression at the end, using the expression sublanguage from [KerML, 7.4.9]. The result of the result expression is implicitly bound to the result parameter of the containing calculation definition or usage..

```

calc def Average {
    in scores[1..*] : Rational;
    return : Rational;

    sum(scores) / size(scores)
}

```

Note. A result expression is written *without* a final semicolon.

The result of a calculation definition or usage can also be explicitly bound, particularly using a feature value on the result parameter declaration (see [7.13.4](#)). In this case, the body of the calculation definition or usage should *not* include a result expression.

```

calc def Average {
    in scores[1..*] : Rational;
    return : Rational = sum(scores) / size(scores);
}

```

The base calculation definition and usage are Calculation and calculations from the Calculations library model (see [7.18](#)).

7.19 Constraints

7.19.1 Constraints Overview

Metamodel references:

- *Textual notation*, [8.2.2.19](#)
- *Graphical notation*, [8.2.3.19](#)
- *Abstract syntax*, [8.3.19](#)
- *Semantics*, [8.4.15](#)

Constraint Definition and Usage

A *constraint definition* is a kind of occurrence definition (see [7.9](#)) that defines a logical predicate. Similar to a calculation definition (see [7.18](#)), a constraint definition may have parameters with direction **in**. A constraint always has an implicit Boolean-value result parameter with direction **out**. A constraint usage is an occurrence usage that is the usage of a constraint definition.

Also similarly to a calculation, a constraint definition or usage may have features that are calculation or action usages that carry out steps in the computation of the result of the calculation. The constraint may also have other features that are used to record intermediate results in the computation. The final result is specified as an expression

```

        return result;
    }
calc vehicleComputation subsets computation {
    // Input parameters are inherited, result is redefined.
    return : VehicleState;
}

```

The body of a calculation definition or usage is like the body of an action definition or usage (see [7.16.2](#)), with the optional addition of the declaration of a result expression at the end, using the expression sublanguage from [KerML, 7.4.9]. The result of the result expression is implicitly bound to the result parameter of the containing calculation definition or usage..

```

calc def Average {
    in scores[1..*] : Rational;
    return : Rational;

    sum(scores) / size(scores)
}

```

Note. A result expression is written *without* a final semicolon.

The result of a calculation definition or usage can also be explicitly bound, particularly using a feature value on the result parameter declaration (see [7.13.4](#)). In this case, the body of the calculation definition or usage should *not* include a result expression.

```

calc def Average {
    in scores[1..*] : Rational;
    return : Rational = sum(scores) / size(scores);
}

```

The base calculation definition and usage are `Calculation` and `calculations` from the `Calculations` library model (see [7.18](#)).

7.19 Constraints

7.19.1 Constraints Overview

Metamodel references:

- *Textual notation*, [8.2.2.19](#)
- *Graphical notation*, [8.2.3.19](#)
- *Abstract syntax*, [8.3.19](#)
- *Semantics*, [8.4.15](#)

Constraint Definition and Usage

A *constraint definition* is a kind of occurrence definition (see [7.9](#)) that defines a logical predicate. Similar to a calculation definition (see [7.18](#)), a constraint definition may have parameters with direction `in`. A constraint always has an implicit Boolean-value result parameter with direction `out`. A constraint usage is an occurrence usage that is the usage of a constraint definition.

Also similarly to a calculation, a constraint definition or usage may have features that are calculation or action usages that carry out steps in the computation of the result of the calculation. The constraint may also have other features that are used to record intermediate results in the computation. The final result is specified as an expression written in terms of the input parameters of the calculation and any intermediate results. In addition, a constraint definition is also a KerML predicate and a constraint usage is a KerML Boolean expression, which allows a constraint definition or usage to also be invoked using the notation of a KerML invocation expression.

written in terms of the input parameters of the calculation and any intermediate results. In addition, a constraint definition is also a KerML predicate and a constraint usage is a KerML Boolean expression, which allows a constraint definition or usage to also be invoked using the notation of a KerML invocation expression.

For a given set of input parameter values, a constraint usage is *satisfied* if its expression evaluates to `true` and is *violated* otherwise. The parameters of a constraint usage may be bound to specific features whose values can be constrained by the constraint expression. For the constraint expression `{x < y}`, the constraint usage may bind `x` to the diameter of a bolt and bind `y` to the diameter of a hole that the bolt must fit into. This constraint can then be evaluated to be `true` or `false`. E.g., if `x` is 3 and `y` is 5, then the expression `x < y` evaluates to `true`, and the constraint is satisfied. In the general case, the expression used to define a constraint can be arbitrarily complicated, as long as the overall expression returns a Boolean value.

A constraint usage that is a feature of another definition or usage may also directly reference features of its containing context, in which case it may be used to effectively constrain the values of those features. In a context with the features `bolt diameter` and `hole diameter`, a constraint usage may be defined directly without parameters using the expression `{'bolt diameter' < 'hole diameter'}`.

Asserted Constraints

In general, a constraint may be satisfied sometimes and violated other times. However, an *assert constraint usage* asserts that the result of a given constraint must be always `true` at all times. If, at some point in time, it can be determined that an assert constraint usage evaluates to other than its asserted value, this would be a logical inconsistency in the model. Constraints associated with the laws of physics, for example, should be asserted to be `true`, because they cannot be violated in any valid model of the real world. However, a constraint can also be asserted simply if its satisfaction is expected to be implied within a model. That way, if the constraint is violated, this can be flagged by tooling as needing resolution.

An assert constraint usage can also be *negated*, which means that the given constraint is asserted to be `false` rather than `true`. A negated assert constraint usage can be used to assert that some condition must never happen if the model is logically consistent.

Table 18. Constraints – Representative Notation

Element	Graphical Notation	Textual Notation
Constraint Definition	<div style="border: 1px solid black; padding: 10px; width: fit-content;"> <p>«constraint def»</p> <p>ConstraintDef1</p> <p>«constraint def»</p> <p>ConstraintDef1</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p><i>compartment stack</i></p> <p>...</p> </div> </div>	<pre>constraint def ConstraintDef1; constraint def ConstraintDef1 { /* members */ }</pre>
Constraint	<div style="border: 1px solid black; padding: 10px; width: fit-content;"> <p>«constraint»</p> <p>constraint1 : ConstraintDef1</p> <p>«constraint»</p> <p>constraint1 : ConstraintDef1</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p><i>compartment stack</i></p> <p>...</p> </div> </div>	<pre>constraint constraint1 : ConstraintDef1; constraint constraint1 : ConstraintDef1 { /* members */ }</pre>

For a given set of input parameter values, a constraint usage is *satisfied* if its expression evaluates to `true` and is *violated* otherwise. The parameters of a constraint usage may be bound to specific features whose values can be constrained by the constraint expression. For the constraint expression `{x < y}`, the constraint usage may bind `x` to the diameter of a bolt and bind `y` to the diameter of a hole that the bolt must fit into. This constraint can then be evaluated to be `true` or `false`. E.g., if `x` is 3 and `y` is 5, then the expression `x < y` evaluates to true, and the constraint is satisfied. In the general case, the expression used to define a constraint can be arbitrarily complicated, as long as the overall expression returns a Boolean value.

A constraint usage that is a feature of another definition or usage may also directly reference features of its containing context, in which case it may be used to effectively constrain the values of those features. In a context with the features `bolt diameter` and `hole diameter`, a constraint usage may be defined directly without parameters using the expression `{'bolt diameter' < 'hole diameter'}`.

Asserted Constraints

In general, a constraint may be satisfied sometimes and violated other times. However, an *assert constraint usage* asserts that the result of a given constraint must be always `true` at all times. If, at some point in time, it can be determined that an assert constraint usage evaluates to other than its asserted value, this would be a logical inconsistency in the model. Constraints associated with the laws of physics, for example, should be asserted to be `true`, because they cannot be violated in any valid model of the real world. However, a constraint can also be asserted simply if its satisfaction is expected to be implied within a model. That way, if the constraint is violated, this can be flagged by tooling as needing resolution.

An assert constraint usage can also be *negated*, which means that the given constraint is asserted to be `false` rather than `true`. A negated assert constraint usage can be used to assert that some condition must never happen if the model is logically consistent.

Table 18. Constraints – Representative Notation

Element	Graphical Notation	Textual Notation
Constraint Definition	<div style="border: 1px solid black; padding: 10px;"> <p>«constraint def»</p> <p>ConstraintDef1</p> </div> <div style="border: 1px solid black; padding: 10px;"> <p>«constraint def»</p> <p>ConstraintDef1</p> <p>compartment stack</p> <p>...</p> </div>	<pre>constraint def ConstraintDef1; constraint def ConstraintDef1 { /* members */ }</pre>
Constraint	<div style="border: 1px solid black; padding: 10px;"> <p>«constraint»</p> <p>constraint1 : ConstraintDef1</p> </div> <div style="border: 1px solid black; padding: 10px;"> <p>«constraint»</p> <p>constraint1 : ConstraintDef1</p> <p>compartment stack</p> <p>...</p> </div>	<pre>constraint constraint1 : ConstraintDef1; constraint constraint1 : ConstraintDef1 { /* members */ }</pre>

Element	Graphical Notation	Textual Notation
Constraints Compartment	<pre> constraints ^constraint2 : ConstraintDef2 constraint1 : ConstraintDef1 [1..*] ordered nonunique constraint3R : ConstraintDef3R redefines constraint3 constraint4R : ConstraintDef4R >> constraint4 :>> constraint5 constraint6S : ConstraintDef6S [m] subsets constraint6 constraint7S : ConstraintDef7S [m] > constraint7 constraint8R = constraint8 ref constraint9 : ConstraintDef9 assert constraint10 assert {boolean_expression1} {boolean_expression1} constraint11 require constraint12 assume constraint13 ... </pre>	<pre> { constraint constraint1 : ConstraintDef1 [1..*] ordered nonunique; /* ... */ assert constraint constraint10; constraint {boolean_expression1} } </pre>
Assert Constraints Compartment	<pre> assert constraints constraint10 {boolean_expression1} ... </pre>	<pre> { assert constraint constraint1 : ConstraintDef1 [1..*] ordered nonunique; /* ... */ assert constraint {boolean_expression1} } </pre>

7.19.2 Constraint Definitions and Usages

A constraint definition or usage can be declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the kind keyword **constraint**. A constraint usage must be defined by a single constraint definition or a KerML predicate (see [KerML, 7.4.8]).

Constraint definitions and usages are not calculation definitions and usages, but, like calculation definitions and usages, they are kinds of KerML functions and expressions (a predicate is a kind of function). As such, any directed usages declared in the body of a **calculation** definition or usage are considered to be owned parameters of the **calculation**. Furthermore, every constraint definition and usage has a result parameter, but, since this must have a Boolean type, it is generally not necessary to redeclare it for a constraint definition or usage.

The body of a constraint definition or usage is also like the body of a calculation definition or usage (see [7.18.2](#)), including the addition of the declaration of a result expression at the end, using the expression sublanguage from [KerML, 7.4.9]. For a constraint definition or usage, the result expression must be Boolean valued.

```

constraint def IsFull {
  in tank : FuelTank;
  tank.fuelLevel == tank.maxFuelLevel // Result expression

```

Element	Graphical Notation	Textual Notation
Constraints Compartment	<pre> constraints ^constraint2 : ConstraintDef2 constraint1 : ConstraintDef1 [1..*] ordered nonunique constraint3R : ConstraintDef3R redefines constraint3 constraint4R : ConstraintDef4R >> constraint4 :>> constraint5 constraint6S : ConstraintDef6S [m] subsets constraint6 constraint7S : ConstraintDef7S [m] >> constraint7 constraint8R = constraint8 ref constraint9 : ConstraintDef9 assert constraint10 assert {boolean_expression1} {boolean_expression1} constraint11 require constraint12 assume constraint13 ... </pre>	<pre> { constraint constraint1 : ConstraintDef1 [1..*] ordered nonunique; /* ... */ assert constraint constraint10; constraint {boolean_expression1} } </pre>
Assert Constraints Compartment	<div style="border: 1px solid black; padding: 10px; width: fit-content;"> <p>assert constraints</p> constraint10 {boolean_expression1} ... </div>	<pre> { assert constraint constraint1 : ConstraintDef1 [1..*] ordered nonunique; /* ... */ assert constraint {boolean_expression1} } </pre>

7.19.2 Constraint Definitions and Usages

SYSML2_-330: Typo - "calculation" instead of "constraint"

A constraint definition or usage can be declared as a kind of occurrence definition or usage (see [7.9.2](#)), using the kind keyword **constraint**. A constraint usage must be defined by a single constraint definition or a KerML predicate (see [KerML, 7.4.8]).

Constraint definitions and usages are not calculation definitions and usages, but, like calculation definitions and usages, they are kinds of KerML functions and expressions (a predicate is a kind of function). As such, any directed usages declared in the body of a **constraint** definition or usage are considered to be owned parameters of the **constraint**. Furthermore, every constraint definition and usage has a result parameter, but, since this must have a Boolean type, it is generally not necessary to redeclare it for a constraint definition or usage.

The body of a constraint definition or usage is also like the body of a calculation definition or usage (see [7.18.2](#)), including the addition of the declaration of a result expression at the end, using the expression sublanguage from [KerML, 7.4.9]. For a constraint definition or usage, the result expression must be Boolean valued.

```

constraint def IsFull {
  in tank : FuelTank;

```

```

    }
part def Vehicle {
    part fuelTank : FuelTank;
    constraint isFull : IsFull {
        in tank = fuelTank;
    }
}

```

The base constraint definition and usage are `Constraint` and `constraints` from the `Constraints` model library (see [7.19](#))

7.19.3 Assert Constraint Usages

An assert constraint usage is declared like a regular constraint usage (see [8.4.15.2](#)), except using the kind keyword `assert constraint` instead of just `constraint`. By default, an assert constraint usage asserts that it must evaluate to true at all times. However, an assert constraint usage may be *negated* by inserting the keyword `not` between `assert` and `constraint`, in which case the assertion is that the assert constraint usage evaluates to *false* at all times.

```

part testObject {
    attribute computedMass : MassValue;
    assert constraint { computedMass >= 0[kg] }
    // Alternatively, the following is equivalent.
    assert not constraint { computedMass < 0[kg] }
}

```

An assert constraint usage may also be declared using just the keyword `assert` instead of `assert constraint`. In this case, the declaration does not include either a name or short name for the assert constraint usage. Instead, the constraint to be asserted is identified by giving a qualified name or feature chain immediately after the `assert` keyword, and it is then related to the assert constraint usage by a *reference subsetting relationship* (see also [8.4.5.3](#)). A negated assert constraint usage of this form can be constructed using `assert not`.

```

constraint negativeMass {
    attribute mass : MassValue;
    mass < 0[kg]
}
part testObject {
    attribute computedMass : MassValue;

    // The following is equivalent to
    // assert not constraint references negativeMass { ... }
    assert not negativeMass {
        :>> mass = computedMass;
    }
}
part alienObject {
    attribute antiMass : MassValue;

    // The following is equivalent to
    // assert constraint references negativeMass { ... }
    assert negativeMass {
        :>> mass = antiMass;
    }
}

```

7.20 Requirements

```

        tank.fuelLevel == tank.maxFuelLevel // Result expression
    }
part def Vehicle {
    part fuelTank : FuelTank;
    constraint isFull : IsFull {
        in tank = fuelTank;
    }
}

```

The base constraint definition and usage are [Constraint](#) and [constraints](#) from the [Constraints](#) model library (see [7.19](#))

7.19.3 Assert Constraint Usages

An assert constraint usage is declared like a regular constraint usage (see [8.4.15.2](#)), except using the kind keyword **assert constraint** instead of just **constraint**. By default, an assert constraint usage asserts that it must evaluate to true at all times. However, an assert constraint usage may be *negated* by inserting the keyword **not** between **assert** and **constraint**, in which case the assertion is that the assert constraint usage evaluates to *false* at all times.

```

part testObject {
    attribute computedMass : MassValue;
    assert constraint { computedMass >= 0[kg] }
    // Alternatively, the following is equivalent.
    assert not constraint { computedMass < 0[kg] }
}

```

An assert constraint usage may also be declared using just the keyword **assert** instead of **assert constraint**. In this case, the declaration does not include either a name or short name for the assert constraint usage. Instead, the constraint to be asserted is identified by giving a qualified name or feature chain immediately after the **assert** keyword, and it is then related to the assert constraint usage by a *reference subsetting relationship* (see also [8.4.5.3](#)). A negated assert constraint usage of this form can be constructed using **assert not**.

```

constraint negativeMass {
    attribute mass : MassValue;
    mass < 0[kg]
}
part testObject {
    attribute computedMass : MassValue;

    // The following is equivalent to
    // assert not constraint references negativeMass { ... }
    assert not negativeMass {
        :>> mass = computedMass;
    }
}
part alienObject {
    attribute antiMass : MassValue;

    // The following is equivalent to
    // assert constraint references negativeMass { ... }
    assert negativeMass {
        :>> mass = antiMass;
    }
}

```

7.20 Requirements

7.20.1 Requirements Overview

7.20.1 Requirements Overview

Metamodel references:

- *Textual notation*, [8.2.2.20](#)
- *Graphical notation*, [8.2.3.20](#)
- *Abstract syntax*, [8.3.20](#)
- *Semantics*, [8.4.16](#)

Requirements

A *requirement definition* is a kind of constraint definition (see [7.19](#)) that specifies stakeholder-imposed constraints that a design solution must satisfy to be a valid solution. A requirement definition contains one or more features that are constraint usages designated as the *required constraints*. These may be specified informally using text statements (commonly known as "shall" statements) or more formally using constraint expressions. A requirement definition may also optionally include *assumed constraints*. The required constraints of a requirement only apply if all the assumed constraints are satisfied.

A *requirement usage* is a kind of constraint usage (see [7.19](#)) that is a usage of a requirement definition in some context. The context for multiple requirements can be provided by a package (see [7.5](#)), a part (see [7.11](#)) or another requirement. A design solution must satisfy the requirement and all of its member requirements and constraints to be a valid solution.

A requirement definition or usage may be decomposed into nested requirement usages, which may themselves be further decomposed. Since a requirement usage is a kind of constraint usage, any nested composite requirement usage is automatically considered to be a required constraint of the containing requirement definition or usage. A requirement definition or usage may also reference another requirement usage as a required constraint. For the overall requirement to then be satisfied, all such composite or referenced requirements must be satisfied.

Like any usage element, the features of a requirement usage can redefine the features of its requirement definition. For example, a requirement definition `MaximumMass` may include the require constraint `{massActual <= massRequired}`, written in terms of the attribute usages `massActual` and `massRequired`. A requirement usage `maximumVehicleMass` defined by `MaximumMass` could restrict the subject of the requirement to be a `Vehicle`, redefine the `massActual` attribute to be the `mass` of the subject `Vehicle`, and redefine the `massRequired` attribute and bind it to 2000 kilograms. In this way, the requirement definition serves as a requirement template that can be reused and tailored to each context of use.

Subjects

A requirement definition or usage always has a *subject*, which is a distinguished parameter that identifies the entity on which the requirement is being specified. A requirement usage can only be satisfied by an entity that conforms to the definition of its subject. For example, if the subject of a requirement is defined to be a `Vehicle`, then a standard vehicle model or sports vehicle model can satisfy the requirement, as long as these usages are defined by `Vehicle` or a specialization of it. The subject can also be restricted to be a certain kind of definition element, if it is desired to constrain what kind of entity can satisfy the requirement. For example, the subject can be restricted to be an action, if it is desired to constrain the requirement to be satisfied only by action usages.

Constraining the subject of a requirement definition or usage is also useful to allow features of the subject definition to be used in formal expressions for the assumed and required constraints of the requirement. However, this may not be necessary if the requirement is specified more informally, or in terms of parameters or other features to be bound later. In this case, it is not necessary to explicitly specify the subject of a requirement, in which case it the subject is implicitly assumed to be defined as `Anything`.

Note. Cases also have subjects (see [7.21](#)).

Metamodel references:

- *Textual notation*, [8.2.2.20](#)
- *Graphical notation*, [8.2.3.20](#)
- *Abstract syntax*, [8.3.20](#)
- *Semantics*, [8.4.16](#)

Requirements

A *requirement definition* is a kind of constraint definition (see [7.19](#)) that specifies stakeholder-imposed constraints that a design solution must satisfy to be a valid solution. A requirement definition contains one or more features that are constraint usages designated as the *required constraints*. These may be specified informally using text statements (commonly known as "shall" statements) or more formally using constraint expressions. A requirement definition may also optionally include *assumed constraints*. The required constraints of a requirement only apply if all the assumed constraints are satisfied.

A *requirement usage* is a kind of constraint usage (see [7.19](#)) that is a usage of a requirement definition in some context. The context for multiple requirements can be provided by a package (see [7.5](#)), a part (see [7.11](#)) or another requirement. A design solution must satisfy the requirement and all of its member requirements and constraints to be a valid solution.

A requirement definition or usage may be decomposed into nested requirement usages, which may themselves be further decomposed. Since a requirement usage is a kind of constraint usage, any nested composite requirement usage is automatically considered to be a required constraint of the containing requirement definition or usage. A requirement definition or usage may also reference another requirement usage as a required constraint. For the overall requirement to then be satisfied, all such composite or referenced requirements must be satisfied.

Like any usage element, the features of a requirement usage can redefine the features of its requirement definition. For example, a requirement definition `MaximumMass` may include the require constraint `{massActual <= massRequired}`, written in terms of the attribute usages `massActual` and `massRequired`. A requirement usage `maximumVehicleMass` defined by `MaximumMass` could restrict the subject of the requirement to be a `Vehicle`, redefine the `massActual` attribute to be the `mass` of the subject `Vehicle`, and redefine the `massRequired` attribute and bind it to 2000 kilograms. In this way, the requirement definition serves as a requirement template that can be reused and tailored to each context of use.

Subjects

A requirement definition or usage always has a *subject*, which is a distinguished parameter that identifies the entity on which the requirement is being specified. A requirement usage can only be satisfied by an entity that conforms to the definition of its subject. For example, if the subject of a requirement is defined to be a `Vehicle`, then a standard vehicle model or sports vehicle model can satisfy the requirement, as long as these usages are defined by `Vehicle` or a specialization of it. The subject can also be restricted to be a certain kind of definition element, if it is desired to constrain what kind of entity can satisfy the requirement. For example, the subject can be restricted to be an action, if it is desired to constrain the requirement to be satisfied only by action usages.

Constraining the subject of a requirement definition or usage is also useful to allow features of the subject definition to be used in formal expressions for the assumed and required constraints of the requirement. However, this may not be necessary if the requirement is specified more informally, or in terms of parameters or other features to be bound later. In this case, it is not necessary to explicitly specify the subject of a requirement, in which case it the subject is implicitly assumed to be defined as `Anything`.

Note. Cases also have subjects (see [7.21](#)).

Actors, Stakeholders and Concerns

Actors and stakeholders are additional distinguished parameters that may be specified for a requirement definition or usage. Actor and stakeholder parameters are part usages representing entities that play special roles relative to the requirement definition or usage. A requirement may have multiple actors and stakeholders, some of which may have the same definition, representing the same kind of entity playing different roles relative to the requirement.

An *actor parameter* represents a role played by an entity external to the subject of the requirement but necessary for the satisfaction of the requirement. For example, a requirement whose subject is a `Vehicle` may also specify an actor that is the `Driving Environment`. Features of this actor may be used in, for example, the assumed constraints of the requirement, to constrain the environment in which the required constraints apply. The satisfaction of the requirement by a specific subject entity is then relative to the specific environment entity filling the actor role.

Note. Actor parameters may also be specified for cases (see [7.21](#)) and, in particular, use cases (see [7.24](#)).

A *stakeholder parameter* represents a role played by an entity (usually a person, organization or other group) having concerns related to the containing requirement. Stakeholder concerns may also be explicitly modeled as special kinds of requirements. A *concern definition* is a kind of requirement definition that represents a stakeholder concern. A *concern usage* is a kind of requirement usage that is a usage of a concern definition. The stakeholder parameters of a concern definition or usage then delineate the stakeholders that have a certain concern.

Rather than explicitly referencing specific stakeholders, a requirement definition or usage can be specified as *framing* the modeled concerns of relevant stakeholders. All the framed concerns of a requirement must then be *addressed* for the requirement to be satisfied.

Note. Stakeholder and concern modeling is frequently used in the context of view and viewpoint modeling (see [7.25](#)). A viewpoint is a kind of requirement that frames certain stakeholder concerns to be addressed by one or more views satisfying the viewpoint.

Requirement Satisfaction

Since a requirement is a kind of constraint, a requirement can be evaluated to be `true` or `false`. A requirement is *satisfied* when it evaluates to `true`.

A *satisfy requirement usage* is a kind of assert constraint usage (see [7.19](#)) that asserts that a requirement is satisfied when a given feature is bound to the subject parameter of the requirement. Other parameters or features of the requirement may also be bound in the body of the satisfy requirement usage. For example, the `maximumVehicleMass` requirement above could be asserted to be satisfied by a specific `vehicle c1` usage, which means that the required constraint `{massActual <= massRequired}` must be true when `massActual` is bound to the mass of `vehicle c1`.

Similarly to an assert constraint usage, a satisfy requirement usage can also be *negated*. A negated satisfy requirement usage asserts that some entity does *not* satisfy the given requirement.

Actors, Stakeholders and Concerns

Actors and stakeholders are additional distinguished parameters that may be specified for a requirement definition or usage. Actor and stakeholder parameters are part usages representing entities that play special roles relative to the requirement definition or usage. A requirement may have multiple actors and stakeholders, some of which may have the same definition, representing the same kind of entity playing different roles relative to the requirement.

An *actor parameter* represents a role played by an entity external to the subject of the requirement but necessary for the satisfaction of the requirement. For example, a requirement whose subject is a `Vehicle` may also specify an actor that is the `Driving Environment`. Features of this actor may be used in, for example, the assumed constraints of the requirement, to constrain the environment in which the required constraints apply. The satisfaction of the requirement by a specific subject entity is then relative to the specific environment entity filling the actor role.

Note. Actor parameters may also be specified for cases (see [7.21](#)) and, in particular, use cases (see [7.24](#)).

A *stakeholder parameter* represents a role played by an entity (usually a person, organization or other group) having concerns related to the containing requirement. Stakeholder concerns may also be explicitly modeled as special kinds of requirements. A *concern definition* is a kind of requirement definition that represents a stakeholder concern. A *concern usage* is a kind of requirement usage that is a usage of a concern definition. The stakeholder parameters of a concern definition or usage then delineate the stakeholders that have a certain concern.

Rather than explicitly referencing specific stakeholders, a requirement definition or usage can be specified as *framing* the modeled concerns of relevant stakeholders. All the framed concerns of a requirement must then be *addressed* for the requirement to be satisfied.

Note. Stakeholder and concern modeling is frequently used in the context of view and viewpoint modeling (see [7.25](#)). A viewpoint is a kind of requirement that frames certain stakeholder concerns to be addressed by one or more views satisfying the viewpoint.

Requirement Satisfaction

Since a requirement is a kind of constraint, a requirement can be evaluated to be `true` or `false`. A requirement is *satisfied* when it evaluates to `true`.

A *satisfy requirement usage* is a kind of assert constraint usage (see [7.19](#)) that asserts that a requirement is satisfied when a given feature is bound to the subject parameter of the requirement. Other parameters or features of the requirement may also be bound in the body of the satisfy requirement usage. For example, the `maximumVehicleMass` requirement above could be asserted to be satisfied by a specific `vehicle c1` usage, which means that the required constraint `{massActual <= massRequired}` must be true when `massActual` is bound to the mass of `vehicle c1`.

Similarly to an assert constraint usage, a satisfy requirement usage can also be *negated*. A negated satisfy requirement usage asserts that some entity does *not* satisfy the given requirement.

Table 19. Requirements – Representative Notation

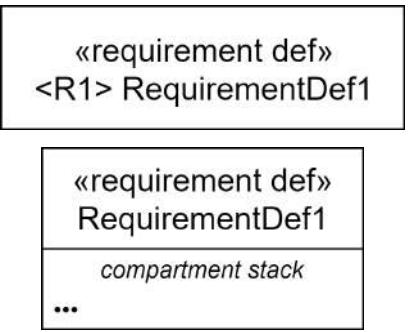
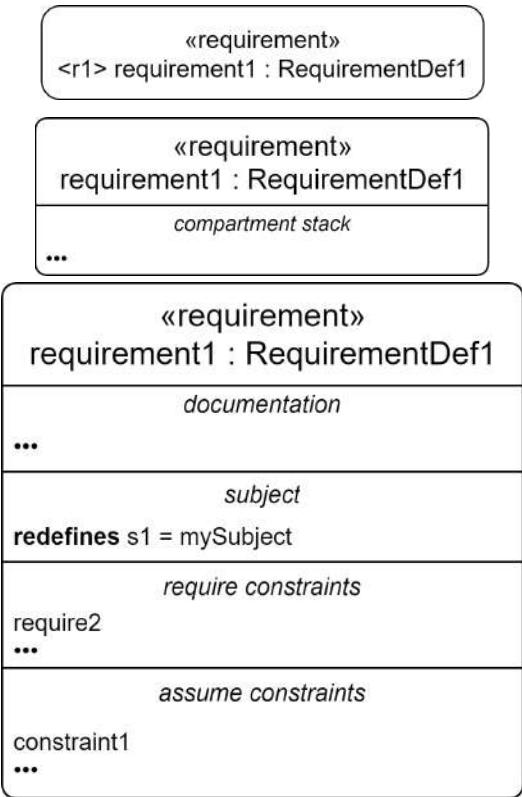
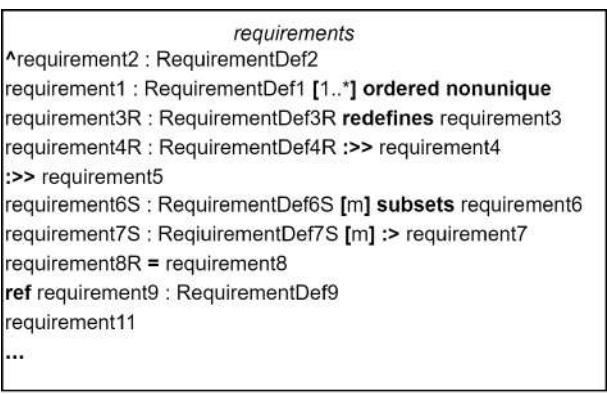


Element	Graphical Notation	Textual Notation
Requirement Definition	 <pre> <> requirement def <R1> RequirementDef1 compartment stack ... </pre>	<pre> requirement def <R1> RequirementDef1 { subject s1 : Subject1; } requirement def RequirementDef1 { /* members */ } </pre>
Requirement	 <pre> <> requirement <r1> requirement1 : RequirementDef1 compartment stack ... <> requirement requirement1 : RequirementDef1 compartment stack ... <> requirement requirement1 : RequirementDef1 documentation ... subject redefines s1 = mySubject require constraints require2 ... assume constraints constraint1 ... </pre>	<pre> requirement <r1> requirement1 : RequirementDef1 { subject redefines s1 = mySubject; } requirement requirement1 : RequirementDef1 { doc /* ... */ subject redefines s1 = mySubject; require require2; assume constraint1; } </pre>
Requirements Compartment	 <pre> requirements ^requirement2 : RequirementDef2 requirement1 : RequirementDef1 [1..*] ordered nonunique requirement3R : RequirementDef3R redefines requirement3 requirement4R : RequirementDef4R >> requirement4 :>> requirement5 requirement6S : RequirementDef6S [m] subsets requirement6 requirement7S : RequirementDef7S [m] >> requirement7 requirement8R = requirement8 ref requirement9 : RequirementDef9 requirement11 ... </pre>	<pre> { requirement requirement1 : RequirementDef1 [1..*] ordered nonunique; /* ... */ } </pre>

Table 19. Requirements – Representative Notation

Element	Graphical Notation	Textual Notation
Requirement Definition	<pre> <>requirement def<> <R1> RequirementDef1 compartment stack ... </pre>	<pre> requirement def <R1> RequirementDef1 { subject s1 : Subject1; } requirement def RequirementDef1 { /* members */ } </pre>
Requirement	<pre> <>requirement<> <r1> requirement1 : RequirementDef1 compartment stack ... </pre> <pre> requirement <r1> requirement1 : RequirementDef1 { subject redefines s1 = mySubject; } requirement requirement1 : RequirementDef1 { doc /* ... */ subject redefines s1 = mySubject; require require2; assume constraint1; } </pre>	
Requirements Compartment	<pre> requirements ^requirement2 : RequirementDef2 requirement1 : RequirementDef1 [1..*] ordered nonunique requirement3R : RequirementDef3R redefines requirement3 requirement4R : RequirementDef4R >> requirement4 :>> requirement5 requirement6S : RequirementDef6S [m] subsets requirement6 requirement7S : RequirementDef7S [m] >> requirement7 requirement8R = requirement8 ref requirement9 : RequirementDef9 requirement11 ... </pre>	<pre> { requirement requirement1 : RequirementDef1 [1..*] ordered nonunique; /* ... */ } </pre>

Element	Graphical Notation	Textual Notation
Satisfy Requirements Compartment	 <pre>satisfy requirements requirement11 requirement11-1.x1 = a requirement11-2.x2 = b ...</pre>	<pre>part part1 { satisfy requirement11 by part1 { bind 'requirement11-1'.x1 = a; bind 'requirement11-2'.x2 = b; } }</pre>
Satisfy	 <pre>«part» part1 : Part1 ↑ «satisfy» requirement1</pre>	<pre>requirement requirement1 : Requirement1; part part1 : Part1 { satisfy requirement1; }</pre>

7.20.2 Requirement Definition and Usage

A requirement definition or usage is declared as a kind of constraint definition or usage (see [7.19.2](#)), using the kind keyword **requirement**. A requirement usage must be defined by a single requirement definition.

The informal *text* of a requirement is given by any documentation comments written in the body of a requirement definition or usage. If a requirement definition or usage is declared with a short name (see [7.2](#)), then this is also considered to be its *requirement ID*.

Formally, a requirement is a kind of constraint. However, rather than specifying its constraint expression directly, a requirement constraint is built from two sets of other constraints: the *assumed* and *required* constraints of the requirement. The effective constraint for the requirement is then a logical implication: if all the assumption constraints are true, all the required constraints must be true. Required and assumed constraints are declared as composite constraint usages in the body of a requirement definition or usage, by prefixing a regular constraint usage declaration (see [7.19.2](#)) with the keyword **assume** or **require**.

```
requirement def <'1.1'> MaximumMass {
  doc
  /*
   * Assuming the required mass is greater than 0,
   * the actual mass shall be less than or equal to
   * the required mass.
  */

  attribute massActual : MassValue;
  attribute massRequired : MassValue;
  assume constraint { massRequired > 0[kg] }
  require constraint { massActual <= massRequired }
}
```

Element	Graphical Notation	Textual Notation
Satisfy Requirements Compartment	<pre> satisfy requirements requirement11 requirement11-1.x1 = a requirement11-2.x2 = b ... </pre>	<pre> part part1 { satisfy requirement11 by part1 { bind 'requirement11-1'.x1 = a; bind 'requirement11-2'.x2 = b; } } </pre>
Satisfy	<pre> classDiagram class part1 { <<part>> part1 : Part1 } class requirement1 { <<satisfy>> requirement1 : Requirement1 } part1 "1" --> "1" requirement1 </pre>	<pre> requirement requirement1 : Requirement1; part part1 : Part1 { satisfy requirement1; } </pre>

7.20.2 Requirement Definition and Usage

A requirement definition or usage is declared as a kind of constraint definition or usage (see [7.19.2](#)), using the kind keyword **requirement**. A requirement usage must be defined by a single requirement definition.

The informal *text* of a requirement is given by any documentation comments written in the body of a requirement definition or usage. If a requirement definition or usage is declared with a short name (see [7.2](#)), then this is also considered to be its *requirement ID*.

Formally, a requirement is a kind of constraint. However, rather than specifying its constraint expression directly, a requirement constraint is built from two sets of other constraints: the *assumed* and *required* constraints of the requirement. The effective constraint for the requirement is then a logical implication: if all the assumption constraints are true, all the required constraints must be true. Required and assumed constraints are declared as composite constraint usages in the body of a requirement definition or usage, by prefixing a regular constraint usage declaration (see [7.19.2](#)) with the keyword **assume** or **require**.

```

requirement def <'1.1'> MaximumMass {
  doc
  /*
   * Assuming the required mass is greater than 0,
   * the actual mass shall be less than or equal to
   * the required mass.
   */
  attribute massActual : MassValue;
  attribute massRequired : MassValue;
  assume constraint { massRequired > 0[kg] }
  require constraint { massActual <= massRequired }
}

```

An assumed or required constraint may also be declared using just the keyword **assume** or **require** instead of **assume constraint** or **require constraint**. In this case, the declaration does not include either a name or short name for the constraint usage. Instead, the constraint to be assumed or required is identified by giving a

An assumed or required constraint may also be declared using just the keyword **assume** or **require** instead of **assume constraint** or **require constraint**. In this case, the declaration does not include either a name or short name for the constraint usage. Instead, the constraint to be assumed or required is identified by giving a qualified name or feature chain immediately after the **assume** or **require** keyword, and it is then related to the assumed or required constraint usage by a *reference subsetting relationship* (see also [8.4.5.3](#)).

```
constraint massIsPositive {
    attribute mass : MassValue;
    mass > 0[kg];
}
constraint massLimit {
    attribute mass : MassValue;
    attribute massLimit : MassValue;
    massActual <= massRequired
}
requirement def <'1.1'> MaximumMass {
    attribute massActual : MassValue;
    attribute massRequired : MassValue;
    assume massIsPositive {
        :>> mass = massRequired;
    }
    require massLimit {
        :>> mass = massActual;
        :>> massLimit = massRequired;
    }
}
```

The *subject* of a requirement definition or usage is modeled as its first parameter. Following the general rule for parameters (see [7.16.2](#)), the subject parameter of a requirement definition or usage will redefine the subject parameter of any requirement definitions or usages that it specializes. The base requirement definition in the Requirements library model specifies the most general possible subject, with the default name `subj` and the most general type `Anything`, and this can then be further specialized in specific requirement definitions and usages. A subject parameter is always an `in` parameter, so it is not necessary to declare it with an explicit direction. Instead, the keyword **subject** is used to identify the declaration of a subject parameter, which must come before the declaration of any other parameters in a requirement definition or usage.

```
requirement <'v1.1'> vehicleMaximumMass : MaximumMass {
    doc
    /* The total mass of a Vehicle shall be no greater than
     * its required mass.
    */
    subject vehicle : Vehicle;
    attribute :>> massActual = vehicle.totalMass;
    attribute :>> massRequired = 2000[kg];
    // Required and assumed constraints are inherited.
}
```

A requirement definition or usage may also have one or more *actor* or *stakeholder* parameters. Similarly to the declaration of a subject parameter, these distinguished parameters are declared using the keywords **actor** and **stakeholder** rather than explicitly declaring their direction. Actor and stakeholder parameters are part usages, so they must be (explicitly or implicitly) defined by part definitions (see [7.11.2](#)).

```
requirement def BrakingRequirement {
    subject vehicle : Vehicle;
    actor environment : 'Driving Environment';
    stakeholder driver : Person;
```

qualified name or feature chain immediately after the **assume** or **require** keyword, and it is then related to the assumed or required constraint usage by a *reference subsetting relationship* (see also [8.4.5.3](#)).

```
constraint massIsPositive {
    attribute mass : MassValue;
    mass > 0[kg];
}
constraint massLimit {
    attribute mass : MassValue;
    attribute massLimit : MassValue;
    massActual <= massRequired
}
requirement def <'1.1'> MaximumMass {
    attribute massActual : MassValue;
    attribute massRequired : MassValue;
    assume massIsPositive {
        :>> mass = massRequired;
    }
    require massLimit {
        :>> mass = massActual;
        :>> massLimit = massRequired;
    }
}
```

The *subject* of a requirement definition or usage is modeled as its first parameter. Following the general rule for parameters (see [7.16.2](#)), the subject parameter of a requirement definition or usage will redefine the subject parameter of any requirement definitions or usages that it specializes. The base requirement definition in the Requirements library model specifies the most general possible subject, with the default name `subj` and the most general type `Anything`, and this can then be further specialized in specific requirement definitions and usages. A subject parameter is always an `in` parameter, so it is not necessary to declare it with an explicit direction. Instead, the keyword **subject** is used to identify the declaration of a subject parameter, which must come before the declaration of any other parameters in a requirement definition or usage.

```
requirement <'v1.1'> vehicleMaximumMass : MaximumMass {
    doc
    /* The total mass of a Vehicle shall be no greater than
     * its required mass.
    */
    subject vehicle : Vehicle;
    attribute :>> massActual = vehicle.totalMass;
    attribute :>> massRequired = 2000[kg];
    // Required and assumed constraints are inherited.
}
```

A requirement definition or usage may also have one or more *actor* or *stakeholder* parameters. Similarly to the declaration of a subject parameter, these distinguished parameters are declared using the keywords **actor** and **stakeholder** rather than explicitly declaring their direction. Actor and stakeholder parameters are part usages, so they must be (explicitly or implicitly) defined by part definitions (see [7.11.2](#)).

```
requirement def BrakingRequirement {
    subject vehicle : Vehicle;
    actor environment : 'Driving Environment';
    stakeholder driver : Person;

    attribute speedLimit : SpeedValue;
    attribute maxBrakingDistance : DistanceValue;

    assume constraint {
        doc /* The environment conditions are poor. */
    }
}
```

```

attribute speedLimit : SpeedValue;
attribute maxBrakingDistance : DistanceValue;

assume constraint {
    doc /* The environment conditions are poor. */
}
assume constraint {
    doc /* The driver is an occupant of the vehicle. */
}
assume constraint {
    doc /* The vehicle speed is less than the speed limit. */
}

require constraint {
    doc /* The vehicle shall brake from its initial speed to zero
        * speed in a distance less than the maxBrakingDistance.
        */
}
}

```

A composite requirement usage nested in a requirement definition or usage is a *subrequirement* of the containing requirement definition or usage. Subrequirements are considered to automatically be required constraints of the containing requirement definition or usage. This is useful for modeling groups of requirements that are intended to be satisfied together on the same subject. To simplify doing this, if a subject parameter is not explicitly declared for a subrequirement, it is assumed to have the same subject as its containing requirement definition or usage, with its subject bound to that of the container.

```

requirement def VehicleRequirementsGroup {
    subject vehicle : Vehicle;

    // The subject of the following subrequirements
    // are implicitly bound to the subject "vehicle"
    // of the containing requirement definition.
    requirement driving : DrivingRequirement;
    requirement braking : BrakingRequirement;

    // The subject of the following subrequirement
    // is declared explicitly.
    requirement engineRqts : EngineRequirementsGroup {
        subject engine = vehicle.engine;
    }
}

```

The base requirement definition and usage are `RequirementCheck` and `requirementChecks` from the Requirements model library (see [9.2.13](#)).

7.20.3 Concern Definitions and Usages

A concern definition or usage is declared as a requirement definition or usage (see [7.20.2](#)) using the kind keyword `concern` instead of `requirement`. Otherwise, a concern definition or usage is specified exactly like a regular requirement definition or usage. The intent, however, is that the concerns of one or more stakeholders can be modeled as the required constraints of a concern definition or usage with appropriate stakeholder parameters.

```

concern def BrakingConcern {
    subject vehicle : Vehicle;
    stakeholder driver : Person;
}

```

```

assume constraint {
    doc /* The driver is an occupant of the vehicle. */
}
assume constraint {
    doc /* The vehicle speed is less than the speed limit. */
}

require constraint {
    doc /* The vehicle shall brake from its initial speed to zero
        * speed in a distance less than the maxBrakingDistance.
        */
}
}

```

A composite requirement usage nested in a requirement definition or usage is a *subrequirement* of the containing requirement definition or usage. Subrequirements are considered to automatically be required constraints of the containing requirement definition or usage. This is useful for modeling groups of requirements that are intended to be satisfied together on the same subject. To simplify doing this, if a subject parameter is not explicitly declared for a subrequirement, it is assumed to have the same subject as its containing requirement definition or usage, with its subject bound to that of the container.

```

requirement def VehicleRequirementsGroup {
    subject vehicle : Vehicle;

    // The subject of the following subrequirements
    // are implicitly bound to the subject "vehicle"
    // of the containing requirement definition.
    requirement driving : DrivingRequirement;
    requirement braking : BrakingRequirement;

    // The subject of the following subrequirement
    // is declared explicitly.
    requirement engineRqts : EngineRequirementsGroup {
        subject engine = vehicle.engine;
    }
}

```

The base requirement definition and usage are `RequirementCheck` and `requirementChecks` from the Requirements model library (see [9.2.13](#)).

7.20.3 Concern Definitions and Usages

A concern definition or usage is declared as a requirement definition or usage (see [7.20.2](#)) using the kind keyword `concern` instead of `requirement`. Otherwise, a concern definition or usage is specified exactly like a regular requirement definition or usage. The intent, however, is that the concerns of one or more stakeholders can be modeled as the required constraints of a concern definition or usage with appropriate stakeholder parameters.

```

concern def BrakingConcern {
    subject vehicle : Vehicle;
    stakeholder driver : Person;

    attribute maxBrakingDistance : DistanceValue;

    assume constraint {
        doc /* The driver is an occupant of the vehicle. */
    }
    require constraint {
        doc /* The vehicle shall brake from its initial speed to zero
            * speed in a distance less than the maxBrakingDistance.
            */
    }
}

```

```

attribute maxBrakingDistance : DistanceValue;

assume constraint {
    doc /* The driver is an occupant of the vehicle. */
}
require constraint {
    doc /* The vehicle shall brake from its initial speed to zero
        * speed in a distance less than the maxBrakingDistance.
        */
}
}

```

One or more concerns can then be *framed* in other requirement definitions and usages. A framed concern usage is a subrequirement usage (see [7.20.2](#)) indicated by prefixing a concern usage declaration with the keyword **frame**. As for an assumed or required constraint, the keyword **frame** can be used rather than **frame concern** to declare a framed concern using reference subsetting. In any case, since the framed concern usage itself is a subrequirement, it will automatically be considered a required constraint of its containing requirement definition or usage.

```

requirement def BrakingRequirement {
    subject vehicle : Vehicle;
    actor environment : 'Driving Environment';

    attribute speedLimit : SpeedValue;
    attribute maxBrakingDistance : DistanceValue;

    assume constraint {
        doc /* The environment conditions are poor. */
    }

    frame concern brakingConcern : BrakingConcern {
        // Subject is automatically bound to "vehicle".
        :>> maxBrakingDistance = BrakingRequirement::maxBrakingDistance;
    }
}

```

The base concern definition and usage are `ConcernCheck` and `concernChecks` from the Requirements model library (see [9.2.13](#)).

7.20.4 Satisfy Requirement Usages

A satisfy requirement usage is declared as a requirement usage (see [7.20.2](#)), using the kind keyword **satisfy requirement**. However, a satisfy requirement usage differs from a regular requirement usage in two ways:

1. The subject parameter of a satisfy requirement usage must be bound to a *satisfying feature*.
2. A satisfy requirement usage is a kind of assert constraint usage (see [7.19.3](#)).

Together, these mean that a satisfy requirement usage asserts that it is satisfied as a requirement (that is, it always evaluates to true) when the role of its subject is bound to the satisfying feature. The satisfying feature for a satisfy requirement usage can be specified in its declaration, immediately before its body, after keyword **by**.

```

part vehicle1 : Vehicle;
satisfy requirement braking : BrakingRequirement by vehicle1 {
    :>> speedLimit = 100[km/h];
    :>> maxBrakingDistance = 10[m];
}

```

```
}
```

One or more concerns can then be *framed* in other requirement definitions and usages. A framed concern usage is a subrequirement usage (see [7.20.2](#)) indicated by prefixing a concern usage declaration with the keyword **frame**. As for an assumed or required constraint, the keyword **frame** can be used rather than **frame concern** to declare a framed concern using reference subsetting. In any case, since the framed concern usage itself is a subrequirement, it will automatically be considered a required constraint of its containing requirement definition or usage.

```
requirement def BrakingRequirement {
    subject vehicle : Vehicle;
    actor environment : 'Driving Environment';

    attribute speedLimit : SpeedValue;
    attribute maxBrakingDistance : DistanceValue;

    assume constraint {
        doc /* The environment conditions are poor. */
    }

    frame concern brakingConcern : BrakingConcern {
        // Subject is automatically bound to "vehicle".
        :>> maxBrakingDistance = BrakingRequirement::maxBrakingDistance;
    }
}
```

The base concern definition and usage are `ConcernCheck` and `concernChecks` from the Requirements model library (see [9.2.13](#)).

7.20.4 Satisfy Requirement Usages

A satisfy requirement usage is declared as a requirement usage (see [7.20.2](#)), using the kind keyword **satisfy requirement**. However, a satisfy requirement usage differs from a regular requirement usage in two ways:

1. The subject parameter of a satisfy requirement usage must be bound to a *satisfying feature*.
2. A satisfy requirement usage is a kind of assert constraint usage (see [7.19.3](#)).

Together, these mean that a satisfy requirement usage asserts that it is satisfied as a requirement (that is, it always evaluates to true) when the role of its subject is bound to the satisfying feature. The satisfying feature for a satisfy requirement usage can be specified in its declaration, immediately before its body, after keyword **by**.

```
part vehicle1 : Vehicle;
satisfy requirement braking : BrakingRequirement by vehicle1 {
    :>> speedLimit = 100[km/h];
    :>> maxBrakingDistance = 10[m];
}
```

A satisfy requirement usage may also be declared using just the keyword **satisfy** instead of **satisfy requirement**. In this case, the declaration does not include either a name or short name for the satisfy requirement usage. Instead, the requirement to be satisfied is identified by giving a qualified name or feature chain immediately after the **satisfy** keyword, and it is then related to the satisfy requirement usage by a *reference subsetting relationship* (see also [8.4.5.3](#)).

```
satisfy vehicleMaximumMass by vehicle1;
```

A satisfy requirement usage can be *negated* by placing the keyword **not** before **satisfy**. A negated satisfy requirement usage asserts that the modeled requirement is *not* satisfied by the value of the given satisfying feature.

A satisfy requirement usage may also be declared using just the keyword **satisfy** instead of **satisfy requirement**. In this case, the declaration does not include either a name or short name for the satisfy requirement usage. Instead, the requirement to be satisfied is identified by giving a qualified name or feature chain immediately after the **satisfy** keyword, and it is then related to the satisfy requirement usage by a *reference subsetting relationship* (see also [8.4.5.3](#)).

```
satisfy vehicleMaximumMass by vehicle1;
```

A satisfy requirement usage can be *negated* by placing the keyword **not** before **satisfy**. A negated satisfy requirement usage asserts that the modeled requirement is *not* satisfied by the value of the given satisfying feature.

```
part vehicle2 : ExperimentalVehicle;
not satisfy vehicleMaximumMass by vehicle2;
```

A satisfy requirement usage can be declared without an explicit satisfying feature if it is nested in definition or usage. In this case, the satisfying feature is considered to be given by the containing definition or usage (in the case of a definition this is essentially the **self** feature of the definition; see [KerML, 9.2.2]).

```
part vehicle3 : Vehicle {
    part engine : Engine;
    // ...

    // "vehicle3" is implicitly the satisfying feature.
    satisfy rqts : VehicleRequirementsGroup;
}
```

7.21 Cases

7.21.1 Cases Overview

Metamodel references:

- *Textual notation*, [8.2.2.21](#)
- *Graphical notation*, [8.2.3.21](#)
- *Abstract syntax*, [8.3.21](#)
- *Semantics*, [8.4.17](#)

A *case definition* is a kind of calculation definition (see [7.18](#)) that produces a result intended to achieve a specific objective regarding a given subject. A *case usage* is a kind of calculation usage that is a usage of a case definition. A case is a general concept that may be used in its own right, but also provides the basis for more specific kinds of cases, including analysis cases (see [7.22](#)), verification cases (see [7.23](#)), and use cases (see [7.24](#)).

The *subject* of a case is modeled as a distinguished parameter, similarly to the subject of a requirement (see [7.20](#)). The *objective* of a case is modeled as a requirement usage to be satisfied by the performance of the case. Depending on the kind of case, the subject of the objective may be the same as the subject of the case (such as for a verification case or a use case) or it may be the result of the case (such as for an analysis case).

A case definition or usage may also have one or more *actor parameters* that represent roles played by an entity external to the subject of the case but necessary to the specification of the case. An actor parameter is a part usage representing an entity that plays a designated actor role for the case. A case may have multiple actors representing the same kind of entity playing different roles relative to the case.

Note. Actor parameters may also be specified for any kind of case, but they are used, in particular, in the specification of use cases (see [7.24](#)). Requirements may also have actor parameters (see [7.20](#)).

```

part vehicle2 : ExperimentalVehicle;
not satisfy vehicleMaximumMass by vehicle2;

```

A satisfy requirement usage can be declared without an explicit satisfying feature if it is nested in definition or usage. In this case, the satisfying feature is considered to be given by the containing definition or usage (in the case of a definition this is essentially the `self` feature of the definition; see [KerML, 9.2.2]).

```

part vehicle3 : Vehicle {
    part engine : Engine;
    // ...

    // "vehicle3" is implicitly the satisfying feature.
    satisfy rqts : VehicleRequirementsGroup;
}

```

7.21 Cases

7.21.1 Cases Overview

Metamodel references:

- *Textual notation*, [8.2.2.21](#)
- *Graphical notation*, [8.2.3.21](#)
- *Abstract syntax*, [8.3.21](#)
- *Semantics*, [8.4.17](#)

A *case definition* is a kind of calculation definition (see [7.18](#)) that produces a result intended to achieve a specific objective regarding a given subject. A *case usage* is a kind of calculation usage that is a usage of a case definition. A case is a general concept that may be used in its own right, but also provides the basis for more specific kinds of cases, including analysis cases (see [7.22](#)), verification cases (see [7.23](#)), and use cases (see [7.24](#)).

The *subject* of a case is modeled as a distinguished parameter, similarly to the subject of a requirement (see [7.20](#)). The *objective* of a case is modeled as a requirement usage to be satisfied by the performance of the case. Depending on the kind of case, the subject of the objective may be the same as the subject of the case (such as for a verification case or a use case) or it may be the result of the case (such as for an analysis case).

A case definition or usage may also have one or more *actor parameters* that represent roles played by an entity external to the subject of the case but necessary to the specification of the case. An actor parameter is a part usage representing an entity that plays a designated actor role for the case. A case may have multiple actors representing the same kind of entity playing different roles relative to the case.

Note. Actor parameters may also be specified for any kind of case, but they are used, in particular, in the specification of use cases (see [7.24](#)). Requirements may also have actor parameters (see [7.20](#)).

The body of a case can be specified using subactions and subcalculations needed to achieve the case objective. This generally includes some combination of collecting information about the subject, evaluating it, and then producing a result.

7.21.2 Case Definitions and Usages

A case definition or usage is declared as a kind of calculation definition or usage (see [7.18.2](#)), using the kind keyword `case`. A case usage must be defined by a single case definition.

The *subject* of a case definition or usage is modeled as its first parameter. Following the general rule for parameters (see [7.16.2](#)), the subject parameter of a case definition or usage will redefine the subject parameter of any case definitions or usages that it specializes. The base case definition in the `Cases` library model specifies the most

The body of a case can be specified using subactions and subcalculations needed to achieve the case objective. This generally includes some combination of collecting information about the subject, evaluating it, and then producing a result.

7.21.2 Case Definitions and Usages

A case definition or usage is declared as a kind of calculation definition or usage (see [7.18.2](#)), using the kind keyword **case**. A case usage must be defined by a single case definition.

The *subject* of a case definition or usage is modeled as its first parameter. Following the general rule for parameters (see [7.16.2](#)), the subject parameter of a case definition or usage will redefine the subject parameter of any case definitions or usages that it specializes. The base case definition in the Cases library model specifies the most general possible subject, with the default name `subj` and the most general type `Anything`, and this can then be further specialized in specific case definitions and usages. A subject parameter is always an `in` parameter, so it is not necessary to declare it with an explicit direction. Instead, the keyword **subject** is used to identify the declaration of a subject parameter, which must come before the declaration of any other parameters in a case definition or usage.

A case definition or usage may also have one or more *actor* parameters. Similarly to the declaration of a subject parameter, these distinguished parameters are declared using the keyword **actor** rather than explicitly declaring their direction. Actor parameters are part usages, so they must be (explicitly or implicitly) defined by part definitions (see [7.11.2](#)).

The *objective* of a case definition or usage is declared as a requirement usage (see [7.20.2](#)), but using the keyword **objective** instead of **requirement**. The subject of an objective requirement is bound by default to the result of the case definition or usage, meaning that the objective of the case concerns its result. However, this can be overridden in specific case definitions or usages (but see [7.22.2](#) and [7.23.2](#) on the required bindings for analysis cases and verification cases).

```
case def FaultRecovery {
    subject system : AutomationSystem;
    actor engineer : Person;
    objective {
        doc
        /* The engineer determines the cause of the system
         * fault and resolves it returning the system to
         * nominal operation.
        */
    }
}
```

The base case definition and usage for are `Case` and `cases` from the Cases model library (see [9.2.14](#)).

7.22 Analysis Cases

7.22.1 Analysis Cases Overview

Metamodel references:

- *Textual notation*, [8.2.2.22](#)
- *Graphical notation*, [8.2.3.22](#)
- *Abstract syntax*, [8.3.22](#)
- *Semantics*, [8.4.18](#)

general possible subject, with the default name `subj` and the most general type `Anything`, and this can then be further specialized in specific case definitions and usages. A subject parameter is always an `in` parameter, so it is not necessary to declare it with an explicit direction. Instead, the keyword `subject` is used to identify the declaration of a subject parameter, which must come before the declaration of any other parameters in a case definition or usage.

A case definition or usage may also have one or more `actor` parameters. Similarly to the declaration of a subject parameter, these distinguished parameters are declared using the keyword `actor` rather than explicitly declaring their direction. Actor parameters are part usages, so they must be (explicitly or implicitly) defined by part definitions (see [7.11.2](#)).

The *objective* of a case definition or usage is declared as a requirement usage (see [7.20.2](#)), but using the keyword `objective` instead of `requirement`. The subject of an objective requirement is bound by default to the result of the case definition or usage, meaning that the objective of the case concerns its result. However, this can be overridden in specific case definitions or usages (but see [7.22.2](#) and [7.23.2](#) on the required bindings for analysis cases and verification cases).

```
case def FaultRecovery {
    subject system : AutomationSystem;
    actor engineer : Person;
    objective {
        doc
        /* The engineer determines the cause of the system
         * fault and resolves it returning the system to
         * nominal operation.
        */
    }
}
```

The base case definition and usage for are `Case` and `cases` from the `Cases` model library (see [9.2.14](#)).

7.22 Analysis Cases

7.22.1 Analysis Cases Overview

Metamodel references:

- *Textual notation*, [8.2.2.22](#)
- *Graphical notation*, [8.2.3.22](#)
- *Abstract syntax*, [8.3.22](#)
- *Semantics*, [8.4.18](#)

An *analysis case definition* is a kind of case definition (see [7.21](#)) whose objective is to carry out an analysis on the subject of the case. An *analysis case usage* is a kind of case usage that is a usage of an analysis case definition.

The subject of an analysis case identifies what is being analyzed. The subject can often be kept quite general in an analysis case definition and then made more specific in usages of that definition. Performing an analysis case returns a result about the subject. For example, a fuel economy analysis of a vehicle subject returns the estimated fuel economy of the vehicle, given a set of analysis inputs and assumed conditions. The analysis result can be evaluated to determine whether it satisfies the analysis objective.

The performance of an analysis case can be specified in a number of different ways.

- The analysis case can include a set of *analysis actions*, each of which can specify calculations that return results. For example, the fuel economy analysis referred to above may require both a dynamics analysis and a fuel consumption analysis. The dynamics analysis determines the vehicle trajectory and the required engine power versus time. The fuel consumption analysis determines the fuel consumed to achieve the

An *analysis case definition* is a kind of case definition (see [7.21](#)) whose objective is to carry out an analysis on the subject of the case. An *analysis case usage* is a kind of case usage that is a usage of an analysis case definition.

The subject of an analysis case identifies what is being analyzed. The subject can often be kept quite general in an analysis case definition and then made more specific in usages of that definition. Performing an analysis case returns a result about the subject. For example, a fuel economy analysis of a vehicle subject returns the estimated fuel economy of the vehicle, given a set of analysis inputs and assumed conditions. The analysis result can be evaluated to determine whether it satisfies the analysis objective.

The performance of an analysis case can be specified in a number of different ways.

- The analysis case can include a set of *analysis actions*, each of which can specify calculations that return results. For example, the fuel economy analysis referred to above may require both a dynamics analysis and a fuel consumption analysis. The dynamics analysis determines the vehicle trajectory and the required engine power versus time. The fuel consumption analysis determines the fuel consumed to achieve the required engine power. Both the dynamics analysis and the fuel consumption analysis may require multiple calculations.
- An analysis can be specified in SysML and solved by external solvers. In this case, the analysis case specifies the analysis to be performed, but does not define how the analysis is actually executed. For example, the analysis case could specify that the analysis result is obtained by integrating a differential equation, without detailing what integration algorithm is to be used to do this.
- An analysis case can also specify a set of simultaneous equations to be solved. This can be done defining one or more constraint usages (see [7.19](#)) that logically and each of the equations, and asserting that the constraint must be true. A solver would be expected to solve the equations such that it returns values that satisfy each equation.





Table 20. Analysis Cases - Representative Notation



Element	Graphical Notation	Textual Notation
Analysis Case Definition	<div style="border: 1px solid black; padding: 10px;"> <pre>«analysis def» AnalysisDef1 subject s1 : Subject objective doc '...' assume assumption1</pre> <pre>«analysis def» AnalysisDef1 compartment stack ...</pre> </div>	<pre>analysis def AnalysisDef1 { subject s1 : Subject1; objective { doc /* '...' */; assume assumption1; } } analysis def AnalysisDef1 { /* members */ }</pre>

required engine power. Both the dynamics analysis and the fuel consumption analysis may require multiple calculations.

- An analysis can be specified in SysML and solved by external solvers. In this case, the analysis case specifies the analysis to be performed, but does not define how the analysis is actually executed. For example, the analysis case could specify that the analysis result is obtained by integrating a differential equation, without detailing what integration algorithm is to be used to do this.
- An analysis case can also specify a set of simultaneous equations to be solved. This can be done defining one or more constraint usages (see [7.19](#)) that logically and each of the equations, and asserting that the constraint must be true. A solver would be expected to solve the equations such that it returns values that satisfy each equation.

Table 20. Analysis Cases - Representative Notation

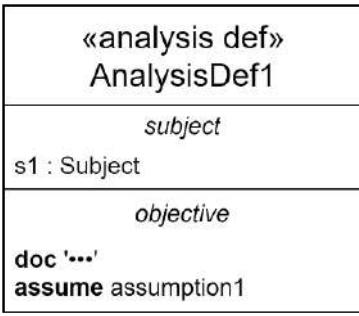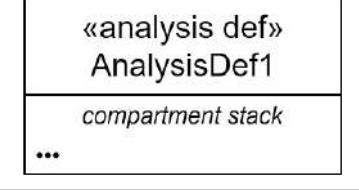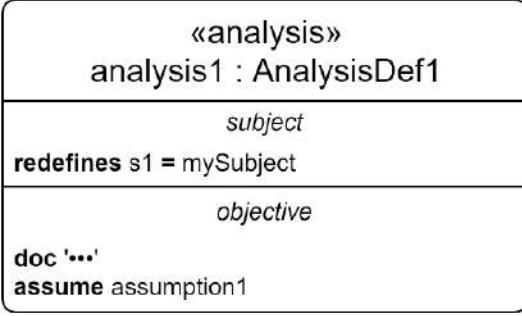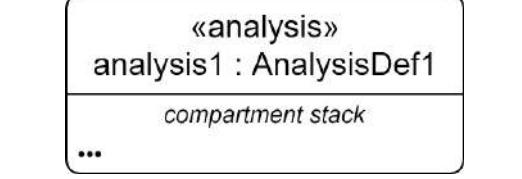Element	Graphical Notation	Textual Notation
Analysis Case Definition	 	<pre> analysis def AnalysisDef1 { subject s1 : Subject1; objective { doc /* '...' */; assume assumption1; } } analysis def AnalysisDef1 { /* members */ } </pre>
Analysis Case	 	<pre> analysis analysis1 : AnalysisDef1 { subject redefines s1 = mySubject; objective { doc /* '...' */; assume assumption1; } } analysis analysis1 : AnalysisDef1 { /* members */ } </pre>

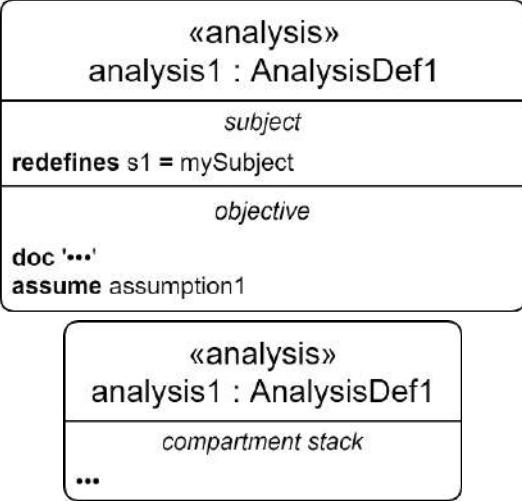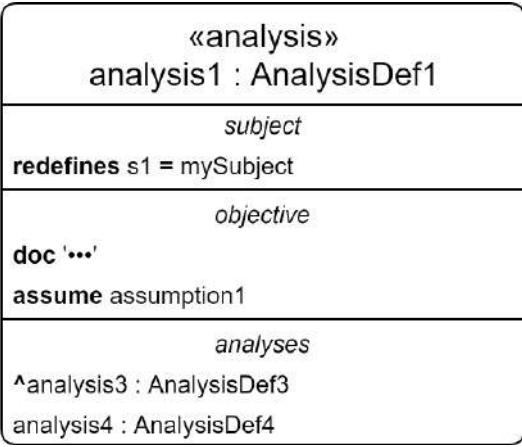Element	Graphical Notation	Textual Notation
Analysis Case		<pre> analysis analysis1 : AnalysisDef1 { subject redefines s1 = mySubject; objective { doc /* '...' */ assume assumption1; } } analysis analysis1 : AnalysisDef1 { /* members */ } </pre>
Analyses Compartment		<pre> analysis analysis1 : AnalysisDef1 { ... analysis analysis4 : AnalysisDef4; } </pre>

7.22.2 Analysis Case Definitions and Usages

An analysis case definition or usage is declared as a case definition or usage (see [7.21.2](#)), using the kind keyword **analysis**. An analysis case usage must be defined by a single analysis case definition.

For an analysis case, the subject of the objective is always bound to the result of the analysis case definition or usage. That is, the objective is always about the result that is produced by the analysis.

```

analysis def FuelEconomyAnalysis {
  subject vehicle : Vehicle;
  return fuelEconomyResult : DistancePerVolumeValue;

  objective fuelEconomyAnalysisObjective {
    doc
    /*
     * The objective of this analysis is to determine whether the
     * subject vehicle can satisfy the fuel economy requirement.
     */
    requirement : FuelEconomyRequirement;
  }
}

```

Element	Graphical Notation	Textual Notation
Analyses Compartment	<pre> «analysis» analysis1 : AnalysisDef1 subject redefines s1 = mySubject objective doc '...' assume assumption1 analyses ^analysis3 : AnalysisDef3 analysis4 : AnalysisDef4 </pre>	<pre> analysis analysis1 : AnalysisDef1 { ... analysis analysis4 : AnalysisDef4; } </pre>

7.22.2 Analysis Case Definitions and Usages

An analysis case definition or usage is declared as a case definition or usage (see [7.21.2](#)), using the kind keyword **analysis**. An analysis case usage must be defined by a single analysis case definition.

For an analysis case, the subject of the objective is always bound to the result of the analysis case definition or usage. That is, the objective is always about the result that is produced by the analysis.

```

analysis def FuelEconomyAnalysis {
    subject vehicle : Vehicle;
    return fuelEconomyResult : DistancePerVolumeValue;

    objective fuelEconomyAnalysisObjective {
        doc
        /*
         * The objective of this analysis is to determine whether the
         * subject vehicle can satisfy the fuel economy requirement.
         */
        requirement : FuelEconomyRequirement;
    }
    // ...
}

```

The base analysis case definition and usage are `AnalysisCase` and `analysisCases` in the `AnalnsysisCases` model library (see [9.2.15](#)).

7.22.3 Trade-Off Analyses

A *trade-off analysis* is a special kind of analysis used to evaluate and compare alternatives. Such an analysis can be modeled by a usage of the `TradeStudy` analysis case definition from the `TradeStudies` library model found in the Analysis Domain Library (see [9.4.5](#)).

The subject of a `TradeStudy` analysis case is the collection of alternatives to be analyzed. An *evaluation function* is then provided that is used to evaluate each alternative, in order to find the alternative that meets the objective of the analysis case. Common `TradeStudy` objectives are to maximize or minimize the value of the objective function.

An example of a trade-off analysis is an analysis that evaluates and compares alternatives for a vehicle engine in terms of various criteria, such as power, mass, efficiency and cost. The evaluation function establishes a relative

```
// ...
}
```

The base analysis case definition and usage are `AnalysisCase` and `analysisCases` in the `AnalysysisCases` model library (see [9.2.15](#)).

7.22.3 Trade-Off Analyses

A *trade-off analysis* is a special kind of analysis used to evaluate and compare alternatives. Such an analysis can be modeled by a usage of the `TradeStudy` analysis case definition from the `TradeStudies` library model found in the Analysis Domain Library (see [9.4.5](#)).

The subject of a `TradeStudy` analysis case is the collection of alternatives to be analyzed. An *evaluation function* is then provided that is used to evaluate each alternative, in order to find the alternative that meets the objective of the analysis case. Common `TradeStudy` objectives are to maximize or minimize the value of the objective function.

An example of a trade-off analysis is an analysis that evaluates and compares alternatives for a vehicle engine in terms of various criteria, such as power, mass, efficiency and cost. The evaluation function establishes a relative weighting of each criterion based on its importance to the stakeholder. The evaluation result is computed for each alternative based on a weighted sum of the normalized value for each of the criteria. The evaluation results for each alternative are then compared with each other, based on the `TradeStudy` objective, to determine a preferred solution.

```
analysis engineTradeStudy : TradeStudy {
    // The subject is bound to the two alternatives to be studied.
    subject : Engine = (engine4cyl, engine6cyl);

    // The objective is to find the alternative that has the
    // maximum value for the evaluationFunction.
    objective : MaximizeObjective;

    // For each one of the alternatives, the evaluationFunction
    // produces a numerical evaluation result.
    calc :>> evaluationFunction {
        in part anEngine : Engine :>> alternative;

        calc powerRollup: PowerRollup {
            in engine = anEngine;
            return power;
        }
        calc massRollup: MassRollup {
            in engine = anEngine;
            return mass;
        }
        calc efficiencyRollup: EfficiencyRollup {
            in engine = anEngine;
            return efficiency;
        }
        calc costRollup: CostRollup {
            in engine = anEngine;
            return cost;
        }

        return :>> result : Real = EngineEvaluation(
            power = powerRollup.power,
            mass = massRollup.mass,
            efficiency = efficiencyRollup.efficiency,
        )
    }
}
```

weighting of each criterion based on its importance to the stakeholder. The evaluation result is computed for each alternative based on a weighted sum of the normalized value for each of the criteria. The evaluation results for each alternative are then compared with each other, based on the TradeStudy objective, to determine a preferred solution.

```

analysis engineTradeStudy : TradeStudy {
    // The subject is bound to the two alternatives to be studied.
    subject : Engine = (engine4cyl, engine6cyl);

    // The objective is to find the alternative that has the
    // maximum value for the evaluationFunction.
    objective : MaximizeObjective;

    // For each one of the alternatives, the evaluationFunction
    // produces a numerical evaluation result.
    calc :>> evaluationFunction {
        in part anEngine : Engine :>> alternative;

        calc powerRollup: PowerRollup {
            in engine = anEngine;
            return power;
        }
        calc massRollup: MassRollup {
            in engine = anEngine;
            return mass;
        }
        calc efficiencyRollup: EfficiencyRollup {
            in engine = anEngine;
            return efficiency;
        }
        calc costRollup: CostRollup {
            in engine = anEngine;
            return cost;
        }

        return :>> result : Real = EngineEvaluation(
            power = powerRollup.power,
            mass = massRollup.mass,
            efficiency = efficiencyRollup.efficiency,
            cost = costRollup.cost
        );
    }

    // The selected alternative will be the one that has the
    // maximum value for the evaluationFunction.
    return part :>> selectedAlternative : Engine;
}

```

7.23 Verification Cases

7.23.1 Verification Cases Overview

Metamodel references:

- *Textual notation*, [8.2.2.23](#)
- *Graphical notation*, [8.2.3.23](#)
- *Abstract syntax*, [8.3.23](#)
- *Semantics*, [8.3.23](#)

```

        cost = costRollup.cost
    );
}

// The selected alternative will be the one that has the
// maximum value for the evaluationFunction.
return part :>> selectedAlternative : Engine;
}

```

7.23 Verification Cases

7.23.1 Verification Cases Overview

Metamodel references:

- *Textual notation*, [8.2.2.23](#)
- *Graphical notation*, [8.2.3.23](#)
- *Abstract syntax*, [8.3.23](#)
- *Semantics*, [8.3.23](#)

A *verification case definition* is a kind of case definition (see [7.21](#)) whose result is a verdict on whether the subject of the case satisfies certain requirements. A *verification case usage* is a case usage that is a usage of a verification case definition.

The subject of a verification case is an input parameter that identifies the system or other entity that is being evaluated as to whether it satisfies certain requirements (often referred to as the "unit under test" or "unit under verification"). The subject may be kept general in a verification case definition and then made more specific in usages of that definition. The objective of a verification case is to verify that the verification subject satisfies one or more specific requirements, which are specified as a special kind of required constraint in the objective. The result of the validation case is a *verdict*, which is one of the following:

- *Pass* indicates that the subject has been determined to satisfy the requirements to be verified.
- *Fail* indicates that the subject has been determined *not* to satisfy the requirements to be verified.
- *Inconclusive* indicates that a determination could not be made as to whether the subject satisfies the requirements to be verified.
- *Error* indicates that an error occurred during the performance of the verification.

A typical verification case includes a set of *verification actions* that perform the following steps.

1. *Collect data* about the subject as needed to support the verification objective, which is typically done using *verification methods* such as analysis, inspection, demonstration, and test.
2. *Analyze collected data*. For example, the data may include multiple measurements that span a range of conditions for a particular individual, or measurements of different individuals. This analysis step may need to determine the probability distribution, mean, and standard deviation associated with the measurements.
3. *Evaluate the results of the analysis* based on the objective to produce a verdict.

Each of the verification actions in the verification case requires a set of resources to perform the actions. This may include verification personnel, equipment, facilities, and other resources. These resources may be represented in the model as parts that perform actions, or more specifically, using actor parameters on the verification case.

A *verification case definition* is a kind of case definition (see 7.21) whose result is a verdict on whether the subject of the case satisfies certain requirements. A *verification case usage* is a case usage that is a usage of a verification case definition.

The subject of a verification case is an input parameter that identifies the system or other entity that is being evaluated as to whether it satisfies certain requirements (often referred to as the "unit under test" or "unit under verification"). The subject may be kept general in a verification case definition and then made more specific in usages of that definition. The objective of a verification case is to verify that the verification subject satisfies one or more specific requirements, which are specified as a special kind of required constraint in the objective. The result of the validation case is a *verdict*, which is one of the following:

- *Pass* indicates that the subject has been determined to satisfy the requirements to be verified.
- *Fail* indicates that the subject has been determined *not* to satisfy the requirements to be verified.
- *Inconclusive* indicates that a determination could not be made as to whether the subject satisfies the requirements to be verified.
- *Error* indicates that an error occurred during the performance of the verification.

A typical verification case includes a set of *verification actions* that perform the following steps.

1. *Collect data* about the subject as needed to support the verification objective, which is typically done using *verification methods* such as analysis, inspection, demonstration, and test.
2. *Analyze collected data*. For example, the data may include multiple measurements that span a range of conditions for a particular individual, or measurements of different individuals. This analysis step may need to determine the probability distribution, mean, and standard deviation associated with the measurements.
3. *Evaluate the results of the analysis* based on the objective to produce a verdict.

Each of the verification actions in the verification case requires a set of resources to perform the actions. This may include verification personnel, equipment, facilities, and other resources. These resources may be represented in the model as parts that perform actions, or more specifically, using actor parameters on the verification case.


Table 21. Verification Cases – Representative Notation

Element	Graphical Notation	Textual Notation
Verification Case Definition	<div style="border: 1px solid black; padding: 10px;"> <p>«verification def»</p> <p>VerificationDef1</p> <hr/> <p><i>subject</i></p> <p>s1 : Subject1</p> <hr/> <p><i>objective</i></p> <p>doc objective statement</p> <p>verify requirement1</p> <p>...</p> </div> <div style="border: 1px solid black; padding: 10px; margin-top: 10px;"> <p>«verification def»</p> <p>VerificationDef1</p> <hr/> <p><i>compartment stack</i></p> <p>...</p> </div>	<pre> verification def VerificationDef1 { subject s1 : Subject1; objective { doc /* '...' */ verify requirement1; } } verification def VerificationDef1 { /* members */ } </pre>

Table 21. Verification Cases – Representative Notation

Element	Graphical Notation	Textual Notation
Verification Case Definition	<pre> «verification def» VerificationDef1 +-----+ subject s1 : Subject1 +-----+ objective doc objective statement verify requirement1 ... +-----+ </pre> <pre> «verification def» VerificationDef1 +-----+ compartment stack ... +-----+ </pre>	<pre> verification def VerificationDef1 { subject s1 : Subject1; objective { doc /* '...' */ verify requirement1; } } verification def VerificationDef1 { /* members */ } </pre>
Verification Case	<pre> «verification» verification1 : VerificationDef1 +-----+ subject redefines s1 = mySubject +-----+ objective doc objective statement verify requirement2 ... +-----+ </pre> <pre> «verification» verification1 : VerificationDef1 +-----+ compartment stack ... +-----+ </pre>	<pre> verification verification1 : VerificationDef1 { subject redefines s1 = mySubject; objective { doc /* '...' */ verify requirement1; } } verification verification1 : VerificationDef1 { /* members */ } </pre>
Verified Requirements Compartment		



Element	Graphical Notation	Textual Notation
Verification Case	<div style="border: 1px solid black; padding: 10px;"> <p>«verification»</p> <p>verification1 : VerificationDef1</p> <p><i>subject</i></p> <p>redefines s1 = mySubject</p> <p><i>objective</i></p> <p>doc objective statement</p> <p>verify requirement2</p> <p>...</p> </div> <div style="border: 1px solid black; padding: 10px; margin-top: 10px;"> <p>«verification»</p> <p>verification1 : VerificationDef1</p> <p><i>compartment stack</i></p> <p>...</p> </div>	<pre> verification verification1 : VerificationDef1 { subject redefines s1 = mySubject; objective { doc /* '...' */ verify requirement1; } } verification verification1 : VerificationDef1 { /* members */ } } </pre>
Verified Requirements Compartment		
Verifications Compartment	<div style="border: 1px solid black; padding: 10px;"> <p><i>verifications</i></p> <p>^verification2 : VerificationDef2 (in : ParamDef1, out : ParamDef2)</p> <p>verification1 : VerificationDef1 [1..*] ordered nonunique</p> <p>verification3R : VerificationDef3R redefines verification3</p> <p>verification4R : VerificationDef4R :>> verification4</p> <p>:>> verification5</p> <p>verification6S : VerificationDef6S [m] subsets verification6</p> <p>verification7S : VerificationDef7S [m] :> verification7</p> <p>verification8R = verification8</p> <p>ref verification9 : VerificationDef9</p> <p>perform verification10</p> <p>verification11</p> <p>...</p> </div>	<pre> { verification verification1 : VerificationDef1 [1..*] ordered nonunique; /* ... */ perform verification verification10; verification verification11 { verification 'verification11.1'; verification 'verification11.2'; } } </pre>
Verification Methods Compartment	<div style="border: 1px solid black; padding: 10px;"> <p><i>verification methods</i></p> <p>inspection</p> <p>analysis</p> <p>demonstration</p> <p>test</p> <p>...</p> </div>	<pre> metadata VerificationMethod { kind = (inspection, analysis, demonstration, test); } </pre>

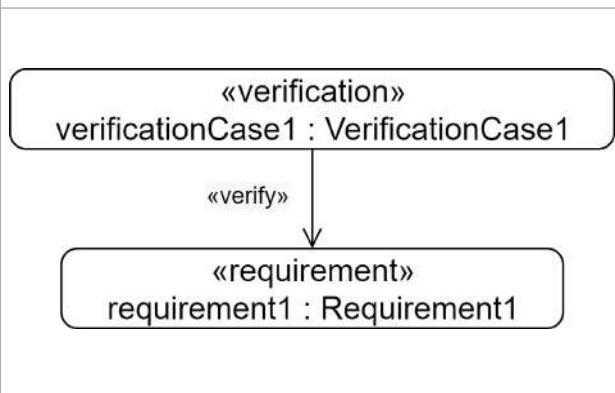Element	Graphical Notation	Textual Notation
Verifications Compartment	<pre> <i>verifications</i> ^verification2 : VerificationDef2 (<i>in</i> : ParamDef1, <i>out</i> : ParamDef2) verification1 : VerificationDef1 [1..*] ordered nonunique verification3R : VerificationDef3R redefines verification3 verification4R : VerificationDef4R >> verification4 :>> verification5 verification6S : VerificationDef6S [m] subsets verification6 verification7S : VerificationDef7S [m] >: verification7 verification8R = verification8 ref verification9 : VerificationDef9 perform verification10 verification11 ... </pre>	<pre>{ verification verification1 : VerificationDef1 [1..*] ordered nonunique; /* ... */ perform verification verification10; verification verification11 { verification 'verification11.1'; verification 'verification11.2'; } }</pre>
Verification Methods Compartment	<pre> <i>verification methods</i> inspection analysis demonstration test ... </pre>	<pre> metadata VerificationMethod { kind = (inspection, analysis, demonstration, test); }</pre>
Verifies Compartment	<pre> <i>verifies</i> requirement1 requirement2 ... </pre>	<pre> objective { verify requirement1; verify requirement2; }</pre>
Verify	 <pre> <i>«verification»</i> verificationCase1 : VerificationCase1 ↓ <i>«requirement»</i> requirement1 : Requirement1 </pre>	<pre> requirement requirement1: Requirement1; verification verificationCase1 : VerificationCase1 { objective { verify requirement1; } } }</pre>

7.23.2 Verification Case Definitions and Usages

A verification case definition or usage is declared as a case definition or usage (see [7.21.2](#)), using the kind keyword **verification**. A verification case usage must be defined by a single verification case definition.

For a verification case, the subject of the objective is always bound to the subject of the verification case definition or usage. That is, the objective is always about the verification of requirements relative to the subject of the case.

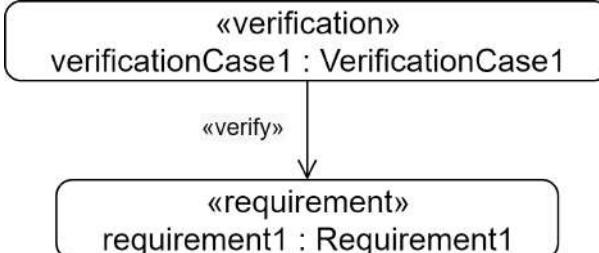Element	Graphical Notation	Textual Notation
Verifies Compartment		<pre>objective { verify requirement1; verify requirement2; }</pre>
Verify		<pre>requirement requirement1: Requirement1; verification verificationCase1 : VerificationCase1 { objective { verify requirement1; } } }</pre>

7.23.2 Verification Case Definitions and Usages

A verification case definition or usage is declared as a case definition or usage (see [7.21.2](#)), using the kind keyword **verification**. A verification case usage must be defined by a single verification case definition.

For a verification case, the subject of the objective is always bound to the subject of the verification case definition or usage. That is, the objective is always about the verification of requirements relative to the subject of the case.

In addition to assumed and required constraint usages allowed in any requirement usage (see [7.20.2](#)), the objective of a verification case may also have *requirement verification* usages, which indicate the requirements to be verified by the verification case. A requirement verification usage is a subrequirement of the objective that is indicated by prefixing a requirement usage declaration with the keyword **verify**. As for an assumed or required constraint, the keyword **verify** can be used rather than **verify requirement** to declare a verified requirement using reference subsetting. In any case, since the requirement verification usage itself is a subrequirement, it is automatically considered a required constraint of its containing objective. In addition, its subject is bound by default to the subject of the objective, which is itself bound to the subject of the verification case.

The result of a verification case is a verdict that can have the values `pass`, `fail`, `inconclusive`, or `error`. In simple cases, the `PassIf` calculation definition from the `VerificationCases` library model (see [9.2.16](#)) can be used to obtain a pass or fail verdict based on a Boolean value. In addition, the `VerificationMethod` metadata definition can be used to annotate a verification case with the method used to carry out the verification, one of `inspect`, `analyze`, `demo`, or `test` (see also [7.26](#)).

```
verification def VehicleMassTest {
    import VerificationCases::*;

    subject testVehicle : Vehicle;
    objective vehicleMassVerificationObjective {
        // The subject of the verify is automatically bound to "testVehicle".
        verify vehicleMassRequirement;
    }

    metadata VerificationMethod {
        kind = VerificationKind::test;
    }
}
```

In addition to assumed and required constraint usages allowed in any requirement usage (see [7.20.2](#)), the objective of a verification case may also have *requirement verification* usages, which indicate the requirements to be verified by the verification case. A requirement verification usage is a subrequirement of the objective that is indicated by prefixing a requirement usage declaration with the keyword **verify**. As for an assumed or required constraint, the keyword **verify** can be used rather than **verify requirement** to declare a verified requirement using reference subsetting. In any case, since the requirement verification usage itself is a subrequirement, it is automatically considered a required constraint of its containing objective. In addition, its subject is bound by default to the subject of the objective, which is itself bound to the subject of the verification case.

The result of a verification case is a verdict that can have the values `pass`, `fail`, `inconclusive`, or `error`. In simple cases, the `PassIf` calculation definition from the `VerificationCases` library model (see [9.2.16](#)) can be used to obtain a pass or fail verdict based on a Boolean value. In addition, the `VerificationMethod` metadata definition can be used to annotate a verification case with the method used to carry out the verification, one of `inspect`, `analyze`, `demo`, or `test` (see also [7.26](#)).

```

verification def VehicleMassTest {
    import VerificationCases::*;

    subject testVehicle : Vehicle;
    objective vehicleMassVerificationObjective {
        // The subject of the verify is automatically bound to "testVehicle".
        verify vehicleMassRequirement;
    }

    metadata VerificationMethod {
        kind = VerificationKind::test;
    }

    action collectData {
        in part testVehicle : Vehicle = VehicleMassTest::testVehicle;
        out massMeasured :> ISQ::mass;
    }
    action processData {
        in massMeasured :> ISQ::mass = collectData.massMeasured;
        out massProcessed :> ISQ::mass;
    }
    action evaluateData {
        in massProcessed :> ISQ::mass = processData.massProcessed;
        out verdict : VerdictKind =
            // Check that "testVehicle" statisfies "vehicleMassRequirement"
            // if its mass equals 'massProcessed'.
            PassIf(vehicleMassRequirement(
                vehicle = testVehicle,
                massActual = massProcessed)
            );
    }

    return verdict : VerdictKind = evaluateData.verdict;
}

```

7.24 Use Cases

7.24.1 Use Cases Overview

Metamodel references:

- *Textual notation*, [8.2.2.24](#)

```

action collectData {
    in part testVehicle : Vehicle = VehicleMassTest::testVehicle;
    out massMeasured :> ISQ::mass;
}
action processData {
    in massMeasured :> ISQ::mass = collectData.massMeasured;
    out massProcessed :> ISQ::mass;
}
action evaluateData {
    in massProcessed :> ISQ::mass = processData.massProcessed;
    out verdict : VerdictKind =
        // Check that "testVehicle" statisfies "vehicleMassRequirement"
        // if its mass equals 'massProcessed'.
        PassIf(vehicleMassRequirement(
            vehicle = testVehicle,
            massActual = massProcessed)
        );
}
return verdict : VerdictKind = evaluateData.verdict;
}

```

7.24 Use Cases

7.24.1 Use Cases Overview

Metamodel references:

- *Textual notation*, [8.2.2.24](#)
- *Graphical notation*, [8.2.3.24](#)
- *Abstract syntax*, [8.3.24](#)
- *Semantics*, [8.4.20](#)

A *use case definition* is a kind of case definition (see [7.21](#)) that specifies the required behavior of its subject relative to one or more external actors. The objective of the use case is to provide an observable result of value to one or more of its actors. A *use case usage* is a case usage that is a usage of a use case.

A use case is typically specified as a sequence of interactions between the subject and the various actors, which are all modeled as part usages. Each interaction can be modeled as a *message* (see [7.13](#)) that delivers some payload or signal from an actor to the system or vice versa. The sources and target ends of these messages can either be modeled simply as abstract events within the lifetime of the subject and actor occurrences (see [7.9](#)), or more concretely as actions performed to carry out the interaction (see [7.16](#)).

An *include use case usage* is a use case usage that is also a kind of perform action usage (see [7.16](#)). A use case definition or usage may contain an include use case usage to specify that the behavior of the containing use case includes the behavior of the included use case. The subject of the included use case is the same as the subject of the containing use case, so the subject parameter of the included use case must have a definition that is compatible with the definition of the containing use case. Actor parameters of the included use case may be bound to corresponding actor parameters of the containing use case as necessary (see also [7.16](#) on parameter binding and [7.13](#) on binding in general).

As a behavior, a use case can be performed with specific values for its subject and actor parameters. If a given subject also has a design model that decomposes its internal structure, then it should be possible to construct an interaction of the internal parts of the subject, consistent with the design model, that can be shown to be a specialization of the behavior specified by the performance of the use case for that subject. This is known as a *realization* of the use case relative to the design model. A system is properly designed to provide the behavior required by a set of use cases if there is a legal realization of each use case relative to the design of the system.

- *Graphical notation*, [8.2.3.24](#)
- *Abstract syntax*, [8.3.24](#)
- *Semantics*, [8.4.20](#)

A *use case definition* is a kind of case definition (see [7.21](#)) that specifies the required behavior of its subject relative to one or more external actors. The objective of the use case is to provide an observable result of value to one or more of its actors. A *use case usage* is a case usage that is a usage of a use case.

A use case is typically specified as a sequence of interactions between the subject and the various actors, which are all modeled as part usages. Each interaction can be modeled as a *message* (see [7.13](#)) that delivers some payload or signal from an actor to the system or vice versa. The sources and target ends of these messages can either be modeled simply as abstract events within the lifetime of the subject and actor occurrences (see [7.9](#)), or more concretely as actions performed to carry out the interaction (see [7.16](#)).

An *include use case usage* is a use case usage that is also a kind of perform action usage (see [7.16](#)). A use case definition or usage may contain an include use case usage to specify that the behavior of the containing use case includes the behavior of the included use case. The subject of the included use case is the same as the subject of the containing use case, so the subject parameter of the included use case must have a definition that is compatible with the definition of the containing use case. Actor parameters of the included use case may be bound to corresponding actor parameters of the containing use case as necessary (see also [7.16](#) on parameter binding and [7.13](#) on binding in general).

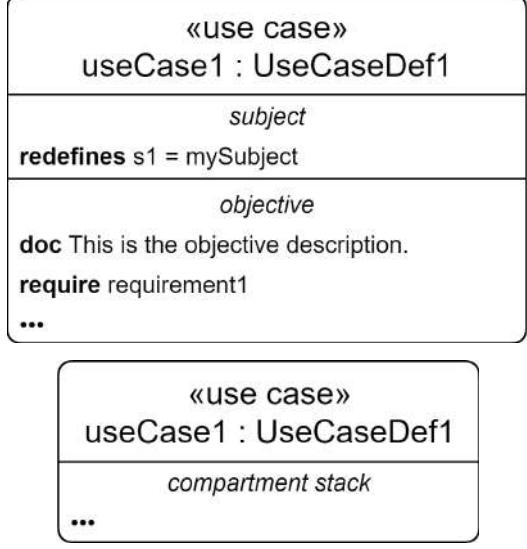
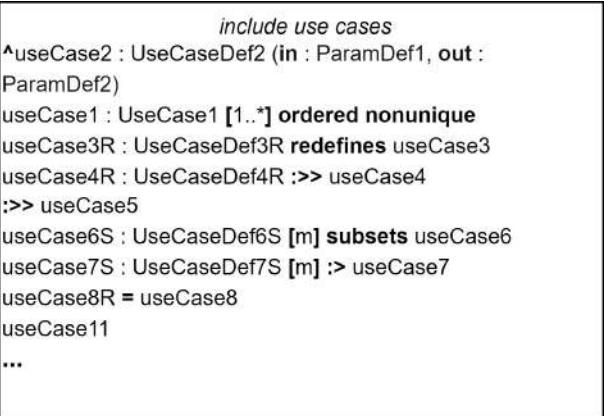

As a behavior, a use case can be performed with specific values for its subject and actor parameters. If a given subject also has a design model that decomposes its internal structure, then it should be possible to construct an interaction of the internal parts of the subject, consistent with the design model, that can be shown to be a specialization of the behavior specified by the performance of the use case for that subject. This is known as a *realization* of the use case relative to the design model. A system is properly designed to provide the behavior required by a set of use cases if there is a legal realization of each use case relative to the design of the system.



Table 22. Use Cases – Representative Notation

Element	Graphical Notation	Textual Notation
Use Case Definition	<div style="border: 1px solid black; padding: 10px;"> <p>«use case def»</p> <p> UseCaseDef1</p> <hr/> <p> <i>subject</i></p> <p> s1 : Subject1</p> <hr/> <p> <i>objective</i></p> <p> doc This is the objective description.</p> <p> require requirement1</p> <p> ...</p> </div> <div style="border: 1px solid black; padding: 10px;"> <p>«use case def»</p> <p> UseCaseDef1</p> <hr/> <p> <i>compartment stack</i></p> <p> ...</p> </div>	<pre> use case def UseCaseDef1 { subject s1:Subject1; objective { doc /* This is the objective description. */ require requirement1; } } use case def UseCaseDef1 { /* members */ } </pre>

Table 22. Use Cases – Representative Notation

Element	Graphical Notation	Textual Notation
Use Case Definition	<pre> «use case def» UseCaseDef1 +-----+ subject s1 : Subject1 +-----+ objective doc This is the objective description. require requirement1 ... +-----+ compartment stack ... </pre>	<pre> use case def UseCaseDef1 { subject s1:Subject1; objective { doc /* This is the objective description.*/ } require requirement1; } </pre> <pre> use case def UseCaseDef1 { /* members */ } </pre>
Use Case	<pre> «use case» useCase1 : UseCaseDef1 +-----+ subject redefines s1 = mySubject +-----+ objective doc This is the objective description. require requirement1 ... +-----+ compartment stack ... </pre>	<pre> use case useCase1 : UseCaseDef1 { subject redefines s1 = mySubject; objective { doc /* '...' */ require requirement1; } } use case useCase1 : UseCaseDef1 { /* members */ } </pre>

Element	Graphical Notation	Textual Notation
Use Case	 <pre> <<use case>> useCase1 : UseCaseDef1 subject redefines s1 = mySubject objective doc This is the objective description. require requirement1 ... </pre> <pre> <<use case>> useCase1 : UseCaseDef1 compartment stack ... </pre>	<pre> use case useCase1 : UseCaseDef1 { subject redefines s1 = mySubject; objective { doc /* '...' */ require requirement1; } } use case useCase1 : UseCaseDef1 { /* members */ } </pre>
Include Use Cases Compartment	 <pre> include use cases ^useCase2 : UseCaseDef2 (in : ParamDef1, out : ParamDef2) useCase1 : UseCase1 [1..*] ordered nonunique useCase3R : UseCaseDef3R redefines useCase3 useCase4R : UseCaseDef4R >> useCase4 :>> useCase5 useCase6S : UseCaseDef6S [m] subsets useCase6 useCase7S : UseCaseDef7S [m] >> useCase7 useCase8R = useCase8 useCase11 ... </pre>	<pre> { include use case useCase1 : UseCase1 [1..*] ordered nonunique; /* ... */ } </pre>
Includes Compartment	 <pre> includes ^useCase1 useCase2 useCase3 </pre>	

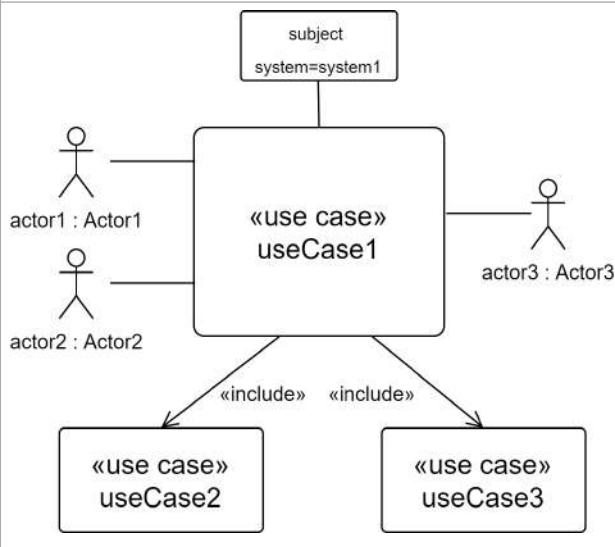Element	Graphical Notation	Textual Notation
Include Use Cases Compartment	<pre> <i>include use cases</i> ^useCase2 : UseCaseDef2 (in : ParamDef1, out : ParamDef2) useCase1 : UseCase1 [1..*] ordered nonunique useCase3R : UseCaseDef3R redefines useCase3 useCase4R : UseCaseDef4R >> useCase4 :>> useCase5 useCase6S : UseCaseDef6S [m] subsets useCase6 useCase7S : UseCaseDef7S [m] >> useCase7 useCase8R = useCase8 useCase11 ... </pre>	<pre> { include use case useCase1 : UseCase1 [1..*] ordered nonunique; /* ... */ } </pre>
Includes Compartment	 <pre> <i>includes</i> ^useCase1 useCase2 useCase3 </pre>	
Use Case Graphical Compartment	 <pre> subject system=system1 </pre> <pre> <i>use case</i> useCase1 { subject system = system1; actor actor1 : Actor1; actor actor2 : Actor2; actor actor3 : Actor3; include useCase2; include useCase3; } use case useCase2; use case useCase3; </pre>	

7.24.2 Use Case Definitions and Usages

A use case definition or usage is declared as a case definition or usage (see [7.21.2](#)), using the kind keyword **use case**. A use case usage must be defined by a single use case definition.

A use case definition will typically have an explicit declaration of its subject and one or more external actors (see see [7.21.2](#) on the declaration of subject and actor parameters in case definitions). The objective of the use case is for the subject to provide some result of value to one or more of the actors. The subject and the actors interact in order to achieve this objective, and the use case definition may specify this interaction as, for example, messages passing between them (see [7.13.6](#) on message declarations).

```

use case def 'Provide Transportation' {
  subject vehicle : Vehicle;

  actor driver : Person;

```

Element	Graphical Notation	Textual Notation
Use Case Graphical Compartment	<pre> graph TD subgraph useCase1 [use case useCase1] direction TB subgraph subject [subject system=system1] end actor1[actor1 : Actor1] --- useCase1 actor2[actor2 : Actor2] --- useCase1 actor3[actor3 : Actor3] --- useCase1 end useCase2[use case useCase2] useCase3[use case useCase3] useCase1 -- "include" --> useCase2 useCase1 -- "include" --> useCase3 </pre>	<pre> use case useCase1 { subject system = system1; actor actor1 : Actor1; actor actor2 : Actor2; actor actor3 : Actor3; include useCase2; include useCase3; } use case useCase2; use case useCase3; </pre>

7.24.2 Use Case Definitions and Usages

A use case definition or usage is declared as a case definition or usage (see [7.21.2](#)), using the kind keyword **use case**. A use case usage must be defined by a single use case definition.

A use case definition will typically have an explicit declaration of its subject and one or more external actors (see see [7.21.2](#) on the declaration of subject and actor parameters in case definitions). The objective of the use case is for the subject to provide some result of value to one or more of the actors. The subject and the actors interact in order to achieve this objective, and the use case definition may specify this interaction as, for example, messages passing between them (see [7.13.6](#) on message declarations).

```

use case def 'Provide Transportation' {
    subject vehicle : Vehicle;

    actor driver : Person;
    actor passengers : Person[0..4];
    actor environment : Environment;

    objective {
        doc
        /* Transport driver and passengers from starting location
         * to ending location.
         */
    }

    message of Enter from driver to vehicle;
    then message of Enter from passengers to vehicle;
    then message of Drive from vehicle to environment;
    then message of Exit from passengers to vehicle;
    then message of Exit from driver to vehicle;
}

```

The base use case definition and usage are **UseCase** and **useCases** from the **UseCases** library model (see [9.2.17](#))

```

actor passengers : Person[0..4];
actor environment : Environment;

objective {
    doc
        /* Transport driver and passengers from starting location
         * to ending location.
        */
}
}

message of Enter from driver to vehicle;
then message of Enter from passengers to vehicle;
then message of Drive from vehicle to environment;
then message of Exit from passengers to vehicle;
then message of Exit from driver to vehicle;
}

```

The base use case definition and usage are `UseCase` and `useCases` from the `UseCases` library model (see [9.2.17](#))

7.24.3 Include Use Case Usages

An *include* use case usage is declared as a use case usage (see [7.24.2](#)) using the kind keyword `include use case` instead of just `use case`. An include use case usage is a kind of perform action usage (see [7.16.6](#)) for which the action usage is a use case usage, known as the *included use case*. As for a perform action usage, the included use case is related to the include use usage by a *reference subsetting* relationship, specified textually using the keyword `references` or the symbol `::>`. Or, if the include use case usage has no such reference subsetting, then the included use case is the include use case usage itself.

An include use case usage may also be declared using just the keyword `include` instead of `include use case`. In this case, the declaration does not include either a name or short name. Instead, the included use case of the include use case usage is identified by giving a qualified name or feature chain immediately after the `include` keyword.

The subject of an included use case usage is bound by default to the subject of its containing use case definition or usage. However, the actor parameters of the included use case usages should be explicitly bound to appropriate actors of the containing use case, as necessary.

```

use case 'provide transportation' : 'Provide Transportation' {
    first start;

    then include 'enter vehicle' {
        actor :>> driver = 'provide transportation'::driver;
        actor :>> passengers = 'provide transportation'::passengers;
    }

    then include 'drive vehicle' {
        actor :>> driver = 'provide transportation'::driver;
        actor :>> environment = 'provide transportation'::environment;
    }

    then include 'exit vehicle' {
        actor :>> driver = 'provide transportation'::driver;
        actor :>> passengers = 'provide transportation'::passengers;
    }

    then done;
}

```

7.25 Views and Viewpoints

7.24.3 Include Use Case Usages

An *include* use case usage is declared as a use case usage (see [7.24.2](#)) using the kind keyword **include use case** instead of just **use case**. An include use case usage is a kind of perform action usage (see [7.16.6](#)) for which the action usage is a use case usage, known as the *included use case*. As for a perform action usage, the included use case is related to the include usage by a *reference subsetting* relationship, specified textually using the keyword **references** or the symbol `::>`. Or, if the include use case usage has no such reference subsetting, then the included use case is the include use case usage itself.

An include use case usage may also be declared using just the keyword **include** instead of **include use case**. In this case, the declaration does not include either a name or short name. Instead, the included use case of the include use case usage is identified by giving a qualified name or feature chain immediately after the **include** keyword.

The subject of an included use case usage is bound by default to the subject of its containing use case definition or usage. However, the actor parameters of the included use case usages should be explicitly bound to appropriate actors of the containing use case, as necessary.

```
use case 'provide transportation' : 'Provide Transportation' {
    first start;

    then include 'enter vehicle' {
        actor :>> driver = 'provide transportation'::driver;
        actor :>> passengers = 'provide transportation'::passengers;
    }

    then include 'drive vehicle' {
        actor :>> driver = 'provide transportation'::driver;
        actor :>> environment = 'provide transportation'::environment;
    }

    then include 'exit vehicle' {
        actor :>> driver = 'provide transportation'::driver;
        actor :>> passengers = 'provide transportation'::passengers;
    }

    then done;
}
```

7.25 Views and Viewpoints

7.25.1 Views and Viewpoints Overview

Metamodel references:

- *Textual notation*, [8.2.2.25](#)
- *Graphical notation*, [8.2.3.25](#)
- *Abstract syntax*, [8.3.25](#)
- *Semantics*, [8.4.21](#)

A *viewpoint definition* is a kind of requirement definition (see [7.20](#)) that frames the concerns of one or more stakeholders regarding information about a modeled system or domain of interest. A *viewpoint usage* is a requirement usage that is a usage of a viewpoint definition. The subject of a viewpoint is a *view* that is required to address the stakeholder concerns.

7.25.1 Views and Viewpoints Overview

Metamodel references:

- *Textual notation*, [8.2.2.25](#)
- *Graphical notation*, [8.2.3.25](#)
- *Abstract syntax*, [8.3.25](#)
- *Semantics*, [8.4.21](#)

A *viewpoint definition* is a kind of requirement definition (see [7.20](#)) that frames the concerns of one or more stakeholders regarding information about a modeled system or domain of interest. A *viewpoint usage* is a requirement usage that is a usage of a viewpoint definition. The subject of a viewpoint is a *view* that is required to address the stakeholder concerns.

A *view definition* is a kind of part definition (see [7.11](#)) that specifies how to create a view artifact to satisfy one or more viewpoints. A view artifact is a rendering of information that addresses some aspect of a system or domain of interest of concern to one or more stakeholders. A view definition can include *view conditions* to extract the relevant model content, and a *rendering* that specifies how the model content should be rendered in a view artifact. A view condition is specified using metadata, in the same way as for a filter condition on a package (see [7.5](#)).

A view definition and its rendering can preserve a correspondence between elements of the model and of the graphical and/or textual elements of the view artifact. The implementation of a rendering can follow this correspondence to propagate changes to a view artifact back to the model from which the view artifact was extracted and rendered.

A view usage is a kind of part usage (see [7.11](#)) that is a usage of a view definition. A view usage *exposes* a portion of a model, which is a kind of import (see [7.5](#)) without regard to visibility that provides the scope of application of the view conditions. The view rendering can then be applied to those exposed elements that meet all the view conditions to produce the view artifact. A view usage can add further view conditions to those inherited from its view definition, and it can specify a view rendering if one is not provided by its definition.

View usages can be nested and ordered within a composite view to generate composite view artifacts. The view usage also can contain further rendering specifications on the symbolic representation, style, and layout for a particular view. For example, a complex view definition with deeply nested structures can be rendered as a document, where each nested view usage corresponds to a section of a document, and the ordering represents the order of the sections within the document. Within each section of the document, the nested view usages can then specify the information that is rendered as a combination of text, graphical, and tabular information.

A *rendering definition* is a kind of part definition (see [7.11](#)) that specifies how a view artifact is to be rendered. A *rendering usage* is a kind of part usage that is a usage of a rendering definition. A rendering usage is used in a view definition or usage to specify the view rendering.

A *view definition* is a kind of part definition (see [7.11](#)) that specifies how to create a view artifact to satisfy one or more viewpoints. A view artifact is a rendering of information that addresses some aspect of a system or domain of interest of concern to one or more stakeholders. A view definition can include *view conditions* to extract the relevant model content, and a *rendering* that specifies how the model content should be rendered in a view artifact. A view condition is specified using metadata, in the same way as for a filter condition on a package (see [7.5](#)).

A view definition and its rendering can preserve a correspondence between elements of the model and of the graphical and/or textual elements of the view artifact. The implementation of a rendering can follow this correspondence to propagate changes to a view artifact back to the model from which the view artifact was extracted and rendered.

A view usage is a kind of part usage (see [7.11](#)) that is a usage of a view definition. A view usage *exposes* a portion of a model, which is a kind of import (see [7.5](#)) without regard to visibility that provides the scope of application of the view conditions. The view rendering can then be applied to those exposed elements that meet all the view conditions to produce the view artifact. A view usage can add further view conditions to those inherited from its view definition, and it can specify a view rendering if one is not provided by its definition.

View usages can be nested and ordered within a composite view to generate composite view artifacts. The view usage also can contain further rendering specifications on the symbolic representation, style, and layout for a particular view. For example, a complex view definition with deeply nested structures can be rendered as a document, where each nested view usage corresponds to a section of a document, and the ordering represents the order of the sections within the document. Within each section of the document, the nested view usages can then specify the information that is rendered as a combination of text, graphical, and tabular information.

A *rendering definition* is a kind of part definition (see [7.11](#)) that specifies how a view artifact is to be rendered. A *rendering usage* is a kind of part usage that is a usage of a rendering definition. A rendering usage is used in a view definition or usage to specify the view rendering.

Table 23. Views and Viewpoints – Representative Notation

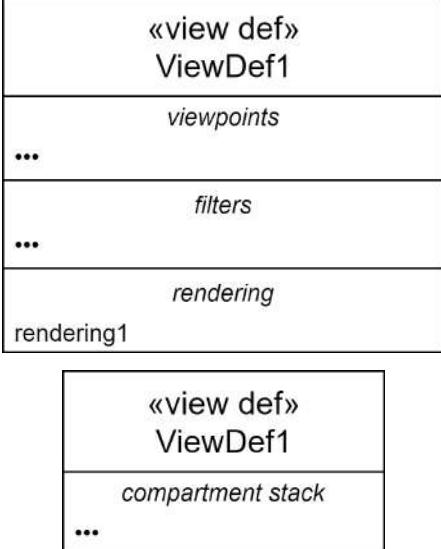
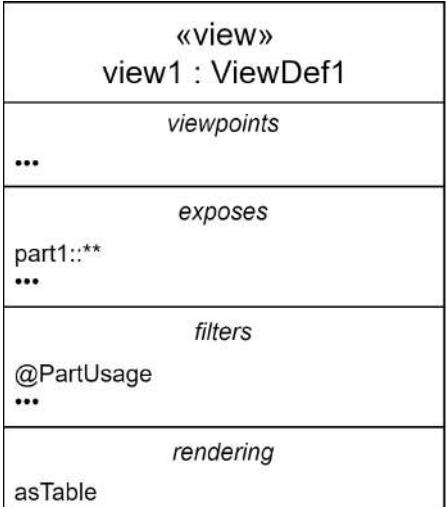


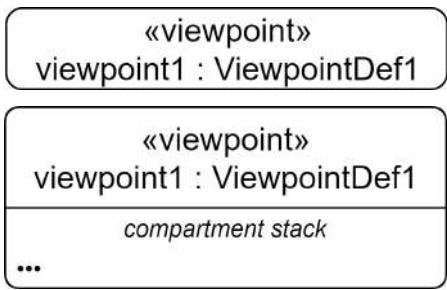


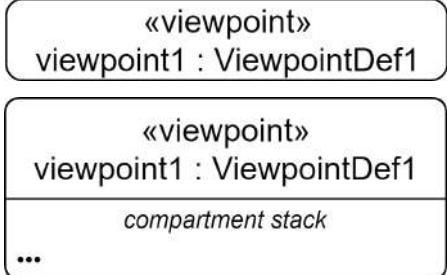

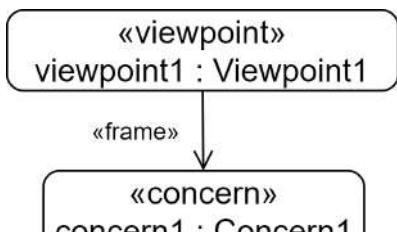

Element	Graphical Notation	Textual Notation
View Definition		<pre> view def ViewDef1 { satisfy viewpoint1; /* ... */ filter filterExpression1; /* ... */ render rendering1; } view def ViewDef1 { /* members */ } </pre>

Table 23. Views and Viewpoints – Representative Notation

Element	Graphical Notation	Textual Notation
View Definition	<pre> <<view def>> ViewDef1 viewpoints ... filters ... rendering rendering1 </pre> <pre> <<view def>> ViewDef1 compartment stack ... </pre>	<pre> view def ViewDef1 { satisfy viewpoint1; /* ... */ filter filterExpression1; /* ... */ render rendering1; } view def ViewDef1 { /* members */ } </pre>
View	<pre> <<view>> view1 : ViewDef1 viewpoints ... exposes part1::** ... filters @PartUsage ... rendering asTable </pre> <pre> <<view>> view1 : ViewDef1 compartment stack ... </pre>	<pre> view view1 : ViewDef1 { satisfy viewpoint1; expose part1::**; filter @PartUsage; render asTable; } view view1 : ViewDef1 { /* members */ } </pre>

Element	Graphical Notation	Textual Notation
View	 	<pre> view view1 : ViewDef1 { satisfy viewpoint1; expose part1::**; filter @PartUsage; render asTable; } view view1 : ViewDef1 { /* members */ } </pre>
Viewpoint Definition		<pre> viewpoint def ViewPointDef1; viewpoint def ViewPointDef1 { /* members */ } </pre>
Viewpoint		<pre> viewpoint viewpoint1 : ViewPointDef1; viewpoint viewpoint1 : ViewPointDef1 { /* members */ } </pre>
Expose		<pre> part part1 : Part1; view view1 : View1 { expose part1; } </pre>

Element	Graphical Notation	Textual Notation
Viewpoint Definition		<pre data-bbox="1067 304 1274 361">viewpoint def ViewPointDef1;</pre> <pre data-bbox="1067 388 1290 487">viewpoint def ViewPointDef1 { /* members */ }</pre>
Viewpoint		<pre data-bbox="1067 620 1388 677">viewpoint viewpoint1 : ViewPointDef1;</pre> <pre data-bbox="1067 705 1388 804">viewpoint viewpoint1 : ViewPointDef1 { /* members */ }</pre>
Expose		<pre data-bbox="1067 958 1356 1058">part part1 : Part1; view view1 : View1 { expose part1; }</pre>
Frame		<pre data-bbox="1067 1212 1388 1353">concern concern1 : Concern1; viewpoint viewpoint1 : Viewpoint1 { frame concern1; }</pre>
Frames Compartment		<pre data-bbox="1067 1486 1416 1670">{ frame concern concern1 : Concern1 [1..*] ordered nonunique; /* ... */ }</pre>

Element	Graphical Notation	Textual Notation
Frame	<pre> graph TD A["«viewpoint» viewpoint1 : Viewpoint1"] -- "«frame»" --> B["«concern» concern1 : Concern1"] </pre>	<pre> concern concern1 : Concern1; viewpoint viewpoint1 : Viewpoint1 { frame concern1; } </pre>
Frames Compartment	<pre> graph TD A["frames concern1 : Concern1 [1..*] ordered nonunique ..."] </pre>	<pre> { frame concern concern1 : Concern1 [1..*] ordered nonunique; /* ... */ } </pre>

7.25.2 View Definitions and Usages

A view definition or usage is declared as a kind of part definition or usage (see [7.11.2](#)), using the kind keyword **view**. A view usage must be defined by a single view.

A view definition includes *filter conditions* on what kinds of elements can be included in a view and identifies a *view rendering* that determines how the included elements are to be rendered. The filter conditions are specified in the same way as for packages (see [7.5.4](#)), by using the keyword **filter** followed by a Boolean-valued, model-level evaluable expression (see [KerML. 7.4.9]).

The view rendering is specified using the keyword **render** followed by a composite rendering usage declaration (see [7.25.4](#)). Alternatively, the keyword **render** may be followed by just a qualified name or feature chain identifying a rendering usage, which establishes a reference subsetting relationship between the view rendering usage and the identified rendering usage. The Views model in the Systems Model Library provides a limited number of basic standard renderings (see [9.2.18](#)).

```

view def 'Part Structure View' {
    import Views::*;

    filter @SysML::PartUsage;
    render asTreeDiagram;
}
  
```

A view usage inherits any filter conditions from its view definition and can declare addition conditions of its own. If a view usage does not declare a view rendering, then this will be inherited from the view definition, if it has one. If a view usage does declare a view rendering, then this will redefine the view rendering from its view definition (if any). Note that this means that the view rendering for a view usage must be consistent with the rendering specified in the view definition, though it can be more specialized.

In addition, a view usage can specify which elements are actually to be *exposed* by the view. This is done using expose relationships, which are a special kind of import relationships. Expose relationships are declared like import relationships (see [7.5.3](#)), but using the keyword **expose** instead of **import**. A view artifact is generated from a view usage by first importing the exposed elements based on the expose relationships of the view usage, filtering those

7.25.2 View Definitions and Usages

SYSML2 -212: Inconsistencies in the graphical notation for "expose"
SYSML2 -288: Missing word in description of view usage

A view definition or usage is declared as a kind of part definition or usage (see [7.11.2](#)), using the kind keyword **view**. A view usage must be defined by a single view definition.

A view definition includes *filter conditions* on what kinds of elements can be included in a view and identifies a *view rendering* that determines how the included elements are to be rendered. The filter conditions are specified in the same way as for packages (see [7.5.4](#)), by using the keyword **filter** followed by a Boolean-valued, model-level evaluable expression (see [KerML. 7.4.9]).

The view rendering is specified using the keyword **render** followed by a composite rendering usage declaration (see [7.25.4](#)). Alternatively, the keyword **render** may be followed by just a qualified name or feature chain identifying a rendering usage, which establishes a reference subsetting relationship between the view rendering usage and the identified rendering usage. The Views model in the Systems Model Library provides a limited number of basic standard renderings (see [9.2.18](#)).

```
view def 'Part Structure View' {
    import Views::*;

    filter @SysML::PartUsage;
    render asTreeDiagram;
}
```

A view usage inherits any filter conditions from its view definition and can declare addition conditions of its own. If a view usage does not declare a view rendering, then this will be inherited from the view definition, if it has one. If a view usage does declare a view rendering, then this will redefine the view rendering from its view definition (if any). Note that this means that the view rendering for a view usage must be consistent with the rendering specified in the view definition, though it can be more specialized.

In addition, a view usage can specify which elements are actually to be *exposed* by the view. This is done using expose relationships, which are a special kind of import relationships. Expose relationships are declared like import relationships (see [7.5.3](#)), but using the keyword **expose** instead of **import** and with no specification of visibility. A view artifact is generated from a view usage by first importing the exposed elements based on the expose relationships of the view usage, filtering those based on the filter conditions that are owned and inherited by the view usage, and then generating a rendered view artifact using the view rendering specified for the view usage. An expose relationship always has **protected** visibility, which means that the elements exposed by a view usage are *not* publicly visible outside the view usage, but they *are* visible within specializations of the view usage.

```
view 'vehicle parts view' : 'Part Structure View' {
    // Recursive import is useful for exposing elements
    // from hierarchical models.
    expose VehicleDesignModel::**;

    // This is an additional filter condition.
    filter not @SysML::ConnectionUsage;

    // This implicitly redefines the view rendering from
    // the view definition.
    render asMyTreeDiagram;
}
```

Since an expose relationship is a kind of import relationship, the filtered import notation can also be used with it (see [7.5.4](#)). This provides an alternate way to filter the elements exposed by a view usage.

based on the filter conditions that are owned and inherited by the view usage, and then generating a rendered view artifact using the view rendering specified for the view usage.

```
view 'vehicle parts view' : 'Part Structure View' {
    // Recursive import is useful for exposing elements
    // from hierarchical models.
    expose VehicleDesignModel::**;

    // This is an additional filter condition.
    filter not @SysML::ConnectionUsage;

    // This implicitly redefines the view rendering from
    // the view definition.
    render asMyTreeDiagram;
}
```

Since an expose relationship is a kind of import relationship, the filtered import notation can also be used with it (see [7.5.4](#)). This provides an alternate way to filter the elements exposed by a view usage.

```
view 'vehicle parts view' : 'Part Structure View' {
    // This applies the filter directly on the imported
    // elements from the expose relationships. (The filter
    // conditions from the view definition also still apply.)
    expose VehicleDesignModel::**[not @SysML::ConnectionUsage];

    render asMyTreeDiagram;
}
```

The base view definition and usage are `View` and `views` from the `Views` model library (see [9.2.18](#)).

7.25.3 Viewpoint Definitions and Usages

A viewpoint definition or usage is declared as a kind of requirement definition or usage (see [7.20.2](#)). A viewpoint usage must be defined by a single viewpoint definition.

The subject of a viewpoint definition or usage must be a view. Otherwise, a viewpoint is specified with assumed and required constraints, just like any requirement definition or usage. However, it is typical for a viewpoint definition to be structured as framing a set of stakeholder concerns (see [7.20.3](#)) regarding information about a modeled system or domain of interest. The viewpoint then models the requirement for view needed in order to address the framed concerns.

```
concern 'system breakdown' {
    stakeholder se : 'Systems Engineer';
    stakeholder ivv : 'IV&V';
}

concern 'modularity' {
    stakeholder se : 'Systems Engineer';
}

viewpoint def 'System Structure Perspective' {
    frame 'system breakdown';
    frame 'modularity';

    require constraint {
        doc
        /* A system structure view shall show the hierarchical
         * part decomposition of a system, starting with a
         * specified root part.
    }
}
```

```

view 'vehicle parts view' : 'Part Structure View' {
    // This applies the filter directly on the imported
    // elements from the expose relationships. (The filter
    // conditions from the view definition also still apply.)
    expose VehicleDesignModel::**[not @SysML::ConnectionUsage];

    render asMyTreeDiagram;
}

```

The base view definition and usage are `View` and `views` from the `Views` model library (see [9.2.18](#)).

7.25.3 Viewpoint Definitions and Usages

A viewpoint definition or usage is declared as a kind of requirement definition or usage (see [7.20.2](#)). A viewpoint usage must be defined by a single viewpoint definition.

The subject of a viewpoint definition or usage must be a view. Otherwise, a viewpoint is specified with assumed and required constraints, just like any requirement definition or usage. However, it is typical for a viewpoint definition to be structured as framing a set of stakeholder concerns (see [7.20.3](#)) regarding information about a modeled system or domain of interest. The viewpoint then models the requirement for view needed in order to address the framed concerns.

```

concern 'system breakdown' {
    stakeholder se : 'Systems Engineer';
    stakeholder ivv : 'IV&V';
}

concern 'modularity' {
    stakeholder se : 'Systems Engineer';
}

viewpoint def 'System Structure Perspective' {
    frame 'system breakdown';
    frame 'modularity';

    require constraint {
        doc
        /* A system structure view shall show the hierarchical
         * part decomposition of a system, starting with a
         * specified root part.
        */
    }
}

```

Since a viewpoint usage is a kind of requirement usage, a view usage can be declared to satisfy a viewpoint usage using a satisfy requirement usage (see [7.20.4](#)). However, as a short cut, any composite viewpoint usage nested in a view definition or usage is asserted to be satisfied by that view.

```

view def 'Part Structure View' {
    // This viewpoint is asserted to be satisfied by any
    // instance of the view definition.
    viewpoint vp : 'System Structure Perspective';

    //...
}

```

Alternatively, a satisfy requirement usage can be used explicitly between a viewpoint and a view. In particular, a satisfy requirement usage for a viewpoint that is nested in a view definition or usage will, by default, have the containing view as its satisfying feature (as described in general for nested satisfy requirement usages in [7.20.4](#)).

```

        */
    }
}

```

Since a viewpoint usage is a kind of requirement usage, a view usage can be declared to satisfy a viewpoint usage using a satisfy requirement usage (see [7.20.4](#)). However, as a short cut, any composite viewpoint usage nested in a view definition or usage is asserted to be satisfied by that view.

```

view def 'Part Structure View' {
    // This viewpoint is asserted to be satisfied by any
    // instance of the view definition.
    viewpoint vp : 'System Structure Perspective';

    //...
}

```

Alternatively, a satisfy requirement usage can be used explicitly between a viewpoint and a view. In particular, a satisfy requirement usage for a viewpoint that is nested in a view definition or usage will, by default, have the containing view as its satisfying feature (as described in general for nested satisfy requirement usages in [7.20.4](#)).

```

viewpoint 'vehicle structure perspective' :
    'System Structure Perspective' {
        subject : Vehicle;
    }
view 'vehicle parts view' : 'Part Structure View' {
    // This asserts that the give viewpoint is satisfied by the
    // 'vehicle parts view'.
    satisfy 'vehicle structure perspective';

    // ...
}

```

The base viewpoint definition and usage are `Viewpoint` and `viewpoints` from the `Views` library model (see [9.2.18](#)).

7.25.4 Rendering Definitions and Usages

A rendering definition or usage is declared as a kind of part definition or usage (see [7.11.2](#)), using the kind keyword `rendering`. A rendering usage must be defined by a single rendering definition.

While a rendering is intended to specify how a view is rendered as a view artifact, there are no specific constructs provided in SysML for specifying that. A rendering definition or usage can be defined similarly to any other part definition or usage, perhaps with nested subrenderings and references to related view usages. Nevertheless, conforming tools can provide libraries of rendering usages that reflect the capabilities they provide for rendering various kinds of views, which can then be identified in user models specifying those kinds of views. A small number of basic standard rendering usages are provided in the `Views` library model (see [9.2.18](#)).

The base rendering definition and usage are `Rendering` and `renderings` from the `Views` library model (see [9.2.18](#)).

7.25.5 Diagrams

A *diagram* is a view usage (see [7.25.2](#)) where the diagram name and type are the names of the view usage and view definition, respectively. A *view artifact* is an individual view usage where the model content is rendered in a compartment of the view usage. A view about a particular element can expose the element and be rendered as a compartment of the rendering of that element. For example, the attributes view of a part can be rendered in an

```

viewpoint 'vehicle structure perspective' :
  'System Structure Perspective' {
    subject : Vehicle;
  }
view 'vehicle parts view' : 'Part Structure View' {
  // This asserts that the give viewpoint is satisfied by the
  // 'vehicle parts view'.
  satisfy 'vehicle structure perspective';

  // ...
}

```

The base viewpoint definition and usage are `Viewpoint` and `viewpoints` from the `Views` library model (see [9.2.18](#)).

7.25.4 Rendering Definitions and Usages

A rendering definition or usage is declared as a kind of part definition or usage (see [7.11.2](#)), using the kind keyword `rendering`. A rendering usage must be defined by a single rendering definition.

While a rendering is intended to specify how a view is rendered as a view artifact, there are no specific constructs provided in SysML for specifying that. A rendering definition or usage can be defined similarly to any other part definition or usage, perhaps with nested subrenderings and references to related view usages. Nevertheless, conforming tools can provide libraries of rendering usages that reflect the capabilities they provide for rendering various kinds of views, which can then be identified in user models specifying those kinds of views. A small number of basic standard rendering usages are provided in the `Views` library model (see [9.2.18](#)).

The base rendering definition and usage are `Rendering` and `renderings` from the `Views` library model (see [9.2.18](#)).

7.25.5 Compartments and Diagrams as View Usages

SYSML2 -11: Missing explicit explanation of compartments as views

A `compartment` is a view usage (see [7.25.2](#)). For example, a part definition or part usage may contain an attributes compartment that lists its attributes (see, for example, [Table 9](#) in [7.11.2](#)). The compartment label is the view name. This view implicitly exposes the owning part and applies a filter expression to select the attributes of the part. The filtered contents are then rendered as a list of attributes in accordance with the textual rendering specified in the graphical notation (see [7.7.1](#) and [8.2.3.7](#)).

A graphical node symbol, such as for a part definition or usage, can have any number of compartments. Each compartment can be rendered using graphical notation in a graphical compartment or using textual notation in a textual compartment. For example, an interconnection view of a part can be rendered in a graphical compartment of the part symbol showing nested parts as nodes and connections as edges. The parts can also be rendered in a textual compartment labeled as parts and rendered as a list of parts.

A `diagram` is also a view usage. The diagram header is the name compartment of the view usage. As with any other view usage, the filtered contents of a diagram are rendered in a compartment. These contents are typically rendered as a graphical compartment that contains nodes and edges, but it may be a textual compartment as well. A graphical node within the graphical compartment of a diagram can also have compartments that are view usages as described above. This provides a mechanism to nest views within other views. Definition and usage nodes can include symbols on the boundary of the node to represent ports and parameters.

An edge in a graphical view can be attached via a dashed line to a node that elaborates the features of the edge. The attached node can also have graphical or textual compartments to show the internal structure of a connection, such as its decomposition into nested connections.

attributes compartment of the graphical symbol for the part (see, for example, [Table 9](#) in [7.11.2](#)). The rendered information can be in textual or graphical form.

The `StandardViewDefinitions` model in the Systems Model Library (see [9.2.19](#)) provides a small set of standard view definitions for typical kinds of diagrams. However, visualization of SysML models is not limited to these standard views. User models of view definitions and usages can be used to provide a wide range of user-defined visualizations.

Table 24. Diagrams – Representative Examples

Standard View	Diagram
General View	<pre>«view» view1 : ViewDef1</pre> <pre>«view» 'view1.1' «part def» Part1 «action def» Action1 parameters «view» 'view1.2' «part» part1 : Part1 «action» action1 parameters</pre>
Tree View	<pre>«view» vehiclePartsTree : PartsTree</pre> <pre>«part» vehicle_b : Vehicle «part» frontAxleAssembly «part» rearAxleAssembly «part» frontAxle : Axle «part» rearAxle : Axle «part» frontWheel : Wheel [2] «part» rearWheel : Wheel [2]</pre>
Nested View	<pre>«view» vehiclePartsInterconnection : PartsInterconnection</pre> <pre>«part» vehicle_b : Vehicle «part» frontAxleAssembly «part» rearAxleAssembly «part» frontAxle : Axle «part» rearAxle : Axle «part» frontWheel : Wheel [2] «part» rearWheel : Wheel [2]</pre>

A view usage may contain other view usages that each contain a name compartment and rendered contents in their respective compartment. This enables nesting of diagrams within other diagrams.

The StandardViewDefinitions package in the Systems Model Library (see [9.2.19](#)) provides a set of standard view definitions for typical kinds of diagrams, including the valid contents for the view. The standard views are then rendered as specified for the graphical notation, such as the General View in [8.2.3.5](#), the Interconnection View in [8.2.3.11](#), etc. (see [Table 33](#) in [9.2.19](#) for the complete list). However, visualization of SysML models is not limited to these standard views. User-defined view definitions and usages can be used to provide a wide range of views beyond the standard set.

Table 24. Diagrams – Representative Examples

Standard View	Diagram
General View	<pre> <<view>> view1 : ViewDef1 <<view>> view1_1 <<part def>> Part1 <<view>> view1_2 <<part>> part1 : Part1 <<action def>> Action1 parameters <<action>> action1 parameters </pre>
Tree View	<pre> <<view>> vehiclePartsTree : PartsTree <<part>> vehicle_b : Vehicle <<part>> frontAxleAssembly <<part>> frontAxle : Axle <<part>> frontWheel : Wheel [2] <<part>> rearAxleAssembly <<part>> rearAxle : Axle <<part>> rearWheel : Wheel [2] </pre>

Standard View	Diagram																																								
Table View Table View	<pre>«view» vehiclePartsTree : PartsTreeTable</pre> <table border="1"> <thead> <tr> <th>#</th> <th>Part-Level1</th> <th>Part-Level2</th> <th>Part-Level3</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>vehicle_b : Vehicle</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td></td> <td>rearAxleAssembly : AxleAssembly</td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td>rearAxle : Axle</td> </tr> <tr> <td>4</td> <td></td> <td></td> <td>rearWheel[1] : Wheel</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td>rearWheel[2] : Wheel</td> </tr> <tr> <td>6</td> <td></td> <td>frontAxleAssembly : AxleAssembly</td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td>frontAxle : Axle</td> </tr> <tr> <td>8</td> <td></td> <td></td> <td>frontWheel[1] : Wheel</td> </tr> <tr> <td>9</td> <td></td> <td></td> <td>frontWheel[2] : Wheel</td> </tr> </tbody> </table>	#	Part-Level1	Part-Level2	Part-Level3	1	vehicle_b : Vehicle			2		rearAxleAssembly : AxleAssembly		3			rearAxle : Axle	4			rearWheel[1] : Wheel	5			rearWheel[2] : Wheel	6		frontAxleAssembly : AxleAssembly		7			frontAxle : Axle	8			frontWheel[1] : Wheel	9			frontWheel[2] : Wheel
#	Part-Level1	Part-Level2	Part-Level3																																						
1	vehicle_b : Vehicle																																								
2		rearAxleAssembly : AxleAssembly																																							
3			rearAxle : Axle																																						
4			rearWheel[1] : Wheel																																						
5			rearWheel[2] : Wheel																																						
6		frontAxleAssembly : AxleAssembly																																							
7			frontAxle : Axle																																						
8			frontWheel[1] : Wheel																																						
9			frontWheel[2] : Wheel																																						
Matrix View Matrix View	<pre>«view» vehicleReqsSatisfaction : RequirementsSatisfactionMatrix</pre> <table border="1"> <thead> <tr> <th>#</th> <th>Specification-Level0</th> <th>Specification-Level1</th> <th>Specification-Level2</th> <th>Satisfied By</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>vehicleSpecification</td> <td></td> <td></td> <td>vehicle_b</td> </tr> <tr> <td>2</td> <td></td> <td>physicalReqt</td> <td>massReqt</td> <td>vehicle_b.mass</td> </tr> <tr> <td>3</td> <td></td> <td>performanceReqt</td> <td>fuelEconomyReqt</td> <td>vehicle_b.fuelEconomy</td> </tr> </tbody> </table>	#	Specification-Level0	Specification-Level1	Specification-Level2	Satisfied By	1	vehicleSpecification			vehicle_b	2		physicalReqt	massReqt	vehicle_b.mass	3		performanceReqt	fuelEconomyReqt	vehicle_b.fuelEconomy																				
#	Specification-Level0	Specification-Level1	Specification-Level2	Satisfied By																																					
1	vehicleSpecification			vehicle_b																																					
2		physicalReqt	massReqt	vehicle_b.mass																																					
3		performanceReqt	fuelEconomyReqt	vehicle_b.fuelEconomy																																					
Matrix View Matrix View	<pre>«view» vehicleLogicalToPhysicalAllocation : AllocationMatrix</pre> <table border="1"> <thead> <tr> <th>#</th> <th>Logical Component</th> <th colspan="2">Physical Component</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td>alternator</td> <td>engine</td> </tr> <tr> <td>1</td> <td>electricalGenerator</td> <td>↑</td> <td></td> </tr> <tr> <td>2</td> <td>torqueGenerator</td> <td></td> <td>↑</td> </tr> </tbody> </table>	#	Logical Component	Physical Component				alternator	engine	1	electricalGenerator	↑		2	torqueGenerator		↑																								
#	Logical Component	Physical Component																																							
		alternator	engine																																						
1	electricalGenerator	↑																																							
2	torqueGenerator		↑																																						

7.26 Metadata

7.26.1 Metadata Overview

Metamodel references:



- *Textual notation*, [8.2.2.26](#)
- *Graphical notation*, [8.2.3.26](#)
- *Abstract syntax*, [8.3.26](#)
- *Semantics*, [8.4.22](#)

A *metadata usage* is a kind of annotating element (see [7.4](#)) that allows for the definition of structured metadata with modeler-specified attributes. This may be used, for example, to add tool-specific information to a model that can be relevant to the function of various kinds of tooling that may use or process a model, or domain-specific information relevant to a certain project or organization. A metadata usage is defined by a single *metadata definition*. If the definition has no nested features itself, then the metadata usage simply acts as a user-defined syntactic tag on the annotated element. If the definition does have features, then the metadata usage must provide value bindings for all of them, specifying metadata for the annotated element.

Standard View	Diagram																																								
Nested View	<p>«view» vehiclePartsInterconnection : PartsInterconnection</p> <p>expose vehicle_b:** filter @SysML::PartUsage or @SysML::ConnectionUsage</p> <pre> graph TD vehicle_b["«part» vehicle_b : Vehicle"] --- frontAxleAssembly["«part» frontAxleAssembly"] vehicle_b --- rearAxleAssembly["«part» rearAxleAssembly"] frontAxleAssembly --- frontAxle["«part» frontAxle : Axle"] frontAxle --- frontWheel1["«part» frontWheel : Wheel [2]"] frontAxle --- frontWheel2["«part» frontWheel : Wheel [2]"] rearAxleAssembly --- rearAxle["«part» rearAxle : Axle"] rearAxle --- rearWheel1["«part» rearWheel : Wheel [2]"] rearAxle --- rearWheel2["«part» rearWheel : Wheel [2]"] </pre> <p>Date: 2024-06-05 Status: Draft Project: My Project XYZ Author: John Doe</p> <p>Note. The info compartment at the bottom-right corner is an example of rendering data structured by a metadata definition similar to:</p> <pre> metadata def ProjectInfo { attribute projectName : String; attribute modifiedAt : Time::Iso8601DateTime; attribute author : String; attribute status : StatusKind; } </pre>																																								
Table View	<p>«view» vehiclePartsTree : PartsTreeTable</p> <table border="1"> <thead> <tr> <th>#</th> <th>Part-Level1</th> <th>Part-Level2</th> <th>Part-Level3</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>vehicle_b : Vehicle</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td></td> <td>rearAxleAssembly : AxleAssembly</td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td>rearAxle : Axle</td> </tr> <tr> <td>4</td> <td></td> <td></td> <td>rearWheel[1] : Wheel</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td>rearWheel[2] : Wheel</td> </tr> <tr> <td>6</td> <td></td> <td>frontAxleAssembly : AxleAssembly</td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td>frontAxle : Axle</td> </tr> <tr> <td>8</td> <td></td> <td></td> <td>frontWheel[1] : Wheel</td> </tr> <tr> <td>9</td> <td></td> <td></td> <td>frontWheel[2] : Wheel</td> </tr> </tbody> </table>	#	Part-Level1	Part-Level2	Part-Level3	1	vehicle_b : Vehicle			2		rearAxleAssembly : AxleAssembly		3			rearAxle : Axle	4			rearWheel[1] : Wheel	5			rearWheel[2] : Wheel	6		frontAxleAssembly : AxleAssembly		7			frontAxle : Axle	8			frontWheel[1] : Wheel	9			frontWheel[2] : Wheel
#	Part-Level1	Part-Level2	Part-Level3																																						
1	vehicle_b : Vehicle																																								
2		rearAxleAssembly : AxleAssembly																																							
3			rearAxle : Axle																																						
4			rearWheel[1] : Wheel																																						
5			rearWheel[2] : Wheel																																						
6		frontAxleAssembly : AxleAssembly																																							
7			frontAxle : Axle																																						
8			frontWheel[1] : Wheel																																						
9			frontWheel[2] : Wheel																																						
Matrix View	<p>«view» vehicleReqtsSatisfaction : RequirementsSatisfactionMatrix</p> <table border="1"> <thead> <tr> <th>#</th> <th>Specification-Level0</th> <th>Specification-Level1</th> <th>Specification-Level2</th> <th>Satisfied By</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>vehicleSpecification</td> <td></td> <td></td> <td>vehicle_b</td> </tr> <tr> <td>2</td> <td></td> <td>physicalReqt</td> <td>massReqt</td> <td>vehicle_b.mass</td> </tr> <tr> <td>3</td> <td></td> <td>performanceReqt</td> <td>fuelEconomyReqt</td> <td>vehicle_b.fuelEconomy</td> </tr> </tbody> </table>	#	Specification-Level0	Specification-Level1	Specification-Level2	Satisfied By	1	vehicleSpecification			vehicle_b	2		physicalReqt	massReqt	vehicle_b.mass	3		performanceReqt	fuelEconomyReqt	vehicle_b.fuelEconomy																				
#	Specification-Level0	Specification-Level1	Specification-Level2	Satisfied By																																					
1	vehicleSpecification			vehicle_b																																					
2		physicalReqt	massReqt	vehicle_b.mass																																					
3		performanceReqt	fuelEconomyReqt	vehicle_b.fuelEconomy																																					
Matrix View	<p>«view» vehicleLogicalToPhysicalAllocation : AllocationMatrix</p> <table border="1"> <thead> <tr> <th>#</th> <th>Logical Component</th> <th colspan="2">Physical Component</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td>alternator</td> <td>engine</td> </tr> <tr> <td>1</td> <td>electricalGenerator</td> <td>↑</td> <td></td> </tr> <tr> <td>2</td> <td>torqueGenerator</td> <td></td> <td>↑</td> </tr> </tbody> </table>	#	Logical Component	Physical Component				alternator	engine	1	electricalGenerator	↑		2	torqueGenerator		↑																								
#	Logical Component	Physical Component																																							
		alternator	engine																																						
1	electricalGenerator	↑																																							
2	torqueGenerator		↑																																						

7.26 Metadata

Table 25. Metadata – Representative Notation

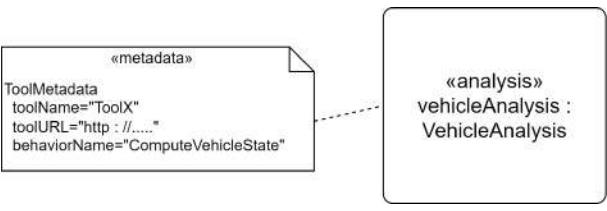Element	Graphical Notation	Textual Notation
Metadata	 <pre> «metadata» AttributeDef1 attribute1=value1 attribute2="value2" attribute3="http://....." </pre>	<pre> metadata MetadataDef1 { attribute1=value1; attribute2="value2"; attribute3="http://....." } or @MetadataDef1 { attribute1=value1; attribute2="value2"; attribute3="http://....." } </pre>
Annotation-Metadata	 <pre> «metadata» ToolMetadata toolName="ToolX" toolURL="http://....." behaviorName="ComputeVehicleState" «analysis» vehicleAnalysis : VehicleAnalysis </pre>	<pre> analysis vehicleAnalysis : VehicleAnalysis; metadata ToolMetadata about vehicleAnalysis { toolName="ToolX"; toolURL="http://....."; behaviorName= "ComputeVehicleState"; } or analysis vehicleAnalysis : VehicleAnalysis { metadata ToolMetadata { toolName="ToolX"; toolURL="http://....."; behaviorName= "ComputeVehicleState"; } } </pre>

7.26.1 Metadata Overview


SYSML2 -272: Typos in graphical metadata representative notation
SYSML2 -18: No support for metadata definition in graphical notation




Metamodel references:

- *Textual notation*, [8.2.2.26](#)
- *Graphical notation*, [8.2.3.26](#)
- *Abstract syntax*, [8.3.26](#)
- *Semantics*, [8.4.22](#)

A *metadata usage* is a kind of annotating element (see [7.4](#)) that allows for the definition of structured metadata with modeler-specified attributes. This may be used, for example, to add tool-specific information to a model that can be relevant to the function of various kinds of tooling that may use or process a model, or domain-specific information relevant to a certain project or organization. A metadata usage is defined by a single *metadata definition*. If the definition has no nested features itself, then the metadata usage simply acts as a user-defined syntactic tag on the annotated element. If the definition does have features, then the metadata usage must provide value bindings for all of them, specifying metadata for the annotated element.

Table 25. Metadata – Representative Notation

Element	Graphical Notation	Textual Notation
Metadata		<pre>metadata MetadataDef1 { attribute1=value1; attribute2="value2"; attribute3="http://...." } or @MetadataDef1 { attribute1=value1; attribute2="value2"; attribute3="http://...." }</pre>

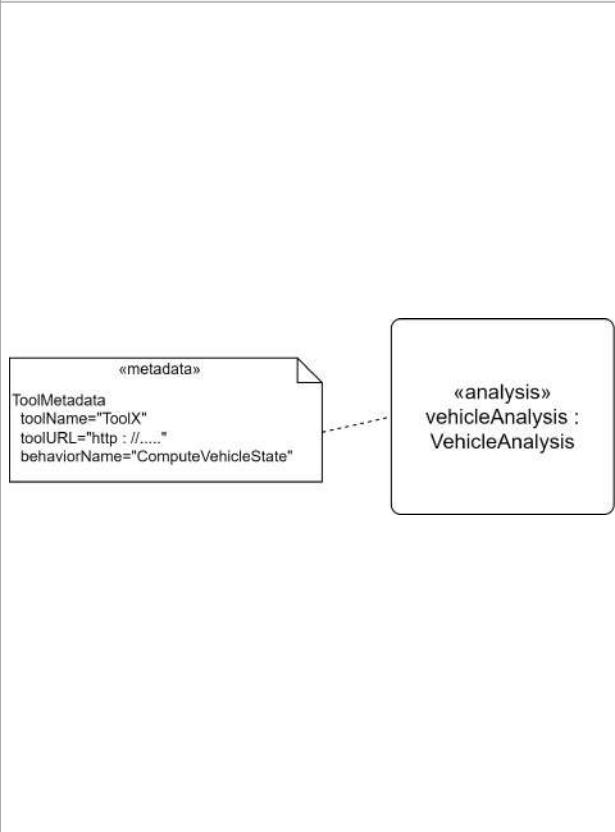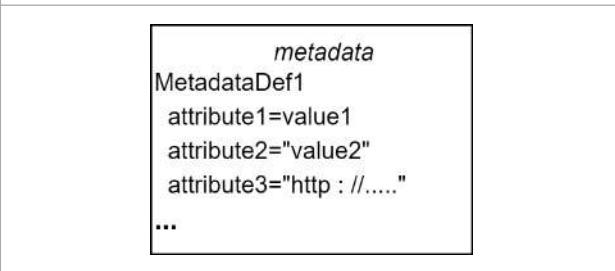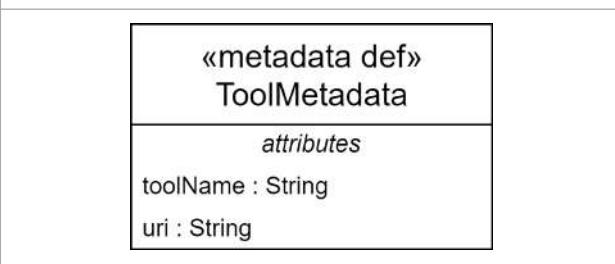Element	Graphical Notation	Textual Notation
Annotation-Metadata	 <p>The diagram shows a 'ToolMetadata' compartment containing the following text:</p> <pre>«metadata» ToolMetadata toolName="ToolX" toolURL="http://....." behaviorName="ComputeVehicleState"</pre> <p>A dashed line connects this compartment to another 'analysis' compartment, which contains the following text:</p> <pre>«analysis» vehicleAnalysis : VehicleAnalysis</pre>	<pre>analysis vehicleAnalysis : VehicleAnalysis; metadata ToolMetadata about vehicleAnalysis { toolName="ToolX"; toolURL="http://....."; behaviorName= "ComputeVehicleState"; } or analysis vehicleAnalysis : VehicleAnalysis { metadata ToolMetadata { toolName="ToolX"; toolURL="http://....."; behaviorName= "ComputeVehicleState"; } }</pre>
Metadata Compartment	 <p>The diagram shows a 'metadata' compartment containing the following text:</p> <pre>metadata MetadataDef1 attribute1=value1 attribute2="value2" attribute3="http://....." ...</pre>	<pre>metadata MetadataDef1 { attribute1=value1; attribute2="value2"; attribute3= "http://....."; }</pre>
Metadata Definition	 <p>The diagram shows a 'metadata def' compartment containing the following text:</p> <pre>«metadata def» ToolMetadata attributes toolName : String uri : String</pre>	<pre>metadata def ToolMetadata { attribute toolName : String; attribute uri : String; }</pre>

Element	Graphical Notation	Textual Notation
Metadata Compartment	<div style="border: 1px solid black; padding: 10px; width: fit-content;"> <p style="text-align: center;"><i>metadata</i></p> <p>AttributeDef1 attribute1=value1 attribute2="value2" attribute3="http://....." ...</p> </div>	<pre>metadata MetadataDef1 { attribute1=value1; attribute2="value2"; attribute3= "http://....."; }</pre>

7.26.2 Metadata Definitions and Usages

A metadata definition is declared like an item definition (see [7.10](#)), but using the keyword **metadata def**.

```
metadata def SecurityRelated;

metadata def ApprovalAnnotation {
    attribute approved : Boolean;
    attribute approver : String;
}
```

A metadata usage is declared like an item usage (see [7.10](#)) using the keyword **metadata** (or the symbol @) followed by the keyword **defined by** (or the symbol :) and the qualified name of exactly one metadata definition or KerML Metaclass (see [KerML], 7.4.13). If there is no declared name or short name, then the keyword **defined by** (or the symbol :) may also be omitted. In addition, one or more annotated elements can be identified for the metadata usage after the keyword **about**, indicating that the metadata usage has annotation relationships to each of the identified elements (see also [7.4](#) on annotation relationships).

```
metadata securityDesignAnnotation : SecurityRelated
    about SecurityRequirements, SecurityDesign;
```

If the specified metadata definition (or KerML metaclass) has features, then a body must be given for the metadata usage that declares reference usages (see [7.6](#)) that redefine each of the features of the definition and binds them to the result of model-level evaluable expressions (see [KerML, 7.4.9]). These nested reference usages of a metadata usage must always have the same names as the names of the features of its metadata definition, so the shorthand prefix redefines notation (see [7.6](#)) is always used

```
metadata ApprovalAnnotation about Design {
    ref :>> approved = true;
    ref :>> approver = "John Smith";
}
```

The keyword **ref** and/or **redefines** (or the equivalent symbol :>>) may be omitted in the declaration of a feature of a metadata usage.

```
metadata ApprovalAnnotation about Design {
    approved = true;
    approver = "John Smith";
}
```

If the metadata usage is an owned member of a namespace (see [7.5](#)), then the explicit identification of annotated elements can be omitted, in which case the annotated element shall be implicitly the containing namespace.

Element	Graphical Notation	Textual Notation
SemanticMetadata Definition	<pre> «state» 'failure modes' [*] «metadata def» <fm> 'failure mode' :> SemanticMetadata features :>> baseType = 'failure modes' meta SysML::StateUsage :> annotatedElement : SysML::StateDefinition :> annotatedElement : SysML::StateUsage </pre>	<pre> state 'failure modes' [*]; metadata def <fm> 'failure mode' :> SemanticMetadata { :>> baseType = 'failure modes' meta SysML::StateUsage; :> annotatedElement : SysML::StateDefinition; :> annotatedElement : SysML::StateUsage; } </pre>

7.26.2 Metadata Definitions and Usages

A metadata definition is declared like an item definition (see [7.10](#)), but using the keyword **metadata def**.

```

metadata def SecurityRelated;

metadata def ApprovalAnnotation {
  attribute approved : Boolean;
  attribute approver : String;
}
  
```

A metadata usage is declared like an item usage (see [7.10](#)) using the keyword **metadata** (or the symbol @) followed by the keyword **defined by** (or the symbol :) and the qualified name of exactly one metadata definition or KerML Metaclass (see [KerML], 7.4.13). If there is no declared name or short name, then the keyword **defined by** (or the symbol :) may also be omitted. In addition, one or more annotated elements can be identified for the metadata usage after the keyword **about**, indicating that the metadata usage has annotation relationships to each of the identified elements (see also [7.4](#) on annotation relationships).

```

metadata securityDesignAnnotation : SecurityRelated
  about SecurityRequirements, SecurityDesign;
  
```

If the specified metadata definition (or KerML metaclass) has features, then a body must be given for the metadata usage that declares reference usages (see [7.6](#)) that redefine each of the features of the definition and binds them to the result of model-level evaluable expressions (see [KerML, 7.4.9]). These nested reference usages of a metadata usage must always have the same names as the names of the features of its metadata definition, so the shorthand prefix **redefines** notation (see [7.6](#)) is always used

```

metadata ApprovalAnnotation about Design {
  ref :>> approved = true;
  ref :>> approver = "John Smith";
}
  
```

The keyword **ref** and/or **redefines** (or the equivalent symbol :>>) may be omitted in the declaration of a feature of a metadata usage.

```

metadata ApprovalAnnotation about Design {
  approved = true;
  approver = "John Smith";
}
  
```

```

part def Design {
    // This metadata usage is implicitly about the part def Design.
    @ApprovalAnnotation {
        approved = true;
        approver = "John Smith";
    }
}

```

The base metadata definition and usage are `MetadataItem` and `metadataItems` from the `Metadata` library (see [9.2.20](#)). The base metadata definition `MetadataItem` specializes the KerML metaclass `Metaobject`, and it inherits the feature `annotatedElement` from `Metaobject`, which is typed by the reflected KerML metaclass `KerML::Element` (see [KerML, 9.2.17]). When a metadata usage is declared, its inherited `annotatedElement` feature is implicitly bound to reflective instances representing its annotated elements.

```

metadata securityDesignAnnotation : SecurityRelated
    about SecurityRequirements, SecurityDesign {
        // The feature "annotatedElement" is implicitly bound to the list
        // of SecurityRequirements meta KerML::Element and
        // SecurityDesign meta KerML::Element.
    }
}

```

A metadata definition can restrict the kind of elements that it can be applied to by subsetting `Metaobject::annotatedElement` and restricting its type. If a metadata usage then inherits one or more concrete features that directly or indirectly subset `annotatedElement`, any annotated element of the metadata usage must conform to the type of at least one of these features. The restricted type should be one of the reflective metaclasses from the KerML (see [KerML, 9.2.17]) or SysML (see [9.2.21](#)) abstract syntax models.

```

metadata def CommandMetadata {
    // A metadata usage of this definition may annotate
    // an ActionDefinition or an ActionUsage.
    :> annotatedElement : SysML::ActionDefinition;
    :> annotatedElement : SysML::ActionUsage;
}

action def Save specializes UserAction {
    @CommandMetadata; // This is valid.
    redefine action doAction {
        @CommandMetadata; // This is valid.
    }
}
item def Options {
    @CommandMetadata; // This is INVALID.
}

```

7.26.3 Semantic Metadata

If the metadata definition of a metadata usage is a direct or indirect specialization of KerML metaclass `SemanticMetadata` from the `Metaobjects` model in the Kernel Semantic Library (see [KerML, 9.2.16]), then the annotated elements of the metadata usage must all be types (e.g., definitions or usages), and the inherited feature `SemanticMetadata::baseType` must be bound to a value of type `KerML::Type` (which is a generalization of `SysML::Definition` and `SysML::Usage`). Each annotated element is then considered to implicitly specialize a definition or usage determined from the `baseType` value as follows:

- If the annotated type is a definition and the `baseType` is a definition (or KerML classifier), then the annotated definition implicitly subclasses the `baseType`.

If the metadata usage is an owned member of a namespace (see [7.5](#)), then the explicit identification of annotated elements can be omitted, in which case the annotated element shall be implicitly the containing namespace.

```
part def Design {
    // This metadata usage is implicitly about the part def Design.
    @ApprovalAnnotation {
        approved = true;
        approver = "John Smith";
    }
}
```

The base metadata definition and usage are `MetadataItem` and `metadataItems` from the `Metadata` library (see [9.2.20](#)). The base metadata definition `MetadataItem` specializes the KerML metaclass `Metaobject`, and it inherits the feature `annotatedElement` from `Metaobject`, which is typed by the reflected KerML metaclass `KerML::Element` (see [KerML, 9.2.17]). When a metadata usage is declared, its inherited `annotatedElement` feature is implicitly bound to reflective instances representing its annotated elements.

```
metadata securityDesignAnnotation : SecurityRelated
    about SecurityRequirements, SecurityDesign {
        // The feature "annotatedElement" is implicitly bound to the list
        // of SecurityRequirements meta KerML::Element and
        // SecurityDesign meta KerML::Element.
    }
```

A metadata definition can restrict the kind of elements that it can be applied to by subsetting `Metaobject::annotatedElement` and restricting its type. If a metadata usage then inherits one or more concrete features that directly or indirectly subset `annotatedElement`, any annotated element of the metadata usage must conform to the type of at least one of these features. The restricted type should be one of the reflective metaclasses from the KerML (see [KerML, 9.2.17]) or SysML (see [9.2.21](#)) abstract syntax models.

```
metadata def CommandMetadata {
    // A metadata usage of this definition may annotate
    // an ActionDefinition or an ActionUsage.
    :> annotatedElement : SysML::ActionDefinition;
    :> annotatedElement : SysML::ActionUsage;
}

action def Save specializes UserAction {
    @CommandMetadata; // This is valid.
    redefine action doAction {
        @CommandMetadata; // This is valid.
    }
}
item def Options {
    @CommandMetadata; // This is INVALID.
}
```

7.26.3 Semantic Metadata

If the metadata definition of a metadata usage is a direct or indirect specialization of KerML metaclass `SemanticMetadata` from the `Metaobjects` model in the Kernel Semantic Library (see [KerML, 9.2.16]), then the annotated elements of the metadata usage must all be types (e.g., definitions or usages), and the inherited feature `SemanticMetadata::baseType` must be bound to a value of type `KerML::Type` (which is a generalization of `SysML::Definition` and `SysML::Usage`). Each annotated element is then considered to implicitly specialize a definition or usage determined from the `baseType` value as follows:

- If the annotated type is a definition and the `baseType` is a definition (or KerML classifier), then the annotated definition implicitly subclasses the `baseType`.

- If the annotated type is a definition and the `baseType` is a usage (or KerML feature), then the annotated definition implicitly subclassifies each definition (or type) of the `baseType`.
- If the annotated type is a usage and the `baseType` is a usage (or KerML feature), then the annotated usage implicitly subsets the `baseType`.
- Otherwise no implicit specialization is added.

When evaluated in a model-level evaluable expression, the meta-cast operator `meta` (see [KerML, 7.4.9.2]) may be used to cast a type element referenced as its first operand to the actual reflective metadata definition (or KerML metaclass) value for the type, which may then be bound to the `baseType` feature of `SemanticMetadata`.

```

action def UserAction;
action userActions : UserAction[*] nonunique;

metadata def CommandMetadata :> SemanticMetadata {
    // The meta-cast operation "userAction meta SysML::Usage" has
    // type Usage, which conforms to the type KermL::Type of baseType.
    // Since userActions is an ActionUsage, the expression evaluates
    // at model level to a value of type SysML::ActionUsage.
    :>> baseType = userActions meta SysML::Usage;
}

// Save implicitly subclassifies UserAction
// (which is the definition of userActions).
action def Save {
    @CommandMetadata;
}

// previousAction implicitly subsets userActions.
action previousAction[1] {
    @CommandMetadata;
}

```

7.26.4 User-Defined Keywords

A *user-defined keyword* is the (possibly qualified) name (or short name) of a metadata definition (or KerML metaclass) preceded by the symbol `#`. Such a keyword can be used in package, dependency, definition and usage declarations. The user-defined keyword is placed immediately before the language-defined (reserved) keyword for the declaration and specifies a metadata annotation of the declared element. If the named metadata definition is a kind of `SemanticMetadata`, then the implicit specialization rules given in [7.26.3](#) for semantic metadata also apply.

```

occurrence def Situation;
occurrence situations : Situation[0..*] nonunique;

// It is often convenient to use a lower-case initial name or
// short name for semantic metadata intended to be used as a keyword.
metadata def <situation> SituationMetadata :> SemanticMetadata {
    :>> baseType = situations meta SysML::Usage;
}

// Failure is an OccurrenceDefinition that implicitly subclassifies Situation.
#situation occurrence def Failure;

// batteryLow is an OccurrenceUsage that implicitly subsets situations.
#situation occurrence batteryLow;

```

In addition, a user-defined keyword for semantic metadata may also be used to declare a definition or usage without using any language-defined keyword.

- If the annotated type is a definition and the `baseType` is a usage (or KerML feature), then the annotated definition implicitly subclassifies each definition (or type) of the `baseType`.
- If the annotated type is a usage and the `baseType` is a usage (or KerML feature), then the annotated usage implicitly subsets the `baseType`.
- Otherwise no implicit specialization is added.

When evaluated in a model-level evaluable expression, the meta-cast operator `meta` (see [KerML, 7.4.9.2]) may be used to cast a type element referenced as its first operand to the actual reflective metadata definition (or KerML metaclass) value for the type, which may then be bound to the `baseType` feature of `SemanticMetadata`.

```

action def UserAction;
action userActions : UserAction[*] nonunique;

metadata def CommandMetadata :> SemanticMetadata {
    // The meta-cast operation "userAction meta SysML::Usage" has
    // type Usage, which conforms to the type KermL::Type of baseType.
    // Since userActions is an ActionUsage, the expression evaluates
    // at model level to a value of type SysML::ActionUsage.
    :>> baseType = userActions meta SysML::Usage;
}

// Save implicitly subclassifies UserAction
// (which is the definition of userActions).
action def Save {
    @CommandMetadata;
}

// previousAction implicitly subsets userActions.
action previousAction[1] {
    @CommandMetadata;
}

```

7.26.4 User-Defined Keywords

A *user-defined keyword* is the (possibly qualified) name (or short name) of a metadata definition (or KerML metaclass) preceded by the symbol `#`. Such a keyword can be used in package, dependency, definition and usage declarations. The user-defined keyword is placed immediately before the language-defined (reserved) keyword for the declaration and specifies a metadata annotation of the declared element. If the named metadata definition is a kind of `SemanticMetadata`, then the implicit specialization rules given in [7.26.3](#) for semantic metadata also apply.

```

occurrence def Situation;
occurrence situations : Situation[0..*] nonunique;

// It is often convenient to use a lower-case initial name or
// short name for semantic metadata intended to be used as a keyword.
metadata def <situation> SituationMetadata :> SemanticMetadata {
    :>> baseType = situations meta SysML::Usage;
}

// Failure is an OccurrenceDefinition that implicitly subclassifies Situation.
#situation occurrence def Failure;

// batteryLow is an OccurrenceUsage that implicitly subsets situations.
#situation occurrence batteryLow;

```

In addition, a user-defined keyword for semantic metadata may also be used to declare a definition or usage without using any language-defined keyword.

```
// Failure is a definition that implicitly subclasses Situation.  
#situation def Failure;  
  
// batteryLow is a usage implicitly subsets situations.  
#situation batteryLow;
```

It is also possible to include more than one user defined-keyword in a declaration.

```
#SecurityRelated #situation def Vulnerability;
```

```
// Failure is a definition that implicitly subclasses Situation.  
#situation def Failure;  
  
// batteryLow is a usage implicitly subsets situations.  
#situation batteryLow;
```

It is also possible to include more than one user defined-keyword in a declaration.

```
#SecurityRelated #situation def Vulnerability;
```

8 Metamodel

8.1 Metamodel Overview

The SysML metamodel extends the KerML metamodel as specified in the KerML specification [KerML].

- The SysML concrete syntax includes a textual notation (see [8.2.2](#)), which is generally distinct from that of KerML, though consistent on common elements (such as packages and expressions), and a complete graphical notation (see [8.2.3](#)).
- The SysML abstract syntax (see [8.3](#)) imports the KerML abstract syntax, reusing some KerML metaclasses directly, and further specializing most other KerML metaclasses.
- The SysML semantics (see [8.4](#)) are defined by relating the SysML abstract syntax to the semantic models in the Systems Model Library (see [Clause 9](#)), which is based on the Kernel Model Library from KerML, and providing syntactic transformations from SysML models to syntactically equivalent KerML models (including elements that are otherwise implicit in the SysML abstract syntax).

Throughout this clause, the names of elements from the SysML (and KerML) abstract syntax models appear in a "code" font. Further:

1. Names of metaclasses appear exactly as in the abstract syntax, including capitalization, except possibly with added pluralization. When used as English common nouns, e.g., "a Usage", "multiple Subsettings", they refer to instances of the metaclass. E.g., "Usages can be nested in other Usages" refers to instances of the metaclass `Usage` that reside in models. This can be modified with the term "metaclass" as necessary to refer to the metaclass itself instead of its instances, e.g., "The `Usage` metaclass is contained in the `DefinitionAndUsage` package."
2. Names of properties of metaclasses, when used as English common nouns, e.g., "an ownedUsage", "multiple nestedActions", refer to values of the properties. This can be modified using the term "metaproPERTY" as necessary to refer to the metaproPERTY itself instead of its values, e.g., "The `ownedUsage` metaproPERTY is contained in the `DefinitionAndUsage` package."

Similar stylistic conventions apply to text about SysML (and KerML) models, except that an "*italic code*" front is used.

1. Convention 1 above applies to SysML Definitions (e.g., `Action`), using "definition" (or a more specialized term) instead of "metaclass" (e.g., "the action definition `Action`").
2. Convention 2 above applies to SysML Usages (e.g., `actions`), using "usage" (or a more specialized term) instead of "metaproPERTY" (e.g., "the action usage `actions`").

8.2 Concrete Syntax

8.2.1 Concrete Syntax Overview

Concrete syntax specifies the how the language appears to modelers. They construct and review models shown according to the concrete syntax. The SysML concrete syntax includes both a textual notation, described in [8.2.2](#), and a graphical notation, described in [8.2.3](#). Various views of a SysML model may be rendered entirely using the textual notation, entirely using the graphical notation, or using a combination of the two.

8.2.2 Textual Notation

8.2.2.1 Textual Notation Overview

8 Metamodel

8.1 Metamodel Overview

The SysML metamodel extends the KerML metamodel as specified in the KerML specification [KerML].

- The SysML concrete syntax includes a textual notation (see [8.2.2](#)), which is generally distinct from that of KerML, though consistent on common elements (such as packages and expressions), and a complete graphical notation (see [8.2.3](#)).
- The SysML abstract syntax (see [8.3](#)) imports the KerML abstract syntax, reusing some KerML metaclasses directly, and further specializing most other KerML metaclasses.
- The SysML semantics (see [8.4](#)) are defined by relating the SysML abstract syntax to the semantic models in the Systems Model Library (see [Clause 9](#)), which is based on the Kernel Model Library from KerML, and providing syntactic transformations from SysML models to syntactically equivalent KerML models (including elements that are otherwise implicit in the SysML abstract syntax).

Throughout this clause, the names of elements from the SysML (and KerML) abstract syntax models appear in a "code" font. Further:

1. Names of metaclasses appear exactly as in the abstract syntax, including capitalization, except possibly with added pluralization. When used as English common nouns, e.g., "a Usage", "multiple Subsettings", they refer to instances of the metaclass. E.g., "Usages can be nested in other Usages" refers to instances of the metaclass `Usage` that reside in models. This can be modified with the term "metaclass" as necessary to refer to the metaclass itself instead of its instances, e.g., "The `Usage` metaclass is contained in the `DefinitionAndUsage` package."
2. Names of properties of metaclasses, when used as English common nouns, e.g., "an ownedUsage", "multiple nestedActions", refer to values of the properties. This can be modified using the term "metaproPERTY" as necessary to refer to the metaproPERTY itself instead of its values, e.g., "The `ownedUsage` metaproPERTY is contained in the `DefinitionAndUsage` package."

Similar stylistic conventions apply to text about SysML (and KerML) models, except that an "*italic code*" front is used.

1. Convention 1 above applies to SysML Definitions (e.g., `Action`), using "definition" (or a more specialized term) instead of "metaclass" (e.g., "the action definition `Action`").
2. Convention 2 above applies to SysML Usages (e.g., `actions`), using "usage" (or a more specialized term) instead of "metaproPERTY" (e.g., "the action usage `actions`").

8.2 Concrete Syntax

8.2.1 Concrete Syntax Overview

Concrete syntax specifies the how the language appears to modelers. They construct and review models shown according to the concrete syntax. The SysML concrete syntax includes both a textual notation, described in [8.2.2](#), and a graphical notation, described in [8.2.3](#). Various views of a SysML model may be rendered entirely using the textual notation, entirely using the graphical notation, or using a combination of the two.

8.2.2 Textual Notation

8.2.2.1 Textual Notation Overview

8.2.2.1.1 EBNF Conventions

The *grammar* definition for the SysML textual concrete syntax defines how lexical tokens for an input text are grouped in order to construct an abstract syntax representation of a model (see [8.3](#)). The concrete syntax grammar

8.2.2.1.1 EBNF Conventions

The *grammar* definition for the SysML textual concrete syntax defines how lexical tokens for an input text are grouped in order to construct an abstract syntax representation of a model (see [8.3](#)). The concrete syntax grammar definition uses an Extended Backus Naur Form (EBNF) notation (see [Table 26](#)) that includes further notations to describe how the concrete syntax maps to the abstract syntax (see [Table 27](#)).

Productions in the grammar formally result in the synthesis of classes in the abstract syntax and the population of their properties (see [Table 28](#)). Productions may also be parameterized, with the parameters typed by abstract syntax classes. Information passed in parameters during parsing allows a production to update the properties of the provided abstract syntax elements as a side-effect of the parsing it specifies. Some productions only update the properties of parameters, without synthesizing any new abstract syntax element.

Table 26. EBNF Notation Conventions

Lexical element	LEXICAL
Terminal element	'terminal'
Non-terminal element	NonterminalElement
Sequential elements	Element1 Element2
Alternative elements	Element1 Element2
Optional elements (zero or one)	Element ?
Repeated elements (zero or more)	Element *
Repeated elements (one or more)	Element +
Grouping	(Elements ...)

Table 27. Abstract Syntax Synthesis Notation

Property assignment	p = Element	Assign the result of parsing the concrete syntax Element to abstract syntax property p.
List property construction	p += Element	Add the result of parsing the concrete syntax Element to the abstract syntax list property p.
Boolean property assignment	p ?= Element	If the concrete syntax Element is parsed, then set the abstract Boolean property p to true.
Non-parsing assignment	{ p = value } { p += value }	Assign (or add) the given value to the abstract syntax property p, without parsing any input. The value may be a literal or a reference to another abstract syntax property. The symbol "this" refers to the element being synthesized.
Name resolution	[QualifiedName]	Parse a QualifiedName, then resolve that name to an Element reference for use as a value in an assignment as above.

definition uses an Extended Backus Naur Form (EBNF) notation (see [Table 26](#)) that includes further notations to describe how the concrete syntax maps to the abstract syntax (see [Table 27](#)).

Productions in the grammar formally result in the synthesis of classes in the abstract syntax and the population of their properties (see [Table 28](#)). Productions may also be parameterized, with the parameters typed by abstract syntax classes. Information passed in parameters during parsing allows a production to update the properties of the provided abstract syntax elements as a side-effect of the parsing it specifies. Some productions only update the properties of parameters, without synthesizing any new abstract syntax element.

Table 26. EBNF Notation Conventions

Lexical element	LEXICAL
Terminal element	'terminal'
Non-terminal element	NonterminalElement
Sequential elements	Element1 Element2
Alternative elements	Element1 Element2
Optional elements (zero or one)	Element ?
Repeated elements (zero or more)	Element *
Repeated elements (one or more)	Element +
Grouping	(Elements ...)

Table 27. Abstract Syntax Synthesis Notation

Property assignment	p = Element	Assign the result of parsing the concrete syntax Element to abstract syntax property p.
List property construction	p += Element	Add the result of parsing the concrete syntax Element to the abstract syntax list property p.
Boolean property assignment	p ?= Element	If the concrete syntax Element is parsed, then set the abstract Boolean property p to true.
Non-parsing assignment	{ p = value } { p += value }	Assign (or add) the given value to the abstract syntax property p, without parsing any input. The value may be a literal or a reference to another abstract syntax property. The symbol "this" refers to the element being synthesized.
Name resolution	[QualifiedName]	Parse a QualifiedName, then resolve that name to an Element reference for use as a value in an assignment as above.

Table 28. Grammar Production Definitions

Production definition	NonterminalElement : AbstractSyntaxElement = ...	Define a production for the NonterminalElement that synthesizes the AbstractSyntaxElement. If the NonterminalElement has the same name as the AbstractSyntaxElement, then ":" AbstractSyntaxElement" may be omitted.
Parameterized production definition	NonterminalElement (p : Type) : AbstractSyntaxElement = ...	Define a production for the NonterminalElement that synthesizes the AbstractSyntaxElement, with a parameter named p, whose type is an abstract syntax class.

8.2.2.1.2 Lexical Structure

The lexical structure of the SysML textual notation is identical to that of the KerML textual notation [KerML], except for the following two points.

1. The reserved keywords of SysML are the following.

```
about abstract accept action actor after alias all allocate allocation
analysis and as assign assert assoc assume at attribute bind binding block
by calc case comment concern connect connection constraint decide def
default defined dependency derived do doc else end entry enum event exhibit
exit expose filter first flow for fork frame from hastype if implies import
in include individual inout interface istype item join language loop merge
message metadata nonunique not objective occurrence of or ordered out
package parallel part perform port private protected public readonly
redefines ref references render rendering rep require requirement return
satisfy send snapshot specializes stakeholder state subject subsets
succession then timeslice to transition until use variant variation
verification verify via viewpoint when while xor
```

2. The set of special lexical terminals matching either certain keywords or their symbolic equivalents are the following in SysML.

```
DEFINED_BY = ':' | 'defined' 'by'
SPECIALIZES = ':>' | 'specializes'
SUBSETS = ':>' | 'subsets'
REFERENCES = '::>' | 'references'
REDEFINES = ':>>' | 'redefines'
```

8.2.2.2 Elements and Relationships Textual Notation

```
Identification : Element =
( '<' declaredShortName = NAME '>' )?
( declaredName = NAME )?
```

Table 28. Grammar Production Definitions

Production definition	NonterminalElement : AbstractSyntaxElement = ...	Define a production for the NonterminalElement that synthesizes the AbstractSyntaxElement. If the NonterminalElement has the same name as the AbstractSyntaxElement, then ": AbstractSyntaxElement" may be omitted.
Parameterized production definition	NonterminalElement (p : Type) : AbstractSyntaxElement = ...	Define a production for the NonterminalElement that synthesizes the AbstractSyntaxElement, with a parameter named p, whose type is an abstract syntax class.

8.2.2.1.2 Lexical Structure

SYSML2 -202: Missing guidance on highlighting keywords

SYSML2 -44: Transformation of UML4SysML::ActivityFinalNode is not specified yet

The lexical structure of the SysML textual notation is identical to that of the KerML textual notation [KerML], except for the following two points.

1. The reserved keywords of SysML are the following.

```
about abstract accept action actor after alias all allocate allocation
analysis and as assign assert assoc assume at attribute bind binding block
by calc case comment concern connect connection constraint decide def
default defined dependency derived do doc else end entry enum event exhibit
exit expose filter first flow for fork frame from hastype if implies import
in include individual inout interface istype item join language loop merge
message metadata nonunique not objective occurrence of or ordered out
package parallel part perform port private protected public readonly
redefines ref references render rendering rep require requirement return
satisfy send snapshot specializes stakeholder state subject subsets
succession terminate then timeslice to transition until use variant
variation verification verify via view viewpoint when while xor
```

2. The set of special lexical terminals matching either certain keywords or their symbolic equivalents are the following in SysML.

```
DEFINED_BY  = ':'  | 'defined' 'by'
SPECIALIZES = ':>' | 'specializes'
SUBSETS     = ':>' | 'subsets'
REFERENCES  = '::>' | 'references'
REDEFINES   = ':>>' | 'redefines'
```

Tooling for the SysML textual notation should generally highlight keywords relative to other text, for example by using boldface and/or distinctive coloring. However, while keywords are shown in boldface in this specification, the specification does not require any specific highlighting (or any highlighting at all). SysML textual notation

```
RelationshipBody : Relationship =
  ';' | '{' ( ownedRelationship += OwnedAnnotation )* '}'
```

8.2.2.3 Dependencies Textual Notation

```
Dependency =
  ( ownedRelationship += PrefixMetadataAnnotation )*
  'dependency' DependencyDeclaration
  RelationshipBody

DependencyDeclaration =
  ( Identification 'from' )?
  client += [QualifiedName] ( ',' client += [QualifiedName] )* 'to'
  supplier += [QualifiedName] ( ',' supplier += [QualifiedName] )*
```

8.2.2.4 Annotations Textual Notation

8.2.2.4.1 Annotations

```
Annotation =
  annotatedElement = [QualifiedName]

OwnedAnnotation : Annotation =
  annotatingElement = AnnotatingElement
  { ownedRelatedElement += annotatingElement }

AnnotatingMember : OwningMembership =
  ownedRelatedElement += AnnotatingElement

AnnotatingElement =
  Comment
  | Documentation
  | TextualRepresentation
  | MetadataFeature
```

8.2.2.4.2 Comments and Documentation

```
Comment =
  ( 'comment' Identification
    ( 'about' annotation += Annotation
      { ownedRelationship += annotation }
      ( ',' annotation += Annotation
        { ownedRelationship += annotation } )*
    )?
  )?
  ( 'locale' locale = STRING_VALUE )?
  body = REGULAR_COMMENT

Documentation =
  'doc' Identification
  ( 'locale' locale = STRING_VALUE )?
  body = REGULAR_COMMENT
```

8.2.2.4.3 Textual Representation

```
TextualRepresentation =
  ( 'rep' Identification )?
  'language' language = STRING_VALUE body = REGULAR_COMMENT
```

8.2.2.5 Namespaces and Packages Textual Notation

documents are expected to be interchanged as plain text (see also [KerML, Clause 10] on Model Interchange). This recommendation also applies to snippets of textual notation used as part of the graphical notation, i.e., textual elements residing inside graphical elements.

8.2.2.2 Elements and Relationships Textual Notation

```
Identification : Element =
  ( '<' declaredShortName = NAME '>' )?
  ( declaredName = NAME )?

RelationshipBody : Relationship =
  ';' | '{' ( ownedRelationship += OwnedAnnotation )* '}'
```

8.2.2.3 Dependencies Textual Notation

```
Dependency =
  ( ownedRelationship += PrefixMetadataAnnotation )*
  'dependency' DependencyDeclaration
  RelationshipBody

DependencyDeclaration =
  ( Identification 'from' )?
  client += [QualifiedName] ( ',' client += [QualifiedName] )* 'to'
  supplier += [QualifiedName] ( ',' supplier += [QualifiedName] )*
```

8.2.2.4 Annotations Textual Notation

8.2.2.4.1 Annotations

```
Annotation =
  annotatedElement = [QualifiedName]

OwnedAnnotation : Annotation =
  annotatingElement = AnnotatingElement
  { ownedRelatedElement += annotatingElement }

AnnotatingMember : OwningMembership =
  ownedRelatedElement += AnnotatingElement

AnnotatingElement =
  Comment
  | Documentation
  | TextualRepresentation
  | MetadataFeature
```

8.2.2.4.2 Comments and Documentation

```
Comment =
  ( 'comment' Identification
    ( 'about' annotation += Annotation
      { ownedRelationship += annotation } )
    ( ',' annotation += Annotation
      { ownedRelationship += annotation } )*
  )?
  )?
  ( 'locale' locale = STRING_VALUE )?
  body = REGULAR_COMMENT

Documentation =
  'doc' Identification
  ( 'locale' locale = STRING_VALUE )?
  body = REGULAR_COMMENT
```

8.2.2.5.1 Packages

```
RootNamespace : Namespace =
    PackageBodyElement*

Package =
( ownedRelationship += PrefixMetadataMember )*
    PackageDeclaration PackageBody

LibraryPackage =
( isStandard ?= 'standard' ) 'library'
( ownedRelationship += PrefixMetadataMember )*
    PackageDeclaration PackageBody

PackageDeclaration : Package =
    'package' Identification

PackageBody : Package =
    ';' | '{' PackageBodyElement* '}''

PackageBodyElement : Package =
    ownedRelationship += PackageMember
| ownedRelationship += ElementFilterMember
| ownedRelationship += AliasMember
| ownedRelationship += Import

MemberPrefix : Membership =
    ( visibility = VisibilityIndicator )?

PackageMember : OwningMembership
    MemberPrefix
    ( ownedRelatedElement += DefinitionElement
    | ownedRelatedElement = UsageElement )

ElementFilterMember : ElementFilterMembership =
    MemberPrefix
    'filter' ownedRelatedElement += OwnedExpression ';'

AliasMember : Membership =
    MemberPrefix
    'alias' ( '<' memberShortName = NAME '>' )?
    ( memberName = NAME )?
    'for' memberElement = [QualifiedName]
    RelationshipBody

Import =
    ( visibility = VisibilityIndicator )?
    'import' ( isImportAll ?= 'all' )?
    ( ImportedNamespace
    | ImportedFilterPackage )
    RelationshipBody

ImportedNamespace : Import =
    ( importedNamespace = [QualifiedName] )?
    ( importedMemberName = NAME | '*' )
    ( '::' isRecursive ?= '***' )?

ImportedFilterPackage : Import :
    importedNamespace = FilterPackage
```

8.2.2.4.3 Textual Representation

```
TextualRepresentation =
  ( 'rep' Identification )?
  'language' language = STRING_VALUE body = REGULAR_COMMENT
```

8.2.2.5 Namespaces and Packages Textual Notation

8.2.2.5.1 Packages

SYSML2 -207: Update language description and concrete syntax related to imports

```
RootNamespace : Namespace =
  PackageBodyElement*

Package =
  ( ownedRelationship += PrefixMetadataMember )*
  PackageDeclaration PackageBody

LibraryPackage =
  ( isStandard ?= 'standard' ) 'library'
  ( ownedRelationship += PrefixMetadataMember )*
  PackageDeclaration PackageBody

PackageDeclaration : Package =
  'package' Identification

PackageBody : Package =
  ';' | '{' PackageBodyElement* '}''

PackageBodyElement : Package =
  ownedRelationship += PackageMember
  | ownedRelationship += ElementFilterMember
  | ownedRelationship += AliasMember
  | ownedRelationship += Import

MemberPrefix : Membership =
  ( visibility = VisibilityIndicator )?

PackageMember : OwningMembership
  MemberPrefix
  ( ownedRelatedElement += DefinitionElement
  | ownedRelatedElement = UsageElement )

ElementFilterMember : ElementFilterMembership =
  MemberPrefix
  'filter' ownedRelatedElement += OwnedExpression ';'

AliasMember : Membership =
  MemberPrefix
  'alias' ( '<' memberShortName = NAME '>' )?
  ( memberName = NAME )?
  'for' memberElement = [QualifiedName]
  RelationshipBody

Import =
  visibility = VisibilityIndicator
  'import' ( isImportAll ?= 'all' )?
  ImportDeclaration
  RelationshipBody

ImportDeclaration : Import =
```

```

{ ownedRelatedElement += FilterPackage }

FilterPackage : Package =
    ownedRelationship += FilterPackageImport
    ( ownedRelationship += FilterPackageMember )+

FilterPackageImport : Import =
    ImportedNamespace

FilterPackageMember : ElementFilterMembership =
    '[' ownedRelatedElement += OwnedExpression ']'
    { visibility = 'private' }

VisibilityIndicator : VisibilityKind =
    'public' | 'private' | 'protected'

```

8.2.2.5.2 Package Elements

```

DefinitionElement : Element =
    Package
    | LibraryPackage
    | AnnotatingElement
    | Dependency
    | AttributeDefinition
    | EnumerationDefinition
    | OccurrenceDefinition
    | IndividualDefinition
    | ItemDefinition
    | PartDefinition
    | ConnectionDefinition
    | FlowConnectionDefinition
    | InterfaceDefinition
    | PortDefinition
    | ActionDefinition
    | CalculationDefinition
    | StateDefinition
    | ConstraintDefinition
    | RequirementDefinition
    | ConcernDefinition
    | CaseDefinition
    | AnalysisCaseDefinition
    | VerificationCaseDefinition
    | UseCaseDefinition
    | ViewDefinition
    | ViewpointDefinition
    | RenderingDefinition
    | MetadataDefinition
    | ExtendedDefinition

UsageElement : Usage =
    NonOccurrenceUsageElement
    | OccurrenceUsageElement

```

8.2.2.6 Definition and Usage Textual Notation

8.2.2.6.1 Definitions

```

BasicDefinitionPrefix =
    isAbstract ?= 'abstract' | isVariation ?= 'variation'

```

```

MembershipImport | NamespaceImport

MembershipImport =
    importedMembership = [QualifiedName]
    ( '::' isRecursive ?= '**' )?

NamespaceImport =
    importedNamespace = [QualifiedName] '::' '**'
    ( '::' isRecursive ?= '**' )?
    | importedNamespace = FilterPackage
        { ownedRelatedElement += importedNamespace }

FilterPackage : Package =
    ownedRelationship += FilterPackageImport
    ( ownedRelationship += FilterPackageMember )+

FilterPackageMember : ElementFilterMembership =
    '[' ownedRelatedElement += OwnedExpression ']'

VisibilityIndicator : VisibilityKind =
    'public' | 'private' | 'protected'

```

8.2.2.5.2 Package Elements

```

DefinitionElement : Element =
    Package
    | LibraryPackage
    | AnnotatingElement
    | Dependency
    | AttributeDefinition
    | EnumerationDefinition
    | OccurrenceDefinition
    | IndividualDefinition
    | ItemDefinition
    | PartDefinition
    | ConnectionDefinition
    | FlowConnectionDefinition
    | InterfaceDefinition
    | PortDefinition
    | ActionDefinition
    | CalculationDefinition
    | StateDefinition
    | ConstraintDefinition
    | RequirementDefinition
    | ConcernDefinition
    | CaseDefinition
    | AnalysisCaseDefinition
    | VerificationCaseDefinition
    | UseCaseDefinition
    | ViewDefinition
    | ViewpointDefinition
    | RenderingDefinition
    | MetadataDefinition
    | ExtendedDefinition

UsageElement : Usage =
    NonOccurrenceUsageElement
    | OccurrenceUsageElement

```

8.2.2.6 Definition and Usage Textual Notation

8.2.2.6.1 Definitions

```

DefinitionExtensionKeyword : Definition =
    ownedRelationship += PrefixMetadataMember

DefinitionPrefix : Definition =
    BasicDefinitionPrefix? DefinitionExtensionKeyword*

Definition =
    DefinitionDeclaration DefinitionBody

DefinitionDeclaration : Definition
    Identification SubclassificationPart?

DefinitionBody : Type =
    ';' | '{' DefinitionBodyItem* '}' 

DefinitionBodyItem : Type =
    ownedRelationship += DefinitionMember
    | ownedRelationship += VariantUsageMember
    | ownedRelationship += NonOccurrenceUsageMember
    | ( ownedRelationship += SourceSuccessionMember )?
        ownedRelationship += OccurrenceUsageMember
    | ownedRelationship += AliasMember
    | ownedRelationship += Import

DefinitionMember : OwningMembership =
    MemberPrefix
    ownedRelatedElement += DefinitionElement

VariantUsageMember : VariantMembership =
    MemberPrefix 'variant'
    ownedVariantUsage = VariantUsageElement

NonOccurrenceUsageMember : FeatureMembership =
    MemberPrefix
    ownedRelatedElement += NonOccurrenceUsageElement

OccurrenceUsageMember : FeatureMembership =
    MemberPrefix
    ownedRelatedElement += OccurrenceUsageElement

StructureUsageMember : FeatureMembership =
    MemberPrefix
    ownedRelatedElement += StructureUsageElement

BehaviorUsageMember : FeatureMembership =
    MemberPrefix
    ownedRelatedElement += BehaviorUsageElement

```

8.2.2.6.2 Usages

```

FeatureDirection : FeatureDirectionKind =
    'in' | 'out' | 'inout'

RefPrefix : Usage =
    ( direction = FeatureDirection )?
    ( isAbstract ?= 'abstract' | isVariation ?= 'variation')?
    ( isReadOnly ?= 'readonly' )?
    ( isDerived ?= 'derived' )?
    ( isEnd ?= 'end' )?

```

```

BasicDefinitionPrefix =
    isAbstract ?= 'abstract' | isVariation ?= 'variation'

DefinitionExtensionKeyword : Definition =
    ownedRelationship += PrefixMetadataMember

DefinitionPrefix : Definition =
    BasicDefinitionPrefix? DefinitionExtensionKeyword*

Definition =
    DefinitionDeclaration DefinitionBody

DefinitionDeclaration : Definition
    Identification SubclassificationPart?

DefinitionBody : Type =
    ';' | '{' DefinitionBodyItem* '}''

DefinitionBodyItem : Type =
    ownedRelationship += DefinitionMember
    | ownedRelationship += VariantUsageMember
    | ownedRelationship += NonOccurrenceUsageMember
    | ( ownedRelationship += SourceSuccessionMember )?
        ownedRelationship += OccurrenceUsageMember
    | ownedRelationship += AliasMember
    | ownedRelationship += Import

DefinitionMember : OwningMembership =
    MemberPrefix
    ownedRelatedElement += DefinitionElement

VariantUsageMember : VariantMembership =
    MemberPrefix 'variant'
    ownedVariantUsage = VariantUsageElement

NonOccurrenceUsageMember : FeatureMembership =
    MemberPrefix
    ownedRelatedElement += NonOccurrenceUsageElement

OccurrenceUsageMember : FeatureMembership =
    MemberPrefix
    ownedRelatedElement += OccurrenceUsageElement

StructureUsageMember : FeatureMembership =
    MemberPrefix
    ownedRelatedElement += StructureUsageElement

BehaviorUsageMember : FeatureMembership =
    MemberPrefix
    ownedRelatedElement += BehaviorUsageElement

```

8.2.2.6.2 Usages

```

FeatureDirection : FeatureDirectionKind =
    'in' | 'out' | 'inout'

RefPrefix : Usage =
    ( direction = FeatureDirection )?
    ( isAbstract ?= 'abstract' | isVariation ?= 'variation')?
    ( isReadOnly ?= 'readonly' )?
    ( isDerived ?= 'derived' )?
    ( isEnd ?= 'end' )?

```

```

BasicUsagePrefix : Usage =
    RefPrefix
    ( isReference ?= 'ref' )?

UsageExtensionKeyword : Usage =
    ownedRelationship += PrefixMetadataMember

UsagePrefix : Usage =
    BasicUsagePrefix UsageExtensionKeyword*

Usage =
    UsageDeclaration UsageCompletion

UsageDeclaration : Usage =
    Identification FeatureSpecializationPart?

UsageCompletion : Usage =
    ValuePart? UsageBody

UsageBody : Usage =
    DefinitionBody

ValuePart : Feature =
    ownedRelationship += FeatureValue

FeatureValue =
    ( '='
    | isInitial ?= ':='
    | isDefault ?= 'default' ( '=' | isInitial ?= ':=' )?
    )
    ownedRelatedElement += OwnedExpression

```

8.2.2.6.3 Reference Usages

```

DefaultReferenceUsage : ReferenceUsage =
    RefPrefix Usage

ReferenceUsage =
    RefPrefix 'ref' Usage

VariantReference : ReferenceUsage =
    ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecialization* UsageBody

```

8.2.2.6.4 Body Elements

```

NonOccurrenceUsageElement : Usage =
    DefaultReferenceUsage
    | ReferenceUsage
    | AttributeUsage
    | EnumerationUsage
    | BindingConnectorAsUsage
    | SuccessionAsUsage
    | ExtendedUsage

OccurrenceUsageElement : Usage =
    StructureUsageElement | BehaviorUsageElement

StructureUsageElement : Usage =
    OccurrenceUsage

```

```

BasicUsagePrefix : Usage =
    RefPrefix
    ( isReference ?= 'ref' )?

UsageExtensionKeyword : Usage =
    ownedRelationship += PrefixMetadataMember

UsagePrefix : Usage =
    BasicUsagePrefix UsageExtensionKeyword*

Usage =
    UsageDeclaration UsageCompletion

UsageDeclaration : Usage =
    Identification FeatureSpecializationPart?

UsageCompletion : Usage =
    ValuePart? UsageBody

UsageBody : Usage =
    DefinitionBody

ValuePart : Feature =
    ownedRelationship += FeatureValue

FeatureValue =
    ( '='
    | isInitial ?= ':='
    | isDefault ?= 'default' ( '=' | isInitial ?= ':=' )?
    )
    ownedRelatedElement += OwnedExpression

```

8.2.2.6.3 Reference Usages

```

DefaultReferenceUsage : ReferenceUsage =
    RefPrefix Usage

ReferenceUsage =
    RefPrefix 'ref' Usage

VariantReference : ReferenceUsage =
    ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecialization* UsageBody

```

8.2.2.6.4 Body Elements

```

NonOccurrenceUsageElement : Usage =
    DefaultReferenceUsage
    | ReferenceUsage
    | AttributeUsage
    | EnumerationUsage
    | BindingConnectorAsUsage
    | SuccessionAsUsage
    | ExtendedUsage

OccurrenceUsageElement : Usage =
    StructureUsageElement | BehaviorUsageElement

StructureUsageElement : Usage =
    OccurrenceUsage
    | IndividualUsage
    | PortionUsage

```

```

| IndividualUsage
| PortionUsage
| EventOccurrenceUsage
| ItemUsage
| PartUsage
| ViewUsage
| RenderingUsage
| PortUsage
| ConnectionUsage
| InterfaceUsage
| AllocationUsage
| Message
| FlowConnectionUsage
| SuccessionFlowConnectionUsage

BehaviorUsageElement : Usage =
    ActionUsage
| CalculationUsage
| StateUsage
| ConstraintUsage
| RequirementUsage
| ConcernUsage
| CaseUsage
| AnalysisCaseUsage
| VerificationCaseUsage
| UseCaseUsage
| ViewpointUsage
| PerformActionUsage
| ExhibitStateUsage
| IncludeUseCaseUsage
| AssertConstraintUsage
| SatisfyRequirementUsage

VariantUsageElement : Usage =
    VariantReference
| ReferenceUsage
| AttributeUsage
| BindingConnectorAsUsage
| SuccessionAsUsage
| OccurrenceUsage
| IndividualUsage
| PortionUsage
| EventOccurrenceUsage
| ItemUsage
| PartUsage
| ViewUsage
| RenderingUsage
| PortUsage
| ConnectionUsage
| InterfaceUsage
| AllocationUsage
| Message
| FlowConnectionUsage
| SuccessionFlowConnectionUsage
| BehaviorUsageElement

```

8.2.2.6.5 Specialization

```

SubclassificationPart : Classifier =
    SPECIALIZES ownedRelationship += OwnedSubclassification

```

```

| EventOccurrenceUsage
| ItemUsage
| PartUsage
| ViewUsage
| RenderingUsage
| PortUsage
| ConnectionUsage
| InterfaceUsage
| AllocationUsage
| Message
| FlowConnectionUsage
| SuccessionFlowConnectionUsage

BehaviorUsageElement : Usage =
    ActionUsage
| CalculationUsage
| StateUsage
| ConstraintUsage
| RequirementUsage
| ConcernUsage
| CaseUsage
| AnalysisCaseUsage
| VerificationCaseUsage
| UseCaseUsage
| ViewpointUsage
| PerformActionUsage
| ExhibitStateUsage
| IncludeUseCaseUsage
| AssertConstraintUsage
| SatisfyRequirementUsage

VariantUsageElement : Usage =
    VariantReference
| ReferenceUsage
| AttributeUsage
| BindingConnectorAsUsage
| SuccessionAsUsage
| OccurrenceUsage
| IndividualUsage
| PortionUsage
| EventOccurrenceUsage
| ItemUsage
| PartUsage
| ViewUsage
| RenderingUsage
| PortUsage
| ConnectionUsage
| InterfaceUsage
| AllocationUsage
| Message
| FlowConnectionUsage
| SuccessionFlowConnectionUsage
| BehaviorUsageElement

```

8.2.2.6.5 Specialization

```

SubclassificationPart : Classifier =
    SPECIALIZES ownedRelationship += OwnedSubclassification
    ( ',' ownedRelationship += OwnedSubclassification )*

```

```

OwnedSubclassification : Subclassification =
    superClassifer = [QualifiedName]

```

```

( ',' ownedRelationship += OwnedSubclassification )*
OwnedSubclassification : Subclassification =
    superClassifier = [QualifiedName]

FeatureSpecializationPart : Feature =
    FeatureSpecialization+ MultiplicityPart? FeatureSpecialization*
    | MultiplicityPart FeatureSpecialization*

FeatureSpecialization : Feature =
    Typings | Subsettings | References | Redefinitions

Typings : Feature =
    TypedBy ( ',' ownedRelationship += FeatureTyping )*

TypedBy : Feature =
    DEFINED_BY ownedRelationship += FeatureTyping

FeatureTyping =
    OwnedFeatureTyping | ConjugatedPortTyping

OwnedFeatureTyping : FeatureTyping =
    type = [QualifiedName]
    | type = OwnedFeatureChain
        { ownedRelatedElement += type }

Subsettings : Feature =
    Subsets ( ',' ownedRelationship += OwnedSubsetting )*

Subsets : Feature =
    SUBSETS ownedRelationship += OwnedSubsetting

OwnedSubsetting : Subsetting =
    subsettetedFeature = [QualifiedName]
    | subsettetedFeature = OwnedFeatureChain
        { ownedRelatedElement += subsettetedFeature }

References : Feature =
    REFERENCES ownedRelationship += OwnedReferenceSubsetting

OwnedReferenceSubsetting : ReferenceSubsetting =
    referencedFeature = [QualifiedName]
    | referencedFeature = OwnedFeatureChain
        { ownedRelatedElement += referenceFeature }

Redefinitions : Feature =
    Redefines ( ',' ownedRelationship += OwnedRedefinition )*

Redefines : Feature =
    REDEFINES ownedRelationship += OwnedRedefinition

OwnedRedefinition : Redefinition =
    redefinedFeature = [QualifiedName]
    | redefinedFeature = OwnedFeatureChain
        { ownedRelatedElement += redefinedFeature }

OwnedFeatureChain : Feature =
    ownedRelationship += OwnedFeatureChaining
    ( '.' ownedRelationship += OwnedFeatureChaining )+

```

```

FeatureSpecializationPart : Feature =
    FeatureSpecialization+ MultiplicityPart? FeatureSpecialization*
    | MultiplicityPart FeatureSpecialization*

FeatureSpecialization : Feature =
    Typings | Subsettings | References | Redefinitions

Typings : Feature =
    TypedBy ( ',' ownedRelationship += FeatureTyping )*

TypedBy : Feature =
    DEFINED_BY ownedRelationship += FeatureTyping

FeatureTyping =
    OwnedFeatureTyping | ConjugatedPortTyping

OwnedFeatureTyping : FeatureTyping =
    type = [QualifiedName]
    | type = OwnedFeatureChain
    { ownedRelatedElement += type }

Subsettings : Feature =
    Subsets ( ',' ownedRelationship += OwnedSubsetting )*

Subsets : Feature =
    SUBSETS ownedRelationship += OwnedSubsetting

OwnedSubsetting : Subsetting =
    subsettedFeature = [QualifiedName]
    | subsettedFeature = OwnedFeatureChain
    { ownedRelatedElement += subsettedFeature }

References : Feature =
    REFERENCES ownedRelationship += OwnedReferenceSubsetting

OwnedReferenceSubsetting : ReferenceSubsetting =
    referencedFeature = [QualifiedName]
    | referencedFeature = OwnedFeatureChain
    { ownedRelatedElement += referenceFeature }

Redefinitions : Feature =
    Redefines ( ',' ownedRelationship += OwnedRedefinition )*

Redefines : Feature =
    REDEFINES ownedRelationship += OwnedRedefinition

OwnedRedefinition : Redefinition =
    redefinedFeature = [QualifiedName]
    | redefinedFeature = OwnedFeatureChain
    { ownedRelatedElement += redefinedFeature }

OwnedFeatureChain : Feature =
    ownedRelationship += OwnedFeatureChaining
    ( '.' ownedRelationship += OwnedFeatureChaining )+

OwnedFeatureChaining : FeatureChaining =
    chainingFeature = [QualifiedName]

```

8.2.2.6.6 Multiplicity

```

MultiplicityPart : Feature =
    ownedRelationship += OwnedMultiplicity
    | ( ownedRelationship += OwnedMultiplicity )?

```

```

OwnedFeatureChaining : FeatureChaining =
    chainingFeature = [QualifiedName]

```

8.2.2.6 Multiplicity

```

MultiplicityPart : Feature =
    ownedRelationship += OwnedMultiplicity
    | ( ownedRelationship += OwnedMultiplicity )?
        ( isOrdered ?= 'ordered' ( { isUnique = false } 'nonunique' )?
        | { isUnique = false } 'nonunique' ( isOrdered ?= 'ordered' )? )

```

```

OwnedMultiplicity : OwningMembership =
    ownedRelatedElement += MultiplicityRange

```

```

MultiplicityRange =
    '[' ( ownedRelationship += MultiplicityExpressionMember '..' )?
        ownedRelationship += MultiplicityExpressionMember ']'

```

```

MultiplicityExpressionMember : OwningMembership =
    ownedRelatedElement += ( LiteralExpression | FeatureReferenceExpression )

```

8.2.2.7 Attributes Textual Notation

```

AttributeDefinition : AttributeDefinition =
    DefinitionPrefix 'attribute' 'def' Definition

```

```

AttributeUsage : AttributeUsage =
    UsagePrefix 'attribute' Usage

```

8.2.2.8 Enumerations Textual Notation

```

EnumerationDefinition =
    DefinitionExtensionKeyword*
    'enum' 'def' DefinitionDeclaration EnumerationBody

```

```

EnumerationBody : EnumerationDefinition =
    ';'
    | '{' ( ownedRelationship += AnnotatingMember
            | ownedRelationship += EnumerationUsageMember )*
    '}'

```

```

EnumerationUsageMember : VariantMembership =
    MemberPrefix ownedRelatedElement += EnumeratedValue

```

```

EnumeratedValue : EnumerationUsage =
    'enum'? Usage

```

```

EnumerationUsage : EnumerationUsage =
    UsagePrefix 'enum' Usage

```

8.2.2.9 Occurrences Textual Notation

8.2.2.9.1 Occurrence Definitions

```

OccurrenceDefinitionPrefix : OccurrenceDefinition =
    BasicDefinitionPrefix?
    ( isIndividual ?= 'individual' )?
    DefinitionExtensionKeyword*

```

```

OccurrenceDefinition =

```

```

( isOrdered ?= 'ordered' ( { isUnique = false } 'nonunique' )?
| { isUnique = false } 'nonunique' ( isOrdered ?= 'ordered' )? )

OwnedMultiplicity : OwningMembership =
    ownedRelatedElement += MultiplicityRange

MultiplicityRange =
  '[' ( ownedRelationship += MultiplicityExpressionMember '..' )?
    ownedRelationship += MultiplicityExpressionMember ']'

MultiplicityExpressionMember : OwningMembership =
    ownedRelatedElement += ( LiteralExpression | FeatureReferenceExpression )

```

8.2.2.7 Attributes Textual Notation

```

AttributeDefinition : AttributeDefinition =
  DefinitionPrefix 'attribute' 'def' Definition

AttributeUsage : AttributeUsage =
  UsagePrefix 'attribute' Usage

```

8.2.2.8 Enumerations Textual Notation

```

EnumerationDefinition =
  DefinitionExtensionKeyword*
  'enum' 'def' DefinitionDeclaration EnumerationBody

EnumerationBody : EnumerationDefinition =
  ';'
  | '{' ( ownedRelationship += AnnotatingMember
    | ownedRelationship += EnumerationUsageMember )*
  '}'

EnumerationUsageMember : VariantMembership =
  MemberPrefix ownedRelatedElement += EnumeratedValue

EnumeratedValue : EnumerationUsage =
  'enum'? Usage

EnumerationUsage : EnumerationUsage =
  UsagePrefix 'enum' Usage

```

8.2.2.9 Occurrences Textual Notation

8.2.2.9.1 Occurrence Definitions

```

OccurrenceDefinitionPrefix : OccurrenceDefinition =
  BasicDefinitionPrefix?
  ( isIndividual ?= 'individual' )?
  DefinitionExtensionKeyword*

OccurrenceDefinition =
  OccurrenceDefinitionPrefix 'occurrence' 'def' Definition

IndividualDefinition : OccurrenceDefinition =
  BasicDefinitionPrefix? isIndividual ?= 'individual'
  DefinitionExtensionKeyword* 'def' Definition

```

8.2.2.9.2 Occurrence Usages

```

OccurrenceUsagePrefix : OccurrenceUsage =
  BasicUsagePrefix

```

```

OccurrenceDefinitionPrefix 'occurrence' 'def' Definition

IndividualDefinition : OccurrenceDefinition =
  BasicDefinitionPrefix? isIndividual ?= 'individual'
  DefinitionExtensionKeyword* 'def' Definition

```

8.2.2.9.2 Occurrence Usages

```

OccurrenceUsagePrefix : OccurrenceUsage =
  BasicUsagePrefix
  ( isIndividual ?= 'individual' )?
  ( portionKind = PortionKind )?
  UsageExtensionKeyword*

OccurrenceUsage =
  OccurrenceUsagePrefix 'occurrence' Usage

IndividualUsage : OccurrenceUsage =
  BasicUsagePrefix isIndividual ?= 'individual'
  UsageExtensionKeyword* Usage

PortionUsage : OccurrenceUsage =
  BasicUsagePrefix ( isIndividual ?= 'individual' )?
  portionKind = PortionKind
  UsageExtensionKeyword* Usage

PortionKind =
  'snapshot' | 'timeslice'

EventOccurrenceUsage =
  OccurrenceUsagePrefix 'event'
  ( ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecializationPart?
  | 'occurrence' UsageDeclaration? )
  UsageCompletion

```

8.2.2.9.3 Occurrence Successions

```

SourceSuccessionMember : FeatureMembership =
  'then' ownedRelatedElement += SourceSuccession

SourceSuccession : SuccessionAsUsage =
  ownedRelationship += SourceEndMember

SourceEndMember : EndFeatureMembership =
  ownedRelatedElement += SourceEnd

SourceEnd : ReferenceUsage =
  ( ownedRelationship += OwnedMultiplicity )?

```

8.2.2.10 Items Textual Notation

```

ItemDefinition =
  OccurrenceDefinitionPrefix
  'item' 'def' Definition

ItemUsage =
  OccurrenceUsagePrefix 'item' Usage

```

```

(isIndividual ?= 'individual')?
(portionKind = PortionKind)?
UsageExtensionKeyword*

OccurrenceUsage =
  OccurrenceUsagePrefix 'occurrence' Usage

IndividualUsage : OccurrenceUsage =
  BasicUsagePrefix isIndividual ?= 'individual'
  UsageExtensionKeyword* Usage

PortionUsage : OccurrenceUsage =
  BasicUsagePrefix (isIndividual ?= 'individual')?
  portionKind = PortionKind
  UsageExtensionKeyword* Usage

PortionKind =
  'snapshot' | 'timeslice'

EventOccurrenceUsage =
  OccurrenceUsagePrefix 'event'
  (ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecializationPart?
  | 'occurrence' UsageDeclaration?)?
  UsageCompletion

```

8.2.2.9.3 Occurrence Successions

```

SourceSuccessionMember : FeatureMembership =
  'then' ownedRelatedElement += SourceSuccession

SourceSuccession : SuccessionAsUsage =
  ownedRelationship += SourceEndMember

SourceEndMember : EndFeatureMembership =
  ownedRelatedElement += SourceEnd

SourceEnd : ReferenceUsage =
  (ownedRelationship += OwnedMultiplicity)?

```

8.2.2.10 Items Textual Notation

```

ItemDefinition =
  OccurrenceDefinitionPrefix
  'item' 'def' Definition

ItemUsage =
  OccurrenceUsagePrefix 'item' Usage

```

8.2.2.11 Parts Textual Notation

```

PartDefinition =
  OccurrenceDefinitionPrefix 'part' 'def' Definition

PartUsage =
  OccurrenceUsagePrefix 'part' Usage

```

8.2.2.12 Ports Textual Notation

```

PortDefinition =
  DefinitionPrefix 'port' 'def' Definition
  ownedRelationship += ConjugatedPortDefinitionMember

```

8.2.2.11 Parts Textual Notation

```
PartDefinition =
    OccurrenceDefinitionPrefix 'part' 'def' Definition

PartUsage =
    OccurrenceUsagePrefix 'part' Usage
```

8.2.2.12 Ports Textual Notation

```
PortDefinition =
    DefinitionPrefix 'port' 'def' Definition
    ownedRelationship += ConjugatedPortDefinitionMember
    { conjugatedPortDefinition.ownedPortConjugator.
        originalPortDefinition = this }
(See Note 1)

ConjugatedPortDefinitionMember : OwningMembership =
    ownedRelatedElement += ConjugatedPortDefinition

ConjugatedPortDefinition =
    ownedRelationship += PortConjugation

PortConjugation =
    {}

PortUsage =
    OccurrenceUsagePrefix 'port' Usage

ConjugatedPortTyping : ConjugatedPortTyping =
    '~' originalPortDefinition = ~[QualifiedName]
(See Note 2)
```

Notes

1. Even though it is not explicitly represented in the text, a `PortDefinition` is always parsed as containing a nested `ConjugatedPortDefinition` with a `PortDefinition` Relationship pointing back to the containing `PortDefinition`. The abstract syntax for `ConjugatedPortDefinition` sets its `effectiveName` to the name of its `originalPortDefinition` with the symbol `~` prepended to it (see [8.3.12.2](#)). (See also [8.4.8.1](#).)
2. The notation `~[QualifiedName]` indicates that a `QualifiedName` shall be parsed from the input text, but that it shall be resolved as if it was the qualified name constructed as follows:
 - Extract the last segment name of the given `QualifiedName` and prepend the symbol `~` to it.
 - Append the name so constructed to the end of the entire original `QualifiedName`.For example, if the `ConjugatedPortTyping` is `~A::B::C`, then the given `QualifiedName` is `A::B::C`, and `~[QualifiedName]` is resolved as `A::B::C::'~C'`. Alternatively, a conforming tool may first resolve the given `QualifiedName` as usual to a `PortDefinition` and then use the `conjugatedPortDefinition` of this `PortDefinition` as the resolution of `~[QualifiedName]`.

8.2.2.13 Connections Textual Notation

8.2.2.13.1 Connection Definition and Usage

```
ConnectionDefinition =
    OccurrenceDefinitionPrefix 'connection' 'def' Definition

ConnectionUsage =
    OccurrenceUsagePrefix
```

```

{ conjugatedPortDefinition.ownedPortConjugator.
    originalPortDefinition = this }
(See Note 1)

ConjugatedPortDefinitionMember : OwningMembership =
    ownedRelatedElement += ConjugatedPortDefinition

ConjugatedPortDefinition =
    ownedRelationship += PortConjugation

PortConjugation =
    {}

PortUsage =
    OccurrenceUsagePrefix 'port' Usage

ConjugatedPortTyping : ConjugatedPortTyping =
    '~' originalPortDefinition = ~[Qualifiedname]
(See Note 2)

```

Notes

1. Even though it is not explicitly represented in the text, a `PortDefinition` is always parsed as containing a nested `ConjugatedPortDefinition` with a `PortDefinition Relationship` pointing back to the containing `PortDefinition`. The abstract syntax for `ConjugatedPortDefinition` sets its `effectiveName` to the name of its `originalPortDefinition` with the symbol `~` prepended to it (see [8.3.12.2](#)). (See also [8.4.8.1](#).)
2. The notation `~[Qualifiedname]` indicates that a `Qualifiedname` shall be parsed from the input text, but that it shall be resolved as if it was the qualified name constructed as follows:
 - Extract the last segment name of the given `Qualifiedname` and prepend the symbol `~` to it.
 - Append the name so constructed to the end of the entire `original Qualifiedname`.
 For example, if the `ConjugatedPortTyping` is `~A::B::C`, then the given `Qualifiedname` is `A::B::C`, and `~[Qualifiedname]` is resolved as `A::B::C:'~C'`. Alternatively, a conforming tool may first resolve the given `Qualifiedname` as usual to a `PortDefinition` and then use the `conjugatedPortDefinition` of this `PortDefinition` as the resolution of `~[Qualifiedname]`.

8.2.2.13 Connections Textual Notation

8.2.2.13.1 Connection Definition and Usage

```

ConnectionDefinition =
    OccurrenceDefinitionPrefix 'connection' 'def' Definition

ConnectionUsage =
    OccurrenceUsagePrefix
    ( 'connection' UsageDeclaration ValuePart?
        ( 'connect' ConnectorPart )?
    | 'connect' ConnectorPart )
    UsageBody

ConnectorPart : ConnectionUsage =
    BinaryConnectorPart | NaryConnectorPart

BinaryConnectorPart : ConnectionUsage =
    ownedRelationship += ConnectorEndMember 'to'
    ownedRelationship += ConnectorEndMember

NaryConnectorPart : ConnectionUsage =
    '(' ownedRelationship += ConnectorEndMember ','
        ownedRelationship += ConnectorEndMember
        ( ',', ownedRelationship += ConnectorEndMember )* ')'

```

```

( 'connection' UsageDeclaration ValuePart?
  ( 'connect' ConnectorPart )?
| 'connect' ConnectorPart )
UsageBody

ConnectorPart : ConnectionUsage =
  BinaryConnectorPart | NaryConnectorPart

BinaryConnectorPart : ConnectionUsage =
  ownedRelationship += ConnectorEndMember 'to'
  ownedRelationship += ConnectorEndMember

NaryConnectorPart : ConnectionUsage =
  '(' ownedRelationship += ConnectorEndMember ','
    ownedRelationship += ConnectorEndMember
    ( ',', ownedRelationship += ConnectorEndMember )* ')'

ConnectorEndMember : EndFeatureMembership :
  ownedRelatedElement += ConnectorEnd

ConnectorEnd : ReferenceUsage =
  ( declaredName = NAME REFERENCES )?
  ownedRelationship += OwnedReferenceSubsetting
  ( ownedRelationship += OwnedMultiplicity )?

```

8.2.2.13.2 Binding Connectors

```

BindingConnectorAsUsage =
  UsagePrefix ( 'binding' UsageDeclaration )?
  'bind' ownedRelationship += ConnectorEndMember
  '=' ownedRelationship += ConnectorEndMember
UsageBody

```

8.2.2.13.3 Successions

```

SuccessionAsUsage =
  UsagePrefix ( 'succession' UsageDeclaration )?
  'first' s.ownedRelationship += ConnectorEndMember
  'then' s.ownedRelationship += ConnectorEndMember
UsageBody

```

8.2.2.13.4 Messages and Flow Connections

```

FlowConnectionDefinition :
  OccurrenceDefinitionPrefix 'flow' 'def' Definition

Message : FlowConnectionUsage =
  OccurrenceUsagePrefix 'message'
  MessageDeclaration DefinitionBody
  { isAbstract = true }

MessageDeclaration : FlowConnectionUsage =
  UsageDeclaration ValuePart?
  ( 'of' ownedRelationship += FlowPayloadFeatureMember )?
  ( 'from' ownedRelationship += MessageEventMember
    'to' ownedRelationship += MessageEventMember
  )?
| ownedRelationship += MessageEventMember 'to'
  ownedRelationship += MessageEventMember

```

```

ConnectorEndMember : EndFeatureMembership :
    ownedRelatedElement += ConnectorEnd

ConnectorEnd : ReferenceUsage =
    ( declaredName = NAME REFERENCES )?
    ownedRelationship += OwnedReferenceSubsetting
    ( ownedRelationship += OwnedMultiplicity )?

```

8.2.2.13.2 Binding Connectors

```

BindingConnectorAsUsage =
    UsagePrefix ( 'binding' UsageDeclaration )?
    'bind' ownedRelationship += ConnectorEndMember
    '=' ownedRelationship += ConnectorEndMember
    UsageBody

```

8.2.2.13.3 Successions

```

SuccessionAsUsage =
    UsagePrefix ( 'succession' UsageDeclaration )?
    'first' s.ownedRelationship += ConnectorEndMember
    'then' s.ownedRelationship += ConnectorEndMember
    UsageBody

```

8.2.2.13.4 Messages and Flow Connections

```

FlowConnectionDefinition :
    OccurrenceDefinitionPrefix 'flow' 'def' Definition

Message : FlowConnectionUsage =
    OccurrenceUsagePrefix 'message'
    MessageDeclaration DefinitionBody
    { isAbstract = true }

MessageDeclaration : FlowConnectionUsage =
    UsageDeclaration ValuePart?
    ( 'of' ownedRelationship += FlowPayloadFeatureMember )?
    ( 'from' ownedRelationship += MessageEventMember
        'to' ownedRelationship += MessageEventMember
    )?
    | ownedRelationship += MessageEventMember 'to'
        ownedRelationship += MessageEventMember

MessageEventMember : ParameterMembership =
    ownedRelatedElement += MessageEvent

MessageEvent : EventOccurrenceUsage =
    ownedRelationship += OwnedReferenceSubsetting

FlowConnectionUsage =
    OccurrenceUsagePrefix 'flow'
    FlowConnectionDeclaration DefinitionBody

SuccessionFlowConnectionUsage =
    OccurrenceUsagePrefix 'succession' 'flow'
    FlowConnectionDeclaration DefinitionBody

FlowConnectionDeclaration : FlowConnectionUsage =
    UsageDeclaration ValuePart?
    ( 'of' ownedRelationship += FlowPayloadFeatureMember )?
    ( 'from' ownedRelationship += FlowEndMember

```

```

MessageEventMember : ParameterMembership =
    ownedRelatedElement += MessageEvent

MessageEvent : EventOccurrenceUsage =
    ownedRelationship += OwnedReferenceSubsetting

FlowConnectionUsage =
    OccurrenceUsagePrefix 'flow'
    FlowConnectionDeclaration DefinitionBody

SuccessionFlowConnectionUsage =
    OccurrenceUsagePrefix 'succession' 'flow'
    FlowConnectionDeclaration DefinitionBody

FlowConnectionDeclaration : FlowConnectionUsage =
    UsageDeclaration ValuePart?
    ( 'of' ownedRelationship += FlowPayloadFeatureMember )?
    ( 'from' ownedRelationship += FlowEndMember
        'to' ownedRelationship += FlowEndMember )?
    | ownedRelationship += FlowEndMember 'to'
        ownedRelationship += FlowEndMember

FlowPayloadFeatureMember : FeatureMembership =
    ownedRelatedElement += FlowPayloadFeature

FlowPayloadFeature : ItemFeature =
    PayloadFeature

PayloadFeature : Feature =
    Identification? PayloadFeatureSpecializationPart
    ValuePart?
    | ownedRelationship += OwnedFeatureTyping
        ( ownedRelationship += OwnedMultiplicity )?
    | ownedRelationship += OwnedMultiplicity
        ownedRelationship += OwnedFeatureTyping

PayloadFeatureSpecializationPart : Feature =
    ( -> FeatureSpecialization )+ MultiplicityPart?
    FeatureSpecialization*
    | MultiplicityPart FeatureSpecialization+

FlowEndMember : EndFeatureMembership =
    ownedRelatedElement += FlowEnd

FlowEnd : ItemFlowEnd =
    ( ownedRelationship += FlowEndSubsetting )?
    ownedRelationship += FlowFeatureMember

FlowEndSubsetting : ReferenceSubsetting =
    referencedFeature = [QualifiedName]
    | referencedFeature = FeatureChainPrefix
        { ownedRelatedElement += referencedFeature }

FeatureChainPrefix : Feature =
    ( ownedRelationship += OwnedFeatureChaining '..' )+
    ownedRelationship += OwnedFeatureChaining '.'

FlowFeatureMember : FeatureMembership =
    ownedRelatedElement += FlowFeature

```

```

        'to'    ownedRelationship += FlowEndMember )?
| ownedRelationship += FlowEndMember 'to'
ownedRelationship += FlowEndMember

FlowPayloadFeatureMember : FeatureMembership =
ownedRelatedElement += FlowPayloadFeature

FlowPayloadFeature : ItemFeature =
PayloadFeature

PayloadFeature : Feature =
Identification? PayloadFeatureSpecializationPart
ValuePart?
| ownedRelationship += OwnedFeatureTyping
( ownedRelationship += OwnedMultiplicity )?
| ownedRelationship += OwnedMultiplicity
ownedRelationship += OwnedFeatureTyping

PayloadFeatureSpecializationPart : Feature =
( -> FeatureSpecialization )+ MultiplicityPart?
FeatureSpecialization*
| MultiplicityPart FeatureSpecialization+

FlowEndMember : EndFeatureMembership =
ownedRelatedElement += FlowEnd

FlowEnd : ItemFlowEnd =
( ownedRelationship += FlowEndSubsetting )?
ownedRelationship += FlowFeatureMember

FlowEndSubsetting : ReferenceSubsetting =
referencedFeature = [QualifiedName]
| referencedFeature = FeatureChainPrefix
{ ownedRelatedElement += referencedFeature }

FeatureChainPrefix : Feature =
( ownedRelationship += OwnedFeatureChaining '..')+
ownedRelationship += OwnedFeatureChaining '.'

FlowFeatureMember : FeatureMembership =
ownedRelatedElement += FlowFeature

FlowFeature : ReferenceUsage =
ownedRelationship += FlowFeatureRedefinition
(See Note 1)

FlowFeatureRefefinition : Redefinition =
redefinedFeature = [QualifiedName]

```

Notes

1. To ensure that a FlowFeature passes the validateRedefinitionDirectionConformance constraint (see [KerML, 8.3.3.3.8]), its direction must be set to the direction of its redefinedFeature, relative to its owning FlowEnd, that is, the result of the following OCL expression:
`owningType.directionOf(ownedRedefinition->at(1).redefinedFeature)`

8.2.2.14 Interfaces Textual Notation

8.2.2.14.1 Interface Definitions

```

FlowFeature : ReferenceUsage =
    ownedRelationship += FlowFeatureRedefinition
(See Note 1)

FlowFeatureRefefinition : Redefinition =
    redefinedFeature = [QualifiedName]

```

Notes

1. To ensure that a FlowFeature passes the validateRedefinitionDirectionConformance constraint (see [KerML, 8.3.3.3.8]), its direction must be set to the direction of its redefinedFeature, relative to its owning FlowEnd, that is, the result of the following OCL expression:

```
owningType.directionOf(ownedRedefinition->at(1).redefinedFeature)
```

8.2.2.14 Interfaces Textual Notation

8.2.2.14.1 Interface Definitions

```

InterfaceDefinition =
    OccurrenceDefinitionPrefix 'interface' 'def'
    DefinitionDeclaration InterfaceBody

InterfaceBody : Type =
    ';' | '{' InterfaceBodyItem* '}''

InterfaceBodyItem : Type =
    ownedRelationship += DefinitionMember
    | ownedRelationship += VariantUsageMember
    | ownedRelationship += InterfaceNonOccurrenceUsageMember
    | ( ownedRelationship += SourceSuccessionMember )?
        ownedRelationship += InterfaceOccurrenceUsageMember
    | ownedRelationship += AliasMember
    | ownedRelationship += Import

InterfaceNonOccurrenceUsageMember : FeatureMembership =
    MemberPrefix ownedRelatedElement += InterfaceNonOccurrenceUsageElement

InterfaceNonOccurrenceUsageElement : Usage =
    ReferenceUsage
    | AttributeUsage
    | EnumerationUsage
    | BindingConnectorAsUsage
    | SuccessionAsUsage

InterfaceOccurrenceUsageMember : FeatureMembership =
    MemberPrefix ownedRelatedElement += InterfaceOccurrenceUsageElement

InterfaceOccurrenceUsageElement : Usage =
    DefaultInterfaceEnd | StructureUsageElement | BehaviorUsageElement

DefaultInterfaceEnd : PortUsage =
    ( direction = FeatureDirection )?
    ( isAbstract ?= 'abstract' | isVariation ?= 'variation')?
    isEnd ?= 'end' Usage

```

```

InterfaceDefinition =
    OccurrenceDefinitionPrefix 'interface' 'def'
        DefinitionDeclaration InterfaceBody

InterfaceBody : Type =
    ';' | '{' InterfaceBodyItem* '}''

InterfaceBodyItem : Type =
    ownedRelationship += DefinitionMember
    | ownedRelationship += VariantUsageMember
    | ownedRelationship += InterfaceNonOccurrenceUsageMember
    | ( ownedRelationship += SourceSuccessionMember )?
        ownedRelationship += InterfaceOccurrenceUsageMember
    | ownedRelationship += AliasMember
    | ownedRelationship += Import

InterfaceNonOccurrenceUsageMember : FeatureMembership =
    MemberPrefix ownedRelatedElement += InterfaceNonOccurrenceUsageElement

InterfaceNonOccurrenceUsageElement : Usage =
    ReferenceUsage
    | AttributeUsage
    | EnumerationUsage
    | BindingConnectorAsUsage
    | SuccessionAsUsage

InterfaceOccurrenceUsageMember : FeatureMembership =
    MemberPrefix ownedRelatedElement += InterfaceOccurrenceUsageElement

InterfaceOccurrenceUsageElement : Usage =
    DefaultInterfaceEnd | StructureUsageElement | BehaviorUsageElement

DefaultInterfaceEnd : PortUsage =
    ( direction = FeatureDirection )?
    ( isAbstract ?= 'abstract' | isVariation ?= 'variation')?
    isEnd ?= 'end' Usage

```

8.2.2.14.2 Interface Usages

```

InterfaceUsage =
    OccurrenceUsagePrefix 'interface'
        InterfaceUsageDeclaration InterfaceBody

InterfaceUsageDeclaration : InterfaceUsage =
    UsageDeclaration ValuePart?
    ( 'connect' InterfacePart )?
    | InterfacePart

InterfacePart : InterfaceUsage =
    BinaryInterfacePart | NaryInterfacePart

BinaryInterfacePart : InterfaceUsage =
    ownedRelationship += InterfaceEndMember 'to'
    ownedRelationship += InterfaceEndMember

NaryInterfacePart : InterfaceUsage =
    '(' ownedRelationship += InterfaceEndMember ','
        ownedRelationship += InterfaceEndMember
        ( ',', ownedRelationship += InterfaceEndMember )* ')'

InterfaceEndMember : EndFeatureMembership =
    ownedRelatedElement += InterfaceEnd

```

8.2.2.14.2 Interface Usages

```
InterfaceUsage =
    OccurrenceUsagePrefix 'interface'
    InterfaceUsageDeclaration InterfaceBody

InterfaceUsageDeclaration : InterfaceUsage =
    UsageDeclaration ValuePart?
    ( 'connect' InterfacePart )?
    | InterfacePart

InterfacePart : InterfaceUsage =
    BinaryInterfacePart | NaryInterfacePart

BinaryInterfacePart : InterfaceUsage =
    ownedRelationship += InterfaceEndMember 'to'
    ownedRelationship += InterfaceEndMember

NaryInterfacePart : InterfaceUsage =
    '(' ownedRelationship += InterfaceEndMember ','
        ownedRelationship += InterfaceEndMember
        ( ',', ownedRelationship += InterfaceEndMember )* ')'

InterfaceEndMember : EndFeatureMembership =
    ownedRelatedElement += InterfaceEnd

InterfaceEnd : PortUsage :
    ( declaredName = Name REFERENCES )?
    ownedRelationship += OwnedReferenceSubsetting
    ( ownedRelationship += OwnedMultiplicity )?
```

8.2.2.15 Allocations Textual Notation

```
AllocationDefinition =
    OccurrenceDefinitionPrefix 'allocation' 'def' Definition

AllocationUsage =
    OccurrenceUsagePrefix
    AllocationUsageDeclaration UsageBody

AllocationUsageDeclaration : AllocationUsage =
    'allocation' UsageDeclaration
    ( 'allocate' ConnectorPart )?
    | 'allocate' ConnectorPart
```

8.2.2.16 Actions Textual Notation

8.2.2.16.1 Action Definitions

```
ActionDefinition =
    OccurrenceDefinitionPrefix 'action' 'def'
    DefinitionDeclaration ActionBody

ActionBody : Type =
    ';' | '{' ActionBodyItem* '}''

ActionBodyItem : Type =
    NonBehaviorBodyItem
    | ownedRelationship += InitialNodeMember
    ( ownedRelationship += ActionTargetSuccessionMember )*
```

```

InterfaceEnd : PortUsage :
  ( declaredName = Name REFERENCES )?
  ownedRelationship += OwnedReferenceSubsetting
  ( ownedRelationship += OwnedMultiplicity )?

```

8.2.2.15 Allocations Textual Notation

```

AllocationDefinition =
  OccurrenceDefinitionPrefix 'allocation' 'def' Definition

AllocationUsage =
  OccurrenceUsagePrefix
  AllocationUsageDeclaration UsageBody

AllocationUsageDeclaration : AllocationUsage =
  'allocation' UsageDeclaration
  ( 'allocate' ConnectorPart )?
  | 'allocate' ConnectorPart

```

8.2.2.16 Actions Textual Notation

8.2.2.16.1 Action Definitions

```

ActionDefinition =
  OccurrenceDefinitionPrefix 'action' 'def'
  DefinitionDeclaration ActionBody

ActionBody : Type =
  ';' | '{' ActionBodyItem* '}''

ActionBodyItem : Type =
  NonBehaviorBodyItem
  | ownedRelationship += InitialNodeMember
    ( ownedRelationship += ActionTargetSuccessionMember )*
  | ( ownedRelationship += SourceSuccessionMember )?
    ownedRelationship += ActionBehaviorMember
    ( ownedRelationship += ActionTargetSuccessionMember )*
  | ownedRelationship += GuardedSuccessionMember

NonBehaviorBodyItem =
  ownedRelationship += Import
  | ownedRelationship += AliasMember
  | ownedRelationship += DefinitionMember
  | ownedRelationship += VariantUsageMember
  | ownedRelationship += NonOccurrenceUsageMember
  | ( ownedRelationship += SourceSuccessionMember )?
    ownedRelationship += StructureUsageMember

ActionBehaviorMember : FeatureMembership =
  BehaviorUsageMember | ActionNodeMember

InitialNodeMember : FeatureMembership =
  MemberPrefix 'first' memberFeature = [QualifiedName]
  RelationshipBody

ActionNodeMember : FeatureMembership =
  MemberPrefix ownedRelatedElement += ActionNode

ActionTargetSuccessionMember : FeatureMembership =
  MemberPrefix ownedRelatedElement += ActionTargetSuccession

GuardedSuccessionMember : FeatureMembership =
  MemberPrefix ownedRelatedElement += GuardedSuccession

```

```

| ( ownedRelationship += SourceSuccessionMember )?
  ownedRelationship += ActionBehaviorMember
  ( ownedRelationship += ActionTargetSuccessionMember )*
| ownedRelationship += GuardedSuccessionMember

NonBehaviorBodyItem =
  ownedRelationship += Import
| ownedRelationship += AliasMember
| ownedRelationship += DefinitionMember
| ownedRelationship += VariantUsageMember
| ownedRelationship += NonOccurrenceUsageMember
| ( ownedRelationship += SourceSuccessionMember )?
  ownedRelationship += StructureUsageMember

ActionBehaviorMember : FeatureMembership =
  BehaviorUsageMember | ActionNodeMember

InitialNodeMember : FeatureMembership =
  MemberPrefix 'first' memberFeature = [QualifiedName]
  RelationshipBody

ActionNodeMember : FeatureMembership =
  MemberPrefix ownedRelatedElement += ActionNode

ActionTargetSuccessionMember : FeatureMembership =
  MemberPrefix ownedRelatedElement += ActionTargetSuccession

GuardedSuccessionMember : FeatureMembership =
  MemberPrefix ownedRelatedElement += GuardedSuccession

```

8.2.2.16.2 Action Usages

```

ActionUsage =
  OccurrenceUsagePrefix 'action'
  ActionUsageDeclaration ActionBody

ActionUsageDeclaration : ActionUsage =
  UsageDeclaration ValuePart?

PerformActionUsage =
  OccurrenceUsagePrefix 'perform'
  PerformActionUsageDeclaration ActionBody

PerformActionUsageDeclaration : PerformActionUsage =
  ( ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecializationPart?
  | 'action' UsageDeclaration )
  ValuePart?

ActionNode : ActionUsage =
  ControlNode
| AssignmentNode
| SendNode | AcceptNode
| IfNode | WhileLoopNode | ForLoopNode

ActionNodeUsageDeclaration : ActionUsage =
  'action' UsageDeclaration?

ActionNodePrefix : ActionUsage =
  OccurrenceUsagePrefix ActionNodeUsageDeclaration?

```

8.2.2.16.2 Action Usages

SYSML2 -44: Transformation of UML4SysML::ActivityFinalNode is not specified yet

```
ActionUsage =
  OccurrenceUsagePrefix 'action'
  ActionUsageDeclaration ActionBody

ActionUsageDeclaration : ActionUsage =
  UsageDeclaration ValuePart?

PerformActionUsage =
  OccurrenceUsagePrefix 'perform'
  PerformActionUsageDeclaration ActionBody

PerformActionUsageDeclaration : PerformActionUsage =
  ( ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecializationPart?
  | 'action' UsageDeclaration )
  ValuePart?

ActionNode : ActionUsage =
  ControlNode
  | SendNode | AcceptNode
  | AssignmentNode
  | TerminateNode
  | IfNode | WhileLoopNode | ForLoopNode

ActionNodeUsageDeclaration : ActionUsage =
  'action' UsageDeclaration?

ActionNodePrefix : ActionUsage =
  OccurrenceUsagePrefix ActionNodeUsageDeclaration?
```

8.2.2.16.3 Control Nodes

```
ControlNode =
  MergeNode | DecisionNode | JoinNode| ForkNode

ControlNodePrefix : OccurrenceUsage =
  RefPrefix
  ( isIndividual ?= 'individual' )?
  ( portionKind = PortionKind )?
  UsageExtensionKeyword*

MergeNode =
  ControlNodePrefix
  isComposite ?= 'merge' UsageDeclaration
  ActionNodeBody

DecisionNode =
  ControlNodePrefix
  isComposite ?= 'decide' UsageDeclaration
  ActionNodeBody

JoinNode =
  ControlNodePrefix
  isComposite ?= 'join' UsageDeclaration
  ActionNodeBody

ForkNode =
  ControlNodePrefix
```

8.2.2.16.3 Control Nodes

```
ControlNode =
    MergeNode | DecisionNode | JoinNode| ForkNode

ControlNodePrefix : OccurrenceUsage =
    RefPrefix
    ( isIndividual ?= 'individual' )?
    ( portionKind = PortionKind )?
    UsageExtensionKeyword*

MergeNode =
    ControlNodePrefix
    isComposite ?= 'merge' UsageDeclaration
    ActionNodeBody

DecisionNode =
    ControlNodePrefix
    isComposite ?= 'decide' UsageDeclaration
    ActionNodeBody

JoinNode =
    ControlNodePrefix
    isComposite ?= 'join' UsageDeclaration
    ActionNodeBody

ForkNode =
    ControlNodePrefix
    isComposite ?= 'fork' UsageDeclaration
    ActionNodeBody

ActionNodeBody : ControlNode =
    ';' | '{' ( ownedRelationship += AnnotatingMember )* '}'
```

8.2.2.16.4 Send and Accept Action Usages

```
AcceptNode : AcceptActionUsage =
    OccurrenceUsagePrefix
    AcceptNodeDeclaration ActionBody

AcceptNodeDeclaration : AcceptActionUsage =
    ActionNodeUsageDeclaration?
    'accept' AcceptParameterPart

AcceptParameterPart : AcceptActionUsage =
    ownedRelationship += PayloadParameterMember
    ( 'via' ownedRelationship += NodeParameterMember
    | ownedRelationship += EmptyParameterMember )

PayloadParameterMember : ParameterMembership =
    ownedRelatedElement += PayloadParameter

PayloadParameter : ReferenceUsage =
    PayloadFeature
    | Identification PayloadFeatureSpecializationPart?
    TriggerValuePart

TriggerValuePart : Feature =
    ownedRelationship += TriggerFeatureValue
```

```

isComposite ?= 'fork' UsageDeclaration
ActionNodeBody

ActionNodeBody : ControlNode =
';' | '{' ( ownedRelationship += AnnotatingMember )* '}'

8.2.2.16.4 Send and Accept Action Usages

AcceptNode : AcceptActionUsage =
OccurrenceUsagePrefix
AcceptNodeDeclaration ActionBody

AcceptNodeDeclaration : AcceptActionUsage =
ActionNodeUsageDeclaration?
'accept' AcceptParameterPart

AcceptParameterPart : AcceptActionUsage =
ownedRelationship += PayloadParameterMember
( 'via' ownedRelationship += NodeParameterMember
| ownedRelationship += EmptyParameterMember )

PayloadParameterMember : ParameterMembership =
ownedRelatedElement += PayloadParameter

PayloadParameter : ReferenceUsage =
PayloadFeature
| Identification PayloadFeatureSpecializationPart?
TriggerValuePart

TriggerValuePart : Feature =
ownedRelationship += TriggerFeatureValue

TriggerFeatureValue : FeatureValue =
ownedRelatedElement += TriggerExpression

TriggerExpression : TriggerInvocationExpression =
kind = ( 'at' | 'after' )
ownedRelationship += ArgumentMember
| kind = 'when'
ownedRelationship += ArgumentExpressionMember

ArgumentMember : ParameterMembership =
ownedMemberParameter = Argument

Argument : Feature =
ownedRelationship += ArgumentValue

ArgumentValue : FeatureValue =
value = OwnedExpression

ArgumentExpressionMember : ParameterMembership =
ownedRelatedElement += ArgumentExpression

ArgumentExpression : Feature =
ownedRelationship += ArgumentExpressionValue

ArgumentExpressionValue : FeatureValue =
ownedRelatedElement += OwnedExpressionReference

SendNode : SendActionUsage =
OccurrenceUsagePrefix
SendNodeDeclaration ActionBody

```

```

TriggerFeatureValue : FeatureValue =
    ownedRelatedElement += TriggerExpression

TriggerExpression : TriggerInvocationExpression =
    kind = ( 'at' | 'after' )
    ownedRelationship += ArgumentMember
| kind = 'when'
    ownedRelationship += ArgumentExpressionMember

ArgumentMember : ParameterMembership =
    ownedMemberParameter = Argument

Argument : Feature =
    ownedRelationship += ArgumentValue

ArgumentValue : FeatureValue =
    value = OwnedExpression

ArgumentExpressionMember : ParameterMembership =
    ownedRelatedElement += ArgumentExpression

ArgumentExpression : Feature =
    ownedRelationship += ArgumentExpressionValue

ArgumentExpressionValue : FeatureValue =
    ownedRelatedElement += OwnedExpressionReference

SendNode : SendActionUsage =
    OccurrenceUsagePrefix
    SendNodeDeclaration ActionBody

SendNodeDeclaration : SendActionUsage =
    ActionNodeUsageDeclaration?
    'send' ownedRelationship += NodeParameterMember
    ( 'via' ownedRelationship += NodeParameterMember
    | ownedRelationship += EmptyParameterMember )
    ( 'to' ownedRelationship += NodeParameterMember
    | ownedRelationship += EmptyParameterMember )

NodeParameterMember : ParameterMembership =
    ownedRelatedElement += NodeParameter

NodeParameter : ReferenceUsage =
    ownedRelationship += FeatureBinding

FeatureBinding : FeatureValue =
    ownedRelatedElement += OwnedExpression

EmptyParameterMember : ParameterMembership =
    ownedRelatedElement += EmptyUsage

EmptyUsage : ReferenceUsage =
{ }

```

Notes

1. The productions for `ArgumentMember`, `Argument`, `ArgumentValue`, `ArgumentExpressionMember`, `ArgumentExpression` and `ArgumentExpressionValue` are the same as given in [KerML, 8.2.5.8.1].

```

SendNodeDeclaration : SendActionUsage =
  ActionNodeUsageDeclaration?
  'send' ownedRelationship += NodeParameterMember
  ( 'via' ownedRelationship += NodeParameterMember
  | ownedRelationship += EmptyParameterMember )
  ( 'to' ownedRelationship += NodeParameterMember
  | ownedRelationship += EmptyParameterMember )

NodeParameterMember : ParameterMembership =
  ownedRelatedElement += NodeParameter

NodeParameter : ReferenceUsage =
  ownedRelationship += FeatureBinding

FeatureBinding : FeatureValue =
  ownedRelatedElement += OwnedExpression

EmptyParameterMember : ParameterMembership =
  ownedRelatedElement += EmptyUsage

EmptyUsage : ReferenceUsage =
  {}

```

Notes

1. The productions for ArgumentMember, Argument, ArgumentValue, ArgumentExpressionMember, ArgumentExpression and ArgumentExpressionValue are the same as given in [KerML, 8.2.5.8.1].

8.2.2.16.5 Assignment Action Usages

```

AssignmentNode : AssignmentActionUsage =
  OccurrenceUsagePrefix
  AssignmentNodeDeclaration ActionBody

AssignmentNodeDeclaration: ActionUsage =
  ( ActionNodeUsageDeclaration )? 'assign'
  ownedRelationship += AssignmentTargetMember
  ownedRelationship += FeatureChainMember ':='
  ownedRelationship += NodeParameterMember

AssignmentTargetMember : ParameterMembership =
  ownedRelatedElement += AssignmentTargetParameter

AssignmentTargetParameter : ReferenceUsage =
  ( ownedRelationship += AssignmentTargetBinding '.' )?

AssignmentTargetBinding : FeatureValue =
  ownedRelatedElement += NonFeatureChainPrimaryExpression

FeatureChainMember : Membership =
  memberElement = [QualifiedName]
  | OwnedFeatureChainMember

OwnedFeatureChainMember : OwningMembership =
  ownedRelatedElement += OwnedFeatureChain

```

8.2.2.16.6 Terminate Action Usages

SYSML2 -44: Transformation of UML4SysML::ActivityFinalNode is not specified yet

8.2.2.16.5 Assignment Action Usages

```
AssignmentNode : AssignmentActionUsage =
    OccurrenceUsagePrefix
    AssignmentNodeDeclaration ActionBody

AssignmentNodeDeclaration: ActionUsage =
    ( ActionNodeUsageDeclaration )? 'assign'
    ownedRelationship += AssignmentTargetMember
    ownedRelationship += FeatureChainMember ':='
    ownedRelationship += NodeParameterMember

AssignmentTargetMember : ParameterMembership =
    ownedRelatedElement += AssignmentTargetParameter

AssignmentTargetParameter : ReferenceUsage =
    ( ownedRelationship += AssignmentTargetBinding '.' )?

AssignmentTargetBinding : FeatureValue =
    ownedRelatedElement += NonFeatureChainPrimaryExpression

FeatureChainMember : Membership =
    memberElement = [QualifiedName]
    | OwnedFeatureChainMember

OwnedFeatureChainMember : OwningMembership =
    ownedRelatedElement += OwnedFeatureChain
```

8.2.2.16.6 Structured Control Action Usages

```
IfNode : IfActionUsage =
    ActionNodePrefix
    'if' ownedRelationship += ExpressionParameterMember
    ownedRelationship += ActionBodyParameterMember
    ( 'else' ownedRelationship +=
        ( ActionBodyParameterMember | IfNodeParameterMember ) )?

ExpressionParameterMember : ParameterMembership =
    ownedRelatedElement += OwnedExpression

ActionBodyParameterMember : ParameterMembership =
    ownedRelatedElement += ActionBodyParameter

ActionBodyParameter : ActionUsage =
    ( 'action' UsageDeclaration? )?
    '{' ActionBodyItem* '}' 

IfNodeParameterMember : ParameterMembership =
    ownedRelatedElement += IfNode

WhileLoopNode : WhileLoopActionUsage =
    ActionNodePrefix
    ( 'while' ownedRelationship += ExpressionParameterMember
    | 'loop' ownedRelationship += EmptyParameterMember
    )
    ownedRelationship += ActionBodyParameterMember
    ( 'until' ownedRelationship += ExpressionParameterMember ';' )?
```

```

TerminateNode : TerminateActionUsage =
  OccurrenceUsagePrefix ActionNodeUsageDeclaration?
  'terminate' ( ownedRelationship += NodeParameterMember ) ?
  ActionBody

```

8.2.2.16.7 Structured Control Action Usages

```

IfNode : IfActionUsage =
  ActionNodePrefix
  'if' ownedRelationship += ExpressionParameterMember
  ownedRelationship += ActionBodyParameterMember
  ( 'else' ownedRelationship +=
    ( ActionBodyParameterMember | IfNodeParameterMember ) ) ?

ExpressionParameterMember : ParameterMembership =
  ownedRelatedElement += OwnedExpression

ActionBodyParameterMember : ParameterMembership =
  ownedRelatedElement += ActionBodyParameter

ActionBodyParameter : ActionUsage =
  ( 'action' UsageDeclaration? )?
  '{' ActionBodyItem* '}' 

IfNodeParameterMember : ParameterMembership =
  ownedRelatedElement += IfNode

WhileLoopNode : WhileLoopActionUsage =
  ActionNodePrefix
  ( 'while' ownedRelationship += ExpressionParameterMember
  | 'loop' ownedRelationship += EmptyParameterMember
  )
  ownedRelationship += ActionBodyParameterMember
  ( 'until' ownedRelationship += ExpressionParameterMember ';' ) ?

ForLoopNode : ForLoopActionUsage =
  ActionNodePrefix
  'for' ownedRelationship += ForVariableDeclarationMember
  'in' ownedRelationship += NodeParameterMember
  ownedRelationship += ActionBodyParameterMember

ForVariableDeclarationMember : FeatureMembership =
  ownedRelatedElement += UsageDeclaration

ForVariableDeclaration : ReferenceUsage =
  UsageDeclaration

```

8.2.2.16.8 Action Successions

```

ActionTargetSuccession : Usage =
  ( TargetSuccession | GuardedTargetSuccession | DefaultTargetSuccession )
  UsageBody

TargetSuccession : SuccessionAsUsage =
  ownedRelationship += SourceEndMember
  'then' ownedRelationship += ConnectorEndMember

GuardedTargetSuccession : TransitionUsage =
  ownedRelationship += GuardExpressionMember
  'then' ownedRelationship += TransitionSuccessionMember

DefaultTargetSuccession : TransitionUsage =

```

```

ForLoopNode : ForLoopActionUsage =
  ActionNodePrefix
  'for' ownedRelationship += ForVariableDeclarationMember
  'in' ownedRelationship += NodeParameterMember
  ownedRelationship += ActionBodyParameterMember

ForVariableDeclarationMember : FeatureMembership =
  ownedRelatedElement += UsageDeclaration

ForVariableDeclaration : ReferenceUsage =
  UsageDeclaration

```

8.2.2.16.7 Action Successions

```

ActionTargetSuccession : Usage =
  ( TargetSuccession | GuardedTargetSuccession | DefaultTargetSuccession )
  UsageBody

TargetSuccession : SuccessionAsUsage =
  ownedRelationship += SourceEndMember
  'then' ownedRelationship += ConnectorEndMember

GuardedTargetSuccession : TransitionUsage =
  ownedRelationship += GuardExpressionMember
  'then' ownedRelationship += TransitionSuccessionMember

DefaultTargetSuccession : TransitionUsage =
  'else' ownedRelationship += TransitionSuccessionMember

GuardedSuccession : TransitionUsage =
  ( 'succession' UsageDeclaration )?
  'first' ownedRelationship += FeatureChainMember
  ownedRelationship += GuardExpressionMember
  'then' ownedRelationship += TransitionSuccessionMember
  UsageBody

```

8.2.2.17 States Textual Notation

8.2.2.17.1 State Definitions

```

StateDefinition =
  OccurrenceDefinitionPrefix 'state' 'def'
  DefinitionDeclaration StateDefBody

StateDefBody : StateDefinition =
  ';'
  | ( isParallel ?= 'parallel' )?
  '{' StateBodyItem* '}''

StateBodyItem : Type =
  NonBehaviorBodyItem
  | ( ownedRelationsup += SourceSuccessionMember )?
    ownedRelationship += BehaviorUsageMember
    ( ownedRelationship += TargetTransitionUsageMember )*
  | ownedRelationship += TransitionUsageMember
  | ownedRelationship += EntryActionMember
    ( ownedRelationship += EntryTransitionMember )*
  | ownedRelationship += DoActionMember
  | ownedRelationship += ExitActionMember

```

```

'else' ownedRelationship += TransitionSuccessionMember

GuardedSuccession : TransitionUsage =
  ( 'succession' UsageDeclaration )?
  'first' ownedRelationship += FeatureChainMember
  ownedRelationship += GuardExpressionMember
  'then' ownedRelationship += TransitionSuccessionMember
  UsageBody

```

8.2.2.17 States Textual Notation

8.2.2.17.1 State Definitions

```

StateDefinition =
  OccurrenceDefinitionPrefix 'state' 'def'
  DefinitionDeclaration StateDefBody

StateDefBody : StateDefinition =
  ';'
  | ( isParallel ?= 'parallel' )?
  '{' StateBodyItem* '}''

StateBodyItem : Type =
  NonBehaviorBodyItem
  | ( ownedRelationsup += SourceSuccessionMember )?
  ownedRelationship += BehaviorUsageMember
  ( ownedRelationship += TargetTransitionUsageMember )*
  | ownedRelationship += TransitionUsageMember
  | ownedRelationship += EntryActionMember
  ( ownedRelationship += EntryTransitionMember )*
  | ownedRelationship += DoActionMember
  | ownedRelationship += ExitActionMember

EntryActionMember : StateSubactionMembership =
  MemberPrefix kind = 'entry'
  ownedRelatedElement += StateActionUsage

DoActionMember : StateSubactionMembership =
  MemberPrefix kind = 'do'
  ownedRelatedElement += StateActionUsage

ExitActionMember : StateSubactionMembership =
  MemberPrefix kind = 'exit'
  ownedRelatedElement += StateActionUsage

EntryTransitionMember : FeatureMembership :
  MemberPrefix
  ( ownedRelatedElement += GuardedTargetSuccession
  | 'then' ownedRelatedElement += TargetSuccession
  ) ';'

StateActionUsage : ActionUsage =
  EmptyActionUsage ';'
  | StatePerformActionUsage
  | StateAcceptActionUsage
  | StateSendActionUsage
  | StateAssignmentActionUsage

EmptyActionUsage : ActionUsage =
  {}

StatePerformActionUsage : PerformActionUsage =
  PerformActionUsageDeclaration ActionBody

```

```

EntryActionMember : StateSubactionMembership =
    MemberPrefix kind = 'entry'
    ownedRelatedElement += StateActionUsage

DoActionMember : StateSubactionMembership =
    MemberPrefix kind = 'do'
    ownedRelatedElement += StateActionUsage

ExitActionMember : StateSubactionMembership =
    MemberPrefix kind = 'exit'
    ownedRelatedElement += StateActionUsage

EntryTransitionMember : FeatureMembership :
    MemberPrefix
    ( ownedRelatedElement += GuardedTargetSuccession
    | 'then' ownedRelatedElement += TargetSuccession
    ) ';''

StateActionUsage : ActionUsage =
    EmptyActionUsage ';'
    | StatePerformActionUsage
    | StateAcceptActionUsage
    | StateSendActionUsage
    | StateAssignmentActionUsage

EmptyActionUsage : ActionUsage =
    {}

StatePerformActionUsage : PerformActionUsage =
    PerformActionUsageDeclaration ActionBody

StateAcceptActionUsage : AcceptActionUsage =
    AcceptNodeDeclaration ActionBody

StateSendActionUsage : SendActionUsage
    SendNodeDeclaration ActionBody

StateAssignmentActionUsage : AssignmentActionUsage =
    AssignmentNodeDeclaration ActionBody

TransitionUsageMember : FeatureMembership =
    MemberPrefix ownedRelatedElement += TransitionUsage

TargetTransitionUsageMember : FeatureMembership =
    MemberPrefix ownedRelatedElement += TargetTransitionUsage

```

8.2.2.17.2 State Usages

```

StateUsage =
    OccurrenceUsagePrefix 'state'
    ActionUsageDeclaration StateUsageBody

StateUsageBody : StateUsage =
    ';'
    | ( isParallel ?= 'parallel' )?
    '{' StateBodyItem* '}''

ExhibitStateUsage =
    OccurrenceUsagePrefix 'exhibit'
    ( ownedRelationship += OwnedReferenceSubsetting

```

```

StateAcceptActionUsage : AcceptActionUsage =
    AcceptNodeDeclaration ActionBody

StateSendActionUsage : SendActionUsage
    SendNodeDeclaration ActionBody

StateAssignmentActionUsage : AssignmentActionUsage =
    AssignmentNodeDeclaration ActionBody

TransitionUsageMember : FeatureMembership =
    MemberPrefix ownedRelatedElement += TransitionUsage

TargetTransitionUsageMember : FeatureMembership =
    MemberPrefix ownedRelatedElement += TargetTransitionUsage

```

8.2.2.17.2 State Usages

```

StateUsage =
    OccurrenceUsagePrefix 'state'
    ActionUsageDeclaration StateUsageBody

StateUsageBody : StateUsage =
    ';'
    | ( isParallel ?= 'parallel' )?
    '{' StateBodyItem* '}''

ExhibitStateUsage =
    OccurrenceUsagePrefix 'exhibit'
    ( ownedRelationship += OwnedReferenceSubsetting
        FeatureSpecializationPart?
    | 'state' UsageDeclaration )
    ValuePart? StateUsageBody

```

8.2.2.17.3 Transition Usages

```

TransitionUsage =
    'transition' ( UsageDeclaration 'first' )?
    ownedRelationship += FeatureChainMember
    ownedRelationship += EmptyParameterMember
    ( ownedRelationship += EmptyParameterMember
        ownedRelationship += TriggerActionMember )?
    ( ownedRelationship += GuardExpressionMember )?
    ( ownedRelationship += EffectBehaviorMember )?
    'then' ownedRelationship += TransitionSuccessionMember
    ActionBody

TargetTransitionUsage : TransitionUsage =
    ownedRelationship += EmptyParameterMember
    ( 'transition'
        ( ownedRelationship += EmptyParameterMember
            ownedRelationship += TriggerActionMember )?
        ( ownedRelationship += GuardExpressionMember )?
        ( ownedRelationship += EffectBehaviorMember )?
    | ownedRelationship += EmptyParameterMember
        ownedRelationship += TriggerActionMember
        ( ownedRelationship += GuardExpressionMember )?
        ( ownedRelationship += EffectBehaviorMember )?
    | ownedRelationship += GuardExpressionMember
        ( ownedRelationship += EffectBehaviorMember )?
    )?
    'then' ownedRelationship += TransitionSuccessionMember

```

```

    FeatureSpecializationPart?
| 'state' UsageDeclaration )
ValuePart? StateUsageBody

```

8.2.2.17.3 Transition Usages

```

TransitionUsage =
  'transition' ( UsageDeclaration 'first' )?
  ownedRelationship += FeatureChainMember
  ownedRelationship += EmptyParameterMember
  ( ownedRelationship += EmptyParameterMember
    ownedRelationship += TriggerActionMember )?
  ( ownedRelationship += GuardExpressionMember )?
  ( ownedRelationship += EffectBehaviorMember )?
  'then' ownedRelationship += TransitionSuccessionMember
  ActionBody

TargetTransitionUsage : TransitionUsage =
  ownedRelationship += EmptyParameterMember
  ( 'transition'
    ( ownedRelationship += EmptyParameterMember
      ownedRelationship += TriggerActionMember )?
    ( ownedRelationship += GuardExpressionMember )?
    ( ownedRelationship += EffectBehaviorMember )?
  | ownedRelationship += EmptyParameterMember
    ownedRelationship += TriggerActionMember
    ( ownedRelationship += GuardExpressionMember )?
    ( ownedRelationship += EffectBehaviorMember )?
  | ownedRelationship += GuardExpressionMember
    ( ownedRelationship += EffectBehaviorMember )?
  )?
  'then' ownedRelationship += TransitionSuccessionMember
  ActionBody

TriggerActionMember : TransitionFeatureMembership =
  'accept' { kind = 'trigger' } ownedRelatedElement += TriggerAction

TriggerAction : AcceptActionUsage =
  AcceptParameterPart

GuardExpressionMember : TransitionFeatureMembership =
  'if' { kind = 'guard' } ownedRelatedElement += OwnedExpression

EffectBehaviorMember : TransitionFeatureMembership =
  'do' { kind = 'effect' } ownedRelatedElement += EffectBehaviorUsage

EffectBehaviorUsage : ActionUsage =
  EmptyActionUsage
| TransitionPerformActionUsage
| TransitionAcceptActionUsage
| TransitionSendActionUsage
| TransitionAssignmentActionUsage

TransitionPerformActionUsage : PerformActionUsage =
  PerformActionUsageDeclaration ( '{' ActionBodyItem* '}' )?

TransitionAcceptActionUsage : AcceptActionUsage =
  AcceptNodeDeclaration ( '{' ActionBodyItem* '}' )?

TransitionSendActionUsage : SendActionUsage =

```

```

ActionBody

TriggerActionMember : TransitionFeatureMembership =
  'accept' { kind = 'trigger' } ownedRelatedElement += TriggerAction

TriggerAction : AcceptActionUsage =
  AcceptParameterPart

GuardExpressionMember : TransitionFeatureMembership =
  'if' { kind = 'guard' } ownedRelatedElement += OwnedExpression

EffectBehaviorMember : TransitionFeatureMembership =
  'do' { kind = 'effect' } ownedRelatedElement += EffectBehaviorUsage

EffectBehaviorUsage : ActionUsage =
  EmptyActionUsage
  | TransitionPerformActionUsage
  | TransitionAcceptActionUsage
  | TransitionSendActionUsage
  | TransitionAssignmentActionUsage

TransitionPerformActionUsage : PerformActionUsage =
  PerformActionUsageDeclaration ( '{' ActionBodyItem* '}' )?

TransitionAcceptActionUsage : AcceptActionUsage =
  AcceptNodeDeclaration ( '{' ActionBodyItem* '}' )?

TransitionSendActionUsage : SendActionUsage =
  SendNodeDeclaration ( '{' ActionBodyItem* '}' )?

TransitionAssignmentActionUsage : AssignmentActionUsage =
  AssignmentNodeDeclaration ( '{' ActionBodyItem* '}' )?

TransitionSuccessionMember : OwningMembership =
  ownedRelatedElement += TransitionSuccession

TransitionSuccession : Succession =
  ownedRelationship += EmptyEndMember
  ownedRelationship += ConnectorEndMember

EmptyEndMember : EndFeatureMembership =
  ownedRelatedElement += EmptyFeature

EmptyFeature : ReferenceUsage =
  {}


```

8.2.2.18 Calculations Textual Notation

```

CalculationDefinition =
  OccurrenceDefinitionPrefix 'calc' 'def'
  DefinitionDeclaration CalculationBody

CalculationUsage : CalculationUsage =
  OccurrenceUsagePrefix 'calc'
  ActionUsageDeclaration CalculationBody

CalculationBody : Type =
  ';' | '{' CalculationBodyPart '}' 

CalculationBodyPart : Type =
  CalculationBodyItem*
  ( ownedRelationship += ResultExpressionMember )?

```

```

SendNodeDeclaration ( '{' ActionBodyItem* '}' )?

TransitionAssignmentActionUsage : AssignmentActionUsage =
    AssignmentNodeDeclaration ( '{' ActionBodyItem* '}' )?

TransitionSuccessionMember : OwningMembership =
    ownedRelatedElement += TransitionSuccession

TransitionSuccession : Succession =
    ownedRelationship += EmptyEndMember
    ownedRelationship += ConnectorEndMember

EmptyEndMember : EndFeatureMembership =
    ownedRelatedElement += EmptyFeature

EmptyFeature : ReferenceUsage =
    {}

```

8.2.2.18 Calculations Textual Notation

```

CalculationDefinition =
    OccurrenceDefinitionPrefix 'calc' 'def'
    DefinitionDeclaration CalculationBody

CalculationUsage : CalculationUsage =
    OccurrenceUsagePrefix 'calc'
    ActionUsageDeclaration CalculationBody

CalculationBody : Type =
    ';' | '{' CalculationBodyPart '}''

CalculationBodyPart : Type =
    CalculationBodyItem*
    ( ownedRelationship += ResultExpressionMember )?

CalculationBodyItem : Type =
    ActionBodyItem
    | ownedRelationship += ReturnParameterMember

ReturnParameterMember : ReturnParameterMembership =
    MemberPrefix? 'return' ownedRelatedElement += UsageElement

ResultExpressionMember : ResultExpressionMembership =
    MemberPrefix? ownedRelatedElement += OwnedExpression

```

8.2.2.19 Constraints Textual Notation

```

ConstraintDefinition =
    OccurrenceDefinitionPrefix 'constraint' 'def'
    DefinitionDeclaration CalculationBody

ConstraintUsage =
    OccurrenceUsagePrefix 'constraint'
    ConstraintUsageDeclaration CalculationBody

AssertConstraintUsage =
    OccurrenceUsagePrefix 'assert' ( isNegated ?= 'not' )?
    ( ownedRelationship += OwnedReferenceSubsetting
        FeatureSpecializationPart?
    | 'constraint' ConstraintUsageDeclaration )

```

```

CalculationBodyItem : Type =
    ActionBodyItem
    | ownedRelationship += ReturnParameterMember

ReturnParameterMember : ReturnParameterMembership =
    MemberPrefix? 'return' ownedRelatedElement += UsageElement

ResultExpressionMember : ResultExpressionMembership =
    MemberPrefix? ownedRelatedElement += OwnedExpression

```

8.2.2.19 Constraints Textual Notation

```

ConstraintDefinition =
    OccurrenceDefinitionPrefix 'constraint' 'def'
    DefinitionDeclaration CalculationBody

ConstraintUsage =
    OccurrenceUsagePrefix 'constraint'
    ConstraintUsageDeclaration CalculationBody

AssertConstraintUsage =
    OccurrenceUsagePrefix 'assert' ( isNegated ?= 'not' )?
    ( ownedRelationship += OwnedReferenceSubsetting
        FeatureSpecializationPart?
    | 'constraint' ConstraintUsageDeclaration )
    CalculationBody

ConstraintUsageDeclaration : ConstraintUsage =
    UsageDeclaration ValuePart?

```

8.2.2.20 Requirements Textual Notation

8.2.2.20.1 Requirement Definitions

```

RequirementDefinition =
    OccurrenceDefinitionPrefix 'requirement' 'def'
    DefinitionDeclaration RequirementBody

RequirementBody : Type =
    ';' | '{' RequirementBodyItem* '}''

RequirementBodyItem : Type =
    DefinitionBodyItem
    | ownedRelationship += SubjectMember
    | ownedRelationship += RequirementConstraintMember
    | ownedRelationship += FramedConcernMember
    | ownedRelationship += RequirementVerificationMember
    | ownedRelationship += ActorMember
    | ownedRelationship += StakeholderMember

SubjectMember : SubjectMembership =
    MemberPrefix ownedRelatedElement += SubjectUsage

SubjectUsage : ReferenceUsage =
    'subject' UsageExtensionKeyword* Usage

RequirementConstraintMember : RequirementConstraintMembership =
    MemberPrefix? RequirementKind
    ownedRelatedElement += RequirementConstraintUsage

RequirementKind : RequirementConstraintMembership =
    'assume' { kind = 'assumption' }
    | 'require' { kind = 'requirement' }

```

```

CalculationBody

ConstraintUsageDeclaration : ConstraintUsage =
    UsageDeclaration ValuePart?

8.2.2.20 Requirements Textual Notation

8.2.2.20.1 Requirement Definitions

RequirementDefinition =
    OccurrenceDefinitionPrefix 'requirement' 'def'
    DefinitionDeclaration RequirementBody

RequirementBody : Type =
    ';' | '{' RequirementBodyItem* '}''

RequirementBodyItem : Type =
    DefinitionBodyItem
    | ownedRelationship += SubjectMember
    | ownedRelationship += RequirementConstraintMember
    | ownedRelationship += FramedConcernMember
    | ownedRelationship += RequirementVerificationMember
    | ownedRelationship += ActorMember
    | ownedRelationship += StakeholderMember

SubjectMember : SubjectMembership =
    MemberPrefix ownedRelatedElement += SubjectUsage

SubjectUsage : ReferenceUsage =
    'subject' UsageExtensionKeyword* Usage

RequirementConstraintMember : RequirementConstraintMembership =
    MemberPrefix? RequirementKind
    ownedRelatedElement += RequirementConstraintUsage

RequirementKind : RequirementConstraintMembership =
    'assume' { kind = 'assumption' }
    | 'require' { kind = 'requirement' }

RequirementConstraintUsage : ConstraintUsage =
    ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecializationPart? RequirementBody
    | ( UsageExtensionKeyword* 'constraint'
        | UsageExtensionKeyword+ )
    ConstraintUsageDeclaration CalculationBody

FramedConcernMember : FramedConcernMembership =
    MemberPrefix? 'frame'
    ownedRelatedElement += FramedConcernUsage

FramedConcernUsage : ConcernUsage =
    ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecializationPart? CalculationBody
    | ( UsageExtensionKeyword* 'concern'
        | UsageExtensionKeyword+ )
    CalculationUsageDeclaration CalculationBody

ActorMember : ActorMembership =
    MemberPrefix ownedRelatedElement += ActorUsage

```

```

RequirementConstraintUsage : ConstraintUsage =
    ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecializationPart? RequirementBody
    | ( UsageExtensionKeyword* 'constraint'
    | UsageExtensionKeyword+ )
    ConstraintUsageDeclaration CalculationBody

FramedConcernMember : FramedConcernMembership =
    MemberPrefix? 'frame'
    ownedRelatedElement += FramedConcernUsage

FramedConcernUsage : ConcernUsage =
    ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecializationPart? CalculationBody
    | ( UsageExtensionKeyword* 'concern'
    | UsageExtensionKeyword+ )
    CalculationUsageDeclaration CalculationBody

ActorMember : ActorMembership =
    MemberPrefix ownedRelatedElement += ActorUsage

ActorUsage : PartUsage =
    'actor' UsageExtensionKeyword* Usage

StakeholderMember : StakeholderMembership =
    MemberPrefix ownedRelatedElement += StakeholderUsage

StakeholderUsage : PartUsage =
    'stakeholder' UsageExtensionKeyword* Usage

```

8.2.2.20.2 Requirement Usages

```

RequirementUsage =
    OccurrenceUsagePrefix 'requirement'
    ConstraintUsageDeclaration RequirementBody

SatisfyRequirementUsage =
    OccurrenceUsagePrefix 'assert' ( isNegated ?= 'not' ) 'satisfy'
    ( ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecializationPart?
    | 'requirement' UsageDeclaration )
    ValuePart?
    ( 'by' ownedRelationship += SatisfactionSubjectMember )?
    RequirementBody

SatisfactionSubjectMember : SubjectMembership =
    ownedRelatedElement += SatisfactionParameter

SatisfactionParameter : ReferenceUsage =
    ownedRelationship += SatisfactionFeatureValue

SatisfactionFeatureValue : FeatureValue =
    ownedRelatedElement += SatisfactionReferenceExpression

SatisfactionReferenceExpression : FeatureReferenceExpression =
    ownedRelationship += FeatureChainMember

```

8.2.2.20.3 Concerns

```

ConcernDefinition =
    OccurrenceDefinitionPrefix 'concern' 'def'

```

```

ActorUsage : PartUsage =
    'actor' UsageExtensionKeyword* Usage

StakeholderMember : StakeholderMembership =
    MemberPrefix ownedRelatedElement += StakeholderUsage

StakeholderUsage : PartUsage =
    'stakeholder' UsageExtensionKeyword* Usage

```

8.2.2.20.2 Requirement Usages

```

RequirementUsage =
    OccurrenceUsagePrefix 'requirement'
    ConstraintUsageDeclaration RequirementBody

SatisfyRequirementUsage =
    OccurrenceUsagePrefix 'assert' ( isNegated ?= 'not' ) 'satisfy'
    ( ownedRelationship += OwnedReferenceSubsetting
        FeatureSpecializationPart?
    | 'requirement' UsageDeclaration )
    ValuePart?
    ( 'by' ownedRelationship += SatisfactionSubjectMember )?
    RequirementBody

SatisfactionSubjectMember : SubjectMembership =
    ownedRelatedElement += SatisfactionParameter

SatisfactionParameter : ReferenceUsage =
    ownedRelationship += SatisfactionFeatureValue

SatisfactionFeatureValue : FeatureValue =
    ownedRelatedElement += SatisfactionReferenceExpression

SatisfactionReferenceExpression : FeatureReferenceExpression =
    ownedRelationship += FeatureChainMember

```

8.2.2.20.3 Concerns

```

ConcernDefinition =
    OccurrenceDefinitionPrefix 'concern' 'def'
    DefinitionDeclaration RequirementBody

ConcernUsage =
    OccurrenceUsagePrefix 'concern'
    ConstraintUsageDeclaration RequirementBody

```

8.2.2.21 Cases Textual Notation

```

CaseDefinition =
    OccurrenceDefinitionPrefix 'case' 'def'
    DefinitionDeclaration CaseBody

CaseUsage =
    OccurrenceUsagePrefix 'case'
    ConstraintUsageDeclaration CaseBody

CaseBody : Type =
    ';'
    | '{' CaseBodyItem*
        ( ownedRelationship += ResultExpressionMember )?

```

```

DefinitionDeclaration RequirementBody

ConcernUsage =
  OccurrenceUsagePrefix 'concern'
  ConstraintUsageDeclaration RequirementBody

```

8.2.2.21 Cases Textual Notation

```

CaseDefinition =
  OccurrenceDefinitionPrefix 'case' 'def'
  DefinitionDeclaration CaseBody

CaseUsage =
  OccurrenceUsagePrefix 'case'
  ConstraintUsageDeclaration CaseBody

CaseBody : Type =
  ';'
  | '{' CaseBodyItem*
    ( ownedRelationship += ResultExpressionMember )?
  '}'

CaseBodyItem : Type =
  ActionBodyItem
  | ownedRelationship += SubjectMember
  | ownedRelationship += ActorMember
  | ownedRelationship += ObjectiveMember

ObjectiveMember : ObjectiveMembership =
  MemberPrefix 'objective'
  ownedRelatedElement += ObjectiveRequirementUsage

ObjectiveRequirementUsage : RequirementUsage =
  UsageExtensionKeyword* ConstraintUsageDeclaration
  RequirementBody

```

8.2.2.22 Analysis Cases Textual Notation

```

AnalysisCaseDefinition =
  OccurrenceDefinitionPrefix 'analysis' 'def'
  DefinitionDeclaration CaseBody

AnalysisCaseUsage =
  OccurrenceUsagePrefix 'analysis'
  ConstraintUsageDeclaration CaseBody

```

8.2.2.23 Verification Cases Textual Notation

```

VerificationCaseDefinition =
  OccurrenceDefinitionPrefix 'verification' 'def'
  DefinitionDeclaration CaseBody

VerificationCaseUsage =
  OccurrenceUsagePrefix 'verification'
  ConstraintUsageDeclaration CaseBody

RequirementVerificationMember : RequirementVerificationMembership =
  MemberPrefix 'verify' { kind = 'requirement' }
  ownedRelatedElement += RequirementVerificationUsage

RequirementVerificationUsage : RequirementUsage =
  ownedRelationship += OwnedReferenceSubsetting

```

```

        '}'

CaseBodyItem : Type =
    ActionBodyItem
    | ownedRelationship += SubjectMember
    | ownedRelationship += ActorMember
    | ownedRelationship += ObjectiveMember

ObjectiveMember : ObjectiveMembership =
    MemberPrefix 'objective'
    ownedRelatedElement += ObjectiveRequirementUsage

ObjectiveRequirementUsage : RequirementUsage =
    UsageExtensionKeyword* ConstraintUsageDeclaration
    RequirementBody

```

8.2.2.22 Analysis Cases Textual Notation

```

AnalysisCaseDefinition =
    OccurrenceDefinitionPrefix 'analysis' 'def'
    DefinitionDeclaration CaseBody

AnalysisCaseUsage =
    OccurrenceUsagePrefix 'analysis'
    ConstraintUsageDeclaration CaseBody

```

8.2.2.23 Verification Cases Textual Notation

```

VerificationCaseDefinition =
    OccurrenceDefinitionPrefix 'verification' 'def'
    DefinitionDeclaration CaseBody

VerificationCaseUsage =
    OccurrenceUsagePrefix 'verification'
    ConstraintUsageDeclaration CaseBody

RequirementVerificationMember : RequirementVerificationMembership =
    MemberPrefix 'verify' { kind = 'requirement' }
    ownedRelatedElement += RequirementVerificationUsage

RequirementVerificationUsage : RequirementUsage =
    ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecialization* RequirementBody
    | ( UsageExtensionKeyword* 'requirement'
    | UsageExtensionKeyword+ )
    ConstraintUsageDeclaration RequirementBody

```

8.2.2.24 Use Cases Textual Notation

```

UseCaseDefinition =
    OccurrenceDefinitionPrefix 'use' 'case' 'def'
    DefinitionDeclaration CaseBody

UseCaseUsage =
    OccurrenceUsagePrefix 'use' 'case'
    ConstraintUsageDeclaration CaseBody

IncludeUseCaseUsage :
    OccurrenceUsagePrefix 'include'
    ( ownedRelationship += OwnedReferenceSubsetting

```

```

    FeatureSpecialization* RequirementBody
| ( UsageExtensionKeyword* 'requirement'
| UsageExtensionKeyword+ )
ConstraintUsageDeclaration RequirementBody

```

8.2.2.24 Use Cases Textual Notation

```

UseCaseDefinition =
  OccurrenceDefinitionPrefix 'use' 'case' 'def'
  DefinitionDeclaration CaseBody

UseCaseUsage =
  OccurrenceUsagePrefix 'use' 'case'
  ConstraintUsageDeclaration CaseBody

IncludeUseCaseUsage :
  OccurrenceUsagePrefix 'include'
  ( ownedRelationship += OwnedReferenceSubsetting
    FeatureSpecializationPart?
  | 'use' 'case' UsageDeclaration )
  ValuePart?
  CaseBody

```

8.2.2.25 Views and Viewpoints Textual Notation

8.2.2.25.1 View Definitions

```

ViewDefinition =
  OccurrenceDefinitionPrefix 'view' 'def'
  DefinitionDeclaration ViewDefinitionBody

ViewDefinitionBody : ViewDefinition =
  ';' | '{' ViewDefinitionBodyItem* '}''

ViewDefinitionBodyItem : ViewDefinition =
  DefinitionBodyItem
  | ownedRelationship += ElementFilterMember
  | ownedRelationship += ViewRenderingMember

ViewRenderingMember : ViewRenderingMembership =
  MemberPrefix 'render'
  ownedRelatedElement += ViewRenderingUsage

ViewRenderingUsage : RenderingUsage =
  ownedRelationship += OwnedReferenceSubsetting
  FeatureSpecializationPart?
  UsageBody
  | ( UsageExtensionKeyword* 'rendering'
  | UsageExtensionKeyword+ )
  Usage

```

8.2.2.25.2 View Usages

SYSML2 -212: Inconsistencies in the graphical notation for "expose"

```

ViewUsage =
  OccurrenceUsagePrefix 'view'
  UsageDeclaration? ValuePart?
  ViewBody

ViewBody : ViewUsage =
  ';' | '{' ViewBodyItem* '}'

```

```

    FeatureSpecializationPart?
| 'use' 'case' UsageDeclaration )
ValuePart?
CaseBody

```

8.2.2.25 Views and Viewpoints Textual Notation

8.2.2.25.1 View Definitions

```

ViewDefinition =
  OccurrenceDefinitionPrefix 'view' 'def'
  DefinitionDeclaration ViewDefinitionBody

ViewDefinitionBody : ViewDefinition =
  ';' | '{' ViewDefinitionBodyItem* '}''

ViewDefinitionBodyItem : ViewDefinition =
  DefinitionBodyItem
| ownedRelationship += ElementFilterMember
| ownedRelationship += ViewRenderingMember

ViewRenderingMember : ViewRenderingMembership =
  MemberPrefix 'render'
  ownedRelatedElement += ViewRenderingUsage

ViewRenderingUsage : RenderingUsage =
  ownedRelationship += OwnedReferenceSubsetting
  FeatureSpecializationPart?
  UsageBody
| ( UsageExtensionKeyword* 'rendering'
| UsageExtensionKeyword+ )
  Usage

```

8.2.2.25.2 View Usages

```

ViewUsage =
  OccurrenceUsagePrefix 'view'
  UsageDeclaration? ValuePart?
  ViewBody

ViewBody : ViewUsage =
  ';' | '{' ViewBodyItem* '}''

ViewBodyItem : ViewUsage =
  DefinitionBodyItem
| ownedRelationship += ElementFilterMember
| ownedRelationship += ViewRenderingMember
| ownedRelationship += Expose

Expose =
  ( visibility = VisibilityIndicator )?
  'expose' ( ImportedNamespace | ImportedFilterPackage ) ';'

```

8.2.2.25.3 Viewpoints

```

ViewpointDefinition =
  OccurrenceDefinitionPrefix 'viewpoint' 'def'
  DefinitionDeclaration RequirementBody

ViewpointUsage =

```

```

ViewBodyItem : ViewUsage =
    DefinitionBodyItem
| ownedRelationship += ElementFilterMember
| ownedRelationship += ViewRenderingMember
| ownedRelationship += Expose

Expose =
    'expose' ( MembershipExpose | NamespaceExpose )
    RelationshipBody

MembershipExpose =
    MembershipImport

NamespaceExpose =
    NamespaceImport

```

8.2.2.25.3 Viewpoints

```

ViewpointDefinition =
    OccurrenceDefinitionPrefix 'viewpoint' 'def'
    DefinitionDeclaration RequirementBody

ViewpointUsage =
    OccurrenceUsagePrefix 'viewpoint'
    ConstraintUsageDeclaration RequirementBody

```

8.2.2.25.4 Renderings

```

RenderingDefinition =
    OccurrenceDefinitionPrefix 'rendering' 'def'
    Definition

RenderingUsage =
    OccurrenceUsagePrefix 'rendering'
    Usage

```

8.2.2.26 Metadata Textual Notation

```

MetadataDefinition =
    ( isAbstract ?= 'abstract')? DefinitionExtensionKeyWord*
    'metadata' 'def' Definition

PrefixMetadataAnnotation : Annotation =
    '#' annotatingElement = PrefixMetadataUsage
    { ownedRelatedElement += annotatingElement }

PrefixMetadataMember : OwningMembership =
    '#' ownedRelatedEleemnt = PrefixMetadataUsage

PrefixMetadataUsage : MetadataUsage =
    ownedRelationship += OwnedFeatureTyping

MetadataUsage =
    UsageExtensionKeyword* ( '@' | 'metadata' )
    MetadataUsageDeclaration
    ( 'about' annotation += Annotation
        ownedRelationship += Annotation
        ( ',' annotation += Annotation
            { ownedRelationship += Annotation } )*
    )?
    MetadataBody

```

```

OccurrenceUsagePrefix 'viewpoint'
ConstraintUsageDeclaration RequirementBody

```

8.2.2.25.4 Renderings

```

RenderingDefinition =
  OccurrenceDefinitionPrefix 'rendering' 'def'
  Definition

RenderingUsage =
  OccurrenceUsagePrefix 'rendering'
  Usage

```

8.2.2.26 Metadata Textual Notation

```

MetadataDefinition =
  ( isAbstract ?= 'abstract')? DefinitionExtensionKeyWord*
  'metadata' 'def' Definition

PrefixMetadataAnnotation : Annotation =
  '#' annotatingElement = PrefixMetadataUsage
  { ownedRelatedElement += annotatingElement }

PrefixMetadataMember : OwningMembership =
  '#' ownedRelatedEleemnt = PrefixMetadataUsage

PrefixMetadataUsage : MetadataUsage =
  ownedRelationship += OwnedFeatureTyping

MetadataUsage =
  UsageExtensionKeyword* ( '@' | 'metadata' )
  MetadataUsageDeclaration
  ( 'about' annotation += Annotation
    ownedRelationship += Annotation
    ( ',' annotation += Annotation
      { ownedRelationship += Annotation } )*
  )?
  MetadataBody

MetadataUsageDeclaration : MetadataUsage =
  ( Identification ( ':' | 'typed' 'by' ) )?
  ownedRelationship += OwnedFeatureTyping

MetadataBody : Type =
  ';' |
  '{' ( ownedRelationship += DefinitionMember
    | ownedRelationship += MetadataBodyUsageMember
    | ownedRelationship += AliasMember
    | ownedRelationship += Import
    )*
  '}'

MetadataBodyUsageMember : FeatureMembership =
  ownedMemberFeature = MetadataBodyUsage

MetadataBodyUsage : ReferenceUsage :
  'ref'? ( ':>>' | 'redefines' )? ownedRelationship += OwnedRedefinition
  FeatureSpecializationPart? ValuePart?
  MetadataBody

```

```

MetadataUsageDeclaration : MetadataUsage =
  ( Identification ( ':' | 'typed' 'by' ) )?
  ownedRelationship += OwnedFeatureTyping

MetadataBody : Type =
  ';' |
  '{' ( ownedRelationship += DefinitionMember
    | ownedRelationship += MetadataBodyUsageMember
    | ownedRelationship += AliasMember
    | ownedRelationship += Import
  )*
  '}'

MetadataBodyUsageMember : FeatureMembership =
  ownedMemberFeature = MetadataBodyUsage

MetadataBodyUsage : ReferenceUsage :
  'ref'? ( ':>>' | 'redefines' )? ownedRelationship += OwnedRedefinition
  FeatureSpecializationPart? ValuePart?
  MetadataBody

ExtendedDefinition : Definition =
  BasicDefinitionPrefix? DefinitionExtensionKeyword+
  'def' Definition

ExtendedUsage : Usage =
  BasicUsagePrefix UsageExtensionKeyword+
  Usage

```

8.2.3 Graphical Notation

8.2.3.1 Graphical Notation Overview

SYSML2 -11: Missing explicit explanation of compartments as views

A *graphical view* is rendered as a graph with nodes connected by edges. The nodes and edges may be rendered with specialized syntax in different views. Nodes that depict definition and usage elements may also contain connection points, such as those corresponding to ports and parameters.

Each node in a graphical view can have any number of *compartments*. Each compartment is also a view that contains selected members of the node (which may be modeled as a view usage having a filter condition selecting the contents). The compartment shall either be a textual compartment, whose contents are rendered using textual syntax, or a graphical compartment, whose contents are rendered using graphical syntax. In either case, the rendering shall be as specified in the graphical notation grammar (see below and [8.2.3.2](#)).

A *diagram* is a view where the diagram header is the name compartment of the view (see [view-frame](#) in [8.2.3.25](#)). The view exposes some portion of the model and applies filter conditions to select the contents to be rendered in a compartment of the view. The compartment shall either be a textual compartment or a graphical compartment.

The StandardViewDefinitions package in the Systems Model Library (see [9.2.19](#)) provides a set of standard view definitions for typical kinds of diagrams, including the valid contents for the view. The standard views are then rendered as specified in the graphical notation grammar (as given in [Table 33](#) in [9.2.19.1](#)). User-defined view definitions and usages (see [8.2.2.25](#) and [8.2.3.25](#)) can also be used to provide views beyond the standard set. User-defined views may use or extend the graphical notation specification, but this is not required.

The SysML graphical notation is expressed using a simplified form of the EBNF notation used to define the SysML textual notation (see [8.2.2.1.1](#)). This graphical BNF has been extended to include productions with a mixture of graphical and textual elements. [Table 29](#) summarizes the conventions used.

```

ExtendedDefinition : Definition =
  BasicDefinitionPrefix? DefinitionExtensionKeyword+
  'def' Definition

ExtendedUsage : Usage =
  BasicUsagePrefix UsageExtensionKeyword+
  Usage

```

8.2.3 Graphical Notation

8.2.3.1 Graphical Notation Overview

The SysML graphical notation is expressed using a simplified form of the EBNF notation used to define the SysML textual notation (see [8.2.2.1.1](#)). This graphical BNF has been extended to include productions with a mixture of graphical and textual elements. [Table 29](#) summarizes the conventions used.

Table 29. Graphical BNF Conventions

Non-terminal element	non-terminal-element
Non-terminal element production (complete)	non-terminal-element = elements
Non-terminal element production (partial)	non-terminal-element = elements
Grouping	(elements)
Alternative elements	elements elements
Repeated elements (zero or more)	element *
Repeated elements (one or more)	element +
Optional elements (zero or one)	element ?
Elements	2-D layout of graphical and textual elements
Graphical element	graphical shape or graphical line
Graphical shape	2-D shape with optional nested elements
Graphical line	1-D shape with optional nested elements
Graphical line that connects other elements	&element graphical-line &element
Sequential text elements	element1 element2
Terminal text element as literal string	'terminal'
Terminal text element as lexical symbol	LEXICAL
Graphical Notation to Textual Notation mapping	graphical production <=> textual production

These conventions make a distinction between a complete production, which must include all alternatives within the production itself, and partial productions, which allow alternatives to be distributed across multiple productions located anywhere within a specification. This distinction allows greater reuse of production symbols across sections of a specification that build on partial productions given by earlier sections, while still making clear productions that are already complete within a given section.

A graphical production contains a two-dimensional layout of graphical and textual elements including graphical shapes and lines. Shapes may contain other elements nested within these shapes. Generally speaking, graphical elements specify only containment and connectivity of graphical and textual elements out of which they are built.

Table 29. Graphical BNF Conventions

Non-terminal element	non-terminal-element
Non-terminal element production (complete)	non-terminal-element = elements
Non-terminal element production (partial)	non-terminal-element = elements
Grouping	(elements)
Alternative elements	elements elements
Repeated elements (zero or more)	element *
Repeated elements (one or more)	element +
Optional elements (zero or one)	element ?
Elements	2-D layout of graphical and textual elements
Graphical element	graphical shape or graphical line
Graphical shape	2-D shape with optional nested elements
Graphical line	1-D shape with optional nested elements
Graphical line that connects other elements	&element graphical-line &element
Sequential text elements	element1 element2
Terminal text element as literal string	'terminal'
Terminal text element as lexical symbol	LEXICAL
Graphical Notation to Textual Notation mapping	graphical production <=> textual production

These conventions make a distinction between a complete production, which must include all alternatives within the production itself, and partial productions, which allow alternatives to be distributed across multiple productions located anywhere within a specification. This distinction allows greater reuse of production symbols across sections of a specification that build on partial productions given by earlier sections, while still making clear productions that are already complete within a given section.

A graphical production contains a two-dimensional layout of graphical and textual elements including graphical shapes and lines. Shapes may contain other elements nested within these shapes. Generally speaking, graphical elements specify only containment and connectivity of graphical and textual elements out of which they are built. Shapes within the graphical notation may generally be relocated anywhere within a given graphical layout. They may also have any of their graphical elements stretched as necessary to hold their contents.

Lines that connect other graphical elements may be composed of one or more straight or curved line segments. Any of these line segments may contain a semicircular jump symbol where the segment overlaps a line segment of another connecting line.

A textual production contains only other textual productions. All production symbols within the graphical BNF follow a convention of all-lowercase names with optional internal hyphens. Elements of the textual notation defined in subclause [8.2.2](#) of this specification may also be referenced by textual productions within the graphical BNF. These imported textual notation elements can be distinguished from those of the graphical BNF by their use of one or more uppercase letters within the name.

8.2.3.2 Elements and Relationships Graphical Notation

```
element =
    dependencies-and-annotations-element
```

Shapes within the graphical notation may generally be relocated anywhere within a given graphical layout. They may also have any of their graphical elements stretched as necessary to hold their contents.

Lines that connect other graphical elements may be composed of one or more straight or curved line segments. Any of these line segments may contain a semicircular jump symbol where the segment overlaps a line segment of another connecting line.

A textual production contains only other textual productions. All production symbols within the graphical BNF follow a convention of all-lowercase names with optional internal hyphens. Elements of the textual notation defined in subclause [8.2.2](#) of this specification may also be referenced by textual productions within the graphical BNF. These imported textual notation elements can be distinguished from those of the graphical BNF by their use of one or more uppercase letters within the name.

8.2.3.2 Elements and Relationships Graphical Notation

```
element =
    dependencies-and-annotations-element
  | general-element
  | element-inside-textual-compartment

compartment =| general-compartment

general-compartment =
    _____
    'general'
    general-view

general-view =
    (general-element)*
    (dependencies-and-annotations-element)*
    (ellipsis-at-lower-left-corner)?

ellipsis-at-lower-left-corner = '...'

general-element =
    general-node
  | general-relationship

element-inside-textual-compartment =
    [REDACTED]

rel-name =
    Identification
  | QualifiedName
```

Note. An element inside a textual compartment is selected by graying out a substring containing the element. The grayed-out section must cover a single element within the textual syntax inside the compartment.

8.2.3.3 Dependencies Graphical Notation

```
dependencies-and-annotations-element =| dependencies-element

dependencies-element =|
    binary-dependency
  | n-ary-dependency
```

```

| general-element
| element-inside-textual-compartment

compartment =| general-compartment

general-compartment =
  _____
  'general'
  general-view

general-view =
  (general-element)*
  (dependencies-and-annotations-element)*
  (ellipsis-at-lower-left-corner)?

ellipsis-at-lower-left-corner = '...'

general-element =
  general-node
  | general-relationship

element-inside-textual-compartment =
  [REDACTED]

rel-name =
  Identification
  | QualifiedName

```

Note. An element inside a textual compartment is selected by graying out a substring containing the element. The grayed-out section must cover a single element within the textual syntax inside the compartment.


8.2.3.3 Dependencies Graphical Notation

```

dependencies-and-annotations-element =| dependencies-element

dependencies-element =|
  binary-dependency
  | n-ary-dependency

binary-dependency =
  &element-node -----> &element-node
  (rel-name)?
```



```

n-ary-dependency =
  &n-ary-association-dot (n-ary-dependency-client-or-supplier-link &element-node)+

n-ary-dependency-client-or-supplier-link =
  n-ary-dependency-client-link
  | n-ary-dependency-supplier-link

n-ary-association-dot =
  (rel-name)?
  ●
```

n-ary-dependency-client-link =

```

binary-dependency =
    &element-node -----> &element-node
                                (rel-name)?
```

n-ary-dependency =
 &n-ary-association-dot (n-ary-dependency-client-or-supplier-link &element-node) +

n-ary-dependency-client-or-supplier-link =
 n-ary-dependency-client-link
 | n-ary-dependency-supplier-link

n-ary-association-dot =
 (rel-name)?
 ●

n-ary-dependency-client-link =
 &element-node -----> &n-ary-association-dot

n-ary-dependency-supplier-link =
 &n-ary-association-dot -----> &element-node

Note. An n-ary dependency must have two or more client elements or two or more supplier elements.

8.2.3.4 Annotations Graphical Notation


```
dependencies-and-annotations-element =|
    annotation-node
    | annotation-link
```

```
annotation-node =
    comment-node
    | documentation-node
    | textual-representation-node
```

```
text-block = (LINE_TEXT)*
```

```
comment-node =
    comment-without-keyword
    | comment-with-keyword
```

```
comment-without-keyword =
```

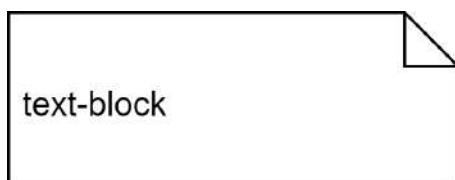

```
comment-with-keyword =
```

```

&element-node ----- &n-ary-association-dot

n-ary-dependency-supplier-link =
    &n-ary-association-dot -----> &element-node

```

Note. An n-ary dependency must have two or more client elements or two or more supplier elements.

8.2.3.4 Annotations Graphical Notation

```

dependencies-and-annotations-element =|
    annotation-node
| annotation-link

```

```


annotation-node =
    comment-node
| documentation-node
| textual-representation-node

```

```
text-block = (LINE_TEXT) *
```

```
comment-node =
    comment-without-keyword
| comment-with-keyword
```


```
comment-without-keyword =
```

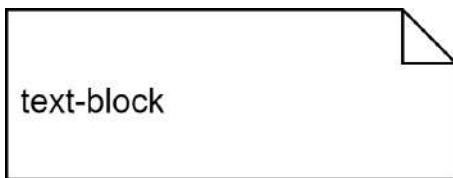

```
comment-with-keyword =
```



```
documentation-node =
```

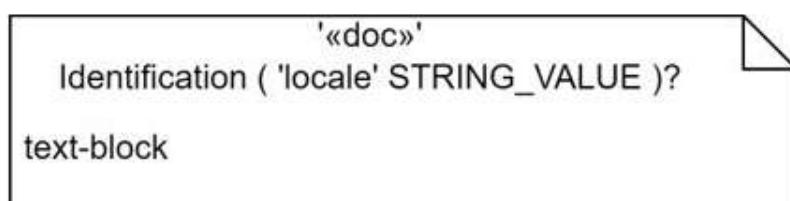

```
documentation-compartment =
```

```

'«comment»'
Identification ( 'locale' STRING_VALUE )?

text-block

```

documentation-node =

```

'«doc»'
Identification ( 'locale' STRING_VALUE )?

text-block

```

documentation-compartment =

'doc'

Identification
text-block

textual-representation-node =

```

'«rep»'
Identification

language-string
text-block

```

language-string = 'language' '=' STRING_VALUE

annotation-link =

(rel-name)?
&annotation-node ----- &element

annotated-element =
 element
 | element-inside-textual-compartment

Note. A comment node may be attached to zero, one, or more than one annotated elements. All other annotation nodes must be attached to one and only one annotated element.

8.2.3.5 Namespaces and Packages Graphical Notation

general-node =| namespace-node


namespace-node =| package-node

package-node =

'doc'

Identification
text-block

textual-representation-node =

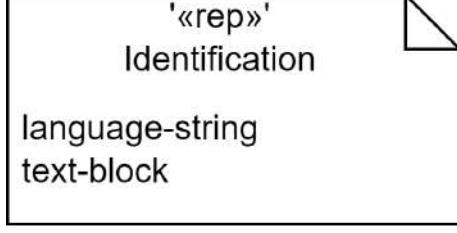

```

    '«rep»'
    Identification

    language-string
    text-block
  
```

language-string = 'language' '=' STRING_VALUE

annotation-link =

(rel-name)?
&annotation-node ----- &element

annotated-element =

element
 | element-inside-textual-compartment

Note. A comment node may be attached to zero, one, or more than one annotated elements. All other annotation nodes must be attached to one and only one annotated element.

8.2.3.5 Namespaces and Packages Graphical Notation

SYSML2 -207: Update language description and concrete syntax related to imports


general-node =| namespace-node

namespace-node =| package-node

package-node =

package-with-name-inside
 | package-with-name-in-tab
 | imported-package-with-name-inside
 | imported-package-with-name-in-tab


package-with-name-inside =

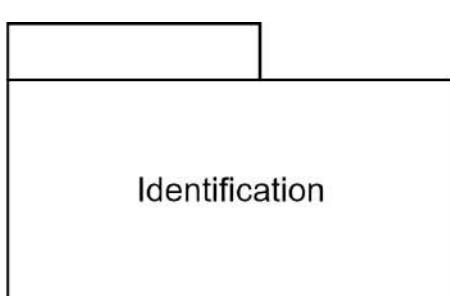


package-with-name-in-tab =

```
package-with-name-inside  
| package-with-name-in-tab  
| imported-package-with-name-inside  
| imported-package-with-name-in-tab
```


package-with-name-inside =

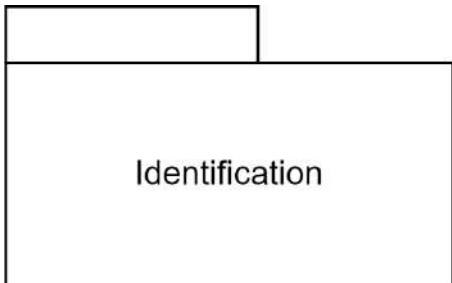


package-with-name-in-tab =

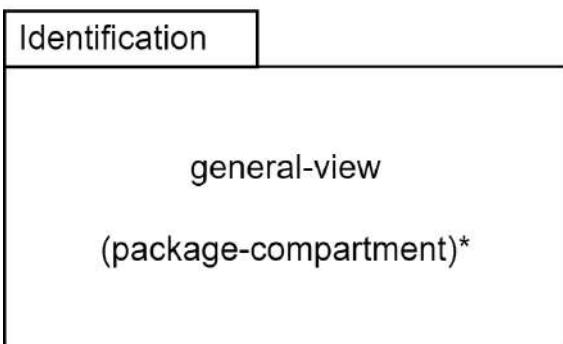

imported-package-with-name-inside =

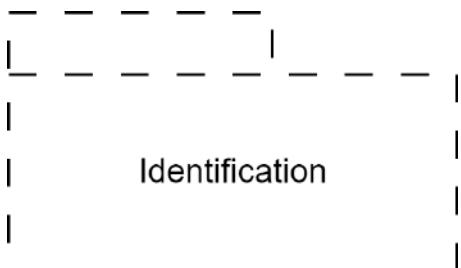

imported-package-with-name-in-tab =

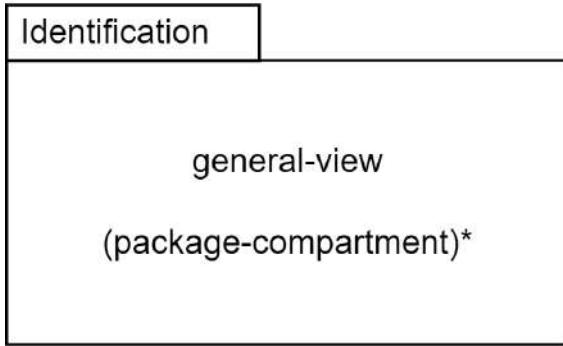

imported-package-with-name-inside =

Identification

```
imported-package-with-name-in-tab =
```

```
|-----|  
| Identification |  
|-----|  
|  
|  
|-----|  
| general-view  
|  
|-----|  
| (package-compartment)*  
|  
|-----|
```

```
package-compartment =  
    general-compartment  
    | documentation-compartment  
    | packages-compartment  
    | members-compartment  
    | relationships-compartment
```

```
compartment =| package-compartment
```

packages-compartment =

'packages'

packages-compartment-contents

```
packages-compartment-contents = packages-compartment-element* '...'?
packages-compartment-element = el-prefix? Identification
```

members-compartment =

```

|_Identification_
|-----|
|   general-view
|   (package-compartment)*
|-----|
|-----|
package-compartment =
  general-compartment
  | documentation-compartment
  | packages-compartment
  | members-compartment
  | relationships-compartment

compartメント = package-compartment

packages-compartment =
  _____
  'packages'
  packages-compartment-contents

packages-compartment-contents = packages-compartment-element* '...'?
packages-compartment-element = el-prefix? Identification

members-compartment =
  _____
  'members'
  members-compartment-contents

members-compartment-contents = members-compartment-element* '...'?
members-compartment-element = el-prefix? (DefinitionElement | UsageElement)

relationships-compartment =
  _____
  'relationships'
  relationships-compartment-contents

relationships-compartment-contents = (relationships-compartment-element)* '...'?
relationships-compartment-element = el-prefix? relationship-name QualifiedName
relationship-name = 'defines', 'defined by', 'specializes', 'specialized by', 'connect to', 'subsets'

general-relationship =|
  import
  | top-level-import
  | recursive-import
  | owned-membership
  | unowned-membership

```

```

'members'
members-compartment-contents

members-compartment-contents = members-compartment-element* '...'?
members-compartment-element = el-prefix? (DefinitionElement | UsageElement)

relationships-compartment =

'relationships'
relationships-compartment-contents

relationships-compartment-contents = (relationships-compartment-element)* '...'?
relationships-compartment-element = el-prefix? relationship-name QualifiedName
relationship-name = 'defines', 'defined by', 'specializes', 'specialized by', 'connect to',
'subsets', 'subsetted by', 'performs', 'performed by', 'allocated', 'allocated to',
'satisfy', 'satisfied by'

general-relationship =
import
| top-level-import
| recursive-import
| owned-membership
| unowned-membership

import =

&namespace-node — '«' VisibilityIndicator? 'import' '»' —> &namespace-node

top-level-import =

&namespace-node — '«' VisibilityIndicator? 'import' '»*' —> &namespace-node

recursive-import =

&namespace-node — '«' VisibilityIndicator? 'import' '»**' —> &namespace-node

owned-membership =

&namespace-node ⊕ ————— &element-node

unowned-membership =

&namespace-node ○ ————— &element-node

```

8.2.3.6 Definition and Usage Graphical Notation

[SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects](#)
[SYSML2 -18: No support for metadata definition in graphical notation](#)
[SYSML2 -227: Name expressions in GBNF are too constraining](#)

```

import =
    &namespace-node -- «import» --> &namespace-node

top-level-import =
    &namespace-node -- «import» * --> &namespace-node

recursive-import =
    &namespace-node -- «import» ** --> &namespace-node

owned-membership =
    &namespace-node ⊕ ----- &element-node

unowned-membership =
    &namespace-node ○ ----- &element-node

```

8.2.3.6 Definition and Usage Graphical Notation

```

general-node =| type-node

type-node =
    definition-node
    | usage-node

namespace-node =| type-node

basic-name-prefix =
    ('«variation»')?
    ('«variant»')?
    ('«abstract»')?

definition-name-with-alias =
    Identification
    ( '«alias»' ( QualifiedName ( ',' QualifiedName)* ) )?

usage-name-with-alias =
    Identification ( ':' QualifiedName )?
    ( '«alias»' ( QualifiedName ( ',' QualifiedName)* ) )?

compartment-stack = (compartment)*

compartment =|
    | variants-compartment
    | variant-elementusages-compartment

variants-compartment =

```

```

general-node =| type-node

type-node =
    definition-node
  | usage-node

namespace-node =| type-node

definition-name-with-alias =
    DefinitionDeclaration
    ('«alias»' ( QualifiedName (',' QualifiedName)* ) )?

usage-name-with-alias =
    UsageDeclaration
    ('«alias»' ( QualifiedName (',' QualifiedName)* ) )?

compartment-stack = (compartment)*

compartment =|
    features-compartment
  | variants-compartment
  | variant-elementusages-compartment

features-compartment =
    _____
    'features'
    features-compartment-contents

features-compartment-contents = (features-compartment-element)* '...'?
features-compartment-element = el-prefix? UsagePrefix usage-cp

variants-compartment =
    _____
    'variants'
    variants-compartment-contents

variants-compartment-contents = members-compartment-contents

variant-elementusages-compartment =
    _____
    'variant elementusages'
    variants-compartment-contents

general-relationship =|
    type-relationship

type-relationship =
    subclassification
  | subsetting
  | definition
  | redefinition
  | composite-feature-membership
  | noncomposite-feature-membership

subclassification =
    &definition-node <-----> &definition-node

```

'variants'

```
variants-compartment-contents

variants-compartment-contents = members-compartment-contents
```

```
variant-elementusages-compartment =
```

'variant elementusages'

```
variant-compartment-contents
```

```
general-relationship =|
    type-relationship
```

```
type-relationship =
    subclassification
    | subsetting
    | definition
    | redefinition
    | composite-feature-membership
    | noncomposite-feature-membership
```

```
subclassification =
```

&definition-node <--> &definition-node

```
definition =
```

&definition-node <::> &usage-node

```
subsetting =
```

&usage-node <--> &usage-node

```
reference-subsetting =
```

&usage-node <:::> &usage-node

```
redefinition =
```

&usage-node <|> &usage-node

```
composite-feature-membership =
```

&type-node <--> &usage-node

```
noncomposite-feature-membership =
```

```

definition =
  &definition-node <!--> &usage-node

subsetting =
  &usage-node <--> &usage-node

reference-subsetting =
  &usage-node <!--> &usage-node

redefinition =
  &usage-node <!--> &usage-node

composite-feature-membership =
  &type-node <--> &usage-node

noncomposite-feature-membership =
  &type-node <--> &usage-node

el-prefix = '^' | '/'

usage-cp = usageDeclaration ValuePart?

extended-def =
  extended-def-name-compartment
    compartment-stack

extended-def-name-compartment =
  '<<' DefinitionPrefix 'def' '>''
  definition-name-with-alias

definition-node |= extended-def

extended-usage =

```

```
&type-node ◇————&usage-node
```

```
el-prefix = '^' | '/'  
usage-cp = usageDeclaration ValuePart?  
keyword = '#' QualifiedName  
extended-def =
```

```
extended-def-name-compartment  
compartment-stack
```

```
extended-def-name-compartment =  
  basic-name-prefix  
  '<<' keyword+ 'def' '>>'  
  definition-name-with-alias  
definition-node |= extended-def
```

```
extended-usage =
```

```
extended-usage-name-compartment  
compartment-stack
```

```
extended-usage-name-compartment =  
  basic-name-prefix  
  '<<' keyword+ '>>'  
  usage-name-with-alias  
usage-node |= extended-usage
```

8.2.3.7 Attributes Graphical Notation

```
definition-node =| attribute-def  
attribute-def =
```

```
attribute-def-name-compartment  
compartment-stack
```

```
attribute-def-name-compartment =
```

```
extended-usage-name-compartment
```

```
compartment-stack
```

```
extended-usage-name-compartment =  
  '«' UsagePrefix '»'  
  usage-name-with-alias
```

```
usage-node |= extended-usage
```

8.2.3.7 Attributes Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```
definition-node =| attribute-def
```

```
attribute-def =
```

```
attribute-def-name-compartment
```

```
compartment-stack
```

```
attribute-def-name-compartment =  
  '«' DefinitionPrefix 'attribute' 'def' '»'  
  definition-name-with-alias
```

```
usage-node =| attribute
```

```
attribute =
```

```
attribute-name-compartment
```

```
compartment-stack
```

```
attribute-name-compartment =  
  '«' UsagePrefix 'attribute' '»'  
  usage-name-with-alias
```

```
compartment =| attributes-compartment
```

```
attributes-compartment =
```

'attributes'

```
attributes-compartment-contents
```


```
attributes-compartment-contents = (attributes-compartment-element)* '...'?  
attributes-compartment-element = el-prefix? UsagePrefix usage-cp
```

```

basic-name-prefix
'«' keyword* 'attribute' 'def' '»'
definition-name-with-alias

usage-node =| attribute

attribute =

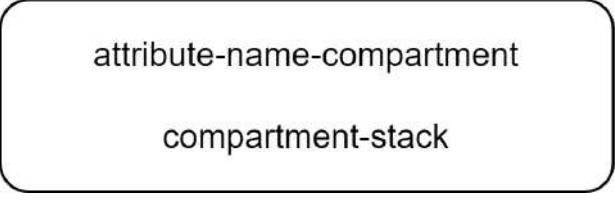

attribute-name-compartment



compartment-stack



attribute-name-compartment =
basic-name-prefix
'«' keyword* 'attribute' '»'
usage-name-with-alias

compartment =| attributes-compartment

attributes-compartment =


---


'attributes'


---


attributes-compartment-contents


attributes-compartment-contents = (attributes-compartment-element)* '...'?
attributes-compartment-element = el-prefix? UsagePrefix usage-cp

```

8.2.3.8 Enumerations Graphical Notation

```

definition-node =| enumeration-def

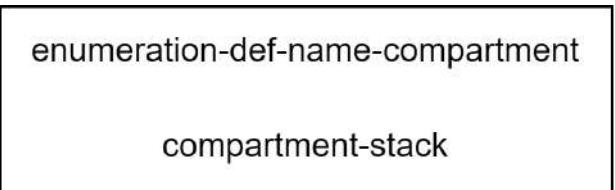enumeration-def =


enumeration-def-name-compartment



compartment-stack



enumeration-def-name-compartment =
basic-name-prefix
'«' keyword* 'enumeration' 'def' '»'
definition-name-with-alias

usage-node =| enumeration

enumeration =

```

8.2.3.8 Enumerations Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```
definition-node =| enumeration-def
enumeration-def =
    enumeration-def-name-compartment
        compartment-stack
enumeration-def-name-compartment =
    '«' DefinitionPrefix 'enum' 'def' '»'
    definition-name-with-alias
usage-node =| enumeration
enumeration =
    enumeration-name-compartment
        compartment-stack
enumeration-name-compartment =
    '«' UsagePrefix 'enum' '»'
    usage-name-with-alias
compartment =| enums-compartment
enums-compartment =
    _____
    'enums'
    enums-compartment-contents
enums-compartment_contents = (enums-compartment-element)* '...'?
enums-compartment-element = el-prefix? UsagePrefix usage-cp
```

8.2.3.9 Occurrences Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```
definition-node =| occurrence-def
general-relationship =| portion-relationship
occurrence-def =
```

enumeration-name-compartment

compartment-stack

```
enumeration-name-compartment =
  basic-name-prefix
  '«' keyword* 'enumeration' '»'
  usage-name-with-alias

compartment =| enums-compartment

enums-compartment =
  _____
  'enums'
  enums-compartment-contents

enums-compartment_contents = (enums-compartment-element)* '...'?
enums-compartment-element = el-prefix? UsagePrefix usage-cp
```

8.2.3.9 Occurrences Graphical Notation

```
definition-node =| occurrence-def

general-relationship =| portion-relationship

occurrence-name-prefix = basic-name-prefix (<<individual>>)?

occurrence-def =
```

occurrence-def-name-compartment

sequence-view

compartment-stack

```
occurrence-def-name-compartment =
  basic-name-prefix
  '«' keyword* 'occurrence' 'def' '»'
  usage-name-with-alias
```

```
usage-node =|
  occurrence
  | occurrence-ref
  | timeslice-or-snapshot-node
```

```
occurrence =
```

```
occurrence-def-name-compartment
```

```
    sequence-view
```

```
    compartment-stack
```

```
occurrence-def-name-compartment =  
  '«' DefinitionPrefix 'occurrence' 'def' '»'  
  definition-name-with-alias
```

```
usage-node =|  
  occurrence  
  | occurrence-ref  
  | timeslice-or-snapshot-node
```

```
occurrence =
```

```
occurrence-name-compartment
```

```
    sequence-view
```

```
    compartment-stack
```

```
occurrence-ref =
```

```
occurrence-name-compartment
```

```
    sequence-view
```

```
    compartment-stack
```

```
occurrence-name-compartment =  
  '«' OccurrenceUsagePrefix 'occurrence' '»'  
  usage-name-with-alias
```

```
timeslice-or-snapshot-node =  
  timeslice  
  | snapshot
```

```
timeslice =
```

```
timeslice-name-compartment
```

rd

```
    compartment-stack
```

```
occurrence-name-compartment
```

```
sequence-view
```

```
compartment-stack
```

```
occurrence-ref =
```

```
occurrence-name-compartment
```

```
sequence-view
```

```
compartment-stack
```

```
occurrence-name-compartment =
```

```
basic-name-prefix
```

```
'«' 'ref'? keyword* 'occurrence' '»'
```

```
usage-name-with-alias
```

```
timeslice-or-snapshot-node =
```

```
timeslice
```

```
| snapshot
```

```
timeslice =
```

```
timeslice-name-compartment
```

rd

```
compartment-stack
```

```
timeslice-name-compartment =
```

```
'«timeslice»'
```

```
usage-name-with-alias
```

```
snapshot =
```

```
snapshot-name-compartment
```

rd

```
compartment-stack
```

```
snapshots-name-compartment
```


```
'«snapshot»'
```

```
usage-name-with-alias
```

```

timeslice-name-compartment =
  '«timeslice»'
  usage-name-with-alias

snapshot =

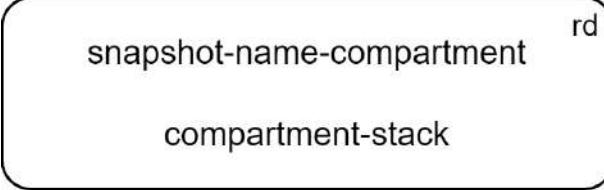

snapshot-name-compartment  
compartment-stack




rd



snapshots-name-compartment
  '«snapshot»'
  usage-name-with-alias

portion-relationship =

  &occurrence-node  &timeslice-or-snapshot-node

compartment =|
  occurrences-compartment
| individuals-compartment
| timeslices-compartment
| snapshots-compartment
| sequence-compartment

occurrences-compartment =
  'occurrences'
  occurrences-compartment-contents

occurrences-compartment-contents = (occurrences-compartment-element)* '...'?
occurrences-compartment-element = el-prefix? OccurrenceUsagePrefix usage-cp

individuals-compartment =
  'individuals'
  individuals-compartment-contents

individuals-compartment-contents = (individuals-compartment-element)* '...'?
individuals-compartment-element = occurrences-compartment-element

timeslices-compartment =
  'timeslices'
  timeslices-compartment-contents

timeslices-compartment-contents = (timeslices-compartment-element)* '...'?
timeslices-compartment-element = occurrences-compartment-element

snapshots-compartment =
  'snapshots'
  snapshots-compartment-contents

```

portion-relationship =

&occurrence-node  ×lice-or-snapshot-node

compartment =|
 occurrences-compartment
| individuals-compartment
| timeslices-compartment
| snapshots-compartment
| sequence-compartment

occurrences-compartment =

'occurrences'

 occurrences-compartment-contents

occurrences-compartment-contents = (occurrences-compartment-element)* '...'?

occurrences-compartment-element = el-prefix? OccurrenceUsagePrefix usage-cp

individuals-compartment =

'individuals'

 individuals-compartment-contents

individuals-compartment-contents = (individuals-compartment-element)* '...'?

individuals-compartment-element = occurrences-compartment-element

timeslices-compartment =

'timeslices'

 timeslices-compartment-contents

timeslices-compartment-contents = (timeslices-compartment-element)* '...'?

timeslices-compartment-element = occurrences-compartment-element

snapshots-compartment =

'snapshots'

 snapshots-compartment-contents

snapshots-compartment-contents = (snapshots-compartment-element)* '...'?

snapshots-compartment-element = occurrences-compartment-element

sequence-compartment =

'sequence'

 sequence-view

sequence-view = (sq-graphical-element)*

sq-graphical-element =

 sq-graphical-node
| sq-graphical-relationship

```
snapshots-compartment-contents = (snapshots-compartment-element)* '...'?
snapshots-compartment-element = occurrences-compartment-element
```

```
sequence-compartment =
```

'sequence'

```
sequence-view
```


```
sequence-view = (sq-graphical-element)*
```

```
sq-graphical-element =
    sq-graphical-node
    | sq-graphical-relationship
    | dependencies-and-annotations-element
```

```
sq-graphical-node = sq-head-node | sq-l-node
```

```
sq-head-node = sq-part | sq-port
```

```
sq-part =
```

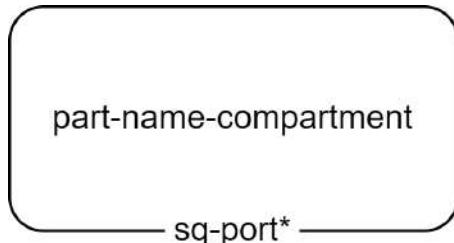

```
sq-port =
```




```
sq-port-label = UsageDeclaration
```

```
sq-l-node =
    lifeline
    | proxy
```

```
lifeline =
```

```
| dependencies-and-annotations-element  
sq-graphical-node = sq-head-node | sq-l-node  
sq-head-node = sq-part | sq-port  
sq-part =
```

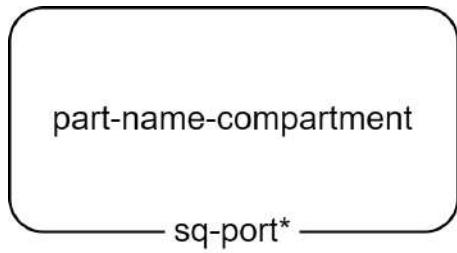

```
sq-port =  
  
sq-port-label
```

A square box labeled "sq-port-label".


```
sq-port-label = UsageDeclaration  
  
sq-l-node =  
    lifeline  
    | proxy  
  
lifeline =
```

&sq-head-node



```
proxy =  
  
● proxy-label
```

```
sq-proxy-label = QualifiedName  
sq-ev-occurrence-label = UsageDeclaration
```

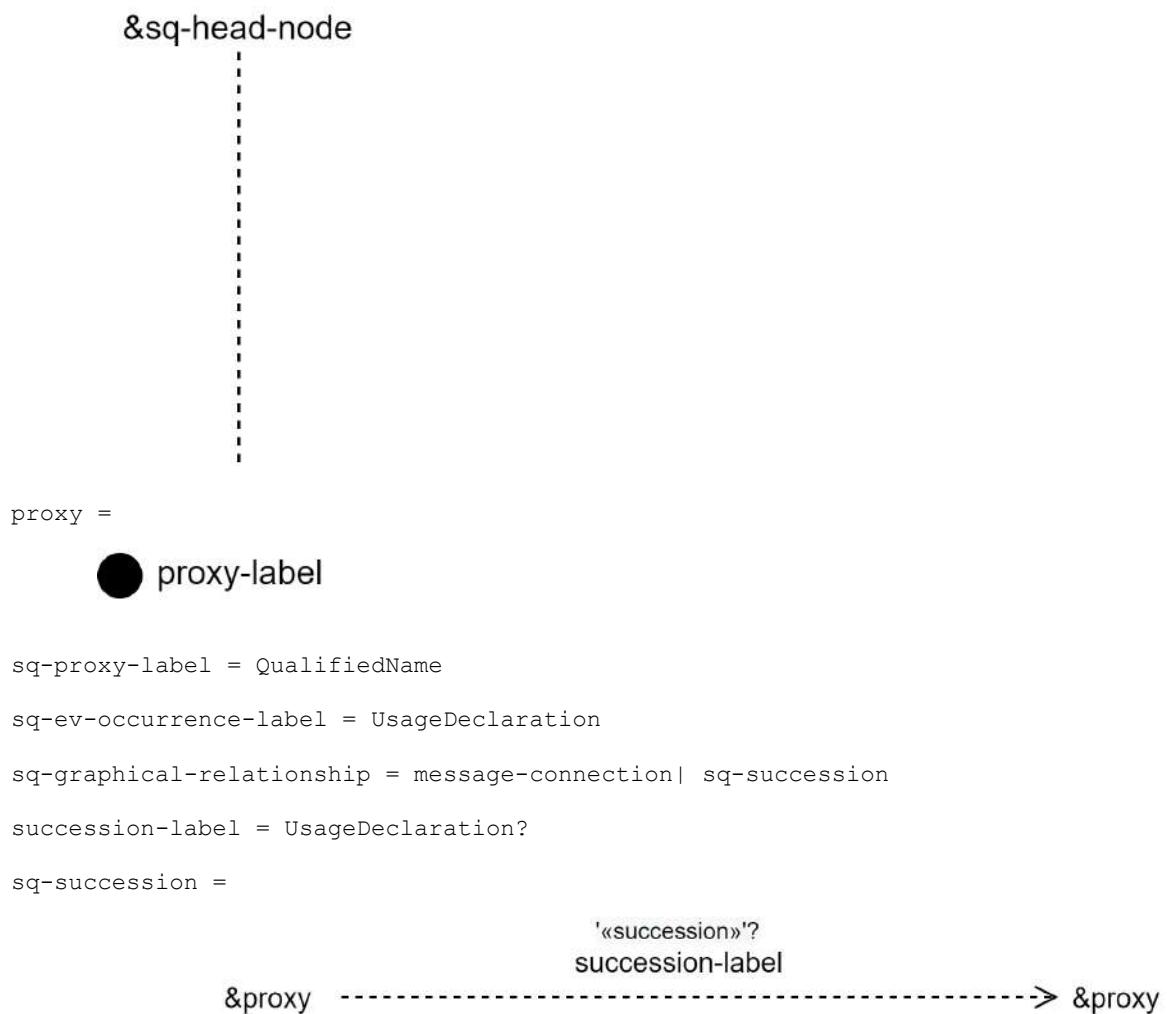

Note: the proxy nodes attached to a succession must refer to an event


8.2.3.10 Items Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```

definition-node =| item-def
interconnection-element = | item| item-ref
item-def =

```

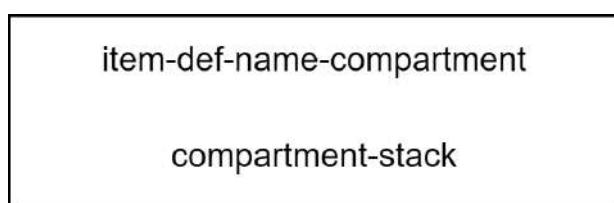

```
item-def-name-compartment =
```

```

sq-graphical-relationship = message-connection| sq-succession
succession-label = UsageDeclaration?
sq-succession =
    '«succession»'?
    succession-label
    &proxy -----> &proxy

```


Note: the proxy nodes attached to a succession must refer to an event

8.2.3.10 Items Graphical Notation

```

definition-node =| item-def
interconnection-element = | item| item-ref
item-def =

```

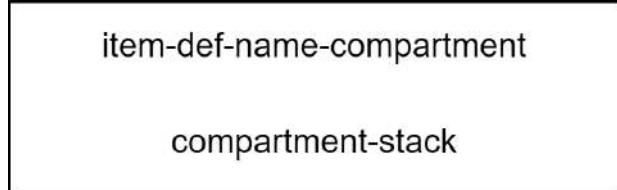


```

item-def-name-compartment =
    basic-name-prefix
    '«' keyword* 'item' 'def' '»'
    definition-name-with-alias

```

```
usage-node =| item
```

```
item =
```

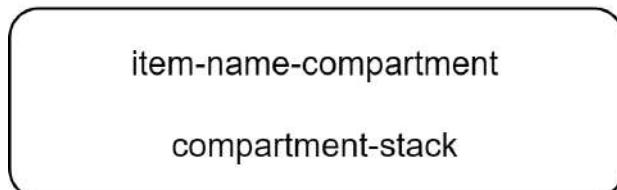

```

item-name-compartment =
    basic-name-prefix
    '«' 'ref'? keyword* 'item' '»'

```

```
usage-name-with-alias
```

```
item-ref =
```

```

'«' DefinitionPrefix 'item' 'def' '»'
definition-name-with-alias

usage-node =| item

item =

```

item-name-compartment

compartment-stack


```

item-name-compartment =
  basic-name-prefix
  '«' 'ref'? keyword* 'item' '»'

usage-name-with-alias

item-ref =

```

item-name-compartment

compartment-stack


```

compartment =| items-compartment

items-compartment =

```

'items'

```

  items-compartment-contents

items-compartment-contents = (items-compartment-element)* '...'
items-compartment-element = el-prefix? OccurrenceUsagePrefix usage-cp

```

8.2.3.11 Parts Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```

definition-node =| part-def

interconnection-element = | part | part-ref

part-def =

```

```

item-name-compartment
compartment-stack

```

```

compartment =| items-compartment
items-compartment =
'items'
items-compartment-contents
items-compartment-contents = (items-compartment-element)* '...'
items-compartment-element = el-prefix? OccurrenceUsagePrefix usage-cp


```

8.2.3.11 Parts Graphical Notation

```

definition-node =| part-def
interconnection-element = | part | part-ref
part-def =

```

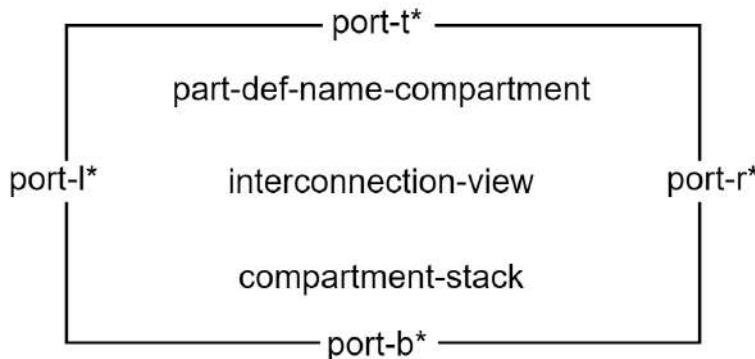

```


part-def-name-compartment =
basic-name-prefix
'«' keyword* 'part' 'def' '»'
definition-name-with-alias

```

```

usage-node =| part
part =


```

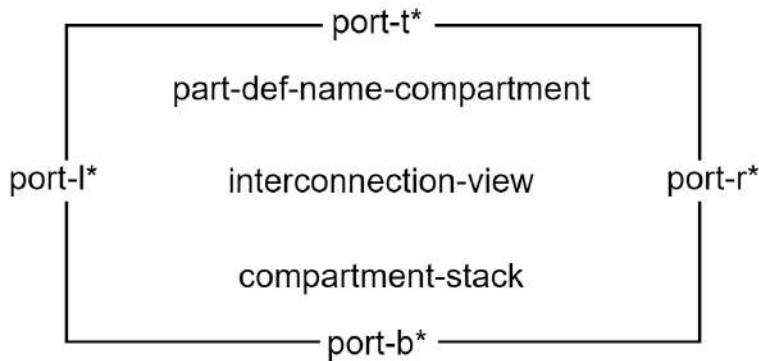

```
part-def-name-compartment =
  '«' DefinitionPrefix 'part' 'def' '»'
  definition-name-with-alias
```


```
usage-node =| part
```

```
part =
```

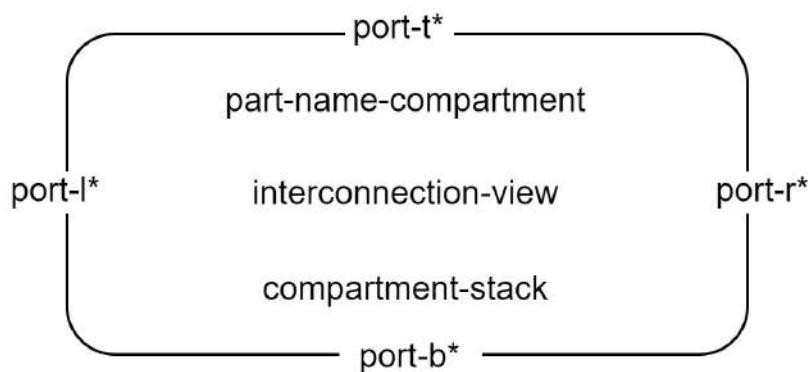


```
part-name-compartment =
  '«' OccurrenceUsagePrefix 'part' '»'
  usage-name-with-alias
```

```
part-ref =
```

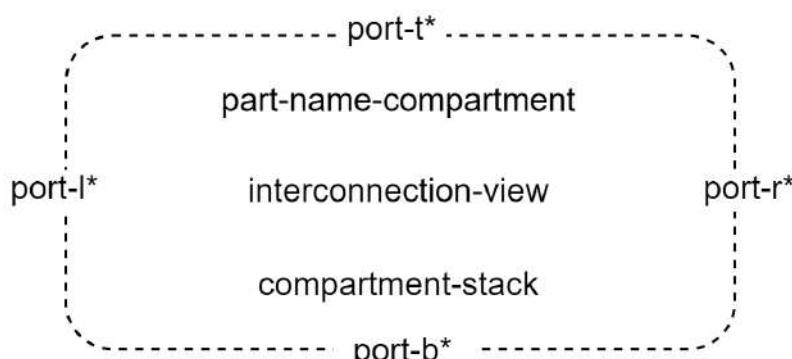


```
compartment =|
  parts-compartment
  | directed-features-compartment
  | interconnection-compartment
```

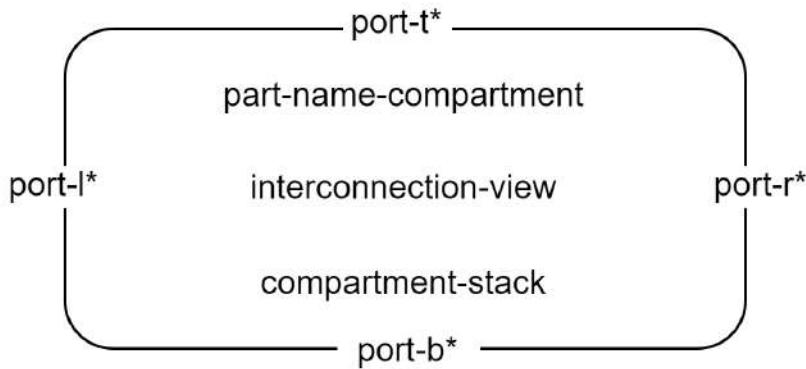

```
part-name-compartment =
  basic-name-prefix
  '«' 'ref'? keyword* 'part' '»'
  usage-name-with-alias
```

```
part-ref =
```

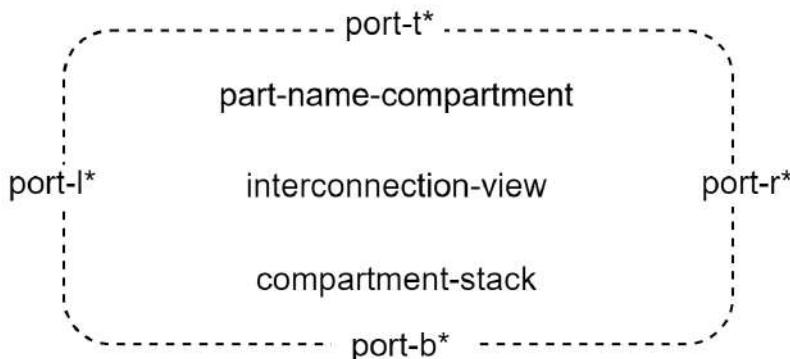

```
compartment =|
  parts-compartment
  | directed-features-compartment
  | interconnection-compartment
```

```
parts-compartment =
```

'parts'

parts-compartment-contents

```
parts-compartment-contents = (parts-compartment-element)* '...'?  
parts-compartment-element = el-prefix? OccurrenceUsagePrefix usage-cp
```

```
directed-features-compartment =
```

'directed features'

directed-features-compartment-contents

```
directed-features-compartment-contents = (directed-features-compartment-element)* '...'?  
directed-features-compartment-element =
```

```
el-prefix FeatureDirection Definition-Body-Item*
```

```

parts-compartment =
  _____
  'parts'
  parts-compartment-contents

parts-compartment-contents = (parts-compartment-element)* '...'?
parts-compartment-element = el-prefix? OccurrenceUsagePrefix usage-cp

directed-features-compartment =
  _____
  'directed features'
  directed-features-compartment-contents

directed-features-compartment-contents = (directed-features-compartment-element)* '...'?

directed-features-compartment-element =
  el-prefix FeatureDirection Definition-Body-Item*

interconnection-compartment =
  _____
  'interconnection'
  interconnection-view

interconnection-view =|
  (interconnection-element)*
  (dependencies-and-annotations-element)*
  (ellipsis-at-lower-left-corner)??

general-view =| interconnection-view


```

8.2.3.12 Ports Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```
definition-node =| port-def
```

```
port-def =
```

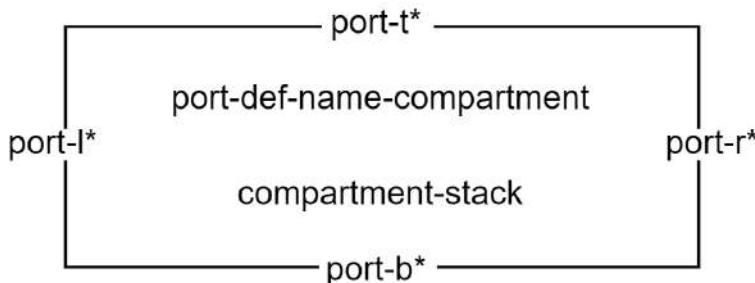

```
port-def-name-compartment =
  «' DefinitionPrefix 'port' 'def' '»'
  definition-name-with-alias
```

```
usage-node =| port-usage
```

```
port-usage =
```

```

interconnection-compartment =
    ┌─────────────────────────────────────────────────────────────────────────┐
    │   'interconnection'   ──────────────────────────────────────────────────┘
    └─────────────────────────────────────────────────────────────────────────┘
    interconnection-view

interconnection-view =|
    (interconnection-element)*
    (dependencies-and-annotations-element)*
    (ellipsis-at-lower-left-corner)??


general-view =| interconnection-view

```

8.2.3.12 Ports Graphical Notation

```
definition-node =| port-def
```

```
port-def =
```

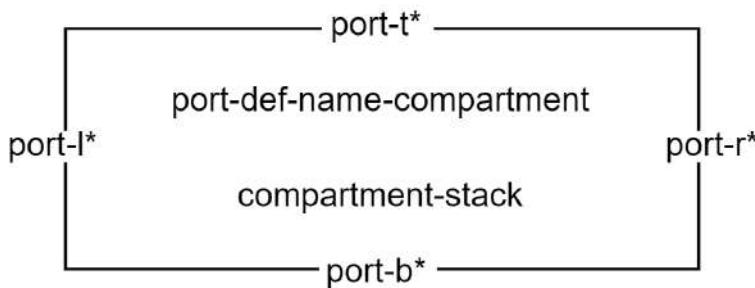


```

port-def-name-compartment =
    basic-name-prefix
    '<<' keyword* 'port' 'def' '>>'
    definition-name-with-alias

```

```
usage-node =| port-usage
```

```
port-usage =
```

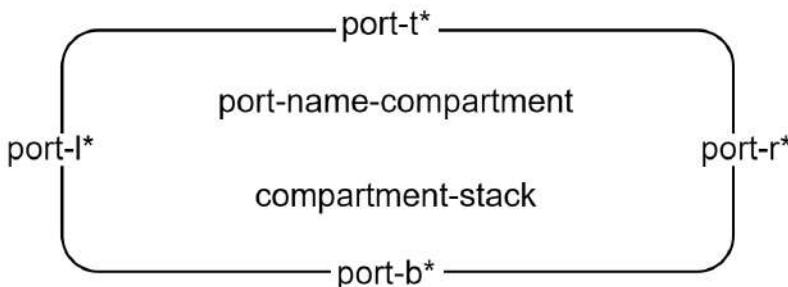


```

port-name-compartment =
    basic-name-prefix
    '<<' keyword* 'port' '>>'
    usage-name-with-alias

```

```
compartment =| ports-compartment
```

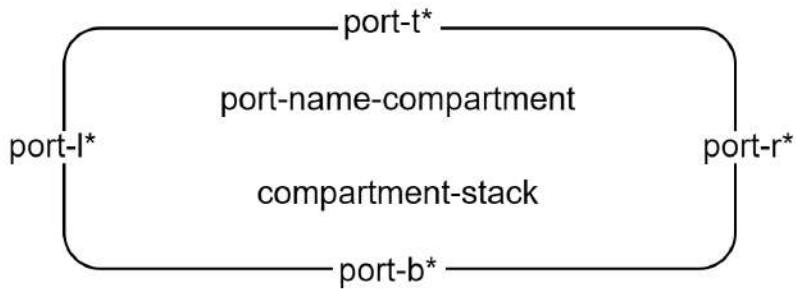

```

port-name-compartment =
  '«' OccurrenceUsagePrefix 'port' '»'
  usage-name-with-alias

compartment =| ports-compartment

ports-compartment =
  _____
  'ports'
  ports-compartment-contents

```

```

ports-compartment-contents = (ports-compartment-element)* '...'?
ports-compartment-element = el-prefix? OccurrenceUsagePrefix usage-cp

```

```
interconnection-element =| port-def | port
```

```

pdh =
  ⇡
  |
  →
  |
  ←

```

```

pdv =
  ⇧
  |
  ↑
  |
  ↓

```

```
port-l =
```

```

ports-compartment =
  _____
  'ports'
  ports-compartment-contents

ports-compartment-contents = (ports-compartment-element)* '...'?
ports-compartment-element = el-prefix? OccurrenceUsagePrefix usage-cp

```

```
interconnection-element =| port-def | port
```

```
pdh =
```

↔

|

→

|

←

```
pdv =
```

↑



|


↑

|

↓




```
port-l =
```



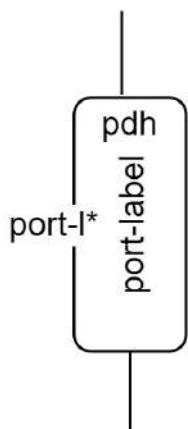


proxy




port-r =

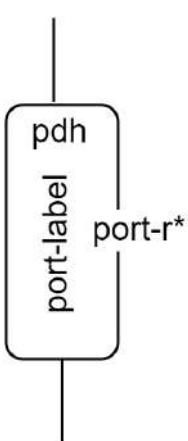

proxy



port-t =




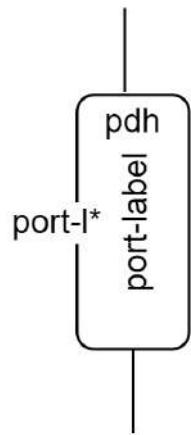

proxy

port-r =



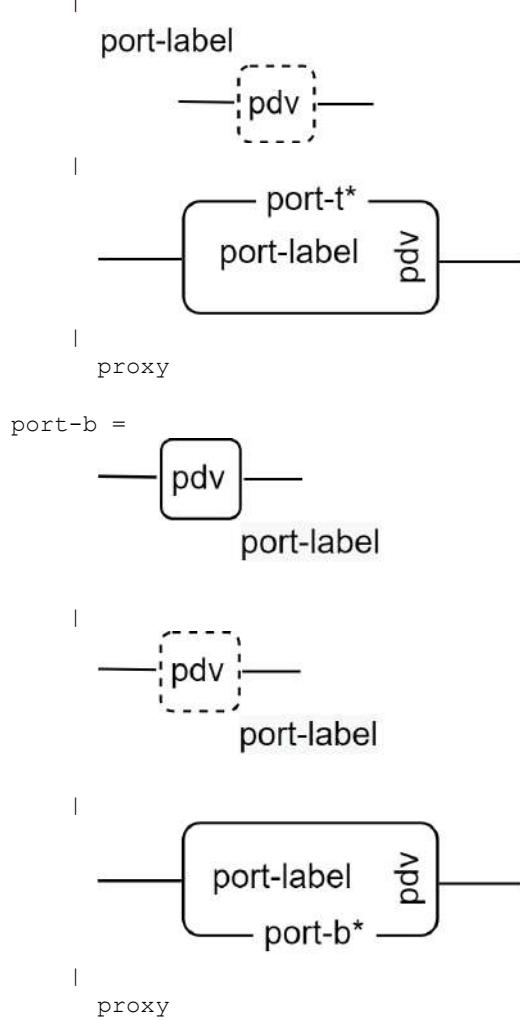

```
port-label = QualifiedName (':' QualifiedName) ?
```


Note. Dotted line port productions (references) are only possible for nested ports

Note. The proxy option of a port production is valid only on a part usage contained within an interconnection view.

8.2.3.13 Connections Graphical Notation

```
definition-node =| connection-def
```


```
connection-def =
```

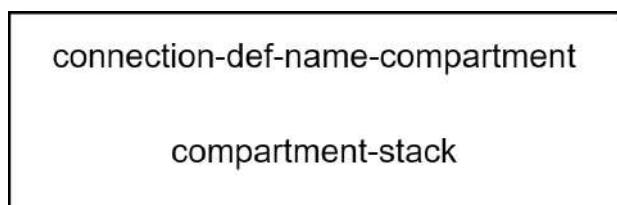

```
connection-def-name-compartment =
  basic-name-prefix
```



port-t =



port-label



port-t*

port-label


pdv

proxy

port-b =



port-label



port-label

port-label

pdv

port-b*

proxy

```

'«' keyword* 'connection' 'def' '»'
definition-name-with-alias

usage-node =| connection

connection =

```

connection-name-compartment

compartment-stack

```

connection-name-compartment =
basic-name-prefix
'«' keyword* 'connection' '»'
usage-name-with-alias

compartment =| connections-compartment

connections-compartment =

```

'connections'

```

connections-compartment-contents

connections-compartment-contents = (connections-compartment-element)* '...'?
connections-compartment-element =
    el-prefix? OccurrenceUsagePrefix UsageDeclaration

interconnection-element =
    connection-def
| connection
| connection-relationship
| attribute

connection-relationship =
    binding-connection
| connection-graphical
| n-ary-connection
| flow-connection
| succession-flow-connection
| message-connection
| flow-on-connection
| connection-definition-elaboration
| connection-usage-elaboration
| connection-def-graphical

connection-graphical =
    &connection-end --> rolename      connection-label?      rolename
                                multiplicity          c-adornment
    &connection-end --> multiplicity      c-adornment

```

c-adornment =	(a-property a-direction a-subsetting a-redefinition)*
---------------	---

```
port-label = QualifiedName (':' QualifiedName) ?
```

Note. Dotted line port productions (references) are only possible for nested ports

Note. The proxy option of a port production is valid only on a part usage contained within an interconnection view.

8.2.3.13 Connections Graphical Notation


SYSML2 -177: Guillems should not be used on keywords in textual notation snippets used in the graphical notation

SYSML2 -197: Inconsistent use of guillems in graphical notation for metamodel aspects

SYSML2 -25: Source and target on binary ConnectionDefinition symbol missing

```
definition-node =| connection-def
```


```
connection-def =
```

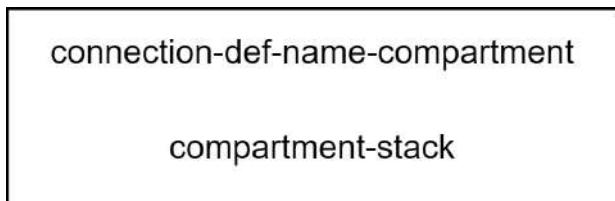

```
connection-def-name-compartment =
'«' DefinitionPrefix 'connection' 'def' '»'
definition-name-with-alias
```

```
usage-node =| connection
```

```
connection =
```

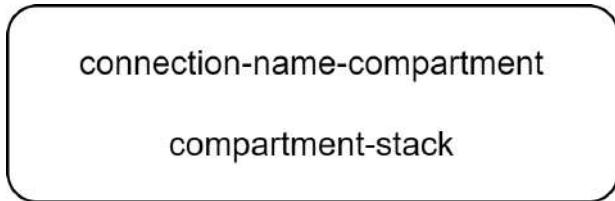

```
connection-name-compartment =
'«' OccurrenceUsagePrefix 'connection' '»'
usage-name-with-alias
```

```
compartment =| connections-compartment
```

```
connections-compartment =
```

'connections'

```
connections-compartment-contents
```

```
connections-compartment-contents = (connections-compartment-element)* '...'?
connections-compartment-element =
```

```
    el-prefix? OccurrenceUsagePrefix UsageDeclaration
```

```
interconnection-element =|
```

```
    connection-def
```

```
    | connection
```

```

a-property =
  '«ordered»' | '«nonunique»' | '«abstract»' | '«derived»' | '«readonly»'
a-direction =
  '«in»' | '«out»' | '«inout»'
a-subsetting =
  '«subsets»' ownedRelationship (', ' ownedRelationship)*
a-redefinition =
  '«redefines»' ownedRelationship (', ' ownedRelationship)*

connection-end = usage-node | usage-edge

usage-edge = |connection-graphical | flow-connection | interface-connection | binding-connection

connection-label = UsageDeclaration

connection-def-graphical =


|            |              |                   |              |            |
|------------|--------------|-------------------|--------------|------------|
| &type-node | rolename     | connection-label? | rolename     | &type-node |
|            | multiplicity |                   | multiplicity |            |
|            | c-adornment  |                   | c-adornment  |            |



cdef-label = Identification

n-ary-connection =
  n-ary-connection-dot n-ary-segment+

n-ary-connection-dot =
  cdot-label 
```

cdot-label = UsageDeclaration

n-ary-segment =

&n-ary-connection-dot	rolename	&usage-node
	multiplicity	

binding-connection =

&usage-node	'='	&usage-node
-------------	-----	-------------

msg-end-node =
 occurrence| sq-l-node| item | part | port | action | state
 | use-case | verification-case | analysis-case | proxy

message-connection =
 '<<message>>?'
 message-label

&msg-end-node	→ &msg-end-node
---------------	-----------------

```

| connection-relationship
| attribute

connection-relationship =
    binding-connection
| connection-graphical
| n-ary-connection
| flow-connection
| succession-flow-connection
| message-connection
| flow-on-connection
| connection-definition-elaboration
| connection-usage-elaboration
| connection-def-graphical

connection-graphical =
    &connection-end ———————— rolename ———————— connection-label? ———————— rolename ———————— &connection-end
                                         multiplicity                                c-adornment
                                         c-adornment

    |                               connection-label?
    &connection-end ———————— rolename ———————— rolename ———————— &connection-end
                                         multiplicity                                c-adornment
                                         c-adornment

c-adornment =
    (a-property | a-direction | a-subsetting | a-redefinition)*

a-property =
    'ordered' | 'nonunique' | 'abstract' | 'derived' | 'readonly'
a-direction =
    'in' | 'out' | 'inout'
a-subsetting =
    'subsets' OwnedSubsetting (',', OwnedSubsetting)*
a-redefinition =
    'redefines' OwnedRedefinition (',', OwnedRedefinition)*

connection-end = usage-node | usage-edge

usage-edge = |connection-graphical | flow-connection | interface-connection | binding-connection

connection-label = UsageDeclaration

connection-def-graphical =
    &type-node ———————— rolename ———————— connection-label? ———————— rolename ———————— &type-node
                                         multiplicity                                c-adornment
                                         c-adornment

    |                               connection-label?
    &type-node ———————— rolename ———————— rolename ———————— &type-node
                                         multiplicity                                c-adornment
                                         c-adornment

cdef-label = Identification

```

Note: proxy nodes and end of message connections must refer to occurrences

```
message-label =
    UsageDeclaration? ('<<of>>' ItemFeatureMember)? | ItemFeatureMember

flow-connection =
    '<<flow>>'?
    flow-label
    &flow-end-node --> &flow-end-node
```

```
flow-label =
    UsageDeclaration? ('<<of>>' FlowPayloadFeatureMember)? | FlowPayloadF
```

```
flow-end-node =
    parameter | proxy
```

Note: proxy nodes at end of flow connections must refer to directed features

```
succession-flow-connection =
    '<<succession flow>>'?
    succession-flow-label
    &flow-end-node -----> &flow-end-node
```

```
succession-flow-label = flow-label
```

```
flow-on-connection =
    &port-node --- flow-node* --- &port-node
```

```
flow-node =
    flow-node-r
    | flow-node-l
    | sflow-node-r
    | sflow-node-l
    | message-node-r
    | message-node-l
```

```
flow-node-r =
```

```
'<<flow>>'?
    flow-label
    -->
```

```
flow-node-l =
```

```
'<<flow>>'?
    flow-label
    --<
```

```
sflow-node-r =
```

```

n-ary-connection =
  n-ary-connection-dot n-ary-segment+
n-ary-connection-dot =
  cdot-label 
cdot-label = UsageDeclaration

n-ary-segment =
  &n-ary-connection-dot  &usage-node
                                rolename
                                multiplicity
                                _____
                                &usage-node

binding-connection =
  &usage-node  &usage-node
                                =
                                _____
                                &usage-node

msg-end-node =
  occurrence| sq-l-node| item | part | port | action | state
  | use-case | verification-case | analysis-case | proxy

message-connection =
  '«message»'?
  message-label
  &msg-end-node  &msg-end-node
                                _____
                                >
                                &msg-end-node

```

Note: proxy nodes and end of message connections must refer to occurrences

```

message-label =
  UsageDeclaration? ('of' ItemFeatureMember)? | ItemFeatureMember

flow-connection =
  '«flow»'?
  flow-label
  &flow-end-node  &flow-end-node
                                _____
                                >
                                &flow-end-node

flow-label =
  UsageDeclaration? ('of' FlowPayloadFeatureMember)? | FlowPayloadFeatureMember

flow-end-node =
  parameter | proxy

```

Note: proxy nodes at end of flow connections must refer to directed features

```
succession-flow-connection =
```

```
'«succession flow»'?
flow-label
  

sflow-node-l =
'«succession flow»'?
flow-label
  

message-node-r =
'«message»'?
message-label
  

message-node-l =
'«message»'?
message-label
  

flow-label =
Identification | FlowPayloadFeatureMember  

rolename = Identification?  

multiplicity = MultiplicityRange?  

connection-definition-elaboration =
&connection-relationship
  

&definition-node
```

```

'«succession flow»'?
succession-flow-label
&flow-end-node -----> &flow-end-node

succession-flow-label = flow-label
flow-on-connection =
&port-node ----- flow-node* ----- &port-node

flow-node =
  flow-node-r
  | flow-node-l
  | sflow-node-r
  | sflow-node-l
  | message-node-r
  | message-node-l

flow-node-r =
  '«flow»'?
  flow-label
  ──────────→

flow-node-l =
  '«flow»'?
  flow-label
  ←─────────

sflow-node-r =
  '«succession flow»'?
  flow-label
  ──────────→

sflow-node-l =
  '«succession flow»'?
  flow-label
  ←─────────

message-node-r =
  '«message»'?
  message-label
  ──────────→

message-node-l =

```

```

connection-usage-elaboration =
    &connection-relationship
    .
    .
    .
    &usage-node

```


Note. The usage-nodes at the ends of a binding-connection must be of compatible types.

8.2.3.14 Interfaces Graphical Notation

```

definition-node =| interface-def
interconnection-element =| interface
interface-def =

```

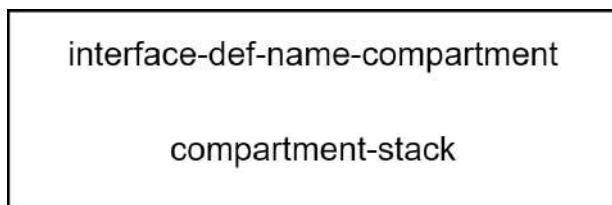


```

interface-def-name-compartment =
    basic-name-prefix
    '<<' keyword* 'interface' 'def' '>>'
    definition-name-with-alias

```

```
usage-node =| interface
```

```
interface =
```

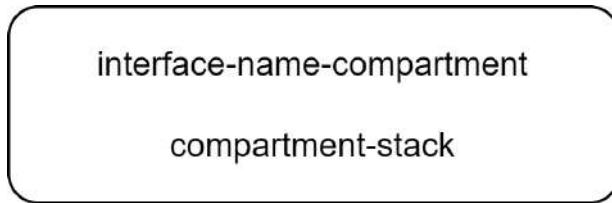

```

interface-name-compartment =
    basic-name-prefix
    '<<' keyword* 'interface' '>>'
    usage-name-with-alias

```

```

compartment =|
    interfaces-compartment
    | ends-compartment

```

```

'«message»'?
message-label
  

flow-label =
Identification | FlowPayloadFeatureMember  

rolename = Identification?  

multiplicity = MultiplicityRange?  

connection-definition-elaboration =  

&connection-relationship  

&definition-node  

connection-usage-elaboration =  

&connection-relationship  

&usage-node

```

Note. The usage-nodes at the ends of a binding-connection must be of compatible types.

8.2.3.14 Interfaces Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```

definition-node =| interface-def  

interconnection-element =| interface  

interface-def =

```

```

interfaces-compartment =
    _____
    'interfaces'
    interfaces-compartment-contents

interfaces-compartment-contents = (interfaces-compartment-element)* '...'?
interfaces-compartment-element =
    el-prefix? OccurrenceUsagePrefix InterfaceUsageDeclaration

ends-compartment =
    _____
    'ends'
    ends-compartment-contents

ends-compartment-contents = (ends-compartment-element)* '...'?
ends-compartment-element = QualifiedName (':' QualifiedName) ?

connection-relationship =
    | interface-connection

interface-connection =
    &port-node rolename _____ '«interface»'?
    multiplicity                                     interface-label
                                                    _____ flow-node* rolename
                                                    multiplicity   &port-node


```

interface-label = UsageDeclaration?

8.2.3.15 Allocations Graphical Notation

definition-node =| allocation-def

allocation-def =

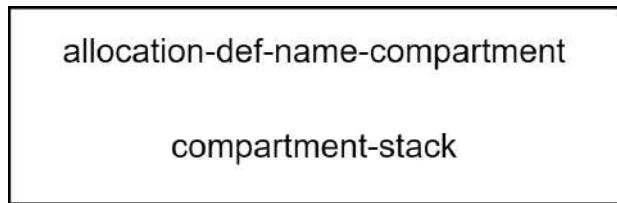

```

allocation-def-name-compartment =
    basic-name-prefix
    '«' keyword* 'allocation' 'def' '»'
    definition-name-with-alias

```

usage-node =| allocation

allocation =

interface-def-name-compartment

compartment-stack

```
interface-def-name-compartment =  
  '«' DefinitionPrefix 'interface' 'def' '»'  
  definition-name-with-alias<  
  
usage-node =| interface  
  
interface =
```

interface-name-compartment

compartment-stack

```
interface-name-compartment =  
  '«' OccurrenceUsagePrefix 'interface' '»'  
  usage-name-with-alias  
  
compartment =|  
  interfaces-compartment  
  | ends-compartment  
  
interfaces-compartment =  
  _____  
  'interfaces'  
  interfaces-compartment-contents  
  
interfaces-compartment-contents = (interfaces-compartment-element)* '...'?  
interfaces-compartment-element =  
  el-prefix? OccurrenceUsagePrefix InterfaceUsageDeclaration  
  
ends-compartment =  
  _____  
  'ends'  
  ends-compartment-contents  
  
ends-compartment-contents = (ends-compartment-element)* '...'?  
ends-compartment-element = QualifiedName (':' QualifiedName)?  
  
connection-relationship =  
  | interface-connection  
  
interface-connection =
```

allocation-name-compartment

compartment-stack

```
allocation-name-compartment =  
    basic-name-prefix  
    '<<' keyword* 'allocation' '>'  
    usage-name-with-alias  
  
compartment =| allocations-compartment  
  
allocations-compartment =  
    _____  
    'allocations'  
    allocations-compartment-contents  
  
allocations-compartment-contents = (allocations-compartment-element)* '...'?  
  
allocations-compartment-element =  
    el-prefix? OccurrenceUsagePrefix AllocationUsageDeclaration UsageBody*  
  
general-relationship =| allocate-relationship  
  
allocate-relationship =  
    &allocation-node ————— "«allocate»" —————> &allocation-node
```

```
allocation-node =  
    general-node  
    | element-in-textual-compartment  
  
usage-edge = |allocate-relationship
```

8.2.3.16 Actions Graphical Notation

```
definition-node =| action-def
```

```
action-def =
```




interface-label = UsageDeclaration?

8.2.3.15 Allocations Graphical Notation

SYSML2_-197: Inconsistent use of guillemets in graphical notation for metamodel aspects

definition-node =| allocation-def


allocation-def =

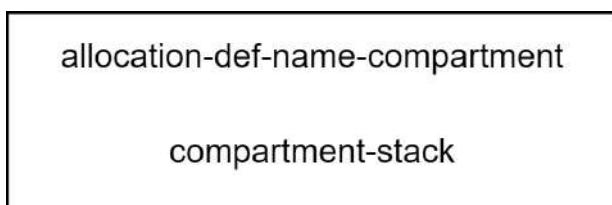

allocation-def-name-compartment =
 '«' DefinitionPrefix 'allocation' 'def' '»'
 definition-name-with-alias

usage-node =| allocation

allocation =

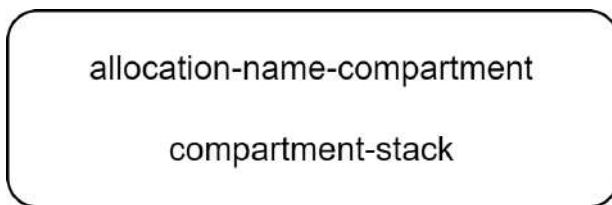

allocation-name-compartment =
 '«' OccurrenceUsagePrefix 'allocation' '»'
 usage-name-with-alias

compartment =| allocations-compartment

allocations-compartment =


—————
'allocations'

allocations-compartment-contents

allocations-compartment-contents = (allocations-compartment-element)* '...'?

allocations-compartment-element =
 el-prefix? OccurrenceUsagePrefix AllocationUsageDeclaration UsageBody*


general-relationship =| allocate-relationship

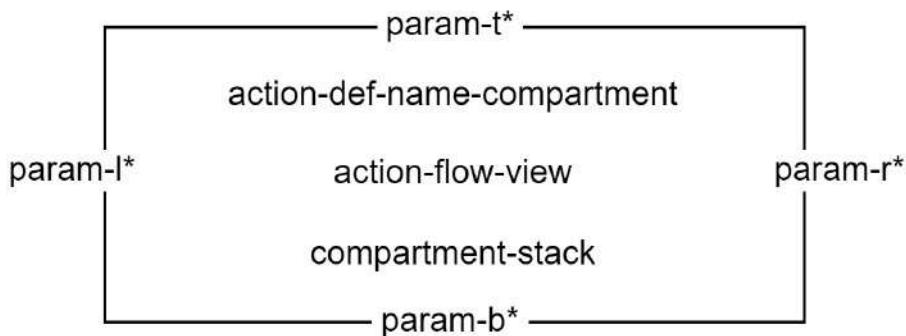

```
action-def-name-compartment =
    basic-name-prefix
    «' keyword* 'action' 'def' '»'
    definition-name-with-alias
```


```
usage-node =|
    action
    | perform-action-usage
```

```
action =
```

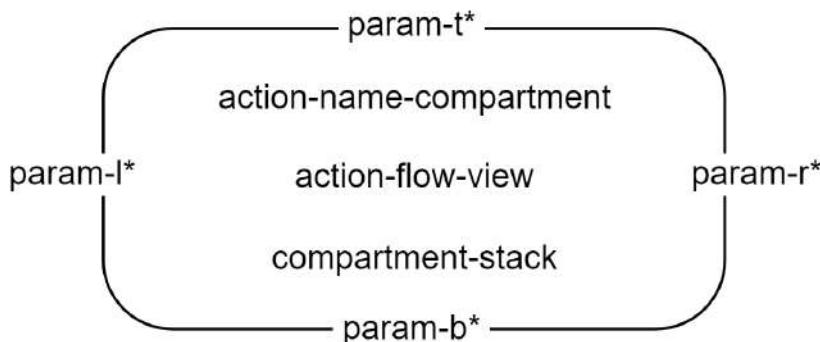

```
action-name-compartment =
    basic-name-prefix
    «' 'ref'? keyword* 'action' '»'
    usage-name-with-alias
```

```
perform-action-usage =
```

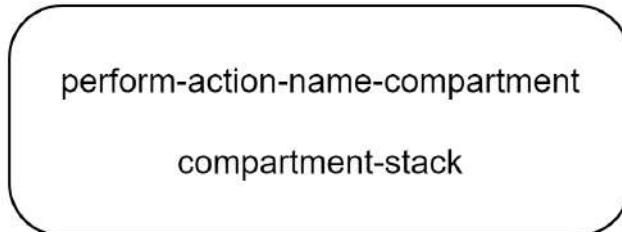

```
action-ref =
```

```

allocate-relationship =
    &allocation-node --"«allocate»"--> &allocation-node

```

```

allocation-node =
    general-node
    | element-in-textual-compartment
usage-edge = |allocate-relationship


```

8.2.3.16 Actions Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects
SYSML2 -200: Structured actions not properly covered by GBNF and notation tables

```
definition-node =| action-def
```

```
action-def =
```

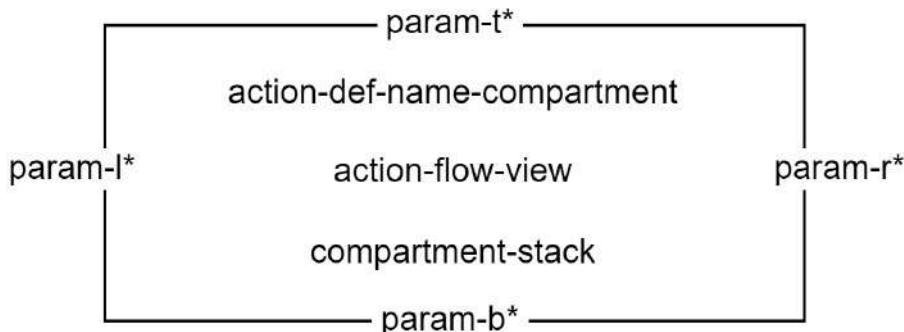


```

action-def-name-compartment =
    '«' DefinitionPrefix 'action' 'def' '»'
    definition-name-with-alias<


```

```
usage-node =|
    action
    | perform-action-usage
```

```
action =
```

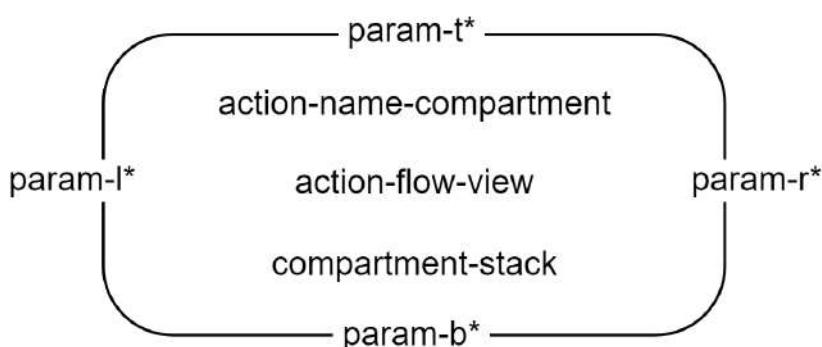

```
action-name-compartment =
```

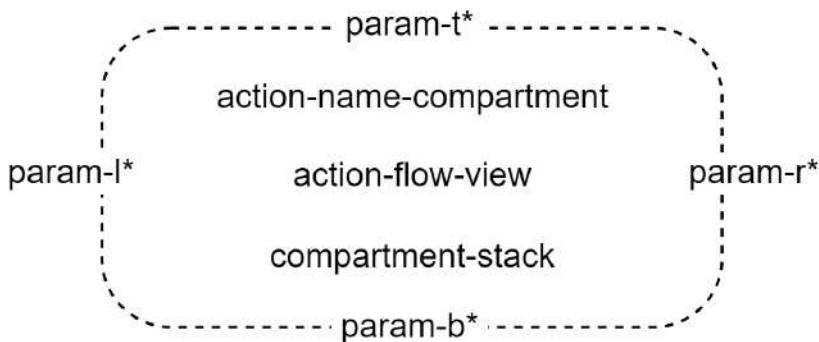

```

perform-action-name-compartment =
  '<<perform-action>>'  

  action-name-compartment

compartments =|  

  actions-compartment  

  | perform-actions-compartment  

  | parameters-compartment  

  | action-flow-compartment

actions-compartment =  

  _____  

  'actions'  

  actions-compartment-contents

actions-compartment-contents = (actions-compartment-element)* '...'?  

actions-compartment-element =  

  el-prefix? OccurrenceUsagePrefix ActionUsageDeclaration

perform-actions-compartment =  

  _____  

  'perform actions'  

  perform-actions-compartment-contents

perform-actions-compartment-contents = (perform-actions-compartment-element)* '...'?  

perform-actions-compartment-element =  

  el-prefix? OccurrenceUsagePrefix PerformActionUsageDeclaration

parameters-compartment =  

  _____  

  'parameters'  

  parameters-compartment-contents

parameters-compartment-contents = (parameters-compartment-element)* '...'?  

parameters-compartment-element =  

  el-prefix? FeatureDirection UsageDeclaration ValueOrFlowPart? DefinitionBodyItem*

performed-by-compartment =  

  _____  


  'performed by'  

  performed-by-compartment-contents


```

```
'«' OccurrenceUsagePrefix 'action' '»'  
usage-name-with-alias<
```

```
perform-action-usage =
```

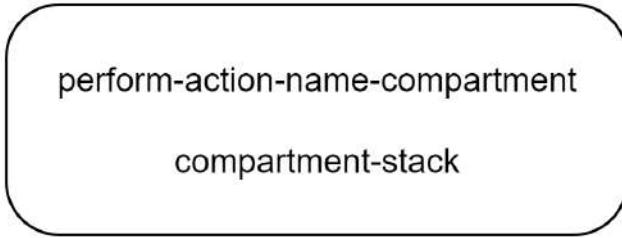

```
action-ref =
```

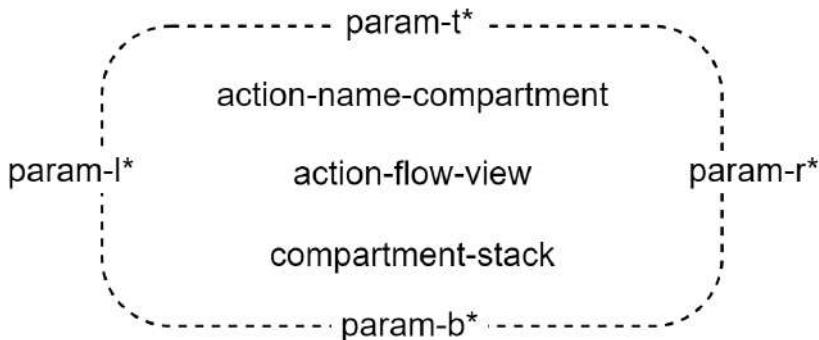

```
perform-action-name-compartment =  
  '«' OccurrenceUsagePrefix 'perform' 'action' '»'  
  usage-name-with-alias
```

```
compartment =|  
  actions-compartment  
  | perform-actions-compartment  
  | parameters-compartment  
  | action-flow-compartment
```

```
actions-compartment =
```

'actions'

```
  actions-compartment-contents
```

```
actions-compartment-contents = (actions-compartment-element)* '...'?  
actions-compartment-element =  
  el-prefix? OccurrenceUsagePrefix ActionUsageDeclaration
```

```
perform-actions-compartment =
```

'perform actions'

```
  perform-actions-compartment-contents
```

```
perform-actions-compartment-contents = (perform-actions-compartment-element)* '...'?  
perform-actions-compartment-element =  
  el-prefix? OccurrenceUsagePrefix PerformActionUsageDeclaration
```

```
parameters-compartment =
```

```

performed-by-compartment-contents = QualifiedName* '...'?

action-flow-compartment =
    _____
        'action flow'
    action-flow-view

action-flow-view =
    (dependencies-and-annotations-element)*
    (action-flow-element)*
    (perform-action-swimlanes)?


action-flow-element =|
    action-ref
    | action
    | action-flow-node
    | action-flow-relationship

action-flow-node =
    start-node
    | done-node
    | fork-node
    | join-node
    | decision-node
    | merge-node
    | send-action-node
    | accept-action-node
    | loop-action-node
    | assign-action-node

action-flow-relationship =
    flow-connection
    | aflow-succession
    | binding-connection

```

param-l =



'parameters'

parameters-compartment-contents

parameters-compartment-contents = (parameters-compartment-element)* '...'?

parameters-compartment-element =
 el-prefix? FeatureDirection UsageDeclaration ValueOrFlowPart? DefinitionBodyItem*

performed-by-compartment =

'performed by'

performed-by-compartment-contents

performed-by-compartment-contents = QualifiedName* '...'?

action-flow-compartment =

'action flow'

action-flow-view

action-flow-view =
 (dependencies-and-annotations-element)*
 (action-flow-element)*
 (perform-action-swimlanes)?


action-flow-element =|
 action-ref
 | action
 | action-flow-node
 | action-flow-relationship


action-flow-node =
 start-node
 | done-node
 | fork-node
 | join-node
 | decision-node
 | merge-node
 | send-action-node
 | accept-action-node
 | while-loop-action-node
 | for-loop-action-node
 | if-else-action-node
 | assign-action-node


action-flow-relationship =
 flow-connection
 | aflow-succession
 | binding-connection

param-l =

param-label



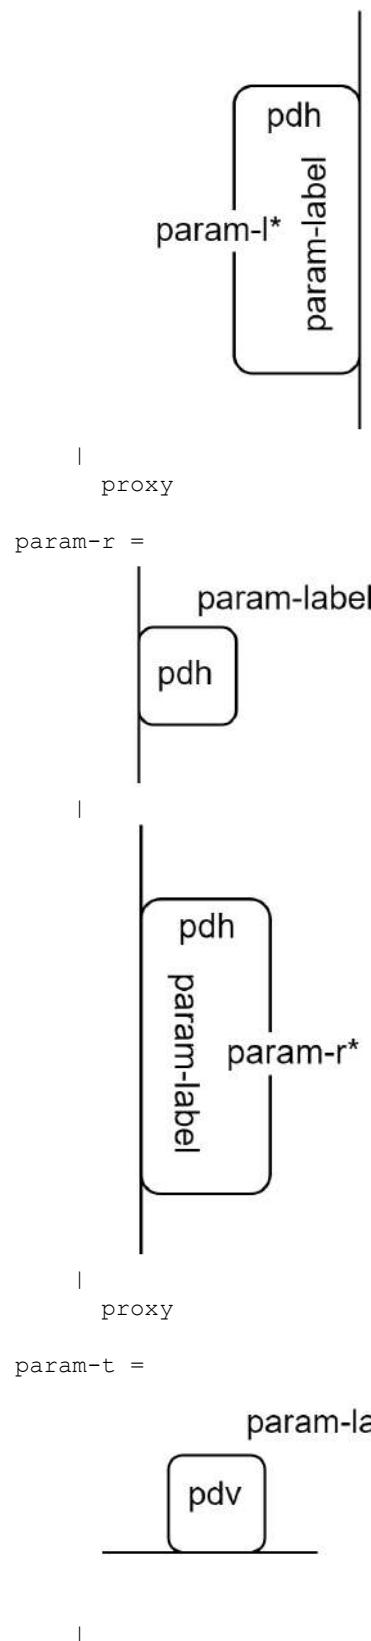


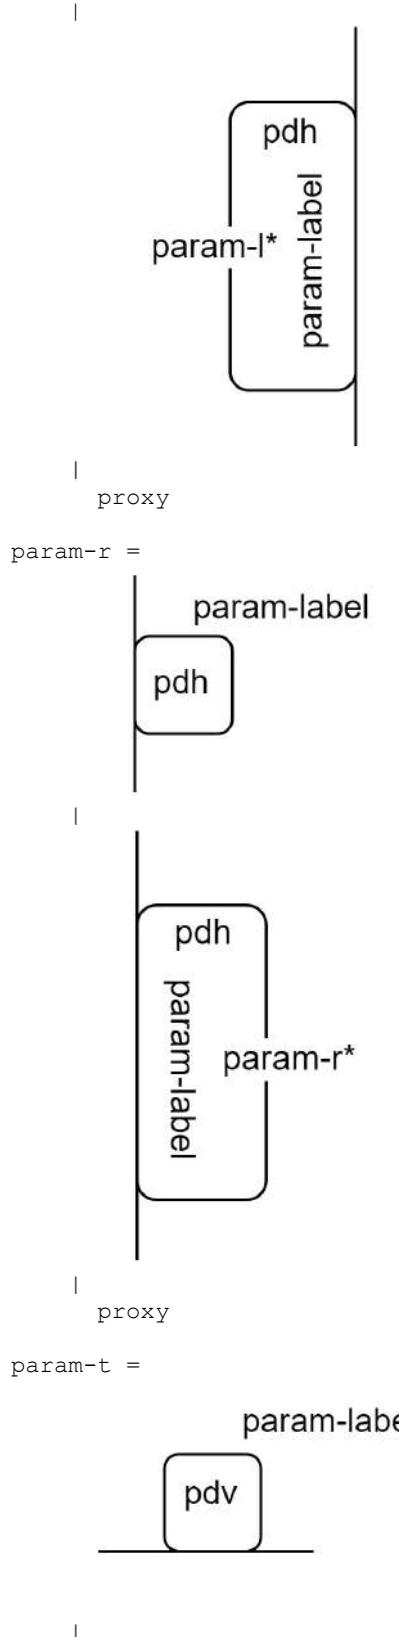




|
proxy

param-b =



param-label

|

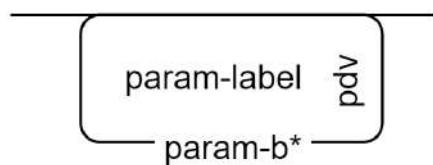

|
proxy

param-label = QualifiedName (`:` QualifiedName) *

start-node =



done-node =




fork-node =




join-node =




decision-node =



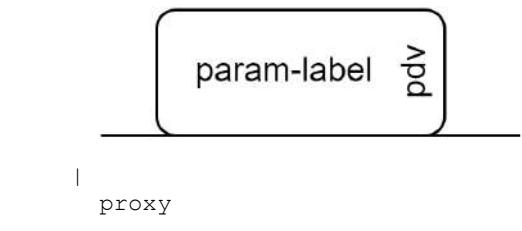

param-b =

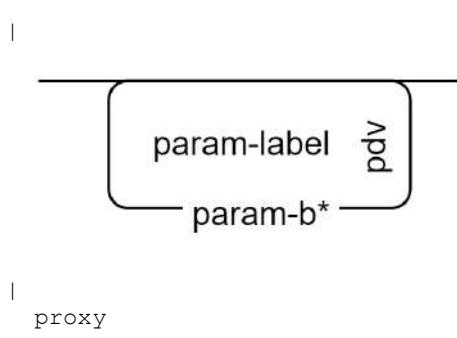

param-label = QualifiedName (':' QualifiedName)*

start-node =



done-node =




fork-node =



join-node =




decision-node =




merge-node =

```
merge-node =
```




```
send-action-node =
```

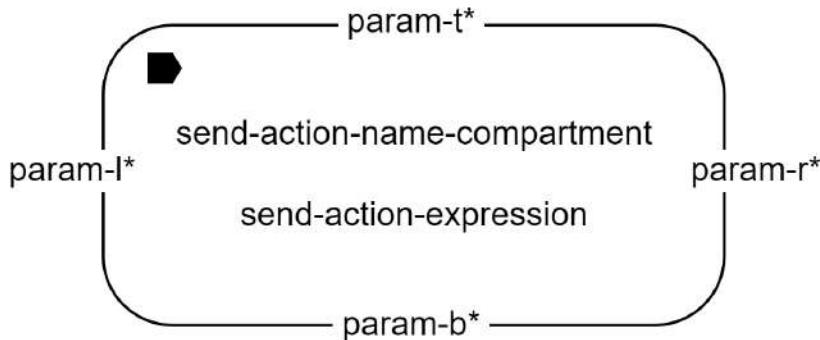

```
send-action-name-compartment = ('«send»')? qualified-name (':' qualified-name)?  
('«alias»' ( qualified-name (',' qualified-name)* ) )?
```

```
send-action-expression = NodeParameterMember 'to' NodeParameterMember
```


```
accept-action-node =
```

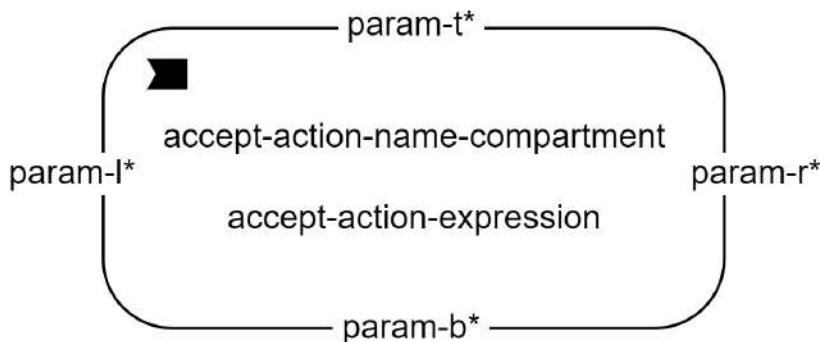


```
accept-action-name-compartment = ('«accept»')? qualified-name (':' qualified-name)?  
('«alias»' ( qualified-name (',' qualified-name)* ) )?
```

```
accept-action-expression = AcceptParameterPart
```

```
loop-action-node =
```




```
send-action-node =
```

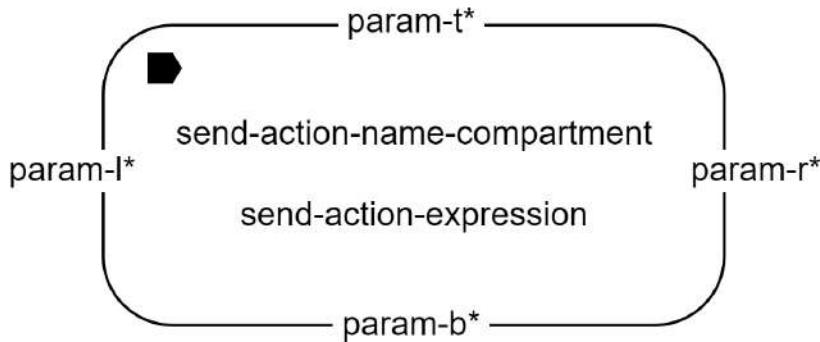

```
send-action-name-compartment =
  '«' OccurrenceUsagePrefix 'send' 'action' '»'
  usage-name-with-alias
```

```
send-action-expression = NodeParameterMember 'to' NodeParameterMember
```


```
accept-action-node =
```

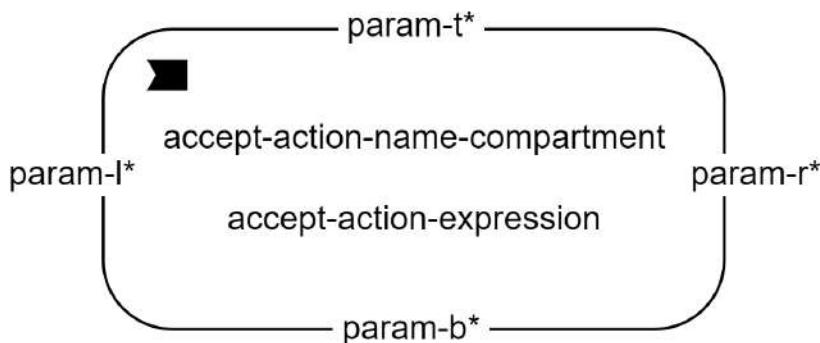

```
accept-action-name-compartment =
  '«' OccurrenceUsagePrefix 'accept' 'action' '»'
  usage-name-with-alias
```

```
accept-action-expression = AcceptParameterPart
```

```
while-loop-action-node =
```

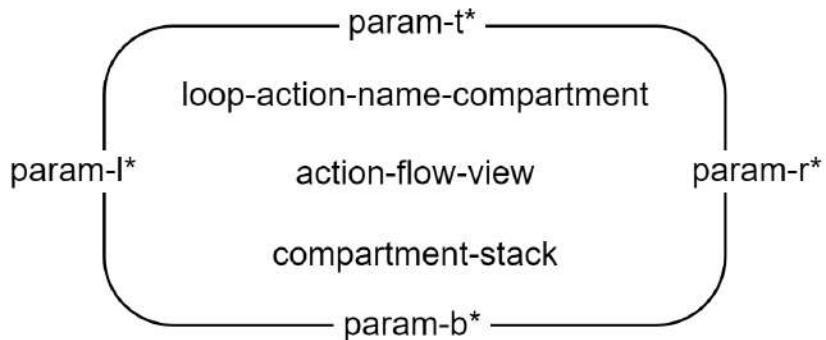


```

loop-action-name-compartment = ('«loop»')? qualified-name (':' qualified-name)?
  ('«alias»' ( qualified-name (',' qualified-name)* ) )?

```

assign-action-node =

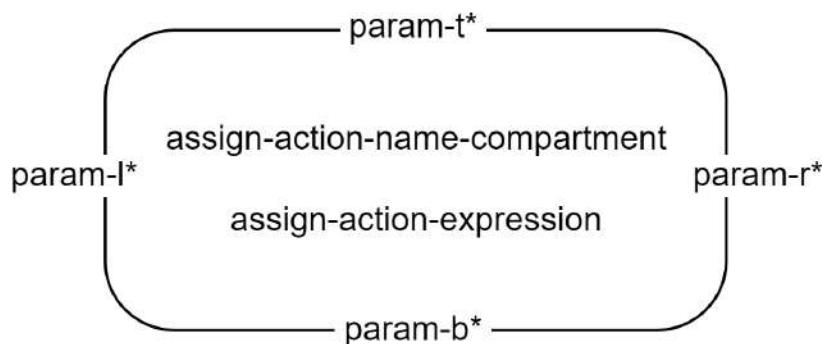


```

assign-action-name-compartment = ('«assign»')? qualified-name (':' qualified-name)?
  ('«alias»' ( qualified-name (',' qualified-name)* ) )?

```

perform-actions-swimlanes = (swimlane)*

swimlane =

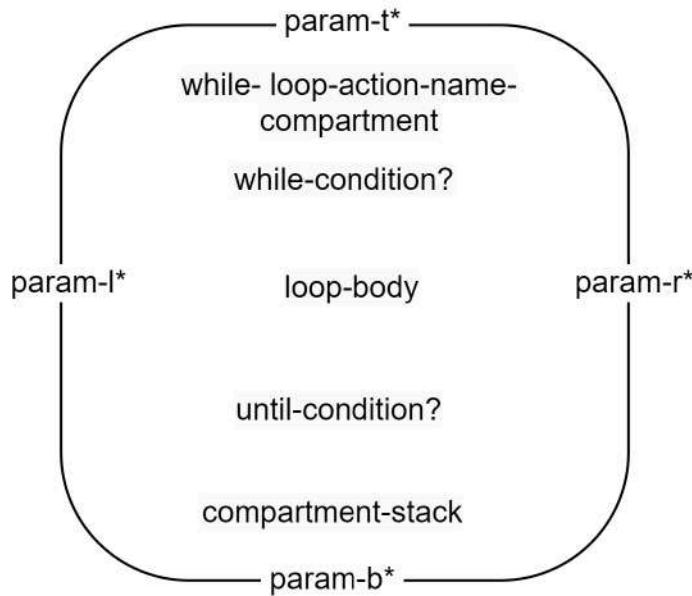

```
while-condition =
  _____
    'while condition'
```


```
condition-expression
```

```
until-condition =
  _____
    'until condition'
```

```
condition-expression
```

```
while-loop-action-name-compartment =
  '«' OccurrenceUsagePrefix 'loop' '»'
  usage-name-with-alias
```

```
for-loop-action-node =
```

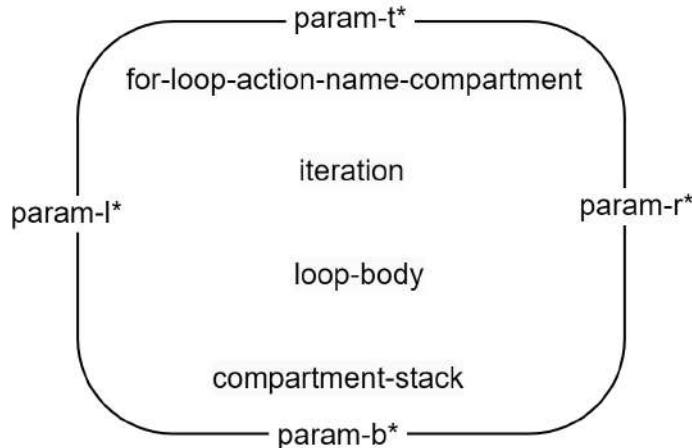

```
iteration =
  _____
    'for iterator'
```

```
iteration-expression
```



```

loop-body =
    'loop body'

action-body

for-loop-action-name-compartment =
    '«' OccurrenceUsagePrefix 'loop' '»'
    usage-name-with-alias

if-else-action-node =
    ifelse-action-name-compartment
        if-condition
        then-body
        else-body?
    compartment-stack
        param-t*
        param-l*
        param-r*
        param-b*

```

Diagram Description: A diagram showing the structure of an if-else-action-node. It is represented by a large rounded rectangle labeled "compartment-stack". Inside this stack, from top to bottom, are "param-t*", "ifelse-action-name-compartment", "if-condition", "then-body", and "else-body?". Outside the stack, from left to right, are "param-l*", "param-r*", and "param-b*".

```

if-condition =
    'if condition'

condition-expression

then-body =
    'then body'

action-body

else-body =
    'else body'

action-body


ifelse-action-name-compartment =
    '«' OccurrenceUsagePrefix 'if' '»'
    usage-name-with-alias

action-body =
    action-body-textual | action-flow-view

condition-expression =
    ExpressionParameterMember

iteration-expression =
    ForVariableDeclarationMember 'in' NodeParameterMember

```

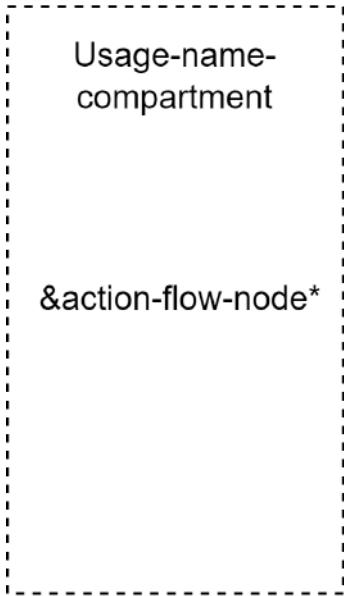

```

parameter =
    param-l | param-r | param-t | param-b

aflow-succession =
    &action-flow-node -----> guard-expression?
    &action-flow-node ----->&action-flow-node

usage-edge = |succession

guard-expression = '[' ExpressionParameterMember ActionBodyParameterMember ']'

```

Note. All swimlanes are attached to each other on vertical edges and aligned along the top and bottom horizontal edges.

Note. The proxy option of a parameter production is valid only on an action usage contained within an action flow view.

8.2.3.17 States Graphical Notation

```


definition-node =| state-def

state-def =

```

```
action-body-textual =
    ActionBodyParameterMember
```


```
assign-action-node =
```

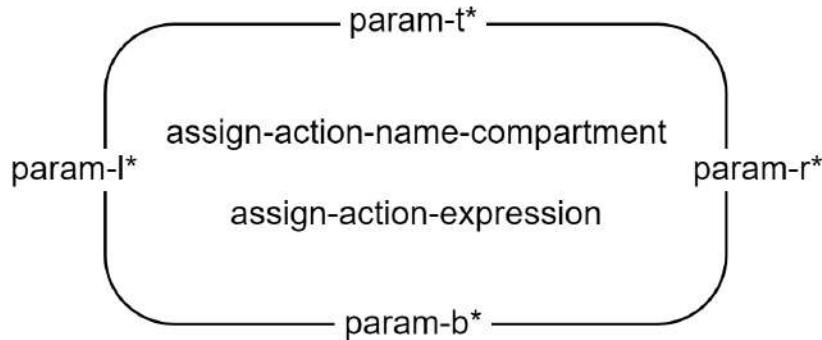

```
assign-action-name-compartment =
    '«' OccurrenceUsagePrefix 'assign' '»'
    usage-name-with-alias
```

```
perform-actions-swimlanes = (swimlane)*
```

```
swimlane =
```

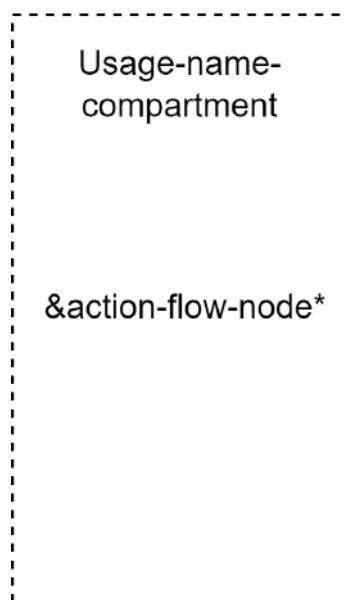

```
parameter =
    param-l | param-r | param-t | param-b
```

```
aflow-succession =
```

```
state-def-name-compartment
```

```
state-transition-view
```

```
compartment-stack
```

```
state-def-name-compartment =  
  basic-name-prefix  
  '«' keyword* 'state' 'def' '»'  
  definition-name-with-alias
```

```
usage-node =|  
  state  
  | exhibit-state-usage
```

```
state =
```

```
state-name-compartment
```

```
state-transition-view
```

```
compartment-stack
```

```
state-ref =
```

```
state-name-compartment
```

```
state-transition-view
```

```
compartment-stack
```

```
state-name-compartment =  
  basic-name-prefix  
  '«' 'ref'? keyword* 'state' '»'  
  usage-name-with-alias
```

```
exhibit-state-usage =
```



```

usage-edge = |succession
guard-expression = '[' ExpressionParameterMember ActionBodyParameterMember ']'
  
```

Note. All swimlanes are attached to each other on vertical edges and aligned along the top and bottom horizontal edges.


Note. The proxy option of a parameter production is valid only on an action usage contained within an action flow view.

8.2.3.17 States Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```

definition-node =| state-def
state-def =
  
```

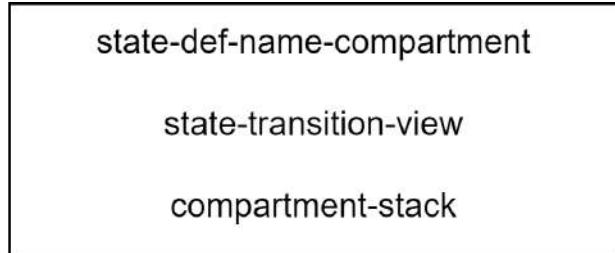


```

state-def-name-compartment =
  '<<' DefinitionPrefix 'state' 'def' '>>
definition-name-with-alias
('<<' 'parallel' '>>')?

usage-node =|
  state
  | exhibit-state-usage
  
```

state =

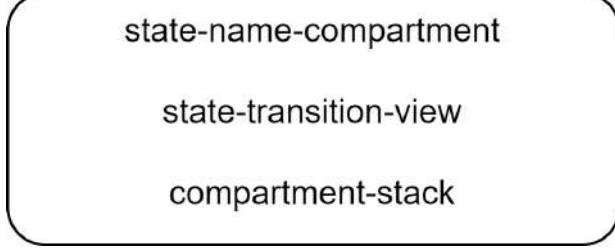

state-ref =

exhibit-state-name-compartment

compartment-stack

```
exhibit-state-name-compartment =
    '«exhibit-state»'
    state-name-compartment

compartments =
    states-compartment
    | states-actions-compartment
    | exhibit-states-compartment
    | successions-compartment
    | state-transition-compartment

states-compartment =
    _____
    'states'
    states-compartment-contents

states-compartment-contents = (states-compartment-element)* '...'?
states-compartment-element =
    el-prefix? OccurrencePrefix ActionUsageDeclaration

state-actions-compartment =
    _____
    'states'
    state-actions-compartment-contents

state-actions-compartment-contents = (state-actions-compartment-element)* '...'?
state-actions-compartment-element =
    el-prefix? EntryActionMember | DoActionMember | ExitActionMember


exhibit-states-compartment =
    _____
    'exhibit states'
    exhibit-states-compartment-contents

exhibit-states-compartment-contents = exhibit-state-scompartment-element* '...'?
exhibit-states-compartment-element-compartment = UsageDeclaration

succession-compartment =
    _____
    'successions'
    succession-compartment-contents

succession-compartment-contents = QualifiedName* '...'?

state-transition-compartment =
```

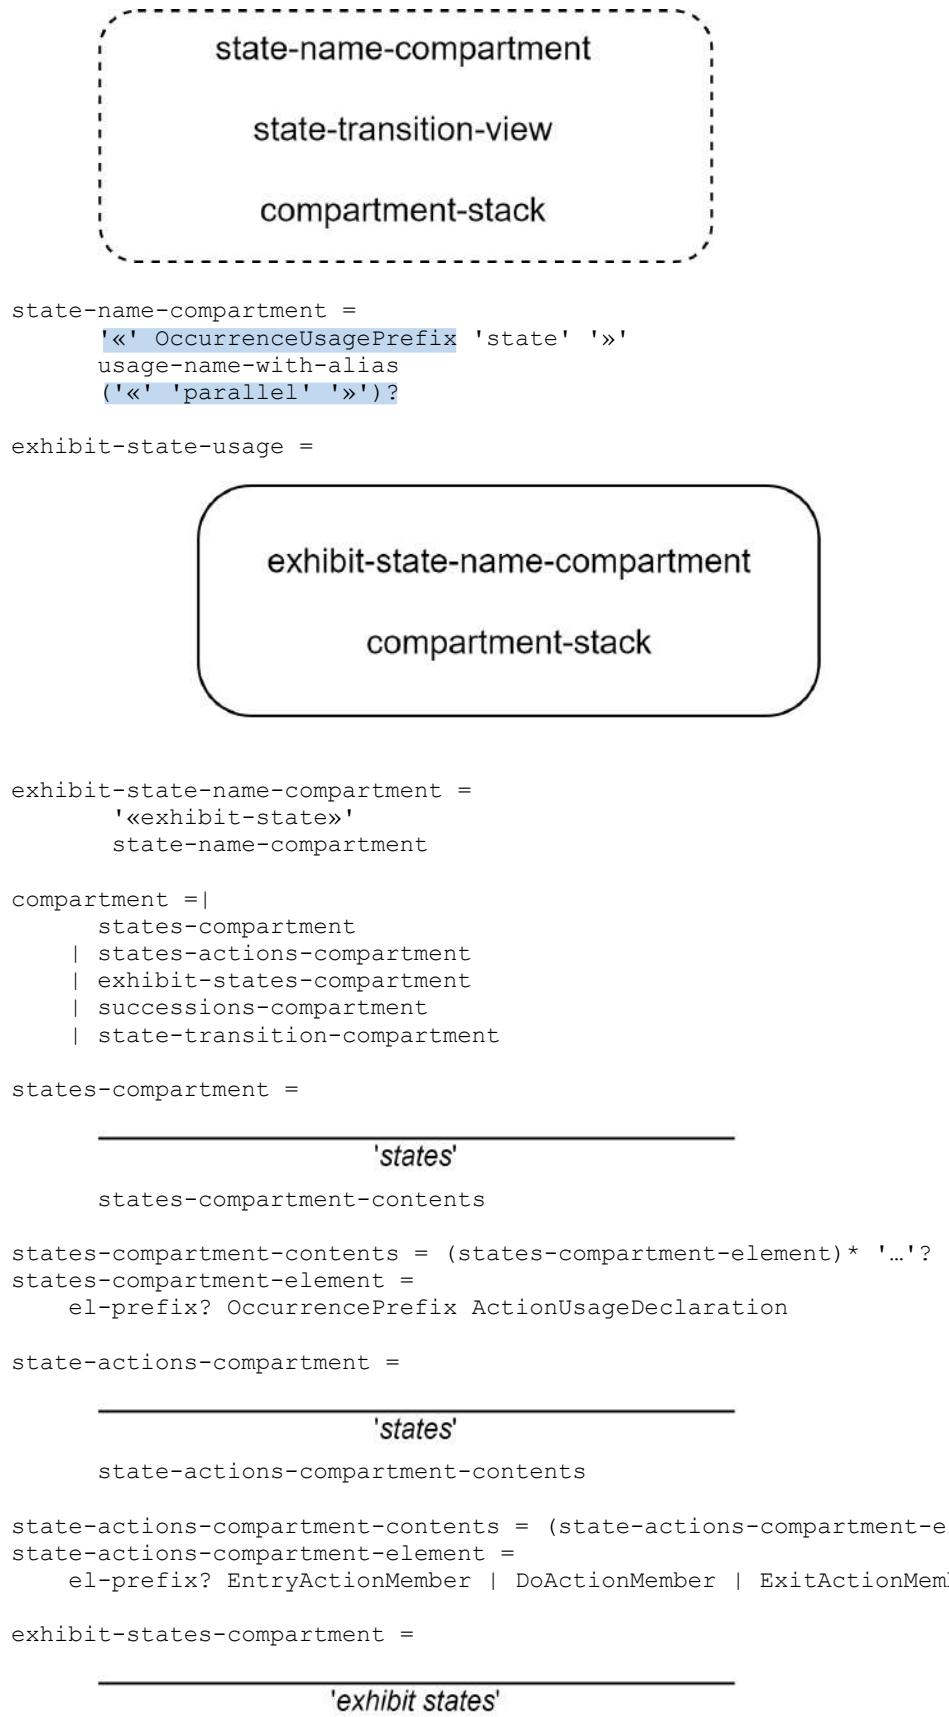

'state transition'

```

state-transition-view

state-transition-view =
  (state-transition-element)*
  (dependencies-and-annotations-element)*

state-transition-element =
  state-def-node
  | state-node
  | state-ref-node
  | transition
  | start-node
  | done-node
  | fork-node
  | join-node
  | decision-node
  | merge-node

transition =
  &state -- transition-label --> &state

```

```

transition-label = trigger-expression '/' ActionUsage

trigger-expression = AcceptParameterPart (guard-expression) ?


usage-edge = |transition

```

8.2.3.18 Calculations Graphical Notation

```
definition-node =| calc-def
```

```
calc-def =
```

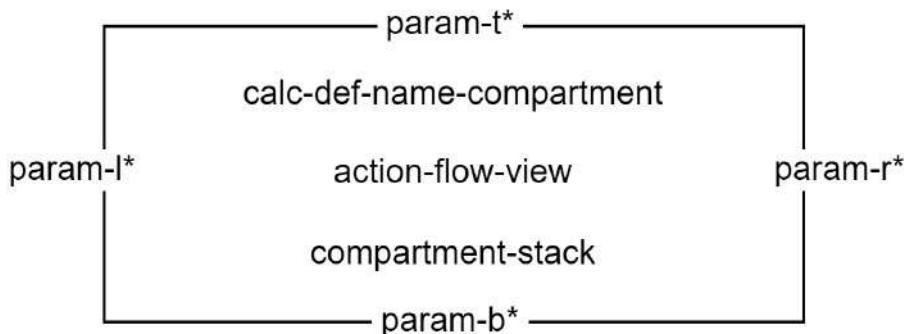

```

calc-def-name-compartment =
  occurrence-name-prefix
  '<<' 'ref'? keyword* 'calc' 'def' '>>'
  definition-name-with-alias

```

```
usage-node =| calc
```

```
calc =
```

```

exhibit-states-compartment-contents

exhibit-states-compartment-contents = exhibit-state-scompartment-element* '...'?
exhibit-states-compartment-element-compartment = UsageDeclaration

succession-compartment =
  _____
  'successions'
  succession-compartment-contents

succession-compartment-contents = QualifiedName* '...'?

state-transition-compartment =
  _____
  'state transition'
  state-transition-view

state-transition-view =
  (state-transition-element)*
  (dependencies-and-annotations-element)*

state-transition-element =
  state-def-node
  | state-node
  | state-ref-node
  | transition
  | start-node
  | done-node
  | fork-node
  | join-node
  | decision-node
  | merge-node

transition =
  &state -- transition-label --> &state

transition-label = trigger-expression '/' ActionUsage

trigger-expression = AcceptParameterPart (guard-expression) ?

usage-edge = |transition

```

8.2.3.18 Calculations Graphical Notation


SYSML2_197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```

definition-node =| calc-def

calc-def =

```

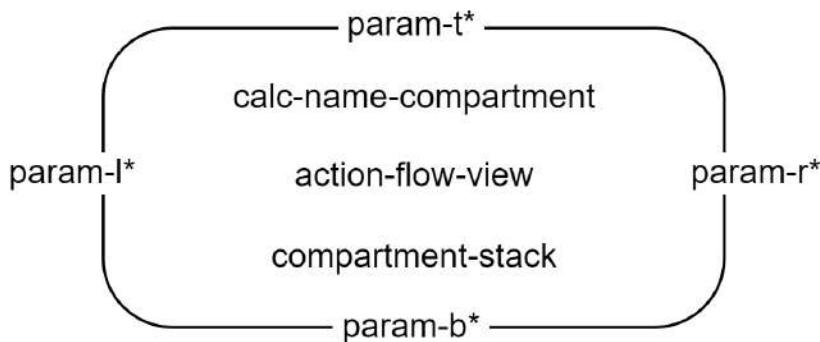

```

calc-name-compartment =
  occurrence-name-prefix
  '<< 'ref'? keyword* 'calc' '>>'
  definition-name-with-alias

action-flow-element =|
  calc-def
| calc

compartment =|
  calcs-compartment
| result-compartment

calcs-compartment =
  _____
  'calcs'
  calcs-compartment-contents

calcs-compartment-contents = calcs-compartment-element* '...'?
calcs-compartment-element = el-prefix? OccurrenceUsagePrefix ActionUsageDeclaration

results-compartment =
  _____
  'result'
  result-compartment-contents

result-compartment-contents = OwnedExpression

```


8.2.3.19 Constraints Graphical Notation

```

definition-node =| constraint-def

constraint-def =

```

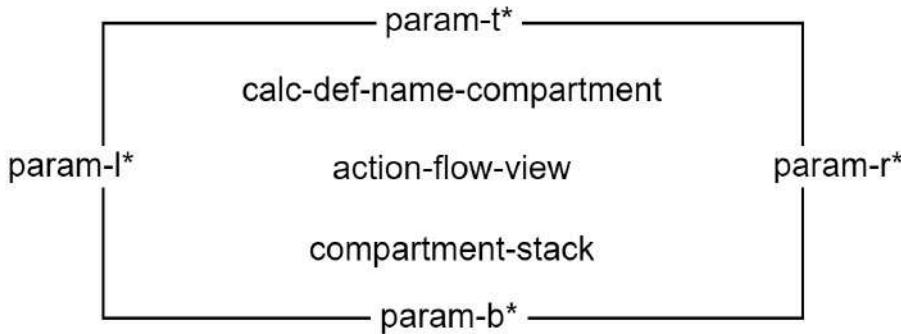


```

calc-def-name-compartment =
  '<<' DefinitionPrefix 'calc' 'def' '>>'
  definition-name-with-alias

```

`usage-node =| calc`

`calc =`

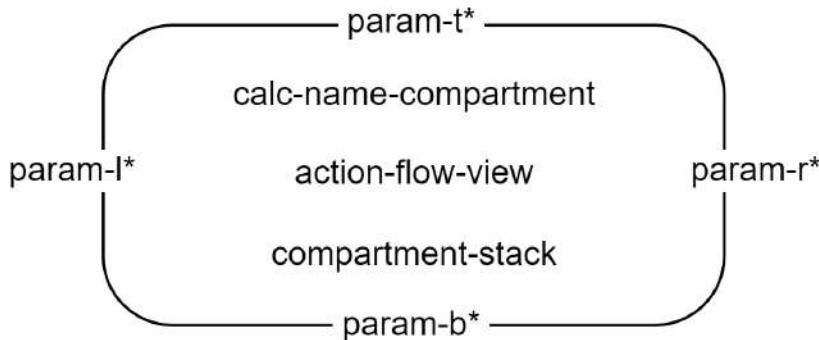

```

calc-name-compartment =
  occurrence-name-prefix
  '<<' 'ref'? keyword* 'calc' '>>'
  definition-name-with-alias

```

```

calc-name-compartment =
  '<<' OccurrenceUsagePrefix 'calc' '>>'
  usage-name-with-alias

```

```

action-flow-element =|
  calc-def
  | calc

```

```

compartment =|
  calcs-compartment
  | result-compartment

```

`calcs-compartment =`

`'calcs'`

`calcs-compartment-contents`

```


calcs-compartment-contents = calcs-compartment-element* '...'??

```

```

calcs-compartment-element = el-prefix? OccurrenceUsagePrefix ActionUsageDeclaration


```

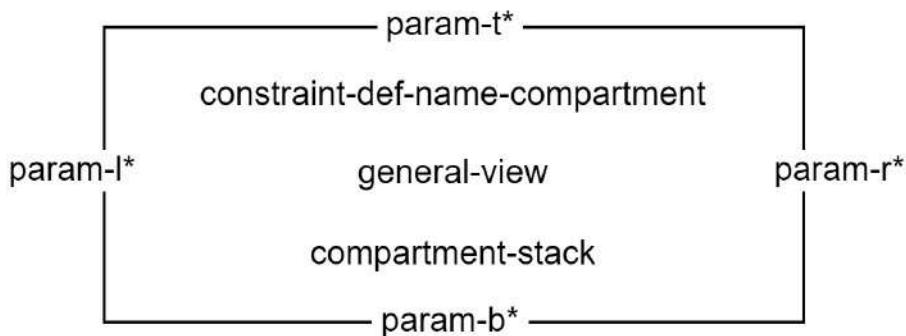


```
constraint-def-name-compartment =
  basic-name-prefix
  '«' keyword* 'constraint' 'def' '»'
  definition-name-with-alias
```

```
usage-node =
  constraint
  | assert-constraint-usage
```

```
constraint =
```

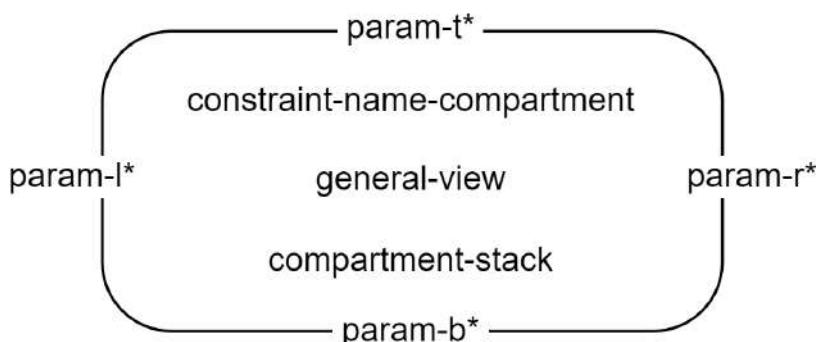

```
constraint-ref =
```

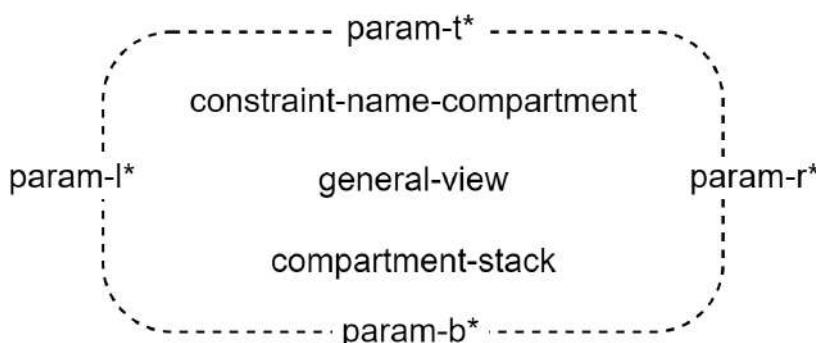

```
constraint-name-compartment =
  basic-name-prefix
  '«' 'ref'? keyword* 'constraint' '»'
```

```

results-compartment =
  _____
  'result'
  result-compartment-contents
  result-compartment-contents = OwnedExpression

```


8.2.3.19 Constraints Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```

definition-node =| constraint-def
constraint-def =

```

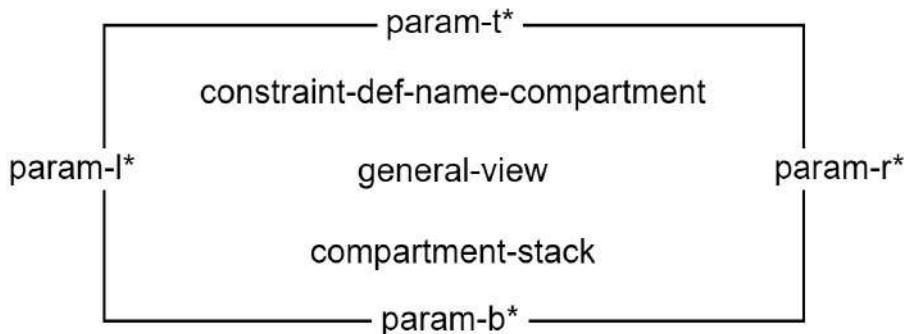

```


constraint-def-name-compartment =
  '<<' DefinitionPrefix 'constraint' 'def' '>>'
  definition-name-with-alias

```

```

usage-node =
  constraint
  | assert-constraint-usage
constraint =

```

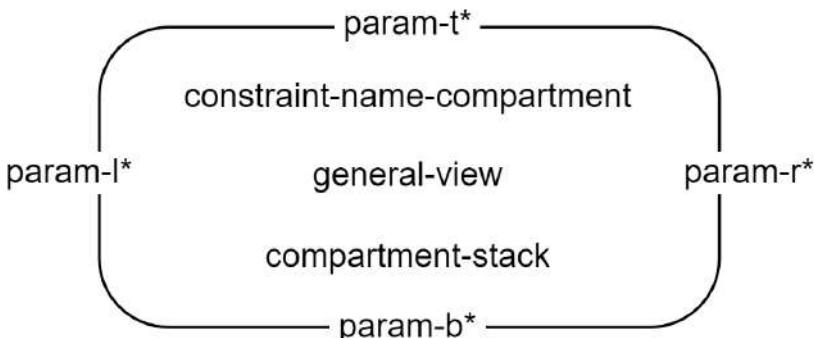

```
constraint-ref =
```

```
usage-name-with-alias  
assert-constraint-usage =
```


assert-constraint-name-compartment

compartment-stack

```
assert-constraint-name-compartment =  
    '«assert constraint»'  
    constraint-name-compartment  
  
compartment =|  
    constraints-compartment  
    | assert-constraints-compartment  
  
constraints-compartment =  
    _____  
    'constraints'  
    constraints-compartment-contents  
  
constraints-compartment-contents = (constraints-usage-compartment-element)* '...'?  
constraints-usage-compartment-element =  
    el-prefix? OccurrenceUsagePrefix ConstraintUsageDeclaration CalculationBody*  
  
assert-constraints-compartment =  
    _____  
    'assert constraints'  
    assert-constraints-compartment-contents  
  
assert-constraints-compartment-contents = (assert-constraints-compartment-element)* '...'?  
assert-constraints-compartment-element =  
    el-prefix? OccurrenceUsagePrefix ( 'not' )?  
    ( OwnedSubsetting FeatureSpecializationPart? | UsageDeclaration )  
    CalculationUsageParameterPart CalculationBody  
  
interconnection-element =|  
    constraint-ref  
    | constraint
```

8.2.3.20 Requirements Graphical Notation

```
definition-node =|  
    requirement-def  
    | concern-def  
  
requirement-def =
```

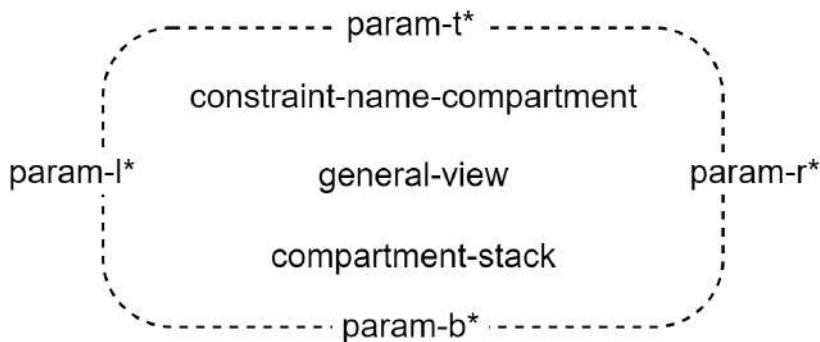

```
constraint-name-compartment =
  '«' OccurrenceUsagePrefix 'constraint' '»'
  usage-name-with-alias
```

```
assert-constraint-usage =
```

assert-constraint-name-compartment

compartment-stack

```
assert-constraint-name-compartment =
  '«assert constraint»'
  constraint-name-compartment
```

```
compartment =|
  constraints-compartment
  | assert-constraints-compartment
```

```
constraints-compartment =
```

'constraints'

constraints-compartment-contents

```
constraints-compartment-contents = (constraints-usage-compartment-element)* '...'?
```

```
constraints-usage-compartment-element =
  el-prefix? OccurrenceUsagePrefix ConstraintUsageDeclaration CalculationBody*
```


```
assert-constraints-compartment =
```

'assert constraints'

assert-constraints-compartment-contents

```
assert-constraints-compartment-contents = (assert-constraints-compartment-element)* '...'?
```


```
assert-constraints-compartment-element =
  el-prefix? OccurrenceUsagePrefix ( 'not' )?
  ( OwnedSubsetting FeatureSpecializationPart? | UsageDeclaration )
  CalculationUsageParameterPart CalculationBody
```

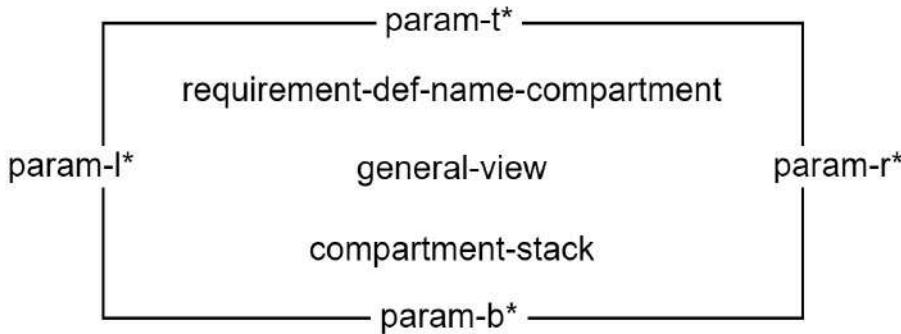


```
requirement-def-name-compartment =
    basic-name-prefix
    '<<' keyword* 'requirement' 'def' '>>'
    definition-name-with-alias
```

```
usage-node =
    requirement
    | satisfy-requirement-usage
    | concern
```

```
requirement =
```

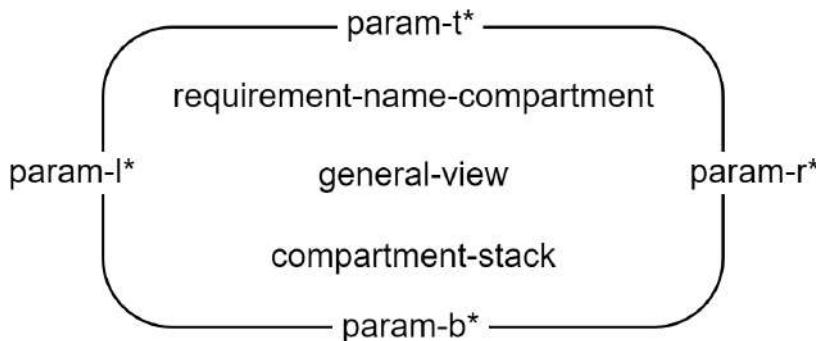

```
requirement-ref =
```

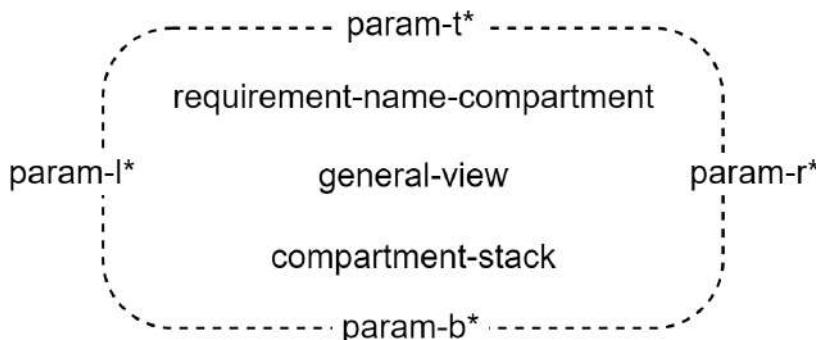

```
requirement-name-compartment =
    basic-name-prefix
```


```
interconnection-element =  
    constraint-ref  
    | constraint
```

8.2.3.20 Requirements Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```
definition-node =  
    requirement-def  
    | concern-def
```


```
requirement-def =
```

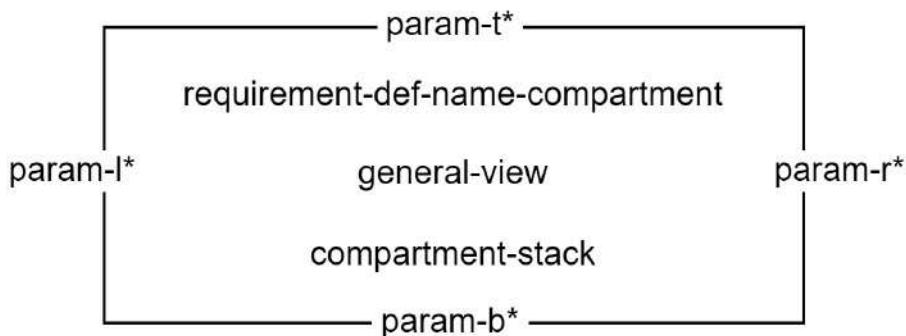

```
requirement-def-name-compartment =  
    '«' DefinitionPrefix 'requirement' 'def' '»'  
    definition-name-with-alias
```

```
usage-node =  
    requirement  
    | satisfy-requirement-usage  
    | concern
```

```
requirement =
```

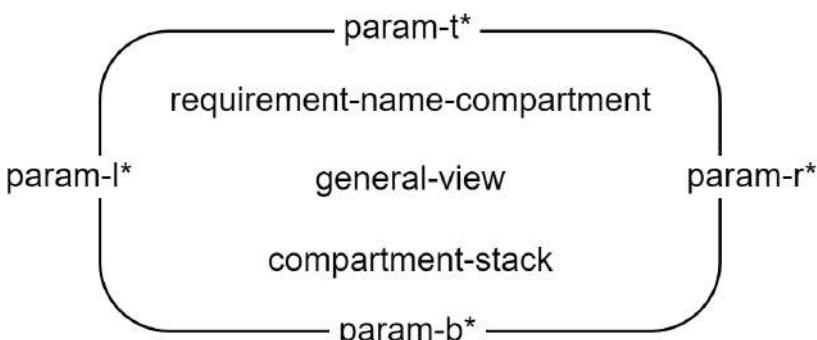

```
requirement-ref =
```

```
'«' 'ref' keyword* 'requirement' '»'
usage-name-with-alias

satisfy-requirement-usage =
```

```
satisfy-requirement-name-compartment
compartment-stack
```

```
satisfy-requirement-name-compartment =
'«satisfy requirement»'
requirement-name-compartment
```

```
concern-def =
```

```
concern-def-name-compartment
compartment-stack
```

```
concern-def-name-compartment =
occurrence-name-prefix
'«concern-def»'
definition-name-with-alias
```


```
concern =
```

```
concern-name-compartment
compartment-stack
```

```
concern-name-compartment =
occurrence-prefix
'«concern»'
definition-name-with-alias

compartment =|
  constraints-compartment
| assert-constraints-compartment

compartment =|
  requirements-compartment
| require-constraints-compartment
| assume-constraints-compartment
| satisfy-requirements-compartment
| satisfies-compartment
```

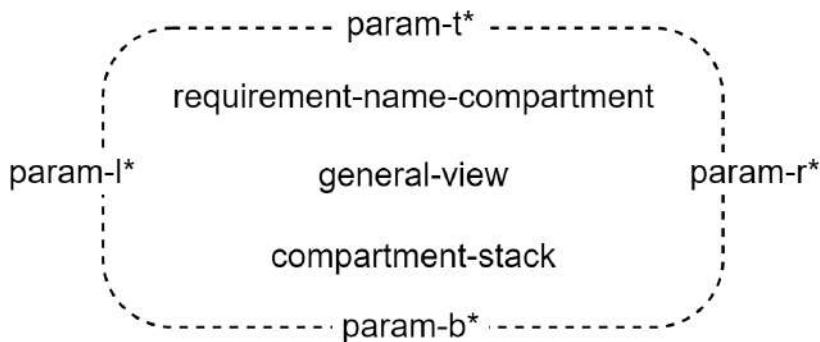

```

requirement-name-compartment =
  '«' OccurrenceUsagePrefix 'requirement' '»'
  usage-name-with-alias

satisfy-requirement-usage =

```

satisfy-requirement-name-compartment
compartment-stack

```

satisfy-requirement-name-compartment =
  '«satisfy requirement»'
  requirement-name-compartment

```

concern-def =

concern-def-name-compartment
compartment-stack

```

concern-def-name-compartment =
  '«' DefinitionPrefix 'concern' 'def' '»'
  definition-name-with-alias

```

concern =

concern-name-compartment
compartment-stack

```

concern-name-compartment =
  '«' OccurrenceUsagePrefix 'concern' '»'

```

```

| actors-compartment
| subject-compartment
| stakeholders-compartment
| frames-compartment

requirements-compartment =


---


'requirements'
requirements-compartment-contents

requirements-compartment-contents = (requirements-compartment-element)* '...'?
requirements-compartment-element =
    OccurrenceUsagePrefix ConstraintUsageDeclaration

require-constraints-compartment =


---


'require constraints'
require-constraints-compartment-contents

require-constraints-compartment-contents = require-constraint-element* '...'?
require-constraint-element =
    el-prefix? requireMemberPrefix? RequirementConstraintUsage

assume-constraints-compartment =


---


'assume constraints'
assume-constraints-compartment-contents

assume-constraints-compartment-contents = require-constraint-element* '...'?

satisfy-requirements-compartment =


---


'satisfy requirements'
satisfy-requirements-compartment-contents

satisfy-requirements-compartment-contents = text-block

satisfies-compartment =


---


'satisfies'
satisfies-compartment-contents

satisfies-compartment-contents = UsageDeclaration* '...'?

actors-compartment =


---


'actors'
actors-compartment-contents

actors-compartment-contents = (actors-compartment-element)* '...'?
actors-compartment-element = el-prefix? MemberPrefix usage-cp

subject-compartment =

```

```

usage-name-with-alias

compartment =|
    constraints-compartment
| assert-constraints-compartment

compartment =|
    requirements-compartment
| require-constraints-compartment
| assume-constraints-compartment
| satisfy-requirements-compartment
| satisfies-compartment
| actors-compartment
| subject-compartment
| stakeholders-compartment
| frames-compartment

requirements-compartment =



---


'requirements'

requirements-compartment-contents

requirements-compartment-contents = (requirements-compartment-element)* '...'?
requirements-compartment-element =
    OccurrenceUsagePrefix ConstraintUsageDeclaration

require-constraints-compartment =



---


'require constraints'

require-constraints-compartment-contents

require-constraints-compartment-contents = require-constraint-element* '...'?
require-constraint-element =
    el-prefix? requireMemberPrefix? RequirementConstraintUsage

assume-constraints-compartment =



---


'assume constraints'

assume-constraints-compartment-contents

assume-constraints-compartment-contents = require-constraint-element* '...'?

satisfy-requirements-compartment =



---


'satisfy requirements'

satisfy-requirements-compartment-contents

satisfy-requirements-compartment-contents = text-block

satisfies-compartment =



---


'satisfies'

satisfies-compartment-contents

satisfies-compartment-contents = UsageDeclaration* '...'?

actors-compartment =

```

```



---


'subject'
subject-compartment-contents

subject-compartment-contents = (subject-compartment-element)* '...'?
subject-compartment-element = el-prefix? MemberPrefix usage-cp

stakeholders-compartment =



---


'stakeholders'
stakeholders-compartment-contents

stakeholders-compartment-contents = (stakeholders-compartment-element)* '...'?
stakeholders-compartment-element = el-prefix? MemberPrefix usage-cp

frames-compartment =



---


'frames'
frames-compartment-contents

frames-compartment-contents = (frames-compartment-element)* '...'?
frames-compartment-element = el-prefix* MemberPrefix? FramedConcernUsage

concerns-compartment =



---


'concerns'
concerns-compartment-contents

interconnection-element =|
  requirement-ref
| requirement
| concern
| distinguished-parameter
| distinguished-parameter-link
| concern-stakeholder-link

general-relationship =| frame-relationship

subject-actors-stakeholders-node =| requirement

distinguished-parameter =
  subject
| actor
| stakeholder

subject =



«subject»  

  subject-name



actor =

```

'actors'

```

actors-compartment-contents

actors-compartment-contents = (actors-compartment-element)* '...'?
actors-compartment-element = el-prefix? MemberPrefix usage-cp
```

subject-compartment =

'subject'

```

subject-compartment-contents

subject-compartment-contents = (subject-compartment-element)* '...'?
subject-compartment-element = el-prefix? MemberPrefix usage-cp
```

stakeholders-compartment =

'stakeholders'

```

stakeholders-compartment-contents

stakeholders-compartment-contents = (stakeholders-compartment-element)* '...'?
stakeholders-compartment-element = el-prefix? MemberPrefix usage-cp
```

frames-compartment =

'frames'

```

frames-compartment-contents

frames-compartment-contents = (frames-compartment-element)* '...'?
frames-compartment-element = el-prefix* MemberPrefix? FramedConcernUsage
```

concerns-compartment =

'concerns'

```

concerns-compartment-contents


interconnection-element =
  requirement-ref
  | requirement
  | concern
  | distinguished-parameter
  | distinguished-parameter-link
  | concern-stakeholder-link

general-relationship =| frame-relationship


subject-actors-stakeholders-node =| requirement

distinguished-parameter =
  subject
  | actor
  | stakeholder


subject =
```



actor-name



stakeholder =



subject-name = UsageDeclaration

actor-name = UsageDeclaration

stakeholder-name = UsageDeclaration

distinguished-parameter-link =

&subject-actors-stakeholders-node ————— &distinguished-parameter

frame-relationship =

&subject-actors-stakeholders-node ————— '«frame»' → &concern

concern-stakeholder-link =

&concern ————— &stakeholder-node


8.2.3.21 Cases Graphical Notation

compartment =| objective-compartment

objective-compartment =

«subject»
subject-name

actor =

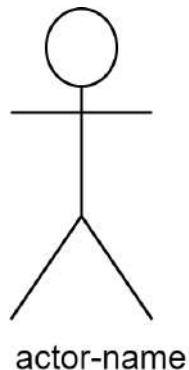

actor-name

«actor»
actor-name

stakeholder =

«stakeholder»
stakeholder-name

subject-name = UsageDeclaration
actor-name = UsageDeclaration
stakeholder-name = UsageDeclaration

distinguished-parameter-link =

&subject-actors-stakeholders-node ————— &distinguished-parameter

frame-relationship =

&subject-actors-stakeholders-node ————— '«frame»' → &concern

concern-stakeholder-link =

'objective'

```

objective-compartment-contents


objective-compartment-contents = (objective-compartment-element)* '...'?
objective-compartment-element =
    comp-prefix? MemberPrefix ConstraintUsageDeclaration RequirementBody

```

8.2.3.22 Analysis Cases Graphical Notation

```
definition-node =| calc-def
```

```
analysis-def =
```

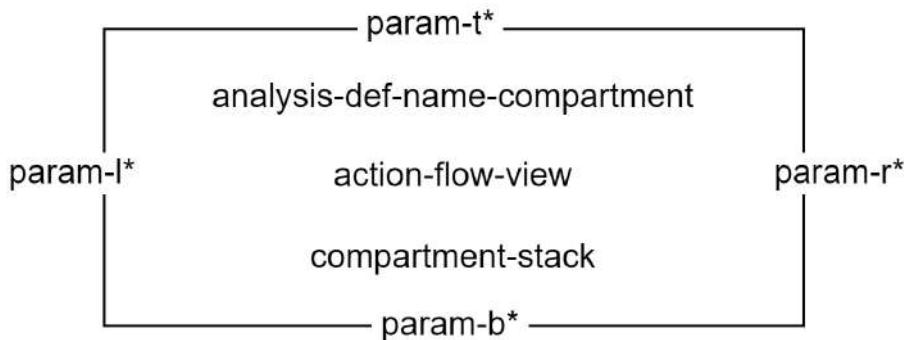


```

analysis-def-name-compartment =
occurrence-name-prefix
'«' keyword* 'analysis' 'def' '»'
definition-name-with-alias

```

```
usage-node =| analysis
```

```
analysis =
```

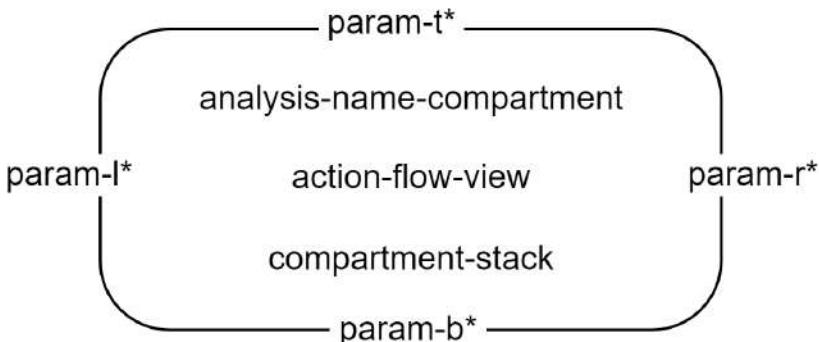

```

analysis-name-compartment =
occurrence-name-prefix
'«' keyword* 'analysis' '»'
definition-name-with-alias

```

```
compartment =| analyses-compartment
```

```
analyses-compartment =
```

&concern ————— &stakeholder-node

8.2.3.21 Cases Graphical Notation


```
compartment =| objective-compartment  
objective-compartment =  
    _____  
    'objective'  
    objective-compartment-contents  
objective-compartment-contents = (objective-compartment-element)* '...'?  
objective-compartment-element =  
    comp-prefix? MemberPrefix ConstraintUsageDeclaration RequirementBody
```

8.2.3.22 Analysis Cases Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```
definition-node =| analysis-def
```

```
analysis-def =
```

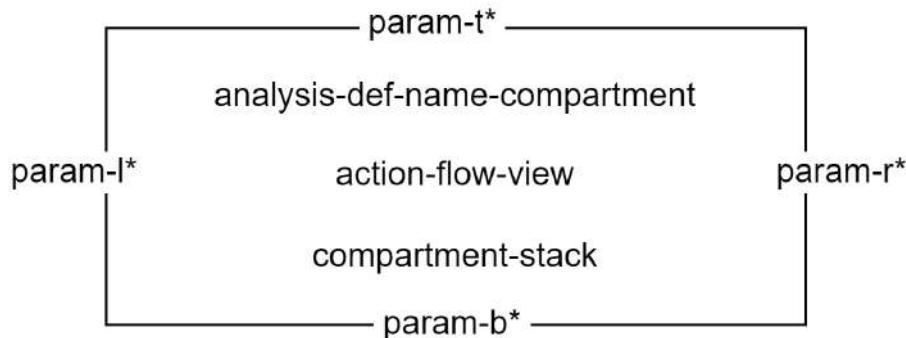

```
analysis-def-name-compartment =  
    '<<' DefinitionPrefix 'analysis' 'def' '>>'  
    definition-name-with-alias
```

```
usage-node =| analysis
```

```
analysis =
```

'analyses'

```

analyses-compartment-contents

analyses-compartment-contents = analyses-compartment-element* '...'?
analyses-compartment-element =
    el-prefix? OccurrenceUsagePrefix ConstraintUsageDeclaration CaseBody

action-flow-element =|
    analysis-def
| analysis


subject-actors-stakeholders-node =| analysis | analysis-def

```

8.2.3.23 Verification Cases Graphical Notation

```
definition-node =| verification-def
```


```
verification-def =
```

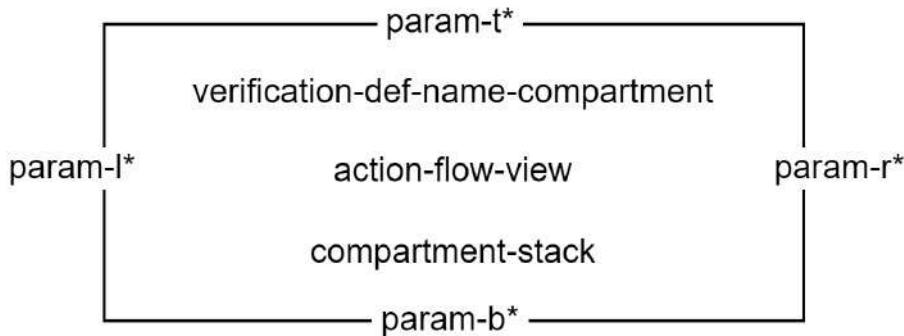


```
verification-def-name-compartment =
    occurrence-name-prefix
    '<<' keyword* 'verification' 'def' '>>'
    definition-name-with-alias
```

```
usage-node =| verification
```

```
verification =
```

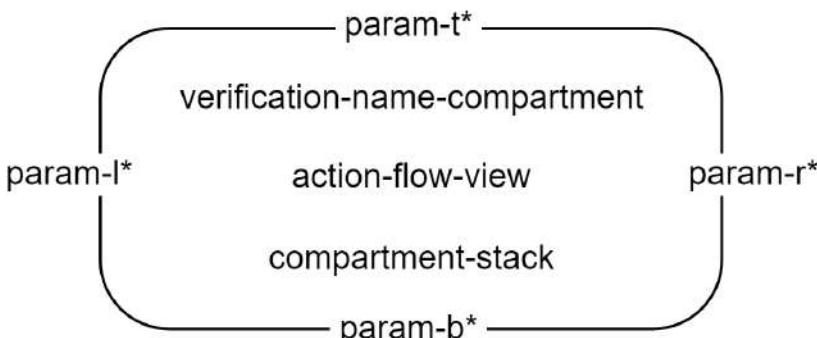

```
verification-name-compartment =
    occurrence-name-prefix
    '<<' keyword* 'verification' '>>'
    definition-name-with-alias
```

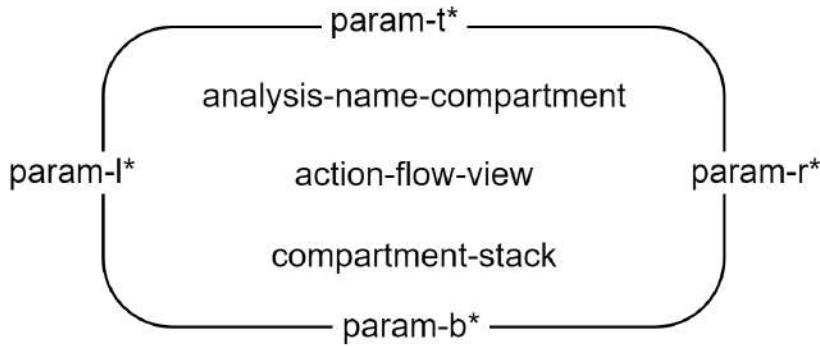

```

analysis-name-compartment =
  '«' OccurrenceUsagePrefix 'analysis' '»'
  usage-name-with-alias

compartment =| analyses-compartment

analyses-compartment =
  _____
  'analyses'
  analyses-compartment-contents

analyses-compartment-contents = analyses-compartment-element* '...'?
analyses-compartment-element =
  el-prefix? OccurrenceUsagePrefix ConstraintUsageDeclaration CaseBody


action-flow-element =|
  analysis-def
  | analysis

subject-actors-stakeholders-node =| analysis  | analysis-def

```

8.2.3.23 Verification Cases Graphical Notation

SYSML2 -197: Inconsistent use of guillemets in graphical notation for metamodel aspects

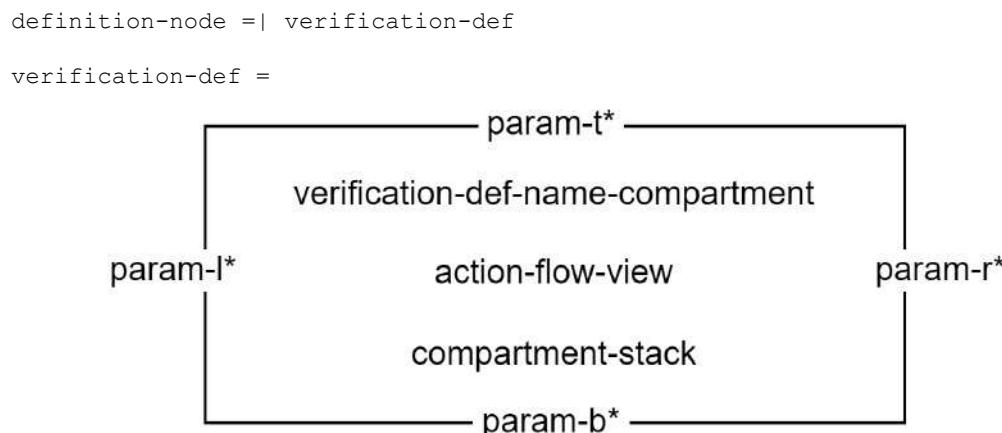

```

verification-def-name-compartment =
  '«' DefinitionPrefix 'verification' 'def' '»'

```

```

compartment =|
    verifications-compartment
| verifies-compartment
| verification-methods-compartment

verifications-compartment =
    _____
    'verifications'  

    verifications-compartment-contents

verifications-compartment-contents = (verifications-compartment-element)* '...'?
verifications-compartment-element =
    el-prefix? OccurrenceUsagePrefix ConstraintUsageDeclaration CaseBody '...'

verifies-compartment =
    _____
    'verifies'  

    verifies-compartment-contents

verifies-compartment-contents = (verifies-compartment-element)* '...'?
verifies-compartment-element = el-prefix? MemberPrefix RequirementVerificationUsage '...'

verification-methods-compartment =
    _____
    'verification methods'  

    verification-methods-compartment-contents

verification-methods-compartment-contents = (verification-methods-compartment-element)* '...'?
verification-methods-compartment-element = MetadataBody

action-flow-element =|
    verification-def
| verification

general-relationship =| verify-relationship

verify-relationship =
    &verification-case _____ '«verify»' → &requirement

subject-actors-stakeholders-node =| verification | verification-def

```

8.2.3.24 Use Cases Graphical Notation

```

definition-node =| use-case-def

use-case-def =

```

```

definition-name-with-alias

usage-node =| verification

verification =

```

```

    param-t*
    verification-name-compartment
    action-flow-view
    param-r*
    compartment-stack
    param-b*

```

```

verification-name-compartment =
  '«' OccurrenceUsagePrefix 'verification' '»'
  usage-name-with-alias

compartment =|
  verifications-compartment
  | verifies-compartment
  | verification-methods-compartment

verifications-compartment =

```

'verifications'

```

  verifications-compartment-contents

verifications-compartment-contents = (verifications-compartment-element)* '...'?
verifications-compartment-element =
  el-prefix? OccurrenceUsagePrefix ConstraintUsageDeclaration CaseBody '...'

verifies-compartment =

```

'verifies'

```

  verifies-compartment-contents

verifies-compartment-contents = (verifies-compartment-element)* '...'?
verifies-compartment-element = el-prefix? MemberPrefix RequirementVerificationUsage '...'

verification-methods-compartment =

```

'verification methods'

```


  verification-methods-compartment-contents

verification-methods-compartment-contents = (verification-methods-compartment-element)* '...'?
verification-methods-compartment-element = MetadataBody

action-flow-element =|
  verification-def
  | verification

general-relationship =| verify-relationship


```

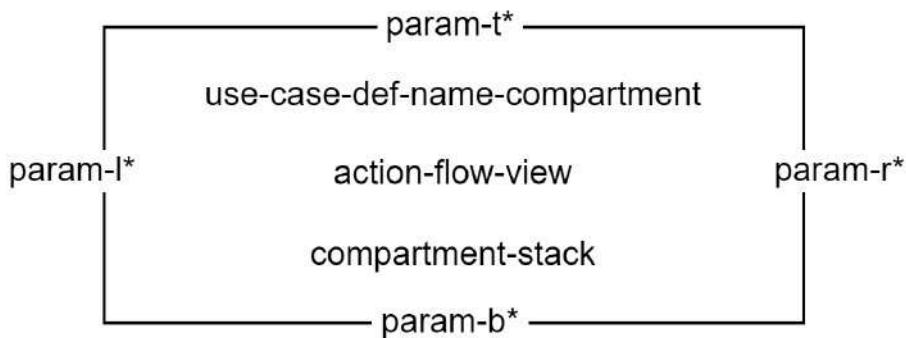

```
use-case-def-name-compartment =
  basic-name-prefix
  '«' keyword* 'use' 'case' 'def' '»'
  definition-name-with-alias
```


```
usage-node =|
  use-case
  | include-use-case-usage
```

```
use-case =
```

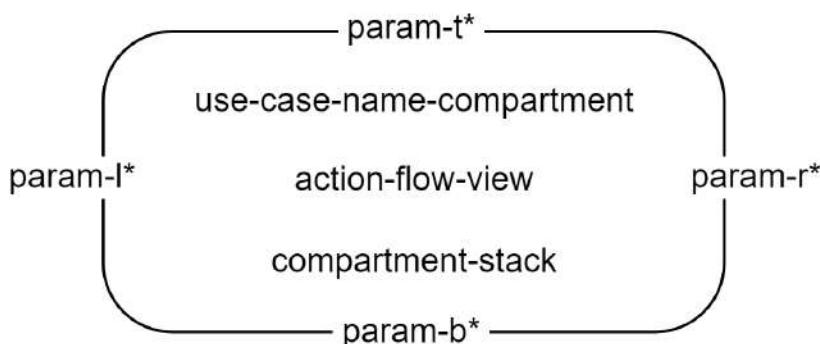

```
use-case-name-compartment =
  basic-name-prefix
  '«' keyword* 'use' 'case' '»'
  usage-name-with-alias
```

```
include-use-case-usage =
```

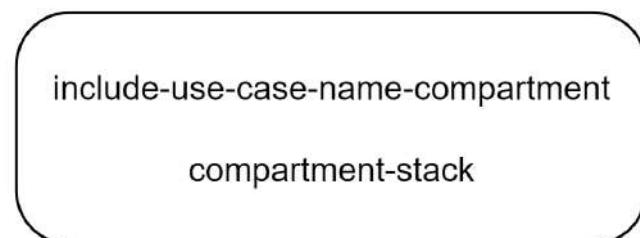

```
include-use-case-name-compartment =
```

```

verify-relationship =
  &verification-case → '«verify»' → &requirement
  subject-actors-stakeholders-node =| verification | verification-def

```


8.2.3.24 Use Cases Graphical Notation

SYSML2_197: Inconsistent use of guillemets in graphical notation for metamodel aspects

```

definition-node =| use-case-def
use-case-def =

```

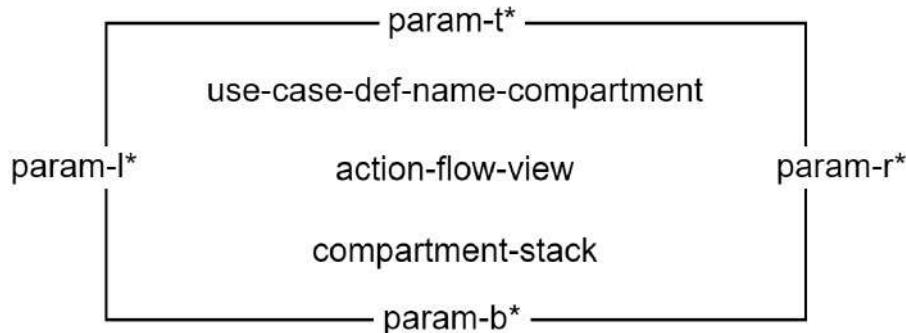

```

use-case-def-name-compartment =
  '«' DefinitionPrefix 'use' 'case' 'def' '»'
  definition-name-with-alias


```

```

usage-node =|
  use-case
  | include-use-case-usage

```

```
use-case =
```

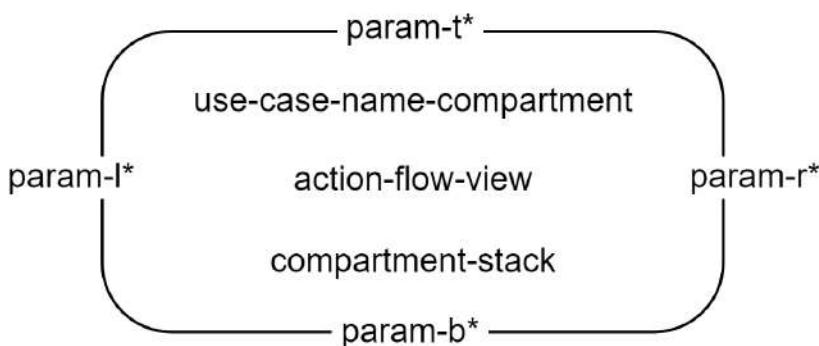

```

use-case-name-compartment =
  '«' OccurrenceUsagePrefix 'use' 'case' '»'
  usage-name-with-alias

```

```
include-use-case-usage =
```

```

'«include use case»'
requirement-name-compartment

compartment =|
    use-cases-compartment
| include-actions-compartment
| includes-compartment

use-cases-compartment =


---


'use cases'
use-cases-compartment-contents

use-cases-compartment-contents = use-cases-compartment-element* '...'?
use-cases-compartment-element = el-prefix? OccurrenceUsagePrefix ConstraintUsageDeclaration

include-use-cases-compartment =


---


'include use cases'
include-use-cases-compartment-contents

include-use-cases-compartment-contents = (include-use-cases-compartment-element* '...'?
include-use-cases-compartment-element =
    el-prefix? OccurrenceUsagePrefix
    ( OwnedSubsetting FeatureSpecializationPart? | UsageDeclaration )
    ( ValuePart | ActionUsageParameterList )? CaseBody

includes-compartment =


---


'includes'
includes-compartment-contents

includes-compartment-contents = (includes-compartment-element)* '...'?
includes-compartment-element =
    el-prefix? OccurrenceUsagePrefix
    ( OwnedSubsetting FeatureSpecializationPart? | UsageDeclaration )

action-flow-element =|
    use-case-def
| use-case

general-relationship =| include-use-case-relationship

include-use-case-relationship =


---


'«include»'
&use-case → &use-case

subject-actors-stakeholders-node =| use-case | use-case-def

```

8.2.3.25 Views and Viewpoints Graphical Notation

```

definition-node =|
    viewpoint-def
| view-def

```

include-use-case-name-compartment

compartment-stack

```
include-use-case-name-compartment =
    '«include use case»'
    requirement-name-compartment

compartments =|
    use-cases-compartment
    | include-actions-compartment
    | includes-compartment

use-cases-compartment =
    'use cases'
    use-cases-compartment-contents

use-cases-compartment-contents = use-cases-compartment-element* '...'?
use-cases-compartment-element = el-prefix? OccurrenceUsagePrefix ConstraintUsageDeclaration

include-use-cases-compartment =
    'include use cases'
    include-use-cases-compartment-contents

include-use-cases-compartment-contents = (include-use-cases-compartment-element* '...'?
include-use-cases-compartment-element =
    el-prefix? OccurrenceUsagePrefix
    ( OwnedSubsetting FeatureSpecializationPart? | UsageDeclaration )
    ( ValuePart | ActionUsageParameterList )? CaseBody

includes-compartment =
    'includes'
    includes-compartment-contents


includes-compartment-contents = (includes-compartment-element)* '...'?
includes-compartment-element =
    el-prefix? OccurrenceUsagePrefix
    ( OwnedSubsetting FeatureSpecializationPart? | UsageDeclaration )

action-flow-element =|
    use-case-def
    | use-case

general-relationship =| include-use-case-relationship

include-use-case-relationship =
```

```
viewpoint-def =
```

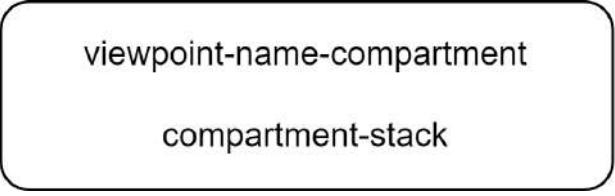


```
viewpoint-name-compartment
```

```
compartment-stack
```

```
viewpoint-def-name-compartment =
  basic-name-prefix
  '«' keyword* 'viewpoint' 'def' '»'
  definition-name-with-alias
```

```
view-def =
```

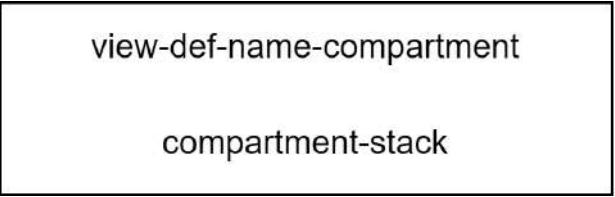

```
view-def-name-compartment
```


```
compartment-stack
```

```
view-def-name-compartment =
```

```
  basic-name-prefix
  '«' keyword* 'view' 'def' '»'
  definition-name-with-alias
```

```
usage-node =
  viewpoint
  | view
  | view-frame
```

```
viewpoint =
```

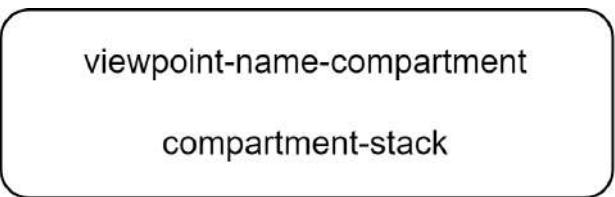


```
viewpoint-name-compartment
```

```
compartment-stack
```


```
viewpoint-name-compartment =
  basic-name-prefix
  ( '«' 'viewpoint' '»' | '«' keyword+ 'viewpoint' '»' )
  usage-name-with-alias
```

```
view =
```

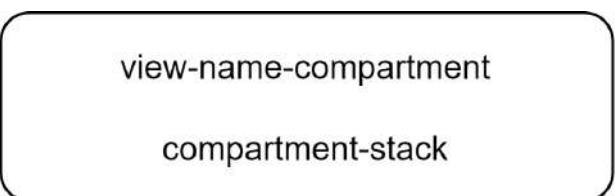

```
view-name-compartment
```

```
compartment-stack
```




subject-actors-stakeholders-node =| use-case | use-case-def

8.2.3.25 Views and Viewpoints Graphical Notation

SYSML2_197: Inconsistent use of guillemets in graphical notation for metamodel aspects
SYSML2_212: Inconsistencies in the graphical notation for "expose"
SYSML2_230: Inconsistent graphical notation for view frame


```
definition-node =|
  viewpoint-def
  | view-def
```

viewpoint-def =

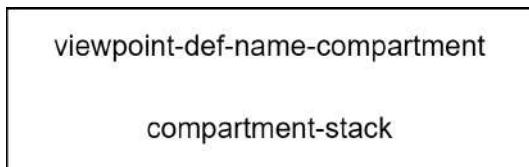

```
viewpoint-def-name-compartment =
  '<<' DefinitionPrefix 'viewpoint' 'def' '>>'
  definition-name-with-alias
```


view-def =

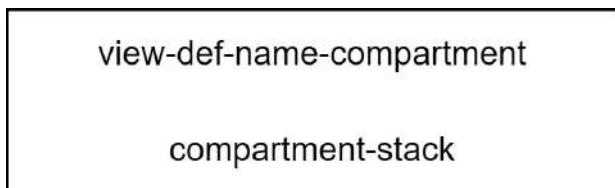

```
view-def-name-compartment =
  '<<' DefinitionPrefix 'view' 'def' '>>'
  definition-name-with-alias
```

```
usage-node =
  viewpoint
  | view
  | view-frame
```

viewpoint =

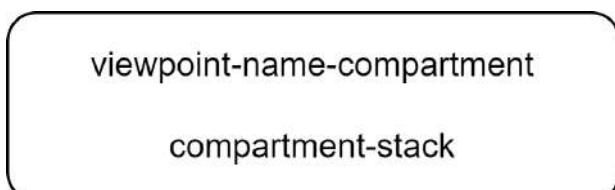

viewpoint-name-compartment =

```

view-name-compartment=
    basic-name-prefix
    '<<' keyword* 'view' '">'
    usage-name-with-alias

compartment =|
    | views-compartment
    | viewpoints-compartment
    | exposes-compartment
    | filters-compartment
    | rendering-compartment

views-compartment =
    _____
    'views'
    views-compartment-contents

views-compartment-contents = (views-compartment-element)* '...'
views-compartment-element =
    el-prefix? OccurrenceUsagePrefix UsageDeclaration? ValueOrFlowPart? ViewBody

viewpoints-compartment =
    _____
    'viewpoints'
    viewpoints-compartment-contents

viewpoints-compartment-contents = (viewpoints-compartment-element)* '...'?
viewpoints-compartment-element =
    el-prefix? OccurrenceUsagePrefix ConstraintUsageDeclaration RequirementBody

exposes-compartment =
    _____
    'exposes'
    exposes-compartment-contents

exposes-compartment-contents = exposes-compartment-element* '...'?
exposes-compartment-element = VisibilityIndicator? ( ImportedNamespace | ImportedFilterPackage )

filters-compartment =
    _____
    'filters'
    filters-compartment-contents

filters-compartment-contents = (filters-compartment-element)* '...'?
filters-compartment-element = el-prefix? MemberPrefix OwnedExpression

rendering-compartment =
    _____
    'rendering'
    rendering-compartment-contents

rendering-compartment-contents = usage-cp* '...'?

interconnection-element =|

```

```

'«' OccurrenceUsagePrefix 'viewpoint' '»'
usage-name-with-alias

view =

```

view-name-compartment

compartment-stack

```

view-name-compartment ==
'«' OccurrenceUsagePrefix 'view' '»'
usage-name-with-alias

compartment =|
  | views-compartment
  | viewpoints-compartment
  | exposes-compartment
  | filters-compartment
  | rendering-compartment

views-compartment =

```

'views'

```

  views-compartment-contents

views-compartment-contents = (views-compartment-element)* '...'

views-compartment-element =
  el-prefix? OccurrenceUsagePrefix UsageDeclaration? ValueOrFlowPart? ViewBody

viewpoints-compartment =

```

'viewpoints'

```

  viewpoints-compartment-contents

viewpoints-compartment-contents = (viewpoints-compartment-element)* '...'??
viewpoints-compartment-element =
  el-prefix? OccurrenceUsagePrefix ConstraintUsageDeclaration RequirementBody

exposes-compartment =

```

'exposes'

```

  exposes-compartment-contents

exposes-compartment-contents = exposes-compartment-element* '...'??
exposes-compartment-element = MembershipExpose | NamespaceExpose

filters-compartment =

```

'filters'

```


  filters-compartment-contents

filters-compartment-contents = (filters-compartment-element)* '...'??
filters-compartment-element = el-prefix? MemberPrefix OwnedExpression

```

```
viewpoint-def  
| viewpoint  
| view-def  
| view
```


```
view-frame =
```

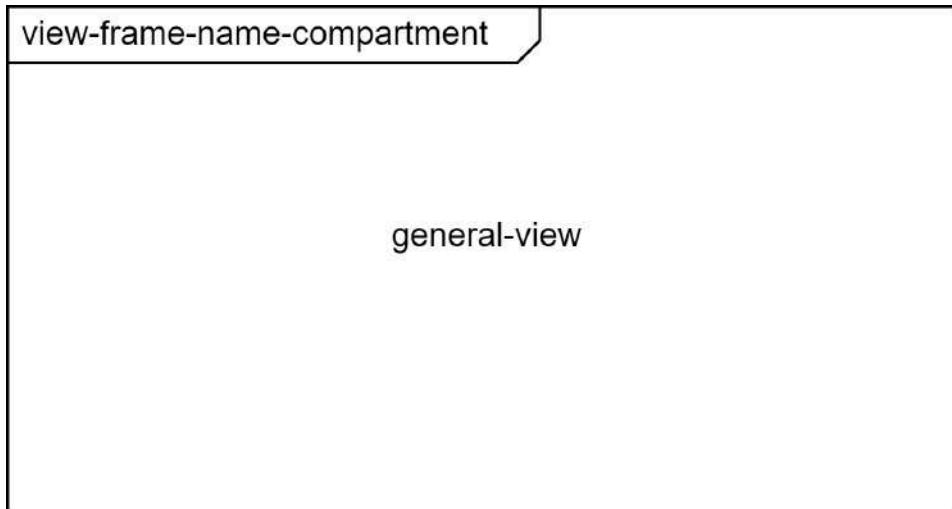

```
view-frame-name-compartment = '«view»' QualifiedName (':' QualifiedName)?
```

```
general-relationship =| expose-relationship
```

```
expose-relationship =
```




Note. A model library in Section 9.2.18 defines standard graphical view definitions for SysML. These may be supplemented by further, customized View Definitions specific to a model.

8.2.3.26 Metadata Graphical Notation

```
annotation-node =| metadata-feature-annotation-node
```

```
metadata-feature-annotation-node =
```

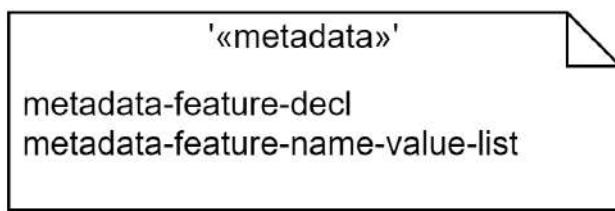

```
metadata-feature-decl = Identifier  
metadata-feature-name-value-list =  
  ( metadata-feature-name '=' expression-text ) *  
metadata-feature-name = Identifier  
expression-text = text-block
```

```

rendering-compartment =
  _____
  'rendering'
  rendering-compartment-contents

rendering-compartment-contents = usage-cp* '...'?

interconnection-element =|
  viewpoint-def
| viewpoint
| view-def
| view

view-frame =

  view-frame-name-compartment
  view-frame-info-compartment-tr?
  general-view
  view-frame-info-compartment-bl? ----- view-frame-info-compartment-br?

view-frame-name-compartment = '«view»' QualifiedName (':' QualifiedName) ?

view-frame-info-contents = Expose? ElementFilterMember? AnnotatingElement*

view-frame-info-compartment-tr =

  view-frame-info-contents
  view-frame-info-contents

view-frame-info-compartment-bl =

  view-frame-info-contents

view-frame-info-compartment-br =

  view-frame-info-contents

general-relationship =| expose-relationship

expose-relationship =

```



```

expose_r | toplevel-expose-r | recursive-expose-r

expose_r =
    '«' 'expose' '»'
    &view -----> &element

toplevel-expose-r =
    '«' 'expose' '»'*"
    &view -----> &element

recursive-expose-r =
    '«' 'expose' '»***'
    &view -----> &element

```

Note. The view frame info compartments are optional elements. The `AnnotatingElement*` enables adding any relevant supporting information related to a view, possibly using a configurable rendering.


Note. A model library in Section 9.2.18 defines standard graphical view definitions for SysML. These may be supplemented by further, customized view definitions specific to a model.

8.2.3.26 Metadata Graphical Notation

SYSML2 -18: No support for metadata definition in graphical notation

```
annotation-node =| metadata-feature-annotation-node
```

```
metadata-feature-annotation-node =
```

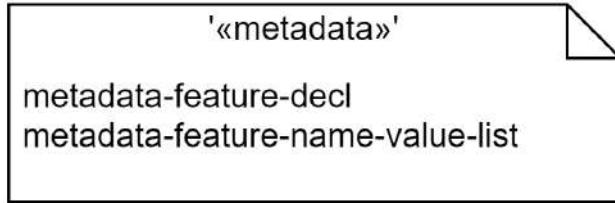


```

metadata-feature-decl = Identifier
metadata-feature-name-value-list =
    ( metadata-feature-name '=' expression-text )*
metadata-feature-name = Identifier
expression-text = text-block

```

```
metadata-def =
```

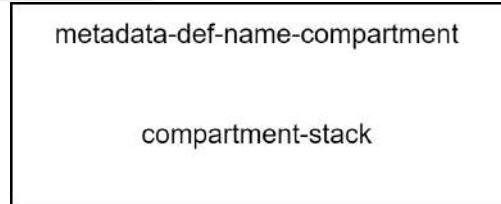

```

metadata-def-name-compartment =
    basic-name-prefix

```

8.3 Abstract Syntax

8.3.1 Abstract Syntax Overview

The *abstract syntax* is the common underlying syntactic representation for SysML models. The SysML textual or graphical notations (see [8.2](#)) provide for concrete presentation of models in the abstract syntax presentation. This concrete syntax notation may also be parsed to create or update the abstract syntax representation of models. The semantics for SysML models are then formally defined on the abstract syntax representation (see [8.4](#)).

The SysML abstract syntax is specified as a MOF model [MOF] that is an extension of the KerML abstract syntax model [KerML]. Each of the subsequent abstract subclauses describes one package in the abstract syntax model, including one or more overview diagrams and descriptions of each of the elements in the package. In the diagrams, metaclasses and relationships from the KerML abstract syntax are shown in gray. See [KerML] for the description of these elements.

The MOF-compliant class model for the abstract syntax defines the basic structural representation for any SysML model. In addition to this basic structure, the abstract syntax also includes *constraints* defined on various metaclasses. A conformant tool shall be able to accept any KerML model that conforms to the structural abstract syntax class model, and it may then additionally report on and/or enforce the constraints on a model so represented (as further described below).

The SysML abstract syntax model follows the conventions from [KerML, 8.3.1] on three kinds of constraints:

1. *Derivation constraints*. These constraints specify how the values of the derived properties of a metaclass are computed from the values of other properties in the abstract syntax model. A tool conformant to the SysML abstract syntax shall always enforce derivation constraints. However, the computed values of derived properties may depend on whether implied relationships are included in the model or not (see below). A derivation constraint has a name starting with the word `derive`, followed by the name of the metaclass it constrains, followed by the name of the derived property it is for. The OCL specification of such a constraint always has the form of an equality, with the derived property on the left-hand side and the derivation expression on the right-hand side. For example, the derivation constraint for the derived property `Usage::isReference` is called `deriveUsageIsReference` and has the OCL specification `isReference = not isComposite`.

Note. Derivation constraints are *not* included for derived properties in the following cases:

- The derived property subsets a property with multiplicity upper bound 1. In this case, if the derived property has a value, it must be the same as that of the subsetted property.
 - The derived property redefines another derived property. In this case, the derivation of the redefined property also applies to the redefining property, though the redefining property will generally place additional constraints on type and/or multiplicity.
2. *Semantic constraints*. These constraints specify relationships that are semantically required in a SysML model (see [8.4.1](#)), particularly relationships with elements in the Kernel Semantic Library (see [KerML, 9.2]) and Systems Model Library (see [9.2](#)). These constraints may be violated by a model as entered by a user or as interchanged. In this case, a tool may satisfy the constraints by introducing *implied relationships* into the model, it may simply report their violation, or it may ignore the violations. Semantic constraints have names that start with the word `check`, followed by the name of the constrained metaclass, followed by a descriptive word or phrase. For example, `checkPartDefinitionSpecialization`.
 3. *Validation constraints*. These constraints specify additional syntactic conditions that must be satisfied in order to give a model a proper semantic interpretation. They are written presuming that all semantic constraints are satisfied. A *valid* model is a model that satisfies all validation constraints. A tool conformant to the SysML abstract syntax should report violations of validation constraints. A tool conformant to the SysML semantics is only required to operate on valid models. Validation constraints

```
'«' keyword* 'metadata' 'def' '»'
definition-name-with-alias
```

8.3 Abstract Syntax

8.3.1 Abstract Syntax Overview

8.3.2 Elements and Relationships Abstract Syntax

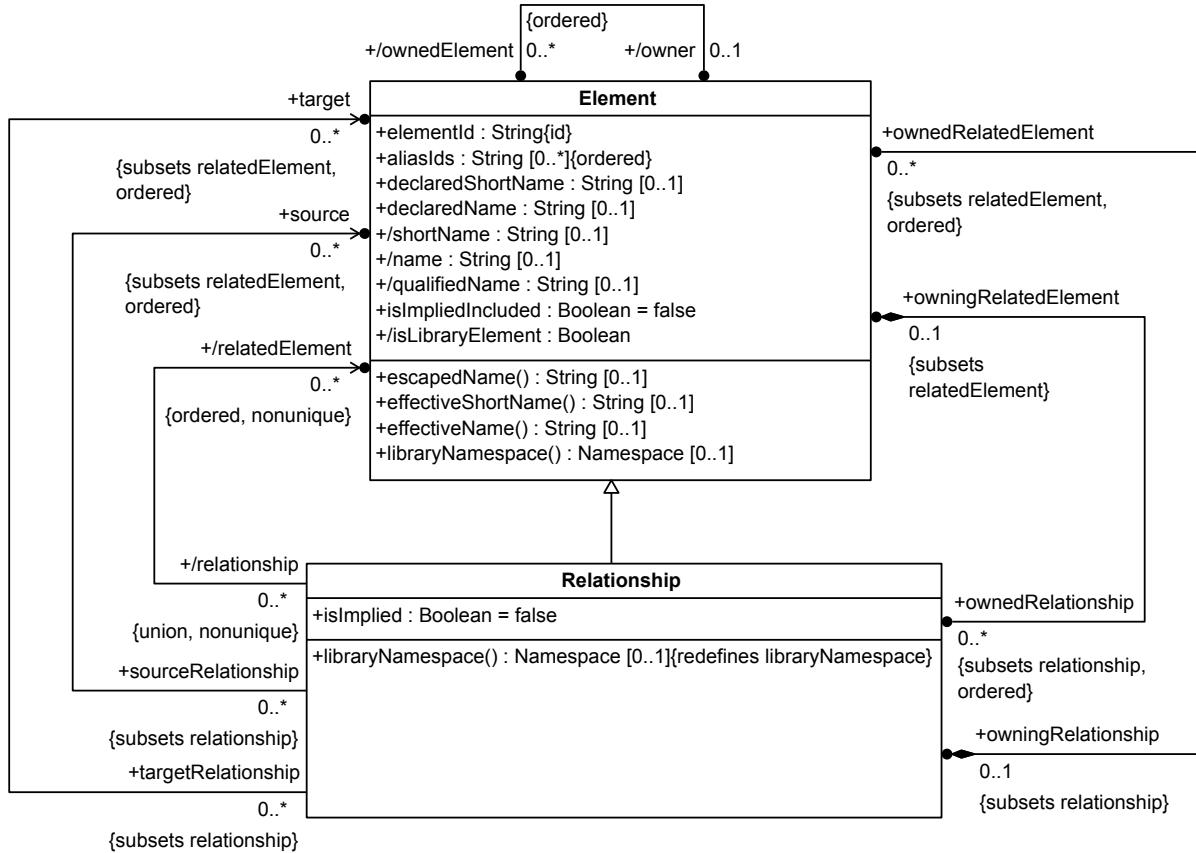


Figure 2. Elements

It is a general design principle of the KerML abstract syntax that non-Relationship Elements are related only by reified instances of Relationships. All other meta-associations between Elements are derived from these reified Relationships. For example, the `owningRelatedElement/ownedRelationship` meta-association between an Element and a Relationship is fundamental to establishing the structure of a model. However, the `owner/ownedElement` meta-association between two Elements is derived, based on the Relationship structure between them.

8.3.3 Dependencies Abstract Syntax

have names that start with the word `validate`, followed by the name of the metaclass, followed by a descriptive word or phrase. For example, `validateUsageOwningType`.

8.3.2 Elements and Relationships Abstract Syntax

This is a Kernel abstract syntax model. For Elements and Relationships Abstract Syntax class descriptions, see [KerML, 8.3.2.1].

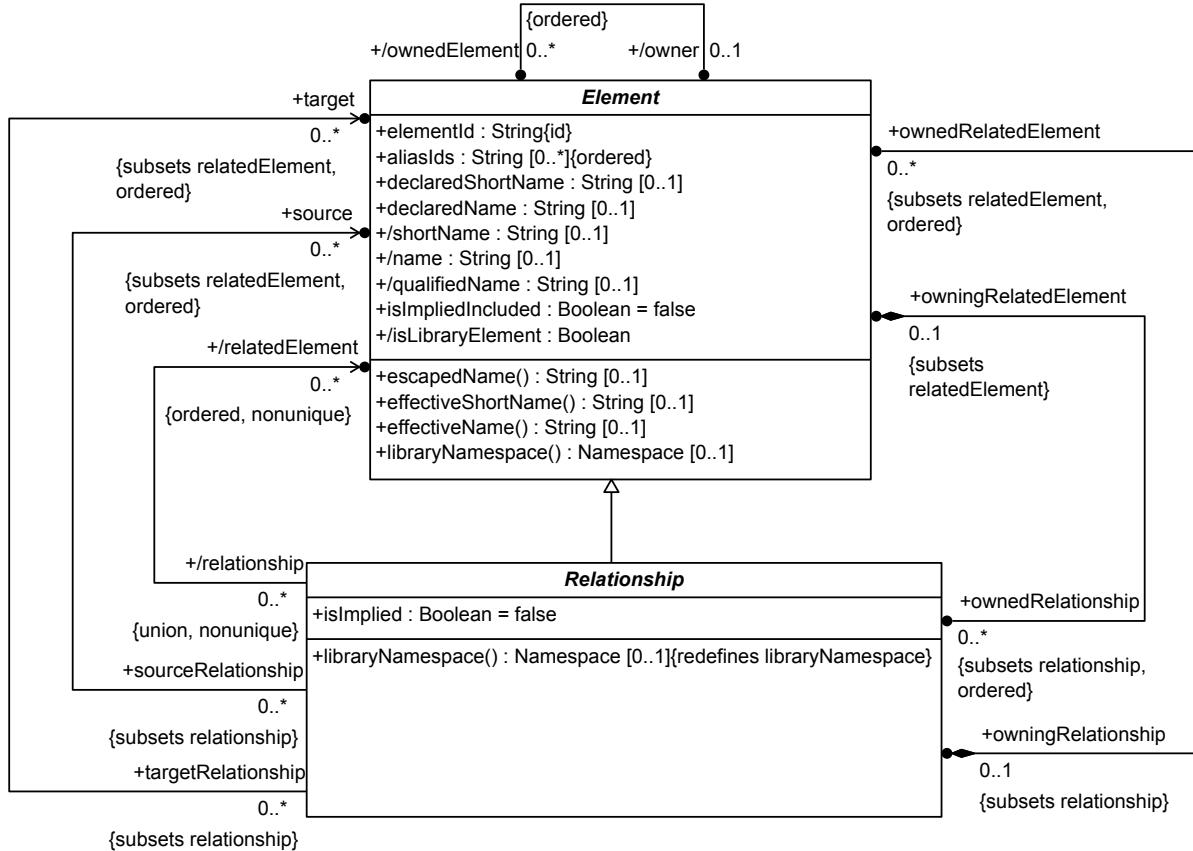


Figure 2. Elements

It is a general design principle of the KerML abstract syntax that non-Relationship Elements are related only by reified instances of Relationships. All other meta-associations between Elements are derived from these reified Relationships. For example, the owningRelatedElement/ownedRelationship meta-association between an Element and a Relationship is fundamental to establishing the structure of a model. However, the owner/ownedElement meta-association between two Elements is derived, based on the Relationship structure between them.

8.3.3 Dependencies Abstract Syntax

This is a Kernel abstract syntax model. For Dependencies Abstract Syntax class descriptions, see [KerML, 8.3.2.2].

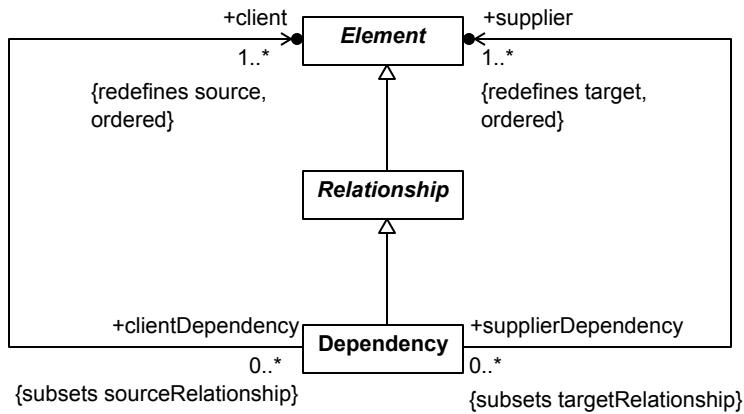


Figure 3. Dependencies

8.3.4 Annotations Abstract Syntax

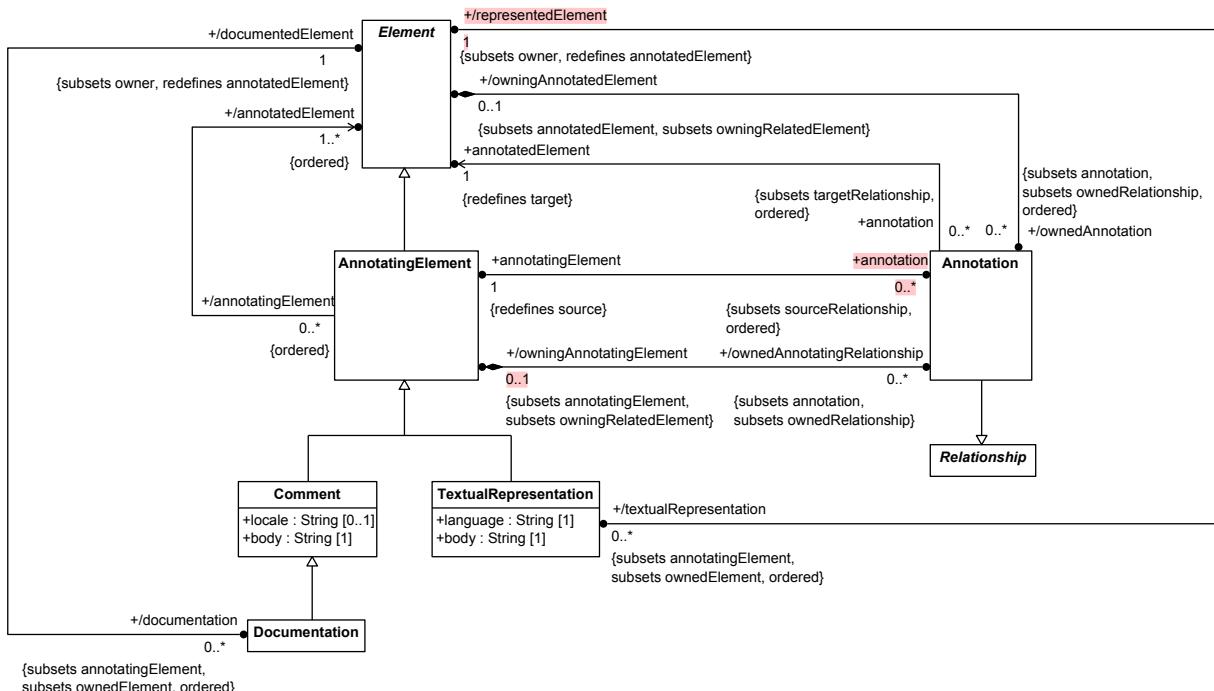


Figure 4. Annotation

This is a Kernel abstract syntax model. For Annotations Abstract Syntax class descriptions, see [KerML, 8.3.2.3].

8.3.5 Namespaces and Packages Abstract Syntax

This is a Kernel abstract syntax model. For Namespaces Abstract Syntax class descriptions, see [KerML, 8.3.2.4]. For Packages Abstract Syntax class descriptions, see [KerML, 8.3.4.13].

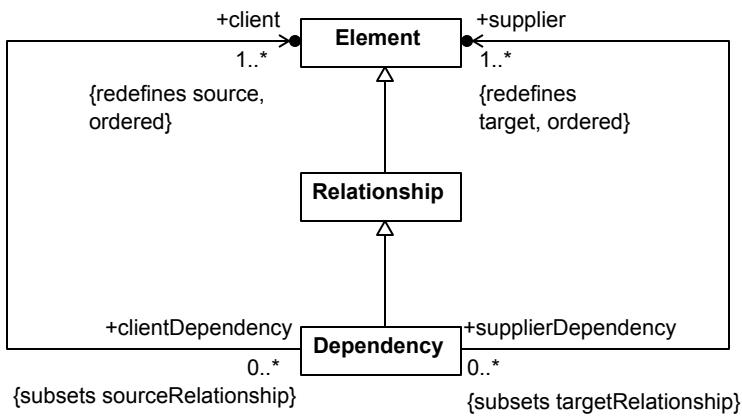


Figure 3. Dependencies

8.3.4 Annotations Abstract Syntax

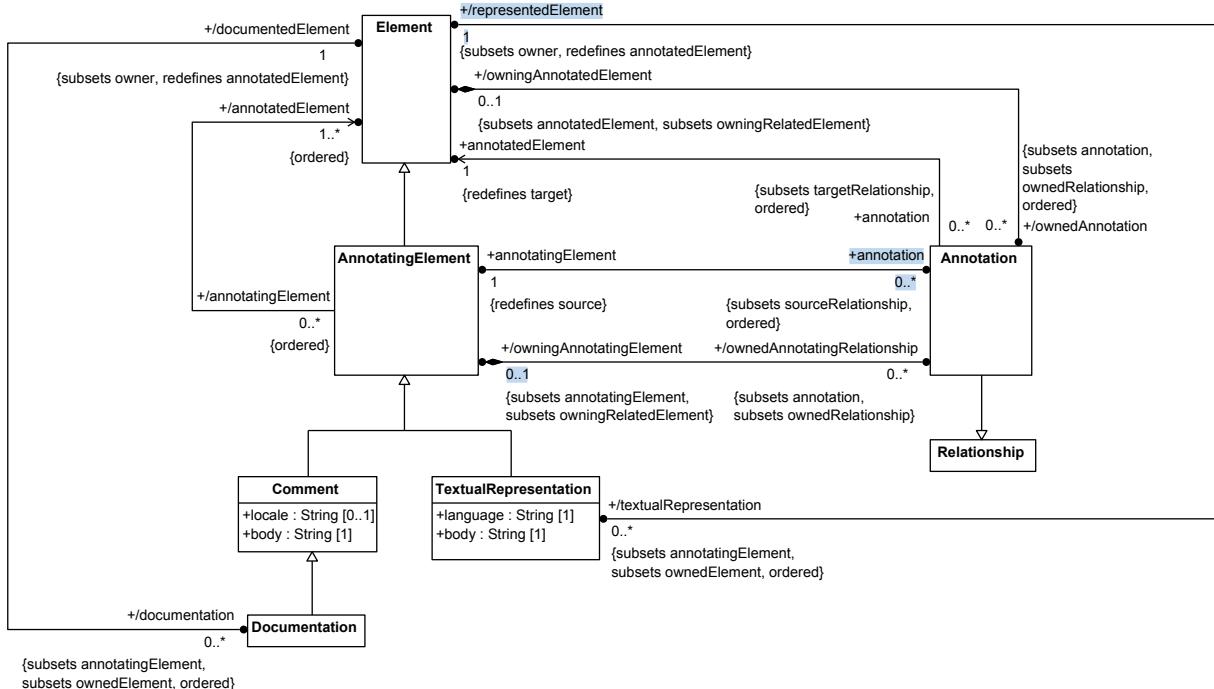


Figure 4. Annotation

8.3.5 Namespaces and Packages Abstract Syntax

SYSML2 -207: Update language description and concrete syntax related to imports

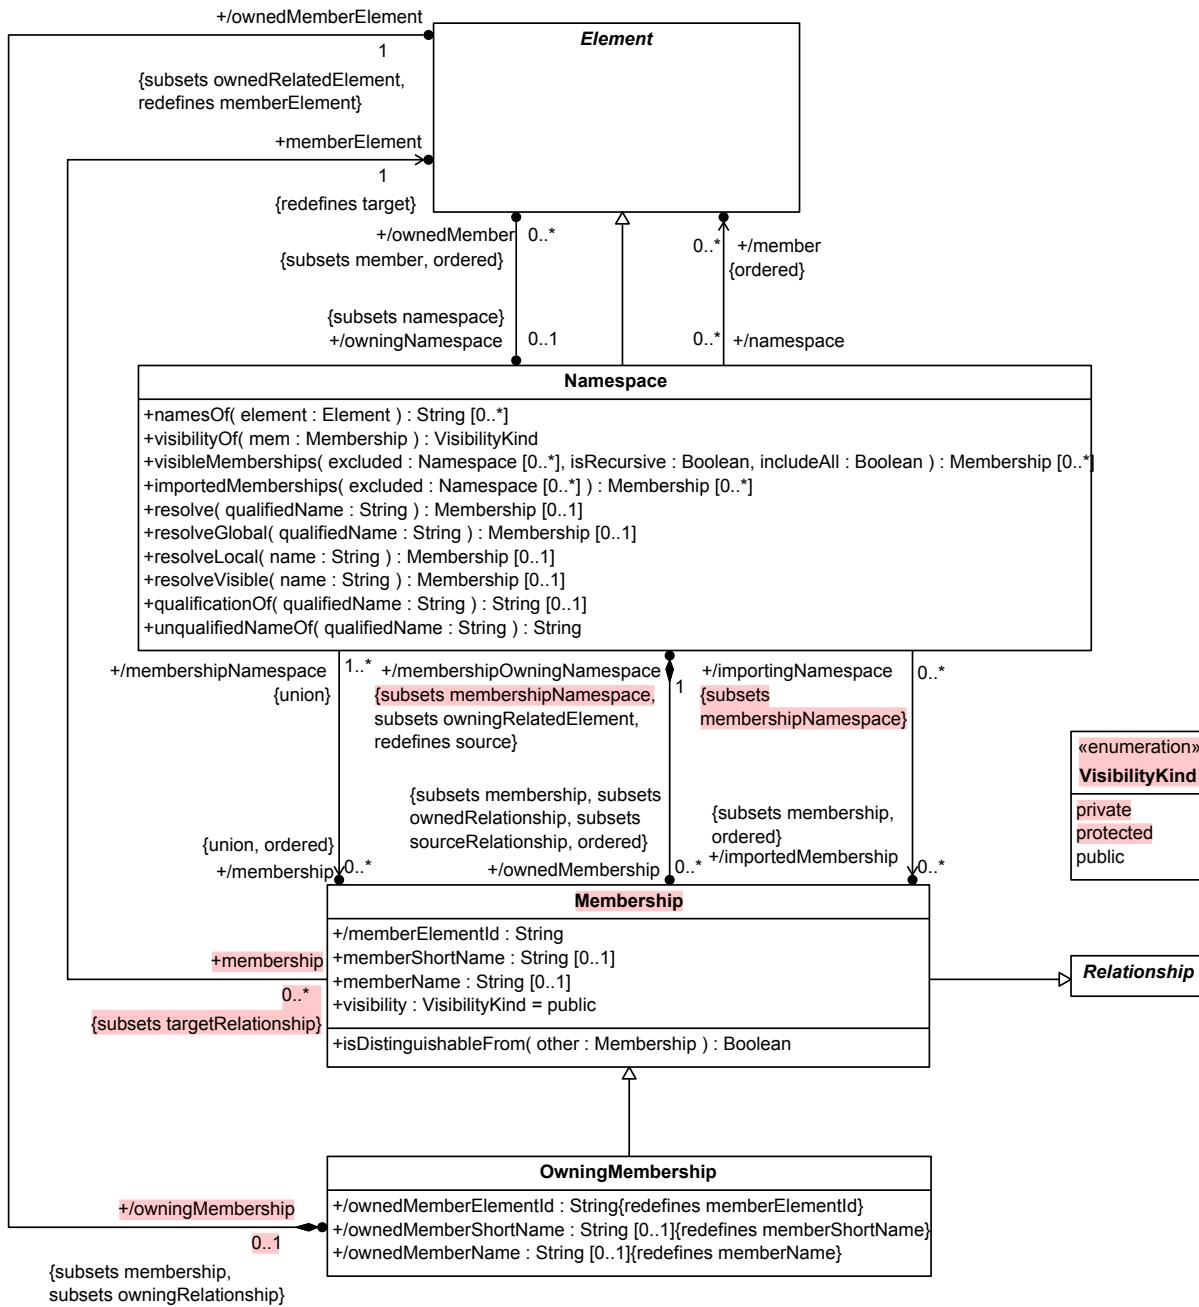


Figure 5. Namespaces

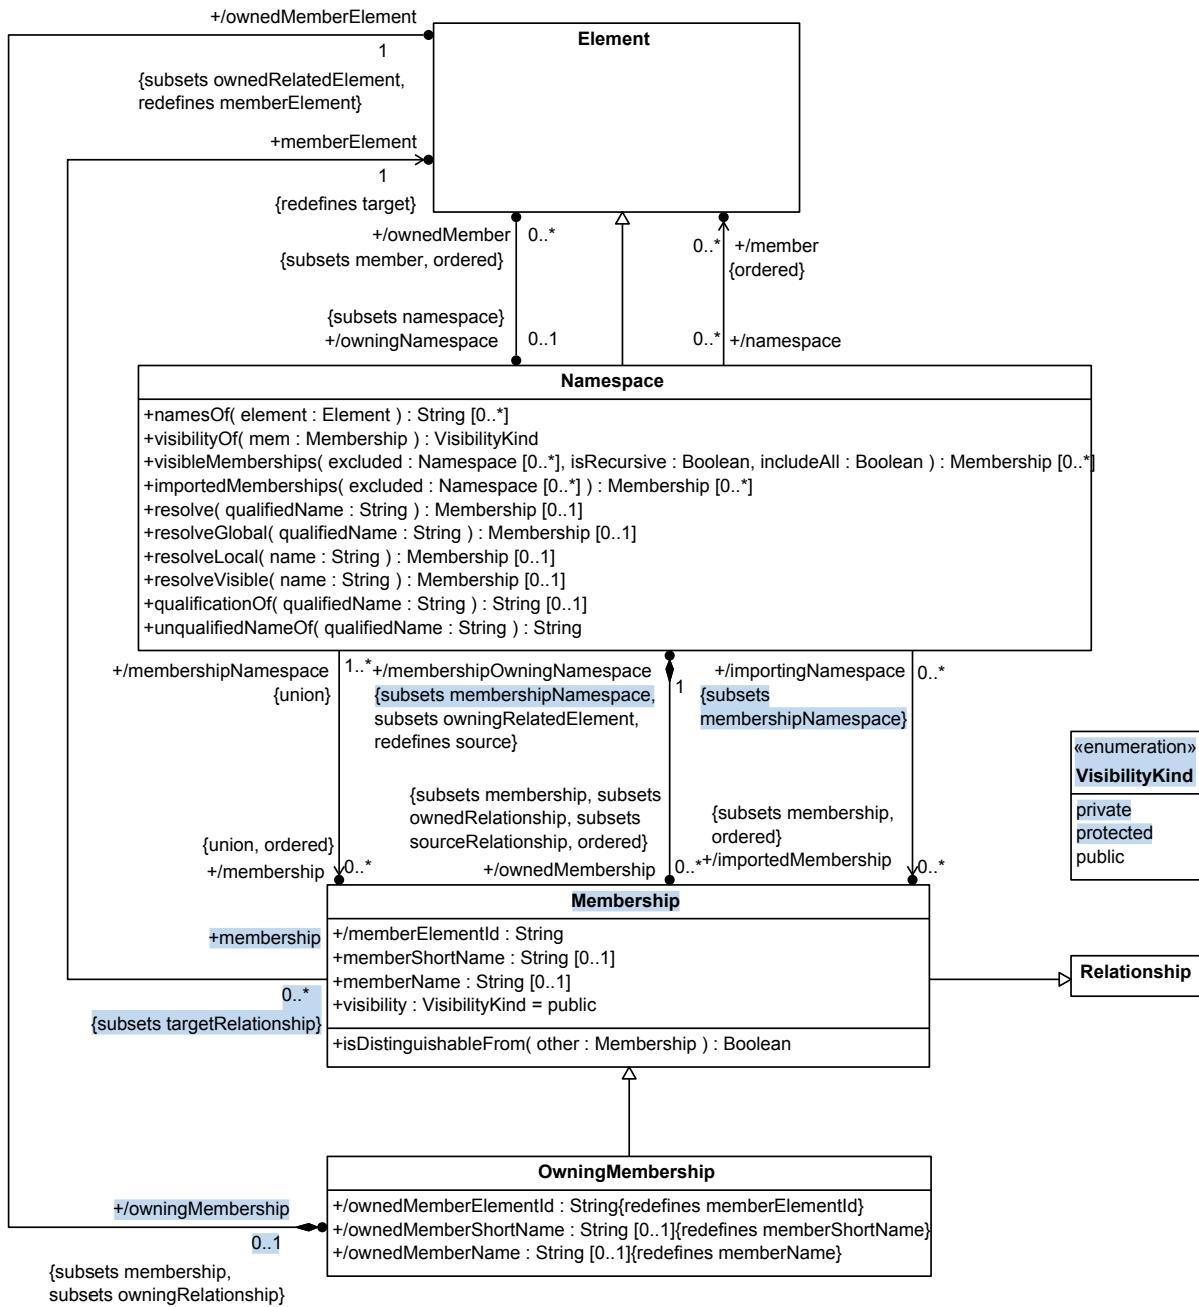


Figure 5. Namespaces

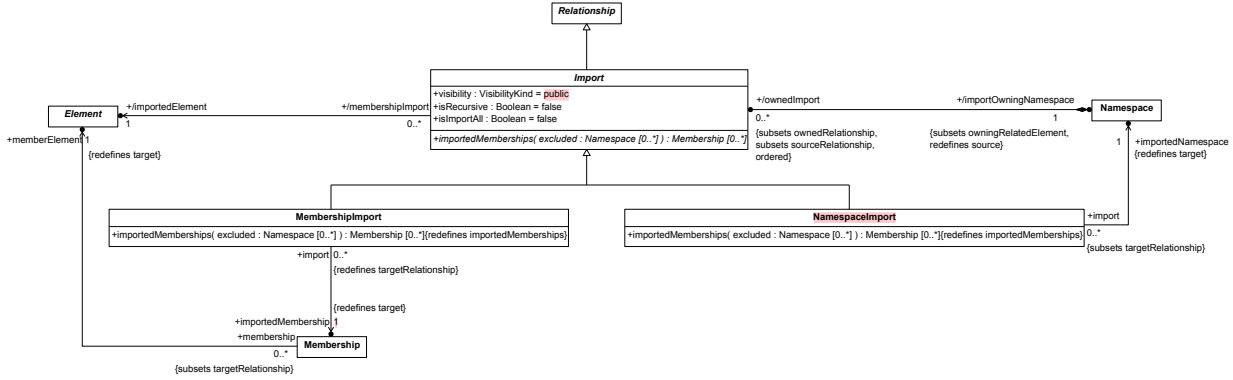


Figure 6. Imports

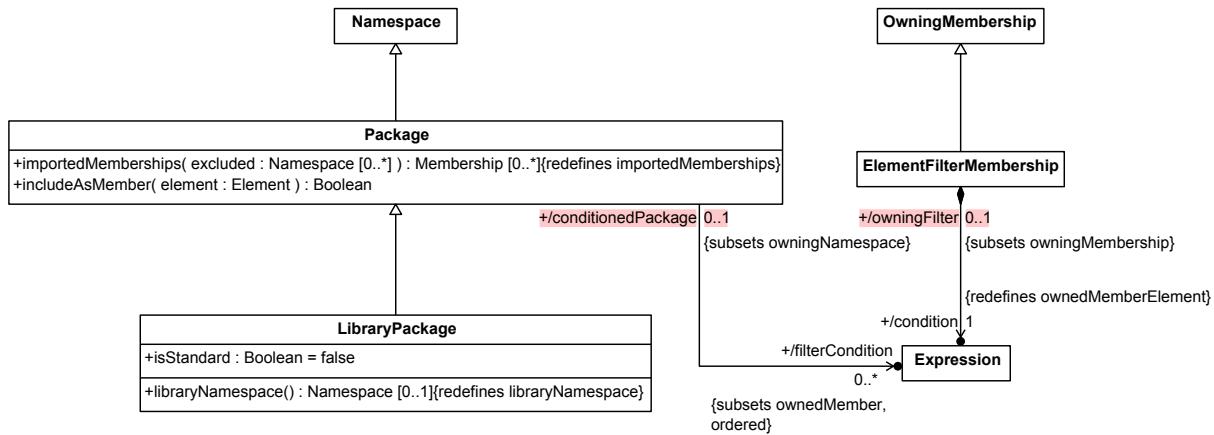


Figure 7. Packages

8.3.6 Definition and Usage Abstract Syntax

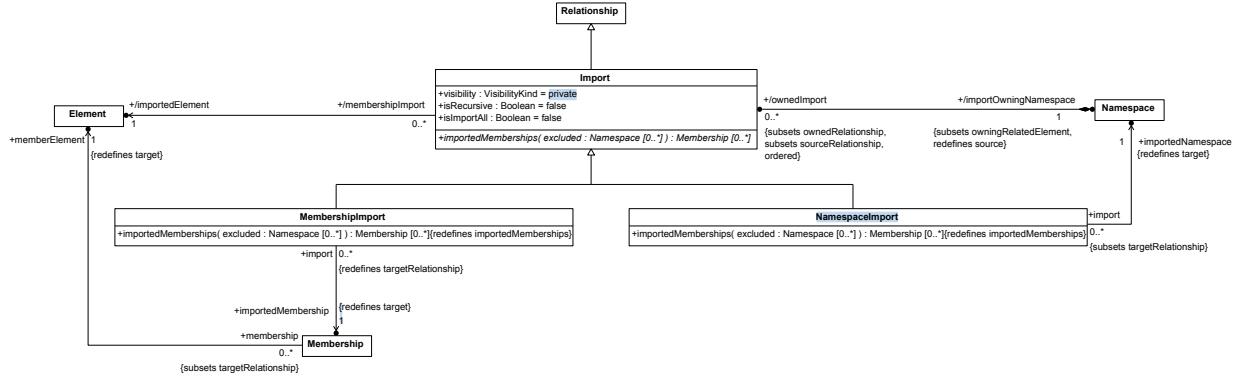


Figure 6. Imports

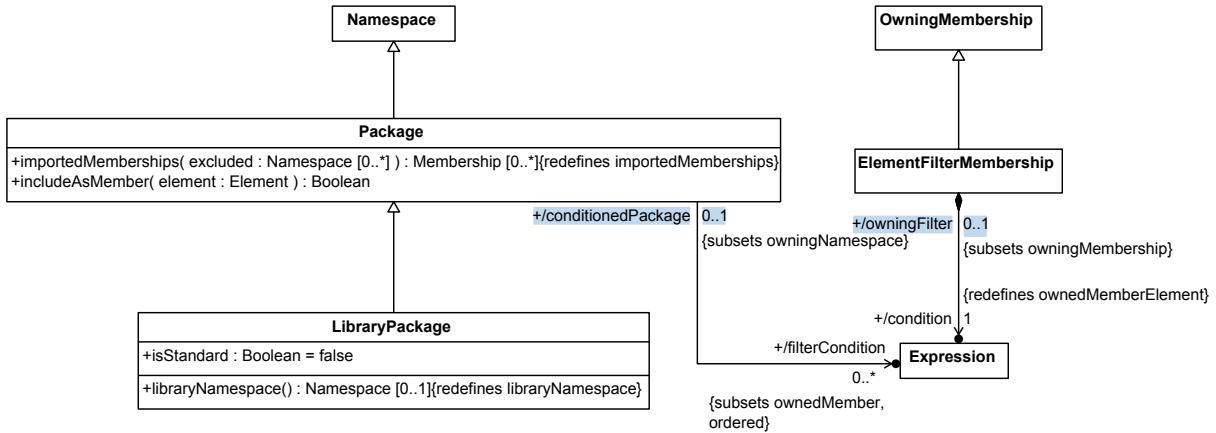


Figure 7. Packages

8.3.6 Definition and Usage Abstract Syntax

8.3.6.1 Overview

8.3.6.1 Overview

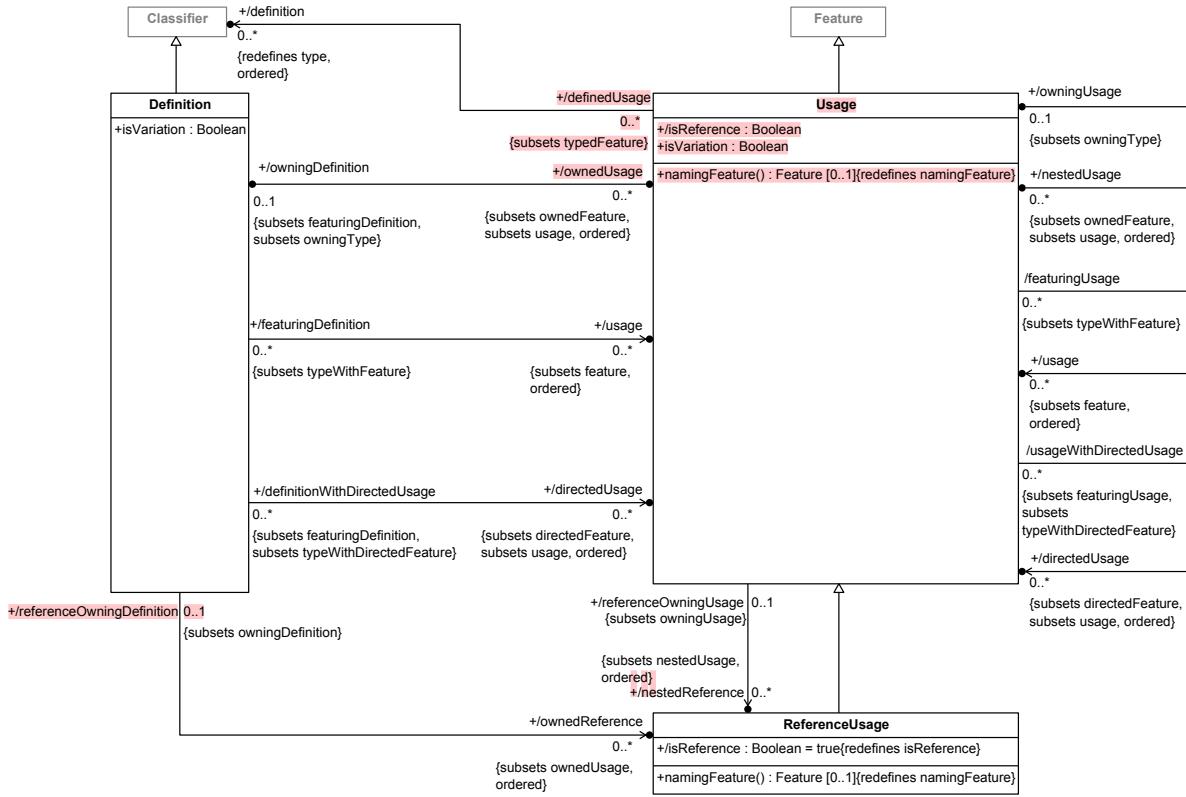


Figure 8. Definition and Usage

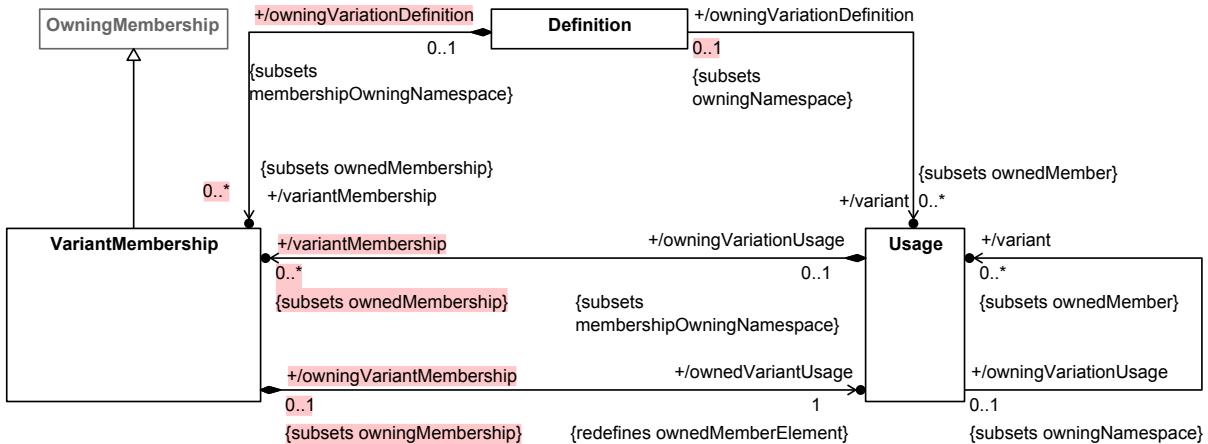


Figure 9. Variant Membership

8.3.6.2 Definition

Description

A **Definition** is a Classifier of Usages. The actual kinds of **Definition** that may appear in a model are given by the subclasses of **Definition** (possibly as extended with user-defined *SemanticMetadata*).

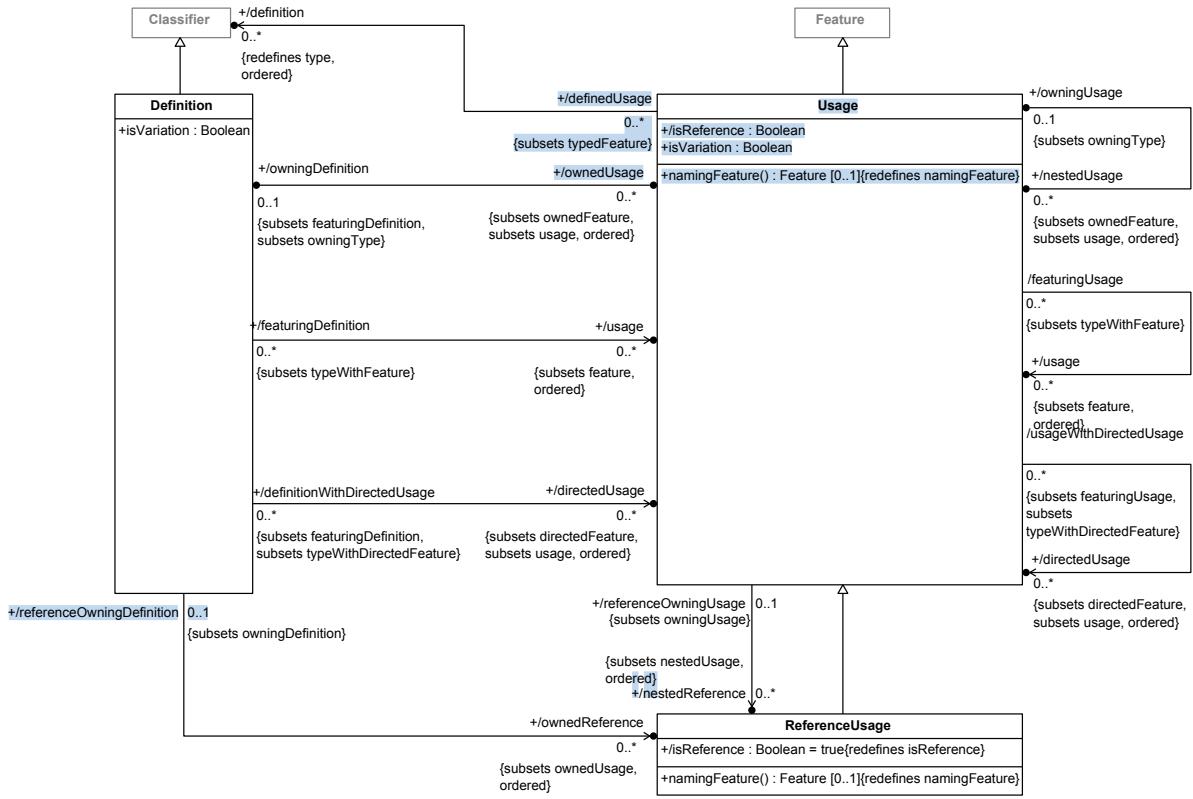


Figure 8. Definition and Usage

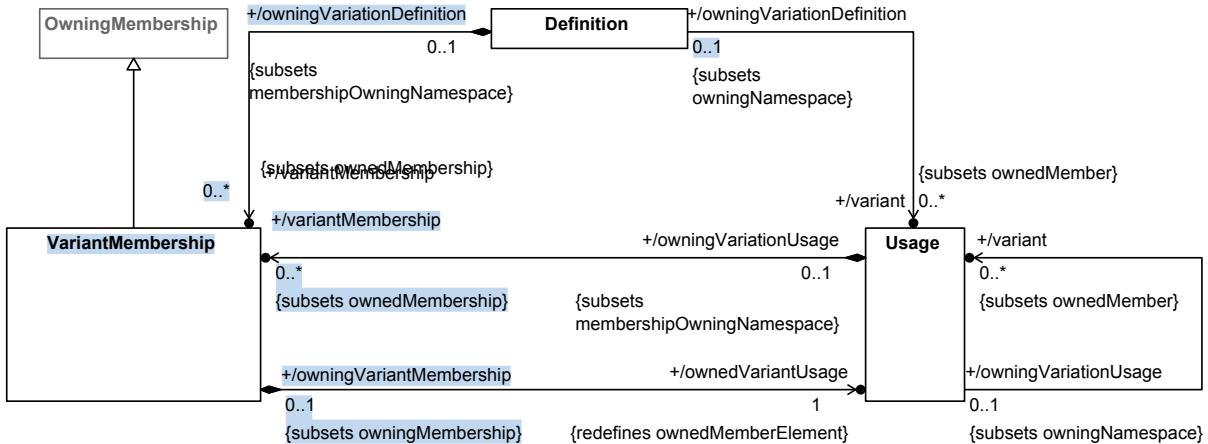


Figure 9. Variant Membership

8.3.6.2 Definition

Description

A **Definition** is a Classifier of Usages. The actual kinds of **Definition** that may appear in a model are given by the subclasses of **Definition** (possibly as extended with user-defined *SemanticMetadata*).

Normally, a `Definition` has owned `Usages` that model `features` of the thing being defined. A `Definition` may also have other `Definitions` nested in it, but this has no semantic significance, other than the nested scoping resulting from the `Definition` being considered as a Namespace for any nested `Definitions`.

However, if a `Definition` has `isVariation = true`, then it represents a *variation point* `Definition`. In this case, all of its members must be `variant Usages`, related to the `Definition` by `VariantMembership` Relationships. Rather than being `features` of the `Definition`, `variant Usages` model different concrete alternatives that can be chosen to fill in for an abstract `Usage` of the variation point `Definition`.

General Classes

`Classifier`

Attributes

`/directedUsage : Usage [0..*] {subsets usage, directedFeature, ordered}`

The usages of this `Definition` that are `directedFeatures`.

`isVariation : Boolean`

Whether this `Definition` is for a variation point or not. If true, then all the memberships of the `Definition` must be `VariantMemberships`.

`/ownedAction : ActionUsage [0..*] {subsets ownedOccurrence, ordered}`

The `ActionUsages` that are `ownedUsages` of this `Definition`.

`/ownedAllocation : AllocationUsage [0..*] {subsets ownedConnection, ordered}`

The `AllocationUsages` that are `ownedUsages` of this `Definition`.

`/ownedAnalysisCase : AnalysisCaseUsage [0..*] {subsets ownedCase, ordered}`

The `AnalysisCaseUsages` that are `ownedUsages` of this `Definition`.

`/ownedAttribute : AttributeUsage [0..*] {subsets ownedUsage, ordered}`

The `AttributeUsages` that are `ownedUsages` of this `Definition`.

`/ownedCalculation : CalculationUsage [0..*] {subsets ownedAction, ordered}`

The `CalculationUsages` that are `ownedUsages` of this `Definition`.

`/ownedCase : CaseUsage [0..*] {subsets ownedCalculation, ordered}`

The code>`CaseUsages` that are `ownedUsages` of this `Definition`.

`/ownedConcern : ConcernUsage [0..*] {subsets ownedRequirement}`

The `ConcernUsages` that are `ownedUsages` of this `Definition`.

`/ownedConnection : ConnectorAsUsage [0..*] {subsets ownedPart, ordered}`

Normally, a `Definition` has owned `Usages` that model `features` of the thing being defined. A `Definition` may also have other `Definitions` nested in it, but this has no semantic significance, other than the nested scoping resulting from the `Definition` being considered as a `Namespace` for any nested `Definitions`.

However, if a `Definition` has `isVariation = true`, then it represents a *variation point* `Definition`. In this case, all of its members must be variant `Usages`, related to the `Definition` by `VariantMembership` Relationships. Rather than being `features` of the `Definition`, variant `Usages` model different concrete alternatives that can be chosen to fill in for an abstract `Usage` of the variation point `Definition`.

General Classes

`Classifier`

Attributes

`/directedUsage : Usage [0..*] {subsets usage, directedFeature, ordered}`

The usages of this `Definition` that are `directedFeatures`.

`isVariation : Boolean`

Whether this `Definition` is for a variation point or not. If true, then all the memberships of the `Definition` must be `VariantMemberships`.

`/ownedAction : ActionUsage [0..*] {subsets ownedOccurrence, ordered}`

The `ActionUsages` that are `ownedUsages` of this `Definition`.

`/ownedAllocation : AllocationUsage [0..*] {subsets ownedConnection, ordered}`

The `AllocationUsages` that are `ownedUsages` of this `Definition`.

`/ownedAnalysisCase : AnalysisCaseUsage [0..*] {subsets ownedCase, ordered}`

The `AnalysisCaseUsages` that are `ownedUsages` of this `Definition`.

`/ownedAttribute : AttributeUsage [0..*] {subsets ownedUsage, ordered}`

The `AttributeUsages` that are `ownedUsages` of this `Definition`.

`/ownedCalculation : CalculationUsage [0..*] {subsets ownedAction, ordered}`

The `CalculationUsages` that are `ownedUsages` of this `Definition`.

`/ownedCase : CaseUsage [0..*] {subsets ownedCalculation, ordered}`

The code>`CaseUsages` that are `ownedUsages` of this `Definition`.

`/ownedConcern : ConcernUsage [0..*] {subsets ownedRequirement}`

The `ConcernUsages` that are `ownedUsages` of this `Definition`.

`/ownedConnection : ConnectorAsUsage [0..*] {subsets ownedPart, ordered}`

The ConnectorAsUsages that are ownedUsages of this Definition. Note that this list includes BindingConnectorAsUsages and SuccessionAsUsages, even though these are ConnectorAsUsages but not ConnectionUsages.

/ownedConstraint : ConstraintUsage [0..*] {subsets ownedOccurrence, ordered}

The ConstraintUsages that are ownedUsages of this Definition.

/ownedEnumeration : EnumerationUsage [0..*] {subsets ownedAttribute, ordered}

The EnumerationUsages that are ownedUsages of this Definition.

/ownedFlow : FlowConnectionUsage [0..*] {subsets ownedConnection}

The FlowConnectionUsages that are ownedUsages of this Definition.

/ownedInterface : InterfaceUsage [0..*] {subsets ownedConnection, ordered}

The InterfaceUsages that are ownedUsages of this Definition.

/ownedItem : ItemUsage [0..*] {subsets ownedOccurrence, ordered}

The ItemUsages that are ownedUsages of this Definition.

/ownedMetadata : MetadataUsage [0..*] {subsets ownedItem, ordered}

The MetadataUsages that are ownedUsages of this Definition.

/ownedOccurrence : OccurrenceUsage [0..*] {subsets ownedUsage, ordered}

The OccurrenceUsages that are ownedUsages of this Definition.

/ownedPart : PartUsage [0..*] {subsets ownedItem, ordered}

The PartUsages that are ownedUsages of this Definition.

/ownedPort : PortUsage [0..*] {subsets ownedUsage, ordered}

The PortUsages that are ownedUsages of this Definition.

/ownedReference : ReferenceUsage [0..*] {subsets ownedUsage, ordered}

The ReferenceUsages that are ownedUsages of this Definition.

/ownedRendering : RenderingUsage [0..*] {subsets ownedPart, ordered}

The RenderingUsages that are ownedUsages of this Definition.

/ownedRequirement : RequirementUsage [0..*] {subsets ownedConstraint, ordered}

The RequirementUsages that are ownedUsages of this Definition.

/ownedState : StateUsage [0..*] {subsets ownedAction, ordered}

The StateUsages that are ownedUsages of this Definition.

The ConnectorAsUsages that are ownedUsages of this Definition. Note that this list includes BindingConnectorAsUsages and SuccessionAsUsages, even though these are ConnectorAsUsages but not ConnectionUsages.

/ownedConstraint : ConstraintUsage [0..*] {subsets ownedOccurrence, ordered}

The ConstraintUsages that are ownedUsages of this Definition.

/ownedEnumeration : EnumerationUsage [0..*] {subsets ownedAttribute, ordered}

The EnumerationUsages that are ownedUsages of this Definition.

/ownedFlow : FlowConnectionUsage [0..*] {subsets ownedConnection}

The FlowConnectionUsages that are ownedUsages of this Definition.

/ownedInterface : InterfaceUsage [0..*] {subsets ownedConnection, ordered}

The InterfaceUsages that are ownedUsages of this Definition.

/ownedItem : ItemUsage [0..*] {subsets ownedOccurrence, ordered}

The ItemUsages that are ownedUsages of this Definition.

/ownedMetadata : MetadataUsage [0..*] {subsets ownedItem, ordered}

The MetadataUsages that are ownedUsages of this Definition.

/ownedOccurrence : OccurrenceUsage [0..*] {subsets ownedUsage, ordered}

The OccurrenceUsages that are ownedUsages of this Definition.

/ownedPart : PartUsage [0..*] {subsets ownedItem, ordered}

The PartUsages that are ownedUsages of this Definition.

/ownedPort : PortUsage [0..*] {subsets ownedUsage, ordered}

The PortUsages that are ownedUsages of this Definition.

/ownedReference : ReferenceUsage [0..*] {subsets ownedUsage, ordered}

The ReferenceUsages that are ownedUsages of this Definition.

/ownedRendering : RenderingUsage [0..*] {subsets ownedPart, ordered}

The RenderingUsages that are ownedUsages of this Definition.

/ownedRequirement : RequirementUsage [0..*] {subsets ownedConstraint, ordered}

The RequirementUsages that are ownedUsages of this Definition.

/ownedState : StateUsage [0..*] {subsets ownedAction, ordered}

The StateUsages that are ownedUsages of this Definition.

/ownedTransition : TransitionUsage [0..*] {subsets ownedUsage}

The TransitionUsages that are ownedUsages of this Definition.

/ownedUsage : Usage [0..*] {subsets ownedFeature, usage, ordered}

The Usages that are ownedFeatures of this Definition.

/ownedUseCase : UseCaseUsage [0..*] {subsets ownedCase, ordered}

The UseCaseUsages that are ownedUsages of this Definition.

/ownedVerificationCase : VerificationCaseUsage [0..*] {subsets ownedCase, ordered}

The VerificationCaseUsages that are ownedUsages of this Definition.

/ownedView : ViewUsage [0..*] {subsets ownedPart, ordered}

The ViewUsages that are ownedUsages of this Definition.

/ownedViewpoint : ViewpointUsage [0..*] {subsets ownedRequirement, ordered}

The ViewpointUsages that are ownedUsages of this Definition.

/usage : Usage [0..*] {subsets feature, ordered}

The Usages that are features of this Definition (not necessarily owned).

/variant : Usage [0..*] {subsets ownedMember}

The Usages which represent the variants of this Definition as a variation point Definition, if isVariation = true. If isVariation = false, there must be no variants.

/variantMembership : VariantMembership [0..*] {subsets ownedMembership}

The ownedMemberships of this Definition that are VariantMemberships. If isVariation = true, then this must be all ownedMemberships of the Definition. If isVariation = false, then variantMembership must be empty.

Operations

None.

Constraints

deriveDefinitionDirectedUsage

The directedUsages of a Definition are all its directedFeatures that are Usages.

```
directedUsage = directedFeature->selectByKind(Usage)
```

deriveDefinitionOwnedAction

The ownedActions of a Definition are all its ownedUsages that are ActionUsages.

/ownedTransition : TransitionUsage [0..*] {subsets ownedUsage}

The TransitionUsages that are ownedUsages of this Definition.

/ownedUsage : Usage [0..*] {subsets ownedFeature, usage, ordered}

The Usages that are ownedFeatures of this Definition.

/ownedUseCase : UseCaseUsage [0..*] {subsets ownedCase, ordered}

The UseCaseUsages that are ownedUsages of this Definition.

/ownedVerificationCase : VerificationCaseUsage [0..*] {subsets ownedCase, ordered}

The VerificationCaseUsages that are ownedUsages of this Definition.

/ownedView : ViewUsage [0..*] {subsets ownedPart, ordered}

The ViewUsages that are ownedUsages of this Definition.

/ownedViewpoint : ViewpointUsage [0..*] {subsets ownedRequirement, ordered}

The ViewpointUsages that are ownedUsages of this Definition.

/usage : Usage [0..*] {subsets feature, ordered}

The Usages that are features of this Definition (not necessarily owned).

/variant : Usage [0..*] {subsets ownedMember}

The Usages which represent the variants of this Definition as a variation point Definition, if isVariation = true. If isVariation = false, there must be no variants.

/variantMembership : VariantMembership [0..*] {subsets ownedMembership}

The ownedMemberships of this Definition that are VariantMemberships. If isVariation = true, then this must be all ownedMemberships of the Definition. If isVariation = false, then variantMembership must be empty.

Operations

None.

Constraints

deriveDefinitionDirectedUsage

The directedUsages of a Definition are all its directedFeatures that are Usages.

```
directedUsage = directedFeature->selectByKind(Usage)
```

deriveDefinitionOwnedAction

The ownedActions of a Definition are all its ownedUsages that are ActionUsages.

```
ownedAction = ownedUsage->selectByKind(ActionUsage)
```

```
ownedAction = ownedUsage->selectByKind(ActionUsage)
```

deriveDefinitionOwnedAllocation

The ownedAllocations of a Definition are all its ownedUsages that are AllocationUsages.

```
ownedAllocation = ownedUsage->selectByKind(AllocationUsage)
```

deriveDefinitionOwnedAnalysisCase

The ownedAnalysisCases of a Definition are all its ownedUsages that are AnalysisCaseUsages.

```
ownedAnalysisCase = ownedUsage->selectByKind(AnalysisCaseUsage)
```

deriveDefinitionOwnedAttribute

The ownedAttributes of a Definition are all its ownedUsages that are AttributeUsages.

```
ownedAttribute = ownedUsage->selectByKind(AttributeUsage)
```

deriveDefinitionOwnedCalculation

The ownedCalculations of a Definition are all its ownedUsages that are CalculationUsages.

```
ownedCalculation = ownedUsage->selectByKind(CalculationUsage)
```

deriveDefinitionOwnedCase

The ownedCases of a Definition are all its ownedUsages that are CaseUsages.

```
ownedCase = ownedUsage->selectByKind(CaseUsage)
```

deriveDefinitionOwnedConcern

The ownedConcerns of a Definition are all its ownedUsages that are ConcernUsages.

```
ownedConcern = ownedUsage->selectByKind(ConcernUsage)
```

deriveDefinitionOwnedConnection

The ownedConnections of a Definition are all its ownedUsages that are ConnectorAsUsages.

```
ownedConnection = ownedUsage->selectByKind(ConnectorAsUsage)
```

deriveDefinitionOwnedConstraint

The ownedConstraints of a Definition are all its ownedUsages that are ConstraintUsages.

```
ownedConstraint = ownedUsage->selectByKind(ConstraintUsage)
```

deriveDefinitionOwnedEnumeration

The ownedEnumerations of a Definition are all its ownedUsages that are EnumerationUsages.

```
ownedEnumeration = ownedUsage->selectByKind(EnumerationUsage)
```

deriveDefinitionOwnedAllocation

The ownedAllocations of a Definition are all its ownedUsages that are AllocationUsages.

```
ownedAllocation = ownedUsage->selectByKind(AllocationUsage)
```

deriveDefinitionOwnedAnalysisCase

The ownedAnalysisCases of a Definition are all its ownedUsages that are AnalysisCaseUsages.

```
ownedAnalysisCase = ownedUsage->selectByKind(AnalysisCaseUsage)
```

deriveDefinitionOwnedAttribute

The ownedAttributes of a Definition are all its ownedUsages that are AttributeUsages.

```
ownedAttribute = ownedUsage->selectByKind(AttributeUsage)
```

deriveDefinitionOwnedCalculation

The ownedCalculations of a Definition are all its ownedUsages that are CalculationUsages.

```
ownedCalculation = ownedUsage->selectByKind(CalculationUsage)
```

deriveDefinitionOwnedCase

The ownedCases of a Definition are all its ownedUsages that are CaseUsages.

```
ownedCase = ownedUsage->selectByKind(CaseUsage)
```

deriveDefinitionOwnedConcern

The ownedConcerns of a Definition are all its ownedUsages that are ConcernUsages.

```
ownedConcern = ownedUsage->selectByKind(ConcernUsage)
```

deriveDefinitionOwnedConnection

The ownedConnections of a Definition are all its ownedUsages that are ConnectorAsUsages.

```
ownedConnection = ownedUsage->selectByKind(ConnectorAsUsage)
```

deriveDefinitionOwnedConstraint

The ownedConstraints of a Definition are all its ownedUsages that are ConstraintUsages.

```
ownedConstraint = ownedUsage->selectByKind(ConstraintUsage)
```

deriveDefinitionOwnedEnumeration

The ownedEnumerations of a Definition are all its ownedUsages that are EnumerationUsages.

```
ownedEnumeration = ownedUsage->selectByKind(EnumerationUsage)
```

deriveDefinitionOwnedFlow

The ownedFlows of a Definition are all its ownedUsages that are FlowConnectionUsages.

deriveDefinitionOwnedFlow

The ownedFlows of a Definition are all its ownedUsages that are FlowConnectionUsages.

```
ownedFlow = ownedUsage->selectByKind(FlowConnectionUsage)
```

deriveDefinitionOwnedInterface

The ownedInterfaces of a Definition are all its ownedUsages that are InterfaceUsages.

```
ownedInterface = ownedUsage->selectByKind(ReferenceUsage)
```

deriveDefinitionOwnedItem

The ownedItems of a Definition are all its ownedUsages that are ItemUsages.

```
ownedItem = ownedUsage->selectByKind(ItemUsage)
```

deriveDefinitionOwnedMetadata

The ownedMetadata of a Definition are all its ownedUsages that are MetadataUsages.

```
ownedMetadata = ownedUsage->selectByKind(MetadataUsage)
```

deriveDefinitionOwnedOccurrence

The ownedOccurrences of a Definition are all its ownedUsages that are OccurrenceUsages.

```
ownedOccurrence = ownedUsage->selectByKind(OccurrenceUsage)
```

deriveDefinitionOwnedPart

The ownedParts of a Definition are all its ownedUsages that are PartUsages.

```
ownedPart = ownedUsage->selectByKind(PartUsage)
```

deriveDefinitionOwnedPort

The ownedPorts of a Definition are all its ownedUsages that are PortUsages.

```
ownedPort = ownedUsage->selectByKind(PortUsage)
```

deriveDefinitionOwnedReference

The ownedReferences of a Definition are all its ownedUsages that are ReferenceUsages.

```
ownedReference = ownedUsage->selectByKind(ReferenceUsage)
```

deriveDefinitionOwnedRendering

The ownedRenderings of a Definition are all its ownedUsages that are RenderingUsages.

```
ownedRendering = ownedUsage->selectByKind(RenderingUsage)
```

deriveDefinitionOwnedRequirement

```
ownedFlow = ownedUsage->selectByKind(FlowConnectionUsage)
```

deriveDefinitionOwnedInterface

The ownedInterfaces of a Definition are all its ownedUsages that are InterfaceUsages.

```
ownedInterface = ownedUsage->selectByKind(ReferenceUsage)
```

deriveDefinitionOwnedItem

The ownedItems of a Definition are all its ownedUsages that are ItemUsages.

```
ownedItem = ownedUsage->selectByKind(ItemUsage)
```

deriveDefinitionOwnedMetadata

The ownedMetadata of a Definition are all its ownedUsages that are MetadataUsages.

```
ownedMetadata = ownedUsage->selectByKind(MetadataUsage)
```

deriveDefinitionOwnedOccurrence

The ownedOccurrences of a Definition are all its ownedUsages that are OccurrenceUsages.

```
ownedOccurrence = ownedUsage->selectByKind(OccurrenceUsage)
```

deriveDefinitionOwnedPart

The ownedParts of a Definition are all its ownedUsages that are PartUsages.

```
ownedPart = ownedUsage->selectByKind(PartUsage)
```

deriveDefinitionOwnedPort

The ownedPorts of a Definition are all its ownedUsages that are PortUsages.

```
ownedPort = ownedUsage->selectByKind(PortUsage)
```

deriveDefinitionOwnedReference

The ownedReferences of a Definition are all its ownedUsages that are ReferenceUsages.

```
ownedReference = ownedUsage->selectByKind(ReferenceUsage)
```

deriveDefinitionOwnedRendering

The ownedRenderings of a Definition are all its ownedUsages that are RenderingUsages.

```
ownedRendering = ownedUsage->selectByKind(RenderingUsage)
```

deriveDefinitionOwnedRequirement

The ownedRequirements of a Definition are all its ownedUsages that are RequirementUsages.

```
ownedRequirement = ownedUsage->selectByKind(RequirementUsage)
```

deriveDefinitionOwnedState

The ownedRequirements of a Definition are all its ownedUsages that are RequirementUsages.

```
ownedRequirement = ownedUsage->selectByKind(RequirementUsage)
```

deriveDefinitionOwnedState

The ownedStates of a Definition are all its ownedUsages that are StateUsages.

```
ownedState = ownedUsage->selectByKind(StateUsage)
```

deriveDefinitionOwnedTransition

The ownedTransitions of a Definition are all its ownedUsages that are TransitionUsages.

```
ownedTransition = ownedUsage->selectByKind(TransitionUsage)
```

deriveDefinitionOwnedUsage

The ownedUsages of a Definition are all its ownedFeatures that are Usages.

```
ownedUsage = ownedFeature->selectByKind(Usage)
```

deriveDefinitionOwnedUseCase

The ownedUseCases of a Definition are all its ownedUsages that are UseCaseUsages.

```
ownedUseCase = ownedUsage->selectByKind(UseCaseUsage)
```

deriveDefinitionOwnedVerificationCase

The ownedValidationCases of a Definition are all its ownedUsages that are ValidationCaseUsages.

```
ownedVerificationCase = ownedUsage->selectByKind(VerificationCaseUsage)
```

deriveDefinitionOwnedView

The ownedViews of a Definition are all its ownedUsages that are ViewUsages.

```
ownedView = ownedUsage->selectByKind(ViewUsage)
```

deriveDefinitionOwnedViewpoint

The ownedViewpoints of a Definition are all its ownedUsages that are ViewpointUsages.

```
ownedViewpoint = ownedUsage->selectByKind(ViewpointUsage)
```

deriveDefinitionUsage

The usages of a Definition are all its features that are Usages.

```
usage = feature->selectByKind(Usage)
```

deriveDefinitionVariant

The variants of a Definition are the ownedVariantUsages of its variantMemberships.

The ownedStates of a Definition are all its ownedUsages that are StateUsages.

```
ownedState = ownedUsage->selectByKind(StateUsage)
```

deriveDefinitionOwnedTransition

The ownedTransitions of a Definition are all its ownedUsages that are TransitionUsages.

```
ownedTransition = ownedUsage->selectByKind(TransitionUsage)
```

deriveDefinitionOwnedUsage

The ownedUsages of a Definition are all its ownedFeatures that are Usages.

```
ownedUsage = ownedFeature->selectByKind(Usage)
```

deriveDefinitionOwnedUseCase

The ownedUseCases of a Definition are all its ownedUsages that are UseCaseUsages.

```
ownedUseCase = ownedUsage->selectByKind(UseCaseUsage)
```

deriveDefinitionOwnedVerificationCase

The ownedValidationCases of a Definition are all its ownedUsages that are ValidationCaseUsages.

```
ownedVerificationCase = ownedUsage->selectByKind(VerificationCaseUsage)
```

deriveDefinitionOwnedView

The ownedViews of a Definition are all its ownedUsages that are ViewUsages.

```
ownedView = ownedUsage->selectByKind(ViewUsage)
```

deriveDefinitionOwnedViewpoint

The ownedViewpoints of a Definition are all its ownedUsages that are ViewpointUsages.

```
ownedViewpoint = ownedUsage->selectByKind(ViewpointUsage)
```

deriveDefinitionUsage

The usages of a Definition are all its features that are Usages.

```
usage = feature->selectByKind(Usage)
```

deriveDefinitionVariant

The variants of a Definition are the ownedVariantUsages of its variantMemberships.

```
variant = variantMembership.ownedVariantUsage
```

deriveDefinitionVariantMembership

The variantMemberships of a Definition are those ownedMemberships that are VariantMemberships.

```
variantMembership = ownedMembership->selectByKind(VariantMembership)
```

```
variant = variantMembership.ownedVariantUsage
```

deriveDefinitionVariantMembership

The variantMemberships of a Definition are those ownedMemberships that are VariantMemberships.

```
variantMembership = ownedMembership->selectByKind(VariantMembership)
```

validateDefinitionVariationIsAbstract

If a Definition is a variation, then it must be abstract.

```
isVariation implies isAbstract
```

validateDefinitionVariationOwnedFeatureMembership

If a Definition is a variation, then all it must not have any ownedFeatureMemberships.

```
isVariation implies ownedFeatureMembership->isEmpty()
```

validateDefinitionVariationSpecialization

A variation Definition may not specialize any other variation Definition.

```
isVariation implies
    not ownedSpecialization.specific->exists(
        oclIsKindOf(Definition) and
        oclAsType(Definition).isVariation)
```

8.3.6.3 ReferenceUsage

Description

A ReferenceUsage is a Usage that specifies a non-compositional (`isComposite = false`) reference to something. The definition of a ReferenceUsage can be any kind of Classifier, with the default being the top-level `Classifier Base::Anything` from the Kernel Semantic Library. This allows the specification of a generic reference without distinguishing if the thing referenced is an attribute value, item, action, etc.

General Classes

Usage

Attributes

```
/isReference : Boolean {redefines isReference}
```

Always true for a ReferenceUsage.

Operations

```
namingFeature() : Feature [0..1] {redefines namingFeature}
```

If this ReferenceUsage is the `payload` parameter of a TransitionUsage, then its naming Feature is the `payloadParameter` of the triggerAction of that TransitionUsage (if any).

validateDefinitionVariationIsAbstract

If a `Definition` is a variation, then it must be abstract.

```
isVariation implies isAbstract
```

validateDefinitionVariationOwnedFeatureMembership

If a `Definition` is a variation, then all it must not have any `ownedFeatureMemberships`.

```
isVariation implies ownedFeatureMembership->isEmpty()
```

validateDefinitionVariationSpecialization

A variation `Definition` may not specialize any other variation `Definition`.

```
isVariation implies
  not ownedSpecialization.specific->exists(
    oclIsKindOf(Definition) and
    oclAsType(Definition).isVariation)
```

8.3.6.3 ReferenceUsage

Description

A `ReferenceUsage` is a `Usage` that specifies a non-compositional (`isComposite = false`) reference to something. The definition of a `ReferenceUsage` can be any kind of `Classifier`, with the default being the top-level `Classifier Base::Anything` from the Kernel Semantic Library. This allows the specification of a generic reference without distinguishing if the thing referenced is an attribute value, item, action, etc.

General Classes

`Usage`

Attributes

```
/isReference : Boolean {redefines isReference}
```

Always true for a `ReferenceUsage`.

Operations

```
namingFeature() : Feature [0..1] {redefines namingFeature}
```

If this `ReferenceUsage` is the `payload` parameter of a `TransitionUsage`, then its naming `Feature` is the `payloadParameter` of the `triggerAction` of that `TransitionUsage` (if any).

```
body: if owningType <> null and owningType.oclIsKindOf(TransitionUsage) and
  owningType.oclAsType(TransitionUsage).inputParameter(2) = self then
    owningType.oclAsType(TransitionUsage).triggerPayloadParameter()
  else self.oclAsType(Usage).namingFeature()
endif
```

Constraints

validateReferenceUsageIsReference

A `ReferenceUsage` is always referential.

```

body: if owningType <> null and owningType.oclIsKindOf(TransitionUsage) and
    owningType.oclAsType(TransitionUsage).inputParameter(2) = self then
        owningType.oclAsType(TransitionUsage).triggerPayloadParameter()
    else self.oclAsType(Usage).namingFeature()
endif

```

Constraints

validateReferenceUsageIsReference

A ReferenceUsage is always referential.

isReference

8.3.6.4 Usage

Description

A Usage is a usage of a Definition. A Usage may only be an ownedFeature of a Definition or another Usage.

A Usage may have nestedUsages that model features that apply in the context of the owningUsage. A Usage may also have Definitions nested in it, but this has no semantic significance, other than the nested scoping resulting from the Usage being considered as a Namespace for any nested Definitions.

However, if a Usage has isVariation = true, then it represents a *variation point* Usage. In this case, all of its members must be variant Usages, related to the Usage by VariantMembership Relationships. Rather than being features of the Usage, variant Usages model different concrete alternatives that can be chosen to fill in for the variation point Usage.

General Classes

Feature

Attributes

/definition : Classifier [0..*] {redefines type, ordered}

The Classifiers that are the types of this Usage. Nominally, these are Definitions, but other kinds of Kernel Classifiers are also allowed, to permit use of Classifiers from the Kernel Model Libraries.

/directedUsage : Usage [0..*] {subsets usage, directedFeature, ordered}

The usages of this Usage that are directedFeatures.

/isReference : Boolean

Whether this Usage is a referential Usage, that is, it has isComposite = false.

isVariation : Boolean

Whether this Usage is for a variation point or not. If true, then all the memberships of the Usage must be VariantMemberships.

/nestedAction : ActionUsage [0..*] {subsets nestedOccurrence, ordered}

isReference

8.3.6.4 Usage

SYSML2 -206: Editorial errors in constraints

Description

A Usage is a usage of a Definition. A Usage may only be an ownedFeature of a Definition or another Usage.

A Usage may have nestedUsages that model features that apply in the context of the owningUsage. A Usage may also have Definitions nested in it, but this has no semantic significance, other than the nested scoping resulting from the Usage being considered as a Namespace for any nested Definitions.

However, if a Usage has isVariation = true, then it represents a *variation point* Usage. In this case, all of its members must be variant Usages, related to the Usage by VariantMembership Relationships. Rather than being features of the Usage, variant Usages model different concrete alternatives that can be chosen to fill in for the variation point Usage.

General Classes

Feature

Attributes

/definition : Classifier [0..*] {redefines type, ordered}

The Classifiers that are the types of this Usage. Nominally, these are Definitions, but other kinds of Kernel Classifiers are also allowed, to permit use of Classifiers from the Kernel Model Libraries.

/directedUsage : Usage [0..*] {subsets usage, directedFeature, ordered}

The usages of this Usage that are directedFeatures.

/isReference : Boolean

Whether this Usage is a referential Usage, that is, it has isComposite = false.

isVariation : Boolean

Whether this Usage is for a variation point or not. If true, then all the memberships of the Usage must be VariantMemberships.

/nestedAction : ActionUsage [0..*] {subsets nestedOccurrence, ordered}

The ActionUsages that are nestedUsages of this Usage.

/nestedAllocation : AllocationUsage [0..*] {subsets nestedConnection, ordered}

The AllocationUsages that are nestedUsages of this Usage.

/nestedAnalysisCase : AnalysisCaseUsage [0..*] {subsets nestedCase, ordered}

The AnalysisCaseUsages that are nestedUsages of this Usage.

The ActionUsages that are nestedUsages of this Usage.

/nestedAllocation : AllocationUsage [0..*] {subsets nestedConnection, ordered}

The AllocationUsages that are nestedUsages of this Usage.

/nestedAnalysisCase : AnalysisCaseUsage [0..*] {subsets nestedCase, ordered}

The AnalysisCaseUsages that are nestedUsages of this Usage.

/nestedAttribute : AttributeUsage [0..*] {subsets nestedUsage, ordered}

The code>AttributeUsages that are nestedUsages of this Usage.

/nestedCalculation : CalculationUsage [0..*] {subsets nestedAction, ordered}

The CalculationUsages that are nestedUsages of this Usage.

/nestedCase : CaseUsage [0..*] {subsets nestedCalculation, ordered}

The CaseUsages that are nestedUsages of this Usage.

/nestedConcern : ConcernUsage [0..*] {subsets nestedRequirement}

The ConcernUsages that are nestedUsages of this Usage.

/nestedConnection : ConnectorAsUsage [0..*] {subsets nestedPart, ordered}

The ConnectorAsUsages that are nestedUsages of this Usage. Note that this list includes BindingConnectorAsUsages and SuccessionAsUsages, even though these are ConnectorAsUsages but not ConnectionUsages.

/nestedConstraint : ConstraintUsage [0..*] {subsets nestedOccurrence, ordered}

The ConstraintUsages that are nestedUsages of this Usage.

/nestedEnumeration : EnumerationUsage [0..*] {subsets nestedAttribute, ordered}

The code>EnumerationUsages that are nestedUsages of this Usage.

/nestedFlow : FlowConnectionUsage [0..*] {subsets nestedConnection}

The code>FlowConnectionUsages that are nestedUsages of this Usage.

/nestedInterface : InterfaceUsage [0..*] {subsets nestedConnection, ordered}

The InterfaceUsages that are nestedUsages of this Usage.

/nestedItem : ItemUsage [0..*] {subsets nestedOccurrence, ordered}

The ItemUsages that are nestedUsages of this Usage.

/nestedMetadata : MetadataUsage [0..*] {subsets nestedItem, ordered}

The MetadataUsages that are nestedUsages of this Usage.

/nestedAttribute : AttributeUsage [0..*] {subsets nestedUsage, ordered}

The code>AttributeUsages that are nestedUsages of this Usage.

/nestedCalculation : CalculationUsage [0..*] {subsets nestedAction, ordered}

The CalculationUsages that are nestedUsages of this Usage.

/nestedCase : CaseUsage [0..*] {subsets nestedCalculation, ordered}

The CaseUsages that are nestedUsages of this Usage.

/nestedConcern : ConcernUsage [0..*] {subsets nestedRequirement}

The ConcernUsages that are nestedUsages of this Usage.

/nestedConnection : ConnectorAsUsage [0..*] {subsets nestedPart, ordered}

The ConnectorAsUsages that are nestedUsages of this Usage. Note that this list includes BindingConnectorAsUsages and SuccessionAsUsages, even though these are ConnectorAsUsages but not ConnectionUsages.

/nestedConstraint : ConstraintUsage [0..*] {subsets nestedOccurrence, ordered}

The ConstraintUsages that are nestedUsages of this Usage.

/nestedEnumeration : EnumerationUsage [0..*] {subsets nestedAttribute, ordered}

The code>EnumerationUsages that are nestedUsages of this Usage.

/nestedFlow : FlowConnectionUsage [0..*] {subsets nestedConnection}

The code>FlowConnectionUsages that are nestedUsages of this Usage.

/nestedInterface : InterfaceUsage [0..*] {subsets nestedConnection, ordered}

The InterfaceUsages that are nestedUsages of this Usage.

/nestedItem : ItemUsage [0..*] {subsets nestedOccurrence, ordered}

The ItemUsages that are nestedUsages of this Usage.

/nestedMetadata : MetadataUsage [0..*] {subsets nestedItem, ordered}

The MetadataUsages that are nestedUsages of this of this Usage.

/nestedOccurrence : OccurrenceUsage [0..*] {subsets nestedUsage, ordered}

The OccurrenceUsages that are nestedUsages of this Usage.

/nestedPart : PartUsage [0..*] {subsets nestedItem, ordered}

The PartUsages that are nestedUsages of this Usage.

/nestedPort : PortUsage [0..*] {subsets nestedUsage, ordered}

/nestedOccurrence : OccurrenceUsage [0..*] {subsets nestedUsage, ordered}

The OccurrenceUsages that are nestedUsages of this Usage.

/nestedPart : PartUsage [0..*] {subsets nestedItem, ordered}

The PartUsages that are nestedUsages of this Usage.

/nestedPort : PortUsage [0..*] {subsets nestedUsage, ordered}

The PortUsages that are nestedUsages of this Usage.

/nestedReference : ReferenceUsage [0..*] {subsets nestedUsage, ordered}

The ReferenceUsages that are nestedUsages of this Usage.

/nestedRendering : RenderingUsage [0..*] {subsets nestedPart, ordered}

The RenderingUsages that are nestedUsages of this Usage.

/nestedRequirement : RequirementUsage [0..*] {subsets nestedConstraint, ordered}

The RequirementUsages that are nestedUsages of this Usage.

/nestedState : StateUsage [0..*] {subsets nestedAction, ordered}

The StateUsages that are nestedUsages of this Usage.

/nestedTransition : TransitionUsage [0..*] {subsets nestedUsage}

The TransitionUsages that are nestedUsages of this Usage.

/nestedUsage : Usage [0..*] {subsets ownedFeature, usage, ordered}

The Usages that are ownedFeatures of this Usage.

/nestedUseCase : UseCaseUsage [0..*] {subsets nestedCase, ordered}

The UseCaseUsages that are nestedUsages of this Usage.

/nestedVerificationCase : VerificationCaseUsage [0..*] {subsets nestedCase, ordered}

The VerificationCaseUsages that are nestedUsages of this Usage.

/nestedView : ViewUsage [0..*] {subsets nestedPart, ordered}

The ViewUsages that are nestedUsages of this Usage.

/nestedViewpoint : ViewpointUsage [0..*] {subsets nestedRequirement, ordered}

The ViewpointUsages that are nestedUsages of this Usage.

/owningDefinition : Definition [0..1] {subsets owningType, featuringDefinition}

The Definition that owns this Usage (if any).

The PortUsages that are nestedUsages of this Usage.

/nestedReference : ReferenceUsage [0..*] {subsets nestedUsage, ordered}

The ReferenceUsages that are nestedUsages of this Usage.

/nestedRendering : RenderingUsage [0..*] {subsets nestedPart, ordered}

The RenderingUsages that are nestedUsages of this Usage.

/nestedRequirement : RequirementUsage [0..*] {subsets nestedConstraint, ordered}

The RequirementUsages that are nestedUsages of this Usage.

/nestedState : StateUsage [0..*] {subsets nestedAction, ordered}

The StateUsages that are nestedUsages of this Usage.

/nestedTransition : TransitionUsage [0..*] {subsets nestedUsage}

The TransitionUsages that are nestedUsages of this Usage.

/nestedUsage : Usage [0..*] {subsets ownedFeature, usage, ordered}

The Usages that are ownedFeatures of this Usage.

/nestedUseCase : UseCaseUsage [0..*] {subsets nestedCase, ordered}

The UseCaseUsages that are nestedUsages of this Usage.

/nestedVerificationCase : VerificationCaseUsage [0..*] {subsets nestedCase, ordered}

The VerificationCaseUsages that are nestedUsages of this Usage.

/nestedView : ViewUsage [0..*] {subsets nestedPart, ordered}

The ViewUsages that are nestedUsages of this Usage.

/nestedViewpoint : ViewpointUsage [0..*] {subsets nestedRequirement, ordered}

The ViewpointUsages that are nestedUsages of this Usage.

/owningDefinition : Definition [0..1] {subsets owningType, featuringDefinition}

The Definition that owns this Usage (if any).

/owningUsage : Usage [0..1] {subsets owningType}

The Usage in which this Usage is nested (if any).

/usage : Usage [0..*] {subsets feature, ordered}

The Usages that are features of this Usage (not necessarily owned).

/variant : Usage [0..*] {subsets ownedMember}

```
/owningUsage : Usage [0..1] {subsets owningType}
```

The `Usage` in which this `Usage` is nested (if any).

```
/usage : Usage [0..*] {subsets feature, ordered}
```

The `Usages` that are `features` of this `Usage` (not necessarily owned).

```
/variant : Usage [0..*] {subsets ownedMember}
```

The `Usages` which represent the variants of this `Usage` as a variation point `Usage`, if `isVariation = true`. If `isVariation = false`, then there must be no variants.

```
/variantMembership : VariantMembership [0..*] {subsets ownedMembership}
```

The `ownedMemberships` of this `Usage` that are `VariantMemberships`. If `isVariation = true`, then this must be all memberships of the `Usage`. If `isVariation = false`, then `variantMembership` must be empty.

Operations

```
namingFeature() : Feature [0..1] {redefines namingFeature}
```

If this `Usage` is a variant, then its `namingFeature` is the `referencedFeature` of its `ownedReferenceSubsetting`.

```
body: if not owningMembership.oclIsKindOf(VariantMembership) then
      self.oclAsType(Feature).namingFeature()
    else if ownedReferenceSubsetting = null then null
    else ownedReferenceSubsetting.referencedFeature
  endif endif
```

Constraints

```
checkUsageVariationDefinitionSpecialization
```

If a `Usage` has an `owningVariationDefinition`, then it must directly or indirectly specialize that `Definition`.

```
owningVariationDefinition <> null implies
  specializes(owningVariationDefinition)
```

```
checkUsageVariationUsageSpecialization
```

If a `Usage` has an `owningVariationUsage`, then it must directly or indirectly specialize that `Usage`.

```
owningVariationUsage <> null implies
  specializes(owningVariationUsage)
```

```
deriveUsageDirectedUsage
```

The `directedUsages` of a `Usage` are all its `directedFeatures` that are `Usages`.

```
directedUsage = directedFeature->selectByKind(Usage)
```

```
deriveUsageIsReference
```

A `Usage` is referential if it is not composite.

The Usages which represent the variants of this Usage as a variation point Usage, if isVariation = true. If isVariation = false, then there must be no variants.

```
/variantMembership : VariantMembership [0..*] {subsets ownedMembership}
```

The ownedMemberships of this Usage that are VariantMemberships. If isVariation = true, then this must be all memberships of the Usage. If isVariation = false, then variantMembership must be empty.

Operations

```
namingFeature() : Feature [0..1] {redefines namingFeature}
```

If this Usage is a variant, then its naming Feature is the referencedFeature of its ownedReferenceSubsetting.

```
body: if not owningMembership.oclIsKindOf(VariantMembership) then
      self.oclAsType(Feature).namingFeature()
    else if ownedReferenceSubsetting = null then null
    else ownedReferenceSubsetting.referencedFeature
  endif endif
```

Constraints

```
checkUsageVariationDefinitionSpecialization
```

If a Usage has an owningVariationDefinition, then it must directly or indirectly specialize that Definition.

```
owningVariationDefinition <> null implies
  specializes(owningVariationDefinition)
```

```
checkUsageVariationUsageSpecialization
```

If a Usage has an owningVariationUsage, then it must directly or indirectly specialize that Usage.

```
owningVariationUsage <> null implies
  specializes(owningVariationUsage)
```

```
deriveUsageDirectedUsage
```

The directedUsages of a Usage are all its directedFeatures that are Usages.

```
directedUsage = directedFeature->selectByKind(Usage)
```

```
deriveUsageIsReference
```

A Usage is referential if it is not composite.

```
isReference = not isComposite
```

```
deriveUsageNestedAction
```

The ownedActions of a Usage are all its ownedUsages that are ActionUsages.

```
nestedAction = nestedUsage->selectByKind(ActionUsage)
```

```
deriveUsageNestedAllocation
```

```
isReference = not isComposite
```

deriveUsageNestedAction

The ownedActions of a Usage are all its ownedUsages that are ActionUsages.

```
nestedAction = nestedUsage->selectByKind(ActionUsage)
```

deriveUsageNestedAllocation

The ownedAllocations of a Usage are all its ownedUsages that are AllocationUsages.

```
nestedAllocation = nestedUsage->selectByKind(AllocationUsage)
```

deriveUsageNestedAnalysisCase

The ownedAnalysisCases of a Usage are all its ownedUsages that are AnalysisCaseUsages.

```
nestedAnalysisCase = nestedUsage->selectByKind(AnalysisCaseUsage)
```

deriveUsageNestedAttribute

The ownedAttributes of a Usage are all its ownedUsages that are AttributeUsages.

```
nestedAttribute = nestedUsage->selectByKind(AttributeUsage)
```

deriveUsageNestedCalculation

The ownedCalculations of a Usage are all its ownedUsages that are CalculationUsages.

```
nestedCalculation = nestedUsage->selectByKind(CalculationUsage)
```

deriveUsageNestedCase

The ownedCases of a Usage are all its ownedUsages that are CaseUsages.

```
nestedCase = nestedUsage->selectByKind(CaseUsage)
```

deriveUsageNestedConcern

The ownedConcerns of a Usage are all its ownedUsages that are ConcernUsages.

```
nestedConcern = nestedUsage->selectByKind(ConcernUsage)
```

deriveUsageNestedConnection

The ownedConnections of a Usage are all its ownedUsages that are ConnectorAsUsages.

```
nestedConnection = nestedUsage->selectByKind(ConnectorAsUsage)
```

deriveUsageNestedConstraint

The ownedConstraints of a Usage are all its ownedUsages that are ConstraintUsages.

```
nestedConstraint = nestedUsage->selectByKind(ConstraintUsage)
```

The ownedAllocations of a Usage are all its ownedUsages that are AllocationUsages.

```
nestedAllocation = nestedUsage->selectByKind(AllocationUsage)
```

deriveUsageNestedAnalysisCase

The ownedAnalysisCases of a Usage are all its ownedUsages that are AnalysisCaseUsages.

```
nestedAnalysisCase = nestedUsage->selectByKind(AnalysisCaseUsage)
```

deriveUsageNestedAttribute

The ownedAttributes of a Usage are all its ownedUsages that are AttributeUsages.

```
nestedAttribute = nestedUsage->selectByKind(AttributeUsage)
```

deriveUsageNestedCalculation

The ownedCalculations of a Usage are all its ownedUsages that are CalculationUsages.

```
nestedCalculation = nestedUsage->selectByKind(CalculationUsage)
```

deriveUsageNestedCase

The ownedCases of a Usage are all its ownedUsages that are CaseUsages.

```
nestedCase = nestedUsage->selectByKind(CaseUsage)
```

deriveUsageNestedConcern

The ownedConcerns of a Usage are all its ownedUsages that are ConcernUsages.

```
nestedConcern = nestedUsage->selectByKind(ConcernUsage)
```

deriveUsageNestedConnection

The ownedConnections of a Usage are all its ownedUsages that are ConnectorAsUsages.

```
nestedConnection = nestedUsage->selectByKind(ConnectorAsUsage)
```

deriveUsageNestedConstraint

The ownedConstraints of a Usage are all its ownedUsages that are ConstraintUsages.

```
nestedConstraint = nestedUsage->selectByKind(ConstraintUsage)
```

deriveUsageNestedEnumeration

The ownedEnumerations of a Usage are all its ownedUsages that are EnumerationUsages.

```
ownedNested = nestedUsage->selectByKind(EnumerationUsage)
```

deriveUsageNestedFlow

The ownedFlows of a Usage are all its ownedUsages that are FlowConnectionUsages.

```
nestedFlow = nestedUsage->selectByKind(FlowConnectionUsage)
```

deriveUsageNestedEnumeration

The ownedEnumerations of a Usage are all its ownedUsages that are EnumerationUsages.

```
ownedNested = nestedUsage->selectByKind(EnumerationUsage)
```

deriveUsageNestedFlow

The ownedFlows of a Usage are all its ownedUsages that are FlowConnectionUsages.

```
nestedFlow = nestedUsage->selectByKind(FlowConnectionUsage)
```

deriveUsageNestedInterface

The ownedInterfaces of a Usage are all its ownedUsages that are InterfaceUsages.

```
nestedInterface = nestedUsage->selectByKind(ReferenceUsage)
```

deriveUsageNestedItem

The ownedItems of a Usage are all its ownedUsages that are ItemUsages.

```
nestedItem = nestedUsage->selectByKind(ItemUsage)
```

deriveUsageNestedMetadata

The ownedMetadata of a Usage are all its ownedUsages that are MetadataUsages.

```
nestedMetadata = nestedUsage->selectByKind(MetadataUsage)
```

deriveUsageNestedOccurrence

The ownedOccurrences of a Usage are all its ownedUsages that are OccurrenceUsages.

```
nestedOccurrence = nestedUsage->selectByKind(OccurrenceUsage)
```

deriveUsageNestedPart

The ownedParts of a Usage are all its ownedUsages that are PartUsages.

```
nestedPart = nestedUsage->selectByKind(PartUsage)
```

deriveUsageNestedPort

The ownedPorts of a Usage are all its ownedUsages that are PortUsages.

```
nestedPort = nestedUsage->selectByKind(PortUsage)
```

deriveUsageNestedReference

The ownedReferences of a Usage are all its ownedUsages that are ReferenceUsages.

```
nestedReference = nestedUsage->selectByKind(ReferenceUsage)
```

deriveUsageNestedRendering

deriveUsageNestedInterface

The ownedInterfaces of a Usage are all its ownedUsages that are InterfaceUsages.

```
nestedInterface = nestedUsage->selectByKind(ReferenceUsage)
```

deriveUsageNestedItem

The ownedItems of a Usage are all its ownedUsages that are ItemUsages.

```
nestedItem = nestedUsage->selectByKind(ItemUsage)
```

deriveUsageNestedMetadata

The ownedMetadata of a Usage are all its ownedUsages that are MetadataUsages.

```
nestedMetadata = nestedUsage->selectByKind(MetadataUsage)
```

deriveUsageNestedOccurrence

The ownedOccurrences of a Usage are all its ownedUsages that are OccurrenceUsages.

```
nestedOccurrence = nestedUsage->selectByKind(OccurrenceUsage)
```

deriveUsageNestedPart

The ownedParts of a Usage are all its ownedUsages that are PartUsages.

```
nestedPart = nestedUsage->selectByKind(PartUsage)
```

deriveUsageNestedPort

The ownedPorts of a Usage are all its ownedUsages that are PortUsages.

```
nestedPort = nestedUsage->selectByKind(PortUsage)
```

deriveUsageNestedReference

The ownedReferences of a Usage are all its ownedUsages that are ReferenceUsages.

```
nestedReference = nestedUsage->selectByKind(ReferenceUsage)
```

deriveUsageNestedRendering

The ownedRenderings of a Usage are all its ownedUsages that are RenderingUsages.

```
nestedRendering = nestedUsage->selectByKind(RenderingUsage)
```

deriveUsageNestedRequirement

The ownedRequirements of a Usage are all its ownedUsages that are RequirementUsages.

```
nestedRequirement = nestedUsage->selectByKind(RequirementUsage)
```

deriveUsageNestedState

The ownedStates of a Usage are all its ownedUsages that are StateUsages.

The ownedRenderings of a Usage are all its ownedUsages that are RenderingUsages.

```
nestedRendering = nestedUsage->selectByKind(RenderingUsage)
```

deriveUsageNestedRequirement

The ownedRequirements of a Usage are all its ownedUsages that are RequirementUsages.

```
nestedRequirement = nestedUsage->selectByKind(RequirementUsage)
```

deriveUsageNestedState

The ownedStates of a Usage are all its ownedUsages that are StateUsages.

```
nestedState = nestedUsage->selectByKind(StateUsage)
```

deriveUsageNestedTransition

The ownedTransitions of a Usage are all its ownedUsages that are TransitionUsages.

```
nestedTransition = nestedUsage->selectByKind(TransitionUsage)
```

deriveUsageNestedUsage

The ownedUsages of a Usage are all its ownedFeatures that are Usages.

```
nestedUsage = ownedFeature->selectByKind(Usage)
```

deriveUsageNestedUseCase

The ownedUseCases of a Usage are all its ownedUsages that are UseCaseUsages.

```
nestedUseCase = nestedUsage->selectByKind(UseCaseUsage)
```

deriveUsageNestedVerificationCase

The ownedValidationCases of a Usage are all its ownedUsages that are ValidationCaseUsages.

```
nestedVerificationCase = nestedUsage->selectByKind(VerificationCaseUsage)
```

deriveUsageNestedView

The ownedViews of a Usage are all its ownedUsages that are ViewUsages.

```
nestedView = nestedUsage->selectByKind(ViewUsage)
```

deriveUsageNestedViewpoint

The ownedViewpoints of a Usage are all its ownedUsages that are ViewpointUsages.

```
nestedViewpoint = nestedUsage->selectByKind(ViewpointUsage)
```

deriveUsageUsage

The usages of a Usage are all its features that are Usages.

```
nestedState = nestedUsage->selectByKind(StateUsage)
```

deriveUsageNestedTransition

The ownedTransitions of a Usage are all its ownedUsages that are TransitionUsages.

```
nestedTransition = nestedUsage->selectByKind(TransitionUsage)
```

deriveUsageNestedUsage

The ownedUsages of a Usage are all its ownedFeatures that are Usages.

```
nestedUsage = ownedFeature->selectByKind(Usage)
```

deriveUsageNestedUseCase

The ownedUseCases of a Usage are all its ownedUsages that are UseCaseUsages.

```
nestedUseCase = nestedUsage->selectByKind(UseCaseUsage)
```

deriveUsageNestedVerificationCase

The ownedValidationCases of a Usage are all its ownedUsages that are ValidationCaseUsages.

```
nestedVerificationCase = nestedUsage->selectByKind(VerificationCaseUsage)
```

deriveUsageNestedView

The ownedViews of a Usage are all its ownedUsages that are ViewUsages.

```
nestedView = nestedUsage->selectByKind(ViewUsage)
```

deriveUsageNestedViewpoint

The ownedViewpoints of a Usage are all its ownedUsages that are ViewpointUsages.

```
nestedViewpoint = nestedUsage->selectByKind(ViewpointUsage)
```

deriveUsageUsage

The usages of a Usage are all its features that are Usages.

```
usage = feature->selectByKind(Usage)
```

deriveUsageVariant

The variants of a Usage are the ownedVariantUsages of its variantMemberships.

```
variant = variantMembership.ownedVariantUsage
```

deriveUsageVariantMembership

The variantMemberships of a Usage are those ownedMemberships that are VariantMemberships.

```
variantMembership = ownedMembership->selectByKind(VariantMembership)
```

validateUsageIsReferential

```
usage = feature->selectByKind(Usage)
```

deriveUsageVariant

The variants of a Usage are the ownedVariantUsages of its variantMemberships.

```
variant = variantMembership.ownedVariantUsage
```

deriveUsageVariantMembership

The variantMemberships of a Usage are those ownedMemberships that are VariantMemberships.

```
variantMembership = ownedMembership->selectByKind(VariantMembership)
```

validateUsageVariationIsAbstract

If a Usage is a variation, then it must be abstract.

```
isVariation implies isAbstract
```

validateUsageIsReferential

A Usage that is directed, an end feature or has no featuringTypes must be referential.

```
direction <> null or isEnd or featuringType->isEmpty() implies  
    isReference
```

validateUsageVariationOwnedFeatureMembership

If a Usage is a variation, then it must not have any ownedFeatureMemberships.

```
isVariation implies ownedFeatureMembership->isEmpty()
```

validateUsageVariationSpecialization

A variation Usage may not specialize any variation Definition or Usage.

```
isVariation implies  
    not ownedSpecialization.specific->exists(  
        oclIsKindOf(Definition) and  
        oclAsType(Definition).isVariation or  
        oclIsKindOf(Usage) and  
        oclAsType(Usage).isVariation)
```

8.3.6.5 VariantMembership

Description

A VariantMembership is a Membership between a variation point Definition or Usage and a Usage that represents a variant in the context of that variation. The membershipOwningNamespace for the VariantMembership must be either a Definition or a Usage with isVariation = true.

General Classes

OwningMembership

A Usage that is directed, an end feature or has no featuringTypes must be referential.

```
direction <> null or isEnd or featuringType->isEmpty() implies  
isReference
```

validateUsageVariationIsAbstract

If a Usage is a variation, then it must be abstract.

```
isVariation implies isAbstract
```

validateUsageVariationOwnedFeatureMembership

If a Usage is a variation, then it must not have any ownedFeatureMemberships.

```
isVariation implies ownedFeatureMembership->isEmpty()
```

validateUsageVariationSpecialization

A variation Usage may not specialize any variation Definition or Usage.

```
isVariation implies  
not ownedSpecialization.specific->exists(  
    oclIsKindOf(Definition) and  
    oclAsType(Definition).isVariation or  
    oclIsKindOf(Usage) and  
    oclAsType(Usage).isVariation)
```

8.3.6.5 VariantMembership

Description

A VariantMembership is a Membership between a variation point Definition or Usage and a Usage that represents a variant in the context of that variation. The membershipOwningNamespace for the VariantMembership must be either a Definition or a Usage with isVariation = true.

General Classes

OwningMembership

Attributes

```
/ownedVariantUsage : Usage {redefines ownedMemberElement}
```

The Usage that represents a variant in the context of the owningVariationDefinition or owningVariationUsage.

Operations

None.

Constraints

validateVariantMembershipOwningNamespace

The membershipOwningNamespace of a VariantMembership must be a variation-point Definition or Usage.

Attributes

/ownedVariantUsage : Usage {redefines ownedMemberElement}

The Usage that represents a variant in the context of the owningVariationDefinition or owningVariationUsage.

Operations

None.

Constraints

validateVariantMembershipOwningNamespace

The membershipOwningNamespace of a VariantMembership must be a variation-point Definition or Usage.

```
membershipOwningNamespace.oclIsKindOf(Definition) and  
membershipOwningNamespace.oclAsType(Definition).isVariation or  
membershipOwningNamespace.oclIsKindOf(Usage) and  
membershipOwningNamespace.oclAsType(Usage).isVariation
```

8.3.7 Attributes Abstract Syntax

8.3.7.1 Overview

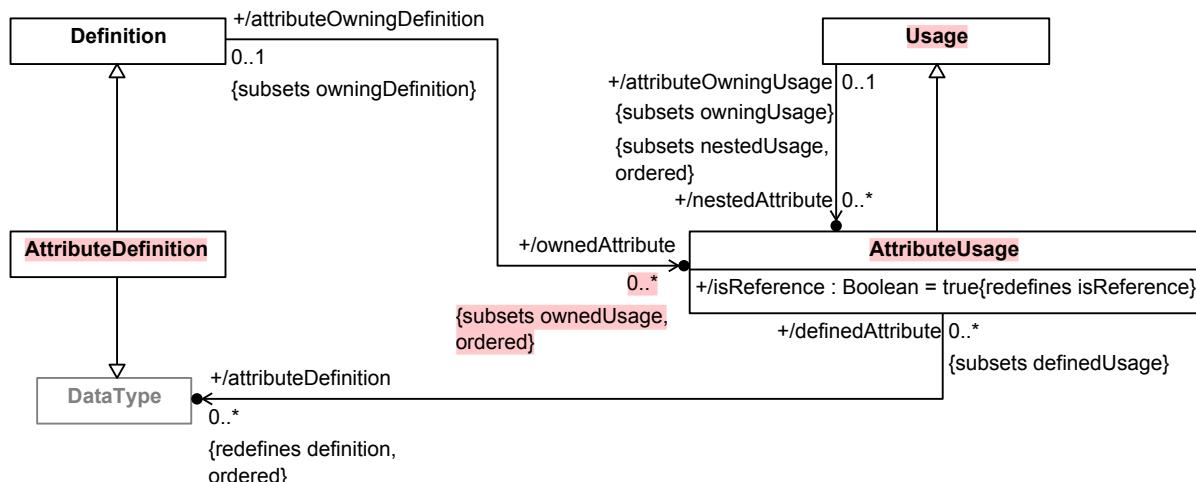


Figure 10. Attribute Definition and Usage

8.3.7.2 AttributeDefinition

Description

An AttributeDefinition is a Definition and a DataType of information about a quality or characteristic of a system or part of a system that has no independent identity other than its value. All features of an AttributeDefinition must be referential (non-composite).

As a DataType, an AttributeDefinition must specialize, directly or indirectly, the base DataType *Base:::DataValue* from the Kernel Semantic Library.

```

membershipOwningNamespace.oclIsKindOf(Definition) and
membershipOwningNamespace.oclAsType(Definition).isVariation or
membershipOwningNamespace.oclIsKindOf(Usage) and
membershipOwningNamespace.oclAsType(Usage).isVariation

```

8.3.7 Attributes Abstract Syntax

8.3.7.1 Overview

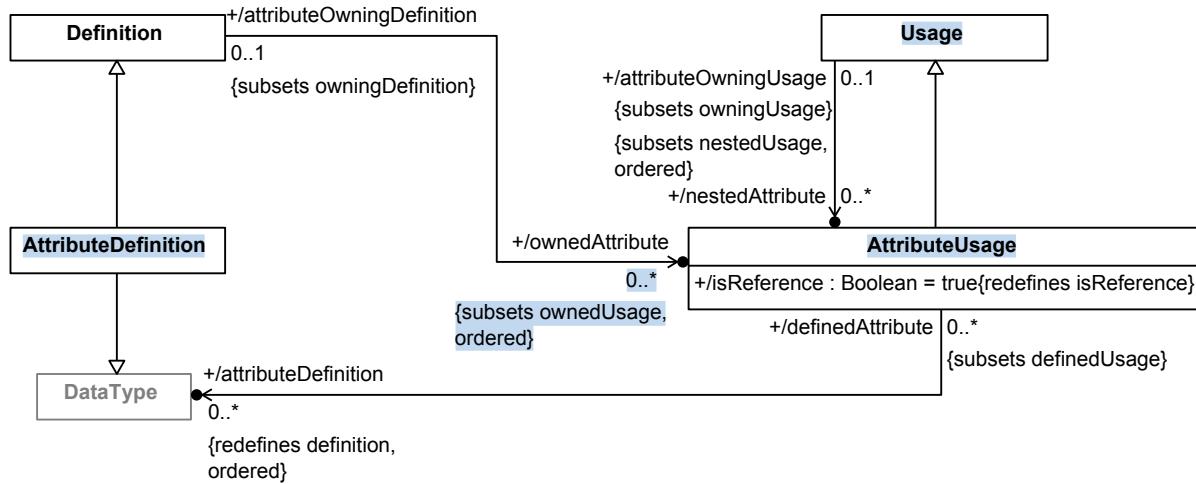


Figure 10. Attribute Definition and Usage

8.3.7.2 AttributeDefinition

Description

An **AttributeDefinition** is a **Definition** and a **DataType** of information about a quality or characteristic of a system or part of a system that has no independent identity other than its value. All features of an **AttributeDefinition** must be referential (non-composite).

As a **DataType**, an **AttributeDefinition** must specialize, directly or indirectly, the base **DataType** **Base::DataValue** from the Kernel Semantic Library.

General Classes

DataType
Definition

Attributes

None.

Operations

None.

Constraints

validateAttributeDefinitionFeatures

All features of an **AttributeDefinition** must be non-composite.

General Classes

Definition
 DataType

Attributes

None.

Operations

None.

Constraints

validateAttributeDefinitionFeatures

All features of an AttributeDefinition must be non-composite.

feature->forAll(not isComposite)

8.3.7.3 AttributeUsage

Description

An AttributeUsage is a Usage whose type is a DataType. Nominally, if the type is an AttributeDefinition, an AttributeUsage is a usage of a AttributeDefinition to represent the value of some system quality or characteristic. However, other kinds of kernel DataTypes are also allowed, to permit use of DataTypes from the Kernel Model Libraries. An AttributeUsage itself as well as all its nested features must be referential (non-composite).

An AttributeUsage must specialize, directly or indirectly, the base Feature *Base::dataValues* from the Kernel Semantic Library.

General Classes

Usage

Attributes

/attributeDefinition : DataType [0..*] {redefines definition, ordered}

The DataTypes that are the types of this AttributeUsage. Nominally, these are AttributeDefinitions, but other kinds of kernel DataTypes are also allowed, to permit use of DataTypes from the Kernel Model Libraries.

/isReference : Boolean {redefines isReference}

Always true for an AttributeUsage.

Operations

None.

Constraints

```
feature->forAll(not isComposite)
```

8.3.7.3 AttributeUsage

Description

An AttributeUsage is a Usage whose type is a DataType. Nominally, if the type is an AttributeDefinition, an AttributeUsage is a usage of a AttributeDefinition to represent the value of some system quality or characteristic. However, other kinds of kernel DataTypes are also allowed, to permit use of DataTypes from the Kernel Model Libraries. An AttributeUsage itself as well as all its nested features must be referential (non-composite).

An AttributeUsage must specialize, directly or indirectly, the base Feature *Base::dataValues* from the Kernel Semantic Library.

General Classes

Usage

Attributes

```
/attributeDefinition : DataType [0..*] {redefines definition, ordered}
```

The DataTypes that are the types of this AttributeUsage. Nominally, these are AttributeDefinitions, but other kinds of kernel DataTypes are also allowed, to permit use of DataTypes from the Kernel Model Libraries.

```
/isReference : Boolean {redefines isReference}
```

Always true for an AttributeUsage.

Operations

None.

Constraints

checkAttributeUsageSpecialization

An AttributeUsage must directly or indirectly specialize *Base::dataValues* from the Kernel Semantic Library.

```
specializesFromLibrary('Base::dataValues')
```

validateAttributeUsageFeatures

All features of an AttributeUsage must be non-composite.

```
feature->forAll(not isComposite)
```

validateAttributeUsageIsReference

An AttributeUsage is always referential.

```
isReference
```

8.3.8 Enumerations Abstract Syntax

checkAttributeUsageSpecialization

An AttributeUsage must directly or indirectly specialize `Base::dataValues` from the Kernel Semantic Library.

```
specializesFromLibrary('Base::dataValues')
```

validateAttributeUsageFeatures

All features of an AttributeUsage must be non-composite.

```
feature->forAll(not isComposite)
```

validateAttributeUsageIsReference

An AttributeUsage is always referential.

```
isReference
```

8.3.8 Enumerations Abstract Syntax

8.3.8.1 Overview

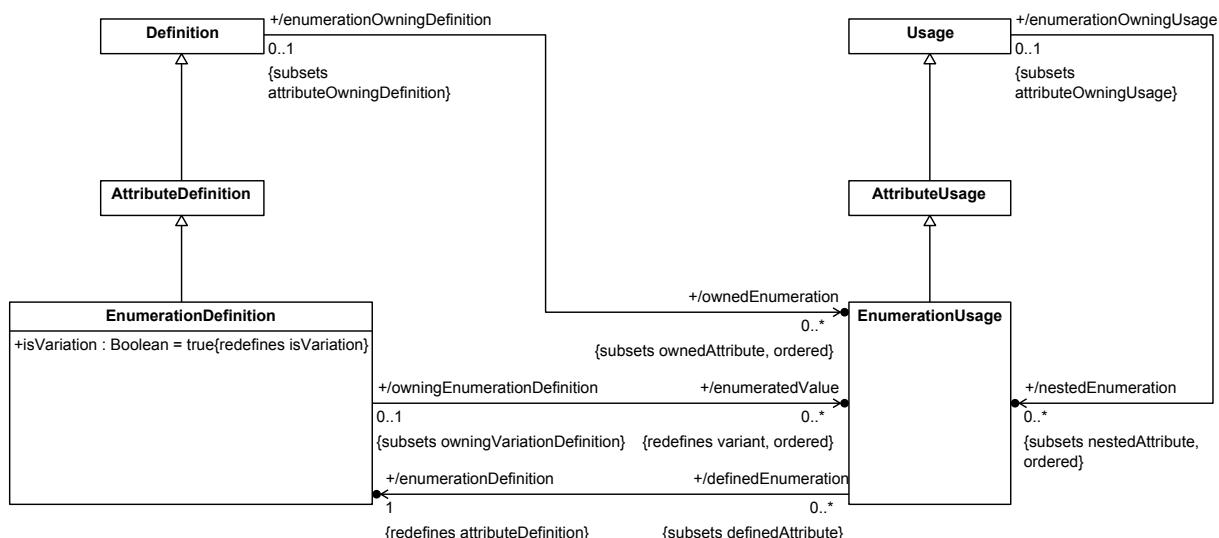


Figure 11. Enumeration Definition and Usage

8.3.8.2 EnumerationDefinition

Description

An EnumerationDefinition is an AttributeDefinition all of whose instances are given by an explicit list of enumeratedValues. This is realized by requiring that the EnumerationDefinition have `isVariation = true`, with the enumeratedValues being its variants.

General Classes

AttributeDefinition

Attributes

8.3.8.1 Overview

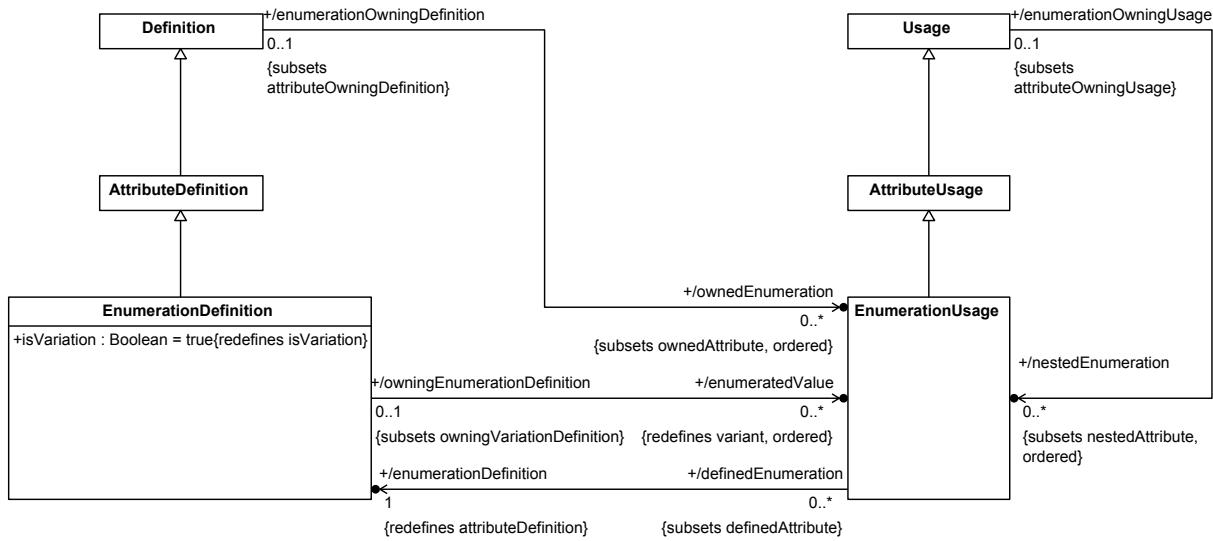


Figure 11. Enumeration Definition and Usage

8.3.8.2 EnumerationDefinition

Description

An `EnumerationDefinition` is an `AttributeDefinition` all of whose instances are given by an explicit list of `enumeratedValues`. This is realized by requiring that the `EnumerationDefinition` have `isVariation = true`, with the `enumeratedValues` being its variants.

General Classes

`AttributeDefinition`

Attributes

`/enumeratedValue : EnumerationUsage [0..*] {redefines variant, ordered}`

EnumerationUsages of this `EnumerationDefinition` that have distinct, fixed values. Each `enumeratedValue` specifies one of the allowed instances of the `EnumerationDefinition`.

`isVariation : Boolean {redefines isVariation}`

An `EnumerationDefinition` is considered semantically to be a variation whose allowed variants are its `enumerationValues`.

Operations

None.

Constraints

`validateEnumerationDefinitionIsVariation`

An `EnumerationDefinition` must be a variation.

/enumeratedValue : EnumerationUsage [0..*] {redefines variant, ordered}

EnumerationUsages of this EnumerationDefinition that have distinct, fixed values. Each enumeratedValue specifies one of the allowed instances of the EnumerationDefinition.

isVariation : Boolean {redefines isVariation}

An EnumerationDefinition is considered semantically to be a variation whose allowed variants are its enumerationValues.

Operations

None.

Constraints

validateEnumerationDefinitionIsVariation

An EnumerationDefinition must be a variation.

isVariation

8.3.8.3 EnumerationUsage

Description

An EnumerationUsage is an AttributeUsage whose attributeDefinition is an EnumerationDefinition.

General Classes

AttributeUsage

Attributes

/enumerationDefinition : EnumerationDefinition {redefines attributeDefinition}

The single EnumerationDefinition that is the type of this EnumerationUsage.

Operations

None.

Constraints

None.

8.3.9 Occurrences Abstract Syntax

isVariation

8.3.8.3 EnumerationUsage

Description

An EnumerationUsage is an AttributeUsage whose attributeDefinition is an EnumerationDefinition.

General Classes

AttributeUsage

Attributes

/enumerationDefinition : EnumerationDefinition {redefines attributeDefinition}

The single EnumerationDefinition that is the type of this EnumerationUsage.

Operations

None.

Constraints

None.

8.3.9 Occurrences Abstract Syntax

8.3.9.1 Overview

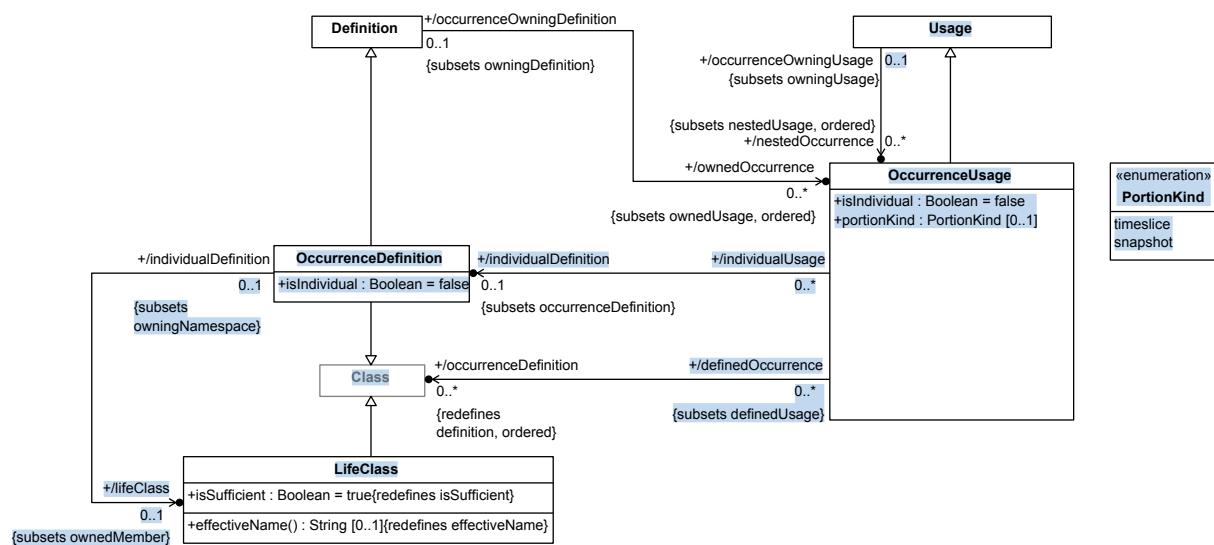


Figure 12. Occurrence Definition and Usage

8.3.9.1 Overview

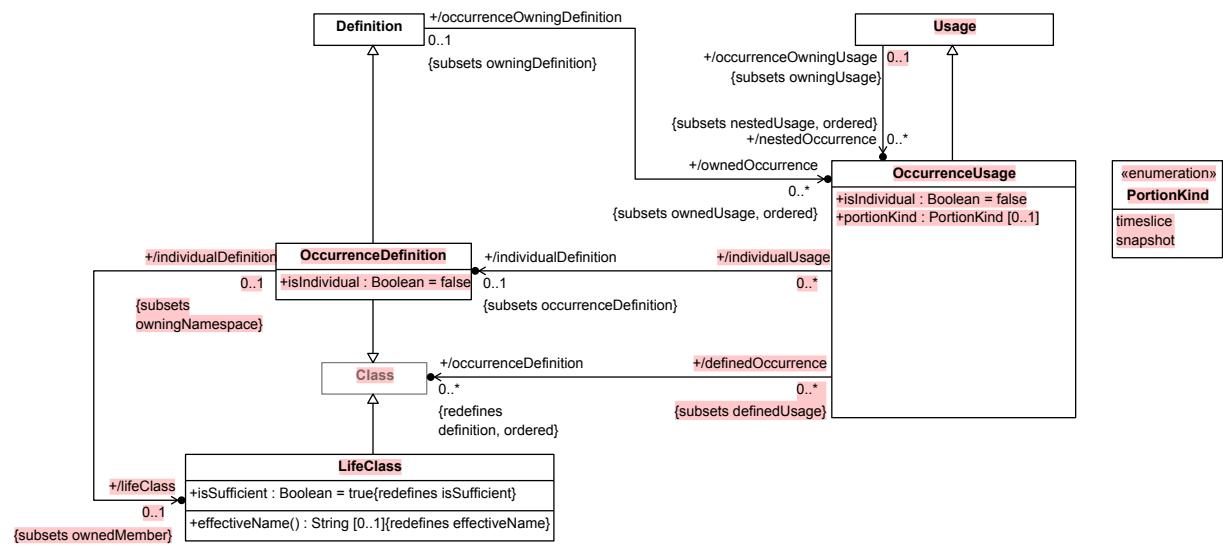


Figure 12. Occurrence Definition and Usage

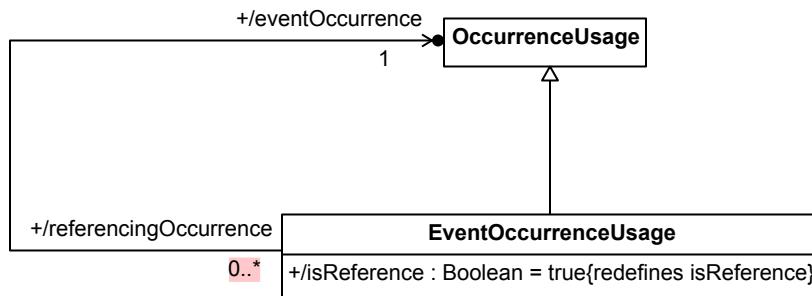


Figure 13. Event Occurrences

8.3.9.2 EventOccurrenceUsage

Description

An EventOccurrenceUsage is an OccurrenceUsage that represents another OccurrenceUsage occurring as a *suboccurrence* of the containing occurrence of the EventOccurrenceUsage. Unless it is the EventOccurrenceUsage itself, the referenced OccurrenceUsage is related to the EventOccurrenceUsage by a ReferenceSubsetting Relationship.

If the EventOccurrenceUsage is owned by an OccurrenceDefinition or OccurrenceUsage, then it also subsets the *timeEnclosedOccurrences* property of the Class *Occurrence* from the Kernel Semantic Library model *Occurrences*.

General Classes

OccurrenceUsage

Attributes

/eventOccurrence : OccurrenceUsage

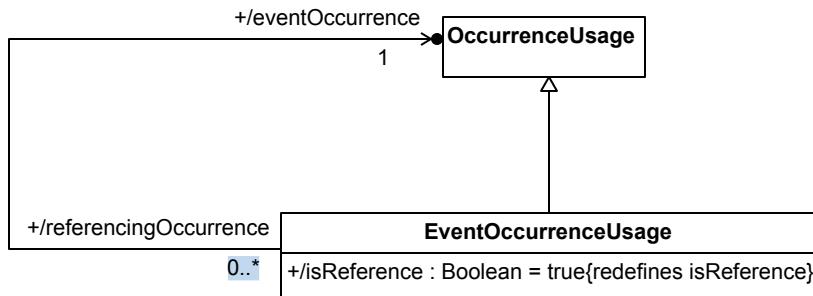


Figure 13. Event Occurrences

8.3.9.2 EventOccurrenceUsage

Description

An **EventOccurrenceUsage** is an **OccurrenceUsage** that represents another **OccurrenceUsage** occurring as a *suboccurrence* of the containing occurrence of the **EventOccurrenceUsage**. Unless it is the **EventOccurrenceUsage** itself, the referenced **OccurrenceUsage** is related to the **EventOccurrenceUsage** by a **ReferenceSubsetting Relationship**.

If the **EventOccurrenceUsage** is owned by an **OccurrenceDefinition** or **OccurrenceUsage**, then it also subsets the *timeEnclosedOccurrences* property of the **Class Occurrence** from the Kernel Semantic Library model *Occurrences*.

General Classes

OccurrenceUsage

Attributes

`/eventOccurrence : OccurrenceUsage`

The **OccurrenceUsage** referenced as an event by this **EventOccurrenceUsage**. It is the **referenceFeature** of the **ownedReferenceSubsetting** for the **EventOccurrenceUsage**, if there is one, and, otherwise, the **EventOccurrenceUsage** itself.

`/isReference : Boolean {redefines isReference}`

Always true for an **EventOccurrenceUsage**.

Operations

None.

Constraints

`checkEventOccurrenceUsageSpecialization`

If an **EventOccurrenceUsage** has an **owningType** that is an **OccurrenceDefinition** or **OccurrenceUsage**, then it must directly or indirectly specialize the Feature *Occurrences::Occurrence::timeEnclosedOccurrences*.

`owningType <> null and
(owningType.oclIsKindOf(OccurrenceDefinition) or`

The OccurrenceUsage referenced as an event by this EventOccurrenceUsage. It is the referenceFeature of the ownedReferenceSubsetting for the EventOccurrenceUsage, if there is one, and, otherwise, the EventOccurrenceUsage itself.

```
/isReference : Boolean {redefines isReference}
```

Always true for an EventOccurrenceUsage.

Operations

None.

Constraints

checkEventOccurrenceUsageSpecialization

If an EventOccurrenceUsage has an owningType that is an OccurrenceDefinition or OccurrenceUsage, then it must directly or indirectly specialize the Feature *Occurrences::Occurrence::timeEnclosedOccurrences*.

```
owningType <> null and  
(owningType.oclIsKindOf(OccurrenceDefinition) or  
owningType.oclIsKindOf(OccurrenceUsage)) implies  
specializesFromLibrary('Occurrences::Occurrence::timeEnclosedOccurrences')
```

deriveEventOccurrenceUsageEventOccurrence

If an EventOccurrenceUsage has no ownedReferenceSubsetting, then its eventOccurrence is the EventOccurrenceUsage itself. Otherwise, the eventOccurrence is the referencedFeature of the ownedReferenceSubsetting (which must be an OccurrenceUsage).

```
eventOccurrence =  
    if ownedReferenceSubsetting = null then self  
    else if ownedReferenceSubsetting.referencedFeature.oclIsKindOf(OccurrenceUsage) then  
        ownedReferenceSubsetting.referencedFeature.oclAsType(OccurrenceUsage)  
    else null  
    endif endif
```

validateEventOccurrenceUsageIsReference

An EventOccurrenceUsage must be referential.

```
isReference
```

validateEventOccurrenceUsageReference

If an EventOccurrenceUsage has an ownedReferenceSubsetting, then its referencedFeature must be an OccurrenceUsage.

```
ownedReferenceSubsetting <> null implies  
    ownedReferenceSubsetting.referencedFeature.oclIsKindOf(OccurrenceUsage)
```

8.3.9.3 LifeClass

Description

```
owningTypeoclIsKindOf(OccurrenceUsage)) implies  
specializesFromLibrary('Occurrences::Occurrence::timeEnclosedOccurrences')
```

deriveEventOccurrenceUsageEventOccurrence

If an EventOccurrenceUsage has no ownedReferenceSubsetting, then its eventOccurrence is the EventOccurrenceUsage itself. Otherwise, the eventOccurrence is the referencedFeature of the ownedReferenceSubsetting (which must be an OccurrenceUsage).

```
eventOccurrence =  
    if ownedReferenceSubsetting = null then self  
    else if ownedReferenceSubsetting.referencedFeature.oclIsKindOf(OccurrenceUsage) then  
        ownedReferenceSubsetting.referencedFeature.oclAsType(OccurrenceUsage)  
    else null  
    endif endif
```

validateEventOccurrenceUsageIsReference

An EventOccurrenceUsage must be referential.

isReference

validateEventOccurrenceUsageReference

If an EventOccurrenceUsage has an ownedReferenceSubsetting, then its referencedFeature must be an OccurrenceUsage.

```
ownedReferenceSubsetting <> null implies  
    ownedReferenceSubsetting.referencedFeature.oclIsKindOf(OccurrenceUsage)
```

8.3.9.3 LifeClass

Description

A LifeClass is a Class that specializes both the Class *Occurrences::Life* from the Kernel Semantic Library and a single OccurrenceDefinition, and has a multiplicity of 0..1. This constrains the OccurrenceDefinition being specialized to have at most one instance that is a complete Life.

General Classes

Class

Attributes

isSufficient : Boolean {redefines isSufficient}

Always true for a LifeClass.

Operations

effectiveName() : String [0..1] {redefines effectiveName}

The name of a LifeClass is *Life*.

body: "Life"

Constraints

A `LifeClass` is a `Class` that specializes both the `Class Occurrences::Life` from the Kernel Semantic Library and a single `OccurrenceDefinition`, and has a multiplicity of `0..1`. This constrains the `OccurrenceDefinition` being specialized to have at most one instance that is a complete `Life`.

General Classes

`Class`

Attributes

`isSufficient : Boolean {redefines isSufficient}`

Always true for a `LifeClass`.

Operations

`effectiveName() : String [0..1] {redefines effectiveName}`

The name of a `LifeClass` is `Life`.

`body: "Life"`

Constraints

`checkLifeClassLifeSpecialization`

A `LifeClass` must specialize the `Class Occurrences::Life` from the Kernel Semantic Model Library.

`specializesFromLibrary('Occurrences::Life')`

`checkLifeClassMultiplicitySpecialization`

The multiplicity of a `LifeClass` is `zeroOrOne`.

`multiplicity <> null and`
`multiplicity.specializesFromLibrary('Base::zeroOrOne')`

`checkLifeClassOccurrenceSpecialization`

A `LifeClass` must specialize its `individualDefinition`.

`specializes(individualDefinition)`

`validateLifeClassIsSufficient`

A `LifeClass` always has `isSufficient = true`.

`isSufficient`

8.3.9.4 OccurrenceDefinition

Description

An `OccurrenceDefinition` is a `Definition` of a `Class` of individuals that have an independent life over time and potentially an extent over space. This includes both structural things and behaviors that act on such structures.

checkLifeClassLifeSpecialization

A `LifeClass` must specialize the Class `Occurrences::Life` from the Kernel Semantic Model Library.

```
specializesFromLibrary('Occurrences::Life')
```

checkLifeClassMultiplicitySpecialization

The multiplicity of a `LifeClass` is `zeroOrOne`.

```
multiplicity <> null and  
multiplicity.specializesFromLibrary('Base::zeroOrOne')
```

checkLifeClassOccurrenceSpecialization

A `LifeClass` must specialize its `individualDefinition`.

```
specializes(individualDefinition)
```

validateLifeClassIsSufficient

A `LifeClass` always has `isSufficient = true`.

```
isSufficient
```

8.3.9.4 OccurrenceDefinition

Description

An `OccurrenceDefinition` is a `Definition` of a `Class` of individuals that have an independent life over time and potentially an extent over space. This includes both structural things and behaviors that act on such structures.

If `isIndividual` is true, then the `OccurrenceDefinition` is constrained to represent an individual thing. The instances of such an `OccurrenceDefinition` include all spatial and temporal portions of the individual being represented, but only one of these can be the complete `Life` of the individual. All other instances must be portions of the "maximal portion" that is single `Life` instance, capturing the conception that all of the instances represent one individual with a single "identity".

An `OccurrenceDefinition` must specialize, directly or indirectly, the base `Class Occurrence` from the Kernel Semantic Library.

General Classes

Class
Definition

Attributes

`isIndividual : Boolean`

Whether this `OccurrenceDefinition` is constrained to represent single individual.

`/lifeClass : LifeClass [0..1] {subsets ownedMember}`

If `isIndividual` is true, a `LifeClass` that specializes this `OccurrenceDefinition`, restricting it to represent an individual.

If `isIndividual` is true, then the `OccurrenceDefinition` is constrained to represent an individual thing. The instances of such an `OccurrenceDefinition` include all spatial and temporal portions of the individual being represented, but only one of these can be the complete `Life` of the individual. All other instances must be portions of the "maximal portion" that is single `Life` instance, capturing the conception that all of the instances represent one individual with a single "identity".

An `OccurrenceDefinition` must specialize, directly or indirectly, the base Class `Occurrence` from the Kernel Semantic Library.

General Classes

Class
Definition

Attributes

`isIndividual` : Boolean

Whether this `OccurrenceDefinition` is constrained to represent single individual.

`/lifeClass` : `LifeClass` [0..1] {subsets `ownedMember`}

If `isIndividual` is true, a `LifeClass` that specializes this `OccurrenceDefinition`, restricting it to represent an individual.

Operations

None.

Constraints

`deriveOccurrenceDefinitionLifeClass`

The `lifeClass` of an `OccurrenceDefinition` is its single `ownedMember` that is a `LifeClass` (if any).

```
lifeClass =  
    let lifeClasses: OrderedSet(LifeClass) =  
        ownedMember->selectByKind(LifeClass) in  
        if lifeClasses->isEmpty() then null  
        else lifeClasses->first()  
        endif
```

`validateOccurrenceDefinitionLifeClass`

If an `OccurrenceDefinition` has `isIndividual` = true, then it has exactly one `ownedMember` that is a `LifeClass`. Otherwise it has none.

```
let n : Integer = ownedMember->selectByKind(LifeClass) in  
if isIndividual then n = 1 else n = 0 endif
```

8.3.9.5 OccurrenceUsage

Description

Operations

None.

Constraints

deriveOccurrenceDefinitionLifeClass

The `lifeClass` of an `OccurrenceDefinition` is its single `ownedMember` that is a `LifeClass` (if any).

```
lifeClass =  
    let lifeClasses: OrderedSet(LifeClass) =  
        ownedMember->selectByKind(LifeClass) in  
        if lifeClasses->isEmpty() then null  
        else lifeClasses->first()  
    endif
```

validateOccurrenceDefinitionLifeClass

If an `OccurrenceDefinition` has `isIndividual = true`, then it has exactly one `ownedMember` that is a `LifeClass`. Otherwise it has none.

```
let n : Integer = ownedMember->selectByKind(LifeClass) in  
if isIndividual then n = 1 else n = 0 endif
```

8.3.9.5 OccurrenceUsage

Description

An `OccurrenceUsage` is a `Usage` whose `types` are all `Classes`. Nominally, if a `type` is an `OccurrenceDefinition`, an `OccurrenceUsage` is a `Usage` of that `OccurrenceDefinition` within a system. However, other types of `Kernel Classes` are also allowed, to permit use of `Classes` from the `Kernel Model Libraries`.

General Classes

Usage

Attributes

/individualDefinition : OccurrenceDefinition [0..1] {subsets occurrenceDefinition}

The at most one `occurrenceDefinition` that has `isIndividual = true`.

isIndividual : Boolean

Whether this `OccurrenceUsage` represents the usage of the specific individual (or portion of it) represented by its `individualDefinition`.

/occurrenceDefinition : Class [0..*] {redefines definition, ordered}

The `Classes` that are the types of this `OccurrenceUsage`. Nominally, these are `OccurrenceDefinitions`, but other kinds of `kernel Classes` are also allowed, to permit use of `Classes` from the `Kernel Model Libraries`.

portionKind : PortionKind [0..1]

An OccurrenceUsage is a Usage whose types are all Classes. Nominally, if a type is an OccurrenceDefinition, an OccurrenceUsage is a Usage of that OccurrenceDefinition within a system. However, other types of Kernel Classes are also allowed, to permit use of Classes from the Kernel Model Libraries.

General Classes

Usage

Attributes

/individualDefinition : OccurrenceDefinition [0..1] {subsets occurrenceDefinition}

The at most one occurrenceDefinition that has isIndividual = true.

isIndividual : Boolean

Whether this OccurrenceUsage represents the usage of the specific individual (or portion of it) represented by its individualDefinition.

/occurrenceDefinition : Class [0..*] {redefines definition, ordered}

The Classes that are the types of this OccurrenceUsage. Nominally, these are OccurrenceDefinitions, but other kinds of kernel Classes are also allowed, to permit use of Classes from the Kernel Model Libraries.

portionKind : PortionKind [0..1]

The kind of (temporal) portion of the life of the occurrenceDefinition represented by this OccurrenceUsage, if it is so restricted.

Operations

None.

Constraints

checkOccurrenceUsageSpecialization

An OccurrenceUsage must directly or indirectly specialize *Occurrences::occurrences* from the Kernel Semantic Library.

specializesFromLibrary('Occurrences::occurrences')

checkOccurrenceUsageSuboccurrenceSpecialization

A composite OccurrenceUsage, whose ownedType is a Class, another OccurrenceUsage, or any kind of Feature typed by a Class, must directly or indirectly specialize *Occurrences::Occurrence::suboccurrences*.

isComposite and
owningType <> null and
(owningType.oclIsKindOf(Class) or
owningType.oclIsKindOf(OccurrenceUsage) or
owningType.oclIsKindOf(Feature) and
owningType.oclaAsType(Feature).type->

The kind of (temporal) portion of the life of the occurrenceDefinition represented by this OccurrenceUsage, if it is so restricted.

Operations

None.

Constraints

checkOccurrenceUsageSpecialization

An OccurrenceUsage must directly or indirectly specialize *Occurrences::occurrences* from the Kernel Semantic Library.

```
specializesFromLibrary('Occurrences::occurrences')
```

checkOccurrenceUsageSuboccurrenceSpecialization

A composite OccurrenceUsage, whose ownedType is a Class, another OccurrenceUsage, or any kind of Feature typed by a Class, must directly or indirectly specialize *Occurrences::Occurrence::suboccurrences*

```
isComposite and
owningType <> null and
(owningType.oclIsKindOf(Class) or
 owningType.oclIsKindOf(OccurrenceUsage) or
 owningType.oclIsKindOf(Feature) and
 owningType.oclAsType(Feature).type->
 exists(oclIsKind(Class))) implies
specializesFromLibrary('Occurrences::Occurrence::suboccurrences')
```

checkOccurrenceUsageTypeFeaturing

If the portionKind of an OccurrenceUsage is not empty, then, for each occurrenceDefinition of the OccurrenceUsage, there must be a featuringType of the OccurrenceUsage which either is the occurrenceDefinition or directly or indirectly specializes it.

```
portionKind <> null implies
    occurrenceDefinition->forAll(occ |
        featuringType->exists(specializes(occ)))
```

deriveOccurrenceUsageIndividualDefinition

The individualDefinition of an OccurrenceUsage is the occurrenceDefinition that is an OccurrenceDefinition with isIndividual = true, if any.

```
individualDefinition =
let individualDefinitions : OrderedSet(OccurrenceDefinition) =
    occurrenceDefinition->
        selectByKind(OccurrenceDefinition)->
            select(isIndividual) in
    if individualDefinitions->isEmpty() then null
    else individualDefinitions->first() endif
```

validateOccurrenceUsageIndividualDefinition

An OccurrenceUsage must have at most one occurrenceDefinition with isIndividual = true.

```
exists(oclIsKind(Class))) implies  
specializesFromLibrary('Occurrences::Occurrence::suboccurrences')
```

checkOccurrenceUsageTypeFeaturing

If the portionKind of an OccurrenceUsage is not empty, then, for each occurrenceDefinition of the OccurrenceUsage, there must be a featuringType of the OccurrenceUsage which either is the occurrenceDefinition or directly or indirectly specializes it.

```
portionKind <> null implies  
occurrenceDefinition->forAll(occ |  
featuringType->exists(specializes(occ)))
```

deriveOccurrenceUsageIndividualDefinition

The individualDefinition of an OccurrenceUsage is the occurrenceDefinition that is an OccurrenceDefinition with isIndividual = true, if any.

```
individualDefinition =  
let individualDefinitions : OrderedSet(OccurrenceDefinition) =  
occurrenceDefinition->  
selectByKind(OccurrenceDefinition)->  
select(isIndividual) in  
if individualDefinitions->isEmpty() then null  
else individualDefinitions->first() endif
```

validateOccurrenceUsageIndividualDefinition

An OccurrenceUsage must have at most one occurrenceDefinition with isIndividual = true.

```
occurrenceDefinition->  
selectByKind(OccurrenceDefinition)->  
select(isIndividual).size() <= 1
```

validateOccurrenceUsageIndividualUsage

If an OccurrenceUsage has isIndividual = true, then it must have an individualDefinition.

isIndividual implies individualDefinition <> null

8.3.9.6 PortionKind

Description

PortionKind is an enumeration of the specific kinds of *Occurrence* portions that can be represented by an OccurrenceUsage.

General Classes

None.

Literal Values

snapshot

A snapshot of an Occurrence (a time slice with zero duration).

```

occurrenceDefinition->
    selectByKind(OccurrenceDefinition)->
        select(isIndividual).size() <= 1

```

validateOccurrenceUsageIndividualUsage

If an OccurrenceUsage has isIndividual = true, then it must have an individualDefinition.

isIndividual implies individualDefinition <> null

8.3.9.6 PortionKind

Description

PortionKind is an enumeration of the specific kinds of *Occurrence* portions that can be represented by an OccurrenceUsage.

General Classes

None.

Literal Values

snapshot

A snapshot of an Occurrence (a time slice with zero duration).

timeslice

A time slice of an Occurrence (a portion over time).

8.3.10 Items Abstract Syntax

8.3.10.1 Overview

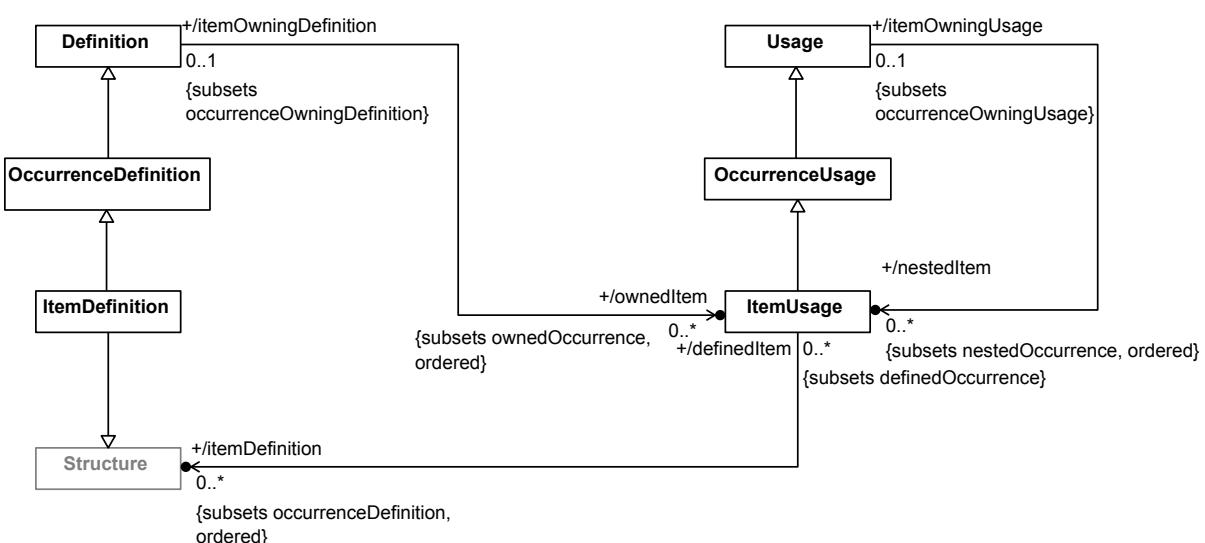


Figure 14. Item Definition and Usage

8.3.10.2 ItemDefinition

timeslice

A time slice of an Occurrence (a portion over time).

8.3.10 Items Abstract Syntax

8.3.10.1 Overview

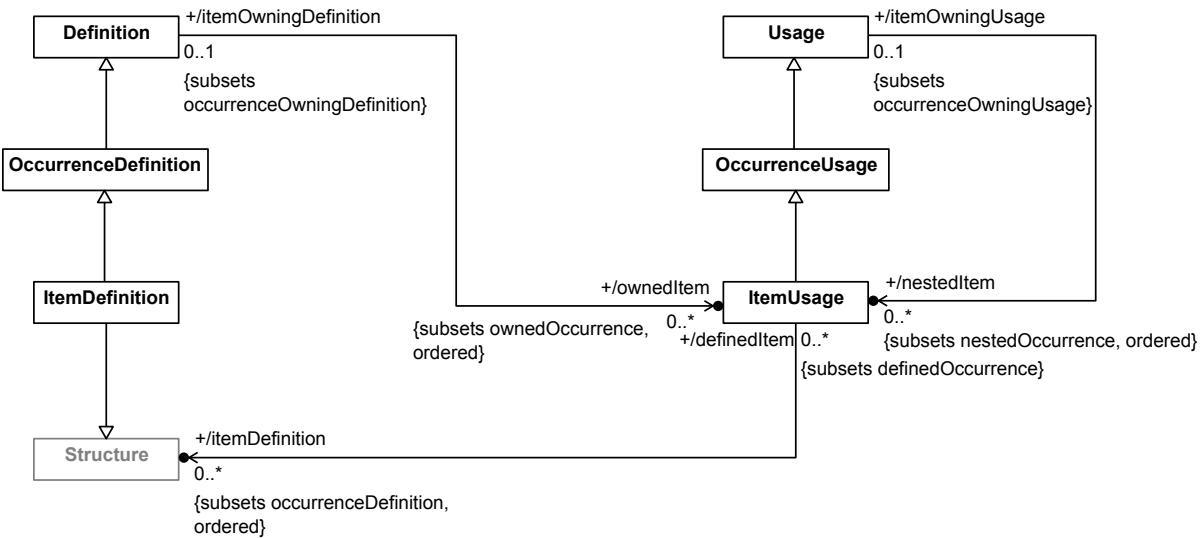


Figure 14. Item Definition and Usage

8.3.10.2 ItemDefinition

Description

An ItemDefinition is an OccurrenceDefinition of the Structure of things that may themselves be systems or parts of systems, but may also be things that are acted on by a system or parts of a system, but which do not necessarily perform actions themselves. This includes items that can be exchanged between parts of a system, such as water or electrical signals.

General Classes

OccurrenceDefinition
Structure

Attributes

None.

Operations

None.

Constraints

checkItemDefinitionSpecialization

Description

An ItemDefinition is an OccurrenceDefinition of the Structure of things that may themselves be systems or parts of systems, but may also be things that are acted on by a system or parts of a system, but which do not necessarily perform actions themselves. This includes items that can be exchanged between parts of a system, such as water or electrical signals.

General Classes

OccurrenceDefinition
Structure

Attributes

None.

Operations

None.

Constraints

checkItemDefinitionSpecialization

An ItemDefinition must directly or indirectly specialize the Systems Library Model ItemDefinition *Items::Item*.

specializesFromLibrary('Items::Item')

8.3.10.3 ItemUsage

Description

An ItemUsage is a ItemUsage whose definition is a Structure. Nominally, if the definition is an ItemDefinition, an ItemUsage is a ItemUsage of that ItemDefinition within a system. However, other kinds of Kernel Structures are also allowed, to permit use of Structures from the Kernel Model Libraries.

General Classes

OccurrenceUsage

Attributes

/itemDefinition : Structure [0..*] {subsets occurrenceDefinition, ordered}

The Structures that are the definitions of this ItemUsage. Nominally, these are ItemDefinitions, but other kinds of Kernel Structures are also allowed, to permit use of Structures from the Kernel Library.

Operations

None.

Constraints

checkItemUsageSpecialization

An `ItemDefinition` must directly or indirectly specialize the Systems Library Model `ItemDefinition` `Items::Item`.

```
specializesFromLibrary('Items::Item')
```

8.3.10.3 ItemUsage

Description

An `ItemUsage` is a `ItemUsage` whose definition is a `Structure`. Nominally, if the definition is an `ItemDefinition`, an `ItemUsage` is a `ItemUsage` of that `ItemDefinition` within a system. However, other kinds of Kernel Structures are also allowed, to permit use of `Structures` from the Kernel Model Libraries.

General Classes

`OccurrenceUsage`

Attributes

```
/itemDefinition : Structure [0..*] {subsets occurrenceDefinition, ordered}
```

The `Structures` that are the `definitions` of this `ItemUsage`. Nominally, these are `ItemDefinitions`, but other kinds of Kernel Structures are also allowed, to permit use of `Structures` from the Kernel Library.

Operations

None.

Constraints

`checkItemUsageSpecialization`

An `ItemUsage` must directly or indirectly specialize the Systems Model Library `ItemUsage items`.

```
specializesFromLibrary('Items::items')
```

`checkItemUsageSubitemSpecialization`

```
isComposite and owningType <> null and  
(owningType.oclIsKindOf(ItemDefinition) or  
owningType.oclIsKindOf(ItemUsage)) implies  
    specializesFromLibrary('Items::Item::subitem')
```

`deriveItemUsageItemDefinition`

The `itemDefinitions` of an `ItemUsage` are those `occurrenceDefinitions` that are `ItemDefinitions`.

```
itemDefinition = occurrenceDefinition->selectByKind(ItemDefinition)
```

8.3.11 Parts Abstract Syntax

An ItemUsage must directly or indirectly specialize the Systems Model Library ItemUsage *items*.

```
specializesFromLibrary('Items::items')
```

```
checkItemUsageSubitemSpecialization
```

```
isComposite and owningType <> null and
(owningType.oclIsKindOf(ItemDefinition) or
owningType.oclIsKindOf(ItemUsage)) implies
    specializesFromLibrary('Items::Item::subitem')
```

```
deriveItemUsageItemDefinition
```

The itemDefinitions of an ItemUsage are those occurrenceDefinitions that are ItemDefinitions.

```
itemDefinition = occurrenceDefinition->selectByKind(ItemDefinition)
```

8.3.11 Parts Abstract Syntax

8.3.11.1 Overview

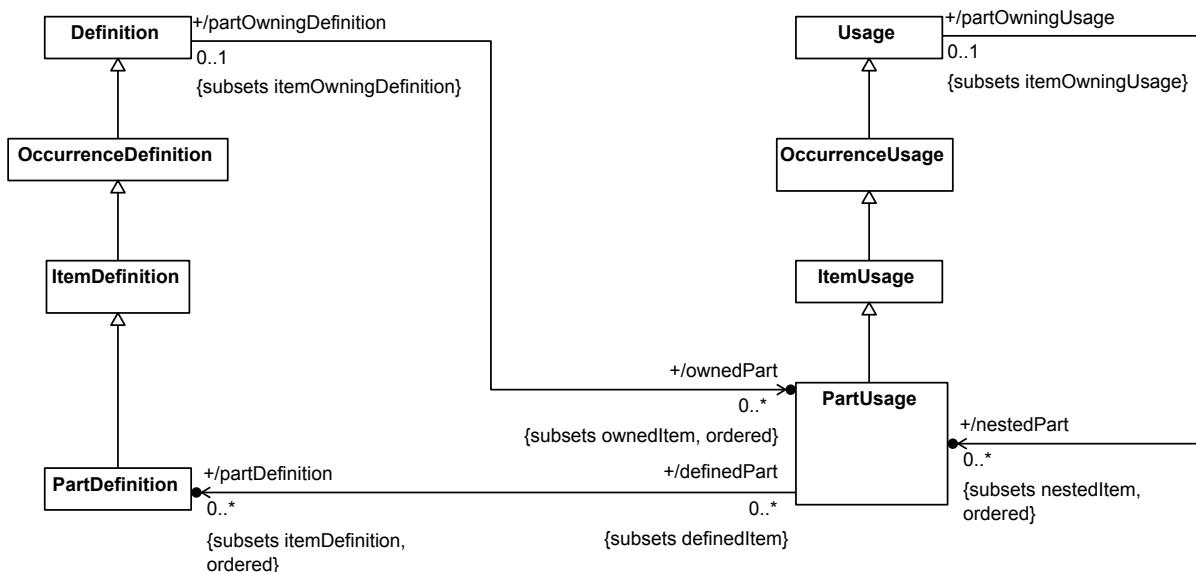


Figure 15. Part Definition and Usage

8.3.11.2 PartDefinition

Description

A PartDefinition is an ItemDefinition of a Class of systems or parts of systems. Note that all parts may be considered items for certain purposes, but not all items are parts that can perform actions within a system.

General Classes

ItemDefinition

Attributes

None.

8.3.11.1 Overview

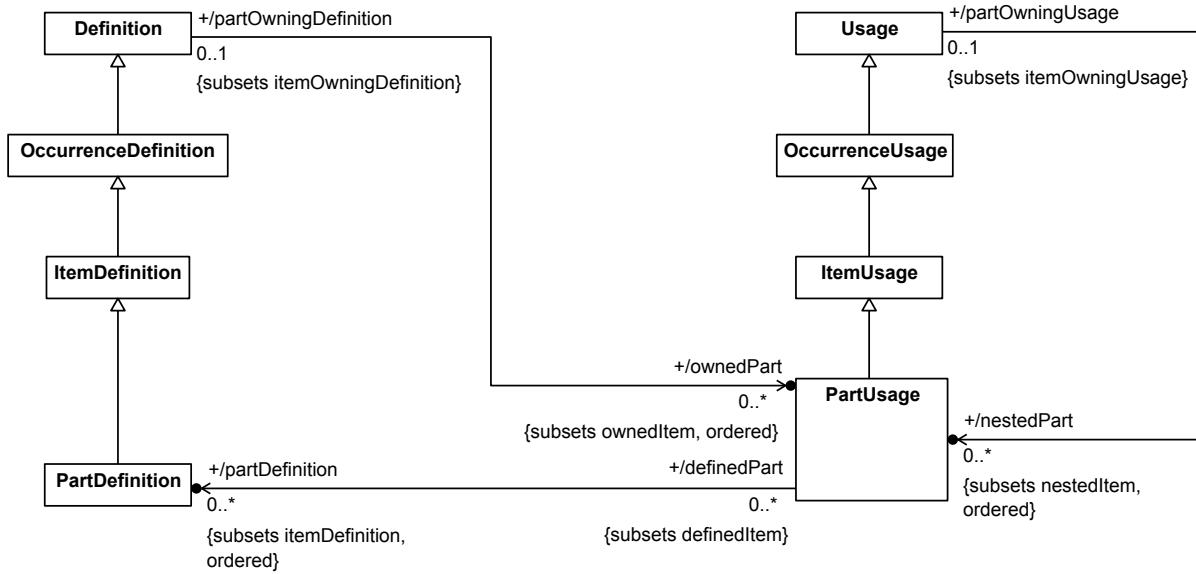


Figure 15. Part Definition and Usage

8.3.11.2 PartDefinition

Description

A **PartDefinition** is an **ItemDefinition** of a **Class** of systems or parts of systems. Note that all parts may be considered items for certain purposes, but not all items are parts that can perform actions within a system.

General Classes

ItemDefinition

Attributes

None.

Operations

None.

Constraints

`checkPartDefinitionSpecialization`

A **PartDefinition** must directly or indirectly specialize the base **PartDefinition** *Parts::Part* from the Systems Model Library.

`specializesFromLibrary('Parts::Part')`

8.3.11.3 PartUsage

Description

Operations

None.

Constraints

checkPartDefinitionSpecialization

A PartDefinition must directly or indirectly specialize the base PartDefinition *Parts::Part* from the Systems Model Library.

```
specializesFromLibrary('Parts::Part')
```

8.3.11.3 PartUsage

Description

A PartUsage is a usage of a PartDefinition to represent a system or a part of a system. At least one of the itemDefinitions of the PartUsage must be a PartDefinition.

A PartUsage must subset, directly or indirectly, the base PartUsage *parts* from the Systems Model Library.

General Classes

ItemUsage

Attributes

```
/partDefinition : PartDefinition [0..*] {subsets itemDefinition, ordered}
```

The itemDefinitions of this PartUsage that are PartDefinitions.

Operations

None.

Constraints

checkPartUsageActorSpecialization

If a PartUsage is owned via an ActorMembership, then it must directly or indirectly specialize either Requirements::RequirementCheck::actors (if its owningType is a RequirementDefinition or RequirementUsage or Cases::Case::actors (otherwise).

```
owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(ActorMembership) implies
    if owningType.oclIsKindOf(RequirementDefinition) or
        owningType.oclIsKindOf(RequirementUsage)
    then specializesFromLibrary('Requirements::RequirementCheck::actors')
    else specializesFromLibrary('Cases::Case::actors')
```

checkPartUsageSpecialization

A PartUsage must directly or indirectly specialize the PartUsage *Parts::parts* from the Systems Model Library.

```
specializesFromLibrary('Parts::parts')
```

A `PartUsage` is a usage of a `PartDefinition` to represent a system or a part of a system. At least one of the `itemDefinitions` of the `PartUsage` must be a `PartDefinition`.

A `PartUsage` must subset, directly or indirectly, the base `PartUsage parts` from the Systems Model Library.

General Classes

`ItemUsage`

Attributes

```
/partDefinition : PartDefinition [0..*] {subsets itemDefinition, ordered}
```

The `itemDefinitions` of this `PartUsage` that are `PartDefinitions`.

Operations

None.

Constraints

`checkPartUsageActorSpecialization`

If a `PartUsage` is owned via an `ActorMembership`, then it must directly or indirectly specialize either `Requirements::RequirementCheck::actors` (if its `owningType` is a `RequirementDefinition` or `RequirementUsage` or `Cases::Case::actors` (otherwise).

```
owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(ActorMembership) implies
    if owningType.oclIsKindOf(RequirementDefinition) or
        owningType.oclIsKindOf(RequirementUsage)
    then specializesFromLibrary('Requirements::RequirementCheck::actors')
    else specializesFromLibrary('Cases::Case::actors')
```

`checkPartUsageSpecialization`

A `PartUsage` must directly or indirectly specialize the `PartUsage Parts::parts` from the Systems Model Library.

```
specializesFromLibrary('Parts::parts')
```

`checkPartUsageStakeholderSpecialization`

If a `PartUsage` is owned via a `StakeholderMembership`, then it must directly or indirectly specialize either `Requirements::RequirementCheck::stakeholders`.

```
owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(StakeholderMembership) implies
    specializesFromLibrary('Requirements::RequirementCheck::stakeholders')
```

`checkPartUsageSubpartSpecialization`

A composite `PartUsage` whose `owningType` is a `ItemDefinition` or `ItemUsage` must directly or indirectly specialize the `PartUsage Items::Item::subparts` from the Systems Model Library.

checkPartUsageStakeholderSpecialization

If a PartUsage is owned via a StakeholderMembership, then it must directly or indirectly specialize either Requirements::RequirementCheck::stakeholders.

```
owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(StakeholderMembership) implies
    specializesFromLibrary('Requirements::RequirementCheck::stakeholders')
```

checkPartUsageSubpartSpecialization

A composite PartUsage whose owningType is a ItemDefinition or ItemUsage must directly or indirectly specialize the PartUsage Items::Item::subparts from the Systems Model Library.

```
isComposite and owningType <> null and
(owningType.oclIsKindOf(ItemDefinition) or
owningType.oclIsKindOf(ItemUsage)) implies
    specializesFromLibrary('Items::Item::subparts')
```

derivePartUsagePartDefinition

The partDefinitions of an PartUsage are those itemDefinitions that are PartDefinitions.

```
itemDefinition->selectByKind(PartDefinition)
```

validatePartUsagePartDefinition

At least one of the itemDefinitions of a PartUsage must be a PartDefinition.

```
partDefinition->notEmpty()
```

8.3.12 Ports Abstract Syntax

8.3.12.1 Overview

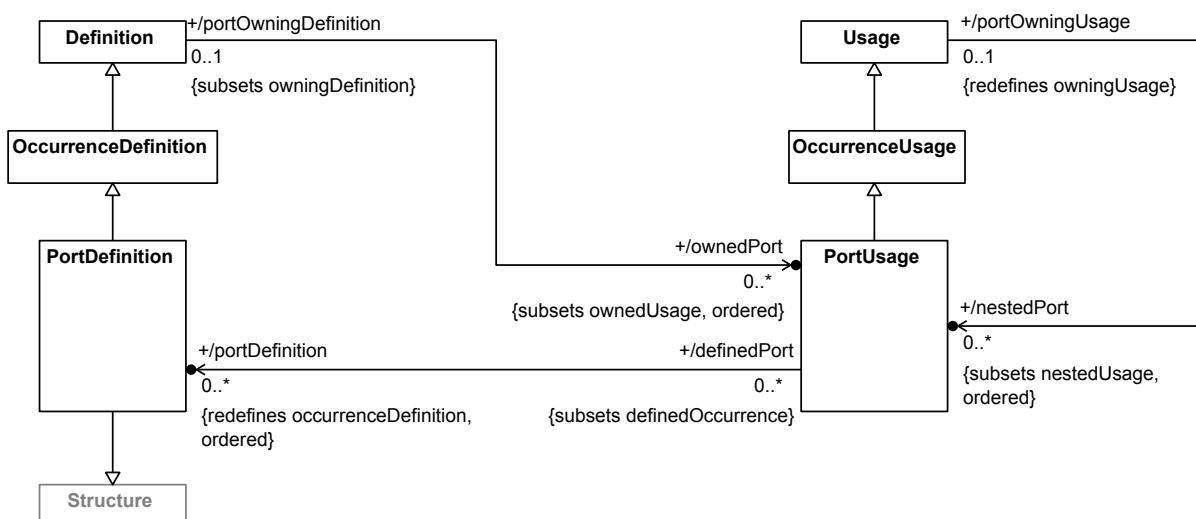


Figure 16. Port Definition and Usage

```

isComposite and owningType <> null and
(owningType.oclIsKindOf(ItemDefinition) or
owningType.oclIsKindOf(ItemUsage)) implies
specializesFromLibrary('Items::Item::subparts')

```

derivePartUsagePartDefinition

The partDefinitions of an PartUsage are those itemDefinitions that are PartDefinitions.

```
itemDefinition->selectByKind(PartDefinition)
```

validatePartUsagePartDefinition

At least one of the itemDefinitions of a PartUsage must be a PartDefinition.

```
partDefinition->notEmpty()
```

8.3.12 Ports Abstract Syntax

8.3.12.1 Overview

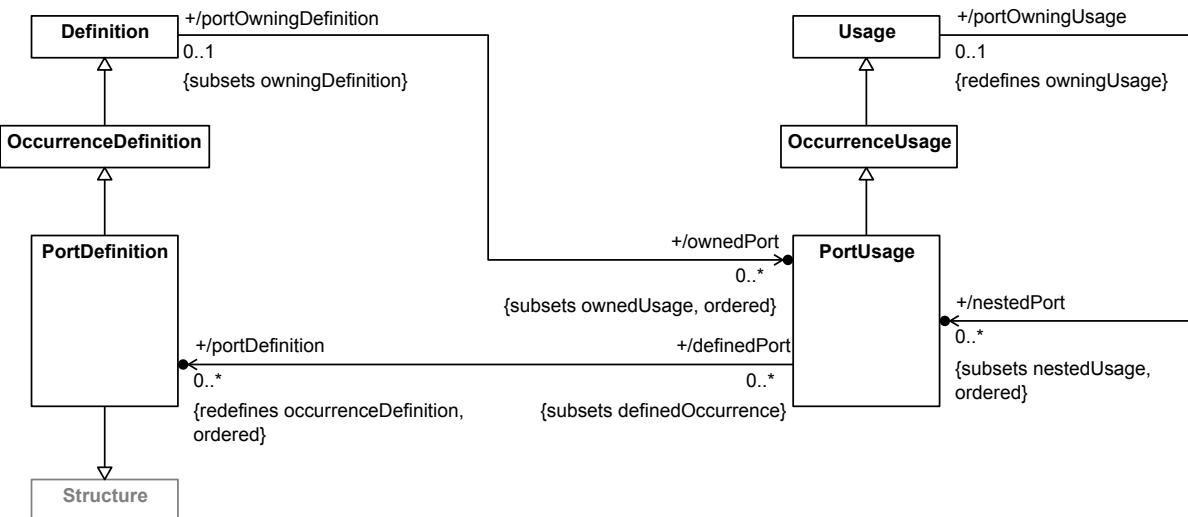


Figure 16. Port Definition and Usage

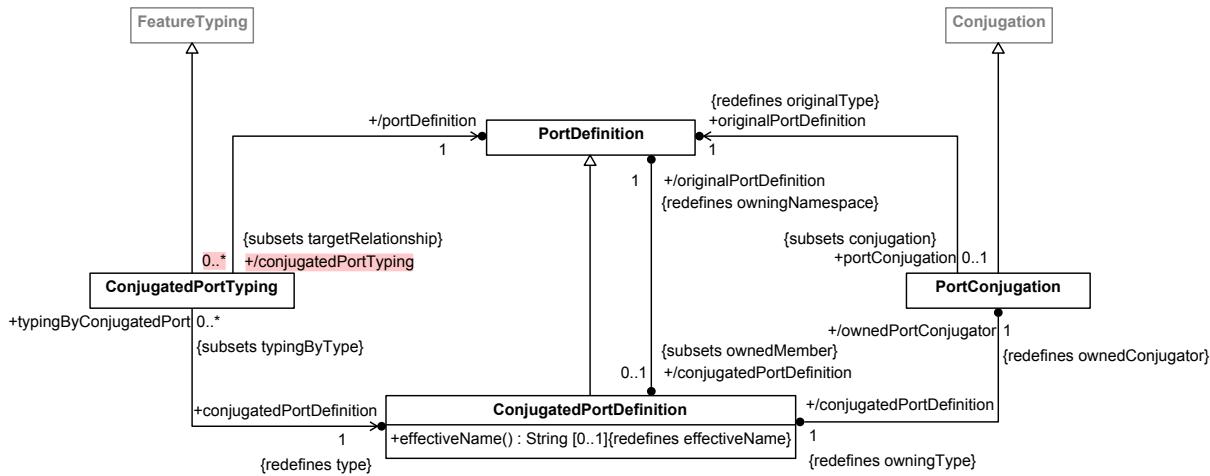


Figure 17. Port Conjugation

8.3.12.2 ConjugatedPortDefinition

Description

A ConjugatedPortDefinition is a PortDefinition that is a PortDefinition of its original PortDefinition. That is, a ConjugatedPortDefinition inherits all the features of the original PortDefinition, but input flows of the original PortDefinition become outputs on the ConjugatedPortDefinition and output flows of the original PortDefinition become inputs on the ConjugatedPortDefinition. Every PortDefinition (that is not itself a ConjugatedPortDefinition) has exactly one corresponding ConjugatedPortDefinition, whose effective name is the name of the originalPortDefinition, with the character ~ prepended.

General Classes

PortDefinition

Attributes

/originalPortDefinition : PortDefinition {redefines owningNamespace}

The original PortDefinition for this ConjugatedPortDefinition, which is the owningNamespace of the ConjugatedPortDefinition.

/ownedPortConjugator : PortConjugation {redefines ownedConjugator}

The PortConjugation that is the ownedConjugator of this ConjugatedPortDefinition, linking it to its originalPortDefinition.

Operations

effectiveName() : String [0..1] {redefines effectiveName}

If the name of the originalPortDefinition is non-empty, then return that with the character ~ prepended.

```

body: let originalName : String = originalPortDefinition.name in
if originalName = null then null
  
```

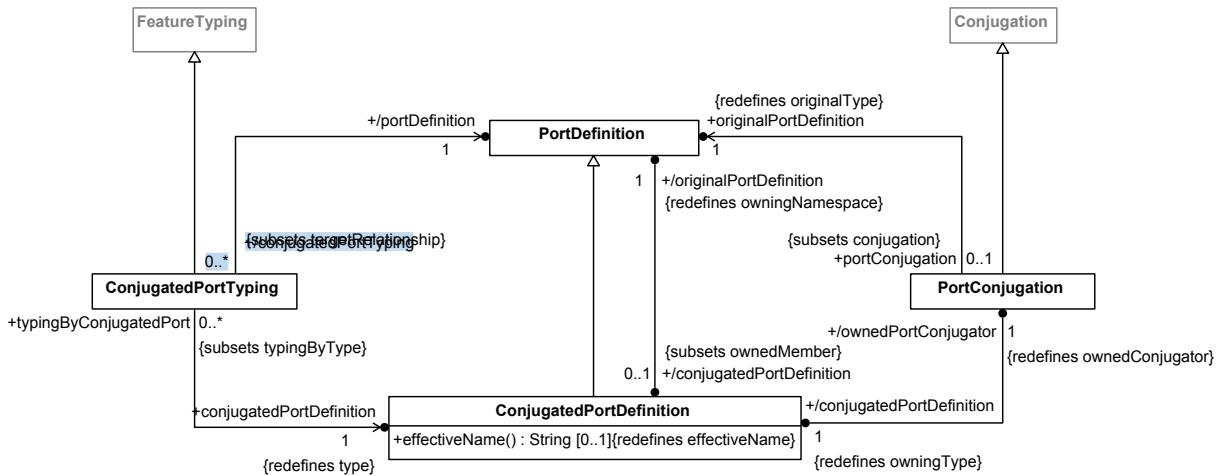


Figure 17. Port Conjugation

8.3.12.2 ConjugatedPortDefinition

Description

A **ConjugatedPortDefinition** is a **PortDefinition** that is a **PortDefinition** of its original **PortDefinition**. That is, a **ConjugatedPortDefinition** inherits all the features of the original **PortDefinition**, but input flows of the original **PortDefinition** become outputs on the **ConjugatedPortDefinition** and output flows of the original **PortDefinition** become inputs on the **ConjugatedPortDefinition**. Every **PortDefinition** (that is not itself a **ConjugatedPortDefinition**) has exactly one corresponding **ConjugatedPortDefinition**, whose effective name is the name of the **originalPortDefinition**, with the character ~ prepended.

General Classes

PortDefinition

Attributes

/originalPortDefinition : PortDefinition {redefines owningNamespace}

The original **PortDefinition** for this **ConjugatedPortDefinition**, which is the **owningNamespace** of the **ConjugatedPortDefinition**.

/ownedPortConjugator : PortConjugation {redefines ownedConjugator}

The **PortConjugation** that is the **ownedConjugator** of this **ConjugatedPortDefinition**, linking it to its **originalPortDefinition**.

Operations

effectiveName() : String [0..1] {redefines effectiveName}

If the name of the **originalPortDefinition** is non-empty, then return that with the character ~ prepended.

```

body: let originalName : String = originalPortDefinition.name in
if originalName = null then null
else '~' + originalName
endif
  
```

```
else '~' + originalName  
endif
```

Constraints

validateConjugatedPortDefinitionConjugatedPortDefinitionIsEmpty

A ConjugatedPortDefinition must not itself have a conjugatedPortDefinition.

```
conjugatedPortDefinition = null
```

validateConjugatedPortDefinitionOriginalPortDefinition

The originalPortDefinition of the ownedPortConjugator of a ConjugatedPortDefinition must be the originalPortDefinition of the ConjugatedPortDefinition.

```
ownedPortConjugator.originalPortDefinition = originalPortDefinition
```

8.3.12.3 ConjugatedPortTyping

Description

A ConjugatedPortTyping is a FeatureTyping whose type is a ConjugatedPortDefinition. (This relationship is intended to be an abstract-syntax marker for a special surface notation for conjugated typing of ports.)

General Classes

FeatureTyping

Attributes

conjugatedPortDefinition : ConjugatedPortDefinition {redefines type}

The type of this ConjugatedPortTyping considered as a FeatureTyping, which must be a ConjugatedPortDefinition.

/portDefinition : PortDefinition

The originalPortDefinition of the conjugatedPortDefinition of this ConjugatedPortTyping.

Operations

None.

Constraints

deriveConjugatedPortTypingPortDefinition

The portDefinition of a ConjugatedPortTyping is the originalPortDefinition of the conjugatedPortDefinition of the ConjugatedPortTyping.

```
portDefinition = conjugatedPortDefinition.originalPortDefinition
```

8.3.12.4 PortConjugation

Description

Constraints

validateConjugatedPortDefinitionConjugatedPortDefinitionIsEmpty

A ConjugatedPortDefinition must not itself have a conjugatedPortDefinition

```
conjugatedPortDefinition = null
```

validateConjugatedPortDefinitionOriginalPortDefinition

The originalPortDefinition of the ownedPortConjugator of a ConjugatedPortDefinition must be the originalPortDefinition of the ConjugatedPortDefinition.

```
ownedPortConjugator.originalPortDefinition = originalPortDefinition
```

8.3.12.3 ConjugatedPortTyping

Description

A ConjugatedPortTyping is a FeatureTyping whose type is a ConjugatedPortDefinition. (This relationship is intended to be an abstract-syntax marker for a special surface notation for conjugated typing of ports.)

General Classes

FeatureTyping

Attributes

conjugatedPortDefinition : ConjugatedPortDefinition {redefines type}

The type of this ConjugatedPortTyping considered as a FeatureTyping, which must be a ConjugatedPortDefinition.

/portDefinition : PortDefinition

The originalPortDefinition of the conjugatedPortDefinition of this ConjugatedPortTyping.

Operations

None.

Constraints

deriveConjugatedPortTypingPortDefinition

The portDefinition of a ConjugatedPortTyping is the originalPortDefinition of the conjugatedPortDefinition of the ConjugatedPortTyping.

```
portDefinition = conjugatedPortDefinition.originalPortDefinition
```

8.3.12.4 PortConjugation

Description

A PortConjugation is a Conjugation Relationship between a PortDefinition and its corresponding ConjugatedPortDefinition. As a result of this Relationship, the ConjugatedPortDefinition inherits all the features of the original PortDefinition, but input flows of the original PortDefinition become

A PortConjugation is a Conjugation Relationship between a PortDefinition and its corresponding ConjugatedPortDefinition. As a result of this Relationship, the ConjugatedPortDefinition inherits all the features of the original PortDefinition, but input flows of the original PortDefinition become outputs on the ConjugatedPortDefinition and output flows of the original PortDefinition become inputs on the ConjugatedPortDefinition.

General Classes

Conjugation

Attributes

/conjugatedPortDefinition : ConjugatedPortDefinition {redefines owningType}

The ConjugatedPortDefinition that is conjugate to the originalPortDefinition.

originalPortDefinition : PortDefinition {redefines originalType}

The PortDefinition being conjugated.

Operations

None.

Constraints

None.

8.3.12.5 PortDefinition

Description

A PortDefinition defines a point at which external entities can connect to and interact with a system or part of a system. Any ownedUsages of a PortDefinition, other than PortUsages, must not be composite.

General Classes

OccurrenceDefinition

Structure

Attributes

/conjugatedPortDefinition : ConjugatedPortDefinition [0..1] {subsets ownedMember}

The that is conjugate to this PortDefinition.

Operations

None.

Constraints

checkPortDefinitionSpecialization

outputs on the `ConjugatedPortDefinition` and output flows of the original `PortDefinition` become inputs on the `ConjugatedPortDefinition`.

General Classes

Conjugation

Attributes

/conjugatedPortDefinition : ConjugatedPortDefinition {redefines owningType}

The `ConjugatedPortDefinition` that is conjugate to the `originalPortDefinition`.

`originalPortDefinition` : PortDefinition {redefines originalType}

The `PortDefinition` being conjugated.

Operations

None.

Constraints

None.

8.3.12.5 PortDefinition

Description

A `PortDefinition` defines a point at which external entities can connect to and interact with a system or part of a system. Any `ownedUsages` of a `PortDefinition`, other than `PortUsages`, must not be composite.

General Classes

OccurrenceDefinition

Structure

Attributes

/conjugatedPortDefinition : ConjugatedPortDefinition [0..1] {subsets ownedMember}

The that is conjugate to this `PortDefinition`.

Operations

None.

Constraints

checkPortDefinitionSpecialization

A `PortDefinition` must directly or indirectly specialize the `PortDefinition Ports::Port` from the Systems Model Library.

specializesFromLibrary('Ports::Port')

A PortDefinition must directly or indirectly specialize the PortDefinition Ports::Port from the Systems Model Library.

```
specializesFromLibrary('Ports::Port')
```

derivePortDefinitionConjugatedPortDefinition

The conjugatedPortDefinition of a PortDefinition is the ownedMember that is a ConjugatedPortDefinition.

```
conjugatedPortDefinition =  
let conjugatedPortDefinitions : OrderedSet(ConjugatedPortDefinition) =  
    ownedMember->selectByKind(ConjugatedPortDefinition) in  
if conjugatedPortDefinitions->isEmpty() then null  
else conjugatedPortDefinitions->first()  
endif
```

validatePortDefinitionConjugatedPortDefinition

Unless it is a ConjugatedPortDefinition, a PortDefinition must have exactly one ownedMember that is a ConjugatedPortDefinition.

```
not oclIsKindOf(ConjugatedPortDefinition) implies  
ownedMember->  
    selectByKind(ConjugatedPortDefinition)->  
    size() = 1
```

validatePortDefinitionOwnedUsagesNotComposite

The ownedUsages of a PortDefinition that are not PortUsages must not be composite.

```
ownedUsage->  
    reject(oclIsKindOf(PortUsage)) ->  
    forAll(not isComposite)
```

8.3.12.6 PortUsage

Description

A PortUsage is a usage of a PortDefinition. A PortUsage itself as well as all its nestedUsages must be referential (non-composite).

General Classes

OccurrenceUsage

Attributes

```
/portDefinition : PortDefinition [0..*] {redefines occurrenceDefinition, ordered}
```

The occurrenceDefinitions of this PortUsage, which must all be PortDefinitions.

Operations

None.

derivePortDefinitionConjugatedPortDefinition

The conjugatedPortDefinition of a PortDefinition is the ownedMember that is a ConjugatedPortDefinition.

```
conjugatedPortDefinition =  
let conjugatedPortDefinitions : OrderedSet(ConjugatedPortDefinition) =  
    ownedMember->selectByKind(ConjugatedPortDefinition) in  
if conjugatedPortDefinitions->isEmpty() then null  
else conjugatedPortDefinitions->first()  
endif
```

validatePortDefinitionConjugatedPortDefinition

Unless it is a ConjugatedPortDefinition, a PortDefinition must have exactly one ownedMember that is a ConjugatedPortDefinition.

```
not oclIsKindOf(ConjugatedPortDefinition) implies  
    ownedMember->  
        selectByKind(ConjugatedPortDefinition)->  
            size() = 1
```

validatePortDefinitionOwnedUsagesNotComposite

The ownedUsages of a PortDefinition that are not PortUsages must not be composite.

```
ownedUsage->  
    reject(oclIsKindOf(PortUsage)) ->  
        forAll(not isComposite)
```

8.3.12.6 PortUsage

Description

A PortUsage is a usage of a PortDefinition. A PortUsage itself as well as all its nestedUsages must be referential (non-composite).

General Classes

OccurrenceUsage

Attributes

/portDefinition : PortDefinition [0..*] {redefines occurrenceDefinition, ordered}

The occurrenceDefinitions of this PortUsage, which must all be PortDefinitions.

Operations

None.

Constraints

checkPortUsageSpecialization

A PortUsage must directly or indirectly specialize the PortUsage *Ports::ports* from the Systems Model Library.

Constraints

checkPortUsageSpecialization

A PortUsage must directly or indirectly specialize the PortUsage *Ports::ports* from the Systems Model Library.

```
specializesFromLibrary('Ports::ports')
```

checkPortUsageSubportSpecialization

A composite PortUsage with an owningType that is a PortDefinition or PortUsage must directly or indirectly specialize the PortUsage *Ports::Port::subports* from the Systems Model Library.

```
isComposite and owningType <> null and  
(owningType.oclIsKindOf(PortDefinition) or  
owningType.oclIsKindOf(PortUsage)) implies  
    specializesFromLibrary('Ports::Port::subports')
```

validatePortUsageIsReference

Unless a PortUsage has an owningType that is a PortDefinition or a PortUsage, it must be referential (non-composite).

```
owningType = null or  
not owningType.oclIsKindOf(PortDefinition) and  
not owningType.oclIsKindOf(PortUsage) implies  
    isReference
```

validatePortUsageNestedUsagesNotComposite

The nestedUsages of a PortUsage that are not themselves PortUsages must not be composite.

```
nestedUsage->  
    reject(oclIsKindOf(PortUsage)) ->  
        forAll(not isComposite)
```

8.3.13 Connections Abstract Syntax

```
specializesFromLibrary('Ports::ports')
```

```
checkPortUsageSubportSpecialization
```

A composite `PortUsage` with an `owningType` that is a `PortDefinition` or `PortUsage` must directly or indirectly specialize the `PortUsage Ports::Port::subports` from the Systems Model Library.

```
isComposite and owningType <> null and  
(owningType.oclIsKindOf(PortDefinition) or  
owningType.oclIsKindOf(PortUsage)) implies  
specializesFromLibrary('Ports::Port::subports')
```

```
validatePortUsageIsReference
```

Unless a `PortUsage` has an `owningType` that is a `PortDefinition` or a `PortUsage`, it must be referential (non-composite).

```
owningType = null or  
not owningType.oclIsKindOf(PortDefinition) and  
not owningType.oclIsKindOf(PortUsage) implies  
isReference
```

```
validatePortUsageNestedUsagesNotComposite
```

The `nestedUsages` of a `PortUsage` that are not themselves `PortUsages` must not be composite.

```
nestedUsage->  
    reject(oclIsKindOf(PortUsage)) ->  
        forAll(not isComposite)
```

8.3.13 Connections Abstract Syntax

8.3.13.1 Overview

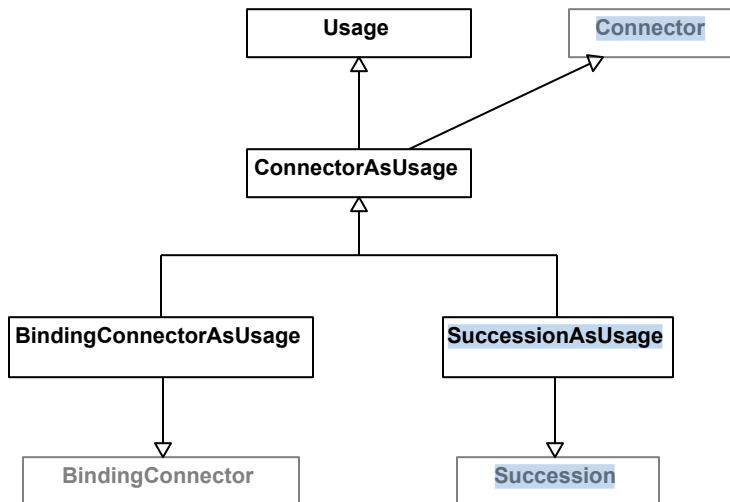


Figure 18. Connectors as Usages

8.3.13.1 Overview

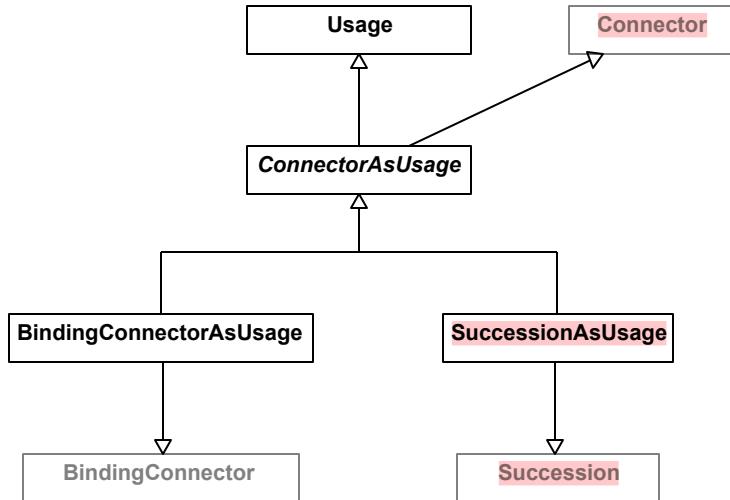


Figure 18. Connectors as Usages

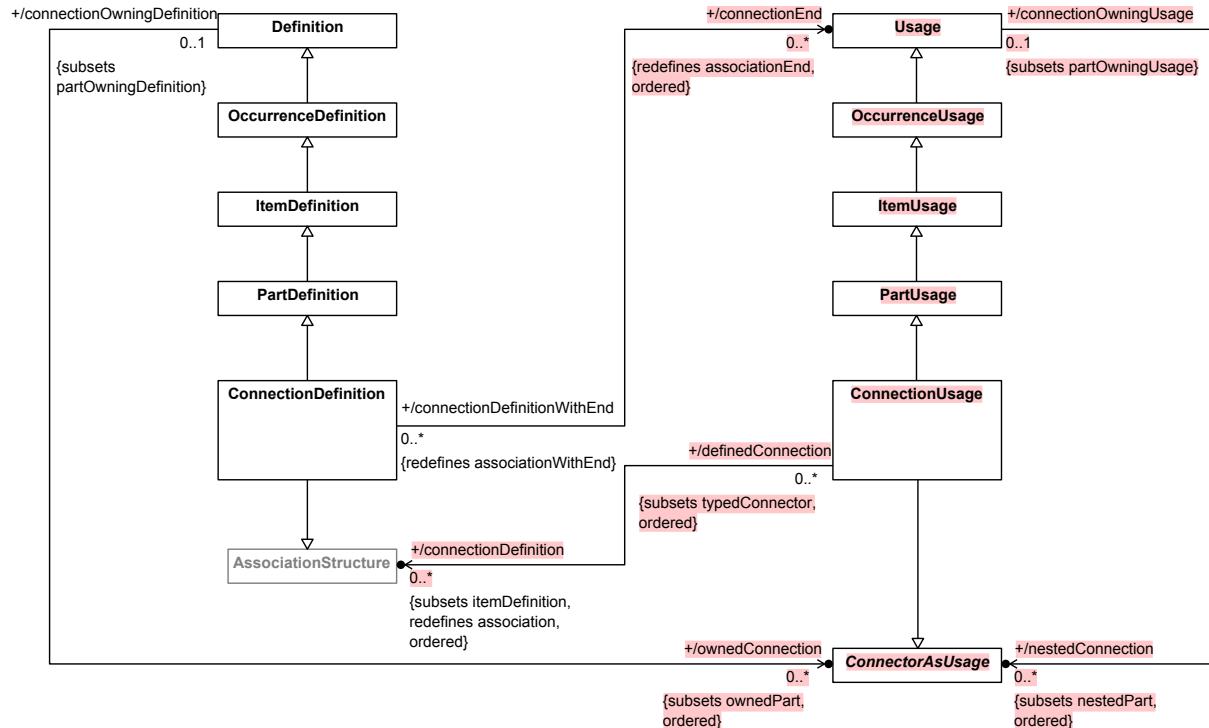


Figure 19. Connection Definition and Usage

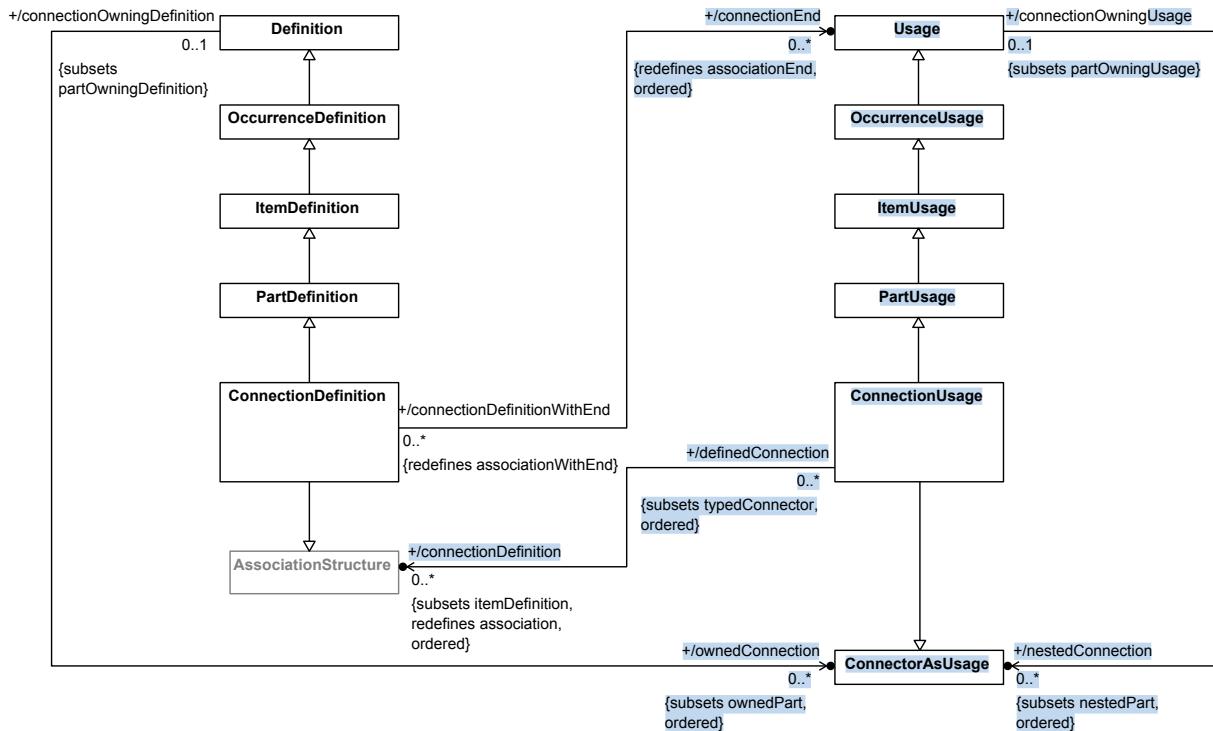


Figure 19. Connection Definition and Usage

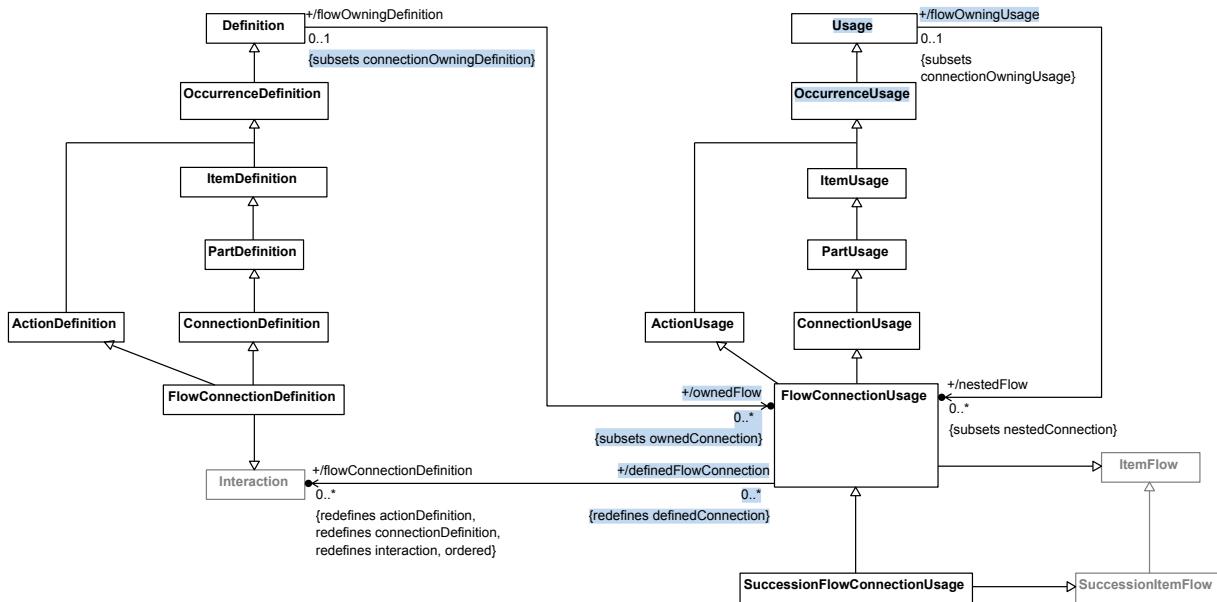


Figure 20. Flow Connections

8.3.13.2 BindingConnectorAsUsage

Description

A BindingConnectorAsUsage is both a BindingConnector and a ConnectorAsUsage.

General Classes

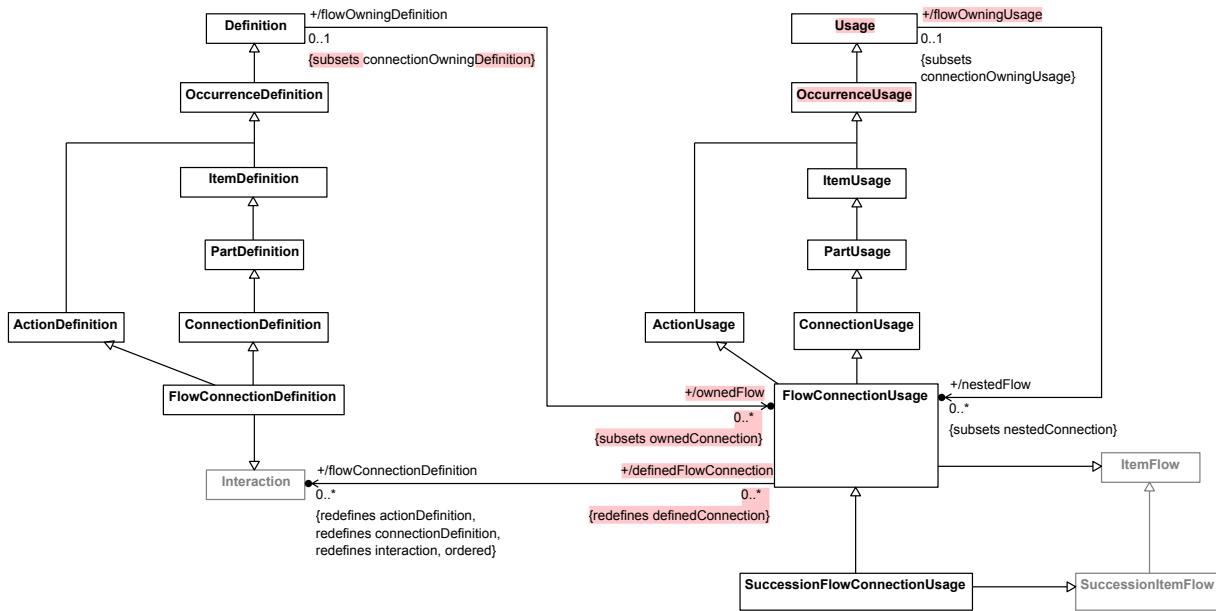


Figure 20. Flow Connections

8.3.13.2 BindingConnectorAsUsage

Description

A **BindingConnectorAsUsage** is both a **BindingConnector** and a **ConnectorAsUsage**.

General Classes

BindingConnector
ConnectorAsUsage

Attributes

None.

Operations

None.

Constraints

None.

8.3.13.3 ConnectionDefinition

Description

A **ConnectionDefinition** is a **PartDefinition** that is also an **AssociationStructure**. The end **Features** of a **ConnectionDefinition** must be **Usages**.

General Classes

PartDefinition

ConnectorAsUsage
BindingConnector

Attributes

None.

Operations

None.

Constraints

None.

8.3.13.3 ConnectionDefinition

Description

A ConnectionDefinition is a PartDefinition that is also an AssociationStructure. The end Features of a ConnectionDefinition must be Usages.

General Classes

AssociationStructure
PartDefinition

Attributes

/connectionEnd : Usage [0..*] {redefines associationEnd, ordered}

The Usages that define the things related by the ConnectionDefinition.

Operations

None.

Constraints

checkConnectionDefinitionBinarySpecialization

A binary ConnectionDefinition must directly or indirectly specialize the ConnectionDefinition *Connections::BinaryConnection* from the Systems Model Library.

ownedEndFeature->size() = 2 implies
specializesFromLibrary('Connections::BinaryConnections')

checkConnectionDefinitionSpecializations

A ConnectionDefinition must directly or indirectly specialize the ConnectionDefinition *Connections::Connection* from the Systems Model Library.

specializesFromLibrary('Connections::Connection')

8.3.13.4 ConnectionUsage

Description

AssociationStructure

Attributes

```
/connectionEnd : Usage [0..*] {redefines associationEnd, ordered}
```

The Usages that define the things related by the ConnectionDefinition.

Operations

None.

Constraints

```
checkConnectionDefinitionBinarySpecialization
```

A binary ConnectionDefinition must directly or indirectly specialize the ConnectionDefinition *Connections::BinaryConnection* from the Systems Model Library.

```
ownedEndFeature->size() = 2 implies  
    specializesFromLibrary('Connections::BinaryConnections')
```

```
checkConnectionDefinitionSpecializations
```

A ConnectionDefinition must directly or indirectly specialize the ConnectionDefinition *Connections::Connection* from the Systems Model Library.

```
specializesFromLibrary('Connections::Connection')
```

8.3.13.4 ConnectionUsage

Description

A ConnectionUsage is a ConnectorAsUsage that is also a PartUsage. Nominally, if its type is a ConnectionDefinition, then a ConnectionUsage is a Usage of that ConnectionDefinition, representing a connection between parts of a system. However, other kinds of kernel AssociationStructures are also allowed, to permit use of AssociationStructures from the Kernel Model Libraries.

General Classes

```
ConnectorAsUsage  
PartUsage
```

Attributes

```
/connectionDefinition : AssociationStructure [0..*] {subsets itemDefinition, redefines association, ordered}
```

The AssociationStructures that are the types of this ConnectionUsage. Nominally, these are , but other kinds of Kernel AssociationStructures are also allowed, to permit use of AssociationStructures from the Kernel Model Libraries

Operations

None.

A `ConnectionUsage` is a `ConnectorAsUsage` that is also a `PartUsage`. Nominally, if its type is a `ConnectionDefinition`, then a `ConnectionUsage` is a Usage of that `ConnectionDefinition`, representing a connection between parts of a system. However, other kinds of kernel `AssociationStructures` are also allowed, to permit use of `AssociationStructures` from the Kernel Model Libraries.

General Classes

`ConnectorAsUsage`
`PartUsage`

Attributes

/connectionDefinition : `AssociationStructure` [0..*] {subsets itemDefinition, redefines association, ordered}

The `AssociationStructures` that are the types of this `ConnectionUsage`. Nominally, these are , but other kinds of Kernel `AssociationStructures` are also allowed, to permit use of `AssociationStructures` from the Kernel Model Libraries

Operations

None.

Constraints

`checkConnectionUsageBinarySpecialization`

A binary `ConnectionUsage` must directly or indirectly specialize the `ConnectionUsage Connections::binaryConnections` from the Systems Model Library.

`ownedEndFeature->size() = 2 implies
specializesFromLibrary('Connections::binaryConnections')`

`checkConnectionUsageSpecialization`

A `ConnectionUsage` must directly or indirectly specialize the `ConnectionUsage Connections::connections` from the Systems Model Library.

`specializesFromLibrary('Connections::connections')`

8.3.13.5 ConnectorAsUsage

Description

A `ConnectorAsUsage` is both a `Connector` and a `Usage`. `ConnectorAsUsage` cannot itself be instantiated in a SysML model, but it is the base class for the concrete classes `BindingConnectorAsUsage`, `SuccessionAsUsage` and `ConnectionUsage`.

General Classes

`Usage`
`Connector`

Attributes

None.

Constraints

checkConnectionUsageBinarySpecialization

A binary ConnectionUsage must directly or indirectly specialize the ConnectionUsage Connections::binaryConnections from the Systems Model Library.

```
ownedEndFeature->size() = 2 implies  
    specializesFromLibrary('Connections::binaryConnections')
```

checkConnectionUsageSpecialization

A ConnectionUsage must directly or indirectly specialize the ConnectionUsage Connections::connections from the Systems Model Library.

```
specializesFromLibrary('Connections::connections')
```

8.3.13.5 ConnectorAsUsage

Description

A ConnectorAsUsage is both a Connector and a Usage. ConnectorAsUsage cannot itself be instantiated in a SysML model, but it is the base class for the concrete classes BindingConnectorAsUsage, SuccessionAsUsage and ConnectionUsage.

General Classes

Usage
Connector

Attributes

None.

Operations

None.

Constraints

None.

8.3.13.6 FlowConnectionDefinition

Description

A FlowConnectionDefinition is a ConnectionDefinition and ActionDefinition that is also an Interaction representing flows between Usages.

General Classes

ActionDefinition
ConnectionDefinition
Interaction

Operations

None.

Constraints

None.

8.3.13.6 FlowConnectionDefinition

Description

A `FlowConnectionDefinition` is a `ConnectionDefinition` and `ActionDefinition` that is also an `Interaction` representing flows between `Usages`.

General Classes

`ActionDefinition`
`ConnectionDefinition`
`Interaction`

Attributes

None.

Operations

None.

Constraints

`checkFlowConnectionDefinitionSpecialization`

A `FlowConnectionDefinition` must directly or indirectly specialize the base `FlowConnectionDefinition` `MessageConnectionDefinition` from the Systems Model Library.

`specializesFromLibrary('Connections::MessageConnection')`

8.3.13.7 FlowConnectionUsage

Description

A `FlowConnectionUsage` is a `ConnectionUsage` that is also an `ItemFlow`.

General Classes

`ActionUsage`
`ConnectionUsage`
`ItemFlow`

Attributes

`/flowConnectionDefinition : Interaction [0..*] {redefines actionDefinition, connectionDefinition, interaction, ordered}`

Attributes

None.

Operations

None.

Constraints

checkFlowConnectionDefinitionSpecialization

A `FlowConnectionDefinition` must directly or indirectly specialize the base `FlowConnectionDefinition` `MessageConnectionDefinition` from the Systems Model Library.

`specializesFromLibrary('Connections::MessageConnection')`

8.3.13.7 FlowConnectionUsage

Description

A `FlowConnectionUsage` is a `ConnectionUsage` that is also an `ItemFlow`.

General Classes

`ConnectionUsage`

`ItemFlow`

`ActionUsage`

Attributes

`/flowConnectionDefinition : Interaction [0..*] {redefines actionDefinition, connectionDefinition, interaction, ordered}`

The `Interactions` that are the types of this `FlowConnectionUsage`. Nominally, these are `FlowConnectionDefinitions`, but other kinds of Kernel `Interactions` are also allowed, to permit use of `Interactions` from the Kernel Model Libraries.

Operations

None.

Constraints

checkFlowConnectionUsageSpecialization

If a `FlowConnectionUsage` has no `ownedEndFeatures`, then it must directly or indirectly specialize the base `FlowConnectionUsage` `Connections::messageConnections` from the Systems Library model. Otherwise, it must directly or indirectly specialize the `FlowConnectionUsage` `Connections::flowConnections`.

```
if ownedEndFeatures->isEmpty() then
    specializesFromLibrary('Connections::messageConnections')
else
    specializesFromLibrary('Connections::flowConnections')
endif
```

The `Interactions` that are the types of this `FlowConnectionUsage`. Nominally, these are `FlowConnectionDefinitions`, but other kinds of Kernel `Interactions` are also allowed, to permit use of `Interactions` from the Kernel Model Libraries.

Operations

None.

Constraints

`checkFlowConnectionUsageSpecialization`

If a `FlowConnectionUsage` has no `ownedEndFeatures`, then it must directly or indirectly specialize the base `FlowConnectionUsage Connections::messageConnections` from the Systems Library model. Otherwise, it must directly or indirectly specialize the `FlowConnectionUsage Connections::flowConnections`.

```
if ownedEndFeatures->isEmpty() then
    specializesFromLibrary('Connections::messageConnections')
else
    specializesFromLibrary('Connections::flowConnections')
endif
```

8.3.13.8 SuccessionAsUsage

Description

A `SuccessionAsUsage` is both a `ConnectorAsUsage` and a `Succession`.

General Classes

`ConnectorAsUsage`
`Succession`

Attributes

None.

Operations

None.

Constraints

None.

8.3.13.9 SuccessionFlowConnectionUsage

Description

A `SuccessionFlowConnectionUsage` is a `FlowConnectionUsage` that is also a `SuccessionItemFlow`.

General Classes

`SuccessionItemFlow`
`FlowConnectionUsage`

Attributes

8.3.13.8 SuccessionAsUsage

Description

A SuccessionAsUsage is both a ConnectorAsUsage and a Succession.

General Classes

Succession

ConnectorAsUsage

Attributes

None.

Operations

None.

Constraints

None.

8.3.13.9 SuccessionFlowConnectionUsage

Description

A SuccessionFlowConnectionUsage is a FlowConnectionUsage that is also a SuccessionItemFlow.

General Classes

SuccessionItemFlow

FlowConnectionUsage

Attributes

None.

Operations

None.

Constraints

checkSuccessionFlowConnectionUsageSpecialization

A SuccessionFlowConnectionUsage must directly or indirectly specialize the base FlowConnectionUsage
Connections::successionFlowConnections from the Systems Library model.

specializesFromLibrary('Connections::successionFlowConnections')

8.3.14 Interfaces Abstract Syntax

None.

Operations

None.

Constraints

checkSuccessionFlowConnectionUsageSpecialization

A SuccessionFlowConnectionUsage must directly or indirectly specialize the base FlowConnectionUsage Connections::successionFlowConnections from the Systems Library model.

```
specializesFromLibrary('Connections::successionFlowConnections')
```

8.3.14 Interfaces Abstract Syntax

8.3.14.1 Overview

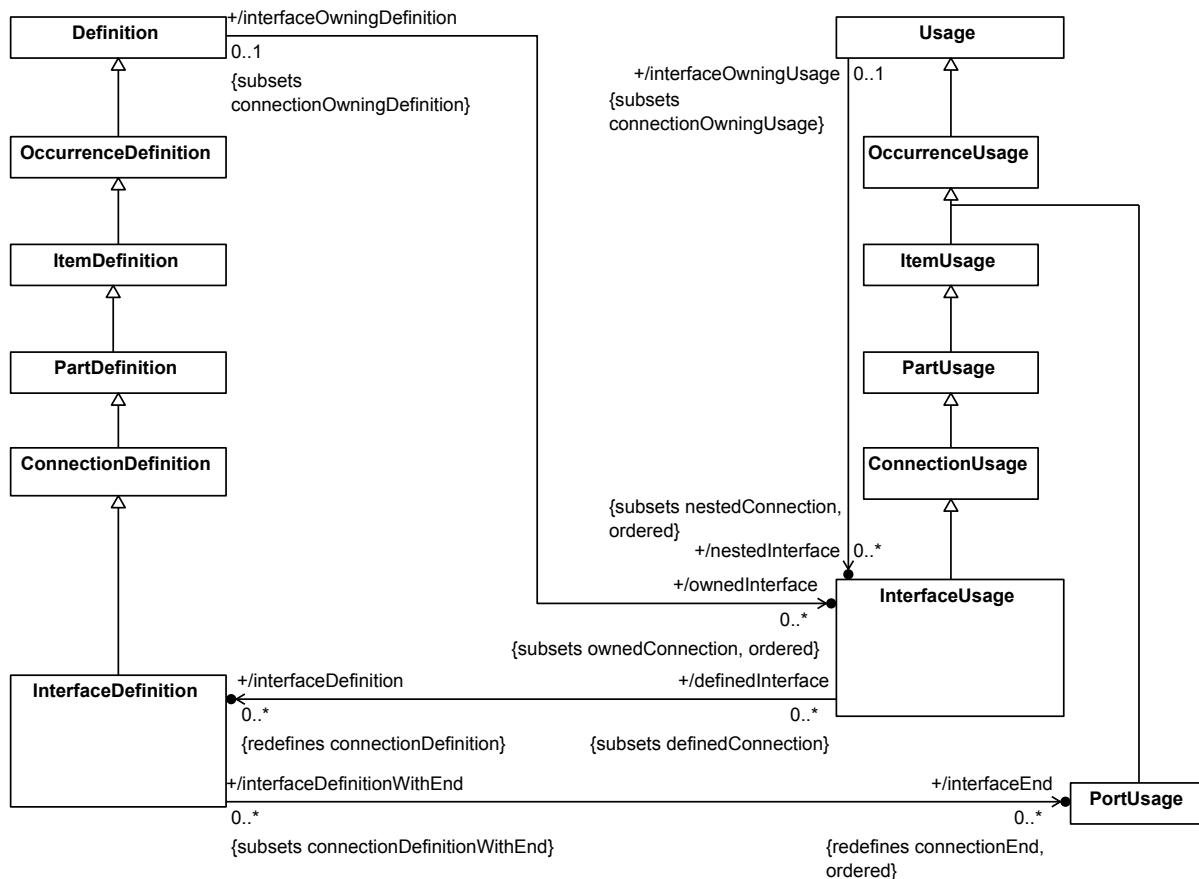


Figure 21. Interface Definition and Usage

8.3.14.2 InterfaceDefinition

Description

An InterfaceDefinition is a ConnectionDefinition all of whose ends are PortUsages, defining an interface between elements that interact through such ports.

8.3.14.1 Overview

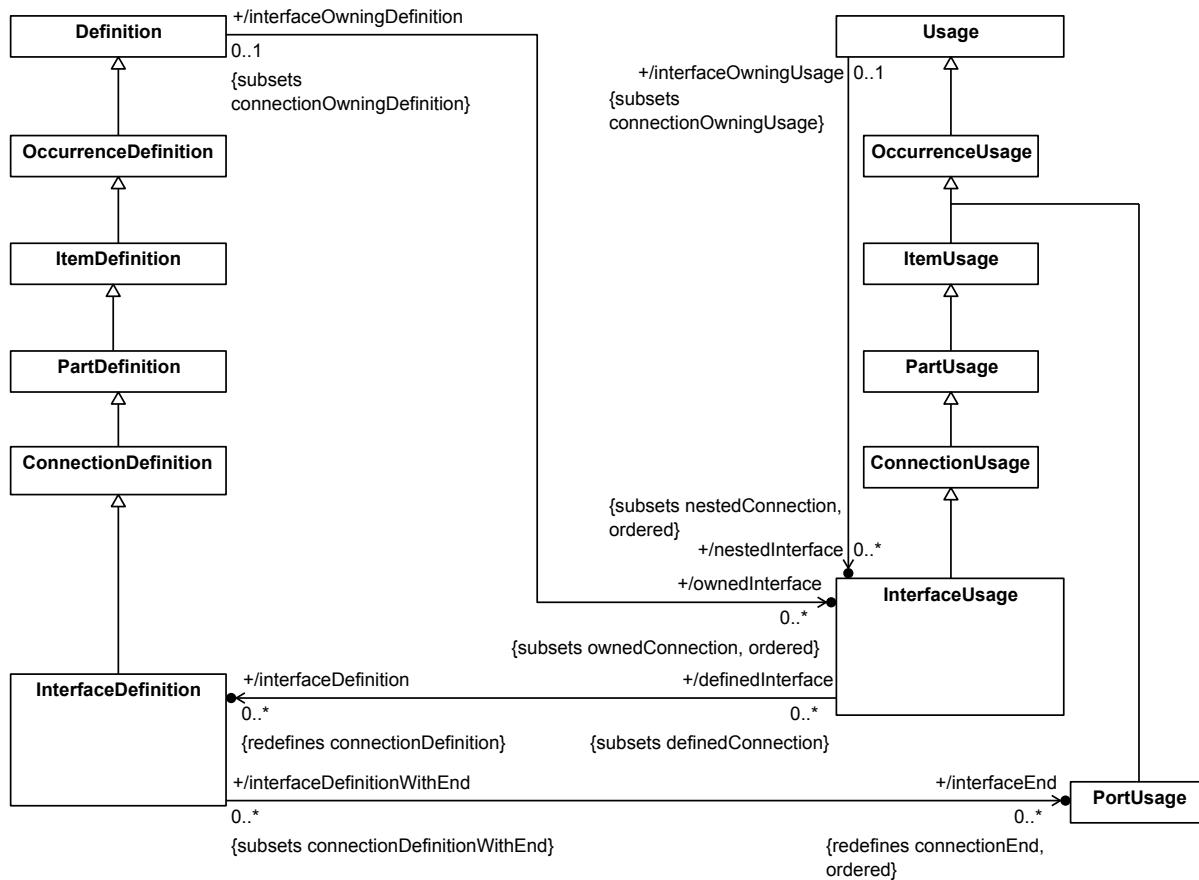


Figure 21. Interface Definition and Usage

8.3.14.2 InterfaceDefinition

Description

An **InterfaceDefinition** is a **ConnectionDefinition** all of whose ends are **PortUsages**, defining an interface between elements that interact through such ports.

General Classes

ConnectionDefinition

Attributes

`/interfaceEnd : PortUsage [0..*] {redefines connectionEnd, ordered}`

The **PortUsages** that are the `connectionEnds` of this **InterfaceDefinition**.

Operations

None.

Constraints

General Classes

ConnectionDefinition

Attributes

```
/interfaceEnd : PortUsage [0..*] {redefines connectionEnd, ordered}
```

The PortUsages that are the connectionEnds of this InterfaceDefinition

Operations

None.

Constraints

checkInterfaceDefinitionBinarySpecialization

A binary InterfaceDefinition must directly or indirectly specialize the InterfaceDefinition *Interfaces::BinaryInterface* from the Systems Model Library.

```
ownedEndFeature->size() = 2 implies  
    specializesFromLibrary('Interfaces::BinaryInterface')
```

checkInterfaceDefinitionSpecialization

An InterfaceDefinition must directly or indirectly specialize the InterfaceDefinition *Interfaces::Interface* from the Systems Model Library.

```
specializesFromLibrary('Interfaces::Interface')
```

8.3.14.3 InterfaceUsage

Description

An InterfaceUsage is a Usage of an InterfaceDefinition to represent an interface connecting parts of a system through specific ports.

General Classes

ConnectionUsage

Attributes

```
/interfaceDefinition : InterfaceDefinition [0..*] {redefines connectionDefinition}
```

The InterfaceDefinitions that type this InterfaceUsage.

Operations

None.

Constraints

checkInterfaceUsageBinarySpecialization

checkInterfaceDefinitionBinarySpecialization

A binary `InterfaceDefinition` must directly or indirectly specialize the `InterfaceDefinition Interfaces::BinaryInterface` from the Systems Model Library.

```
ownedEndFeature->size() = 2 implies  
    specializesFromLibrary('Interfaces::BinaryInterface')
```

checkInterfaceDefinitionSpecialization

An `InterfaceDefinition` must directly or indirectly specialize the `InterfaceDefinition Interfaces::Interface` from the Systems Model Library.

```
specializesFromLibrary('Interfaces::Interface')
```

8.3.14.3 InterfaceUsage

Description

An `InterfaceUsage` is a Usage of an `InterfaceDefinition` to represent an interface connecting parts of a system through specific ports.

General Classes

`ConnectionUsage`

Attributes

```
/interfaceDefinition : InterfaceDefinition [0..*] {redefines connectionDefinition}
```

The `InterfaceDefinitions` that type this `InterfaceUsage`.

Operations

None.

Constraints

checkInterfaceUsageBinarySpecialization

A binary `InterfaceUsage` must directly or indirectly specialize the `InterfaceUsage Interfaces::binaryInterfaces` from the Systems Model Library.

```
ownedEndFeature->size() = 2 implies  
    specializesFromLibrary('Interfaces::binaryInterfaces')
```

checkInterfaceUsageSpecialization

An `InterfaceUsage` must directly or indirectly specialize the `InterfaceUsage Interfaces::interfaces` from the Systems Model Library.

```
specializesFromLibrary('Interfaces::interfaces')
```

8.3.15 Allocations Abstract Syntax

A binary `InterfaceUsage` must directly or indirectly specialize the `InterfaceUsage` `Interfaces::binaryInterfaces` from the Systems Model Library.

```
ownedEndFeature->size() = 2 implies
    specializesFromLibrary('Interfaces::binaryInterfaces')
```

`checkInterfaceUsageSpecialization`

An `InterfaceUsage` must directly or indirectly specialize the `InterfaceUsage` `Interfaces::interfaces` from the Systems Model Library.

```
specializesFromLibrary('Interfaces::interfaces')
```

8.3.15 Allocations Abstract Syntax

8.3.15.1 Overview

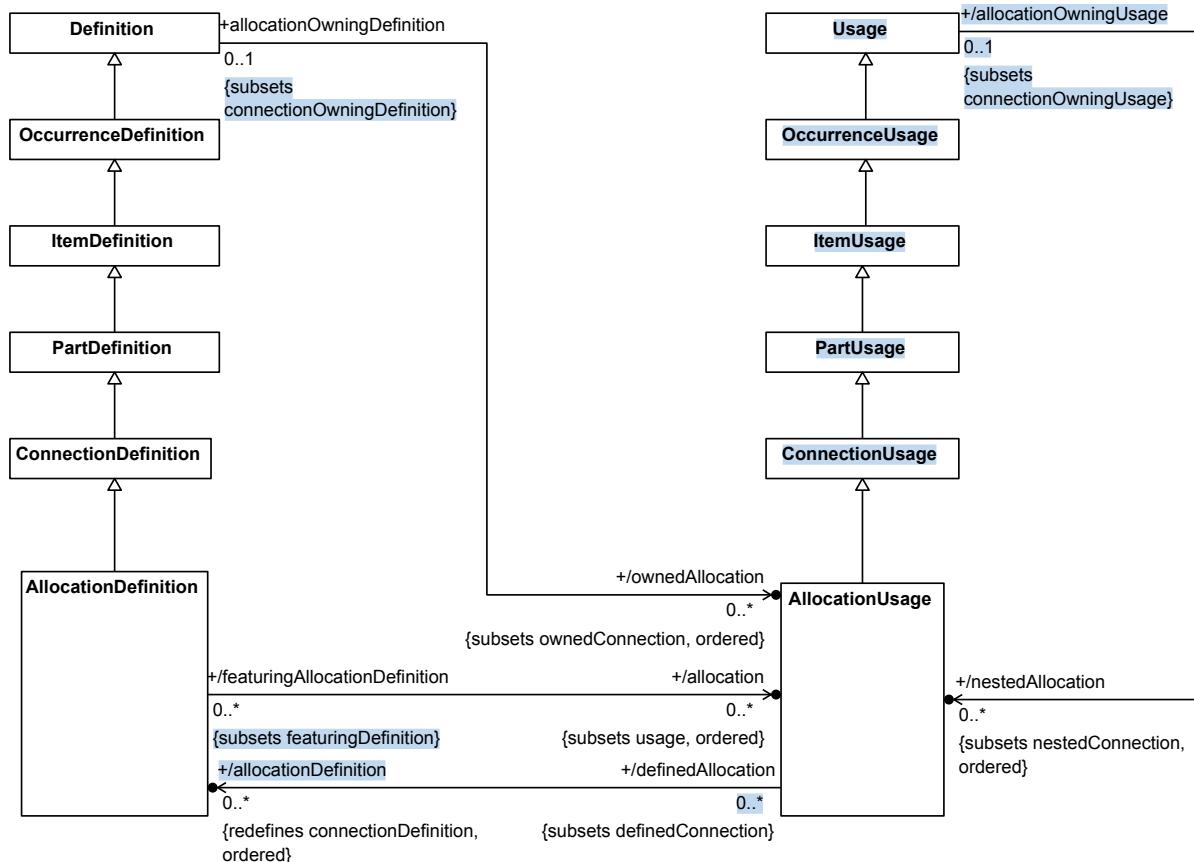


Figure 22. Allocation Definition and Usage

8.3.15.2 AllocationDefinition

Description

An `AllocationDefinition` is a `ConnectionDefinition` that specifies that some or all of the responsibility to realize the intent of the `source` is allocated to the `target` instances. Such allocations define mappings across the various structures and hierarchies of a system model, perhaps as a precursor to more rigorous specifications and

8.3.15.1 Overview

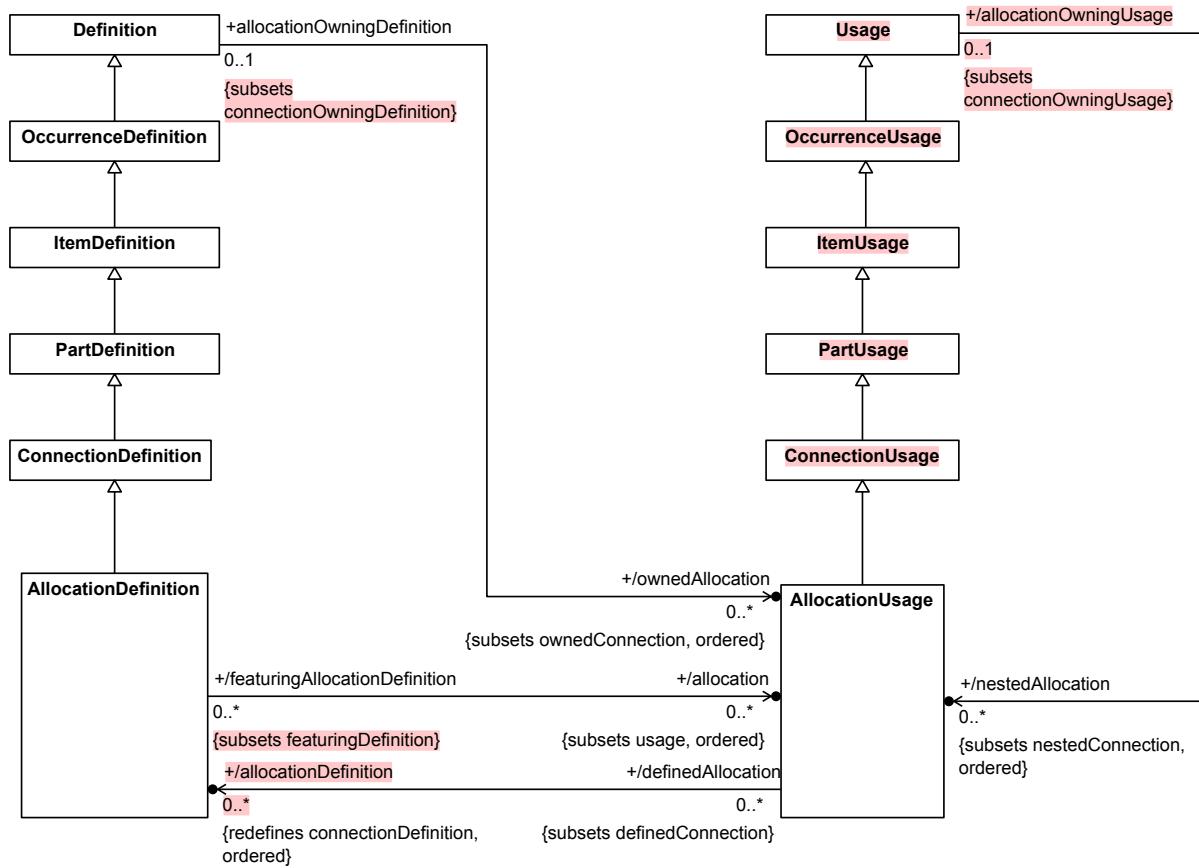


Figure 22. Allocation Definition and Usage

8.3.15.2 AllocationDefinition

Description

An **AllocationDefinition** is a **ConnectionDefinition** that specifies that some or all of the responsibility to realize the intent of the source is allocated to the target instances. Such allocations define mappings across the various structures and hierarchies of a system model, perhaps as a precursor to more rigorous specifications and implementations. An **AllocationDefinition** can itself be refined using nested allocations that give a finer-grained decomposition of the containing allocation mapping.

General Classes

ConnectionDefinition

Attributes

/allocation : **AllocationUsage** [0..*] {subsets usage, ordered}

The **AllocationUsages** that refine the allocation mapping defined by this **AllocationDefinition**.

Operations

implementations. An `AllocationDefinition` can itself be refined using nested `allocations` that give a finer-grained decomposition of the containing allocation mapping.

General Classes

`ConnectionDefinition`

Attributes

`/allocation : AllocationUsage [0..*] {subsets usage, ordered}`

The `AllocationUsages` that refine the allocation mapping defined by this `AllocationDefinition`.

Operations

None.

Constraints

`checkAllocationDefinitionSpecialization`

An `AllocationDefinition` must directly or indirectly specialize the `AllocationDefinition` `Allocations::Allocation` from the Systems Model Library.

`specializesFromLibrary('Allocations::Allocation')`

`deriveAllocationDefinitionAllocation`

The allocations of an `AllocationDefinition` are all its usages that are `AllocationUsages`.

`allocation = usage->selectAsKind(AllocationUsage)`

8.3.15.3 AllocationUsage

Description

An `AllocationUsage` is a usage of an `AllocationDefinition` asserting the allocation of the `source` feature to the `target` feature.

General Classes

`ConnectionUsage`

Attributes

`/allocationDefinition : AllocationDefinition [0..*] {redefines connectionDefinition, ordered}`

The `AllocationDefinitions` that are the types of this `AllocationUsage`.

Operations

None.

Constraints

`checkAllocationUsageSpecialization`

None.

Constraints

checkAllocationDefinitionSpecialization

An AllocationDefinition must directly or indirectly specialize the AllocationDefinition *Allocations::Allocation* from the Systems Model Library.

```
specializesFromLibrary('Allocations::Allocation')
```

deriveAllocationDefinitionAllocation

The allocations of an AllocationDefinition are all its usages that are AllocationUsages.

```
allocation = usage->selectAsKind(AllocationUsage)
```

8.3.15.3 AllocationUsage

Description

An AllocationUsage is a usage of an AllocationDefinition asserting the allocation of the source feature to the target feature.

General Classes

ConnectionUsage

Attributes

/allocationDefinition : AllocationDefinition [0..*] {redefines connectionDefinition, ordered}

The AllocationDefinitions that are the types of this AllocationUsage.

Operations

None.

Constraints

checkAllocationUsageSpecialization

An AllocationUsage must directly or indirectly specialize the AllocationUsage *Allocations::allocations* from the Systems Model Library.

```
specializesFromLibrary('Allocations::allocations')
```

8.3.16 Actions Abstract Syntax

An AllocationUsage must directly or indirectly specialize the AllocationUsage Allocations::allocations from the Systems Model Library.

```
specializesFromLibrary('Allocations::allocations')
```

8.3.16 Actions Abstract Syntax

8.3.16.1 Overview

SYSML2_44: Transformation of UML4SysML::ActivityFinalNode is not specified yet

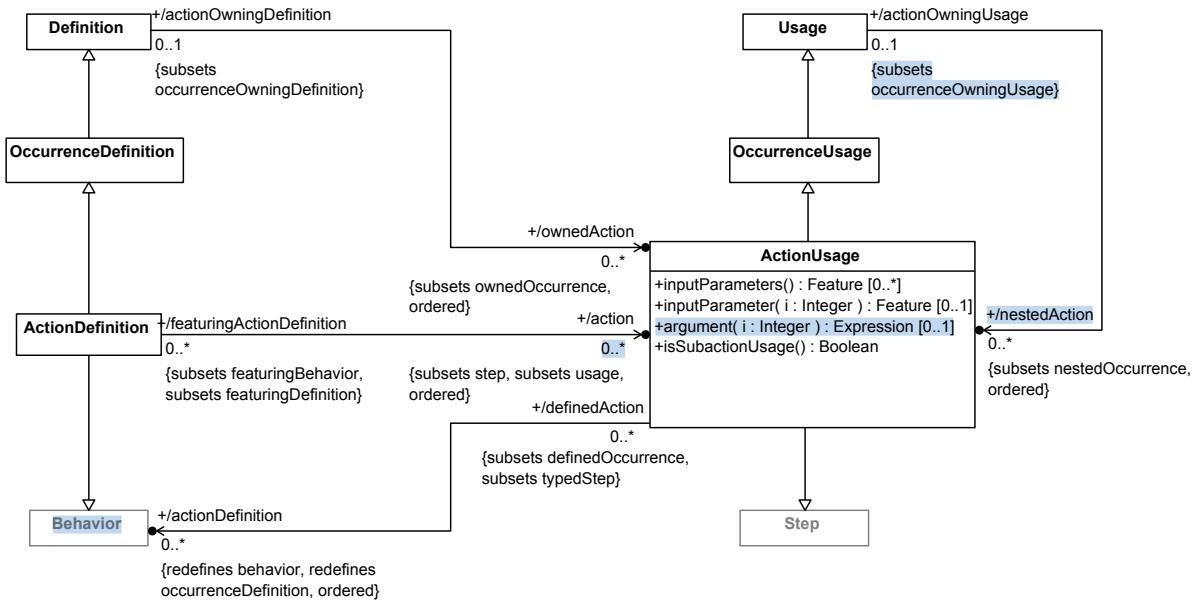


Figure 23. Action Definition and Usage

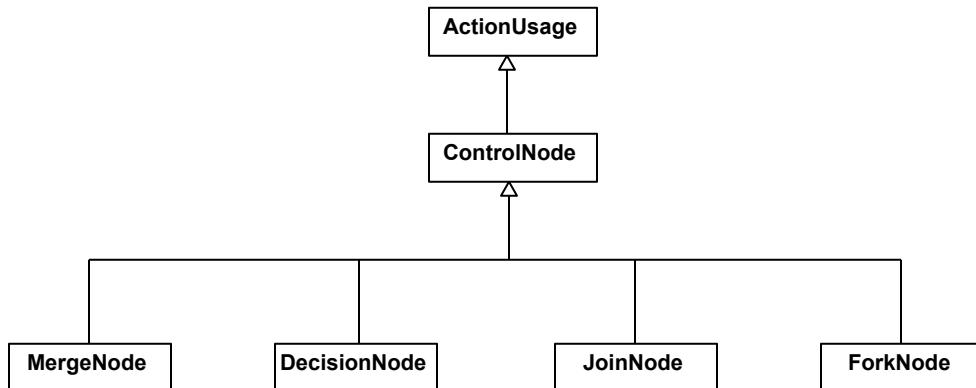


Figure 24. Control Nodes

8.3.16.1 Overview

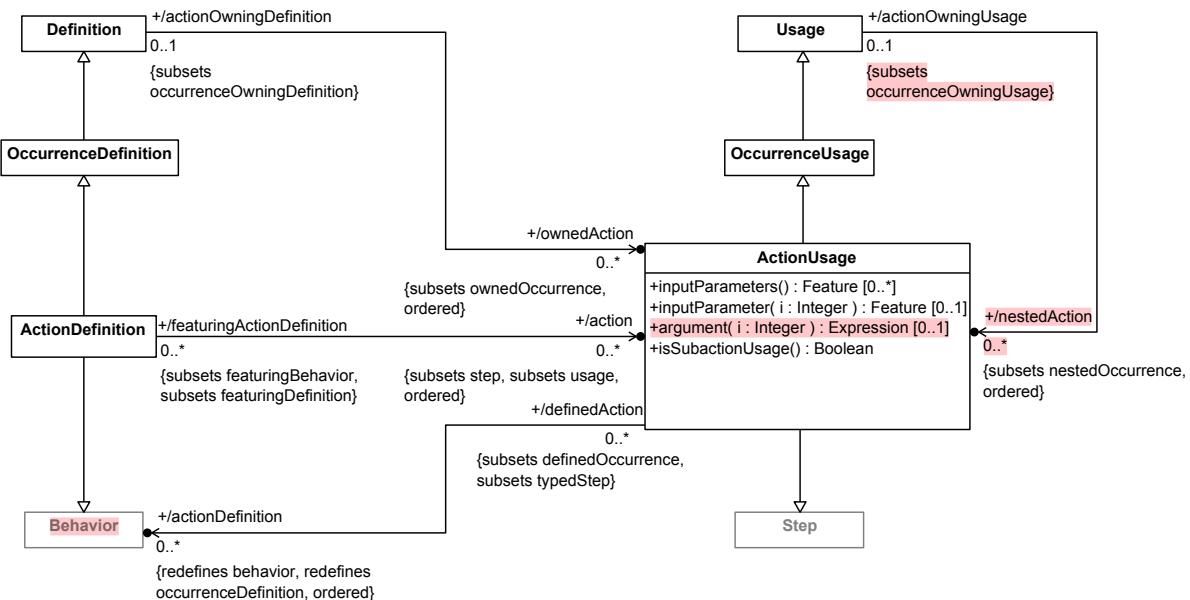


Figure 23. Action Definition and Usage

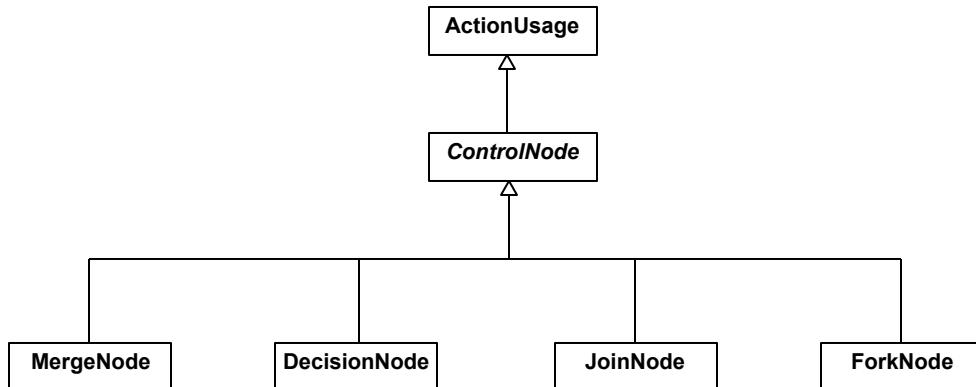


Figure 24. Control Nodes

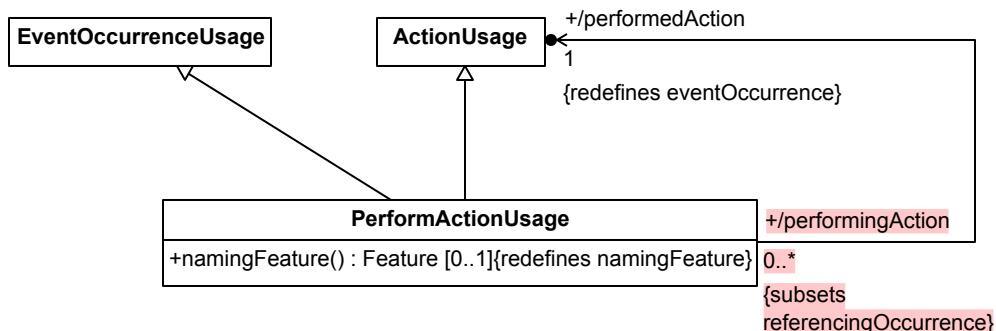


Figure 25. Performed Actions

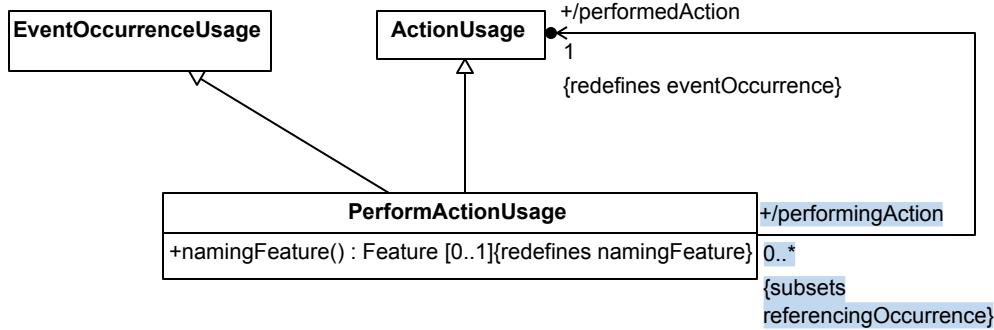


Figure 25. Performed Actions

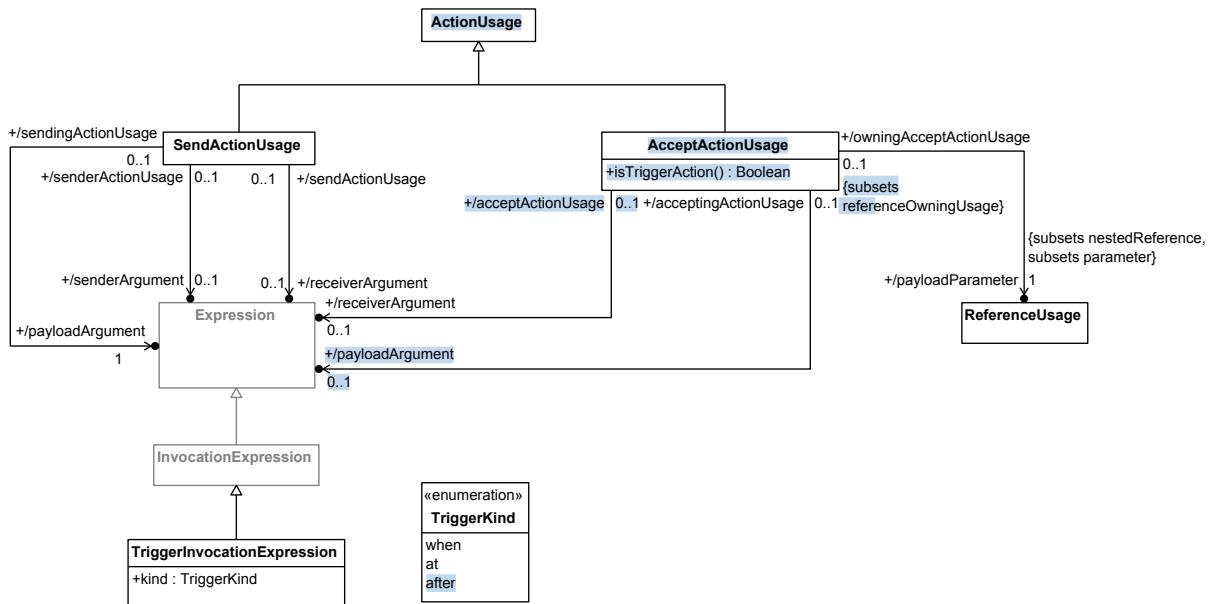


Figure 26. Send and Accept Actions

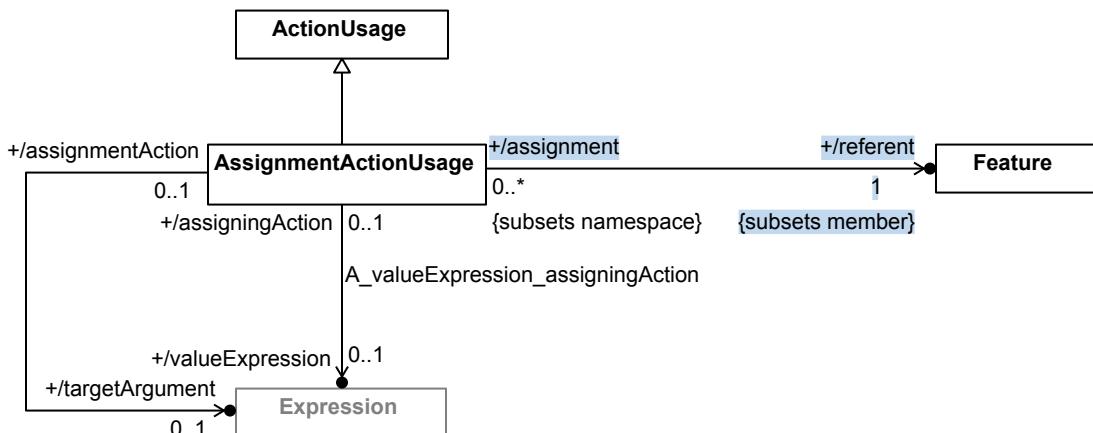


Figure 27. Assignment Actions

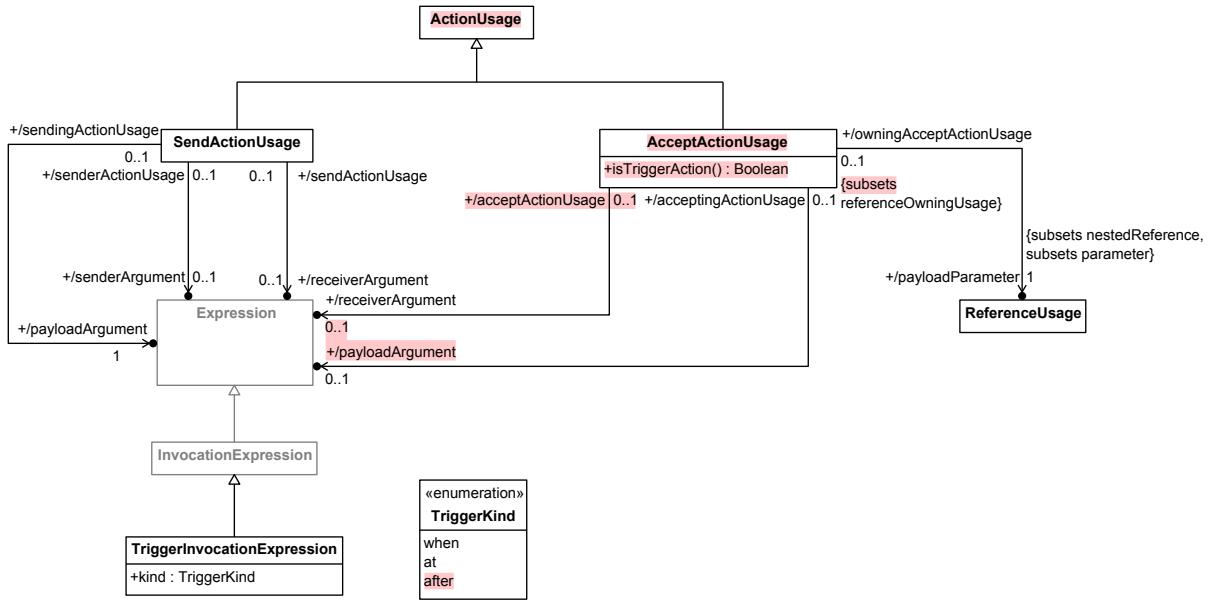


Figure 26. Send and Accept Actions

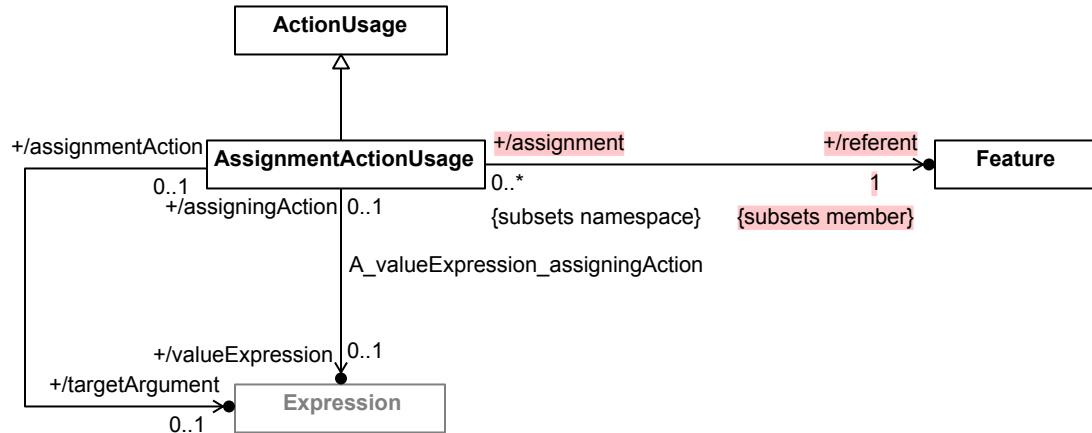


Figure 27. Assignment Actions

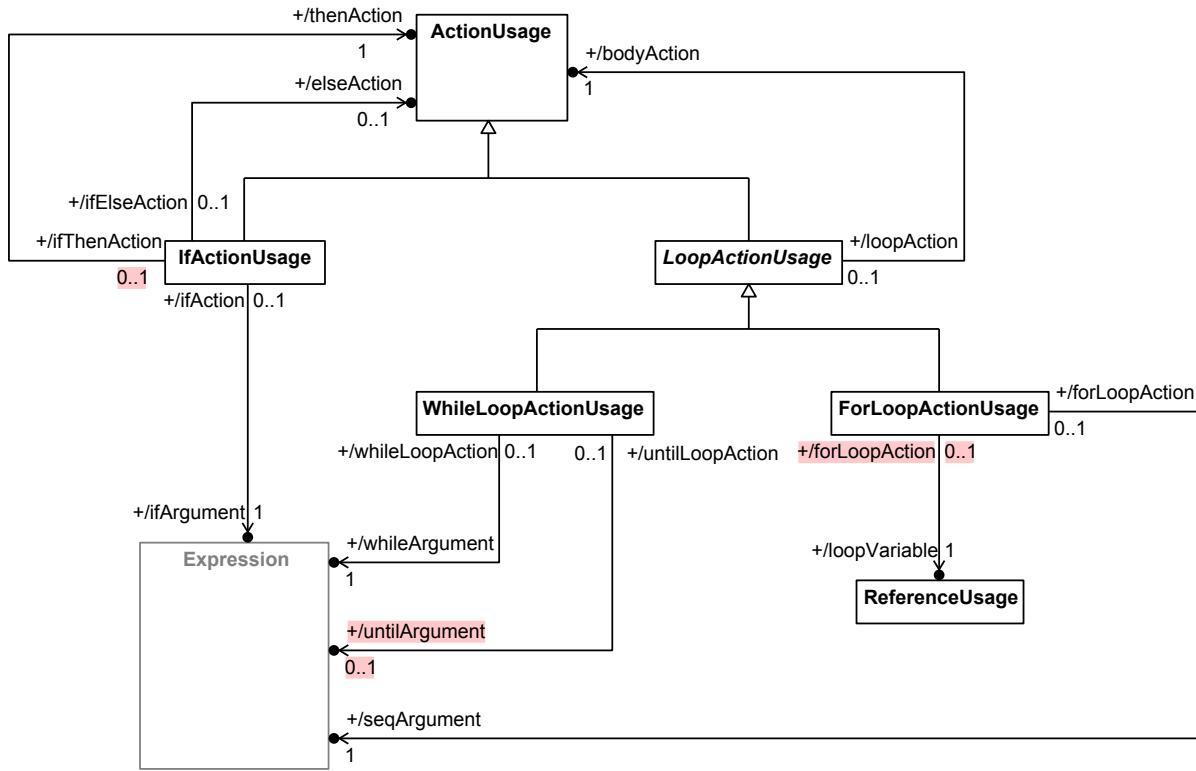


Figure 28. Structured Control Actions

8.3.16.2 AcceptActionUsage

Description

An `AcceptActionUsage` is an `ActionUsage` that specifies the acceptance of an *incomingTransfer* from the *Occurrence* given by the result of its `receiverArgument` `Expression`. (If no `receiverArgument` is provided, the default is the *this* context of the `AcceptActionUsage`.) The payload of the accepted `Transfer` is output on its `payloadParameter`. Which `Transfers` may be accepted is determined by conformance to the typing and (potentially) binding of the `payloadParameter`.

General Classes

`ActionUsage`

Attributes

`/payloadArgument : Expression [0..1]`

An `Expression` whose result is bound to the `payload` parameter of this `AcceptActionUsage`. If provided, the `AcceptActionUsage` will only accept a `Transfer` with exactly this `payload`.

`/payloadParameter : ReferenceUsage {subsets nestedReference, parameter}`

The `nestedReference` of this `AcceptActionUsage` that redefines the `payload` output parameter of the base `AcceptActionUsage` `AcceptAction` from the Systems Model Library.

`/receiverArgument : Expression [0..1]`

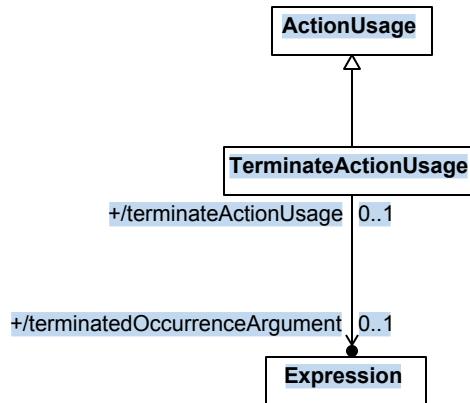


Figure 28. Terminate Actions

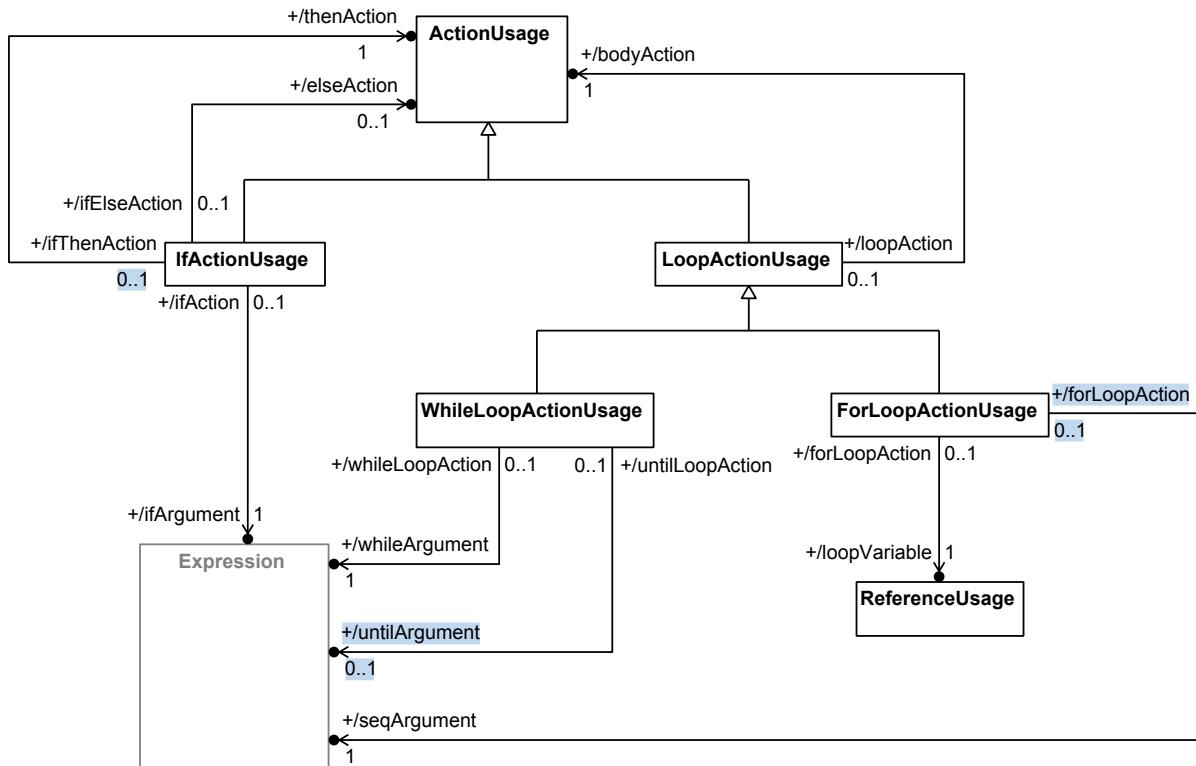


Figure 29. Structured Control Actions

8.3.16.2 AcceptActionUsage

Description

An **AcceptActionUsage** is an **ActionUsage** that specifies the acceptance of an *incomingTransfer* from the *Occurrence* given by the result of its *receiverArgument* **Expression**. (If no *receiverArgument* is provided, the default is the *this* context of the **AcceptActionUsage**.) The payload of the accepted *Transfer* is output on its *payloadParameter*. Which *Transfers* may be accepted is determined by conformance to the typing and (potentially) binding of the *payloadParameter*.

General Classes

An Expression whose result is bound to the `receiver` input parameter of this `AcceptActionUsage`.

Operations

`isTriggerAction() : Boolean`

Check if this `AcceptActionUsage` is the `triggerAction` of a `TransitionUsage`.

```
body: owningType <> null and
owningType.oclIsKindOf(TransitionUsage) and
owningType.oclAsType(TransitionUsage).triggerAction->includes(self)
```

Constraints

`checkAcceptActionUsageReceiverBindingConnector`

If the `payloadArgument` of an `AcceptActionUsage` is a `TriggerInvocationExpression`, then the `AcceptActionUsage` must have an `ownedFeature` that is a `BindingConnector` between its `receiver` parameter and the `receiver` parameter of the `TriggerInvocationExpression`.

```
payloadArgument <> null and
payloadArgument.oclIsKindOf(TriggerInvocationExpression) implies
    let invocation : Expression =
        payloadArgument.oclAsType(Expression) in
    parameter->size() >= 2 and
    invocation.parameter->size() >= 2 and
    ownedFeature->selectByKind(BindingConnector)->exists(b |
        b.relatedFeatures->includes(parameter->at(2)) and
        b.relatedFeatures->includes(invocation.parameter->at(2)))
```

`checkAcceptActionUsageSpecialization`

An `AcceptActionUsage` that is not the `triggerAction` of a `TransitionUsage` must directly or indirectly specialize the ActionUsage `Actions::acceptActions` from the Systems Model Library.

```
not isTriggerAction() implies
    specializesFromLibrary('Actions::acceptActions')
```

`checkAcceptActionUsageSubactionSpecialization`

A composite `AcceptActionUsage` that is a subaction usage, but is *not* the `triggerAction` of a `TransitionUsage`, must directly or indirectly specialize the ActionUsage `Actions::Action::acceptSubactions` from the Systems Model Library.

```
isSubactionUsage() and not isTriggerAction() implies
    specializesFromLibrary('Actions::Action::acceptSubactions')
```

`checkAcceptActionUsageTriggerActionSpecialization`

An `AcceptActionUsage` that is the `triggerAction` of `TransitionUsage` must directly or indirectly specialize the ActionUsage `Actions::TransitionAction::accepter` from the Systems Model Library.

```
isTriggerAction() implies
    specializesFromLibrary('Actions::TransitionAction::accepter')
```

`deriveAcceptActionUsagePayloadArgument`

ActionUsage

Attributes

/payloadArgument : Expression [0..1]

An Expression whose result is bound to the *payload* parameter of this AcceptActionUsage. If provided, the AcceptActionUsage will only accept a *Transfer* with exactly this *payload*.

/payloadParameter : ReferenceUsage {subsets nestedReference, parameter}

The *nestedReference* of this AcceptActionUsage that redefines the *payload output* parameter of the base AcceptActionUsage *AcceptAction* from the Systems Model Library.

/receiverArgument : Expression [0..1]

An Expression whose result is bound to the *receiver input* parameter of this AcceptActionUsage.

Operations

isTriggerAction() : Boolean

Check if this AcceptActionUsage is the triggerAction of a TransitionUsage.

body: owningType <> null and
owningType.oclIsKindOf(TransitionUsage) and
owningType.oclAsType(TransitionUsage).triggerAction->includes(self)

Constraints

checkAcceptActionUsageReceiverBindingConnector

If the payloadArgument of an AcceptActionUsage is a TriggerInvocationExpression, then the AcceptActionUsage must have an ownedFeature that is a BindingConnector between its receiver parameter and the receiver parameter of the TriggerInvocationExpression.

```
payloadArgument <> null and
payloadArgument.oclIsKindOf(TriggerInvocationExpression) implies
    let invocation : Expression =
        payloadArgument.oclAsType(Expression) in
    parameter->size() >= 2 and
    invocation.parameter->size() >= 2 and
    ownedFeature->selectByKind(BindingConnector)->exists(b |
        b.relatedFeatures->includes(parameter->at(2)) and
        b.relatedFeatures->includes(invocation.parameter->at(2)))
```

checkAcceptActionUsageSpecialization

An AcceptActionUsage that is not the triggerAction of a TransitionUsage must directly or indirectly specialize the ActionUsage *Actions::acceptActions* from the Systems Model Library.

```
not isTriggerAction() implies
    specializesFromLibrary('Actions::acceptActions')
```

checkAcceptActionUsageSubactionSpecialization

The payloadArgument of an AcceptUsageAction is its first argument Expression.

```
payloadArgument = argument(1)  
  
deriveAcceptActionUsagePayloadParameter
```

The payloadParameter of an AcceptActionUsage is its first parameter.

```
payloadParameter =  
  if parameter->isEmpty() then null  
  else parameter->first() endif
```

```
deriveAcceptActionUsageReceiverArgument
```

The receiverArgument of an AcceptUsageAction is its second argument Expression.

```
receiverArgument = argument(2)  
  
validateAcceptActionUsageParameters
```

An AcceptUsageAction must have at least two input parameters, corresponding to its *payload* and *receiver*, respectively (even if they have no FeatureValue). (Note that the payloadParameter is an input as well as an output.)

```
inputParameters()->size() >= 2
```

8.3.16.3 ActionDefinition

Description

An ActionDefinition is a Definition that is also a Behavior that defines an Action performed by a system or part of a system.

General Classes

OccurrenceDefinition
Behavior

Attributes

/action : ActionUsage [0..*] {subsets step, usage, ordered}

The ActionUsages that are steps in this ActionDefinition, which define the actions that specify the behavior of the ActionDefinition.

Operations

None.

Constraints

checkActionDefinitionSpecialization

An ActionDefinition must directly or indirectly specialize the ActionDefinition Actions::Action from the Systems Model Library.

A composite `AcceptActionUsage` that is a subaction usage, but is *not* the `triggerAction` of a `TransitionUsage`, must directly or indirectly specialize the `ActionUsage Actions::Action::acceptSubactions` from the Systems Model Library.

```
isSubactionUsage() and not isTriggerAction() implies  
specializesFromLibrary('Actions::Action::acceptSubactions')
```

`checkAcceptActionUsageTriggerActionSpecialization`

An `AcceptActionUsage` that is the `triggerAction` of `TransitionUsage` must directly or indirectly specialize the `ActionUsage Actions::TransitionAction::accepter` from the Systems Model Library.

```
isTriggerAction() implies  
specializesFromLibrary('Actions::TransitionAction::accepter')
```

`deriveAcceptActionUsagePayloadArgument`

The `payloadArgument` of an `AcceptUsageAction` is its first argument `Expression`.

```
payloadArgument = argument(1)
```

`deriveAcceptActionUsagePayloadParameter`

The `payloadParameter` of an `AcceptActionUsage` is its first parameter.

```
payloadParameter =  
if parameter->isEmpty() then null  
else parameter->first() endif
```

`deriveAcceptActionUsageReceiverArgument`

The `receiverArgument` of an `AcceptUsageAction` is its second argument `Expression`.

```
receiverArgument = argument(2)
```

`validateAcceptActionUsageParameters`

An `AcceptUsageAction` must have at least two input parameters, corresponding to its `payload` and `receiver`, respectively (even if they have no `FeatureValue`). (Note that the `payloadParameter` is an input as well as an output.)

```
inputParameters()->size() >= 2
```

8.3.16.3 ActionDefinition

Description

An `ActionDefinition` is a `Definition` that is also a `Behavior` that defines an `Action` performed by a system or part of a system.

General Classes

`OccurrenceDefinition`
`Behavior`

Attributes

```
specializesFromLibrary('Actions::Action')
```

```
deriveActionDefinitionAction
```

The actions of a ActionDefinition are those of its usages that are ActionUsages.

```
action = usage->selectByKind(ActionUsage)
```

8.3.16.4 ActionUsage

Description

An ActionUsage is a Usage that is also a Step, and, so, is typed by a Behavior. Nominally, if the type is an ActionDefinition, an ActionUsage is a Usage of that ActionDefinition within a system. However, other kinds of kernel Behaviors are also allowed, to permit use of Behaviors from the Kernel Model Libraries.

General Classes

OccurrenceUsage

Step

Attributes

```
/actionDefinition : Behavior [0..*] {redefines behavior, occurrenceDefinition, ordered}
```

The Behaviors that are the types of this ActionUsage. Nominally, these would be ActionDefinitions, but other kinds of Kernel Behaviors are also allowed, to permit use of Behaviors from the Kernel Model Libraries.

Operations

```
argument(i : Integer) : Expression [0..1]
```

Return the i-th argument Expression of an ActionUsage, defined as the value Expression of the FeatureValue of the i-th owned input parameter of the ActionUsage. Return null if the ActionUsage has less than i owned input parameters or the i-th owned input parameter has no FeatureValue.

```
body: if inputParameter(i) = null then null
else
    let featureValue : Sequence(FeatureValue) = inputParameter(i).
        ownedMembership->select(oclIsKindOf(FeatureValue)) in
    if featureValue->isEmpty() then null
    else featureValue->at(1).value
    endif
endif
```

```
inputParameter(i : Integer) : Feature [0..1]
```

Return the i-th owned input parameter of the ActionUsage. Return null if the ActionUsage has less than i owned input parameters.

```
body: if inputParameters()->size() < i then null
else inputParameters()->at(i)
endif
```

```
inputParameters() : Feature [0..*]
```

```
/action : ActionUsage [0..*] {subsets step, usage, ordered}
```

The ActionUsages that are steps in this ActionDefinition, which define the actions that specify the behavior of the ActionDefinition.

Operations

None.

Constraints

checkActionDefinitionSpecialization

An ActionDefinition must directly or indirectly specialize the ActionDefinition Actions::Action from the Systems Model Library.

```
specializesFromLibrary('Actions::Action')
```

deriveActionDefinitionAction

The actions of a ActionDefinition are those of its usages that are ActionUsages.

```
action = usage->selectByKind(ActionUsage)
```

8.3.16.4 ActionUsage

SYSML2 -187: There is no need for AnalysisAction

Description

An ActionUsage is a Usage that is also a Step, and, so, is typed by a Behavior. Nominally, if the type is an ActionDefinition, an ActionUsage is a Usage of that ActionDefinition within a system. However, other kinds of kernel Behaviors are also allowed, to permit use of Behaviors from the Kernel Model Libraries.

General Classes

Step
OccurrenceUsage

Attributes

```
/actionDefinition : Behavior [0..*] {redefines behavior, occurrenceDefinition, ordered}
```

The Behaviors that are the types of this ActionUsage. Nominally, these would be ActionDefinitions, but other kinds of Kernel Behaviors are also allowed, to permit use of Behaviors from the Kernel Model Libraries.

Operations

argument(i : Integer) : Expression [0..1]

Return the i-th argument Expression of an ActionUsage, defined as the value Expression of the FeatureValue of the i-th owned input parameter of the ActionUsage. Return null if the ActionUsage has less than i owned input parameters or the i-th owned input parameter has no FeatureValue.

```
body: if inputParameter(i) = null then null
else
    let featureValue : Sequence(FeatureValue) = inputParameter(i).
```

Return the owned input parameters of this ActionUsage.

```
body: input->select(f | f.owner = self)
```

isSubactionUsage() : Boolean

Check if this ActionUsage is composite and has an owningType that is an ActionDefinition or ActionUsage but is *not* the entryAction or exitAction of a StateDefinition or StateUsage. If so, then it represents an Action that is a *subaction* of another Action.

```
body: isComposite and owningType <> null and
(owningType.oclIsKindOf(ActionDefinition) or
owningType.oclIsKindOf(ActionUsage)) and
(owningFeatureMembership.oclIsKindOf(StateSubactionMembership) implies
owningFeatureMembership.oclAsType(StateSubactionMembership).kind =
StateSubactionKind::do)
```

Constraints

checkActionUsageAnalysisActionSpecialization

An ActionUsage that is an analysisAction of an AnalysisCaseDefinition or and AnalysisCaseUsage must directly or indirectly specialize the ActionUsage *AnalysisCases::AnalysisCase::analysisSteps* from the Systems Model Library.

```
owningType <> null and
(owningType.oclIsKindOf(AnalysisCaseDefinition) and
owningType.oclAsType(AnalysisCaseDefinition).analysisAction->
includes(self) or
owningType.oclIsKindOf(AnalysisCaseUsage) and
owningType.oclAsType(AnalysisCaseUsage).analysisAction->
includes(self)) implies
specializesFromLibrary('AnalysisCases::AnalysisCase::analysisSteps')
```

checkActionUsageOwnedActionSpecialization

A composite ActionUsage whose owningType is PartDefinition or PartUsage must directly or indirectly specialize the ActionUsage *Parts::Part::ownedActions* from the Systems Model Library.

```
isComposite and owningType <> null and
(owningType.oclIsKindOf(PartDefinition) or
owningType.oclIsKindOf(PartUsage)) implies
specializesFromLibrary('Parts::Part::ownedActions')
```

checkActionUsageSpecialization

An ActionUsage must directly or indirectly specialize the ActionUsage *Actions::actions* from the Systems Model Library.

```
specializesFromLibrary('Actions::actions')
```

checkActionUsageStateActionRedefinition

An ActionUsage that is the *entry*, *do*, or *exit Action* of a StateDefinition or StateUsage must redefine the entryAction, doAction, or exitAction feature, respectively, of the StateDefinition *States::StateAction* from the Systems Model Library.

```

    ownedMembership->select(oclIsKindOf(FeatureValue)) in
    if featureValue->isEmpty() then null
    else featureValue->at(1).value
    endif
endif

```

inputParameter(i : Integer) : Feature [0..1]

Return the *i*-th owned input parameter of the ActionUsage. Return null if the ActionUsage has less than *i* owned input parameters.

```

body: if inputParameters()->size() < i then null
else inputParameters()->at(i)
endif

```

inputParameters() : Feature [0..*]

Return the owned input parameters of this ActionUsage.

```

body: input->select(f | f.owner = self)

```

isSubactionUsage() : Boolean

Check if this ActionUsage is composite and has an owningType that is an ActionDefinition or ActionUsage but is *not* the entryAction or exitAction of a StateDefinition or StateUsage. If so, then it represents an Action that is a *subaction* of another Action.

```

body: isComposite and owningType <> null and
(owningType.oclIsKindOf(ActionDefinition) or
owningType.oclIsKindOf(ActionUsage)) and
(owningFeatureMembership.oclIsKindOf(StateSubactionMembership) implies
owningFeatureMembership.oclAsType(StateSubactionMembership).kind =
StateSubactionKind::do)

```

Constraints

checkActionUsageOwnedActionSpecialization

A composite ActionUsage whose owningType is PartDefinition or PartUsage must directly or indirectly specialize the ActionUsage *Parts::Part::ownedActions* from the Systems Model Library.

```

isComposite and owningType <> null and
(owningType.oclIsKindOf(PartDefinition) or
owningType.oclIsKindOf(PartUsage)) implies
specializesFromLibrary('Parts::Part::ownedActions')

```

checkActionUsageSpecialization

An ActionUsage must directly or indirectly specialize the ActionUsage *Actions::actions* from the Systems Model Library.

```

specializesFromLibrary('Actions::actions')

```

checkActionUsageStateActionRedefinition

An ActionUsage that is the *entry*, *do*, or *exit Action* of a StateDefinition or StateUsage must redefine the entryAction, doAction, or exitAction feature, respectively, of the StateDefinition *States::StateAction* from the Systems Model Library.

```

owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(StateSubactionMembership) implies
    let kind : StateSubactionKind =
        owningFeatureMembership.oclAsType(StateSubactionMembership).kind in
    if kind = StateSubactionKind::entry then
        redefinesFromLibrary('States::StateAction::entryAction')
    else if kind = StateSubactionKind::do then
        redefinesFromLibrary('States::StateAction::doAction')
    else
        redefinesFromLibrary('States::StateAction::exitAction')
    endif endif

```

checkActionUsageSubactionSpecialization

A composite ActionUsage that is a subaction usage must directly or indirectly specialize the ActionUsage *Actions::Action::subactions* from the Systems Model Library.

```

isSubactionUsage() implies
    specializesFromLibrary('Actions::Action::subactions')

```

8.3.16.5 AssignmentActionUsage

Description

An AssignmentActionUsage is an ActionUsage that is defined, directly or indirectly, by the ActionDefinition *AssignmentAction* from the Systems Model Library. It specifies that the value of the referent Feature, relative to the target given by the result of the targetArgument Expression, should be set to the result of the valueExpression.

General Classes

ActionUsage

Attributes

/referent : Feature {subsets member}

The Feature whose value is to be set.

/targetArgument : Expression [0..1]

The Expression whose value is an occurrence in the domain of the referent Feature, for which the value of the referent will be set to the result of the valueExpression by this AssignmentActionUsage.

/valueExpression : Expression [0..1]

The Expression whose result is to be assigned to the referent Feature.

Operations

None.

Constraints

checkAssignmentActionUsageAccessedFeatureRedefinition

```

owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(StateSubactionMembership) implies
    let kind : StateSubactionKind =
        owningFeatureMembership.oclAsType(StateSubactionMembership).kind in
    if kind = StateSubactionKind::entry then
        redefinesFromLibrary('States::StateAction::entryAction')
    else if kind = StateSubactionKind::do then
        redefinesFromLibrary('States::StateAction::doAction')
    else
        redefinesFromLibrary('States::StateAction::exitAction')
    endif endif

```

checkActionUsageSubactionSpecialization

A composite ActionUsage that is a subaction usage must directly or indirectly specialize the ActionUsage *Actions::Action::subactions* from the Systems Model Library.

```

isSubactionUsage() implies
    specializesFromLibrary('Actions::Action::subactions')

```

8.3.16.5 AssignmentActionUsage

Description

An AssignmentActionUsage is an ActionUsage that is defined, directly or indirectly, by the ActionDefinition *AssignmentAction* from the Systems Model Library. It specifies that the value of the referent Feature, relative to the target given by the result of the targetArgument Expression, should be set to the result of the valueExpression.

General Classes

ActionUsage

Attributes

/referent : Feature {subsets member}

The Feature whose value is to be set.

/targetArgument : Expression [0..1]

The Expression whose value is an occurrence in the domain of the referent Feature, for which the value of the referent will be set to the result of the valueExpression by this AssignmentActionUsage.

/valueExpression : Expression [0..1]

The Expression whose result is to be assigned to the referent Feature.

Operations

None.

Constraints

checkAssignmentActionUsageAccessedFeatureRedefinition

The first ownedFeature of the first ownedFeature of the first parameter of an AssignmentActionUsage must redefine *AssignmentAction::target::startingAt::accessedFeature*.

The first ownedFeature of the first ownedFeature of the first parameter of an AssignmentActionUsage must redefine AssignmentAction::target::startingAt::accessedFeature.

```
let targetParameter : Feature = inputParameter(1) in
targetParameter <> null and
targetParameter.ownedFeature->notEmpty() and
targetParameter->first().ownedFeature->notEmpty() and
targetParameter->first().ownedFeature->first().
    redefines('AssignmentAction::target::startingAt::accessedFeature')
```

checkAssignmentActionUsageReferentRedefinition

The first ownedFeature of the first ownedFeature of the first parameter of an AssignmentActionUsage must redefine the referent of the AssignmentActionUsage.

```
let targetParameter : Feature = inputParameter(1) in
targetParameter <> null and
targetParameter.ownedFeature->notEmpty() and
targetParameter->first().ownedFeature->notEmpty() and
targetParameter->first().ownedFeature->first().redefines(referent)
```

checkAssignmentActionUsageSpecialization

An AssignmentActionUsage must directly or indirectly specialize the ActionUsage Actions::assignmentActions from the Systems Model Library.

```
specializesFromLibrary('Actions::assignmentActions')
```

checkAssignmentActionUsageStartingAtRedefinition

The first ownedFeature of the first parameter of an AssignmentActionUsage must redefine AssignmentAction::target::startingAt.

```
let targetParameter : Feature = inputParameter(1) in
targetParameter <> null and
targetParameter.ownedFeature->notEmpty() and
targetParameter.ownedFeature->first().
    redefines('AssignmentAction::target::startingAt')
```

checkAssignmentActionUsageSubactionSpecialization

A composite AssignmentActionUsage that is a subaction usage must directly or indirectly specialize the ActionUsage Actions::Action::assignments from the Systems Model Library.

```
isSubactionUsage() implies
    specializesFromLibrary('Actions::Action::assignments')
```

deriveAssignmentActionUsageReferent

The referent of an AssignmentActionUsage is the first Feature that is the memberElement of a ownedMembership that is not a FeatureMembership.

```
referent =
let unownedFeatures : Sequence(Feature) = ownedMembership->
    reject(oclIsKindOf(FeatureMembership)).memberElement->
        selectByKind(Feature) in
if unownedFeatures->isEmpty() then null
```

```

let targetParameter : Feature = inputParameter(1) in
targetParameter <> null and
targetParameter.ownedFeature->notEmpty() and
targetParameter->first().ownedFeature->notEmpty() and
targetParameter->first().ownedFeature->first().
    redefines('AssignmentAction::target::startingAt::accessedFeature')

```

checkAssignmentActionUsageReferentRedefinition

The first ownedFeature of the first ownedFeature of the first parameter of an AssignmentActionUsage must redefine the referent of the AssignmentActionUsage.

```

let targetParameter : Feature = inputParameter(1) in
targetParameter <> null and
targetParameter.ownedFeature->notEmpty() and
targetParameter->first().ownedFeature->notEmpty() and
targetParameter->first().ownedFeature->first().redefines(referent)

```

checkAssignmentActionUsageSpecialization

An AssignmentActionUsage must directly or indirectly specialize the ActionUsage Actions::assignmentActions from the Systems Model Library.

```
specializesFromLibrary('Actions::assignmentActions')
```

checkAssignmentActionUsageStartingAtRedefinition

The first ownedFeature of the first parameter of an AssignmentActionUsage must redefine AssignmentAction::target::startingAt.

```

let targetParameter : Feature = inputParameter(1) in
targetParameter <> null and
targetParameter.ownedFeature->notEmpty() and
targetParameter.ownedFeature->first().
    redefines('AssignmentAction::target::startingAt')

```

checkAssignmentActionUsageSubactionSpecialization

A composite AssignmentActionUsage that is a subaction usage must directly or indirectly specialize the ActionUsage Actions::Action::assignments from the Systems Model Library.

```
isSubactionUsage() implies
    specializesFromLibrary('Actions::Action::assignments')
```

deriveAssignmentActionUsageReferent

The referent of an AssignmentActionUsage is the first Feature that is the memberElement of a ownedMembership that is not a FeatureMembership.

```

referent =
    let unownedFeatures : Sequence(Feature) = ownedMembership->
        reject(oclIsKindOf(FeatureMembership)).memberElement->
        selectByKind(Feature) in
    if unownedFeatures->isEmpty() then null
    else unownedFeatures->first().oclAsType(Feature)
    endif

```

deriveAssignmentActionUsageValueExpression

```
else unownedFeatures->first().oclAsType(Feature)
endif
```

deriveAssignmentActionUsageValueExpression

The valueExpression of a AssignmentActionUsage is its second argument Expression.

```
valueExpression = argument(2)
```

deriveAssignmentUsageTargetArgument

The targetArgument of a AssignmentActionUsage is its first argument Expression.

```
targetArgument = argument(1)
```

validateAssignmentActionUsageReferent

An AssignmentActionUsage must have an ownedMembership that is not an OwningMembership and whose memberElement is a Feature.

```
ownedMembership->exists(
    not oclIsKindOf(OwningMembership) and
    memberElement.oclIsKindOf(Feature))
```

8.3.16.6 ControlNode

Description

A ControlNode is an ActionUsage that does not have any inherent behavior but provides constraints on incoming and outgoing Successions that are used to control other Actions. A ControlNode must be a composite owned usage of an ActionDefinition or ActionUsage.

General Classes

ActionUsage

Attributes

None.

Operations

multiplicityHasBounds(mult : Multiplicity, lower : Integer, upper : UnlimitedNatural) : Boolean

Check that the given Multiplicity has lowerBound and upperBound expressions that are model-level evaluable to the given lower and upper values.

```
body: mult <> null and
if mult.oclIsKindOf(MultiplicityRange) then
    mult.oclAsType(MultiplicityRange).hasBounds(lower, upper)
else
    mult.allSuperTypes()->exists(
        oclIsKindOf(MultiplicityRange) and
        oclAsType(MultiplicityRange).hasBounds(lower, upper))
endif
```

The `valueExpression` of a `AssignmentActionUsage` is its second argument `Expression`.

```
valueExpression = argument(2)
```

```
deriveAssignmentUsageTargetArgument
```

The `targetArgument` of a `AssignmentActionUsage` is its first argument `Expression`.

```
targetArgument = argument(1)
```

```
validateAssignmentActionUsageReferent
```

An `AssignmentActionUsage` must have an `ownedMembership` that is not an `OwningMembership` and whose `memberElement` is a `Feature`.

```
ownedMembership->exists(
    not oclIsKindOf(OwningMembership) and
    memberElement.oclIsKindOf(Feature))
```

8.3.16.6 ControlNode

Description

A `ControlNode` is an `ActionUsage` that does not have any inherent behavior but provides constraints on incoming and outgoing `Successions` that are used to control other `Actions`. A `ControlNode` must be a composite owned usage of an `ActionDefinition` or `ActionUsage`.

General Classes

`ActionUsage`

Attributes

None.

Operations

```
multiplicityHasBounds(mult : Multiplicity, lower : Integer, upper : UnlimitedNatural) : Boolean
```

Check that the given `Multiplicity` has `lowerBound` and `upperBound` expressions that are model-level evaluable to the given `lower` and `upper` values.

```
body: mult <> null and
if mult.oclIsKindOf(MultiplicityRange) then
    mult.oclaType(MultiplicityRange).hasBounds(lower, upper)
else
    mult.allSuperTypes()->exists(
        oclIsKindOf(MultiplicityRange) and
        oclAsType(MultiplicityRange).hasBounds(lower, upper))
endif
```

Constraints

```
checkControlNodeSpecialization
```

A `ControlNode` must directly or indirectly specialize the `ActionUsage Actions::Action::control` from the Systems Model Library.

Constraints

checkControlNodeSpecialization

A ControlNode must directly or indirectly specialize the ActionUsage `Actions::Action::control` from the Systems Model Library.

```
specializesFromLibrary('Action::Action::controls')
```

validateControlNodeIncomingSuccessions

All incoming Successions to a ControlNode must have a target multiplicity of 1..1.

```
targetConnector->selectByKind(Succession)->
    collect(connectorEnd->at(2).multiplicity)->
    forAll(targetMult |
        multiplicityHasBounds(targetMult, 1, 1))
```

validateControlNodeOutgoingSuccessions

All outgoing Successions from a ControlNode must have a source multiplicity of 1..1.

```
sourceConnector->selectByKind(Succession)->
    collect(connectorEnd->at(1).multiplicity)->
    forAll(sourceMult |
        multiplicityHasBounds(sourceMult, 1, 1))
```

validateControlNodeOwningType

The owningType of a ControlNode must be an ActionDefinition or ActionUsage.

```
owningType <> null and
(owningType.oclIsKindOf(ActionDefinition) or
 owningType.oclIsKindOf(ActionUsage))
```

8.3.16.7 DecisionNode

Description

A DecisionNode is a ControlNode that makes a selection from its outgoing Successions.

General Classes

ControlNode

Attributes

None.

Operations

None.

Constraints

checkDecisionNodeOutgoingSuccessionSpecialization

```
specializesFromLibrary('Action::Action::controls')
```

validateControlNodeIncomingSuccessions

All incoming Successions to a ControlNode must have a target multiplicity of 1..1.

```
targetConnector->selectByKind(Succession)->
    collect(connectorEnd->at(2).multiplicity)->
    forAll(targetMult |
        multiplicityHasBounds(targetMult, 1, 1))
```

validateControlNodeOutgoingSuccessions

All outgoing Successions from a ControlNode must have a source multiplicity of 1..1.

```
sourceConnector->selectByKind(Succession)->
    collect(connectorEnd->at(1).multiplicity)->
    forAll(sourceMult |
        multiplicityHasBounds(sourceMult, 1, 1))
```

validateControlNodeOwningType

The owningType of a ControlNode must be an ActionDefinition or ActionUsage.

```
owningType <> null and
(owningType.oclIsKindOf(ActionDefinition) or
owningType.oclIsKindOf(ActionUsage))
```

8.3.16.7 DecisionNode

Description

A DecisionNode is a ControlNode that makes a selection from its outgoing Successions.

General Classes

ControlNode

Attributes

None.

Operations

None.

Constraints

checkDecisionNodeOutgoingSuccessionSpecialization

All outgoing Successions from a DecisionNode must subset the inherited *outgoingHBLINK* feature of the DecisionNode.

```
sourceConnector->selectByKind(Succession)->
    forAll(subsetsChain(self,
        resolveGlobal('ControlPerformances::MergePerformance::outgoingHBLINK')))
```

checkDecisionNodeSpecialization

All outgoing Successions from a `DecisionNode` must subset the inherited `outgoingHBLink` feature of the `DecisionNode`.

```
sourceConnector->selectByKind(Succession) ->
    forAll(subsetsChain(self,
        resolveGlobal('ControlPerformances::MergePerformance::outgoingHBLink')))
```

`checkDecisionNodeSpecialization`

A `DecisionNode` must directly or indirectly specialize the `ActionUsage Actions::Action::decisions` from the Systems Model Library.

```
specializesFromLibrary('Actions::Action::decisions')
```

`validateDecisionNodeIncomingSuccessions`

A `DecisionNode` may have at most one incoming Succession.

```
targetConnector->selectByKind(Succession)->size() <= 1
```

`validateDecisionNodeOutgoingSuccessions`

All outgoing Successions from a `DecisionNode` must have a target multiplicity of 0..1.

```
sourceConnector->selectAsKind(Succession) ->
    collect(connectorEnd->at(2))->
    forAll(targetMult |
        multiplicityHasBounds(targetMult, 0, 1))
```

8.3.16.8 ForkNode

Description

A `ForkNode` is a `ControlNode` that must be followed by successor `Actions` as given by all its outgoing Successions.

General Classes

`ControlNode`

Attributes

None.

Operations

None.

Constraints

`checkForkNodeSpecialization`

A `ForkNode` must directly or indirectly specialize the `ActionUsage Actions::Action::forks` from the Systems Model Library.

```
specializesFromLibrary('Actions::Action::forks')
```

A `DecisionNode` must directly or indirectly specialize the ActionUsage `Actions::Action::decisions` from the Systems Model Library.

```
specializesFromLibrary('Actions::Action::decisions')
```

`validateDecisionNodeIncomingSuccessions`

A `DecisionNode` may have at most one incoming Succession.

```
targetConnector->selectByKind(Succession)->size() <= 1
```

`validateDecisionNodeOutgoingSuccessions`

All outgoing Successions from a `DecisionNode` must have a target multiplicity of 0..1.

```
sourceConnector->selectAsKind(Succession)->
    collect(connectorEnd->at(2))->
    forAll(targetMult |
        multiplicityHasBounds(targetMult, 0, 1))
```

8.3.16.8 ForkNode

Description

A `ForkNode` is a `ControlNode` that must be followed by successor Actions as given by all its outgoing Successions.

General Classes

`ControlNode`

Attributes

None.

Operations

None.

Constraints

`checkForkNodeSpecialization`

A `ForkNode` must directly or indirectly specialize the ActionUsage `Actions::Action::forks` from the Systems Model Library.

```
specializesFromLibrary('Actions::Action::forks')
```

`validateForkNodeIncomingSuccessions`

A `ForkNode` may have at most one incoming Succession.

```
targetConnector->selectByKind(Succession)->size() <= 1
```

8.3.16.9 ForLoopActionUsage

Description

validateForkNodeIncomingSuccessions

A ForkNode may have at most one incoming Succession.

```
targetConnector->selectByKind(Succession)->size() <= 1
```

8.3.16.9 ForLoopActionUsage

Description

A ForLoopActionUsage is a LoopActionUsage that specifies that its bodyAction ActionUsage should be performed once for each value, in order, from the sequence of values obtained as the result of the seqArgument Expression, with the loopVariable set to the value for each iteration.

General Classes

LoopActionUsage

Attributes

/loopVariable : ReferenceUsage

The ownedFeature of this ForLoopActionUsage that acts as the loop variable, which is assigned the successive values of the input sequence on each iteration. It is the ownedFeature that redefines *ForLoopAction::var*.

/seqArgument : Expression

The Expression whose result provides the sequence of values to which the loopVariable is set for each iterative performance of the bodyAction. It is the Expression whose result is bound to the seq input parameter of this ForLoopActionUsage.

Operations

None.

Constraints

checkForLoopActionUsageSpecialization

A ForLoopActionUsage must directly or indirectly specialize the ActionUsage *Actions::forLoopActions* from the Systems Model Library.

```
specializesFromLibrary('Actions::forLoopActions')
```

checkForLoopActionUsageSubactionSpecialization

A composite ForLoopActionUsage that is a subaction usage must directly or indirectly specialize the ActionUsage *Actions::Action::forLoops* from the Systems Model Library.

```
isSubactionUsage() implies  
    specializesFromLibrary('Actions::Action::forLoops')
```

checkForLoopActionUsageVarRedefinition

A `ForLoopActionUsage` is a `LoopActionUsage` that specifies that its `bodyAction ActionUsage` should be performed once for each value, in order, from the sequence of values obtained as the result of the `seqArgument Expression`, with the `loopVariable` set to the value for each iteration.

General Classes

`LoopActionUsage`

Attributes

`/loopVariable : ReferenceUsage`

The `ownedFeature` of this `ForLoopActionUsage` that acts as the loop variable, which is assigned the successive values of the input sequence on each iteration. It is the `ownedFeature` that redefines `ForLoopAction::var`.

`/seqArgument : Expression`

The `Expression` whose result provides the sequence of values to which the `loopVariable` is set for each iterative performance of the `bodyAction`. It is the `Expression` whose `result` is bound to the `seq` input parameter of this `ForLoopActionUsage`.

Operations

None.

Constraints

`checkForLoopActionUsageSpecialization`

A `ForLoopActionUsage` must directly or indirectly specialize the `ActionUsage Actions::forLoopActions` from the Systems Model Library.

`specializesFromLibrary('Actions::forLoopActions')`

`checkForLoopActionUsageSubactionSpecialization`

A composite `ForLoopActionUsage` that is a subaction usage must directly or indirectly specialize the `ActionUsage Actions::Action::forLoops` from the Systems Model Library.

`isSubactionUsage() implies
specializesFromLibrary('Actions::Action::forLoops')`

`checkForLoopActionUsageVarRedefinition`

The `loopVariable` of a `ForLoopActionUsage` must redefine the `ActionUsage Actions::ForLoopAction::var`.

`loopVariable <> null and
loopVariable.redefinesFromLibrary('Actions::ForLoopAction::var')`

`deriveForLoopActionUsageLoopVariable`

The `loopVariable` of a `ForLoopActionUsage` is its first `ownedFeature`, which must be a `ReferenceUsage`.

`loopVariable =
if ownedFeature->isEmpty() or
not ownedFeature->first().oclIsKindOf(ReferenceUsage) then`

The `loopVariable` of a `ForLoopActionUsage` must redefine the `ActionUsage Actions::ForLoopAction::var`.

```
loopVariable <> null and
loopVariable.redefinesFromLibrary('Actions::ForLoopAction::var')
```

`deriveForLoopActionUsageLoopVariable`

The `loopVariable` of a `ForLoopActionUsage` is its first `ownedFeature`, which must be a `ReferenceUsage`.

```
loopVariable =
    if ownedFeature->isEmpty() or
        not ownedFeature->first().oclIsKindOf(ReferenceUsage) then
            null
    else
        ownedFeature->first().oclAsType(ReferenceUsage)
    endif
```

`deriveForLoopActionUsageSeqArgument`

The `seqArgument` of a `ForLoopActionUsage` is its first argument `Expression`.

```
seqArgument = argument(1)
```

`validateForLoopActionUsageLoopVariable`

The first `ownedFeature` of a `ForLoopActionUsage` must be a `ReferenceUsage`.

```
ownedFeature->notEmpty() and
ownedFeature->at(1).oclIsKindOf(ReferenceUsage)
```

`validateForLoopActionUsageParameters`

A `ForLoopActionUsage` must have two owned `input parameters`.

```
inputParameters()->size() = 2
```

8.3.16.10 IfActionUsage

Description

An `IfActionUsage` is an `ActionUsage` that specifies that the `thenAction ActionUsage` should be performed if the result of the `ifArgument Expression` is true. It may also optionally specify an `elseAction ActionUsage` that is performed if the result of the `ifArgument` is false.

General Classes

`ActionUsage`

Attributes

`/elseAction : ActionUsage [0..1]`

The `ActionUsage` that is to be performed if the result of the `ifArgument` is false. It is the (optional) third parameter of the `IfActionUsage`.

```

        null
    else
        ownedFeature->first().oclAsType(ReferenceUsage)
    endif

deriveForLoopActionUsageSeqArgument

```

The seqArgument of a ForLoopActionUsage is its first argument Expression.

```
seqArgument = argument(1)
```

validateForLoopActionUsageLoopVariable

The first ownedFeature of a ForLoopActionUsage must be a ReferenceUsage.

```
ownedFeature->notEmpty() and
ownedFeature->at(1).oclIsKindOf(ReferenceUsage)
```

validateForLoopActionUsageParameters

A ForLoopActionUsage must have two owned input parameters.

```
inputParameters()->size() = 2
```

8.3.16.10 IfActionUsage

Description

An IfActionUsage is an ActionUsage that specifies that the thenAction ActionUsage should be performed if the result of the ifArgument Expression is true. It may also optionally specify an elseAction ActionUsage that is performed if the result of the ifArgument is false.

General Classes

ActionUsage

Attributes

/elseAction : ActionUsage [0..1]

The ActionUsage that is to be performed if the result of the ifArgument is false. It is the (optional) third parameter of the IfActionUsage.

/ifArgument : Expression

The Expression whose result determines whether the thenAction or (optionally) the elseAction is performed. It is the first parameter of the IfActionUsage.

/thenAction : ActionUsage

The ActionUsage that is to be performed if the result of the ifArgument is true. It is the second parameter of the IfActionUsage.

Operations

None.

/ifArgument : Expression

The Expression whose result determines whether the thenAction or (optionally) the elseAction is performed. It is the first parameter of the IfActionUsage.

/thenAction : ActionUsage

The ActionUsage that is to be performed if the result of the ifArgument is true. It is the second parameter of the IfActionUsage.

Operations

None.

Constraints

checkIfActionUsageSpecialization

A IfActionUsage must directly or indirectly specialize the ActionUsage Actions::ifThenActions from the Systems Model Library. If it has an elseAction, then it must directly or indirectly specialize Actions::ifThenElseActions.

```
if elseAction = null then
    specializesFromLibrary('Actions::ifThenActions')
else
    specializesFromLibrary('Actions::ifThenElseActions')
endif
```

checkIfActionUsageSubactionSpecialization

A composite IfActionUsage that is a subaction usage must directly or indirectly specialize the ActionUsage Actions::Action::ifSubactions from the Systems Model Library.

```
isSubactionUsage() implies
    specializesFromLibrary('Actions::Action::ifSubactions')
```

deriveIfActionUsageElseAction

The elseAction of an IfActionUsage is its third parameter, if there is one, which must then be an ActionUsage.

```
elseAction =
    let parameter : Feature = inputParameter(3) in
    if parameter <> null and parameter.oclIsKindOf(ActionUsage) then
        parameter.oclAsType(ActionUsage)
    else
        null
    endif
```

deriveIfActionUsageIfArgument

The ifArgument of an IfActionUsage is its first parameter, which must be an Expression.

```
ifArgument =
    let parameter : Feature = inputParameter(1) in
    if parameter <> null and parameter.oclIsKindOf(Expression) then
```

Constraints

checkIfActionUsageSpecialization

A `IfActionUsage` must directly or indirectly specialize the `ActionUsage Actions::ifThenActions` from the Systems Model Library. If it has an `elseAction`, then it must directly or indirectly specialize `Actions::ifThenElseActions`

```
if elseAction = null then
    specializesFromLibrary('Actions::ifThenActions')
else
    specializesFromLibrary('Actions::ifThenElseActions')
endif
```

checkIfActionUsageSubactionSpecialization

A composite `IfActionUsage` that is a subaction usage must directly or indirectly specialize the `ActionUsage Actions::Action::ifSubactions` from the Systems Model Library.

```
isSubactionUsage() implies
    specializesFromLibrary('Actions::Action::ifSubactions')
```

deriveIfActionUsageElseAction

The `elseAction` of an `IfActionUsage` is its third parameter, if there is one, which must then be an `ActionUsage`.

```
elseAction =
    let parameter : Feature = inputParameter(3) in
    if parameter <> null and parameter.oclIsKindOf(ActionUsage) then
        parameter.oclAsType(ActionUsage)
    else
        null
    endif
```

deriveIfActionUsageIfArgument

The `ifArgument` of an `IfActionUsage` is its first parameter, which must be an `Expression`.

```
ifArgument =
    let parameter : Feature = inputParameter(1) in
    if parameter <> null and parameter.oclIsKindOf(Expression) then
        parameter.oclAsType(Expression)
    else
        null
    endif
```

deriveIfActionUsageThenAction

The `thenAction` of an `IfActionUsage` is its second parameter, which must be an `ActionUsage`.

```
thenAction =
    let parameter : Feature = inputParameter(2) in
    if parameter <> null and parameter.oclIsKindOf(ActionUsage) then
        parameter.oclAsType(ActionUsage)
    else
        null
    endif
```

```

        parameter.oclAsType(Expression)
else
    null
endif

```

deriveIfActionUsageThenAction

The `thenAction` of an `IfActionUsage` is its second parameter, which must be an `ActionUsage`.

```

thenAction =
let parameter : Feature = inputParameter(2) in
if parameter <> null and parameter.oclIsKindOf(ActionUsage) then
    parameter.oclAsType(ActionUsage)
else
    null
endif

```

validateIfActionUsageParameters

An `IfActionUsage` must have at least two owned `input` parameters.

```
inputParameters() -> size() >= 2
```

8.3.16.11 JoinNode

Description

A `JoinNode` is a `ControlNode` that waits for the completion of all the predecessor `Actions` given by incoming `Successions`.

General Classes

`ControlNode`

Attributes

None.

Operations

None.

Constraints

checkJoinNodeSpecialization

A `JoinNode` must directly or indirectly specialize the `ActionUsage Actions::Action::joins` from the Systems Model Library.

```
specializesFromLibrary('Actions::Action::join')
```

validateJoinNodeOutgoingSuccessions

A `JoinNode` may have at most one outgoing Succession.

```
sourceConnector->selectByKind(Succession)->size() <= 1
```

```
validateIfActionUsageParameters
```

An IfActionUsage must have at least two owned input parameters.

```
inputParameters()->size() >= 2
```

8.3.16.11 JoinNode

Description

A JoinNode is a ControlNode that waits for the completion of all the predecessor Actions given by incoming Successions.

General Classes

ControlNode

Attributes

None.

Operations

None.

Constraints

checkJoinNodeSpecialization

A JoinNode must directly or indirectly specialize the ActionUsage *Actions::Action::joins* from the Systems Model Library.

```
specializesFromLibrary('Actions::Action::join')
```

validateJoinNodeOutgoingSuccessions

A JoinNode may have at most one outgoing Succession.

```
sourceConnector->selectByKind(Succession)->size() <= 1
```

8.3.16.12 LoopActionUsage

Description

A LoopActionUsage is an ActionUsage that specifies that its bodyAction should be performed repeatedly. Its subclasses WhileLoopActionUsage and ForLoopActionUsage provide different ways to determine how many times the bodyAction should be performed.

General Classes

ActionUsage

Attributes

/bodyAction : ActionUsage

8.3.16.12 LoopActionUsage

Description

A `LoopActionUsage` is an `ActionUsage` that specifies that its `bodyAction` should be performed repeatedly. Its subclasses `WhileLoopActionUsage` and `ForLoopActionUsage` provide different ways to determine how many times the `bodyAction` should be performed.

General Classes

`ActionUsage`

Attributes

`/bodyAction : ActionUsage`

The `ActionUsage` to be performed repeatedly by the `LoopActionUsage`. It is the second parameter of the `LoopActionUsage`.

Operations

None.

Constraints

`deriveLoopActionUsageBodyAction`

The `bodyAction` of a `LoopActionUsage` is its second input parameter, which must be an `Action`.

```
bodyAction =  
    let parameter : Feature = inputParameter(2) in  
    if parameter <> null and parameter.oclIsKindOf(Action) then  
        parameter.oclAsType(Action)  
    else  
        null  
    endif
```

8.3.16.13 MergeNode

Description

A `MergeNode` is a `ControlNode` that asserts the merging of its incoming `Successions`. A `MergeNode` may have at most one outgoing `Successions`.

General Classes

`ControlNode`

Attributes

None.

Operations

None.

The ActionUsage to be performed repeatedly by the LoopActionUsage. It is the second parameter of the LoopActionUsage.

Operations

None.

Constraints

deriveLoopActionUsageBodyAction

The bodyAction of a LoopActionUsage is its second input parameter, which must be an Action.

```
bodyAction =  
    let parameter : Feature = inputParameter(2) in  
    if parameter <> null and parameter.oclIsKindOf(Action) then  
        parameter.oclAsType(Action)  
    else  
        null  
    endif
```

8.3.16.13 MergeNode

Description

A MergeNode is a ControlNode that asserts the merging of its incoming Successions. A MergeNode may have at most one outgoing Successions.

General Classes

ControlNode

Attributes

None.

Operations

None.

Constraints

checkMergeNodeIncomingSuccessionSpecialization

All incoming Successions to a MergeNode must subset the inherited *incomingHBLINK* feature of the MergeNode.

```
targetConnector->selectByKind(Succession)->  
    forAll(subsetsChain(self,  
        resolveGlobal('ControlPerformances::MergePerformance::incomingHBLINK')))
```

checkMergeNodeSpecialization

A MergeNode must directly or indirectly specialize the ActionUsage *Actions::Action::merges* from the Systems Model Library.

```
specializesFromLibrary('Actions::Action::merges')
```

Constraints

checkMergeNodeIncomingSuccessionSpecialization

All incoming Successions to a MergeNode must subset the inherited *incomingHBLINK* feature of the MergeNode.

```
targetConnector->selectByKind(Succession)->
    forAll(subsetsChain(self,
        resolveGlobal('ControlPerformances::MergePerformance::incomingHBLINK')))
```

checkMergeNodeSpecialization

A MergeNode must directly or indirectly specialize the ActionUsage *Actions::Action::merges* from the Systems Model Library.

```
specializesFromLibrary('Actions::Action::merges')
```

validateMergeNodeIncomingSuccessions

All incoming Successions to a MergeNode must have a source multiplicity of 0..1.

```
targetConnector->selectByKind(Succession)->
    collect(connectorEnd->at(1))->
    forAll(sourceMult |
        multiplicityHasBounds(sourceMult, 0, 1))
```

validateMergeNodeOutgoingSuccessions

A MergeNode may have at most one outgoing Succession.

```
sourceConnector->selectAsKind(Succession)->size() <= 1
```

8.3.16.14 PerformActionUsage

Description

A PerformActionUsage is an ActionUsage that represents the performance of an ActionUsage. Unless it is the PerformActionUsage itself, the ActionUsage to be performed is related to the PerformActionUsage by a ReferenceSubsetting relationship. A PerformActionUsage is also an EventOccurrenceUsage, with its performedAction as the eventOccurrence.

General Classes

EventOccurrenceUsage
ActionUsage

Attributes

/performedAction : ActionUsage {redefines eventOccurrence}

The ActionUsage to be performed by this PerformedActionUsage. It is the eventOccurrence of the PerformActionUsage considered as an EventOccurrenceUsage, which must be an ActionUsage.

Operations

validateMergeNodeIncomingSuccessions

All incoming Successions to a MergeNode must have a source multiplicity of 0..1.

```
targetConnector->selectByKind(Succession)->
    collect(connectorEnd->at(1))->
    forAll(sourceMult |
        multiplicityHasBounds(sourceMult, 0, 1))
```

validateMergeNodeOutgoingSuccessions

A MergeNode may have at most one outgoing Succession.

```
sourceConnector->selectAsKind(Succession)->size() <= 1
```

8.3.16.14 PerformActionUsage

Description

A PerformActionUsage is an ActionUsage that represents the performance of an ActionUsage. Unless it is the PerformActionUsage itself, the ActionUsage to be performed is related to the PerformActionUsage by a ReferenceSubsetting relationship. A PerformActionUsage is also an EventOccurrenceUsage, with its performedAction as the eventOccurrence.

General Classes

EventOccurrenceUsage
ActionUsage

Attributes

/performedAction : ActionUsage {redefines eventOccurrence}

The ActionUsage to be performed by this PerformedActionUsage. It is the eventOccurrence of the PerformActionUsage considered as an EventOccurrenceUsage, which must be an ActionUsage.

Operations

namingFeature() : Feature [0..1] {redefines namingFeature}

The naming Feature of a PerformActionUsage is its performedAction, if this is different than the PerformActionUsage. If the PerformActionUsage is its own performedAction, then the naming Feature is the same as the usual default for a Usage.

```
body: if performedAction <> self then performedAction
else self.oclAsType(Usage).namingFeature()
endif
```

Constraints

checkPerformActionUsageSpecialization

If a PerformActionUsage has an owningType that is a PartDefinition or PartUsage, then it must directly or indirectly specialize the ActionUsage Parts::Part::performedActions.

```
owningType <> null and
(owningType.oclIsKindOf(PartDefinition) or
```

```
namingFeature() : Feature [0..1] {redefines namingFeature}
```

The naming Feature of a PerformActionUsage is its performedAction, if this is different than the PerformActionUsage. If the PerformActionUsage is its own performedAction, then the naming Feature is the same as the usual default for a Usage.

```
body: if performedAction <> self then performedAction  
else self.oclAsType(Usage).namingFeature()  
endif
```

Constraints

checkPerformActionUsageSpecialization

If a PerformActionUsage has an owningType that is a PartDefinition or PartUsage, then it must directly or indirectly specialize the ActionUsage *Parts::Part::performedActions*.

```
owningType <> null and  
(owningType.oclIsKindOf(PartDefinition) or  
owningType.oclIsKindOf(PartUsage)) implies  
specializesFromLibrary('Parts::Part::performedActions')
```

validatePerformActionUsageReference

If a PerformActionUsage has an ownedReferenceSubsetting, then its referencedFeature must be a ActionUsage.

```
ownedReferenceSubsetting <> null implies  
ownedReferenceSubsetting.referencedFeature.oclIsKindOf(ActionUsage)
```

8.3.16.15 SendActionUsage

Description

A SendActionUsage is an ActionUsage that specifies the sending of a payload given by the result of its payloadArgument Expression via a *MessageTransfer* whose *source* is given by the result of the senderArgument Expression and whose *target* is given by the result of the receiverArgument Expression. If no senderArgument is provided, the default is the *this* context for the action. If no receiverArgument is given, then the receiver is to be determined by, e.g., outgoing *Connections* from the sender.

General Classes

ActionUsage

Attributes

/payloadArgument : Expression

An Expression whose result is bound to the *payload* input parameter of this SendActionUsage.

/receiverArgument : Expression [0..1]

An Expression whose result is bound to the *receiver* input parameter of this SendActionUsage.

```
owningType.oclIsKindOf(PartUsage)) implies  
specializesFromLibrary('Parts::Part::performedActions')
```

validatePerformActionUsageReference

If a PerformActionUsage has an ownedReferenceSubsetting, then its referencedFeature must be a ActionUsage.

```
ownedReferenceSubsetting <> null implies  
ownedReferenceSubsetting.referencedFeature.oclIsKindOf(ActionUsage)
```

8.3.16.15 SendActionUsage

Description

A SendActionUsage is an ActionUsage that specifies the sending of a payload given by the result of its payloadArgument Expression via a *MessageTransfer* whose *source* is given by the result of the senderArgument Expression and whose target is given by the result of the receiverArgument Expression. If no senderArgument is provided, the default is the *this* context for the action. If no receiverArgument is given, then the receiver is to be determined by, e.g., outgoing *Connections* from the sender.

General Classes

ActionUsage

Attributes

/payloadArgument : Expression

An Expression whose result is bound to the *payload* input parameter of this SendActionUsage.

/receiverArgument : Expression [0..1]

An Expression whose result is bound to the *receiver* input parameter of this SendActionUsage.

/senderArgument : Expression [0..1]

An Expression whose result is bound to the *sender* input parameter of this SendActionUsage.

Operations

None.

Constraints

checkSendActionUsageSpecialization

A SendActionUsage must directly or indirectly specialize the ActionUsage *Actions::sendActions* from the Systems Model Library.

```
specializesFromLibrary('Actions::sendActions')
```

checkSendActionUsageSubactionSpecialization

A composite SendActionUsage that is a subaction must directly or indirectly specialize the ActionUsage *Actions::Action::sendSubactions* from the Systems Model Library.

/senderArgument : Expression [0..1]

An Expression whose result is bound to the *sender* input parameter of this SendActionUsage.

Operations

None.

Constraints

checkSendActionUsageSpecialization

A SendActionUsage must directly or indirectly specialize the ActionUsage *Actions::sendActions* from the Systems Model Library.

```
specializesFromLibrary('Actions::sendActions')
```

checkSendActionUsageSubactionSpecialization

A composite SendActionUsage that is a subaction must directly or indirectly specialize the ActionUsage *Actions::Action::sendSubactions* from the Systems Model Library.

```
isSubactionUsage() implies  
    specializesFromLibrary('Actions::Action::acceptSubactions')
```

deriveSendActionUsagePayloadArgument

The payloadArgument of a SendActionUsage is its first argument Expression.

```
payloadArgument = argument(1)
```

deriveSendActionUsageReceiverArgument

The receiverArgument of a SendActionUsage is its third argument Expression.

```
receiverArgument = argument(3)
```

deriveSendActionUsageSenderArgument

The senderArgument of a SendActionUsage is its second argument Expression.

```
senderArgument = argument(2)
```

validateSendActionParameters

A SendActionUsage must have at least three owned input parameters, corresponding to its *payload*, *sender* and *receiver*, respectively (whether or not they have FeatureValues).

```
inputParameters() ->size() >= 3
```

8.3.16.16 TriggerInvocationExpression

Description

A TriggerInvocationExpression is an InvocationExpression that invokes one of the trigger Functions from the Kernel Semantic Library *Triggers package*, as indicated by its kind.

```
isSubactionUsage() implies  
specializesFromLibrary('Actions::Action::acceptSubactions')
```

deriveSendActionUsagePayloadArgument

The payloadArgument of a SendActionUsage is its first argument Expression.

```
payloadArgument = argument(1)
```

deriveSendActionUsageReceiverArgument

The receiverArgument of a SendActionUsage is its third argument Expression.

```
receiverArgument = argument(3)
```

deriveSendActionUsageSenderArgument

The senderArgument of a SendActionUsage is its second argument Expression.

```
senderArgument = argument(2)
```

validateSendActionParameters

A SendActionUsage must have at least three owned input parameters, corresponding to its *payload*, *sender* and *receiver*, respectively (whether or not they have FeatureValues).

```
inputParameters() ->size() >= 3
```

8.3.16.16 TerminateActionUsage

SYSML2 -44: Transformation of UML4SysML::ActivityFinalNode is not specified yet

Description

A TerminateActionUsage is an ActionUsage that directly or indirectly specializes the ActionDefinition *TerminateAction* from the Systems Model Library, which causes a given *terminatedOccurrence* to end during its performance. By default, the *terminatedOccurrence* is the featuring instance (*that*) of the performance of the TerminateActionUsage, generally the performance of its immediately containing ActionDefinition or ActionUsage.

General Classes

ActionUsage

Attributes

/terminatedOccurrenceArgument : Expression [0..1]

The Expression that is the featureValue of the *terminateOccurrence* parameter of this TerminateActionUsage

Operations

None.

Constraints

General Classes

InvocationExpression

Attributes

kind : TriggerKind

Indicates which of the Functions from the *Triggers* model in the Kernel Semantic Library is to be invoked by this TriggerInvocationExpression.

Operations

None.

Constraints

checkTriggerInvocationExpressionSpecialization

A TriggerInvocationExpression must directly or indirectly specialize one of the Functions *TriggerWhen*, *TriggerAt* or *TriggerAfter*, from the Kernel Semantic Library Triggers package, depending on whether its kind is when, at or after, respectively.

```
specializesFromLibrary(
    if kind = TriggerKind::when then
        'Triggers::TriggerWhen'
    else if kind = TriggerKind::at then
        'Triggers::TriggerAt'
    else
        'Triggers::TriggerAfter'
    endif endif
)
```

validateTriggerInvocationExpressionAfterArgument

If a TriggerInvocationExpression has kind = after, then it must have an argument Expression with a result that conforms to the type *Quantities::ScalarQuantityValue* and a feature that directly or indirectly redefines *Quantities::TensorQuantityValue::mRef* and directly or indirectly specializes *ISQBase::DurationUnit*.

```
kind = TriggerKind::after implies
    argument->notEmpty() and
    argument->at(1).result.specializesFromLibrary('Quantities::ScalarQuantityValue') and
    let mRef : Element =
        resolveGlobal('Quantities::TensorQuantityValue::mRef').ownedMemberElement in
    argument->at(1).result.feature->
        select(ownedRedefinition.redefinedFeature->
            closure(ownedRedefinition.redefinedFeature)->
            includes(mRef))->
        exists(specializesFromLibrary('ISQBase::DurationUnit'))
```

validateTriggerInvocationExpressionAtArgument

If a TriggerInvocationExpression has kind = at, then it must have an argument Expression with a result that conforms to the type *Time::TimeInstantValue*.

checkTerminateActionUsageSpecialization

A TerminateActionUsage must directly or indirectly specialize the ActionUsage Actions::terminateActions from the Systems Modeling Library.

```
specializesFromLibrary('Actions::terminateActions')
```

checkTerminateActionUsageSubactionSpecialization

A composite TerminateActionUsage that is a subaction must directly or indirectly specialize the ActionUsage Actions::Action::terminateSubactions from the Systems Modeling Library.

```
isSubactionUsage() implies  
    specializesFromLibrary('Actions::Action::terminateSubactions')
```

deriveTerminateActionUsageTerminatedOccurrenceArgument

The terminatedOccurrenceArgument of a TerminateActionUsage is its first argument.

```
terminatedOccurrenceArgument = argument(1)
```

8.3.16.17 TriggerInvocationExpression

Description

A TriggerInvocationExpression is an InvocationExpression that invokes one of the trigger Functions from the Kernel Semantic Library *Triggers package*, as indicated by its kind.

General Classes

InvocationExpression

Attributes

kind : TriggerKind

Indicates which of the Functions from the *Triggers* model in the Kernel Semantic Library is to be invoked by this TriggerInvocationExpression.

Operations

None.

Constraints

checkTriggerInvocationExpressionSpecialization

A TriggerInvocationExpression must directly or indirectly specialize one of the Functions TriggerWhen, TriggerAt or TriggerAfter, from the Kernel Semantic Library Triggers package, depending on whether its kind is when, at or after, respectively.

```
specializesFromLibrary(  
    if kind = TriggerKind::when then  
        'Triggers::TriggerWhen'  
    else if kind = TriggerKind::at then  
        'Triggers::TriggerAt'  
    else
```

```
kind = TriggerKind::at implies
    argument->notEmpty() and
    argument->at(1).result.specializesFromLibrary('Time::TimeInstantValue')
```

validateTriggerInvocationExpressionWhenArgument

If a TriggerInvocationExpression has kind = when, then it must have an argument that is a FeatureReferenceExpression whose referent is an Expression with a result that conforms to the type `ScalarValues::Boolean`.

```
kind = TriggerKind::when implies
    argument->notEmpty() and
    argument->at(1).oclIsKindOf(FeatureReferenceExpression) and
    let referent : Feature =
        argument->at(1).oclAsType(FeatureReferenceExpression).referent in
        referent.oclIsKindOf(Expression) and
        referent.oclAsType(Expression).result.specializesFromLibrary('ScalarValues::Boolean')
```

8.3.16.17 TriggerKind

Description

TriggerKind enumerates the kinds of triggers that can be represented by a TriggerInvocationExpression.

General Classes

None.

Literal Values

after

Indicates a *relative time trigger*, corresponding to the `TriggerAfter` Function from the `Triggers` model in the Kernel Semantic Library.

at

Indicates an *absolute time trigger*, corresponding to the `TriggerAt` Function from the `Triggers` model in the Kernel Semantic Library.

when

Indicates a *change trigger*, corresponding to the `TriggerWhen` Function from the `Triggers` model in the Kernel Semantic Library.

8.3.16.18 WhileLoopActionUsage

Description

A WhileLoopActionUsage is a LoopActionUsage that specifies that the bodyAction ActionUsage should be performed repeatedly while the result of the whileArgument Expression is true or until the result of the untilArgument Expression (if provided) is true. The whileArgument Expression is evaluated before each (possible) performance of the bodyAction, and the untilArgument Expression is evaluated after each performance of the bodyAction.

```

        'Triggers::TriggerAfter'
    endif endif
)

validateTriggerInvocationExpressionAfterArgument

```

If a TriggerInvocationExpression has kind = after, then it must have an argument Expression with a result that conforms to the type Quantities::ScalarQuantityValue and a feature that directly or indirectly redefines Quantities::TensorQuantityValue::mRef and directly or indirectly specializes ISQBase::DurationUnit.

```

kind = TriggerKind::after implies
    argument->notEmpty() and
    argument->at(1).result.specializesFromLibrary('Quantities::ScalarQuantityValue') and
    let mRef : Element =
        resolveGlobal('Quantities::TensorQuantityValue::mRef').ownedMemberElement in
    argument->at(1).result.feature->
        select(ownedRedefinition.redefinedFeature->
            closure(ownedRedefinition.redefinedFeature)->
            includes(mRef))->
        exists(specializesFromLibrary('ISQBase::DurationUnit'))

```

validateTriggerInvocationExpressionAtArgument

If a TriggerInvocationExpression has kind = at, then it must have an argument Expression with a result that conforms to the type Time::TimeInstantValue.

```

kind = TriggerKind::at implies
    argument->notEmpty() and
    argument->at(1).result.specializesFromLibrary('Time::TimeInstantValue')

```

validateTriggerInvocationExpressionWhenArgument

If a TriggerInvocationExpression has kind = when, then it must have an argument that is a FeatureReferenceExpression whose referent is an Expression with a result that conforms to the type ScalarValues::Boolean.

```

kind = TriggerKind::when implies
    argument->notEmpty() and
    argument->at(1).oclIsKindOf(FeatureReferenceExpression) and
    let referent : Feature =
        argument->at(1).oclAsType(FeatureReferenceExpression).referent in
    referent.oclIsKindOf(Expression) and
    referent.oclAsType(Expression).result.specializesFromLibrary('ScalarValues::Boolean')

```

8.3.16.18 TriggerKind

Description

TriggerKind enumerates the kinds of triggers that can be represented by a TriggerInvocationExpression.

General Classes

None.

Literal Values

after

General Classes

LoopActionUsage

Attributes

/untilArgument : Expression [0..1]

The Expression whose result, if false, determines that the bodyAction should continue to be performed. It is the (optional) third owned parameter of the WhileLoopActionUsage.

/whileArgument : Expression

The Expression whose result, if true, determines that the bodyAction should continue to be performed. It is the first owned parameter of the WhileLoopActionUsage.

Operations

None.

Constraints

checkWhileLoopActionUsageSpecialization

A WhileLoopActionUsage must directly or indirectly specialize the ActionUsage Actions::whileLoopActions from the Systems Model Library.

specializesFromLibrary('Actions::whileLoopActions')

checkWhileLoopActionUsageSubactionSpecialization

A composite WhileLoopActionUsage that is a subaction usage must directly or indirectly specialize the ActionUsage Actions::Action::whileLoops from the Systems Model Library.

isSubactionUsage() implies
specializesFromLibrary('Actions::Action::whileLoops')

deriveWhileLoopActionUsageUntilArgument

The whileArgument of a WhileLoopActionUsage is its third input parameter, which, if it exists, must be an Expression.

```
untilArgument =  
    let parameter : Feature = inputParameter(3) in  
        if parameter <> null and parameter.oclIsKindOf(Expression) then  
            parameter.oclAsType(Expression)  
        else  
            null  
        endif
```

deriveWhileLoopActionUsageWhileArgument

The whileArgument of a WhileLoopActionUsage is its first input parameter, which must be an Expression.

```
whileArgument =  
    let parameter : Feature = inputParameter(1) in
```

Indicates a *relative time trigger*, corresponding to the *TriggerAfter* Function from the *Triggers* model in the Kernel Semantic Library.

at

Indicates an *absolute time trigger*, corresponding to the *TriggerAt* Function from the *Triggers* model in the Kernel Semantic Library.

when

Indicates a *change trigger*, corresponding to the *TriggerWhen* Function from the *Triggers* model in the Kernel Semantic Library.

8.3.16.19 WhileLoopActionUsage

Description

A *WhileLoopActionUsage* is a *LoopActionUsage* that specifies that the *bodyAction ActionUsage* should be performed repeatedly while the result of the *whileArgument Expression* is true or until the result of the *untilArgument Expression* (if provided) is true. The *whileArgument Expression* is evaluated before each (possible) performance of the *bodyAction*, and the *untilArgument Expression* is evaluated after each performance of the *bodyAction*.

General Classes

LoopActionUsage

Attributes

/untilArgument : Expression [0..1]

The *Expression* whose result, if false, determines that the *bodyAction* should continue to be performed. It is the (optional) third owned parameter of the *WhileLoopActionUsage*.

/whileArgument : Expression

The *Expression* whose result, if true, determines that the *bodyAction* should continue to be performed. It is the first owned parameter of the *WhileLoopActionUsage*.

Operations

None.

Constraints

checkWhileLoopActionUsageSpecialization

A *WhileLoopActionUsage* must directly or indirectly specialize the *ActionUsage Actions::whileLoopActions* from the Systems Model Library.

specializesFromLibrary('Actions::whileLoopActions')

checkWhileLoopActionUsageSubactionSpecialization

A composite *WhileLoopActionUsage* that is a subaction usage must directly or indirectly specialize the *ActionUsage Actions::Action::whileLoops* from the Systems Model Library.

```

if parameter <> null and parameter.oclIsKindOf(Expression) then
    parameter.oclAsType(Expression)
else
    null
endif

```

validateWhileLoopActionUsage

A WhileLoopActionUsage must have at least two owned input parameters.

```
inputParameters() -> size() >= 2
```

8.3.17 States Abstract Syntax

8.3.17.1 Overview

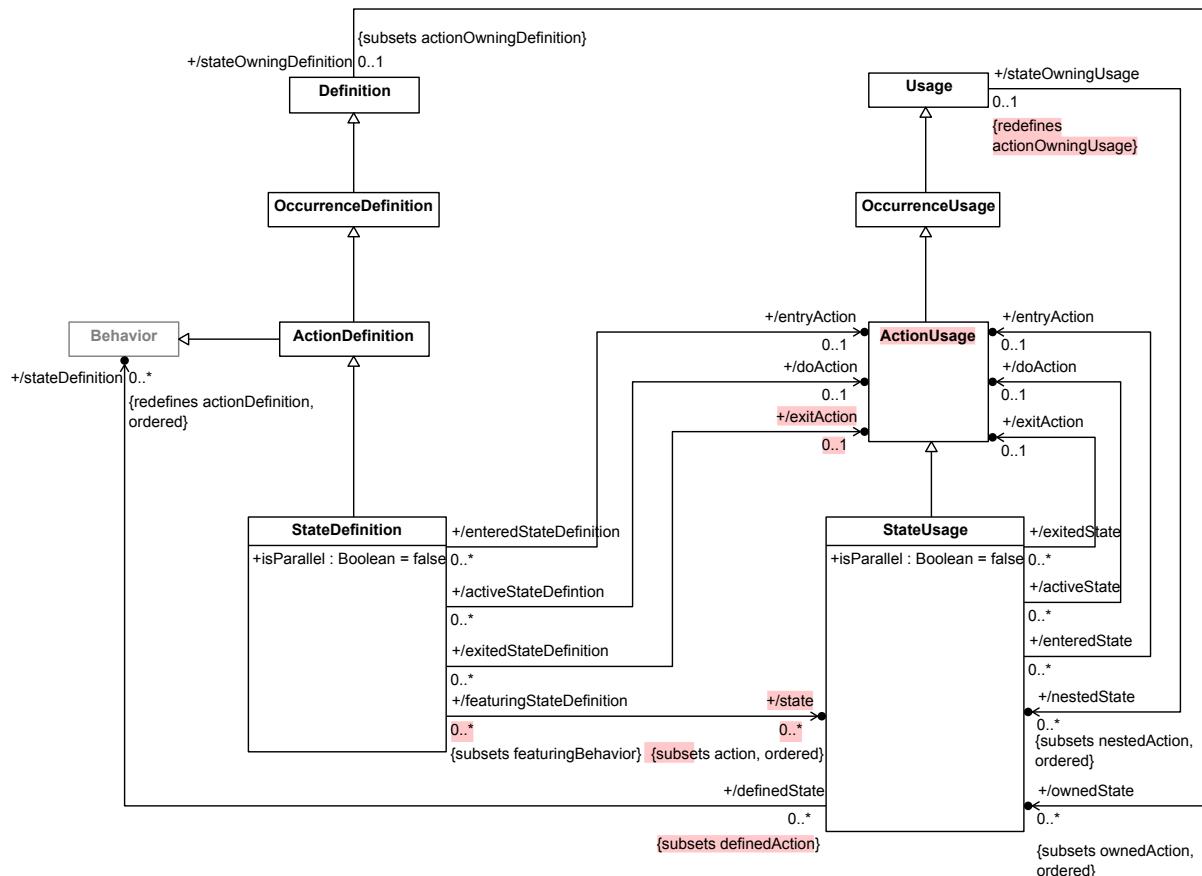


Figure 29. State Definition and Usage

```
isSubactionUsage() implies  
specializesFromLibrary('Actions::Action::whileLoops')
```

deriveWhileLoopActionUsageUntilArgument

The `whileArgument` of a `WhileLoopActionUsage` is its third input parameter, which, if it exists, must be an `Expression`.

```
untilArgument =  
    let parameter : Feature = inputParameter(3) in  
    if parameter <> null and parameter.oclIsKindOf(Expression) then  
        parameter.oclAsType(Expression)  
    else  
        null  
    endif
```

deriveWhileLoopActionUsageWhileArgument

The `whileArgument` of a `WhileLoopActionUsage` is its first input parameter, which must be an `Expression`.

```
whileArgument =  
    let parameter : Feature = inputParameter(1) in  
    if parameter <> null and parameter.oclIsKindOf(Expression) then  
        parameter.oclAsType(Expression)  
    else  
        null  
    endif
```

validateWhileLoopActionUsage

A `WhileLoopActionUsage` must have at least two owned input parameters.

```
inputParameters()->size() >= 2
```

8.3.17 States Abstract Syntax

8.3.17.1 Overview

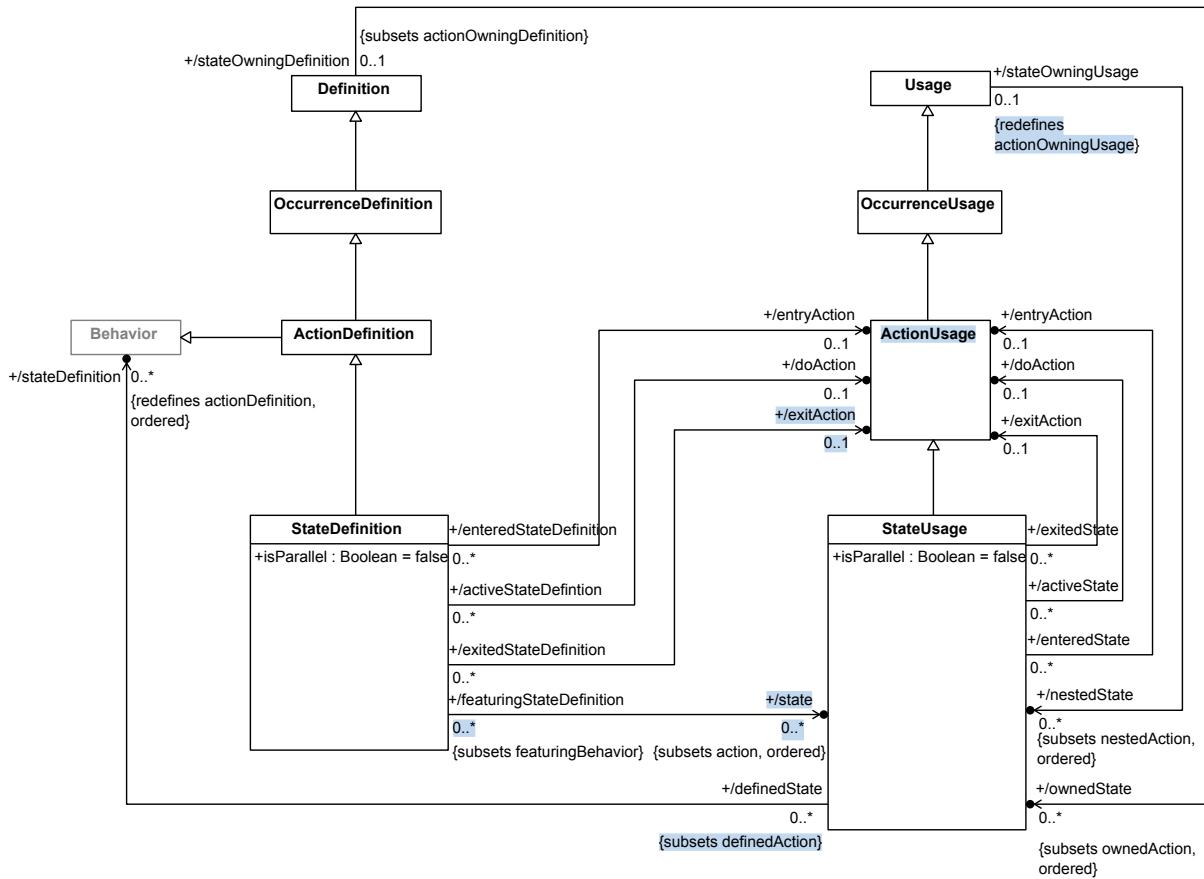


Figure 30. State Definition and Usage

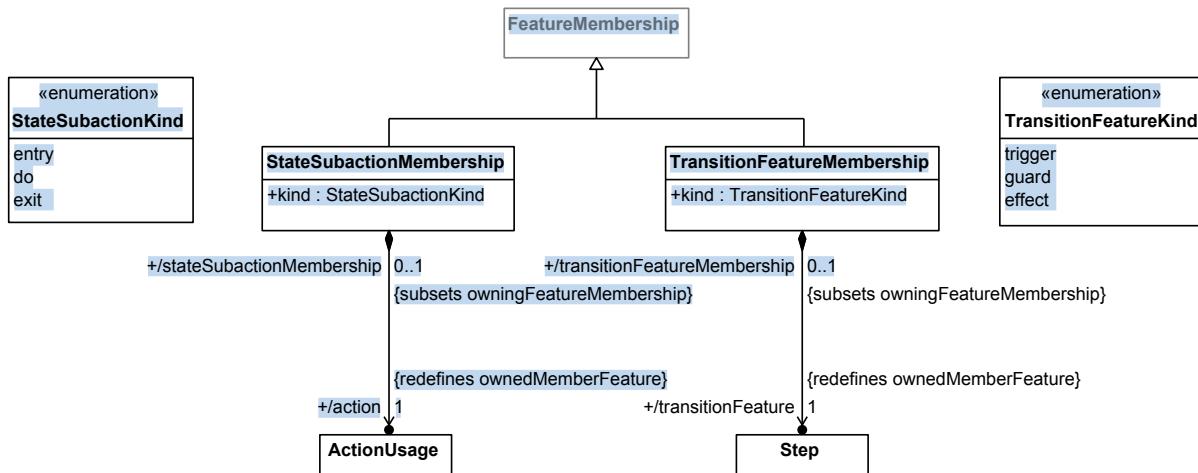


Figure 31. State Membership

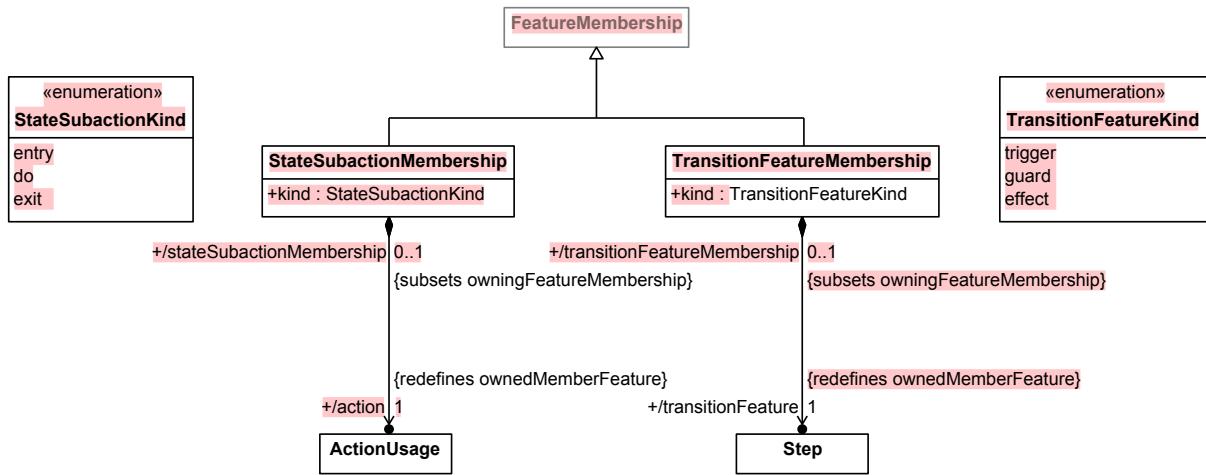


Figure 30. State Membership

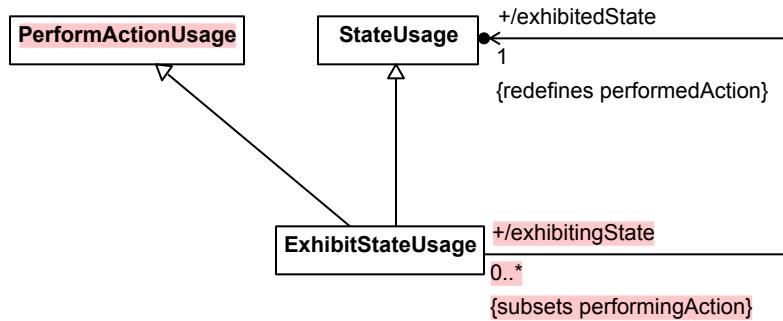


Figure 31. Exhibited States

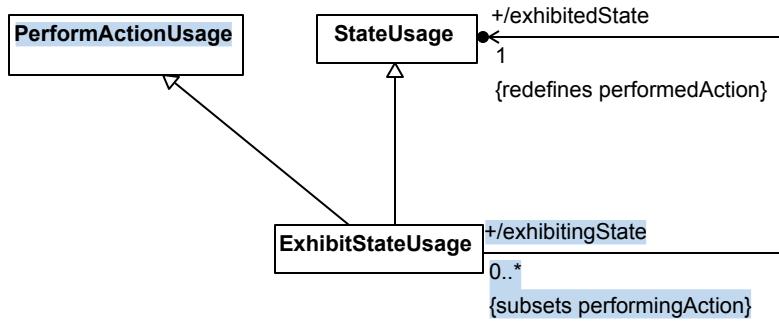


Figure 32. Exhibited States

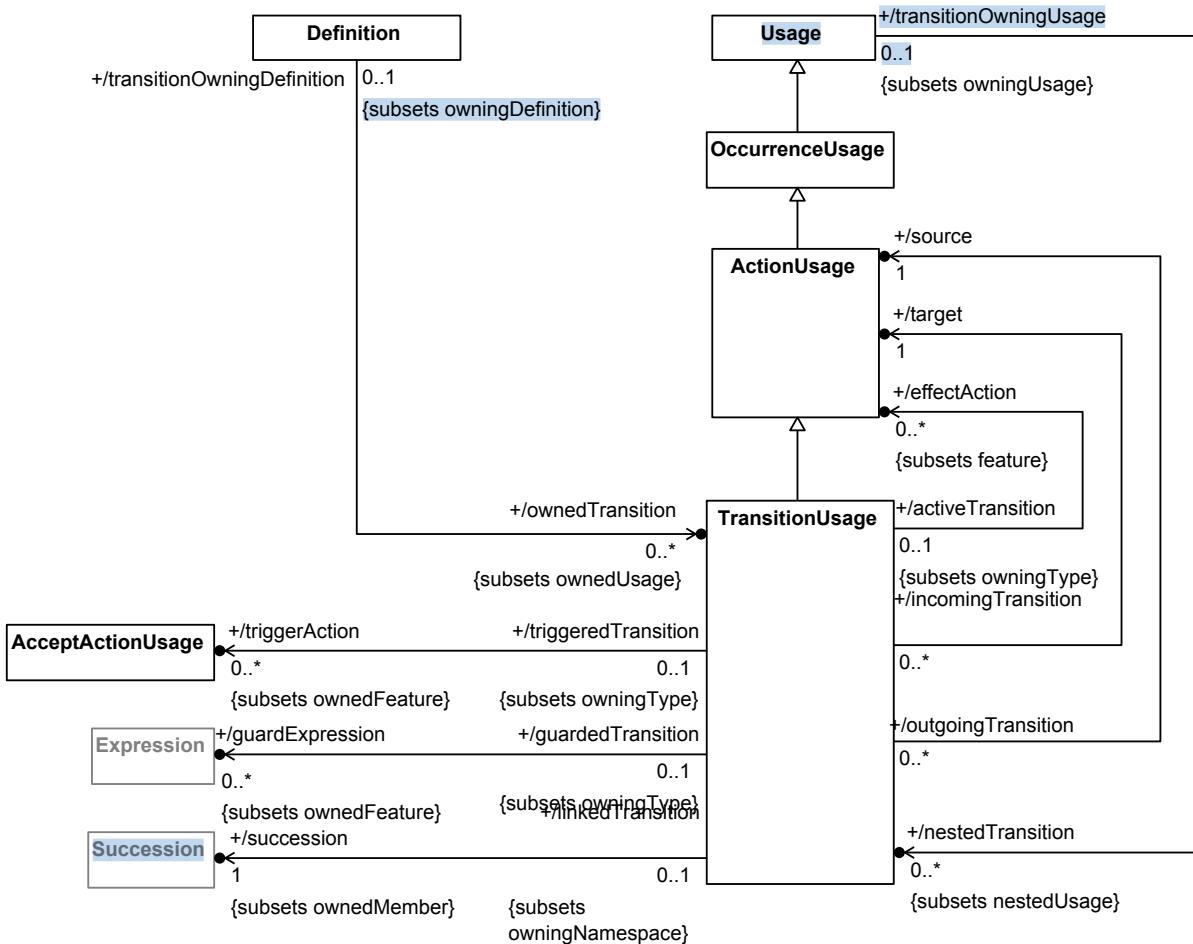


Figure 33. Transition Usage

8.3.17.2 ExhibitStateUsage

Description

An **ExhibitStateUsage** is a **StateUsage** that represents the exhibiting of a **StateUsage**. Unless it is the **StateUsage** itself, the **StateUsage** to be exhibited is related to the **ExhibitStateUsage** by a **ReferenceSubsetting Relationship**. An **ExhibitStateUsage** is also a **PerformActionUsage**, with its **exhibitedState** as the **performedAction**.

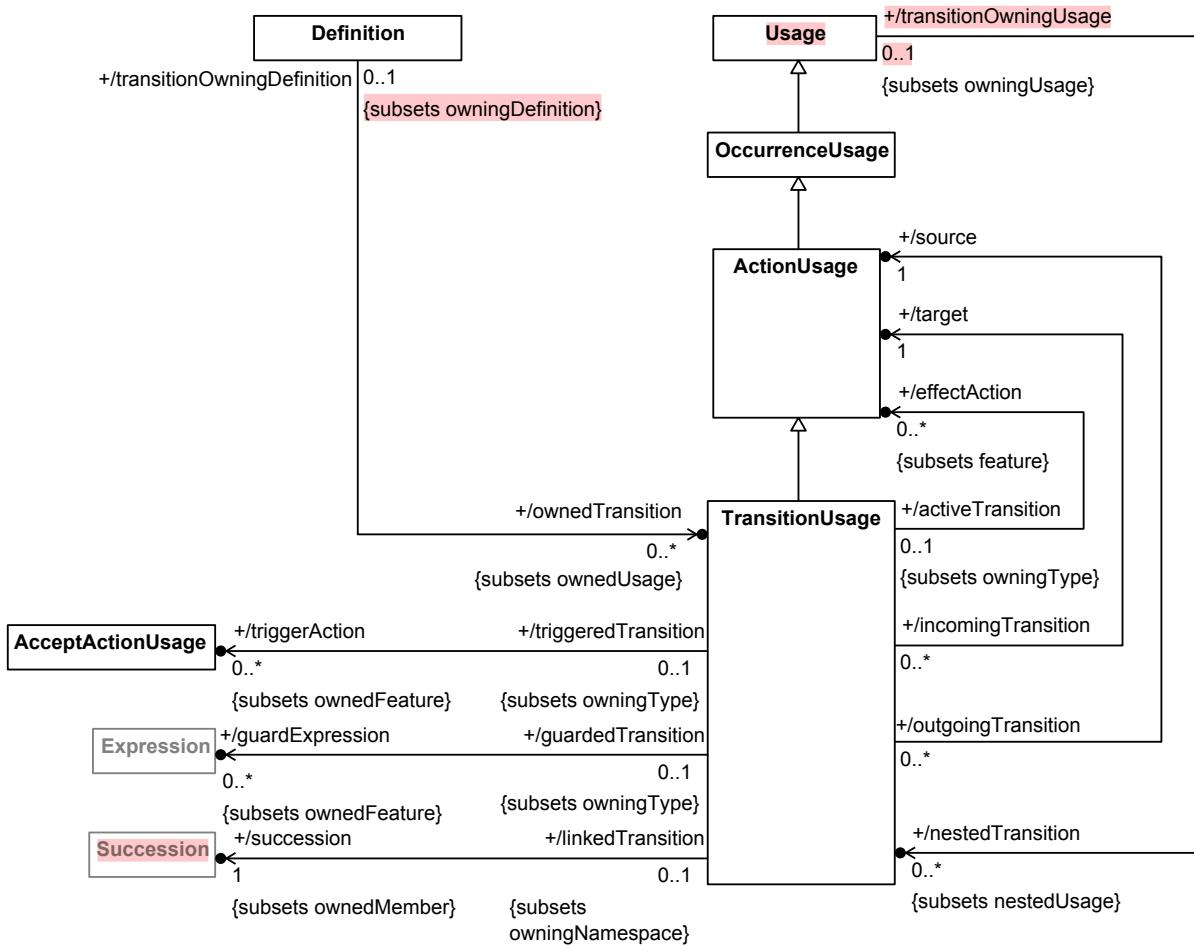


Figure 32. Transition Usage

8.3.17.2 ExhibitStateUsage

Description

An **ExhibitStateUsage** is a **StateUsage** that represents the exhibiting of a **StateUsage**. Unless it is the **StateUsage** itself, the **StateUsage** to be exhibited is related to the **ExhibitStateUsage** by a **ReferenceSubsetting** Relationship. An **ExhibitStateUsage** is also a **PerformActionUsage**, with its **exhibitedState** as the **performedAction**.

General Classes

StateUsage
PerformActionUsage

Attributes

`/exhibitedState : StateUsage {redefines performedAction}`

The **StateUsage** to be exhibited by the **ExhibitStateUsage**. It is the **performedAction** of the **ExhibitStateUsage** considered as a **PerformActionUsage**, which must be a **StateUsage**.

General Classes

StateUsage
PerformActionUsage

Attributes

/exhibitedState : StateUsage {redefines performedAction}

The StateUsage to be exhibited by the ExhibitStateUsage. It is the performedAction of the ExhibitStateUsage considered as a PerformActionUsage, which must be a StateUsage.

Operations

None.

Constraints

checkExhibitStateUsageSpecialization

If an ExhibitStateUsage has an owningType that is a PartDefinition or PartUsage, then it must directly or indirectly specialize the StateUsage *Parts::Part::exhibitedStates*.

```
owningType <> null and
(owningType.oclIsKindOf(PartDefinition) or
 owningType.oclIsKindOf(PartUsage)) implies
    specializesFromLibrary('Parts::Part::exhibitedStates')
```

validateExhibitStateUsageReference

If an ExhibitStateUsage has an ownedReferenceSubsetting, then its referencedFeature must be a StateUsage.

```
ownedReferenceSubsetting <> null implies
    ownedReferenceSubsetting.referencedFeature.oclIsKindOf(StateUsage)
```

8.3.17.3 StateSubactionKind

Description

A StateSubactionKind indicates whether the action of a StateSubactionMembership is an entry, do or exit action.

General Classes

None.

Literal Values

do

Indicates that the action of a StateSubactionMembership is a doAction.

entry

Indicates that the action of a StateSubactionMembership is an entryAction.

Operations

None.

Constraints

checkExhibitStateUsageSpecialization

If an `ExhibitStateUsage` has an `owningType` that is a `PartDefinition` or `PartUsage`, then it must directly or indirectly specialize the `StateUsage Parts::Part::exhibitedStates`.

```
owningType <> null and
(owningType.oclIsKindOf(PartDefinition) or
 owningType.oclIsKindOf(PartUsage)) implies
    specializesFromLibrary('Parts::Part::exhibitedStates')
```

validateExhibitStateUsageReference

If an `ExhibitStateUsage` has an `ownedReferenceSubsetting`, then its `referencedFeature` must be a `StateUsage`.

```
ownedReferenceSubsetting <> null implies
    ownedReferenceSubsetting.referencedFeature.oclIsKindOf(StateUsage)
```

8.3.17.3 StateSubactionKind

Description

A `StateSubactionKind` indicates whether the action of a `StateSubactionMembership` is an entry, do or exit action.

General Classes

None.

Literal Values

do

Indicates that the action of a `StateSubactionMembership` is a `doAction`.

entry

Indicates that the action of a `StateSubactionMembership` is an `entryAction`.

exit

Indicates that the action of a `StateSubactionMembership` is an `exitAction`.

8.3.17.4 StateSubactionMembership

Description

A `StateSubactionMembership` is a `FeatureMembership` for an entry, do or exit `ActionUsage` of a `StateDefinition` or `StateUsage`.

exit

Indicates that the action of a StateSubactionMembership is an exitAction.

8.3.17.4 StateSubactionMembership

Description

A StateSubactionMembership is a FeatureMembership for an entry, do or exit ActionUsage of a StateDefinition or StateUsage.

General Classes

FeatureMembership

Attributes

/action : ActionUsage {redefines ownedMemberFeature}

The ActionUsage that is the ownedMemberFeature of this StateSubactionMembership.

kind : StateSubactionKind

Whether this StateSubactionMembership is for an entry, do or exit ActionUsage.

Operations

None.

Constraints

validateStateSubactionMembershipOwningType

The owningType of a StateSubactionMembership must be a StateDefinition or a StateUsage.

owningType.oclIsKindOf(StateDefinition) or
owningType.oclIsKindOf(StateUsage)

8.3.17.5 StateDefinition

Description

A StateDefinition is the Definition of the Behavior of a system or part of a system in a certain state condition.

A StateDefinition may be related to up to three of its ownedFeatures by StateBehaviorMembership Relationships, all of different kinds, corresponding to the entry, do and exit actions of the StateDefinition.

General Classes

ActionDefinition

Attributes

/doAction : ActionUsage [0..1]

General Classes

FeatureMembership

Attributes

/action : ActionUsage {redefines ownedMemberFeature}

The ActionUsage that is the ownedMemberFeature of this StateSubactionMembership.

kind : StateSubactionKind

Whether this StateSubactionMembership is for an entry, do or exit ActionUsage.

Operations

None.

Constraints

validateStateSubactionMembershipOwningType

The owningType of a StateSubactionMembership must be a StateDefinition or a StateUsage.

owningType.oclIsKindOf(StateDefinition) or
owningType.oclIsKindOf(StateUsage)

8.3.17.5 StateDefinition

Description

A StateDefinition is the Definition of the Behavior of a system or part of a system in a certain state condition.

A StateDefinition may be related to up to three of its ownedFeatures by StateBehaviorMembership Relationships, all of different kinds, corresponding to the entry, do and exit actions of the StateDefinition.

General Classes

ActionDefinition

Attributes

/doAction : ActionUsage [0..1]

The ActionUsage of this StateDefinition to be performed while in the state defined by the StateDefinition. It is the owned ActionUsage related to the StateDefinition by a StateSubactionMembership with kind = do.

/entryAction : ActionUsage [0..1]

The ActionUsage of this StateDefinition to be performed on entry to the state defined by the StateDefinition. It is the owned ActionUsage related to the StateDefinition by a StateSubactionMembership with kind = entry.

The ActionUsage of this StateDefinition to be performed while in the state defined by the StateDefinition. It is the owned ActionUsage related to the StateDefinition by a StateSubactionMembership with kind = do.

/entryAction : ActionUsage [0..1]

The ActionUsage of this StateDefinition to be performed on entry to the state defined by the StateDefinition. It is the owned ActionUsage related to the StateDefinition by a StateSubactionMembership with kind = entry.

/exitAction : ActionUsage [0..1]

The ActionUsage of this StateDefinition to be performed on exit to the state defined by the StateDefinition. It is the owned ActionUsage related to the StateDefinition by a StateSubactionMembership with kind = exit.

isParallel : Boolean

Whether the ownedStates of this StateDefinition are to all be performed in parallel. If true, none of the ownedActions (which includes ownedStates) may have any incoming or outgoing Transitions. If false, only one ownedState may be performed at a time.

/state : StateUsage [0..*] {subsets action, ordered}

The StateUsages, which are actions in the StateDefinition, that specify the discrete states in the behavior defined by the StateDefinition.

Operations

None.

Constraints

checkStateDefinitionSpecialization

A StateDefinition must directly or indirectly specialize the StateDefinition States::StateAction from the Systems Model Library.

specializesFromLibrary('States::StateAction')

deriveStateDefinitionDoAction

The doAction of a StateDefinition is the action of the owned StateSubactionMembership with kind = do.

```
doAction =
    let doMemberships : Sequence(StateSubactionMembership) =
        ownedMembership->
            selectByKind(StateSubactionMembership)->
                select(kind = StateSubactionKind::do) in
    if doMemberships->isEmpty() then null
    else doMemberships->at(1)
    endif
```

deriveStateDefinitionEntryAction

/exitAction : ActionUsage [0..1]

The ActionUsage of this StateDefinition to be performed on exit to the state defined by the StateDefinition. It is the owned ActionUsage related to the StateDefinition by a StateSubactionMembership with kind = exit.

isParallel : Boolean

Whether the ownedStates of this StateDefinition are to all be performed in parallel. If true, none of the ownedActions (which includes ownedStates) may have any incoming or outgoing Transitions. If false, only one ownedState may be performed at a time.

/state : StateUsage [0..*] {subsets action, ordered}

The StateUsages, which are actions in the StateDefinition, that specify the discrete states in the behavior defined by the StateDefinition.

Operations

None.

Constraints

checkStateDefinitionSpecialization

A StateDefinition must directly or indirectly specialize the StateDefinition States::StateAction from the Systems Model Library.

```
specializesFromLibrary('States::StateAction')
```

deriveStateDefinitionDoAction

The doAction of a StateDefinition is the action of the owned StateSubactionMembership with kind = do.

```
doAction =
    let doMemberships : Sequence(StateSubactionMembership) =
        ownedMembership-
            selectByKind(StateSubactionMembership) ->
                select(kind = StateSubactionKind::do) in
    if doMemberships->isEmpty() then null
    else doMemberships->at(1)
    endif
```

deriveStateDefinitionEntryAction

The entryAction of a StateDefinition is the action of the owned StateSubactionMembership with kind = entry.

```
entryAction =
    let entryMemberships : Sequence(StateSubactionMembership) =
        ownedMembership-
            selectByKind(StateSubactionMembership) ->
                select(kind = StateSubactionKind::entry) in
    if entryMemberships->isEmpty() then null
```

The entryAction of a StateDefinition is the action of the owned StateSubactionMembership with kind = entry.

```
entryAction =
    let entryMemberships : Sequence(StateSubactionMembership) =
        ownedMembership->
            selectByKind(StateSubactionMembership)->
                select(kind = StateSubactionKind::entry) in
    if entryMemberships->isEmpty() then null
    else entryMemberships->at(1)
    endif
```

deriveStateDefinitionExitAction

The exitAction of a StateDefinition is the action of the owned StateSubactionMembership with kind = exit .

```
exitAction =
    let exitMemberships : Sequence(StateSubactionMembership) =
        ownedMembership->
            selectByKind(StateSubactionMembership)->
                select(kind = StateSubactionKind::exit) in
    if exitMemberships->isEmpty() then null
    else exitMemberships->at(1)
    endif
```

deriveStateDefinitionState

The states of a StateDefinition are those of its actions that are StateUsages.

```
state = action->selectByKind(StateUsage)
```

validateStateDefinitionParallelSubactions

If a StateDefinition is parallel, then its ownedActions (which includes its ownedStates) must not have any incomingTransitions or outgoingTransitions.

```
isParallel implies
    ownedAction.incomingTransition->isEmpty() and
    ownedAction.outgoingTransition->isEmpty()
```

validateStateDefinitionStateSubactionKind

A StateDefinition must not have more than one owned StateSubactionMembership of each kind.

```
ownedMembership->
    selectByKind(StateSubactionMembership)->
        isUnique(kind)
```

8.3.17.6 StateUsage

SYSML2 -183: checkStateUsageExclusiveStateSpecialization and checkStateUsageSubstateSpecialization have problems

Description

A StateUsage is an ActionUsage that is nominally the Usage of a StateDefinition. However, other kinds of kernel Behaviors are also allowed as types, to permit use of Behaviors

```

    else entryMemberships->at(1)
endif

deriveStateDefinitionExitAction

The exitAction of a StateDefinition is the action of the owned StateSubactionMembership with kind
= exit .

exitAction =
    let exitMemberships : Sequence(StateSubactionMembership) =
        ownedMembership->
            selectByKind(StateSubactionMembership)->
                select(kind = StateSubactionKind::exit) in
    if exitMemberships->isEmpty() then null
    else exitMemberships->at(1)
endif

```

deriveStateDefinitionState

The states of a StateDefinition are those of its actions that are StateUsages.

```
state = action->selectByKind(StateUsage)
```

validateStateDefinitionParallelSubactions

If a StateDefinition is parallel, then its ownedActions (which includes its ownedStates) must not have any incomingTransitions or outgoingTransitions.

```

isParallel implies
    ownedAction.incomingTransition->isEmpty() and
    ownedAction.outgoingTransition->isEmpty()

```

validateStateDefinitionStateSubactionKind

A StateDefinition must not have more than one owned StateSubactionMembership of each kind.

```

ownedMembership->
    selectByKind(StateSubactionMembership)->
        isUnique(kind)

```

8.3.17.6 StateUsage

Description

A StateUsage is an ActionUsage that is nominally the Usage of a StateDefinition. However, other kinds of kernel Behaviors are also allowed as types, to permit use of Behaviors

A StateUsage may be related to up to three of its ownedFeatures by StateSubactionMembership Relationships, all of different kinds, corresponding to the entry, do and exit actions of the StateUsage.

General Classes

ActionUsage

Attributes

A StateUsage may be related to up to three of its ownedFeatures by StateSubactionMembership Relationships, all of different kinds, corresponding to the entry, do and exit actions of the StateUsage.

General Classes

ActionUsage

Attributes

/doAction : ActionUsage [0..1]

The ActionUsage of this StateUsage to be performed while in the state defined by the StateDefinition. It is the owned ActionUsage related to the StateUsage by a StateSubactionMembership with kind = do.

/entryAction : ActionUsage [0..1]

The ActionUsage of this StateUsage to be performed on entry to the state defined by the StateDefinition. It is the owned ActionUsage related to the StateUsage by a StateSubactionMembership with kind = entry.

/exitAction : ActionUsage [0..1]

The ActionUsage of this StateUsage to be performed on exit to the state defined by the StateDefinition. It is the owned ActionUsage related to the StateUsage by a StateSubactionMembership with kind = exit.

isParallel : Boolean

Whether the nestedStates of this StateUsage are to all be performed in parallel. If true, none of the nestedActions (which include nestedStates) may have any incoming or outgoing Transitions. If false, only one nestedState may be performed at a time.

/stateDefinition : Behavior [0..*] {redefines actionDefinition, ordered}

The Behaviors that are the types of this StateUsage. Nominally, these would be StateDefinitions, but kernel Behaviors are also allowed, to permit use of Behaviors from the Kernel Model Libraries.

Operations

isSubstateUsage(isParallel : Boolean) : Boolean

Check if this StateUsage is composite and has an owningType that is a StateDefinition or StateUsage with the given value of isParallel, but is *not* an entryAction, doAction, or exitAction. If so, then it represents a StateAction that is a substate or exclusiveState (for isParallel = false) of another StateAction.

```
body: isComposite and owningType <> null and
(owningType.oclIsKindOf(StateDefinition) and
 owningType.oclAsType(StateDefinition).isParallel = isParallel or
 owningType.oclIsKindOf(StateUsage) and
 owningType.oclAsType(StateUsage).isParallel = isParallel) and
not owningFeatureMembership.oclIsKindOf(StateSubactionMembership)
```

Constraints

checkStateUsageExclusiveStateSpecialization

A StateUsage that is a substate usage with a non-parallel owning StateDefinition or StateUsage must directly or indirectly specialize the StateUsage States::StateAction::exclusiveStates from the Systems Model Library.

/doAction : ActionUsage [0..1]

The ActionUsage of this StateUsage to be performed while in the state defined by the StateDefinition. It is the owned ActionUsage related to the StateUsage by a StateSubactionMembership with kind = do.

/entryAction : ActionUsage [0..1]

The ActionUsage of this StateUsage to be performed on entry to the state defined by the StateDefinition. It is the owned ActionUsage related to the StateUsage by a StateSubactionMembership with kind = entry.

/exitAction : ActionUsage [0..1]

The ActionUsage of this StateUsage to be performed on exit to the state defined by the StateDefinition. It is the owned ActionUsage related to the StateUsage by a StateSubactionMembership with kind = exit.

isParallel : Boolean

Whether the nestedStates of this StateUsage are to all be performed in parallel. If true, none of the nestedActions (which include nestedStates) may have any incoming or outgoing Transitions. If false, only one nestedState may be performed at a time.

/stateDefinition : Behavior [0..*] {redefines actionDefinition, ordered}

The Behaviors that are the types of this StateUsage. Nominally, these would be StateDefinitions, but kernel Behaviors are also allowed, to permit use of Behaviors from the Kernel Model Libraries.

Operations

isSubstateUsage(isParallel : Boolean) : Boolean

Check if this StateUsage is composite and has an owningType that is an StateDefinition or StateUsage with the given value of isParallel, but is not an entryAction or exitAction. If so, then it represents a StateAction that is a substate or exclusiveState (for isParallel = false) of another StateAction.

```
body: owningType <> null and
  (owningType.oclIsKindOf(StateDefinition) and
   owningType.oclAsType(StateDefinition).isParallel = isParallel or
   owningType.oclIsKindOf(StateUsage) and
   owningType.oclAsType(StateUsage).isParallel = isParallel) and
  not owningFeatureMembership.oclIsKindOf(StateSubactionMembership)
```

Constraints

checkStateUsageExclusiveStateSpecialization

A StateUsage that is a substate usage with a non-parallel owning StateDefinition or StateUsage must directly or indirectly specialize the StateUsage States::State::exclusiveStates from the Systems Model Library.

```
isSubstateUsage(true) implies
  specializesFromLibrary('States::State::substates')
```

checkStateUsageSpecialization

```
isSubstateUsage(false) implies  
specializesFromLibrary('States::StateAction::exclusiveStates')
```

checkStateUsageSpecialization

A StateUsage must directly or indirectly specialize the StateUsage *States::stateActions* from the Systems Model Library.

```
specializesFromLibrary('States::stateActions')
```

checkStateUsageSubstateSpecialization

A StateUsage that is a substate usage with a owning StateDefinition or StateUsage that is parallel must directly or indirectly specialize the StateUsage *States::StateAction::substates* from the Systems Model Library.

```
isSubstateUsage(true) implies  
specializesFromLibrary('States::StateAction::substates')
```

deriveStateUsageDoAction

The doAction of a StateUsage is the action of the owned StateSubactionMembership with kind = do.

```
doAction =  
let doMemberships : Sequence(StateSubactionMembership) =  
    ownedMembership->  
        selectByKind(StateSubactionMembership)->  
            select(kind = StateSubactionKind::do) in  
    if doMemberships->isEmpty() then null  
    else doMemberships->at(1)  
    endif
```

deriveStateUsageEntryAction

The entryAction of a StateUsage is the action of the owned StateSubactionMembership with kind = entry.

```
entryAction =  
let entryMemberships : Sequence(StateSubactionMembership) =  
    ownedMembership->  
        selectByKind(StateSubactionMembership)->  
            select(kind = StateSubactionKind::entry) in  
    if entryMemberships->isEmpty() then null  
    else entryMemberships->at(1)  
    endif
```

deriveStateUsageExitAction

The exitAction of a StateUsage is the action of the owned StateSubactionMembership with kind = exit .

```
exitAction =  
let exitMemberships : Sequence(StateSubactionMembership) =  
    ownedMembership->  
        selectByKind(StateSubactionMembership)->  
            select(kind = StateSubactionKind::exit) in  
    if exitMemberships->isEmpty() then null  
    else exitMemberships->at(1)  
    endif
```

A StateUsage must directly or indirectly specialize the StateUsage States::stateActions from the Systems Model Library.

```
specializesFromLibrary('States::stateActions')
```

checkStateUsageSubstateSpecialization

A StateUsage that is a substate usage with a owning StateDefinition or StateUsage that is parallel must directly or indirectly specialize the StateUsage States::State::substates from the Systems Model Library.

```
isSubstateUsage(false) implies  
    specializesFromLibrary('States::State::substates')
```

deriveStateUsageDoAction

The doAction of a StateUsage is the action of the owned StateSubactionMembership with kind = do.

```
doAction =  
    let doMemberships : Sequence(StateSubactionMembership) =  
        ownedMembership->  
            selectByKind(StateSubactionMembership) ->  
                select(kind = StateSubactionKind::do) in  
        if doMemberships->isEmpty() then null  
        else doMemberships->at(1)  
        endif
```

deriveStateUsageEntryAction

The entryAction of a StateUsage is the action of the owned StateSubactionMembership with kind = entry.

```
entryAction =  
    let entryMemberships : Sequence(StateSubactionMembership) =  
        ownedMembership->  
            selectByKind(StateSubactionMembership) ->  
                select(kind = StateSubactionKind::entry) in  
        if entryMemberships->isEmpty() then null  
        else entryMemberships->at(1)  
        endif
```

deriveStateUsageExitAction

The exitAction of a StateUsage is the action of the owned StateSubactionMembership with kind = exit .

```
exitAction =  
    let exitMemberships : Sequence(StateSubactionMembership) =  
        ownedMembership->  
            selectByKind(StateSubactionMembership) ->  
                select(kind = StateSubactionKind::exit) in  
        if exitMemberships->isEmpty() then null  
        else exitMemberships->at(1)  
        endif
```

validateStateUsageParallelSubactions

validateStateUsageParallelSubactions

If a StateUsage is parallel, then its nestedActions (which includes nestedStates) must not have any incomingTransitions or outgoingTransitions.

```
isParallel implies
    nestedAction.incomingTransition->isEmpty() and
    nestedAction.outgoingTransition->isEmpty()
```

validateStateUsageStateSubactionKind

A StateUsage must not have more than one owned StateSubactionMembership of each kind.

```
ownedMembership->
    selectByKind(StateSubactionMembership) ->
        isUnique(kind)
```

8.3.17.7 TransitionFeatureKind

Description

A TransitionActionKind indicates whether the transitionFeature of a TransitionFeatureMembership is a trigger, guard or effect.

General Classes

None.

Literal Values

effect

Indicates that the transitionFeature of a TransitionFeatureMembership is an effectAction.

guard

Indicates that the transitionFeature of a TransitionFeatureMembership is a guardExpression.

trigger

Indicates that the transitionFeature of a TransitionFeatureMembership is a triggerAction.

8.3.17.8 TransitionFeatureMembership

Description

A TransitionFeatureMembership is a FeatureMembership for a trigger, guard or effect of a TransitionUsage, whose transitionFeature is a AcceptActionUsage, Boolean-valued Expression or ActionUsage, depending on its kind.

General Classes

FeatureMembership

Attributes

kind : TransitionFeatureKind

If a StateUsage is parallel, then its nestedActions (which includes nestedStates) must not have any incomingTransitions or outgoingTransitions.

```
isParallel implies
    nestedAction.incomingTransition->isEmpty() and
    nestedAction.outgoingTransition->isEmpty()
```

validateStateUsageStateSubactionKind

A StateUsage must not have more than one owned StateSubactionMembership of each kind.

```
ownedMembership->
    selectByKind(StateSubactionMembership)->
        isUnique(kind)
```

8.3.17.7 TransitionFeatureKind

Description

A TransitionActionKind indicates whether the transitionFeature of a TransitionFeatureMembership is a trigger, guard or effect.

General Classes

None.

Literal Values

effect

Indicates that the transitionFeature of a TransitionFeatureMembership is an effectAction.

guard

Indicates that the transitionFeature of a TransitionFeatureMembership is a guardExpression.

trigger

Indicates that the transitionFeature of a TransitionFeatureMembership is a triggerAction.

8.3.17.8 TransitionFeatureMembership

Description

A TransitionFeatureMembership is a FeatureMembership for a trigger, guard or effect of a TransitionUsage, whose transitionFeature is a AcceptActionUsage, Boolean-valued Expression or ActionUsage, depending on its kind.

General Classes

FeatureMembership

Attributes

kind : TransitionFeatureKind

Whether this TransitionFeatureMembership is for a trigger, guard or effect.

```
/transitionFeature : Step {redefines ownedMemberFeature}
```

The Step that is the ownedMemberFeature of this TransitionFeatureMembership.

Operations

None.

Constraints

validateTransitionFeatureMembershipEffectAction

If the kind of a TransitionUsage is effect, then its transitionFeature must be a kind of ActionUsage.

```
kind = TransitionFeatureKind::effect implies  
      transitionFeature.oclIsKindOf(ActionUsage)
```

validateTransitionFeatureMembershipGuardExpression

If the kind of a TransitionUsage is guard, then its transitionFeature must be a kind of Expression whose result is a Boolean value.

```
kind = TransitionFeatureKind::guard implies  
      transitionFeature.oclIsKindOf(Expression) and  
      let guard : Expression = transitionFeature.oclIsKindOf(Expression) in  
      guard.result.specializesFromLibrary('ScalarValues::Boolean') and  
      guard.result.multiplicity <> null and  
      guard.result.multiplicity.hasBounds(1,1)
```

validateTransitionFeatureMembershipOwningType

The owningType of a TransitionFeatureMembership must be a TransitionUsage.

```
owningType.oclIsKindOf(TransitionUsage)
```

validateTransitionFeatureMembershipTriggerAction

If the kind of a TransitionUsage is trigger, then its transitionFeature must be a kind of AcceptActionUsage.

```
kind = TransitionFeatureKind::trigger implies  
      transitionFeature.oclIsKindOf(AcceptActionUsage)
```

8.3.17.9 TransitionUsage

Description

A TransitionUsage is an ActionUsage representing a triggered transition between ActionUsages or StateUsages. When triggered by a triggerAction, when its guardExpression is true, the TransitionUsage asserts that its source is exited, then its effectAction (if any) is performed, and then its target is entered.

Whether this TransitionFeatureMembership is for a trigger, guard or effect.

```
/transitionFeature : Step {redefines ownedMemberFeature}
```

The Step that is the ownedMemberFeature of this TransitionFeatureMembership.

Operations

None.

Constraints

validateTransitionFeatureMembershipEffectAction

If the kind of a TransitionUsage is effect, then its transitionFeature must be a kind of ActionUsage.

```
kind = TransitionFeatureKind::effect implies  
      transitionFeature.oclIsKindOf(ActionUsage)
```

validateTransitionFeatureMembershipGuardExpression

If the kind of a TransitionUsage is guard, then its transitionFeature must be a kind of Expression whose result is a Boolean value.

```
kind = TransitionFeatureKind::guard implies  
      transitionFeature.oclIsKindOf(Expression) and  
      let guard : Expression = transitionFeature.oclIsKindOf(Expression) in  
      guard.result.specializesFromLibrary('ScalarValues::Boolean') and  
      guard.result.multiplicity <> null and  
      guard.result.multiplicity.hasBounds(1,1)
```

validateTransitionFeatureMembershipOwningType

The owningType of a TransitionFeatureMembership must be a TransitionUsage.

```
owningType.oclIsKindOf(TransitionUsage)
```

validateTransitionFeatureMembershipTriggerAction

If the kind of a TransitionUsage is trigger, then its transitionFeature must be a kind of AcceptActionUsage.

```
kind = TransitionFeatureKind::trigger implies  
      transitionFeature.oclIsKindOf(AcceptActionUsage)
```

8.3.17.9 TransitionUsage

SYSML2 -222: TransitionUsage source and target properties do not support feature chains

SYSML2 -206: Editorial errors in constraints

Description

A TransitionUsage is an ActionUsage representing a triggered transition between ActionUsages or StateUsages. When triggered by a triggerAction, when its guardExpression is true, the TransitionUsage asserts that its source is exited, then its effectAction (if any) is performed, and then its target is entered.

A TransitionUsage can be related to some of its ownedFeatures using TransitionFeatureMembership Relationships, corresponding to the triggerAction, guardExpression and effectAction of the TransitionUsage.

General Classes

ActionUsage

Attributes

/effectAction : ActionUsage [0..*] {subsets feature}

The ActionUsages that define the effects of this TransitionUsage, which are the ownedFeatures of the TransitionUsage related to it by TransitionFeatureMemberships with kind = effect, which must all be ActionUsages.

/guardExpression : Expression [0..*] {subsets ownedFeature}

The Expressions that define the guards of this TransitionUsage, which are the ownedFeatures of the TransitionUsage related to it by TransitionFeatureMemberships with kind = guard, which must all be Expressions.

/source : ActionUsage

The source ActionUsage of this TransitionUsage, which becomes the source of the succession for the TransitionUsage.

/succession : Succession {subsets ownedMember}

The Succession that is the ownedFeature of this TransitionUsage, which, if the TransitionUsage is triggered, asserts the temporal ordering of the source and target.

/target : ActionUsage

The target ActionUsage of this TransitionUsage, which is the targetFeature of the succession for the TransitionUsage.

/triggerAction : AcceptActionUsage [0..*] {subsets ownedFeature}

The AcceptActionUsages that define the triggers of this TransitionUsage, which are the ownedFeatures of the TransitionUsage related to it by TransitionFeatureMemberships with kind = trigger, which must all be AcceptActionUsages.

Operations

triggerPayloadParameter() : ReferenceUsage [0..1]

Return the payloadParameter of the triggerAction of this TransitionUsage, if it has one.

```
body: if triggerAction->isEmpty() then null  
else triggerAction->first().payloadParameter  
endif
```

Constraints

A TransitionUsage can be related to some of its ownedFeatures using TransitionFeatureMembership Relationships, corresponding to the triggerAction, guardExpression and effectAction of the TransitionUsage.

General Classes

ActionUsage

Attributes

/effectAction : ActionUsage [0..*] {subsets feature}

The ActionUsages that define the effects of this TransitionUsage, which are the ownedFeatures of the TransitionUsage related to it by TransitionFeatureMemberships with kind = effect, which must all be ActionUsages.

/guardExpression : Expression [0..*] {subsets ownedFeature}

The Expressions that define the guards of this TransitionUsage, which are the ownedFeatures of the TransitionUsage related to it by TransitionFeatureMemberships with kind = guard, which must all be Expressions.

/source : ActionUsage

The source ActionUsage of this TransitionUsage, which becomes the source of the succession for the TransitionUsage.

/succession : Succession {subsets ownedMember}

The Succession that is the ownedFeature of this TransitionUsage, which, if the TransitionUsage is triggered, asserts the temporal ordering of the source and target.

/target : ActionUsage

The target ActionUsage of this TransitionUsage, which is the targetFeature of the succession for the TransitionUsage.

/triggerAction : AcceptActionUsage [0..*] {subsets ownedFeature}

The AcceptActionUsages that define the triggers of this TransitionUsage, which are the ownedFeatures of the TransitionUsage related to it by TransitionFeatureMemberships with kind = trigger, which must all be AcceptActionUsages.

Operations

sourceFeature() : Feature [0..1]

Return the Feature to be used as the source of the succession of this TransitionUsage, which is the first ownedMember of the TransitionUsage that is a Feature *not* owned via a FeatureMembership whose featureTarget is an ActionUsage.

```
body: let features : Sequence(Feature) = ownedMembers->
    reject(owningMembership.oclIsKindOf(FeatureMembership)) ->
    selectByKind(Feature) ->
    select(featureTarget.oclIsKindOf(ActionUsage)) in
if features->isEmpty() then null
```

checkTransitionUsageActionSpecialization

A composite TransitionUsage whose owningType is a ActionDefinition or ActionUsage, but *not* a StateDefinition or StateUsage, must directly or indirectly specialize the ActionUsage Actions::Action::decisionTransitions from the Systems Model Library.

```
isComposite and owningType <> null and
(owningType.oclIsKindOf(ActionDefinition) or
 owningType.oclIsKindOf(ActionUsage)) and
not (owningType.oclIsKindOf(StateDefinition) or
      owningType.oclIsKindOf(StateUsage)) implies
      specializesFromLibrary('Actions::Action::decisionTransitions')
```

checkTransitionUsagePayloadSpecialization

If a TransitionUsage has a triggerAction, then the payload parameter of the TransitionUsage subsets the Feature chain of the triggerAction and its payloadParameter.

```
triggerAction->notEmpty() implies
  let payloadParameter : Feature = inputParameter(2) in
  payloadParameter <> null and
  payloadParameter.subsetsChain(triggerAction->at(1), triggerPayloadParameter())
```

checkTransitionUsageSourceBindingConnector

A TransitionUsage must have an ownedMember that is a BindingConnector between its source and its first input parameter (which redefines Actions::TransitionAction::transitionLinkSource).

```
ownedMember->selectByKind(BindingConnector)->exists(b |
  b.relatedFeatures->includes(source) and
  b.relatedFeatures->includes(inputParameter(1)))
```

checkTransitionUsageSpecialization

A TransitionUsage must directly or indirectly specialize the ActionUsage Actions::transitionActions from the Systems Model Library.

```
specializesFromLibrary('Actions::transitionActions')
```

checkTransitionUsageStateSpecialization

A composite TransitionUsage whose owningType is a StateDefinition or StateUsage must directly or indirectly specialize the ActionUsage States::State::stateTransitions from the Systems Model Library.

```
isComposite and owningType <> null and
(owningType.oclIsKindOf(StateDefinition) or
 owningType.oclIsKindOf(StateUsage)) implies
      specializesFromLibrary('States::State::stateTransitions')
```

checkTransitionUsageSuccessionBindingConnector

A TransitionUsage must have an ownedMember that is a BindingConnector between its succession and the inherited Feature TransitionPerformances::TransitionPerformance::transitionLink.

```
ownedMember->selectByKind(BindingConnector)->exists(b |
  b.relatedFeatures->includes(succession) and
```

```
else features->first()
endif
```

triggerPayloadParameter() : ReferenceUsage [0..1]

Return the payloadParameter of the triggerAction of this TransitionUsage, if it has one.

```
body: if triggerAction->isEmpty() then null
else triggerAction->first().payloadParameter
endif
```

Constraints

checkTransitionUsageActionSpecialization

A composite TransitionUsage whose owningType is a ActionDefinition or ActionUsage, but *not* a StateDefinition or StateUsage, must directly or indirectly specialize the ActionUsage *Actions::Action::decisionTransitions* from the Systems Model Library.

```
isComposite and owningType <> null and
(owningType.oclIsKindOf(ActionDefinition) or
 owningType.oclIsKindOf(ActionUsage)) and
not (owningType.oclIsKindOf(StateDefinition) or
      owningType.oclIsKindOf(StateUsage)) implies
specializesFromLibrary('Actions::Action::decisionTransitions')
```

checkTransitionUsagePayloadSpecialization

If a TransitionUsage has a triggerAction, then the payload parameter of the TransitionUsage subsets the Feature chain of the triggerAction and its payloadParameter.

```
triggerAction->notEmpty() implies
let payloadParameter : Feature = inputParameter(2) in
payloadParameter <> null and
payloadParameter.subsetsChain(triggerAction->at(1), triggerPayloadParameter())
```

checkTransitionUsageSourceBindingConnector

A TransitionUsage must have an ownedMember that is a BindingConnector between its source and its first input parameter (which redefines *Actions::TransitionAction::transitionLinkSource*).

```
ownedMember->selectByKind(BindingConnector)->exists(b |
b.relatedFeatures->includes(source) and
b.relatedFeatures->includes(inputParameter(1)))
```

checkTransitionUsageSpecialization

A TransitionUsage must directly or indirectly specialize the ActionUsage *Actions::transitionActions* from the Systems Model Library.

```
specializesFromLibrary('Actions::transitionActions')
```

checkTransitionUsageStateSpecialization

A composite TransitionUsage whose owningType is a StateDefinition or StateUsage must directly or indirectly specialize the ActionUsage *States::State::stateTransitions* from the Systems Model Library.

```
b.relatedFeatures->includes(resolveGlobal(
    'TransitionPerformances::TransitionPerformance::transitionLink')))
```

checkTransitionUsageSuccessionSourceSpecialization

The sourceFeature of the succession of a TransitionUsage must be the source of the TransitionUsage (i.e., the first connectorEnd of the succession must have a ReferenceSubsetting Relationship with the source).

```
succession.sourceFeature = source
```

checkTransitionUsageTransitionFeatureSpecialization

The triggerActions, guardExpressions, and effectActions of a TransitionUsage must specialize, respectively, the accepter, guard, and effect features of the ActionUsage Actions:::TransitionActions from the Systems Model Library.

```
triggerAction->forAll(specializesFromLibrary('Actions::TransitionAction::accepter')) and
guardExpression->forAll(specializesFromLibrary('Actions::TransitionAction::guard')) and
effectAction->forAll(specializesFromLibrary('Actions::TransitionAction::effect'))
```

deriveTransitionUsageEffectAction

The effectActions of a TransitionUsage are the transitionFeatures of the ownedFeatureMemberships of the TransitionUsage with kind = effect, which must all be ActionUsages.

```
triggerAction = ownedFeatureMembership->
    selectByKind(TransitionFeatureMembership)->
    select(kind = TransitionFeatureKind::trigger).transitionFeatures->
    selectByKind(AcceptActionUsage)
```

deriveTransitionUsageGuardExpression

The triggerActions of a TransitionUsage are the transitionFeatures of the ownedFeatureMemberships of the TransitionUsage with kind = trigger, which must all be Expressions.

```
guardExpression = ownedFeatureMembership->
    selectByKind(TransitionFeatureMembership)->
    select(kind = TransitionFeatureKind::trigger).transitionFeature->
    selectByKind(Expression)
```

deriveTransitionUsageSource

The source of a TransitionUsage is given by the memberElement of its first ownedMembership, which must be an ActionUsage.

```
source =
    if ownedMembership->isEmpty() then null
    else
        let member : Element =
            ownedMembership->at(1).memberElement in
        if not member.oclIsKindOf(ActionUsage) then null
        else member.oclAsKindOf(ActionUsage)
```

```
isComposite and owningType <> null and
(owningType.oclIsKindOf(StateDefinition) or
owningType.oclIsKindOf(StateUsage)) implies
    specializesFromLibrary('States::State::stateTransitions')
```

checkTransitionUsageSuccessionBindingConnector

A TransitionUsage must have an ownedMember that is a BindingConnector between its succession and the inherited Feature *TransitionPerformances::TransitionPerformance::transitionLink*.

```
ownedMember->selectByKind(BindingConnector)->exists(b |
    b.relatedFeatures->includes(succession) and
    b.relatedFeatures->includes(resolveGlobal(
        'TransitionPerformances::TransitionPerformance::transitionLink')))
```

checkTransitionUsageSuccessionSourceSpecialization

The sourceFeature of the succession of a TransitionUsage must be the source of the TransitionUsage (i.e., the first connectorEnd of the succession must have a ReferenceSubsetting Relationship with the source).

```
succession.sourceFeature = source
```

checkTransitionUsageTransitionFeatureSpecialization

The triggerActions, guardExpressions, and effectActions of a TransitionUsage must specialize, respectively, the accepter, guard, and effect features of the ActionUsage *Actions::TransitionActions* from the Systems Model Library.

```
triggerAction->forAll(specializesFromLibrary('Actions::TransitionAction::accepter')) and
guardExpression->forAll(specializesFromLibrary('Actions::TransitionAction::guard')) and
effectAction->forAll(specializesFromLibrary('Actions::TransitionAction::effect'))
```

deriveTransitionUsageEffectAction

The effectActions of a TransitionUsage are the transitionFeatures of the ownedFeatureMemberships of the TransitionUsage with kind = effect, which must all be ActionUsages.

```
triggerAction = ownedFeatureMembership->
    selectByKind(TransitionFeatureMembership)->
    select(kind = TransitionFeatureKind::trigger).transitionFeatures->
    selectByKind(AcceptActionUsage)
```

deriveTransitionUsageGuardExpression

The triggerActions of a TransitionUsage are the transitionFeatures of the ownedFeatureMemberships of the TransitionUsage with kind = trigger, which must all be Expressions.

```
guardExpression = ownedFeatureMembership->
    selectByKind(TransitionFeatureMembership)->
    select(kind = TransitionFeatureKind::trigger).transitionFeature->
    selectByKind(Expression)
```

deriveTransitionUsageSource

```
        endif  
    endif
```

deriveTransitionUsageSuccession

The succession of a TransitionUsage is its first ownedMember that is a Succession.

```
succession = ownedMember->selectByKind(Succession)->at(1)
```

deriveTransitionUsageTarget

The target of a TransitionUsage is given by the targetFeature of its succession, which must be an ActionUsage.

```
target =  
    if succession.targetFeature->isEmpty() then null  
    else  
        let targetFeature : Feature =  
            succession.targetFeature->at(1) in  
            if not targetFeature.oclIsKindOf(ActionUsage) then null  
            else targetFeature.oclAsType(ActionUsage)  
            endif  
    endif
```

deriveTransitionUsageTriggerAction

The triggerActions of a TransitionUsage are the transitionFeatures of the ownedFeatureMemberships of the TransitionUsage with kind = trigger, which must all be AcceptActionUsages.

```
triggerAction = ownedFeatureMembership->  
    selectByKind(TransitionFeatureMembership)->  
    select(kind = TransitionFeatureKind::trigger).transitionFeature->  
    selectByKind(AcceptActionUsage)
```

validateTransitionUsageParameters

A TransitionUsage must have at least one owned input parameter and, if it has a triggerAction, it must have at least two.

```
if triggerAction->isEmpty() then  
    inputParameters()->size() >= 1  
else  
    inputParameters()->size() >= 2  
endif
```

validateTransitionUsageSuccession

A TransitionUsage must have an ownedMember that is a Succession with a ActionUsage as its targetFeature.

```
let successions : Sequence(Successions) =  
    ownedMember->selectByKind(Succession) in  
successions->notEmpty() and  
successions->at(1).targetFeature->  
    forAll(oclIsKindOf(ActionUsage))
```

The source of a TransitionUsage is `featureTarget` of the result of `sourceFeature()`, which must be an ActionUsage.

```
source =
    let sourceFeature : Feature = sourceFeature() in
    if sourceFeature = null then null
    else sourceFeature.featureTarget.oclAsType(ActionUsage)
```

deriveTransitionUsageSuccession

The succession of a TransitionUsage is its first ownedMember that is a Succession.

```
succession = ownedMember->selectByKind(Succession)->at(1)
```

deriveTransitionUsageTarget

The target of a TransitionUsage is given by the `featureTarget` of the `targetFeature` of its succession, which must be an ActionUsage.

```
target =
    if succession.targetFeature->isEmpty() then null
    else
        let targetFeature : Feature =
            succession.targetFeature->first().featureTarget in
            if not targetFeature.oclIsKindOf(ActionUsage) then null
            else targetFeature.oclAsType(ActionUsage)
            endif
        endif
```

deriveTransitionUsageTriggerAction

The triggerActions of a TransitionUsage are the transitionFeatures of the ownedFeatureMemberships of the TransitionUsage with kind = trigger, which must all be AcceptActionUsages.

```
triggerAction = ownedFeatureMembership->
    selectByKind(TransitionFeatureMembership)->
    select(kind = TransitionFeatureKind::trigger).transitionFeature->
    selectByKind(AcceptActionUsage)
```

validateTransitionUsageParameters

A TransitionUsage must have at least one owned input parameter and, if it has a triggerAction, it must have at least two.

```
if triggerAction->isEmpty() then
    inputParameters()->size() >= 1
else
    inputParameters()->size() >= 2
endif
```

validateTransitionUsageSuccession

A TransitionUsage must have an ownedMember that is a Succession with a ActionUsage as its targetFeature.

```
let successions : Sequence(Successions) =
    ownedMember->selectByKind(Succession) in
```

8.3.18 Calculations Abstract Syntax

8.3.18.1 Overview

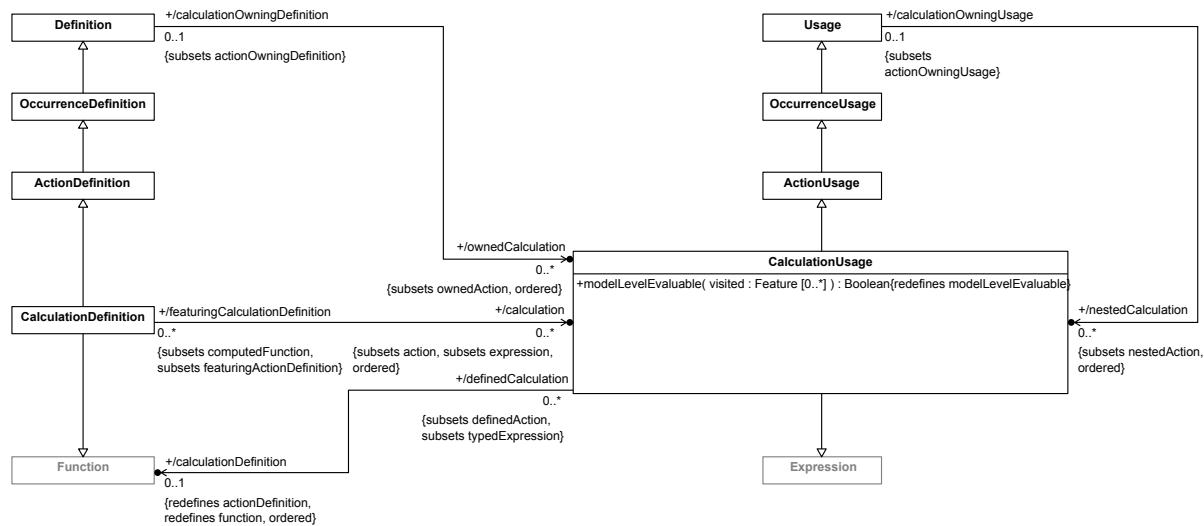


Figure 33. Calculation Definition and Usage

8.3.18.2 CalculationDefinition

Description

A CalculationDefinition is an ActionDefinition that also defines a Function producing a result.

General Classes

ActionDefinition
Function

Attributes

/calculation : CalculationUsage [0..*] {subsets action, expression, ordered}

The actions of this CalculationDefinition that are CalculationUsages.

Operations

None.

Constraints

checkCalculationDefinitionSpecialization

A CalculationDefinition must directly or indirectly specialize the CalculationDefinition *Calculations::Calculation* from the Systems Model Library.

specializesFromLibrary('Calculations::Calculation')

deriveCalculationUsageCalculation

```

successions->notEmpty() and
successions->at(1).targetFeature->
forAll(oclIsKindOf(ActionUsage) )

```

8.3.18 Calculations Abstract Syntax

8.3.18.1 Overview

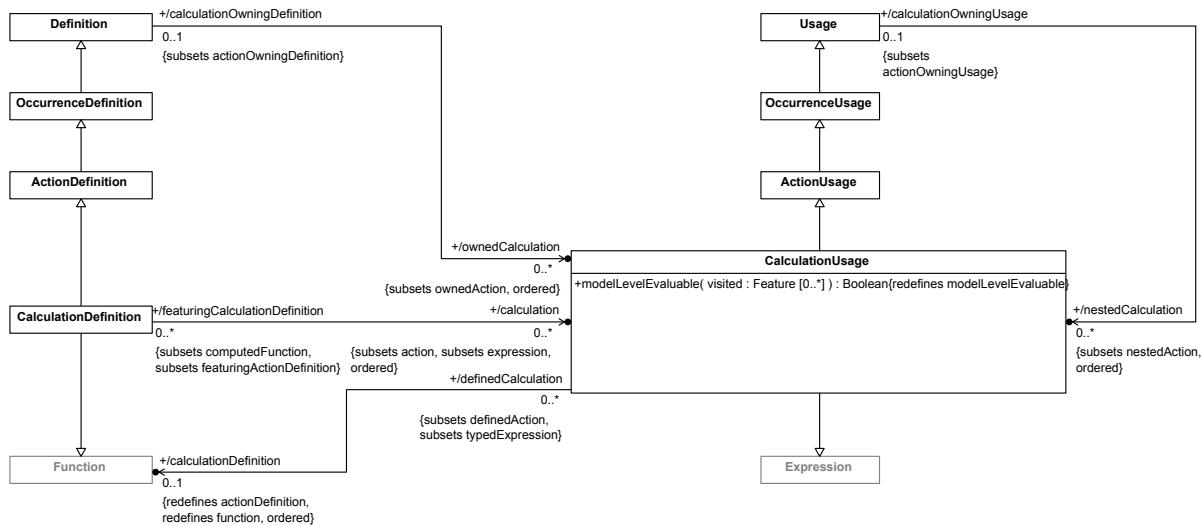


Figure 34. Calculation Definition and Usage

8.3.18.2 CalculationDefinition

Description

A CalculationDefinition is an ActionDefinition that also defines a Function producing a result.

General Classes

ActionDefinition
Function

Attributes

/calculation : CalculationUsage [0..*] {subsets action, expression, ordered}

The actions of this CalculationDefinition that are CalculationUsages.

Operations

None.

Constraints

checkCalculationDefinitionSpecialization

A CalculationDefinition must directly or indirectly specialize the CalculationDefinition *Calculations::Calculation* from the Systems Model Library.

```
specializesFromLibrary('Calculations::Calculation')
```

The calculations of a CalculationDefinition are those of its actions that are CalculationUsages.

```
calculation = action->selectByKind(CalculationUsage)
```

8.3.18.3 CalculationUsage

Description

A CalculationUsage is an ActionUsage that is also an Expression, and, so, is typed by a Function. Nominally, if the type is a CalculationDefinition, a CalculationUsage is a Usage of that CalculationDefinition within a system. However, other kinds of kernel Functions are also allowed, to permit use of Functions from the Kernel Model Libraries.

General Classes

Expression

ActionUsage

Attributes

```
/calculationDefinition : Function [0..1] {redefines function, actionDefinition, ordered}
```

The Function that is the type of this CalculationUsage. Nominally, this would be a CalculationDefinition, but a kernel Function is also allowed, to permit use of Functions from the Kernel Model Libraries.

Operations

```
modelLevelEvaluable(visited : Feature [0..*]) : Boolean {redefines modelLevelEvaluable}
```

A CalculationUsage is not model-level evaluable.

```
body: false
```

Constraints

checkCalculationUsageSpecialization

A CalculationUsage must specialize directly or indirectly the CalculationUsage *Calculations::calculations* from the Systems Model Library.

```
specializesFromLibrary('Calculations::calculations')
```

checkCalculationUsageSubcalculationSpecialization

```
owningType <> null and  
(owningType.oclIsKindOf(CalculationDefinition) or  
owningType.oclIsKindOf(CalculationUsage)) implies  
    specializesFromLibrary('Calculations::Calculation::subcalculations')
```

8.3.19 Constraints Abstract Syntax

deriveCalculationUsageCalculation

The calculations of a CalculationDefinition are those of its actions that are CalculationUsages.

```
calculation = action->selectByKind(CalculationUsage)
```

8.3.18.3 CalculationUsage

Description

A CalculationUsage is an ActionUsage that is also an Expression, and, so, is typed by a Function. Nominally, if the type is a CalculationDefinition, a CalculationUsage is a Usage of that CalculationDefinition within a system. However, other kinds of kernel Functions are also allowed, to permit use of Functions from the Kernel Model Libraries.

General Classes

ActionUsage
Expression

Attributes

```
/calculationDefinition : Function [0..1] {redefines function, actionDefinition, ordered}
```

The Function that is the type of this CalculationUsage. Nominally, this would be a CalculationDefinition, but a kernel Function is also allowed, to permit use of Functions from the Kernel Model Libraries.

Operations

```
modelLevelEvaluable(visited : Feature [0..*]) : Boolean {redefines modelLevelEvaluable}
```

A CalculationUsage is not model-level evaluable.

body: false

Constraints

```
checkCalculationUsageSpecialization
```

A CalculationUsage must specialize directly or indirectly the CalculationUsage *Calculations::calculations* from the Systems Model Library.

```
specializesFromLibrary('Calculations::calculations')
```

```
checkCalculationUsageSubcalculationSpecialization
```

```
owningType <> null and
(owningType.oclIsKindOf(CalculationDefinition) or
 owningType.oclIsKindOf(CalculationUsage)) implies
    specializesFromLibrary('Calculations::Calculation::subcalculations')
```

8.3.19 Constraints Abstract Syntax

8.3.19.1 Overview

8.3.19.1 Overview

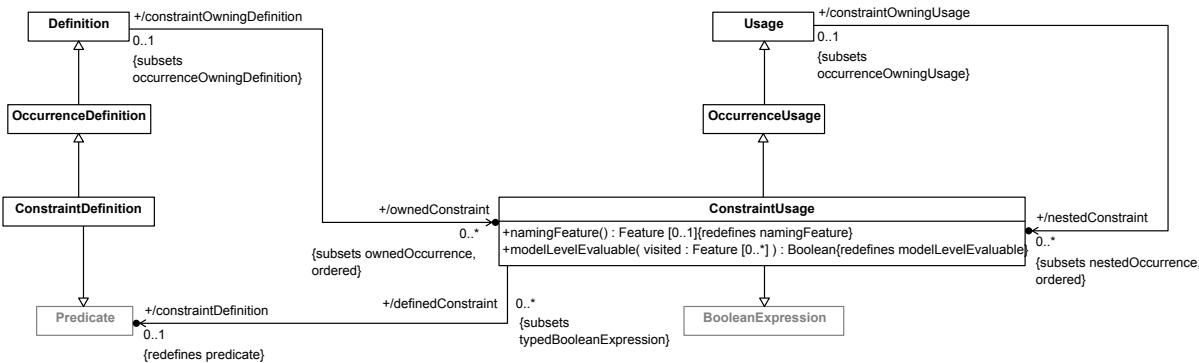


Figure 34. Constraint Definition and Usage

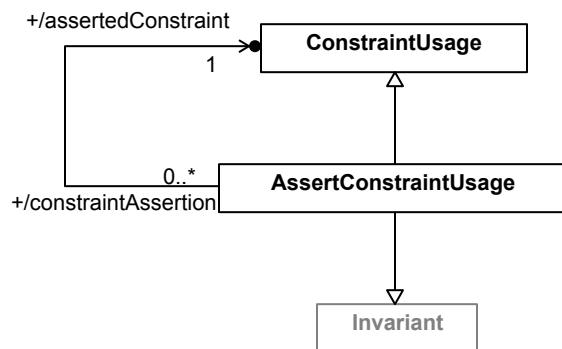


Figure 35. Asserted Constraints

8.3.19.2 AssertConstraintUsage

Description

An `AssertConstraintUsage` is a `ConstraintUsage` that is also an `Invariant` and, so, is asserted to be true (by default). Unless it is the `AssertConstraintUsage` itself, the asserted `ConstraintUsage` is related to the `AssertConstraintUsage` by a `ReferenceSubsetting` Relationship.

General Classes

`Invariant`
`ConstraintUsage`

Attributes

`/assertedConstraint : ConstraintUsage`

The `ConstraintUsage` to be performed by the `AssertConstraintUsage`. It is the `referenceFeature` of the `ownedReferenceSubsetting` for the `AssertConstraintUsage`, if there is one, and, otherwise, the `AssertConstraintUsage` itself.

Operations

None.

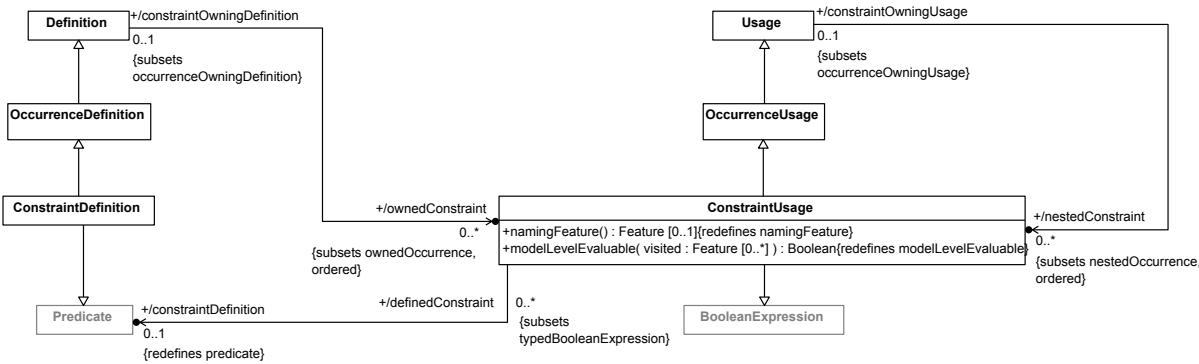


Figure 35. Constraint Definition and Usage

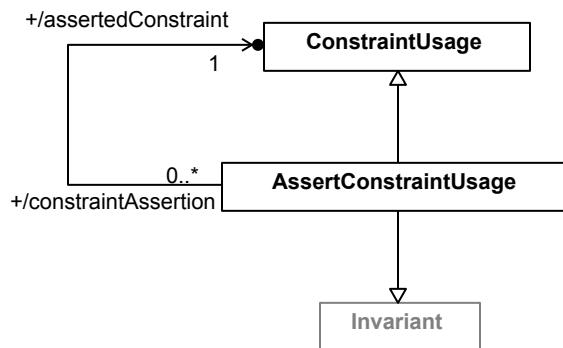


Figure 36. Asserted Constraints

8.3.19.2 AssertConstraintUsage

Description

An `AssertConstraintUsage` is a `ConstraintUsage` that is also an `Invariant` and, so, is asserted to be true (by default). Unless it is the `AssertConstraintUsage` itself, the asserted `ConstraintUsage` is related to the `AssertConstraintUsage` by a `ReferenceSubsetting` Relationship.

General Classes

`Invariant`
`ConstraintUsage`

Attributes

`/assertedConstraint : ConstraintUsage`

The `ConstraintUsage` to be performed by the `AssertConstraintUsage`. It is the `referenceFeature` of the `ownedReferenceSubsetting` for the `AssertConstraintUsage`, if there is one, and, otherwise, the `AssertConstraintUsage` itself.

Operations

None.

Constraints

Constraints

checkAssertConstraintUsageSpecialization

If a `AssertConstraintUsage` is negated, then it must directly or indirectly specialize the `ConstraintUsage Constraints::negatedConstraints`. Otherwise, it must directly or indirectly specialize the `ConstraintUsage Constraints::assertedConstraints`.

```
if isNegated then
    specializesFromLibrary('Constraints::negatedConstraints')
else
    specializesFromLibrary('Constraints::assertedConstraints')
endif
```

deriveAssertConstraintUsageAssertedConstraint

If an `AssertConstraintUsage` has no `ownedReferenceSubsetting`, then its `assertedConstraint` is the `AssertConstraintUsage` itself. Otherwise, the `assertedConstraint` is the `referencedFeature` of the `ownedReferenceSubsetting`, which must be a `ConstraintUsage`.

```
assertedConstraint =
    if ownedReferenceSubsetting = null then self
    else ownedReferenceSubsetting.referencedFeature.oclAsType(ConstraintUsage)
    endif
```

validateAssertConstraintUsageReference

If an `AssertConstraintUsage` has an `ownedReferenceSubsetting`, then its `referencedFeature` must be a `ConstraintUsage`.

```
ownedReferenceSubsetting <> null implies
    ownedReferenceSubsetting.referencedFeature.oclIsKindOf(ConstraintUsage)
```

8.3.19.3 ConstraintDefinition

Description

A `ConstraintDefinition` is an `OccurrenceDefinition` that is also a `Predicate` that defines a constraint that may be asserted to hold on a system or part of a system.

General Classes

`OccurrenceDefinition`
`Predicate`

Attributes

None.

Operations

None.

Constraints

checkConstraintDefinitionSpecialization

checkAssertConstraintUsageSpecialization

If a `AssertConstraintUsage` is negated, then it must directly or indirectly specialize the `ConstraintUsage Constraints::negatedConstraints`. Otherwise, it must directly or indirectly specialize the `ConstraintUsage Constraints::assertedConstraints`.

```
if isNegated then
    specializesFromLibrary('Constraints::negatedConstraints')
else
    specializesFromLibrary('Constraints::assertedConstraints')
endif
```

deriveAssertConstraintUsageAssertedConstraint

If an `AssertConstraintUsage` has no `ownedReferenceSubsetting`, then its `assertedConstraint` is the `AssertConstraintUsage` itself. Otherwise, the `assertedConstraint` is the `referencedFeature` of the `ownedReferenceSubsetting`, which must be a `ConstraintUsage`.

```
assertedConstraint =
    if ownedReferenceSubsetting = null then self
    else ownedReferenceSubsetting.referencedFeature.oclAsType(ConstraintUsage)
    endif
```

validateAssertConstraintUsageReference

If an `AssertConstraintUsage` has an `ownedReferenceSubsetting`, then its `referencedFeature` must be a `ConstraintUsage`.

```
ownedReferenceSubsetting <> null implies
    ownedReferenceSubsetting.referencedFeature.oclIsKindOf(ConstraintUsage)
```

8.3.19.3 ConstraintDefinition

Description

A `ConstraintDefinition` is an `OccurrenceDefinition` that is also a `Predicate` that defines a constraint that may be asserted to hold on a system or part of a system.

General Classes

`OccurrenceDefinition`
`Predicate`

Attributes

None.

Operations

None.

Constraints

checkConstraintDefinitionSpecialization

A `ConstraintDefinition` must directly or indirectly specialize the base `ConstraintDefinition Constraints::ConstraintCheck` from the Systems Model Library.

A ConstraintDefinition must directly or indirectly specialize the base ConstraintDefinition Constraints::ConstraintCheck from the Systems Model Library.

```
specializesFromLibrary('Constraints::ConstraintCheck')
```

8.3.19.4 ConstraintUsage

Description

A ConstraintUsage is an OccurrenceUsage that is also a BooleanExpression, and, so, is typed by a Predicate. Nominally, if the type is a ConstraintDefinition, a ConstraintUsage is a Usage of that ConstraintDefinition. However, other kinds of kernel Predicates are also allowed, to permit use of Predicates from the Kernel Model Libraries.

General Classes

OccurrenceUsage
BooleanExpression

Attributes

```
/constraintDefinition : Predicate [0..1] {redefines predicate}
```

The (single) Predicate that is the type of this ConstraintUsage. Nominally, this will be a ConstraintDefinition, but other kinds of Predicates are also allowed, to permit use of Predicates from the Kernel Model Libraries.

Operations

```
modelLevelEvaluable(visited : Feature [0..*]) : Boolean {redefines modelLevelEvaluable}
```

A ConstraintUsage is not model-level evaluable.

body: false

```
namingFeature() : Feature [0..1] {redefines namingFeature}
```

The naming Feature of a ConstraintUsage that is owned by a RequirementConstraintMembership and has an ownedReferenceSubsetting is the referencedFeature of that ownedReferenceSubsetting.

```
body: if owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(RequirementConstraintMembership) and
ownedReferenceSubsetting <> null then
    ownedReferenceSubsetting.referencedFeature
else
    self.oclAsType(OccurrenceUsage).namingFeature()
endif
```

Constraints

```
checkConstraintUsageCheckedConstraintSpecialization
```

A ConstraintUsage whose owningType is an ItemDefinition or ItemUsage must directly or indirectly specialize the ConstraintUsage Items::Item::checkedConstraints.

```
specializesFromLibrary('Constraints::ConstraintCheck')
```

8.3.19.4 ConstraintUsage

Description

A `ConstraintUsage` is an `OccurrenceUsage` that is also a `BooleanExpression`, and, so, is typed by a `Predicate`. Nominally, if the type is a `ConstraintDefinition`, a `ConstraintUsage` is a `Usage` of that `ConstraintDefinition`. However, other kinds of kernel `Predicates` are also allowed, to permit use of `Predicates` from the Kernel Model Libraries.

General Classes

`BooleanExpression`
`OccurrenceUsage`

Attributes

```
/constraintDefinition : Predicate [0..1] {redefines predicate}
```

The (single) `Predicate` that is the type of this `ConstraintUsage`. Nominally, this will be a `ConstraintDefinition`, but other kinds of `Predicates` are also allowed, to permit use of `Predicates` from the Kernel Model Libraries.

Operations

```
modelLevelEvaluable(visited : Feature [0..*]) : Boolean {redefines modelLevelEvaluable}
```

A `ConstraintUsage` is not model-level evaluable.

body: `false`

```
namingFeature() : Feature [0..1] {redefines namingFeature}
```

The `naming Feature` of a `ConstraintUsage` that is owned by a `RequirementConstraintMembership` and has an `ownedReferenceSubsetting` is the `referencedFeature` of that `ownedReferenceSubsetting`.

```
body: if owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(RequirementConstraintMembership) and
ownedReferenceSubsetting <> null then
    ownedReferenceSubsetting.referencedFeature
else
    self.oclAsType(OccurrenceUsage).namingFeature()
endif
```

Constraints

```
checkConstraintUsageCheckedConstraintSpecialization
```

A `ConstraintUsage` whose `owningType` is an `ItemDefinition` or `ItemUsage` must directly or indirectly specialize the `ConstraintUsage Items::Item::checkedConstraints`.

```
owningType <> null and
(owningType.oclIsKindOf(ItemDefinition) or
owningType.oclIsKindOf(ItemUsage)) implies
    specializesFromLibrary('Items::Item::checkedConstraints')
```

```
checkConstraintUsageRequirementConstraintSpecialization
```

```
owningType <> null and
(owningType.oclIsKindOf(ItemDefinition) or
owningType.oclIsKindOf(ItemUsage)) implies
    specializesFromLibrary('Items::Item::checkedConstraints')
```

checkConstraintUsageRequirementConstraintSpecialization

A ConstraintUsage whose owningFeatureMembership is a RequirementConstraintMembership must directly or indirectly specialize on the ConstraintUsages *assumptions* or *constraints* from the *ConstraintDefinition Requirements::RequirementCheck* in the Systems Model Library, depending on whether the kind of the RequirementConstraintMembership is assumption or requirement, respectively.

```
owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(RequirementConstraintMembership) implies
    if owningFeatureMembership.oclAsType(RequirementConstraintMembership).kind =
        RequirementConstraintKind::assumption then
            specializesFromLibrary('Requirements::RequirementCheck::assumptions')
    else
        specializesFromLibrary('Requirements::RequirementCheck::constraints')
    endif
```

checkConstraintUsageSpecialization

A ConstraintUsage must directly or indirectly specialize the base ConstraintUsage *Constraints::constraintChecks* from the Systems Model Library.

```
specializesFromLibrary('Constraints::constraintChecks')
```

8.3.20 Requirements Abstract Syntax

A ConstraintUsage whose owningFeatureMembership is a RequirementConstraintMembership must directly or indirectly specialize on the ConstraintUsages assumptions or constraints from the ConstraintDefinition Requirements::RequirementCheck in the Systems Model Library, depending on whether the kind of the RequirementConstraintMembership is assumption or requirement, respectively.

```

owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(RequirementConstraintMembership) implies
    if owningFeatureMembership.oclAsType(RequirementConstraintMembership).kind =
        RequirementConstraintKind::assumption then
            specializesFromLibrary('Requirements::RequirementCheck::assumptions')
        else
            specializesFromLibrary('Requirements::RequirementCheck::constraints')
    endif

```

checkConstraintUsageSpecialization

A ConstraintUsage must directly or indirectly specialize the base ConstraintUsage Constraints::constraintChecks from the Systems Model Library.

```
specializesFromLibrary('Constraints::constraintChecks')
```

8.3.20 Requirements Abstract Syntax

8.3.20.1 Overview

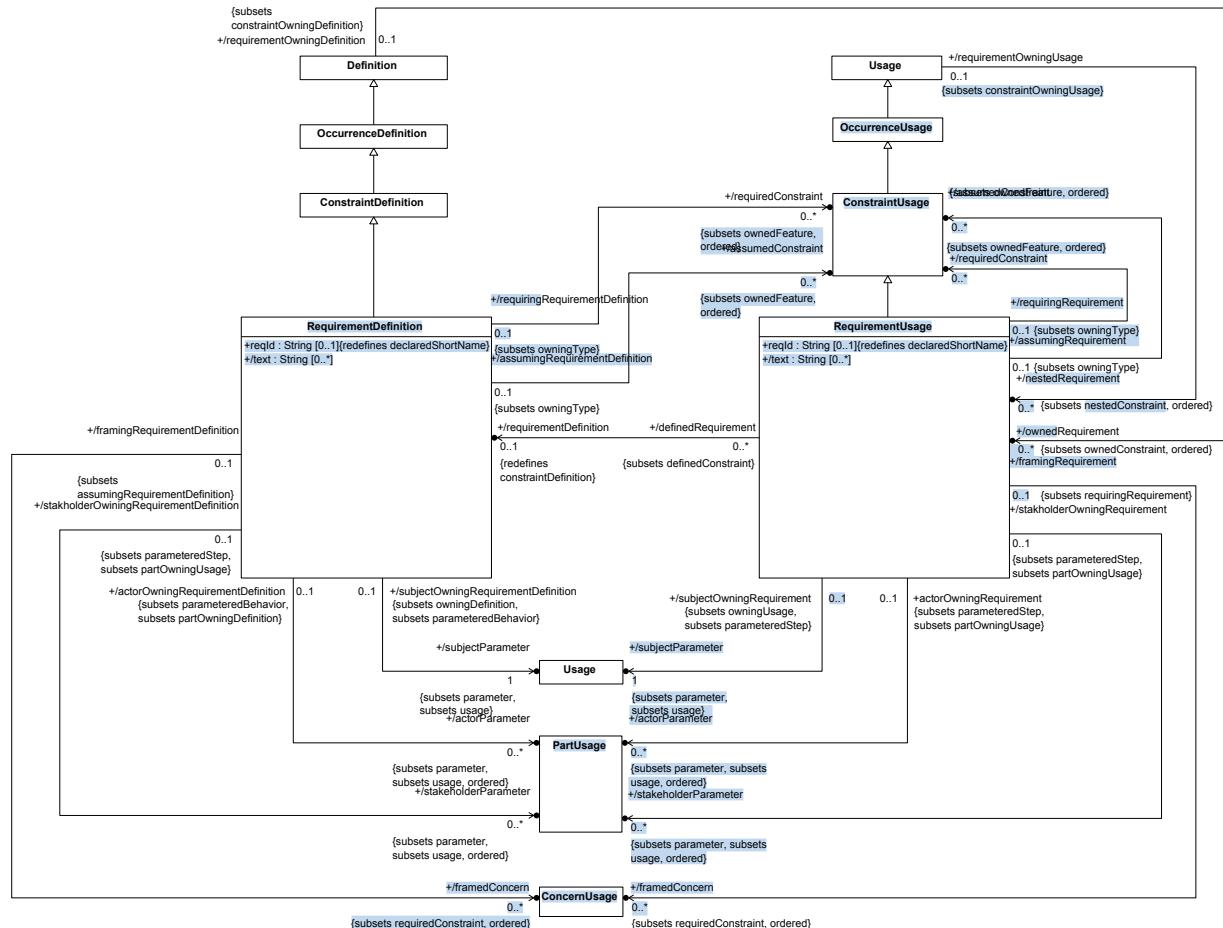


Figure 37. Requirement Definition and Usage

8.3.20.1 Overview

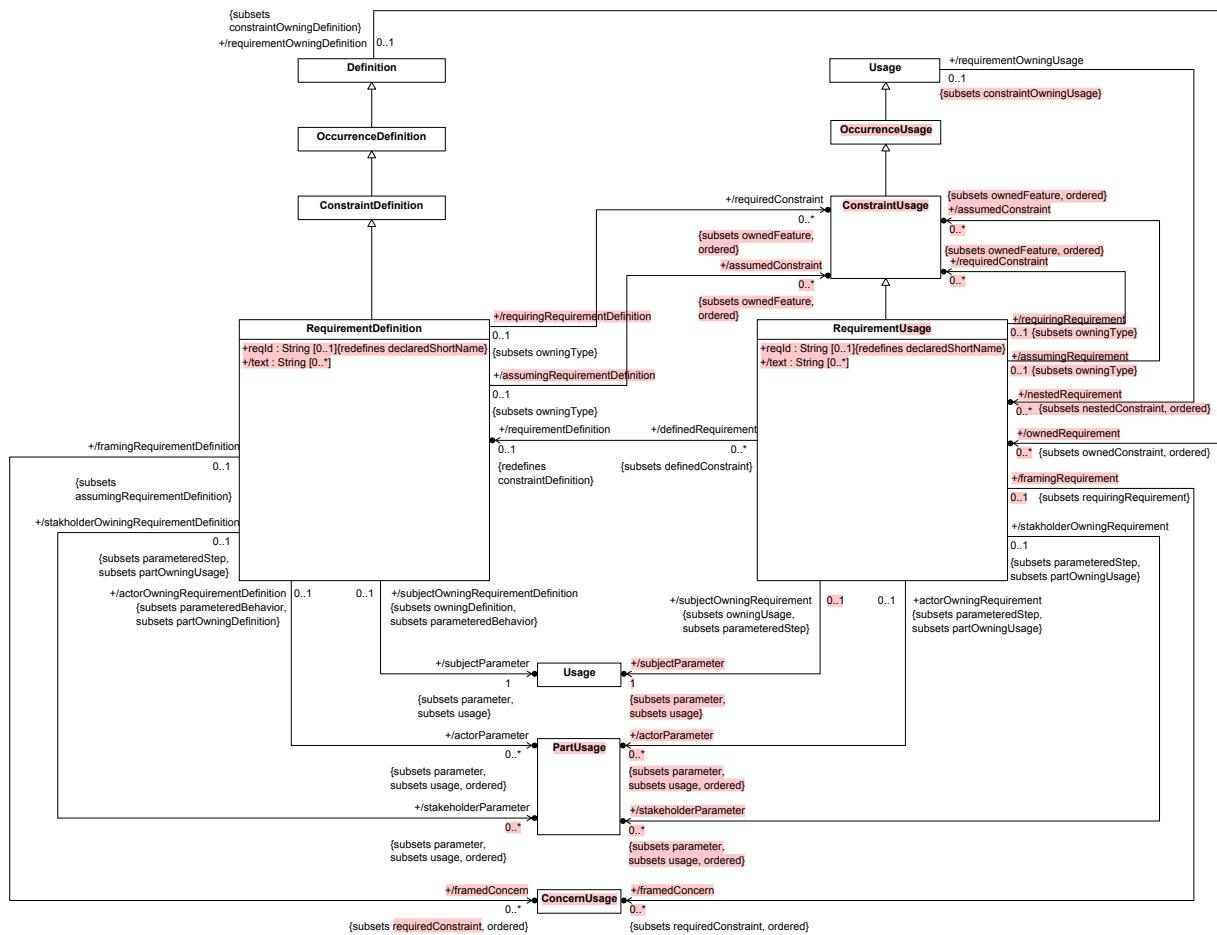


Figure 36. Requirement Definition and Usage

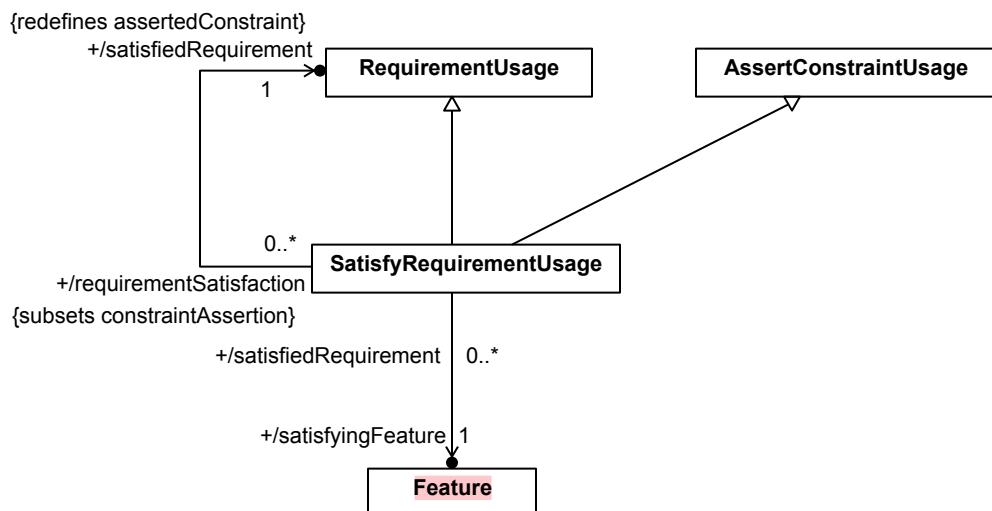


Figure 37. Satisfied Requirements

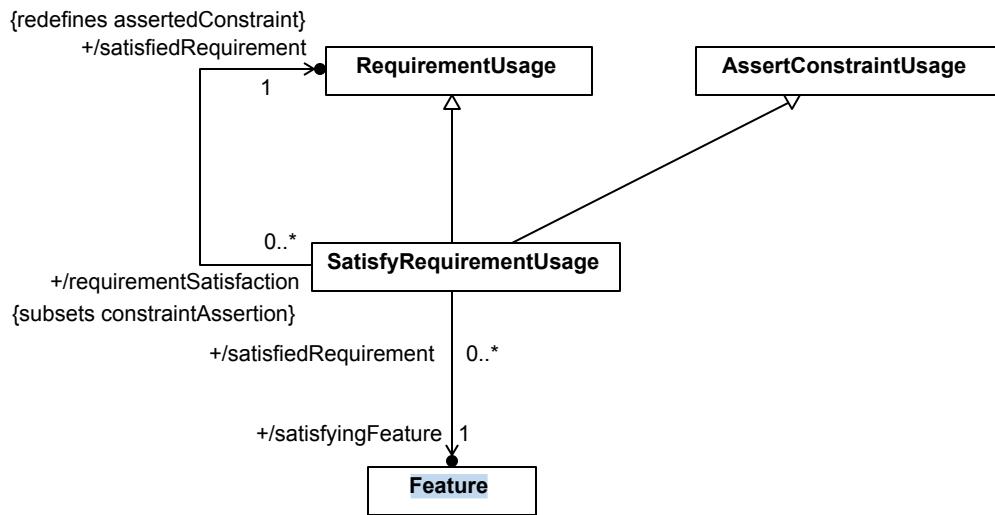


Figure 38. Satisfied Requirements

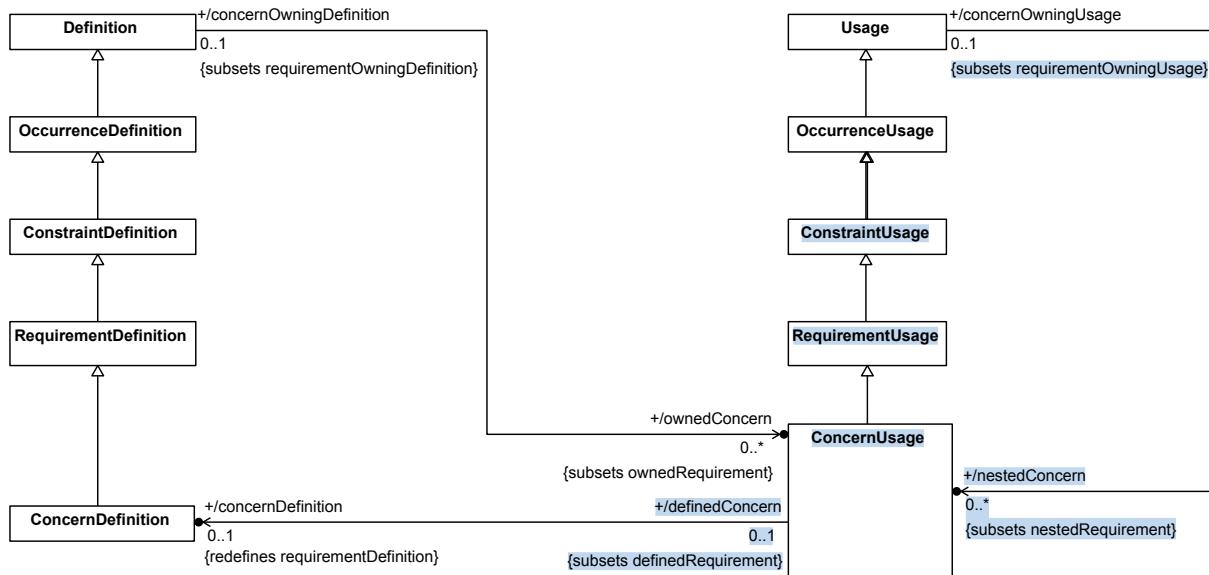


Figure 39. Concern Definition and Usage

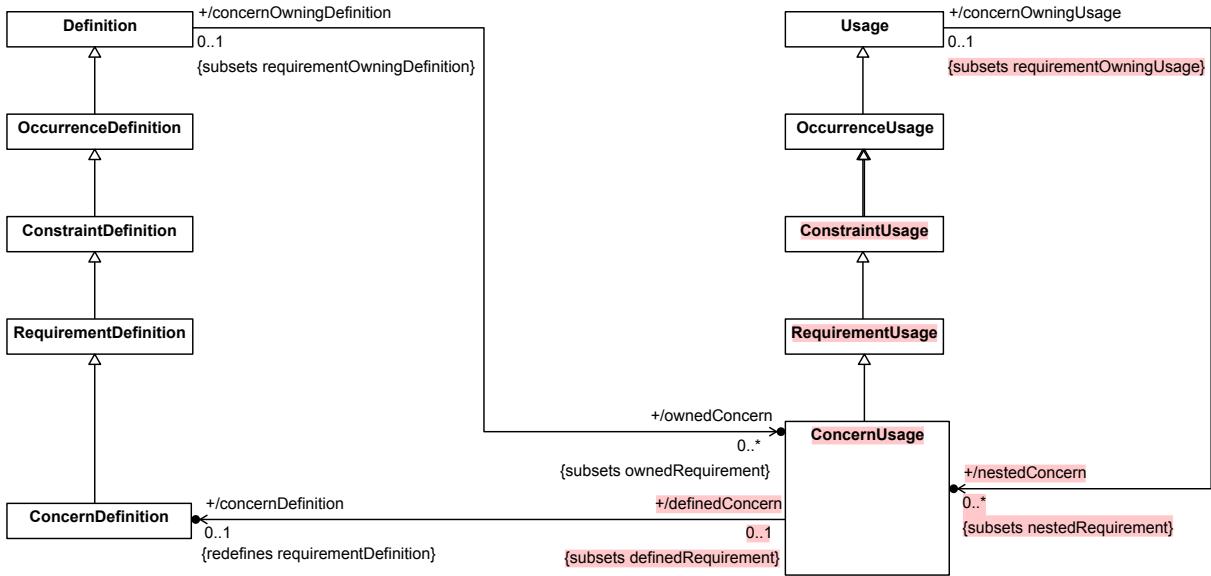


Figure 38. Concern Definition and Usage

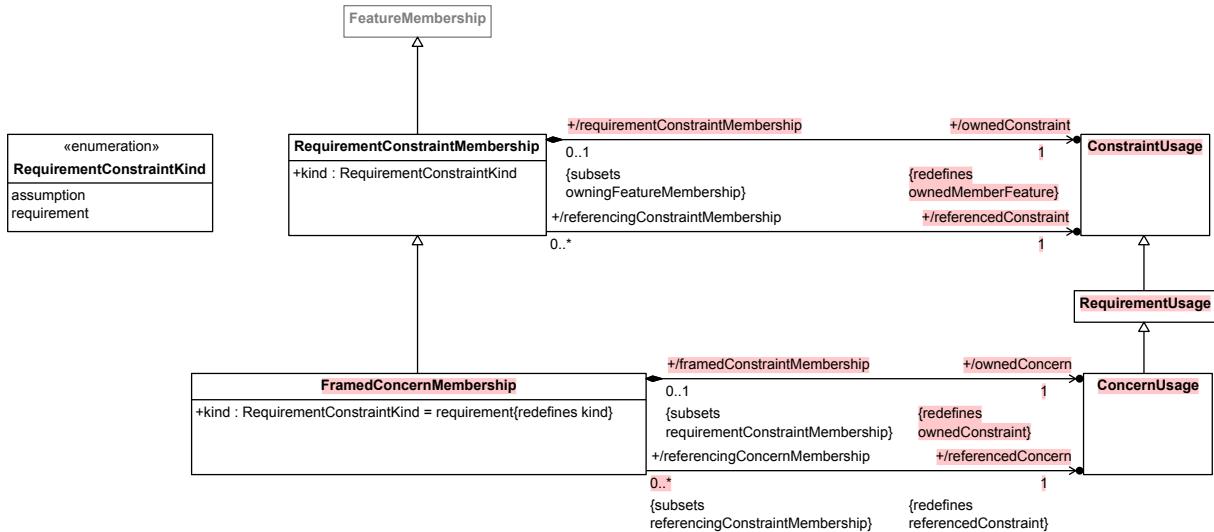


Figure 39. Requirement Constraint Membership

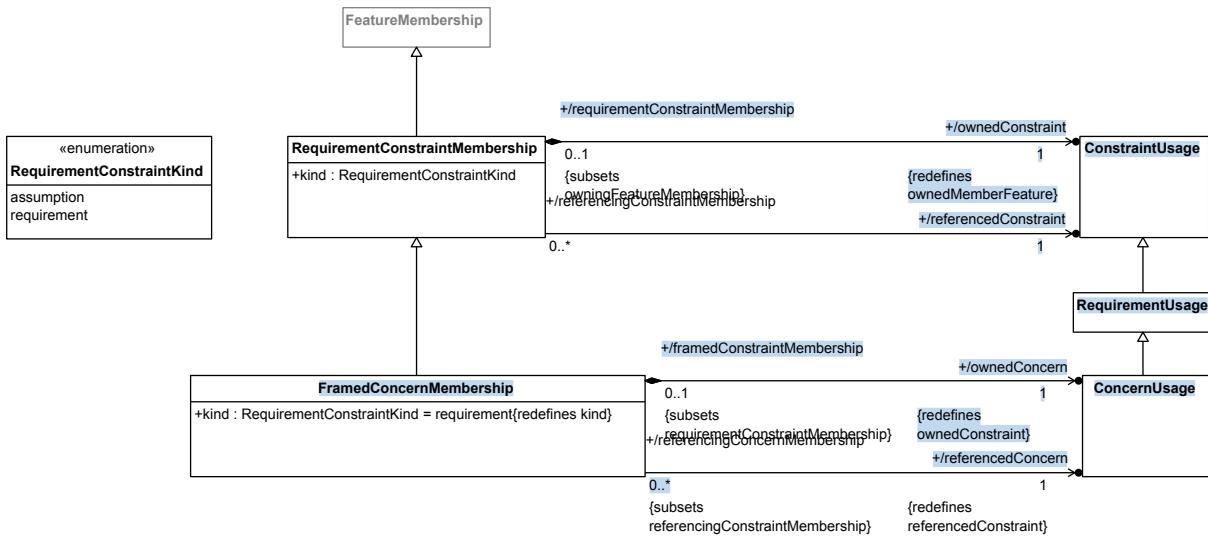


Figure 40. Requirement Constraint Membership

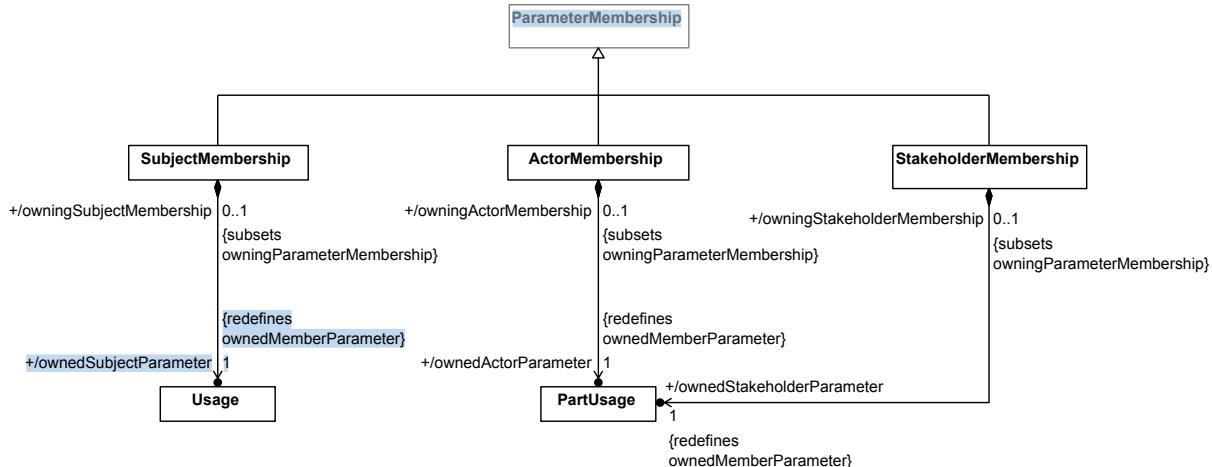


Figure 41. Requirement Parameter Memberships

8.3.20.2 ActorMembership

Description

An **ActorMembership** is a **ParameterMembership** that identifies a **PartUsage** as an *actor* parameter, which specifies a role played by an external entity in interaction with the **owningType** of the **ActorMembership**.

General Classes

ParameterMembership

Attributes

/ownedActorParameter : PartUsage {redefines ownedMemberParameter}

The **PartUsage** specifying the actor.

Operations

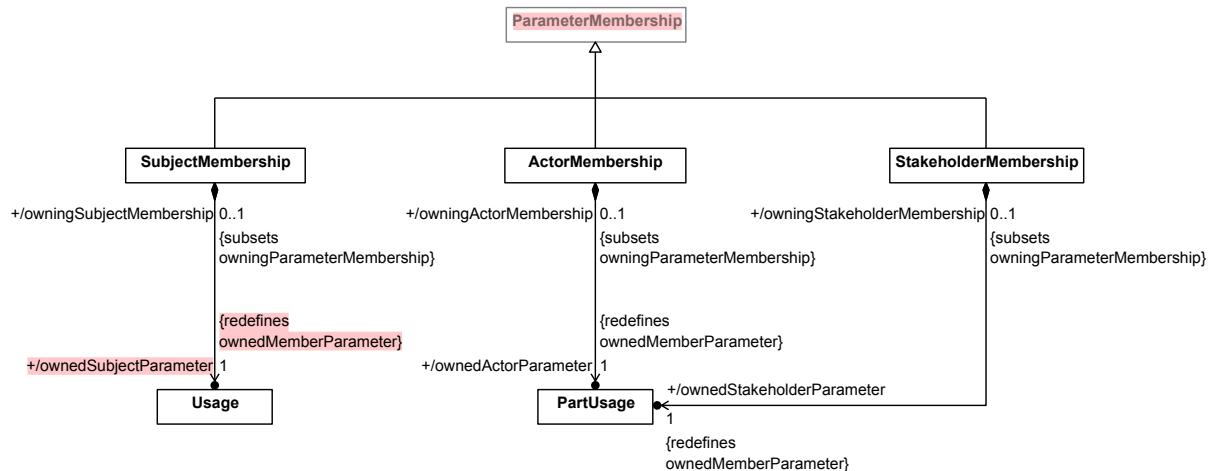


Figure 40. Requirement Parameter Memberships

8.3.20.2 ActorMembership

Description

An ActorMembership is a ParameterMembership that identifies a PartUsage as an *actor* parameter, which specifies a role played by an external entity in interaction with the owningType of the ActorMembership.

General Classes

ParameterMembership

Attributes

/ownedActorParameter : PartUsage {redefines ownedMemberParameter}

The PartUsage specifying the actor.

Operations

None.

Constraints

validateActorMembershipOwningType

The owningType of an ActorMembership must be a RequirementDefinition, RequirementUsage, CaseDefinition, or CaseUsage.

```

owningTypeoclIsKindOf(RequirementUsage) or
owningTypeoclIsKindOf(RequirementDefinition) or
owningTypeoclIsKindOf(CaseDefinition) or
owningTypeoclIsKindOf(CaseUsage)

```

8.3.20.3 ConcernDefinition

Description

None.

Constraints

validateActorMembershipOwningType

The `owningType` of an `ActorMembership` must be a `RequirementDefinition`, `RequirementUsage`, `CaseDefinition`, or `CaseUsage`.

```
owningTypeoclIsKindOf(RequirementUsage) or  
owningTypeoclIsKindOf(RequirementDefinition) or  
owningTypeoclIsKindOf(CaseDefinition) or  
owningTypeoclIsKindOf(CaseUsage)
```

8.3.20.3 ConcernDefinition

Description

A `ConcernDefinition` is a `RequirementDefinition` that one or more stakeholders may be interested in having addressed. These stakeholders are identified by the `ownedStakeholders` of the `ConcernDefinition`.

General Classes

`RequirementDefinition`

Attributes

None.

Operations

None.

Constraints

checkConcernDefinitionSpecialization

A `ConcernDefinition` must directly or indirectly specialize the base `ConcernDefinition Requirements::ConcernCheck` from the Systems Model Library.

```
specializesFromLibrary('Requirements::ConcernCheck')
```

8.3.20.4 ConcernUsage

Description

A `ConcernUsage` is a `Usage` of a `ConcernDefinition`.

The `ownedStakeholder` features of the `ConcernUsage` shall all subset the `ConcernCheck::concernedStakeholders` feature. If the `ConcernUsage` is an `ownedFeature` of a `StakeholderDefinition` or `StakeholderUsage`, then the `ConcernUsage` shall have an `ownedStakeholder` feature that is bound to the `self` feature of its owner.

General Classes

`RequirementUsage`

A `ConcernDefinition` is a `RequirementDefinition` that one or more stakeholders may be interested in having addressed. These stakeholders are identified by the `ownedStakeholders` of the `ConcernDefinition`.

General Classes

`RequirementDefinition`

Attributes

None.

Operations

None.

Constraints

`checkConcernDefinitionSpecialization`

A `ConcernDefinition` must directly or indirectly specialize the base `ConcernDefinition Requirements::ConcernCheck` from the Systems Model Library.

`specializesFromLibrary('Requirements::ConcernCheck')`

8.3.20.4 ConcernUsage

Description

A `ConcernUsage` is a `Usage` of a `ConcernDefinition`.

The `ownedStakeholder` features of the `ConcernUsage` shall all subset the `ConcernCheck::concernedStakeholders` feature. If the `ConcernUsage` is an `ownedFeature` of a `StakeholderDefinition` or `StakeholderUsage`, then the `ConcernUsage` shall have an `ownedStakeholder` feature that is bound to the `self` feature of its owner.

General Classes

`RequirementUsage`

Attributes

`/concernDefinition : ConcernDefinition [0..1] {redefines requirementDefinition}`

The `ConcernDefinition` that is the single type of this `ConcernUsage`.

Operations

None.

Constraints

`checkConcernUsageFramedConcernSpecialization`

If a `ConcernUsage` is owned via a `FramedConcernMembership`, then it must directly or indirectly specialize the `ConcernUsage Requirements::RequirementCheck::concerns` from the Systems Model Library.

Attributes

/concernDefinition : ConcernDefinition [0..1] {redefines requirementDefinition}

The ConcernDefinition that is the single type of this ConcernUsage.

Operations

None.

Constraints

checkConcernUsageFramedConcernSpecialization

If a ConcernUsage is owned via a FramedConcernMembership, then it must directly or indirectly specialize the ConcernUsage Requirements::RequirementCheck::concerns from the Systems Model Library.

```
owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(FramedConcernMembership) implies
    specializesFromLibrary('Requirements::RequirementCheck::concerns')
```

checkConcernUsageSpecialization

A ConcernUsage must directly or indirectly specialize the base ConcernUsage Requirements::concernChecks from the Systems Model Library.

```
specializesFromLibrary('Requirements::concernChecks')
```

8.3.20.5 FramedConcernMembership

Description

A FramedConcernMembership is a RequirementConstraintMembership for a framed ConcernUsage of a RequirementDefinition or RequirementUsage.

General Classes

RequirementConstraintMembership

Attributes

kind : RequirementConstraintKind {redefines kind}

The kind of an FramedConcernMembership must be requirement.

/ownedConcern : ConcernUsage {redefines ownedConstraint}

The ConcernUsage that is the ownedConstraint of this FramedConcernMembership.

/referencedConcern : ConcernUsage {redefines referencedConstraint}

The ConcernUsage that is referenced through this FramedConcernMembership. It is the referencedConstraint of the FramedConcernMembership considered as a RequirementConstraintMembership, which must be a ConcernUsage.

Operations

```
owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(FramedConcernMembership) implies
    specializesFromLibrary('Requirements::RequirementCheck::concerns')
```

checkConcernUsageSpecialization

A ConcernUsage must directly or indirectly specialize the base ConcernUsage Requirements::concernChecks from the Systems Model Library.

```
specializesFromLibrary('Requirements::concernChecks')
```

8.3.20.5 FramedConcernMembership

Description

A FramedConcernMembership is a RequirementConstraintMembership for a framed ConcernUsage of a RequirementDefinition or RequirementUsage.

General Classes

RequirementConstraintMembership

Attributes

kind : RequirementConstraintKind {redefines kind}

The kind of an FramedConcernMembership must be requirement.

/ownedConcern : ConcernUsage {redefines ownedConstraint}

The ConcernUsage that is the ownedConstraint of this FramedConcernMembership.

/referencedConcern : ConcernUsage {redefines referencedConstraint}

The ConcernUsage that is referenced through this FramedConcernMembership. It is the referencedConstraint of the FramedConcernMembership considered as a RequirementConstraintMembership, which must be a ConcernUsage.

Operations

None.

Constraints

validateFramedConcernMembershipConstraintKind

A FramedConcernMembership must have kind = requirement.

kind = RequirementConstraintKind::requirement

8.3.20.6 RequirementConstraintKind

Description

None.

Constraints

validateFramedConcernMembershipConstraintKind

A `FramedConcernMembership` must have `kind = requirement`.

`kind = RequirementConstraintKind::requirement`

8.3.20.6 RequirementConstraintKind

Description

A `RequirementConstraintKind` indicates whether a `ConstraintUsage` is an assumption or a requirement in a `RequirementDefinition` or `RequirementUsage`.

General Classes

None.

Literal Values

assumption

Indicates that a member `ConstraintUsage` of a `RequirementDefinition` or `RequirementUsage` represents an assumption.

requirement

Indicates that a member `ConstraintUsage` of a `RequirementDefinition` or `RequirementUsage` represents an requirement.

8.3.20.7 RequirementConstraintMembership

Description

A `RequirementConstraintMembership` is a `FeatureMembership` for an assumed or required `ConstraintUsage` of a `RequirementDefinition` or `RequirementUsage`.

General Classes

`FeatureMembership`

Attributes

`kind : RequirementConstraintKind`

Whether the `RequirementConstraintMembership` is for an assumed or required `ConstraintUsage`.

`/ownedConstraint : ConstraintUsage {redefines ownedMemberFeature}`

The `ConstraintUsage` that is the `ownedMemberFeature` of this `RequirementConstraintMembership`.

`/referencedConstraint : ConstraintUsage`

A RequirementConstraintKind indicates whether a ConstraintUsage is an assumption or a requirement in a RequirementDefinition or RequirementUsage.

General Classes

None.

Literal Values

assumption

Indicates that a member ConstraintUsage of a RequirementDefinition or RequirementUsage represents an assumption.

requirement

Indicates that a member ConstraintUsage of a RequirementDefinition or RequirementUsage represents an requirement.

8.3.20.7 RequirementConstraintMembership

Description

A RequirementConstraintMembership is a FeatureMembership for an assumed or required ConstraintUsage of a RequirementDefinition or RequirementUsage.

General Classes

FeatureMembership

Attributes

kind : RequirementConstraintKind

Whether the RequirementConstraintMembership is for an assumed or required ConstraintUsage.

/ownedConstraint : ConstraintUsage {redefines ownedMemberFeature}

The ConstraintUsage that is the ownedMemberFeature of this RequirementConstraintMembership.

/referencedConstraint : ConstraintUsage

The ConstraintUsage that is referenced through this RequirementConstraintMembership. It is the referencedFeature of the ownedReferenceSubsetting of the ownedConstraint, if there is one, and, otherwise, the ownedConstraint itself.

Operations

None.

Constraints

deriveRequirementConstraintMembershipReferencedConstraint

The ConstraintUsage that is referenced through this RequirementConstraintMembership. It is the referencedFeature of the ownedReferenceSubsetting of the ownedConstraint, if there is one, and, otherwise, the ownedConstraint itself.

Operations

None.

Constraints

deriveRequirementConstraintMembershipReferencedConstraint

The referencedConstraint of a RequirementConstraintMembership is the referencedFeature of the ownedReferenceSubsetting of the ownedConstraint, if there is one, and, otherwise, the ownedConstraint itself.

```
referencedConstraint =  
    let reference : ReferenceSubsetting =  
        ownedConstraint.ownedReferenceSubsetting in  
        if reference = null then ownedConstraint  
        else if not reference.referencedFeature.oclIsKindOf(ConstraintUsage) then null  
        else reference.referencedFeature.oclAsType(ConstraintUsage)  
    endif endif
```

validateRequirementConstraintMembershipIsComposite

The ownedConstraint of a RequirementConstraintMembership must be composite.

ownedConstraint.isComposite

validateRequirementConstraintMembershipOwningType

The owningType of a RequirementConstraintMembership must be a RequirementDefinition or a RequirementUsage.

owningType.oclIsKindOf(RequirementDefinition) or
owningType.oclIsKindOf(RequirementUsage)

8.3.20.8 RequirementDefinition

Description

A RequirementDefinition is a ConstraintDefinition that defines a requirement used in the context of a specification as a constraint that a valid solution must satisfy. The specification is relative to a specified subject, possibly in collaboration with one or more external actors.

General Classes

ConstraintDefinition

Attributes

/actorParameter : PartUsage [0..*] {subsets usage, parameter, ordered}

The parameters of this RequirementDefinition that represent actors involved in the requirement.

/assumedConstraint : ConstraintUsage [0..*] {subsets ownedFeature, ordered}

The referencedConstraint of a RequirementConstraintMembership is the referencedFeature of the ownedReferenceSubsetting of the ownedConstraint, if there is one, and, otherwise, the ownedConstraint itself.

```
referencedConstraint =  
    let reference : ReferenceSubsetting =  
        ownedConstraint.ownedReferenceSubsetting in  
        if reference = null then ownedConstraint  
        else if not reference.referencedFeature.oclIsKindOf(ConstraintUsage) then null  
        else reference.referencedFeature.oclAsType(ConstraintUsage)  
    endif endif
```

validateRequirementConstraintMembershipIsComposite

The ownedConstraint of a RequirementConstraintMembership must be composite.

```
ownedConstraint.isComposite
```

validateRequirementConstraintMembershipOwningType

The owningType of a RequirementConstraintMembership must be a RequirementDefinition or a RequirementUsage.

```
owningType.oclIsKindOf(RequirementDefinition) or  
owningType.oclIsKindOf(RequirementUsage)
```

8.3.20.8 RequirementDefinition

Description

A RequirementDefinition is a ConstraintDefinition that defines a requirement used in the context of a specification as a constraint that a valid solution must satisfy. The specification is relative to a specified subject, possibly in collaboration with one or more external actors.

General Classes

ConstraintDefinition

Attributes

/actorParameter : PartUsage [0..*] {subsets usage, parameter, ordered}

The parameters of this RequirementDefinition that represent actors involved in the requirement.

/assumedConstraint : ConstraintUsage [0..*] {subsets ownedFeature, ordered}

The owned ConstraintUsages that represent assumptions of this RequirementDefinition, which are the ownedConstraints of the RequirementConstraintMemberships of the RequirementDefinition with kind = assumption.

/framedConcern : ConcernUsage [0..*] {subsets requiredConstraint, ordered}

The ConcernUsages framed by this RequirementDefinition, which are the ownedConcerns of all FramedConcernMemberships of the RequirementDefinition.

reqId : String [0..1] {redefines declaredShortName}

The owned ConstraintUsages that represent assumptions of this RequirementDefinition, which are the ownedConstraints of the RequirementConstraintMemberships of the RequirementDefinition with kind = assumption.

/framedConcern : ConcernUsage [0..*] {subsets requiredConstraint, ordered}

The ConcernUsages framed by this RequirementDefinition, which are the ownedConcerns of all FramedConcernMemberships of the RequirementDefinition.

reqId : String [0..1] {redefines declaredShortName}

An optional modeler-specified identifier for this RequirementDefinition (used, e.g., to link it to an original requirement text in some source document), which is the declaredShortName for the RequirementDefinition.

/requiredConstraint : ConstraintUsage [0..*] {subsets ownedFeature, ordered}

The owned ConstraintUsages that represent requirements of this RequirementDefinition, derived as the ownedConstraints of the RequirementConstraintMemberships of the RequirementDefinition with kind = requirement.

/stakeholderParameter : PartUsage [0..*] {subsets parameter, usage, ordered}

The parameters of this RequirementDefinition that represent stakeholders for the requirement.

/subjectParameter : Usage {subsets parameter, usage}

The parameter of this RequirementDefinition that represents its subject.

/text : String [0..*]

An optional textual statement of the requirement represented by this RequirementDefinition, derived from the bodies of the documentation of the RequirementDefinition.

Operations

None.

Constraints

checkRequirementDefinitionSpecialization

A RequirementDefinition must directly or indirectly specialize the base RequirementDefinition Requirements::RequirementCheck from the Systems Model Library.

specializesFromLibrary('Requirements::RequirementCheck')

deriveRequirementDefinitionActorParameter

The actorParameters of a RequirementDefinition are the ownedActorParameters of the ActorMemberships of the RequirementDefinition.

```
actorParameter = featureMembership->
    selectByKind(ActorMembership).
    ownedActorParameter
```

An optional modeler-specified identifier for this `RequirementDefinition` (used, e.g., to link it to an original requirement text in some source document), which is the `declaredShortName` for the `RequirementDefinition`.

`/requiredConstraint : ConstraintUsage [0..*] {subsets ownedFeature, ordered}`

The owned `ConstraintUsages` that represent requirements of this `RequirementDefinition`, derived as the `ownedConstraints` of the `RequirementConstraintMemberships` of the `RequirementDefinition` with `kind = requirement`.

`/stakeholderParameter : PartUsage [0..*] {subsets parameter, usage, ordered}`

The parameters of this `RequirementDefinition` that represent stakeholders for the requirement.

`/subjectParameter : Usage {subsets parameter, usage}`

The parameter of this `RequirementDefinition` that represents its subject.

`/text : String [0..*]`

An optional textual statement of the requirement represented by this `RequirementDefinition`, derived from the bodies of the documentation of the `RequirementDefinition`.

Operations

None.

Constraints

`checkRequirementDefinitionSpecialization`

A `RequirementDefinition` must directly or indirectly specialize the base `RequirementDefinition` `Requirements::RequirementCheck` from the Systems Model Library.

`specializesFromLibrary('Requirements::RequirementCheck')`

`deriveRequirementDefinitionActorParameter`

The `actorParameters` of a `RequirementDefinition` are the `ownedActorParameters` of the `ActorMemberships` of the `RequirementDefinition`.

```
actorParameter = featureMembership->
    selectByKind(ActorMembership).
    ownedActorParameter
```

`deriveRequirementDefinitionAssumedConstraint`

The `assumedConstraints` of a `RequirementDefinition` are the `ownedConstraints` of the `RequirementConstraintMemberships` of the `RequirementDefinition` with `kind = assumption`.

```
assumedConstraint = ownedFeatureMembership->
    selectByKind(RequirementConstraintMembership)->
    select(kind = RequirementConstraintKind::assumption).
    ownedConstraint
```

deriveRequirementDefinitionAssumedConstraint

The assumedConstraints of a RequirementDefinition are the ownedConstraints of the RequirementConstraintMemberships of the RequirementDefinition with kind = assumption.

```
assumedConstraint = ownedFeatureMembership->
    selectByKind(RequirementConstraintMembership)->
    select(kind = RequirementConstraintKind::assumption).
    ownedConstraint
```

deriveRequirementDefinitionFramedConcern

The framedConcerns of a RequirementDefinition are the ownedConcerns of the FramedConcernMemberships of the RequirementDefinition.

```
framedConcern = featureMembership->
    selectByKind(FramedConcernMembership).
    ownedConcern
```

deriveRequirementDefinitionRequiredConstraint

The requiredConstraints of a RequirementDefinition are the ownedConstraints of the RequirementConstraintMemberships of the RequirementDefinition with kind = requirement.

```
requiredConstraint = ownedFeatureMembership->
    selectByKind(RequirementConstraintMembership)->
    select(kind = RequirementConstraintKind::requirement).
    ownedConstraint
```

deriveRequirementDefinitionStakeholderParameter

The stakeHolderParameters of a RequirementDefinition are the ownedStakeholderParameters of the StakeholderMemberships of the RequirementDefinition.

```
stakeholderParameter = featureMembership->
    selectByKind(StakholderMembership).
    ownedStakeholderParameter
```

deriveRequirementDefinitionSubjectParameter

The subjectParameter of a RequirementDefinition is the ownedSubjectParameter of its SubjectMembership (if any).

```
subjectParameter =
    let subjects : OrderedSet(SubjectMembership) =
        featureMembership->selectByKind(SubjectMembership) in
    if subjects->isEmpty() then null
    else subjects->first().ownedSubjectParameter
    endif
```

deriveRequirementDefinitionText

The texts of aRequirementDefinition are the bodies of the documentation of the RequirementDefinition.

```
text = documentation.body
```

validateRequirementDefinitionOnlyOneSubject

deriveRequirementDefinitionFramedConcern

The framedConcerns of a RequirementDefinition are the ownedConcerns of the FramedConcernMemberships of the RequirementDefinition.

```
framedConcern = featureMembership->  
    selectByKind(FramedConcernMembership).  
    ownedConcern
```

deriveRequirementDefinitionRequiredConstraint

The requiredConstraints of a RequirementDefinition are the ownedConstraints of the RequirementConstraintMemberships of the RequirementDefinition with kind = requirement.

```
requiredConstraint = ownedFeatureMembership->  
    selectByKind(RequirementConstraintMembership)->  
    select(kind = RequirementConstraintKind::requirement).  
    ownedConstraint
```

deriveRequirementDefinitionStakeholderParameter

The stakeHolderParameters of a RequirementDefinition are the ownedStakeholderParameters of the StakeholderMemberships of the RequirementDefinition.

```
stakeholderParameter = featureMembership->  
    selectByKind(StakholderMembership).  
    ownedStakeholderParameter
```

deriveRequirementDefinitionSubjectParameter

The subjectParameter of a RequirementDefinition is the ownedSubjectParameter of its SubjectMembership (if any).

```
subjectParameter =  
    let subjects : OrderedSet(SubjectMembership) =  
        featureMembership->selectByKind(SubjectMembership) in  
        if subjects->isEmpty() then null  
        else subjects->first().ownedSubjectParameter  
    endif
```

deriveRequirementDefinitionText

The texts of a RequirementDefinition are the bodies of the documentation of the RequirementDefinition.

```
text = documentation.body
```

validateRequirementDefinitionOnlyOneSubject

A RequirementDefinition must have at most one featureMembership that is a SubjectMembership.

```
featureMembership->  
    selectByKind(SubjectMembership)->  
    size() <= 1
```

validateRequirementDefinitionSubjectParameterPosition

A RequirementDefinition must have at most one featureMembership that is a SubjectMembership.

```
featureMembership->
    selectByKind(SubjectMembership) ->
    size() <= 1
```

validateRequirementDefinitionSubjectParameterPosition

The subjectParameter of a RequirementDefinition must be its first input.

```
input->notEmpty() and input->first() = subjectParameter
```

8.3.20.9 RequirementUsage

Description

A RequirementUsage is a Usage of a RequirementDefinition.

General Classes

ConstraintUsage

Attributes

/actorParameter : PartUsage [0..*] {subsets usage, parameter, ordered}

The parameters of this RequirementUsage that represent actors involved in the requirement.

/assumedConstraint : ConstraintUsage [0..*] {subsets ownedFeature, ordered}

The owned ConstraintUsages that represent assumptions of this RequirementUsage, derived as the ownedConstraints of the RequirementConstraintMemberships of the RequirementUsage with kind = assumption.

/framedConcern : ConcernUsage [0..*] {subsets requiredConstraint, ordered}

The ConcernUsages framed by this RequirementUsage, which are the ownedConcerns of all FramedConcernMemberships of the RequirementUsage.

reqId : String [0..1] {redefines declaredShortName}

An optional modeler-specified identifier for this RequirementUsage (used, e.g., to link it to an original requirement text in some source document), which is the declaredShortName for the RequirementUsage.

/requiredConstraint : ConstraintUsage [0..*] {subsets ownedFeature, ordered}

The owned ConstraintUsages that represent requirements of this RequirementUsage, which are the ownedConstraints of the RequirementConstraintMemberships of the RequirementUsage with kind = requirement.

/requirementDefinition : RequirementDefinition [0..1] {redefines constraintDefinition}

The RequirementDefinition that is the single definition of this RequirementUsage.

/stakeholderParameter : PartUsage [0..*] {subsets parameter, usage, ordered}

The parameters of this RequirementUsage that represent stakeholders for the requirement.

The `subjectParameter` of a `RequirementDefinition` must be its first input.

```
input->notEmpty() and input->first() = subjectParameter
```

8.3.20.9 RequirementUsage

Description

A `RequirementUsage` is a Usage of a `RequirementDefinition`.

General Classes

`ConstraintUsage`

Attributes

`/actorParameter : PartUsage [0..*] {subsets usage, parameter, ordered}`

The parameters of this `RequirementUsage` that represent actors involved in the requirement.

`/assumedConstraint : ConstraintUsage [0..*] {subsets ownedFeature, ordered}`

The owned `ConstraintUsages` that represent assumptions of this `RequirementUsage`, derived as the ownedConstraints of the `RequirementConstraintMemberships` of the `RequirementUsage` with kind = assumption.

`/framedConcern : ConcernUsage [0..*] {subsets requiredConstraint, ordered}`

The `ConcernUsages` framed by this `RequirementUsage`, which are the ownedConcerns of all `FramedConcernMemberships` of the `RequirementUsage`.

`reqId : String [0..1] {redefines declaredShortName}`

An optional modeler-specified identifier for this `RequirementUsage` (used, e.g., to link it to an original requirement text in some source document), which is the `declaredShortName` for the `RequirementUsage`.

`/requiredConstraint : ConstraintUsage [0..*] {subsets ownedFeature, ordered}`

The owned `ConstraintUsages` that represent requirements of this `RequirementUsage`, which are the ownedConstraints of the `RequirementConstraintMemberships` of the `RequirementUsage` with kind = requirement.

`/requirementDefinition : RequirementDefinition [0..1] {redefines constraintDefinition}`

The `RequirementDefinition` that is the single definition of this `RequirementUsage`.

`/stakeholderParameter : PartUsage [0..*] {subsets parameter, usage, ordered}`

The parameters of this `RequirementUsage` that represent stakeholders for the requirement.

`/subjectParameter : Usage {subsets parameter, usage}`

The parameter of this `RequirementUsage` that represents its subject.

`/text : String [0..*]`

An optional textual statement of the requirement represented by this `RequirementUsage`, derived from the bodies of the documentation of the `RequirementUsage`.

Operations

None.

Constraints

checkRequirementUsageObjectiveRedefinition

A `RequirementUsage` whose `owningFeatureMembership` is a `ObjectiveMembership` must redefine the `objectiveRequirement` of each `CaseDefinition` or `CaseUsage` that is specialized by the `owningType` of the `RequirementUsage`.

```
owningfeatureMembership <> null and
owningfeatureMembership.oclIsKindOf(ObjectiveMembership) implies
    owningType.ownedSpecialization.general->forAll(gen |
        (gen.oclIsKindOf(CaseDefinition) implies
            redefines(gen.oclAsType(CaseDefinition).objectiveRequirement)) and
        (gen.oclIsKindOf(CaseUsage) implies
            redefines(gen.oclAsType(CaseUsage).objectiveRequirement)))
```

checkRequirementUsageRequirementVerificationSpecialization

A `RequirementUsage` whose `owningFeatureMembership` is a `RequirementVerificationMembership` must directly or indirectly specialize the `RequirementUsage`

VerificationCases::VerificationCase::obj::requirementVerifications.

```
owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(RequirementVerificationMembership) implies
    specializesFromLibrary('VerificationCases::VerificationCase::obj::requirementVerifications')
```

checkRequirementUsageSpecialization

A `RequirementUsage` must directly or indirectly specialize the base `RequirementUsage`
Requirements::requirementChecks from the Systems Model Library.

```
specializesFromLibrary('Requirements::requirementChecks')
```

checkRequirementUsageSubrequirementSpecialization

A composite `RequirementUsage` whose `owningType` is a `RequirementDefinition` or
`RequirementUsage` must directly or indirectly specialize the `RequirementUsage`
Requirements::RequirementCheck::subrequirements from the Systems Model Library.

```
isComposite and owningType <> null and
    (owningType.oclIsKindOf(RequirementDefinition) or
     owningType.oclIsKindOf(RequirementUsage)) implies
        specializesFromLibrary('Requirements::RequirementCheck::subrequirements')
```

deriveRequirementUsageActorParameter

The `actorParameters` of a `RequirementUsage` are the `ownedActorParameters` of the `ActorMemberships` of the `RequirementUsage`.

/subjectParameter : Usage {subsets parameter, usage}

The parameter of this RequirementUsage that represents its subject.

/text : String [0..*]

An optional textual statement of the requirement represented by this RequirementUsage, derived from the bodies of the documentation of the RequirementUsage.

Operations

None.

Constraints

checkRequirementUsageObjectiveRedefinition

A RequirementUsage whose owningFeatureMembership is a ObjectiveMembership must redefine the objectiveRequirement of each CaseDefinition or CaseUsage that is specialized by the owningType of the RequirementUsage.

```
owningfeatureMembership <> null and
owningfeatureMembership.oclIsKindOf(ObjectiveMembership) implies
    owningType.ownedSpecialization.general->forAll(gen |
        (gen.oclIsKindOf(CaseDefinition) implies
            redefines(gen.oclaSType(CaseDefinition).objectiveRequirement)) and
        (gen.oclIsKindOf(CaseUsage) implies
            redefines(gen.oclaSType(CaseUsage).objectiveRequirement)))
```

checkRequirementUsageRequirementVerificationSpecialization

A RequirementUsage whose owningFeatureMembership is a RequirementVerificationMembership must directly or indirectly specialize the RequirementUsage
VerificationCases::VerificationCase::obj::requirementVerifications.

```
owningFeatureMembership <> null and
owningFeatureMembership.oclIsKindOf(RequirementVerificationMembership) implies
    specializesFromLibrary('VerificationCases::VerificationCase::obj::requirementVerifications')
```

checkRequirementUsageSpecialization

A RequirementUsage must directly or indirectly specialize the base RequirementUsage
Requirements::requirementChecks from the Systems Model Library.

```
specializesFromLibrary('Requirements::requirementChecks')
```

checkRequirementUsageSubrequirementSpecialization

A composite RequirementUsage whose owningType is a RequirementDefinition or
RequirementUsage must directly or indirectly specialize the RequirementUsage
Requirements::RequirementCheck::subrequirements from the Systems Model Library.

```
isComposite and owningType <> null and
    (owningType.oclIsKindOf(RequirementDefinition) or
     owningType.oclIsKindOf(RequirementUsage)) implies
        specializesFromLibrary('Requirements::RequirementCheck::subrequirements')
```

deriveRequirementUsageActorParameter

```
actorParameter = featureMembership->
    selectByKind(ActorMembership).
    ownedActorParameter
```

deriveRequirementUsageAssumedConstraint

The assumedConstraints of a RequirementUsage are the ownedConstraints of the RequirementConstraintMemberships of the RequirementDefinition with kind = assumption.

```
assumedConstraint = ownedFeatureMembership->
    selectByKind(RequirementConstraintMembership)->
    select(kind = RequirementConstraintKind::assumption).
    ownedConstraint
```

deriveRequirementUsageFramedConcern

The framedConcerns of a RequirementUsage are the ownedConcerns of the FramedConcernMemberships of the RequirementUsage.

```
framedConcern = featureMembership->
    selectByKind(FramedConcernMembership).
    ownedConcern
```

deriveRequirementUsageRequiredConstraint

The requiredConstraints of a RequirementUsage are the ownedConstraints of the RequirementConstraintMemberships of the RequirementUsage with kind = requirement.

```
requiredConstraint = ownedFeatureMembership->
    selectByKind(RequirementConstraintMembership)->
    select(kind = RequirementConstraintKind::requirement).
    ownedConstraint
```

deriveRequirementUsageStakeholderParameter

The stakeHolderParameters of a RequirementUsage are the ownedStakeholderParameters of the StakeholderMemberships of the RequirementUsage.

```
stakeholderParameter = featureMembership->
    selectByKind(AStakholderMembership).
    ownedStakeholderParameter
```

deriveRequirementUsageSubjectParameter

The subjectParameter of a RequirementUsage is the ownedSubjectParameter of its SubjectMembership (if any).

```
subjectParameter =
  let subjects : OrderedSet(SubjectMembership) =
    featureMembership->selectByKind(SubjectMembership) in
  if subjects->isEmpty() then null
  else subjects->first().ownedSubjectParameter
  endif
```

deriveRequirementUsageText

The texts of aRequirementUsage are the bodies of the documentation of the RequirementUsage.

The actorParameters of a RequirementUsage are the ownedActorParameters of the ActorMemberships of the RequirementUsage.

```
actorParameter = featureMembership->
    selectByKind(ActorMembership) .
    ownedActorParameter
```

deriveRequirementUsageAssumedConstraint

The assumedConstraints of a RequirementUsage are the ownedConstraints of the RequirementConstraintMemberships of the RequirementDefinition with kind = assumption.

```
assumedConstraint = ownedFeatureMembership->
    selectByKind(RequirementConstraintMembership)->
    select(kind = RequirementConstraintKind::assumption) .
    ownedConstraint
```

deriveRequirementUsageFramedConcern

The framedConcerns of a RequirementUsage are the ownedConcerns of the FramedConcernMemberships of the RequirementUsage.

```
framedConcern = featureMembership->
    selectByKind(FramedConcernMembership) .
    ownedConcern
```

deriveRequirementUsageRequiredConstraint

The requiredConstraints of a RequirementUsage are the ownedConstraints of the RequirementConstraintMemberships of the RequirementUsage with kind = requirement.

```
requiredConstraint = ownedFeatureMembership->
    selectByKind(RequirementConstraintMembership)->
    select(kind = RequirementConstraintKind::requirement) .
    ownedConstraint
```

deriveRequirementUsageStakeholderParameter

The stakeHolderParameters of a RequirementUsage are the ownedStakeholderParameters of the StakeholderMemberships of the RequirementUsage.

```
stakeholderParameter = featureMembership->
    selectByKind(AStakholderMembership) .
    ownedStakeholderParameter
```

deriveRequirementUsageSubjectParameter

The subjectParameter of a RequirementUsage is the ownedSubjectParameter of its SubjectMembership (if any).

```
subjectParameter =
let subjects : OrderedSet(SubjectMembership) =
    featureMembership->selectByKind(SubjectMembership) in
if subjects->isEmpty() then null
else subjects->first().ownedSubjectParameter
endif
```

deriveRequirementUsageText

```
text = documentation.body
```

validateRequirementUsageOnlyOneSubject

A RequirementDefinition must have at most one featureMembership that is a SubjectMembership.

```
featureMembership->
    selectByKind(SubjectMembership) ->
        size() <= 1
```

validateRequirementUsageSubjectParameterPosition

The subjectParameter of a RequirementUsage must be its first input.

```
input->notEmpty() and input->first() = subjectParameter
```

8.3.20.10 SatisfyRequirementUsage

Description

A SatisfyRequirementUsage is an AssertConstraintUsage that asserts, by default, that a satisfied RequirementUsage is true for a specific satisfyingFeature, or, if isNegated = true, that the RequirementUsage is false. The satisfied RequirementUsage is related to the SatisfyRequirementUsage by a ReferenceSubsetting Relationship.

General Classes

AssertConstraintUsage
RequirementUsage

Attributes

```
/satisfiedRequirement : RequirementUsage {redefines assertedConstraint}
```

The RequirementUsage that is satisfied by the satisfyingSubject of this SatisfyRequirementUsage. It is the assertedConstraint of the SatisfyRequirementUsage considered as an AssertConstraintUsage, which must be a RequirementUsage.

```
/satisfyingFeature : Feature
```

The Feature that represents the actual subject that is asserted to satisfy the satisfiedRequirement. The satisfyingFeature is bound to the subjectParameter of the SatisfyRequirementUsage.

Operations

None.

Constraints

```
checkSatisfyRequirementUsageBindingConnector
```

A SatisfyRequirementUsage must have exactly one ownedMember that is a BindingConnector between its subjectParameter and some Feature other than the subjectParameter.

The texts of a RequirementUsage are the bodies of the documentation of the RequirementUsage.

```
text = documentation.body
```

validateRequirementUsageOnlyOneSubject

A RequirementDefinition must have at most one featureMembership that is a SubjectMembership.

```
featureMembership->
  selectByKind(SubjectMembership) ->
  size() <= 1
```

validateRequirementUsageSubjectParameterPosition

The subjectParameter of a RequirementUsage must be its first input.

```
input->notEmpty() and input->first() = subjectParameter
```

8.3.20.10 SatisfyRequirementUsage

Description

A SatisfyRequirementUsage is an AssertConstraintUsage that asserts, by default, that a satisfied RequirementUsage is true for a specific satisfyingFeature, or, if isNegated = true, that the RequirementUsage is false. The satisfied RequirementUsage is related to the SatisfyRequirementUsage by a ReferenceSubsetting Relationship.

General Classes

AssertConstraintUsage
RequirementUsage

Attributes

/satisfiedRequirement : RequirementUsage {redefines assertedConstraint}

The RequirementUsage that is satisfied by the satisfyingSubject of this SatisfyRequirementUsage. It is the assertedConstraint of the SatisfyRequirementUsage considered as an AssertConstraintUsage, which must be a RequirementUsage.

/satisfyingFeature : Feature

The Feature that represents the actual subject that is asserted to satisfy the satisfiedRequirement. The satisfyingFeature is bound to the subjectParameter of the SatisfyRequirementUsage.

Operations

None.

Constraints

checkSatisfyRequirementUsageBindingConnector

A SatisfyRequirementUsage must have exactly one ownedMember that is a BindingConnector between its subjectParameter and some Feature other than the subjectParameter.

```

ownedMember->selectByKind(BindingConnector)->
    select(b |
        b.relatedElement->includes(subjectParameter) and
        b.relatedElement->exists(r | r <> subjectParameter))->
    size() = 1

```

deriveSatisfyRequirementUsageSatisfyingFeature

The `satisfyingFeature` of a `SatisfyRequirementUsage` is the Feature to which the `subjectParameter` is bound.

```

satisfyingFeature =
    let bindings: BindingConnector = ownedMember->
        selectByKind(BindingConnector)->
        select(b | b.relatedElement->includes(subjectParameter)) in
    if bindings->isEmpty() or
        bindings->first().relatedElement->exists(r | r <> subjectParameter)
    then null
    else bindings->first().relatedElement->any(r | r <> subjectParameter)
    endif

```

validateSatisfyRequirementUsageReference

If a `SatisfyRequirementUsage` has an `ownedReferenceSubsetting`, then its `referencedFeature` must be a `RequirementUsage`.

```

ownedReferenceSubsetting <> null implies
    ownedReferenceSubsetting.referencedFeature.oclIsKindOf(RequirementUsage)

```

8.3.20.11 SubjectMembership

Description

A `SubjectMembership` is a `ParameterMembership` that indicates that its `ownedSubjectParameter` is the subject of its `owningType`. The `owningType` of a `SubjectMembership` must be a `RequirementDefinition`, `RequirementUsage`, `CaseDefinition`, or `CaseUsage`.

General Classes

`ParameterMembership`

Attributes

/`ownedSubjectParameter` : Usage {redefines `ownedMemberParameter`}

The `Usage``ownedMemberParameter` of this `SubjectMembership`.

Operations

None.

Constraints

`validateSubjectMembershipOwningType`

```

ownedMember->selectByKind(BindingConnector)->
    select(b |
        b.relatedElement->includes(subjectParameter) and
        b.relatedElement->exists(r | r <> subjectParameter))->
    size() = 1

```

deriveSatisfyRequirementUsageSatisfyingFeature

The `satisfyingFeature` of a `SatisfyRequirementUsage` is the `Feature` to which the `subjectParameter` is bound.

```

satisfyingFeature =
    let bindings: BindingConnector = ownedMember->
        selectByKind(BindingConnector)->
        select(b | b.relatedElement->includes(subjectParameter)) in
    if bindings->isEmpty() or
        bindings->first().relatedElement->exists(r | r <> subjectParameter)
    then null
    else bindings->first().relatedElement->any(r | r <> subjectParameter)
    endif

```

validateSatisfyRequirementUsageReference

If a `SatisfyRequirementUsage` has an `ownedReferenceSubsetting`, then its `referencedFeature` must be a `RequirementUsage`.

```

ownedReferenceSubsetting <> null implies
    ownedReferenceSubsetting.referencedFeature.oclIsKindOf(RequirementUsage)

```

8.3.20.11 SubjectMembership

Description

A `SubjectMembership` is a `ParameterMembership` that indicates that its `ownedSubjectParameter` is the subject of its `owningType`. The `owningType` of a `SubjectMembership` must be a `RequirementDefinition`, `RequirementUsage`, `CaseDefinition`, or `CaseUsage`.

General Classes

`ParameterMembership`

Attributes

`/ownedSubjectParameter : Usage {redefines ownedMemberParameter}`

The `Usage``ownedMemberParameter` of this `SubjectMembership`.

Operations

None.

Constraints

validateSubjectMembershipOwningType

The `owningType` of a `SubjectMembership` must be a `RequirementDefinition`, `RequirementUsage`, `CaseDefinition`, or `CaseUsage`.

The `owningType` of a `SubjectMembership` must be a `RequirementDefinition`, `RequirementUsage`, `CaseDefinition`, or `CaseUsage`.

```
owningTypeoclIsType(RequirementDefinition) or  
owningTypeoclIsType(RequirementCaseDefinition) or  
owningTypeoclIsType(CaseDefinition) or  
owningTypeoclIsType(CaseUsage)
```

8.3.20.12 StakeholderMembership

Description

A `StakeholderMembership` is a `ParameterMembership` that identifies a `PartUsage` as a `stakeholderParameter` of a `RequirementDefinition` or `RequirementUsage`, which specifies a role played by an entity with concerns framed by the `owningType`.

General Classes

`ParameterMembership`

Attributes

/ownedStakeholderParameter : `PartUsage` {redefines ownedMemberParameter}

The `PartUsage` specifying the stakeholder.

Operations

None.

Constraints

`validateStakeholderMembershipOwningType`

The `owningType` of a `StakeholderMembership` must be a `RequirementDefinition` or `RequirementUsage`.

```
owningTypeoclIsKindOf(RequirementUsage) or  
owningTypeoclIsKindOf(RequirementDefinition)
```

8.3.21 Cases Abstract Syntax

```
owningType.oclIsType(RequirementDefinition) or  
owningType.oclIsType(RequirementCaseRequirementDefinition) or  
owningType.oclIsType(CaseDefinition) or  
owningType.oclIsType(CaseUsage)
```

8.3.20.12 StakeholderMembership

Description

A StakeholderMembership is a ParameterMembership that identifies a PartUsage as a stakeholderParameter of a RequirementDefinition or RequirementUsage, which specifies a role played by an entity with concerns framed by the owningType.

General Classes

ParameterMembership

Attributes

```
/ownedStakeholderParameter : PartUsage {redefines ownedMemberParameter}
```

The PartUsage specifying the stakeholder.

Operations

None.

Constraints

```
validateStakeholderMembershipOwningType
```

The owningType of a StakeholderMembership must be a RequirementDefinition or RequirementUsage.

```
owningType.oclIsKindOf(RequirementUsage) or  
owningType.oclIsKindOf(RequirementDefinition)
```

8.3.21 Cases Abstract Syntax

8.3.21.1 Overview

8.3.21.1 Overview

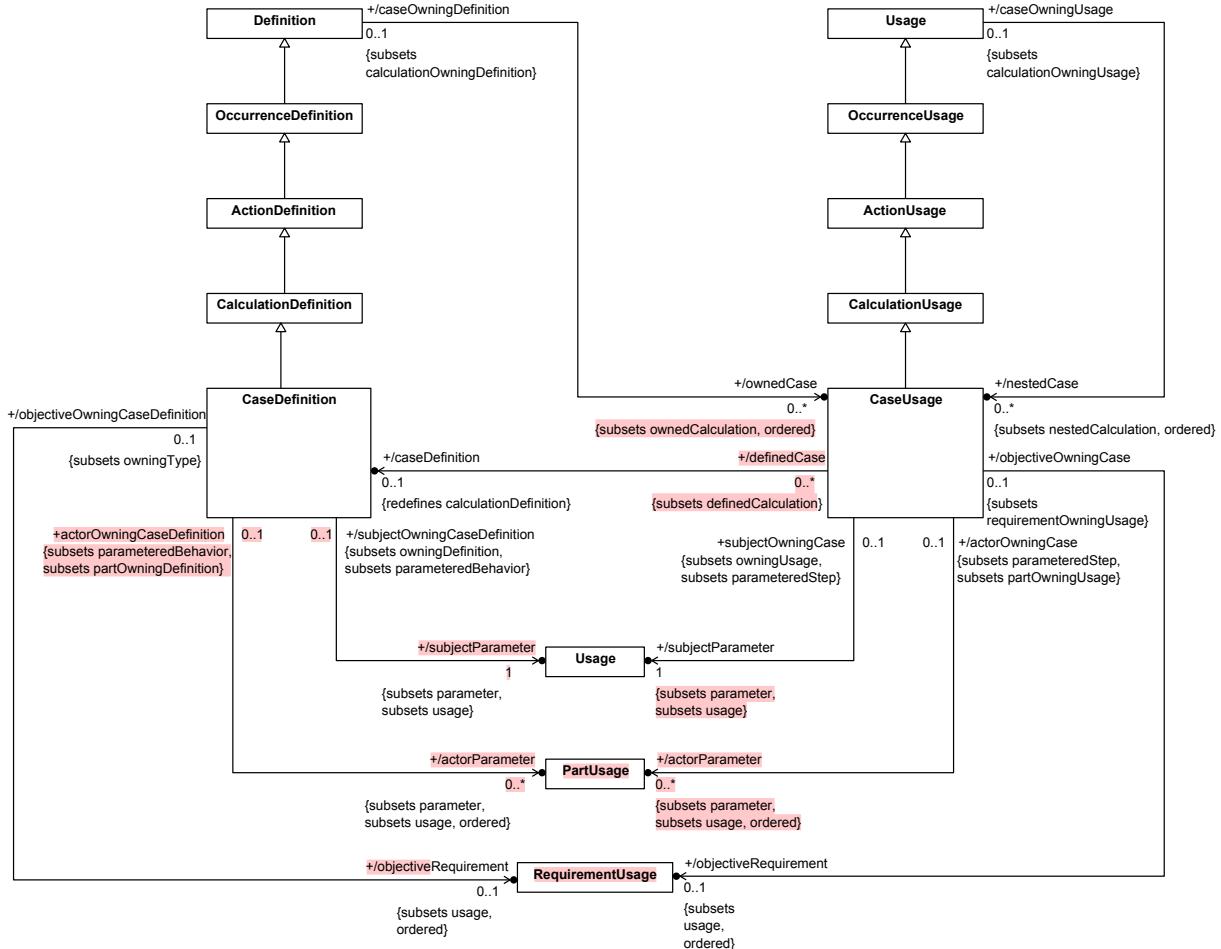


Figure 41. Case Definition and Usage

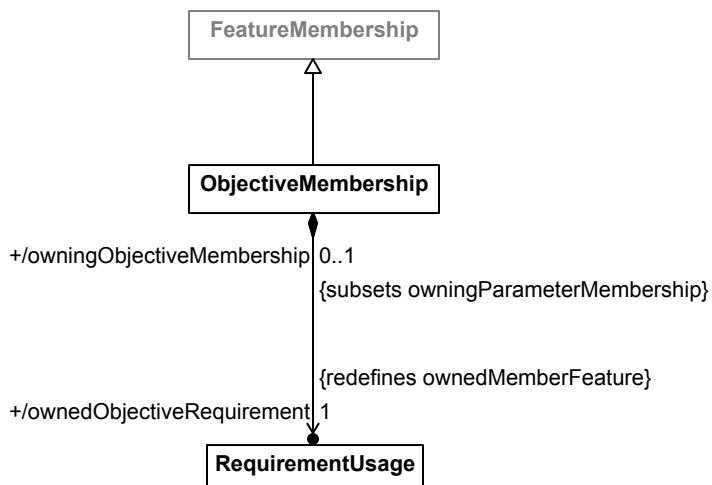


Figure 42. Case Membership

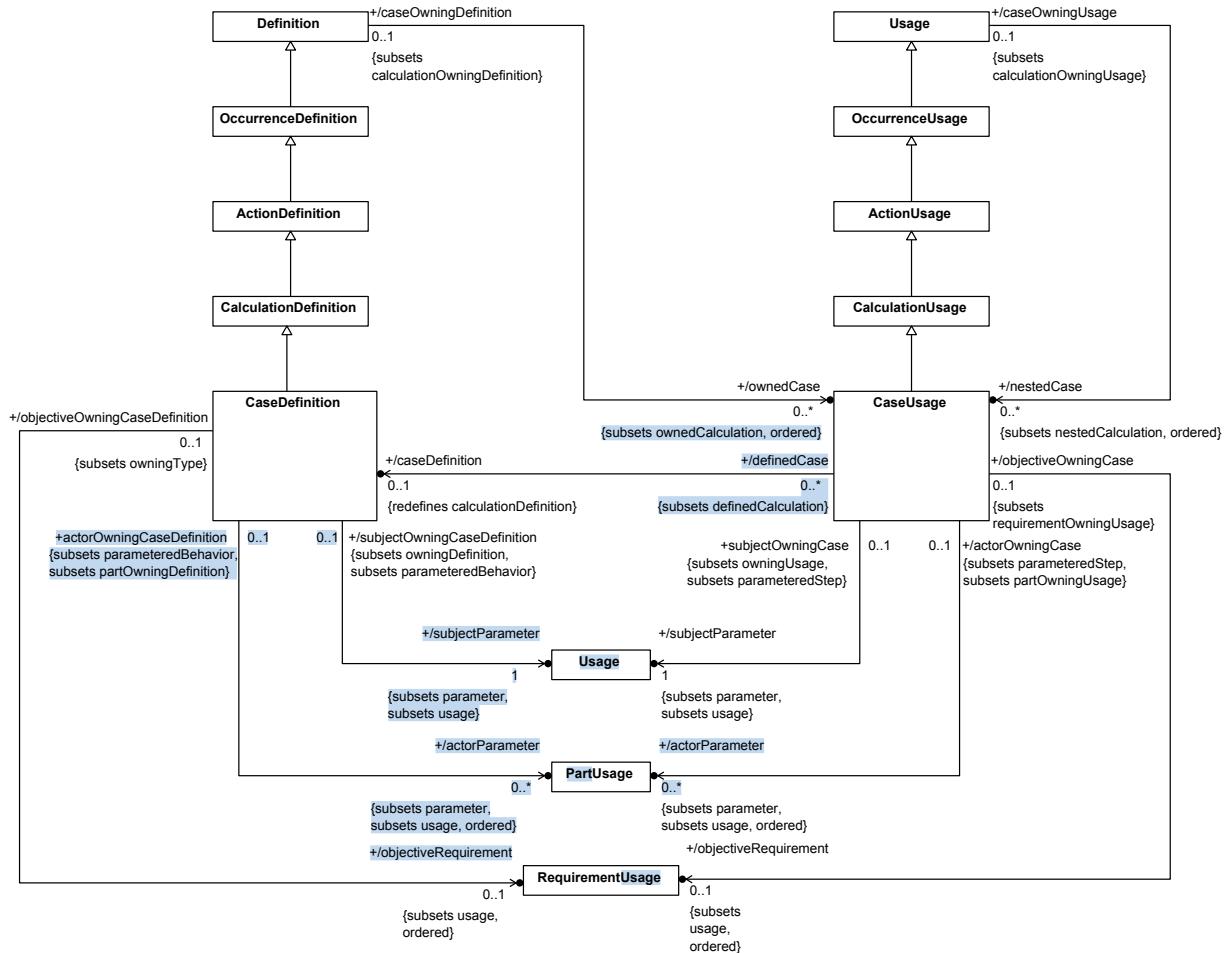


Figure 42. Case Definition and Usage

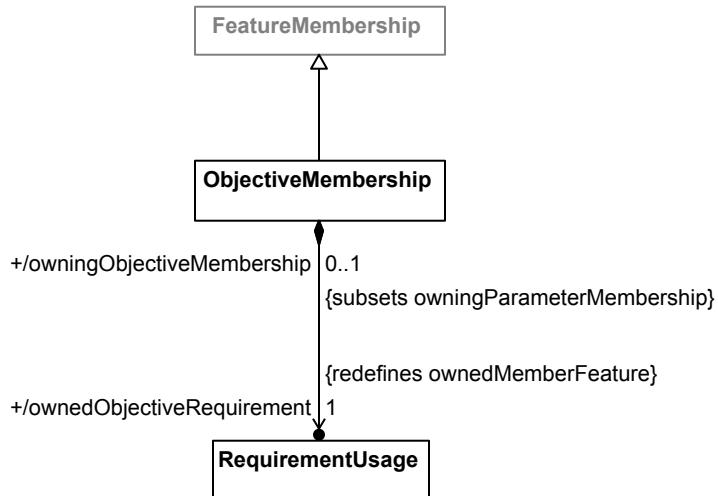


Figure 43. Case Membership

8.3.21.2 CaseDefinition

8.3.21.2 CaseDefinition

Description

A **CaseDefinition** is a **CalculationDefinition** for a process, often involving collecting evidence or data, relative to a subject, possibly involving the collaboration of one or more other actors, producing a result that meets an objective.

General Classes

CalculationDefinition

Attributes

/actorParameter : PartUsage [0..*] {subsets parameter, usage, ordered}

The parameters of this **CaseDefinition** that represent actors involved in the case.

/objectiveRequirement : RequirementUsage [0..1] {subsets usage, ordered}

The **RequirementUsage** representing the objective of this **CaseDefinition**.

/subjectParameter : Usage {subsets parameter, usage}

The parameter of this **CaseDefinition** that represents its subject.

Operations

None.

Constraints

checkCaseDefinitionSpecialization

A **CaseDefinition** must directly or indirectly specialize the base **CaseDefinition** *Cases::Case* from the Systems Model Library.

specializesFromLibrary('Cases::Case')

deriveCaseDefinitionActorParameter

The actorParameters of a **CaseDefinition** are the ownedActorParameters of the ActorMemberships of the **CaseDefinition**.

```
actorParameter = featureMembership->
    selectByKind(ActorMembership) .
    ownedActorParameter
```

deriveCaseDefinitionObjectiveRequirement

The objectiveRequirement of a **CaseDefinition** is the ownedObjectiveRequirement of its ObjectiveMembership, if any.

```
objectiveRequirement =
    let objectives: OrderedSet(RequirementUsage) =
```

Description

A CaseDefinition is a CalculationDefinition for a process, often involving collecting evidence or data, relative to a subject, possibly involving the collaboration of one or more other actors, producing a result that meets an objective.

General Classes

CalculationDefinition

Attributes

/actorParameter : PartUsage [0..*] {subsets parameter, usage, ordered}

The parameters of this CaseDefinition that represent actors involved in the case.

/objectiveRequirement : RequirementUsage [0..1] {subsets usage, ordered}

The RequirementUsage representing the objective of this CaseDefinition.

/subjectParameter : Usage {subsets parameter, usage}

The parameter of this CaseDefinition that represents its subject.

Operations

None.

Constraints

checkCaseDefinitionSpecialization

A CaseDefinition must directly or indirectly specialize the base CaseDefinition *Cases::Case* from the Systems Model Library.

specializesFromLibrary('Cases::Case')

deriveCaseDefinitionActorParameter

The actorParameters of a CaseDefinition are the ownedActorParameters of the ActorMemberships of the CaseDefinition.

```
actorParameter = featureMembership->
    selectByKind(ActorMembership) .
    ownedActorParameter
```

deriveCaseDefinitionObjectiveRequirement

The objectiveRequirement of a CaseDefinition is the ownedObjectiveRequirement of its ObjectiveMembership, if any.

```
objectiveRequirement =
    let objectives: OrderedSet(RequirementUsage) =
        featureMembership->
            selectByKind(ObjectiveMembership) .
            ownedRequirement in
    if objectives->isEmpty() then null
```

```

featureMembership->
    selectByKind(ObjectiveMembership) .
    ownedRequirement in
if objectives->isEmpty() then null
else objectives->first().ownedObjectiveRequirement
endif

```

deriveCaseDefinitionSubjectParameter

The subjectParameter of a CaseDefinition is the ownedSubjectParameter of its SubjectMembership (if any).

```

subjectParameter =
let subjectMems : OrderedSet(SubjectMembership) =
    featureMembership->selectByKind(SubjectMembership) in
if subjectMems->isEmpty() then null
else subjectMems->first().ownedSubjectParameter
endif

```

validateCaseDefinitionOnlyOneObjective

A CaseDefinition must have at most one featureMembership that is a ObjectiveMembership.

```

featureMembership->
    selectByKind(ObjectiveMembership)->
    size() <= 1

```

validateCaseDefinitionOnlyOneSubject

A CaseDefinition must have at most one featureMembership that is a SubjectMembership.

```
featureMembership->selectByKind(SubjectMembership)->size() <= 1
```

validateCaseDefinitionSubjectParameterPosition

The subjectParameter of a CaseDefinition must be its first input.

```
input->notEmpty() and input->first() = subjectParameter
```

8.3.21.3 CaseUsage

Description

A CaseUsage is a Usage of a CaseDefinition.

General Classes

CalculationUsage

Attributes

/actorParameter : PartUsage [0..*] {subsets parameter, usage, ordered}

The parameters of this CaseUsage that represent actors involved in the case.

/caseDefinition : CaseDefinition [0..1] {redefines calculationDefinition}

```
else objectives->first().ownedObjectiveRequirement  
endif
```

deriveCaseDefinitionSubjectParameter

The subjectParameter of a CaseDefinition is the ownedSubjectParameter of its SubjectMembership (if any).

```
subjectParameter =  
  let subjectMems : OrderedSet(SubjectMembership) =  
    featureMembership->selectByKind(SubjectMembership) in  
    if subjectMems->isEmpty() then null  
    else subjectMems->first().ownedSubjectParameter  
  endif
```

validateCaseDefinitionOnlyOneObjective

A CaseDefinition must have at most one featureMembership that is a ObjectiveMembership.

```
featureMembership->  
  selectByKind(ObjectiveMembership)->  
  size() <= 1
```

validateCaseDefinitionOnlyOneSubject

A CaseDefinition must have at most one featureMembership that is a SubjectMembership.

```
featureMembership->selectByKind(SubjectMembership)->size() <= 1
```

validateCaseDefinitionSubjectParameterPosition

The subjectParameter of a CaseDefinition must be its first input.

```
input->notEmpty() and input->first() = subjectParameter
```

8.3.21.3 CaseUsage

Description

A CaseUsage is a Usage of a CaseDefinition.

General Classes

CalculationUsage

Attributes

/actorParameter : PartUsage [0..*] {subsets parameter, usage, ordered}

The parameters of this CaseUsage that represent actors involved in the case.

/caseDefinition : CaseDefinition [0..1] {redefines calculationDefinition}

The CaseDefinition that is the type of this CaseUsage.

/objectiveRequirement : RequirementUsage [0..1] {subsets usage, ordered}

The RequirementUsage representing the objective of this CaseUsage.

The CaseDefinition that is the type of this CaseUsage.

/objectiveRequirement : RequirementUsage [0..1] {subsets usage, ordered}

The RequirementUsage representing the objective of this CaseUsage.

/subjectParameter : Usage {subsets parameter, usage}

The parameter of this CaseUsage that represents its subject.

Operations

None.

Constraints

checkCaseUsageSpecialization

A CaseUsage must directly or indirectly specialize the base CaseUsage *Cases::cases* from the Systems Model Library.

```
specializesFromLibrary('Cases::cases')
```

checkCaseUsageSubcaseSpecialization

A composite CaseUsage whose owningType is a CaseDefinition or CaseUsage must directly or indirectly specialize the CaseUsage *Cases::Case::subcases*.

```
isComposite and owningType <> null and  
  (owningType.oclIsKindOf(CaseDefinition) or  
   owningType.oclIsKindOf(CaseUsage)) implies  
   specializesFromLibrary('Cases::Case::subcases')
```

deriveCaseUsageActorParameter

The actorParameters of a CaseUsage are the ownedActorParameters of the ActorMemberships of the CaseUsage.

```
actorParameter = featureMembership->  
  selectByKind(ActorMembership).  
  ownedActorParameter
```

deriveCaseUsageObjectiveRequirement

The objectiveRequirement of a CaseUsage is the RequirementUsage it owns via an ObjectiveMembership, if any.

```
objectiveRequirement =  
  let objectives: OrderedSet(RequirementUsage) =  
    featureMembership->  
      selectByKind(ObjectiveMembership).  
      ownedRequirement in  
    if objectives->isEmpty() then null  
    else objectives->first().ownedObjectiveRequirement  
  endif
```

```
/subjectParameter : Usage {subsets parameter, usage}
```

The parameter of this CaseUsage that represents its subject.

Operations

None.

Constraints

checkCaseUsageSpecialization

A CaseUsage must directly or indirectly specialize the base CaseUsage *Cases::cases* from the Systems Model Library.

```
specializesFromLibrary('Cases::cases')
```

checkCaseUsageSubcaseSpecialization

A composite CaseUsage whose owningType is a CaseDefinition or CaseUsage must directly or indirectly specialize the CaseUsage *Cases::Case::subcases*.

```
isComposite and owningType <> null and  
  (owningType.oclIsKindOf(CaseDefinition) or  
   owningType.oclIsKindOf(CaseUsage)) implies  
   specializesFromLibrary('Cases::Case::subcases')
```

deriveCaseUsageActorParameter

The actorParameters of a CaseUsage are the ownedActorParameters of the ActorMemberships of the CaseUsage.

```
actorParameter = featureMembership->  
  selectByKind(ActorMembership).  
  ownedActorParameter
```

deriveCaseUsageObjectiveRequirement

The objectiveRequirement of a CaseUsage is the RequirementUsage it owns via an ObjectiveMembership, if any.

```
objectiveRequirement =  
  let objectives: OrderedSet(RequirementUsage) =  
    featureMembership->  
      selectByKind(ObjectiveMembership).  
      ownedRequirement in  
    if objectives->isEmpty() then null  
    else objectives->first().ownedObjectiveRequirement  
  endif
```

deriveCaseUsageSubjectParameter

The subjectParameter of a CaseUsage is the ownedSubjectParameter of its SubjectMembership (if any).

```
subjectParameter =  
  let subjects : OrderedSet(SubjectMembership) =  
    featureMembership->selectByKind(SubjectMembership) in  
    if subjects->isEmpty() then null
```

deriveCaseUsageSubjectParameter

The subjectParameter of a CaseUsage is the ownedSubjectParameter of its SubjectMembership (if any).

```
subjectParameter =  
    let subjects : OrderedSet(SubjectMembership) =  
        featureMembership->selectByKind(SubjectMembership) in  
        if subjects->isEmpty() then null  
        else subjects->first().ownedSubjectParameter  
    endif
```

validateCaseUsageOnlyOneObjective

A CaseUsage must have at most one featureMembership that is a ObjectiveMembership.

```
featureMembership->  
    selectByKind(ObjectiveMembership)->  
    size() <= 1
```

validateCaseUsageOnlyOneSubject

A CaseUsage must have at most one featureMembership that is a SubjectMembership.

```
featureMembership->  
    selectByKind(SubjectMembership)->  
    size() <= 1
```

validateCaseUsageSubjectParameterPosition

The subjectParameter of a CaseUsage must be its first input.

```
input->notEmpty() and input->first() = subjectParameter
```

8.3.21.4 ObjectiveMembership

Description

An ObjectiveMembership is a FeatureMembership that indicates that its ownedObjectiveRequirement is the objective RequirementUsage for its owningType, which must be a CaseDefinition or CaseUsage.

General Classes

FeatureMembership

Attributes

/ownedObjectiveRequirement : RequirementUsage {redefines ownedMemberFeature}

The RequirementUsage that is the ownedMemberFeature of this RequirementUsage.

Operations

None.

Constraints

```
else subjects->first().ownedSubjectParameter  
endif
```

validateCaseUsageOnlyOneObjective

A CaseUsage must have at most one featureMembership that is a ObjectiveMembership.

```
featureMembership->  
    selectByKind(ObjectiveMembership)->  
    size() <= 1
```

validateCaseUsageOnlyOneSubject

A CaseUsage must have at most one featureMembership that is a SubjectMembership.

```
featureMembership->  
    selectByKind(SubjectMembership)->  
    size() <= 1
```

validateCaseUsageSubjectParameterPosition

The subjectParameter of a CaseUsage must be its first input.

```
input->notEmpty() and input->first() = subjectParameter
```

8.3.21.4 ObjectiveMembership

Description

An ObjectiveMembership is a FeatureMembership that indicates that its ownedObjectiveRequirement is the objective RequirementUsage for its owningType, which must be a CaseDefinition or CaseUsage.

General Classes

FeatureMembership

Attributes

/ownedObjectiveRequirement : RequirementUsage {redefines ownedMemberFeature}

The RequirementUsage that is the ownedMemberFeature of this RequirementUsage.

Operations

None.

Constraints

validateObjectiveMembershipIsComposite

The ownedObjectiveRequirement of an ObjectiveMembership must be composite.

```
ownedObjectiveRequirement.isComposite
```

validateObjectiveMembershipOwningType

The owningType of an ObjectiveMembership must be a CaseDefinition or CaseUsage.

validateObjectiveMembershipIsComposite

The ownedObjectiveRequirement of an ObjectiveMembership must be composite.

ownedObjectiveRequirement.isComposite

validateObjectiveMembershipOwningType

The owningType of an ObjectiveMembership must be a CaseDefinition or CaseUsage.

owningType.oclIsType(CaseDefinition) or
owningType.oclIsType(CaseUsage)

8.3.22 Analysis Cases Abstract Syntax

8.3.22.1 Overview

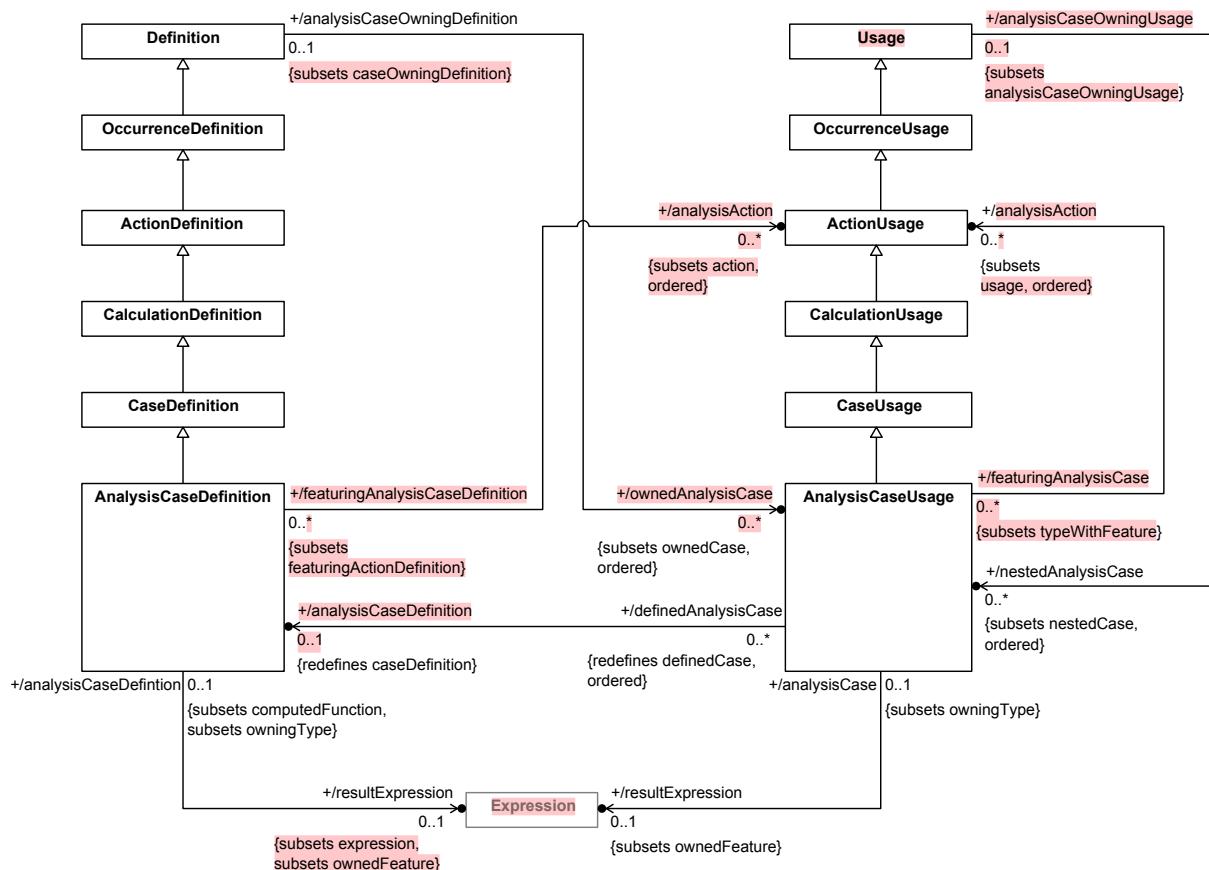


Figure 43. Analysis Case Definition and Usage

8.3.22.2 AnalysisCaseDefinition

Description

An AnalysisCaseDefinition is a CaseDefinition for the case of carrying out an analysis.

General Classes

owningType.oclIsType(CaseDefinition) or
owningType.oclIsType(CaseUsage)

8.3.22 Analysis Cases Abstract Syntax

8.3.22.1 Overview

SYSML2 -187: There is no need for AnalysisAction

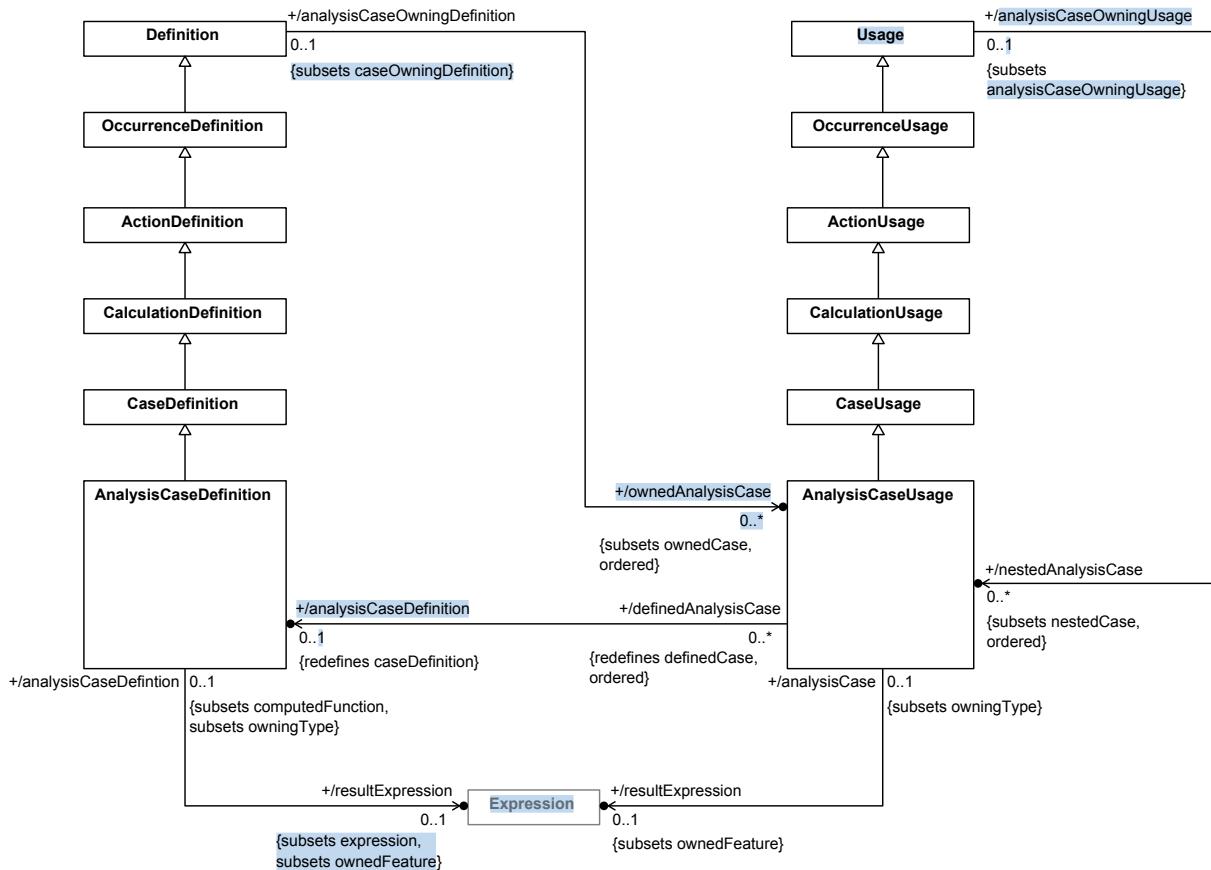


Figure 44. Analysis Case Definition and Usage

8.3.22.2 AnalysisCaseDefinition

SYSML2 -187: There is no need for AnalysisAction

Description

An AnalysisCaseDefinition is a CaseDefinition for the case of carrying out an analysis.

General Classes

CaseDefinition

Attributes

/resultExpression : Expression [0..1] {subsets expression, ownedFeature}

CaseDefinition

Attributes

/analysisAction : ActionUsage [0..*] {subsets action, ordered}

The composite actions of the AnalysisCaseDefinition that are defined as AnalysisActions.

/resultExpression : Expression [0..1] {subsets expression, ownedFeature}

An Expression used to compute the result of the AnalysisCaseDefinition, owned via a ResultExpressionMembership.

Operations

None.

Constraints

checkAnalysisCaseDefinitionSpecialization

An AnalysisCaseDefinition must directly or indirectly specialize the base AnalysisCaseDefinition *AnalysisCases::AnalysisCase* from the Systems Model Library.

specializesFromLibrary('AnalysisCases::AnalysisCase')

deriveAnalysisCaseDefinitionAnalysisAction

The analysisActions of a AnalysisCaseDefinition are all its actions that directly or indirectly specialize *AnalysisCases::AnalysisAction*.

```
analysisAction = action->select(
    isComposite and
    specializes('AnalysisCases::AnalysisAction'))
```

deriveAnalysisCaseDefinitionResultExpression

The resultExpression of a AnalysisCaseDefinition is the ownedResultExpression of its ResultExpressionMembership, if any.

```
resultExpression =
    let results : OrderedSet(ResultExpressionMembership) =
        featureMembership-
            selectByKind(ResultExpressionMembership) in
    if results->isEmpty() then null
    else results->first().ownedResultExpression
    endif
```

8.3.22.3 AnalysisCaseUsage

Description

An AnalysisCaseUsage is a Usage of an AnalysisCaseDefinition.

General Classes

An Expression used to compute the result of the AnalysisCaseDefinition, owned via a ResultExpressionMembership.

Operations

None.

Constraints

checkAnalysisCaseDefinitionSpecialization

An AnalysisCaseDefinition must directly or indirectly specialize the base AnalysisCaseDefinition *AnalysisCases::AnalysisCase* from the Systems Model Library.

```
specializesFromLibrary('AnalysisCases::AnalysisCase')
```

deriveAnalysisCaseDefinitionResultExpression

The resultExpression of a AnalysisCaseDefinition is the ownedResultExpression of its ResultExpressionMembership, if any.

```
resultExpression =  
    let results : OrderedSet(ResultExpressionMembership) =  
        featureMembership->  
            selectByKind(ResultExpressionMembership) in  
        if results->isEmpty() then null  
        else results->first().ownedResultExpression  
    endif
```

8.3.22.3 AnalysisCaseUsage

SYSML2 -187: There is no need for AnalysisAction

Description

An AnalysisCaseUsage is a Usage of an AnalysisCaseDefinition.

General Classes

CaseUsage

Attributes

/analysisCaseDefinition : AnalysisCaseDefinition [0..1] {redefines caseDefinition}

The AnalysisCaseDefinition that is the definition of this AnalysisCaseUsage.

/resultExpression : Expression [0..1] {subsets ownedFeature}

An Expression used to compute the result of the AnalysisCaseUsage, owned via a ResultExpressionMembership.

Operations

None.

Constraints

CaseUsage

Attributes

/analysisAction : ActionUsage [0..*] {subsets usage, ordered}

The composite usages of the AnalysisCaseUsage that are defined as AnalysisActions.

/analysisCaseDefinition : AnalysisCaseDefinition [0..1] {redefines caseDefinition}

The AnalysisCaseDefinition that is the definition of this AnalysisCaseUsage.

/resultExpression : Expression [0..1] {subsets ownedFeature}

An Expression used to compute the result of the AnalysisCaseUsage, owned via a ResultExpressionMembership.

Operations

None.

Constraints

checkAnalysisCaseUsageSpecialization

An AnalysisCaseUsage must directly or indirectly specialize the base AnalysisCaseUsage *AnalysisCases::analysisCases* from the Systems Model Library.

specializesFromLibrary('AnalysisCases::analysisCases')

checkAnalysisCaseUsageSubAnalysisCaseSpecialization

A composite AnalysisCaseUsage whose owningType is an AnalysisCaseDefinition or AnalysisCaseUsage must specialize the AnalysisCaseUsage *AnalysisCases::AnalysisCase::subAnalysisCases* from the Systems Model Library.

isComposite and owningType <> null and
(owningType.oclIsKindOf(AnalysisCaseDefinition) or
owningType.oclIsKindOf(AnalysisCaseUsage)) implies
specializesFromLibrary('AnalysisCases::AnalysisCase::subAnalysisCases')

deriveAnalysisCaseUsageAnalysisAction

The analysisActions of a AnalysisCaseUsage are all its actions that directly or indirectly specialize *AnalysisCases::AnalysisAction*.

```
analysisAction = usage->select(  
    isComposite and  
    specializes('AnalysisCases::AnalysisAction'))
```

deriveAnalysisCaseUsageResultExpression

The resultExpression of a AnalysisCaseUsage is the ownedResultExpression of its ResultExpressionMembership, if any.

checkAnalysisCaseUsageSpecialization

An `AnalysisCaseUsage` must directly or indirectly specialize the base `AnalysisCaseUsage` `AnalysisCases::analysisCases` from the Systems Model Library.

```
specializesFromLibrary('AnalysisCases::analysisCases')
```

checkAnalysisCaseUsageSubAnalysisCaseSpecialization

A composite `AnalysisCaseUsage` whose `owningType` is an `AnalysisCaseDefinition` or `AnalysisCaseUsage` must specialize the `AnalysisCaseUsage` `AnalysisCases::AnalysisCase::subAnalysisCases` from the Systems Model Library.

```
isComposite and owningType <> null and  
  (owningType.oclIsKindOf(AnalysisCaseDefinition) or  
   owningType.oclIsKindOf(AnalysisCaseUsage)) implies  
   specializesFromLibrary('AnalysisCases::AnalysisCase::subAnalysisCases')
```

deriveAnalysisCaseUsageResultExpression

The `resultExpression` of a `AnalysisCaseUsage` is the `ownedResultExpression` of its `ResultExpressionMembership`, if any.

```
resultExpression =  
  let results : OrderedSet(ResultExpressionMembership) =  
    featureMembership->  
      selectByKind(ResultExpressionMembership) in  
    if results->isEmpty() then null  
    else results->first().ownedResultExpression  
  endif
```

8.3.23 Verification Cases Abstract Syntax

8.3.23.1 Overview

```

resultExpression =
    let results : OrderedSet(ResultExpressionMembership) =
        featureMembership->
            selectByKind(ResultExpressionMembership) in
    if results->isEmpty() then null
    else results->first().ownedResultExpression
endif

```

8.3.23 Verification Cases Abstract Syntax

8.3.23.1 Overview

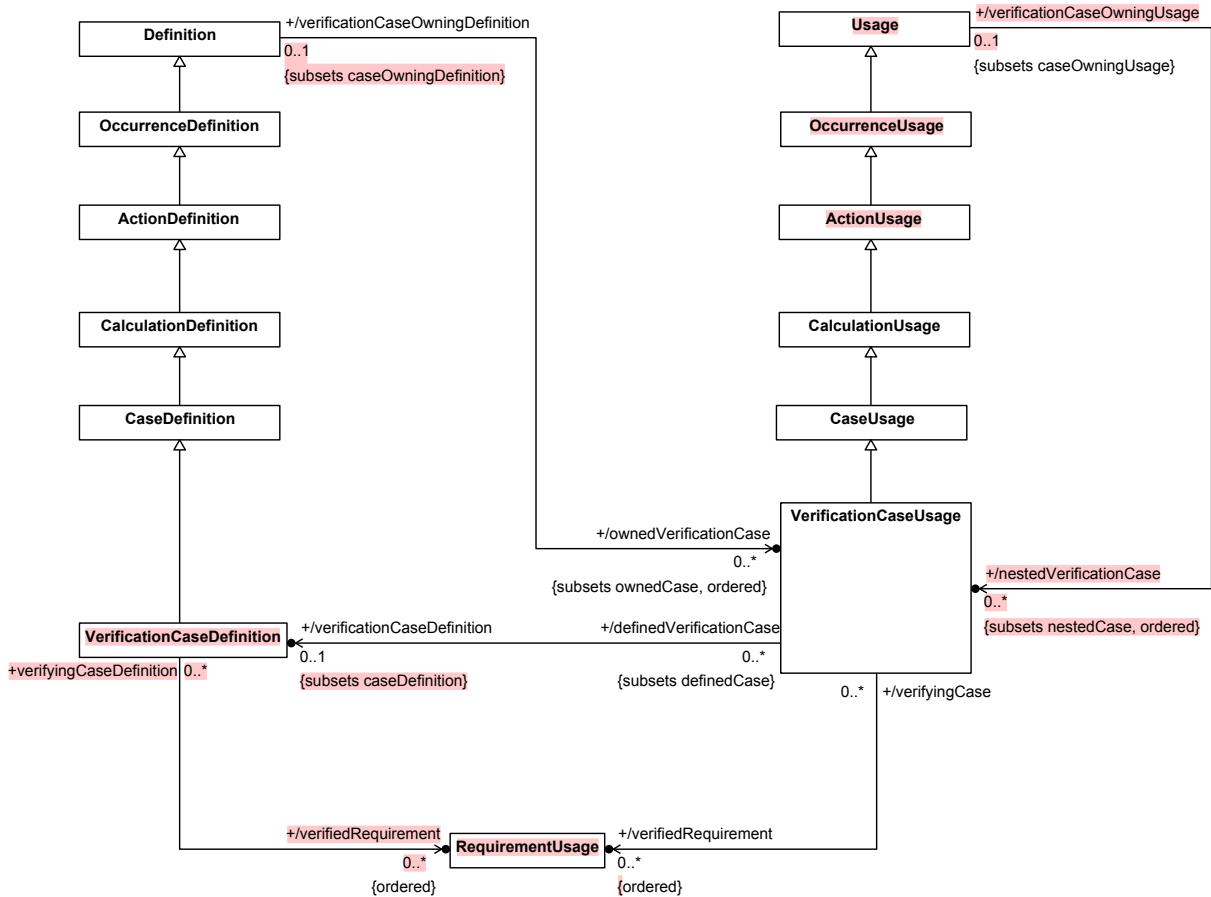


Figure 44. Verification Case Definition and Usage

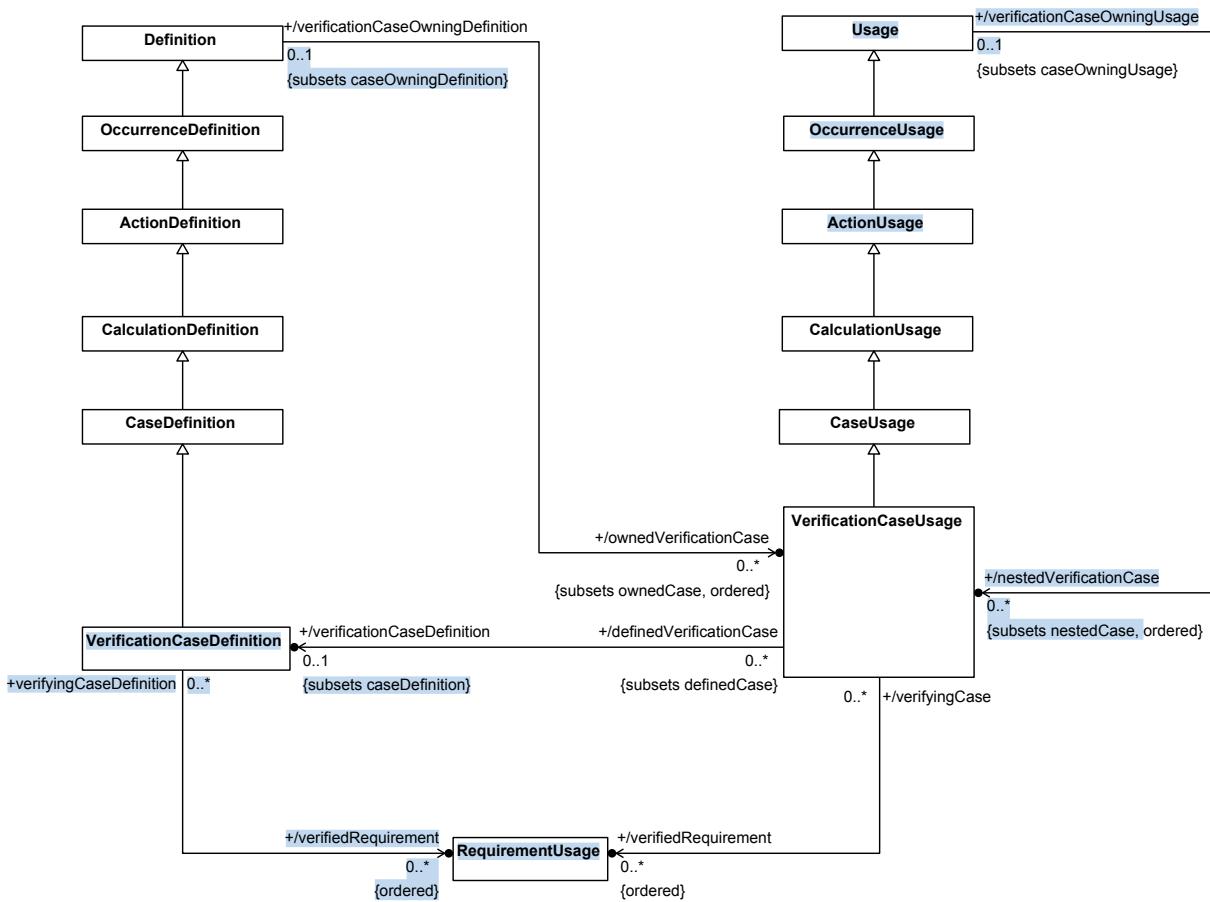


Figure 45. Verification Case Definition and Usage

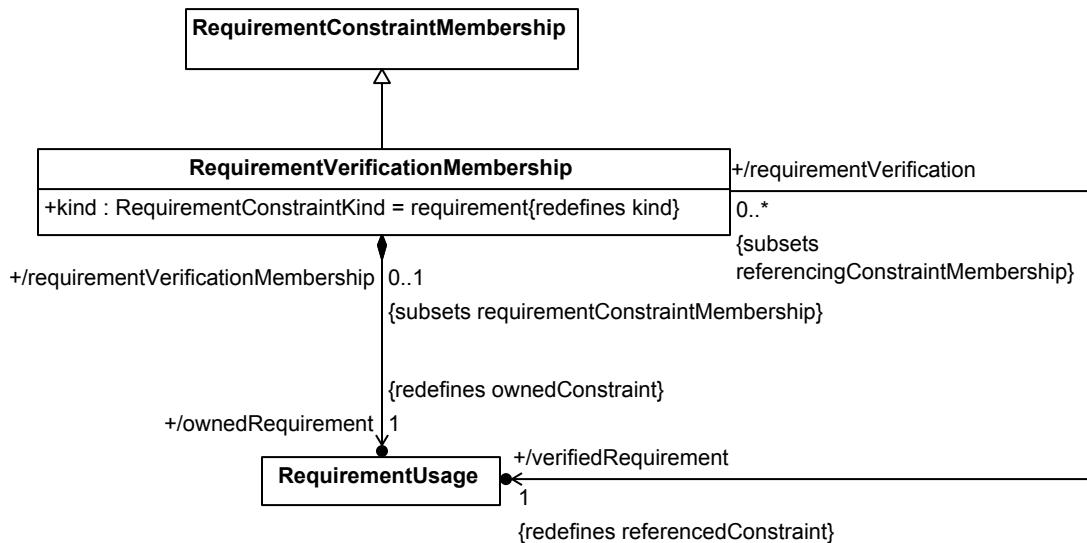


Figure 46. Verification Membership

8.3.23.2 RequirementVerificationMembership

Description

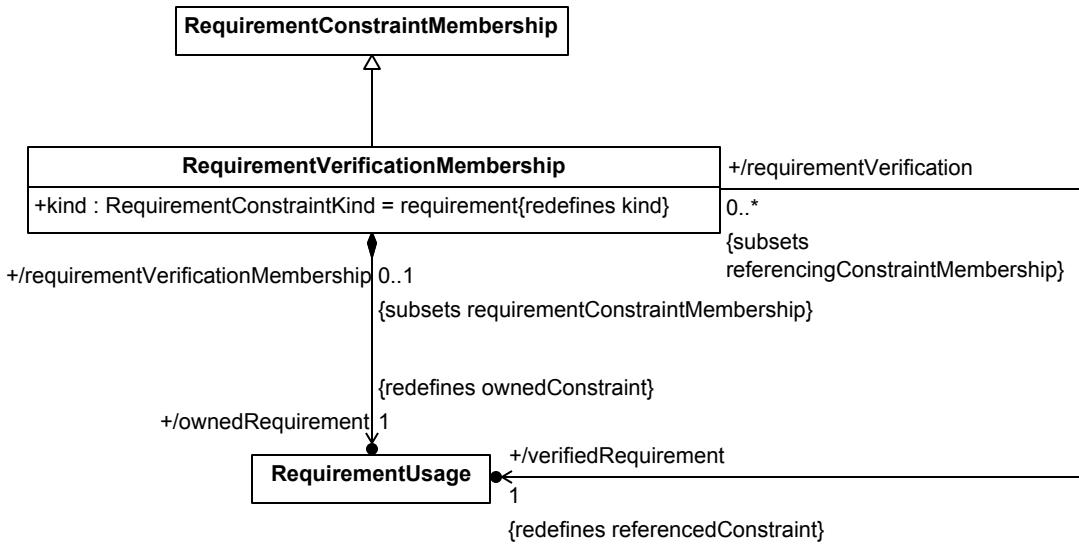


Figure 45. Verification Membership

8.3.23.2 RequirementVerificationMembership

Description

A **RequirementVerificationMembership** is a **RequirementConstraintMembership** used in the objective of a **VerificationCase** to identify a **RequirementUsage** that is verified by the **VerificationCase**.

General Classes

RequirementConstraintMembership

Attributes

kind : RequirementConstraintKind {redefines kind}

The kind of a RequirementVerificationMembership must be requirement.

/ownedRequirement : RequirementUsage {redefines ownedConstraint}

The owned RequirementUsage that acts as the ownedConstraint for this RequirementVerificationMembership. This will either be the verifiedRequirement, or it will subset the verifiedRequirement.

/verifiedRequirement : RequirementUsage {redefines referencedConstraint}

The RequirementUsage that is identified as being verified. It is the referencedConstraint of the RequirementVerificationMembership considered as a RequirementConstraintMembership, which must be a RequirementUsage.

Operations

None.

Constraints

A RequirementVerificationMembership is a RequirementConstraintMembership used in the objective of a VerificationCase to identify a RequirementUsage that is verified by the VerificationCase.

General Classes

RequirementConstraintMembership

Attributes

kind : RequirementConstraintKind {redefines kind}

The kind of a RequirementVerificationMembership must be requirement.

/ownedRequirement : RequirementUsage {redefines ownedConstraint}

The owned RequirementUsage that acts as the ownedConstraint for this RequirementVerificationMembership. This will either be the verifiedRequirement, or it will subset the verifiedRequirement.

/verifiedRequirement : RequirementUsage {redefines referencedConstraint}

The RequirementUsage that is identified as being verified. It is the referencedConstraint of the RequirementVerificationMembership considered as a RequirementConstraintMembership, which must be a RequirementUsage.

Operations

None.

Constraints

validateRequirementVerificationMembershipKind

A RequirementVerificationMembership must have kind = requirement.

kind = RequirementConstraintKind::requirement

validateRequirementVerificationMembershipOwningType

The owningType of a RequirementVerificationMembership must a RequirementUsage that is owned by an ObjectiveMembership.

owningType.oclIsKindOf(RequirementUsage) and
owningType.owningFeatureMembership <> null and
owningType.owningFeatureMembership.oclIsKindOf(ObjectiveMembership)

8.3.23.3 VerificationCaseDefinition

Description

A VerificationCaseDefinition is a CaseDefinition for the purpose of verification of the subject of the case against its requirements.

General Classes

CaseDefinition

validateRequirementVerificationMembershipKind

A RequirementVerificationMembership must have kind = requirement.

kind = RequirementConstraintKind::requirement

validateRequirementVerificationMembershipOwningType

The owningType of a RequirementVerificationMembership must a RequirementUsage that is owned by an ObjectiveMembership.

owningType.oclIsKindOf(RequirementUsage) and
owningType.owningFeatureMembership <> null and
owningType.owningFeatureMembership.oclIsKindOf(ObjectiveMembership)

8.3.23.3 VerificationCaseDefinition

Description

A VerificationCaseDefinition is a CaseDefinition for the purpose of verification of the subject of the case against its requirements.

General Classes

CaseDefinition

Attributes

/verifiedRequirement : RequirementUsage [0..*] {ordered}

The RequirementUsages verified by this VerificationCaseDefinition, which are the verifiedRequirements of all RequirementVerificationMemberships of the objectiveRequirement.

Operations

None.

Constraints

checkVerificationCaseSpecialization

A VerificationCaseDefinition must directly or indirectly specialize the base VerificationCaseDefinition *VerificationCases::VerificationCase* from the Systems Model Library.

specializesFromLibrary('VerificationCases::VerificationCase')

deriveVerificationCaseDefinitionVerifiedRequirement

The verifiedRequirements of a VerificationCaseDefinition are the verifiedRequirements of its RequirementVerificationMemberships.

```
verifiedRequirement =  
    if objectiveRequirement = null then OrderedSet{}  
    else  
        objectiveRequirement.featureMembership->
```

Attributes

/verifiedRequirement : RequirementUsage [0..*] {ordered}

The RequirementUsages verified by this VerificationCaseDefinition, which are the verifiedRequirements of all RequirementVerificationMemberships of the objectiveRequirement.

Operations

None.

Constraints

checkVerificationCaseSpecialization

A VerificationCaseDefinition must directly or indirectly specialize the base VerificationCaseDefinition *VerificationCases::VerificationCase* from the Systems Model Library.

specializesFromLibrary ('VerificationCases::VerificationCase')

deriveVerificationCaseDefinitionVerifiedRequirement

The verifiedRequirements of a VerificationCaseDefinition are the verifiedRequirements of its RequirementVerificationMemberships.

```
verifiedRequirement =  
    if objectiveRequirement = null then OrderedSet{}  
    else  
        objectiveRequirement.featureMembership->  
            selectByKind(RequirementVerificationMembership).  
            verifiedRequirement->asOrderedSet()  
    endif
```

8.3.23.4 VerificationCaseUsage

Description

A VerificationCaseUsage is a Usage of a VerificationCaseDefinition.

General Classes

CaseUsage

Attributes

/verificationCaseDefinition : VerificationCaseDefinition [0..1] {subsets caseDefinition}

The VerificationCase that is the definition of this VerificationCaseUsage.

/verifiedRequirement : RequirementUsage [0..*] {ordered}

The RequirementUsages verified by this VerificationCaseUsage, which are the verifiedRequirements of all RequirementVerificationMemberships of the objectiveRequirement.

Operations

```

        selectByKind(RequirementVerificationMembership) .
        verifiedRequirement->asOrderedSet()
    endif

```

8.3.23.4 VerificationCaseUsage

Description

A VerificationCaseUsage is a Usage of a VerificationCaseDefinition.

General Classes

CaseUsage

Attributes

/verificationCaseDefinition : VerificationCaseDefinition [0..1] {subsets caseDefinition}

The VerificationCase that is the definition of this VerificationCaseUsage.

/verifiedRequirement : RequirementUsage [0..*] {ordered}

The RequirementUsages verified by this VerificationCaseUsage, which are the verifiedRequirements of all RequirementVerificationMemberships of the objectiveRequirement.

Operations

None.

Constraints

checkVerificationCaseUsageSpecialization

A VerificationCaseUsage must subset, directly or indirectly, the base VerificationCaseUsage *VerificationCases::verificationCases* from the Systems Model Library.

specializesFromLibrary('VerificationCases::verificationCases')

checkVerificationCaseUsageSubVerificationCaseSpecialization

If it is composite and owned by a VerificationCaseDefinition or VerificationCaseUsage, then it must specialize VerificationCaseUsage

VerificationCases::VerificationCase::subVerificationCases.

isComposite and owningType <> null and
 (owningType.oclIsKindOf(VerificationCaseDefinition) or
 owningType.oclIsKindOf(VerificationCaseUsage)) implies
 specializesFromLibrary('VerificationCases::VerificationCase::subVerificationCases')

deriveVerificationCaseUsageVerifiedRequirement

The verifiedRequirements of a VerificationCaseUsage are the verifiedRequirements of its RequirementVerificationMemberships.

```

verifiedRequirement =
    if objectiveRequirement = null then OrderedSet{}

```

None.

Constraints

checkVerificationCaseUsageSpecialization

A VerificationCaseUsage must subset, directly or indirectly, the base verificationCaseUsage *VerificationCases::verificationCases* from the Systems Model Library.

```
specializesFromLibrary('VerificationCases::verificationCases')
```

checkVerificationCaseUsageSubVerificationCaseSpecialization

If it is composite and owned by a VerificationCaseDefinition or VerificationCaseUsage, then it must specialize VerificationCaseUsage

VerificationCases::VerificationCase::subVerificationCases.

```
isComposite and owningType <> null and  
  (owningType.oclIsKindOf(VerificationCaseDefinition) or  
   owningType.oclIsKindOf(VerificationCaseUsage)) implies  
   specializesFromLibrary('VerificationCases::VerificationCase::subVerificationCases')
```

deriveVerificationCaseUsageVerifiedRequirement

The verifiedRequirements of a VerificationCaseUsage are the verifiedRequirements of its RequirementVerificationMemberships.

```
verifiedRequirement =  
  if objectiveRequirement = null then OrderedSet{}  
  else  
    objectiveRequirement.featureMembership->  
      selectByKind(RequirementVerificationMembership).  
      verifiedRequirement->asOrderedSet()  
  endif
```

8.3.24 Use Cases Abstract Syntax

8.3.24.1 Overview

```

        else
            objectiveRequirement.featureMembership->
                selectByKind(RequirementVerificationMembership) .
            verifiedRequirement->asOrderedSet()
        endif
    
```

8.3.24 Use Cases Abstract Syntax

8.3.24.1 Overview

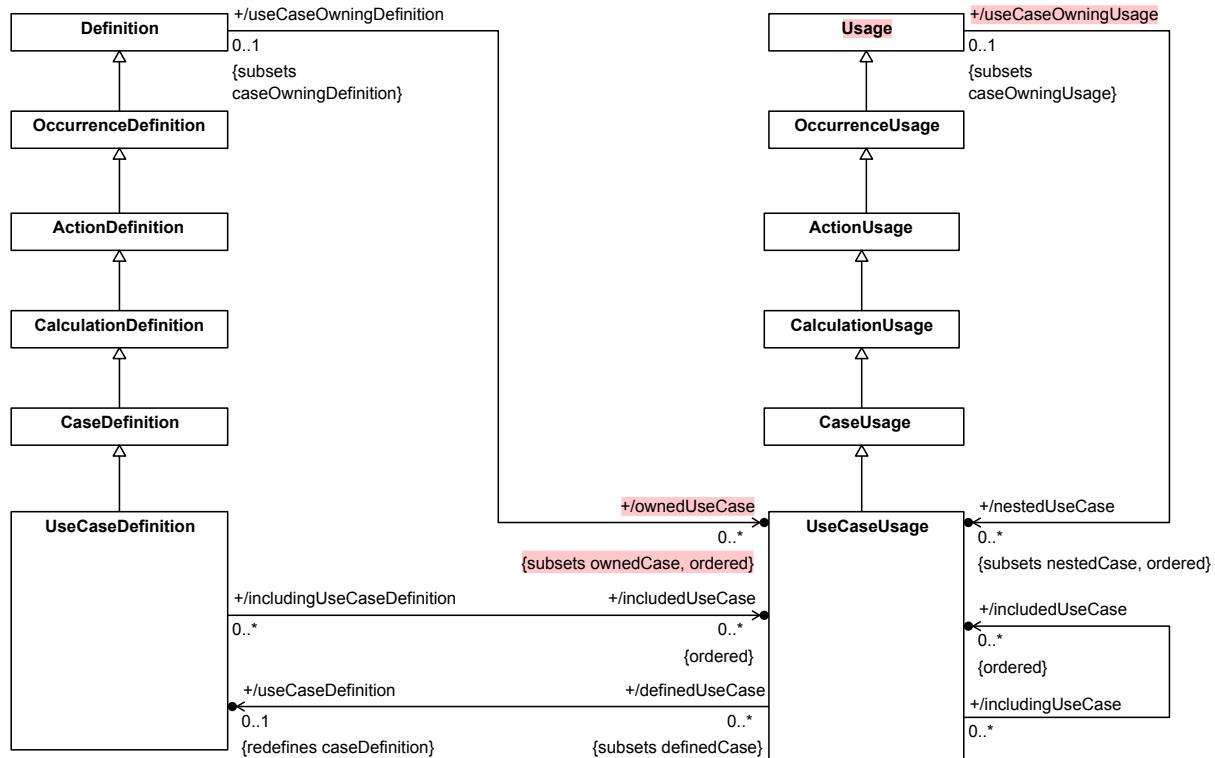


Figure 46. Use Case Definition and Usage

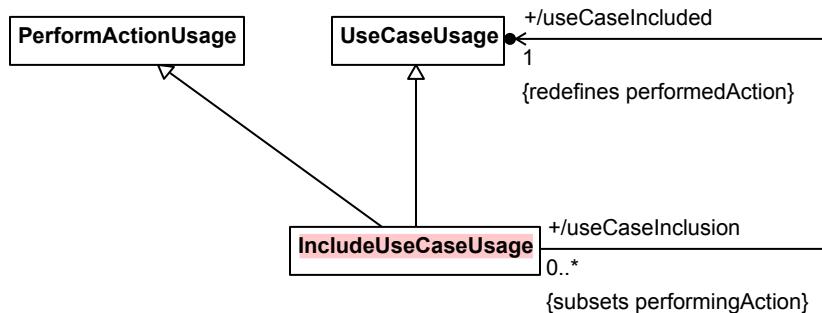


Figure 47. Included Use Case

8.3.24.2 IncludeUseCaseUsage

Description

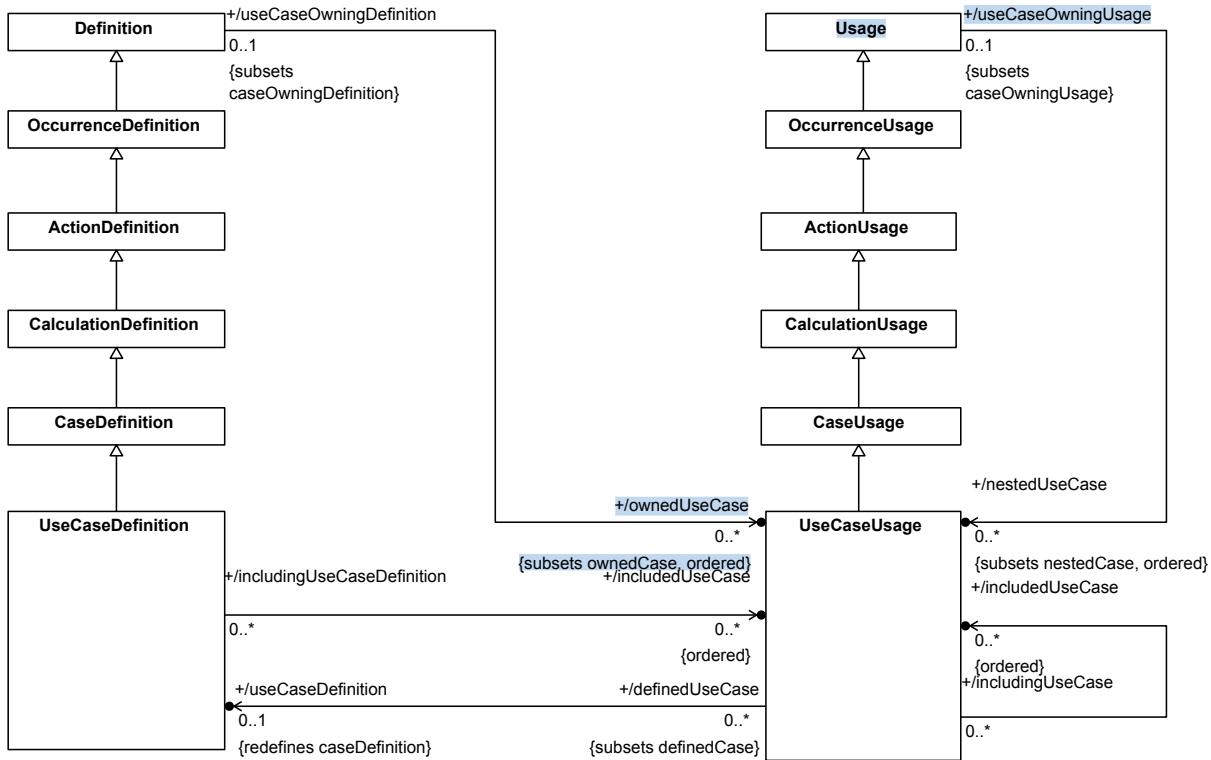


Figure 47. Use Case Definition and Usage

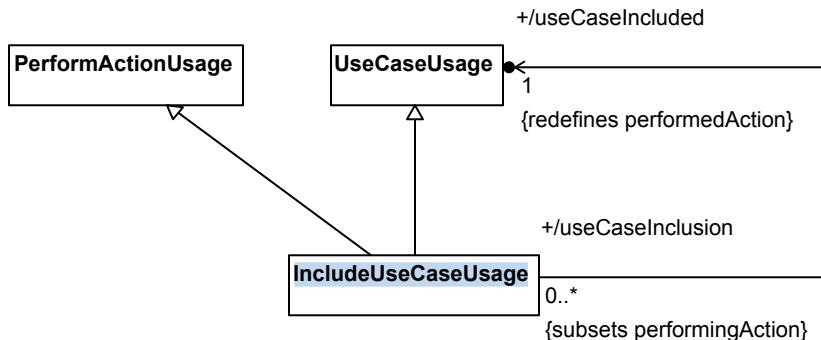


Figure 48. Included Use Case

8.3.24.2 IncludeUseCaseUsage

Description

An **IncludeUseCaseUsage** is a **UseCaseUsage** that represents the inclusion of a **UseCaseUsage** by a **UseCaseDefinition** or **UseCaseUsage**. Unless it is the **IncludeUseCaseUsage** itself, the **UseCaseUsage** to be included is related to the **includedUseCase** by a **ReferenceSubsetting Relationship**. An **IncludeUseCaseUsage** is also a **PerformActionUsage**, with its **useCaseIncluded** as the **performedAction**.

General Classes

UseCaseUsage
PerformActionUsage

An `IncludeUseCaseUsage` is a `UseCaseUsage` that represents the inclusion of a `UseCaseUsage` by a `UseCaseDefinition` or `UseCaseUsage`. Unless it is the `IncludeUseCaseUsage` itself, the `UseCaseUsage` to be included is related to the `includedUseCase` by a `ReferenceSubsetting` Relationship. An `IncludeUseCaseUsage` is also a `PerformActionUsage`, with its `useCaseIncluded` as the `performedAction`.

General Classes

`PerformActionUsage`
`UseCaseUsage`

Attributes

`/useCaseIncluded : UseCaseUsage {redefines performedAction}`

The `UseCaseUsage` to be included by this `IncludeUseCaseUsage`. It is the `performedAction` of the `IncludeUseCaseUsage` considered as a `PerformActionUsage`, which must be a `UseCaseUsage`.

Operations

None.

Constraints

`checkIncludeUseCaseSpecialization`

A `IncludeUseCaseUsage` whose `owningType` is a `UseCaseDefinition` or `UseCaseUsage` must directly or indirectly specialize the `UseCaseUsage` `UseCases::UseCase::includedUseCases` from the Systems Model Library.

```
owningType <> null and  
(owningType.oclIsKindOf(UseCaseDefinition) or  
owningType.oclIsKindOf(UseCaseUsage) implies  
specializesFromLibrary('UseCases::UseCase::includedUseCases'))
```

`validateIncludeUseCaseUsageReference`

If an `IncludeUseCaseUsage` has an `ownedReferenceSubsetting`, then its `referencedFeature` must be a `UseCaseUsage`.

```
ownedReferenceSubsetting <> null implies  
ownedReferenceSubsetting.referencedFeature.oclIsKindOf(UseCaseUsage)
```

8.3.24.3 UseCaseDefinition

Description

A `UseCaseDefinition` is a `CaseDefinition` that specifies a set of actions performed by its subject, in interaction with one or more actors external to the subject. The objective is to yield an observable result that is of value to one or more of the actors.

General Classes

`CaseDefinition`

Attributes

Attributes

/useCaseIncluded : UseCaseUsage {redefines performedAction}

The UseCaseUsage to be included by this `IncludeUseCaseUsage`. It is the `performedAction` of the `IncludeUseCaseUsage` considered as a `PerformActionUsage`, which must be a `UseCaseUsage`.

Operations

None.

Constraints

checkIncludeUseCaseSpecialization

A `IncludeUseCaseUsage` whose `owningType` is a `UseCaseDefinition` or `UseCaseUsage` must directly or indirectly specialize the `UseCaseUsage` `UseCases::UseCase::includedUseCases` from the Systems Model Library.

```
owningType <> null and
(owningType.oclIsKindOf(UseCaseDefinition) or
 owningType.oclIsKindOf(UseCaseUsage) implies
 specializesFromLibrary('UseCases::UseCase::includedUseCases'))
```

validateIncludeUseCaseUsageReference

If an `IncludeUseCaseUsage` has an `ownedReferenceSubsetting`, then its `referencedFeature` must be a `UseCaseUsage`.

```
ownedReferenceSubsetting <> null implies
 ownedReferenceSubsetting.referencedFeature.oclIsKindOf(UseCaseUsage)
```

8.3.24.3 UseCaseDefinition

Description

A `UseCaseDefinition` is a `CaseDefinition` that specifies a set of actions performed by its subject, in interaction with one or more actors external to the subject. The objective is to yield an observable result that is of value to one or more of the actors.

General Classes

`CaseDefinition`

Attributes

/includedUseCase : UseCaseUsage [0..*] {ordered}

The `UseCaseUsages` that are included by this `UseCaseDefinition`, which are the `useCaseIncludeds` of the `IncludeUseCaseUsages` owned by this `UseCaseDefinition`.

Operations

None.

Constraints

/includedUseCase : UseCaseUsage [0..*] {ordered}

The UseCaseUsages that are included by this UseCaseDefinition, which are the useCaseIncludeds of the IncludeUseCaseUsages owned by this UseCaseDefinition.

Operations

None.

Constraints

checkUseCaseDefinitionSpecialization

A UseCaseDefinition must directly or indirectly specialize the base UseCaseDefinition *UseCases::UseCase* from the Systems Model Library.

specializesFromLibrary('UseCases::UseCase')

deriveUseCaseDefinitionIncludedUseCase

The includedUseCases of a UseCaseDefinition are the useCaseIncludeds of the IncludeUseCaseUsages owned by the UseCaseDefinition.

```
includedUseCase = ownedUseCase->
    selectByKind(IncludeUseCaseUsage) .
    useCaseIncluded
```

8.3.24.4 UseCaseUsage

Description

A UseCaseUsage is a Usage of a UseCaseDefinition.

General Classes

CaseUsage

Attributes

/includedUseCase : UseCaseUsage [0..*] {ordered}

The UseCaseUsages that are included by this UseCaseUse, which are the useCaseIncludeds of the IncludeUseCaseUsages owned by this UseCaseUsage.

/useCaseDefinition : UseCaseDefinition [0..1] {redefines caseDefinition}

The UseCaseDefinition that is the definition of this UseCaseUsage.

Operations

None.

Constraints

checkUseCaseUsageSpecialization

checkUseCaseDefinitionSpecialization

A `UseCaseDefinition` must directly or indirectly specializes the base `UseCaseDefinition` `UseCases::UseCase` from the Systems Model Library.

```
specializesFromLibrary('UseCases::UseCase')
```

deriveUseCaseDefinitionIncludedUseCase

The `includedUseCases` of a `UseCaseDefinition` are the `useCaseIncludeds` of the `IncludeUseCaseUsages` owned by the `UseCaseDefinition`.

```
includedUseCase = ownedUseCase->
    selectByKind(IncludeUseCaseUsage) .
    useCaseIncluded
```

8.3.24.4 UseCaseUsage

Description

A `UseCaseUsage` is a Usage of a `UseCaseDefinition`.

General Classes

`CaseUsage`

Attributes

`/includedUseCase : UseCaseUsage [0..*] {ordered}`

The `UseCaseUsages` that are included by this `UseCaseUse`, which are the `useCaseIncludeds` of the `IncludeUseCaseUsages` owned by this `UseCaseUsage`.

`/useCaseDefinition : UseCaseDefinition [0..1] {redefines caseDefinition}`

The `UseCaseDefinition` that is the definition of this `UseCaseUsage`.

Operations

None.

Constraints

checkUseCaseUsageSpecialization

A `UseCaseUsage` must directly or indirectly specializes the base `UseCaseUsage` `UseCases::useCases` from the Systems Model Library.

```
specializesFromLibrary('UseCases::useCases')
```

checkUseCaseUsageSubUseCaseSpecialization

A composite `UseCaseUsage` whose `owningType` is a `UseCaseDefinition` or `UseCaseUsage` must specialize the `UseCaseUsage` `UseCases::UseCase::subUseCases` from the Systems Model Library.

```
isComposite and owningType <> null and
(owningType.oclIsKindOf(UseCaseDefinition)) or
```

A `UseCaseUsage` must directly or indirectly specializes the base `UseCaseUsage` `UseCases::useCases` from the Systems Model Library.

```
specializesFromLibrary('UseCases::useCases')
```

`checkUseCaseUsageSubUseCaseSpecialization`

A composite `UseCaseUsage` whose `owningType` is a `UseCaseDefinition` or `UseCaseUsage` must specialize the `UseCaseUsage` `UseCases::UseCase::subUseCases` from the Systems Model Library.

```
isComposite and owningType <> null and
(owningType.oclIsKindOf(UseCaseDefinition) or
owningType.oclIsKindOf(UseCaseUsage)) implies
specializesFromLibrary('UseCases::UseCase::subUseCases')
```

`deriveUseCaseUsageIncludedUseCase`

The `includedUseCases` of a `UseCaseUsage` are the `useCaseIncludeds` of the `IncludeUseCaseUsages` owned by the `UseCaseUsage`.

```
includedUseCase = ownedUseCase->
    selectByKind(IncludeUseCaseUsage) .
    useCaseIncluded
```

8.3.25 Views and Viewpoints Abstract Syntax

8.3.25.1 Overview

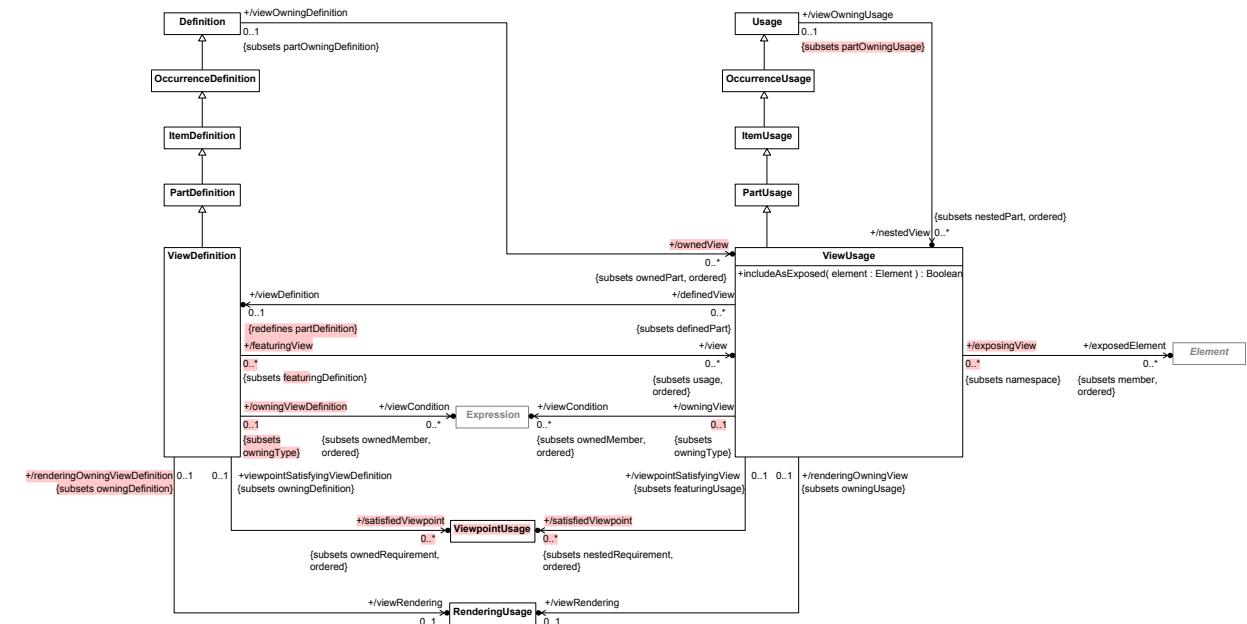


Figure 48. View Definition and Usage

```

owningType.oclIsKindOf(UseCaseUsage)) implies
specializesFromLibrary('UseCases::UseCase::subUseCases')

```

deriveUseCaseUsageIncludedUseCase

The includedUseCases of a UseCaseUsage are the useCaseIncludeds of the IncludeUseCaseUsages owned by the UseCaseUsage.

```

includedUseCase = ownedUseCase->
    selectByKind(IncludeUseCaseUsage) .
    useCaseIncluded

```

8.3.25 Views and Viewpoints Abstract Syntax

8.3.25.1 Overview

SYSML2 -212: Inconsistencies in the graphical notation for "expose"

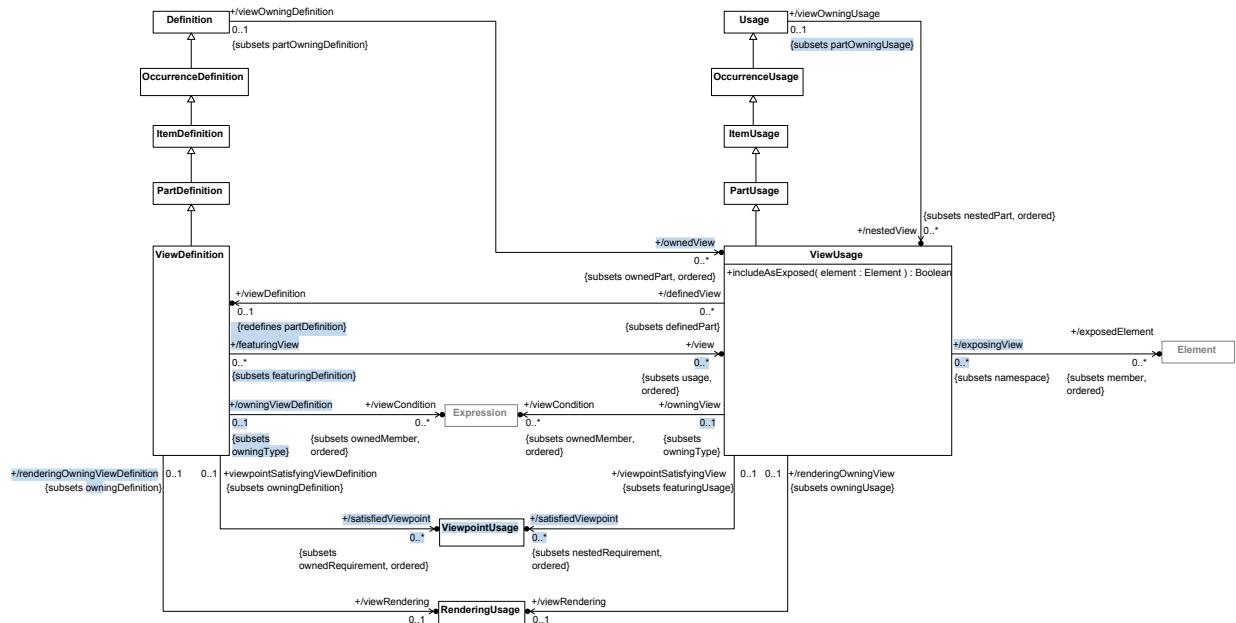


Figure 49. View Definition and Usage

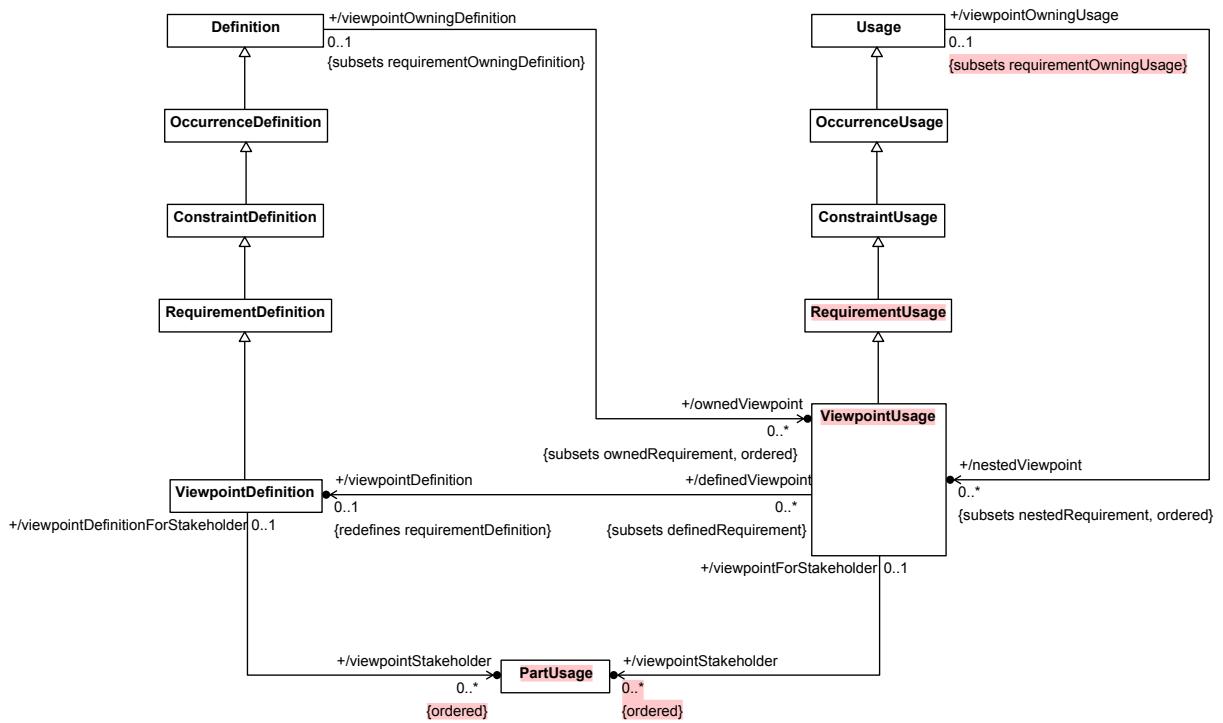


Figure 49. Viewpoint Definition and Usage

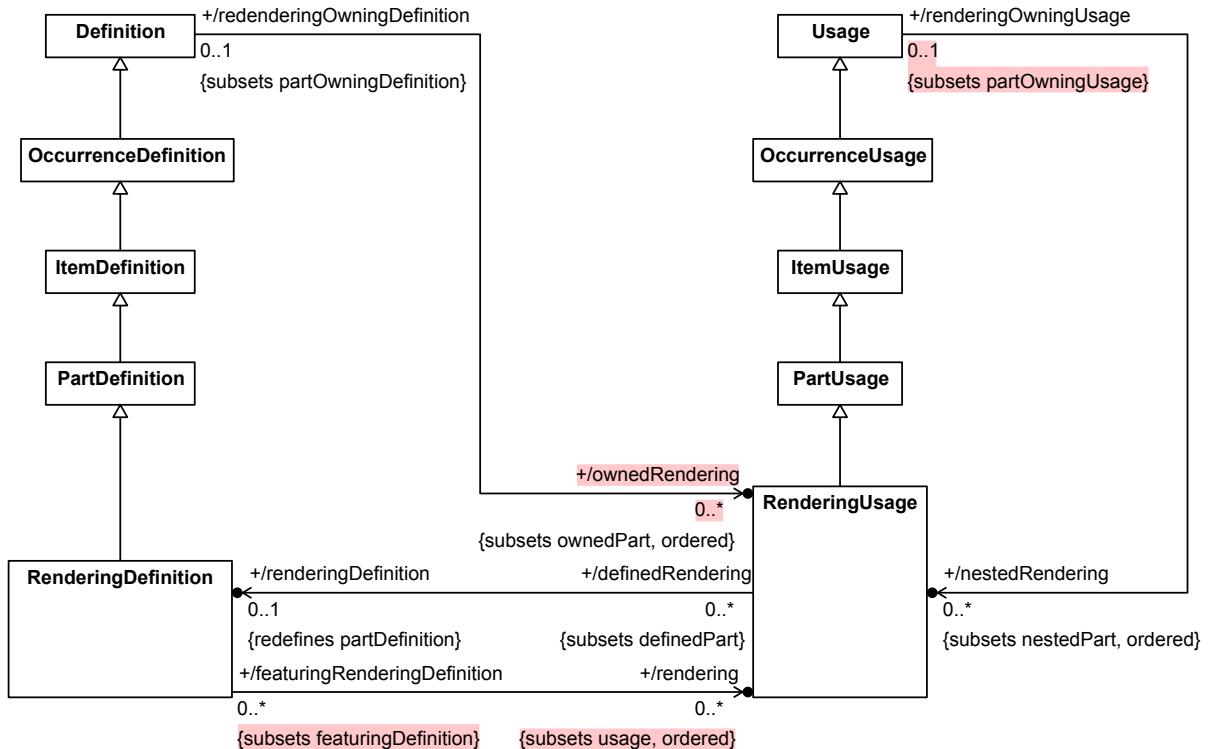


Figure 50. Rendering Definition and Usage

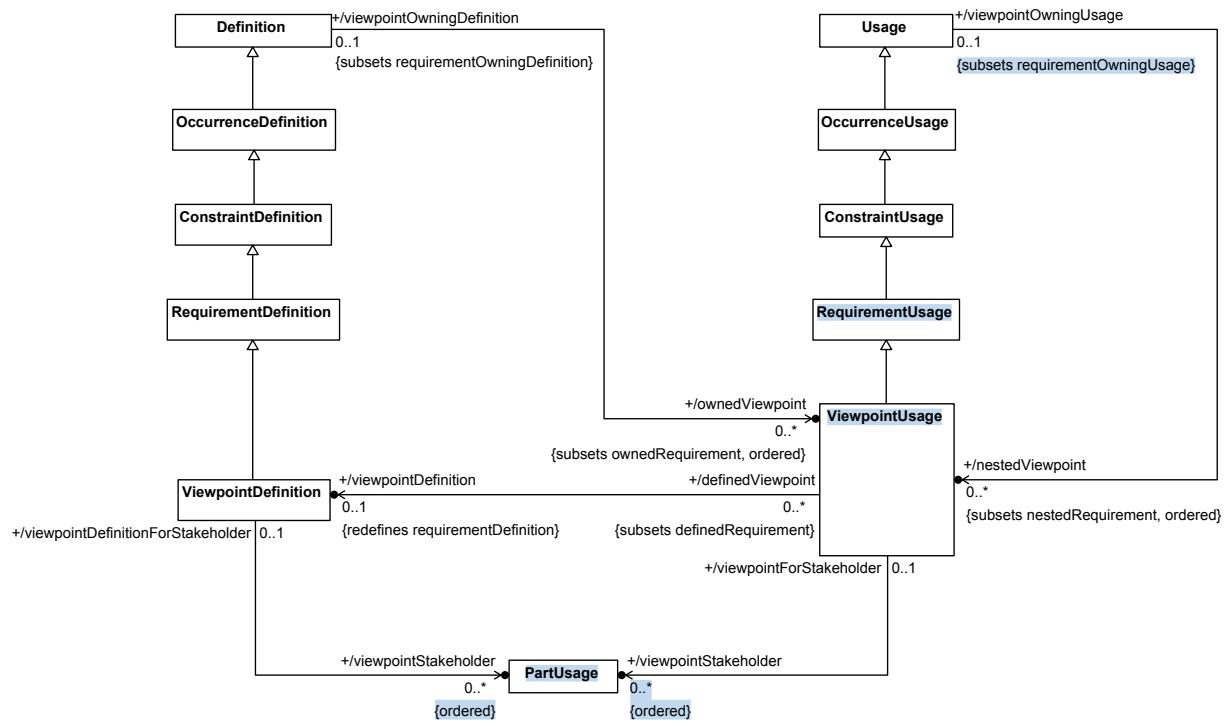


Figure 50. Viewpoint Definition and Usage

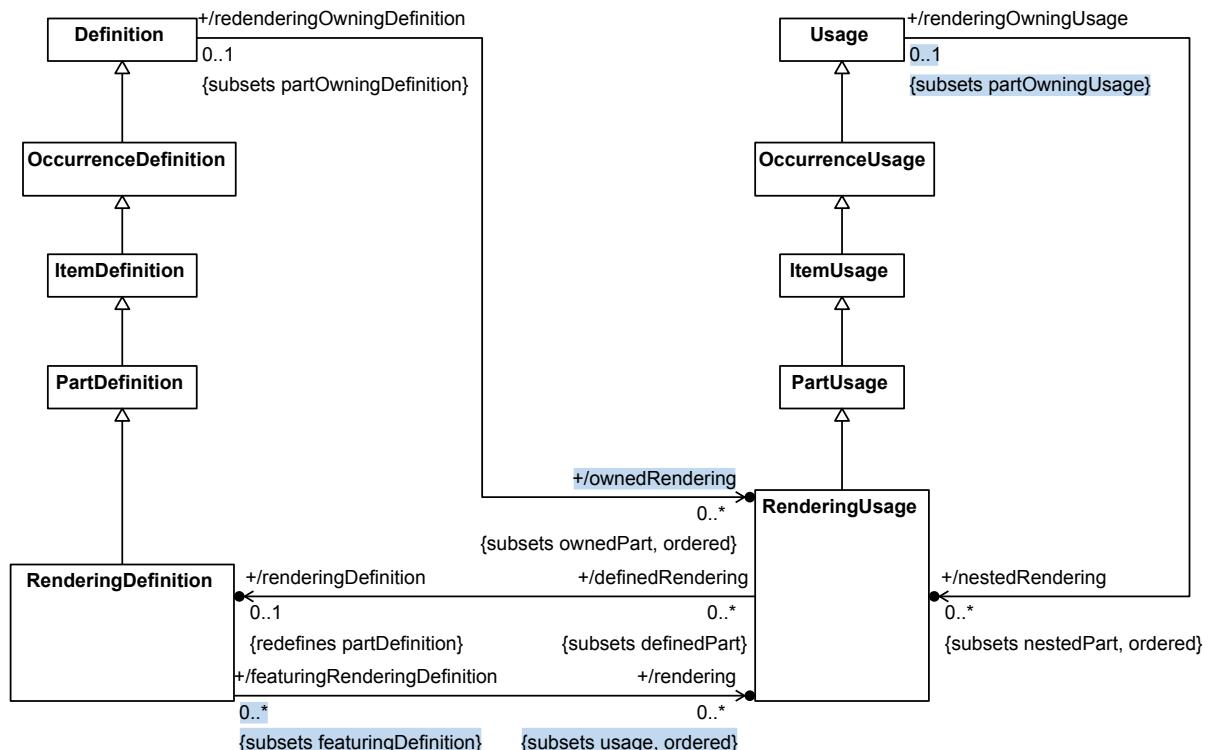


Figure 51. Rendering Definition and Usage

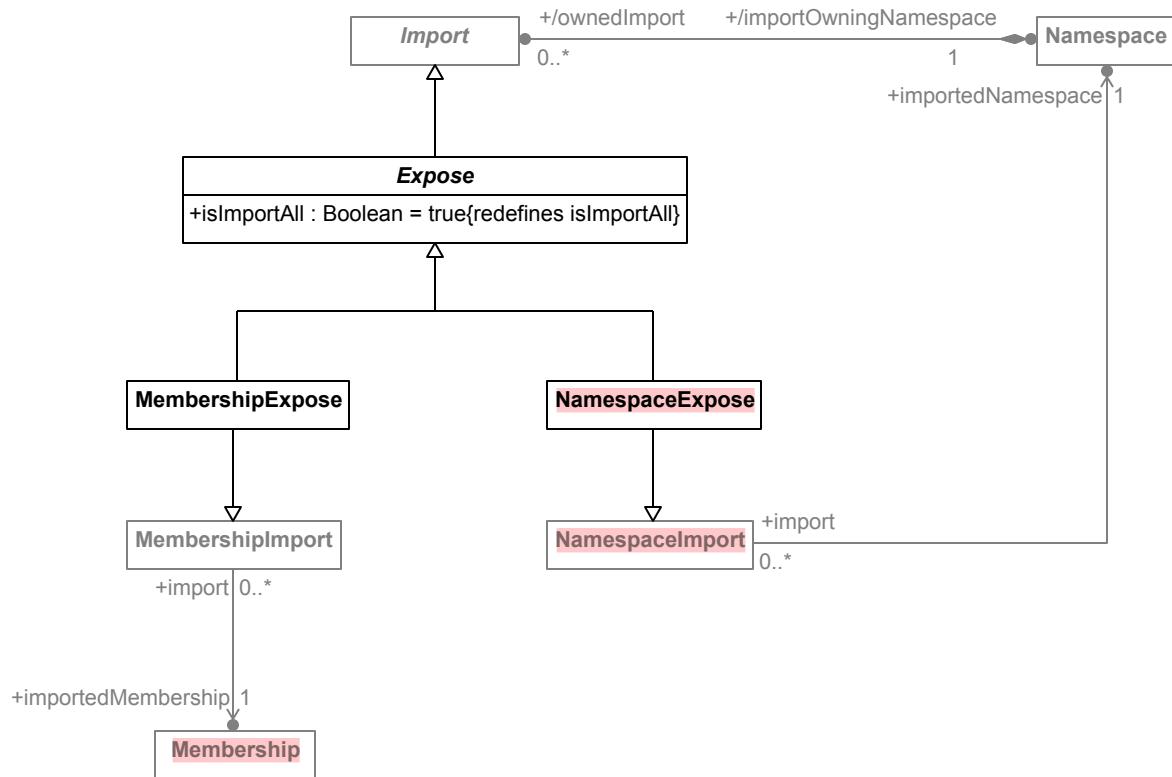


Figure 51. Expose Relationship

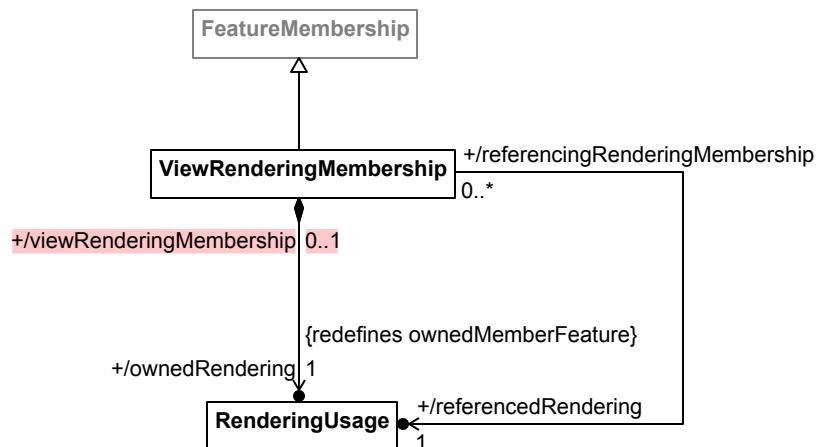


Figure 52. View Rendering Membership

8.3.25.2 Expose

Description

An **Expose** is an **Import** of **Memberships** into a **ViewUsage** that provide the **Elements** to be included in a view. Visibility is always ignored for an **Expose** (i.e., **isImportAll** = **true**).

General Classes

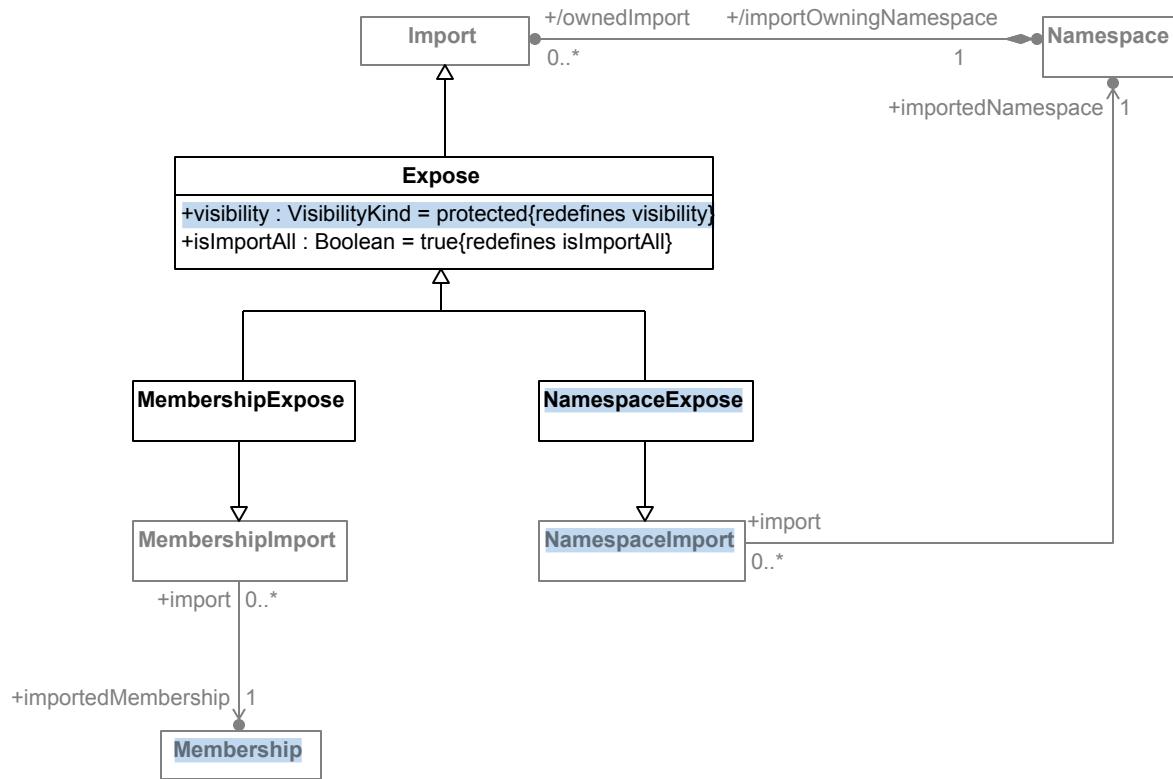


Figure 52. Expose Relationship

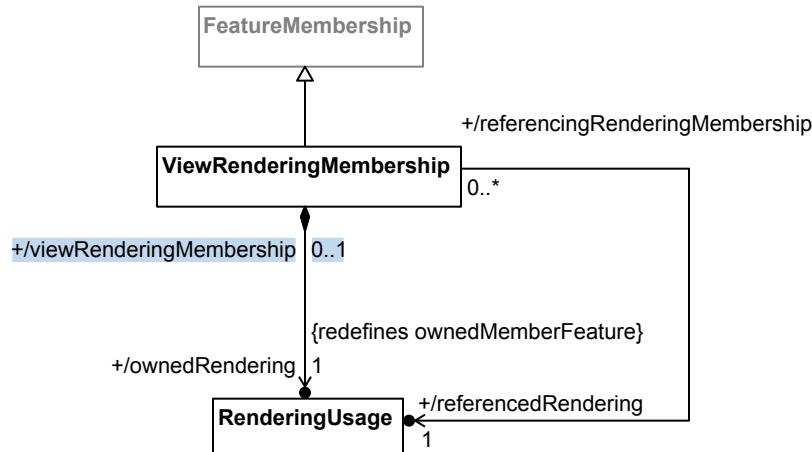


Figure 53. View Rendering Membership

8.3.25.2 Expose

SYSML2 -212: Inconsistencies in the graphical notation for "expose"

Description

An **Expose** is an **Import** of **Memberships** into a **ViewUsage** that provide the **Elements** to be included in a view. Visibility is always ignored for an **Expose** (i.e., **isImportAll = true**).

Import

Attributes

isImportAll : Boolean {redefines isImportAll}

An Expose always imports all Elements, regardless of visibility (isImportAll = true).

Operations

None.

Constraints

validateExposeIsImportAll

An Expose always imports all Elements, regardless of visibility.

isImportAll

validateExposeOwningNamespace

The importOwningNamespace of an Expose must be a ViewUsage.

importOwningNamespace.oclIsType(ViewUsage)

8.3.25.3 MembershipExpose

Description

A MembershipExpose is an Expose that exposes a specific importedMembership and, if isRecursive = true, additional Memberships recursively.

General Classes

Expose

MembershipImport

Attributes

None.

Operations

None.

Constraints

None.

8.3.25.4 NamespaceExpose

Description

General Classes

Import

Attributes

isImportAll : Boolean {redefines isImportAll}

An Expose always imports all Elements, regardless of visibility (isImportAll = true).

visibility : VisibilityKind {redefines visibility}

An Expose always has protected visibility.

Operations

None.

Constraints

validateExposeIsImportAll

An Expose always imports all Elements, regardless of visibility.

isImportAll

validateExposeOwningNamespace

The importOwningNamespace of an Expose must be a ViewUsage.

importOwningNamespaceoclIsType(ViewUsage)

validateExposeVisibility

An Expose always has protected visibility.

visibility = VisibilityKind::protected

8.3.25.3 MembershipExpose

Description

A MembershipExpose is an Expose that exposes a specific importedMembership and, if isRecursive = true, additional Memberships recursively.

General Classes

MembershipImport
Expose

Attributes

None.

Operations

None.

A NamespaceExpose is an Expose Relationship that exposes the Memberships of a specific importedNamespace and, if isRecursive = true, additional Memberships recursively.

General Classes

Expose
NamespaceImport

Attributes

None.

Operations

None.

Constraints

None.

8.3.25.5 RenderingDefinition

Description

A RenderingDefinition is a PartDefinition that defines a specific rendering of the content of a model view (e.g., symbols, style, layout, etc.).

General Classes

PartDefinition

Attributes

/rendering : RenderingUsage [0..*] {subsets usage, ordered}

The usages of a RenderingDefinition that are RenderingUsages.

Operations

None.

Constraints

checkRenderingDefinitionSpecialization

A RenderingDefinition must directly or indirectly specialize the base RenderingDefinition Views::Rendering from the Systems Model Library.

specializesFromLibrary('Views::Rendering')

deriveRenderingDefinitionRendering

The renderings of a RenderingDefinition are all its usages that are RenderingUsages.

rendering = usages->selectByKind(RenderingUsage)

Constraints

None.

8.3.25.4 NamespaceExpose

Description

A NamespaceExpose is an Expose Relationship that exposes the Memberships of a specific importedNamespace and, if isRecursive = true, additional Memberships recursively.

General Classes

NamespaceImport
Expose

Attributes

None.

Operations

None.

Constraints

None.

8.3.25.5 RenderingDefinition

Description

A RenderingDefinition is a PartDefinition that defines a specific rendering of the content of a model view (e.g., symbols, style, layout, etc.).

General Classes

PartDefinition

Attributes

/rendering : RenderingUsage [0..*] {subsets usage, ordered}

The usages of a RenderingDefinition that are RenderingUsages.

Operations

None.

Constraints

checkRenderingDefinitionSpecialization

A RenderingDefinition must directly or indirectly specialize the base RenderingDefinition *Views::Rendering* from the Systems Model Library.

8.3.25.6 RenderingUsage

Description

A `RenderingUsage` is the usage of a `RenderingDefinition` to specify the rendering of a specific model view to produce a physical view artifact.

General Classes

`PartUsage`

Attributes

`/renderingDefinition : RenderingDefinition [0..1] {redefines partDefinition}`

The `RenderingDefinition` that is the definition of this `RenderingUsage`.

Operations

None.

Constraints

`checkRenderingUsageRedefinition`

A `RenderingUsage` whose `owningFeatureMembership` is a `ViewRenderingMembership` must redefine the `RenderingUsage Views::View::viewRendering`.

```
owningFeatureMembership <> null and  
owningFeatureMembership.oclIsKindOf(ViewRenderingMembership) implies  
    redefinesFromLibrary('Views::View::viewRendering')
```

`checkRenderingUsageSpecialization`

A `RenderingUsage` must directly or indirectly specialize the base `RenderingUsage Views::renderings` from the Systems Model Library.

```
specializesFromLibrary('Views::renderings')
```

`checkRenderingUsageSubrenderingSpecialization`

A `RenderingUsage` whose `owningType` is a `RenderingDefinition` or `RenderingUsage` must directly or indirectly specialize the `RenderingUsage Views::Rendering::subrenderings` from the Systems Model Library.

```
owningType <> null and  
(owningType.oclIsKindOf(RenderingDefinition) or  
owningType.oclIsKindOf(RenderingUsage)) implies  
    specializesFromLibrary('Views::Rendering::subrenderings')
```

8.3.25.7 ViewDefinition

Description

```
specializesFromLibrary('Views::Rendering')
```

```
deriveRenderingDefinitionRendering
```

The renderings of a RenderingDefinition are all its usages that are RenderingUsages.

```
rendering = usages->selectByKind(RenderingUsage)
```

8.3.25.6 RenderingUsage

Description

A RenderingUsage is the usage of a RenderingDefinition to specify the rendering of a specific model view to produce a physical view artifact.

General Classes

PartUsage

Attributes

```
/renderingDefinition : RenderingDefinition [0..1] {redefines partDefinition}
```

The RenderingDefinition that is the definition of this RenderingUsage.

Operations

None.

Constraints

checkRenderingUsageRedefinition

A RenderingUsage whose owningFeatureMembership is a ViewRenderingMembership must redefine the RenderingUsage Views::View::viewRendering.

```
owningFeatureMembership <> null and  
owningFeatureMembership.oclIsKindOf(ViewRenderingMembership) implies  
    redefinesFromLibrary('Views::View::viewRendering')
```

checkRenderingUsageSpecialization

A RenderingUsage must directly or indirectly specialize the base RenderingUsage Views::renderings from the Systems Model Library.

```
specializesFromLibrary('Views::renderings')
```

checkRenderingUsageSubrenderingSpecialization

A RenderingUsage whose owningType is a RenderingDefinition or RenderingUsage must directly or indirectly specialize the RenderingUsage Views::Rendering::subrenderings from the Systems Model Library.

```
owningType <> null and  
(owningType.oclIsKindOf(RenderingDefinition) or  
owningType.oclIsKindOf(RenderingUsage)) implies  
    specializesFromLibrary('Views::Rendering::subrenderings')
```

A **ViewDefinition** is a **PartDefinition** that specifies how a view artifact is constructed to satisfy a viewpoint. It specifies a **viewConditions** to define the model content to be presented and a **viewRendering** to define how the model content is presented.

General Classes

PartDefinition

Attributes

/satisfiedViewpoint : ViewpointUsage [0..*] {subsets ownedRequirement, ordered}

The composite **ownedRequirements** of this **ViewDefinition** that are **ViewpointUsages** for viewpoints satisfied by the **ViewDefinition**.

/view : ViewUsage [0..*] {subsets usage, ordered}

The usages of this **ViewDefinition** that are **ViewUsages**.

/viewCondition : Expression [0..*] {subsets ownedMember, ordered}

The Expressions related to this **ViewDefinition** by **ElementFilterMemberships**, which specify conditions on Elements to be rendered in a view.

/viewRendering : RenderingUsage [0..1]

The **RenderingUsage** to be used to render views defined by this **ViewDefinition**, which is the **referencedRendering** of the **ViewRenderingMembership** of the **ViewDefinition**.

Operations

None.

Constraints

checkViewDefinitionSpecialization

A **ViewDefinition** must directly or indirectly specialize the base **ViewDefinition Views::View** from the Systems Model Library.

specializesFromLibrary('Views::View')

deriveViewDefinitionSatisfiedViewpoint

The **satisfiedViewpoints** of a **ViewDefinition** are its **ownedRequirements** that are composite **ViewpointUsages**.

```
satisfiedViewpoint = ownedRequirement->
    selectByKind(ViewpointUsage)->
    select(isComposite)
```

deriveViewDefinitionView

The **views** of a **ViewDefinition** are all its usages that are **ViewUsages**.

8.3.25.7 ViewDefinition

Description

A `ViewDefinition` is a `PartDefinition` that specifies how a view artifact is constructed to satisfy a viewpoint. It specifies a `viewConditions` to define the model content to be presented and a `viewRendering` to define how the model content is presented.

General Classes

`PartDefinition`

Attributes

`/satisfiedViewpoint : ViewpointUsage [0..*] {subsets ownedRequirement, ordered}`

The composite `ownedRequirements` of this `ViewDefinition` that are `ViewpointUsages` for viewpoints satisfied by the `ViewDefinition`.

`/view : ViewUsage [0..*] {subsets usage, ordered}`

The usages of this `ViewDefinition` that are `ViewUsages`.

`/viewCondition : Expression [0..*] {subsets ownedMember, ordered}`

The Expressions related to this `ViewDefinition` by `ElementFilterMemberships`, which specify conditions on Elements to be rendered in a view.

`/viewRendering : RenderingUsage [0..1]`

The `RenderingUsage` to be used to render views defined by this `ViewDefinition`, which is the `referencedRendering` of the `ViewRenderingMembership` of the `ViewDefinition`.

Operations

None.

Constraints

`checkViewDefinitionSpecialization`

A `ViewDefinition` must directly or indirectly specialize the base `ViewDefinition` `Views::View` from the Systems Model Library.

`specializesFromLibrary('Views::View')`

`deriveViewDefinitionSatisfiedViewpoint`

The `satisfiedViewpoints` of a `ViewDefinition` are its `ownedRequirements` that are composite `ViewpointUsages`

```
satisfiedViewpoint = ownedRequirement->
    selectByKind(ViewpointUsage)->
        select(isComposite)
```

`deriveViewDefinitionView`

```
view = usage->selectByKind(ViewUsage)
```

deriveViewDefinitionViewCondition

The viewConditions of a ViewDefinition are the conditions of its owned ElementFilterMemberships.

```
viewCondition = ownedMembership->
    selectByKind(ElementFilterMembership) .
    condition
```

deriveViewDefinitionViewRendering

The viewRendering of a ViewDefinition is the referencedRendering of its owned ViewRenderingMembership, if any.

```
viewRendering =
let renderings: OrderedSet(ViewRenderingMembership) =
    featureMembership->selectByKind(ViewRenderingMembership) in
if renderings->isEmpty() then null
else renderings->first().referencedRendering
endif
```

validateViewDefinitionOnlyOneViewRendering

A ViewDefinition must have at most one ViewRenderingMembership.

```
featureMembership->
    selectByKind(ViewRenderingMembership)->
    size() <= 1
```

8.3.25.8 ViewpointDefinition

Description

A ViewpointDefinition is a RequirementDefinition that specifies one or more stakeholder concerns that are to be satisfied by creating a view of a model.

General Classes

RequirementDefinition

Attributes

/viewpointStakeholder : PartUsage [0..*] {ordered}

The PartUsages that identify the stakeholders with concerns framed by this ViewpointDefinition, which are the owned and inherited stakeholderParameters of the framedConcerns of this ViewpointDefinition.

Operations

None.

Constraints

checkViewpointDefinitionSpecialization

The views of a ViewDefinition are all its usages that are ViewUsages.

```
view = usage->selectByKind(ViewUsage)
```

deriveViewDefinitionViewCondition

The viewConditions of a ViewDefinition are the conditions of its owned ElementFilterMemberships.

```
viewCondition = ownedMembership->
    selectByKind(ElementFilterMembership) .
    condition
```

deriveViewDefinitionViewRendering

The viewRendering of a ViewDefinition is the referencedRendering of its owned ViewRenderingMembership, if any.

```
viewRendering =
    let renderings: OrderedSet(ViewRenderingMembership) =
        featureMembership->selectByKind(ViewRenderingMembership) in
    if renderings->isEmpty() then null
    else renderings->first().referencedRendering
    endif
```

validateViewDefinitionOnlyOneViewRendering

A ViewDefinition must have at most one ViewRenderingMembership.

```
featureMembership->
    selectByKind(ViewRenderingMembership)->
    size() <= 1
```

8.3.25.8 ViewpointDefinition

Description

A ViewpointDefinition is a RequirementDefinition that specifies one or more stakeholder concerns that are to be satisfied by creating a view of a model.

General Classes

RequirementDefinition

Attributes

/viewpointStakeholder : PartUsage [0..*] {ordered}

The PartUsages that identify the stakeholders with concerns framed by this ViewpointDefinition, which are the owned and inherited stakeholderParameters of the framedConcerns of this ViewpointDefinition.

Operations

None.

Constraints

checkViewpointDefinitionSpecialization

A `ViewpointDefinition` must directly or indirectly specialize the base `ViewpointDefinition` `Views::Viewpoint` from the Systems Model Library.

```
specializesFromLibrary('Views::Viewpoint')
```

`deriveViewpointDefinitionViewpointStakeholder`

The `viewpointStakeholders` of a `ViewpointDefinition` are the `ownedStakeholderParameters` of all `featureMemberships` that are `StakeholderMemberships`.

```
viewpointStakeholder = framedConcern.featureMembership->
    selectByKind(StakeholderMembership).
    ownedStakeholderParameter
```

8.3.25.9 ViewpointUsage

Description

A `ViewpointUsage` is a `Usage` of a `ViewpointDefinition`.

General Classes

`RequirementUsage`

Attributes

```
/viewpointDefinition : ViewpointDefinition [0..1] {redefines requirementDefinition}
```

The `ViewpointDefinition` that is the definition of this `ViewpointUsage`.

```
/viewpointStakeholder : PartUsage [0..*] {ordered}
```

The `PartUsages` that identify the stakeholders with concerns framed by this `ViewpointUsage`, which are the owned and inherited `stakeholderParameters` of the `framedConcerns` of this `ViewpointUsage`.

Operations

None.

Constraints

`checkViewpointUsageSpecialization`

A `ViewpointUsage` must directly or indirectly specialize the base `ViewpointUsage` `Views::viewpoints` from the Systems Model Library.

```
specializesFromLibrary('Views::viewpoints')
```

`checkViewpointUsageViewpointSatisfactionSpecialization`

A composite `ViewpointUsage` whose `owningType` is a `ViewDefinition` or `ViewUsage` must directly or indirectly specialize the `ViewpointUsage` `Views::View::viewpointSatisfactions` from the Systems Model Library.

A ViewpointDefinition must directly or indirectly specialize the base ViewpointDefinition Views::Viewpoint from the Systems Model Library.

```
specializesFromLibrary('Views::Viewpoint')
```

```
deriveViewpointDefinitionViewpointStakeholder
```

The viewpointStakeholders of a ViewpointDefinition are the ownedStakeholderParameters of all featureMemberships that are StakeholderMemberships.

```
viewpointStakeholder = framedConcern.featureMembership->
    selectByKind(StakeholderMembership).
    ownedStakeholderParameter
```

8.3.25.9 ViewpointUsage

Description

A ViewpointUsage is a Usage of a ViewpointDefinition.

General Classes

RequirementUsage

Attributes

```
/viewpointDefinition : ViewpointDefinition [0..1] {redefines requirementDefinition}
```

The ViewpointDefinition that is the definition of this ViewpointUsage.

```
/viewpointStakeholder : PartUsage [0..*] {ordered}
```

The PartUsages that identify the stakeholders with concerns framed by this ViewpointUsage, which are the owned and inherited stakeholderParameters of the framedConcerns of this ViewpointUsage.

Operations

None.

Constraints

```
checkViewpointUsageSpecialization
```

A ViewpointUsage must directly or indirectly specialize the base ViewpointUsage Views::viewpoints from the Systems Model Library.

```
specializesFromLibrary('Views::viewpoints')
```

```
checkViewpointUsageViewpointSatisfactionSpecialization
```

A composite ViewpointUsage whose owningType is a ViewDefinition or ViewUsage must directly or indirectly specialize the ViewpointUsage Views::View::viewpointSatisfactions from the Systems Model Library.

```
isComposite and owningType <> null and
(owningType.oclIsKindOf(ViewDefinition) or
```

```

isComposite and owningType <> null and
(owningType.oclIsKindOf(ViewDefinition) or
owningType.oclIsKindOf(ViewUsage)) implies
    specializesFromLibrary('Views::View::viewpointSatisfactions')

```

deriveViewpointUsageViewpointStakeholder

The viewpointStakeholders of a ViewpointUsage are the ownedStakeholderParameters of all featureMemberships that are StakeholderMemberships.

```

viewpointStakeholder = framedConcern.featureMembership->
    selectByKind(StakeholderMembership).
    ownedStakeholderParameter

```

8.3.25.10 ViewRenderingMembership

Description

A ViewRenderingMembership is a FeatureMembership that identifies the viewRendering of a ViewDefinition or ViewUsage.

General Classes

FeatureMembership

Attributes

/ownedRendering : RenderingUsage {redefines ownedMemberFeature}

The owned RenderingUsage that is either itself the referencedRendering or subsets the referencedRendering.

/referencedRendering : RenderingUsage

The RenderingUsage that is referenced through this ViewRenderingMembership. It is the referencedFeature of the ownedReferenceSubsetting for the ownedRendering, if there is one, and, otherwise, the ownedRendering itself.

Operations

None.

Constraints

deriveViewRenderingMembershipReferencedRendering

The referencedRendering of a ViewRenderingMembership is the referencedFeature of the ownedReferenceSubsetting (which must be a RenderingUsage) of the ownedRendering, if there is one, and, otherwise, the ownedRendering itself.

```

referencedRendering =
    let reference: ReferenceSubsetting =
        ownedRendering.ownedReferenceSubsetting in
    if reference = null then ownedRendering
    else if not reference.referencedFeature.oclIsKindOf(RenderingUsage) then null

```

```
owningType.oclIsKindOf(ViewUsage)) implies  
specializesFromLibrary('Views::View::viewpointSatisfactions')
```

deriveViewpointUsageViewpointStakeholder

The viewpointStakeholders of a ViewpointUsage are the ownedStakeholderParameters of all featureMemberships that are StakeholderMemberships.

```
viewpointStakeholder = framedConcern.featureMembership->  
    selectByKind(StakeholderMembership).  
    ownedStakeholderParameter
```

8.3.25.10 ViewRenderingMembership

Description

A ViewRenderingMembership is a FeatureMembership that identifies the viewRendering of a ViewDefinition or ViewUsage.

General Classes

FeatureMembership

Attributes

/ownedRendering : RenderingUsage {redefines ownedMemberFeature}

The owned RenderingUsage that is either itself the referencedRendering or subsets the referencedRendering

/referencedRendering : RenderingUsage

The RenderingUsage that is referenced through this ViewRenderingMembership. It is the referencedFeature of the ownedReferenceSubsetting for the ownedRendering, if there is one, and, otherwise, the ownedRendering itself.

Operations

None.

Constraints

deriveViewRenderingMembershipReferencedRendering

The referencedRendering of a ViewRenderingMembership is the referencedFeature of the ownedReferenceSubsetting (which must be a RenderingUsage) of the ownedRendering, if there is one, and, otherwise, the ownedRendering itself.

```
referencedRendering =  
    let reference: ReferenceSubsetting =  
        ownedRendering.ownedReferenceSubsetting in  
        if reference = null then ownedRendering  
        else if not reference.referencedFeature.oclIsKindOf(RenderingUsage) then null  
        else reference.referencedFeature.oclAsType(RenderingUsage)  
    endif
```

validateViewRenderingMembershipOwningType

```

else reference.referencedFeatureoclAsType(RenderingUsage)
endif

validateViewRenderingMembershipOwningType

```

The owningType of a ViewRenderingMembership must be a ViewDefinition or a ViewUsage.

```

owningType.oclIsKindOf(ViewDefinition) or
owningType.oclIsKindOf(ViewUsage)

```

8.3.25.11 ViewUsage

Description

A ViewUsage is a usage of a ViewDefinition to specify the generation of a view of the members of a collection of exposedNamespaces. The ViewUsage can satisfy more viewpoints than its definition, and it can specialize the viewRendering specified by its definition.

General Classes

PartUsage

Attributes

/exposedElement : Element [0..*] {subsets member, ordered}

The Elements that are exposed by this ViewUsage, which are those memberElements of the imported Memberships from all the Expose Relationships that meet all the owned and inherited viewConditions.

/satisfiedViewpoint : ViewpointUsage [0..*] {subsets nestedRequirement, ordered}

The nestedRequirements of this ViewUsage that are ViewpointUsages for (additional) viewpoints satisfied by the ViewUsage.

/viewCondition : Expression [0..*] {subsets ownedMember, ordered}

The Expressions related to this ViewUsage by ElementFilterMemberships, which specify conditions on Elements to be rendered in a view.

/viewDefinition : ViewDefinition [0..1] {redefines partDefinition}

The ViewDefinition that is the definition of this ViewUsage.

/viewRendering : RenderingUsage [0..1]

The RenderingUsage to be used to render views defined by this ViewUsage, which is the referencedRendering of the ViewRenderingMembership of the ViewUsage.

Operations

includeAsExposed(element : Element) : Boolean

Determine whether the given element meets all the owned and inherited viewConditions.

The `owningType` of a `ViewRenderingMembership` must be a `ViewDefinition` or a `ViewUsage`.

```
owningType.oclIsKindOf(ViewDefinition) or  
owningType.oclIsKindOf(ViewUsage)
```

8.3.25.11 ViewUsage

Description

A `ViewUsage` is a usage of a `ViewDefinition` to specify the generation of a view of the `members` of a collection of `exposedNamespaces`. The `ViewUsage` can satisfy more `viewpoints` than its definition, and it can specialize the `viewRendering` specified by its definition.

General Classes

`PartUsage`

Attributes

`/exposedElement : Element [0..*] {subsets member, ordered}`

The `Elements` that are exposed by this `ViewUsage`, which are those `memberElements` of the imported `Memberships` from all the `Expose` Relationships that meet all the owned and inherited `viewConditions`.

`/satisfiedViewpoint : ViewpointUsage [0..*] {subsets nestedRequirement, ordered}`

The `nestedRequirements` of this `ViewUsage` that are `ViewpointUsages` for (additional) viewpoints satisfied by the `ViewUsage`.

`/viewCondition : Expression [0..*] {subsets ownedMember, ordered}`

The `Expressions` related to this `ViewUsage` by `ElementFilterMemberships`, which specify conditions on `Elements` to be rendered in a view.

`/viewDefinition : ViewDefinition [0..1] {redefines partDefinition}`

The `ViewDefinition` that is the definition of this `ViewUsage`.

`/viewRendering : RenderingUsage [0..1]`

The `RenderingUsage` to be used to render views defined by this `ViewUsage`, which is the `referencedRendering` of the `ViewRenderingMembership` of the `ViewUsage`.

Operations

`includeAsExposed(element : Element) : Boolean`

Determine whether the given `element` meets all the owned and inherited `viewConditions`.

```
body: let metadataFeatures: Sequence(AnnotatingElement) =  
    element.ownedAnnotation.annotatingElement->  
        select(oclIsKindOf(MetadataFeature)) in  
    self.membership->selectByKind(ElementFilterMembership).  
        condition->forAll(cond |  
            metadataFeatures->exists(elem |  
                cond.checkCondition(elem)))
```

```

body: let metadataFeatures: Sequence(AnnotatingElement) =
    element.ownedAnnotation.annotatingElement->
        select(oclIsKindOf(MetadataFeature)) in
self.membership->selectByKind(ElementFilterMembership).
    condition->forAll(cond |
        metadataFeatures->exists(elem |
            cond.checkCondition(elem)))

```

Constraints

checkViewUsageSpecialization

A ViewUsage must directly or indirectly specialize the base ViewUsage *Views::views* from the Systems Model Library.

```
specializesFromLibrary('Views::views')
```

checkViewUsageSubviewSpecialization

A ViewUsage whose owningType is a ViewDefinition or ViewUsage must specialize the ViewUsage *Views::View::subviews* from the Systems Library Model.

```

owningType <> null and
(owningType.oclIsKindOf(ViewDefinition) or
owningType.oclIsKindOf(ViewUsage)) implies
    specializesFromLibrary('Views::View::subviews')

```

deriveViewUsageExposedElement

The exposedElements of a ViewUsage are those memberElements of the imported Memberships from all the Expose Relationships for which the includeAsExposed operation returns true.

```

exposedElement = ownedImport->selectByKind(Expose) .
    importedMemberships(Set{}).memberElement->
        select(elm | includeAsExposed(elm))->
            asOrderedSet()

```

deriveViewUsageSatisfiedViewpoint

The satisfiedViewpoints of a ViewUsage are its ownedRequirements that are composite ViewpointUsages.

```

satisfiedViewpoint = ownedRequirement->
    selectByKind(ViewpointUsage)->
        select(isComposite)

```

deriveViewUsageViewCondition

The viewConditions of a ViewUsage are the conditions of its owned ElementFilterMemberships.

```

viewCondition = ownedMembership->
    selectByKind(ElementFilterMembership) .
    condition

```

deriveViewUsageViewRendering

Constraints

checkViewUsageSpecialization

A `ViewUsage` must directly or indirectly specialize the base `ViewUsage Views::views` from the Systems Model Library.

```
specializesFromLibrary('Views::views')
```

checkViewUsageSubviewSpecialization

A `ViewUsage` whose `owningType` is a `ViewDefinition` or `ViewUsage` must specialize the `ViewUsage Views::View::subviews` from the Systems Library Model.

```
owningType <> null and
(owningType.oclIsKindOf(ViewDefinition) or
owningType.oclIsKindOf(ViewUsage)) implies
    specializesFromLibrary('Views::View::subviews')
```

deriveViewUsageExposedElement

The `exposedElements` of a `ViewUsage` are those `memberElements` of the imported `Memberships` from all the `Expose Relationships` for which the `includeAsExposed` operation returns true.

```
exposedElement = ownedImport->selectByKind(Expose) .
    importedMemberships(Set{}).memberElement->
    select(elm | includeAsExposed(elm))->
    asOrderedSet()
```

deriveViewUsageSatisfiedViewpoint

The `satisfiedViewpoints` of a `ViewUsage` are its `ownedRequirements` that are composite `ViewpointUsages`

```
satisfiedViewpoint = ownedRequirement->
    selectByKind(ViewpointUsage) ->
    select(isComposite)
```

deriveViewUsageViewCondition

The `viewConditions` of a `ViewUsage` are the conditions of its owned `ElementFilterMemberships`.

```
viewCondition = ownedMembership->
    selectByKind(ElementFilterMembership) .
    condition
```

deriveViewUsageViewRendering

The `viewRendering` of a `ViewUsage` is the `referencedRendering` of its owned `ViewRenderingMembership`, if any.

```
viewRendering =
    let renderings: OrderedSet(ViewRenderingMembership) =
        featureMembership->selectByKind(ViewRenderingMembership) in
    if renderings->isEmpty() then null
    else renderings->first().referencedRendering
    endif
```

The viewRendering of a ViewUsage is the referencedRendering of its owned ViewRenderingMembership, if any.

```
viewRendering =
    let renderings: OrderedSet(ViewRenderingMembership) =
        featureMembership->selectByKind(ViewRenderingMembership) in
    if renderings->isEmpty() then null
    else renderings->first().referencedRendering
    endif

validateViewUsageOnlyOneViewRendering
```

A ViewUsage must have at most one ViewRenderingMembership.

```
featureMembership->
    selectByKind(ViewRenderingMembership)->
    size() <= 1
```

8.3.26 Metadata Abstract Syntax

8.3.26.1 Overview

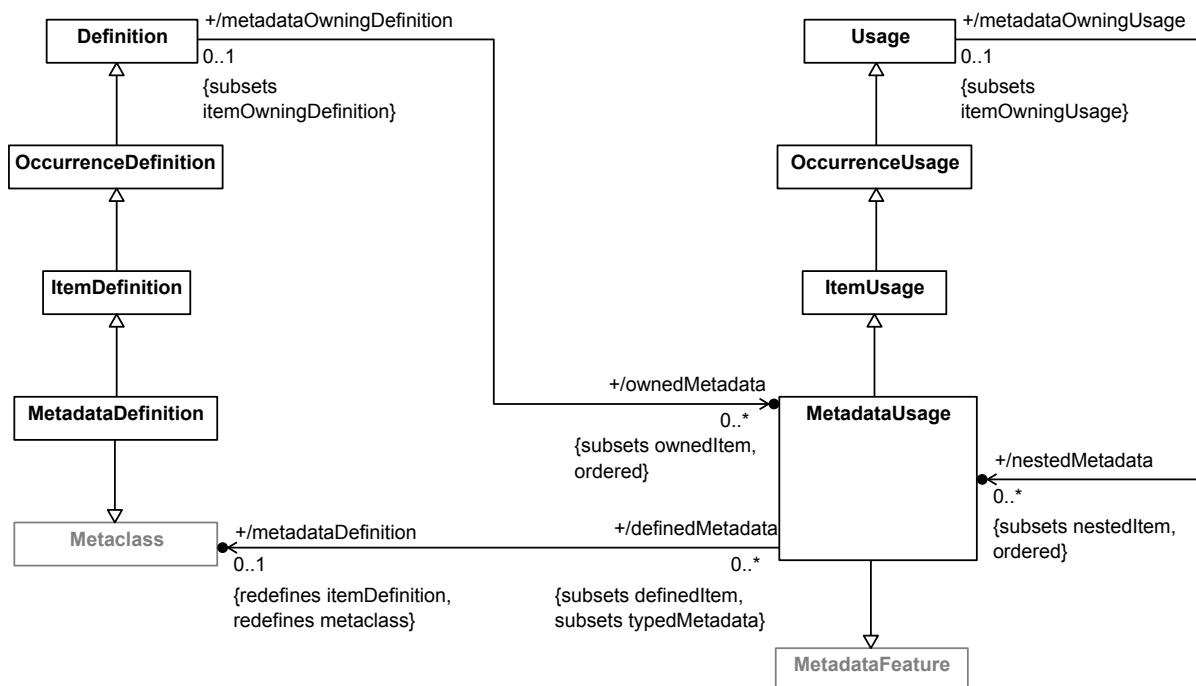


Figure 53. Metadata Definition and Usage

8.3.26.2 MetadataDefinition

Description

A MetadataDefinition is an ItemDefinition that is also a Metaclass.

General Classes

Metaclass

validateViewUsageOnlyOneViewRendering

A ViewUsage must have at most one ViewRenderingMembership.

```
featureMembership->
    selectByKind(ViewRenderingMembership) ->
    size() <= 1
```

8.3.26 Metadata Abstract Syntax

8.3.26.1 Overview

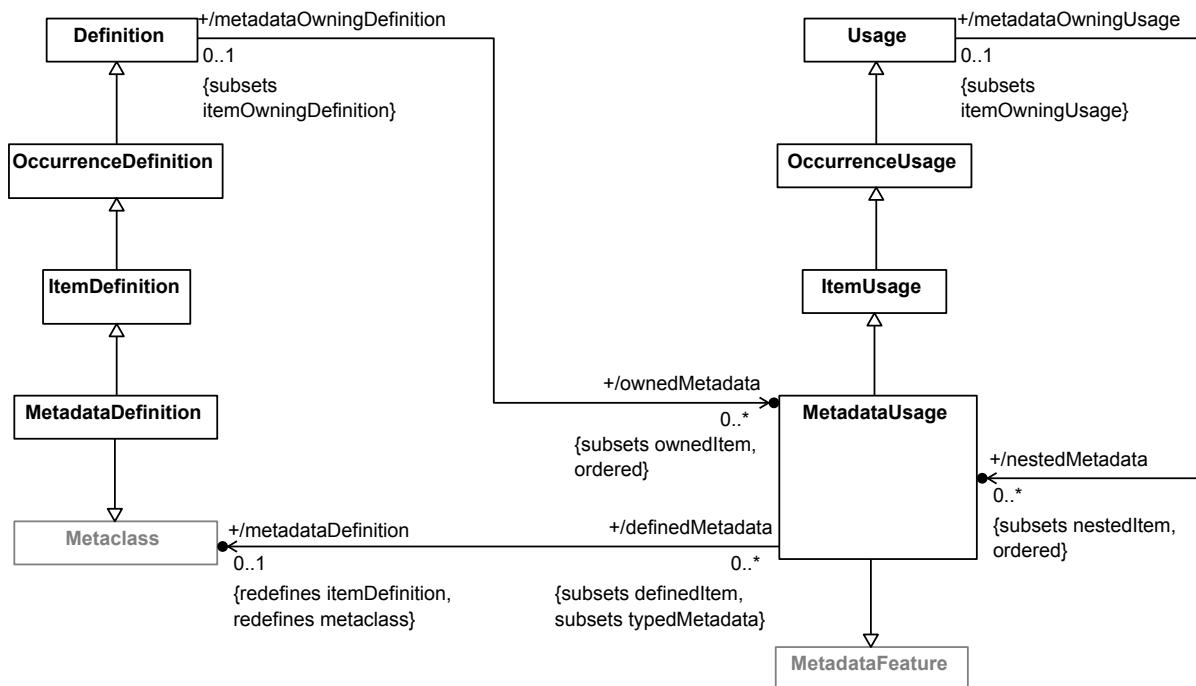


Figure 54. Metadata Definition and Usage

8.3.26.2 MetadataDefinition

Description

A MetadataDefinition is an ItemDefinition that is also a Metaclass.

General Classes

Metaclass
ItemDefinition

Attributes

None.

Operations

None.

ItemDefinition

Attributes

None.

Operations

None.

Constraints

checkMetadataDefinitionSpecialization

A `MetadataDefinition` must directly or indirectly specialize the base `MetadataDefinition` `Metadata::MetadataItem` from the Systems Model Library.

```
specializesFromLibrary('Metadata::MetadataItem')
```

8.3.26.3 MetadataUsage

Description

A `MetadataUsage` is a `Usage` and a `MetadataFeature`, used to annotate other `Elements` in a system model with metadata. As a `MetadataFeature`, its type must be a `Metaclass`, which will nominally be a `MetadataDefinition`. However, any kernel `Metaclass` is also allowed, to permit use of `Metaclasses` from the Kernel Model Libraries.

General Classes

ItemUsage
MetadataFeature

Attributes

```
/metadataDefinition : Metaclass [0..1] {redefines itemDefinition, metaclass}
```

The `MetadataDefinition` that is the definition of this `MetadataUsage`.

Operations

None.

Constraints

checkMetadataUsageSpecialization

A `MetadataUsage` must directly or indirectly specialize the base `MetadataUsage` `Metadata::metadataItems` from the Systems Model Library.

```
specializesFromLibrary('Metadata::metadataItems')
```

8.4 Semantics

Constraints

checkMetadataDefinitionSpecialization

A `MetadataDefinition` must directly or indirectly specialize the base `MetadataDefinition Metadata::MetadataItem` from the Systems Model Library.

`specializesFromLibrary('Metadata::MetadataItem')`

8.3.26.3 MetadataUsage

Description

A `MetadataUsage` is a `Usage` and a `MetadataFeature`, used to annotate other `Elements` in a system model with metadata. As a `MetadataFeature`, its type must be a `Metaclass`, which will nominally be a `MetadataDefinition`. However, any kernel `Metaclass` is also allowed, to permit use of `Metaclasses` from the Kernel Model Libraries.

General Classes

`ItemUsage`
`MetadataFeature`

Attributes

`/metadataDefinition : Metaclass [0..1] {redefines itemDefinition, metaclass}`

The `MetadataDefinition` that is the definition of this `MetadataUsage`.

Operations

None.

Constraints

checkMetadataUsageSpecialization

A `MetadataUsage` must directly or indirectly specialize the base `MetadataUsage Metadata::metadataItems` from the Systems Model Library.

`specializesFromLibrary('Metadata::metadataItems')`

8.4 Semantics

8.4.1 Semantics Overview

SYSML2 -44: Transformation of UML4SysML::ActivityFinalNode is not specified yet

Table 30. Other Implied Relationships

Semantic Constraint	Source	Target
<code>Redefinition</code>		

8.4.1 Semantics Overview

The semantics of constructs in SysML are specified in terms of the constructs defined in KerML supported by reuse of model elements from the Kernel Semantic Model Library (see [KerML, 9.2]) and the Systems Model Library (see [9.2](#)). This is similar to how the KerML Kernel Layer semantics are build on the KerML Core Layer (see [KerML, 8.4.4.1]). The semantic requirements are formalized by *semantic constraints* included in the SysML abstract syntax (see also [8.3.1](#) on the various kinds of constraints in the abstract syntax). Additionally, other semantic constraints require relationships between elements within a user model necessary for the model to be semantically well formed.

Specifically, there are four categories of semantic constraints used to specify SysML semantics, each dealing with a different kind of relationship.

1. *Specialization constraints*. These constraints require that `Definition` or `Usage` elements of a certain kind directly or indirectly specialize some specific base `Definition` or `Usage` from the Kernel Semantic Library or the Systems Model Library. They are the fundamental means for providing semantics to abstract syntax elements in SysML. Specialization constraints always have the word `Specialization` in their name. For example, `checkPartDefinitionSpecialization` requires that a `PartDefinition` directly or indirectly specialize the `PartDefinition Parts::Part` from the Systems Model Library.
2. *Redefinition constraints*. These constraints require that certain `Usages` in a model have `Redefinition` relationships with certain other `Usages` (or KerML `Features`) in the model. While `Redefinitions` are kinds of `Specializations`, redefinition constraints differ from the specialization constraints described above because of the specific semantics of redefinition. Redefinition constraints always have the word `Redefinition` in their name. For example, `checkRenderingUsageRedefinition` requires a `Redefinition` on a `RenderingUsage` used to specify a `viewRendering`.
3. *Type-featuring constraints*. These constraints require that certain `Usages` in a model have `TypeFeaturing` relationships with certain other `Definitions` or `Usages` in the model. The SysML specification includes only one constraint in this category, `checkOccurrenceUsageFeatureTyping`, which applies to `OccurrenceUsages` modeling time slices or snapshots. However, various type-featuring constraints from KerML also apply to corresponding SysML constructs. For instance, the KerML `checkConnectorTypeFeaturing` also applies to SysML `ConnectionUsages`.
4. *Binding-connector constraints*. These constraints require that `BindingConnectors` exist between certain `Features` in a model. For example, `checkSatisfyRequirementUsageBindingConnector` requires that the `satisfyingFeature` of a `SatisfyRequirementUsage` be bound to the subject of the `SatisfyRequirementUsage`. (In a SysML model, it is allowable for binding-connector constraints to be satisfied by SysML `BindingConnectorAsUsages`, rather than plain KerML `BindingConnectors`.)

A SysML model parsed from the textual or graphical concrete syntax (see [8.2](#)) or obtained through model interchange (see [KerML, Clause 10]) will not necessarily meet the semantic constraints specified for the abstract syntax. In this case, a tool may insert certain implied Relationships into the model in order to meet the semantic constraints. In all cases, the semantics of a model are only defined if it meets all semantic and validation constraints (see [8.3.1](#)).

For specialization constraints applying to `Definitions`, the implied Relationship is a `Subclassification`, as given in [Table 30](#). For specialization constraints applying to `Usages`, the implied Relationship is a `Subsetting`, as given in [Table 31](#). For redefinition, type-featuring and binding-connector constraints, the implied Relationship is a `Redefinition`, `TypeFeaturing`, or `BindingConnector`, as given in [Table 32](#). Note that an implied Relationship should only be added if the constraint would actually be violated otherwise. For the detailed conditions on when a constraint applies, see its specification in the abstract syntax model ([8.3](#)).

When including implied Relationships for specialization constraints, it is possible that multiple such constraints may apply to a single Element. For example, a `PartDefinition` is a kind of `ItemDefinition`, which is a kind of `OccurrenceDefinition`, and there are specialization constraints for all three of these metaclasses, with corresponding implied `Subclassification` Relationships. However, simply including all three implied

Semantic Constraint	Source	Target
checkActionUsageStateActionRedefinition	The ActionUsage	<code>entryAction, doAction, or exitAction of States::StateAction (depending on whether the kind of the owning StateSubactionMembership is entry, do, or exit, respectively)</code>
checkAssignmentActionUsageAccessedFeatureRedefinition	The first ownedFeature of the first ownedFeature of the first parameter of the AssignmentActionUsage	<code>AssignmentAction::target::startingAt::accessedFeature</code>
checkAssignmentActionUsageReferentRedefinition	The first ownedFeature of the first ownedFeature of the first parameter of the AssignmentActionUsage	referent of the AssignmentActionUsage
checkAssignmentActionUsageStartingAtRedefinition	The first ownedFeature of the first parameter of the AssignmentActionUsage	<code>AssignmentAction::target::startingAt</code>
checkRequirementUsageObjectiveSpecialization	The RequirementUsage	The objectiveRequirement of each CaseDefinition or CaseUsage specialized by the owningType of the RequirementUsage.
checkRenderingUsageRedefinition	The RenderingUsage	<code>Views::View::viewRendering</code>
TypeFeaturing		
checkOccurrenceUsageTypeFeaturing	The OccurrenceUsage	occurrenceDefinition of the OccurrenceUsage
BindingConnector (see Note 1)		
checkAcceptActionUsageReceiverBindingConnector	The receiver parameter (second parameter) of the AcceptActionUsage	The receiver parameter (second parameter) of the TriggerInvocationExpression
checkTransitionUsageSourceBindingConnector	The source of the TransitionUsage	The transitionLinkSource parameter (first input parameter) of the TransitionUsage
checkTransitionUsageSuccessionBindingConnector	The succession of the TransitionUsage	<code>TransitionPerformances::TransitionPerformance::transitionLink</code>
checkSatisfyRequirementUsageBindingConnector	subjectParameter of the SatisfyRequirementUsage	<code>Base::things::that</code>

Subclassification would be redundant, because the Subclassification implied by the checkPartDefinitionSpecialization constraint will also automatically satisfy the checkItemDefinitionSpecialization and checkOccurrenceDefinitionSpecialization constraints.

Therefore, in order to avoid redundant Relationships, a tool should observe the following rules when selecting which Specializations to actually include for a certain constrained Element, out of the set of those implied by all specialization constraints applicable to the Element:

1. If there is any ownedSpecialization or other implied Specialization whose general Type is a direct or indirect subtype of (but not the same as) the general Type of an implied Specialization, or if there is an ownedSpecialization with the same general Type, then that implied Specialization should *not* be included.
2. If there are two implied Specializations with the same general Type, then only one should be included.

Note that the above rules do *not* apply to Redefinitions implied by redefinition constraints, because Redefinition relationships have semantics beyond just basic Specialization.

The following subclauses specify the semantics for each syntactic area of SysML in terms of the semantic constraints that must be satisfied for various Elements, the pattern of Relationships these imply, and the model library Elements that are reused to support this. For compactness, the textual notation is used in these subclauses to present model snippets to illustrate the semantic patterns being discussed. However, it should be understood that, like the semantic constraints themselves, these semantic patterns are actually defined on the abstract syntax representation of a model, independent of its textual or graphical concrete syntax representation.

Table 30. Implied Definition Subclassification Relationships

Semantic Constraint	Subclassification Target (see Note 1)
checkLifeClassLifeSpecialization	Occurrences::Life
checkLifeClassOccurrenceSpecialization	individualDefinition of the LifeClass
checkItemDefinitionSpecialization	Items::Item
checkPartDefinitionSpecialization	Parts::Part
checkPortDefinitionSpecialization	Ports::Port
checkConnectionDefinitionSpecialization	Connections::Connection
checkConnectionDefinitionBinarySpecialization	Connections::BinaryConnection
checkFlowConnectionDefinitionSpecialization	Connections::MessageConnection
checkInterfaceDefinitionSpecialization	Interfaces::Interface
checkInterfaceDefinitionBinarySpecialization	Interface::BinaryInterface
checkAllocationDefinitionSpecialization	Allocations::Allocation
checkActionDefinitionSpecialization	Actions::Action
checkStateDefinitionSpecialization	States::StateAction
checkCalculationDefinitionSpecialization	Calculations::Calculation
checkConstraintDefinitionSpecialization	Constraints::ConstraintCheck

Notes

- It is acceptable to use either KerML BindingConnectors or SysML BindingConnectorAsUsages as the implied Relationships for binding-connector constraints. However, a conforming tool should consistently use one or the other.

Table 31. Implied Usage Subsetting Relationships

Semantic Constraint	Subsetting Target (see Note 1)
checkUsageVariationUsageSpecialization	owningVariationUsage of the Usage
checkAttributeUsageSpecialization	Attributes::attributes
checkEventOccurrenceSpecialization	Occurrences::Occurrence::timeEnclosedOccurrences
checkLifeClassMultiplicitySpecialization	Base::exactlyOne (source is the multiplicity of the LifeClass)
checkOccurrenceUsageSpecialization	Occurrences::occurrences
checkOccurrenceUsageSuboccurrence Specialization	Occurrences::Occurrence::suboccurrences
checkItemUsageSpecialization	Items::items
checkItemUsageSubitemSpecialization	Items::Item::subitems
checkPartUsageSpecialization	Parts::parts
checkPartUsageSubpartSpecialization	Items::Item::subparts
checkPartUsageActorSpecialization	Requirements::Requirement::actors or Cases::Case::actors (depending on the owningType of the PartUsage)
checkPartUsageStakeholderSpecialization	Requirements::Requirement::stakeholders
checkPortUsageSpecialization	Ports::ports
checkPortSubportSpecialization	Ports::Port::subports
checkConnectionUsageSpecialization	Connections::connections
checkConnectionUsageBinarySpecialization	Connections::binaryConnections
checkFlowConnectionUsageSpecialization	Connections::messageConnections or Connections::flowConnections (depending on whether the FlowConnectionUsage has itemFlowEnds)
checkSuccessionFlowConnectionUsage Specialization	Connections::successionFlowConnections
checkInterfaceUsageSpecialization	Interfaces::interfaces
checkInterfaceUsageBinarySpecialization	Interfaces::binaryInterfaces
checkAllocationUsageSpecialization	Allocations::allocations
checkActionUsageSpecialization	Actions::actions

Semantic Constraint	Subclassification Target (see Note 1)
checkRequirementDefinitionSpecialization	Requirements::RequirementCheck
checkConcernDefinitionSpecialization	Concerns::ConcernCheck
checkCaseDefinitionSpecialization	Cases::Case
checkAnalysisCaseDefinitionSpecialization	AnalysisCases::AnalysisCase
checkVerificationCaseDefinitionSpecialization	VerificationCases::VerificationCase
checkUseCaseDefinitionSpecialization	UseCases::UseCase
checkViewDefinitionSpecialization	Views::View
checkViewpointDefinitionSpecialization	Views::ViewpointCheck
checkRenderingDefinitionSpecialization	Views::Rendering
checkMetadataDefinitionSpecialization	Views::MetadataItem

Notes

- In all cases, the source of the Subclassification is the Definition to which the constraint applies.

Table 31. Implied Usage Subsetting Relationships

Semantic Constraint	Subsetting Target (see Note 1)
checkUsageVariationUsageSpecialization	owningVariationUsage of the Usage
checkAttributeUsageSpecialization	Attributes::attributes
checkEventOccurrenceSpecialization	Occurrences::Occurrence::timeEnclosedOccurrences
checkLifeClassMultiplicitySpecialization	Base::exactlyOne (source is the multiplicity of the LifeClass)
checkOccurrenceUsageSpecialization	Occurrences::occurrences
checkOccurrenceUsageSuboccurrence Specialization	Occurrences::Occurrence::suboccurrences
checkItemUsageSpecialization	Items::items
checkItemUsageSubitemSpecialization	Items::Item::subitems
checkPartUsageSpecialization	Parts::parts
checkPartUsageSubpartSpecialization	Items::Item::subparts
checkPartUsageActorSpecialization	Requirements::Requirement::actors or Cases::Case::actors (depending on the owningType of the PartUsage)
checkPartUsageStakeholderSpecialization	Requirements::Requirement::stakeholders
checkPortUsageSpecialization	Ports::ports

Semantic Constraint	Subsetting Target (see Note 1)
checkPortSubportSpecialization	<i>Ports::Port::subports</i>
checkConnectionUsageSpecialization	<i>Connections::connections</i>
checkConnectionUsageBinarySpecialization	<i>Connections::binaryConnections</i>
checkFlowConnectionUsageSpecialization	<i>Connections::messageConnections or Connections::flowConnections</i> (depending on whether the FlowConnectionUsage has itemFlowEnds)
checkSuccessionFlowConnectionUsage Specialization	<i>Connections::successionFlowConnections</i>
checkInterfaceUsageSpecialization	<i>Interfaces::interfaces</i>
checkInterfaceUsageBinarySpecialization	<i>Interfaces::binaryInterfaces</i>
checkAllocationUsageSpecialization	<i>Allocations::allocations</i>
checkActionUsageSpecialization	<i>Actions::actions</i>
checkActionUsageSubactionSpecialization	<i>Actions::Action::subactions</i>
checkActionUsageOwnedActionSpecialization	<i>Parts::Part::ownedActions</i>
checkActionUsageAnalysisAction Specialization	<i>AnalysisCases::AnalysisCase::analysisActions</i>
checkControlNodeSpecialization	<i>Actions::Action::controls</i>
checkJoinNodeSpecialization	<i>Actions::Action::joins</i>
checkForkNodeSpecialization	<i>Actions::Action::forks</i>
checkMergeNodeSpecialization	<i>Actions::Action::merges</i>
checkMergeNodeIncomingSuccession Specialization	<i>incomingHBLINK</i> of the MergeNode (source is the incoming Succession)
checkDecisionNodeSpecialization	<i>Actions::Action::decisions</i>
checkDecisionNodeOutgoingSuccession Specialization	<i>outgoingHBLINK</i> of the DecisionNode (source is the outgoing Succession)
checkSendActionUsageSpecialization	<i>Actions::sendActions</i>
checkSendActionUsageSubaction Specialization	<i>Actions::Action::sendSubactions</i>
checkAcceptActionUsageSpecialization	<i>Actions::acceptActions</i>
checkAcceptActionUsageSubaction Specialization	<i>Actions::Action::acceptSubactions</i>
checkAcceptActionUsageTriggerAction Specialization	<i>Actions::TransitionAction::accepter</i>
checkAssignmentActionUsageSpecialization	<i>Actions::assignmentActions</i>

Semantic Constraint	Subsetting Target (see Note 1)
checkActionUsageSubactionSpecialization	<i>Actions::Action::subactions</i>
checkActionUsageOwnedActionSpecialization	<i>Parts::Part::ownedActions</i>
checkActionUsageAnalysisActionSpecialization	<i>AnalysisCases::AnalysisCase::analysisActions</i>
checkControlNodeSpecialization	<i>Actions::Action::controls</i>
checkJoinNodeSpecialization	<i>Actions::Action::joins</i>
checkForkNodeSpecialization	<i>Actions::Action::forks</i>
checkMergeNodeSpecialization	<i>Actions::Action::merges</i>
checkMergeNodeIncomingSuccessionSpecialization	<i>incomingHBLINK of the MergeNode (source is the incoming Succession)</i>
checkDecisionNodeSpecialization	<i>Actions::Action::decisions</i>
checkDecisionNodeOutgoingSuccessionSpecialization	<i>outgoingHBLINK of the DecisionNode (source is the outgoing Succession)</i>
checkSendActionUsageSpecialization	<i>Actions::sendActions</i>
checkSendActionUsageSubactionSpecialization	<i>Actions::Action::sendSubactions</i>
checkAcceptActionUsageSpecialization	<i>Actions::acceptActions</i>
checkAcceptActionUsageSubactionSpecialization	<i>Actions::Action::acceptSubctions</i>
checkAcceptActionUsageTriggerActionSpecialization	<i>Actions::TransitionAction::accepter</i>
checkAssignmentActionUsageSpecialization	<i>Actions::assignmentActions</i>
checkAssignmentActionUsageSubactionSpecialization	<i>Actions::Action::assignments</i>
checkTerminateActionUsageSpecialization	<i>Actions::terminateActions</i>
checkTerminateActionUsageSubactionSpecialization	<i>Actions::Action::terminateSubactions</i>
checkIfActionUsageSpecialization	<i>Actions::ifThenActions or Actions::ifThenElseActions (depending on whether the IfActionUsage has an elseClause)</i>
checkIfActionUsageSubactionSpecialization	<i>Actions::Action::ifSubactions</i>
checkWhileLoopActionUsageSpecialization	<i>Actions::whileLoopActions</i>
checkWhileLoopActionUsageSubactionSpecialization	<i>Actions::Action::whileLoops</i>
checkForLoopActionUsageSpecialization	<i>Actions::forLoopActions</i>
checkForLoopActionUsageSubactionSpecialization	<i>Actions::Action::forLoops</i>

Semantic Constraint	Subsetting Target (see Note 1)
checkAssignmentActionUsageSubactionSpecialization	<i>Actions::Action::assignments</i>
checkIfActionUsageSpecialization	<i>Actions::ifThenActions</i> or <i>Actions::ifThenElseActions</i> (depending on whether the IfActionUsage has an elseClause)
checkIfActionUsageSubactionSpecialization	<i>Actions::Action::ifSubactions</i>
checkWhileLoopActionUsageSpecialization	<i>Actions::whileLoopActions</i>
checkWhileLoopActionUsageSubactionSpecialization	<i>Actions::Action::whileLoops</i>
checkForLoopActionUsageSpecialization	<i>Actions::forLoopActions</i>
checkForLoopActionUsageSubactionSpecialization	<i>Actions::Action::forLoops</i>
checkPerformActionUsageSpecialization	<i>Parts::Part::performedActions</i>
checkStateUsageSpecialization	<i>States::stateActions</i>
checkStateUsageSubstateSpecialization	<i>States::State::substates</i>
checkStateUsageExclusiveStateSpecialization	<i>States::State::exclusiveStates</i>
checkTransitionUsageSpecialization	<i>Actions::transitions</i>
checkTransitionUsageActionSpecialization	<i>Actions::Action::decisionTransitions</i>
checkTransitionUsageStateSpecialization	<i>States::StateAction::stateTransitions</i>
checkTransitionUsagePayloadSpecialization	<i>TransitionAction::triggerAction.</i> <i>payloadParameter</i> (source is <i>TransitionAction::payload</i>)
checkTransitionUsageSuccessionSourceSpecialization	source of the TransitionUsage (source is the sourceFeature of the succession of the TransitionUsage; Relationship is a ReferenceSubsetting)
checkTransitionUsageTransitionFeatureSpecialization	accepter, guard, or effect of <i>Actions::TransitionActions</i> (for the triggerActions, guardExpressions, and effectActions of the TransitionUsage, respectively)
checkExhibitStateUsageSpecialization	<i>Parts::Part::exhibitedStates</i>
checkCalculationUsageSpecialization	<i>Calculations::calculations</i>
checkCalculationUsageSubcalculationSpecialization	<i>Calculations::Calculation::subcalculations</i>
checkConstraintUsageSpecialization	<i>Constraints::constraintChecks</i>

Semantic Constraint	Subsetting Target (see Note 1)
checkPerformActionUsageSpecialization	<i>Parts::Part::performedActions</i>
checkStateUsageSpecialization	<i>States::stateActions</i>
checkStateUsageSubstateSpecialization	<i>States::State::substates</i>
checkStateUsageExclusiveState Specialization	<i>States::State::exclusiveStates</i>
checkTransitionUsageSpecialization	<i>Actions::transitions</i>
checkTransitionUsageActionSpecialization	<i>Actions::Action::decisionTransitions</i>
checkTransitionUsageStateSpecialization	<i>States::StateAction::stateTransitions</i>
checkTransitionUsagePayloadSpecialization	<i>TransitionAction::triggerAction.</i> <i>payloadParameter</i> (<i>source</i> is <i>TransitionAction::payload</i>)
checkTransitionUsageSuccessionSource Specialization	source of the <i>TransitionUsage</i> (<i>source</i> is the sourceFeature of the succession of the <i>TransitionUsage</i> ; Relationship is a ReferenceSubsetting)
checkTransitionUsageTransitionFeature Specialization	accepter, guard, or effect of <i>Actions::TransitionActions</i> (for the triggerActions, guardExpressions, and effectActions of the <i>TransitionUsage</i> , respectively)
checkExhibitStateUsageSpecialization	<i>Parts::Part::exhibitedStates</i>
checkCalculationUsageSpecialization	<i>Calculations::calculations</i>
checkCalculationUsageSubcalculation Specialization	<i>Calculations::Calculation::subcalculations</i>
checkConstraintUsageSpecialization	<i>Constraints::constraintChecks</i>
checkConstraintUsageCheckedConstraint Specialization	<i>Items::Item::checkConstraints</i>
checkConstraintUsageRequirementConstraint Specialization	<i>Requirements::RequirementCheck::assumptions</i> or <i>Requirements::RequirementCheck::constraints</i> (depending on whether the kind of the owning <i>RequirementConstraintMembership</i> is assumption or requirement)
checkAssertConstraintUsageSpecialization	Either <i>Constraints::assertedConstraints</i> (if <i>isNegated</i> = false) or <i>Constraints::negatedConstraints</i> (if <i>isNegated</i> = true)
checkRequirementUsageSpecialization	<i>Requirements::requirementChecks</i>
checkRequirementUsageSubrequirement Specialization	<i>Requirements::RequirementCheck::</i> <i>subrequirement</i>

Semantic Constraint	Subsetting Target (see Note 1)
checkConstraintUsageCheckedConstraintSpecialization	<i>Items</i> :: <i>Item</i> :: <i>checkConstraints</i>
checkConstraintUsageRequirementConstraintSpecialization	<i>Requirements</i> :: <i>RequirementCheck</i> :: <i>assumptions</i> or <i>Requirements</i> :: <i>RequirementCheck</i> :: <i>constraints</i> (depending on whether the kind of the owning <i>RequirementConstraintMembership</i> is assumption or requirement)
checkAssertConstraintUsageSpecialization	Either <i>Constraints</i> :: <i>assertedConstraints</i> (if <i>isNegated</i> = false) or <i>Constraints</i> :: <i>negatedConstraints</i> (if <i>isNegated</i> = true)
checkRequirementUsageSpecialization	<i>Requirements</i> :: <i>requirementChecks</i>
checkRequirementUsageSubrequirementSpecialization	<i>Requirements</i> :: <i>RequirementCheck</i> :: <i>subrequirement</i>
checkRequirementUsageRequirementVerificationSpecialization	<i>VerificationCases</i> :: <i>VerificationCase</i> :: <i>obj</i> :: <i>requirementVerifications</i>
checkConcernUsageSpecialization	<i>Requirements</i> :: <i>concernChecks</i>
checkConcernUsageFramedConcernSpecialization	<i>Requirements</i> :: <i>RequirementCheck</i> :: <i>concerns</i>
checkCaseUsageSpecialization	<i>Cases</i> :: <i>Cases</i>
checkCaseUsageSubcaseSpecialization	<i>Cases</i> :: <i>Case</i> :: <i>subcases</i>
checkAnalysisCaseUsageSpecialization	<i>AnalysisCases</i> :: <i>analysisCases</i>
checkAnalysisCaseUsageSubAnalysisCaseSpecialization	<i>AnalysisCases</i> :: <i>AnalysisCase</i> :: <i>subAnalysisCases</i>
checkVerificationCaseUsageSpecialization	<i>VerificationCases</i> :: <i>verificationCases</i>
checkVerificationCaseUsageSubVerificationCaseSpecialization	<i>VerificationCases</i> :: <i>VerificationCase</i> :: <i>subVerificationCases</i>
checkUseCaseUsageSpecialization	<i>UseCases</i> :: <i>useCases</i>
checkUseCaseUsageSubUseCaseSpecialization	<i>UseCases</i> :: <i>UseCase</i> :: <i>subUseCases</i>
checkIncludeUseCaseUsageSpecialization	<i>UseCases</i> :: <i>UseCase</i> :: <i>includedUseCases</i>
checkViewUsageSpecialization	<i>Views</i> :: <i>views</i>
checkViewUsageSubviewSpecialization	<i>Views</i> :: <i>View</i> :: <i>subviews</i>
checkViewpointUsageSpecialization	<i>Views</i> :: <i>viewpoints</i>
checkViewpointUsageViewpointSatisfactionSpecialization	<i>Views</i> :: <i>View</i> :: <i>viewpointSatisfactions</i>
checkRenderingUsageSpecialization	<i>Views</i> :: <i>renderings</i>

Semantic Constraint	Subsetting Target (see Note 1)
checkRequirementUsageRequirement VerificationSpecialization	<i>VerificationCases::VerificationCase::obj::requirementVerifications</i>
checkConcernUsageSpecialization	<i>Requirements::concernChecks</i>
checkConcernUsageFramedConcern Specialization	<i>Requirements::RequirementCheck::concerns</i>
checkCaseUsageSpecialization	<i>Cases::Cases</i>
checkCaseUsageSubcaseSpecialization	<i>Cases::Case::subcases</i>
checkAnalysisCaseUsageSpecialization	<i>AnalysisCases::analysisCases</i>
checkAnalysisCaseUsageSubAnalysisCase Specialization	<i>AnalysisCases::AnalysisCase::subAnalysisCases</i>
checkVerificationCaseUsageSpecialization	<i>VerificationCases::verificationCases</i>
checkVerificationCaseUsageSubVerification CaseSpecialization	<i>VerificationCases::VerificationCase::subVerificationCases</i>
checkUseCaseUsageSpecialization	<i>UseCases::useCases</i>
checkUseCaseUsageSubUseCaseSpecialization	<i>UseCases::UseCase::subUseCases</i>
checkIncludeUseCaseUsageSpecialization	<i>UseCases::UseCase::includedUseCases</i>
checkViewUsageSpecialization	<i>Views::views</i>
checkViewUsageSubviewSpecialization	<i>Views::View::subviews</i>
checkViewpointUsageSpecialization	<i>Views::viewpoints</i>
checkViewpointUsageViewpointSatisfaction Specialization	<i>Views::View::viewpointSatisfactions</i>
checkRenderingUsageSpecialization	<i>Views::renderings</i>
checkRenderingUsageSubrendering Specialization	<i>Views::Rendering::subrenderings</i>
checkMetadataUsageSpecialization	<i>Metadata::metadataItems</i>

Notes

- Unless otherwise indicated, the source of the Subsetting is the Usage to which the constraint applies.

Table 32. Implied Definition Subclassification Relationships

Semantic Constraint	Subclassification Target (see Note 1)
checkLifeClassLifeSpecialization	<i>Occurrences::Life</i>
checkLifeClassOccurrenceSpecialization	<i>individualDefinition of the LifeClass</i>
checkItemDefinitionSpecialization	<i>Items::Item</i>
checkPartDefinitionSpecialization	<i>Parts::Part</i>
checkPortDefinitionSpecialization	<i>Ports::Port</i>

Semantic Constraint	Subsetting Target (see Note 1)
checkRenderingUsageSubrenderingSpecialization	<i>Views::Rendering::subrenderings</i>
checkMetadataUsageSpecialization	<i>Metadata::metadataItems</i>

Notes

1. Unless otherwise indicated, the source of the Subsetting is the Usage to which the constraint applies.

Table 32. Other Implied Relationships

Semantic Constraint	Source	Target
Redefinition		
checkActionUsageStateActionRedefinition	The ActionUsage	<i>entryAction, doAction, or exitAction of States::StateAction (depending on whether the kind of the owning StateSubactionMembership is entry, do, or exit, respectively)</i>
checkAssignmentActionUsageAccessedFeatureRedefinition	The first ownedFeature of the first ownedFeature of the first parameter of the AssignmentActionUsage	<i>AssignmentAction::target::startingAt::accessedFeature</i>
checkAssignmentActionUsageReferentRedefinition	The first ownedFeature of the first ownedFeature of the first parameter of the AssignmentActionUsage	<i>referent of the AssignmentActionUsage</i>
checkAssignmentActionUsageStartingAtRedefinition	The first ownedFeature of the first parameter of the AssignmentActionUsage	<i>AssignmentAction::target::startingAt</i>
checkRequirementUsageObjectiveSpecialization	The RequirementUsage	<i>The objectiveRequirement of each CaseDefinition or CaseUsage specialized by the owningType of the RequirementUsage.</i>
checkRenderingUsageRedefinition	The RenderingUsage	<i>Views::View::viewRendering</i>
TypeFeaturing		
checkOccurrenceUsageTypeFeaturing	The OccurrenceUsage	<i>occurrenceDefinition of the OccurrenceUsage</i>

Semantic Constraint	Source	Target
BindingConnector (see Note 1)		
<code>checkAcceptActionUsage</code> <code>ReceiverBindingConnector</code>	The <code>receiver</code> parameter (second parameter) of the <code>AcceptActionUsage</code>	The <code>receiver</code> parameter (second parameter) of the <code>TriggerInvocationExpression</code>
<code>checkTransitionUsageSource</code> <code>BindingConnector</code>	The source of the <code>TransitionUsage</code>	The <code>transitionLinkSource</code> parameter (first input parameter) of the <code>TransitionUsage</code>
<code>checkTransitionUsage</code> <code>SuccessionBindingConnector</code>	The succession of the <code>TransitionUsage</code>	<code>TransitionPerformances::TransitionPerformance::transitionLink</code>
<code>checkSatisfyRequirement</code> <code>UsageBindingConnector</code>	<code>subjectParameter</code> of the <code>SatisfyRequirementUsage</code>	<code>Base::things::that</code>

Notes

1. It is acceptable to use either KerML BindingConnectors or SysML BindingConnectorAsUsages as the implied Relationships for binding-connector constraints. However, a conforming tool should consistently use one or the other.

8.4.2 Definition and Usage Semantics

Abstract syntax reference: [8.3.6](#)

8.4.2.1 Definitions

A SysML Definition has the semantics of a KerML Classifier (see [KerML, 8.4.3.3]). However, a Definition element is always either instantiated as one of its more specific subclasses (e.g., AttributeDefinition, ItemDefinition, etc.), or with at least one semantic metadata annotation. In the former case, the Definition has the semantics of the more specialize kind. In the latter case it has semantics as given by the base Type(s) from the annotation(s) (see [8.4.22](#)).

8.4.2.2 Usages

A SysML Usage has the semantics of a KerML Feature (see [KerML, 8.4.3.4]). However, a Usage element is always either instantiated as on of its mode specific subclasses (e.g., AttributeUsage, ItemUsage, etc.), or with at least one semantic metadata annotation. In the former case, the Usage has the semantics of the more specialized kind, except that a ReferenceUsage has no additional semantics. In the latter case it has semantics as given by the base Type(s) from the annotation(s) (see [8.4.22](#)).

8.4.2.3 Variation Definitions and Usages

A Definition or Usage with `isVariation = true` has additional semantic restrictions. In this case, the `validateDefinitionVariationMembership` and `validateUsageVariationMembership` constraints require that all the ownedMembers of the Definition or Usage be variant Usages. The `checkUsageVariationDefinitionSpecialization` and `checkUsageVariationUsageSpecialization`

Semantic Constraint	Subclassification Target (see Note 1)
checkConnectionDefinitionSpecialization	Connections::Connection
checkConnectionDefinitionBinarySpecialization	Connections::BinaryConnection
checkFlowConnectionDefinitionSpecialization	Connections::MessageConnection
checkInterfaceDefinitionSpecialization	Interfaces::Interface
checkInterfaceDefinitionBinarySpecialization	Interface::BinaryInterface
checkAllocationDefinitionSpecialization	Allocations::Allocation
checkActionDefinitionSpecialization	Actions::Action
checkStateDefinitionSpecialization	States::StateAction
checkCalculationDefinitionSpecialization	Calculations::Calculation
checkConstraintDefinitionSpecialization	Constraints::ConstraintCheck
checkRequirementDefinitionSpecialization	Requirements::RequirementCheck
checkConcernDefinitionSpecialization	Concerns::ConcernCheck
checkCaseDefinitionSpecialization	Cases::Case
checkAnalysisCaseDefinitionSpecialization	AnalysisCases::AnalysisCase
checkVerificationCaseDefinitionSpecialization	VerificationCases::VerificationCase
checkUseCaseDefinitionSpecialization	UseCases::UseCase
checkViewDefinitionSpecialization	Views::View
checkViewpointDefinitionSpecialization	Views::ViewpointCheck
checkRenderingDefinitionSpecialization	Views::Rendering
checkMetadataDefinitionSpecialization	Views::MetadataItem

Notes

- In all cases, the source of the Subclassification is the Definition to which the constraint applies.

The semantics of constructs in SysML are specified in terms of the constructs defined in KerML supported by reuse of model elements from the Kernel Semantic Model Library (see [KerML, 9.2]) and the Systems Model Library (see 9.2.). This is similar to how the KerML Kernel Layer semantics are build on the KerML Core Layer (see [KerML, 8.4.4.1]). The semantic requirements are formalized by *semantic constraints* included in the SysML abstract syntax (see also 8.3.1 on the various kinds of constraints in the abstract syntax). Additionally, other semantic constraints require relationships between elements within a user model necessary for the model to be semantically well formed.

Specifically, there are four categories of semantic constraints used to specify SysML semantics, each dealing with a different kind of relationship.

- Specialization constraints.* These constraints require that Definition or Usage elements of a certain kind directly or indirectly specialize some specific base Definition or Usage from the Kernel Semantic Library or the Systems Model Library. They are the fundamental means for providing semantics to abstract syntax elements in SysML. Specialization constraints always have the word Specialization in their name. For example, checkPartDefinitionSpecialization requires that a PartDefinition directly or indirectly specialize the PartDefinition Parts::Part from the Systems Model Library.

2. *Redefinition constraints.* These constraints require that certain Usages in a model have Redefinition relationships with certain other Usages (or KerML Features) in the model. While Redefinitions are kinds of Specializations, redefinition constraints differ from the specialization constraints described above because of the specific semantics of redefinition. Redefinition constraints always have the word Redefinition in their name. For example, checkRenderingUsageRedefinition requires a Redefinition on a RenderingUsage used to specify a viewRendering.
3. *Type-featuring constraints.* These constraints require that certain Usages in a model have TypeFeaturing relationships with certain other Definitions or Usages in the model. The SysML specification includes only one constraint in this category, checkOccurrenceUsageFeatureTyping, which applies to OccurrenceUsages modeling time slices or snapshots. However, various type-featuring constraints from KerML also apply to corresponding SysML constructs. For instance, the KerML checkConnectorTypeFeaturing also applies to SysML ConnectionUsages.
4. *Binding-connector constraints.* These constraints require that BindingConnectors exist between certain Features in a model. For example, checkSatisfyRequirementUsageBindingConnector requires that the satisfyingFeature of a SatisfyRequirementUsage be bound to the subject of the SatisfyRequirementUsage. (In a SysML model, it is allowable for binding-connector constraints to be satisfied by SysML BindingConnectorAsUsages, rather than plain KerML BindingConnectors.)

A SysML model parsed from the textual or graphical concrete syntax (see [8.2](#)) or obtained through model interchange (see [KerML, Clause 10]) will not necessarily meet the semantic constraints specified for the abstract syntax. In this case, a tool may insert certain implied Relationships into the model in order to meet the semantic constraints. In all cases, the semantics of a model are only defined if it meets all semantic and validation constraints (see [8.3.1](#)).

For specialization constraints applying to Definitions, the implied Relationship is a Subclassification, as given in [Table 32](#). For specialization constraints applying to Usages, the implied Relationship is a Subsetting, as given in [Table 31](#). For redefinition, type-featuring and binding-connector constraints, the implied Relationship is a Redefinition, TypeFeaturing, or BindingConnector, as given in [Table 30](#). Note that an implied Relationship should only be added if the constraint would actually be violated otherwise. For the detailed conditions on when a constraint applies, see its specification in the abstract syntax model ([8.3](#)).

When including implied Relationships for specialization constraints, it is possible that multiple such constraints may apply to a single Element. For example, a PartDefinition is a kind of ItemDefinition, which is a kind of OccurrenceDefinition, and there are specialization constraints for all three of these metaclasses, with corresponding implied Subclassification Relationships. However, simply including all three implied Subclassification would be redundant, because the Subclassification implied by the checkPartDefinitionSpecialization constraint will also automatically satisfy the checkItemDefinitionSpecialization and checkOccurrenceDefinitionSpecialization constraints.

Therefore, in order to avoid redundant Relationships, a tool should observe the following rules when selecting which Specializations to actually include for a certain constrained Element, out of the set of those implied by all specialization constraints applicable to the Element:

1. If there is any ownedSpecialization or other implied Specialization whose general Type is a direct or indirect subtype of (but not the same as) the general Type of an implied Specialization, or if there is an ownedSpecialization with the same general Type, then that implied Specialization should *not* be included.
2. If there are two implied Specializations with the same general Type, then only one should be included.

Note that the above rules do *not* apply to Redefinitions implied by redefinition constraints, because Redefinition relationships have semantics beyond just basic Specialization.

The following subclauses specify the semantics for each syntactic area of SysML in terms of the semantic constraints that must be satisfied for various Elements, the pattern of Relationships these imply, and the model

constraints then require that each variant Usage directly or indirectly specialize its owning variation Definition or Usage.

Thus, a variation Definition of the form

```
variation part def P {  
    variant part p1;  
    variant part p2;  
    ...  
}
```

has, with implied Relationships included, the equivalent kernel semantics of

```
// KerML  
class P specializes Parts::Part {  
    member feature p1 : P subsets Parts::parts;  
    member feature p2 : P subsets Parts::parts;  
    ...  
}
```

Note that VariantMemberships are OwningMemberships but *not* FeatureMemberships, so variant Usages are ownedMembers but *not* ownedFeatures of the variation Definition. Similarly, a Usage of the form

```
variation part p {  
    variant part p1;  
    variant part p2;  
    ...  
}
```

has, with implied Relationships included, the equivalent kernel semantics of

```
// KerML  
feature p subsets Parts::parts {  
    member feature p1 subsets p;  
    member feature p2 subsets p;  
    ...  
}
```

(PartDefinition and PartUsage are used in the examples above for concreteness, but the variation semantics are similar for any kind of Definition or Usage *other than* EnumerationDefinition or EnumerationUsage.)

In addition, the allowable instances of a variation Definition or Usage shall be restricted to values of its corresponding owned variant Usages. This is the fundamental intent of enumerating the variants in the variation declaration. Since a variation enumerates in this way a fixed set of allowed variants, it is not valid for a variation to specialize another variation, since this would imply an inconsistent subsetting of the allowed instances in the specialized Definition or Usage.

Note. The semantic restriction on the instances of a variation is not currently formally captured in the *Systems* semantic model. However, it is required to be enforced by any semantically conformant tool for variability modeling.

8.4.3 Attributes Semantics

Abstract syntax reference: [8.3.7](#)

library Elements that are reused to support this. For compactness, the textual notation is used in these subclauses to present model snippets to illustrate the semantic patterns being discussed. However, it should be understood that, like the semantic constraints themselves, these semantic patterns are actually defined on the abstract syntax representation of a model, independent of its textual or graphical concrete syntax representation.

8.4.2 Definition and Usage Semantics

Abstract syntax reference: [8.3.6](#)

8.4.2.1 Definitions

A SysML Definition has the semantics of a KerML Classifier (see [KerML, 8.4.3.3]). However, a Definition element is always either instantiated as one of its more specific subclasses (e.g., AttributeDefinition, ItemDefinition, etc.), or with at least one semantic metadata annotation. In the former case, the Definition has the semantics of the more specialize kind. In the latter case it has semantics as given by the base Type(s) from the annotation(s) (see [8.4.22](#)).

8.4.2.2 Usages

A SysML Usage has the semantics of a KerML Feature (see [KerML, 8.4.3.4]). However, a Usage element is always either instantiated as on of its mode specific subclasses (e.g., AttributeUsage, ItemUsage, etc.), or with at least one semantic metadata annotation. In the former case, the Usage has the semantics of the more specialized kind, except that a ReferenceUsage has no additional semantics. In the latter case it has semantics as given by the base Type(s) from the annotation(s) (see [8.4.22](#)).

8.4.2.3 Variation Definitions and Usages

A Definition or Usage with `isVariation = true` has additional semantic restrictions. In this case, the `validateDefinitionVariationMembership` and `validateUsageVariationMembership` constraints require that all the `ownedMembers` of the Definition or Usage be variant Usages. The `checkUsageVariationDefinitionSpecialization` and `checkUsageVariationUsageSpecialization` constraints then require that each variant Usage directly or indirectly specialize its owning variation Definition or Usage.

Thus, a variation Definition of the form

```
variation part def P {  
    variant part p1;  
    variant part p2;  
    ...  
}
```

has, with implied Relationships included, the equivalent kernel semantics of

```
// KerML  
class P specializes Parts::Part {  
    member feature p1 : P subsets Parts::parts;  
    member feature p2 : P subsets Parts::parts;  
    ...  
}
```

Note that VariantMemberships are OwningMemberships but *not* FeatureMemberships, so variant Usages are ownedMembers but *not* ownedFeatures of the variation Definition. Similarly, a Usage of the form

```
variation part p {  
    variant part p1;  
    variant part p2;
```

8.4.3.1 Attribute Definitions

An AttributeDefinition is a kind of Definition and a kind of KerML DataType. The base AttributeDefinition *Attributes::AttributeValue* (see [9.2.2.1](#)) is just an alias for the KerML DataType *Base::DataValue* (see [KerML, 9.2.2]). Therefore, SysML AttributeDefinitions have the same semantics as KerML DataTypes (see [KerML, 8.4.4.2]), and the KerML checkDataTypeSpecialization constraint requires that an AttributeDefinition specialize *Base::DataValue*. An AttributeDefinition is also syntactically restricted by the validateAttributeDefinitionFeatures constraint to have no composite features.

```
attribute def D1 specializes Base::DataValue {
    ref a subsets Base::things;
}
```

As specified in the Kernel Semantic Library, *DataValue* is disjoint from *Occurrence*, which is the base Type of SysML OccurrenceDefinitions (see [8.4.5](#)). This means that an AttributeDefinition cannot specialize an OccurrenceDefinition (or any of its more specialized kinds, such as ItemDefinition, ActionDefinition and ConstraintDefinition).

8.4.3.2 Attribute Usages

An AttributeUsage is a kind of Usage that is syntactically required to be defined only by DataTypes (including AttributeDefinitions). The base AttributeUsage *Attributes::attributeValues* (see [9.2.2.2](#)) is an alias for the KerML Feature *Base::dataValues* (see [KerML, 9.2.2]). The checkAttributeUsageDataTypeSpecialization constraint requires that an AttributeUsage specialize *Base::dataValues*, which is typed by *Base::DataValue*. AttributeUsages are also syntactically restricted by the validateAttributeUsageIsReference to be referential (non-composite) and, by the validateAttributeUsageFeatures constraint to have no composite features.

```
attribute def D2 specializes Base::DataValue {
    ref attribute a : ScalarValue::String subsets Base::dataValues;
}
ref attribute d : D2 subsets Base::dataValues {
    ref attribute b subsets a;
}
```

8.4.4 Enumerations Semantics

Abstract syntax reference: [8.3.8](#)

An EnumerationDefinition is a kind of AttributeDefinition, so the semantic constraints for KerML DataTypes apply to it, as for an AttributeDefinition (see [8.4.3](#)). However, an EnumerationDefinition is also required to have *isVariation* = true, and its *enumeratedValues* are then just its variants (see [8.4.2.3](#) on the semantics of variation Definitions). Therefore, an EnumerationDefinition of the form

```
enum def E {
    enum e1;
    enum e2;
    ...
}
```

is essentially equivalent to

```
variation attribute def E specializes Base::DataValue {
    variant attribute e1 : E subsets Base::dataValues;
```

```
    ...
}
```

has, with implied Relationships included, the equivalent kernel semantics of

```
// KerML
feature p subsets Parts::parts {
    member feature p1 subsets p;
    member feature p2 subsets p;
    ...
}
```

(PartDefinition and PartUsage are used in the examples above for concreteness, but the variation semantics are similar for any kind of Definition or Usage other than EnumerationDefinition or EnumerationUsage.)

In addition, the allowable instances of a variation Definition or Usage shall be restricted to values of its corresponding owned variant Usages. This is the fundamental intent of enumerating the variants in the variation declaration. Since a variation enumerates in this way a fixed set of allowed variants, it is not valid for a variation to specialize another variation, since this would imply an inconsistent subsetting of the allowed instances in the specialized Definition or Usage.

Note. The semantic restriction on the instances of a variation is not currently formally captured in the *Systems* semantic model. However, it is required to be enforced by any semantically conformant tool for variability modeling.

8.4.3 Attributes Semantics

Abstract syntax reference: [8.3.7](#)

8.4.3.1 Attribute Definitions

An AttributeDefinition is a kind of Definition and a kind of KerML DataType. The base AttributeDefinition *Attributes::AttributeValue* (see [9.2.2.2.1](#)) is just an alias for the KerML DataType *Base::DataValue* (see [KerML, 9.2.2]). Therefore, SysML AttributeDefinitions have the same semantics as KerML DataTypes (see [KerML, 8.4.4.2]), and the KerML checkDataTypeSpecialization constraint requires that an AttributeDefinition specialize *Base::DataValue*. An AttributeDefinition is also syntactically restricted by the validateAttributeDefinitionFeatures constraint to have no composite features.

```
attribute def D1 specializes Base::DataValue {
    ref a subsets Base::things;
}
```

As specified in the Kernel Semantic Library, *DataValue* is disjoint from *Occurrence*, which is the base Type of SysML OccurrenceDefinitions (see [8.4.5](#)). This means that an AttributeDefinition cannot specialize an OccurrenceDefinition (or any of its more specialized kinds, such as ItemDefinition, ActionDefinition and ConstraintDefinition).

8.4.3.2 Attribute Usages

An AttributeUsage is a kind of Usage that is syntactically required to be defined only by DataTypes (including AttributeDefinitions). The base AttributeUsage *Attributes::attributeValues* (see [9.2.2.2.2](#)) is an alias for the KerML Feature *Base::dataValues* (see [KerML, 9.2.2]). The checkAttributeUsageDataTypeSpecialization constraint requires that an AttributeUsage specialize *Base::dataValues*, which is typed by *Base::DataValue*. AttributeUsages are also syntactically restricted by the validateAttributeUsageIsReference to be referential (non-composite) and, by the validateAttributeUsageFeatures constraint to have no composite features.

```

variant attribute e2 : E subsets Base::dataValues;
...
}

```

Note, in particular, that this means that the `enumeratedValues` are *not* features of the containing `EnumeratedDefinition` but, rather, members owned via `VariantMemberships`. However, other than when nested in an `EnumerationDefinition`, an `EnumerationUsage` is semantically just an `AttributeUsage` that is required to be typed by exactly one `EnumerationDefinition` (syntactically enforced by the 1..1 multiplicity of `EnumerationUsage::enumerationDefinition`, see [8.3.8](#)).

Since an `EnumerationDefinition` is already a variation, there is no further concept of a "variation enumeration". Also, since, in general, a variation cannot specialize another variation (as discussed in [8.4.2.3](#)), an `EnumerationDefinition` cannot specialize another `EnumerationDefinition`.

8.4.5 Occurrences Semantics

Abstract syntax reference: [8.3.9](#)

8.4.5.1 Occurrence Definitions

An `OccurrenceDefinition` is a kind of `Definition` and a kind of `KerML Class`. The kernel `checkClassSpecialization` constraint requires that it specialize the base `Class Occurrences::Occurrence` from the Kernel Semantic Library (see [KerML, 9.2.4]). Therefore, SysML `OccurrenceDefinitions` have the same basic semantics as KerML `classes` (see [KerML, 8.4.4.3]). However, there are additional semantic constraints on an `OccurrenceDefinition` if it has `isIndividual = true` (see below). The `Class Occurrences::Occurrence` is disjoint with `Base::DataValues`, the base Type for `AttributeDefinitions` (see [8.4.3](#)), so an `OccurrenceDefinition` cannot specialize an `AttributeDefinition`.

If an `OccurrenceDefinition` has `isIndividual = true`, then the `validateOccurrenceDefinitionLifeClass` constraint requires that it have a single `ownedMember` that is a `LifeClass`. The following constraints apply to `LifeClass`:

- `checkLifeClassLifeSpecialization` requires that it specialize the `Class Life` from the Kernel Semantic Library `Occurrences` (see [KerML, 9.2.4]).
- `checkLifeClassOccurrenceSpecialization` requires that it specialize its owning `OccurrenceDefinition`.
- `checkLifeClassMultiplicitySpecialization` requires that it have multiplicity `zeroOrOne`.
- `validateLifeClassIsSufficient` requires that it have `isSufficient = true`.

Thus, an `OccurrenceDefinition` declaration of the form

```
individual occurrence def Ind;
```

has the equivalent kernel semantics of

```

// KerML
class Ind specializes Occurrences::Occurrence {
    class all Life specializes Occurrences::Life, Ind {
        multiplicity subsets Base::zeroOrOne;
    }
}

```

The Kernel Semantic Library `Class Life` classifies all `Occurrences` that are *maximal portions*, that is, those `Occurrences` that are not a portion of any other `Occurrence`. Every `Occurrence` is a portion of some `Life`

```

attribute def D2 specializes Base::DataValue {
    ref attribute a : ScalarValue::String subsets Base::dataValues;
}
ref attribute d : D2 subsets Base::dataValues {
    ref attribute b subsets a;
}

```

8.4.4 Enumerations Semantics

Abstract syntax reference: [8.3.8](#)

An EnumerationDefinition is a kind of AttributeDefinition, so the semantic constraints for KerML DataTypes apply to it, as for an AttributeDefinition (see [8.4.3](#)). However, an EnumerationDefinition is also required to have `isVariation = true`, and its `enumeratedValues` are then just its variants (see [8.4.2.3](#) on the semantics of variation Definitions). Therefore, an EnumerationDefinition of the form

```

enum def E {
    enum e1;
    enum e2;
    ...
}

```

is essentially equivalent to

```

variation attribute def E specializes Base::DataValue {
    variant attribute e1 : E subsets Base::dataValues;
    variant attribute e2 : E subsets Base::dataValues;
    ...
}

```

Note, in particular, that this means that the `enumeratedValues` are *not* features of the containing EnumerationDefinition but, rather, members owned via VariantMemberships. However, other than when nested in an EnumerationDefinition, an EnumerationUsage is semantically just an AttributeUsage that is required to be typed by exactly one EnumerationDefinition (syntactically enforced by the 1..1 multiplicity of `EnumerationUsage::enumerationDefinition`, see [8.3.8](#)).

Since an EnumerationDefinition is already a variation, there is no further concept of a "variation enumeration". Also, since, in general, a variation cannot specialize another variation (as discussed in [8.4.2.3](#)), an EnumerationDefinition cannot specialize another EnumerationDefinition.

8.4.5 Occurrences Semantics

Abstract syntax reference: [8.3.9](#)

8.4.5.1 Occurrence Definitions

An OccurrenceDefinition is a kind of Definition and a kind of KerML Class. The kernel `checkClassSpecialization` constraint requires that it specialize the base Class `Occurrences::Occurrence` from the Kernel Semantic Library (see [KerML, 9.2.4]). Therefore, SysML OccurrenceDefinitions have the same basic semantics as KerML Classes (see [KerML, 8.4.4.3]). However, there are additional semantic constraints on an OccurrenceDefinition if it has `isIndividual = true` (see below). The Class `Occurrences::Occurrence` is disjoint with `Base::DataValues`, the base Type for AttributeDefinitions (see [8.4.3](#)), so an OccurrenceDefinition cannot specialize an AttributeDefinition.

If an OccurrenceDefinition has `isIndividual = true`, then the `validateOccurrenceDefinitionLifeClass` constraint requires that it have a single `ownedMember` that is a LifeClass. The following constraints apply to LifeClass:

(possibly itself), as given by the value of its `portionOfLife` feature (see [KerML, 9.2.4]). An *individual Occurrence* is modeled as the subclass that includes a single `Life` and all possible portions (in time and space) of that `Life`. Colloquially, a `Life` represents the "identity" of an individual and the totality of its existence in space and time.

The required Specializations and sufficiency of a `LifeClass` mean that it is the subclass of all `Lives` that are also instances of the owning `OccurrenceDefinition`. The `zeroOrOne` multiplicity of the `LifeClass` then asserts that the `LifeClass` has at most a single instance, meaning that there is at most one instance of the owning `OccurrenceDefinition` that is a `Life`. If this instance exists, then all other instances of the `OccurrenceDefinition` will be portions of it, and the `OccurrenceDefinition` will then model exactly a single individual, as described above. If the instance does not exist, then the extent of `OccurrenceDefinition` will be empty, meaning no such individual exists. (The optional multiplicity on a `LifeClass` thus provides for the ability to model counterfactual situations in which a certain individual is asserted *not* to exist.)

8.4.5.2 Occurrence Usages

An `OccurrenceUsage` is a kind of `Usage` that is syntactically required to be defined only by `Classes` (including `OccurrenceDefinitions`). The following specialization constraints apply to an `OccurrenceUsage`:

- `checkOccurrenceUsageSpecialization` requires that it specialize the Feature `Occurrences::occurrences` from the Kernel Model Library (see [KerML, 9.2.4]), which is typed by `Occurrences::Occurrence`.
- `checkOccurrenceUsageSuboccurrenceSpecialization` requires that, if the `OccurrenceUsage` is composite (non-referential) and owned by an `OccurrenceDefinition` or `OccurrenceUsage`, it specialize the Feature `Occurrences::Occurrence::suboccurrences` (see [KerML, 9.2.4]), which subsets `Occurrences::occurrences`.

```
occurrence def Occ specializes Occurrences::Occurrence {
    ref occurrence a subsets Occurrences::occurrences;
    occurrence b subsets Occurrences::Occurrence::suboccurrences;
}
```

An `OccurrenceUsage` that has an `occurrenceDefinition` with `isIndividual = true` represents a usage of the individual modeled by that `OccurrenceDefinition` (or possibly a time slice or snapshot of it, see below). This is constrained as follows:

- `validateOccurrenceUsageIndividualDefinition` requires that an `OccurrenceUsage` have at most one such `occurrenceDefinition` that has `isIndividual = true`.
- `validateOccurrenceUsageIsIndividual` requires that, if the `OccurrenceUsage` has `isIndividual = true`, it have *exactly* one such `occurrenceDefinition` (which will then be the value of its `individualDefinition` property).

If an `OccurrenceUsage` has a non-null `portionKind`, then it is also required to have a `portioningFeature` with the same `portionKind`. The following semantic constraints apply to a `PortioningFeature`:

- `checkPortioningFeatureSpecialization` requires that it specialize each of the `occurrenceDefinitions` of its owning `OccurrenceUsage`.
- `checkPortioningFeatureRedefinition` requires that, if that, if `portionKind = timeslice`, the `PortioningFeature` redefine the Feature `Occurrences::Occurrence::timeSliceOf` and, if `portionKind = snapshot`, it redefine the Feature `Occurrences::Occurrence::snapshotOf`, both from the Kernel Semantic Library model for `Occurrences` (see [KerML, 9.2.4]).
- `checkPortioningFeatureMultiplicitySpecialization` requires that it have multiplicity `exactlyOne`.

- `checkLifeClassLifeSpecialization` requires that it specialize the Class `Life` from the Kernel Semantic Library `Occurrences` (see [KerML, 9.2.4]).
- `checkLifeClassOccurrenceSpecialization` requires that it specialize its owning `OccurrenceDefinition`.
- `checkLifeClassMultiplicitySpecialization` requires that it have multiplicity `zeroOrOne`.
- `validateLifeClassIsSufficient` requires that it have `isSufficient = true`.

Thus, an `OccurrenceDefinition` declaration of the form

```
individual occurrence def Ind;
```

has the equivalent kernel semantics of

```
// KerML
class Ind specializes Occurrences::Occurrence {
    class all Life specializes Occurrences::Life, Ind {
        multiplicity subsets Base::zeroOrOne;
    }
}
```

The Kernel Semantic Library Class `Life` classifies all `Occurrences` that are *maximal portions*, that is, those `Occurrences` that are not a portion of any other `Occurrence`. Every `Occurrence` is a portion of some `Life` (possibly itself), as given by the value of its `portionOfLife` feature (see [KerML, 9.2.4]). An *individual occurrence* is modeled as the subclass that includes a single `Life` and all possible portions (in time and space) of that `Life`. Colloquially, a `Life` represents the "identity" of an individual and the totality of its existence in space and time.

The required Specializations and sufficiency of a `LifeClass` mean that it is the subclass of all `Lives` that are also instances of the owning `OccurrenceDefinition`. The `zeroOrOne` multiplicity of the `LifeClass` then asserts that the `LifeClass` has at most a single instance, meaning that there is at most one instance of the owning `OccurrenceDefinition` that is a `Life`. If this instance exists, then all other instances of the `OccurrenceDefinition` will be portions of it, and the `OccurrenceDefinition` will then model exactly a single individual, as described above. If the instance does not exist, then the extent of `OccurrenceDefinition` will be empty, meaning no such individual exists. (The optional multiplicity on a `LifeClass` thus provides for the ability to model counterfactual situations in which a certain individual is asserted *not* to exist.)

8.4.5.2 Occurrence Usages

An `OccurrenceUsage` is a kind of `Usage` that is syntactically required to be defined only by `Classes` (including `OccurrenceDefinitions`). The following specialization constraints apply to an `OccurrenceUsage`:

- `checkOccurrenceUsageSpecialization` requires that it specialize the Feature `Occurrences::occurrences` from the Kernel Model Library (see [KerML, 9.2.4]), which is typed by `Occurrences::Occurrence`.
- `checkOccurrenceUsageSuboccurrenceSpecialization` requires that, if the `OccurrenceUsage` is composite (non-referential) and owned by an `OccurrenceDefinition` or `OccurrenceUsage`, it specialize the Feature `Occurrences::Occurrence::suboccurrences` (see [KerML, 9.2.4]), which subsets `Occurrences::occurrences`.

```
occurrence def Occ specializes Occurrences::Occurrence {
    ref occurrence a subsets Occurrences::occurrences;
    occurrence b subsets Occurrences::Occurrence::suboccurrences;
}
```

An `OccurrenceUsage` that has an `occurrenceDefinition` with `isIndividual = true` represents a usage of the individual modeled by that `OccurrenceDefinition` (or possibly a time slice or snapshot of it, see below). This is constrained as follows:

Thus, the time slice and snapshot declarations

```
timeslice occurrence t : Occ;
snapshot occurrence s : Occ;
```

have, with implied Relationships included, the equivalent kernel semantics of

```
// KerML
feature t : Occ subsets Occurrences::occurrences {
    // Portioning feature
    feature redefines Occurrences::Occurrence::timeSliceOf : Occ {
        multiplicity subsets Base::exactlyOne;
    }
}
feature s : Occ subsets Occurrences::occurrences {
    // Portioning feature
    feature redefines Occurrences::Occurrence::snapshotOf : Occ {
        multiplicity subsets Base::exactlyOne;
    }
}
```

In the semantic model for *Occurrence*, the Features *timeSliceOf* and *snapshotOf* are the inverses of the Features *timeSlices* and *snapshots*, respectively. The portioningFeatures for *t* and *s*, above, therefore, require that each value of *t* or *s* be one of the *timeSlices* or *snapshots* of an instance of the defining *OccurrenceDefinition* *Occ*.

8.4.5.3 Event Occurrence Usages

An *EventOccurrenceUsage* is a kind of *OccurrenceUsage* that is required to always be referential by the *validateEventOccurrenceUsageIsReference*. All general semantic constraints on an *OccurrenceUsage* (see [8.4.5.2](#)) also apply to an *EventOccurrenceUsage*. In addition, if an *EventOccurrenceUsage* is an ownedFeature of an *OccurrenceDefinition* or *OccurrenceUsage*, then the *checkEventOccurrenceUsageSpecialization* constraint requires that it specialize the kernel Feature *Occurrences::Occurrence::timeEnclosedOccurrences* (see [KerML, 9.2.4]). In this case, any *Occurrence* referenced by the *EventOccurrenceUsage* must happen within the lifetime of the featuring *Occurrence* of the *EventOccurrenceUsage*.

For example, the following model:

```
occurrence occ1;
occurrence occ2 {
    event occurrence evt references occ1;
    // Other than having a name, the above is equivalent to
    // event occ1;
}
```

is, with implied Relationships included, semantically equivalent to

```
occurrence occ1 subsets Occurrences::occurrences;
occurrence occ2 subsets Occurrences::occurrences {
    ref occurrence evt references occ1
    subsets Occurrences::Occurrence::timeEnclosedOccurrences;
}
```

Thus, the values of *occ2.evt* will be some subset of the *Occurrences* represented by *occ1* that happen within the lifetime of *occ2*.

- validateOccurrenceUsageIndividualDefinition requires that an OccurrenceUsage have at most one such occurrenceDefinition that has isIndividual = true.
- validateOccurrenceUsageIsIndividual requires that, if the OccurrenceUsage has isIndividual = true, it have *exactly* one such occurrenceDefinition (which will then be the value of its individualDefinition property).

If an OccurrenceUsage has a non-null portionKind, then it is also required to have a portioningFeature with the same portionKind. The following semantic constraints apply to a PortioningFeature:

- checkPortioningFeatureSpecialization requires that it specialize each of the occurrenceDefinitions of its owning OccurrenceUsage.
- checkPortioningFeatureRedefinition requires that, if that, if portionKind = timeslice, the PortioningFeature redefine the Feature Occurrences::Occurrence::timeSliceOf and, if portionKind = snapshot, it redefine the Feature Occurrences::Occurrence::snapshotOf, both from the Kernel Semantic Library model for Occurrences (see [KerML, 9.2.4]).
- checkPortioningFeatureMultiplicitySpecialization requires that it have multiplicity exactlyOne.

Thus, the time slice and snapshot declarations

```
timeslice occurrence t : Occ;
snapshot occurrence s : Occ;
```

have, with implied Relationships included, the equivalent kernel semantics of

```
// KerML
feature t : Occ subsets Occurrences::occurrences {
    // Portioning feature
    feature redefines Occurrences::Occurrence::timeSliceOf : Occ {
        multiplicity subsets Base::exactlyOne;
    }
}
feature s : Occ subsets Occurrences::occurrences {
    // Portioning feature
    feature redefines Occurrences::Occurrence::snapshotOf : Occ {
        multiplicity subsets Base::exactlyOne;
    }
}
```

In the semantic model for Occurrence, the Features *timeSliceOf* and *snapshotOf* are the inverses of the Features *timeSlices* and *snapshots*, respectively. The portioningFeatures for *t* and *s*, above, therefore, require that each value of *t* or *s* be one of the *timeSlices* or *snapshots* of an instance of the defining OccurrenceDefinition *Occ*.

8.4.5.3 Event Occurrence Usages

An EventOccurrenceUsage is a kind of OccurrenceUsage that is required to always be referential by the validateEventOccurrenceUsageIsReference. All general semantic constraints on an OccurrenceUsage (see [8.4.5.2](#)) also apply to an EventOccurrenceUsage. In addition, if an EventOccurrenceUsage is an ownedFeature of an OccurrenceDefinition or OccurrenceUsage, then the checkEventOccurrenceUsageSpecialization constraint requires that it specialize the kernel Feature Occurrences::Occurrence::timeEnclosedOccurrences (see [KerML, 9.2.4]). In this case, any Occurrence referenced by the EventOccurrenceUsage must happen within the lifetime of the featuring Occurrence of the EventOccurrenceUsage.

For example, the following model:

An `EventOccurrenceUsage` that is *not* an `ownedFeature` of an `OccurrenceDefinition` or `OccurrenceUsage` has the same semantics as a referential `OccurrenceUsage` (see [8.4.5.2](#)).

8.4.6 Items Semantics

Abstract syntax reference: [8.3.10](#)

8.4.6.1 Item Definitions

An `ItemDefinition` is a kind of `OccurrenceDefinition` and a kind of KerML Structure. As such, all the general semantic constraints for an `OccurrenceDefinition` (see [8.4.5](#)) and a `Structure` (see [KerML, 8.4.4.4]) also apply to an `ItemDefinition`. In addition, the `checkItemDefinitionSpecialization` constraint requires that an `ItemDefinition` specialize the base `ItemDefinition` `Items::Item` (see [9.2.3.2.1](#)), which subclassifies the kernel class `Objects::Object` (see [KerML, 9.2.5]).

The `Item` semantic model also includes additional features whose semantics is covered in other subclauses:

- `subparts` – A subset of `subitems` and `Parts::parts` that collects the values of all composite `PartUsages` featured by an `Item`. Covered under Parts Semantics (see [8.4.7](#)).
- `checkedConstraints` – A subset of `Constraints::constraintChecks` and `Object::ownedPerformances` that collects all checks of composite `ConstraintUsages` featured by an `Item`. Covered under Constraints Semantics (see [8.4.15](#)).

8.4.6.2 Item Usages

An `ItemUsage` is a kind of `OccurrenceUsage`. As such, all the general semantic constraints for an `OccurrenceUsage` (see [8.4.5](#)) also apply to an `ItemUsage`. The following additional specialization constraints also apply to an `ItemUsage`:

- `checkItemUsageSpecialization` requires that an `ItemUsage` specialize the base `ItemUsage` `Items::items` (see [9.2.3.2.2](#)), which subsets the Kernel Feature `Objects::objects` (see [KerML, 9.2.5]).
- `checkItemUsageSubitemSpecialization` requires that an `ItemUsage` that is composite and has an `owningType` that is an `ItemDefinition` or `ItemUsage` specialize the `ItemUsage` `Items::Item::subitems` (see [9.2.3.2.1](#)), which subsets `Objects::Objects::subobjects` (see [KerML, 9.2.5]) and `Items::items`.

```
item def I specializes Items::Item {  
    ref item a subsets Items::items;  
    item b subsets Items::Item::subitems;  
}
```

As a kind of `Object`, an `Item` may have a physical extent in three-dimensional space as well as existing over time. The semantic model for an `Item` contains a number of specializations of the kernel spatial model (see [KerML, 9.2.4 and 9.2.5]), including the features `shape`, `envelopingShapes`, `boundingShapes`, `voids`, and `isSolid` (see [9.2.3.2.1](#) for details). This provides the basis for the geometric shape model defined in the Geometry Domain Library (see [9.7](#)).

8.4.7 Parts Semantics

Abstract syntax reference: [8.3.11](#)

```

occurrence occ1;
occurrence occ2 {
    event occurrence evt references occ1;
    // Other than having a name, the above is equivalent to
    // event occ1;
}

```

is, with implied Relationships included, semantically equivalent to

```

occurrence occ1 subsets Occurrences::occurrences;
occurrence occ2 subsets Occurrences::occurrences {
    ref occurrence evt references occ1
    subsets Occurrences::Occurrence::timeEnclosedOccurrences;
}

```

Thus, the values of `occ2.evt` will be some subset of the `Occurrences` represented by `occ1` that happen within the lifetime of `occ2`.

An `EventOccurrenceUsage` that is *not* an `ownedFeature` of an `OccurrenceDefinition` or `OccurrenceUsage` has the same semantics as a referential `OccurrenceUsage` (see [8.4.5.2](#)).

8.4.6 Items Semantics

Abstract syntax reference: [8.3.10](#)

8.4.6.1 Item Definitions

An `ItemDefinition` is a kind of `OccurrenceDefinition` and a kind of KerML Structure. As such, all the general semantic constraints for an `OccurrenceDefinition` (see [8.4.5](#)) and a `Structure` (see [KerML, 8.4.4.4]) also apply to an `ItemDefinition`. In addition, the `checkItemDefinitionSpecialization` constraint requires that an `ItemDefinition` specialize the base `ItemDefinition` `Items::Item` (see [9.2.3.2.1](#)), which subclassifies the kernel class `Objects::Object` (see [KerML, 9.2.5]).

The `Item` semantic model also includes additional features whose semantics is covered in other subclauses:

- `subparts` – A subset of `subitems` and `Parts::parts` that collects the values of all composite `PartUsages` featured by an `Item`. Covered under Parts Semantics (see [8.4.7](#)).
- `checkedConstraints` – A subset of `Constraints::constraintChecks` and `Object::ownedPerformances` that collects all checks of composite `ConstraintUsages` featured by an `Item`. Covered under Constraints Semantics (see [8.4.15](#)).

8.4.6.2 Item Usages

An `ItemUsage` is a kind of `OccurrenceUsage`. As such, all the general semantic constraints for an `OccurrenceUsage` (see [8.4.5](#)) also apply to an `ItemUsage`. The following additional specialization constraints also apply to an `ItemUsage`:

- `checkItemUsageSpecialization` requires that an `ItemUsage` specialize the base `ItemUsage` `Items::items` (see [9.2.3.2.2](#)), which subsets the Kernel Feature `Objects::objects` (see [KerML, 9.2.5]).
- `checkItemUsageSubitemSpecialization` requires that an `ItemUsage` that is composite and has an `owningType` that is an `ItemDefinition` or `ItemUsage` specialize the `ItemUsage` `Items::Item::subitems` (see [9.2.3.2.1](#)), which subsets `Objects::Objects::subobjects` (see [KerML, 9.2.5]) and `Items::items`.

```

item def I specializes Items::Item {
    ref item a subsets Items::items;
}

```

8.4.7.1 Part Definitions

A `PartDefinition` is a kind of `ItemDefinition`. As such, all the general semantic constraints for an `ItemDefinition` (see [8.4.6](#)) also apply to a `PartDefinition`. In addition, the `checkPartDefinitionSpecialization` constraint requires that a `PartDefinition` specialize the base `PartDefinition` `Parts::Part` (see [9.2.4.2.1](#)), which subclassifies `Items::Item` (see [9.2.3.2.1](#)).

The `Part` semantic model also includes additional features whose semantics is covered in other subclauses:

- `ownedPorts` – A subset of `Ports::ports` and `Occurrences::timeEnclosedOccurrences` that collects the values of the `PortUsages` featured by a `Part`. Covered under Ports Semantics (see [8.4.8](#)).
- `performedActions` – A subset of `Actions::actions` and `Objects::enactedPerformances` that collects the values of the `PerformedActionUsages` featured by a `Part`. Covered under Actions Semantics (see [8.4.12](#)).
- `ownedActions` – A subset of `Actions::actions` and `Objects::ownedPerformances` that collects the values of the composite `ActionUsages` featured by a `Part`. Covered under Actions Semantics (see [8.4.12](#)).
- `exhibitedStates` – A subset of `States::stateActions` and `performedActions` that collects the values of the `ExhibitStateUsages` featured by a `Part`. Covered under States Semantics (see [8.4.13](#)).
- `ownedStates` – A subset of `States::stateActions` and `ownedActions` that collects the values of the composite `StateUsages` featured by a `Part`. Covered under States Semantics (see [8.4.13](#)).

8.4.7.2 Part Usages

A `PartUsage` is a kind of `ItemUsage`. As such, all the general semantic constraints for an `ItemUsage` (see [8.4.6](#)) also apply to a `PartUsage`, as well as the following additional specialization constraints:

- `checkPartUsageSpecialization` requires that a `PartUsage` specialize the base `PartUsage` `Parts::parts` (see [9.2.4.2.2](#)).
- `checkPartUsageSubpartSpecialization` requires that a `PartUsage` that is composite and has an `owningType` that is an `ItemDefinition` or `ItemUsage` specialize the `PartUsage` `Items::Item::subparts` (see [9.2.3.2.1](#)), which subsets `Items::Item::subitems` (see [9.2.3.2.1](#)) and `Parts::parts`.

```
part def P specializes Parts::Part {
    ref part a subsets Parts::parts;
    part b subsets Items::Item::subparts;
    item c subsets Items::Item::subitems {
        part p : P subsets Items::Item::subparts;
    }
}
```

- `checkPartUsageActorSpecialization` requires that a `PartUsage` that is owned by a `ActorMembership` specialize either the `PartUsage Requirements::RequirementCheck::actors` (see [9.2.13.2.8](#)) or `Cases::Case::actors` (see [9.2.14.2.1](#)). See also Requirements Semantics ([8.4.16](#)) and Case Semantics (see [8.4.17](#)).
- `checkPartUsageStakeholderSpecialization` requires that a `PartUsage` that is owned by a `StakeholderMembership` specialize the `PartUsage Requirements::RequirementCheck::stakeholders` (see [9.2.13.2.8](#)). See also Requirements Semantics ([8.4.16](#)).

8.4.8 Ports Semantics

Abstract syntax reference: [8.3.12](#)

```

    item b subsets Items::Item::subitems;
}

```

As a kind of *Object*, an *Item* may have a physical extent in three-dimensional space as well as existing over time. The semantic model for an *Item* contains a number of specializations of the kernel spatial model (see [KerML, 9.2.4 and 9.2.5]), including the features *shape*, *envelopingShapes*, *boundingShapes*, *voids*, and *isSolid* (see [9.2.3.2.1](#) for details). This provides the basis for the geometric shape model defined in the Geometry Domain Library (see [9.7](#)).

8.4.7 Parts Semantics

Abstract syntax reference: [8.3.11](#)

8.4.7.1 Part Definitions

A *PartDefinition* is a kind of *ItemDefinition*. As such, all the general semantic constraints for an *ItemDefinition* (see [8.4.6](#)) also apply to a *PartDefinition*. In addition, the *checkPartDefinitionSpecialization* constraint requires that a *PartDefinition* specialize the base *PartDefinition* *Parts::Part* (see [9.2.4.2.1](#)), which subclassifies *Items::Item* (see [9.2.3.2.1](#)).

The *Part* semantic model also includes additional features whose semantics is covered in other subclauses:

- *ownedPorts* – A subset of *Ports::ports* and *Occurrences::timeEnclosedOccurrences* that collects the values of the *PortUsages* featured by a *Part*. Covered under Ports Semantics (see [8.4.8](#)).
- *performedActions* – A subset of *Actions::actions* and *Objects::enactedPerformances* that collects the values of the *PerformedActionUsages* featured by a *Part*. Covered under Actions Semantics (see [8.4.12](#)).
- *ownedActions* – A subset of *Actions::actions* and *Objects::ownedPerformances* that collects the values of the composite *ActionUsages* featured by a *Part*. Covered under Actions Semantics (see [8.4.12](#)).
- *exhibitedStates* – A subset of *States::stateActions* and *performedActions* that collects the values of the *ExhibitStateUsages* featured by a *Part*. Covered under States Semantics (see [8.4.13](#)).
- *ownedStates* – A subset of *States::stateActions* and *ownedActions* that collects the values of the composite *StateUsages* featured by a *Part*. Covered under States Semantics (see [8.4.13](#)).

8.4.7.2 Part Usages

A *PartUsage* is a kind of *ItemUsage*. As such, all the general semantic constraints for an *ItemUsage* (see [8.4.6](#)) also apply to a *PartUsage*, as well as the following additional specialization constraints:

- *checkPartUsageSpecialization* requires that a *PartUsage* specialize the base *PartUsage* *Parts::parts* (see [9.2.4.2.2](#)).
- *checkPartUsageSubpartSpecialization* requires that a *PartUsage* that is composite and has an *owningType* that is an *ItemDefinition* or *ItemUsage* specialize the *PartUsage* *Items::Item::subparts* (see [9.2.3.2.1](#)), which subsets *Items::Item::subitems* (see [9.2.3.2.1](#)) and *Parts::parts*.

```

part def P specializes Parts::Part {
    ref part a subsets Parts::parts;
    part b subsets Items::Item::subparts;
    item c subsets Items::Item::subitems {
        part p : P subsets Items::Item::subparts;
    }
}

```

8.4.8.1 Port Definitions

A `PortDefinition` is a kind of `OccurrenceDefinition` and a kind of `KerML Structure`. As such, all the general semantic constraints for an `OccurrenceDefinition` (see [8.4.5](#)) and a `Structure` (see [KerML, 8.4.4.4]) also apply to a `PortDefinition`. The following additional constraints apply to a `PortDefinition`:

- `checkPortDefinitionSpecialization` requires that a `PortDefinition` specialize the base `PortDefinition Ports::Port` (see [9.2.5.2.1](#)), which subclassifies the kernel Class `Objects::Object` (see [KerML, 9.2.5]).
- `validatePortDefinitionNestedUsagesNotComposite` requires that all `nestedUsages` of the `PortDefinition` that are *not* `PortUsages` are referential (non-composite).

A `PortDefinition` is parsed as containing a `ConjugatedPortDefinition` with a `ConjugatedPortDefinition Relationship` pointing back to the containing `PortDefinition`. A `PortConjugation` is a kind of `KerML Conjugation` and, except for being syntactically restricted to be between a `ConjugatedPortDefinition` and a (non-conjugated) `PortDefinition`, it has the same effect as `Conjugation`. That is, the `ConjugatedPortDefinition` is considered to inherit the features of its `PortDefinition`, but `in` and `out` directions are reversed (see [KerML, 8.3.3.1]).

Thus, a `PortDefinition` declaration of the form

```
port def Pd {
    // Directed features are always referential
    // (ref keyword is optional).
    in ref a;
    out ref b;
    inout ref c;
    ref item d;
}
```

has, with implied Specializations included, the equivalent kernel semantics of

```
// KerML
struct Pd specializes Ports::Port {
    in feature a subsets Base::things;
    out feature b subsets Base::things;
    inout feature c subsets Base::things;
    feature d subsets Items::Item;

    struct '~Pd' conjugates Pd {
        /* Effective conjugated features:
        out feature a subsets Base::things;
        in feature b subsets Base::things;
        inout feature c subsets Base::things;
        feature d subsets Items::Item;
        */
    }
}
```

Note that the `KerML validateSpecificationSpecificNotConjugated` constraint disallows a Type that is conjugated from having an `ownedSpecialization` (see [KerML, 8.3.3.1]). Nevertheless, `~Pd` still satisfies the `checkPortDefinitionSpecialization` constraint because its original `PortDefinition` does.

- `checkPartUsageActorSpecialization` requires that a `PartUsage` that is owned by a `ActorMembership` specialize either the `PartUsage Requirements::RequirementCheck::actors` (see [9.2.13.2.8](#)) or `Cases::Case::actors` (see [9.2.14.2.1](#)). See also Requirements Semantics ([8.4.16](#)) and Case Semantics (see [8.4.17](#)).
- `checkPartUsageStakeholderSpecialization` requires that a `PartUsage` that is owned by a `StakeholderMembership` specialize the `PartUsage Requirements::RequirementCheck::stakeholders` (see [9.2.13.2.8](#)). See also Requirements Semantics ([8.4.16](#)).

8.4.8 Ports Semantics

Abstract syntax reference: [8.3.12](#)

8.4.8.1 Port Definitions

A `PortDefinition` is a kind of `OccurrenceDefinition` and a kind of KerML Structure. As such, all the general semantic constraints for an `OccurrenceDefinition` (see [8.4.5](#)) and a `Structure` (see [KerML, 8.4.4.4]) also apply to a `PortDefinition`. The following additional constraints apply to a `PortDefinition`:

- `checkPortDefinitionSpecialization` requires that a `PortDefinition` specialize the base `PortDefinition Ports::Port` (see [9.2.5.2.1](#)), which subclassifies the kernel Class `Objects::Object` (see [KerML, 9.2.5]).
- `validatePortDefinitionNestedUsagesNotComposite` requires that all `nestedUsages` of the `PortDefinition` that are *not* `PortUsages` are referential (non-composite).

A `PortDefinition` is parsed as containing a `ConjugatedPortDefinition` with a `ConjugatedPortDefinition Relationship` pointing back to the containing `PortDefinition`. A `PortConjugation` is a kind of KerML `Conjugation` and, except for being syntactically restricted to be between a `ConjugatedPortDefinition` and a (non-conjugated) `PortDefinition`, it has the same effect as `Conjugation`. That is, the `ConjugatedPortDefinition` is considered to inherit the features of its `PortDefinition`, but `in` and `out` directions are reversed (see [KerML, 8.3.3.1]).

Thus, a `PortDefinition` declaration of the form

```
port def Pd {
    // Directed features are always referential
    // (ref keyword is optional).
    in ref a;
    out ref b;
    inout ref c;
    ref item d;
}
```

has, with implied Specializations included, the equivalent kernel semantics of

```
// KerML
struct Pd specializes Ports::Port {
    in feature a subsets Base::things;
    out feature b subsets Base::things;
    inout feature c subsets Base::things;
    feature d subsets Items::Item;

    struct '~Pd' conjugates Pd {
        /* Effective conjugated features:
        out feature a subsets Base::things;
        in feature b subsets Base::things;
        inout feature c subsets Base::things;
        feature d subsets Items::Item;
```

8.4.8.2 Port Usages

A `PortUsage` is a kind of `OccurrenceUsage` that is syntactically restricted to be defined only by `PortDefinitions`. As such, all the general semantic constraints for an `OccurrenceUsage` (see [8.4.5](#)) also apply to a `PortUsage`, as well as the following additional constraints:

- `checkPortUsageSpecialization` requires that a `PortUsage` specialize the base `PortUsage Ports::ports` (see [9.2.5.2.2](#)), which subsets the kernel `Feature Objects::objects` (see [KerML, 9.2.5]).
- `checkPortUsageSubportSpecialization` constraint requires that a `PortUsage` that is composite and has an `owningType` that is an `PortDefinition` or `PortUsage` specialize the `PortUsage Ports::Port::subports` (see [9.2.5.2.1](#)), which subsets `Occurrences::Occurrence::timeEnclosedOccurrences` (see [KerML, 9.2.4]) and `Ports::ports`.
- `validatePortUsageNestedUsagesNotComposite` requires that all `nestedUsages` of the `PortUsage` that are *not* `PortUsages` are referential (non-composite).

```
port p : Pd specializes Ports::ports {  
    port p1 subsets Ports::Port::subports;  
    ref port p2 subsets Ports::ports;  
}
```

The following constraints apply to a `PortUsage` that is *not* nested in a `PortDefinition` or `PortUsage`:

- `validatePortUsageIsReference` requires that it is referential (non-composite).
- `checkPortUsageOwnedPortSpecialization` requires that a `PortUsage` has an `owningType` that is a `PartDefinition` or `PartUsage` specialize the `PortUsage Parts::Part::ownedPorts` (see [9.2.4.2.1](#)).

```
part def P specializes Parts::Part {  
    // PortUsages not nested in PortDefinitions or PortUsages  
    // are always referential (ref keyword is optional).  
    ref port p : Pd subsets Parts::Part::ownedPorts;  
}
```

A `PortUsage` may have an `ownedFeatureTyping` that is a `ConjugatedPortTyping`, in which case the type is the `ConjugatedPortDefinition` for the named `PortDefinition` (see [8.2.2.12](#)). Thus, the declaration

```
port p : ~Pd;
```

is equivalent to

```
port p : Pd:'~Pd';
```

8.4.9 Connections Semantics

Abstract Syntax Reference: [8.3.13](#)

8.4.9.1 Connection Definitions

A `ConnectionDefinition` is a kind of `PartDefinition` and a kind of KerML `AssociationStructure`. As such, all the general semantic constraints for a `PartDefinition` (see [8.4.7](#)) and an `AssociationStructure` (see [KerML, 8.4.4.5.2]) also apply to a `ConnectionDefinition`. In addition, the `checkConnectionDefinitionSpecialization` constraint requires that a `ConnectionDefinition` specialize the base `ConnectionDefinition Connections::Connection` (see [9.2.6.2.3](#)), which classifies the

```

    *//      }
}

```

Note that the KerML validateSpecificationSpecificNotConjugated constraint disallows a Type that is conjugated from having an ownedSpecialization (see [KerML, 8.3.3.1]). Nevertheless, $\sim Pd$ still satisfies the checkPortDefinitionSpecialization constraint because its original PortDefinition does.

8.4.8.2 Port Usages

A PortUsage is a kind of OccurrenceUsage that is syntactically restricted to be defined only by PortDefinitions. As such, all the general semantic constraints for an OccurrenceUsage (see [8.4.5](#)) also apply to a PortUsage, as well as the following additional constraints:

- checkPortUsageSpecialization requires that a PortUsage specialize the base PortUsage `Ports::ports` (see [9.2.5.2.2](#)), which subsets the kernel Feature `Objects::objects` (see [KerML, 9.2.5]).
- checkPortUsageSubportSpecialization constraint requires that a PortUsage that is composite and has an owningType that is an PortDefinition or PortUsage specialize the PortUsage `Ports::Port::subports` (see [9.2.5.2.1](#)), which subsets `Occurrences::Occurrence::timeEnclosedOccurrences` (see [KerML, 9.2.4]) and `Ports::ports`.
- validatePortUsageNestedUsagesNotComposite requires that all nestedUsages of the PortUsage that are *not* PortUsages are referential (non-composite).

```

port p : Pd specializes Ports::ports {
    port p1 subsets Ports::Port::subports;
    ref port p2 subsets Ports::ports;
}

```

The following constraints apply to a PortUsage that is *not* nested in a PortDefinition or PortUsage:

- validatePortUsageIsReference requires that it is referential (non-composite).
- checkPortUsageOwnedPortSpecialization requires that a PortUsage has an owningType that is a PartDefinition or PartUsage specialize the PortUsage `Parts::Part::ownedPorts` (see [9.2.4.2.1](#)).

```

part def P specializes Parts::Part {
    // PortUsages not nested in PortDefinitions or PortUsages
    // are always referential (ref keyword is optional).
    ref port p : Pd subsets Parts::Part::ownedPorts;
}

```

A PortUsage may have an ownedFeatureTyping that is a ConjugatedPortTyping, in which case the type is the ConjugatedPortDefinition for the named PortDefinition (see [8.2.2.12](#)). Thus, the declaration

```
port p : ~Pd;
```

is equivalent to

```
port p : Pd:'~Pd';
```

8.4.9 Connections Semantics

Abstract Syntax Reference: [8.3.13](#)

8.4.9.1 Connection Definitions

PartDefinition *Parts*::*Part* (see [9.2.4.2.1](#)) and the kernel AssociationStructure *Objects*::*LinkObject* (see [KerML, 9.2.5]).

A ConnectionDefinition must have at least two connectionEnd Features (unless it is abstract), and it may also have ownedFeatures that are not ends. The checkFeatureEndSpecialization and checkFeatureEndRedefinitionSpecialization constraints apply to the connectionEnds of a ConnectionDefinition. As a result, all connectionEnds must directly or indirectly specialize the kernel Feature *Link*::*participant* and they must redefine the end Features of any Associations specialized by their owning ConnectionDefinition (see [KerML, 8.4.4.5]).

```
connection def C specializes Connections::Connection {
    end ref e1 subsets Links::Link::participant;
    end ref e2 subsets Links::Link::participant;
    end ref e3 subsets Links::Link::participant;
}
connection def D specializes C {
    end ref f1 redefines C::e1;
    end ref f2 redefines C::e2;
    end ref f3 redefines C::e3;
}
```

In addition, there are special rules for the semantics of the multiplicity of end Features (see [KerML, 8.4.4.5]).

The checkConnectionDefinitionBinarySpecialization constraint requires that a binary ConnectionDefinition specialize the ConnectionDefinition *Connections*::*BinaryConnection*, which classifies *Connection* and *Objects*::*BinaryLinkObject* (see [KerML, 9.2.5]), which is a subclassification of *Objects*::*LinkObject* and *Links*::*BinaryLink* (see [KerML, 9.2.3] that restricts a *BinaryConnection* to have exactly two participants corresponding to two ends called *source* and *target*. As required by the checkFeatureEndRedefinition constraint, the first connectionEnd of a binary Association will redefine *Connections*::*BinaryConnection*::*source* and its second connectionEnd will redefine *Connections*::*BinaryConnection*::*target*.

```
connection def B specializes Connections::BinaryConnections {
    end ref e1 redefines Connections::BinaryConnection::source;
    end ref e2 redefines Connections::BinaryConnection::target;
}
```

8.4.9.2 Connection Usages

A ConnectionUsage is a PartUsage and a ConnectorAsUsage, which is a kind of KerML Connector. As such, all the general semantic constraints for a PartUsage (see [8.4.7](#)) and a Connector (see [KerML, 8.4.4.6.1]) also apply to a ConnectionUsage. In addition, the checkConnectionUsageSpecialization constraint requires that a ConnectionUsage specialize the base ConnectionUsage *Connections*::*connections* (see [9.2.6.2.4](#)), which is defined by *Connections*::*Connection* and subsets the PartUsage *Parts*::*parts* (see [9.2.4.2.2](#)) and the kernel Feature *Objects*::*linkObjects* (see [KerML, 9.2.5]). A ConnectionUsage is syntactically restricted to be defined only by AssociationStructures (including ConnectionDefinitions). Further, the checkFeatureEndRedefinition constraint requires that the end Features of a ConnectionUsage redefine of corresponding end Features of its connectionDefinitions (see [KerML, 8.4.4.5]).

```
connection c : C subsets Connections::connections {
    end ref e1 references f1 redefines C::e1;
    end ref e2 references f2 redefines C::e2;
    end ref e3 references f3 redefines C::e1;
}
```

A ConnectionDefinition is a kind of PartDefinition and a kind of KerML AssociationStructure. As such, all the general semantic constraints for a PartDefinition (see [8.4.7](#)) and an AssociationStructure (see [KerML, 8.4.4.5.2]) also apply to a ConnectionDefinition. In addition, the checkConnectionDefinitionSpecialization constraint requires that a ConnectionDefinition specialize the base ConnectionDefinition Connections::Connection (see [9.2.6.2.3](#)), which subclassifies the PartDefinition Parts::Part (see [9.2.4.2.1](#)) and the kernel AssociationStructure Objects::LinkObject (see [KerML, 9.2.5]).

A ConnectionDefinition must have at least two connectionEnd Features (unless it is abstract), and it may also have ownedFeatures that are not ends. The checkFeatureEndSpecialization and checkFeatureEndRedefinitionSpecialization constraints apply to the connectionEnds of a ConnectionDefinition. As a result, all connectionEnds must directly or indirectly specialize the kernel Feature Link::participant and they must redefine the end Features of any Associations specialized by their owning ConnectionDefinition (see [KerML, 8.4.4.5]).

```
connection def C specializes Connections::Connection {
    end ref e1 subsets Links::Link::participant;
    end ref e2 subsets Links::Link::participant;
    end ref e3 subsets Links::Link::participant;
}
connection def D specializes C {
    end ref f1 redefines C::e1;
    end ref f2 redefines C::e2;
    end ref f3 redefines C::e3;
}
```

In addition, there are special rules for the semantics of the multiplicity of end Features (see [KerML, 8.4.4.5]).

The checkConnectionDefinitionBinarySpecialization constraint requires that a binary ConnectionDefinition specialize the ConnectionDefinition Connections::BinaryConnection, which subclassifies Connection and Objects::BinaryLinkObject (see [KerML, 9.2.5]), which is a subclassification of Objects::LinkObject and Links::BinaryLink (see [KerML, 9.2.3] that restricts a BinaryConnection to have exactly two participants corresponding to two ends called *source* and *target*. As required by the checkFeatureEndRedefinition constraint, the first connectionEnd of a binary Association will redefine Connections::BinaryConnection::source and its second connectionEnd will redefine Connections::BinaryConnection::target.

```
connection def B specializes Connections::BinaryConnections {
    end ref e1 redefines Connections::BinaryConnection::source;
    end ref e2 redefines Connections::BinaryConnection::target;
}
```

8.4.9.2 Connection Usages

A ConnectionUsage is a PartUsage and a ConnectorAsUsage, which is a kind of KerML Connector. As such, all the general semantic constraints for a PartUsage (see [8.4.7](#)) and a Connector (see [KerML, 8.4.4.6.1]) also apply to a ConnectionUsage. In addition, the checkConnectionUsageSpecialization constraint requires that a ConnectionUsage specialize the base ConnectionUsage Connections::connections (see [9.2.6.2.4](#)), which is defined by Connections::Connection and subsets the PartUsage Parts::parts (see [9.2.4.2.2](#)) and the kernel Feature Objects::linkObjects (see [KerML, 9.2.5]). A ConnectionUsage is syntactically restricted to be defined only by AssociationStructures (including ConnectionDefinitions). Further, the checkFeatureEndRedefinition constraint requires that the end Features of a ConnectionUsage redefine of corresponding end Features of its connectionDefinitions (see [KerML, 8.4.4.5]).

```
connection c : C subsets Connections::connections {
    end ref e1 references f1 redefines C::e1;
    end ref e2 references f2 redefines C::e2;
```

Note that the `relatedFeatures` of a `ConnectionUsage` are determined by the `referencedFeatures` of its ends. Therefore, unless the `ConnectionUsage` is abstract, every end must have an `ownedReferenceSubsetting`.

The `checkConnectionUsageBinarySpecialization` constraint requires that a binary `ConnectionUsage` specialize the `ConnectionUsage Connections::binaryConnections` (see [9.2.6.2.2](#)), which is defined by `Connections::BinaryConnection` and subsets the `Connections::connections` and the kernel Feature `Objects::binaryLinkObjects` (see [KerML, 9.2.5])

```
connection b : B subsets Connections::binaryConnections {
    end ref source references f1 redefines B::source;
    end ref target references f2 redefines B::target;
}
```

Since a `ConnectionUsage` is a kind of `PartUsage`, the `checkPartUsageSupartSpecialization` constraint requires that a composite `ConnectionUsage` nested in an `ItemDefinition` or `ItemUsage` of any kind specialize the `PartUsage Items::Item::subparts` (see [9.2.3.2.1](#)) as well as `Connections::connections` or `Connections::binaryConnections` (see also [8.4.7.2](#)).

```
part def P specializes Parts::Part {
    part f1 subsets Items::Item::subparts;
    part f2 subsets Items::Item::subparts;
    connector b : B
        subsets Connections::binaryConnections, Items::Items::subparts
        connects f1 to f2;
}
```

8.4.9.3 Binding Connectors As Usages

A `BindingConnectorAsUsage` is a kind of `ConnectorAsUsage` and a kind of KerML `BindingConnector`. As such, all the general semantic constraints for a `Usage` (see [8.4.2](#)) and a `BindingConnector` (see [KerML, 8.4.4.6.2]) also apply to a `BindingConnectorAsUsage`. In particular, the `checkBindingConnectorSpecialization` constraint requires that `BindingConnectorAsUsages` specialize the kernel Feature `Links::selfLink`, which is typed by the Association `SelfLink` (see [KerML, 9.2.3]). A `BindingConnectorAsUsage` therefore has the same basic semantics as a KerML `BindingConnector`, asserting that the (single) values of its two ends must be the same things (see [KerML, 8.4.4.6.2]).

Thus, a `BindingConnectorAsUsage` declaration of the form

```
bind f1 = f2;
```

has, with implied Specializations included, the equivalent kernel semantics of

```
// KerML
connector subsets Links::selfLinks {
    end feature thisThing redefines Links::SelfLink::thisThing references f1;
    end feature thatThing redefines Links::SelfLink::thatThing references f2;
}
```

Note that a `BindingConnectorAsUsage` does *not* have the semantics of a SysML `ConnectionUsage`, because a `ConnectionUsage` must be defined by `AssociationStructures` (see [8.4.9.2](#)), and `Links::selfLink` is an Association but *not* an `AssociationStructure`.

The KerML `checkFeatureValueBindingConnector` constraint requires that a `FeatureValue` with `isDefault = false` have a `BindingConnector` to enforce its semantics (see [KerML, 8.4.4.11]). For a SysML

```

    end ref e3 references f3 redefines C::e1;
}

```

Note that the `relatedFeatures` of a `ConnectionUsage` are determined by the `referencedFeatures` of its ends. Therefore, unless the `ConnectionUsage` is abstract, every `end` must have an `ownedReferenceSubsetting`.

The `checkConnectionUsageBinarySpecialization` constraint requires that a binary `ConnectionUsage` specialize the `ConnectionUsage Connections::binaryConnections` (see [9.2.6.2.2](#)), which is defined by `Connections::BinaryConnection` and subsets the `Connections::connections` and the kernel Feature `Objects::binaryLinkObjects` (see [KerML, 9.2.5])

```

connection b : B subsets Connections::binaryConnections {
    end ref source references f1 redefines B::source;
    end ref target references f2 redefines B::target;
}

```

Since a `ConnectionUsage` is a kind of `PartUsage`, the `checkPartUsageSupartSpecialization` constraint requires that a composite `ConnectionUsage` nested in an `ItemDefinition` or `ItemUsage` of any kind specialize the `PartUsage Items::Item::subparts` (see [9.2.3.2.1](#)) as well as `Connections::connections` or `Connections::binaryConnections` (see also [8.4.7.2](#)).

```

part def P specializes Parts::Part {
    part f1 subsets Items::Item::subparts;
    part f2 subsets Items::Item::subparts;
    connector b : B
        subsets Connections::binaryConnections, Items::Items::subparts
        connects f1 to f2;
}

```

8.4.9.3 Binding Connectors As Usages

A `BindingConnectorAsUsage` is a kind of `ConnectorAsUsage` and a kind of KerML `BindingConnector`. As such, all the general semantic constraints for a `Usage` (see [8.4.2](#)) and a `BindingConnector` (see [KerML, 8.4.4.6.2]) also apply to a `BindingConnectorAsUsage`. In particular, the `checkBindingConnectorSpecialization` constraint requires that `BindingConnectorAsUsages` specialize the kernel Feature `Links::selfLink`, which is typed by the Association `SelfLink` (see [KerML, 9.2.3]). A `BindingConnectorAsUsage` therefore has the same basic semantics as a KerML `BindingConnector`, asserting that the (single) values of its two ends must be the same things (see [KerML, 8.4.4.6.2]).

Thus, a `BindingConnectorAsUsage` declaration of the form

```
bind f1 = f2;
```

has, with implied Specializations included, the equivalent kernel semantics of

```

// KerML
connector subsets Links::selfLinks {
    end feature thisThing redefines Links::SelfLink::thisThing references f1;
    end feature thatThing redefines Links::SelfLink::thatThing references f2;
}

```

Note that a `BindingConnectorAsUsage` does *not* have the semantics of a SysML `ConnectionUsage`, because a `ConnectionUsage` must be defined by `AssociationStructures` (see [8.4.9.2](#)), and `Links::selfLink` is an Association but *not* an `AssociationStructure`.

The KerML `checkFeatureValueBindingConnector` constraint requires that a `FeatureValue` with `isDefault = false` have a `BindingConnector` to enforce its semantics (see [KerML, 8.4.4.11]). For a SysML

model, it is allowable to use a `BindingConnectorAsUsage`, rather than a plain KerML `BindingConnector`, as the implied `Relationship` to satisfy this constraint.

8.4.9.4 Successions As Usages

A `SuccessionAsUsage` is a kind of `ConnectorAsUsage` and a kind of KerML `Succession`. As such, all the general semantic constraints for an `Usage` (see [8.4.2](#)) and a `Succession` (see [KerML, 8.4.4.6.3]) also apply to a `SuccessionAsUsage`. In particular, the `checkSuccessionSpecialization` constraint requires that a `SuccessionAsUsage` specialize the KerML Feature `Occurrences::happensBeforeLinks` (see [KerML, 9.2.4]), which is typed by the Association `HappensBefore`. A `SuccessionAsUsage` therefore has the same basic semantics as a KerML `Succession`, asserting that the `Occurrence` identified by its first end happens temporally before the one identified by its second end.

Thus, a `SuccessionAsUsage` declaration of the form

```
succession first f1 then f2;
```

has, with implied `Specifications` included, the equivalent kernel semantics of

```
// KerML
connector subsets Occurrences::happensBeforeLinks {
    end feature earlierOccurrence references f1
        redefines Occurrences::HappensBefore::earlierOccurrence;
    end feature laterOccurrence references f2
        redefines Occurrences::HappensBefore::laterOccurrence;
}
```

Note that a `SuccessionAsUsage` does *not* have the semantics of a SysML `ConnectionUsage`, because a `ConnectionUsage` must be defined by `AssociationStructures` (see [8.4.9.2](#)), and `Occurrences::HappensBefore` is an Association but *not* an `AssociationStructure`.

8.4.9.5 Flow Connection Definitions

A `FlowConnectionDefinition` is a kind of `ConnectionDefinition`, a kind of `ActionDefinition`, and a kind of KerML `Interaction`. As such, all the general semantic constraints for `ConnectionDefinitions` (see [8.4.9.1](#)), `ActionDefinitions` (see [8.4.12.1](#)), and `Interactions` (see [KerML, 8.4.4.10.1]) also apply to `FlowConnectionDefinitions`. In addition, the `checkFlowConnectionDefinitionSpecialization` constraint requires that a `FlowConnectionDefinition` specialize the base `FlowConnectionDefinition` `Connections::MessageConnection` (see [9.2.6.2.7](#)), which subclassifies the `ConnectionDefinition` `BinaryConnection` (see [9.2.6.2.1](#)) and the `ActionDefinition` `Actions::Action` (see [9.2.9.2.4](#), as well as the kernel `Interaction` `Transfers::Transfer` (see [KerML, 9.2.7]).

A `FlowConnectionDefinition` is always binary, with `source` and `target` ends corresponding to the corresponding ends of `Transfer`. It also inherits `MessageConnection::payload`, which is a redefinition of `Transfer::item`, representing the payload being transferred. These features can be redefined to restrict the allowed type of the ends connected by a flow and the type of the payload transferred across the flow, as desired. Note that the `source` and `target` ends must be kinds of `Occurrences`, but that the `payload` can be anything,

```
flow def M specializes Connections::MessageConnection {
    item i : I redefines MessageConnection::payload;
    end p : P redefines MessageConnection::source;
    end q : Q redefines MessageConnection::target;
}
```

model, it is allowable to use a `BindingConnectorAsUsage`, rather than a plain KerML `BindingConnector`, as the implied `Relationship` to satisfy this constraint.

8.4.9.4 Successions As Usages

A `SuccessionAsUsage` is a kind of `ConnectorAsUsage` and a kind of KerML `Succession`. As such, all the general semantic constraints for an `Usage` (see [8.4.2](#)) and a `Succession` (see [KerML, 8.4.4.6.3]) also apply to a `SuccessionAsUsage`. In particular, the `checkSuccessionSpecialization` constraint requires that a `SuccessionAsUsage` specialize the KerML Feature `Occurrences::happensBeforeLinks` (see [KerML, 9.2.4]), which is typed by the Association `HappensBefore`. A `SuccessionAsUsage` therefore has the same basic semantics as a KerML `Succession`, asserting that the `Occurrence` identified by its first end happens temporally before the one identified by its second end.

Thus, a `SuccessionAsUsage` declaration of the form

```
succession first f1 then f2;
```

has, with implied specifications included, the equivalent kernel semantics of

```
// KerML
connector subsets Occurrences::happensBeforeLinks {
    end feature earlierOccurrence references f1
        redefines Occurrences::HappensBefore::earlierOccurrence;
    end feature laterOccurrence references f2
        redefines Occurrences::HappensBefore::laterOccurrence;
}
```

Note that a `SuccessionAsUsage` does *not* have the semantics of a SysML `ConnectionUsage`, because a `ConnectionUsage` must be defined by `AssociationStructures` (see [8.4.9.2](#)), and `Occurrences::HappensBefore` is an Association but *not* an `AssociationStructure`.

8.4.9.5 Flow Connection Definitions

A `FlowConnectionDefinition` is a kind of `ConnectionDefinition`, a kind of `ActionDefinition`, and a kind of KerML `Interaction`. As such, all the general semantic constraints for `ConnectionDefinitions` (see [8.4.9.1](#)), `ActionDefinitions` (see [8.4.12.1](#)), and `Interactions` (see [KerML, 8.4.4.10.1]) also apply to `FlowConnectionDefinitions`. In addition, the `checkFlowConnectionDefinitionSpecialization` constraint requires that a `FlowConnectionDefinition` specialize the base `FlowConnectionDefinition` `Connections::MessageConnection` (see [9.2.6.2.7](#)), which subclassifies the `ConnectionDefinition` `BinaryConnection` (see [9.2.6.2.1](#)) and the `ActionDefinition` `Actions::Action` (see [9.2.9.2.4](#), as well as the kernel `Interaction` `Transfers::Transfer` (see [KerML, 9.2.7]).

A `FlowConnectionDefinition` is always binary, with `source` and `target` ends corresponding to the corresponding ends of `Transfer`. It also inherits `MessageConnection::payload`, which is a redefinition of `Transfer::item`, representing the payload being transferred. These features can be redefined to restrict the allowed type of the ends connected by a flow and the type of the payload transferred across the flow, as desired. Note that the `source` and `target` ends must be kinds of `Occurrences`, but that the `payload` can be anything,

```
flow def M specializes Connections::MessageConnection {
    item i : I redefines MessageConnection::payload;
    end p : P redefines MessageConnection::source;
    end q : Q redefines MessageConnection::target;
}
```

The ends of a `MessageConnection` identify the `Occurrences` between which `payload` values are flowing, but they do not identify how these values are obtained from the `source` (the `sourceOutput` Feature) or to where they are delivered at the target (the `targetInput` Feature). In order to restrict the `sourceOutput` and `targetInput`

The ends of a *MessageConnection* identify the *Occurrences* between which *payload* values are flowing, but they do not identify how these values are obtained from the *source* (the *sourceOutput* Feature) or to where they are delivered at the target (the *targetInput* Feature). In order to restrict the *sourceOutput* and *targetInput* in a *FlowConnectionDefinition*, the *FlowConnectionDefinition* can specialize *Connections::FlowConnection* (see [9.2.6.2.5](#)), which is a *MessageConnection* that also subclassifies the kernel Interaction *FlowTransfer* (see [KerML, 9.2.7]).

```

part def P specializes Parts::Part {
    port p1 : Pd subsets Parts::Part::ownedPorts;
}
part def Q specializes Parts::Part {
    port p2 : ~Pd subsets Parts::Part::ownedPorts;
}
flow def F specializes Connections::FlowConnection {
    item i : I redefines MessageConnection::payload;
    end p : P redefines MessageConnection::source {
        port p1 redefines P::p1, MessageConnection::source::sourceInput;
    }
    end q : Q redefines MessageConnection::target {
        port p2 redefines Q::p2, MessageConnection::source::targetOutput;
    }
}

```

A *FlowConnectionDefinition* may also specialize *Connections::SuccessionFlowConnection* (see [9.2.6.2.9](#)), which is a *FlowConnection* that also subclassifies the kernel Interaction *FlowTransferBefore* (see [KerML, 9.2.7]). A *SuccessionFlowConnection* not only represents a flow from the *source* to the *target*, but it also asserts that the flow happens after the completion of the lifetime of the *source* and before the start of the lifetime of the *target* (e.g., if the *source* and *target* are *Actions*, then the *source Action* must complete before the flow can start, and the flow must complete before the *target Action* can start).

8.4.9.6 Flow Connection Usages

A *FlowConnectionUsage* is a kind of *ConnectionUsage*, a kind of *ActionUsage*, and a kind of KerML *ItemFlow* that is syntactically restricted to be defined by only KerML Interactions (including *FlowConnectionDefinitions*). As such, all the general semantic constraints that apply to a *ConnectionUsage* (see [8.4.9.2](#)), an *ActionUsage* (see [8.4.12.2](#)), and an *ItemFlow* (see [KerML, 8.4.4.10.2]) also apply to a *FlowConnectionUsage*. In addition, the *checkFlowConnectionUsageSpecification* constraint requires that a *FlowConnectionUsage* specialize the base *FlowConnectionUsage* *Connections::messageConnections* (see [9.2.6.2.8](#)), which is typed by the *ConnectionDefinition* *Connections::MessageConnection* (see [9.2.6.2.7](#)) and subsets the *ConnectionUsage* *Connections::binaryConnections* (see [9.2.6.2.2](#)), the *ActionUsage* *Actions::actions* (see [9.2.9.2.5](#)), and the kernel Step *Transfers::transfers* (see [KerML, 9.2.7]). Further, if the *FlowConnectionUsage* has *itemFlowEnds*, then it must specialize the *FlowConnectionUsage* *Connections::flowConnections* (see [9.2.6.2.6](#)), which is defined by the *FlowConnectionDefinition* *Connections::FlowConnection* (see [9.2.6.2.5](#)) and subsets *Connections::messageConnections* and the kernel Step *Transfers::flowTransfers* (see [KerML, 9.2.7]).

A message declaration of the form

```
message m : M of i : I from evt1 to evt2;
```

is parsed as an abstract *FlowConnectionUsage*, but without any *connectionEnds* (see [8.2.2.13.4](#)), so it is required by *checkFlowConnectionUsageSpecification* to just specialize *Connections::messageConnections*. Rather than being parsed as *connectionEnds*, *evt1* and *evt2* are

in a FlowConnectionDefinition, the FlowConnectionDefinition can specialize *Connections::FlowConnection* (see [9.2.6.2.5](#)), which is a *MessageConnection* that also subclasses the kernel Interaction *FlowTransfer* (see [KerML, 9.2.7]).

```

part def P specializes Parts::Part {
    port p1 : Pd subsets Parts::Part::ownedPorts;
}
part def Q specializes Parts::Part {
    port p2 : ~Pd subsets Parts::Part::ownedPorts;
}
flow def F specializes Connections::FlowConnection {
    item i : I redefines MessageConnection::payload;
    end p : P redefines MessageConnection::source {
        port p1 redefines P::p1, MessageConnection::source::sourceInput;
    }
    end q : Q redefines MessageConnection::target {
        port p2 redefines Q::p2, MessageConnection::source::targetOutput;
    }
}

```

A FlowConnectionDefinition may also specialize *Connections::SuccessionFlowConnection* (see [9.2.6.2.9](#)), which is a *FlowConnection* that also subclasses the kernel Interaction *FlowTransferBefore* (see [KerML, 9.2.7]). A *SuccessionFlowConnection* not only represents a flow from the *source* to the *target*, but it also asserts that the flow happens after the completion of the lifetime of the *source* and before the start of the lifetime of the *target* (e.g., if the *source* and *target* are *Actions*, then the *source Action* must complete before the flow can start, and the flow must complete before the *target Action* can start).

8.4.9.6 Flow Connection Usages

A FlowConnectionUsage is a kind of ConnectionUsage, a kind of ActionUsage, and a kind of KerML ItemFlow that is syntactically restricted to be defined by only KerML Interactions (including FlowConnectionDefinitions). As such, all the general semantic constraints that apply to a ConnectionUsage (see [8.4.9.2](#)), an ActionUsage (see [8.4.12.2](#)), and an ItemFlow (see [KerML, 8.4.4.10.2]) also apply to a FlowConnectionUsage. In addition, the checkFlowConnectionUsageSpecification constraint requires that a FlowConnectionUsage specialize the base FlowConnectionUsage *Connections::messageConnections* (see [9.2.6.2.8](#)), which is typed by the ConnectionDefinition *Connections::MessageConnection* (see [9.2.6.2.7](#)) and subsets the ConnectionUsage *Connections::binaryConnections* (see [9.2.6.2.2](#)), the ActionUsage *Actions::actions* (see [9.2.9.2.5](#)), and the kernel Step *Transfers::transfers* (see [KerML, 9.2.7]). Further, if the FlowConnectionUsage has itemFlowEnds, then it must specialize the FlowConnectionUsage *Connections::flowConnections* (see [9.2.6.2.6](#)), which is defined by the FlowConnectionDefinition *Connections::FlowConnection* (see [9.2.6.2.5](#)) and subsets *Connections::messageConnections* and the kernel Step *Transfers::flowTransfers* (see [KerML, 9.2.7]).

A message declaration of the form

```
message m : M of i : I from evt1 to evt2;
```

is parsed as an abstract FlowConnectionUsage, but without any connectionEnds (see [8.2.2.13.4](#)), so it is required by checkFlowConnectionUsageSpecification to just specialize *Connections::messageConnections*. Rather than being parsed as connectionEnds, evt1 and evt2 are parsed as in parameters, which are then, by the KerML checkFeatureParameterRedefinition constraint (see [KerML, 8.4.4.7]), required to redefine the parameters *sourceEvent* and *targetEvent* from *MessageConnection*. The payload declaration *i : I* is parsed as a KerML ItemFeature (see [KerML, 8.4.4.10]) that is required by the checkItemFeatureRedefinition constraint to redefine the Feature *Transfers::Transfer::item* (see [KerML, 9.2.7]; this is equivalent to redefining *Connections::MessageConnection::payload*).

parsed as in `parameters`, which are then, by the KerML `checkFeatureParameterRedefinition` constraint (see [KerML, 8.4.4.7]), required to redefine the parameters `sourceEvent` and `targetEvent` from `MessageConnection`. The payload declaration `i : I` is parsed as a KerML `ItemFeature` (see [KerML, 8.4.4.10]) that is required by the `checkItemFeatureRedefinition` constraint to redefine the Feature `Transfers::Transfer::item` (see [KerML, 9.2.7]; this is equivalent to redefining `Connections::MessageConnection::payload`).

```
abstract flow m : M subsets Connections::messageConnections {
    // ItemFeature
    ref i : I redefines Transfers::Transfer::'item';

    // parameters
    in redefines Connections::MessageConnection::sourceEvent
        references evt1;
    in redefines Connections::MessageConnection::targetEvent
        references evt2;
}
```

Such a `FlowConnectionUsage` asserts that there is some `sourceEvent` that occurs to initiate a flow and provide the payload and some `targetEvent` that occurs to accept the flow payload, but it does not constrain what the actually connected `source` and `target` Features are. This allows for, e.g., the case in which the `sourceEvent` is a `SendAction` and the `targetEvent` is an `AcceptAction`, but the connected `source` and `target` Features are Ports (see also [8.4.12](#) on the semantics of `SendActionUsage` and `AcceptActionUsage`).

A flow declaration of the form

```
flow f : F of i : I from src.src_out to tgt.tgt_in;
```

is parsed with two `ItemFlowEnds` (see [KerML, 8.3.4.9]) referencing `src` and `tgt`, with nested redefinitions of `src_out` and `tgt_in` (as for a KerML `ItemFlow` [KerML, 8.4.4.10]), respectively. Since it has `ItemFlowEnds`, the `checkFlowConnectionUsageSpecification` constraint requires it to specialize `Connections::flowConnections`. The KerML `checkFeatureEndRedefinition` and `checkFeatureItemFlowFeatureRedefinition` constraints then require both the redefinition of the end Features (as for a regular `ConnectionUsage`, see [8.4.9.2](#)) and the redefinition of the `sourceOutput` and `targetInput` Features.

```
flow f : F subsets Connections::flowConnections {
    // ItemFeature
    ref i : I redefines Transfers::Transfer::'item';

    // First ItemFlowEnd
    end redefines Connections::flowConnections::source references src {
        redefines Transfers::Transfer::source::sourceOutput, src_out;
    }

    // Second ItemFlowEnd
    end redefines Connections::flowConnections::target references tgt {
        redefines Transfers::Transfer::target::targetInput, tgt_in;
    }
}
```

In this case, the `sourceEvent` and `targetEvent` parameters default to the starting and ending snapshots of the `FlowConnection`, which are required to occur during the lifetime of the `source` and `target Occurrences`, respectively.

```

abstract flow m : M subsets Connections::messageConnections {
    // ItemFeature
    ref i : I redefines Transfers::Transfer:'item';

    // parameters
    in redefines Connections::MessageConnection::sourceEvent
        references evt1;
    in redefines Connections::MessageConnection::targetEvent
        references evt2;
}

```

Such a FlowConnectionUsage asserts that there is some *sourceEvent* that occurs to initiate a flow and provide the payload and some *targetEvent* that occurs to accept the flow payload, but it does not constrain what the actually connected *source* and *target* Features are. This allows for, e.g., the case in which the *sourceEvent* is a *SendAction* and the *targetEvent* is an *AcceptAction*, but the connected *source* and *target* Features are Ports (see also [8.4.12](#) on the semantics of *SendActionUsage* and *AcceptActionUsage*).

A flow declaration of the form

```
flow f : F of i : I from src.src_out to tgt.tgt_in;
```

is parsed with two *ItemFlowEnds* (see [KerML, 8.3.4.9]) referencing *src* and *tgt*, with nested redefinitions of *src_out* and *tgt_in* (as for a KerML *ItemFlow* [KerML, 8.4.4.10]), respectively. Since it has *ItemFlowEnds*, the *checkFlowConnectionUsageSpecification* constraint requires it to specialize *Connections::flowConnections*. The KerML *checkFeatureEndRedefinition* and *checkFeatureItemFlowFeatureRedefinition* constraints then require both the redefinition of the end Features (as for a regular *ConnectionUsage*, see [8.4.9.2](#)) and the redefinition of the *sourceOutput* and *targetInput* Features.

```

flow f : F subsets Connections::flowConnections {
    // ItemFeature
    ref i : I redefines Transfers::Transfer:'item';

    // First ItemFlowEnd
    end redefines Connections::flowConnections::source references src {
        redefines Transfers::Transfer::source::sourceOutput, src_out;
    }

    // Second ItemFlowEnd
    end redefines Connections::flowConnections::target references tgt {
        redefines Transfers::Transfer::target::targetInput, tgt_in;
    }
}

```

In this case, the *sourceEvent* and *targetEvent* parameters default to the starting and ending snapshots of the *FlowConnection*, which are required to occur during the lifetime of the *source* and *target Occurrences*, respectively.

Since a *FlowConnectionUsage* is a kind of *ActionUsage*, the *checkActionUsageSubactionSpecialization* constraint requires that a *FlowConnectionUsage* nested in an *ActionDefinition* or *ActionUsage* specialize *Actions::Action::subactions* (see [9.2.9.2.4](#)) as well as *Connections::flowConnections* (see also [8.4.12.2](#)).

```

action def A specializes Actions::Action {
    action a1 : A1 subsets Actions::Action::subactions;
    action a2 : A2 subsets Actions::Action::subactions;
    flow subsets Connections::flowConnections, Actions::Action::subactions
        from a1.a1_out to a2.a2_in;
}

```

Since a FlowConnectionUsage is a kind of ActionUsage, the checkActionUsageSubactionSpecialization constraint requires that a FlowConnectionUsage nested in an ActionDefinition or ActionUsage specialize Actions::Action::subactions (see [9.2.9.2.4](#)) as well as Connections::flowConnections (see also [8.4.12.2](#)).

```
action def A specializes Actions::Action {
    action a1 : A1 subsets Actions::Action::subactions;
    action a2 : A2 subsets Actions::Action::subactions;
    flow subsets Connections::flowConnections, Actions::Action::subactions
        from a1.a1_out to a2.a2_in;
}
```

8.4.9.7 Succession Flow Connection Usage

A SuccessionFlowConnectionUsage is a kind of FlowConnectionUsage and a kind of KerML SuccessionItemFlow. As such, all the general semantic constraints of a FlowConnectionUsage (see [8.4.9.6](#)) and a SuccessionItemFlow (see [KerML, 8.4.4.10]) also apply to a SuccessionFlowConnectionUsage. A SuccessionFlowConnectionUsage is semantically the same as a FlowConnectionUsage, except that the checkSuccessionFlowConnectionUsageSpecialization constraint requires that it specialize the FlowConnectionUsage Connections::successionFlowConnections (see [9.2.6.2.10](#)), which is defined by the FlowConnectionDefinition SuccessionFlowConnection (see [9.2.6.2.9](#); see also [8.4.9.5](#)) and subsets the FlowConnectionUsage Connections::flowConnections (see [9.2.6.2.6](#)) and the kernel Step flowTransfersBefore (see [KerML, 9.2.7]). As a result, a SuccessionFlowConnectionUsage has the semantics of both a temporal succession from its *source* to itself to its *target* and a flow from the *source* to the *target*.

Thus, a succession flow declaration of the form

```
succession flow of i : I from src.src_out to tgt.tgt_in;
```

is semantically equivalent, with implied Specializations included, to:

```
succession flow subsets Connections::successionFlowConnections {
    // ItemFeature
    ref i : I redefines Transfers::Transfer::'item';

    // First ItemFlowEnd
    end redefines Connections::flowConnections::source references src {
        redefines Transfers::Transfer::source::sourceOutput, src_out;
    }

    // Second ItemFlowEnd
    end redefines Connections::flowConnections::target references tgt {
        redefines Transfers::Transfer::target::targetInput, tgt_in;
    }
}
```

8.4.10 Interfaces Semantics

Abstract syntax reference: [8.3.14](#)

8.4.10.1 Interface Definitions

An InterfaceDefinition is a kind of ConnectionDefinition whose connectionEnds are syntactically restricted to be PortUsages. As such, all the general semantic constraints that apply to a

8.4.9.7 Succession Flow Connection Usage

A SuccessionFlowConnectionUsage is a kind of FlowConnectionUsage and a kind of KerML SuccessionItemFlow. As such, all the general semantic constraints of a FlowConnectionUsage (see [8.4.9.6](#)) and a SuccessionItemFlow (see [KerML, 8.4.4.10]) also apply to a SuccessionFlowConnectionUsage. A SuccessionFlowConnectionUsage is semantically the same as a FlowConnectionUsage, except that the checkSuccessionFlowConnectionUsageSpecialization constraint requires that it specialize the FlowConnectionUsage Connections::successionFlowConnections (see [9.2.6.2.10](#)), which is defined by the FlowConnectionDefinition SuccessionFlowConnection (see [9.2.6.2.9](#); see also [8.4.9.5](#)) and subsets the FlowConnectionUsage Connections::flowConnections (see [9.2.6.2.6](#)) and the kernel Step flowTransfersBefore (see [KerML, 9.2.7]). As a result, a SuccessionFlowConnectionUsage has the semantics of both a temporal succession from its *source* to itself to its *target* and a flow from the *source* to the *target*.

Thus, a succession flow declaration of the form

```
succession flow of i : I from src.src_out to tgt.tgt_in;
```

is semantically equivalent, with implied Specializations included, to:

```
succession flow subsets Connections::successionFlowConnections {
    // ItemFeature
    ref i : I redefines Transfers::Transfer:'item';

    // First ItemFlowEnd
    end redefines Connections::flowConnections::source references src {
        redefines Transfers::Transfer::source::sourceOutput, src_out;
    }

    // Second ItemFlowEnd
    end redefines Connections::flowConnections::target references tgt {
        redefines Transfers::Transfer::target::targetInput, tgt_in;
    }
}
```

8.4.10 Interfaces Semantics

Abstract syntax reference: [8.3.14](#)

8.4.10.1 Interface Definitions

An InterfaceDefinition is a kind of ConnectionDefinition whose connectionEnds are syntactically restricted to be PortUsages. As such, all the general semantic constraints that apply to a ConnectionDefinition (see [8.4.9.1](#)) also apply to an InterfaceDefinition, as well as the following additional specialization constraints:

- checkInterfaceDefinitionSpecialization requires that an InterfaceDefinition specialize the base InterfaceDefinition Interfaces::Interface (see [9.2.7.2.3](#)), which subclassifies the ConnectionDefinition Connection::Connection (see [9.2.6.2.3](#)).
- checkInterfaceDefinitionBinarySpecialization requires that an InterfaceDefinition that is binary specialize the InterfaceDefinition Interfaces::BinaryInterface (see [9.2.7.2.1](#)), which subclassifies Interfaces::Interface and the ConnectionDefinition Connections::BinaryConnection (see [9.2.6.2.1](#)), redefining the *source* and *target* ends so that they are PortUsages.

```
interface def I1 specializes Interfaces::Interface {
    end port p1 subsets Links::Link::participant;
```

`ConnectionDefinition` (see [8.4.9.1](#)) also apply to an `InterfaceDefinition`, as well as the following additional specialization constraints:

- `checkInterfaceDefinitionSpecialization` requires that an `InterfaceDefinition` specialize the base `InterfaceDefinition Interfaces::Interface` (see [9.2.7.2.3](#)), which subclassifies the `ConnectionDefinition Connection::Connection` (see [9.2.6.2.3](#)).
- `checkInterfaceDefinitionBinarySpecialization` requires that an `InterfaceDefinition` that is binary specialize the `InterfaceDefinition Interfaces::BinaryInterface` (see [9.2.7.2.1](#)), which subclassifies `Interfaces::Interface` and the `ConnectionDefinition Connections::BinaryConnection` (see [9.2.6.2.1](#)), redefining the `source` and `target` ends so that they are `PortUsages`.

```
interface def I1 specializes Interfaces::Interface {
    end port p1 subsets Links::Link::participant;
    end port p2 subsets Links::Link::participant;
    end port p3 subsets Links::Link::participant;
}
interface def I2 specializes Interfaces::BinaryInterface {
    end port p1 redefines Interfaces::BinaryInterface::source;
    end port p2 redefines Interfaces::BinaryInterface::target;
}
```

8.4.10.2 Interface Usages

An `InterfaceUsage` is a kind of `ConnectionUsage` whose `connectionDefinitions` are syntactically restricted to be only `InterfaceDefinitions`. Since `InterfaceDefinitions` have ends that are `PortUsages`, the ends of an `InterfaceUsage` must also be ports. The general semantic constraints of a `ConnectionUsage` (see [8.4.9.2](#)) also apply to an `InterfaceUsage`, as well as the following additional specialization constraints:

- `checkInterfaceUsageSpecialization` requires that an `InterfaceUsage` specialize the base `InterfaceUsage Interfaces::interfaces` (see [9.2.7.2.4](#)), which is defined by the `InterfaceDefinition Interfaces::Interface` (see [9.2.7.2.3](#)) and subsets the `ConnectionUsage Connection::connections` (see [9.2.6.2.4](#)).
- `checkInterfaceUsageBinarySpecialization` requires that a binary `InterfaceUsage` specialize the `InterfaceUsage Interfaces::binaryInterfaces` (see [9.2.7.2.2](#)), which is defined by the `InterfaceDefinition Interfaces::BinaryInterface` (see [9.2.7.2.1](#)) and subsets the `ConnectionUsage Connections::binaryConnections` (see [9.2.6.2.2](#)).

```
interface il : I1 subsets Interfaces::interfaces {
    end port p1 references q1 redefines I1::e1;
    end port p2 references q2 redefines I1::e2;
    end port p3 references q3 redefines I1::e3;
}
interface i2 : I2 subsets Interfaces::binaryInterfaces {
    end port p1 references q1 redefines I2::p1;
    end port p2 references q2 redefines I2::p2;
}

part def P specializes Parts::Part {
    part f1 : F1 subsets Items::Item::subparts;
    part f2 : F2 subsets Items::Item::subparts;

    // A nested InterfaceUsage also subsets subparts.
    interface b : B
        subsets Interface::binaryInterfaces, Items::Items::subparts
}
```

```

    end port p2 subsets Links::Link::participant;
    end port p3 subsets Links::Link::participant;
}
interface def I2 specializes Interfaces::BinaryInterface {
    end port p1 redefines Interfaces::BinaryInterface::source;
    end port p2 redefines Interfaces::BinaryInterface::target;
}

```

8.4.10.2 Interface Usages

An **InterfaceUsage** is a kind of **ConnectionUsage** whose **connectionDefinitions** are syntactically restricted to be only **InterfaceDefinitions**. Since **InterfaceDefinitions** have ends that are **PortUsages**, the ends of an **InterfaceUsage** must also be ports. The general semantic constraints of a **ConnectionUsage** (see [8.4.9.2](#)) also apply to an **InterfaceUsage**, as well as the following additional specialization constraints:

- **checkInterfaceUsageSpecialization** requires that an **InterfaceUsage** specialize the base **InterfaceUsage** *Interfaces::interfaces* (see [9.2.7.2.4](#)), which is defined by the **InterfaceDefinition** *Interfaces::Interface* (see [9.2.7.2.3](#)) and subsets the **ConnectionUsage** *Connection::connections* (see [9.2.6.2.4](#)).
- **checkInterfaceUsageBinarySpecialization** requires that a binary **InterfaceUsage** specialize the **InterfaceUsage** *Interfaces::binaryInterfaces* (see [9.2.7.2.2](#)), which is defined by the **InterfaceDefinition** *Interfaces::BinaryInterface* (see [9.2.7.2.1](#)) and subsets the **ConnectionUsage** *Connections::binaryConnections* (see [9.2.6.2.2](#)).

```

interface i1 : I1 subsets Interfaces::interfaces {
    end port p1 references q1 redefines I1::e1;
    end port p2 references q2 redefines I1::e2;
    end port p3 references q3 redefines I1::e3;
}
interface i2 : I2 subsets Interfaces::binaryInterfaces {
    end port p1 references q1 redefines I2::p1;
    end port p2 references q2 redefines I2::p2;
}

part def P specializes Parts::Part {
    part f1 : F1 subsets Items::Item::subparts;
    part f2 : F2 subsets Items::Item::subparts;

    // A nested InterfaceUsage also subsets subparts.
    interface b : B
        subsets Interface::binaryInterfaces, Items::Items::subparts
        connects f1.p1 to f2.p2;
}

```

8.4.11 Allocations Semantics

Abstract syntax reference: [8.3.15](#)

8.4.11.1 Allocation Definitions

An **AllocationDefinition** is a kind of binary **ConnectionDefinition**. The **checkAllocationDefinitionSpecialization** constraint requires that an **AllocationDefinition** specialize the base **AllocationDefinition** *Allocations::Allocation* (see [9.2.8.2.1](#)), which subclasses the **ConnectionDefinition** *Connection::BinaryConnection* (see [9.2.6.2.1](#)). Otherwise, the semantics of an **AllocationDefinition** are the same as for a binary **ConnectionDefinition** (see [8.4.9.1](#)).

```

allocation def A specializes Allocations::Allocation {
    end el redefines Allocations::Allocation::source;

```

```

    connects f1.p1 to f2.p2;
}

```

8.4.11 Allocations Semantics

Abstract syntax reference: [8.3.15](#)

8.4.11.1 Allocation Definitions

An AllocationDefinition is a kind of binary ConnectionDefinition. The checkAllocationDefinitionSpecialization constraint requires that an AllocationDefinition specialize the base AllocationDefinition *Allocations::Allocation* (see [9.2.8.2.1](#)), which subclassifies the ConnectionDefinition *Connection::BinaryConnection* (see [9.2.6.2.1](#)). Otherwise, the semantics of an AllocationDefinition are the same as for a binary ConnectionDefinition (see [8.4.9.1](#)).

```

allocation def A specializes Allocations::Allocation {
    end e1 redefines Allocations::Allocation::source;
    end e2 redefines Allocations::Allocation::target;
}

```

8.4.11.2 Allocation Usages

An AllocationUsage is a kind of binary ConnectionUsage whose connectionDefinitions are syntactically restricted to be only AllocationDefinitions. The checkAllocationUsageSpecialization constraint requires that an AllocationUsage specialize the base AllocationUsage *Allocations::allocations* (see [9.2.8.2.2](#)), which is defined by the AllocationDefinition *Allocations::Allocation* (see [9.2.8.2.1](#)) and subsets the ConnectionUsage *Connection::binaryConnections* (see [9.2.6.2.4](#)) (see [9.2.6.2.2](#)). Otherwise, the semantics of an AllocationUsage are the same as for a ConnectionUsage (see [8.4.9.2](#))

```

allocation a : A subsets Allocations::allocations {
    end ref e1 references f1 redefines A::e1;
    end ref e2 references f2 redefines A::e2;

    // A nested AllocationUsage is a subpart.
    allocation subsets Allocations::allocations, Items::Item::subparts
        allocate e1.x to e2.y;
}

```

8.4.12 Actions Semantics

Abstract syntax reference: [8.3.16](#)

8.4.12.1 Action Definitions

An ActionDefinition is a kind of OccurrenceDefinition and a kind of KerML Behavior. As such, all the general semantic constraints for an OccurrenceDefinition (see [8.4.5](#)) and a Behavior (see [KerML, 8.4.4.7.1]) also apply to an ActionDefinition. In addition, the checkActionDefinitionSpecialization constraint requires that an ActionDefinition specialize the base ActionDefinition *Actions::Action* (see [9.2.9.2.4](#)), which subclassifies the kernel Behavior *Performances::Performance* (see [KerML, 9.2.6]). Further, the KerML checkFeatureParameterRedefinition constraint (see [KerML, 8.4.4.7.1]) requires that any owned parameters (i.e., directed ownedFeatures) of an ActionDefinition redefine corresponding parameters of any Behaviors it specializes (including other ActionDefinitions).

```

action def A specializes Actions::Action {
    in ref x[0...*] subsets Base::things;
}

```

```

    end e2 redefines Allocations::Allocation::target;
}

```

8.4.11.2 Allocation Usages

An AllocationUsage is a kind of binary ConnectionUsage whose connectionDefinitions are syntactically restricted to be only AllocationDefinitions. The checkAllocationUsageSpecialization constraint requires that an AllocationUsage specialize the base AllocationUsage *Allocations::allocations* (see [9.2.8.2.2](#)), which is defined by the AllocationDefinition *Allocations::Allocation* (see [9.2.8.2.1](#)) and subsets the ConnectionUsage *Connection::binaryConnections* (see [9.2.6.2.4](#)) (see [9.2.6.2.2](#)). Otherwise, the semantics of an AllocationUsage are the same as for a ConnectionUsage (see [8.4.9.2](#)).

```

allocation a : A subsets Allocations::allocations {
    end ref e1 references f1 redefines A::e1;
    end ref e2 references f2 redefines A::e2;

    // A nested AllocationUsage is a subpart.
    allocation subsets Allocations::allocations, Items::Item::subparts
        allocate e1.x to e2.y;
}

```

8.4.12 Actions Semantics

Abstract syntax reference: [8.3.16](#)

8.4.12.1 Action Definitions

An ActionDefinition is a kind of OccurrenceDefinition and a kind of KerML Behavior. As such, all the general semantic constraints for an OccurrenceDefinition (see [8.4.5](#)) and a Behavior (see [KerML, 8.4.4.7.1]) also apply to an ActionDefinition. In addition, the checkActionDefinitionSpecialization constraint requires that an ActionDefinition specialize the base ActionDefinition *Actions::Action* (see [9.2.9.2.4](#)), which classifies the kernel Behavior *Performances::Performance* (see [KerML, 9.2.6]). Further, the KerML checkFeatureParameterRedefinition constraint (see [KerML, 8.4.4.7.1]) requires that any owned parameters (i.e., directed ownedFeatures) of an ActionDefinition redefine corresponding parameters of any Behaviors it specializes (including other ActionDefinitions).

```

action def A specializes Actions::Action {
    in ref x[0..*] subsets Base::things;
    out ref y[0..1] subsets Base::things;
    inout ref z subsets Base::things;
}
action def A1 specializes A {
    in ref x1[1] redefines x;
    out ref y1[1] redefines y;
    // z is inherited without redefinition
}

```

The *Action* semantic model also includes additional features that collect various composite *subactions* of an *Action*:

- *subactions* – All *subperformances* of an *Action* that are *Actions* (see [8.4.12.2](#)).
- *transitions* – The *subactions* that are *TransitionActions* (see [8.4.12.3](#) and [8.4.13.3](#)).
 - *decisionTransitions* – The *transitions* that are *DecisionTransitionActions*.
- *controls* – The *subactions* that are *ControlActions* (see [8.4.12.4](#)).
 - *merges* – The *controls* that are *MergeActions*.
 - *decisions* – The *controls* that are *DecisionActions*.
 - *joins* – The *controls* that are *JoinActions*.

```

    out ref y[0..1] subsets Base:::things;
    inout ref z subsets Base:::things;
}
action def A1 specializes A {
    in ref x1[1] redefines x;
    out ref y1[1] redefines y;
    // z is inherited without redefinition
}

```

The *Action* semantic model also includes additional features that collect various composite *subactions* of an *Action*:

- *subactions* – All *subperformances* of an *Action* that are *Actions* (see [8.4.12.2](#)).
- *transitions* – The *subactions* that are *TransitionActions* (see [8.4.12.3](#) and [8.4.13.3](#)).
 - *decisionTransitions* – The *transitions* that are *DecisionTransitionActions*.
- *controls* – The *subactions* that are *ControlActions* (see [8.4.12.4](#)).
 - *merges* – The *controls* that are *MergeActions*.
 - *decisions* – The *controls* that are *DecisionActions*.
 - *joins* – The *controls* that are *JoinActions*.
 - *forks* – The *controls* that are *ForkActions*.
- *sendSubactions* – The *subactions* that are *SendActions* (see [8.4.12.5](#)).
- *acceptSubactions* – The *subactions* that are *AcceptActions* (see [8.4.12.6](#)).
- *assignments* – The *subactions* that are *AssignmentActions* (see [8.4.12.7](#)).
- *ifSubactions* – The *subactions* that are *IfThenActions* (see [8.4.12.8](#)).
- *loops* – The *subactions* that are *LoopActions* (see [8.4.12.9](#)).
 - *whileLoops* – The *loops* that are *WhileLoopActions*.
 - *forLoops* – The *loops* that are *ForLoopActions*.

8.4.12.2 Action Usages

An *ActionUsage* is a kind of *OccurrenceUsage* and a kind of *KerML Step*. As such, all the general semantic constraints for an *OccurrenceUsage* (see [8.4.5](#)) and a *Step* (see [KerML, 8.4.4.7.2]) also apply to an *ActionUsage*, as well as the following additional specialization constraints:

- *checkActionUsageSpecialization* requires that an *ActionUsage* specialize the base *ActionUsage Actions:::actions* (see [9.2.9.2.5](#)), which is defined by the *ActionDefinition Actions:::Action* (see [9.2.9.2.4](#)) and subsets the kernel *Step Performances:::performances* (see [KerML, 9.2.6]). Further, the KerML *checkFeatureParameterRedefinition* constraint requires that any owned parameters (i.e., *directed ownedFeatures*) of a *ActionUsage* redefine corresponding parameters of any *Behaviors* or *Steps* it specializes (including *ActionDefinitions* and *ActionUsages*).

```

action a : A subsets Actions:::actions {
    in ref x redefines A:::x = x1;
    out ref y redefines A:::y;
    inout ref z redefines A:::z := z1 ;
}

action a1 : A1 subsets a {
    in ref x redefines A1:::x, a:::x;
    out ref y redefines A2:::y, a:::y;
}

```

- *checkActionUsageSubactionSpecialization* requires that an *ActionUsage* that is composite, has an *owningType* that is an *ActionDefinition* or *ActionUsage*, and is *not* the *entryAction* or *exitAction* of a *StateDefinition* or *StateUsage* (see [8.4.13](#)) specialize the *ActionUsage*

- *forks* – The controls that are *ForkActions*.
- *sendSubactions* – The *subactions* that are *SendActions* (see [8.4.12.5](#)).
- *acceptSubactions* – The *subactions* that are *AcceptActions* (see [8.4.12.6](#)).
- *assignments* – The *subactions* that are *AssignmentActions* (see [8.4.12.7](#)).
- *ifSubactions* – The *subactions* that are *IfThenActions* (see [8.4.12.9](#)).
- *loops* – The *subactions* that are *LoopActions* (see [8.4.12.10](#)).
 - *whileLoops* – The *loops* that are *WhileLoopActions*.
 - *forLoops* – The *loops* that are *ForLoopActions*.

8.4.12.2 Action Usages

An *ActionUsage* is a kind of *OccurrenceUsage* and a kind of *KerML Step*. As such, all the general semantic constraints for an *OccurrenceUsage* (see [8.4.5](#)) and a *Step* (see [KerML, 8.4.4.7.2]) also apply to an *ActionUsage*, as well as the following additional specialization constraints:

- *checkActionUsageSpecialization* requires that an *ActionUsage* specialize the base *ActionUsage Actions::actions* (see [9.2.9.2.5](#)), which is defined by the *ActionDefinition Actions::Action* (see [9.2.9.2.4](#)) and subsets the kernel *Step Performances::performances* (see [KerML, 9.2.6]). Further, the KerML *checkFeatureParameterRedefinition* constraint requires that any owned parameters (i.e., directed *ownedFeatures*) of a *ActionUsage* redefine corresponding parameters of any *Behaviors* or *Steps* it specializes (including *ActionDefinitions* and *ActionUsages*).

```
action a : A subsets Actions::actions {
  in ref x redefines A::x = x1;
  out ref y redefines A::y;
  inout ref z redefines A::z := z1 ;
}

action a1 : A1 subsets a {
  in ref x redefines A1::x, a::x;
  out ref y redefines A2::y, a::y;
}
```

- *checkActionUsageSubactionSpecialization* requires that an *ActionUsage* that is composite, has an *owningType* that is an *ActionDefinition* or *ActionUsage*, and is *not* the *entryAction* or *exitAction* of a *StateDefinition* or *StateUsage* (see [8.4.13](#)) specialize the *ActionUsage Actions::Action::subactions* (see [9.2.9.2.4](#)), which subsets the kernel *Step Performances::Performance::subperformances* (see [KerML, 9.2.6]). Note also that, in other cases, the general KerML *checkStepEnclosedPerformanceSpecialization* and *checkStepSubperformanceSpecialization* constraints will still apply (see [KerML, 8.4.4.7]).

```
action def Act subsets Actions::Action {
  action act1 subsets Actions::Action::subactions;
  ref action act2 subsets Actions::actions,
    Performances::Performance::enclosedPerformances;
}
```

- *checkActionUsageOwnedActionSpecialization* requires that a composite *ActionUsage* whose *owningType* is a *PartDefinition* or a *PartUsage* specialize the *ActionUsage Parts::Part::ownedActions* (see [9.2.4.2.1](#)), which subsets the *ActionUsage Action::actions* and the kernel *Feature Objects::Object::ownedPerformances* (see [KerML, 9.2.5]). Note also that, in other cases, the general KerML *checkStepOwnedPerformanceSpecialization* constraint will still apply (see [KerML, 8.4.4.7]).

```
part def PA specializes Parts::Part {
  action a : A subsets Parts::Part::ownedActions;
}
```

Actions::Action::subactions (see [9.2.9.2.4](#)), which subsets the kernel Step *Performances::Performance::subperformances* (see [KerML, 9.2.6]). Note also that, in other cases, the general KerML *checkStepEnclosedPerformanceSpecialization* and *checkStepSubperformanceSpecialization* constraints will still apply (see [KerML, 8.4.4.7]).

```
action def Act subsets Actions::Action {
    action act1 subsets Actions::Action::subactions;
    ref action act2 subsets Actions::actions,
        Performances::Performance::enclosedPerformances;
}
```

- *checkActionUsageOwnedActionSpecialization* requires that a composite *ActionUsage* whose *owningType* is a *PartDefinition* or a *PartUsage* specialize the *ActionUsage Parts::Part::ownedActions* (see [9.2.4.2.1](#)), which subsets the *ActionUsage Action::actions* and the kernel Feature *Objects::Object::ownedPerformances* (see [KerML, 9.2.5]). Note also that, in other cases, the general KerML *checkStepOwnedPerformanceSpecialization* constraint will still apply (see [KerML, 8.4.4.7]).

```
part def PA specializes Parts::Part {
    action a : A subsets Parts::Part::ownedActions;
}
item def IA specializes Items::Item {
    action a : A subsets Objects::Object::ownedPerformances;
}
```

- *checkActionUsageStateActionRedefinition* requires that an *ActionUsage* that is an *entryAction*, *exitAction* or *doAction* of a *StateDefinition* or *StateUsage* specialize, respectively, the *entryAction*, *exitAction*, or *doAction* feature of the *StateDefinition States::StateAction* (see [9.2.10.2.1](#)), which redefine the *entry*, *exit*, and *do* features of the kernel Behavior *StatePerformances::StatePerformance* (see [KerML, 9.2.6]), restricting them to be *Actions* (see [9.2.9.2.4](#)). (See also [8.4.13](#) on State Semantics.)
- *checkActionUsageAnalysisActionSpecialization* requires that an *ActionUsage* that is an *analysisAction* of an *AnalysisCaseDefinition* or *AnalysisCaseUsage* specialize the *ActionUsage Actions::Action::analysisSteps* (see [9.2.9.2.4](#)). (See also [8.4.18](#) on Analysis Case Semantics.)

Semantics of *this*

Action inherits the kernel Feature *Occurrences::Occurrence::this* (see [KerML, 9.2.4]). The value for this Feature is determined in by the semantic model for *Object::Object* (see [KerML, 9.2.5]) and *Performances::Performance* (see [KerML, 9.2.6]), as further specialized for *Parts::Part::ownedActions* (see [9.2.4.2.1](#)) and *Actions::Action::subactions* (see [9.2.9.2.4](#)). For an *Action* in a hierarchy of *subactions*, the value of *this* is the top-level *Action* in the hierarchy (that is, one that is not one of the *subactions* of any other *Action*), unless that top-level *Action* is itself one of the *ownedActions* of a *Part* (or on of the *ownedPerformances* of an *Item*), in which case the value is that *Part* (or *Item*).

For example, consider the model

```
package Pkg {
    action def A specializes Actions::Action {
        action b subsets Actions::Action::subactions;
    }
    action a1 : A[1] subsets Action::actions {
        // a1.this == a1
        // b.x == a1
    }
}
```

```

item def IA specializes Items::Item {
    action a : A subsets Objects::Object::ownedPerformances;
}

```

- `checkActionUsageStateActionRedefinition` requires that an `ActionUsage` that is an `entryAction`, `exitAction` or `doAction` of a `StateDefinition` or `StateUsage` specialize, respectively, the `entryAction`, `exitAction`, or `doAction` feature of the `StateDefinition States::StateAction` (see [9.2.10.2.1](#)), which redefine the `entry`, `exit`, and `do` features of the kernel Behavior `StatePerformances::StatePerformance` (see [KerML, 9.2.6]), restricting them to be `Actions` (see [9.2.9.2.4](#)). (See also [8.4.13](#) on State Semantics.)
- `checkActionUsageAnalysisActionSpecialization` requires that an `ActionUsage` that is an `analysisAction` of an `AnalysisCaseDefinition` or `AnalysisCaseUsage` specialize the `ActionUsage Actions::Action::analysisSteps` (see [9.2.9.2.4](#)). (See also [8.4.18](#) on Analysis Case Semantics.)

Semantics of *this*

`Action` inherits the kernel Feature `Occurrences::Occurrence::this` (see [KerML, 9.2.4]). The value for this Feature is determined in by the semantic model for `Object::Object` (see [KerML, 9.2.5]) and `Performances::Performance` (see [KerML, 9.2.6]), as further specialized for `Parts::Part::ownedActions` (see [9.2.4.2.1](#)) and `Actions::Action::subactions` (see [9.2.9.2.4](#)). For an `Action` in a hierarchy of `subactions`, the value of `this` is the top-level `Action` in the hierarchy (that is, one that is not one of the `subactions` of any other `Action`), unless that top-level `Action` is itself one of the `ownedActions` of a `Part` (or on of the `ownedPerformances` of an `Item`), in which case the value is that `Part` (or `Item`).

For example, consider the model

```

package Pkg {
    action def A specializes Actions::Action {
        action b subsets Actions::Action::subactions;
    }
    action a1 : A[1] subsets Action::actions {
        // a1.this == a1
        // b.x == a1
    }
    part p subsets Parts::parts {
        action a2: A[1] subsets Parts::Part::ownedActions {
            // a2.this == p
            // b.this == p
        }
    }
}

```

As indicated, the value of `this` for both the `Action a1` and its `subaction a1.b` will be (the value of) `a1`, since the `ActionUsage a1` is at "package level", while the value of `this` for both `p.a2` and `p.a2.b` will be (the value of) `p`, since `a2` is an `ownedAction` of `p`.

The semantics of `this` are particularly important in the specification of default semantics for `SendActionUsages` (see [8.4.12.5](#)) and `AcceptActionUsages` (see [8.4.12.6](#)).

8.4.12.3 Decision Transition Usages

A `Succession` in the body of an `ActionDefinition` or `ActionUsage` may be syntactically declared with a `guard Expression`. In this case, it is actually parsed as a `TransitionUsage`, with the `guard Expression` and the declared `Succession` nested in the `TransitionUsage` (see [8.2.2.16.8](#)). The `checkTransitionUsageActionSpecialization` constraint requires that a composite `TransitionUsage` whose `ownedType` is an `ActionDefinition` or `ActionUsage`, but *not* a `StateDefinition` or `StateUsage`,

```

        }
    part p subsets Parts::parts {
        action a2: A[1] subsets Parts::Part::ownedActions {
            // a2.this == p
            // b.this == p
        }
    }
}

```

As indicated, the value of *this* for both the Action *a1* and its subaction *a1.b* will be (the value of) *a1*, since the ActionUsage *a1* is at "package level", while the value of *this* for both *p.a2* and *p.a2.b* will be (the value of) *p*, since *a2* is an *ownedAction* of *p*.

The semantics of *this* are particularly important in the specification of default semantics for `SendActionUsages` (see [8.4.12.5](#)) and `AcceptActionUsages` (see [8.4.12.6](#)).

8.4.12.3 Decision Transition Usages

A Succession in the body of an ActionDefinition or ActionUsage may be syntactically declared with a guard Expression. In this case, it is actually parsed as a TransitionUsage, with the guard Expression and the declared Succession nested in the TransitionUsage (see [8.2.2.16.7](#)). The checkTransitionUsageActionSpecialization constraint requires that a composite TransitionUsage whose ownedType is an ActionDefinition or ActionUsage, but *not* a StateDefinition or StateUsage, specialize the ActionUsage `Actions::Action::decisionTransitions` (see [9.2.9.2.4](#)), which is typed by the ActionDefinition `Actions::DecisionTransitionAction` (see [9.2.9.2.10](#)). `DecisionTransitionAction` subclassifies the ActionDefinition `Actions::TransitionAction` (see [9.2.9.2.24](#)) and the kernel Behavior `TransitionPerformances::NonStateTransitionPerformance` (see [KerML, 9.2.10]). It represents a `TransitionAction` that has a *guard*, but no *accepter* or *effects*.

For example, consider the following model of a conditional Succession between two ActionUsages:

```

action def AC {
    action a1 { out ref test : ScalarValues::Boolean; }
    succession sc first a1 if a1.test then a2;
    action a2;
}

```

With implied Relationships included (see [8.2.2.17.3](#) on the semantic constraints related to a TransitionUsage), this has the equivalent kernel semantics of:

```

// KerML
behavior AC specializes Actions::Action {
    step a1 subsets Actions::Action::subactions {
        out feature test : ScalarValues::Boolean;
    }

    step sc subsets Actions::Action::decisionTransitions {
        in feature redefines
            Actions::TransitionAction::transitionLinkSource;

        bool redefines Actions::TransitionAction::guard {
            a1.test
        }
    }

    member succession sc_link
        subsets Occurrences::happensBeforeLinks
}

```

specialize the ActionUsage `Actions::Action::decisionTransitions` (see [9.2.9.2.4](#)), which is typed by the ActionDefinition `Actions::DecisionTransitionAction` (see [9.2.9.2.10](#)). `DecisionTransitionAction` classifies the ActionDefinition `Actions::TransitionAction` (see [9.2.9.2.26](#)) and the kernel Behavior `TransitionPerformances::NonStateTransitionPerformance` (see [KerML, 9.2.10]). It represents a `TransitionAction` that has a `guard`, but no `accepter` or effects.

For example, consider the following model of a conditional Succession between two ActionUsages:

```
action def AC {
    action a1 { out ref test : ScalarValues::Boolean; }
    succession sc first a1 if a1.test then a2;
    action a2;
}
```

With implied Relationships included (see [8.2.2.17.3](#) on the semantic constraints related to a `TransitionUsage`), this has the equivalent kernel semantics of:

```
// KerML
behavior AC specializes Actions::Action {
    step a1 subsets Actions::Action::subactions {
        out feature test : ScalarValues::Boolean;
    }

    step sc subsets Actions::Action::decisionTransitions {
        in feature redefines
            Actions::TransitionAction::transitionLinkSource;

        bool redefines Actions::TransitionAction::guard {
            a1.test
        }

        member succession sc_link
            subsets Occurrences::happensBeforeLinks
            featured by AC
            first a1 then a2;
        member binding featured by AC of sc_link =
            TransitionPerformances::TransitionPerformance::transitionLink;

        member binding featured by AC of s1 = transitionLinkSource;
    }

    step a2 subsets Actions::Action::subactions;
}
```

As specified for a `NonStateTransitionPerformance`, the `guard` of a `DecisionTransitionAction` is evaluated after the completion of the `Performance` of the `transitionLinkSource`, which is the source of the nested `transitionLink` Succession. If the `guard` evaluates to true, then the `transitionLink` may have a value, meaning that there must be a `Performance` of the `targetFeature` of the Succession temporally following the `Performance` of the `sourceFeature`. If the `guard` evaluates to false, the `transitionLink` does not have a value, so no such temporal ordering is asserted.

8.4.12.4 Control Nodes

A `ControlNode` is a kind of `ActionUsage` that has no inherent behavior but is used to control other `Actions` within a containing `Action`. All the general semantic constraints of an `ActionUsage` (see [8.4.12.2](#)) also apply to a `ControlNode`, as well as the following additional constraints:

- `checkControlNodeSpecialization` requires that a `ControlNode` specialize the `ActionUsage` `Actions::Action::controls` (see [9.2.9.2.4](#)), which is defined by the ActionDefinition

```

featured by AC
  first a1 then a2;
member binding featured by AC of sc_link =
  TransitionPerformances::TransitionPerformance::transitionLink;

member binding featured by AC of s1 = transitionLinkSource;
}

step a2 subsets Actions::Action::subactions;
}

```

As specified for a *NonStateTransitionPerformance*, the *guard* of a *DecisionTransitionAction* is evaluated after the completion of the *Performance* of the *transitionLinkSource*, which is the *source* of the nested *transitionLink* Succession. If the *guard* evaluates to true, then the *transitionLink* may have a value, meaning that there must be a *Performance* of the *targetFeature* of the Succession temporally following the *Performance* of the *sourceFeature*. If the *guard* evaluates to false, the *transitionLink* does not have a value, so no such temporal ordering is asserted.

8.4.12.4 Control Nodes

A *ControlNode* is a kind of *ActionUsage* that has no inherent behavior but is used to control other *Actions* within a containing *Action*. All the general semantic constraints of an *ActionUsage* (see [8.4.12.2](#)) also apply to a *ControlNode*, as well as the following additional constraints:

- *checkControlNodeSpecialization* requires that a *ControlNode* specialize the *ActionUsage* *Actions::Action::controls* (see [9.2.9.2.4](#)), which is defined by the *ActionDefinition* *Actions::ControlAction* (see [9.2.9.2.8](#)) and subsets the composite *ActionUsage* *Actions::Action::subactions* (further implying that a *ControlNode* must be composite). *ControlAction* includes a constraint that it's performance is instantaneous.
- *validateControlNodeOwningType* requires that the *owningType* of a *ControlNode* be an *ActionDefinition* or *ActionUsage*.
- *validateControlNodeIncomingSuccessions* requires that all incoming Successions to a *ControlNode* have *target* multiplicity 1..1.
- *validateControlNodeOutgoingSuccessions* requires that all outgoing Successions from a *ControlNode* have *source* multiplicity 1..1.

Note. Multiplicities are given in a model as *MultiplicityRanges* which have *Expressions* for *lowerBound* and *upperBound*. When checking validation constraints such as the above on *MultiplicityRanges*, the *lowerBound* and *upperBound* *Expressions* shall be *model-level evaluable* to the required values for the bounds (see [KerML, 8.4.4.9]). If the *lowerBound* is empty, then an *upperBound* value of 1 is equivalent to multiplicity 1..1. The constraints can also be equivalently satisfied by multiplicities that subset the *MultiplicityRanges* *ExactlyOne* or *ZeroOrOne* from the Kernel Semantic Library model *Base* (see [KerML, 9.2.2]).

The *ControlNode* metaclass is itself abstract, but it has four concrete subclasses representing various specific *ControlNode* elements. Each of these places additional constraints on incoming and outgoing Successions, as appropriate to achieve the specific control constraints required for each kind of element.

Join Nodes

A *JoinNode* is a kind of *ControlNode* that represents the joining of control. The following additional constraints apply to a *JoinNode*:

`Actions::ControlAction` (see [9.2.9.2.8](#)) and subsets the composite `ActionUsage` `Actions::Action::subactions` (further implying that a `ControlNode` must be composite). `ControlAction` includes a constraint that its performance is instantaneous.

- `validateControlNodeOwningType` requires that the `owningType` of a `ControlNode` be an `ActionDefinition` or `ActionUsage`.
- `validateControlNodeIncomingSuccessions` requires that all incoming Successions to a `ControlNode` have target multiplicity $1..1$.
- `validateControlNodeOutgoingSuccessions` requires that all outgoing Successions from a `ControlNode` have source multiplicity $1..1$.

Note. Multiplicities are given in a model as `MultiplicityRanges` which have `Expressions` for `lowerBound` and `upperBound`. When checking validation constraints such as the above on `MultiplicityRanges`, the `lowerBound` and `upperBound` Expressions shall be *model-level evaluable* to the required values for the bounds (see [KerML, 8.4.4.9]). If the `lowerBound` is empty, then an `upperBound` value of 1 is equivalent to multiplicity $1..1$. The constraints can also be equivalently satisfied by multiplicities that subset the `MultiplicityRanges` `ExactlyOne` or `ZeroOrOne` from the Kernel Semantic Library model `Base` (see [KerML, 9.2.2]).

The `ControlNode` metaclass is itself abstract, but it has four concrete subclasses representing various specific `ControlNode` elements. Each of these places additional constraints on incoming and outgoing Successions, as appropriate to achieve the specific control constraints required for each kind of element.

Join Nodes

A `JoinNode` is a kind of `ControlNode` that represents the joining of control. The following additional constraints apply to a `JoinNode`:

- `checkJoinNodeSpecialization` requires that a `JoinNode` specialize the `ActionUsage` `Actions::Action::joins` (see [9.2.9.2.4](#)), which is defined by the `ActionDefinition` `Actions::JoinAction` (see [9.2.9.2.21](#)) and subsets `Actions::Action::controls`. `JoinAction` subclassifies `ControlAction`.
- `validateJoinNodeOutgoingSuccessions` requires that a `JoinNode` have at most one outgoing Succession.
- `validateJoinNodeIncomingSuccessions` constraint requires that all incoming Successions to a `JoinNode` have source multiplicity $1..1$.

The semantics of a `JoinNode` are entirely a result of the above constraints. Because of the required multiplicities, for each performance of a `JoinNode`, every incoming Succession must have a value, temporally ordering the `JoinNode` as happening after all the source *Occurrences* (typically `Actions`) of the incoming Successions.

For example, consider the following model of a `JoinNode` with two incoming Successions and one outgoing Succession, explicitly showing the required Succession multiplicities:

```
action def A1 {
    action a1;
    action a2;

    succession s1 first a1[1..1] then j[1..1];
    succession s2 first a2[1..1] then j[1..1];
    join j;
    succession s3 first j[1..1] then a3;

    action a3;
}
```

- `checkJoinNodeSpecialization` requires that a `JoinNode` specialize the `ActionUsage Actions::Action::joins` (see [9.2.9.2.4](#)), which is defined by the `ActionDefinition Actions::JoinAction` (see [9.2.9.2.21](#)) and subsets `Actions::Action::controls`. `JoinAction` subclasses `ControlAction`.
- `validateJoinNodeOutgoingSuccessions` requires that a `JoinNode` have at most one outgoing Succession.
- `validateJoinNodeIncomingSuccessions` constraint requires that all incoming Successions to a `JoinNode` have source multiplicity 1..1.

The semantics of a `JoinNode` are entirely a result of the above constraints. Because of the required multiplicities, for each performance of a `JoinNode`, every incoming Succession must have a value, temporally ordering the `JoinNode` as happening after all the source *Occurrences* (typically *Actions*) of the incoming Successions.

For example, consider the following model of a `JoinNode` with two incoming Successions and one outgoing Succession, explicitly showing the required Succession multiplicities:

```
action def A1 {
    action a1;
    action a2;

    succession s1 first a1[1..1] then j[1..1];
    succession s2 first a2[1..1] then j[1..1];
    join j;
    succession s3 first j[1..1] then a3;

    action a3;
}
```

With implied Specializations included, this is semantically equivalent to:

```
action def A1 specializes Actions::Action {
    action a1 subsets Actions::Action::subactions;
    action a2 subsets Actions::Action::subactions;

    succession s1 subsets Occurrences::happensBeforeLinks
        first a1[1..1] then m[1..1];
    succession s2 subsets Occurrences::happensBeforeLinks
        first a2[1..1] then m[1..1];
    join j subsets Actions::Action::joins;
    succession s3 subsets Occurrences::happensBeforeLinks
        first j[1..1] then a3;

    action a3 subsets Actions::Action::subactions;
}
```

Fork Nodes

A `ForkNode` is a kind of `ControlNode` that represents a forking of control. The following additional constraints apply to a `ForkNode`:

- `checkForkNodeSpecialization` requires that a `ForkNode` specialize the `ActionUsage Actions::Action::forks` (see [9.2.9.2.4](#)), which is defined by the `ActionDefinition Actions::ForkAction` (see [9.2.9.2.21](#)) and subsets `Actions::Action::controls`. `ForkAction` subclasses `ControlAction`.

With implied Specializations included, this is semantically equivalent to:

```
action def A1 specializes Actions::Action {
    action a1 subsets Actions::Action::subactions;
    action a2 subsets Actions::Action::subactions;

    succession s1 subsets Occurrences::happensBeforeLinks
        first a1[1..1] then m[1..1];
    succession s2 subsets Occurrences::happensBeforeLinks
        first a2[1..1] then m[1..1];
    join j subsets Actions::Action::joins;
    succession s3 subsets Occurrences::happensBeforeLinks
        first j[1..1] then a3;

    action a3 subsets Actions::Action::subactions;
}
```

Fork Nodes

A ForkNode is a kind of ControlNode that represents a forking of control. The following additional constraints apply to a ForkNode:

- checkForkNodeSpecialization requires that a ForkNode specialize the ActionUsage `Actions::Action::forks` (see [9.2.9.2.4](#)), which is defined by the ActionDefinition `Actions::ForkAction` (see [9.2.9.2.21](#)) and subsets `Actions::Action::controls`. `ForkAction` subclasses `ControlAction`.
- validateForkNodeIncomingSuccessions requires that a ForkNode have at most one incoming Succession.
- validateForkNodeOutgoingSuccessions requires that all outgoing Successions from a ForkNode have target multiplicity 1..1.

The semantics of a ForkNode are entirely a result of the above constraints. Because of the required multiplicities, for each performance of a ForkNode, every outgoing Succession must have a value, temporally ordering the ForkNode as happening before all the target `Occurrences` (typically `Actions`) of the outgoing Successions.

For example, consider the following model of a ForkNode with two incoming Successions and one outgoing Succession, explicitly showing the required Succession multiplicities:

```
action def A2 {
    action a1;

    succession s1 first a1 then f[1..1];
    fork f;
    succession s2 first f[1..1] then a2[1..1];
    succession s3 first f[1..1] then a3[1..1];

    action a2;
    action a3;
}
```

With implied Specializations included, this is semantically equivalent to:

```
action def A2 specializes Actions::Action {
    action a1 subsets Actions::Action::subactions;

    succession s1 subsets Occurrences::happensBeforeLinks
        first a1 then f[1..1];
    fork f subsets Actions::Action::forks;
    succession s2 subsets Occurrences::happensBeforeLinks
```

- validateForkNodeIncomingSuccessions requires that a ForkNode have at most one incoming Succession.
- validateForkNodeOutgoingSuccessions requires that all outgoing Successions from a ForkNode have target multiplicity 1..1.

The semantics of a ForkNode are entirely a result of the above constraints. Because of the required multiplicities, for each performance of a ForkNode, every outgoing Succession must have a value, temporally ordering the ForkNode as happening before all the target Occurrences (typically Actions) of the outgoing Successions.

For example, consider the following model of a ForkNode with two incoming Successions and one outgoing Succession, explicitly showing the required Succession multiplicities:

```
action def A2 {
    action a1;

    succession s1 first a1 then f[1..1];
    fork f;
    succession s2 first f[1..1] then a2[1..1];
    succession s3 first f[1..1] then a3[1..1];

    action a2;
    action a3;
}
```

With implied Specializations included, this is semantically equivalent to:

```
action def A2 specializes Actions::Action {
    action a1 subsets Actions::subactions;

    succession s1 subsets Occurrences::happensBeforeLinks
        first a1 then f[1..1];
    fork f subsets Actions::Action::forks;
    succession s2 subsets Occurrences::happensBeforeLinks
        first f[1..1] then a2[1..1];
    succession s3 subsets Occurrences::happensBeforeLinks
        first f[1..1] then a3[0..1];

    action a2 subsets Actions::Action::subactions;
    action a3 subsets Actions::Action::subactions;
}
```

Merge Nodes

A MergeNode is a kind of ControlNode that represents the merging of control. The following additional constraints apply to a MergeNode.

- checkMergeNodeSpecialization constraint requires that a MergeNode specialize the ActionUsage Actions::Action::merges (see [9.2.9.2.4](#)), which is defined by the ActionDefinition Actions::MergeAction (see [9.2.9.2.21](#)) and subsets Actions::Action::controls. MergeAction subclasses ControlAction and the kernel Behavior ControlPerformances::MergePerformance (see [KerML, 9.2.9]).
- checkMergeNodeIncomingSuccessionSpecialization requires that any incoming Succession to a MergeNode specialize the Feature MergePerformance::incomingHBLLink (which is inherited by MergeAction).
- validateMergeNodeOutgoingSuccessions requires that a MergeNode have at most one outgoing Succession.

```

        first f[1..1] then a2[1..1];
succession s3 subsets Occurrences::happensBeforeLinks
        first f[1..1] then a3[0..1];

action a2 subsets Actions::Action::subactions;
action a3 subsets Actions::Action::subactions;
}

```

Merge Nodes

A `MergeNode` is a kind of `ControlNode` that represents the merging of control. The following additional constraints apply to a `MergeNode`.

- `checkMergeNodeSpecialization` constraint requires that a `MergeNode` specialize the `ActionUsage Actions::Action::merges` (see [9.2.9.2.4](#)), which is defined by the `ActionDefinition Actions::MergeAction` (see [9.2.9.2.21](#)) and subsets `Actions::Action::controls`. `MergeAction` subclasses `ControlAction` and the kernel Behavior `ControlPerformances::MergePerformance` (see [KerML, 9.2.9]).
- `checkMergeNodeIncomingSuccessionSpecialization` requires that any incoming Succession to a `MergeNode` specialize the Feature `MergePerformance::incomingHBLINK` (which is inherited by `MergeAction`).
- `validateMergeNodeOutgoingSuccessions` requires that a `MergeNode` have at most one outgoing Succession.
- `validateMergeNodeIncomingSuccessions` requires that all incoming Successions to a `MergeNode` have source multiplicity 0..1.

Since `MergePerformance::incomingHBLINK` has a multiplicity of 1, the result of the above constraints is that, for any performance of a `MergeAction`, there must be exactly one incoming Succession that has a value, representing the incoming "control" that triggers this specific performance of the `MergeAction`.

For example, consider the following model of a `MergeNode` with two incoming Successions and one outgoing Succession, explicitly showing the required Succession multiplicities:

```

action def A3 {
    action a1;
    action a2;

    succession s1 first a1[0..1] then m[1..1];
    succession s2 first a2[0..1] then m[1..1];
    merge m;
    succession s3 first m[1..1] then a3;

    action a3;
}

```

With implied Specializations included, this is semantically equivalent to:

```

action def A3 specializes Actions::Action {
    action a1 subsets Actions::Action::subactions;
    action a2 subsets Actions::Action::subactions;

    succession s1 subsets Occurrences::happensBeforeLinks
        subsets m.incomingHBLINK
        first a1[0..1] then m[1..1];
    succession s2 subsets Occurrences::happensBeforeLinks
        subsets m.incomingHBLINK
        first a2[0..1] then m[1..1];
    merge m subsets Actions::Action::merges{
        // m inherits the following feature from MergePerformance:
}

```

- `validateMergeNodeIncomingSuccessions` requires that all incoming Successions to a `MergeNode` have source multiplicity 0..1.

Since `MergePerformance::incomingHBLINK` has a multiplicity of 1, the result of the above constraints is that, for any performance of a `MergeAction`, there must be exactly one incoming Succession that has a value, representing the incoming "control" that triggers this specific performance of the `MergeAction`.

For example, consider the following model of a `MergeNode` with two incoming Successions and one outgoing Succession, explicitly showing the required Succession multiplicities:

```

action def A3 {
    action a1;
    action a2;

    succession s1 first a1[0..1] then m[1..1];
    succession s2 first a2[0..1] then m[1..1];
    merge m;
    succession s3 first m[1..1] then a3;

    action a3;
}

```

With implied Specializations included, this is semantically equivalent to:

```

action def A3 specializes Actions::Action {
    action a1 subsets Actions::Action::subactions;
    action a2 subsets Actions::Action::subactions;

    succession s1 subsets Occurrences::happensBeforeLinks
        subsets m.incomingHBLINK
        first a1[0..1] then m[1..1];
    succession s2 subsets Occurrences::happensBeforeLinks
        subsets m.incomingHBLINK
        first a2[0..1] then m[1..1];
    merge m subsets Actions::Action::merges{
        // m inherits the following feature from MergePerformance:
        // incomingHBLINK : HappensBefore[1];
    }
    succession s3 subsets Occurrences::happensBeforeLinks
        first m[1..1] then a3;

    action a3 subsets Actions::Action::subactions;
}

```

Decision Nodes

A `DecisionNode` is a kind of `ControlNode` that represents a control decision. The following additional constraints apply to a `DecisionNode`:

- `checkDecisionNodeSpecialization` requires that a `DecisionNode` specialize the `ActionUsage Actions::Action::decisions` (see [9.2.9.2.4](#)), which is defined by the `ActionDefinition Actions::DecisionAction` (see [9.2.9.2.21](#)) and subsets `Actions::Action::controls`. `DecisionAction` subclasses `ControlAction` and the kernel Behavior `ControlPerformances::DecisionPerformance` (see [KerML, 9.2.9]).
- `checkDecisionNodeOutgoingSuccessionSpecialization` requires that any incoming Succession to a `MergeNode` specialize the Feature `DecisionPerformance::outgoingHBLINK` (which is inherited by `DecisionAction`).

```

        // incomingHBLINK : HappensBefore[1];
    }
succession s3 subsets Occurrences::happensBeforeLinks
    first m[1..1] then a3;

action a3 subsets Actions::Action::subactions;
}

```

Decision Nodes

A `DecisionNode` is a kind of `ControlNode` that represents a control decision. The following additional constraints apply to a `DecisionNode`:

- `checkDecisionNodeSpecialization` requires that a `DecisionNode` specialize the `ActionUsage Actions::Action::decisions` (see [9.2.9.2.4](#)), which is defined by the `ActionDefinition Actions::DecisionAction` (see [9.2.9.2.21](#)) and subsets `Actions::Action::controls`. `DecisionAction` subclasses `ControlAction` and the kernel Behavior `ControlPerformances::DecisionPerformance` (see [KerML, 9.2.9]).
- `checkDecisionNodeOutgoingSuccessionSpecialization` requires that any incoming Succession to a `MergeNode` specialize the Feature `DecisionPerformance::outgoingHBLINK` (which is inherited by `DecisionAction`).
- `validateDecisionNodeIncomingSuccessions` requires that a `DecisionNode` have at most one incoming Succession.
- `validateDecisionNodeOutcomingSuccessions` constraint requires that all outgoing Successions from a `DecisionNode` have target multiplicity 0..1.

Since `DecisionPerformance::outgoingHBLINK` has a multiplicity of 1, the result of these constraints is that, for any performance of a `DecisionAction`, there must be exactly one outgoing Succession that has a value, representing the outgoing "control" decided on by this specific performance of the `DecisionAction`.

For example, consider the following model of a `DecisionNode` with one incoming Successions and two outgoing Successions, explicitly showing the required Succession multiplicities:

```

action def A4 {
    action a1;

    succession s1 first a1 then d[1..1];
    decide d;
    succession s2 first d[1..1] then a2[0..1];
    succession s3 first d[1..1] then a3[0..1];

    action a2;
    action a3;
}

```

With implied Specializations included, this is semantically equivalent to:

```

action def A4 specializes Actions::Action {
    action a1 subsets Actions::Action::subactions;

    succession s1 subsets Occurrences::happensBeforeLinks
        first a1[0..1] then d[1..1];
    decide d subsets Actions::Action::decisions {
        // d inherits the following feature from DecisionPerformance:
        // outgoingHBLINK : HappensBefore[1];
    }
    succession s2 subsets Occurrences::happensBeforeLinks
        subsets d.outgoingHBLINK
        first d[1..1] then a2[0..1];
}

```

- `validateDecisionNodeIncomingSuccessions` requires that a `DecisionNode` have at most one `incoming Succession`.
- `validateDecisionNodeOutcomingSuccessions` constraint requires that all outgoing `Successions` from a `DecisionNode` have target multiplicity `0..1`.

Since `DecisionPerformance::outgoingHBLINK` has a multiplicity of 1, the result of these constraints is that, for any performance of a `DecisionAction`, there must be exactly one outgoing `Succession` that has a value, representing the outgoing "control" decided on by this specific performance of the `DecisionAction`.

For example, consider the following model of a `DecisionNode` with one incoming `Successions` and two outgoing `Successions`, explicitly showing the required `Succession` multiplicities:

```
action def A4 {
    action a1;

    succession s1 first a1 then d[1..1];
    decide d;
    succession s2 first d[1..1] then a2[0..1];
    succession s3 first d[1..1] then a3[0..1];

    action a2;
    action a3;
}
```

With implied Specializations included, this is semantically equivalent to:

```
action def A4 specializes Actions::Action {
    action a1 subsets Actions::Action::subactions;

    succession s1 subsets Occurrences::happensBeforeLinks
        first a1[0..1] then d[1..1];
    decide d subsets Actions::Action::decisions {
        // d inherits the following feature from DecisionPerformance:
        // outgoingHBLINK : HappensBefore[1];
    }
    succession s2 subsets Occurrences::happensBeforeLinks
        subsets d.outgoingHBLINK
        first d[1..1] then a2[0..1];
    succession s3 subsets Occurrences::happensBeforeLinks
        subsets d.outgoingHBLINK
        first d[1..1] then a3[0..1];

    action a2 subsets Actions::Action::subactions;
    action a3 subsets Actions::Action::subactions;
}
```

The semantics of a `DecisionNode` do not determine which of the outgoing `Successions` will have a value for any specific performance of the `DecisionNode`. However, the outgoing `Successions` of a `DecisionNode` will typically have guard conditions, in which case only the `Succession(s)` for which the guard is true may have values.

```
action def A5 {
    action a1 { out ref x : ScalarValues::Integer; }

    succession s1 first a1 then d[1..1];
    decide d;
    succession s2 first d[1..1] if x < 0 then a2[0..1];
```

```

succession s3 subsets Occurrences::happensBeforeLinks
    subsets d.outgoingHBLINK
    first d[1..1] then a3[0..1];

action a2 subsets Actions::Action::subactions;
action a3 subsets Actions::Action::subactions;
}

```

The semantics of a `DecisionNode` do not determine which of the outgoing `Successions` will have a value for any specific performance of the `DecisionNode`. However, the outgoing `Successions` of a `DecisionNode` will typically have guard conditions, in which case only the `Succession(s)` for which the guard is true may have values.

```

action def A5 {
    action a1 { out ref x : ScalarValues::Integer; }

    succession s1 first a1 then d[1..1];
    decide d;
    succession s2 first d[1..1] if x < 0 then a2[0..1];
    succession s3 first d[1..1] if x >= 0 then a3[0..1];

    action a2;
    action a3;
}

```

Such *conditional Successions* are actually parsed as `TransitionUsages` defined by the `ActionDefinition DecisionTransitionAction` (see [8.2.2.16.8](#)), with a nested `Succession`. It is this nested `Succession` that actually has the `DecisionNode` as its source, and, therefore, to which the `validateDecisionNodeOutcomingSuccessions` constraint applies. See [8.4.12.3](#) on the semantics of decision `TransitionUsages`.

8.4.12.5 Send Action Usages

A `SendActionUsage` is a kind of `ActionUsage`, so all general semantic constraints for an `ActionUsage` (see [8.4.12.2](#)) also apply to a `SendActionUsage`, as well as the following additional specialization constraints:

- `checkSendActionUsageSpecialization` requires that a `SendActionUsage` specialize the `ActionUsage Actions::sendActions` (see [9.2.9.2.23](#)), which is defined by the `ActionDefinition Actions::SendAction` (see [9.2.9.2.22](#)) and subsets the `ActionUsage Actions::actions` (see [9.2.9.2.5](#)) and the kernel Feature `Transfers::sendPerformances` (see [KerML, 9.2.7]).
- `checkSendActionUsageSubactionSpecialization` constraint requires that a `SendActionUsage` that is composite, has an `owningType` that is an `ActionDefinition` or `ActionUsage`, and is *not* the `entryAction` or `exitAction` of a `StateDefinition` or `StateUsage` (see [8.4.13](#)) specialize the `ActionUsage Actions::Action::sendSubactions` (see [9.2.9.2.4](#)), which subsets `Actions::sendActions` and `Actions::Action::subactions`.

A `SendActionUsage` provides arguments for the parameters of a `SendAction`. A `SendActionUsage` declaration of the form

```
action snd send p via src to tgt;
```

(where all of `p`, `src` and `tgt` are `Expressions`) is parsed (including implied Specializations) as (see [8.2.2.16.4](#)):

```

action s subsets Actions::sendActions {
    in ref redefines Actions::SendAction::payload = p;
    in ref redefines Actions::SendAction::sender = src;
}

```

```

succession s3 first d[1..1] if x >= 0 then a3[0..1];

action a2;
action a3;
}

```

Such *conditional Successions* are actually parsed as TransitionUsages defined by the ActionDefinition *DecisionTransitionAction* (see [8.2.2.16.7](#)), with a nested Succession. It is this nested Succession that actually has the *DecisionNode* as its source, and, therefore, to which the validateDecisionNodeOutcomingSuccessions constraint applies. See [8.4.12.3](#) on the semantics of decision TransitionUsages.

8.4.12.5 Send Action Usages

A *SendActionUsage* is a kind of *ActionUsage*, so all general semantic constraints for an *ActionUsage* (see [8.4.12.2](#)) also apply to a *SendActionUsage*, as well as the following additional specialization constraints:

- checkSendActionUsageSpecialization requires that a *SendActionUsage* specialize the *ActionUsage Actions::sendActions* (see [9.2.9.2.23](#)), which is defined by the ActionDefinition *Actions::SendAction* (see [9.2.9.2.22](#)) and subsets the *ActionUsage Actions::actions* (see [9.2.9.2.5](#)) and the kernel Feature *Transfers::sendPerformances* (see [KerML, 9.2.7]).
- checkSendActionUsageSubactionSpecialization constraint requires that a *SendActionUsage* that is composite, has an *owningType* that is an *ActionDefinition* or *ActionUsage*, and is *not* the *entryAction* or *exitAction* of a *StateDefinition* or *StateUsage* (see [8.4.13](#)) specialize the *ActionUsage Actions::Action::sendSubactions* (see [9.2.9.2.4](#)), which subsets *Actions::sendActions* and *Actions::Action::subactions*.

A *SendActionUsage* provides arguments for the parameters of a *SendAction*. A *SendActionUsage* declaration of the form

```
action snd send p via src to tgt;
```

(where all of *p*, *src* and *tgt* are Expressions) is parsed (including implied Specializations) as (see [8.2.2.16.4](#)):

```

action s subsets Actions::sendActions {
    in ref redefines Actions::SendAction::payload = p;
    in ref redefines Actions::SendAction::sender = src;
    in ref redefines Actions::SendAction::receiver = tgt;
}

```

SendAction classifies the ActionDefinition *Actions::Action* (see [9.2.9.2.4](#)) and the kernel Behavior *Transfers::SendPerformance* (see [KerML, 9.2.7]). The semantics of *SendPerformance* is to initiate a *sendMessage*, which is a *MessageTransfer* (for a *SendAction*, this will also be a *MessageConnection*, see [9.2.6.2.7](#)) from a given *sender*. The *SendAction::payload* parameter (which redefines *SendPerformance::sentItems*) provides the values that are transferred.

If given, the *receiver* parameter specifies the *target* of the *sendMessage*. This parameter is optional. If no *receiver* is given, then the *target* of the *sendMessage* is unspecified by the *SendAction*, and must be determined from other constraints in the model. (For example, if the *SendAction* has a *PortUsage* as its *sender*, then the *target* of the *sendMessage* may be determined by a *InterfaceUsage* outgoing from that *PortUsage*.)

```

    in ref redefines Actions::SendAction::receiver = tgt;
}

```

`SendAction` subclassifies the ActionDefinition `Actions::Action` (see [9.2.9.2.4](#)) and the kernel Behavior `Transfers::SendPerformance` (see [KerML, 9.2.7]). The semantics of `SendPerformance` is to initiate a `sentMessage`, which is a `MessageTransfer` (for a `SendAction`, this will also be a `MessageConnection`, see [9.2.6.2.7](#)) from a given `sender`. The `SendAction::payload` parameter (which redefines `SendPerformance::sentItems`) provides the values that are transferred.

If given, the `receiver` parameter specifies the `target` of the `sentMessage`. This parameter is optional. If no `receiver` is given, then the `target` of the `sentMessage` is unspecified by the `SendAction`, and must be determined from other constraints in the model. (For example, if the `SendAction` has a `PortUsage` as its `sender`, then the `target` of the `sentMessage` may be determined by a `InterfaceUsage` outgoing from that `PortUsage`.)

The `sender` parameter is mandatory. However, if no explicit value is given for this parameter, it defaults to the value of `this` for the `SendAction` (see [8.4.12.2](#) on the semantics of `this` for `Actions` in general). This is particularly important when the `SendAction` is nested in other containing `Actions` or `Parts`.

For example, consider a `SendActionUsage` with no declared `sender` nested in an ActionDefinition:

```

action def AS {
    action snd send p to tgt;
}

```

This is equivalent to

```

action def AS specializes Actions::Action {
    action snd subsets Actions::Action::sendSubactions {
        in ref redefines payload = p;
        in ref redefines sender = this;
        in ref redefines receiver = tgt;
    }
}

```

Therefore, in the model

```

package Sending {
    action as1 : AS[1] subsets Action::actions {
        // snd.sender == as1
    }
    part p subsets Parts::parts {
        action as2: AS[1] subsets Parts::Part::ownedActions {
            // snd.sender == p
        }
    }
}

```

the default `sender` for `as1.snd` is `as1`, but the default `sender` for `p.as2.snd` is `p`.

8.4.12.6 Accept Action Usages

An `AcceptActionUsage` is a kind of `ActionUsage`, so all general semantic constraints for an `ActionUsage` (see [8.4.12.2](#)) also apply to an `AcceptActionUsage`, as well as the following additional specialization constraints:

- `checkAcceptActionUsageSpecialization` requires that (unless it is the `triggerAction` of a `TransitionUsage`, see [8.4.13.3](#)) an `AcceptActionUsage` specialize the `ActionUsage` `Actions::acceptActions` (see [9.2.9.2.2](#)), which is defined by the ActionDefinition

The `sender` parameter is mandatory. However, if no explicit value is given for this parameter, it defaults to the value of `this` for the `SendAction` (see [8.4.12.2](#) on the semantics of `this` for `Actions` in general). This is particularly important when the `SendAction` is nested in other containing `Actions` or `Parts`.

For example, consider a `SendActionUsage` with no declared `sender` nested in an `ActionDefinition`:

```
action def AS {
    action snd send p to tgt;
}
```

This is equivalent to

```
action def AS specializes Actions::Action {
    action snd subsets Actions::sendSubactions {
        in ref redefines payload = p;
        in ref redefines sender = this;
        in ref redefines receiver = tgt;
    }
}
```

Therefore, in the model

```
package Sending {
    action as1 : AS[1] subsets Action::actions {
        // snd.sender == as1
    }
    part p subsets Parts::parts {
        action as2: AS[1] subsets Parts::Part::ownedActions {
            // snd.sender == p
        }
    }
}
```

the default `sender` for `as1.snd` is `as1`, but the default `sender` for `p.as2.snd` is `p`.

8.4.12.6 Accept Action Usages

An `AcceptActionUsage` is a kind of `ActionUsage`, so all general semantic constraints for an `ActionUsage` (see [8.4.12.2](#)) also apply to an `AcceptActionUsage`, as well as the following additional specialization constraints:

- `checkAcceptActionUsageSpecialization` requires that (unless it is the `triggerAction` of a `TransitionUsage`, see [8.4.13.3](#)) an `AcceptActionUsage` specialize the `ActionUsage Actions::acceptActions` (see [9.2.9.2.2](#)), which is defined by the `ActionDefinition Actions::AcceptAction` (see [9.2.9.2.1](#)) and subsets `Actions::actions` (see [9.2.9.2.5](#)) and the kernel Feature `Transfers::acceptPerformances` (see [KerML, 9.2.7]).
- `checkAcceptActionUsageSubactionSpecialization` requires that an `AcceptActionUsage` that is composite, has an `owningType` that is an `ActionDefinition` or `ActionUsage`, and is *not* the `triggerAction` of a `TransitionUsage` or the `entryAction` or `exitAction` of a `StateDefinition` or `StateUsage` (see [8.4.13](#)) specialize the `ActionUsage Actions::acceptSubactions` (see [9.2.9.2.4](#)), which subsets `Actions::acceptActions` and `Actions::subactions`.

An `AcceptActionUsage` provides an argument for the input parameter `receiver` of an `AcceptAction` and declares what can be accepted in the output parameter `payload`. An `AcceptActionUsage` declaration of the form

```
action acpt accept x : T via tgt;
```

`Actions::AcceptAction` (see [9.2.9.2.1](#)) and subsets `Actions::Action::actions` (see [9.2.9.2.5](#)) and the kernel Feature `Transfers::acceptPerformances` (see [KerML, 9.2.7]).

- checkAcceptActionUsageSubactionSpecialization requires that an `AcceptActionUsage` that is composite, has an `owningType` that is an `ActionDefinition` or `ActionUsage`, and is *not* the `triggerAction` of a `TransitionUsage` or the `entryAction` or `exitAction` of a `StateDefinition` or `StateUsage` (see [8.4.13](#)) specialize the `ActionUsage` `Actions::Action::acceptSubactions` (see [9.2.9.2.4](#)), which subsets `Actions::acceptActions` and `Actions::Action::subactions`.

An `AcceptActionUsage` provides an argument for the input parameter `receiver` of an `AcceptAction` and declares what can be accepted in the output parameter `payload`. An `AcceptActionUsage` declaration of the form

```
action acpt accept x : T via tgt;
```

(where `src` and `tgt` are Expressions) is parsed (including implied Specializations) as (see [8.2.2.16.4](#)):

```
action acpt subsets Actions::acceptActions {
    inout ref x : T redefines Actions::AcceptAction::payload;
    in ref redefines Actions::AcceptAction::receiver = tgt;
}
```

`AcceptAction` subclassifies the `ActionDefinition` `Actions::AcceptMessageAction` (see [9.2.9.2.3](#)), which itself subclassifies `Actions::Action` (see [9.2.9.2.4](#)) and the kernel Behavior `Transfers::AcceptPerformance` (see [KerML, 9.2.7]). The semantics of `AcceptPerformance` is to select an `incomingTransfer` of the given `receiver Occurrence` that is a `MessageTransfer` and whose transferred values conform to its `acceptedItem` parameter, as redefined in the `AcceptActionUsage` (`AcceptAction::payload` itself redefines `AcceptPerformance::acceptedItem`). `AcceptAction` has a nested `StateActionUsage`, such that, when the `AcceptAction` is performed, it waits for the acceptance of a conforming `MessageTransfer`, and then completes if and when such a `MessageTransfer` is eventually accepted. If so, then the transferred values of the `acceptedMessage` are placed on the `payload` output parameter.

The `receiver` parameter is mandatory. However, if no explicit value is given for this parameter, it defaults to the value of `this` for the `AcceptAction` (see [8.4.12.2](#) on the semantics of `this` for `Actions` in general). This is particularly important when the `AcceptAction` is nested in other containing `Actions` or `Parts`.

For example, consider an `AcceptActionUsage` with no declared `receiver` nested in an `ActionDefinition`:

```
action def AA {
    action acpt accept x : T;
}
```

This is equivalent to

```
action def AA specializes Actions::Action {
    action acpt subsets Actions::Action::acceptSubactions {
        inout ref x : T redefines Actions::AcceptAction::payload;
        in ref redefines Actions::AcceptAction::receiver = this;
    }
}
```

Therefore, in the model

```
package Accepting {
    action aal : AA[1] subsets Action::actions {
        // acpt.receiver == aal
    }
    part p subsets Parts::parts {
        action aa2: AA[1] subsets Parts::Part::ownedActions {
```

(where *src* and *tgt* are Expressions) is parsed (including implied Specializations) as (see [8.2.2.16.4](#)):

```
action acpt subsets Actions::acceptActions {
    inout ref x : T redefines Actions::AcceptAction::payload;
    in ref redefines Actions::AcceptAction::receiver = tgt;
}
```

AcceptAction classifies the ActionDefinition *Actions::AcceptMessageAction* (see [9.2.9.2.3](#)), which itself classifies *Actions::Action* (see [9.2.9.2.4](#)) and the kernel Behavior *Transfers::AcceptPerformance* (see [KerML, 9.2.7]). The semantics of *AcceptPerformance* is to select an *incomingTransfer* of the given *receiver Occurrence* that is a *MessageTransfer* and whose transferred values conform to its *acceptedItem* parameter, as redefined in the *AcceptActionUsage* (*AcceptAction::payload* itself redefines *AcceptPerformance::acceptedItem*). *AcceptAction* has a nested StateActionUsage, such that, when the *AcceptAction* is performed, it waits for the acceptance of a conforming *MessageTransfer*, and then completes if and when such a *MessageTransfer* is eventually accepted. If so, then the transferred values of the *acceptedMessage* are placed on the *payload* output parameter.

The *receiver* parameter is mandatory. However, if no explicit value is given for this parameter, it defaults to the value of *this* for the *AcceptAction* (see [8.4.12.2](#) on the semantics of *this* for *Actions* in general). This is particularly important when the *AcceptAction* is nested in other containing *Actions* or *Parts*.

For example, consider an *AcceptActionUsage* with no declared *receiver* nested in an *ActionDefinition*:

```
action def AA {
    action acpt accept x : T;
}
```

This is equivalent to

```
action def AA specializes Actions::Action {
    action acpt subsets Actions::Action::acceptSubactions {
        inout ref x : T redefines Actions::AcceptAction::payload;
        in ref redefines Actions::AcceptAction::receiver = this;
    }
}
```

Therefore, in the model

```
package Accepting {
    action aal : AA[1] subsets Action::actions {
        // acpt.receiver == aal
    }
    part p subsets Parts::parts {
        action aa2: AA[1] subsets Parts::Part::ownedActions {
            // acpt.receiver == p
        }
    }
}
```

the default *receiver* for *aa1.acpt* is *aa1*, but the default *receiver* for *p.aa2.accept* is *p*.

Note also that the *AcceptAction::payload* parameter actually has direction **inout**, which means that an input value may be optionally provided for it. If a the *payload* parameter has a FeatureValue Relationship to a value Expression, then any *acceptedMessage* must have values that match the result of the value Expression bound to the *payload* parameter. This is used, in particular, to provide the semantics for TriggerInvocationExpressions as used in *AcceptActionUsages*.

```

        // acpt.receiver == p
    }
}
}

```

the default *receiver* for *aa1.acpt* is *aa1*, but the default *receiver* for *p.aa2.accept* is *p*.

Note also that the *AcceptAction::payload* parameter actually has direction **inout**, which means that an input value may be optionally provided for it. If a the *payload* parameter has a FeatureValue Relationship to a value Expression, then any *acceptedMessage* must have values that match the result of the *value* Expression bound to the *payload* parameter. This is used, in particular, to provide the semantics for TriggerInvocationExpressions as used in AcceptActionUsages.

A TriggerInvocationExpression (see [8.3.16.17](#)) is a kind of KerML InvocationExpression (see [KerML, 8.3.4.8]), with the corresponding semantics (see [KerML, 8.4.4.9]). The *checkTriggerInvocationExpressionSpecialization* constraint requires that a TriggerInvocationExpression specialize (invoke) one of the Functions *TriggerWhen*, *TriggerAt* or *TriggerAfter*, from the Kernel Semantic Library *Triggers* package (see [KerML, 9.2.14]), depending on whether its kind is when, at or after (see *TriggerKind*, [8.3.16.18](#)), respectively. An *AcceptActionUsage* with a change (**when**), absolute time (**at**) or relative time (**after**) trigger is parsed as having its *payload* parameter bound to a TriggerInvocationExpression of the corresponding kind.

So, the following:

```

action def AT {
    action acpt_when accept when boolean_expr;
    action acpt_at accept at time_expr;
    action acpt_after accept after duration_expr;
}

```

is equivalent to:

```

action def AT specializes Actions::Action {
    action acpt_when subsets Actions::Action:acceptSubactions {
        in ref redefines Actions::AcceptAction::payload =
            Triggers::TriggerWhen({ boolean_expr }, receiver);
        in ref redefines Actions::AcceptAction::receiver = this;
    }
    action acpt_at subsets Actions::Action:acceptSubactions {
        in ref redefines Actions::AcceptAction::payload =
            Triggers::TriggerAt(time_expr, receiver);
        in ref redefines Actions::AcceptAction::receiver = this;
    }
    action acpt_after subsets Actions::Action:acceptSubactions {
        in ref redefines Actions::AcceptAction::payload =
            Triggers::TriggerAfter(duration_expr, receiver);
        in ref redefines Actions::AcceptAction::receiver = this;
    }
}

```

Note that the *checkAcceptActionUsageReceiverBindingConnector* constraint requires that the second parameter of a TriggerInvocationExpression be bound to the *receiver* parameter of the containing *AcceptActionUsage*, indicating that it is the *AcceptActionUsage receiver* that is to be signaled by the trigger. Each of the *Triggers* Functions also has two additional parameters, which all get their default values.

1. *clock*, typed by *Clocks::Clock* (see [KerML, 9.2.12]), defaults to *Occurrences::Occurrence::localClock* (see [KerML, 9.2.4]).

A TriggerInvocationExpression (see [8.3.16.16](#)) is a kind of KerML InvocationExpression (see [KerML, 8.3.4.8]), with the corresponding semantics (see [KerML, 8.4.4.9]). The checkTriggerInvocationExpressionSpecialization constraint requires that a TriggerInvocationExpression specialize (invoke) one of the Functions *TriggerWhen*, *TriggerAt* or *TriggerAfter*, from the Kernel Semantic Library *Triggers* package (see [KerML, 9.2.14]), depending on whether its kind is when, at or after (see TriggerKind, [8.3.16.17](#)), respectively. An AcceptActionUsage with a change (**when**), absolute time (**at**) or relative time (**after**) trigger is parsed as having its *payload* parameter bound to a TriggerInvocationExpression of the corresponding kind.

So, the following:

```
action def AT {
    action acpt_when accept when boolean_expr;
    action acpt_at accept at time_expr;
    action acpt_after accept after duration_expr;
}
```

is equivalent to:

```
action def AT specializes Actions:::Action {
    action acpt_when subsets Actions:::Action:acceptSubactions {
        in ref redefines Actions:::AcceptAction::payload =
            Triggers:::TriggerWhen({ boolean_expr }, receiver);
        in ref redefines Actions:::AcceptAction::receiver = this;
    }
    action acpt_at subsets Actions:::Action:acceptSubactions {
        in ref redefines Actions:::AcceptAction::payload =
            Triggers:::TriggerAt(time_expr, receiver);
        in ref redefines Actions:::AcceptAction::receiver = this;
    }
    action acpt_after subsets Actions:::Action:acceptSubactions {
        in ref redefines Actions:::AcceptAction::payload =
            Triggers:::TriggerAfter(duration_expr, receiver);
        in ref redefines Actions:::AcceptAction::receiver = this;
    }
}
```

Note that the checkAcceptActionUsageReceiverBindingConnector constraint requires that the second parameter of a TriggerInvocationExpression be bound to the *receiver* parameter of the containing AcceptActionUsage, indicating that it is the AcceptActionUsage *receiver* that is to be signaled by the trigger. Each of the *Triggers* Functions also has two additional parameters, which all get their default values.

1. *clock*, typed by *Clocks:::Clock* (see [KerML, 9.2.12]), defaults to *Occurrences:::Occurrence::localClock* (see [KerML, 9.2.4]).
2. *monitor*, typed by *Observation:::ChangeMonitor* (see [KerML, 9.2.13]), defaults to *Observation:::defaultMonitor*.

In particular, the *Occurrences:::Occurrence::localClock* itself defaults to the singleton *universalClock* (see [9.8.8.2.13](#) and [KerML, 9.2.12]). However, for a *suboccurrence*, this default is overridden to instead be the *localClock* of the containing *Occurrence*. This means that binding the *localClock* feature to a new *Clock* instance in an *OccurrenceDefinition* or *OccurrenceUsage* (particularly a *PartDefinition* or *PartUsage*) means that this *Clock* instance will be used as the default for all contained *suboccurrences* (particularly *ownedActions* and *subactions*) at any level of nesting in the composition hierarchy (unless it is further overridden at some lower level).

2. *monitor*, typed by *Observation::ChangeMonitor* (see [KerML, 9.2.13]), defaults to *Observation::defaultMonitor*.

In particular, the *Occurrences::Occurrence::localClock* itself defaults to the singleton *universalClock* (see 9.8.8.2.13 and [KerML, 9.2.12]). However, for a *suboccurrence*, this default is overridden to instead be the *localClock* of the containing *Occurrence*. This means that binding the *localClock* feature to a new *Clock* instance in an *OccurrenceDefinition* or *OccurrenceUsage* (particularly a *PartDefinition* or *PartUsage*) means that this *Clock* instance will be used as the default for all contained *suboccurrences* (particularly *ownedActions* and *subactions*) at any level of nesting in the composition hierarchy (unless it is further overridden at some lower level).

```
part def TimeContext specializes Parts::Part {
    ref redefines localClock = Time::Clock();
    action behavior subsets Parts::Part::ownedActions {
        // Uses the value bound to TimeContext::localClock,
        // not the default universalClock.
        action subsets Actions::Action::acceptSubactions
            accept after 30 [SI::s];
    }
}
```

8.4.12.7 Assignment Action Usages

An *AssignmentActionUsage* is a kind of *ActionUsage*, so all general semantic constraints for an *ActionUsage* (see 8.4.12.2) also apply to an *AssignmentActionUsage*, as well as the following additional specialization constraints:

- *checkAssignmentActionUsageSpecialization* requires that an *AssignmentActionUsage* specialize the *ActionUsage* *Actions::assignmentActions* (see 9.2.9.2.7), which is defined by the *ActionDefinition* *Actions::AssignmentAction* (see 9.2.9.2.6) and subsets *Actions::Action::actions* (see 9.2.9.2.5).
- *checkAssignmentActionUsageSubactionSpecialization* constraint requires that an *AssignmentActionUsage* that is composite, has an *owningType* that is an *ActionDefinition* or *ActionUsage*, and is *not* the *entryAction* or *exitAction* of a *StateDefinition* or *StateUsage* (see 8.4.13) specialize the *ActionUsage* *Actions::Action::assignments* (see 9.2.9.2.4), which subsets *Actions::assignmentActions* and *Actions::Action::subactions*.

An *AssignmentActionUsage* has two input parameters for the *target* *Occurrence* and the *replacementValues* to be assigned. The *target* has a time slice called *startingAt* with a nested feature called *accessedFeature*. The referent Feature to be assigned by the *AssignmentActionUsage* is actually parsed as an alias member of the *AssignmentActionUsage* (see 8.2.2.16.4). The following constraints then apply:

- *checkAssignmentActionUsageStartingAtRedefinition* requires that the first *ownedFeature* of the first parameter of an *AssignmentActionUsage* (the *target* parameter) redefines *Actions::AssignmentAction::target::startingAt*.
- *checkAssignmentActionUsageAccessedFeatureRedefinition* requires that the first *ownedFeature* of the above redefinition of *startingAt* redefines *Actions::AssignmentAction::target::startingAt::accessedFeature*.
- *checkAssignmentActionReferentRedefinition* requires that *target.startingAt.accessedFeature* of the *AssignmentActionUsage* redefine the referent Feature.

An *AssignmentActionUsage* declaration of the form

```
action asgn assign tgt.rfnt := val;
```

```

part def TimeContext specializes Parts::Part {
    ref redefines localClock = Time::Clock();
    action behavior subsets Parts::Part::ownedActions {
        // Uses the value bound to TimeContext::localClock,
        // not the default universalClock.
        action subsets Actions::Action::acceptSubactions
            accept after 30 [SI::s];
    }
}

```

8.4.12.7 Assignment Action Usages

An AssignmentActionUsage is a kind of ActionUsage, so all general semantic constraints for an ActionUsage (see 8.4.12.2) also apply to an AssignmentActionUsage, as well as the following additional specialization constraints:

- checkAssignmentActionUsageSpecialization requires that an AssignmentActionUsage specialize the ActionUsage *Actions::assignmentActions* (see 9.2.9.2.7), which is defined by the ActionDefinition *Actions::AssignmentAction* (see 9.2.9.2.6) and subsets *Actions::Action::actions* (see 9.2.9.2.5).
- checkAssignmentActionUsageSubactionSpecialization constraint requires that an AssignmentActionUsage that is composite, has an *owningType* that is an ActionDefinition or ActionUsage, and is *not* the entryAction or exitAction of a StateDefinition or StateUsage (see 8.4.13) specialize the ActionUsage *Actions::Action::assignments* (see 9.2.9.2.4), which subsets *Actions::assignmentActions* and *Actions::Action::subactions*.

An AssignmentActionUsage has two input parameters for the *target Occurrence* and the *replacementValues* to be assigned. The *target* has a time slice called *startingAt* with a nested feature called *accessedFeature*. The referent Feature to be assigned by the AssignmentActionUsage is actually parsed as an alias member of the AssignmentActionUsage (see 8.2.2.16.4). The following constraints then apply:

- checkAssignmentActionUsageStartingAtRedefinition requires that the first *ownedFeature* of the first parameter of an AssignmentActionUsage (the *target* parameter) redefines *Actions::AssignmentAction::target::startingAt*.
- checkAssignmentActionUsageAccessedFeatureRedefinition requires that the first *ownedFeature* of the above redefinition of *startingAt* redefines *Actions::AssignmentAction::target::startingAt::accessedFeature*.
- checkAssignmentActionReferentRedefinition requires that *target.startingAt.accessedFeature* of the AssignmentActionUsage redefine the referent Feature.

An AssignmentActionUsage declaration of the form

```
action asgn assign tgt.rfnt := val;
```

(where *tgt* and *val* are Expressions and *rfnt* is a qualified name or feature chain) is parsed (including implied Specializations) as

```

action asgn subsets Actions::assignmentActions {
    in ref redefines Actions::AssignmentAction::target = tgt {
        redefines Actions::AssignmentAction::target::startingAt {
            redefines Actions::AssignmentAction::target::startingAt::accessedFeature,
                rfnt;
        }
    }
}

```

(where *tgt* and *val* are Expressions and *rfnt* is a qualified name or feature chain) is parsed (including implied Specializations) as

```
action asgn subsets Actions::assignmentActions {
    in ref redefines Actions::AssignmentAction::target = tgt {
        redefines Actions::AssignmentAction::target::startingAt {
            redefines Actions::AssignmentAction::target::startingAt::accessedFeature,
                rfnt;
        }
    }
    inout ref redefines Actions::AssignmentAction::replacementValues = val;
}
```

AssignmentAction subclassifies the *Actions::Action* (see [9.2.9.2.4](#)) and the kernel *BehaviorControlPerformances::FeatureWritePerformance* (see [KerML, 9.2.9]). The semantics of *FeatureWritePerformance* is that, at the time it ends, the *accessedFeature* of the *target Occurrence* will have the given *replacementValues*.

8.4.12.8 Terminate Action Usages

SYSML2 -44: Transformation of UML4SysML::ActivityFinalNode is not specified yet

A *TerminateActionUsage* is a kind of *ActionUsage*, so all general semantic constraints for an *ActionUsage* (see [8.4.12.2](#)) also apply to a *TerminateActionUsage*, as well as the following additional specialization constraints:

- *checkTerminateActionUsageSpecialization* requires that a *TerminateActionUsage* specialize the *ActionUsage Actions::terminateActions* (see [9.2.9.2.25](#)), which is defined by the *ActionDefinition Actions::TerminateAction* (see [9.2.9.2.24](#)) and subsets *Actions::Action::actions* (see [9.2.9.2.5](#)).
- *checkTerminateActionUsageSubactionSpecialization* constraint requires that a *TerminateActionUsage* that is composite, has an *owningType* that is an *ActionDefinition* or *ActionUsage*, and is not the *entryAction* or *exitAction* of a *StateDefinition* or *StateUsage* (see [8.4.13](#)) specialize the *ActionUsage Actions::Action::terminateSubactions* (see [9.2.9.2.4](#)), which subsets *Actions::terminateActions* and *Actions::Action::subactions*.

A *TerminateActionUsage* optionally provides an argument for the *terminatedOccurrence* parameter of a *TerminateAction*. A *TerminateActionUsage* declaration of the form

```
action trm terminate occ;
```

(where *occ* is an Expression) is parsed (including implied Specializations, presuming the *TerminateActionUsage* is a *subaction*) as (see [8.4.12.8](#)):

```
action trm subsets Actions::Action::terminateSubactions {
    in ref redefines Actions::terminateActions::terminatedOccurrence = occ;
}
```

When a *TerminateAction* is performed, it has a nested composite *ActionUsage* of the KerML Function Library *FunctionOccurrenceFunctions::destroy*, with the *terminatedOccurrence* as its argument. The semantics of *destroy* then require that the lifetime of the *terminatedOccurrence* end during the performance of *destroy* and, hence, during the performance of the *TerminateAction*.

The *TerminateAction::terminatedOccurrence* parameter is mandatory, but the *ActionUsage terminateActions* provides a default of *that* for this parameter. As specified in [KerML], this means that, by default, the *terminatedOccurrence* will be the featuring instance of a *terminateAction*, which will generally be the immediately containing Action within which the *terminateAction* is being performed.

```

    inout ref redefines Actions::AssignmentAction::replacementValues = val;
}

```

AssignmentAction subclassifies the *Actions::Action* (see [9.2.9.2.4](#)) and the kernel *Behavior Control Performances::FeatureWritePerformance* (see [KerML, 9.2.9]). The semantics of *FeatureWritePerformance* is that, at the time it ends, the *accessedFeature* of the *target Occurrence* will have the given *replacementValues*.

8.4.12.8 If Action Usages

An *IfActionUsage* is a kind of *ActionUsage*, so all general semantic constraints for an *ActionUsage* (see [8.4.12.2](#)) also apply to an *IfActionUsage*, as well as the following additional specialization constraints:

- *checkIfActionUsageSpecialization* requires that
 - If an *IfActionUsage* does *not* have an *elseAction*, it specialize the *ActionUsage Actions::ifThenActions* (see [9.2.9.2.15](#)), which is defined by the *ActionDefinition Actions::IfThenAction* (see [9.2.9.2.14](#)) and subsets *Actions::Action::actions* (see [9.2.9.2.5](#)).
 - If the *IfActionUsage* has an *elseAction*, it specialize the *ActionUsage Actions::ifThenElseActions* (see [9.2.9.2.17](#)), which is defined by the *ActionDefinition Actions::IfThenElseAction* (see [9.2.9.2.14](#)) and subsets *Actions::Action::actions* (see [9.2.9.2.5](#)).
- *checkIfActionUsageSubactionSpecialization* constraint requires that an *IfActionUsage* that is composite, has an *owningType* that is an *ActionDefinition* or *ActionUsage*, and is *not* the *entryAction* or *exitAction* of a *StateDefinition* or *StateUsage* (see [8.4.13](#)) specialize the *ActionUsage Actions::Action::ifSubactions* (see [9.2.9.2.4](#)), which subsets *Actions::ifThenActions* and *Actions::Action::subactions*.

The *ActionDefinition IfThenAction* has two input parameters: *ifTest*, which is a *BooleanEvaluation*, and *thenClause*, which is an *Action*. *IfThenElseAction* specializes *IfThenAction*, adding a third input parameter: *elseClause*, which is also an *Action*. The *ifArgument*, *thenAction* and (optionally) *elseAction* of an *IfActionUsage* are then parsed as parameters of the *IfActionUsage* that redefine the corresponding parameters of the *IfThenAction* or *IfThenElseAction*.

Thus, *IfActionUsages* such as the following:

```

action def AC {
  action if1 if test1
    then action then1 {
      // ...
    }

  action if2 if test2
    then action then2 {
      // ...
    }
    else action else2 {
      // ...
    }
}

```

(where *test1* and *test2* can be arbitrary *Boolean*-valued Expressions) are parsed, with implied Specializations included, as (see [8.2.2.16.6](#)):

8.4.12.9 If Action Usages

An `IfActionUsage` is a kind of `ActionUsage`, so all general semantic constraints for an `ActionUsage` (see [8.4.12.2](#)) also apply to an `IfActionUsage`, as well as the following additional specialization constraints:

- `checkIfActionUsageSpecialization` requires that
 - If an `IfActionUsage` does *not* have an `elseAction`, it specialize the `ActionUsage Actions::ifThenActions` (see [9.2.9.2.15](#)), which is defined by the `ActionDefinition Actions::IfThenAction` (see [9.2.9.2.14](#)) and subsets `Actions::Action::actions` (see [9.2.9.2.5](#)).
 - If the `IfActionUsage` has an `elseAction`, it specialize the `ActionUsage Actions::ifThenElseActions` (see [9.2.9.2.17](#)), which is defined by the `ActionDefinition Actions::IfThenElseAction` (see [9.2.9.2.14](#)) and subsets `Actions::Action::actions` (see [9.2.9.2.5](#)).
- `checkIfActionUsageSubactionSpecialization` constraint requires that an `IfActionUsage` that is composite, has an `owningType` that is an `ActionDefinition` or `ActionUsage`, and is *not* the `entryAction` or `exitAction` of a `StateDefinition` or `StateUsage` (see [8.4.13](#)) specialize the `ActionUsage Actions::Action::ifSubactions` (see [9.2.9.2.4](#)), which subsets `Actions::ifThenActions` and `Actions::Action::subactions`.

The `ActionDefinition IfThenAction` has two input parameters: `ifTest`, which is a `BooleanEvaluation`, and `thenClause`, which is an `Action`. `IfThenElseAction` specializes `IfThenAction`, adding a third input parameter: `elseClause`, which is also an `Action`. The `ifArgument`, `thenAction` and (optionally) `elseAction` of an `IfActionUsage` are then parsed as parameters of the `IfActionUsage` that redefine the corresponding parameters of the `IfThenAction` or `IfThenElseAction`.

Thus, `IfActionUsages` such as the following:

```
action def AC {
    action if1 if test1
        then action then1 {
            // ...
        }

    action if2 if test2
        then action then2 {
            // ...
        }
        else action else2 {
            // ...
        }
}
```

(where `test1` and `test2` can be arbitrary `Boolean`-valued Expressions) are parsed, with implied Specializations included, as (see [8.2.2.16.7](#)):

```
action def AC specializes Actions::Action {
    action if1 subsets Actions::Action::ifSubactions {
        in calc redefines Actions::IfThenAction::ifTest {
            test1
        }
        in action then1 redefines Actions::IfThenAction::thenClause {
            // ...
        }
    }

    action if2 subsets Actions::Action::ifSubactions,
        Actions::ifThenElseActions {
```

```

action def AC specializes Actions::Action {
    action if1 subsets Actions::Action::ifSubactions {
        in calc redefines Actions::IfThenAction::ifTest {
            test1
        }
        in action then1 redefines Actions::IfThenAction::thenClause {
            // ...
        }
    }

    action if2 subsets Actions::Action::ifSubactions,
    Actions::ifThenElseActions {
        in calc redefines Actions::IfThenAction::ifTest {
            test1
        }
        in action then1 redefines Actions::IfThenAction::thenClause {
            // ...
        }
        in action else2 redefines Actions::IfThenElseAction::elseClause {
            // ...
        }
    }
}

```

IfThenAction specializes the KerML Behavior *IfThenPerformance*, whose behavior is to first evaluate the *ifTest* and then, if the result of that evaluation is true, perform the *thenClause*. *IfThenElseAction* specializes the KerML Behavior *IfThenElsePerformance*, which specializes *IfThenPerformance*, adding the additional behavior such that, if the result of the evaluation of the *ifTest* is false, it performs the *elseClause*.

8.4.12.9 Loop Action Usages

A *LoopActionUsage* is a kind of *ActionUsage*, so all general semantic constraints for an *ActionUsage* (see [8.4.12.2](#)) also apply to a *LoopActionUsage*. *LoopActionUsage* is abstract. There are two concrete subclasses of *LoopActionUsage*, *WhileLoopActionUsage* and *ForLoopActionUsage*, and further semantic constraints are specific to those subclasses.

While Loops

A *WhileLoopActionUsage* is a kind of *LoopActionUsage*. The following additional specialization constraints apply to a *WhileLoopActionUsage*:

- *checkWhileLoopActionUsageSpecialization* requires that a *WhileLoopActionUsage* specialize the *ActionUsage* *Actions::whileLoopActions* (see [9.2.9.2.27](#)), which is defined by the *ActionDefinition* *Actions::WhileLoopAction* (see [9.2.9.2.26](#)) and (indirectly) subsets *Actions::Action::actions* (see [9.2.9.2.5](#)).
- *checkWhileLoopActionUsageSubactionSpecialization* requires that a *WhileLoopActionUsage* that is composite, has an *owningType* that is an *ActionDefinition* or *ActionUsage*, and is *not* the *entryAction* or *exitAction* of a *StateDefinition* or *StateUsage* (see [8.4.13](#)) specialize the *ActionUsage* *Actions::Action::whileLoops* (see [9.2.9.2.4](#)), which subsets *Actions::whileLoopActions* and (indirectly) *Actions::Action::subactions*.

A *WhileLoopAction* has three input parameters:

1. *whileTest*, which is a *BooleanExpression* that defaults to *true*
2. *body*, which is an *Action*
3. *untilTest*, which is a *BooleanExpression* that defaults to *false*

```

in calc redefines Actions::IfThenAction::ifTest {
    test1
}
in action then1 redefines Actions::IfThenAction::thenClause {
    // ...
}
in action else2 redefines Actions::IfThenElseAction::elseClause {
    // ...
}
}

```

IfThenAction specializes the KerML Behavior *IfThenPerformance*, whose behavior is to first evaluate the *ifTest* and then, if the result of that evaluation is true, perform the *thenClause*. *IfThenElseAction* specializes the KerML Behavior *IfThenElsePerformance*, which specializes *IfThenPerformance*, adding the additional behavior such that, if the result of the evaluation of the *ifTest* is false, it performs the *elseClause*.

8.4.12.10 Loop Action Usages

A *LoopActionUsage* is a kind of *ActionUsage*, so all general semantic constraints for an *ActionUsage* (see [8.4.12.2](#)) also apply to a *LoopActionUsage*. *LoopActionUsage* is abstract. There are two concrete subclasses of *LoopActionUsage*, *WhileLoopActionUsage* and *ForLoopActionUsage*, and further semantic constraints are specific to those subclasses.

While Loops

A *WhileLoopActionUsage* is a kind of *LoopActionUsage*. The following additional specialization constraints apply to a *WhileLoopActionUsage*:

- *checkWhileLoopActionUsageSpecialization* requires that a *WhileLoopActionUsage* specialize the *ActionUsage Actions::whileLoopActions* (see [9.2.9.2.29](#)), which is defined by the *ActionDefinition Actions::WhileLoopAction* (see [9.2.9.2.28](#)) and (indirectly) subsets *Actions::Action::actions* (see [9.2.9.2.5](#)).
- *checkWhileLoopActionUsageSubactionSpecialization* requires that a *WhileLoopActionUsage* that is composite, has an *owningType* that is an *ActionDefinition* or *ActionUsage*, and is *not* the *entryAction* or *exitAction* of a *StateDefinition* or *StateUsage* (see [8.4.13](#)) specialize the *ActionUsage Actions::Action::whileLoops* (see [9.2.9.2.4](#)), which subsets *Actions::whileLoopActions* and (indirectly) *Actions::Action::subactions*.

A *WhileLoopAction* has three input parameters:

1. *whileTest*, which is a *BooleanExpression* that defaults to *true*
2. *body*, which is an *Action*
3. *untilTest*, which is a *BooleanExpression* that defaults to *false*

The *whileArgument*, *bodyAction*, and *untilArgument* of the *WhileLoopActionUsage* are then parsed as owned parameters (see [8.2.2.16.7](#)), which must redefine the corresponding parameters of *WhileLoopAction*, as required by the KerML *checkFeatureParameterRedefinition* constraint (see [KerML, 8.4.4.7.1]).

Thus, a *WhileLoopActionUsage* such as the following

```

action def AW {
    action loop1
        while test1
            action body1 {
                // ...
            }
}

```

The `whileArgument`, `bodyAction`, and `untilArgument` of the `WhileLoopActionUsage` are then parsed as owned parameters (see [8.2.2.16.6](#)), which must redefine the corresponding parameters of `WhileLoopAction`, as required by the KerML `checkFeatureParameterRedefinition` constraint (see [KerML, 8.4.4.7.1]).

Thus, a `WhileLoopActionUsage` such as the following

```
action def AW {
    action loop1
        while test1
            action body1 {
                // ...
            }
            until test2;
}
```

(where `test1` and `test2` can be arbitrary Boolean-valued Expressions) is parsed, with implied Specializations included, as:

```
action def AW specializes Actions::Action {
    action loop1 subsets Actions::Action::whileLoops {
        in calc redefines Actions::WhileLoopAction::whileTest {
            test1
        }
        in action body1 redefines Actions::WhileLoopAction::body {
            // ...
        }
        in calc redefines Actions::WhileLoopAction::untilTest {
            test2
        }
    }
}
```

`WhileLoopAction` specializes the KerML Behavior `LoopPerformance`, whose behavior is to perform the `body` while the `whileTest` evaluates to true and the `untilTest` evaluates to false. The `whileTest` is evaluated before each (possible) performance of the `body`, and the `untilTest` is evaluated after each performance of the `body`.

For Loops

A `ForLoopActionUsage` is a kind of `LoopActionUsage`. The following additional specialization constraints apply to a `ForLoopActionUsage`:

- `checkForLoopActionUsageSpecialization` requires that a `ForLoopActionUsage` specialize the ActionUsage `Actions::forLoopActions` (see [9.2.9.2.13](#)), which is defined by the ActionDefinition `Actions::ForLoopAction` (see [9.2.9.2.12](#)) and (indirectly) subsets `Actions::Action::actions` (see [9.2.9.2.5](#)).
- `checkForLoopActionUsageSubactionSpecialization` constraint requires that a `ForLoopActionUsage` that is composite, has an `owningType` that is an ActionDefinition or ActionUsage, and is *not* the `entryAction` or `exitAction` of a StateDefinition or StateUsage (see [8.4.13](#)) specialize the ActionUsage `Actions::Action::forLoops` (see [9.2.9.2.4](#)), which subsets `Actions::forLoopActions` and (indirectly) `Actions::Action::subactions`.

`ForLoopAction` has two input parameters:

1. `seq`, which is a sequence of `Anything`
2. `body`, which is an `Action`

```

        until test2;
    }
}

```

(where `test1` and `test2` can be arbitrary `Boolean`-valued Expressions) is parsed, with implied Specializations included, as:

```

action def AW specializes Actions::Action {
    action loop1 subsets Actions::Action::whileLoops {
        in calc redefines Actions::WhileLoopAction::whileTest {
            test1
        }
        in action body1 redefines Actions::WhileLoopAction::body {
            // ...
        }
        in calc redefines Actions::WhileLoopAction::untilTest {
            test2
        }
    }
}

```

`WhileLoopAction` specializes the KerML Behavior `LoopPerformance`, whose behavior is to perform the `body` while the `whileTest` evaluates to true and the `untilTest` evaluates to false. The `whileTest` is evaluated before each (possible) performance of the `body`, and the `untilTest` is evaluated after each performance of the `body`.

For Loops

A `ForLoopActionUsage` is a kind of `LoopActionUsage`. The following additional specialization constraints apply to a `ForLoopActionUsage`:

- `checkForLoopActionUsageSpecialization` requires that a `ForLoopActionUsage` specialize the ActionUsage `Actions::forLoopActions` (see [9.2.9.2.13](#)), which is defined by the ActionDefinition `Actions::ForLoopAction` (see [9.2.9.2.12](#)) and (indirectly) subsets `Actions::Action::actions` (see [9.2.9.2.5](#)).
- `checkForLoopActionUsageSubactionSpecialization` constraint requires that a `ForLoopActionUsage` that is composite, has an `owningType` that is an ActionDefinition or ActionUsage, and is *not* the `entryAction` or `exitAction` of a StateDefinition or StateUsage (see [8.4.13](#)) specialize the ActionUsage `Actions::Action::forLoops` (see [9.2.9.2.4](#)), which subsets `Actions::forLoopActions` and (indirectly) `Actions::Action::subactions`.

`ForLoopAction` has two input parameters:

1. `seq`, which is a sequence of `Anything`
2. `body`, which is an `Action`

It also has a protected `ownedFeature var` that is a subset of `seq` with multiplicity `0..1`. The `loopVariable`, `seqArgument`, and `bodyAction` of a `ForLoopActionUsage` are parsed as follows (see [8.2.2.16.7](#)):

1. `loopVariable` is an `ownedFeature`
2. `seqArgument` is related by a `FeatureValue` to an `owned` parameter
3. `bodyAction` is an `owned` parameter

The `checkForLoopActionUsageVarRedefinition` constraint then requires that the `loopVariable` redefine `ForLoopAction::var`. The KerML `checkFeatureParameterRedefinition` constraint (see [KerML, 8.4.4.7.1]) requires that the two parameters redefine the corresponding parameters `seq` and `body` of `ForLoopAction`.

Thus, a `ForLoopActionUsage` such as the following

It also has a protected `ownedFeature var` that is a subset of `seq` with multiplicity `0..1`. The `loopVariable`, `seqArgument`, and `bodyAction` of a `ForLoopActionUsage` are parsed as follows (see [8.2.2.16.6](#)):

1. `loopVariable` is an `ownedFeature`
2. `seqArgument` is related by a `FeatureValue` to an `owned parameter`
3. `bodyAction` is an `owned parameter`

The `checkForLoopActionUsageVarRedefinition` constraint then requires that the `loopVariable` `redefine` `ForLoopAction:::var`. The KerML `checkFeatureParameterRedefinition` constraint (see [KerML, 8.4.4.7.1]) requires that the two parameters redefine the corresponding parameters `seq` and `body` of `ForLoopAction`.

Thus, a `ForLoopActionUsage` such as the following

```
action def AF {
    action loop2      for v : T in vals
        action body2 {
            // ...
        }
}
```

(where `vals` is an `Expression`) is parsed, with implied Specializations included, as:

```
action def AF specializes Actions:::Action {
    action loop2 subsets Actions:::Action::forLoops {
        protected v : T redefines Actions:::ForLoopAction::var;
        in ref redefines Actions:::ForLoopAction::seq = vals;
        in action body2 redefines Actions:::ForLoopAction::body {
            // ...
        }
    }
}
```

`ForLoopAction` uses a nested `WhileLoopActionUsage` to iteratively perform its `body Action`, with its `var` assigned to each successive value from `seq` in turn.

8.4.12.10 Perform Action Usages

A `PerformActionUsage` is a kind of `ActionUsage` and a kind of `EventOccurrenceUsage`. As such, all general semantic constraints on an `ActionUsage` (see [8.4.12.2](#)) and an `EventOccurrenceUsage` (see [8.4.5.3](#)) also apply to a `PerformActionUsage`. In particular, `validateEventOccurrenceUsageIsReference` requires a `PerformActionUsage` to be referential. In addition, if a `PerformActionUsage` is an `ownedFeature` of a `PartDefinition` or `PartUsage`, then the `checkPerformActionUsageSpecialization` constraint requires that it specialize the `ActionUsage Parts:::Part::performedActions` (see [9.2.4.2.1](#)), which subsets `Actions:::actions` (see [9.2.9.2.5](#)) and the kernel Feature `Occurrences:::Occurrence::enactedPerformances` (see [KerML, 9.2.4]). In this case, any `Action` referenced by the `PerformActionUsage` is considered to have been performed by the containing `Part` within its lifetime.

For example, the following model:

```
action act;
part p {
    perform action perf references act;
    // Other than having a name, the above is equivalent to
```

```

action def AF {
    action loop2           for v : T in vals
        action body2 {
            // ...
        }
}

```

(where *vals* is an Expression) is parsed, with implied Specializations included, as:

```

action def AF specializes Actions::Action {
    action loop2 subsets Actions::Action::forLoops {
        protected v : T redefines Actions::ForLoopAction::var;
        in ref redefines Actions::ForLoopAction::seq = vals;
        in action body2 redefines Actions::ForLoopAction::body {
            // ...
        }
    }
}

```

ForLoopAction uses a nested *WhileLoopActionUsage* to iteratively perform its *body Action*, with its *var* assigned to each successive value from *seq* in turn.

8.4.12.11 Perform Action Usages

A *PerformActionUsage* is a kind of *ActionUsage* and a kind of *EventOccurrenceUsage*. As such, all general semantic constraints on an *ActionUsage* (see [8.4.12.2](#)) and an *EventOccurrenceUsage* (see [8.4.5.3](#)) also apply to a *PerformActionUsage*. In particular, *validateEventOccurrenceUsageIsReference* requires a *PerformActionUsage* to be referential. In addition, if a *PerformActionUsage* is an *ownedFeature* of a *PartDefinition* or *PartUsage*, then the *checkPerformActionUsageSpecialization* constraint requires that it specialize the *ActionUsage Parts::Part::performedActions* (see [9.2.4.2.1](#)), which subsets *Actions::actions* (see [9.2.9.2.5](#)) and the kernel Feature *Occurrences::Occurrence::enactedPerformances* (see [KerML, 9.2.4]). In this case, any *Action* referenced by the *PerformActionUsage* is considered to have been performed by the containing *Part* within its lifetime.

For example, the following model:

```

action act;
part p {
    perform action perf references act;
    // Other than having a name, the above is equivalent to
    // perform act;
}

```

is, with implied Specializations included, semantically equivalent to

```

action act1 subsets Actions::actions;
part p subsets Parts::parts {
    ref action perf references act
    subsets Parts::Part::performedActions;
}

```

Thus, the values of *p.perf* will be some subset of the *Actions* represented by *act* that are performed by *p*.

As a referential *ActionUsage*, a *PerformActionUsage* that is an *ownedFeature* of an *ActionDefinition* or *ActionUsage* is required by the KerML *checkStepEnclosedPerformanceSpecialization* constraint (see [KerML, 8.4.4.7.2]) to specialize *Performances::Performance::enclosedPerformance* (see [KerML, 9.2.6]). If the *PerformActionUsage* has a *ReferenceSubsetting*, then this will suffice to satisfy the *checkActionUsageSpecialization* constraint, if the referenced *ActionUsage* does. However, if it does not

```

    // perform act;
}

```

is, with implied Specializations included, semantically equivalent to

```

action act1 subsets Actions::actions;
part p subsets Parts::parts {
    ref action perf references act
    subsets Parts::Part::performedActions;
}

```

Thus, the values of *p.perf* will be some subset of the *Actions* represented by *act* that are performed by *p*.

As a referential ActionUsage, a PerformActionUsage that is an ownedFeature of an ActionDefinition or ActionUsage is required by the KerML checkStepEnclosedPerformanceSpecialization constraint (see [KerML, 8.4.4.7.2]) to specialize *Performances::Performance::enclosedPerformance* (see [KerML, 9.2.6]). If the PerformActionUsage has a ReferenceSubsetting, then this will suffice to satisfy the checkActionUsageSpecialization constraint, if the referenced ActionUsage does. However, if it does not have a ReferenceSubsetting (or other relevant explicit ownedSpecialization), it requires an implied Subsetting of *Actions::actions*.

```

action def APA specializes Actions::Action {
    perform action pa1 references act
    subsets Performances::Performance::enclosedPerformances;
    perform action pa2 subsets Actions::actions
    subsets Performances::Performance::enclosedPerformances;
}

```

A PerformActionUsage that is an ownedFeature of an OccurrenceDefinition or OccurrenceUsage but *not* a PartDefinition, PartUsage, ActionDefinition or ActionUsage has the same semantics as an EventOccurrenceUsage in that context, with an ActionUsage as its referenced OccurrenceUsage (see [8.4.5.3](#)). Otherwise, a PerformActionUsage has the same semantics as a referential ActionUsage (see [8.4.12.2](#)).

8.4.13 States Semantics

Abstract syntax reference: [8.3.17](#)

8.4.13.1 State Definitions

A StateDefinition is a kind of ActionDefinition. As such, all the general semantic constraints for an ActionDefinition (see [8.4.12.1](#)) also apply to a StateDefinition. In addition, the checkStateDefinitionSpecialization constraint requires that a StateDefinition specialize the base StateDefinition *States::StateAction* (see [9.2.10.2.1](#)), which specializes the ActionDefinition *Actions::Action* (see [9.2.9.2.4](#)) and the kernel Behavior *StatePerformances::StatePerformance* (see [KerML, 9.2.6]).

```

state def S specializes States::StateAction;
state def S1 specializes S;

```

Further, the checkActionUsageStateActionRedefinition constraint (see [8.4.12.2](#)) requires that an ActionUsage that is an entryAction, exitAction or doAction of a StateDefinition (i.e., is owned via a StateSubactionMembership) redefine, respectively, the entryAction, exitAction, or doAction feature of *StateAction* (see [9.2.10.2.1](#)), which redefine the entry, exit, and do features of *StatePerformances::StatePerformance* (see [KerML, 9.2.6]), restricting them to be *Actions* (see [9.2.9.2.4](#)).

have a `ReferenceSubsetting` (or other relevant explicit `ownedSpecialization`), it requires an implied `Subsetting` of `Actions::actions`.

```
action def APA specializes Actions::Action {
    perform action pa1 references act
    subsets Performances::Performance::enclosedPerformances;
    perform action pa2 subsets Actions::actions
    subsets Performances::Performance::enclosedPerformances;
}
```

A `PerformActionUsage` that is an `ownedFeature` of an `OccurrenceDefinition` or `OccurrenceUsage` but *not* a `PartDefinition`, `PartUsage`, `ActionDefinition` or `ActionUsage` has the same semantics as an `EventOccurrenceUsage` in that context, with an `ActionUsage` as its referenced `OccurrenceUsage` (see [8.4.5.3](#)). Otherwise, a `PerformActionUsage` has the same semantics as a referential `ActionUsage` (see [8.4.12.2](#)).

8.4.13 States Semantics

Abstract syntax reference: [8.3.17](#)

8.4.13.1 State Definitions

A `StateDefinition` is a kind of `ActionDefinition`. As such, all the general semantic constraints for an `ActionDefinition` (see [8.4.12.1](#)) also apply to a `StateDefinition`. In addition, the `checkStateDefinitionSpecialization` constraint requires that a `StateDefinition` specialize the base `StateDefinition States::StateAction` (see [9.2.10.2.1](#)), which specializes the `ActionDefinition Actions::Action` (see [9.2.9.2.4](#)) and the kernel Behavior `StatePerformances::StatePerformance` (see [KerML, 9.2.6]).

```
state def S specializes States::StateAction;
state def S1 specializes S;
```

Further, the `checkActionUsageStateActionRedefinition` constraint (see [8.4.12.2](#)) requires that an `ActionUsage` that is an `entryAction`, `exitAction` or `doAction` of a `StateDefinition` (i.e., is owned via a `StateSubactionMembership`) redefine, respectively, the `entryAction`, `exitAction`, or `doAction` feature of `StateAction` (see [9.2.10.2.1](#)), which redefine the `entry`, `exit`, and `do` features of `StatePerformances::StatePerformance` (see [KerML, 9.2.6]), restricting them to be `Actions` (see [9.2.9.2.4](#)).

```
state def SA specializes States::StateAction {
    entry action entAct redefines States::StateAction::entryAction;
    do action doAct redefines States::StateAction::doAction;
    exit action extAct redefines States::StateAction::exitAction;
}
```

A `StateAction` is a kind of `StatePerformance`, which specifies the basic semantics of entry into a state, the performance of behaviors while in a state, and the acceptance of an *incomingTransfer*, causing an exit from the state (see [KerML, 9.2.6]). See also the descriptions of the semantics of `StateUsages` (see [8.4.13.2](#)) and `TransitionUsages` (see [8.4.13.3](#)). The `StateAction` semantic model also includes various additional features related to various kinds of `subactions` of `StateActions`:

- `subactions` – Redefines `Action::subactions` to subset `StatePerformances::middle`, thus excluding `entryActions` and `exitActions` from the collection of `subactions` for a `StateAction` (see [8.4.13.2](#)).
- `substates` – The `subactions` that are `StateActions` (see [8.4.13.2](#)).
- `exclusiveStates` – The `substates` that are *mutually exclusive*, that is whose performances do not overlap in time. If a `StateDefinition` or `StateUsage` is *not parallel* (i.e., `isParallel = false`), than all the `substates` of its `StateActions` will be `exclusiveStates` (see [8.4.13.2](#)).

```

state def SA specializes States::StateAction {
    entry action entAct redefines States::StateAction::entryAction;
    do action doAct redefines States::StateAction::doAction;
    exit action extAct redefines States::StateAction::exitAction;
}

```

A *StateAction* is a kind of *StatePerformance*, which specifies the basic semantics of entry into a state, the performance of behaviors while in a state, and the acceptance of an *incomingTransfer*, causing an exit from the state (see [KerML, 9.2.6]). See also the descriptions of the semantics of *StateUsages* (see [8.4.13.2](#)) and *TransitionUsages* (see [8.4.13.3](#)). The *StateAction* semantic model also includes various additional features related to various kinds of *subactions* of *StateActions*:

- *subactions* – Redefines *Action::subactions* to subset *StatePerformances::middle*, thus excluding *entryActions* and *exitActions* from the collection of *subactions* for a *StateAction* (see [8.4.13.2](#)).
- *substates* – The *subactions* that are *StateActions* (see [8.4.13.2](#)).
- *exclusiveStates* – The *substates* that are *mutually exclusive*, that is whose performances do not overlap in time. If a *StateDefinition* or *StateUsage* is *not parallel* (i.e., *isParallel* = *false*), than all the *substates* of its *StateActions* will be *exclusiveStates* (see [8.4.13.2](#)).
- *stateTransitions* – The subset of *transitions* (inherited from *Action*; see [8.4.12.1](#)) that are *StateTransitionActions* (see [8.4.13.3](#)).

8.4.13.2 State Usages

A *StateUsage* is a kind of *ActionUsage*. As such, all the general semantic constraints for an *ActionUsage* (see [8.4.12.2](#)) also apply to a *StateUsage*, as well as the following additional specialization constraints:

- *checkStateUsageSpecialization* requires that a *StateUsage* specialize the base *StateUsage* *States::stateActions* (see [9.2.10.2.2](#)), which is defined by the *StateDefinition* *States::StateAction* (see [9.2.10.2.1](#)) and subsets the *ActionUsage* *Actions::actions* (see [9.2.9.2.5](#)).

```

state s : S subsets States::StateActions;
state s1 : S1 subsets s;

```

- *checkStateUsageSubstateSpecialization* requires that a composite *StateUsage* whose *owningType* is a *StateDefinition* or *StateUsage*, but is *not* the *entryAction* or *exitAction*, specialize the *StateUsage* *States::StateAction::substates* (see [9.2.10.2.1](#)), which subsets *State::StateAction::subactions*.
- *checkStateUsageExclusiveStateSpecialization* requires that a composite *StateUsage* whose *owningType* is a *StateDefinition* or *StateUsage* for which *isParallel* = *false*, but is *not* the *entryAction* or *exitAction*, specialize the *StateUsage* *States::StateAction::exclusiveStates* (see [9.2.10.2.1](#)), which subsets *State::StateAction::substates*. This constraint enforces the semantic requirement that a non-parallel *StateAction* perform only one *substate* at a time.

```

state def SE specializes States::StateAction {
    state sel subsets States::StateAction::exclusiveStates;
    state se2 subsets States::StateAction::exclusiveStates;
}
state def SP specializes States::StateAction parallel {
    state sp1 subsets States::StateAction::substates;
    state sp2 subsets States::StateAction::substates;
}

```

- *stateTransitions* – The subset of *transitions* (inherited from *Action*; see [8.4.12.1](#)) that are *StateTransitionActions* (see [8.4.13.3](#)).

8.4.13.2 State Usages

A *StateUsage* is a kind of *ActionUsage*. As such, all the general semantic constraints for an *ActionUsage* (see [8.4.12.2](#)) also apply to a *StateUsage*, as well as the following additional specialization constraints:

- *checkStateUsageSpecialization* requires that a *StateUsage* specialize the base *StateUsage States::stateActions* (see [9.2.10.2.2](#)), which is defined by the *StateDefinition States::StateAction* (see [9.2.10.2.1](#)) and subsets the *ActionUsage Actions::actions* (see [9.2.9.2.5](#)).

```
state s : S subsets States::StateActions;
state s1 : S1 subsets s;
```

- *checkStateUsageSubstateSpecialization* requires that a composite *StateUsage* whose owningType is a *StateDefinition* or *StateUsage*, but is *not* the *entryAction* or *exitAction*, specialize the *StateUsage States::StateAction::substates* (see [9.2.10.2.1](#)), which subsets *State::StateAction::subactions*.
- *checkStateUsageExclusiveStateSpecialization* requires that a composite *StateUsage* whose owningType is a *StateDefinition* or *StateUsage* for which *isParallel* = *false*, but is *not* the *entryAction* or *exitAction*, specialize the *StateUsage States::StateAction::exclusiveStates* (see [9.2.10.2.1](#)), which subsets *State::StateAction::substates*. This constraint enforces the semantic requirement that a non-parallel *StateAction* perform only one *substate* at a time.

```
state def SE specializes States::StateAction {
    state s1 subsets States::StateAction::exclusiveStates;
    state s2 subsets States::StateAction::exclusiveStates;
}
state def SP specializes States::StateAction parallel {
    state sp1 subsets States::StateAction::substates;
    state sp2 subsets States::StateAction::substates;
}
```

- *checkStateUsageOwnedStateSpecialization* requires that a composite *StateUsage* whose owningType is a *PartDefinition* or a *PartUsage* specialize the *StateUsage Parts::Part::ownedStates* (see [9.2.4.2.1](#)), which subsets the *ActionUsage Parts::Part::ownedActions*. Note also that, in other cases, the general KerML *checkStepEnclosedPerformanceSpecialization*, *checkStepSubperformanceSpecialization* and *checkStepOwnedPerformanceSpecialization* constraints will still apply (see [KerML, 8.4.4.7]), as well as *checkActionUsageSubactionSpecialization* (see [8.4.12.2](#)).

```
action def AS subsets Action::Action {
    ref state st1 subsets Performances::Performance::enclosedPerformance;
    state st2 subsets Actions::Action::ownedActions;
}
part def PS specializes Parts::Part {
    state s : S subsets Parts::Part::ownedStates;
}
item def IS specializes Items::Item {
    state s : S subsets Objects::Object::ownedPerformances;
}
```

In addition, the *checkActionUsageStateActionRedefinition* constraint (see [8.4.12.2](#)) requires that an *ActionUsage* that is an *entryAction*, *exitAction* or *doAction* of a *StateUsage* (i.e., is owned via a

- `checkStateUsageOwnedStateSpecialization` requires that a composite `StateUsage` whose `owningType` is a `PartDefinition` or a `PartUsage` specialize the `StateUsage Parts::Part::ownedStates` (see [9.2.4.2.1](#)), which subsets the `ActionUsage Parts::Part::ownedActions`. Note also that, in other cases, the general KerML `checkStepEnclosedPerformanceSpecialization`, `checkStepSubperformanceSpecialization` and `checkStepOwnedPerformanceSpecialization` constraints will still apply (see [KerML, 8.4.4.7]), as well as `checkActionUsageSubactionSpecialization` (see [8.4.12.2](#)).

```

action def AS subsets Action::Action {
    ref state st1 subsets Performances::Performance::enclosedPerformance;
    state st2 subsets Actions::Action::ownedActions;
}
part def PS specializes Parts::Part {
    state s : S subsets Parts::Part::ownedStates;
}
item def IS specializes Items::Item {
    state s : S subsets Objects::Object::ownedPerformances;
}

```

In addition, the `checkActionUsageStateActionRedefinition` constraint (see [8.4.12.2](#)) requires that an `ActionUsage` that is an `entryAction`, `exitAction` or `doAction` of a `StateUsage` (i.e., is owned via a `StateSubactionMembership`) redefine, respectively, the `entryAction`, `exitAction`, or `doAction` feature of the `StateDefinition StateAction` (see [9.2.10.2.1](#)), which redefine the `entry`, `exit`, and `do` features of the kernel Behavior `StatePerformances::StatePerformance` (see [KerML, 9.2.6]), restricting them to be `Actions` (see [9.2.9.2.4](#)).

```

state sa subsets States::stateActions {
    entry action entAct redefines States::StateAction::entryAction;
    do action doAct redefines States::StateAction::doAction;
    exit action extAct redefines States::StateAction::exitAction;
}

```

8.4.13.3 Transition Usages

A `TransitionUsage` is a kind of `ActionUsage`. As such, all the general semantic constraints for an `ActionUsage` (see [8.4.12.2](#)) also apply to a `TransitionUsage`, as well as the following additional specialization constraints:

- `checkTransitionUsageSpecialization` requires that a `TransitionUsage` specialize the `ActionUsage Actions::transitionActions` (see [9.2.9.2.5](#)), which is defined by the `ActionDefinition Actions::TransitionAction` (see [9.2.9.2.4](#)) and subsets the `ActionUsage Actions::actions` (see [9.2.9.2.5](#)).
- `checkTransitionUsageActionSpecialization` requires that a composite `TransitionUsage` whose `ownedType` is an `ActionDefinition` or `ActionUsage`, but *not* a `StateDefinition` or `StateUsage`, specialize the `ActionUsage Actions::Action::decisionTransitions` (see [9.2.9.2.4](#)), which is typed by the `ActionDefinition Actions::DecisionTransitionAction` (see [9.2.9.2.10](#)) and subsets the `ActionUsage Actions::Action::transitions` (see [9.2.9.2.4](#)). (For the semantics of `TransitionUsages` of `DecisionTransitionActions`, see [8.4.12.3](#).)
- `checkTransitionUsageStateSpecialization` requires that a composite `TransitionUsage` whose `ownedType` is a `StateDefinition` or `StateUsage` specialize the `ActionUsage States::StateAction::stateTransitions` (see [9.2.10.2.1](#)), which is typed by the `ActionDefinition States::StateTransitionAction` (see [9.2.10.2.3](#)) and subsets the `ActionUsage Actions::Action::transitions` (see [9.2.9.2.4](#)).

`StateSubactionMembership`) redefine, respectively, the `entryAction`, `exitAction`, or `doAction` feature of the `StateDefinition StateAction` (see [9.2.10.2.1](#)), which redefine the `entry`, `exit`, and `do` features of the kernel Behavior `StatePerformances::StatePerformance` (see [KerML, 9.2.6]), restricting them to be `Actions` (see [9.2.9.2.4](#)).

```
state sa subsets States::stateActions {
    entry action entAct redefines States::StateAction::entryAction;
    do action doAct redefines States::StateAction::doAction;
    exit action extAct redefines States::StateAction::exitAction;
}
```

8.4.13.3 Transition Usages

A `TransitionUsage` is a kind of `ActionUsage`. As such, all the general semantic constraints for an `ActionUsage` (see [8.4.12.2](#)) also apply to a `TransitionUsage`, as well as the following additional specialization constraints:

- `checkTransitionUsageSpecialization` requires that a `TransitionUsage` specialize the `ActionUsage Actions::transitionActions` (see [9.2.9.2.27](#)), which is defined by the `ActionDefinition Actions::TransitionAction` (see [9.2.9.2.26](#)) and subsets the `ActionUsage Actions::actions` (see [9.2.9.2.5](#)).
- `checkTransitionUsageActionSpecialization` requires that a composite `TransitionUsage` whose `ownedType` is an `ActionDefinition` or `ActionUsage`, but *not* a `StateDefinition` or `StateUsage`, specialize the `ActionUsage Actions::Action::decisionTransitions` (see [9.2.9.2.4](#)), which is typed by the `ActionDefinition Actions::DecisionTransitionAction` (see [9.2.9.2.10](#)) and subsets the `ActionUsage Actions::Action::transitions` (see [9.2.9.2.4](#)). (For the semantics of `TransitionUsages` of `DecisionTransitionActions`, see [8.4.12.3](#).)
- `checkTransitionUsageStateSpecialization` requires that a composite `TransitionUsage` whose `ownedType` is a `StateDefinition` or `StateUsage` specialize the `ActionUsage States::StateAction::stateTransitions` (see [9.2.10.2.1](#)), which is typed by the `ActionDefinition States::StateTransitionAction` (see [9.2.10.2.3](#)) and subsets the `ActionUsage Actions::Action::transitions` (see [9.2.9.2.4](#)).

`StateTransitionAction` subclassifies `Actions::TransitionAction` (see [9.2.9.2.26](#)) and the kernel Behavior `StatePerformances::StateTransitionPerformance` (see [KerML, 9.2.11]). The `transitionLinkSource` of a `StateTransitionAction` must be a `StateAction`. The `StateTransitionAction` then represents a possible transition from the source `StateAction` to a target `Action`.

A `TransitionUsage` is parsed as having the following `ownedMemberships` (see [8.2.2.17.3](#)):

- An alias (non-owning) `Membership` to its source `StateUsage` (or a `Feature` chain identifying the source).
- A `ParameterMembership` for the `transitionLinkSource` parameter.
- A `ParameterMembership` for the `payload` parameter (if the `TransitionUsage` has a `triggerAction`).
- Zero to three `TransitionFeatureMemberships` for up to one each of a `triggerAction`, `guardExpression`, and `effectAction`. Note also that a `triggerAction` is parsed as an `AcceptActionUsage`, with `payload` and, optionally, `receiver` parameters (see [8.4.12.6](#)).
- An `OwningMembership` for the succession of the `TransitionUsage`, which is a `Succession` whose `targetFeature` is the target of the `TransitionUsage` (or a `Feature` chain identifying the target).

The following semantic constraints then apply:

- `checkFeatureParameterRedefinition` (see [KerML, 8.4.4.7]) requires that the `transitionLinkSource` and `payload` parameters of a `TransitionUsage` redefinition the corresponding parameters of `StateTransitionAction` (see [9.2.10.2.3](#)), as inherited from `Transition`

StateTransitionAction subclasses *Actions::TransitionAction* (see [9.2.9.2.24](#)) and the kernel Behavior *StatePerformances::StateTransitionPerformance* (see [KerML, 9.2.11]). The *transitionLinkSource* of a *StateTransitionAction* must be a *StateAction*. The *StateTransitionAction* then represents a possible transition from the source *StateAction* to a target *Action*.

A *TransitionUsage* is parsed as having the following ownedMemberships (see [8.2.2.17.3](#)):

- An alias (non-owning) Membership to its source *StateUsage* (or a Feature chain identifying the source).
- A ParameterMembership for the *transitionLinkSource* parameter.
- A ParameterMembership for the *payload* parameter (if the *TransitionUsage* has a *triggerAction*).
- Zero to three *TransitionFeatureMemberships* for up to one each of a *triggerAction*, *guardExpression*, and *effectAction*. Note also that a *triggerAction* is parsed as an *AcceptActionUsage*, with *payload* and, optionally, *receiver* parameters (see [8.4.12.6](#)).
- An OwningMembership for the succession of the *TransitionUsage*, which is a Succession whose *targetFeature* is the target of the *TransitionUsage* (or a Feature chain identifying the target).

The following semantic constraints then apply:

- *checkFeatureParameterRedefinition* (see [KerML, 8.4.4.7]) requires that the *transitionLinkSource* and *payload* parameters of a *TransitionUsage* redefinition the corresponding parameters of *StateTransitionAction* (see [9.2.10.2.3](#)), as inherited from *Transition*
- *checkTransitionUsagePayloadSpecialization* requires that the *payload* parameter of a *TransitionUsage* also subset the *payloadParameter* of the *triggerAction*. Note also that the effective name of a *ReferenceUsage* used as the *payload* parameter of a *TransitionUsage* is defined to be the name of the *payloadParameter* it subsets, rather than the name of the *StateTransitionAction::payload* feature it redefines.
- *checkTransitionUsageTransitionFeatureSpecialization* requires that the *triggerAction*, *guardExpression*, and *effectAction* of a *TransitionUsage* (if they exist) specialize, respectively, the *accepter*, *guard*, and *effect* features of *TransitionAction* ([9.2.9.2.24](#); see also [KerML, 9.2.10, 9.2.11] for inherited features).
- *checkTransitionUsageSuccessionSourceSpecialization* requires that the *sourceFeature* of the succession of a *TransitionUsage* be the aliased source for the *TransitionUsage*.
- *checkTransitionUsageSuccessionBindingConnector* requires that a *TransitionUsage* have an *ownedMember* that is a *BindingConnector* between its succession and the inherited *TransitionPerformances::TransitionPerformance::transitionLink* feature.
- *checkTransitionUsageSourceBindingConnector* requires that a *TransitionUsage* have an *ownedMember* that is a *BindingConnector* between its source and its *transitionLinkSource* parameter.
- *checkConnectorTypeFeaturing* (see [KerML, 8.4.4.6.1]) then determines the *featuringType* of the Succession and two *BindingConnectors* owned by a *TransitionUsage* (typically the *owningType* of the *TransitionUsage*).

As a result of all the above semantic constraints, a *TransitionUsage* such as in the following model

```
state def ST {
    state s1;
    transition trns
    first s1
    accept x : T via tgt
    if test
    effect action efct {
```

- `checkTransitionUsagePayloadSpecialization` requires that the `payload` parameter of a `TransitionUsage` also subset the `payloadParameter` of the `triggerAction`. Note also that the effective name of a `ReferenceUsage` used as the `payload` parameter of a `TransitionUsage` is defined to be the name of the `payloadParameter` it subsets, rather than the name of the `StateTransitionAction::payload` feature it redefines.
- `checkTransitionUsageTransitionFeatureSpecialization` requires that the `triggerAction`, `guardExpression`, and `effectAction` of a `TransitionUsage` (if they exist) specialize, respectively, the `accepter`, `guard`, and `effect` features of `TransitionAction` ([9.2.9.2.26](#); see also [KerML, 9.2.10, 9.2.11] for inherited features).
- `checkTransitionUsageSuccessionSourceSpecialization` requires that the `sourceFeature` of the succession of a `TransitionUsage` be the aliased source for the `TransitionUsage`.
- `checkTransitionUsageSuccessionBindingConnector` requires that a `TransitionUsage` have an `ownedMember` that is a `BindingConnector` between its succession and the inherited `TransitionPerformances::TransitionPerformance::transitionLink` feature.
- `checkTransitionUsageSourceBindingConnector` requires that a `TransitionUsage` have an `ownedMember` that is a `BindingConnector` between its source and its `transitionLinkSource` parameter.
- `checkConnectorTypeFeaturing` (see [KerML, 8.4.4.6.1]) then determines the `featuringType` of the Succession and two `BindingConnectors` owned by a `TransitionUsage` (typically the `owningType` of the `TransitionUsage`).

As a result of all the above semantic constraints, a `TransitionUsage` such as in the following model

```
state def ST {
    state s1;
    transition trns
    first s1
    accept x : T via tgt
    if test
    effect action efct {
        // ...
    }
    then s2;
    state s2;
}
```

(where `test` is a *Boolean*-valued Expression) has, with implied Relationships included, the equivalent kernel semantics of:

```
// KerML
behavior ST specializes States::StateAction {
    step s1 subsets States::StateAction::exclusiveStates;

    step trns subsets States::State::stateTransitions {
        alias s1 of SC::s1;

        in feature redefines
            States::StateTransitionAction::transitionLinkSource;
        in feature x
            redefines States::StateTransitionAction::payload
            subsets accepter.x;

        step redefines Actions::TransitionAction::accepter {
            inout ref x : T redefines Actions::AcceptAction::payload;
            in ref redefines Actions::AcceptAction::receiver = tgt;
        }

        bool redefines Actions::TransitionAction::guard {
            test
        }
    }
}
```

```

        // ...
    }
    then s2;
    state s2;
}

```

(where *test* is a *Boolean*-valued Expression) has, with implied Relationships included, the equivalent kernel semantics of:

```

// KerML
behavior ST specializes States::StateAction {
    step s1 subsets States::StateAction::exclusiveStates;

    step trns subsets States::State::stateTransitions {
        alias s1 of SC::s1;

        in feature redefines
            States::StateTransitionAction::transitionLinkSource;
        in feature x
            redefines States::StateTransitionAction::payload
            subsets accepter.x;

        step redefines Actions::TransitionAction::accepter {
            inout ref x : T redefines Actions::AcceptAction::payload;
            in ref redefines Actions::AcceptAction::receiver = tgt;
        }

        bool redefines Actions::TransitionAction::guard {
            test
        }

        step efct redefines Actions::TransitionAction::effect {
            // ...
        }

        member succession trns_link
            subsets Occurrences::happensBeforeLinks
            featured by ST
            first s1 then s2;

        member binding featured by ST of trns_link =
            TransitionPerformances::TransitionPerformance::transitionLink;

        member binding featured by ST of s1 = transitionLinkSource;
    }

    step s2 subsets States::StateAction::exclusiveStates;
}

```

A *StateTransitionAction* is a kind of *StateTransitionPerformance*, which specifies the fundamental semantics of transition out of a state. The *guard* of a *StateTransitionAction* is evaluated during the performance of its source *StateAction*, and, if the *guard* evaluates to true and the transition accepts a *Transfer*, then its *accepter* is also performed during the source *StateAction*, after which the *exitAction* of the *StateAction* is performed (if it has one), and then the *effect* of the *StateTransitionAction* is performed (if it has one). Finally, the *transitionLink* of the *StateTransitionAction* is asserted to have a value, meaning that there must be a target *Action* temporally following the source *StateAction*. (For a complete description of the semantics of *StateTransitionPerformance*, see [KerML, 9.2.10].)

```

}

step efct redefines Actions::TransitionAction::effect {
    // ...
}

member succession trns_link
    subsets Occurrences::happensBeforeLinks
    featured by ST
    first s1 then s2;

member binding featured by ST of trns_link =
    TransitionPerformances::TransitionPerformance::transitionLink;

member binding featured by ST of s1 = transitionLinkSource;
}

step s2 subsets States::StateAction::exclusiveStates;
}

```

A *StateTransitionAction* is a kind of *StateTransitionPerformance*, which specifies the fundamental semantics of transition out of a state. The *guard* of a *StateTransitionAction* is evaluated during the performance of its source *StateAction*, and, if the *guard* evaluates to true and the transition accepts a *Transfer*, then its *accepter* is also performed during the source *StateAction*, after which the *exitAction* of the *StateAction* is performed (if it has one), and then the *effect* of the *StateTransitionAction* is performed (if it has one). Finally, the *transitionLink* of the *StateTransitionAction* is asserted to have a value, meaning that there must be a target *Action* temporally following the source *StateAction*. (For a complete description of the semantics of *StateTransitionPerformance*, see [KerML, 9.2.10].)

8.4.13.4 Exhibit State Usages

An *ExhibitStateUsage* is a kind of *StateUsage* and a kind of *PerformActionUsage*. As such, all general semantic constraints on a *StateUsage* (see [8.4.13.2](#)) and a *PerformActionUsage* (see [8.4.12.11](#)) also apply to a *ExhibitStateUsage*. In particular, *validateEventOccurrenceUsageIsReference* requires an *ExhibitStateUsage* to be referential. In addition, if an *ExhibitStateUsage* is an *ownedFeature* of a *PartDefinition* or *PartUsage*, then the *checkExhibitStateUsageSpecialization* constraint requires that it specialize the *StateUsage* *Parts::Part::exhibitStates* (see [9.2.4.2.1](#)), which subsets *State::states* (see [7.17](#)) and *Parts::Part::performedActions*. In this case, any *State* referenced by the *ExhibitStateUsage* is considered to have been exhibited by the containing *Part* within its lifetime.

For example, the following model:

```

state st;
part p {
    exhibit state exhb references st;
}

```

is, with implied Specializations included, semantically equivalent to

```

state st subsets State::states;
part p subsets Parts::parts {
    ref state exhb references st
    subsets Parts::Part::exhibitedStates;
}

```

Thus, the values of *p.exhb* will be the subset of the *States* represented by *st* that are performed by *p*.

As a referential *StateUsage*, an *ExhibitStateUsage* that is an *ownedFeature* of an *ActionDefinition* or *ActionUsage* (including a *StateDefinition* or *StateUsage*) is required by the KerML

8.4.13.4 Exhibit State Usages

An `ExhibitStateUsage` is a kind of `StateUsage` and a kind of `PerformActionUsage`. As such, all general semantic constraints on a `StateUsage` (see [8.4.13.2](#)) and a `PerformActionUsage` (see [8.4.12.10](#)) also apply to a `ExhibitStateUsage`. In particular, `validateEventOccurrenceUsageIsReference` requires an `ExhibitStateUsage` to be referential. In addition, if an `ExhibitStateUsage` is an `ownedFeature` of a `PartDefinition` or `PartUsage`, then the `checkExhibitStateUsageSpecialization` constraint requires that it specialize the `StateUsage` `Parts::Part::exhibitStates` (see [9.2.4.2.1](#)), which subsets `State::states` (see [7.17](#)) and `Parts::Part::performedActions`. In this case, any `State` referenced by the `ExhibitStateUsage` is considered to have been exhibited by the containing `Part` within its lifetime.

For example, the following model:

```
state st;
part p {
    exhibit state exhb references st;
}
```

is, with implied Specializations included, semantically equivalent to

```
state st subsets State::states;
part p subsets Parts::parts {
    ref state exhb references st
    subsets Parts::Part::exhibitedStates;
}
```

Thus, the values of `p.exhb` will be the subset of the `States` represented by `st` that are performed by `p`.

As a referential `StateUsage`, an `ExhibitStateUsage` that is an `ownedFeature` of an `ActionDefinition` or `ActionUsage` (including a `StateDefinition` or `StateUsage`) is required by the KerML `checkStepEnclosedPerformanceSpecialization` constraint (see [KerML, 8.4.4.7.2]) to specialize `Performances::Performance::enclosedPerformance` (see [KerML, 9.2.6]). If the `ExhibitStateUsage` has a `ReferenceSubsetting`, then this will suffice to satisfy the `checkStateUsageSpecialization` constraint, if the referenced `StateUsage` does. However, if it does not have a `ReferenceSubsetting` (or other relevant explicit `ownedSpecialization`), it requires an implied Subsetting of `State::states`.

```
state def SES specializes States::State {
    exhibit state es1 references st
    subsets Performances::Performance::enclosedPerformances;
    exhibit state es2 subsets State::states
    subsets Performances::Performance::enclosedPerformances;
}
```

An `ExhibitStateUsage` that is an `ownedFeature` of an `OccurrenceDefinition` or `OccurrenceUsage` but *not* a `PartDefinition`, `PartUsage`, `ActionDefinition` or `ActionUsage` has the same semantics as an `EventOccurrenceUsage` in that context, with a `StateUsage` as its referenced `OccurrenceUsage` (see [8.4.5.3](#)). Otherwise, an `ExhibitStateUsage` has the same semantics as a referential `StateUsage` (see [8.4.13.2](#)).

8.4.14 Calculations Semantics

Abstract syntax reference: [8.3.18](#)

`checkStepEnclosedPerformanceSpecialization` constraint (see [KerML, 8.4.4.7.2]) to specialize `Performances::Performance::enclosedPerformance` (see [KerML, 9.2.6]). If the `ExhibitStateUsage` has a `ReferenceSubsetting`, then this will suffice to satisfy the `checkStateUsageSpecialization` constraint, if the referenced `StateUsage` does. However, if it does not have a `ReferenceSubsetting` (or other relevant explicit `ownedSpecialization`), it requires an implied `Subsetting` of `State::states`.

```
state def SES specializes States::State {
    exhibit state es1 references st
        subsets Performances::Performance::enclosedPerformances;
    exhibit state es2 subsets State::states
        subsets Performances::Performance::enclosedPerformances;
}
```

An `ExhibitStateUsage` that is an `ownedFeature` of an `OccurrenceDefinition` or `OccurrenceUsage` but *not* a `PartDefinition`, `PartUsage`, `ActionDefinition` or `ActionUsage` has the same semantics as an `EventOccurrenceUsage` in that context, with a `StateUsage` as its referenced `OccurrenceUsage` (see [8.4.5.3](#)). Otherwise, an `ExhibitStateUsage` has the same semantics as a referential `StateUsage` (see [8.4.13.2](#)).

8.4.14 Calculations Semantics

Abstract syntax reference: [8.3.18](#)

8.4.14.1 Calculation Definitions

A `CalculationDefinition` is a kind of `ActionDefinition` and a kind of KerML Function. As such, all the general semantic constraints for an `ActionDefinition` (see [8.4.12.1](#)) and a `Function` (see [KerML, 8.4.4.8.1]) apply to a `CalculationDefinition`. In addition, the `checkCalculationDefinitionSpecialization` constraint requires that a `CalculationDefinition` specialize the base `CalculationDefinition` `Calculations::Calculation` (see [9.2.11.2.1](#)), which subclassifies the `ActionDefinition` `Actions::Action` (see [9.2.9.2.4](#)) and the kernel `Behavior` `Performances::Evaluation` (see [KerML, 9.2.6]). Further, in addition to the KerML `checkFeatureParameterRedefinition` constraint, that applies to all kinds of `ActionDefinitions` (see [8.4.12.1](#)), the KerML `checkFeatureResultRedefinition` constraint (see [KerML, 8.4.4.8.1]) constraint also requires that the `result` parameter of a `CalculationDefinition` redefine the `result` parameters of any `Functions` it specializes (including other `CalculationDefinitions`), which means that it ultimately directly or indirectly specializes `Performances::Evaluation::result`.

```
calc def C specializes Calculations::Calculation {
    in ref a redefines Base::things;
    in ref b redefines Base::things;
    return ref result redefines Calculations::Calculation::result;
}
calc def C1 specializes C {
    in ref a redefines C::a;
    // The result parameter can be in any position.
    return ref result redefines C::result;
    in ref b redefines C::b;
}
```

Further, if a `CalculationDefinition` owns an `Expression` via a `ResultExpressionMembership`, then the KerML `checkFunctionResultBindingConnector` constraint (see [KerML, 8.4.4.8.1]) requires that the `CalculationDefinition` have, as an `ownedFeature`, a `BindingConnector` between the `result` parameter of the `Expression` and the `result` parameter of the `CalculationDefinition`.

```
calc def C2 specializes Calculations::Calculation {
    return redefines Calculations::Calculation::result;
    binding result = resultExpr.result; // Implied
```

8.4.14.1 Calculation Definitions

A CalculationDefinition is a kind of ActionDefinition and a kind of KerML Function. As such, all the general semantic constraints for an ActionDefinition (see [8.4.12.1](#)) and a Function (see [KerML, 8.4.4.8.1]) apply to a CalculationDefinition. In addition, the checkCalculationDefinitionSpecialization constraint requires that a CalculationDefinition specialize the base CalculationDefinition Calculations::Calculation (see [9.2.11.2.1](#)), which classifies the ActionDefinition Actions::Action (see [9.2.9.2.4](#)) and the kernel Behavior Performances::Evaluation (see [KerML, 9.2.6]). Further, in addition to the KerML checkFeatureParameterRedefinition constraint, that applies to all kinds of ActionDefinitions (see [8.4.12.1](#)), the KerML checkFeatureResultRedefinition constraint (see [KerML, 8.4.4.8.1]) constraint also requires that the result parameter of a CalculationDefinition redefine the result parameters of any Functions it specializes (including other CalculationDefinitions), which means that it ultimately directly or indirectly specializes Performances::Evaluation::result.

```
calc def C specializes Calculations::Calculation {
    in ref a redefines Base::things;
    in ref b redefines Base::things;
    return ref result redefines Calculations::Calculation::result;
}
calc def C1 specializes C {
    in ref a redefines C::a;
    // The result parameter can be in any position.
    return ref result redefines C::result;
    in ref b redefines C::b;
}
```

Further, if a CalculationDefinition owns an Expression via a ResultExpressionMembership, then the KerML checkFunctionResultBindingConnector constraint (see [KerML, 8.4.4.8.1]) requires that the CalculationDefinition have, as an ownedFeature, a BindingConnector between the result parameter of the Expression and the result parameter of the CalculationDefinition.

```
calc def C2 specializes Calculations::Calculation {
    return redefines Calculations::Calculation::result;
    binding result = resultExpr.result; // Implied
    resultExpr
}
```

where `resultExpr` is an arbitrary Expression and `resultExpr.result` represents a Feature chain to the Expression result.

8.4.14.2 Calculation Usages

A CalculationUsage is a kind of ActionUsage and a kind of KerML Expression. As such, all the general semantic constraints for an ActionUsage (see [8.4.12.2](#)) and an Expression (see [KerML, 8.4.4.8.2]) apply to a CalculationUsage, as well as the following additional specialization constraints:

- checkCalculationUsageSpecialization requires that a CalculationUsage specialize the base CalculationUsage Calculations::calculations (see [9.2.11.2.2](#)), which is defined by the CalculationDefinition Calculations::Calculation (see [9.2.11.2.1](#)) and subsets the ActionUsage Actions::actions (see [9.2.9.2.4](#)) and the kernel Step Performances::evaluations (see [KerML, 9.2.6]). Further, in addition to the KerML checkFeatureParameterRedefinition constraint, that applies to all kinds of ActionUsages (see [8.4.12.2](#)), the KerML checkFeatureResultRedefinition constraint (see [KerML, 8.4.4.8.1]) also requires that the result parameter of a CalculationUsage redefine the result parameters of

```

        resultExpr
    }
}

```

where `resultExpr` is an arbitrary Expression and `resultExpr.result` represents a Feature chain to the Expression result.

8.4.14.2 Calculation Usages

A CalculationUsage is a kind of ActionUsage and a kind of KerML Expression. As such, all the general semantic constraints for an ActionUsage (see 8.4.12.2) and an Expression (see [KerML, 8.4.4.8.2]) apply to a CalculationUsage, as well as the following additional specialization constraints:

- `checkCalculationUsageSpecialization` requires that a CalculationUsage specialize the base CalculationUsage `Calculations::calculations` (see 9.2.11.2.2), which is defined by the CalculationDefinition `Calculations::Calculation` (see 9.2.11.2.1) and subsets the ActionUsage `Actions::actions` (see 9.2.9.2.4) and the kernel Step `Performances::evaluations` (see [KerML, 9.2.6]). Further, in addition to the KerML `checkFeatureParameterRedefinition` constraint, that applies to all kinds of ActionUsages (see 8.4.12.2), the KerML `checkFeatureResultRedefinition` constraint (see [KerML, 8.4.4.8.1]) also requires that the `result` parameter of a CalculationUsage redefine the `result` parameters of any Functions or Expressions it specializes (including CalculationDefinitions and CalculationUsages).

```

calc c : C subsets Calculations::calculations {
    in ref a redefines C::a;
    in ref b redefines C::b;
    return result redefines C::result, Calculation::calculations::result;
}
calc c1 : C1 subsets c {
    return ref result redefines C1::result, c::result;
}

```

- `checkCalculationUsageSubcalculationSpecialization` requires that a CalculationUsage that is composite and has an `owningType` that is a CalculationDefinition or CalculationUsage specialize the CalculationUsage `Calculations::Calculation::subcalculations` (see 9.2.11.2.1), which subsets `Calculations::calculations` and the ActionUsage `Actions::Action::subactions` (see 9.2.9.2.4). Note also that, in other cases, the general `checkActionUsageSubactionSpecialization` constraint (see 8.4.12.2) and the KerML `checkStepEnclosedPerformanceSpecialization` and `checkStepSubperformanceSpecialization` constraints (see [KerML, 8.4.4.7]) will still apply.

```

calc def Clc subsets Calculations::Calculation {
    calc clc1 subsets Calculations::Calculation::subcalculations;
    ref calc clc2 subsets Calculations::calculations,
        Performances::Performance::enclosedPerformances;
}
action def AClc subsets Actions::Action {
    calc clc3 subsets Calculations::calculations,
        Actions::Action::subactions;
}

```

Further, if a CalculationUsage owns an Expression via a `ResultExpressionMembership`, then the KerML `checkExpressionResultBindingConnector` constraint (see [KerML, 8.4.4.8.1]) requires that the CalculationUsage have, as an `ownedFeature`, a `BindingConnector` between the `result` parameter of the Expression and the `result` parameter of the CalculationUsage.

```

calc c2 subsets Calculations::calculations {
    binding result = resultExpr.result; // Implied
}

```

any Functions or Expressions it specializes (including CalculationDefinitions and CalculationUsages).

```
calc c : C subsets Calculations::calculations {
    in ref a redefines C::a;
    in ref b redefines C::b;
    return result redefines C::result, Calculation::calculations::result;
}
calc c1 : C1 subsets c {
    return ref result redefines C1::result, c::result;
}
```

- checkCalculationUsageSubcalculationSpecialization requires that a CalculationUsage that is composite and has an owningType that is a CalculationDefinition or CalculationUsage specialize the CalculationUsage Calculations::Calculation::subcalculations (see [9.2.11.2.1](#)), which subsets Calculations::calculations and the ActionUsage Actions::Action::subactions (see [9.2.9.2.4](#)). Note also that, in other cases, the general checkActionUsageSubactionSpecialization constraint (see [8.4.12.2](#)) and the KerML checkStepEnclosedPerformanceSpecialization and checkStepSubperformanceSpecialization constraints (see [KerML, 8.4.4.7]) will still apply.

```
calc def Clc subsets Calculations::Calculation {
    calc clc1 subsets Calculations::Calculation::subcalculations;
    ref calc clc2 subsets Calculations::calculations,
        Performances::Performance::enclosedPerformances;
}
action def AClc subsets Actions::Action {
    calc clc3 subsets Calculations::calculations,
        Actions::Action::subactions;
}
```

Further, if a CalculationUsage owns an Expression via a ResultExpressionMembership, then the KerML checkExpressionResultBindingConnector constraint (see [KerML, 8.4.4.8.1]) requires that the CalculationUsage have, as an ownedFeature, a BindingConnector between the result parameter of the Expression and the result parameter of the CalculationUsage.

```
calc c2 subsets Calculations::calculations {
    binding result = resultExpr.result; // Implied
    resultExpr
}
```

where *resultExpr* is an arbitrary Expression and *resultExpr.result* represents a Feature chain to the Expression result.

8.4.15 Constraints Semantics

Abstract syntax reference: [8.3.19](#)

8.4.15.1 Constraint Definitions

A ConstraintDefinition is a kind of OccurrenceDefinition and a kind of KerML Predicate. As such, all the general semantic constraints for an OccurrenceDefinition (see [8.4.5](#)) and a Predicate (see [KerML, 8.4.4.8.1]) also apply to a ConstraintDefinition. In addition, the checkConstraintDefinitionSpecialization constraint requires that a ConstraintDefinition specialize

```

        resultExpr
    }

```

where `resultExpr` is an arbitrary Expression and `resultExpr.result` represents a Feature chain to the Expression `result`.

8.4.15 Constraints Semantics

Abstract syntax reference: [8.3.19](#)

8.4.15.1 Constraint Definitions

A ConstraintDefinition is a kind of OccurrenceDefinition and a kind of KerML Predicate. As such, all the general semantic constraints for an OccurrenceDefinition (see [8.4.5](#)) and a Predicate (see [KerML, 8.4.4.8.1]) also apply to a ConstraintDefinition. In addition, the `checkConstraintDefinitionSpecialization` constraint requires that a ConstraintDefinition specialize the base ConstraintDefinition `Constraints::ConstraintCheck` (see [9.2.9.2.4](#)), which subclassifies the kernel Predicate `Performances::BooleanEvaluation` (see [KerML, 9.2.6]).

A ConstraintDefinition is not a CalculationDefinition, but, since a Predicate is a kind of KerML Function, the KerML `checkFeatureParameterRedefinition` constraint (see [KerML, 8.4.4.7.1]) and `checkFeatureResultRedefinition` (see [KerML, 8.4.4.8.1]) constraints also apply to the parameters of a ConstraintDefinition, as for a CalculationDefinition (see [8.4.14.1](#)). However, the `result` parameter of `BooleanEvaluation` has type `ScalarValues::Boolean`, so the `result` of a ConstraintDefinition must also have type `Boolean` (or a specialization of it), and, therefore, it is often just inherited into the ConstraintDefinition.

Also as for a CalculationDefinition, if a ConstraintDefinition owns an Expression via a `ResultExpressionMembership`, then the KerML `checkFunctionResultBindingConnector` constraint (see [KerML, 8.4.4.8.1]) requires that the ConstraintDefinition have, as an ownedFeature, a `BindingConnector` between the `result` parameter of the Expression and the `result` parameter of the ConstraintDefinition. The result Expression must therefore be Boolean-valued.

```

constraint def Cst specializes Constraints::ConstraintCheck {
    in attribute x : ScalarValues::Real subsets Base::dataValues;
    // Implied binding between the inherited result parameter
    // and the result of the Expression x > 0.
    x > 0
}

```

8.4.15.2 Constraint Usages

A ConstraintUsage is a kind of OccurrenceUsage and a kind of KerML Expression. As such, all the general semantic constraints for an OccurrenceUsage (see [8.4.5](#)) and an Expression (see [KerML, 8.4.4.8.2]) also apply to a ConstraintUsage, as well as the following additional specialization constraints:

- `checkConstraintUsageSpecialization` requires that a ConstraintUsage specialize the base ConstraintUsage `Constraints::constraintChecks` (see [9.2.12.2.3](#)), which is defined by the ConstraintDefinition `Constraints::ConstraintCheck` (see [9.2.12.2.2](#)) and subsets the kernel Step `Performances::booleanEvaluations` (see [KerML, 9.2.6]). Further, the KerML `checkFeatureParameterRedefinition` constraint (see [KerML, 8.4.4.7.1]) and `checkFeatureResultRedefinition` (see [KerML, 8.4.4.8.1]) constraints also apply to the parameters of a ConstraintUsage, as for a ConstraintDefinition (see [8.4.15.1](#)).

```

constraint cst : Cst subsets Constraints::constraintChecks {
    in ref x redefines Cst::x = 2;
}

```

the base `ConstraintDefinition` `Constraints::ConstraintCheck` (see [9.2.9.2.4](#)), which subclassifies the kernel `Predicate` `Performances::BooleanEvaluation` (see [KerML, 9.2.6]).

A `ConstraintDefinition` is not a `CalculationDefinition`, but, since a `Predicate` is a kind of KerML Function, the KerML `checkFeatureParameterRedefinition` constraint (see [KerML, 8.4.4.7.1]) and `checkFeatureResultRedefinition` (see [KerML, 8.4.4.8.1]) constraints also apply to the parameters of a `ConstraintDefinition`, as for a `CalculationDefinition` (see [8.4.14.1](#)). However, the `result` parameter of `BooleanEvaluation` has type `ScalarValues::Boolean`, so the result of a `ConstraintDefinition` must also have type `Boolean` (or a specialization of it), and, therefore, it is often just inherited into the `ConstraintDefinition`.

Also as for a `CalculationDefinition`, if a `ConstraintDefinition` owns an `Expression` via a `ResultExpressionMembership`, then the KerML `checkFunctionResultBindingConnector` constraint (see [KerML, 8.4.4.8.1]) requires that the `ConstraintDefinition` have, as an `ownedFeature`, a `BindingConnector` between the `result` parameter of the `Expression` and the `result` parameter of the `ConstraintDefinition`. The `result Expression` must therefore be `Boolean`-valued.

```
constraint def Cst specializes Constraints::ConstraintCheck {
    in attribute x : ScalarValues::Real subsets Base::dataValues;
    // Implied binding between the inherited result parameter
    // and the result of the Expression x > 0.
    x > 0
}
```

8.4.15.2 Constraint Usages

A `ConstraintUsage` is a kind of `OccurrenceUsage` and a kind of KerML `Expression`. As such, all the general semantic constraints for an `OccurrenceUsage` (see [8.4.5](#)) and an `Expression` (see [KerML, 8.4.4.8.2]) also apply to a `ConstraintUsage`, as well as the following additional specialization constraints:

- `checkConstraintUsageSpecialization` requires that a `ConstraintUsage` specialize the base `ConstraintUsage` `Constraints::constraintChecks` (see [9.2.12.2.3](#)), which is defined by the `ConstraintDefinition` `Constraints::ConstraintCheck` (see [9.2.12.2](#)) and subsets the kernel `Step Performances::booleanEvaluations` (see [KerML, 9.2.6]). Further, the KerML `checkFeatureParameterRedefinition` constraint (see [KerML, 8.4.4.7.1]) and `checkFeatureResultRedefinition` (see [KerML, 8.4.4.8.1]) constraints also apply to the parameters of a `ConstraintUsage`, as for a `ConstraintDefinition` (see [8.4.15.1](#)).

```
constraint cst : Cst subsets Constraints::constraintChecks {
    in ref x redefines Cst::x = 2;
    // Inherits result parameter and result Expression from Cst.
}
```

- `checkConstraintUsageCheckedConstraintSpecialization` requires that a composite `ConstraintUsage` whose `owningType` is an `ItemDefinition` or an `ItemUsage` (including a `PartDefinition` or `PartUsage`) specialize the `ConstraintUsage` `Items::Item::checkedConstraints` (see [9.2.4.2.1](#)), which subsets the `ConstraintUsage` `Constraints::constraintChecks` and the kernel Feature `Objects::Object::ownedPerformances` (see [KerML, 9.2.5]). Note also that, in other cases, the general KerML `checkStepOwnedPerformanceSpecialization` constraint will still apply (see [KerML, 8.4.4.7]).

```
item def ICst specializes Items::Item {
    constraint c : Cst subsets Items::Item::checkedConstraints;
}
```

- ```

 // Inherits result parameter and result Expression from Cst.
}

• checkConstraintUsageCheckedConstraintSpecialization requires that a composite ConstraintUsage whose owningType is an ItemDefinition or an ItemUsage (including a PartDefinition or PartUsage) specialize the ConstraintUsage Items::Item::checkedConstraints (see 9.2.4.2.1), which subsets the ConstraintUsage Constraints::constraintChecks and the kernel Feature Objects::Object::ownedPerformances (see [KerML, 9.2.5]). Note also that, in other cases, the general KerML checkStepOwnedPerformanceSpecialization constraint will still apply (see [KerML, 8.4.4.7]).
```
- ```

item def ICst specializes Items::Item {
    constraint c : Cst subsets Items::Item::checkedConstraints;
}
action def ACst specializes Actions::Action {
    constraint c : Cst subsets Objects::Object::ownedPerformances;
}
```
- checkConstraintUsageRequirementConstraintSpecialization requires that a ConstraintUsage whose owningFeatureMembership is a RequirementConstraintMembership specialize either the assumptions (if it is an assumedConstraint) or constraints (if it is a requiredConstraint) feature of the RequirementDefinition Requirements::RequirementCheck (see [9.2.13.2.8](#)). (See also [8.4.16](#) on requirements semantics.)

8.4.15.3 Assert Constraint Usages

An AssertConstraintUsage is a kind of ConstraintUsage and a kind of KerML Invariant. As such, all the general semantic constraints for a ConstraintUsage (see [8.4.15.2](#)) and an Invariant (see [KerML, 8.4.4.8.2]). In addition, the checkAssertConstraintUsageSpecialization constraint requires that an AssertConstraintUsage specialize one of the following:

- If the AssertConstraintUsage is *not* negated, ConstraintUsage Constraints::assertedConstraintChecks (see [9.2.12.2.1](#)), which subsets the ConstraintUsage Constraints::constraintChecks (see [9.2.12.2.3](#)) and the kernel Expression Performances::trueEvaluations (see [KerML, 9.2.6]).
- If the AssertConstraintUsage *is* negated, the ConstraintUsage Constraints::negatedConstraintChecks (see [9.2.12.2.4](#)), which subsets the ConstraintUsage Constraints::constraintChecks (see [9.2.12.2.3](#)) and the kernel Expression Performances::falseEvaluations (see [KerML, 9.2.6]).

```

assert constraint ast references cst subsets Constraints::assertedConstraints;
assert constraint ast1 : Cst subsets Constraints::assertedConstraints {
    redefines x = 3;
}
assert not constraint ast2 : Cst subsets Constraints::negatedConstraints {
    redefines x = -3;
}
```

In general, a *ConstraintCheck* of a ConstraintUsage at a certain point in time produces a *Boolean* result indicating whether the modeled constraint holds or not at that point in time. This may be true at some times and false at other times. However, *assertedConstraintChecks* subsets *trueEvaluations*, which only includes *BooleanEvaluations* that have true results. Therefore, a *ConstraintCheck* of a non-negated AssertConstraintUsage must have a true result—that is, the constraint modeled by the AssertConstraintUsage is asserted to *always* hold. Similarly, *negatedConstraintChecks* subsets *falseEvaluations*, which only includes *BooleanEvaluations* that have false results. Therefore, a

```

action def ACst specializes Actions::Action {
    constraint c : Cst subsets Objects::Object::ownedPerformances;
}

• checkConstraintUsageRequirementConstraintSpecialization requires that a ConstraintUsage whose owningFeatureMembership is a RequirementConstraintMembership specialize either the assumptions (if it is an assumedConstraint) or constraints (if it is a requiredConstraint) feature of the RequirementDefinition Requirements::RequirementCheck (see 9.2.13.2.8). (See also 8.4.16 on requirements semantics.)

```

8.4.15.3 Assert Constraint Usages

An AssertConstraintUsage is a kind of ConstraintUsage and a kind of KerML Invariant. As such, all the general semantic constraints for a ConstraintUsage (see 8.4.15.2) and an Invariant (see [KerML, 8.4.4.8.2]). In addition, the checkAssertConstraintUsageSpecialization constraint requires that an AssertConstraintUsage specialize one of the following:

- If the AssertConstraintUsage is *not* negated, ConstraintUsage Constraints::assertedConstraintChecks (see 9.2.12.2.1), which subsets the ConstraintUsage Constraints::constraintChecks (see 9.2.12.2.3) and the kernel Expression Performances::trueEvaluations (see [KerML, 9.2.6]).
- If the AssertConstraintUsage is negated, the ConstraintUsage Constraints::negatedConstraintChecks (see 9.2.12.2.4), which subsets the ConstraintUsage Constraints::constraintChecks (see 9.2.12.2.3) and the kernel Expression Performances::falseEvaluations (see [KerML, 9.2.6]).

```

assert constraint ast references cst subsets Constraints::assertedConstraints;
assert constraint ast1 : Cst subsets Constraints::assertedConstraints {
    redefines x = 3;
}
assert not constraint ast2 : Cst subsets Constraints::negatedConstraints {
    redefines x = -3;
}

```

In general, a *ConstraintCheck* of a ConstraintUsage at a certain point in time produces a *Boolean* result indicating whether the modeled constraint holds or not at that point in time. This may be true at some times and false at other times. However, *assertedConstraintChecks* subsets *trueEvaluations*, which only includes *BooleanEvaluations* that have true results. Therefore, a *ConstraintCheck* of a non-negated AssertConstraintUsage must have a true result—that is, the constraint modeled by the AssertConstraintUsage is asserted to *always* hold. Similarly, *negatedConstraintChecks* subsets *falseEvaluations*, which only includes *BooleanEvaluations* that have false results. Therefore, a *ConstraintCheck* of a negated AssertConstraintUsage must have a false result—that is, the constraint modeled by the AssertConstraintUsage is asserted to *never* hold.

8.4.16 Requirements Semantics

Abstract syntax reference: 8.3.20

8.4.16.1 Requirement Definitions

A RequirementDefinition is a kind of ConstraintDefinition. As such, all the general semantic constraints for a ConstraintDefinition (see 8.4.15.1) also apply to a RequirementDefinition. In addition, the checkRequirementDefinitionSpecialization constraint requires that a RequirementDefinition

`ConstraintCheck` of a negated `AssertConstraintUsage` must have a false result—that is, the constraint modeled by the `AssertConstraintUsage` is asserted to *never* hold.

8.4.16 Requirements Semantics

Abstract syntax reference: [8.3.20](#)

8.4.16.1 Requirement Definitions

A `RequirementDefinition` is a kind of `ConstraintDefinition`. As such, all the general semantic constraints for a `ConstraintDefinition` (see [8.4.15.1](#)) also apply to a `RequirementDefinition`. In addition, the `checkRequirementDefinitionSpecialization` constraint requires that a `RequirementDefinition` specialize the base `RequirementDefinition Requirements::RequirementCheck` (see [9.2.13.2.8](#)), which specializes the `ConstraintDefinition Constraints::ConstraintCheck` (see [9.2.12.2.2](#)).

```
requirement def R specializes Requirements::RequirementCheck;
requirement def R1 specializes R;
```

A `RequirementDefinitions` differs from a plain `ConstraintDefinition` in that it represents a condition on a *subject* in terms of *assumed* and *required* constraints.

- `validateRequirementDefinitionSubjectParameterPosition` requires that the `subjectParameter` of a `RequirementDefinition` be its first parameter. Thus, as a result of the KerML `checkFeatureParameterRedefinition` constraint (see [KerML, 8.4.4.7.1]), the `subjectParameter` of a `RequirementDefinition` will always redefine the `subjectParameter` of any `RequirementDefinitions` it specializes, and so will directly or indirectly redefine the base `subject parameter Requirements::RequirementCheck::subj` (see [9.2.13.2.8](#)).
- `checkConstraintUsageRequirementConstraintSpecialization` (see [8.4.15.2](#)) requires that a `ConstraintUsage` that is an `assumedConstraint` or `requiredConstraint` of a `RequirementDefinition` specialize, respectively, the `assumptions` or `constraints` feature of `RequirementCheck`, both of which subset `Constraints::constraintChecks` (see [9.2.12.2.3](#)).

```
requirement def R2 specializes Requirements::RequirementCheck {
    subject subj redefines Requirements::RequirementCheck::subj;
    assume constraint ca subsets Requirements::RequirementCheck::assumptions;
    require constraint cr subsets Requirements::RequirementCheck::constraints;
}
```

The result of a `RequirementCheck` is defined to be the following logical test: if all the `assumptions` have a true result, then all the `constraints` must have a true result. In addition to the `assumedConstraints` and `requiredConstraints` declared as above, `RequirementCheck` includes two other features that contribute to the `requiredConstraints` that are checked:

- `subrequirements`—Collects the values of the composite `RequirementUsages` featured by a `RequirementCheck`, subsetting `constraints`. (See [8.4.16.2](#) on the semantics of `RequirementUsages`.)
- `concernChecks`—Collects the values of the composite `ConcernUsages` featured by a `RequirementCheck`, subsetting `subrequirements` (since `ConcernUsages` are kinds of `RequirementUsages`). (See [8.4.16.5](#) on the semantics of `ConcernUsages`.)

Finally, `RequirementCheck` includes two features that collect the values of `PartUsages` representing entities playing actor and stakeholder roles relative to a `RequirementDefinition` (or `RequirementUsage`):

- `actors`—Collects the values of `PartUsages` that are owned via `ActorMemberships`. (See also [8.4.7.2](#) on the semantics of `PartUsages`.)

specialize the base `RequirementDefinition Requirements::RequirementCheck` (see [9.2.13.2.8](#)), which specializes the `ConstraintDefinition Constraints::ConstraintCheck` (see [9.2.12.2.2](#)).

```
requirement def R specializes Requirements::RequirementCheck;
requirement def R1 specializes R;
```

A `RequirementDefinitions` differs from a plain `ConstraintDefinition` in that it represents a condition on a *subject* in terms of *assumed* and *required* constraints.

- `validateRequirementDefinitionSubjectParameterPosition` requires that the `subjectParameter` of a `RequirementDefinition` be its first parameter. Thus, as a result of the KerML `checkFeatureParameterRedefinition constraint` (see [KerML, 8.4.4.7.1]), the `subjectParameter` of a `RequirementDefinition` will always redefine the `subjectParameter` of any `RequirementDefinitions` it specializes, and so will directly or indirectly redefine the base `subject parameter Requirements::RequirementCheck::subj` (see [9.2.13.2.8](#)).
- `checkConstraintUsageRequirementConstraintSpecialization` (see [8.4.15.2](#)) requires that a `ConstraintUsage` that is an `assumedConstraint` or `requiredConstraint` of a `RequirementDefinition` specialize, respectively, the *assumptions* or *constraints* feature of `RequirementCheck`, both of which subset `Constraints::constraintChecks` (see [9.2.12.2.3](#)).

```
requirement def R2 specializes Requirements::RequirementCheck {
    subject subj redefines Requirements::RequirementCheck::subj;
    assume constraint ca subsets Requirements::RequirementCheck::assumptions;
    require constraint cr subsets Requirements::RequirementCheck::constraints;
}
```

The result of a `RequirementCheck` is defined to be the following logical test: if all the *assumptions* have a true result, then all the *constraints* must have a true result. In addition to the `assumedConstraints` and `requiredConstraints` declared as above, `RequirementCheck` includes two other features that contribute to the `requiredConstraints` that are checked:

- *subrequirements* – Collects the values of the composite `RequirementUsages` featured by a `RequirementCheck`, subsetting `constraints`. (See [8.4.16.2](#) on the semantics of `RequirementUsages`.)
- *concernChecks* – Collects the values of the composite `ConcernUsages` featured by a `RequirementCheck`, subsetting *subrequirements* (since `ConcernUsages` are kinds of `RequirementUsages`). (See [8.4.16.5](#) on the semantics of `ConcernUsages`.)

Finally, `RequirementCheck` includes two features that collect the values of `PartUsages` representing entities playing actor and stakeholder roles relative to a `RequirementDefinition` (or `RequirementUsage`):

- *actors* – Collects the values of `PartUsages` that are owned via `ActorMemberships`. (See also [8.4.7.2](#) on the semantics of `PartUsages`.)
- *stakeholders* – Collects the values of `PartUsages` that are owned via `StakeholderMemberships`. (See also [8.4.7.2](#) on the semantics of `PartUsages`.)

```
requirement def R3 specializes Requirements::RequirementCheck {
    actor a subsets Requirements::RequirementCheck::actors;
    stakeholder s subsets Requirements::RequirementCheck::stakeholders;
}
```

- *stakeholders* – Collects the values of PartUsages that are owned via StakeholderMemberships. (See also [8.4.7.2](#) on the semantics of PartUsages.)

```
requirement def R3 specializes Requirements::RequirementCheck {
    actor a subsets Requirements::RequirementCheck::actors;
    stakeholder s subsets Requirements::RequirementCheck::stakeholders;
}
```

8.4.16.2 Requirement Usages

A RequirementUsage is a kind of ConstraintUsage. As such, all the general semantic constraints for a ConstraintUsage (see [8.4.15.2](#)) also apply to a RequirementUsage, as well as the following additional specialization constraints:

- checkRequirementUsageSpecialization requires that a RequirementUsage specialize the base RequirementUsage Requirements::requirementChecks (see [9.2.13.2.9](#)), which subsets Constraints::constraintChecks (see [9.2.12.2.3](#)).

```
requirement r : R subsets Requirements::requirementChecks;
```

- checkRequirementUsageSubrequirementSpecialization requires that a composite RequirementUsage whose owningType is a RequirementDefinition or RequirementUsage specialize the RequirementUsage Requirements::RequirementCheck::subrequirements (see [9.2.13.2.8](#)), which subsets Requirements::RequirementCheck::constraints (see also [8.4.16.1](#)).

```
requirement def Rqt specializes Requirements::RequirementCheck {
    requirement rqt1 subsets Requirements::RequirementCheck::subrequirements;
    ref requirement rqt2 subsets Requirements::requirements,
        Performances::enclosedPerformances;
}
```

- checkRequirementUsageObjectiveRedefinition requires that a RequirementUsage owned by a CaseDefinition or CaseUsage via an ObjectiveMembership redefine the objectiveRequirement of each CaseDefinition or CaseUsage specialized by its owningType. (See also [8.4.17](#) on Case Semantics.)
- checkRequirementUsageRequirementVerificationSpecialization requires that a RequirementUsage that is owned by the objective of a CaseDefinition or CaseUsage via a RequirementVerificationMembership specializes the RequirementUsage VerificationCases::VerificationCase::obj::requirementVerifications (see VerificationCase).

Similarly to RequirementDefinitions, a RequirementUsage also has a *subject* and *assumed* and *required* constraints (see also [8.4.16.1](#)).

- validateRequirementUsageSubjectParameterPosition requires that the subjectParameter of a RequirementUsage be its first parameter. Thus, as a result of the KerML checkFeatureParameterRedefinition constraint (see [KerML, 8.4.4.7.1]), the subjectParameter of a RequirementUsage will always redefine the subjectParameter of any RequirementDefinitions and RequirementUsages it specializes, and so will directly or indirectly redefine the base subject parameter Requirements::RequirementCheck::subj (see [9.2.13.2.8](#)).
- checkConstraintUsageRequirementConstraintSpecialization (see [8.4.15.2](#)) requires that a ConstraintUsage that is an assumedConstraint or requiredConstraint of a RequirementUsage specialize, respectively, the assumptions or constraints feature of RequirementCheck, both of which subset Constraints::constraintChecks (see [9.2.12.2.3](#)).

```
requirement r1 : R1 subsets Requirements::requirementChecks {
    subject subj redefines R1::subj;
```

8.4.16.2 Requirement Usages

A RequirementUsage is a kind of ConstraintUsage. As such, all the general semantic constraints for a ConstraintUsage (see [8.4.15.2](#)) also apply to a RequirementUsage, as well as the following additional specialization constraints:

- checkRequirementUsageSpecialization requires that a RequirementUsage specialize the base RequirementUsage Requirements::requirementChecks (see [9.2.13.2.9](#)), which subsets Constraints::constraintChecks (see [9.2.12.2.3](#)).

```
requirement r : R subsets Requirements::requirementChecks;
```

- checkRequirementUsageSubrequirementSpecialization requires that a composite RequirementUsage whose owningType is a RequirementDefinition or RequirementUsage specialize the RequirementUsage Requirements::RequirementCheck::subrequirements (see [9.2.13.2.8](#)), which subsets Requirements::RequirementCheck::constraints (see also [8.4.16.1](#)).

```
requirement def Rqt specializes Requirements::RequirementCheck {  
    requirement rqt1 subsets Requirements::RequirementCheck::subrequirements;  
    ref requirement rqt2 subsets Requirements::requirements,  
        Performances::enclosedPerformances;  
}
```

- checkRequirementUsageObjectiveRedefinition requires that a RequirementUsage owned by a CaseDefinition or CaseUsage via an ObjectiveMembership redefine the objectiveRequirement of each CaseDefinition or CaseUsage specialized by its owningType. (See also [8.4.17](#) on Case Semantics.)
- checkRequirementUsageRequirementVerificationSpecialization requires that a RequirementUsage that is owned by the objective of a CaseDefinition or CaseUsage via a RequirementVerificationMembership specializes the RequirementUsage VerificationCases::VerificationCase::obj::requirementVerifications (see VerificationCase).

Similarly to RequirementDefinitions, a RequirementUsage also has a *subject* and *assumed* and *required* constraints (see also [8.4.16.1](#)).

- validateRequirementUsageSubjectParameterPosition requires that the subjectParameter of a RequirementUsage be its first parameter. Thus, as a result of the KerML checkFeatureParameterRedefinition constraint (see [KerML, 8.4.4.7.1]), the subjectParameter of a RequirementUsage will always redefine the subjectParameter of any RequirementDefinitions and RequirementUsages it specializes, and so will directly or indirectly redefine the base subject parameter Requirements::RequirementCheck::subj (see [9.2.13.2.8](#)).
- checkConstraintUsageRequirementConstraintSpecialization (see [8.4.15.2](#)) requires that a ConstraintUsage that is an assumedConstraint or requiredConstraint of a RequirementUsage specialize, respectively, the *assumptions* or *constraints* feature of RequirementCheck, both of which subset Constraints::constraintChecks (see [9.2.12.2.3](#)).

```
requirement r1 : R1 subsets Requirements::requirementChecks {  
    subject subj redefines R1::subj;  
    assume constraint ca subsets Requirements::RequirementCheck::assumptions;  
    require constraint cr subsets Requirements::RequirementCheck::constraints;  
}
```


8.4.16.3 Satisfy Requirement Usages

A `SatisfyRequirementUsage` is a kind of `RequirementUsage` and a kind of `AssertConstraintUsage`. As such, all the general semantic constraints for a `RequirementUsage` (see [8.4.16.2](#)) and an `AssertConstraintUsage` (see [8.4.15.3](#)) also apply to a `SatisfyRequirementUsage`. In addition, the `checkSatisfyRequirementUsageBindingConnector` constraint requires that a `SatisfyRequirementUsage` have a `BindingConnector` between its `subjectParameter` and some other `Feature`, which is then considered to be the `satisfyingFeature` of the `SatisfyRequirementUsage`. Further, the `checkAssertConstraintUsageSpecialization` applies to a `SatisfyRequirementUsage`, so it must either specialize `Constraints::assertedConstraintChecks` (see [9.2.12.2.1](#)), or `Constraints::negatedConstraintChecks` (see [9.2.12.2.4](#)), if negated. Together, these constraints mean that a `SatisfyRequirementUsage` asserts the satisfaction (or not, if negated) of a requirement when the `satisfyingFeature` is bound as the subject of the requirement.

A `SatisfyRequirementUsage` of the form

```
satisfy requirement sr : R by f;
```

is parsed with `f` bound to the `subjectParameter` of the `SatisfyRequirementUsage` using a `FeatureValue` Relationship (see [8.2.2.20.2](#)). The KerML `checkFeatureValueBindingConnector` constraint (see [KerML, 8.4.4.11]) then requires that the `SatisfyRequirementUsage` have a `BindingConnector` that effectively also meets the `checkSatisfyRequirementUsageBindingConnector` constraint.

```
satisfy requirement sr : R subsets Requirements::requirementChecks,
  Constraints::assertedConstraintChecks {
    subject subj redefines R::subj = f;
    // Implicit BindingConnector for the FeatureValue also meets
    // the checkSatisfyRequirementUsageBindingConnector constraint.
    bind subj = subj::f_expr.result;
}
```

where `f_expr` is the `FeatureReferenceExpression` that references `f` as the `value` Expression of the `FeatureValue`.

If a `SatisfyRequirementUsage` is declared *without* an explicit `satisfyingFeature`: then the implicit `BindingConnector` for the `checkSatisfyRequirementUsageBindingConnector` constraint targets the `Feature Base::things::that` (see [KerML, 9.2.2]). This means that a `SatisfyRequirementUsage` nested in a `Definition` or `Usage`, such as

```
part p {
  satisfy requirement sr1 : R1;
}
```

is asserted to satisfy the featuring instance of that containing `Definition` or `Usage`.

```
part p subsets Parts::parts {
  satisfy requirement sr1 : R1 subsets Requirements::requirementCheck,
    Constraints::assertedConstraintChecks {
      subject subj redefines R1::subj;
      // The implied BindingConnector means that sr1 is effectively
      // satisfied by the containing Part p.
      bind subj = Base::things::that;
    }
}
```

```

    assume constraint ca subsets Requirements::RequirementCheck::assumptions;
    require constraint cr subsets Requirements::RequirementCheck::constraints;
}

```

8.4.16.3 Satisfy Requirement Usages

A `SatisfyRequirementUsage` is a kind of `RequirementUsage` and a kind of `AssertConstraintUsage`. As such, all the general semantic constraints for a `RequirementUsage` (see [8.4.16.2](#)) and an `AssertConstraintUsage` (see [8.4.15.3](#)) also apply to a `SatisfyRequirementUsage`. In addition, the `checkSatisfyRequirementUsageBindingConnector` constraint requires that a `SatisfyRequirementUsage` have a `BindingConnector` between its `subjectParameter` and some other `Feature`, which is then considered to be the `satisfyingFeature` of the `SatisfyRequirementUsage`. Further, the `checkAssertConstraintUsageSpecialization` applies to a `SatisfyRequirementUsage`, so it must either specialize `Constraints::assertedConstraintChecks` (see [9.2.12.2.1](#)), or `Constraints::negatedConstraintChecks` (see [9.2.12.2.4](#)), if negated. Together, these constraints mean that a `SatisfyRequirementUsage` asserts the satisfaction (or not, if negated) of a requirement when the `satisfyingFeature` is bound as the subject of the requirement.

A `SatisfyRequirementUsage` of the form

```
satisfy requirement sr : R by f;
```

is parsed with `f` bound to the `subjectParameter` of the `SatisfyRequirementUsage` using a `FeatureValue` Relationship (see [8.2.2.20.2](#)). The KerML `checkFeatureValueBindingConnector` constraint (see [KerML, 8.4.4.11]) then requires that the `SatisfyRequirementUsage` have a `BindingConnector` that effectively also meets the `checkSatisfyRequirementUsageBindingConnector` constraint.

```
satisfy requirement sr : R subsets Requirements::requirementChecks,
  Constraints::assertedConstraintChecks {
  subject subj redefines R::subj = f;
  // Implicit BindingConnector for the FeatureValue also meets
  // the checkSatisfyRequirementUsageBindingConnector constraint.
  bind subj = subj::f_expr.result;
}
```

where `f_expr` is the `FeatureReferenceExpression` that references `f` as the `value` Expression of the `FeatureValue`.

If a `SatisfyRequirementUsage` is declared *without* an explicit `satisfyingFeature`: then the implicit `BindingConnector` for the `checkSatisfyRequirementUsageBindingConnector` constraint targets the `Feature Base:::things::that` (see [KerML, 9.2.2]). This means that a `SatisfyRequirementUsage` nested in a Definition or Usage, such as

```
part p {
  satisfy requirement sr1 : R1;
}
```

is asserted to satisfy the featuring instance of that containing Definition or Usage.

```
part p subsets Parts::parts {
  satisfy requirement sr1 : R1 subsets Requirements::requirementCheck,
  Constraints::assertedConstraintChecks {
  subject subj redefines R1::subj;
  // The implied BindingConnector means that sr1 is effectively
  // satisfied by the containing Part p.
  bind subj = Base:::things::that;
}
}
```

8.4.16.4 Concern Definitions

A ConcernDefinition is a kind of RequirementDefinition. As such, all the general semantic constraints for a RequirementDefinition (see [8.4.16.1](#)) also apply to a ConcernDefinition. In addition, the checkConcernDefinitionSpecialization constraint requires that a ConcernDefinition specialize the base ConcernDefinition Requirements::ConcernCheck (see [9.2.13.2.1](#)), which specializes the RequirementDefinition Requirements::RequirementCheck (see [9.2.13.2.8](#)).

```
concern def Crn specializes Requirements::ConcernCheck;
concern def Crn1 specializes Crn;
```

8.4.16.5 Concern Usages

A ConcernUsage is a kind of RequirementUsage. As such, all the general semantic constraints for a RequirementUsage (see [8.4.16.2](#)) also apply to a ConcernUsage, as well as the following additional specialization constraints:

- checkConcernUsageSpecialization requires that a ConcernUsage specialize the base ConcernUsage Requirements::concernChecks (see [9.2.13.2.2](#)), which subsets Requirements::requirementChecks (see [9.2.13.2.9](#)).

```
concern crn : Crn subsets Requirements::concernChecks;
```

- checkConcernUsageFramedConcernSpecialization requires that a ConcernUsage that is owned by a RequirementDefinition or RequirementUsage via a FramedConcernMembership specialize the ConcernUsage Requirements::RequirementCheck::concerns (see [9.2.13.2.8](#)), which subsets Requirements::concernChecks and Requirements::RequirementCheck::subrequirements.

```
requirement def Rcrn subsets Requirements::RequirementCheck {
    concern crn1 : Crn1 subsets Requirements::RequirementCheck::concerns;
}
```

8.4.17 Cases Semantics

Abstract syntax reference: [8.3.21](#)

8.4.17.1 Case Definitions

A CaseDefinition is a kind of CalculationDefinition. As such, all the general semantic constraints for a CalculationDefinition (see [8.4.14.1](#)) apply to a CaseDefinition. In addition, the checkCaseDefinitionSpecialization constraint requires that a CaseDefinition specialize the base CaseDefinition Cases::Case (see [9.2.14.2.1](#)), which classifies the CalculationDefinition Calculations::Calculation (see [9.2.11.2.1](#)). Further, the KerML checkFeatureParameterRedefinition and checkFeatureResultRedefinition constraints (see [KerML, 8.4.4.8.1]) also apply to a CaseDefinition, as for any CalculationDefinition (see [8.4.14.1](#)).

```
case def Cs specializes Cases::Case {
    return ref result redefines Cases::Case::result;
}
case def cs1 : Cs1 specializes cs {
    return ref result redefines Cs1:result, cs::result;
}
```

A CaseDefinition differs from a plain CalculationDefinition in that it has a *subject* and an *objective*, and it may also have one or more *actor* features.

8.4.16.4 Concern Definitions

A ConcernDefinition is a kind of RequirementDefinition. As such, all the general semantic constraints for a RequirementDefinition (see [8.4.16.1](#)) also apply to a ConcernDefinition. In addition, the checkConcernDefinitionSpecialization constraint requires that a ConcernDefinition specialize the base ConcernDefinition Requirements::ConcernCheck (see [9.2.13.2.1](#)), which specializes the RequirementDefinition Requirements::RequirementCheck (see [9.2.13.2.8](#)).

```
concern def Crn specializes Requirements::ConcernCheck;
concern def Crn1 specializes Crn;
```

8.4.16.5 Concern Usages

A ConcernUsage is a kind of RequirementUsage. As such, all the general semantic constraints for a RequirementUsage (see [8.4.16.2](#)) also apply to a ConcernUsage, as well as the following additional specialization constraints:

- checkConcernUsageSpecialization requires that a ConcernUsage specialize the base ConcernUsage Requirements::concernChecks (see [9.2.13.2.2](#)), which subsets Requirements::requirementChecks (see [9.2.13.2.9](#)).

```
concern crn : Crn subsets Requirements::concernChecks;
```

- checkConcernUsageFramedConcernSpecialization requires that a ConcernUsage that is owned by a RequirementDefinition or RequirementUsage via a FramedConcernMembership specialize the ConcernUsage Requirements::RequirementCheck::concerns (see [9.2.13.2.8](#)), which subsets Requirements::concernChecks and Requirements::RequirementCheck::subrequirements.

```
requirement def Rcrn subsets Requirements::RequirementCheck {
    concern crn1 : Crn1 subsets Requirements::RequirementCheck::concerns;
}
```

8.4.17 Cases Semantics

Abstract syntax reference: [8.3.21](#)

8.4.17.1 Case Definitions

A CaseDefinition is a kind of CalculationDefinition. As such, all the general semantic constraints for a CalculationDefinition (see [8.4.14.1](#)) apply to a CaseDefinition. In addition, the checkCaseDefinitionSpecialization constraint requires that a CaseDefinition specialize the base CaseDefinition Cases::Case (see [9.2.14.2.1](#)), which subclassifies the CalculationDefinition Calculations::Calculation (see [9.2.11.2.1](#)). Further, the KerML checkFeatureParameterRedefinition and checkFeatureResultRedefinition constraints (see [KerML, 8.4.4.8.1]) also apply to a CaseDefinition, as for any CalculationDefinition (see [8.4.14.1](#)).

```
case def Cs specializes Cases::Case {
    return ref result redefines Cases::Case::result;
}
case def cs1 : Cs1 specializes cs {
    return ref result redefines Cs1::result, cs::result;
}
```

A CaseDefinition differs from a plain CalculationDefinition in that it has a *subject* and an *objective*, and it may also have one or more *actor* features.

- `validateCaseDefinitionSubjectParameterPosition` requires that the `subjectParameter` of a `CaseDefinition` be its first parameter. Thus, as a result of the KerML `checkFeatureParameterRedefinition` constraint (see [KerML, 8.4.4.7.1]), the `subjectParameter` of a `CaseDefinition` will always redefine the `subjectParameter` of any `CaseDefinitions` it specializes, and so will directly or indirectly redefine the base `subject parameter` `Case::Case::subj` (see [9.2.14.2.1](#)).
- `checkRequirementUsageObjectiveRedefinition` (see [8.2.2.20.2](#)) effectively requires that the `objectiveRequirement` of a `CaseDefinition` redefine the `objectiveRequirements` of any `CaseDefinitions` specialized by the first `CaseDefinition`, which means that it will directly or indirectly redefined the `RequirementUsage` `Cases::Case::obj`. The `obj` feature has a default binding to the `result` of the `Case`, so, unless the default is overridden, the `subjectParameter` of the `objectiveRequirement` of a `CaseDefinition` should conform to the `result` of the `CaseDefinition`.
- `checkPartUsageActorSpecialization` requires that a `PartUsage` that is owned by a `CaseDefinition` via an `ActorMembership` specialize the `PartUsage` `Cases::Case::actors` (see [8.4.7.2](#)).

```
case def Cs2 specializes Cases::Case {
    subject subj redefines Cases::Case::subj;
    objective obj redefines Cases::Case::obj;
    actor a subsets Cases::Case::actors;
    return result : T redefines Cases::Case::result;
}
```

Additional semantics are defined for each of the more specialized kinds of `CaseDefinition` (see [8.4.18.1](#) on `AnalysisCaseDefinitions`, [8.4.19.1](#) on `VerificationCaseDefinitions`, and [8.4.20.1](#) on `UseCaseDefinitions`).

8.4.17.2 Case Usages

A `CaseUsage` is a kind of `CalculationUsage`. As such, all the general semantic constraints for an `CalculationUsage` (see [8.4.14.2](#)) apply to a `CaseUsage`, as well as the following additional specialization constraints:

- `checkCaseUsageSpecialization` requires that a `CaseUsage` specialize the base `CaseUsage` `Cases::cases` (see [9.2.11.2.2](#)), which is defined by the `CaseDefinition` `Cases::Case` (see [9.2.11.2.1](#)) and subsets the `CalculationUsage` `Calculations::calculations` (see [9.2.9.2.4](#)). Further, the KerML `checkFeatureParameterRedefinition` and `checkFeatureResultRedefinition` constraints (see [KerML, 8.4.4.8.1]) also apply to a `CaseUsage`, as for any `CalculationUsage` (see [8.4.14.2](#)).

```
case cs : Cs subsets Cases::cases {
    return result redefines Cs::result;
}
case cs1 : Cs1 subsets cs {
    return ref result redefines Cs1::result, cs::result;
}
```

- `checkCaseUsageSubcaseSpecialization` requires that a `CaseUsage` that is composite and has an `owningType` that is a `CaseDefinition` or `CaseUsage` specialize the `CaseUsage` `Cases::Case::subcases` (see [9.2.11.2.1](#)), which subsets `Cases::cases` and the `CalculationUsage` `Calculations::Calculation::subcalculations` (see [9.2.9.2.4](#)).

```
case def Csc subsets Cases::Case {
    case cs1 subsets Cases::Case::subcases;
```

- validateCaseDefinitionSubjectParameterPosition requires that the subjectParameter of a CaseDefinition be its first parameter. Thus, as a result of the KerML checkFeatureParameterRedefinition constraint (see [KerML, 8.4.4.7.1]), the subjectParameter of a CaseDefinition will always redefine the subjectParameter of any CaseDefinitions it specializes, and so will directly or indirectly redefine the base subject parameter `Case::Case::subj` (see [9.2.14.2.1](#)).
- checkRequirementUsageObjectiveRedefinition (see [8.2.2.20.2](#)) effectively requires that the objectiveRequirement of a CaseDefinition redefine the objectiveRequirements of any CaseDefinitions specialized by the first CaseDefinition, which means that it will directly or indirectly redefined the RequirementUsage `Cases::Case::obj`. The `obj` feature has a default binding to the `result` of the `Case`, so, unless the default is overridden, the subjectParameter of the objectiveRequirement of a CaseDefinition should conform to the `result` of the CaseDefinition.
- checkPartUsageActorSpecialization requires that a PartUsage that is owned by a CaseDefinition via an ActorMembership specialize the PartUsage `Cases::Case::actors` (see [8.4.7.2](#)).

```
case def Cs2 specializes Cases::Case {
    subject subj redefines Cases::Case::subj;
    objective obj redefines Cases::Case::obj;
    actor a subsets Cases::Case::actors;
    return result : T redefines Cases::Case::result;
}
```

Additional semantics are defined for each of the more specialized kinds of CaseDefinition (see [8.4.18.1](#) on AnalysisCaseDefinitions, [8.4.19.1](#) on VerificationCaseDefinitions, and [8.4.20.1](#) on UseCaseDefinitions).

8.4.17.2 Case Usages

A CaseUsage is a kind of CalculationUsage. As such, all the general semantic constraints for an CalculationUsage (see [8.4.14.2](#)) apply to a CaseUsage, as well as the following additional specialization constraints:

- checkCaseUsageSpecialization requires that a CaseUsage specialize the base CaseUsage `Cases::cases` (see [9.2.11.2.2](#)), which is defined by the CaseDefinition `Cases::Case` (see [9.2.11.2.1](#)) and subsets the CalculationUsage `Calculations::calculations` (see [9.2.9.2.4](#)). Further, the KerML checkFeatureParameterRedefinition and checkFeatureResultRedefinition constraints (see [KerML, 8.4.4.8.1]) also apply to a CaseUsage, as for any CalculationUsage (see [8.4.14.2](#)).

```
case cs : Cs subsets Cases::cases {
    return result redefines Cs::result;
}
case cs1 : Cs1 subsets cs {
    return ref result redefines Cs1::result, cs::result;
}
```

- checkCaseUsageSubcaseSpecialization requires that a CaseUsage that is composite and has an owningType that is a CaseDefinition or CaseUsage specialize the CaseUsage `Cases::Case::subcases` (see [9.2.11.2.1](#)), which subsets `Cases::cases` and the CalculationUsage `Calculations::Calculation::subcalculations` (see [9.2.9.2.4](#)).

```
case def Csc subsets Cases::Case {
    case cs1 subsets Cases::Case::subcases;
    ref case csc2 subsets Cases::cases,
```

```

ref case csc2 subsets Cases::cases,
    Performances::Performance::enclosedPerformances;
}

```

Similarly to a CaseDefinition, a CaseUsage also has a *subject* and an *objective*, and may have one or more *actor* features (see also [8.4.17.1](#)).

- validateCaseUsageSubjectParameterPosition requires that the subjectParameter of a CaseUsage be its first parameter. Thus, as a result of the KerML checkFeatureParameterRedefinition constraint (see [KerML, 8.4.4.7.1]), the subjectParameter of a CaseUsage will always redefine the subjectParameter of any CaseDefinition or CaseUsage it specializes, and so will directly or indirectly redefine the base subject parameter *Case::Case::subj* (see [9.2.14.2.1](#)).
- checkRequirementUsageObjectiveRedefinition (see [8.2.2.20.2](#)) effectively requires that the objectiveRequirement of a CaseUsage redefine the objectiveRequirements of any CaseDefinitions or CaseUsages specialized by the first CaseUsage, which means that it will directly or indirectly redefined the RequirementUsage *Cases::Case::obj*. The *obj* feature has a default binding to the *result* of the *Case*, so, unless the default is overridden, the subjectParameter of the objectiveRequirement of a CaseUsage should conform to the result of the CaseUsage.
- checkPartUsageActorSpecialization requires that a PartUsage that is owned by a CaseUsage via an ActorMembership specialize the PartUsage *Cases::Case::actors* (see [8.4.7.2](#)).

```

case cs2 specializes Cases::cases {
    subject subj redefines Cases::Case::subj;
    objective obj redefines Cases::Case::obj;
    actor a subsets Cases::Case::actors;
    return result redefines Cases::Case::result;
}

```

Additional semantics are defined for each of the more specialized kinds of CaseUsage (see [8.4.18.2](#) on AnalysisCaseUsages, [8.4.19.2](#) on VerificationCaseUsages, and [8.4.20.2](#) on UseCaseUsages).

8.4.18 Analysis Cases Semantics

Abstract syntax reference: [8.3.22](#)

8.4.18.1 Analysis Case Definitions

An AnalysisCaseDefinition is a kind of CaseDefinition. As such, all the general semantic constraints for a CaseDefinition (see [8.3.21.2](#)) apply to an AnalysisCaseDefinition. In addition, the checkAnalysisCaseDefinitionSpecialization constraint requires that an AnalysisCaseDefinition specialize the base AnalysisCaseDefinition *AnalysisCases::AnalysisCase* (see [9.2.15.2.2](#)), which subclassifies the CaseDefinition *Cases::Case* (see [9.2.14.2.1](#)).

As discussed in [8.4.17.1](#), the checkRequirementUsageObjectiveRedefinition constraint implies that the objectiveRequirement of any CaseDefinition directly or indirectly redefines the RequirementUsage *Cases::Case::obj*. The *obj* feature is then redefined in *AnalysisCases*, with its subjectParameter bound to the *result* of the *AnalysisCase*, so that the objective is *about* the *result*. This means that the objectiveRequirement for an AnalysisCaseDefinition must have a subjectParameter that is consistent with the *result* of the AnalysisCaseDefinition.

The analysisAction property of an AnalysisCaseDefinition (see [8.3.22.2](#)) collects all the composite actions of the AnalysisCaseDefinition that are directly or indirectly defined by the ActionDefinition *ActivityCases::AnalysisAction* (see [9.2.15.2.1](#)). The AnalysisCaseDefinition

```

    Performances::Performance::enclosedPerformances;
}

```

Similarly to a CaseDefinition, a CaseUsage also has a *subject* and an *objective*, and may have one or more *actor* features (see also [8.4.17.1](#)).

- validateCaseUsageSubjectParameterPosition requires that the subjectParameter of a CaseUsage be its first parameter. Thus, as a result of the KerML checkFeatureParameterRedefinition constraint (see [KerML, 8.4.4.7.1]), the subjectParameter of a CaseUsage will always redefine the subjectParameter of any CaseDefinition or CaseUsage it specializes, and so will directly or indirectly redefine the base subject parameter Case::Case::subj (see [9.2.14.2.1](#)).
- checkRequirementUsageObjectiveRedefinition (see [8.2.2.20.2](#)) effectively requires that the objectiveRequirement of a CaseUsage redefine the objectiveRequirements of any CaseDefinitions or CaseUsages specialized by the first CaseUsage, which means that it will directly or indirectly redefined the RequirementUsage Cases::Case::obj. The obj feature has a default binding to the result of the Case, so, unless the default is overridden, the subjectParameter of the objectiveRequirement of a CaseUsage should conform to the result of the CaseUsage.
- checkPartUsageActorSpecialization requires that a PartUsage that is owned by a CaseUsage via an ActorMembership specialize the PartUsage Cases::Case::actors (see [8.4.7.2](#)).

```

case cs2 specializes Cases::cases {
    subject subj redefines Cases::Case::subj;
    objective obj redefines Cases::Case::obj;
    actor a subsets Cases::Case::actors;
    return result redefines Cases::Case::result;
}

```

Additional semantics are defined for each of the more specialized kinds of CaseUsage (see [8.4.18.2](#) on AnalysisCaseUsages, [8.4.19.2](#) on VerificationCaseUsages, and [8.4.20.2](#) on UseCaseUsages).

8.4.18 Analysis Cases Semantics

Abstract syntax reference: [8.3.22](#)

8.4.18.1 Analysis Case Definitions

An AnalysisCaseDefinition is a kind of CaseDefinition. As such, all the general semantic constraints for a CaseDefinition (see [8.3.21.2](#)) apply to an AnalysisCaseDefinition. In addition, the checkAnalysisCaseDefinitionSpecialization constraint requires that an AnalysisCaseDefinition specialize the base AnalysisCaseDefinition AnalysisCases::AnalysisCase (see [9.2.15.2.1](#)), which subclassifies the CaseDefinition Cases::Case (see [9.2.14.2.1](#)).

As discussed in [8.4.17.1](#), the checkRequirementUsageObjectiveRedefinition constraint implies that the objectiveRequirement of any CaseDefinition directly or indirectly redefines the RequirementUsage Cases::Case::obj. The obj feature is then redefined in AnalysisCases, with its subjectParameter bound to the result of the AnalysisCase, so that the objective is *about* the result. This means that the objectiveRequirement for an AnalysisCaseDefinition must have a subjectParameter that is consistent with the result of the AnalysisCaseDefinition.

The analysisAction property of an AnalysisCaseDefinition (see [8.3.22.2](#)) collects all the composite actions of the AnalysisCaseDefinition that are directly or indirectly defined by the ActionDefinition ActivityCases::AnalysisAction (see). The AnalysisCaseDefinition AnalysisCases::AnalysisCase then has an analysisSteps feature that subsets Actions::Action::subaction (see [9.2.9.2.4](#)) and collects the values of the analysisActions. The checkActionUsageAnalysisActionSpecialization constraint requires that any ActionUsage that is an

`AnalysisCases::AnalysisCase` then has an `analysisSteps` feature that subsets `Actions::Action::subaction` (see [9.2.9.2.4](#)) and collects the values of the `analysisActions`. The `checkActionUsageAnalysisActionSpecialization` constraint requires that any `ActionUsage` that is an `analysisAction` of an `AnalysisCaseDefinition` specialize `AnalysisCases::AnalysisCase::analysisSteps` (see [8.4.12.2](#)).

```

analysis case def AC specializes AnalysisCases::AnalysisCase {
    subject subj redefines AnalysisCases::AnalysisCase::subj;
    objective obj redefines AnalysisCases::AnalysisCase::obj {
        // AnalysisCases::AnalysisCase::obj::subj is bound to
        // AnalysisCases::AnalysisCase::result.
        subject subj : T redefines AnalysisCases::AnalysisCase::obj::subj;
    }
    action aa : Actions::AnalysisAction
        subsets AnalysisCases::AnalysisCase::analysisSteps;
    return result : T redefines AnalysisCases::AnalysisCase::result;
}

```

8.4.18.2 Analysis Case Usages

An `AnalysisCaseUsage` is a kind of `CaseUsage`. As such, all the general semantic constraints for a `CaseUsage` (see [8.4.17.2](#)) apply to an `AnalysisCaseUsage`, as well as the following additional specialization constraints:

- `checkAnalysisCaseUsageSpecialization` constraint requires that an `AnalysisCaseUsage` specialize the base `AnalysisCaseUsage` `AnalysisCases::analysisCases` (see [9.2.15.2.3](#)), which is defined by the `AnalysisCaseDefinition` `AnalysisCases::AnalysisCase` (see [9.2.15.2.2](#)) and subsets the `CaseUsage` `Cases::cases` (see [9.2.14.2.2](#)).
- `checkAnalysisCaseUsageSubAnalysisCaseSpecialization` requires that an `AnalysisCaseUsage` that is composite and has an `owningType` that is an `AnalysisCaseDefinition` or `AnalysisCaseUsage` specialize the `AnalysisCaseUsage` `AnalysisCases::AnalysisCase::subAnalysisCases` (see [9.2.15.2.2](#)), which subsets `AnalysisCases::analysisCases` and the `CaseUsage` `Cases::Case::subcases` (see [9.2.14.2.1](#)).

As for an `AnalysisCaseDefinition` (see [8.4.18.1](#)), the `checkRequirementUsageObjectiveRedefinition` constraint and the binding of `AnalysisCases::AnalysisCase::obj::subj` imply that the `objectiveRequirement` for an `AnalysisCaseUsage` must have a `subjectParameter` that is consistent with the `result` of the `AnalysisCaseUsage`. Also similarly to an `AnalysisCaseDefinition`, the `analysisAction` property of an `AnalysisCaseUsage` (see [8.3.22.3](#)) collects all the composite actions of the `AnalysisCaseUsage` that are directly or indirectly defined by the `ActionDefinition` `ActivityCases::AnalysisAction` (see [9.2.15.2.1](#)), and the `checkActionUsageAnalysisActionSpecialization` constraint also requires that any `ActionUsage` that is an `analysisAction` of an `AnalysisCaseUsage` specialize `AnalysisCases::AnalysisCase::analysisSteps` (see [8.4.12.2](#)).

```

analysis case ac specializes AnalysisCases::analysisCases {
    subject subj redefines AnalysisCases::AnalysisCase::subj;
    objective obj redefines AnalysisCases::AnalysisCase::obj {
        // AnalysisCases::AnalysisCase::obj::subj is bound to
        // AnalysisCases::AnalysisCase::result.
        subject subj : T redefines AnalysisCases::AnalysisCase::obj::subj;
    }
    action aa : Actions::AnalysisAction
        subsets AnalysisCases::AnalysisCase::analysisSteps;
    analysis case an11 subsets AnalysisCases::subAnalysisCases;
    return result : T redefines AnalysisCases::AnalysisCase::result;
}

```

analysisAction of an AnalysisCaseDefinition specialize *AnalysisCases::AnalysisCase::analysisSteps* (see [8.4.12.2](#)).

```

analysis case def AC specializes AnalysisCases::AnalysisCase {
    subject subj redefines AnalysisCases::AnalysisCase::subj;
    objective obj redefines AnalysisCases::AnalysisCase::obj {
        // AnalysisCases::AnalysisCase::obj::subj is bound to
        // AnalysisCases::AnalysisCase::result.
        subject subj : T redefines AnalysisCases::AnalysisCase::obj::subj;
    }
    action aa : Actions::AnalysisAction
        subsets AnalysisCases::AnalysisCase::analysisSteps;
    return result : T redefines AnalysisCases::AnalysisCase::result;
}

```

8.4.18.2 Analysis Case Usages

An AnalysisCaseUsage is a kind of CaseUsage. As such, all the general semantic constraints for a CaseUsage (see [8.4.17.2](#)) apply to an AnalysisCaseUsage, as well as the following additional specialization constraints:

- checkAnalysisCaseUsageSpecialization constraint requires that an AnalysisCaseUsage specialize the base AnalysisCaseUsage *AnalysisCases::analysisCases* (see [9.2.15.2.2](#)), which is defined by the AnalysisCaseDefinition *AnalysisCases::AnalysisCase* (see [9.2.15.2.1](#)) and subsets the CaseUsage *Cases::cases* (see [9.2.14.2.2](#)).
- checkAnalysisCaseUsageSubAnalysisCaseSpecialization requires that an AnalysisCaseUsage that is composite and has an owningType that is an AnalysisCaseDefinition or AnalysisCaseUsage specialize the AnalysisCaseUsage *AnalysisCases::AnalysisCase::subAnalysisCases* (see [9.2.15.2.1](#)), which subsets *AnalysisCases::analysisCases* and the CaseUsage *Cases::Case::subcases* (see [9.2.14.2.1](#)).

As for an AnalysisCaseDefinition (see [8.4.18.1](#)), the checkRequirementUsageObjectiveRedefinition constraint and the binding of *AnalysisCases::AnalysisCase::obj::subj* imply that the objectiveRequirement for an AnalysisCaseUsage must have a subjectParameter that is consistent with the result of the AnalysisCaseUsage. Also similarly to an AnalysisCaseDefinition, the analysisAction property of an AnalysisCaseUsage (see [8.3.22.3](#)) collects all the composite actions of the AnalysisCaseUsage that are directly or indirectly defined by the ActionDefinition *ActivityCases::AnalysisAction* (see), and the checkActionUsageAnalysisActionSpecialization constraint also requires that any ActionUsage that is an analysisAction of an AnalysisCaseUsage specialize *AnalysisCases::AnalysisCase::analysisSteps* (see [8.4.12.2](#)).

```

analysis case ac specializes AnalysisCases::analysisCases {
    subject subj redefines AnalysisCases::AnalysisCase::subj;
    objective obj redefines AnalysisCases::AnalysisCase::obj {
        // AnalysisCases::AnalysisCase::obj::subj is bound to
        // AnalysisCases::AnalysisCase::result.
        subject subj : T redefines AnalysisCases::AnalysisCase::obj::subj;
    }
    action aa : Actions::AnalysisAction
        subsets AnalysisCases::AnalysisCase::analysisSteps;
    analysis case an11 subsets AnalysisCases::subAnalysisCases;
    return result : T redefines AnalysisCases::AnalysisCase::result;
}

```

8.4.19 Verification Cases Semantics

Abstract syntax reference: [8.3.23](#)

8.4.19.1 Verification Case Definitions

8.4.19 Verification Cases Semantics

Abstract syntax reference: [8.3.23](#)

8.4.19.1 Verification Case Definitions

A VerificationCaseDefinition is a kind of CaseDefinition. As such, all the general semantic constraints for a CaseDefinition (see [8.3.21.2](#)) apply to a VerificationCaseDefinition. In addition, the checkVerificationCaseDefinitionSpecialization constraint requires that a VerificationCaseDefinition specialize the base VerificationCaseDefinition VerificationCases::VerificationCase (see [9.2.16.2.3](#)), which subclassifies the CaseDefinition Cases::Case (see [9.2.14.2.1](#)).

As discussed in [8.4.17.1](#), the checkRequirementUsageObjectiveRedefinition constraint implies that the objectiveRequirement of any CaseDefinition directly or indirectly redefines the RequirementUsage Cases::Case::obj. The obj feature is then redefined in VerificationCase, with its subj parameter bound to the subj parameter of the VerificationCase, so that the objective is *about* the subject of the VerificationCase. This means that the objectiveRequirement for a VerificationCaseDefinition must have a subjectParameter that is consistent with the subjectParameter of the VerificationCaseDefinition.

The intent is that the objective of a VerificationCaseDefinition is to verify the satisfaction of requirements on the subject of the VerificationCaseDefinition. In addition to regular RequirementConstraintMemberships (see [8.4.16.2](#)), the objectiveRequirement of a VerificationCaseDefinition can have RequirementVerificationMemberships whose ownedRequirements reference the verifiedRequirements of the VerificationCaseDefinition. The checkRequirementUsageRequirementVerificationSpecialization constraint (see [8.4.16.2](#)) then requires that a RequirementUsage owned by the objective of a VerificationCaseDefinition via a RequirementVerificationMembership specialize the RequirementUsage VerificationCases::VerificationCase::obj::requirementVerifications, which subsets Requirements::RequirementCheck::subrequirements. The requirementVerifications feature thus collects checks, in the context of the objective of the VerificationCase, of the requirements to be verified, which are then required constraints on the objective of the VerificationCase (since subrequirement subsets constraints).

```
verification case V specializes VerificationCases::VerificationCase {
    subject subj : S redefines VerificationCases::VerificationCase::subj;
    objective obj redefines VerificationCases::VerificationCase::obj {
        // VerificationCases::VerificationCase::obj::subj is bound to
        // VerificationCases::VerificationCase::subj.
        subject subj : S redefines
    VerificationCases::VerificationCase::obj::subj;
        verify requirement vr
            subsets
    VerificationCases::VerificationCase::obj::requirementVerifications;
    }
    return verdict redefines VerificationCases::VerificationCase::verdict;
}
```

The result of a VerificationCaseDefinition is a *verdict* that indicates whether a performance of a VerificationCase was *pass*, *fail*, *inconclusive*, or *error*. Commonly, the *verdict* will only be *pass* if the objective of the VerificationCase was satisfied, meaning all the necessary requirements were verified. However, this may not always be the desired condition for passing, so the criteria for passing must be modeled explicitly.

A VerificationCaseDefinition is a kind of CaseDefinition. As such, all the general semantic constraints for a CaseDefinition (see [8.3.21.2](#)) apply to a VerificationCaseDefinition. In addition, the checkVerificationCaseDefinitionSpecialization constraint requires that a VerificationCaseDefinition specialize the base VerificationCaseDefinition VerificationCases::VerificationCase (see [9.2.16.2.3](#)), which subclassifies the CaseDefinition Cases::Case (see [9.2.14.2.1](#)).

As discussed in [8.4.17.1](#), the checkRequirementUsageObjectiveRedefinition constraint implies that the objectiveRequirement of any CaseDefinition directly or indirectly redefines the RequirementUsage Cases::Case::obj. The obj feature is then redefined in VerificationCase, with its subj parameter bound to the subj parameter of the VerificationCase, so that the objective is *about* the subject of the VerificationCase. This means that the objectiveRequirement for a VerificationCaseDefinition must have a subjectParameter that is consistent with the subjectParameter of the VerificationCaseDefinition.

The intent is that the objective of a VerificationCaseDefinition is to verify the satisfaction of requirements on the subject of the VerificationCaseDefinition. In addition to regular RequirementConstraintMemberships (see [8.4.16.2](#)), the objectiveRequirement of a VerificationCaseDefinition can have RequirementVerificationMemberships whose ownedRequirements reference the verifiedRequirements of the VerificationCaseDefinition. The checkRequirementUsageRequirementVerificationSpecialization constraint (see [8.4.16.2](#)) then requires that a RequirementUsage owned by the objective of a VerificationCaseDefinition via a RequirementVerificationMembership specialize the RequirementUsage VerificationCases::VerificationCase::obj::requirementVerifications, which subsets Requirements::RequirementCheck::subrequirements. The requirementVerifications feature thus collects checks, in the context of the objective of the VerificationCase, of the requirements to be verified, which are then required constraints on the objective of the VerificationCase (since subrequirement subsets constraints).

```
verification case V specializes VerificationCases::VerificationCase {
    subject subj : S redefines VerificationCases::VerificationCase::subj;
    objective obj redefines VerificationCases::VerificationCase::obj {
        // VerificationCases::VerificationCase::obj::subj is bound to
        // VerificationCases::VerificationCase::subj.
        subject subj : S redefines
        VerificationCases::VerificationCase::obj::subj;
        verify requirement vr
        subsets
        VerificationCases::VerificationCase::obj::requirementVerifications;
    }
    return verdict redefines VerificationCases::VerificationCase::verdict;
}
```

The result of a VerificationCaseDefinition is a verdict that indicates whether a performance of a VerificationCase was *pass*, *fail*, *inconclusive*, or *error*. Commonly, the verdict will only be *pass* if the objective of the VerificationCase was satisfied, meaning all the necessary requirements were verified. However, this may not always be the desired condition for passing, so the criteria for passing must be modeled explicitly.

8.4.19.2 Verification Case Usages

A VerificationCaseUsage is a kind of CaseUsage. As such, all the general semantic constraints for a CaseUsage (see [8.4.17.2](#)) apply to a VerificationCaseUsage, as well as the following additional specialization constraints:

- checkVerificationCaseUsageSpecialization constraint requires that a VerificationCaseUsage specialize the base VerificationCaseUsage

8.4.19.2 Verification Case Usages

A VerificationCaseUsage is a kind of CaseUsage. As such, all the general semantic constraints for a CaseUsage (see [8.4.17.2](#)) apply to a VerificationCaseUsage, as well as the following additional specialization constraints:

- checkVerificationCaseUsageSpecialization constraint requires that a VerificationCaseUsage specialize the base VerificationCaseUsage *VerificationCases::verificationCases* (see [9.2.16.2.4](#)), which is defined by the VerificationCaseDefinition *VerificationCases::VerificationCase* (see [9.2.16.2.3](#)) and subsets the CaseUsage *Cases::cases* (see [9.2.14.2.2](#)).
- checkVerificationCaseUsageSubAnalysisCaseSpecialization requires that a VerificationCaseUsage that is composite and has an owningType that is a VerificationCaseDefinition or VerificationCaseUsage specialize the VerificationCaseUsage *VerificationCases::VerificationCase::subVerificationCases* (see [9.2.16.2.3](#)), which subsets *VerificationCases::verificationCases* and the CaseUsage *Cases::Case::subcases* (see [9.2.14.2.1](#)).

As for a VerificationCaseDefinition (see [8.4.19.1](#)), the checkRequirementUsageObjectiveRedefinition constraint and the binding of *VerificationCases::VerificationCase::obj::subj* imply that the objectiveRequirement for a VerificationCaseUsage must have a subjectParameter that is consistent with the subjectParameter of the VerificationCaseUsage. Also similarly to a VerificationCaseDefinition, the objectiveRequirement of a VerificationCaseUsage may own RequirementUsages via RequirementVerificationMemberships, to which the checkRequirementUsageRequirementVerificationSpecialization constraint applies (see [8.4.16.2](#)).

```
verification v specializes VerificationCases::VerificationCase {  
    subject subj : S redefines VerificationCases::VerificationCase::subj;  
    objective obj redefines VerificationCases::VerificationCase::obj {  
        // VerificationCases::VerificationCase::obj::subj is bound to  
        // VerificationCases::VerificationCase::subj.  
        subject subj : S redefines  
        VerificationCases::VerificationCase::obj::subj;  
        verify requirement vr  
        subsets  
        VerificationCases::VerificationCase::obj::requirementVerifications;  
    }  
    verification v1 subsets  
    VerificationCases::VerificationCase::subVerificationCases;  
    return verdict redefines VerificationCases::VerificationCase::verdict;  
}
```

As discussed for a VerificationCaseDefinition (see [8.4.19.1](#)), the result of a VerificationCaseUsage is a verdict on whether a VerificationCase passes.

8.4.20 Use Cases Semantics

Abstract syntax reference: [8.3.24](#)

8.4.20.1 Use Case Definitions

A UseCaseDefinition is a kind of CaseDefinition. As such, all the general semantic constraints for a CaseDefinition (see [8.3.21.2](#)) apply to a UseCaseDefinition. In addition, the checkUseCaseDefinitionSpecialization constraint requires that a UseCaseDefinition specialize the base

`VerificationCases::verificationCases` (see [9.2.16.2.4](#)), which is defined by the `VerificationCaseDefinition VerificationCases::VerificationCase` (see [9.2.16.2.3](#)) and subsets the `CaseUsage Cases::cases` (see [9.2.14.2.2](#)).

- `checkVerificationCaseUsageSubAnalysisCaseSpecialization` requires that a `VerificationCaseUsage` that is composite and has an `owningType` that is a `VerificationCaseDefinition` or `VerificationCaseUsage` specialize the `VerificationCaseUsage VerificationCases::VerificationCase::subVerificationCases` (see [9.2.16.2.3](#)), which subsets `VerificationCases::verificationCases` and the `CaseUsage Cases::Case::subcases` (see [9.2.14.2.1](#)).

As for a `VerificationCaseDefinition` (see [8.4.19.1](#)), the `checkRequirementUsageObjectiveRedefinition` constraint and the binding of `VerificationCases::VerificationCase::obj::subj` imply that the `objectiveRequirement` for a `VerificationCaseUsage` must have a `subjectParameter` that is consistent with the `subjectParameter` of the `VerificationCaseUsage`. Also similarly to a `VerificationCaseDefinition`, the `objectiveRequirement` of a `VerificationCaseUsage` may own `RequirementUsages` via `RequirementVerificationMemberships`, to which the `checkRequirementUsageRequirementVerificationSpecialization` constraint applies (see [8.4.16.2](#)).

```

verification v specializes VerificationCases::VerificationCase {
    subject subj : S redefines VerificationCases::VerificationCase::subj;
    objective obj redefines VerificationCases::VerificationCase::obj {
        // VerificationCases::VerificationCase::obj::subj is bound to
        // VerificationCases::VerificationCase::subj.
        subject subj : S redefines
    VerificationCases::VerificationCase::obj::subj;
        verify requirement vr
        subsets
    VerificationCases::VerificationCase::obj::requirementVerifications;
    }
    verification v1 subsets
    VerificationCases::VerificationCase::subVerificationCases;
    return verdict redefines VerificationCases::VerificationCase::verdict;
}

```

As discussed for a `VerificationCaseDefinition` (see [8.4.19.1](#)), the result of a `VerificationCaseUsage` is a `verdict` on whether a `VerificationCase` passes.

8.4.20 Use Cases Semantics

Abstract syntax reference: [8.3.24](#)

8.4.20.1 Use Case Definitions

A `UseCaseDefinition` is a kind of `CaseDefinition`. As such, all the general semantic constraints for a `CaseDefinition` (see [8.3.21.2](#)) apply to a `UseCaseDefinition`. In addition, the `checkUseCaseDefinitionSpecialization` constraint requires that a `UseCaseDefinition` specialize the base `UseCaseDefinition UseCases::UseCase` (see [9.2.17.2.1](#)), which subclassifies the `CaseDefinition Cases::Case` (see [9.2.14.2.1](#)).

```

use case def UC specializes UseCases::UseCase {
    subject subj redefines Cases::Case::subj;
    objective obj redefines Cases::Case::obj;
    actor a subsets Cases::Case::actors;
    return result redefines Cases::Case::result;
}

```

8.4.20.2 Use Case Usages

`UseCaseDefinition UseCases::UseCase` (see [9.2.17.2.1](#)), which subclasses the `CaseDefinition Cases::Case` (see [9.2.14.2.1](#)).

```
use case def UC specializes UseCases::UseCase {
    subject subj redefines Cases::Case::subj;
    objective obj redefines Cases::Case::obj;
    actor a subsets Cases::Case::actors;
    return result redefines Cases::Case::result;
}
```

8.4.20.2 Use Case Usages

A `UseCaseUsage` is a kind of `CaseUsage`. As such, all the general semantic constraints for a `CaseUsage` (see [8.4.17.2](#)) apply to a `UseCaseUsage`, as well as the following additional specialization constraints:

- `checkUseCaseUsageSpecialization` constraint requires that a `UseCaseUsage` specialize the base `UseCaseUsage UseCases::useCases` (see [9.2.17.2.2](#)), which is defined by the `UseCaseDefinition UseCases::UseCase` (see [9.2.17.2.1](#)) and subsets the `CaseUsage Cases::cases` (see [9.2.14.2.2](#)).
- `checkUseCaseUsageSubAnalysisCaseSpecialization` requires that a `UseCaseUsage` that is composite and has an `owningType` that is a `UseCaseDefinition` or `UseCaseUsage` specialize the `UseCaseUsage UseCases::UseCase::subUseCases` (see [9.2.17.2.1](#)), which subsets `UseCases::useCases` and the `CaseUsage Cases::Case::subcases` (see [9.2.14.2.1](#)).

```
use case uc specializes UseCases::useCases {
    subject subj redefines UseCases::Case::subj;
    objective obj redefines UseCases::Case::obj;
    actor a subsets Cases::Case::actors;
    use case uc1 subsets UseCases::UseCase::subUseCases;
    return result redefines UseCases::UseCase::result;
}
```

8.4.20.3 Include Use Case Usages

An `IncludeUseCaseUsage` is a kind of `UseCaseUsage` and a kind of `PerformActionUsage`. As such, all general semantic constraints on a `UseCaseUsage` (see [8.4.20.2](#)) and a `PerformActionUsage` (see [8.4.12.10](#)) also apply to a `IncludeUseCaseUsage`. In particular, `validateEventOccurrenceUsageIsReference` requires an `IncludeUseCaseUsage` to be referential. In addition, if an `IncludeUseCaseUsage` has an `owningType` that is a `UseCaseDefinition` or `UseCaseUsage`, then the `checkUseCaseUsageSpecialization` constraint requires that it specialize the `UseCaseUsage UseCases::UseCase::includedUseCases` (see [9.2.17.2.1](#)), which subsets `UseCases::useCases` (see [9.2.17.2.2](#)) and the kernel Feature `Performances::Performance::enclosedPerformances` (see [KerML, 9.2.6]).

For example, the following model:

```
use case uc1;
use case uc2 {
    include use case incl references uc1;
}
```

is, with implied Specializations included, semantically equivalent to

```
use case uc1 subsets UseCases::useCases;
use case uc2 subsets UseCases::useCases {
    ref use case incl references uc1
    subsets UseCases::UseCase::includedUseCases;
}
```

A UseCaseUsage is a kind of CaseUsage. As such, all the general semantic constraints for a CaseUsage (see [8.4.17.2](#)) apply to a UseCaseUsage, as well as the following additional specialization constraints:

- checkUseCaseUsageSpecialization constraint requires that a UseCaseUsage specialize the base UseCaseUsage UseCases::useCases (see [9.2.17.2.2](#)), which is defined by the UseCaseDefinition UseCases::UseCase (see [9.2.17.2.1](#)) and subsets the CaseUsage Cases::cases (see [9.2.14.2.2](#)).
- checkUseCaseUsageSubAnalysisCaseSpecialization requires that a UseCaseUsage that is composite and has an owningType that is a UseCaseDefinition or UseCaseUsage specialize the UseCaseUsage UseCases::UseCase::subUseCases (see [9.2.17.2.1](#)), which subsets UseCases::useCases and the CaseUsage Cases::Case::subcases (see [9.2.14.2.1](#)).

```
use case uc specializes UseCases::useCases {
    subject subj redefines UseCases::Case::subj;
    objective obj redefines UseCases::Case::obj;
    actor a subsets Cases::Case::actors;
    use case uc1 subsets UseCases::UseCase::subUseCases;
    return result redefines UseCases::UseCase::result;
}
```

8.4.20.3 Include Use Case Usages

An IncludeUseCaseUsage is a kind of UseCaseUsage and a kind of PerformActionUsage. As such, all general semantic constraints on a UseCaseUsage (see [8.4.20.2](#)) and a PerformActionUsage (see [8.4.12.11](#)) also apply to a IncludeUseCaseUsage. In particular, validateEventOccurrenceUsageIsReference requires an IncludeUseCaseUsage to be referential. In addition, if an IncludeUseCaseUsage has an owningType that is a UseCaseDefinition or UseCaseUsage, then the checkUseCaseUsageSpecialization constraint requires that it specialize the UseCaseUsage UseCases::UseCase::includedUseCases (see [9.2.17.2.1](#)), which subsets UseCases::useCases (see [9.2.17.2.2](#)) and the kernel Feature Performances::Performance::enclosedPerformances (see [KerML, 9.2.6]).

For example, the following model:

```
use case uc1;
use case uc2 {
    include use case incl references uc1;
}
```

is, with implied Specializations included, semantically equivalent to

```
use case uc1 subsets UseCases::useCases;
use case uc2 subsets UseCases::useCases {
    ref use case incl references uc1
    subsets UseCases::UseCase::includedUseCases;
}
```

Thus, the values of *uc2.incl* will be the subset of the *useCases* represented by *uc1* that are performed within *uc2*.

If the IncludeUseCaseUsage has a ReferenceSubsetting, then this will suffice to satisfy the checkUseCaseUsageSpecialization constraint, if the referenced UseCaseUsage does. However, if it does not have a ReferenceSubsetting (or other relevant explicit ownedSpecialization), it requires an implied Subsetting of UseCases::useCases.

```
use case def UIU specializes UseCases::UseCases {
    include use case iu1 references uc1
    subsets UseCases::UseCase::includedUseCases;
    include use case iu2 subsets UseCases::useCases
```

Thus, the values of `uc2.incl` will be the subset of the `UseCases` represented by `uc1` that are performed within `uc2`.

If the `IncludeUseCaseUsage` has a `ReferenceSubsetting`, then this will suffice to satisfy the `checkUseCaseUsageSpecialization` constraint, if the referenced `UseCaseUsage` does. However, if it does not have a `ReferenceSubsetting` (or other relevant explicit `ownedSpecialization`), it requires an implied `Subsetting` of `UseCases::useCases`.

```
use case def UIU specializes UseCases::UseCases {
    include use case iu1 references uc1
        subsets UseCases::UseCase::includedUseCases;
    include use case iu2 subsets UseCases::useCases
        subsets UseCases::UseCase::includedUseCases;
}
```

An `ExhibitStateUsage` that is an `ownedFeature` of an `ActionDefinition` or `ActionUsage` other than a `UseCaseDefinition` or `UseCaseUsage` has the same semantics as a `PerformActionUsage` in that context (see [7.16.6](#), with a `UseCaseUsage` as its `performedAction`). If it is an `ownedFeature` of an `OccurrenceDefinition` or `OccurrenceUsage` that is *not* an `ActionDefinition` or `ActionUsage`, it has the same semantics as an `EventOccurrenceUsage` in that context (see [8.4.5.3](#)). Otherwise, it has the same semantics as a referential `UseCaseUsage` (see [8.4.13.2](#)).

8.4.21 Views and Viewpoints Semantics

Abstract syntax reference: [8.3.25](#)

8.4.21.1 View Definitions

A `ViewDefinition` is a kind of `PartDefinition`. As such, all the general semantic constraints for an `PartDefinition` (see [8.4.7.1](#)) also apply to a `ViewDefinition`. In addition, the `checkViewDefinitionSpecialization` constraint requires that a `ViewDefinition` specialize the base `ViewDefinition` `Views::View` (see [9.2.18.2.10](#)), which subclassifies `Parts::Part` (see [9.2.4.2.1](#)).

8.4.21.2 View Usages

A `ViewUsage` is a kind of `PartUsage`. As such, all the general semantic constraints for an `PartUsage` (see [8.4.7.2](#)) also apply to a `ViewUsage`, as well as the following additional specialization constraints:

- `checkViewUsageSpecialization` requires that a `ViewUsage` specialize the base `ViewUsage` `Views::views` (see [9.2.18.2.14](#)).
- `checkViewUsageSubviewSpecialization` requires that a `ViewUsage` that is composite and has an `owningType` that is a `ViewDefinition` or `ViewUsage` specialize the `ViewUsage` `Views::View::subviews` (see [9.2.18.2.10](#)), which subsets `Views::views`.

```
view def V specializes Views::View {
    ref view v1 subsets Views::views;
    view v2 subsets Views::View::subviews;
}
```

8.4.21.3 Viewpoint Definitions

A `ViewpointDefinition` is a kind of `RequirementDefinition`. As such, all the general semantic constraints for a `RequirementDefinition` (see [8.4.16.1](#)) also apply to a `ViewpointDefinition`. In addition, the `checkViewpointDefinitionSpecialization` constraint requires that a `ViewpointDefinition` specialize

```

    subsets UseCases::UseCase::includedUseCases;
}

```

An ExhibitStateUsage that is an ownedFeature of an ActionDefinition or ActionUsage other than a UseCaseDefinition or UseCaseUsage has the same semantics as a PerformActionUsage in that context (see [7.16.6](#)), with a UseCaseUsage as its performedAction. If it is an ownedFeature of an OccurrenceDefinition or OccurrenceUsage that is *not* an ActionDefinition or ActionUsage, it has the same semantics as an EventOccurrenceUsage in that context (see [8.4.5.3](#)). Otherwise, it has the same semantics as a referential UseCaseUsage (see [8.4.13.2](#)).

8.4.21 Views and Viewpoints Semantics

Abstract syntax reference: [8.3.25](#)

8.4.21.1 View Definitions

A ViewDefinition is a kind of PartDefinition. As such, all the general semantic constraints for an PartDefinition (see [8.4.7.1](#)) also apply to a ViewDefinition. In addition, the checkViewDefinitionSpecialization constraint requires that a ViewDefinition specialize the base ViewDefinition Views::View (see [9.2.18.2.10](#)), which subclassifies Parts::Part (see [9.2.4.2.1](#)).

8.4.21.2 View Usages

A ViewUsage is a kind of PartUsage. As such, all the general semantic constraints for an PartUsage (see [8.4.7.2](#)) also apply to a ViewUsage, as well as the following additional specialization constraints:

- checkViewUsageSpecialization requires that a ViewUsage specialize the base ViewUsage Views::views (see [9.2.18.2.14](#)).
- checkViewUsageSubviewSpecialization requires that a ViewUsage that is composite and has an owningType that is a ViewDefinition or ViewUsage specialize the ViewUsage Views::View::subviews (see [9.2.18.2.10](#)), which subsets Views::views.

```

view def V specializes Views::View {
    ref view v1 subsets Views::views;
    view v2 subsets Views::View::subviews;
}

```

8.4.21.3 Viewpoint Definitions

A ViewpointDefinition is a kind of RequirementDefinition. As such, all the general semantic constraints for a RequirementDefinition (see [8.4.16.1](#)) also apply to a ViewpointDefinition. In addition, the checkViewpointDefinitionSpecialization constraint requires that a ViewpointDefinition specialize the base ViewpointDefinition Views::ViewpointCheck (see [9.2.18.2.11](#)), which specializes the RequirementDefinition Requirements::RequirementCheck (see [9.2.13.2.8](#)).

```

viewpoint def Vp specializes Viewpoints::ViewpointCheck;
viewpoint def Vp1 specializes Vp;

```

8.4.21.4 Viewpoint Usages

A ViewpointUsage is a kind of RequirementUsage. As such, all the general semantic constraints for a RequirementUsage (see [8.4.16.2](#)) also apply to a ViewpointUsage, as well as the following additional specialization constraints:

the base `ViewpointDefinition` `Views::ViewpointCheck` (see [9.2.18.2.11](#)), which specializes the `RequirementDefinition` `Requirements::RequirementCheck` (see [9.2.13.2.8](#)).

```
viewpoint def Vp specializes Viewpoints::ViewpointCheck;
viewpoint def Vp1 specializes Vp;
```

8.4.21.4 Viewpoint Usages

A `ViewpointUsage` is a kind of `RequirementUsage`. As such, all the general semantic constraints for a `RequirementUsage` (see [8.4.16.2](#)) also apply to a `ViewpointUsage`, as well as the following additional specialization constraints:

- `checkViewpointUsageSpecialization` requires that a `ViewpointUsage` specialize the base `ViewpointUsage` `Views::viewpointChecks` (see [9.2.18.2.12](#)), which subsets `Requirements::requirementChecks` (see [9.2.13.2.9](#)).

```
viewpoint vp : Vp subsets Views::viewpointChecks;
```

- `checkViewpointUsageViewpointSatisfactionSpecialization` requires that a composite `ViewpointUsage` whose `owningType` is a `ViewDefinition` or `ViewUsage` specialize the `ViewpointUsage` `Views::View::viewpointSatisfactions` (see [9.2.18.2.10](#)), which subsets `Views::viewpointChecks`. Since the `Views::View` model asserts the satisfaction of the `viewpointSatisfactions`, this means that any composite `ViewpointUsage` that is an `ownedFeature` of a `ViewDefinition` or `ViewpointUsage` is implicitly asserted to be satisfied by the specified `View`.

```
view def Vw subsets Views::View {
    // The following ViewpointUsage is implicitly asserted to be
    // satisfied by the Views defined by Vw.
    viewpoint vp1 : Vp1 subsets Views::View::viewpointSatisfactions;
}
```

8.4.21.5 Rendering Definitions

A `RenderingDefinition` is a kind of `PartDefinition`. As such, all the general semantic constraints for a `PartDefinition` (see [8.4.7.1](#)) also apply to a `ViewDefinition`. In addition, the `checkRenderingDefinitionSpecialization` constraint requires that a `RenderingDefinition` specialize the base `RenderingDefinition` `Views::Rendering` (see [9.2.18.2.6](#)), which subclasses `Parts::Part` (see [9.2.4.2.1](#)).

8.4.21.6 Rendering Usages

A `RenderingUsage` is a kind of `PartUsage`. As such, all the general semantic constraints for an `PartUsage` (see [8.4.7.2](#)) also apply to a `RenderingUsage`, as well as the following additional specialization constraints:

- `checkRenderingUsageSpecialization` requires that a `RenderingUsage` specialize the base `RenderingUsage` `Views::rendering` (see [9.2.18.2.7](#)).
- `checkRenderingUsageSubrenderingSpecialization` requires that a `RenderingUsage` that is composite and has an `owningType` that is a `RenderingDefinition` or `RenderingUsage` specialize the `RenderingUsage` `Views::Rendering::subrenderings` (see [9.2.18.2.6](#)), which subsets `Renderings::renderings`.

```
rendering def Rnd specializes Renderings::Rendering {
    ref rendering rnd1 subsets Renderings::renderings;
```

- `checkViewpointUsageSpecialization` requires that a `ViewpointUsage` specialize the base `ViewpointUsage Views::viewpointChecks` (see [9.2.18.2.12](#)), which subsets `Requirements::requirementChecks` (see [9.2.13.2.9](#)).

```
viewpoint vp : Vp subsets Views::viewpointChecks;
```

- `checkViewpointUsageViewpointSatisfactionSpecialization` requires that a composite `ViewpointUsage` whose `owningType` is a `ViewDefinition` or `ViewUsage` specialize the `ViewpointUsage Views::View:viewpointSatisfactions` (see [9.2.18.2.10](#)), which subsets `Views::viewpointChecks`. Since the `Views::View` model asserts the satisfaction of the `viewpointSatisfactions`, this means that any composite `ViewpointUsage` that is an ownedFeature of a `ViewDefinition` or `ViewpointUsage` is implicitly asserted to be satisfied by the specified `View`.

```
view def Vw subsets Views::View {
    // The following ViewpointUsage is implicitly asserted to be
    // satisfied by the Views defined by Vw.
    viewpoint vp1 : Vp1 subsets Views::View::viewpointSatisfactions;
}
```

8.4.21.5 Rendering Definitions

A `RenderingDefinition` is a kind of `PartDefinition`. As such, all the general semantic constraints for a `PartDefinition` (see [8.4.7.1](#)) also apply to a `RenderingDefinition`. In addition, the `checkRenderingDefinitionSpecialization` constraint requires that a `RenderingDefinition` specialize the base `RenderingDefinition Views::Rendering` (see [9.2.18.2.6](#)), which subclassifies `Parts::Part` (see [9.2.4.2.1](#)).

SYSML2 -291: Typo in definition of RenderingDefinition

8.4.21.6 Rendering Usages

A `RenderingUsage` is a kind of `PartUsage`. As such, all the general semantic constraints for an `PartUsage` (see [8.4.7.2](#)) also apply to a `RenderingUsage`, as well as the following additional specialization constraints:

- `checkRenderingUsageSpecialization` requires that a `RenderingUsage` specialize the base `RenderingUsage Views::rendering` (see [9.2.18.2.7](#)).
- `checkRenderingUsageSubrenderingSpecialization` requires that a `RenderingUsage` that is composite and has an `owningType` that is a `RenderingDefinition` or `RenderingUsage` specialize the `RenderingUsage Views::Rendering::subrenderings` (see [9.2.18.2.6](#)), which subsets `Renderings::renderings`.

```
rendering def Rnd specializes Renderings::Rendering {
    ref rendering rnd1 subsets Renderings::renderings;
    view rnd2 subsets Renderings::Rendering::subrenderings;
}
```

- `checkRenderingUsageRedefinition` requires that a `RenderingUsage` that is owned by a `ViewDefinition` or `ViewUsage` via a `ViewRenderingMembership` redefines the `viewRendering` of each `ViewDefinition` or `ViewUsage` that is specialized by the owning `ViewDefinition` or `ViewUsage`. This means that the `viewRendering` of a `ViewDefinition` or `ViewUsage` will always directly or indirectly redefined the `RenderingUsage Views::View::viewRendering` (see [9.2.18.2.10](#)).

```
rendering r1;
rendering r2;
view def VR specializes Views::View {
```

- ```

view rnd2 subsets Renderings::Rendering::subrenderings;
}

• checkRenderingUsageRedefinition requires that a RenderingUsage that is owned by a ViewDefinition or ViewUsage via a ViewRenderingMembership redefines the viewRendering of each ViewDefinition or ViewUsage that is specialized by the owning ViewDefinition or ViewUsage. This means that the viewRendering of a ViewDefinition or ViewUsage will always directly or indirectly redefined the RenderingUsage Views::View::viewRendering (see 9.2.18.2.10).

```

```

rendering r1;
rendering r2;
view def VR specializes Views::View {
 render r1 redefines Views::View::viewRendering;
}
view def vr : VR {
 render r2 redefines VR::r1;
}

```

## 8.4.22 Metadata Semantics

*Abstract syntax reference:* [8.3.26](#)

### 8.4.22.1 Metadata Definitions

A `MetadataDefinition` is a kind of `ItemDefinition` and a kind of KerML `Metaclass`. As such, the general semantic constraints for an `ItemDefinition` (see [8.4.6.1](#)) and a `Metaclass` (see [KerML, 8.4.4.13]) also apply to a `MetadataDefinition`. In addition, the `checkMetadataDefinitionSpecialization` constraint requires that a `MetadataDefinition` specialize the base `MetadataDefinition` `Metadata::MetadataItem` (see [9.2.20.2.1](#)), which subclassifies `Items::Item` (see [9.2.3.2.1](#)) and the kernel `Metaclass` `Metaobjects::Metaobject` (see [KerML, 9.2.16]).

The instances of a `MetadataDefinition` are `MetadataItems` that are part of the structure of a model itself, rather than being an instance in the system represented by the model. The `SysML` library model is a reflective model of the MOF abstract syntax for SysML, containing one SysML `MetadataDefinition` corresponding to each MOF metaclass in the abstract syntax model (see [9.2.21](#) for more details on the relationship between the `SysML` model and the abstract syntax).

### 8.4.22.2 Metadata Usages

A `MetadataUsage` is a kind of `ItemUsage` and a kind of KerML `MetadataFeature`. As such, the general semantic constraints for an `ItemUsage` (see [8.4.6.2](#)) and a `MetadataFeature` (see [KerML, 8.4.4.13]) also apply to a `MetadataUsage`. In addition, the `checkMetadataUsageSpecialization` constraint requires that a `MetadataUsage` specialize the base `MetadataUsage` `Metadata::metadataItems` (see [9.2.20.2.2](#)), which is defined by `Metadata::MetadataItem` (see [9.2.20.2.1](#)) and subsets `Items::items` (see [9.2.3.2.2](#)) and the kernel `Feature` `Metaobjects::metaobjects` (see [KerML, 9.2.16]).

See [KerML, 8.4.4.13.2] for further description of the model-level semantics of `MetadataUsages` as `MetadataFeatures` that can be used to annotate `Elements` of a model. See also [KerML, 8.4.4.13.3] for a discussion of *semantic metadata* that is also usable in SysML.

```

 render r1 redefines Views::View::viewRendering;
}
view def vr : VR {
 render r2 redefines VR::r1;
}

```

## 8.4.22 Metadata Semantics

*Abstract syntax reference:* [8.3.26](#)

### 8.4.22.1 Metadata Definitions

A `MetadataDefinition` is a kind of `ItemDefinition` and a kind of KerML `Metaclass`. As such, the general semantic constraints for an `ItemDefinition` (see [8.4.6.1](#)) and a `Metaclass` (see [KerML, 8.4.4.13]) also apply to a `MetadataDefinition`. In addition, the `checkMetadataDefinitionSpecialization` constraint requires that a `MetadataDefinition` specialize the base `MetadataDefinition` `Metadata::MetadataItem` (see [9.2.20.2.1](#)), which subclassifies `Items::Item` (see [9.2.3.2.1](#)) and the kernel `Metaclass` `Metaobjects::Metaobject` (see [KerML, 9.2.16]).

The instances of a `MetadataDefinition` are `MetadataItems` that are part of the structure of a model itself, rather than being an instance in the system represented by the model. The `SysML` library model is a reflective model of the MOF abstract syntax for SysML, containing one SysML `MetadataDefinition` corresponding to each MOF metaclass in the abstract syntax model (see [9.2.21](#) for more details on the relationship between the `SysML` model and the abstract syntax).

### 8.4.22.2 Metadata Usages

A `MetadataUsage` is a kind of `ItemUsage` and a kind of KerML `MetadataFeature`. As such, the general semantic constraints for an `ItemUsage` (see [8.4.6.2](#)) and a `MetadataFeature` (see [KerML, 8.4.4.13]) also apply to a `MetadataUsage`. In addition, the `checkMetadataUsageSpecialization` constraint requires that a `MetadataUsage` specialize the base `MetadataUsage` `Metadata::metadataItems` (see [9.2.20.2.2](#)), which is defined by `Metadata::MetadataItem` (see [9.2.20.2.1](#)) and subsets `Items::items` (see [9.2.3.2.2](#)) and the kernel Feature `Metaobjects::metaobjects` (see [KerML, 9.2.16]).

See [KerML, 8.4.4.13.2] for further description of the model-level semantics of `MetadataUsages` as `MetadataFeatures` that can be used to annotate `Elements` of a model. See also [KerML, 8.4.4.13.3] for a discussion of *semantic metadata* that is also usable in SysML.



# 9 Model Libraries

## 9.1 Model Libraries Overview

### **SYSML2\_-352: Error in specification of library model UUIDs**

The SysML model libraries are an integral part of the language. The Systems Model Library (see [9.2](#)) is used any time a Definition or Usage element is instantiated in a user model, providing a bridge to the semantic models in the Kernel Model Library [KerML, Clause 8]. For example, any ItemDefinition or ItemUsage must directly or indirectly specialize the base ItemDefinition *Item* from the *Items* library model, where *Item* specializes the Kernel Class *Object*, giving Items the semantics of structural Objects.

SysML also includes a set of domain libraries, which provide models of fundamental concepts from domains of particular importance in systems engineering. These models are normative and available for use in all SysML user models. The following domain libraries are included.

- The *Metadata Domain Library* contains models of attribute definitions for a useful set of standard metadata annotations (see [9.3](#); see also [7.4](#) on Annotations).
- The *Analysis Domain Library* contains models of concepts useful in carrying out analyses of systems. In particular, it includes frameworks for state space representation of systems and for performing trade-off studies (see [9.4](#)).
- The *Cause and Effect Domain Library* contains a language extension for modeling cause and effect relationships (see [9.5](#)).
- The *Requirement Derivation Domain Library* contains a language extension for modeling requirement derivation relationships (see [9.6](#)).
- The *Geometry Domain Library* contains a model for physical items with spacial extent, including an extensive set of basic geometric shapes that can be used to construct such items (see [9.7](#)).
- The *Quantities and Units Domain Library* contains a comprehensive set of models for scalar, vector and tensor quantities, including quantity value and unit definitions covering the ISO/IEC 80000 and ISO 8601-1 standards (see [9.8](#)).

The normative machine-readable representation for each of these model libraries is a project interchange file, formatted consistent with the standard for model interchange given in [KerML, 10.3], as specified for SysML in Clause 2 under *Model Interchange Conformance*. The documentation on these models provided here in [Clause 9](#) is either derived from the model files themselves or gives additional overview information on the use of the models, and is therefore also considered normative.

Each library model is packaged as a model interchange file in the project interchange file for its corresponding model library (see [KerML, 10.2]). Regardless of whether such a library model is interchanged in textual notation, XMI or JSON format, the `elementId` for any `Element` in the library model that has a non-null `qualifiedName` shall be a name-based (version 5) UUID (see [UUID, 14.2]), constructed as specified in [KerML, 9.1], except using the prefix `https://www.omg.org/spec/SysML/` when constructing the URL for a standard library package. The `elementIds` constructed in this way shall be normative across all forms of interchange of the library models and shall remain stable for future versions of the library models, though future revisions of this specification may deprecate certain existing `Elements` and their names, or introduce new `Elements` with new names and hence UUIDs that are distinct (with a high probability). However, the `elementIds` for library `Elements` for which the `qualifiedName` is null are *not* determined by this specification, and representations of the models with different `elementIds` for these `Elements` (such as may happen when parsing the textual representation of a library model) are still considered conformant to the specification.

## 9.2 Systems Model Library

### 9.2.1 Systems Model Library Overview

# 9 Model Libraries

## 9.1 Model Libraries Overview

The SysML model libraries are an integral part of the language. The Systems Model Library (see [9.2](#)) is used any time a Definition or Usage element is instantiated in a user model, providing a bridge to the semantic models in the Kernel Model Library [KerML, Clause 8]. For example, any ItemDefinition or ItemUsage must directly or indirectly specialize the base ItemDefinition *Item* from the *Items* library model, where *Item* specializes the Kernel Class *Object*, giving Items the semantics of structural Objects.

SysML also includes a set of domain libraries, which provide models of fundamental concepts from domains of particular importance in systems engineering. These models are normative and available for use in all SysML user models. The following domain libraries are included.

- The *Metadata Domain Library* contains models of attribute definitions for a useful set of standard metadata annotations (see [9.3](#); see also [7.4](#) on Annotations).
- The *Analysis Domain Library* contains models of concepts useful in carrying out analyses of systems. In particular, it includes frameworks for state space representation of systems and for performing trade-off studies (see [9.4](#)).
- The *Cause and Effect Domain Library* contains a language extension for modeling cause and effect relationships (see [9.5](#)).
- The *Requirement Derivation Domain Library* contains a language extension for modeling requirement derivation relationships (see [9.6](#)).
- The *Geometry Domain Library* contains a model for physical items with spacial extent, including an extensive set of basic geometric shapes that can be used to construct such items (see [9.7](#)).
- The *Quantities and Units Domain Library* contains a comprehensive set of models for scalar, vector and tensor quantities, including quantity value and unit definitions covering the ISO/IEC 80000 and ISO 8601-1 standards (see [9.8](#)).

The normative machine-readable representation for each of these model libraries is a project interchange file, formatted consistent with the standard for model interchange given in [KerML, 10.3], as specified for SysML in Clause 2 under *Model Interchange Conformance*. The documentation on these models provided in here in [Clause 9](#) is either derived from the model files themselves or gives additional overview information on the use of the models, and is therefore also considered normative.

Each library model is packaged as a model interchange file in the project interchange file for its corresponding model library (see [KerML, 10.2]). Regardless of whether such a library model is interchanged in textual notation, XMI or JSON format, the `elementId` for any `Element` in the library model that has a non-null `qualifiedName` shall be a name-based (version 5) UUID (see [UUID, 14.2]), constructed as specified in [KerML, 9.1], except using the prefix `https://www.omg.org/SysML/` when constructing the URL for a standard library package. The `elementIds` constructed in this way shall be normative across all forms of interchange of the library models and shall remain stable for future versions of the library models, though future revisions of this specification may deprecate certain existing `Elements` and their names, or introduce new `Elements` with new names and hence UUIDs that are distinct (with a high probability). However, the `elementIds` for library `Elements` for which the `qualifiedName` is null are *not* determined by this specification, and representations of the models with different `elementIds` for these `Elements` (such as may happen when parsing the textual representation of a library model) are still considered conformant to the specification.

## 9.2 Systems Model Library



## 9.2.1 Systems Model Library Overview

The Systems Model Library includes models for the base types of all kinds of `Definition` and `Usage` elements in SysML. Each of the following subclauses describes a library model package corresponding to the elements in the similarly named abstract syntax package (see [8.3](#)). For example, the `Attributes` library model package (see [9.2.2](#)) includes the `Attribute` and `attributes` types that are the base types for all `AttributeDefinitions` and `AttributeUsages` (respectively) as specified in the `Attributes` abstract syntax package (see [8.3.7](#)).

It also includes a package of `StandardViewDefinitions` (see [9.2.19](#)) and a reflective `SysML` model of the SysML abstract syntax (see [9.2.21](#)).

## 9.2.2 Attributes

### 9.2.2.1 Attributes Overview

This package defines the base types for attributes and related structural elements in the SysML language.

#### 9.2.2.2 Elements

##### 9.2.2.2.1 AttributeValue

###### Element

`AttributeDefinition`

###### Description

`AttributeValue` is the most general type of data values that represent qualities or characteristics of a system or part of a system. `AttributeValue` is the base type of all `AttributeDefinitions`.

###### General Types

`DataValue`

###### Features

None.

###### Constraints

None.

##### 9.2.2.2.2 attributeValues

###### Element

`AttributeUsage`

###### Description

`attributeValues` is the base feature for all `AttributeUsages`.

###### General Types

`dataValues`

The Systems Model Library includes models for the base types of all kinds of `Definition` and `Usage` elements in SysML. Each of the following subclauses describes a library model package corresponding to the elements in the similarly named abstract syntax package (see [8.3](#)). For example, the `Attributes` library model package (see [9.2.2](#)) includes the `Attribute` and `attributes` types that are the base types for all `AttributeDefinitions` and `AttributeUsages` (respectively) as specified in the `Attributes` abstract syntax package (see [8.3.7](#)).

It also includes a package of `StandardViewDefinitions` (see [9.2.19](#)) and a reflective `SysML` model of the SysML abstract syntax (see [9.2.21](#)).

## 9.2.2 Attributes

### 9.2.2.1 Attributes Overview

This package defines the base types for attributes and related structural elements in the SysML language.

### 9.2.2.2 Elements

#### 9.2.2.2.1 AttributeValue

##### Element

`AttributeDefinition`

##### Description

`AttributeValue` is the most general type of data values that represent qualities or characteristics of a system or part of a system. `AttributeValue` is the base type of all `AttributeDefinitions`.

##### General Types

`DataValue`

##### Features

None.

##### Constraints

None.

#### 9.2.2.2.2 attributeValues

##### Element

`AttributeUsage`

##### Description

`attributeValues` is the base feature for all `AttributeUsages`.

##### General Types

`dataValues`

`AttributeValue`

##### Features

## AttributeValue

### Features

None.

### Constraints

None.

## 9.2.3 Items

### 9.2.3.1 Items Overview

This package defines the base types for items and related structural elements in the SysML language.

### 9.2.3.2 Elements

#### 9.2.3.2.1 Item

##### Element

ItemDefinition

##### Description

*Item* is the most general class of objects that are part of, exist in or flow through a system. *Item* is the base type of all ItemDefinitions.

##### General Types

Object

##### Features

boundingShapes : Item [0..\*] {subsets envelopingShapes}

*envelopingShapes* that are *StructuredSpaceObjects* with every *face* or every *edge* intersecting this *Item*.

checkedConstraints : ConstraintCheck [0..\*] {subsets ownedPerformances}

*Constraints* that have been checked by this *Item*.

envelopingShapes : Item [0..\*]

Shapes that are the *shape* of an *Item* that includes this *Item* in space and time.

isSolid : Boolean

An *Item* is solid if it has no *voids*.

shape : Item {redefines spaceBoundary}

Spatial boundary of this *Item*.

subitems : Item [0..\*] {subsets suboccurrences}

None.

## Constraints

None.

### 9.2.3 Items

#### 9.2.3.1 Items Overview

This package defines the base types for items and related structural elements in the SysML language.

#### 9.2.3.2 Elements

##### 9.2.3.2.1 Item

###### Element

ItemDefinition

###### Description

*Item* is the most general class of objects that are part of, exist in or flow through a system. *Item* is the base type of all ItemDefinitions.

###### General Types

Object

###### Features

boundingShapes : Item [0..\*] {subsets envelopingShapes}

*envelopingShapes* that are *StructuredSpaceObjects* with every *face* or every *edge* intersecting this *Item*.

checkedConstraints : ConstraintCheck [0..\*] {subsets ownedPerformances}

*Constraints* that have been checked by this *Item*.

envelopingShapes : Item [0..\*]

Shapes that are the *shape* of an *Item* that includes this *Item* in space and time.

isSolid : Boolean

An *Item* is solid if it has no *voids*.

shape : Item {redefines spaceBoundary}

Spatial boundary of this *Item*.

subitems : Item [0..\*] {subsets suboccurrences}

The *Items* that are composite subitems of this *Item*.

subparts : Part [0..\*] {subsets subitems}

The *Items* that are composite subitems of this *Item*.

subparts : Part [0..\*] {subsets subitems}

The *subitems* of this item that are *parts*.

voids : Item [0..\*] {redefines innerSpaceOccurrences}

*voids* are the *innerSpaceOccurrences* of *Item* Item.

### Constraints

None.

## 9.2.3.2.2 items

### Element

ItemUsage

### Description

*items* is the base feature of all ItemUsages.

### General Types

Item

objects

### Features

None.

### Constraints

None.

## 9.2.3.2.3 Touches

### Element

ConnectionDefinition

### Description

Touching *Occurrences* are *JustOutsideOf* each other and happen at the same time (*HappensWhile*).

### General Types

JustOutsideOf

HappensWhile

### Features

The *subitems* of this item that are *parts*.

voids : Item [0..\*] {redefines innerSpaceOccurrences}

*voids* are the *innerSpaceOccurrences* of *Item* *Item*.

### Constraints

None.

## 9.2.3.2.2 items

### Element

ItemUsage

### Description

*items* is the base feature of all *ItemUsages*.

### General Types

Item

objects

### Features

None.

### Constraints

None.

## 9.2.3.2.3 Touches

### Element

ConnectionDefinition

### Description

Touching *Occurrences* are *JustOutsideOf* each other and happen at the same time (*HappensWhile*).

### General Types

JustOutsideOf

HappensWhile

### Features

touchedItem : Item {redefines separateSpace, thatOccurrence}

touchedItemToo : Item {redefines thisOccurrence, separateSpaceToo}

```
touchedItem : Item {redefines separateSpace, thatOccurrence}
touchedItemToo : Item {redefines thisOccurrence, separateSpaceToo}
touches : Item [0..*] {subsets justOutsideOfOccurrences, timeCoincidentOccurrences}
touchesToo : Item [0..*] {subsets timeCoincidentOccurrences, justOutsideOfOccurrences}
```

## Constraints

None.

## 9.2.4 Parts

### 9.2.4.1 Parts Overview

This package defines the base types for parts and related structural elements in the SysML language.

### 9.2.4.2 Elements

#### 9.2.4.2.1 Part

##### Element

PartDefinition

##### Description

*Part* is the most general class of objects that represent all or a part of a system. *Part* is the base type of all PartDefinitions.

##### General Types

Item

##### Features

exhibitedStates : StateAction [0..\*] {subsets performedActions}

*StateActions* that are exhibited by this *Part*.

ownedActions : Action [0..\*] {subsets ownedPerformances}

*Actions* that are owned by this *Part*. The *this* reference of a *ownedAction* is always its owning *Part*.

ownedPorts : Port [0..\*] {subsets timeEnclosedOccurrences}

*Ports* that are owned by this *Part*.

ownedStates : StateAction [0..\*] {subsets ownedActions}

*StateActions* that are owned by this *Part*.

performedActions : Action [0..\*] {subsets enactedPerformances}

*Actions* that are performed by this *Part*.

touches : Item [0..\*] {subsets justOutsideOfOccurrences, timeCoincidentOccurrences}  
touchesToo : Item [0..\*] {subsets timeCoincidentOccurrences, justOutsideOfOccurrences}

## Constraints

None.

### 9.2.4 Parts

#### 9.2.4.1 Parts Overview

This package defines the base types for parts and related structural elements in the SysML language.

#### 9.2.4.2 Elements

##### 9.2.4.2.1 Part

###### Element

PartDefinition

###### Description

*Part* is the most general class of objects that represent all or a part of a system. *Part* is the base type of all PartDefinitions.

###### General Types

Item

###### Features

exhibitedStates : StateAction [0..\*] {subsets performedActions}

*StateActions* that are exhibited by this *Part*.

ownedActions : Action [0..\*] {subsets ownedPerformances}

*Actions* that are owned by this *Part*. The *this* reference of a *ownedAction* is always its owning *Part*.

ownedPorts : Port [0..\*] {subsets timeEnclosedOccurrences}

*Ports* that are owned by this *Part*.

ownedStates : StateAction [0..\*] {subsets ownedActions}

*StateActions* that are owned by this *Part*.

performedActions : Action [0..\*] {subsets enactedPerformances}

*Actions* that are performed by this *Part*.

###### Constraints

None.

## Constraints

None.

### 9.2.4.2.2 parts

#### Element

PartUsage

#### Description

*parts* is the base feature of all PartUsages.

#### General Types

Part

items

#### Features

None.

## Constraints

None.

## 9.2.5 Ports

### 9.2.5.1 Ports Overview

This package defines the base types for ports and related structural elements in the SysML language.

### 9.2.5.2 Elements

#### 9.2.5.2.1 Port

#### Element

PortDefinition

#### Description

*Port* is the most general class of objects that represent connection points for interacting with a *Part*. *Port* is the base type of all PortDefinitions.

#### General Types

Object

#### Features

subports : Port [0..\*] {subsets timeEnclosedOccurrences}

#### Constraints

## **9.2.4.2.2 parts**

### **Element**

PartUsage

### **Description**

*parts* is the base feature of all PartUsages.

### **General Types**

Part

items

### **Features**

None.

### **Constraints**

None.

## **9.2.5 Ports**

### **9.2.5.1 Ports Overview**

This package defines the base types for ports and related structural elements in the SysML language.

### **9.2.5.2 Elements**

#### **9.2.5.2.1 Port**

### **Element**

PortDefinition

### **Description**

*Port* is the most general class of objects that represent connection points for interacting with a *Part*. *Port* is the base type of all PortDefinitions.

### **General Types**

Object

### **Features**

subports : Port [0..\*] {subsets timeEnclosedOccurrences}

### **Constraints**

None.

## **9.2.5.2.2 ports**

None.

### 9.2.5.2.2 ports

#### Element

PortUsage

#### Description

*ports* is the base feature of all `PortUsages`.

#### General Types

Port

objects

#### Features

None.

#### Constraints

None.

## 9.2.6 Connections

### 9.2.6.1 Connections Overview

This package defines the base types for connections and related structural elements in the SysML language.

### 9.2.6.2 Elements

#### 9.2.6.2.1 BinaryConnection

#### Element

ConnectionDefinition

#### Description

*BinaryConnection* is the most general class of binary links between two things within some containing structure.  
*BinaryConnection* is the base type of all `ConnectionDefinitions` with exactly two ends.

#### General Types

Connection

BinaryLinkObject

#### Features

source : Anything [0..\*] {redefines toSources, source}

target : Anything [0..\*] {redefines toTargets, target}

**Element**

PortUsage

**Description**

*ports* is the base feature of all PortUsages.

**General Types**

Port

objects

**Features**

None.

**Constraints**

None.

## 9.2.6 Connections

### 9.2.6.1 Connections Overview

This package defines the base types for connections and related structural elements in the SysML language.

### 9.2.6.2 Elements

#### **SYSML2 -191: Error in the specification of "connections"**

##### 9.2.6.2.1 BinaryConnection

**Element**

ConnectionDefinition

**Description**

*BinaryConnection* is the most general class of binary links between two things within some containing structure. *BinaryConnection* is the base type of all ConnectionDefinitions with exactly two ends.

**General Types**

Connection

BinaryLinkObject

**Features**

source : Anything [0..\*] {redefines toSources, source}

target : Anything [0..\*] {redefines toTargets, target}

**Constraints**

## **Constraints**

None.

### **9.2.6.2.2 binaryConnections**

#### **Element**

ConnectionUsage

#### **Description**

*binaryConnections* is the base feature of all binary ConnectionUsages .

#### **General Types**

BinaryConnection

binaryLinkObjects

connections

#### **Features**

None.

## **Constraints**

None.

### **9.2.6.2.3 Connection**

#### **Element**

ConnectionDefinition

#### **Description**

*Connection* is the most general class of links between things within some containing structure. *Connection* is the base type of all ConnectionDefinitions .

#### **General Types**

Part

LinkObject

#### **Features**

None.

## **Constraints**

None.

None.

### **9.2.6.2.2 binaryConnections**

#### **Element**

ConnectionUsage

#### **Description**

*binaryConnections* is the base feature of all binary ConnectionUsages .

#### **General Types**

BinaryConnection

binaryLinkObjects

connections

#### **Features**

None.

#### **Constraints**

None.

### **9.2.6.2.3 Connection**

#### **Element**

ConnectionDefinition

#### **Description**

*Connection* is the most general class of links between things within some containing structure. *Connection* is the base type of all ConnectionDefinitions .

#### **General Types**

Part

LinkObject

#### **Features**

None.

#### **Constraints**

None.

### **9.2.6.2.4 connections**

#### **Element**

#### **9.2.6.2.4 connections**

##### **Element**

ConcernUsage

##### **Description**

*connections* is the base feature of all ConnectionUsages.

##### **General Types**

linkObjects

parts

##### **Features**

None.

##### **Constraints**

None.

#### **9.2.6.2.5 FlowConnection**

##### **Element**

FlowConnectionDefinition

##### **Description**

*FlowConnection* is a subclass of message connections that are also flow transfers. It is the base type for FlowConnectionUsages that identify their *source* output and *target* input.

##### **General Types**

FlowTransfer

MessageConnection

##### **Features**

source : Occurrence [0..\*] {redefines source}

target : Occurrence [0..\*] {redefines target}

##### **Constraints**

None.

#### **9.2.6.2.6 flowConnections**

##### **Element**

## ConnectionUsage

### Description

*connections* is the base feature of all ConnectionUsages.

### General Types

linkObjects

parts

### Features

None.

### Constraints

None.

## 9.2.6.2.5 FlowConnection

### Element

FlowConnectionDefinition

### Description

*FlowConnection* is a subclass of message connections that are also flow transfers. It is the base type for FlowConnectionUsages that identify their *source* output and *target* input.

### General Types

FlowTransfer

MessageConnection

### Features

source : Occurrence [0..\*] {redefines source}

target : Occurrence [0..\*] {redefines target}

### Constraints

None.

## 9.2.6.2.6 flowConnections

### Element

FlowConnectionUsage

### Description

*flowConnections* is the base feature of all FlowConnectionUsages.

## FlowConnectionUsage

### Description

*flowConnections* is the base feature of all FlowConnectionUsages.

### General Types

FlowConnection

flowTransfers

messageConnections

### Features

source : Occurrence [0..\*] {redefines source}

target : Occurrence [0..\*] {redefines target}

### Constraints

None.

## 9.2.6.2.7 MessageConnection

### Element

ConnectionDefinition

### Description

*MessageConnection* is the class of binary connections that represent a transfer of objects or values between two occurrences. It is the base type of all FlowConnectionDefinitions.

### General Types

Action

Transfer

BinaryConnection

### Features

source : Occurrence [0..\*] {redefines toTransferSources, source}

target : Occurrence [0..\*] {redefines target, toTransferTargets}

### Constraints

None.

## **General Types**

FlowConnection

flowTransfers

messageConnections

## **Features**

source : Occurrence [0..\*] {redefines source}

target : Occurrence [0..\*] {redefines target}

## **Constraints**

None.

### **9.2.6.2.7 MessageConnection**

#### **Element**

ConnectionDefinition

#### **Description**

*MessageConnection* is the class of binary connections that represent a transfer of objects or values between two occurrences. It is the base type of all FlowConnectionDefinitions.

## **General Types**

Action

Transfer

BinaryConnection

## **Features**

source : Occurrence [0..\*] {redefines toTransferSources, source}

target : Occurrence [0..\*] {redefines target, toTransferTargets}

## **Constraints**

None.

### **9.2.6.2.8 messageConnections**

#### **Element**

FlowConnectionUsage

#### **Description**

*messageConnections* is the base feature of all FlowConnectionUsages.

### **9.2.6.2.8 messageConnections**

#### **Element**

FlowConnectionUsage

#### **Description**

*messageConnections* is the base feature of all FlowConnectionUsages.

#### **General Types**

MessageConnection

binaryConnections

transfers

actions

#### **Features**

None.

#### **Constraints**

None.

### **9.2.6.2.9 SuccessionFlowConnection**

#### **Element**

FlowConnectionDefinition

#### **Description**

*SuccessionFlowConnection* is a subclass of flow connections that happen after their *source* and before their *target*. It is the base type for all SuccessionFlowConnectionUsages.

#### **General Types**

FlowConnection

FlowTransferBefore

#### **Features**

source : Occurrence [0..\*] {redefines source}

target : Occurrence [0..\*] {redefines target}

#### **Constraints**

None.

### **General Types**

MessageConnection

binaryConnections

transfers

actions

### **Features**

None.

### **Constraints**

None.

## **9.2.6.2.9 SuccessionFlowConnection**

### **Element**

FlowConnectionDefinition

### **Description**

*SuccessionFlowConnection* is a subclass of flow connections that happen after their *source* and before their *target*. It is the base type for all *SuccessionFlowConnectionUsages*.

### **General Types**

FlowTransferBefore

FlowConnection

### **Features**

source : Occurrence [0..\*] {redefines source}

target : Occurrence [0..\*] {redefines target}

### **Constraints**

None.

## **9.2.6.2.10 successionFlowConnections**

### **Element**

FlowConnectionUsage

### **Description**

*successionFlowConnections* is the base feature of all *SuccessionFlowConnectionUsages*.

### **General Types**

## **9.2.6.2.10 successionFlowConnections**

### **Element**

FlowConnectionUsage

### **Description**

*successionFlowConnections* is the base feature of all SuccessionFlowConnectionUsages.

### **General Types**

SuccessionFlowConnection

flowConnections

transfersBefore

### **Features**

source : Occurrence [0..\*] {redefines source}

target : Occurrence [0..\*] {redefines target}

### **Constraints**

None.

## **9.2.7 Interfaces**

### **9.2.7.1 Interfaces Overview**

This package defines the base types for interfaces and related structural elements in the SysML language.

### **9.2.7.2 Elements**

#### **9.2.7.2.1 BinaryInterface**

### **Element**

InterfaceDefinition

### **Description**

*BinaryInterface* is the most general class of links between two PortUsages within some containing structure. *BinaryInterface* is the base Type of all InterfaceDefinitions with exactly two ends.

### **General Types**

BinaryConnection

Interface

### **Features**

source : Port [0..\*] {redefines source}

SuccessionFlowConnection

flowConnections

transfersBefore

### Features

source : Occurrence [0..\*] {redefines source}

target : Occurrence [0..\*] {redefines target}

### Constraints

None.

## 9.2.7 Interfaces

### 9.2.7.1 Interfaces Overview

This package defines the base types for interfaces and related structural elements in the SysML language.

### 9.2.7.2 Elements

#### 9.2.7.2.1 BinaryInterface

##### Element

InterfaceDefinition

##### Description

*BinaryInterface* is the most general class of links between two `PortUsages` within some containing structure. `BinaryInterface` is the base `Type` of all `InterfaceDefinitions` with exactly two ends.

##### General Types

BinaryConnection

Interface

##### Features

source : Port [0..\*] {redefines source}

target : Port [0..\*] {redefines target}

##### Constraints

None.

#### 9.2.7.2.2 binaryInterfaces

##### Element

InterfaceUsage

```
target : Port [0..*] {redefines target}
```

### Constraints

None.

## 9.2.7.2.2 binaryInterfaces

### Element

InterfaceUsage

### Description

*binaryInterfaces* is the base feature of all binary InterfaceUsages.

### General Types

interfaces

BinaryInterface

binaryConnections

### Features

None.

### Constraints

None.

## 9.2.7.2.3 Interface

### Element

InterfaceDefinition

### Description

*Interface* is the most general class of links between PortUsages within some containing structure. *Interface* is the base type of all InterfaceDefinitions.

### General Types

Connection

### Features

None.

### Constraints

None.

### Description

*binaryInterfaces* is the base feature of all binary InterfaceUsages.

### General Types

interfaces

BinaryInterface

binaryConnections

### Features

None.

### Constraints

None.

## 9.2.7.2.3 Interface

### Element

InterfaceDefinition

### Description

*Interface* is the most general class of links between PortUsages within some containing structure. *Interface* is the base type of all InterfaceDefinitions.

### General Types

Connection

### Features

None.

### Constraints

None.

## 9.2.7.2.4 interfaces

### Element

InterfaceUsage

### Description

*interfaces* is the base feature of all InterfaceUsages.

### General Types

Interface

#### **9.2.7.2.4 interfaces**

##### **Element**

InterfaceUsage

##### **Description**

*interfaces* is the base feature of all InterfaceUsages.

##### **General Types**

connections

##### **Interface**

##### **Features**

None.

##### **Constraints**

None.

### **9.2.8 Allocations**

#### **9.2.8.1 Allocations Overview**

This package defines the base types for allocations and related structural elements in the SysML language.

##### **9.2.8.2 Elements**

###### **9.2.8.2.1 Allocation**

##### **Element**

AllocationDefinition

##### **Description**

*Allocation* is the most general class of allocations, represented as a connection between the source of the allocation and the target. *Allocation* is the base type of all AllocationDefinitions.

##### **General Types**

BinaryConnection

##### **Features**

source : Anything [0..\*] {redefines source}

suballocations : Allocation [0..\*]

target : Anything [0..\*] {redefines target}

##### **Constraints**

connections

### Features

None.

### Constraints

None.

## 9.2.8 Allocations

### 9.2.8.1 Allocations Overview

This package defines the base types for allocations and related structural elements in the SysML language.

### 9.2.8.2 Elements

#### 9.2.8.2.1 Allocation

##### Element

AllocationDefinition

##### Description

*Allocation* is the most general class of allocations, represented as a connection between the source of the allocation and the target. *Allocation* is the base type of all AllocationDefinitions.

##### General Types

BinaryConnection

##### Features

source : Anything [0..\*] {redefines source}

suballocations : Allocation [0..\*]

target : Anything [0..\*] {redefines target}

##### Constraints

None.

### 9.2.8.2.2 allocations

##### Element

AllocationUsage

##### Description

*allocations* is the base feature of all ConnectionUsages.

##### General Types

None.

### **9.2.8.2.2 allocations**

#### **Element**

AllocationUsage

#### **Description**

*allocations* is the base feature of all ConnectionUsages.

#### **General Types**

Allocation

binaryConnections

#### **Features**

None.

#### **Constraints**

None.

### **9.2.9 Actions**

#### **9.2.9.1 Actions Overview**

This package defines the base types for actions and related behavioral elements in the SysML language.

#### **9.2.9.2 Elements**

##### **9.2.9.2.1 AcceptAction**

#### **Element**

ActionDefinition

#### **Description**

An *AcceptAction* is a *AcceptMessageAction* that waits for a *payload* or *acceptedMessage* of the specified kind to be accepted by a state transition nested in it.

#### **General Types**

AcceptMessageAction

#### **Features**

None.

#### **Constraints**

None.

Allocation

binaryConnections

## Features

None.

## Constraints

None.

## 9.2.9 Actions

### 9.2.9.1 Actions Overview

This package defines the base types for actions and related behavioral elements in the SysML language.

### 9.2.9.2 Elements

**SYSML2 -44: Transformation of UML4SysML::ActivityFinalNode is not specified yet**

#### 9.2.9.2.1 AcceptAction

##### Element

ActionDefinition

##### Description

An *AcceptAction* is a *AcceptMessageAction* that waits for a *payload* or *acceptedMessage* of the specified kind to be accepted by a state transition nested in it.

##### General Types

AcceptMessageAction

##### Features

None.

##### Constraints

None.

#### 9.2.9.2.2 acceptActions

##### Element

ActionUsage

##### Description

*acceptActions* is the base feature for all *SendActionUsages*.

##### General Types

### **9.2.9.2.2 acceptActions**

#### **Element**

ActionUsage

#### **Description**

*acceptActions* is the base feature for all SendActionUsages.

#### **General Types**

AcceptAction

actions

#### **Features**

None.

#### **Constraints**

None.

### **9.2.9.2.3 AcceptMessageAction**

#### **Element**

ActionDefinition

#### **Description**

An *AcceptMessageAction* is an *Action* and *AcceptPerformance* that identifies an *incomingTransferToSelf* of a designated *receiver Occurrence*, providing its *payload* as output.

#### **General Types**

Action

AcceptPerformance

#### **Features**

acceptedMessage : MessageConnection {redefines acceptedTransfer}

payload : Anything {redefines acceptedItem}

The payload received from the incoming *Transfer*. If an input value is provided for this parameter, then the *Transfer* payload must match that value.

#### **Constraints**

None.

AcceptAction

actions

#### Features

None.

#### Constraints

None.

### 9.2.9.2.3 AcceptMessageAction

#### Element

ActionDefinition

#### Description

An *AcceptMessageAction* is an *Action* and *AcceptPerformance* that identifies an *incomingTransferToSelf* of a designated *receiver Occurrence*, providing its *payload* as output.

#### General Types

Action

AcceptPerformance

#### Features

acceptedMessage : MessageConnection {redefines acceptedTransfer}

payload : Anything {redefines acceptedItem}

The payload received from the incoming *Transfer*. If an input value is provided for this parameter, then the *Transfer* payload must match that value.

#### Constraints

None.

### 9.2.9.2.4 Action

#### Element

ActionDefinition

#### Description

*Action* is the most general class of performances of *ActionDefinitions* in a system or part of a system. *Action* is the base class of all *ActionDefinitions*.

#### General Types

Performance

## 9.2.9.2.4 Action

### Element

ActionDefinition

### Description

*Action* is the most general class of performances of ActionDefinitions in a system or part of a system. *Action* is the base class of all ActionDefinitions.

### General Types

Performance

### Features

acceptSubactions : AcceptAction [0..\*] {subsets subactions, acceptActions}

The *subactions* of this *Action* that are *AcceptActions*.

assignments : AssignmentAction [0..\*] {subsets subactions}

The *subactions* of this *Action* that are *AssignmentActions*.

controls : ControlAction [0..\*] {subsets subactions}

The *subactions* of this *Action* that are *ControlActions*.

decisions : DecisionAction [0..\*] {subsets controls}

The *controls* of this *Action* that are *DecisionActions*.

decisionTransitions : DecisionTransitionAction [0..\*] {subsets transitions}

The *subactions* of this *Action* that are *DecisionTransitionActions*.

done : Action {redefines endShot}

The ending *snapshot* of this *Action*.

forks : ForkAction [0..\*] {subsets controls}

The *controls* of this *Action* that are *ForkActions*.

forLoops : ForLoopAction [0..\*] {subsets loops}

The *loops* of this *Action* that are *ForLoopActions*.

ifSubactions : IfThenAction [0..\*] {subsets subactions}

The *subactions* of this *Action* that are *IfThenActions* (including *IfThenElseActions*).

joins : JoinAction [0..\*] {subsets controls}

## Features

acceptSubactions : AcceptAction [0..\*] {subsets subactions, acceptActions}

The *subactions* of this *Action* that are *AcceptActions*.

assignments : AssignmentAction [0..\*] {subsets subactions}

The *subactions* of this *Action* that are *AssignmentActions*.

controls : ControlAction [0..\*] {subsets subactions}

The *subactions* of this *Action* that are *ControlActions*.

decisions : DecisionAction [0..\*] {subsets controls}

The *controls* of this *Action* that are *DecisionActions*.

decisionTransitions : DecisionTransitionAction [0..\*] {subsets transitions}

The *subactions* of this *Action* that are *DecisionTransitionActions*

done : Action {redefines endShot}

The ending *snapshot* of this *Action*.

forks : ForkAction [0..\*] {subsets controls}

The *controls* of this *Action* that are *ForkActions*.

forLoops : ForLoopAction [0..\*] {subsets loops}

The *loops* of this *Action* that are *ForLoopActions*.

ifSubactions : IfThenAction [0..\*] {subsets subactions}

The *subactions* of this *Action* that are *IfThenActions* (including *IfThenElseActions*).

joins : JoinAction [0..\*] {subsets controls}

The *controls* of this *Action* that are *JoinActions*.

loops : LoopAction [0..\*] {subsets subactions}

The *subactions* of this *Action* that are *LoopActions*.

merges : MergeAction [0..\*] {subsets controls}

The *controls* of this *Action* that are *MergeActions*.

sendSubactions : SendAction [0..\*] {subsets subactions, sendActions}

The *subactions* of this *Action* that are *SendActions*.

start : Action {redefines startShot}

The *controls* of this *Action* that are *JoinActions*.

loops : LoopAction [0..\*] {subsets subactions}

The *subactions* of this *Action* that are *LoopActions*.

merges : MergeAction [0..\*] {subsets controls}

The *controls* of this *Action* that are *MergeActions*.

sendSubactions : SendAction [0..\*] {subsets subactions, sendActions}

The *subactions* of this *Action* that are *SendActions*.

start : Action {redefines startShot}

The starting *snapshot* of this *Action*.

subactions : Action [0..\*] {subsets enclosedPerformances}

The *subperformances* of this *Action* that are *Actions*. The *this* reference of a *subaction* is always the same as that of its owning *Action*.

transitions : TransitionAction [0..\*] {subsets subactions}

The *subactions* of this *Action* that are *TransitionActions*.

whileLoops : WhileLoopAction [0..\*] {subsets loops}

The *loops* of this *Action* that are *WhileLoopActions*.

## Constraints

None.

### 9.2.9.2.5 actions

#### Element

ActionUsage

#### Description

*actions* is the base feature for all *ActionUsages*.

#### General Types

Action

performances

#### Features

None.

The starting *snapshot* of this *Action*.

subactions : Action [0..\*] {subsets enclosedPerformances}

The *subperformances* of this *Action* that are *Actions*. The *this* reference of a *subaction* is always the same as that of its owning *Action*.

terminateSubactions : TerminateAction [0..\*] {subsets subactions, terminateActions}

The *subactions* of this *Action* that are *TerminateActions*.

transitions : TransitionAction [0..\*] {subsets subactions}

The *subactions* of this *Action* that are *TransitionActions*.

whileLoops : WhileLoopAction [0..\*] {subsets loops}

The *loops* of this *Action* that are *WhileLoopActions*.

## Constraints

None.

### 9.2.9.2.5 actions

#### Element

ActionUsage

#### Description

*actions* is the base feature for all *ActionUsages*.

#### General Types

Action

performances

#### Features

None.

#### Constraints

None.

### 9.2.9.2.6 AssignmentAction

#### Element

ActionDefinition

#### Description

## Constraints

None.

### 9.2.9.2.6 AssignmentAction

#### Element

ActionDefinition

#### Description

An *AssignmentAction* is an *Action* used to type an *AssignmentActionUsage*. It is also a *FeatureWritePerformance* that updates the *accessedFeature* of its target *Occurrence* with the given *replacementValues*.

#### General Types

FeatureWritePerformance

Action

#### Features

replacementValues : Anything [0..\*] {redefines replacementValues}

The values to be assigned to the *accessedFeature* of the *target*.

target : Occurrence {redefines onOccurrence}

The target *Occurrence* whose *accessedFeature* is being assigned.

#### Constraints

None.

### 9.2.9.2.7 assignmentActions

#### Element

ActionUsage

#### Description

*assignmentActions* is the base feature for all *AssignmentActionUsages*.

#### General Types

AssignmentAction

actions

#### Features

target : Occurrence {redefines target}

An *AssignmentAction* is an *Action* used to type an *AssignmentActionUsage*. It is also a *FeatureWritePerformance* that updates the *accessedFeature* of its target *Occurrence* with the given *replacementValues*.

### General Types

FeatureWritePerformance

Action

### Features

replacementValues : Anything [0..\*] {redefines replacementValues}

The values to be assigned to the *accessedFeature* of the *target*.

target : Occurrence {redefines onOccurrence}

The target *Occurrence* whose *accessedFeature* is being assigned.

### Constraints

None.

## 9.2.9.2.7 assignmentActions

### Element

ActionUsage

### Description

*assignmentActions* is the base feature for all *AssignmentActionUsages*.

### General Types

AssignmentAction

actions

### Features

target : Occurrence {redefines target}

The default *target* for *assignmentActions* is the featuring instance (if that is an *Occurrence*)

### Constraints

None.

## 9.2.9.2.8 ControlAction

### Element

ActionDefinition

The default *target* for *assignmentActions* is the featuring instance (if that is an *Occurrence*).

## Constraints

None.

### 9.2.9.2.8 ControlAction

#### Element

ActionDefinition

#### Description

A *ControlAction* is the *Action* of a *ControlNode*, which has no inherent behavior.

#### General Types

Action

#### Features

None.

#### Constraints

None.

### 9.2.9.2.9 DecisionAction

#### Element

ActionDefinition

#### Description

A *DecisionAction* is the *ControlAction* for a *DecisionNode*. It is a *DecisionPerformance* that selects one outgoing *HappensBeforeLink*.

#### General Types

DecisionPerformance

ControlAction

#### Features

None.

#### Constraints

None.

## Description

A *ControlAction* is the *Action* of a *ControlNode*, which has no inherent behavior.

## General Types

Action

## Features

None.

## Constraints

None.

### 9.2.9.2.9 DecisionAction

#### Element

ActionDefinition

## Description

A *DecisionAction* is the *ControlAction* for a *DecisionNode*. It is a *DecisionPerformance* that selects one outgoing *HappensBeforeLink*.

## General Types

DecisionPerformance

ControlAction

## Features

None.

## Constraints

None.

### 9.2.9.2.10 DecisionTransitionAction

#### Element

ActionDefinition

## Description

A *DecisionTransitionAction* is a *TransitionAction* and *NonStateTransitionPerformance* that has a single *guard*, but no *trigger* or *effects*. It is the base type of *TransitionUsages* used as conditional successions in action models.

## General Types

NonStateTransitionPerformance

### **9.2.9.2.10 DecisionTransitionAction**

#### **Element**

ActionDefinition

#### **Description**

A *DecisionTransitionAction* is a *TransitionAction* and *NonStateTransitionPerformance* that has a single *guard*, but no *trigger* or *effects*. It is the base type of *TransitionUsages* used as conditional successions in action models.

#### **General Types**

NonStateTransitionPerformance

TransitionAction

#### **Features**

accepter : AcceptMessageAction [0] {redefines accepter}

effect : Action [0] {redefines effect}

#### **Constraints**

None.

### **9.2.9.2.11 ForkAction**

#### **Element**

ActionDefinition

#### **Description**

A *ForkAction* is the *ControlAction* for a *ForkNode*.

Note: Fork behavior results from requiring that the target multiplicity of all outgoing succession connectors be 1..1.

#### **General Types**

ControlAction

#### **Features**

None.

#### **Constraints**

None.

### **9.2.9.2.12 ForLoopAction**

#### **Element**

TransitionAction

#### Features

```
accepter : AcceptMessageAction [0] {redefines accepter}
effect : Action [0] {redefines effect}
```

#### Constraints

None.

### 9.2.9.2.11 ForkAction

#### Element

ActionDefinition

#### Description

A *ForkAction* is the *ControlAction* for a *ForkNode*.

Note: Fork behavior results from requiring that the target multiplicity of all outgoing succession connectors be 1..1.

#### General Types

ControlAction

#### Features

None.

#### Constraints

None.

### 9.2.9.2.12 ForLoopAction

#### Element

ActionDefinition

#### Description

A *ForLoopAction* is a *LoopAction* that iterates over an ordered sequence of values. It is the base type for all *ForLoopActionUsages*.

#### General Types

LoopAction

#### Features

```
body : Action [0..*] {redefines body}
```

The *Action* that is performed on each iteration of the loop.

## ActionDefinition

### Description

A *ForLoopAction* is a *LoopAction* that iterates over an ordered sequence of values. It is the base type for all *ForLoopActionUsages*.

### General Types

LoopAction

### Features

body : Action [0..\*] {redefines body}

The *Action* that is performed on each iteration of the loop.

index : Positive

The index of the element of *seq* assigned to *var* on the current iteration of the loop.

initialization : AssignmentAction

Initializes *index* to 1.

seq : Anything [0..\*] {ordered, nonunique}

The sequence of values over which the loop iterates.

var : Anything

The loop variable that is assigned successive elements of *seq* on each iteration of the loop.

whileLoop : WhileLoopAction

While *index* is less than or equal to the size of *seq*, assigns *var* to the *index* element of *seq*, then performs *body* and increments *index*.

### Constraints

None.

## 9.2.9.2.13 forLoopActions

### Element

ActionUsage

### Description

*forLoopActions* is the base feature for all *ForLoopActionUsages*.

### General Types

loopActions

`index` : Positive

The index of the element of `seq` assigned to `var` on the current iteration of the loop.

`initialization` : AssignmentAction

Initializes `index` to 1.

`seq` : Anything [0..\*] {ordered, nonunique}

The sequence of values over which the loop iterates.

`var` : Anything

The loop variable that is assigned successive elements of `seq` on each iteration of the loop.

`whileLoop` : WhileLoopAction

While `index` is less than or equal to the size of `seq`, assigns `var` to the `index` element of `seq`, then performs `body` and increments `index`.

## Constraints

None.

### 9.2.9.2.13 forLoopActions

#### Element

ActionUsage

#### Description

`forLoopActions` is the base feature for all ForLoopActionUsages.

#### General Types

`loopActions`

`ForLoopAction`

#### Features

None.

## Constraints

None.

### 9.2.9.2.14 IfThenAction

#### Element

ActionDefinition

#### Description

## ForLoopAction

### Features

None.

### Constraints

None.

## 9.2.9.2.14 IfThenAction

### Element

ActionDefinition

### Description

An *IfThenAction* is a Kernel *IfThenPerformance* that is also an *Action*. It is the base type for all *IfActionUsages*.

### General Types

Action

IfThenPerformance

### Features

ifTest : BooleanEvaluation {redefines ifTest}

An evaluation of a *Boolean*-valued *Expression* whose result determines whether or not the *thenClause* is performed.

thenClause : Performance [0..1] {redefines thenClause}

An optional *Performance* that occurs if and only if the result of the *ifTest* is true.

### Constraints

None.

## 9.2.9.2.15 ifThenActions

### Element

ActionUsage

### Description

*ifThenActions* is the base feature for all *IfActionUsages*.

### General Types

IfThenAction

An *IfThenAction* is a Kernel *IfThenPerformance* that is also an *Action*. It is the base type for all *IfActionUsages*.

### General Types

Action

IfThenPerformance

### Features

ifTest : BooleanEvaluation {redefines ifTest}

An evaluation of a *Boolean*-valued *Expression* whose result determines whether or not the *thenClause* is performed.

thenClause : Performance [0..1] {redefines thenClause}

An optional *Performance* that occurs if and only if the result of the *ifTest* is true.

### Constraints

None.

## 9.2.9.2.15 ifThenActions

### Element

ActionUsage

### Description

*ifThenActions* is the base feature for all *IfActionUsages*.

### General Types

IfThenAction

actions

### Features

None.

### Constraints

None.

## 9.2.9.2.16 IfThenElseAction

### Element

ActionDefinition

### Description

actions

#### Features

None.

#### Constraints

None.

### 9.2.9.2.16 IfThenElseAction

#### Element

ActionDefinition

#### Description

An *IfThenElseAction* is a Kernel *IfThenElsePerformance* that is also an *IfThenAction*. It is the base type for all *IfActionUsages* that have an *elseAction*.

#### General Types

IfThenAction

IfThenElsePerformance

#### Features

elseClause : Performance [0..1] {redefines elseClause}

An optional *Performance* that occurs if and only if the result of the *ifTest* is false.

#### Constraints

None.

### 9.2.9.2.17 ifThenElseActions

#### Element

ActionUsage

#### Description

*ifThenElseActions* is the base feature for all *IfActionUsages* that have an *elseAction*.

#### General Types

IfThenElseAction

ifThenActions

#### Features

An *IfThenElseAction* is a Kernel *IfThenElsePerformance* that is also an *IfThenAction*. It is the base type for all *IfActionUsages* that have an *elseAction*.

### General Types

IfThenAction

IfThenElsePerformance

### Features

elseClause : Performance [0..1] {redefines elseClause}

An optional *Performance* that occurs if and only if the result of the *ifTest* is false.

### Constraints

None.

## 9.2.9.2.17 ifThenElseActions

### Element

ActionUsage

### Description

*ifThenElseActions* is the base feature for all *IfActionUsages* that have an *elseAction*.

### General Types

IfThenElseAction

ifThenActions

### Features

None.

### Constraints

None.

## 9.2.9.2.18 JoinAction

### Element

ActionDefinition

### Description

A *JoinAction* is the *ControlAction* for a *JoinNode*.

Note: Join behavior results from requiring that the source multiplicity of all incoming succession connectors be 1..1.

### General Types

None.

### **Constraints**

None.

## **9.2.9.2.18 JoinAction**

### **Element**

ActionDefinition

### **Description**

A *JoinAction* is the *ControlAction* for a *JoinNode*.

Note: Join behavior results from requiring that the source multiplicity of all incoming succession connectors be 1..1.

### **General Types**

ControlAction

### **Features**

None.

### **Constraints**

None.

## **9.2.9.2.19 LoopAction**

### **Element**

ActionDefinition

### **Description**

A *LoopAction* is the base type for all *LoopActionUsages*.

### **General Types**

Action

### **Features**

body : Action [0..\*]

The *Action* that is performed repeatedly in the loop.

### **Constraints**

None.

ControlAction

**Features**

None.

**Constraints**

None.

**9.2.9.2.19 LoopAction**

**Element**

ActionDefinition

**Description**

A *LoopAction* is the base type for all *LoopActionUsages*.

**General Types**

Action

**Features**

body : Action [0..\*]

The *Action* that is performed repeatedly in the loop.

**Constraints**

None.

**9.2.9.2.20 loopActions**

**Element**

ActionUsage

**Description**

*loopActions* is the base feature for all *LoopActionUsages*.

**General Types**

LoopAction

actions

**Features**

None.

**Constraints**

### **9.2.9.2.20 loopActions**

#### **Element**

ActionUsage

#### **Description**

*loopActions* is the base feature for all LoopActionUsages.

#### **General Types**

LoopAction

actions

#### **Features**

None.

#### **Constraints**

None.

### **9.2.9.2.21 MergeAction**

#### **Element**

ActionDefinition

#### **Description**

A *MergeAction* is the *ControlAction* for a *MergeNode*. It is a *MergePerformance* that selects exactly one incoming *HappensBefore* link.

#### **General Types**

MergePerformance

ControlAction

#### **Features**

None.

#### **Constraints**

None.

### **9.2.9.2.22 SendAction**

#### **Element**

ActionDefinition

None.

### 9.2.9.2.21 MergeAction

#### Element

ActionDefinition

#### Description

A *MergeAction* is the *ControlAction* for a *MergeNode*. It is a *MergePerformance* that selects exactly one incoming *HappensBefore* link.

#### General Types

MergePerformance

ControlAction

#### Features

None.

#### Constraints

None.

### 9.2.9.2.22 SendAction

#### Element

ActionDefinition

#### Description

A *SendAction* is an *Action* and *SendPerformance* used to type a *SendActionUsages*. It initiates an *outgoingTransferFromSelf* from a designated *sender Occurrence* with a given *payload*, optionally to a designated *receiver Occurrence*.

#### General Types

Action

SendPerformance

#### Features

payload : Anything {redefines sentItem}

The payload to be sent in the outgoing *Transfer*.

sentMessage : MessageConnection {redefines sentTransfer}

#### Constraints

None.

## Description

A *SendAction* is an *Action* and *SendPerformance* used to type a *SendActionUsages*. It initiates an *outgoingTransferFromSelf* from a designated *sender Occurrence* with a given *payload*, optionally to a designated *receiver Occurrence*.

## General Types

Action

SendPerformance

## Features

payload : Anything {redefines sentItem}

The payload to be sent in the outgoing *Transfer*.

sentMessage : MessageConnection {redefines sentTransfer}

## Constraints

None.

## 9.2.9.2.23 sendActions

### Element

ActionUsage

## Description

*sendActions* is the base feature for all *SendActionUsages*.

## General Types

SendAction

actions

## Features

None.

## Constraints

None.

## 9.2.9.2.24 TransitionAction

### Element

ActionDefinition

## Description

### **9.2.9.2.23 sendActions**

#### **Element**

ActionUsage

#### **Description**

*sendActions* is the base feature for all `SendActionUsages`.

#### **General Types**

SendAction

actions

#### **Features**

None.

#### **Constraints**

None.

### **9.2.9.2.24 TerminateAction**

#### **Element**

ActionDefinition

#### **Description**

A `TerminateAction` is an `Action` that terminates a given `Occurrence`, meaning that the `Occurrence` ends during the performance of this `Action`. `TerminateAction` is the base type for all `TerminateActionUsages`.

#### **General Types**

Action

#### **Features**

`terminatedOccurrence : Occurrence`

The `Occurrence` to be terminated. (`in` parameter)

#### **Constraints**

None.

### **9.2.9.2.25 terminateActions**

#### **Element**

ActionUsage

#### **Description**

A *TransitionAction* is a *TransitionPerformance* with an Action as *transitionLinkSource*. It is the base type of all *TransitionUsages*.

### General Types

Action

TransitionPerformance

### Features

acceptedMessage : MessageConnection {redefines trigger}

accepter : AcceptMessageAction [0..1] {subsets subactions, redefines accept}

effect : Action [0..\*] {subsets subactions, redefines effect}

receiver : Occurrence {redefines triggerTarget}

transitionLinkSource : Action {redefines transitionLinkSource}

### Constraints

None.

## 9.2.9.2.25 transitionActions

### Element

TransitionUsage

### Description

*transitionActions* is the base feature for all *TransitionUsages*.

### General Types

Action

TransitionAction

actions

### Features

None.

### Constraints

None.

## 9.2.9.2.26 WhileLoopAction

### Element

*terminateActions* is the base feature for all *TerminateActionUsages*.

### General Types

TerminateAction

actions

### Features

terminatedOccurrence : Occurrence {redefines terminatedOccurrence}

The default *terminatedOccurrence* for a *terminateAction* is its featuring occurrence (which will generally be a containing *Action*).

### Constraints

None.

## 9.2.9.2.26 TransitionAction

### Element

ActionDefinition

### Description

A *TransitionAction* is a *TransitionPerformance* with an Action as *transitionLinkSource*. It is the base type of all *TransitionUsages*.

### General Types

Action

TransitionPerformance

### Features

acceptedMessage : MessageConnection {redefines trigger}

accepter : AcceptMessageAction [0..1] {subsets subactions, redefines accept}

effect : Action [0..\*] {subsets subactions, redefines effect}

receiver : Occurrence {redefines triggerTarget}

transitionLinkSource : Action {redefines transitionLinkSource}

### Constraints

None.

## 9.2.9.2.27 transitionActions

### Element

## ActionDefinition

### Description

A *WhileLoopAction* is a Kernel *LoopPerformance* that is also a *LoopAction*. It is the base type for all *WhileLoopActionUsages*.

### General Types

LoopAction

LoopPerformance

### Features

body : Action [0..\*] {redefines body, body}

The *Action* that is performed while the *whileTest* is true and the *untilTest* is false.

untilTest : BooleanEvaluation [0..\*] {redefines untilTest}

Successive evaluations of a *Boolean*-valued *Expression* that must be false for the loop to continue. The *Expression* is evaluated after the *body* is performed.

whileTest : BooleanEvaluation [1..\*] {redefines whileTest}

Successive evaluations of a *Boolean*-valued *Expression* that must be true for the loop to continue. the *Expression* is evaluated before the *body* is performed and is always evaluated at least once.

### Constraints

None.

## 9.2.9.2.27 whileLoopActions

### Element

ActionUsage

### Description

*whileLoopActions* is the base feature for all *WhileLoopActionUsages*.

### General Types

WhileLoopAction

loopActions

### Features

None.

### Constraints

## TransitionUsage

### Description

*transitionActions* is the base feature for all TransitionUsages.

### General Types

Action

TransitionAction

actions

### Features

None.

### Constraints

None.

## 9.2.9.2.28 WhileLoopAction

### Element

ActionDefinition

### Description

A *WhileLoopAction* is a Kernel *LoopPerformance* that is also a *LoopAction*. It is the base type for all *WhileLoopActionUsages*.

### General Types

LoopAction

LoopPerformance

### Features

body : Action [0..\*] {redefines body, body}

The *Action* that is performed while the *whileTest* is true and the *untilTest* is false.

untilTest : BooleanEvaluation [0..\*] {redefines untilTest}

Successive evaluations of a *Boolean*-valued *Expression* that must be false for the loop to continue. The *Expression* is evaluated after the *body* is performed.

whileTest : BooleanEvaluation [1..\*] {redefines whileTest}

Successive evaluations of a *Boolean*-valued *Expression* that must be true for the loop to continue. the *Expression* is evaluated before the *body* is performed and is always evaluated at least once.

### Constraints

None.

## 9.2.10 States

### 9.2.10.1 States Overview

This package defines the base types for states and related behavioral elements in the SysML language.

### 9.2.10.2 Elements

#### 9.2.10.2.1 StateAction

##### Element

StateDefinition

##### Description

A *StateAction* is a kind of *Action* that is also a *StatePerformance*. It is the base type for all *StateDefinitions*.

##### General Types

Action

StatePerformance

##### Features

doAction : Action {redefines do}

entryAction : Action {redefines entry}

exitAction : Action {redefines exit}

stateTransitions : StateTransitionAction [0..\*] {subsets transitions}

subactions : Action [0..\*] {subsets middle, redefines subactions}

The *subperformances* of this *StateAction* that are *Actions*, other than the entry and exit *Actions*. These *subactions* all take place in the "middle" of the *StatePerformance*, that is, after the entry *Action* and before the exit *Action*.

substates : StateAction [0..\*] {subsets subactions}

The *subactions* of this *StateAction* that are *StateActions*. These *substates* all take place in the "middle" of the *StatePerformance*, that is, after the entry *Action* and before the exit *Action*.

##### Constraints

None.

#### 9.2.10.2.2 stateActions

##### Element

None.

### **9.2.9.2.29 whileLoopActions**

#### **Element**

ActionUsage

#### **Description**

*whileLoopActions* is the base feature for all WhileLoopActionUsages.

#### **General Types**

WhileLoopAction

loopActions

#### **Features**

None.

#### **Constraints**

None.

## **9.2.10 States**

### **9.2.10.1 States Overview**

This package defines the base types for states and related behavioral elements in the SysML language.

### **9.2.10.2 Elements**

**SYSML2 -184: StateAction::substates has an implied subsetting of exclusiveStates**

#### **9.2.10.2.1 StateAction**

##### **Element**

StateDefinition

##### **Description**

A *StateAction* is a kind of *Action* that is also a *StatePerformance*. It is the base type for all *StateDefinitions*.

##### **General Types**

Action

StatePerformance

##### **Features**

doAction : Action {redefines do}

## StateUsage

### Description

*stateActions* is the base feature for all StateUsages.

### General Types

StateAction

actions

### Features

None.

### Constraints

None.

## 9.2.10.2.3 StateTransitionAction

### Element

ActionDefinition

### Description

A *StateTransitionAction* is a *TransitionAction* and a *StateTransitionPerformance* whose *transitionLinkSource* is a *StateAction*. It is the base type of *TransitionUsages* used as transitions in state models.

### General Types

TransitionAction

StateTransitionPerformance

### Features

payload : Anything [0..\*]

receiver : Occurrence {redefines receiver}

transitionLinkSource : StateAction {redefines transitionLinkSource, transitionLinkSource}

### Constraints

None.

## 9.2.11 Calculations

### 9.2.11.1 Calculations Overview

This package defines the base types for calculations and related behavioral elements in the SysML language.

entryAction : Action {redefines entry}

exclusiveStates : StateAction [0..\*] {subsets substates}

The *substates* of this *StateAction* that are mutually exclusive, that is, whose performances do not overlap in time.

exitAction : Action {redefines exit}

stateTransitions : StateTransitionAction [0..\*] {subsets transitions}

subactions : Action [0..\*] {subsets middle, redefines subactions}

The *subperformances* of this *StateAction* that are *Actions*, other than the entry and exit *Actions*. These *subactions* all take place in the "middle" of the *StatePerformance*, that is, after the entry *Action* and before the exit *Action*.

substates : StateAction [0..\*] {subsets subactions}

The *subactions* of this *StateAction* that are *StateActions*.

NOTE: This feature is declared as an *ActionUsage*, not a *StateUsage*, so that the constraint *checkStateUsageExclusiveStateSpecialization* does not apply to it, since this constraint would otherwise incorrectly require that *substates* subset *exclusiveStates*.

## Constraints

None.

### 9.2.10.2.2 stateActions

#### Element

StateUsage

#### Description

*stateActions* is the base feature for all *StateUsages*.

#### General Types

StateAction

actions

#### Features

None.

#### Constraints

None.

### 9.2.10.2.3 StateTransitionAction

#### Element

## **9.2.11.2 Elements**

### **9.2.11.2.1 Calculation**

#### **Element**

CalculationDefinition

#### **Description**

*Calculation* is the most general class of evaluations of CalculationDefinitions in a system or part of a system. *Calculation* is the base class of all CalculationDefinitions.

#### **General Types**

Evaluation

Action

#### **Features**

subcalculations : Calculation [0..\*] {subsets subactions}

The *subcalculations* of this Calculations that are Calculations

#### **Constraints**

None.

## **9.2.11.2.2 calculations**

#### **Element**

CalculationUsage

#### **Description**

*calculations* is the base Feature for all CalculationUsages.

|

#### **General Types**

evaluations

Calculation

actions

#### **Features**

None.

#### **Constraints**

ActionDefinition

### Description

A *StateTransitionAction* is a *TransitionAction* and a *StateTransitionPerformance* whose *transitionLinkSource* is a *StateAction*. It is the base type of *TransitionUsages* used as transitions in state models.

### General Types

TransitionAction

StateTransitionPerformance

### Features

payload : Anything [0..\*]

receiver : Occurrence {redefines receiver}

transitionLinkSource : StateAction {redefines transitionLinkSource, transitionLinkSource}

### Constraints

None.

## 9.2.11 Calculations

### 9.2.11.1 Calculations Overview

This package defines the base types for calculations and related behavioral elements in the SysML language.

### 9.2.11.2 Elements

#### 9.2.11.2.1 Calculation

##### Element

CalculationDefinition

##### Description

*Calculation* is the most general class of evaluations of *CalculationDefinitions* in a system or part of a system. *Calculation* is the base class of all *CalculationDefinitions*.

##### General Types

Evaluation

Action

##### Features

subcalculations : Calculation [0..\*] {subsets subactions}

The *subcalculations* of this *Calculations* that are *Calculations*

None.

## 9.2.12 Constraints

### 9.2.12.1 Constraints Overview

This package defines the base types for constraints and related behavioral elements in the SysML language.

### 9.2.12.2 Elements

#### 9.2.12.2.1 assertedConstraintChecks

##### Element

ConstraintUsage

##### Description

*assertedConstraintChecks* is the subset of *constraintChecks* for *ConstraintChecks* asserted to be true.

##### General Types

constraintChecks

trueEvaluations

##### Features

None.

##### Constraints

None.

#### 9.2.12.2.2 ConstraintCheck

##### Element

ConstraintDefinition

##### Description

*ConstraintCheck* is the most general class for constraint checking. *ConstraintCheck* is the base type of all *ConstraintDefinitions*.

##### General Types

BooleanEvaluation

##### Features

None.

##### Constraints

None.

## **Constraints**

None.

### **9.2.11.2.2 calculations**

#### **Element**

CalculationUsage

#### **Description**

*calculations* is the base Feature for all CalculationUsages.

#### **General Types**

evaluations

Calculation

actions

#### **Features**

None.

## **Constraints**

None.

## **9.2.12 Constraints**

### **9.2.12.1 Constraints Overview**

This package defines the base types for constraints and related behavioral elements in the SysML language.

#### **9.2.12.2 Elements**

##### **9.2.12.2.1 assertedConstraintChecks**

#### **Element**

ConstraintUsage

#### **Description**

*assertedConstraintChecks* is the subset of *constraintChecks* for *ConstraintChecks* asserted to be true.

#### **General Types**

constraintChecks

trueEvaluations

#### **Features**

None.

### **9.2.12.2.3 constraintChecks**

#### **Element**

ConstraintUsage

#### **Description**

*constraintChecks* is the base feature of all ConstraintUsages.

#### **General Types**

booleanEvaluations

ConstraintCheck

#### **Features**

None.

#### **Constraints**

None.

### **9.2.12.2.4 negatedConstraintChecks**

#### **Element**

ConstraintUsage

#### **Description**

*negatedConstraintChecks* is the subset of *constraintChecks* for *ConstraintChecks* asserted to be false.

#### **General Types**

falseEvaluations

constraintChecks

#### **Features**

None.

#### **Constraints**

None.

### **9.2.13 Requirements**

#### **9.2.13.1 Requirements Overview**

This package defines the base types for requirements and related behavioral elements in the SysML language.

## **Constraints**

None.

### **9.2.12.2.2 ConstraintCheck**

#### **Element**

ConstraintDefinition

#### **Description**

*ConstraintCheck* is the most general class for constraint checking. *ConstraintCheck* is the base type of all *ConstraintDefinitions*.

#### **General Types**

BooleanEvaluation

#### **Features**

None.

#### **Constraints**

None.

### **9.2.12.2.3 constraintChecks**

#### **Element**

ConstraintUsage

#### **Description**

*constraintChecks* is the base feature of all *ConstraintUsages*.

#### **General Types**

booleanEvaluations

ConstraintCheck

#### **Features**

None.

#### **Constraints**

None.

### **9.2.12.2.4 negatedConstraintChecks**

#### **Element**

ConstraintUsage

## **9.2.13.2 Elements**

### **9.2.13.2.1 ConcernCheck**

#### **Element**

ConcernDefinition

#### **Description**

*ConcernCheck* is the most general class for concern checking. *ConcernCheck* is the base type of all *ConcernDefinitions*.

#### **General Types**

RequirementCheck

#### **Features**

None.

#### **Constraints**

None.

### **9.2.13.2.2 concernChecks**

#### **Element**

ConcernUsage

#### **Description**

*concernChecks* is the base feature of all *ConcernUsages*.

#### **General Types**

ConcernCheck

requirementChecks

#### **Features**

None.

#### **Constraints**

None.

### **9.2.13.2.3 DesignConstraintCheck**

#### **Element**

ConstraintDefinition

#### **Description**

## Description

*negatedConstraintChecks* is the subset of *constraintChecks* for *ConstraintChecks* asserted to be false.

## General Types

falseEvaluations

constraintChecks

## Features

None.

## Constraints

None.

## 9.2.13 Requirements

### 9.2.13.1 Requirements Overview

This package defines the base types for requirements and related behavioral elements in the SysML language.

### 9.2.13.2 Elements

#### 9.2.13.2.1 ConcernCheck

##### Element

ConcernDefinition

##### Description

*ConcernCheck* is the most general class for concern checking. *ConcernCheck* is the base type of all *ConcernDefinitions*.

##### General Types

RequirementCheck

##### Features

None.

##### Constraints

None.

#### 9.2.13.2.2 concernChecks

##### Element

ConcernUsage

##### Description

A *DesignConstraintCheck* specifies a constraint on the implementation of the system or system part, such as the system must use a commercial-off-the-shelf component.

### General Types

RequirementCheck

### Features

part : Part {redefines subj}

### Constraints

None.

## 9.2.13.2.4 FunctionalRequirementCheck

### Element

ConstraintDefinition

### Description

A *FunctionalRequirementCheck* specifies an action that a system, or part of a system, must perform.

### General Types

RequirementCheck

### Features

subject : Action {redefines subj}

### Constraints

None.

## 9.2.13.2.5 InterfaceRequirementCheck

### Element

ConstraintDefinition

### Description

An *InterfaceRequirementCheck* specifies an *Interface* for connecting systems and system parts, which optionally may include item flows across the *Interface* and/or *Interface* constraints.

### General Types

RequirementCheck

### Features

subject : BinaryInterface {redefines subj}

*concernChecks* is the base feature of all `ConcernUsages`.

#### **General Types**

`ConcernCheck`

`requirementChecks`

#### **Features**

None.

#### **Constraints**

None.

### **9.2.13.2.3 DesignConstraintCheck**

#### **Element**

`ConstraintDefinition`

#### **Description**

A *DesignConstraintCheck* specifies a constraint on the implementation of the system or system part, such as the system must use a commercial-off-the-shelf component.

#### **General Types**

`RequirementCheck`

#### **Features**

`part : Part {redefines subj}`

#### **Constraints**

None.

### **9.2.13.2.4 FunctionalRequirementCheck**

#### **Element**

`ConstraintDefinition`

#### **Description**

A *FunctionalRequirementCheck* specifies an action that a system, or part of a system, must perform.

#### **General Types**

`RequirementCheck`

#### **Features**

`subject : Action {redefines subj}`

## **Constraints**

None.

### **9.2.13.2.6 PerformanceRequirementCheck**

#### **Element**

ConstraintDefinition

#### **Description**

A *PerformanceRequirementCheck* quantitatively measures the extent to which a system, or a system part, satisfies a required capability or condition.

#### **General Types**

RequirementCheck

#### **Features**

subject : AttributeValue {redefines subj}

#### **Constraints**

None.

### **9.2.13.2.7 PhysicalRequirementCheck**

#### **Element**

ConstraintDefinition

#### **Description**

A *PhysicalRequirementCheck* specifies physical characteristics and/or physical constraints of the system, or a system part.

#### **General Types**

RequirementCheck

#### **Features**

subject : Part {redefines subj}

#### **Constraints**

None.

### **9.2.13.2.8 RequirementCheck**

#### **Element**

RequirementDefinition

## **Constraints**

None.

### **9.2.13.2.5 InterfaceRequirementCheck**

#### **Element**

ConstraintDefinition

#### **Description**

An *InterfaceRequirementCheck* specifies an *Interface* for connecting systems and system parts, which optionally may include item flows across the *Interface* and/or *Interface* constraints.

#### **General Types**

RequirementCheck

#### **Features**

subject : BinaryInterface {redefines subj}

#### **Constraints**

None.

### **9.2.13.2.6 PerformanceRequirementCheck**

#### **Element**

ConstraintDefinition

#### **Description**

A *PerformanceRequirementCheck* quantitatively measures the extent to which a system, or a system part, satisfies a required capability or condition.

#### **General Types**

RequirementCheck

#### **Features**

subject : AttributeValue {redefines subj}

#### **Constraints**

None.

### **9.2.13.2.7 PhysicalRequirementCheck**

#### **Element**

ConstraintDefinition

## Description

*RequirementCheck* is the most general class for requirements checking. *RequirementCheck* is the base type of all *RequirementDefinitions*.

## General Types

ConstraintCheck

## Features

actors : Part [0..\*]

The *Parts* that fill the role of actors for this *RequirementCheck*.

assumptions : ConstraintCheck [0..\*] {ordered}

The checks of assumptions that must hold for the required constraints to apply.

concerns : ConcernCheck [0..\*] {subsets constraints}

The checks of any concerns being addressed (as required constraints).

constraints : ConstraintCheck [0..\*] {ordered}

The checks of required constraints.

stakeholders : Part [0..\*]

The *Parts* that represent stakeholders interested in the requirement being checked.

subj : Anything

The entity that is being check for satisfaction of the required constraints.

## Constraints

[no name]

allTrue(assumptions) implies allTrue(constraints)

## 9.2.13.2.9 requirementChecks

### Element

RequirementUsage

## Description

*requirementChecks* is the base feature of all *RequirementUsages*.

## General Types

constraintChecks

## Description

A *PhysicalRequirementCheck* specifies physical characteristics and/or physical constraints of the system, or a system part.

## General Types

RequirementCheck

## Features

subject : Part {redefines subj}

## Constraints

None.

## 9.2.13.2.8 RequirementCheck

### Element

RequirementDefinition

### Description

*RequirementCheck* is the most general class for requirements checking. *RequirementCheck* is the base type of all *RequirementDefinitions*.

## General Types

ConstraintCheck

## Features

actors : Part [0..\*]

The *Parts* that fill the role of actors for this *RequirementCheck*.

assumptions : ConstraintCheck [0..\*] {ordered}

The checks of assumptions that must hold for the required constraints to apply.

concerns : ConcernCheck [0..\*] {subsets constraints}

The checks of any concerns being addressed (as required constraints).

constraints : ConstraintCheck [0..\*] {ordered}

The checks of required constraints.

stakeholders : Part [0..\*]

The *Parts* that represent stakeholders interested in the requirement being checked.

subj : Anything

RequirementCheck

#### Features

None.

#### Constraints

None.

### 9.2.14 Cases

#### 9.2.14.1 Cases Overview

This package defines the base types for cases and related behavioral elements in the SysML language.

#### 9.2.14.2 Elements

##### 9.2.14.2.1 Case

###### Element

CaseDefinition

###### Description

*Case* is the most general class of performances of *CaseDefinitions*. *Case* is the base class of all *CaseDefinitions*.

###### General Types

Calculation

###### Features

actors : Part [0..\*]

The *Parts* that fill the role of actors for this *Case*.

obj : RequirementCheck

A check of whether the objective RequirementUsage was satisfied for this *Case*. By default, the *subj* for the objective is the *result* of the *Case*.

subcases : Case [0..\*] {subsets subcalculations}

Other *Cases* carried out as part of the performance of this *Case*.

subj : Anything

The subject that was investigated by this *Case*.

###### Constraints

None.

The entity that is being checked for satisfaction of the required constraints.

## Constraints

[no name]

```
allTrue(assumptions) implies allTrue(constraints)
```

### 9.2.13.2.9 requirementChecks

#### Element

RequirementUsage

#### Description

`requirementChecks` is the base feature of all `RequirementUsages`.

#### General Types

constraintChecks

RequirementCheck

#### Features

None.

## Constraints

None.

### 9.2.14 Cases

#### 9.2.14.1 Cases Overview

This package defines the base types for cases and related behavioral elements in the SysML language.

#### 9.2.14.2 Elements

##### 9.2.14.2.1 Case

#### Element

CaseDefinition

#### Description

`Case` is the most general class of performances of `CaseDefinitions`. `Case` is the base class of all `CaseDefinitions`.

#### General Types

Calculation

#### Features

## **9.2.14.2.2 cases**

### **Element**

CaseUsage

### **Description**

*cases* is the base feature of all CaseUsages.

### **General Types**

calculations

Case

### **Features**

None.

### **Constraints**

None.

## **9.2.15 Analysis Cases**

### **9.2.15.1 Analysis Cases Overview**

This package defines the base types for analysis cases and related behavioral elements in the SysML language.

### **9.2.15.2 Elements**

#### **9.2.15.2.1 AnalysisAction**

##### **Element**

ActionDefinition

##### **Description**

An *AnalysisAction* is a specialized kind of *Action* used intended to be used as a step in an *AnalysisCase*.

##### **General Types**

Action

##### **Features**

None.

##### **Constraints**

None.

actors : Part [0..\*]

The *Parts* that fill the role of actors for this *Case*.

obj : RequirementCheck

A check of whether the objective RequirementUsage was satisfied for this *Case*. By default, the *subj* for the objective is the *result* of the *Case*.

subcases : Case [0..\*] {subsets subcalculations}

Other *Cases* carried out as part of the performance of this *Case*.

subj : Anything

The subject that was investigated by this *Case*.

## Constraints

None.

### 9.2.14.2.2 cases

#### Element

CaseUsage

#### Description

*cases* is the base feature of all CaseUsages.

#### General Types

calculations

Case

#### Features

None.

#### Constraints

None.

## 9.2.15 Analysis Cases

### 9.2.15.1 Analysis Cases Overview

This package defines the base types for analysis cases and related behavioral elements in the SysML language.

### 9.2.15.2 Elements

**SYSML2\_187: There is no need for AnalysisAction**

#### 9.2.15.2.1 AnalysisCase

## **9.2.15.2.2 AnalysisCase**

### **Element**

AnalysisCaseDefinition

### **Description**

*AnalysisCase* is the most general class of performances of *AnalysisCaseDefinitions*. *AnalysisCase* is the base class of all *AnalysisCaseDefinitions*.

### **General Types**

Case

### **Features**

*analysisSteps* : AnalysisAction [0..\*] {subsets subactions}

The *subactions* of this *AnalysisCase* that are *AnalysisActions*.

*subAnalysisCases* : AnalysisCase [0..\*] {subsets subcases}

The *subcases* of this *AnalysisCase* that are *AnalysisCaseUsages*.

### **Constraints**

None.

## **9.2.15.2.3 analysisCases**

### **Element**

AnalysisCaseUsage

### **Description**

*analysisCases* is the base feature of all *AnalysisCaseUsages*.

### **General Types**

AnalysisCase

cases

### **Features**

None.

### **Constraints**

None.

## **9.2.16 Verification Cases**

**Element**

AnalysisCaseDefinition

**Description**

*AnalysisCase* is the most general class of performances of AnalysisCaseDefinitions. *AnalysisCase* is the base class of all AnalysisCaseDefinitions.

**General Types**

Case

**Features**

subAnalysisCases : AnalysisCase [0..\*] {subsets subcases}

The subcases of this *AnalysisCase* that are AnalysisCaseUsages.

**Constraints**

None.

## 9.2.15.2.2 analysisCases

**Element**

AnalysisCaseUsage

**Description**

*analysisCases* is the base feature of all AnalysisCaseUsages.

**General Types**

AnalysisCase

cases

**Features**

None.

**Constraints**

None.

## 9.2.16 Verification Cases

### 9.2.16.1 Verification Cases Overview

This package defines the base types for verification cases and related behavioral elements in the SysML language.

### 9.2.16.2 Elements

#### 9.2.16.2.1 PassIf

### **9.2.16.1 Verification Cases Overview**

This package defines the base types for verification cases and related behavioral elements in the SysML language.

### **9.2.16.2 Elements**

#### **9.2.16.2.1 PassIf**

##### **Element**

CalculationDefinition

##### **Description**

*PassIf* returns a *pass* or *fail* *VerdictKind* depending on whether its argument is true or false.

##### **General Types**

None.

##### **Features**

*isPassing* : Boolean

**in** Whether or not a verification has passed.

*verdict* : VerdictKind

**return** *pass* if *isPassing* is true and *fail* otherwise.

##### **Constraints**

None.

#### **9.2.16.2.2 VerdictKind**

##### **Element**

EnumerationDefinition

##### **Description**

*VerdictKind* is an enumeration of the possible results of a *VerificationCase*.

##### **General Types**

AttributeValue

##### **Features**

error

fail

inconclusive

**Element**

CalculationDefinition

**Description**

*PassIf* returns a *pass* or *fail* *VerdictKind* depending on whether its argument is true or false.

**General Types**

None.

**Features**

isPassing : Boolean

**in** Whether or not a verification has passed.

verdict : VerdictKind

**return** *pass* if *isPassing* is true and *fail*

**Constraints**

None.

**9.2.16.2.2 VerdictKind****Element**

EnumerationDefinition

**Description**

*VerdictKind* is an enumeration of the possible results of a *VerificationCase*

**General Types**

AttributeValue

**Features**

error

fail

inconclusive

pass

**Constraints**

None.

**9.2.16.2.3 VerificationCase**

pass

## Constraints

None.

### 9.2.16.2.3 VerificationCase

#### Element

VerificationCaseDefinition

#### Description

*VerificationCase* is the most general class of performances of *VerificationCaseDefinitions*. *VerificationCase* is the base class of all *VerificationCaseDefinitions*.

#### General Types

Case

#### Features

obj : VerificationCheck {redefines obj}

The objective of this *VerificationCase*, whose *subject* is bound to the *subject* of the *VerificationCase* and whose *requirementVerifications* are bound to the *requirementVerifications* of the *VerificationCase*.

requirementVerifications : RequirementCheck [0..\*]

Checks on whether the *verifiedRequirements* of the *VerificationCaseDefinition* have been satisfied.

subj : Anything {redefines subj}

The *subject* of this *VerificationCase*, representing the system under test, which is bound to the *subject* of the *objective* of the *VerificationCase*.

subVerificationCases : VerificationCase [0..\*] {subsets subcases}

The *subcases* of this *VerificationCase* that are *VerificationCases*.

verdict : VerdictKind {redefines result}

The *result* of a *VerificationCase* must be a *VerdictKind*.

#### Constraints

None.

### 9.2.16.2.4 verificationCases

#### Element

VerificationCaseUsage

## **Element**

VerificationCaseDefinition

## **Description**

*VerificationCase* is the most general class of performances of VerificationCaseDefinitions. *VerificationCase* is the base class of all VerificationCaseDefinitions.

## **General Types**

Case

## **Features**

obj : VerificationCheck {redefines obj}

The objective of this *VerificationCase*, whose *subject* is bound to the *subject* of the *VerificationCase* and whose *requirementVerifications* are bound to the *requirementVerifications* of the *VerificationCase*.

requirementVerifications : RequirementCheck [0..\*]

Checks on whether the *verifiedRequirements* of the VerificationCaseDefinition have been satisfied.

subj : Anything {redefines subj}

The *subject* of this *VerificationCase*, representing the system under test, which is bound to the *subject* of the *objective* of the *VerificationCase*.

subVerificationCases : VerificationCase [0..\*] {subsets subcases}

The *subcases* of this *VerificationCase* that are *VerificationCases*.

verdict : VerdictKind {redefines result}

The *result* of a *VerificationCase* must be a *VerdictKind*.

## **Constraints**

None.

## **9.2.16.2.4 verificationCases**

## **Element**

VerificationCaseUsage

## **Description**

*verificationCases* is the base feature of all VerificationCaseUsages.

## **General Types**

VerificationCase

## Description

*verificationCases* is the base feature of all *VerificationCaseUsages*.

## General Types

VerificationCase

cases

## Features

None.

## Constraints

None.

## 9.2.16.2.5 VerificationCheck

### Element

RequirementDefinition

## Description

*VerificationCheck* is a specialization of *RequirementCheck* used for the objective of a *VerificationCase* in order to record the evaluations of the *RequirementChecks* of requirements being verified.

## General Types

RequirementCheck

## Features

requirementVerifications : RequirementCheck [0..\*] {subsets constraints}

A record of the evaluations of the *RequirementChecks* of requirements being verified.

## Constraints

None.

## 9.2.16.2.6 VerificationMethod

### Element

AttributeDefinition

## Description

*VerificationMethod* can be used as metadata annotating a verification case or action.

## General Types

cases

#### Features

None.

#### Constraints

None.

### 9.2.16.2.5 VerificationCheck

#### Element

RequirementDefinition

#### Description

*VerificationCheck* is a specialization of *RequirementCheck* used for the objective of a *VerificationCase* in order to record the evaluations of the *RequirementChecks* of requirements being verified.

#### General Types

RequirementCheck

#### Features

requirementVerifications : RequirementCheck [0..\*] {subsets constraints}

A record of the evaluations of the *RequirementChecks* of requirements being verified.

#### Constraints

None.

### 9.2.16.2.6 VerificationMethod

#### Element

AttributeDefinition

#### Description

*VerificationMethod* can be used as metadata annotating a verification case or action.

#### General Types

None.

#### Features

kind : VerificationMethodKind [1..\*]

The methods by which the annotated verification was carried out.

#### Constraints

None.

#### Features

kind : VerificationMethodKind [1..\*]

The methods by which the annotated verification was carried out.

#### Constraints

None.

### 9.2.16.2.7 VerificationMethodKind

#### Element

EnumerationDefinition

#### Description

*VerificationMethodKind* is an enumeration of the standard methods by which verification can be carried out.

#### General Types

AttributeValue

#### Features

analyze

demo

inspect

test

#### Constraints

None.

### 9.2.17 Use Cases

#### 9.2.17.1 Use Cases Overview

This package defines the base types for use cases and related behavioral elements in the SysML language.

#### 9.2.17.2 Elements

##### 9.2.17.2.1 UseCase

#### Element

UseCaseDefinition

#### Description

None.

### **9.2.16.2.7 VerificationMethodKind**

#### **Element**

EnumerationDefinition

#### **Description**

*VerificationMethodKind* is an enumeration of the standard methods by which verification can be carried out.

#### **General Types**

AttributeValue

#### **Features**

analyze

demo

inspect

test

#### **Constraints**

None.

## **9.2.17 Use Cases**

### **9.2.17.1 Use Cases Overview**

This package defines the base types for use cases and related behavioral elements in the SysML language.

#### **9.2.17.2 Elements**

##### **9.2.17.2.1 UseCase**

#### **Element**

UseCaseDefinition

#### **Description**

*UseCase* is the most general class of performances of *UseCaseDefinitions*. *UseCase* is the base class of all *UseCaseDefinitions*.

#### **General Types**

Case

#### **Features**

includedUseCases : UseCase [0..\*] {subsets subUseCases}

*UseCase* is the most general class of performances of *UseCaseDefinitions*. *UseCase* is the base class of all *UseCaseDefinitions*.

### General Types

Case

### Features

includedUseCases : UseCase [0..\*] {subsets subUseCases}

Other *UseCase* included by this *UseCase* (i.e., as modeled by an *IncludeUseCaseUsage*).

subUseCases : UseCase [0..\*] {subsets subcases}

Other *UseCase* carried out as part of the performance of this *UseCase*.

### Constraints

None.

## 9.2.17.2.2 useCases

### Element

UseCaseUsage

### Description

*useCases* is the base feature of all *UseCaseUsages*.

### General Types

cases

UseCase

### Features

None.

### Constraints

None.

## 9.2.18 Views

### 9.2.18.1 Views Overview

This package defines the base types for views, viewpoints, renderings and related elements in the SysML language.

### 9.2.18.2 Elements

#### 9.2.18.2.1 asElementTable

### Element

Other *UseCase* included by this *UseCase* (i.e., as modeled by an `IncludeUseCaseUsage`).

`subUseCases : UseCase [0..*] {subsets subcases}`

Other *UseCase* carried out as part of the performance of this *UseCase*.

### Constraints

None.

## 9.2.17.2.2 useCases

### Element

`UseCaseUsage`

### Description

*useCases* is the base feature of all `UseCaseUsages`.

### General Types

`cases`

`UseCase`

### Features

None.

### Constraints

None.

## 9.2.18 Views

### 9.2.18.1 Views Overview

This package defines the base types for views, viewpoints, renderings and related elements in the SysML language.

### 9.2.18.2 Elements

#### 9.2.18.2.1 asElementTable

### Element

`RenderingUsage`

### Description

*asElementTable* renders a *View* as a table, with one row for each exposed *Element* and columns rendered by applying the *columnViews* in order to the *Element* in each row.

### General Types

`TabularRendering`

RenderingUsage

#### Description

*asElementTable* renders a *View* as a table, with one row for each exposed *Element* and columns rendered by applying the *columnViews* in order to the *Element* in each row.

#### General Types

TabularRendering

#### Features

columnView : View [0..\*] {ordered}

The *Views* to be rendered in the column cells, in order, of each rows of the table.

#### Constraints

None.

### 9.2.18.2.2 asInterconnectionDiagram

#### Element

RenderingUsage

#### Description

*asInterconnectionDiagram* renders a *View* as an interconnection diagram, using the graphical notation defined in the SysML specification.

#### General Types

GraphicalRendering

#### Features

None.

#### Constraints

None.

### 9.2.18.2.3 asTextualNotation

#### Element

RenderingUsage

#### Description

*asTextualNotation* renders a *View* into textual notation as defined in the KerML and SysML specifications.

#### General Types

## **Features**

columnView : View [0..\*] {ordered}

The *Views* to be rendered in the column cells, in order, of each rows of the table.

## **Constraints**

None.

### **9.2.18.2.2 asInterconnectionDiagram**

#### **Element**

RenderingUsage

#### **Description**

*asInterconnectionDiagram* renders a *View* as an interconnection diagram, using the graphical notation defined in the SysML specification.

#### **General Types**

GraphicalRendering

## **Features**

None.

## **Constraints**

None.

### **9.2.18.2.3 asTextualNotation**

#### **Element**

RenderingUsage

#### **Description**

*asTextualNotation* renders a *View* into textual notation as defined in the KerML and SysML specifications.

#### **General Types**

TextualRendering

## **Features**

None.

## **Constraints**

None.

### **9.2.18.2.4 asTreeDiagram**

TextualRendering

**Features**

None.

**Constraints**

None.

**9.2.18.2.4 asTreeDiagram**

**Element**

RenderingUsage

**Description**

*asTreeDiagram* renders a *View* as a tree diagram, using the graphical notation defined in the SysML specification.

**General Types**

GraphicalRendering

**Features**

None.

**Constraints**

None.

**9.2.18.2.5 GraphicalRendering**

**Element**

RenderingDefinition

**Description**

A *GraphicalRendering* is a *Rendering* of a *View* into a graphical format.

**General Types**

Rendering

**Features**

None.

**Constraints**

None.

**Element**

RenderingUsage

**Description**

*asTreeDiagram* renders a *View* as a tree diagram, using the graphical notation defined in the SysML specification.

**General Types**

GraphicalRendering

**Features**

None.

**Constraints**

None.

### **9.2.18.2.5 GraphicalRendering**

**Element**

RenderingDefinition

**Description**

A *GraphicalRendering* is a *Rendering* of a *View* into a graphical format.

**General Types**

Rendering

**Features**

None.

**Constraints**

None.

### **9.2.18.2.6 Rendering**

**Element**

RenderingDefinition

**Description**

*Rendering* is the base type of all *RenderingDefinitions*.

**General Types**

Part

## **9.2.18.2.6 Rendering**

### **Element**

RenderingDefinition

### **Description**

*Rendering* is the base type of all *RenderingDefinitions*.

### **General Types**

Part

### **Features**

subrenderings : Rendering [0..\*]

Other *Rendering* used to carry out this *Rendering*.

### **Constraints**

None.

## **9.2.18.2.7 renderings**

### **Element**

RenderingUsage

### **Description**

*renderings* is the base feature of all *RenderingUsages*.

### **General Types**

Rendering

parts

### **Features**

None.

### **Constraints**

None.

## **9.2.18.2.8 TabularRendering**

### **Element**

RenderingDefinition

### **Description**

## **Features**

subrenderings : Rendering [0..\*]

Other *Rendering* used to carry out this *Rendering*.

## **Constraints**

None.

### **9.2.18.2.7 renderings**

#### **Element**

RenderingUsage

#### **Description**

*renderings* is the base feature of all *RenderingUsages*.

#### **General Types**

Rendering

parts

## **Features**

None.

## **Constraints**

None.

### **9.2.18.2.8 TabularRendering**

#### **Element**

RenderingDefinition

#### **Description**

A *TabularRendering* is a *Rendering* of a *View* into a tabular format.

#### **General Types**

Rendering

## **Features**

None.

## **Constraints**

None.

A *TabularRendering* is a *Rendering* of a *View* into a tabular format.

### **General Types**

Rendering

### **Features**

None.

### **Constraints**

None.

## **9.2.18.2.9 TextualRendering**

### **Element**

RenderingDefinition

### **Description**

A *TextualRendering* is a *Rendering* of a *View* into a textual format.

### **General Types**

Rendering

### **Features**

None.

### **Constraints**

None.

## **9.2.18.2.10 View**

### **Element**

ViewDefinition

### **Description**

*View* is the base type of all *ViewDefinitions*.

### **General Types**

Part

### **Features**

self : View {redefines self}

subviews : View [0..\*]

## **9.2.18.2.9 TextualRendering**

### **Element**

RenderingDefinition

### **Description**

A *TextualRendering* is a *Rendering* of a *View* into a textual format.

### **General Types**

Rendering

### **Features**

None.

### **Constraints**

None.

## **9.2.18.2.10 View**

### **Element**

ViewDefinition

### **Description**

*View* is the base type of all *ViewDefinitions*.

### **General Types**

Part

### **Features**

self : View {redefines self}

subviews : View [0..\*]

Other *Views* that are used in the rendering of this *View*.

viewpointConformance : viewpointConformance

An assertion that all *viewpointSatisfactions* are true.

viewpointSatisfactions : ViewpointCheck [0..\*]

Checks that the *View* satisfies all required *ViewpointUsages*.

viewRendering : Rendering [0..1]

The *Rendering* of this *View*.

Other *Views* that are used in the rendering of this *View*.

viewpointConformance : viewpointConformance

An assertion that all *viewpointSatisfactions* are true.

viewpointSatisfactions : ViewpointCheck [0..\*]

Checks that the *View* satisfies all required *ViewpointUsages*.

viewRendering : Rendering [0..1]

The *Rendering* of this *View*.

## Constraints

None.

### 9.2.18.2.11 ViewpointCheck

#### Element

ViewpointDefinition

#### Description

*ViewpointCheck* is a *RequirementCheck* for checking if a *View* meets the concerns of *concernedStakeholders*. It is the base type of all *ViewpointDefinitions*.

#### General Types

RequirementCheck

#### Features

subject : View {redefines subj}

The subject of this *ViewpointCheck*, which must be a *View*.

#### Constraints

None.

### 9.2.18.2.12 viewpointChecks

#### Element

ViewpointUsage

#### Description

*viewpointChecks* is the base feature of all *ViewpointUsages*.

#### General Types

## **Constraints**

None.

### **9.2.18.2.11 ViewpointCheck**

#### **Element**

ViewpointDefinition

#### **Description**

*ViewpointCheck* is a *RequirementCheck* for checking if a *View* meets the concerns of *concernedStakeholders*. It is the base type of all *ViewpointDefinitions*.

#### **General Types**

RequirementCheck

#### **Features**

subject : View {redefines subj}

The subject of this *ViewpointCheck*, which must be a *View*.

#### **Constraints**

None.

### **9.2.18.2.12 viewpointChecks**

#### **Element**

ViewpointUsage

#### **Description**

*viewpointChecks* is the base feature of all *ViewpointUsages*.

#### **General Types**

ViewpointCheck

requirementChecks

#### **Features**

None.

#### **Constraints**

None.

### **9.2.18.2.13 viewpointConformance**

#### **Element**

ViewpointCheck

requirementChecks

### Features

None.

### Constraints

None.

## 9.2.18.2.13 viewpointConformance

### Element

SatisfyRequirementUsage

### Description

A *RequirementCheck* that all *viewpointSatisfactions* are true.

### General Types

RequirementCheck

### Features

viewpointSatisfactions : ViewpointCheck [0..\*] {subsets constraints}

The required *ViewpointChecks*.

### Constraints

None.

## 9.2.18.2.14 views

### Element

ViewUsage

### Description

*views* is the base feature of all *ViewUsages*.

### General Types

parts

View

### Features

None.

SatisfyRequirementUsage

### Description

A *RequirementCheck* that all *viewpointSatisfactions* are true.

### General Types

RequirementCheck

### Features

*viewpointSatisfactions* : ViewpointCheck [0..\*] {subsets constraints}

The required *ViewpointChecks*.

### Constraints

None.

## 9.2.18.2.14 views

### Element

ViewUsage

### Description

*views* is the base feature of all *ViewUsages*.

### General Types

parts

View

### Features

None.

### Constraints

None.

## 9.2.19 Standard View Definitions

### 9.2.19.1 Standard View Definitions Overview

#### **SYSML2 -11: Missing explicit explanation of compartments as views**

This package defines normative standard view definitions that shall be supported by any tool conforming to the SysML graphical notation. The standard view definitions include filter conditions to specify valid contents for the view, which shall then be rendered as specified in the graphical notation grammar (see 8.2.3). Table 33 lists all the standard view definitions contained in the package, along with the corresponding graphical notation subclause that specifies the rendering of each view.

## Constraints

None.

## 9.2.19 Standard View Definitions

### 9.2.19.1 Standard View Definitions Overview

This package defines the standard graphical view definitions for the SysML language. Each view definition specifies the kind of model elements that can be presented in a view usage and the method for rendering the elements. The standard views are generally rendered as a graph with nodes connected by edges. The nodes can have any number of compartments that contain selected members of the node. For example, a part definition or part usage may contain an attributes compartment that contains the attributes of the part. Definition and usage nodes may also contain connection points corresponding to their ports and parameters. The nodes and edges may be rendered with specialized syntax in different views.

The *StandardViewDefinitions* package contains the following normative standard view definitions as specified in [Table 33](#).

**Table 33. Standard View Definitions**

| Standard View Definition    | Default Compartment                                                  |
|-----------------------------|----------------------------------------------------------------------|
| General View (gv)           | Default compartment for a package, see <a href="#">8.2.3.5</a> .     |
| Interconnection View (iv)   | Default compartment for a part, see <a href="#">8.2.3.11</a> .       |
| Action Flow View (afv)      | Default compartment for an action, see <a href="#">8.2.3.16</a> .    |
| State Transition View (stv) | Default compartment for a state, see <a href="#">8.2.3.17</a> .      |
| Sequence View (sv)          | Default compartment for an occurrence, see <a href="#">8.2.3.9</a> . |
| Geometry View (gev)         |                                                                      |
| Grid View (grv)             |                                                                      |
| Browser View (bv)           |                                                                      |

These standard views establish a basic set of views that shall be supported by any conforming tool. Other kinds of views may also be defined beyond the standard views, using the view modeling capabilities of SysML (see [7.25](#)).

**Note.** Visualization of SysML models is not limited to these standard views. User-defined view definitions and usages can be used to provide a wide range of views beyond the standard set (see [8.2.2.25](#), [8.2.3.25](#), and [8.3.25](#)).

**Table 33. Standard View Definitions**

| Standard View Definition    | Default Compartment                                                  |
|-----------------------------|----------------------------------------------------------------------|
| General View (gv)           | Default compartment for a package, see <a href="#">8.2.3.5</a> .     |
| Interconnection View (iv)   | Default compartment for a part, see <a href="#">8.2.3.11</a> .       |
| Action Flow View (afv)      | Default compartment for an action, see <a href="#">8.2.3.16</a> .    |
| State Transition View (stv) | Default compartment for a state, see <a href="#">8.2.3.17</a> .      |
| Sequence View (sv)          | Default compartment for an occurrence, see <a href="#">8.2.3.9</a> . |
| Geometry View (gev)         |                                                                      |
| Grid View (grv)             |                                                                      |
| Browser View (bv)           |                                                                      |

## 9.2.19.2 Elements

### 9.2.19.2.1 ActionFlowView

#### Element

ViewDefinition

#### Description

ViewDefinition to present connections between actions. Valid nodes and edges in an *ActionFlowView* are:

- Actions with nested actions
- Parameters with direction
- Flow connection usages (e.g., kinds of transfers from output to input)
- Binding connections between parameters (e.g., delegate a parameter from one level of nesting to another)
- Proxy connection points
- Swim lanes
- Conditional succession
- Control nodes (fork, join, decision, merge)
- Control structures, e.g., if-then-else, until-while-loop, for-loop
- Send and accept actions
- Change and time triggers
- Compartments on actions and parameters

## 9.2.19.2 Elements

### 9.2.19.2.1 ActionFlowView

#### Element

ViewDefinition

#### Description

ViewDefinition to present connections between actions. Valid nodes and edges in an *ActionFlowView* are:

- Actions with nested actions
- Parameters with direction
- Flow connection usages (e.g., kinds of transfers from output to input)
- Binding connections between parameters (e.g., delegate a parameter from one level of nesting to another)
- Proxy connection points
- Swim lanes
- Conditional succession
- Control nodes (fork, join, decision, merge)
- Control structures, e.g., if-then-else, until-while-loop, for-loop
- Send and accept actions
- Change and time triggers
- Compartments on actions and parameters

Short name: afv

#### General Types

InterconnectionView

#### Features

None.

#### Constraints

None.

### 9.2.19.2.2 BrowserView

#### Element

ViewDefinition

#### Description

ViewDefinition to present the hierarchical membership structure of model elements starting from an exposed root element. The typical rendering in graphical notation is as an indented list of rows, consisting of dynamically collapsible-expandable nodes that represent branches and leaves of the tree.

Short name: bv

#### General Types

Short name: afv

### General Types

InterconnectionView

### Features

None.

### Constraints

None.

## 9.2.19.2.2 BrowserView

### Element

ViewDefinition

### Description

ViewDefinition to present the hierarchical membership structure of model elements starting from an exposed root element. The typical rendering in graphical notation is as an indented list of rows, consisting of dynamically collapsible-expandable nodes that represent branches and leaves of the tree.

Short name: bv

### General Types

None.

### Features

None.

### Constraints

None.

## 9.2.19.2.3 GeneralView

### Element

ViewDefinition

### Description

ViewDefinition to present any members of exposed model element(s). This is the most general view, enabling presentation of any model element. The typical rendering in graphical notation is as a graph of nodes and edges.

Specializations of *GeneralView* can be specified through appropriate selection of filters, e.g.:

- package view, filtering on Package, Package containment, package Import
- definition and usage view, filtering on Definition, Usage, Specialization, FeatureTyping (covering defined by)

None.

#### **Features**

None.

#### **Constraints**

None.

### **9.2.19.2.3 GeneralView**

#### **Element**

ViewDefinition

#### **Description**

ViewDefinition to present any members of exposed model element(s). This is the most general view, enabling presentation of any model element. The typical rendering in graphical notation is as a graph of nodes and edges.

Specializations of *GeneralView* can be specified through appropriate selection of filters, e.g.:

- package view, filtering on Package, Package containment, package Import
- definition and usage view, filtering on Definition, Usage, Specialization, FeatureTyping (covering defined by)
- requirement view, filtering on RequirementDefinition, RequirementUsage, Specialization, FeatureTyping, SatisfyRequirementUsage, AllocationDefinition, AllocationUsage, ...
- view and viewpoint view, filtering on ViewDefinition, ViewUsage, ViewpointDefinition, ViewpointUsage, RenderingDefinition, RenderingUsage, ConcernDefinition, ConcernUsage, StakeholderMembership, ...
- language extension view, filtering on Metaclass, MetadataFeature, MetadataAccessExpression, ...

Note: filters are specified by referencing concepts from the *KerML* and *SysML* standard library packages.

Short name: gv

#### **General Types**

None.

#### **Features**

None.

#### **Constraints**

None.

### **9.2.19.2.4 GeometryView**

#### **Element**

ViewDefinition

- requirement view, filtering on RequirementDefinition, RequirementUsage, Specialization, FeatureTyping, SatisfyRequirementUsage, AllocationDefinition, AllocationUsage, ...
- view and viewpoint view, filtering on ViewDefinition, ViewUsage, ViewpointDefinition, ViewpointUsage, RenderingDefinition, RenderingUsage, ConcernDefinition, ConcernUsage, StakeholderMembership, ...
- language extension view, filtering on Metaclass, MetadataFeature, MetadataAccessExpression, ...

Note: filters are specified by referencing concepts from the *KerML* and *SysML* standard library packages.

Short name: gv

### **General Types**

None.

### **Features**

None.

### **Constraints**

None.

## **9.2.19.2.4 GeometryView**

### **Element**

ViewDefinition

### **Description**

ViewDefinition to present a visualization of exposed spatial items in two or three dimensions Valid nodes and edges in a *GeometryView* are:

- Spatial item, including shape
- Coordinate frame
- Feature related to spatial item, such as a quantity (e.g. temperature) of which values are to be rendered on a color scale

The typical rendering in graphical notation would include a number of visualization parameters, such as:

- 2D or 3D view
- viewing direction
- zoom level
- light sources
- object projection mode, e.g., isometric, perspective, orthographic
- object rendering mode, e.g., shaded, wireframe, hidden line
- object pan (placement) and rotate (orientation) settings
- color maps

Short name: gev

### **General Types**

None.

## Description

*ViewDefinition* to present a visualization of exposed spatial items in two or three dimensions Valid nodes and edges in a *GeometryView* are:

- Spatial item, including shape
- Coordinate frame
- Feature related to spatial item, such as a quantity (e.g. temperature) of which values are to be rendered on a color scale

The typical rendering in graphical notation would include a number of visualization parameters, such as:

- 2D or 3D view
- viewing direction
- zoom level
- light sources
- object projection mode, e.g., isometric, perspective, orthographic
- object rendering mode, e.g., shaded, wireframe, hidden line
- object pan (placement) and rotate (orientation) settings
- color maps

Short name: gev

## General Types

None.

## Features

None.

## Constraints

None.

## 9.2.19.2.5 GridView

### Element

*ViewDefinition*

## Description

*ViewDefinition* to present exposed model elements and their relationships, arranged in a rectangular grid. *GeometryView* is the generalization of the following more specialized views:

- Tabular view
- Data value tabular view
- Relationship matrix view

Short name: grv

## General Types

None.

## **Features**

None.

## **Constraints**

None.

### **9.2.19.2.5 GridView**

#### **Element**

ViewDefinition

#### **Description**

ViewDefinition to present exposed model elements and their relationships, arranged in a rectangular grid. *GeometryView* is the generalization of the following more specialized views:

- Tabular view
- Data value tabular view
- Relationship matrix view

Short name: grv

#### **General Types**

None.

## **Features**

None.

## **Constraints**

None.

### **9.2.19.2.6 InterconnectionView**

#### **Element**

ViewDefinition

#### **Description**

ViewDefinition to present exposed features as nodes, nested features as nested nodes, and connections between features as edges between (nested) nodes. Nested nodes may present boundary features (e.g., ports, parameters).

Short name: iv

#### **General Types**

None.

## **Features**

## **Features**

None.

## **Constraints**

None.

### **9.2.19.2.6 InterconnectionView**

#### **Element**

ViewDefinition

#### **Description**

ViewDefinition to present exposed features as nodes, nested features as nested nodes, and connections between features as edges between (nested) nodes. Nested nodes may present boundary features (e.g., ports, parameters).

Short name: iv

#### **General Types**

None.

## **Features**

None.

## **Constraints**

None.

### **9.2.19.2.7 SequenceView**

#### **Element**

ViewDefinition

#### **Description**

ViewDefinition to present time ordering of event occurrences on lifelines of exposed features. Valid nodes and edges in a *SequenceView* are:

- Features such as parts with their lifelines
- Event occurrences on the lifelines
- Messages sent from one part to another with and without a type of flow
- Succession between event occurrences
- Nested sequence view (e.g., a reference to a view)
- Compartments

The typical rendering in graphical notation depicts the exposed features horizontally along the top, with vertical lifelines. The time axis is vertical, with time increasing from top to bottom.

Short name: sv

None.

### Constraints

None.

## 9.2.19.2.7 SequenceView

### Element

ViewDefinition

### Description

ViewDefinition to present time ordering of event occurrences on lifelines of exposed features. Valid nodes and edges in a *SequenceView* are:

- Features such as parts with their lifelines
- Event occurrences on the lifelines
- Messages sent from one part to another with and without a type of flow
- Succession between event occurrences
- Nested sequence view (e.g., a reference to a view)
- Compartments

The typical rendering in graphical notation depicts the exposed features horizontally along the top, with vertical lifelines. The time axis is vertical, with time increasing from top to bottom.

Short name: sv

### General Types

None.

### Features

None.

### Constraints

None.

## 9.2.19.2.8 StateTransitionView

### Element

ViewDefinition

### Description

ViewDefinition to present states and their transitions. Valid nodes and edges in a *StateTransitionView* are:

- States with nested states
- Entry, do, and exit actions
- Transition usages with triggers, guards, and actions
- Compartments on states

## **General Types**

None.

## **Features**

None.

## **Constraints**

None.

### **9.2.19.2.8 StateTransitionView**

#### **Element**

ViewDefinition

#### **Description**

ViewDefinition to present states and their transitions. Valid nodes and edges in a *StateTransitionView* are:

- States with nested states
- Entry, do, and exit actions
- Transition usages with triggers, guards, and actions
- Compartments on states

Short name: stv

## **General Types**

InterconnectionView

## **Features**

None.

## **Constraints**

None.

### **9.2.20 Metadata**

#### **9.2.20.1 Metadata Overview**

This package defines the base types for metadata definitions and related metadata annotations in the SysML language.

#### **9.2.20.2 Elements**

##### **9.2.20.2.1 Metadataltem**

#### **Element**

MetadataDefinition

Short name: stv

### General Types

InterconnectionView

### Features

None.

### Constraints

None.

## 9.2.20 Metadata

### 9.2.20.1 Metadata Overview

This package defines the base types for metadata definitions and related metadata annotations in the SysML language.

### 9.2.20.2 Elements

#### 9.2.20.2.1 Metadataltem

##### Element

MetadataDefinition

##### Description

*Metadataltem* is the most general class of *Items* that represent *Metaobjects*. *Metadataltem* is the base type of all *MetadataDefinitions*.

##### General Types

Item

Metaobject

##### Features

None.

##### Constraints

None.

#### 9.2.20.2.2 metadataltems

##### Element

ItemUsage

##### Description

*metadataltems* is the base feature of all *MetadataUsages*.

## Description

*MetadataItem* is the most general class of *Items* that represent *Metaobjects*. *MetadataItem* is the base type of all *MetadataDefinitions*.

## General Types

Item

Metaobject

## Features

None.

## Constraints

None.

## 9.2.20.2.2 metadataItems

### Element

ItemUsage

## Description

*metadataItems* is the base feature of all *MetadataUsages*.

Note: It is not itself a *MetadataUsage*, because it is not being used as an *AnnotatingElement* here.

## General Types

items

metaobjects

MetadataItem

## Features

None.

## Constraints

None.

## 9.2.21 SysML

This package contains a reflective SysML model of the SysML abstract syntax. It is generated from the normative MOF abstract syntax model (see [8.3](#)) as follows.

1. The *SysML* model imports all elements from the reflective *KerML* package (see [KerML, 9.2.17]) and directly contains all metaclasses mapped from the SysML abstract syntax, without any subpackaging.

Note: It is not itself a `MetadataUsage`, because it is not being used as an `AnnotatingElement` here.

## General Types

items

metaobjects

MetadataItem

## Features

None.

## Constraints

None.

## 9.2.21 SysML

### SYSML2\_209: `isOrdered` and `isUnique` are missing from the reflective abstract mapping

This package contains a reflective SysML model of the SysML abstract syntax. It is generated from the normative MOF abstract syntax model (see [8.3](#)) as follows.

1. The `SysML` model imports all elements from the reflective `KerML` package (see [KerML, 9.2.17]) and directly contains all metaclasses mapped from the SysML abstract syntax, without any subpackaging.
2. A metaclass from the MOF model is mapped into a `MetadataDefinition` in the KerML package.
  - The MOF metaclass name is mapped unchanged.
  - Generalizations of the MOF metaclass are mapped to `ownedSpecializations`.
  - All properties from the MOF metaclass are mapped to `usages` of the corresponding `MetadataDefinition` (see below). All non-association-end properties are grouped before association-end properties.
3. A property from the MOF model is mapped into an `AttributeUsage` or `ItemUsage`, depending on whether the MOF property type is a data type or a class.
  - The following feature properties are set as appropriate:
    - `isAbstract` = `true` if the MOF property is a derived union
    - `isReadonly` = `true` if the MOF property is read-only.
    - `isDerived` = `true` if the MOF property is derived.
    - `isReferential` = `true` if the MOF property is *not* composite.
    - `isOrdered` = `true` if the MOF property is ordered
    - `isUnique` = `false` if the MOF property is non-unique
  - The MOF property name is mapped unchanged.
  - The MOF property type is mapped to an `ownedTyping` relationship.
    - If the MOF property type is a primitive type, the relationship is to the corresponding type from the `ScalarValues` package (see [KerML, 9.3.2]).
    - If the MOF property type is a metaclass, the relationship is to the corresponding reflective `MetadataDefinition`.
  - The MOF property multiplicity is mapped to an owned `MultiplicityRange` with bounds given by `LiteralExpressions`.
  - Subsetted properties from the MOF property are mapped to `ownedSubsettings` of the corresponding reflective `Features` or `Usages`.
  - Redefined properties from the MOF property are mapped to `ownedRedefinitions` of the corresponding reflective `Features` or `Usages`.

2. A metaclass from the MOF model is mapped into a `MetadataDefinition` in the KerML package.
  - The MOF metaclass name is mapped unchanged.
  - Generalizations of the MOF metaclass are mapped to `ownedSpecializations`.
  - All properties from the MOF metaclass are mapped to `usages` of the corresponding `MetadataDefinition` (see below). All non-association-end properties are grouped before association-end properties.
3. A property from the MOF model is mapped into an `AttributeUsage` or `ItemUsage`, depending on whether the MOF property type is a data type or a class.
  - The following feature properties are set as appropriate:
    - `isAbstract` = `true` if the MOF property is a derived union
    - `isReadonly` = `true` if the MOF property is read-only.
    - `isDerived` = `true` if the MOF property is derived.
    - `isReferential` = `true` if the MOF property is *not* composite.
  - The MOF property name is mapped unchanged.
  - The MOF property type is mapped to an `ownedTyping` relationship.
    - If the MOF property type is a primitive type, the relationship is to the corresponding type from the `ScalarValues` package (see [KerML, 9.3.2]).
    - If the MOF property type is a metaclass, the relationship is to the corresponding reflective `MetadataDefinition`.
  - The MOF property multiplicity is mapped to an owned `MultiplicityRange` with bounds given by `LiteralExpressions`.
  - Subsetted properties from the MOF property are mapped to `ownedSubsettings` of the corresponding reflective `Features` or `Usages`.
  - Redefined properties from the MOF property are mapped to `ownedRedefinitions` of the corresponding reflective `Features` or `Usages`.
  - If the MOF property is `annotatedElement`, then `Metaobject::annotatedElement` is added to the list of redefined properties for the mapping.
4. An enumeration from the MOF model is mapped into an `EnumerationDefinition`.
  - The MOF enumeration name is mapped unchanged.
  - Each enumeration literal from the MOF enumeration is mapped into an `enumeratedValue` of the `EnumerationDefinition`, with the same name as the MOF enumeration literal.

Note that associations are not mapped from the MOF model and, hence, non-navigable association-owned end properties are not included in the reflective model.

## 9.3 Metadata Domain Library

### 9.3.1 Metadata Domain Library Overview

The Metadata Domain Library contains library models of generally useful metadata that can be used to annotate model elements (see [7.4](#)).

### 9.3.2 Modeling Metadata

#### 9.3.2.1 Modeling Metadata Overview

This package contains definitions of metadata generally useful for annotating models.

#### 9.3.2.2 Elements

##### 9.3.2.2.1 Issue

##### Element

- If the MOF property is `annotatedElement`, then `Metaobject::annotatedElement` is added to the list of redefined properties for the mapping.
- 4. An enumeration from the MOF model is mapped into an `EnumerationDefinition`.
  - The MOF enumeration name is mapped unchanged.
  - Each enumeration literal from the MOF enumeration is mapped into an `enumeratedValue` of the `EnumerationDefinition`, with the same name as the MOF enumeration literal.

Note that associations are not mapped from the MOF model and, hence, non-navigable association-owned end properties are not included in the reflective model.

## 9.3 Metadata Domain Library

### 9.3.1 Metadata Domain Library Overview

The Metadata Domain Library contains library models of generally useful metadata that can be used to annotate model elements (see [7.4](#)).

### 9.3.2 Modeling Metadata

#### 9.3.2.1 Modeling Metadata Overview

This package contains definitions of metadata generally useful for annotating models.

#### 9.3.2.2 Elements

##### 9.3.2.2.1 Issue

###### Element

`MetadataDefinition`

###### Description

`Issue` is used to record some issue concerning the annotated element.

###### General Types

`MetadataItem`

###### Features

`text : String`

A textual description of the issue.

###### Constraints

None.

#### 9.3.2.2.2 Rationale

###### Element

`MetadataDefinition`

###### Description

MetadataDefinition

### Description

*Issue* is used to record some issue concerning the annotated element.

### General Types

MetadataItem

### Features

text : String

A textual description of the issue.

### Constraints

None.

## 9.3.2.2 Rationale

### Element

MetadataDefinition

### Description

*Rationale* is used to explain a choice or other decision made related to the annotated element.

### General Types

MetadataItem

### Features

explanation : Anything [0..1]

A reference to a *Feature* that provides a formal explanation of the rationale. (For example, a trade study whose result explains the choice of a certain alternative).

text : String

A textual description of the rationale (required).

### Constraints

None.

## 9.3.2.3 Refinement

### Element

MetadataDefinition

*Rationale* is used to explain a choice or other decision made related to the annotated element.

### General Types

MetadataItem

### Features

explanation : Anything [0..1]

A reference to a *Feature* that provides a formal explanation of the rationale. (For example, a trade study whose result explains the choice of a certain alternative).

text : String

A textual description of the rationale (required).

### Constraints

None.

## 9.3.2.2.3 Refinement

### Element

MetadataDefinition

### Description

*Refinement* is used to identify a *Dependency* as modeling a refinement relationship. In such a relationship, the source elements of the relationship provide a more precise and/or accurate representation than the target elements.

### General Types

MetadataItem

### Features

annotatedElement : Dependency {redefines annotatedElement}

### Constraints

None.

## 9.3.2.2.4 StatusInfo

### Element

MetadataDefinition

### Description

*StatusInfo* is used to annotate a model element with status information.

### General Types

## Description

*Refinement* is used to identify a Dependency as modeling a refinement relationship. In such a relationship, the source elements of the relationship provide a more precise and/or accurate representation than the target elements.

## General Types

MetadataItem

## Features

annotatedElement : Dependency {redefines annotatedElement}

## Constraints

None.

## 9.3.2.2.4 StatusInfo

### Element

MetadataDefinition

## Description

*StatusInfo* is used to annotate a model element with status information.

## General Types

MetadataItem

## Features

originator : String [0..1]

The originator of the *annotatedElement*.

owner : String [0..1]

The current owner of the *annotatedElement*.

risk : Risk [0..1]

An assessment of risk for the *annotatedElement*.

status : StatusKind

The current status of work on the *annotatedElement* (required).

## Constraints

None.

## MetadataItem

### Features

originator : String [0..1]

The originator of the *annotatedElement*.

owner : String [0..1]

The current owner of the *annotatedElement*.

risk : Risk [0..1]

An assessment of risk for the *annotatedElement*.

status : StatusKind

The current status of work on the *annotatedElement* (required).

### Constraints

None.

## 9.3.2.2.5 StatusKind

### Element

EnumerationDefinition

### Description

*StatusKind* enumerates the possible statuses of work on a model element.

### General Types

AttributeValue

### Features

closed

Status is closed.

done

Status is done.

open

Status is open.

tbc

Status is to be confirmed.

### **9.3.2.2.5 StatusKind**

#### **Element**

EnumerationDefinition

#### **Description**

*StatusKind* enumerates the possible statuses of work on a model element.

#### **General Types**

AttributeValue

#### **Features**

closed

Status is closed.

done

Status is done.

open

Status is open.

tbc

Status is to be confirmed.

tbd

Status is to be determined.

tbr

Status is to be resolved.

#### **Constraints**

None.

## **9.3.3 Risk Metadata**

### **9.3.3.1 Risk Metadata Overview**

This package defines metadata for annotating model elements with assessments of risk.

### **9.3.3.2 Elements**

#### **9.3.3.2.1 Level**

#### **Element**

tbd

Status is to be determined.

tbr

Status is to be resolved.

## Constraints

None.

### 9.3.3 Risk Metadata

#### 9.3.3.1 Risk Metadata Overview

This package defines metadata for annotating model elements with assessments of risk.

#### 9.3.3.2 Elements

##### 9.3.3.2.1 Level

###### Element

AttributeDefinition

###### Description

A *Level* is a *Real* number in the interval 0.0 to 1.0, inclusive.

###### General Types

AttributeValue

Real

###### Features

level : Level {redefines self}

###### Constraints

levelRange

level >= 0.0 and level <= 1.0

##### 9.3.3.2.2 LevelEnum

###### Element

EnumerationDefinition

###### Description

*LevelEnum* provides standard probability Levels for low, medium and high risks.

###### General Types

AttributeDefinition

### Description

A *Level* is a *Real* number in the interval 0.0 to 1.0, inclusive.

### General Types

AttributeValue

Real

### Features

level : Level {redefines self}

### Constraints

levelRange

level >= 0.0 and level <= 1.0

## 9.3.3.2.2 LevelEnum

### Element

EnumerationDefinition

### Description

*LevelEnum* provides standard probability Levels for low, medium and high risks.

### General Types

Level

### Features

high

High level, taken to be 75%.

low

Low level, taken to be 25%.

medium

Medium level taken to be 50%.

### Constraints

None.

**Level**

**Features**

high

High level, taken to be 75%.

low

Low level, taken to be 25%.

medium

Medium level taken to be 50%.

**Constraints**

None.

**9.3.3.2.3 Risk**

**Element**

MetadataDefinition

**Description**

*Risk* is used to annotate a model element with an assessment of the risk related to it in some typical risk areas.

**General Types**

MetadataItem

**Features**

costRisk : RiskLevel [0..1]

The risk that work on the *annotatedElement* will exceed its planned cost.

scheduleRisk : RiskLevel [0..1]

The risk that work on the *annotatedElement* will not be completed on schedule.

technicalRisk : RiskLevel [0..1]

The risk of unresolved technical issues regarding the *annotatedElement*.

totalRisk : RiskLevel [0..1]

The total risk associated with the *annotatedElement*.

**Constraints**

None.

### **9.3.3.2.3 Risk**

#### **Element**

MetadataDefinition

#### **Description**

*Risk* is used to annotate a model element with an assessment of the risk related to it in some typical risk areas.

#### **General Types**

MetadataItem

#### **Features**

costRisk : RiskLevel [0..1]

The risk that work on the *annotatedElement* will exceed its planned cost.

scheduleRisk : RiskLevel [0..1]

The risk that work on the *annotatedElement* will not be completed on schedule.

technicalRisk : RiskLevel [0..1]

The risk of unresolved technical issues regarding the *annotatedElement*.

totalRisk : RiskLevel [0..1]

The total risk associated with the *annotatedElement*.

#### **Constraints**

None.

### **9.3.3.2.4 RiskLevel**

#### **Element**

AttributeDefinition

#### **Description**

*RiskLevel* gives the probability of a risk occurring and, optionally, the impact if the risk occurs.

#### **General Types**

AttributeValue

#### **Features**

impact : Level [0..1]

The impact of the risk if it occurs (with 0.0 being no impact and 1.0 being the most severe impact).

### **9.3.3.2.4 RiskLevel**

#### **Element**

AttributeDefinition

#### **Description**

*RiskLevel* gives the probability of a risk occurring and, optionally, the impact if the risk occurs.

#### **General Types**

AttributeValue

#### **Features**

impact : Level [0..1]

The impact of the risk if it occurs (with 0.0 being no impact and 1.0 being the most severe impact).

probability : Level

The probability that a risk will occur.

#### **Constraints**

None.

### **9.3.3.2.5 RiskLevelEnum**

#### **Element**

EnumerationDefinition

#### **Description**

*RiskLevelEnum* enumerates standard *RiskLevels* for low, medium and high risks (without including impact).

#### **General Types**

RiskLevel

#### **Features**

high

Risk level with high probability.

low

Risk level with low probability.

medium

Risk level with medium probability.

#### **Constraints**

**probability : Level**

The probability that a risk will occur.

#### **Constraints**

None.

### **9.3.3.2.5 RiskLevelEnum**

#### **Element**

EnumerationDefinition

#### **Description**

*RiskLevelEnum* enumerates standard *RiskLevels* for low, medium and high risks (without including impact).

#### **General Types**

RiskLevel

#### **Features**

high

Risk level with high probability.

low

Risk level with low probability.

medium

Risk level with medium probability.

#### **Constraints**

None.

### **9.3.4 Parameters of Interest Metadata**

#### **9.3.4.1 Parameters of Interest Metadata Overview**

This package contains definitions of metadata to identify key parameters of interest, including measures of effectiveness (MOE) and other key measures of performance (MOP).

#### **9.3.4.2 Elements**

##### **9.3.4.2.1 MeasureOfEffectiveness**

#### **Element**

MetadataDefinition

#### **Description**

None.

## 9.3.4 Parameters of Interest Metadata

### 9.3.4.1 Parameters of Interest Metadata Overview

This package contains definitions of metadata to identify key parameters of interest, including measures of effectiveness (MOE) and other key measures of performance (MOP).

### 9.3.4.2 Elements

#### 9.3.4.2.1 MeasureOfEffectiveness

##### Element

MetadataDefinition

##### Description

*MeasureOfEffectiveness* (short name *moe*) is semantic metadata for identifying an attribute as a measure of effectiveness.

##### General Types

SemanticMetadata

MetadataItem

##### Features

annotatedElement : Usage {redefines annotatedElement}

baseType : Type {redefines baseType}

Base type is *measuresOfEffectiveness*.

##### Constraints

None.

#### 9.3.4.2.2 MeasureOfPerformance

##### Element

MetadataDefinition

##### Description

*MeasureOfPerformance* (short name *mop*) is semantic metadata for identifying an attribute as a measure of performance.

##### General Types

SemanticMetadata

MetadataItem

*MeasureOfEffectiveness* (short name *moe*) is semantic metadata for identifying an attribute as a measure of effectiveness.

### General Types

SemanticMetadata

MetadataItem

### Features

annotatedElement : Usage {redefines annotatedElement}

baseType : Type {redefines baseType}

Base type is *measuresOfEffectiveness*.

### Constraints

None.

## 9.3.4.2.2 MeasureOfPerformance

### Element

MetadataDefinition

### Description

*MeasureOfPerformance* (short name *mop*) is semantic metadata for identifying an attribute as a measure of performance.

### General Types

SemanticMetadata

MetadataItem

### Features

annotatedElement : Usage {redefines annotatedElement}

baseType : Type {redefines baseType}

Base type is *measuresOfPerformance*.

### Constraints

None.

## 9.3.4.2.3 measuresOfEffectiveness

### Element

AttributeUsage

## **Features**

annotatedElement : Usage {redefines annotatedElement}

baseType : Type {redefines baseType}

Base type is *measuresOfPerformance*.

## **Constraints**

None.

### **9.3.4.2.3 measuresOfEffectiveness**

#### **Element**

AttributeUsage

#### **Description**

Base feature for attributes that are measures of effectiveness.

#### **General Types**

attributeValues

## **Features**

None.

## **Constraints**

None.

### **9.3.4.2.4 measuresOfPerformance**

#### **Element**

AttributeUsage

#### **Description**

Base feature for attributes that are measures of performance.

#### **General Types**

attributeValues

## **Features**

None.

## **Constraints**

None.

### **Description**

Base feature for attributes that are measures of effectiveness.

### **General Types**

attributeValues

### **Features**

None.

### **Constraints**

None.

## **9.3.4.2.4 measuresOfPerformance**

### **Element**

AttributeUsage

### **Description**

Base feature for attributes that are measures of performance.

### **General Types**

attributeValues

### **Features**

None.

### **Constraints**

None.

## **9.3.5 Image Metadata**

### **9.3.5.1 Image Metadata Overview**

This package provides attributive data and metadata to allow a model element to be annotated with an image to be used in its graphical rendering or as a marker to adorn graphical or textual renderings.

### **9.3.5.2 Elements**

#### **9.3.5.2.1 Icon**

##### **Element**

MetadataDefinition

##### **Description**

## 9.3.5 Image Metadata

### 9.3.5.1 Image Metadata Overview

This package provides attributive data and metadata to allow a model element to be annotated with an image to be used in its graphical rendering or as a marker to adorn graphical or textual renderings.

### 9.3.5.2 Elements

#### 9.3.5.2.1 Icon

##### Element

MetadataDefinition

##### Description

*Icon* metadata can be used to annotate a model element with an image to be used to show render the element on a diagram and/or a small image to be used as an adornment on a graphical or textual rendering. Alternatively, another metadata definition can be annotated with an *Icon* to indicate that any model element annotated by the containing metadata can be rendered according to the *Icon*.

##### General Types

MetadataItem

##### Features

fullImage : Image [0..1]

A full-sized image that can be used to render the annotated element on a graphical view, potentially as an alternative to its standard rendering.

smallImage : Image [0..1]

A smaller image that can be used as an adornment on the graphical rendering of the annotated element or as a marker in a textual rendering.

##### Constraints

None.

#### 9.3.5.2.2 Image

##### Element

AttributeDefinition

##### Description

*Image* provides the data necessary for the physical definition of a graphical image.

##### General Types

AttributeValue

##### Features

*Icon* metadata can be used to annotate a model element with an image to be used to show render the element on a diagram and/or a small image to be used as an adornment on a graphical or textual rendering. Alternatively, another metadata definition can be annotated with an *Icon* to indicate that any model element annotated by the containing metadata can be rendered according to the *Icon*.

## General Types

MetadataItem

### Features

fullImage : Image [0..1]

A full-sized image that can be used to render the annotated element on a graphical view, potentially as an alternative to its standard rendering.

smallImage : Image [0..1]

A smaller image that can be used as an adornment on the graphical rendering of the annotated element or as a marker in a textual rendering.

### Constraints

None.

## 9.3.5.2.2 Image

### Element

AttributeDefinition

### Description

*Image* provides the data necessary for the physical definition of a graphical image.

## General Types

AttributeValue

### Features

content : String [0..1]

Binary data for the image according to the given MIME type, encoded as given by the encoding.

encoding : String [0..1]

Describes how characters in the content are to be decoded into binary data. At least "base64", "hex", "identify", and "JSONEscape" shall be supported.

location : String [0..1]

A URI for the location of a resource containing the image content, as an alternative for embedding it in the content attribute.

content : String [0..1]

Binary data for the image according to the given MIME type, encoded as given by the encoding.

encoding : String [0..1]

Describes how characters in the content are to be decoded into binary data. At least "base64", "hex", "identify", and "JSONEscape" shall be supported.

location : String [0..1]

A URI for the location of a resource containing the image content, as an alternative for embedding it in the content attribute.

type : String [0..1]

The MIME type according to which the content should be interpreted.

## Constraints

None.

## 9.4 Analysis Domain Library

### 9.4.1 Analysis Domain Library Overview

The Analysis Domain Library provides library models supporting the modeling of analysis cases (see [7.22](#)) and related analysis tasks.

### 9.4.2 Analysis Tooling

#### 9.4.2.1 Analysis Tooling Overview

This package contains definitions for metadata annotations related to analysis tool integration.

#### 9.4.2.2 Elements

##### 9.4.2.2.1 ToolExecution

###### Element

MetadataDefinition

###### Description

*ToolExecution* metadata identifies an external analysis tool to be used to implement the annotated action.

###### General Types

MetadataItem

###### Features

toolName : String

uri : String

type : String [0..1]

The MIME type according to which the content should be interpreted.

#### Constraints

None.

## 9.4 Analysis Domain Library

### 9.4.1 Analysis Domain Library Overview

The Analysis Domain Library provides library models supporting the modeling of analysis cases (see [7.22](#)) and related analysis tasks.

### 9.4.2 Analysis Tooling

#### 9.4.2.1 Analysis Tooling Overview

This package contains definitions for metadata annotations related to analysis tool integration.

#### 9.4.2.2 Elements

##### 9.4.2.2.1 ToolExecution

###### Element

MetadataDefinition

###### Description

*ToolExecution* metadata identifies an external analysis tool to be used to implement the annotated action.

###### General Types

MetadataItem

###### Features

toolName : String

uri : String

###### Constraints

None.

##### 9.4.2.2.2 ToolVariable

###### Element

MetadataDefinition

###### Description

## **Constraints**

None.

### **9.4.2.2 ToolVariable**

#### **Element**

MetadataDefinition

#### **Description**

*ToolVariable* metadata is used in the context of an action that has been annotated with *ToolExecution* metadata. It is used to annotate a parameter or other feature of the action with the name of the variable in the tool that is to correspond to the annotated feature.

#### **General Types**

MetadataItem

#### **Features**

name : String

#### **Constraints**

None.

## **9.4.3 Sampled Functions**

### **9.4.3.1 Sampled Functions Overview**

This package provides a library model of discretely sampled mathematical functions.

A *SampledFunction* can be used for many engineering purposes. For example, it can represent a time series observation, where the domain consists of time instants expressed on a given timescale and the range consists of observed quantity values. It can also capture a physical property of a substance that depends on temperature or pressure or both.

A *SampledFunction* with numerical domain and range types can be used as input to an interpolation algorithm in order to obtain range values for domain values that fall in-between the discretely sampled domain values.

### **9.4.3.2 Elements**

#### **9.4.3.2.1 Domain**

##### **Element**

CalculationDefinition

##### **Description**

*Domain* returns the sequence of the *domainValues* of all samples in a *SampledFunction*.

#### **General Types**

Calculation

*ToolVariable* metadata is used in the context of an action that has been annotated with *ToolExecution* metadata. It is used to annotate a parameter or other feature of the action with the name of the variable in the tool that is to correspond to the annotated feature.

## General Types

MetadataItem

### Features

name : String

### Constraints

None.

## 9.4.3 Sampled Functions

### 9.4.3.1 Sampled Functions Overview

This package provides a library model of discretely sampled mathematical functions.

A *SampledFunction* can be used for many engineering purposes. For example, it can represent a time series observation, where the domain consists of time instants expressed on a given timescale and the range consists of observed quantity values. It can also capture a physical property of a substance that depends on temperature or pressure or both.

A *SampledFunction* with numerical domain and range types can be used as input to an interpolation algorithm in order to obtain range values for domain values that fall in-between the discretely sampled domain values.

### 9.4.3.2 Elements

#### 9.4.3.2.1 Domain

##### Element

CalculationDefinition

##### Description

*Domain* returns the sequence of the *domainValues* of all samples in a *SampledFunction*.

## General Types

Calculation

### Features

fn : SampledFunction

input

result : Anything [0..\*]

output

## Features

fn : SampledFunction

input

result : Anything [0..\*]

output

## Constraints

None.

### 9.4.3.2.2 Interpolate

#### Element

CalculationDefinition

#### Description

An *Interpolate* calculation returns an interpolated range value from a given *SampledFunction* for a given domain *value*. If the input domain *value* is outside the bounds of the *domainValues* of the *SampledFunction*, null is returned.

#### General Types

Calculation

## Features

fn : SampledFunction

input

result : Anything [0..1]

output

value : Anything

input

## Constraints

None.

### 9.4.3.2.3 interpolateLinear

#### Element

CalculationUsage

#### Description

## Constraints

None.

### 9.4.3.2.2 Interpolate

#### Element

CalculationDefinition

#### Description

An *Interpolate* calculation returns an interpolated range value from a given *SampledFunction* for a given domain *value*. If the input domain *value* is outside the bounds of the *domainValues* of the *SampleFunction*, null is returned.

#### General Types

Calculation

#### Features

fn : SampledFunction

input

result : Anything [0..1]

output

value : Anything

input

## Constraints

None.

### 9.4.3.2.3 interpolateLinear

#### Element

CalculationUsage

#### Description

*interpolateLinear* is an *Interpolate* calculation assuming a linear functional form between *SamplePairs*.

#### General Types

Interpolate

calculations

#### Features

`interpolateLinear` is an `Interpolate` calculation assuming a linear functional form between `SamplePairs`.

### General Types

Interpolate

calculations

### Features

`fn : SampledFunction`

input

`result : Anything [0..1] {redefines result}`

output

`value : Anything {redefines value}`

input

### Constraints

None.

## 9.4.3.2.4 Range

### Element

`CalculationDefinition`

### Description

`Range` returns the sequence of the `rangeValues` of all samples in a `SampledFunction`.

### General Types

Calculation

### Features

`fn : SampledFunction`

input

`result : Anything [0..*]`

output

### Constraints

None.

## 9.4.3.2.5 Sample

### Element

fn : SampledFunction  
input  
result : Anything [0..1] {redefines result}

output  
value : Anything {redefines value}

input

### Constraints

None.

#### 9.4.3.2.4 Range

##### Element

CalculationDefinition

##### Description

*Range* returns the sequence of the *rangeValues* of all samples in a *SampledFunction*.

##### General Types

Calculation

##### Features

fn : SampledFunction

input

result : Anything [0..\*]

output

### Constraints

None.

#### 9.4.3.2.5 Sample

##### Element

CalculationDefinition

##### Description

*Sample* returns a *SampledFunction* that samples a given calculation over a sequence of *domainValues*.

##### General Types

## CalculationDefinition

### Description

*Sample* returns a *SampledFunction* that samples a given calculation over a sequence of *domainValues*.

### General Types

Calculation

### Features

calculation : Calculation [0..\*]

input

domainValues : Anything [0..\*]

input

sampling : SampledFunction

output

### Constraints

None.

## 9.4.3.2.6 SampledFunction

### Element

AttributeDefinition

### Description

*SampledFunction* is a variable-size, ordered collection of *SamplePair* elements that represents a generic, discretely sampled, uni-variate or multi-variate mathematical function. The function must be monotonic, either strictly increasing or strictly decreasing.

It maps discrete domain values to discrete range values. The domain of the function is represented by the sequence of *domainValues* of each *SamplePair* in *samples*, and the range of the function is represented by the sequence of *rangeValues* of each *SamplePair* in *samples*.

### General Types

OrderedMap

### Features

samples : SamplePair [0..\*] {redefines elements, ordered}

### Constraints

[no name]

## Calculation

### Features

calculation : Calculation [0..\*]

input

domainValues : Anything [0..\*]

input

sampling : SampledFunction

output

### Constraints

None.

## 9.4.3.2.6 SampledFunction

### Element

AttributeDefinition

### Description

*SampledFunction* is a variable-size, ordered collection of *SamplePair* elements that represents a generic, discretely sampled, uni-variate or multi-variate mathematical function. The function must be monotonic, either strictly increasing or strictly decreasing.

It maps discrete domain values to discrete range values. The domain of the function is represented by the sequence of *domainValues* of each *SamplePair* in *samples*, and the range of the function is represented by the sequence of *rangeValues* of each *SamplePair* in *samples*.

### General Types

OrderedMap

### Features

samples : SamplePair [0..\*] {redefines elements, ordered}

### Constraints

[no name]

Note: Assumes the functions '<' and '>' are defined for the domain type.

```
(1..size(samples)-1)->forAll { in i;
 (samples.domainValue[i] < samples.domainValue[i+1]) } or // Strictly increasing
(1..size(samples)-1)->forAll { in i;
 (samples.domainValue[i] > samples.domainValue[i+1]) } // Strictly decreasing
```

Note: Assumes the functions '<' and '>' are defined for the domain type.

```
(1..size(samples)-1)->forAll { in i;
 (samples.domainValue[i] < samples.domainValue[i+1]) } or // Strictly increasing
(1..size(samples)-1)->forAll { in i;
 (samples.domainValue[i] > samples.domainValue[i+1]) } // Strictly decreasing
```

### 9.4.3.2.7 SamplePair

#### Element

AttributeDefinition

#### Description

*SamplePair* is a key-value pair of a *domainValue* and a *rangeValue*, used as a sample element in *SampledFunction*.

#### General Types

KeyValuePair

#### Features

domainValue : Anything {redefines key}

rangeValue : Anything {redefines val}

#### Constraints

None.

## 9.4.4 State Space Representation

### 9.4.4.1 State Space Representation Overview

State Space Representation (SSR) is a foundational dynamical systems representation, commonly used in control systems. In this representation, a system is described by a set of *state variables* whose evolution by a *state equation* (note that this is a different conception of "state" than used in the behavioral state modeling constructs described in [7.17](#)). The system outputs are then given by an *output equation*. This representation provides a description of the quantitative stateful behavior of the target system in an explicit manner so that external solvers can compute the behavior by properly integrating input and state variables.

Mathematically, let  $\mathbf{x}$  be a vector of state variables and  $\mathbf{x}'$  be its time derivative,  $\mathbf{u}$  be a vector of inputs, and  $\mathbf{y}$  be a vector of outputs. Then the state equation has the form

$$\mathbf{x}' = f(\mathbf{x}, \mathbf{u}),$$

for some system-specific function  $f$ , and the output equation has the form

$$\mathbf{y} = g(\mathbf{x}, \mathbf{u}),$$

for some system-specific function  $g$ .

The *StateSpaceRepresentation* library model is a model of this representation in terms of SysML actions and calculations. These can be used in combination with end-user action models to describe system functional behaviors.

### 9.4.3.2.7 SamplePair

#### Element

AttributeDefinition

#### Description

*SamplePair* is a key-value pair of a *domainValue* and a *rangeValue*, used as a sample element in *SampledFunction*.

#### General Types

KeyValuePair

#### Features

domainValue : Anything {redefines key}

rangeValue : Anything {redefines val}

#### Constraints

None.

## 9.4.4 State Space Representation

### 9.4.4.1 State Space Representation Overview

State Space Representation (SSR) is a foundational dynamical systems representation, commonly used in control systems. In this representation, a system is described by a set of *state variables* whose evolution by a *state equation* (note that this is a different conception of "state" than used in the behavioral state modeling constructs described in [7.17](#)). The system outputs are then given by an *output equation*. This representation provides a description of the quantitative stateful behavior of the target system in an explicit manner so that external solvers can compute the behavior by properly integrating input and state variables.

Mathematically, let  $\mathbf{x}$  be a vector of state variables and  $\mathbf{x}'$  be its time derivative,  $\mathbf{u}$  be a vector of inputs, and  $\mathbf{y}$  be a vector of outputs. Then the state equation has the form

$$\mathbf{x}' = f(\mathbf{x}, \mathbf{u}),$$

for some system-specific function  $f$ , and the output equation has the form

$$\mathbf{y} = g(\mathbf{x}, \mathbf{u}),$$

for some system-specific function  $g$ .

The *StateSpaceRepresentation* library model is a model of this representation in terms of SysML actions and calculations. These can be used in combination with end-user action models to describe system functional behaviors.

### 9.4.4.2 Elements

[Fig. 54](#) shows the action definitions in the State Space Representation library. This library defines *StateSpaceDynamics* as the base abstract action definition, which provides the basic structure of input, output,



and state space. This definition has `getNextState` and `getOutput` calculations as well to calculate the next state and the current output, which corresponds to the math functions of  $f()$  and  $g()$ , respectively.

`ContinuousStateSpaceDynamics` gives the continuous extension of `StateSpaceDynamics` by redefining `getNextState` and adding `getDerivative` that calculates the derivative of the state space, corresponding to  $\dot{x}$ . Likewise, `DiscreteStateSpaceDynamics` gives the discrete extension by adding `getDifference` that calculates  $\Delta x$ , that is the difference between the current state and the next state, and `getNextState` adds it to `stateSpace`.

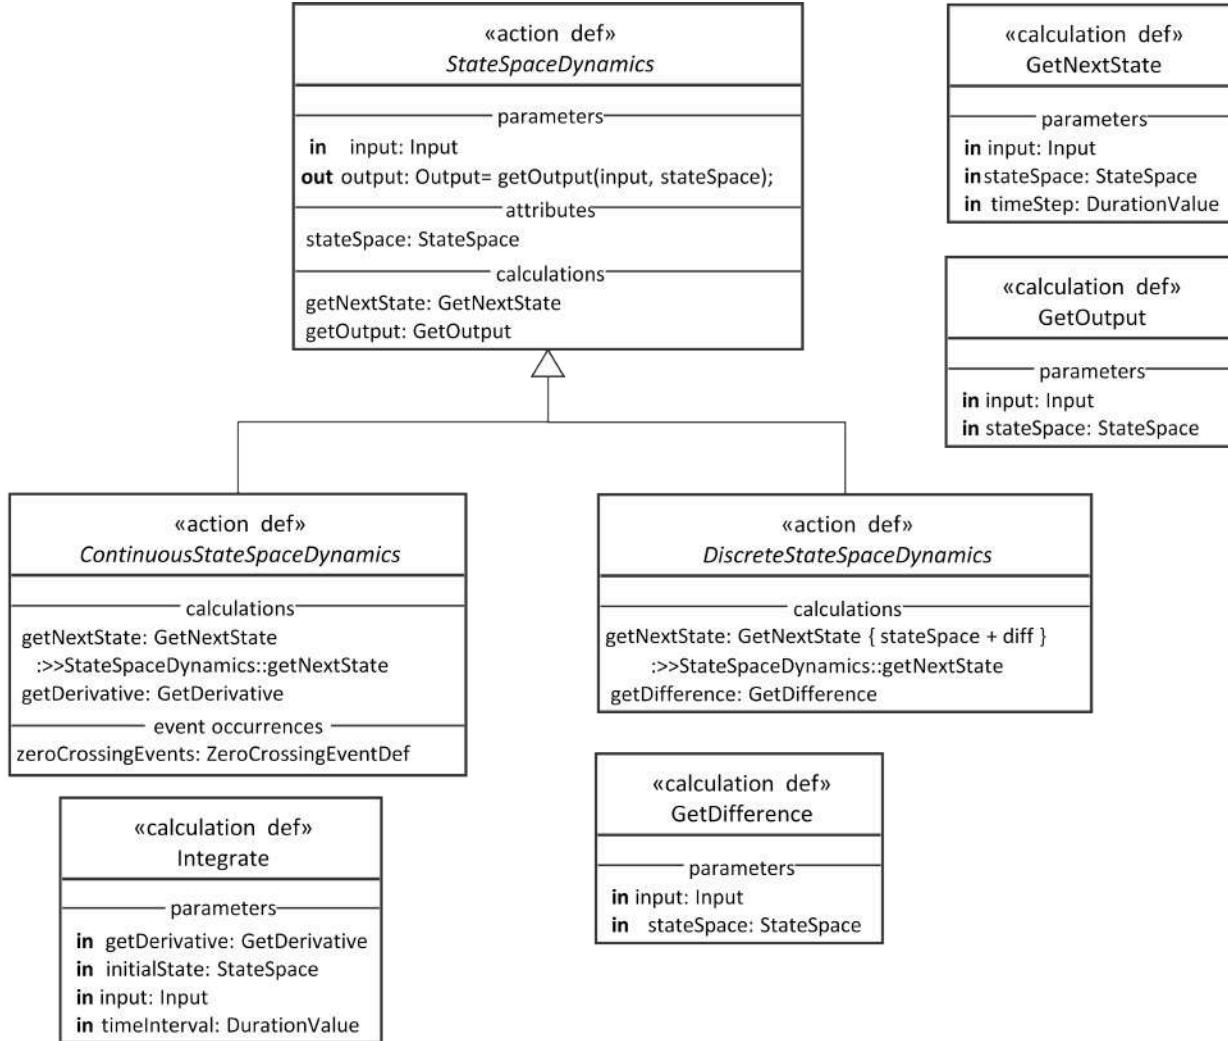


Figure 54. State Space Representation action and calculation definitions

`zeroCrossingEvents` defined in `ContinuousStateSpaceDynamics` give event occurrences when the derivative cross the zero. Some solvers, especially variable-step ones, need to identify such points for precise integration and thus implementations of `ContinuousStateSpaceDynamics` may notify zero-crossings with these event occurrences.

## 9.4.5 Trade Studies

### 9.4.5.1 Trade Studies Overview

This package provides a simple framework for defining trade-off study analysis cases.

#### 9.4.4.2 Elements

[Fig. 55](#) shows the action definitions in the State Space Representation library. This library defines *StateSpaceDynamics* as the base abstract action definition, which provides the basic structure of input, output, and state space. This definition has *getNextState* and *getOutput* calculations as well to calculate the next state and the current output, which corresponds to the math functions of  $f()$  and  $g()$ , respectively.

*ContinuousStateSpaceDynamics* gives the continuous extension of *StateSpaceDynamics* by redefining *getNextState* and adding *getDerivative* that calculates the derivative of the state space, corresponding to  $x'$ . Likewise, *DiscreteStateSpaceDynamics* gives the discrete extension by adding *getDifference* that calculates  $\Delta x$ , that is the difference between the current state and the next state, and *getNextState* adds it to *stateSpace*.

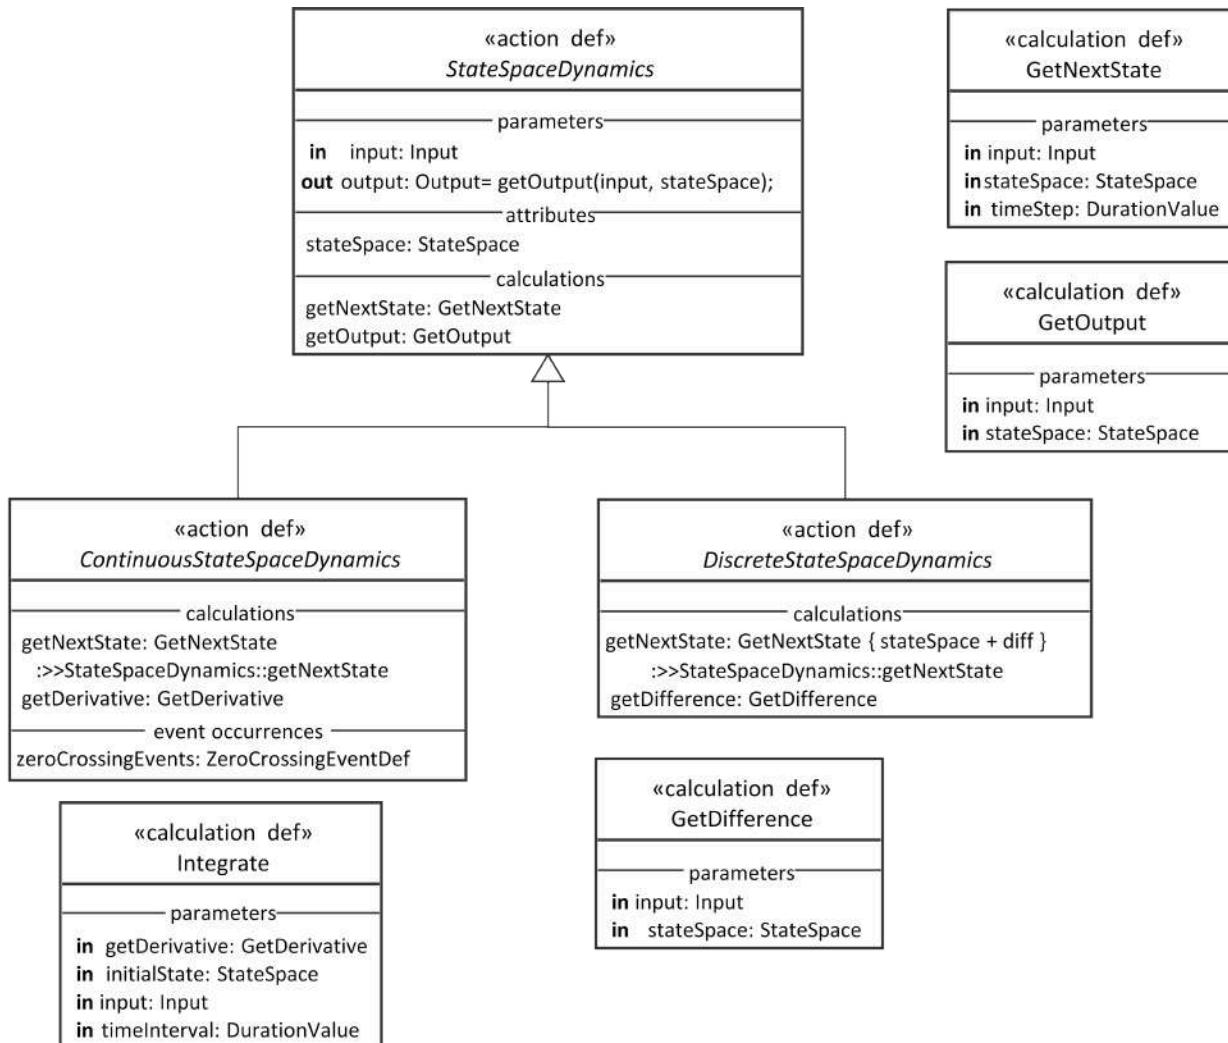


Figure 55. State Space Representation action and calculation definitions

*zeroCrossingEvents* defined in *ContinuousStateSpaceDynamics* give event occurrences when the derivative cross the zero. Some solvers, especially variable-step ones, need to identify such points for precise integration and thus implementations of *ContinuousStateSpaceDynamics* may notify zero-crossings with these event occurrences.

#### 9.4.5 Trade Studies

## 9.4.5.2 Elements

### 9.4.5.2.1 EvaluationFunction

#### Element

CalculationDefinition

#### Description

An *EvaluationFunction* is a calculation that evaluates a *TradeStudy* alternative, producing a *ScalarValue* that can be compared with the evaluation of other alternatives.

#### General Types

Calculation

#### Features

alternative : Anything

The alternative to be evaluated

result : ScalarValue {redefines result}

A *ScalarValue* representing the evaluation of the given alternative.

#### Constraints

None.

### 9.4.5.2.2 MaximizeObjective

#### Element

RequirementDefinition

#### Description

A *MaximizeObjective* is a *TradeStudyObjective* that requires that the *selectedAlternative* have the maximum *EvaluationFunction* value of all the given alternatives.

#### General Types

TradeStudyObjective

#### Features

alternatives : Anything [1..\*] {redefines alternatives}

best : ScalarValue {redefines best}

For a *MaximizeObjective*, the best value is the maximum one.

fn : EvaluationFunction {redefines fn}

### **9.4.5.1 Trade Studies Overview**

This package provides a simple framework for defining trade-off study analysis cases.

### **9.4.5.2 Elements**

#### **9.4.5.2.1 EvaluationFunction**

##### **Element**

CalculationDefinition

##### **Description**

An *EvaluationFunction* is a calculation that evaluates a *TradeStudy* alternative, producing a *ScalarValue* that can be compared with the evaluation of other alternatives.

##### **General Types**

Calculation

##### **Features**

alternative : Anything

The alternative to be evaluated

result : ScalarValue {redefines result}

A *ScalarValue* representing the evaluation of the given alternative.

##### **Constraints**

None.

#### **9.4.5.2.2 MaximizeObjective**

##### **Element**

RequirementDefinition

##### **Description**

A *MaximizeObjective* is a *TradeStudyObjective* that requires that the *selectedAlternative* have the maximum *EvaluationFunction* value of all the given alternatives.

##### **General Types**

TradeStudyObjective

##### **Features**

alternatives : Anything [1..\*] {redefines alternatives}

best : ScalarValue {redefines best}

For a *MaximizeObjective*, the best value is the maximum one.

```
selectedAlternative : Anything {redefines selectedAlternative}
```

### Constraints

None.

### 9.4.5.2.3 MinimizeObjective

#### Element

RequirementDefinition

#### Description

A *MinimizeObjective* is a *TradeStudyObjective* that requires that the *selectedAlternative* have the minimum *EvaluationFunction* value of all the given alternatives.

#### General Types

TradeStudyObjective

#### Features

```
alternatives : Anything [1..*] {redefines alternatives}
```

```
best : ScalarValue {redefines best}
```

For a *MinimizeObjective*, the best value is the minimum one.

```
fn : EvaluationFunction {redefines fn}
```

```
selectedAlternative : Anything {redefines selectedAlternative}
```

### Constraints

None.

### 9.4.5.2.4 TradeStudy

#### Element

AnalysisCaseDefinition

#### Description

A *TradeStudy* is an analysis case whose subject is a set of alternatives (at least one) and whose result is a selection of one of those alternatives. The alternatives are evaluated based on a given *ObjectiveFunction* and the selection is made such that it satisfies the objective of the *TradeStudy* (which must be a *TradeStudyObjective*).

#### General Types

AnalysisCase

#### Features

```
fn : EvaluationFunction {redefines fn}
selectedAlternative : Anything {redefines selectedAlternative}
```

### Constraints

None.

#### 9.4.5.2.3 MinimizeObjective

##### Element

RequirementDefinition

##### Description

A *MinimizeObjective* is a *TradeStudyObjective* that requires that the *selectedAlternative* have the minimum *EvaluationFunction* value of all the given alternatives.

##### General Types

TradeStudyObjective

##### Features

alternatives : Anything [1..\*] {redefines alternatives}

best : ScalarValue {redefines best}

For a *MinimizeObjective*, the best value is the minimum one.

fn : EvaluationFunction {redefines fn}

selectedAlternative : Anything {redefines selectedAlternative}

### Constraints

None.

#### 9.4.5.2.4 TradeStudy

##### Element

AnalysisCaseDefinition

##### Description

A *TradeStudy* is an analysis case whose subject is a set of alternatives (at least one) and whose result is a selection of one of those alternatives. The alternatives are evaluated based on a given *ObjectiveFunction* and the selection is made such that it satisfies the objective of the *TradeStudy* (which must be a *TradeStudyObjective*).

##### General Types

AnalysisCase

##### Features

`evaluationFunction : EvaluationFunction [0..*]`

The *EvaluationFunction* to be used to evaluate the alternatives.

In a *TradeStudy* usage, redefine this feature to provide the desired calculation (or bind it to a calculation usage that does so).

`selectedAlternative : Anything`

The alternative selected by this *TradeStudy*, which is the one that meets the requirement of the *tradeStudyObjective*.

`studyAlternatives : Anything [1..*] {redefines subj}`

The set of alternatives being considered in this *TradeStudy*.

In a *TradeStudy* usage, bind this feature to the actual collection of alternatives to be considered.

`tradeStudyObjective : TradeStudyObjective`

The objective of this *TradeStudy*.

Redefine this feature to give it a definition that is a concrete specialization of *TradeStudyObjective*. That can either be one of the specializations provided in this package, or a more specific user-defined one.

## Constraints

None.

### 9.4.5.2.5 TradeStudyObjective

#### Element

`RequirementDefinition`

#### Description

A *TradeStudyObjective* is the base definition for the objective of a *TradeStudy*. The requirement is to choose from a given set of alternatives the *selectedAlternative* for that has the best evaluation according to a given *EvaluationFunction*. What value is considered "best" is not defined in the abstract base definition but must be computed in any concrete specialization.

#### General Types

`RequirementCheck`

#### Features

`alternatives : Anything [1..*]`

The alternatives being considered in the *TradeStudy* for which this *TradeStudyObjective* is the objective.

`best : ScalarValue`

`evaluationFunction : EvaluationFunction [0..*]`

The *EvaluationFunction* to be used to evaluate the alternatives.

In a *TradeStudy* usage, redefine this feature to provide the desired calculation (or bind it to a calculation usage that does so).

`selectedAlternative : Anything`

The alternative selected by this *TradeStudy*, which is the one that meets the requirement of the *tradeStudyObjective*.

`studyAlternatives : Anything [1..*] {redefines subj}`

The set of alternatives being considered in this *TradeStudy*.

In a *TradeStudy* usage, bind this feature to the actual collection of alternatives to be considered.

`tradeStudyObjective : TradeStudyObjective`

The objective of this *TradeStudy*.

Redefine this feature to give it a definition that is a concrete specialization of *TradeStudyObjective*. That can either be one of the specializations provided in this package, or a more specific user-defined one.

## Constraints

None.

### 9.4.5.2.5 TradeStudyObjective

#### Element

`RequirementDefinition`

#### Description

A *TradeStudyObjective* is the base definition for the objective of a *TradeStudy*. The requirement is to choose from a given set of alternatives the *selectedAlternative* for that has the best evaluation according to a given *EvaluationFunction*. What value is considered "best" is not defined in the abstract base definition but must be computed in any concrete specialization.

#### General Types

`RequirementCheck`

#### Features

`alternatives : Anything [1..*]`

The alternatives being considered in the *TradeStudy* for which this *TradeStudyObjective* is the objective.

`best : ScalarValue`

Out of the evaluation results of all the given alternatives, the one that is considered "best", in the sense that it is the value the *selectedAlternative* should have. This value must be computed in any concrete specialization of *TradeStudyObjective*.

fn : EvaluationFunction

The *EvaluationFunction* to be used in evaluating the given alternatives.

selectedAlternative : Anything {redefines subj}

The alternative that should be selected, as evaluated using the given *EvaluationFunction*.

## Constraints

[no name]

fn(selectedAlternative) == best

# 9.5 Cause and Effect Domain Library

## 9.5.1 Cause and Effect Domain Library Overview

### 9.5.2 Causation Connections

#### 9.5.2.1 Causation Connections Overview

This package provides a library model modeling causes, effects, and causation connections between them.

#### 9.5.2.2 Elements

##### 9.5.2.2.1 Causation

###### Element

ConnectionDefinition

###### Description

A *Causation* is a binary *Multicausation* in which a single cause occurrence causes a single effect occurrence. (However, a single cause can separately have multiple effects, and a single effect can have separate *Causation* connections with multiple causes.)

###### General Types

Multicausation

BinaryConnection

###### Features

theCause : Occurrence [0..\*] {redefines causes, source}

The single causing occurrence.

theEffect : Occurrence [0..\*] {redefines effects, target}

Out of the evaluation results of all the given alternatives, the one that is considered "best", in the sense that it is the value the `selectedAlternative` should have. This value must be computed in any concrete specialization of `TradeStudyObjective/em>`.

`fn : EvaluationFunction`

The `EvaluationFunction` to be used in evaluating the given alternatives.

`selectedAlternative : Anything {redefines subj}`

The alternative that should be selected, as evaluated using the given `EvaluationFunction`.

## Constraints

[no name]

`fn(selectedAlternative) == best`

# 9.5 Cause and Effect Domain Library

## 9.5.1 Cause and Effect Domain Library Overview

### 9.5.2 Causation Connections

#### 9.5.2.1 Causation Connections Overview

This package provides a library model modeling causes, effects, and causation connections between them.

##### 9.5.2.2 Elements

###### 9.5.2.2.1 Causation

###### Element

ConnectionDefinition

###### Description

A `Causation` is a binary `Multicausation` in which a single cause occurrence causes a single effect occurrence. (However, a single cause can separately have multiple effects, and a single effect can have separate `Causation` connections with multiple causes.)

###### General Types

Multicausation

BinaryConnection

###### Features

`theCause : Occurrence [0..*] {redefines causes, source}`

The single causing occurrence.

`theEffect : Occurrence [0..*] {redefines effects, target}`

The single effect occurrence resulting from the cause.

The single effect occurrence resulting from the cause.

### **Constraints**

None.

#### **9.5.2.2.2 causations**

##### **Element**

ConnectionUsage

##### **Description**

*causations* is the base feature for *Causation ConnectionUsages*.

##### **General Types**

multicausations

Causation

##### **Features**

None.

### **Constraints**

None.

#### **9.5.2.2.3 causes**

##### **Element**

OccurrenceUsage

##### **Description**

*Occurrences* that are causes.

##### **General Types**

occurrences

##### **Features**

None.

### **Constraints**

None.

#### **9.5.2.2.4 effects**

##### **Element**

## **Constraints**

None.

### **9.5.2.2.2 causations**

#### **Element**

ConnectionUsage

#### **Description**

*causations* is the base feature for *Causation ConnectionUsages*.

#### **General Types**

multicausations

Causation

#### **Features**

None.

## **Constraints**

None.

### **9.5.2.2.3 causes**

#### **Element**

OccurrenceUsage

#### **Description**

*Occurrences* that are causes.

#### **General Types**

occurrences

#### **Features**

None.

## **Constraints**

None.

### **9.5.2.2.4 effects**

#### **Element**

OccurrenceUsage

#### **Description**

## OccurrenceUsage

### Description

*Occurrences* that are effects.

### General Types

occurrences

### Features

None.

### Constraints

None.

## 9.5.2.2.5 Multicausation

### Element

ConnectionDefinition

### Description

A *Multicausation* connection models the situation in which one set of occurrences causes another. All causes must at least exist before all effects.

To create a *Multicausation* connection, specialize this connection definition adding specific end features of the relavent types. Ends representing causes should subset *causes*, while ends representing effects should subset *effects*. There must be at least one cause and at least one effect.

### General Types

Connection

### Features

causes : Occurrence [1..\*] {subsets participant}

The causing *Occurrences*.

Redefines *CausationConnections::causes* in the context of *Multicausation*.

effects : Occurrence [1..\*] {subsets participant}

The effect *Occurrences* caused by the causing *Occurrences*.

Redefines *CausationConnections::effects* in the context of *Multicausation*.

### Constraints

disjointCauseEffect

*Occurrences* that are effects.

### General Types

occurrences

### Features

None.

### Constraints

None.

## 9.5.2.2.5 Multicausation

### Element

ConnectionDefinition

### Description

A *Multicausation* connection models the situation in which one set of occurrences causes another. All causes must at least exist before all effects.

To create a *Multicausation* connection, specialize this connection definition adding specific end features of the relavent types. Ends representing causes should subset *causes*, while ends representing effects should subset *effects*. There must be at least one cause and at least one effect.

### General Types

Connection

### Features

causes : Occurrence [1..\*] {subsets participant}

The causing *Occurrences*.

Redefines *CausationConnections::causes* in the context of *Multicausation*.

effects : Occurrence [1..\*] {subsets participant}

The effect *Occurrences* caused by the causing *Occurrences*.

Redefines *CausationConnections::effects* in the context of *Multicausation*.

### Constraints

disjointCauseEffect

*causes* must be disjoint from *effects*.

`isEmpty(intersection(causes, effects))`

## 9.5.2.2.6 multicausations

*causes* must be disjoint from *effects*.

```
isEmpty(intersection(causes, effects))
```

### 9.5.2.2.6 multicausations

#### Element

ConnectionUsage

#### Description

*multicausations* is the base feature for *Multicausation ConnectionUsages*.

#### General Types

Multicausation

connections

#### Features

None.

#### Constraints

None.

## 9.5.3 Cause and Effect

### 9.5.3.1 Cause and Effect Overview

This package provides language-extension metadata for cause-effect modeling.

### 9.5.3.2 Elements

#### 9.5.3.2.1 CausationMetadata

#### Element

MetadataDefinition

#### Description

*CausationMetadata* allows for the specification of additional metadata about a cause-effect ConnectionDefinition or ConnectionUsage..

#### General Types

MetadataItem

#### Features

annotatedElement1 : ConnectionDefinition {subsets annotatedElement}

annotatedElement2 : ConnectionUsage {subsets annotatedElement}

**Element**

ConnectionUsage

**Description**

*multicausations* is the base feature for *Multicausation ConnectionUsages*.

**General Types**

Multicausation

connections

**Features**

None.

**Constraints**

None.

## 9.5.3 Cause and Effect

### 9.5.3.1 Cause and Effect Overview

This package provides language-extension metadata for cause-effect modeling.

### 9.5.3.2 Elements

#### 9.5.3.2.1 CausationMetadata

**Element**

MetadataDefinition

**Description**

*CausationMetadata* allows for the specification of additional metadata about a cause-effect ConnectionDefinition or ConnectionUsage..

**General Types**

MetadataItem

**Features**

annotatedElement1 : ConnectionDefinition {subsets annotatedElement}

annotatedElement2 : ConnectionUsage {subsets annotatedElement}

isNecessary : Boolean

Whether all the causes are necessary for all the effects to occur. If this is false (the default), then some or all of the effects may still have occurred even if some of the causes did not.

isSufficient : Boolean

isNecessary : Boolean

Whether all the causes are necessary for all the effects to occur. If this is false (the default), then some or all of the effects may still have occurred even if some of the causes did not.

isSufficient : Boolean

Whether the causes were sufficient for all the effects to occur. If this is false (the default), then it may be the case that some other occurrences were also necessary for some or all of the effects to have occurred.

probability : Real [0..1]

The probability that the causes will actually result in effects occurring.

### Constraints

None.

## 9.5.3.2.2 CausationSemanticMetadata

### Element

MetadataDefinition

### Description

*CausationMetadata* (short name *causation*) is *SemanticMetadata* for a *Causation* connection.

### General Types

SemanticMetadata

CausationMetadata

### Features

baseType : Type {redefines baseType}

Base type is *CausationConnections::causations*.

### Constraints

None.

## 9.5.3.2.3 CauseMetadata

### Element

MetadataDefinition

### Description

*CauseMetadata* (short name *cause*) identifies a *Usage* as being a cause occurrence. It is intended to be used to tag the cause ends of a *Multicausation*.

Whether the causes were sufficient for all the effects to occur. If this is false (the default), then it may be the case that some other occurrences were also necessary for some or all of the effects to have occurred.

probability : Real [0..1]

The probability that the causes will actually result in effects occurring.

### Constraints

None.

## 9.5.3.2.2 CausationSemanticMetadata

### Element

MetadataDefinition

### Description

*CausationMetadata* (short name *causation*) is *SemanticMetadata* for a *Causation* connection.

### General Types

SemanticMetadata

CausationMetadata

### Features

baseType : Type {redefines baseType}

Base type is *CausationConnections::causations*.

### Constraints

None.

## 9.5.3.2.3 CauseMetadata

### Element

MetadataDefinition

### Description

*CauseMetadata* (short name *cause*) identifies a *Usage* as being a cause occurrence. It is intended to be used to tag the cause ends of a *Multicausation*.

### General Types

SemanticMetadata

MetadataItem

### Features

## **General Types**

SemanticMetadata

MetadataItem

## **Features**

annotatedElement : Usage {redefines annotatedElement}

baseType : Type {redefines baseType}

Base type is *CausationConnections::causes*.

## **Constraints**

None.

### **9.5.3.2.4 EffectMetadata**

#### **Element**

MetadataDefinition

#### **Description**

*EffectMetadata* (short name *effect*) identifies a *Usage* as being a effect occurrence. It is intended to be used to tag the effect ends of a *Multicausation*.

## **General Types**

SemanticMetadata

MetadataItem

## **Features**

annotatedElement : Usage {redefines annotatedElement}

baseType : Type {redefines baseType}

Base type is *CausationConnections::effects*.

## **Constraints**

None.

### **9.5.3.2.5 MulticausationSemanticMetadata**

#### **Element**

MetadataDefinition

#### **Description**

annotatedElement : Usage {redefines annotatedElement}  
baseType : Type {redefines baseType}  
Base type is *CausationConnections::causes*.

### Constraints

None.

## 9.5.3.2.4 EffectMetadata

### Element

MetadataDefinition

### Description

*EffectMetadata* (short name *effect*) identifies a *Usage* as being a effect occurrence. It is intended to be used to tag the effect ends of a *Multicausation*.

### General Types

SemanticMetadata

MetadataItem

### Features

annotatedElement : Usage {redefines annotatedElement}  
baseType : Type {redefines baseType}  
Base type is *CausationConnections::effects*.

### Constraints

None.

## 9.5.3.2.5 MulticausationSemanticMetadata

### Element

MetadataDefinition

### Description

*MulticausationMetadata* (short name *multicausation*) is *SemanticMetadata* for a *Multicausation* connection.

### General Types

SemanticMetadata

CausationMetadata

*MulticausationMetadata* (short name *multicausation*) is *SemanticMetadata* for a *Multicausation* connection.

### General Types

SemanticMetadata

CausationMetadata

### Features

baseType : Type {redefines baseType}

Base type is *CausationConnections*::*multicausations*.

### Constraints

None.

## 9.6 Requirement Derivation Domain Library

### 9.6.1 Requirement Derivation Domain Library Overview

### 9.6.2 Derivation Connections

#### 9.6.2.1 Derivation Connections Overview

This package provides a library model for derivation connections between requirements.

#### 9.6.2.2 Elements

##### 9.6.2.2.1 Derivation

###### Element

ConnectionDefinition

###### Description

A *Derivation* connection asserts that one or more *derivedRequirements* are derived from a single *originalRequirement*. This means that any subject that satisfies the *originalRequirement* should, in itself or through other things related to it, satisfy each of the *derivedRequirements*.

A *ConnectionUsage* typed by *Derivation* must have *RequirementUsages* for all its ends. The single end for the original requirement should subset *originalRequirement*, while the rest of the ends should subset *derivedRequirements*.

### General Types

Connection

### Features

derivedRequirements : RequirementCheck [1..\*] {subsets participant}

## Features

baseType : Type {redefines baseType}

Base type is *CausationConnections::multicausations*.

## Constraints

None.

# 9.6 Requirement Derivation Domain Library

## 9.6.1 Requirement Derivation Domain Library Overview

### 9.6.2 Derivation Connections

#### 9.6.2.1 Derivation Connections Overview

This package provides a library model for derivation connections between requirements.

#### 9.6.2.2 Elements

##### 9.6.2.2.1 Derivation

###### Element

ConnectionDefinition

###### Description

A *Derivation* connection asserts that one or more *derivedRequirements* are derived from a single *originalRequirement*. This means that any subject that satisfies the *originalRequirement* should, in itself or through other things related to it, satisfy each of the *derivedRequirements*.

A ConnectionUsage typed by *Derivation* must have RequirementUsages for all its ends. The single end for the original requirement should subset *originalRequirement*, while the rest of the ends should subset *derivedRequirements*.

###### General Types

Connection

###### Features

derivedRequirements : RequirementCheck [1..\*] {subsets participant}

The one or more requirements that are derived from the original requirement.

Redefines *DerivationConnections::derivedRequirements* in the context of *Derivation*.

originalRequirement : RequirementCheck {subsets participant}

The single original requirement.

Redefines *DerivationConnections::originalRequirement* in the context of *Derivation*.

participant : RequirementCheck [2..\*] {redefines participant}

The one or more requirements that are derived from the original requirement.

Redefines *DerivationConnections::derivedRequirements* in the context of *Derivation*.

originalRequirement : RequirementCheck {subsets participant}

The single original requirement.

Redefines *DerivationConnections::originalRequirement* in the context of *Derivation*.

participant : RequirementCheck [2..\*] {redefines participant}

All the *participants* in a *Derivation* must be requirements.

### Constraints

originalImpliesDerived

Whenever the *originalRequirement* is satisfied, all of the *derivedRequirements* must also be satisfied.

originalRequirement.result implies allTrue(derivedRequirements.result)

originalNotDerived

The original requirement must not be a derived requirement.

derivedRequirements->excludes(originalRequirement)

## 9.6.2.2 derivations

### Element

ConnectionUsage

### Description

*derivations* is the base feature for *Derivation ConnectionUsages*.

### General Types

Derivation

connections

### Features

None.

### Constraints

None.

## 9.6.2.3 derivedRequirements

### Element

All the *participants* in a *Derivation* must be requirements.

## Constraints

originalImpliesDerived

Whenever the *originalRequirement* is satisfied, all of the *derivedRequirements* must also be satisfied.

```
originalRequirement.result implies allTrue(derivedRequirements.result)
```

originalNotDerived

The original requirement must not be a derived requirement.

```
derivedRequirements->excludes(originalRequirement)
```

## 9.6.2.2 derivations

### Element

ConnectionUsage

### Description

*derivations* is the base feature for *Derivation ConnectionUsages*.

### General Types

Derivation

connections

### Features

None.

### Constraints

None.

## 9.6.2.3 derivedRequirements

### Element

RequirementUsage

### Description

*derivedRequirements* are the derived requirements in *Derivation* connections.

### General Types

occurrences

### Features

None.

RequirementUsage

#### Description

*derivedRequirements* are the derived requirements in *Derivation* connections.

#### General Types

occurrences

#### Features

None.

#### Constraints

None.

### 9.6.2.2.4 originalRequirements

#### Element

RequirementUsage

#### Description

*originalRequirements* are the original requirements in *Derivation* connections.

#### General Types

occurrences

#### Features

None.

#### Constraints

None.

### 9.6.3 Requirement Derivation

#### 9.6.3.1 Requirement Derivation Overview

This package provides language-extension metadata for modeling requirement derivation.

#### 9.6.3.2 Elements

##### 9.6.3.2.1 DerivationMetadata

#### Element

MetadataDefinition

#### Description

## **Constraints**

None.

### **9.6.2.2.4 originalRequirements**

#### **Element**

RequirementUsage

#### **Description**

*originalRequirements* are the original requirements in *Derivation* connections.

#### **General Types**

occurrences

#### **Features**

None.

#### **Constraints**

None.

## **9.6.3 Requirement Derivation**

### **9.6.3.1 Requirement Derivation Overview**

This package provides language-extension metadata for modeling requirement derivation.

#### **9.6.3.2 Elements**

##### **9.6.3.2.1 DerivationMetadata**

#### **Element**

MetadataDefinition

#### **Description**

*DerivationMetadata* (short name *derivation*) is *SemanticMetadata* for a *Derivation* connection.

#### **General Types**

SemanticMetadata

MetadataItem

#### **Features**

annotatedElement1 : ConnectionDefinition {subsets annotatedElement}

annotatedElement2 : ConnectionUsage {subsets annotatedElement}

baseType : Type

*DerivationMetadata* (short name *derivation*) is *SemanticMetadata* for a *Derivation* connection.

### General Types

SemanticMetadata

MetadataItem

### Features

annotatedElement1 : ConnectionDefinition {subsets annotatedElement}

annotatedElement2 : ConnectionUsage {subsets annotatedElement}

baseType : Type

Base type is *DerivationConnections::derivations*.

### Constraints

None.

## 9.6.3.2.2 DerivedRequirementMetadata

### Element

MetadataDefinition

### Description

*DerivedRequirementMetadata* (short name *derive*) identifies a *Usage* as a derived requirement. It is intended to be used to tag the derived requirement ends of a *Derivation*.

### General Types

SemanticMetadata

MetadataItem

### Features

annotatedElement : Usage

baseType : Type

Base type is *DerivationConnections::derivedRequirements*.

### Constraints

None.

## 9.6.3.2.3 OriginalRequirementMetadata

### Element

Base type is *DerivationConnections::derivations*.

### Constraints

None.

## 9.6.3.2.2 DerivedRequirementMetadata

### Element

MetadataDefinition

### Description

*DerivedRequirementMetadata* (short name *derive*) identifies a Usage as a derived requirement. It is intended to be used to tag the derived requirement ends of a *Derivation*.

### General Types

SemanticMetadata

MetadataItem

### Features

annotatedElement : Usage

baseType : Type

Base type is *DerivationConnections::derivedRequirements*.

### Constraints

None.

## 9.6.3.2.3 OriginalRequirementMetadata

### Element

MetadataDefinition

### Description

*OriginalRequirementMetadata* (short name *original*) identifies a Usage as an original requirement. It is intended to be used to tag the original requirement end of a *Derivation*.

### General Types

SemanticMetadata

MetadataItem

### Features

annotatedElement : Usage

MetadataDefinition

### Description

*OriginalRequirementMetadata* (short name *original*) identifies a *Usage* as an original requirement. It is intended to be used to tag the original requirement end of a *Derivation*.

### General Types

SemanticMetadata

MetadataItem

### Features

annotatedElement : Usage

baseType : Type

Base type is *DerivationConnections::originalRequirements*.

### Constraints

None.

## 9.7 Geometry Domain Library

### 9.7.1 Geometry Domain Library Overview

### 9.7.2 Spatial Items

#### 9.7.2.1 Spatial Items Overview

This package models physical items that have a spatial extent and act as a spatial frame of reference for obtaining position and displacement vectors of points within them.

#### 9.7.2.2 Elements

##### 9.7.2.2.1 CurrentDisplacementOf

###### Element

CalculationDefinition

### Description

The *CurrentDisplacementOf* two *Points* relative to a *SpatialItem* and a *Clock* is the *DisplacementOf* the *Points* relative to the *SpatialItem*, at the *currentTime* of the *Clock*.

### General Types

CurrentDisplacementOf

### Features

clock : Clock {redefines clock}

`baseType : Type`

Base type is `DerivationConnections::originalRequirements`.

### Constraints

None.

## 9.7 Geometry Domain Library

### 9.7.1 Geometry Domain Library Overview

### 9.7.2 Spatial Items

#### 9.7.2.1 Spatial Items Overview

This package models physical items that have a spatial extent and act as a spatial frame of reference for obtaining position and displacement vectors of points within them.

#### 9.7.2.2 Elements

##### 9.7.2.2.1 CurrentDisplacementOf

###### Element

CalculationDefinition

###### Description

The `CurrentDisplacementOf` two `Points` relative to a `SpatialItem` and a `Clock` is the `DisplacementOf` the `Points` relative to the `SpacialItem`, at the `currentTime` of the `Clock`.

###### General Types

`CurrentDisplacementOf`

###### Features

`clock : Clock {redefines clock}`

`displacementVector : Displacement3dVector {redefines displacementVector}`

`frame : SpatialItem {redefines frame}`

`point1 : Point {redefines point1}`

`point2 : Point {redefines point2}`

###### Constraints

None.

##### 9.7.2.2.2 CurrentPositionOf

###### Element

CalculationDefinition

```
displacementVector : Displacement3dVector {redefines displacementVector}
frame : SpatialItem {redefines frame}
point1 : Point {redefines point1}
point2 : Point {redefines point2}
```

### Constraints

None.

## 9.7.2.2 CurrentPositionOf

### Element

CalculationDefinition

### Description

The *CurrentPositionOf* a *Point* relative to a *SpatialItem* and a *Clock* is the *PositionOf* the *Point* relative to the *SpatialItem* at the *currentTime* of the *Clock*.

### General Types

CurrentPositionOf

### Features

```
clock : Clock {redefines clock}
point : Point {redefines point}
positionVector : Position3dVector {redefines positionVector}
spatialItem : SpatialItem {redefines frame}
```

### Constraints

None.

## 9.7.2.3 DisplacementOf

### Element

CalculationDefinition

### Description

The *DisplacementOf* two *Points* relative to a *SpatialItem*, at a specific *TimeInstantValue* relative to a given *Clock*, is the *displacementVector* computed as the difference between the *PositionOf* the first *Point* and *PositionOf* the second *Point*, relative to that *SpatialItem*, at that *timeInstant*.

### General Types

## Description

The *CurrentPositionOf* a *Point* relative to a *SpatialItem* and a *Clock* is the *PositionOf* the *Point* relative to the *SpatialItem* at the *currentTime* of the *Clock*.

## General Types

CurrentPositionOf

## Features

clock : Clock {redefines clock}

point : Point {redefines point}

positionVector : Position3dVector {redefines positionVector}

spatialItem : SpatialItem {redefines frame}

## Constraints

None.

### 9.7.2.2.3 DisplacementOf

## Element

CalculationDefinition

## Description

The *DisplacementOf* two *Points* relative to a *SpatialItem*, at a specific *TimeInstantValue* relative to a given *Clock*, is the *displacementVector* computed as the difference between the *PositionOf* the first *Point* and *PositionOf* the second *Point*, relative to that *SpatialItem*, at that *timeInstant*

## General Types

DisplacementOf

## Features

clock : Clock {redefines clock}

displacementVector : Displacement3dVector {redefines displacementVector}

frame : SpatialItem {redefines frame}

point1 : Point {redefines point1}

point2 : Point {redefines point2}

time : TimeInstantValue {redefines time}

## Constraints

zeroDisplacementConstraint

DisplacementOf

### Features

```
clock : Clock {redefines clock}
displacementVector : Displacement3dVector {redefines displacementVector}
frame : SpatialItem {redefines frame}
point1 : Point {redefines point1}
point2 : Point {redefines point2}
time : TimeInstantValue {redefines time}
```

### Constraints

zeroDisplacementConstraint

If either *point1* or *point2* occurs within the other, then the *displacementVector* is the zero vector.

```
(point1.spaceTimeEnclosedOccurrences->includes (point2) or
point2.spaceTimeEnclosedOccurrences->includes (point1)) implies
isZeroVector(displacementVector)
```

## 9.7.2.2.4 PositionOf

### Element

CalculationDefinition

### Description

The *PositionOf* a *Point* relative to a *SpatialItem*, at a specific *TimeInstantValue* relative to a given *Clock*, is a *positionVector* that is a *VectorQuantityValue* in the *coordinateFrame* of the *SpatialItem*. The default *Clock* is the *localClock* of the *SpatialItem*.

### General Types

PositionOf

### Features

```
clock : Clock {redefines clock}
point : Point {redefines point}
positionVector : Position3dVector {redefines positionVector}
spatialItem : SpatialItem {redefines frame}
time : TimeInstantValue {redefines time}
```

### Constraints

If either *point1* or *point2* occurs within the other, then the *displacementVector* is the zero vector.

```
(point1.spaceTimeEnclosedOccurrences->includes(point2) or
point2.spaceTimeEnclosedOccurrences->includes(point1)) implies
isZeroVector(displacementVector)
```

#### 9.7.2.2.4 PositionOf

##### Element

CalculationDefinition

##### Description

The *PositionOf* a *Point* relative to a *SpatialItem*, at a specific *TimeInstantValue* relative to a given *Clock*, is a *positionVector* that is a *VectorQuantityValue* in the *coordinateFrame* of the *SpatialItem*. The default *Clock* is the *localClock* of the *SpatialItem*.

##### General Types

PositionOf

##### Features

```
clock : Clock {redefines clock}

point : Point {redefines point}

positionVector : Position3dVector {redefines positionVector}

spatialItem : SpatialItem {redefines frame}

time : TimeInstantValue {redefines time}
```

##### Constraints

positionTimePrecondition

The given *point* must exist at the given *time*.

```
TimeOf(point.startShot) <= time and
time <= TimeOf(point.endShot)
```

spacePositionConstraint

The result *positionVector* is equal to the *PositionOf* the *Point* *spaceShot* of the frame that encloses the given *point*, at the given *time*.

```
(frame.spaceShots as Point)->forAll{in p : Point;
 p.spaceTimeEnclosedOccurrences->includes(point) implies
 positionVector == PositionOf(p, time, frame)
}
```

#### 9.7.2.2.5 SpatialItem

##### Element

## positionTimePrecondition

The given *point* must exist at the given *time*.

```
TimeOf(point.startShot) <= time and
time <= TimeOf(point.endShot)
```

## spacePositionConstraint

The result *positionVector* is equal to the *PositionOf* the *Point* *spaceShot* of the frame that encloses the given *point*, at the given *time*.

```
(frame.spaceShots as Point)->forAll{in p : Point;
 p.spaceTimeEnclosedOccurrences->includes(point) implies
 positionVector == PositionOf(p, time, frame)
}
```

## 9.7.2.2.5 SpatialItem

### Element

ItemDefinition

### Description

A *SpatialItem* is an *Item* with a three-dimensional spatial extent that also acts as a *SpatialFrame* of reference.

### General Types

Item

SpatialFrame

### Features

componentItems : SpatialItem [0..\*] {subsets subitems}

A *SpatialItem* with *componentItems* is entirely made up of those items (the *SpatialItem* occurs only as a collection of its *componentItems*). By default they have the same *localClock* and equivalent *coordinateFrame* as the *SpatialItem* they make up. A *SpatialItem* without *componentItems* occurs on its own, separately from its *subitems*.

coordinateFrame : VectorMeasurementReference

The three-dimensional *VectorMeasurementReference* to be used as the measurement reference for position and displacement vector values relative to this *SpatialItem*.

localClock : Clock {redefines localClock}

A local *Clock* to be used as the corresponding time reference within this *SpatialItem*. By default this is the singleton *Time::universalClock*.

originPoint : Point

The *Point* at the origin of the *coordinateFrame* of this *SpatialItem*.

## ItemDefinition

### Description

A *SpatialItem* is an *Item* with a three-dimensional spatial extent that also acts as a *SpatialFrame* of reference.

### General Types

Item

SpatialFrame

### Features

componentItems : SpatialItem [0..\*] {subsets subitems}

A *SpatialItem* with *componentItems* is entirely made up of those items (the *SpatialItem* occurs only as a collection of its *componentItems*). By default they have the same *localClock* and equivalent *coordinateFrame* as the *SpatialItem* they make up. A *SpatialItem* without *componentItems* occurs on its own, separately from its *subitems*.

coordinateFrame : VectorMeasurementReference

The three-dimensional *VectorMeasurementReference* to be used as the measurement reference for position and displacement vector values relative to this *SpatialItem*.

localClock : Clock {redefines localClock}

A local *Clock* to be used as the corresponding time reference within this *SpatialItem*. By default this is the singleton *Time::universalClock*.

originPoint : Point

The *Point* at the origin of the *coordinateFrame* of this *SpatialItem*.

### Constraints

originPointConstraint

The *CurrentPositionOf* the *originPoint* must always be a zero vector.

```
isZeroVector(CurrentPositionOf(originPoint, SpatialItem::self))
```

## 9.7.3 Shape Items

### 9.7.3.1 Shape Items Overview

This package defines basic geometric *Items*, most of which can be used as *shapes* of other *Items* (see [7.10](#)). Their *innerSpaceDimensions* are either 1 (*Curves*) or 2 (*Surfaces*), which is the number of variables needed to identify any space point occupied by an Item, without regard to higher dimensional spaces in which it might be embedded (see *Occurrences* and *Objects* in [KerML]). All are *StructuredSpaceObjects* (*Paths* and *Shells* for *Curves* and *Surfaces*, respectively), except for *Lines*. This enables them to divide their *spaceSlices* into *faces*, *edges*, and *vertices*, identifying *Surfaces*, *Curve*, and *Points*, respectively. *Paths* have no *faces*, but *Shells* do. All the *Paths* and *Shells* are closed (*isClosed=true*, they have no *shape*), except for *Discs*, enabling them to be *shapes* of other *Items*.

## Constraints

originPointConstraint

The *CurrentPositionOf* the *originPoint* must always be a zero vector.

```
isZeroVector(CurrentPositionOf(originPoint, SpatialItem::self))
```

## 9.7.3 Shape Items

### 9.7.3.1 Shape Items Overview

This package defines basic geometric *Items*, most of which can be used as *shapes* of other *Items* (see [7.10](#)). Their *innerSpaceDimensions* are either 1 (*Curves*) or 2 (*Surfaces*), which is the number of variables needed to identify any space point occupied by an Item, without regard to higher dimensional spaces in which it might be embedded (see *Occurrences* and *Objects* in [KerML]). All are *StructuredSpaceObjects* (*Paths* and *Shells* for *Curves* and *Surfaces*, respectively), except for *Lines*. This enables them to divide their *spaceSlices* into *faces*, *edges*, and *vertices*, identifying *Surfaces*, *Curve*, and *Points*, respectively. *Paths* have no *faces*, but *Shells* do. All the *Paths* and *Shells* are closed (*isClosed=true*, they have no *shape*), except for *Discs*, enabling them to be *shapes* of other *Items*.

### 9.7.3.2 Elements

#### 9.7.3.2.1 Circle

##### Element

ItemDefinition

##### Description

A *Circle* is an *Ellipse* with semiaxes equal to its *radius*.

##### General Types

Ellipse

##### Features

radius : LengthValue

semiMajorAxis : LengthValue {redefines semiMajorAxis}

semiMinorAxis : LengthValue {redefines semiMinorAxis}

##### Constraints

None.

#### 9.7.3.2.2 CircularCone

##### Element

ItemDefinition

## **9.7.3.2 Elements**

### **9.7.3.2.1 Circle**

#### **Element**

ItemDefinition

#### **Description**

A *Circle* is an *Ellipse* with semiaxes equal to its *radius*.

#### **General Types**

Ellipse

#### **Features**

radius : LengthValue

semiMajorAxis : LengthValue {redefines semiMajorAxis}

semiMinorAxis : LengthValue {redefines semiMinorAxis}

#### **Constraints**

None.

### **9.7.3.2.2 CircularCone**

#### **Element**

ItemDefinition

#### **Description**

A *CircularCone* is a *Cone* with a circular base.

#### **General Types**

Cone

#### **Features**

base : CircularDisc {redefines base}

radius : LengthValue

semiMajorAxis {redefines semiMajorAxis}

#### **Constraints**

None.

### **9.7.3.2.3 CircularCylinder**

#### **Element**

## Description

A *CircularCone* is a *Cone* with a circular base.

## General Types

Cone

## Features

base : CircularDisc {redefines base}

radius : LengthValue

semiMajorAxis {redefines semiMajorAxis}

## Constraints

None.

### 9.7.3.2.3 CircularCylinder

#### Element

ItemDefinition

#### Description

A *CircularCylinder* is a *Cylinder* with two circular sides.

#### General Types

Cylinder

#### Features

af : CircularDisc {redefines af}

base : CircularDisc {redefines base}

radius : LengthValue

semiMajorAxis {redefines semiMajorAxis}

#### Constraints

None.

### 9.7.3.2.4 CircularDisc

#### Element

#### Description

A *CircularDisc* is a *Disc* bound by a *Circle*.

ItemDefinition

### Description

A *CircularCylinder* is a *Cylinder* with two circular sides.

### General Types

Cylinder

### Features

af : CircularDisc {redefines af}

base : CircularDisc {redefines base}

radius : LengthValue

semiMajorAxis {redefines semiMajorAxis}

### Constraints

None.

## 9.7.3.2.4 CircularDisc

### Element

### Description

A *CircularDisc* is a *Disc* bound by a *Circle*.

### General Types

Disc

### Features

edges : Circle {redefines edges}

radius : LengthValue

shape : Circle {redefines shape}

### Constraints

None.

## 9.7.3.2.5 Cone

### Element

ItemDefinition

### Description

## **General Types**

Disc

### **Features**

edges : Circle {redefines edges}

radius : LengthValue

shape : Circle {redefines shape}

### **Constraints**

None.

## **9.7.3.2.5 Cone**

### **Element**

ItemDefinition

### **Description**

A *Cone* has one elliptical sides joined to a point by a curved side.

## **General Types**

ConeOrCylinder

### **Features**

af [0] {redefines af}

apex {subsets vertices}

edges [2] {redefines edges}

faces [2] {redefines faces}

### **Constraints**

None.

## **9.7.3.2.6 ConeOrCylinder**

### **Element**

ItemDefinition

### **Description**

A *ConeOrCylinder* is a *Cone* or a *Cylinder* with a given elliptical base, height, width (perpendicular distance from the base to the center of the top side or vertex), and offsets of this perpendicular at the base from the center of the base.

A *Cone* has one elliptical sides joined to a point by a curved side.

### General Types

ConeOrCylinder

### Features

af [0] {redefines af}

apex {subsets vertices}

edges [2] {redefines edges}

faces [2] {redefines faces}

### Constraints

None.

## 9.7.3.2.6 ConeOrCylinder

### Element

ItemDefinition

### Description

A *ConeOrCylinder* is a *Cone* or a *Cylinder* with a given elliptical base, height, width (perpendicular distance from the base to the center of the top side or vertex), and offsets of this perpendicular at the base from the center of the base.

### General Types

Shell

### Features

ae [0..2] {subsets edges}

af : Disc [0..1] {subsets faces}

base : Disc {subsets faces}

be [2] {subsets edges}

cf {subsets faces}

edges [2..4] {redefines edges}

faces : Surface [2..3] {redefines faces}

height : LengthValue

semiMajorAxis : LengthValue

## General Types

Shell

## Features

ae [0..2] {subsets edges}

af : Disc [0..1] {subsets faces}

base : Disc {subsets faces}

be [2] {subsets edges}

cf {subsets faces}

edges [2..4] {redefines edges}

faces : Surface [2..3] {redefines faces}

height : LengthValue

semiMajorAxis : LengthValue

semiMinorAxis : LengthValue

vertices [0..1] {redefines vertices}

xoffset : LengthValue

yoffset : LengthValue

## Constraints

None.

### 9.7.3.2.7 ConicSection

#### Element

ItemDefinition

#### Description

A *ConicSection* is a closed *PlanarCurve*, possibly disconnected, see *Hyperbola*.

## General Types

Path

PlanarCurve

## Features

edges [1..2] {redefines edges}

```
semiMinorAxis : LengthValue
vertices [0..1] {redefines vertices}
xoffset : LengthValue
yoffset : LengthValue
```

### Constraints

None.

## 9.7.3.2.7 ConicSection

### Element

ItemDefinition

### Description

A *ConicSection* is a closed *PlanarCurve*, possibly disconnected, see *Hyperbola*.

### General Types

Path

PlanarCurve

### Features

```
edges [1..2] {redefines edges}
isClosed {redefines isClosed}
vertices [0] {redefines vertices}
```

### Constraints

None.

## 9.7.3.2.8 ConicSurface

### Element

ItemDefinition

### Description

A *ConicSurface* is a *Surface* that has *ConicSection* cross-sections.

### General Types

Shell

### Features

```
edges [0] {redefines edges}
```

```
isClosed {redefines isClosed}
vertices [0] {redefines vertices}
```

### Constraints

None.

## 9.7.3.2.8 ConicSurface

### Element

ItemDefinition

### Description

A *ConicSurface* is a *Surface* that has *ConicSection* cross-sections.

### General Types

Shell

### Features

```
edges [0] {redefines edges}
faces [1..2] {redefines faces}
genus {redefines genus}
vertices [0] {redefines vertices}
```

### Constraints

None.

## 9.7.3.2.9 Cuboid

### Element

ItemDefinition

### Description

A *Cuboid* is a *Polyhedron* with six sides, all quadrilateral.

### General Types

CuboidOrTriangularPrism

### Features

```
edges [24] {redefines edges}
faces [6] {redefines faces}
```

faces [1..2] {redefines faces}  
genus {redefines genus}  
vertices [0] {redefines vertices}

### Constraints

None.

## 9.7.3.2.9 Cuboid

### Element

ItemDefinition

### Description

A *Cuboid* is a *Polyhedron* with six sides, all quadrilateral.

### General Types

CuboidOrTriangularPrism

### Features

edges [24] {redefines edges}  
faces [6] {redefines faces}  
ff : Quadrilateral {redefines ff}  
rf : Quadrilateral {redefines rf}

### Constraints

None.

## 9.7.3.2.10 CuboidOrTriangularPrism

### Element

ItemDefinition

### Description

A *CuboidOrTriangularPrism* is a *Polyhedron* that is either a *Cuboid* or *TriangularPrism*.

### General Types

Polyhedron

### Features

bf : Quadrilateral {subsets faces}  
bfe [2] {subsets edges}

ff : Quadrilateral {redefines ff}

rf : Quadrilateral {redefines rf}

## Constraints

None.

### 9.7.3.2.10 CuboidOrTriangularPrism

#### Element

ItemDefinition

#### Description

A *CuboidOrTriangularPrism* is a *Polyhedron* that is either a *Cuboid* or *TriangularPrism*.

#### General Types

Polyhedron

#### Features

bf : Quadrilateral {subsets faces}

bfe [2] {subsets edges}

bflv [3] {subsets vertices}

bfrv [3] {subsets vertices}

bre [2] {subsets edges}

brlv [3] {subsets vertices}

brrv [3] {subsets vertices}

bsle [2] {subsets edges}

bsre [2] {subsets edges}

edges [0..\*] {redefines edges}

faces [5..6] {redefines faces}

ff : Polygon {subsets faces}

rf : Polygon {subsets faces}

slf : Quadrilateral {subsets faces}

srf : Quadrilateral [0..1] {subsets faces}

tf : Quadrilateral {subsets faces}

bflv [3] {subsets vertices}  
bfrv [3] {subsets vertices}  
bre [2] {subsets edges}  
brlv [3] {subsets vertices}  
brrv [3] {subsets vertices}  
bsle [2] {subsets edges}  
bsre [2] {subsets edges}  
edges [0..\*] {redefines edges}  
faces [5..6] {redefines faces}  
ff : Polygon {subsets faces}  
rf : Polygon {subsets faces}  
slf : Quadrilateral {subsets faces}  
srf : Quadrilateral [0..1] {subsets faces}  
tf : Quadrilateral {subsets faces}  
tfe [2] {subsets edges}  
tflv [3] {subsets vertices}  
tfrv [0..3] {subsets vertices}  
tre [2] {subsets edges}  
trlv [3] {subsets vertices}  
trrv [0..3] {subsets vertices}  
tsle [2] {subsets edges}  
tsre [0..2] {subsets edges}  
ufle [2] {subsets edges}  
ufre [0..2] {subsets edges}  
urle [2] {subsets edges}  
urre [0..2] {subsets edges}  
vertices [24] {redefines vertices}

## Constraints

None.

tfe [2] {subsets edges}  
tflv [3] {subsets vertices}  
tfrv [0..3] {subsets vertices}  
tre [2] {subsets edges}  
trlv [3] {subsets vertices}  
trrv [0..3] {subsets vertices}  
tsle [2] {subsets edges}  
tsre [0..2] {subsets edges}  
ufle [2] {subsets edges}  
ufre [0..2] {subsets edges}  
urle [2] {subsets edges}  
urre [0..2] {subsets edges}  
vertices [24] {redefines vertices}

## Constraints

None.

### 9.7.3.2.11 Cylinder

#### Element

ItemDefinition

#### Description

A *Cylinder* has two elliptical sides joined by a curved side.

#### General Types

ConeOrCylinder

#### Features

ae [2] {redefines ae}  
af {redefines af}  
edges [4] {redefines edges}  
faces [3] {redefines faces}  
vertices [0] {redefines vertices}

### **9.7.3.2.11 Cylinder**

#### **Element**

ItemDefinition

#### **Description**

A *Cylinder* has two elliptical sides joined by a curved side.

#### **General Types**

ConeOrCylinder

#### **Features**

ae [2] {redefines ae}

af {redefines af}

edges [4] {redefines edges}

faces [3] {redefines faces}

vertices [0] {redefines vertices}

#### **Constraints**

None.

### **9.7.3.2.12 Disc**

#### **Element**

ItemDefinition

#### **Description**

A *Disc* is a *Shell* bound by an *Ellipse*.

#### **General Types**

Shell

PlanarSurface

#### **Features**

edges : Ellipse {redefines edges}

faces : PlanarSurface {redefines faces}

semiMajorAxis : LengthValue

semiMinorAxis : LengthValue

shape : Ellipse {redefines shape}

## **Constraints**

None.

### **9.7.3.2.12 Disc**

#### **Element**

ItemDefinition

#### **Description**

A *Disc* is a *Shell* bound by an *Ellipse*.

#### **General Types**

Shell

PlanarSurface

#### **Features**

edges : Ellipse {redefines edges}

faces : PlanarSurface {redefines faces}

semiMajorAxis : LengthValue

semiMinorAxis : LengthValue

shape : Ellipse {redefines shape}

vertices [0] {redefines vertices}

#### **Constraints**

None.

### **9.7.3.2.13 EccentricCone**

#### **Element**

ItemDefinition

#### **Description**

An *EccentricCone* is a *Cone* with least one positive offset.

#### **General Types**

Cone

#### **Features**

None.

vertices [0] {redefines vertices}

### Constraints

None.

## 9.7.3.2.13 EccentricCone

### Element

ItemDefinition

### Description

An *EccentricCone* is a *Cone* with least one positive offset.

### General Types

Cone

### Features

None.

### Constraints

None.

## 9.7.3.2.14 EccentricCylinder

### Element

ItemDefinition

### Description

An *EccentricCylinder* is a *Cylinder*

### General Types

Cylinder

### Features

None.

### Constraints

None.

## 9.7.3.2.15 Ellipse

### Element

ItemDefinition

### Description

## **Constraints**

None.

### **9.7.3.2.14 EccentricCylinder**

#### **Element**

ItemDefinition

#### **Description**

An *EccentricCylinder* is a *Cylinder* with least one positive offset.</p>

#### **General Types**

Cylinder

#### **Features**

None.

#### **Constraints**

None.

### **9.7.3.2.15 Ellipse**

#### **Element**

ItemDefinition

#### **Description**

An *Ellipse* is a *ConicSection* in the shape of an ellipse of given semiaxes.

#### **General Types**

ConicSection

#### **Features**

edges {redefines edges}

semiMajorAxis : LengthValue

semiMinorAxis : LengthValue

#### **Constraints**

None.

### **9.7.3.2.16 Ellipsoid**

#### **Element**

An *Ellipse* is a *ConicSection* in the shape of an ellipse of given semiaxes.

### General Types

ConicSection

### Features

edges {redefines edges}

semiMajorAxis : LengthValue

semiMinorAxis : LengthValue

### Constraints

None.

## 9.7.3.2.16 Ellipsoid

### Element

ItemDefinition

### Description

An *Ellipsoid* is a *ConicSurface* with only elliptical cross-sections.

### General Types

ConicSurface

### Features

faces {redefines faces}

semiAxis1 : LengthValue

semiAxis2 : LengthValue

semiAxis3 : LengthValue

### Constraints

None.

## 9.7.3.2.17 Hyperbola

### Element

ItemDefinition

### Description

A *Hyperbola* is a planar *Path* in the shape of a hyperbola with given axes.

ItemDefinition

**Description**

An *Ellipsoid* is a *ConicSurface* with only elliptical cross-sections.

**General Types**

ConicSurface

**Features**

faces {redefines faces}

semiAxis1 : LengthValue

semiAxis2 : LengthValue

semiAxis3 : LengthValue

**Constraints**

None.

**9.7.3.2.17 Hyperbola**

**Element**

ItemDefinition

**Description**

A *Hyperbola* is a planar *Path* in the shape of a hyperbola with given axes.

**General Types**

ConicSection

**Features**

conjugateAxis : LengthValue

tranverseAxis : LengthValue

**Constraints**

None.

**9.7.3.2.18 Hyperboloid**

**Element**

ItemDefinition

**Description**

## **General Types**

ConicSection

### **Features**

conjugateAxis : LengthValue

transverseAxis : LengthValue

### **Constraints**

None.

## **9.7.3.2.18 Hyperboloid**

### **Element**

ItemDefinition

### **Description**

A *Hyperboloid* is a *ConicSurface* with only hyperbolic cross-sections.

## **General Types**

ConicSurface

### **Features**

conjugateAxis : LengthValue

transverseAxis : LengthValue

### **Constraints**

None.

## **9.7.3.2.19 Line**

### **Element**

ItemDefinition

### **Description**

A *Line* is a *PlanarCurve* that is straight.

## **General Types**

PlanarCurve

### **Features**

outerSpaceDimension {redefines outerSpaceDimension}

### **Constraints**

A *Hyperboloid* is a *ConicSurface* with only hyperbolic cross-sections.

### **General Types**

ConicSurface

### **Features**

conjugateAxis : LengthValue

transverseAxis : LengthValue

### **Constraints**

None.

## **9.7.3.2.19 Line**

### **Element**

ItemDefinition

### **Description**

A *Line* is a *PlanarCurve* that is straight.

### **General Types**

PlanarCurve

### **Features**

outerSpaceDimension {redefines outerSpaceDimension}

### **Constraints**

None.

## **9.7.3.2.20 Parabola**

### **Element**

ItemDefinition

### **Description**

A *Parabola* is a planar *Path* in the shape of a parabola of a given focal length.

### **General Types**

ConicSection

### **Features**

edges {redefines edges}

None.

### 9.7.3.2.20 Parabola

#### Element

ItemDefinition

#### Description

A *Parabola* is a planar *Path* in the shape of a parabola of a given focal length.

#### General Types

ConicSection

#### Features

edges {redefines edges}

focalDistance : LengthValue

#### Constraints

None.

### 9.7.3.2.21 Paraboloid

#### Element

ItemDefinition

#### Description

A *Paraboloid* is a *ConicSurface* with only parabolic cross-sections.

#### General Types

ConicSurface

#### Features

faces {redefines faces}

focalDistance : LengthValue

#### Constraints

None.

### 9.7.3.2.22 Path

#### Element

ItemDefinition

#### Description

focalDistance : LengthValue

### Constraints

None.

## 9.7.3.2.21 Paraboloid

### Element

ItemDefinition

### Description

A *Paraboloid* is a *ConicSurface* with only parabolic cross-sections.

### General Types

ConicSurface

### Features

faces {redefines faces}

focalDistance : LengthValue

### Constraints

None.

## 9.7.3.2.22 Path

### Element

ItemDefinition

### Description

*Path* is the most general structured *Curve*.

### General Types

Item

Curve

StructuredSpaceObject

### Features

edges [1..\*] {redefines edges}

faces [0] {redefines faces}

vertices {redefines vertices}

*Path* is the most general structured *Curve*.

### General Types

Item

Curve

StructuredSpaceObject

### Features

edges [1..\*] {redefines edges}

faces [0] {redefines faces}

vertices {redefines vertices}

### Constraints

None.

## 9.7.3.2.23 PlanarCurve

### Element

ItemDefinition

### Description

A *PlanarCurve* is a *Curve* with a given *length* embeddable in a plane.

### General Types

Item

Curve

### Features

length : LengthValue

outerSpaceDimension {redefines outerSpaceDimension}

### Constraints

None.

## 9.7.3.2.24 PlanarSurface

### Element

ItemDefinition

### Description

## **Constraints**

None.

### **9.7.3.2.23 PlanarCurve**

#### **Element**

ItemDefinition

#### **Description**

A *PlanarCurve* is a *Curve* with a given *length* embeddable in a plane.

#### **General Types**

Item

Curve

#### **Features**

length : LengthValue

outerSpaceDimension {redefines outerSpaceDimension}

#### **Constraints**

None.

### **9.7.3.2.24 PlanarSurface**

#### **Element**

ItemDefinition

#### **Description**

A *PlanarSurface* is a *Surface* with given *area* that is flat.

#### **General Types**

Item

Surface

#### **Features**

area : LengthValue

outerSpaceDimension {redefines outerSpaceDimension}

#### **Constraints**

None.

A *PlanarSurface* is a *Surface* with given *area* that is flat.

### General Types

Item

Surface

### Features

area : LengthValue

outerSpaceDimension {redefines outerSpaceDimension}

### Constraints

None.

## 9.7.3.2.25 Polygon

### Element

ItemDefinition

### Description

A *Polygon* is a closed planar *Path* with straight edges.

### General Types

Path

PlanarCurve

### Features

edges : Line {redefines edges}

isClosed {redefines isClosed}

### Constraints

None.

## 9.7.3.2.26 Polyhedron

### Element

ItemDefinition

### Description

A *Polyhedron* is a closed *Shell* with polygonal sides.

### General Types

### **9.7.3.2.25 Polygon**

#### **Element**

ItemDefinition

#### **Description**

A *Polygon* is a closed planar *Path* with straight edges.

#### **General Types**

Path

PlanarCurve

#### **Features**

edges : Line {redefines edges}

isClosed {redefines isClosed}

#### **Constraints**

None.

### **9.7.3.2.26 Polyhedron**

#### **Element**

ItemDefinition

#### **Description**

A *Polyhedron* is a closed *Shell* with polygonal sides.

#### **General Types**

Shell

#### **Features**

edges {redefines edges}

faces : Polygon [2..\*] {redefines faces}

genus {redefines genus}

isClosed

outerSpaceDimension {redefines outerSpaceDimension}

vertices [0..\*] {redefines vertices}

#### **Constraints**

Shell

### Features

edges {redefines edges}  
faces : Polygon [2..\*] {redefines faces}  
genus {redefines genus}  
isClosed  
outerSpaceDimension {redefines outerSpaceDimension}  
vertices [0..\*] {redefines vertices}

### Constraints

None.

## 9.7.3.2.27 Pyramid

### Element

ItemDefinition

### Description

p>A *Pyramid* is a *Polyhedron* with the sides of a polygon (base) forming the bases of triangles that join at an apex point. Its *height* is the perpendicular distance from the base to the apex, and its offsets are between this perpendicular at the base and the center of the base.

### General Types

Polyhedron

### Features

apex [0..\*] {redefines vertices}  
base {subsets faces}  
edges [0..\*] {redefines edges}  
faces [0..\*]  
height : LengthValue  
wall : Triangle [0..\*] {subsets faces}  
wallNumber : Positive  
xoffset : LengthValue  
yoffset : LengthValue

None.

### **9.7.3.2.27 Pyramid**

#### **Element**

ItemDefinition

#### **Description**

A *Pyramid* is a *Polyhedron* with the sides of a polygon (base) forming the bases of triangles that join at an apex point. Its *height* is the perpindicular distance from the base to the apex, and its offsets are between this perpindicular at the base and the center of the base.

#### **General Types**

Polyhedron

#### **Features**

apex [0..\*] {redefines vertices}

base {subsets faces}

edges [0..\*] {redefines edges}

faces [0..\*]

height : LengthValue

wall : Triangle [0..\*] {subsets faces}

wallNumber : Positive

xoffset : LengthValue

yoffset : LengthValue

#### **Constraints**

None.

### **9.7.3.2.28 Quadrilateral**

#### **Element**

ItemDefinition

#### **Description**

A *Quadrilateral* is a four-sided *Polygon*.

#### **General Types**

Polygon

## **Constraints**

None.

### **9.7.3.2.28 Quadrilateral**

#### **Element**

ItemDefinition

#### **Description**

A *Quadrilateral* is a four-sided *Polygon*.

#### **General Types**

Polygon

#### **Features**

e1

e2

e3

edges [4] {redefines edges}

v12 [2] {subsets vertices, ordered}

v23 [2] {subsets vertices, ordered}

v34 [2] {subsets vertices, ordered}

v41 [2] {subsets vertices, ordered}

vertices [8] {redefines vertices}

#### **Constraints**

None.

### **9.7.3.2.29 Rectangle**

#### **Element**

ItemDefinition

#### **Description**

A *Rectangle* is a *Quadrilateral* with four right angles and given *length* and *width*.

#### **General Types**

Quadrilateral

#### **Features**

## Features

e1

e2

e3

edges [4] {redefines edges}

v12 [2] {subsets vertices, ordered}

v23 [2] {subsets vertices, ordered}

v34 [2] {subsets vertices, ordered}

v41 [2] {subsets vertices, ordered}

vertices [8] {redefines vertices}

## Constraints

None.

### 9.7.3.2.29 Rectangle

#### Element

ItemDefinition

#### Description

A *Rectangle* is a *Quadrilateral* with four right angles and given *length* and *width*.

#### General Types

Quadrilateral

## Features

length : LengthValue

width : LengthValue

## Constraints

None.

### 9.7.3.2.30 RectangularCuboid

#### Element

ItemDefinition

#### Description

length : LengthValue

width : LengthValue

### Constraints

None.

## 9.7.3.2.30 RectangularCuboid

### Element

ItemDefinition

### Description

A *RectangularCuboid* is a *Cuboid* with all *Rectangular* sides.

### General Types

Cuboid

### Features

bf : Rectangle {redefines bf}

ff : Rectangle {redefines ff}

height : LengthValue

length : LengthValue

rf : Rectangle {redefines rf}

slf : Rectangle {redefines slf}

srf : Rectangle {redefines srf}

tf : Rectangle {redefines tf}

width : LengthValue

### Constraints

None.

## 9.7.3.2.31 RectangularPyramid

### Element

ItemDefinition

### Description

A *RectangularPyramid* is a *Pyramid* with a rectangular base.

### General Types

A *RectangularCuboid* is a *Cuboid* with all *Rectangular* sides.

### General Types

Cuboid

### Features

bf : Rectangle {redefines bf}

ff : Rectangle {redefines ff}

height : LengthValue

length : LengthValue

rf : Rectangle {redefines rf}

slf : Rectangle {redefines slf}

srf : Rectangle {redefines srf}

tf : Rectangle {redefines tf}

width : LengthValue

### Constraints

None.

## 9.7.3.2.31 RectangularPyramid

### Element

ItemDefinition

### Description

A *RectangularPyramid* is a *Pyramid* with a rectangular base.

### General Types

Pyramid

### Features

base : Rectangle {redefines base}

baseLength : LengthValue

baseWidth : LengthValue

### Constraints

None.

Pyramid

### Features

base : Rectangle {redefines base}

baseLength : LengthValue

baseWidth : LengthValue

### Constraints

None.

## 9.7.3.2.32 RectangularToroid

### Element

ItemDefinition

### Description

A *RectangularToroid* is a revolution of a *Rectangle*.

### General Types

Toriod

### Features

rectangleLength : LengthValue

rectangleWidth : LengthValue

revolvedCurve : Rectangle {redefines revolvedCurve}

### Constraints

None.

## 9.7.3.2.33 RightCircularCone

### Element

ItemDefinition

### Description

A *RightCircularCone* is a *CircularCone* with zero offsets.

### General Types

CircularCone

### Features

xoffset {redefines xoffset}

### **9.7.3.2.32 RectangularToroid**

#### **Element**

ItemDefinition

#### **Description**

A *RectangularToroid* is a revolution of a *Rectangle*.

#### **General Types**

Toroid

#### **Features**

rectangleLength : LengthValue

rectangleWidth : LengthValue

revolvedCurve : Rectangle {redefines revolvedCurve}

#### **Constraints**

None.

### **9.7.3.2.33 RightCircularCone**

#### **Element**

ItemDefinition

#### **Description**

A *RightCircularCone* is a *CircularCone* with zero offsets.

#### **General Types**

CircularCone

#### **Features**

xoffset {redefines xoffset}

yoffset {redefines yoffset}

#### **Constraints**

None.

### **9.7.3.2.34 RightCircularCylinder**

#### **Element**

ItemDefinition

yoffset {redefines yoffset}

### Constraints

None.

## 9.7.3.2.34 RightCircularCylinder

### Element

ItemDefinition

### Description

A *RightCircularCylinder* is a *CircularCylinder* with zero offsets.

### General Types

CircularCylinder

### Features

xoffset {redefines xoffset}

yoffset {redefines yoffset}

### Constraints

None.

## 9.7.3.2.35 RightTriangle

### Element

ItemDefinition

### Description

A *RightTriangle* is a *Triangle* with edges opposite the *hypotenuse* at right angles.

### General Types

Triangle

### Features

hypotenuse {redefines e3}

xoffset {redefines xoffset}

### Constraints

None.

## 9.7.3.2.36 RightTriangularPrism

### Element

## Description

A *RightCircularCylinder* is a *CircularCylinder* with zero offsets.

## General Types

*CircularCylinder*

## Features

xoffset {redefines xoffset}

yoffset {redefines yoffset}

## Constraints

None.

## 9.7.3.2.35 RightTriangle

### Element

*ItemDefinition*

## Description

A *RightTriangle* is a *Triangle* with edges opposite the *hypotenuse* at right angles.

## General Types

*Triangle*

## Features

hypotenuse {redefines e3}

xoffset {redefines xoffset}

## Constraints

None.

## 9.7.3.2.36 RightTriangularPrism

### Element

*ItemDefinition*

## Description

A *RightTriangularPrism* is a *TriangularPrism* with two right triangular sides, with given *length*, *width*, and *height*.

## General Types

ItemDefinition

### Description

A *RightTriangularPrism* is a *TriangularPrism* with two right triangular sides, with given *length*, *width*, and *height*.

### General Types

TriangularPrism

### Features

bf : Rectangle {redefines bf}

ff : RightTriangle {redefines ff}

height : LengthValue

length : LengthValue

rf : RightTriangle {redefines rf}

slf : Rectangle {redefines slf}

tf : Rectangle {redefines tf}

width : LengthValue

### Constraints

None.

## 9.7.3.2.37 Shell

### Element

ItemDefinition

### Description

*Shell* is the most general structured *Surface*.

### General Types

Item

StructuredSpaceObject

Surface

### Features

None.

### Constraints

TriangularPrism

#### Features

bf : Rectangle {redefines bf}  
ff : RightTriangle {redefines ff}  
height : LengthValue  
length : LengthValue  
rf : RightTriangle {redefines rf}  
slf : Rectangle {redefines slf}  
tf : Rectangle {redefines tf}  
width : LengthValue

#### Constraints

None.

### 9.7.3.2.37 Shell

#### Element

ItemDefinition

#### Description

*Shell* is the most general structured *Surface*.

#### General Types

Item

StructuredSpaceObject

Surface

#### Features

None.

#### Constraints

None.

### 9.7.3.2.38 Sphere

#### Element

ItemDefinition



## Description

A *Sphere* is an *Ellipsoid* with all the same semiaxes.

## General Types

Ellipsoid

## Features

radius : LengthValue

semiAxis1 {redefines semiAxis1}

semiAxis2

## Constraints

None.

## 9.7.3.2.39 Tetrahedron

### Element

ItemDefinition

## Description

A *Tetrahedron* is *Pyramid* with a triangular base.

## General Types

Pyramid

## Features

base : Triangle {redefines base}

baseLength : LengthValue

baseWidth : LengthValue

## Constraints

None.

## 9.7.3.2.40 Toriod

### Element

ItemDefinition

## Description

None.

### 9.7.3.2.38 Sphere

#### Element

ItemDefinition

#### Description

A *Sphere* is an *Ellipsoid* with all the same semiaxes.

#### General Types

Ellipsoid

#### Features

radius : LengthValue

semiAxis1 {redefines semiAxis1}

semiAxis2

#### Constraints

None.

### 9.7.3.2.39 Tetrahedron

#### Element

ItemDefinition

#### Description

A *Tetrahedron* is *Pyramid* with a triangular base.

#### General Types

Pyramid

#### Features

base : Triangle {redefines base}

baseLength : LengthValue

baseWidth : LengthValue

#### Constraints

None.

### 9.7.3.2.40 Toriod

#### Element

A *Toroid* is a surface generated from revolving a planar closed curve about an line coplanar with the curve. It is single sided with one hole.

### General Types

Shell

### Features

edges [0] {redefines edges}

faces {redefines faces}

genus {redefines genus}

revolutionRadius : LengthValue

revolvedCurve : PlanarCurve

vertices [0] {redefines vertices}

### Constraints

None.

## 9.7.3.2.41 Torus

### Element

ItemDefinition

### Description

A *Torus* is a revolution of a *Circle*.

### General Types

Toroid

### Features

majorRadius {redefines revolutionRadius}

minorRadius : LengthValue

revolvedCurve : Circle {redefines revolvedCurve}

### Constraints

None.

## 9.7.3.2.42 Triangle

### Element

## **ItemDefinition**

### **Description**

A *Toroid* is a surface generated from revolving a planar closed curve about an line coplanar with the curve. It is single sided with one hole.

### **General Types**

Shell

### **Features**

edges [0] {redefines edges}

faces {redefines faces}

genus {redefines genus}

revolutionRadius : LengthValue

revolvedCurve : PlanarCurve

vertices [0] {redefines vertices}

### **Constraints**

None.

## **9.7.3.2.41 Torus**

### **Element**

## ItemDefinition

### **Description**

A *Torus* is a revolution of a *Circle*.

### **General Types**

Toriad

### **Features**

majorRadius {redefines revolutionRadius}

minorRadius : LengthValue

revolvedCurve : Circle {redefines revolvedCurve}

### **Constraints**

None.

## **9.7.3.2.42 Triangle**

ItemDefinition

### Description

A *Triangle* is three-sided Polygon with given *length* (base), width (perpendicular distance from base to apex), and offset of this perpendicular at the base from the center of the base.

### General Types

Polygon

### Features

apex [2] {subsets vertices, ordered}

base {subsets edges}

e2 {subsets edges}

e3 {subsets edges}

edges [3] {redefines edges}

length : LengthValue

v12 [2] {subsets vertices, ordered}

v31 [2] {subsets vertices, ordered}

vertices [6] {redefines vertices}

width : LengthValue

xoffset : LengthValue

### Constraints

None.

## 9.7.3.2.43 TriangularPrism

### Element

ItemDefinition

### Description

A *TriangularPrism* is a *Polyhedron* with five sides, two triangular and the others quadrilateral.

### General Types

CuboidOrTriangularPrism

### Features

## **Element**

ItemDefinition

## **Description**

A *Triangle* is three-sided Polygon with given *length* (base), width (perpendicular distance from base to apex), and offset of this perpendicular at the base from the center of the base.

## **General Types**

Polygon

## **Features**

apex [2] {subsets vertices, ordered}

base {subsets edges}

e2 {subsets edges}

e3 {subsets edges}

edges [3] {redefines edges}

length : LengthValue

v12 [2] {subsets vertices, ordered}

v31 [2] {subsets vertices, ordered}

vertices [6] {redefines vertices}

width : LengthValue

xoffset : LengthValue

## **Constraints**

None.

## **9.7.3.2.43 TriangularPrism**

## **Element**

ItemDefinition

## **Description**

A *TriangularPrism* is a *Polyhedron* with five sides, two triangular and the others quadrilateral.

## **General Types**

CuboidOrTriangularPrism

## **Features**

edges [18] {redefines edges}

faces [5] {redefines faces}

ff : Triangle {redefines ff}

rf : Triangle {redefines rf}

## Constraints

None.

# 9.8 Quantities and Units Domain Library

## 9.8.1 Quantities and Units Domain Library Overview

For any system model, a solid foundation for the representation of physical quantities, their units, scales, and quantity dimensions, as well as coordinate frames is essential. Quantity attributes are needed to specify many characteristics of a system of interest and its elements. The foundation should be a shareable resource that can be reused in models within and across projects as well as organizations in order to facilitate collaboration and model interoperability.

The Quantities and Units Domain Library defines reusable and extensible model elements for physical quantities, including vector and tensor quantities, quantity dimensions, measurement units, measurement scales, coordinate frames, coordinate transformations and vector spaces. The library also enables the specification of coherent systems of quantities and systems of units, as well as the operators and functions needed to support quantity arithmetic in expressions.

The most widely accepted, scrutinized, and globally used specification of quantities and units is captured and maintained in:

- the International System of Quantities (ISQ)
- the International System of Units (SI)

The ISQ and SI are formally standardized through the ISO/IEC 80000 series of standards. The top level concepts and semantics defined in this domain library are derived from and mapped to the concepts and semantics specified in [ISO 80000-1] and [VIM], as directly as possible, but staying at a generic level. This enables the representation of the ISQ and the SI, but also of any other system of quantities or system of units.

The data model specifies a precise representation of the relationships between quantities, units, scales, quantity dimensions, coordinate frames, coordinate transformations and vectors spaces. As a result, both robust automated conversion between quantity values expressed in compatible measurement units or scales is enabled, as well as static type and quantity dimension analysis of expressions and constraints.

This library further contains lower level packages that specify the actual quantities, units and scales as standardized in parts 3 to 13 of the ISO/IEC 80000 series as `SysML AttributeDefinitions` and `AttributeUsages`, that represent the complete ISQ and SI. These packages provide a broad common basis, that can be extended and tailored for use by particular communities of practice and industry sectors.

Apart from SI, the system of US Customary Units is still in wide industrial use, in particular in North America. The library therefore also contains a package of US Customary Units, as specified in [NIST SP-811], and including their relationships with ISQ quantities as well as the conversion factors to corresponding SI units.

## 9.8.2 Quantities

edges [18] {redefines edges}

faces [5] {redefines faces}

ff : Triangle {redefines ff}

rf : Triangle {redefines rf}

## Constraints

None.

# 9.8 Quantities and Units Domain Library

## 9.8.1 Quantities and Units Domain Library Overview

For any system model, a solid foundation for the representation of physical quantities, their units, scales, and quantity dimensions, as well as coordinate frames is essential. Quantity attributes are needed to specify many characteristics of a system of interest and its elements. The foundation should be a shareable resource that can be reused in models within and across projects as well as organizations in order to facilitate collaboration and model interoperability.

The Quantities and Units Domain Library defines reusable and extensible model elements for physical quantities, including vector and tensor quantities, quantity dimensions, measurement units, measurement scales, coordinate frames, coordinate transformations and vector spaces. The library also enables the specification of coherent systems of quantities and systems of units, as well as the operators and functions needed to support quantity arithmetic in expressions.

The most widely accepted, scrutinized, and globally used specification of quantities and units is captured and maintained in:

- the International System of Quantities (ISQ)
- the International System of Units (SI)

The ISQ and SI are formally standardized through the ISO/IEC 80000 series of standards. The top level concepts and semantics defined in this domain library are derived from and mapped to the concepts and semantics specified in [ISO 80000-1] and [VIM], as directly as possible, but staying at a generic level. This enables the representation of the ISQ and the SI, but also of any other system of quantities or system of units.

The data model specifies a precise representation of the relationships between quantities, units, scales, quantity dimensions, coordinate frames, coordinate transformations and vectors spaces. As a result, both robust automated conversion between quantity values expressed in compatible measurement units or scales is enabled, as well as static type and quantity dimension analysis of expressions and constraints.

This library further contains lower level packages that specify the actual quantities, units and scales as standardized in parts 3 to 13 of the ISO/IEC 80000 series as SysML AttributeDefinitions and AttributeUsages, that represent the complete ISQ and SI. These packages provide a broad common basis, that can be extended and tailored for use by particular communities of practice and industry sectors.

Apart from SI, the system of US Customary Units is still in wide industrial use, in particular in North America. The library therefore also contains a package of US Customary Units, as specified in [NIST SP-811], and including their relationships with ISQ quantities as well as the conversion factors to corresponding SI units.

## 9.8.2 Quantities

### 9.8.2.1 Quantities Overview

### 9.8.2.1 Quantities Overview

#### Taxonomy

The *Quantities* package defines the root elements to represent quantities and their values.

*TensorQuantityValue* (an *AttributeDefinition*) and *tensorQuantities* (an *AttributeUsage*) are defined to represent quantities at the most general level, and can represent any  $n^{\text{th}}$  order tensor quantity. Then, *VectorQuantityValue* and *vectorQuantities* are defined as order 1 specializations of the tensor quantity concepts, and finally, *ScalarQuantityValue* and *scalarQuantities* as order 0 specializations of the vector quantity concepts.

#### Quantity Values

A quantity value is defined as a tuple of:

- a sequence of one or more mathematical numbers (as *AttributeUsage num*),
- a measurement reference (as *AttributeUsage mRef*).

For a *ScalarQuantityValue*, the sequence of numbers collapses to one single number, and the measurement reference is typically a measurement unit or scale. For a *VectorQuantityValue*, there must be as many numbers as needed to define the magnitude and direction of the vector quantity, and a measurement reference that typically specifies a coordinate frame, e.g., a sequence of 3 numbers for the vector components in a standard orthonormal Cartesian 3D vector space with the same measurement unit on each of the axes. For a *TensorQuantityValue*, the measurement reference must establish a reference frame compliant with the full dimensionality of the tensor quantity involved.

**Note.** The specification of a quantity value as a tuple of its numerical value and a measurement reference has the big advantage that the type of a quantity value becomes independent from the choice of measurement reference. For example: a *power* expressed as 1.5 watt has the same type (*AttributeDefinition PowerValue*) as a *power* expressed as 1500 milliwatt. This is an improvement over SysML v1, where the choice of measurement unit or scale was embedded in the value property type.

#### Free versus Bound Quantities and Vector Spaces

A *TensorQuantityValue* can be defined with respect to a free vector space product or a bound vector space product. Similarly, a *VectorQuantityValue* can be defined with respect to a free or a bound vector space, and a *ScalarQuantityValue* with respect to a free or bound number line, which can be regarded as a one-dimensional vector space. In a free vector space, vectors can be added and vectors can be multiplied by a scalar number, where both operations yield a new free vector. Free vectors have only magnitude and direction. A bound vector space includes a particular choice of origin, and vectors in such a space can not be added nor multiplied by scalars. *AttributeUsage isBound* is used to capture this: *false* specifies a free vector space (product), and *true* specifies a bound vector space (product).

Examples that (informally) illustrate the distinction between free and bound vector quantities are given by pairs of quantities of the same quantity dimension:

1. *Displacement vector (free) and position vector (bound), both of quantity dimension length.*

Two displacement vectors can be added and yield a resulting displacement vector. A displacement vector can also be multiplied with a scalar factor, which changes only its magnitude. Two position vectors can not be added, nor can a position vector be multiplied by a scalar number. A position vector is always bound to the origin of its bound vector space. One can however subtract one position vector from another, and the result is a displacement vector. It is the displacement to get from the position defined by the first vector to that defined by the second vector.

## Taxonomy

The *Quantities* package defines the root elements to represent quantities and their values.

*TensorQuantityValue* (an `AttributeDefinition`) and *tensorQuantities* (an `AttributeUsage`) are defined to represent quantities at the most general level, and can represent any  $n^{\text{th}}$  order tensor quantity. Then, *VectorQuantityValue* and *vectorQuantities* are defined as order 1 specializations of the tensor quantity concepts, and finally, *ScalarQuantityValue* and *scalarQuantities* as order 0 specializations of the vector quantity concepts.

## Quantity Values

A quantity value is defined as a tuple of:

- a sequence of one or more mathematical numbers (as `AttributeUsage num`),
- a measurement reference (as `AttributeUsage mRef`).

For a *ScalarQuantityValue*, the sequence of numbers collapses to one single number, and the measurement reference is typically a measurement unit or scale. For a *VectorQuantityValue*, there must be as many numbers as needed to define the magnitude and direction of the vector quantity, and a measurement reference that typically specifies a coordinate frame, e.g., a sequence of 3 numbers for the vector components in a standard orthonormal Cartesian 3D vector space with the same measurement unit on each of the axes. For a *TensorQuantityValue*, the measurement reference must establish a reference frame compliant with the full dimensionality of the tensor quantity involved.

**Note.** The specification of a quantity value as a tuple of its numerical value and a measurement reference has the big advantage that the type of a quantity value becomes independent from the choice of measurement reference. For example: a *power* expressed as 1.5 watt has the same type (`AttributeDefinition PowerValue`) as a *power* expressed as 1500 milliwatt. This is an improvement over SysML v1, where the choice of measurement unit or scale was embedded in the value property type.

## Free versus Bound Quantities and Vector Spaces

A *TensorQuantityValue* can be defined with respect to a free vector space product or a bound vector space product. Similarly, a *VectorQuantityValue* can be defined with respect to a free or a bound vector space, and a *ScalarQuantityValue* with respect to a free or bound number line, which can be regarded as a one-dimensional vector space. In a free vector space, vectors can be added and vectors can be multiplied by a scalar number, where both operations yield a new free vector. Free vectors have only magnitude and direction. A bound vector space includes a particular choice of origin, and vectors in such a space can not be added nor multiplied by scalars. `AttributeUsage isBound` is used to capture this: `false` specifies a free vector space (product), and `true` specifies a bound vector space (product).

Examples that (informally) illustrate the distinction between free and bound vector quantities are given by pairs of quantities of the same quantity dimension:

1. *Displacement vector (free) and position vector (bound), both of quantity dimension length.*  
Two displacement vectors can be added and yield a resulting displacement vector. A displacement vector can also be multiplied with a scalar factor, which changes only its magnitude. Two position vectors can not be added, nor can a position vector be multiplied by a scalar number. A position vector is always bound to the origin of its bound vector space. One can however subtract one position vector from another, and the result is a displacement vector. It is the displacement to get from the position defined by the first vector to that defined by the second vector.
2. *Duration (free scalar) and time instant (bound scalar), both of quantity dimension time.*  
Durations can be added and multiplied, time instants cannot. Time instant values can only be specified

2. *Duration (free scalar) and time instant (bound scalar), both of quantity dimension time.*

Durations can be added and multiplied, time instants cannot. Time instant values can only be specified with respect to a measurement reference that is a time scale with some particular choice of zero. Such a time scale is the same as a (time) coordinate axis in a one-dimensional bound vector space.

### 9.8.2.2 Elements

#### 9.8.2.2.1 3dVectorQuantityValue

##### Element

AttributeDefinition

##### Description

Most general representation of real 3-vector quantities.

Alias: *ThreeDVectorQuantityValue*

##### General Types

VectorQuantityValue

##### Features

num : Real [3] {redefines num}

##### Constraints

None.

#### 9.8.2.2.2 QuantityDimension

##### Element

AttributeDefinition

##### Description

A *QuantityDimension* is the product of powers of the set of base quantities defined for a particular system of quantities, units and scales.

##### General Types

None.

##### Features

quantityPowerFactors : QuantityPowerFactor [0..\*] {ordered}

##### Constraints

None.

with respect to a measurement reference that is a time scale with some particular choice of zero. Such a time scale is the same as a (time) coordinate axis in a one-dimensional bound vector space.

### 9.8.2.2 Elements

#### 9.8.2.2.1 3dVectorQuantityValue

##### Element

AttributeDefinition

##### Description

Most general representation of real 3-vector quantities.

Alias: *ThreeDVectorQuantityValue*

##### General Types

VectorQuantityValue

##### Features

num : Real [3] {redefines num}

##### Constraints

None.

#### 9.8.2.2.2 QuantityDimension

##### Element

AttributeDefinition

##### Description

A *QuantityDimension* is the product of powers of the set of base quantities defined for a particular system of quantities, units and scales.

##### General Types

None.

##### Features

quantityPowerFactors : QuantityPowerFactor [0..\*] {ordered}

##### Constraints

None.

#### 9.8.2.2.3 QuantityPowerFactor

##### Element

AttributeDefinition

### **9.8.2.2.3 QuantityPowerFactor**

#### **Element**

AttributeDefinition

#### **Description**

A *QuantityPowerFactor* is a representation of a quantity power factor, being the combination of a quantity and an exponent.

A sequence of *QuantityPowerFactors* for the *baseQuantities* of a *SystemOfQuantities* define the *QuantityDimension* of a scalar quantity.

#### **General Types**

None.

#### **Features**

exponent : Real

quantity : ScalarQuantityValue

#### **Constraints**

None.

### **9.8.2.2.4 scalarQuantities**

#### **Element**

AttributeUsage

#### **Description**

AttributeUsage *scalarQuantities* : *ScalarQuantityValue*[\*] *nonunique* is the subset of *vectorQuantities* that defines a top-level general self-standing attribute that can be used to consistently specify scalar quantities of *Occurrences*.

Any particular scalar quantity attribute is specified by subsetting *scalarQuantities*. In other words, the co-domain of a scalar quantity attribute is a suitable specialization of *ScalarQuantityValue*.

#### **General Types**

ScalarQuantityValue

vectorQuantities

#### **Features**

None.

#### **Constraints**

## Description

A *QuantityPowerFactor* is a representation of a quantity power factor, being the combination of a quantity and an exponent.

A sequence of *QuantityPowerFactors* for the *baseQuantities* of a *SystemOfQuantities* define the *QuantityDimension* of a scalar quantity.

## General Types

None.

## Features

exponent : Real

quantity : ScalarQuantityValue

## Constraints

None.

## 9.8.2.2.4 scalarQuantities

### Element

AttributeUsage

### Description

AttributeUsage *scalarQuantities* : *ScalarQuantityValue*[\*] *nonunique* is the subset of *vectorQuantities* that defines a top-level general self-standing attribute that can be used to consistently specify scalar quantities of *Occurrences*.

Any particular scalar quantity attribute is specified by subsetting *scalarQuantities*. In other words, the co-domain of a scalar quantity attribute is a suitable specialization of *ScalarQuantityValue*.

## General Types

ScalarQuantityValue

vectorQuantities

## Features

None.

## Constraints

None.

## 9.8.2.2.5 ScalarQuantityValue

### Element

AttributeDefinition

None.

### 9.8.2.2.5 ScalarQuantityValue

#### Element

AttributeDefinition

#### Description

A *ScalarQuantityValue* is an abstract *AttributeDefinition* that specializes *VectorQuantityValue*. It represents a scalar quantity value as a tuple of a *Number num* and a *ScalarMeasurementReference mRef*. By definition it has *order zero*. The *ScalarMeasurementReference* is typically a *MeasurementUnit* or a *MeasurementScale*.

#### General Types

NumericalValue

VectorQuantityValue

#### Features

mRef : ScalarMeasurementReference {redefines mRef}

Specification of the *ScalarMeasurementReference* for the value of the scalar quantity.

#### Constraints

oneElement

dimensions[1] == 1

### 9.8.2.2.6 SystemOfQuantities

#### Element

AttributeDefinition

#### Description

A *SystemOfQuantities* represents the essentials of [VIM] concept "system of quantities" (<https://jcgm.bipm.org/vim/en/1.3.html>), defined as a "set of quantities together with a set of noncontradictory equations relating those quantities". In order to establish such a set of noncontradictory equations a set of *baseQuantities* is selected. Subsequently the system of quantities is completed by adding derived quantities which are products of powers of the base quantities.

#### General Types

None.

#### Features

baseQuantities : ScalarQuantityValue [0..\*] {ordered}

## Description

A *ScalarQuantityValue* is an abstract *AttributeDefinition* that specializes *VectorQuantityValue*. It represents a scalar quantity value as a tuple of a *Number num* and a *ScalarMeasurementReference mRef*. By definition it has *order zero*. The *ScalarMeasurementReference* is typically a *MeasurementUnit* or a *MeasurementScale*.

## General Types

NumericalValue

VectorQuantityValue

## Features

mRef : ScalarMeasurementReference {redefines mRef}

Specification of the *ScalarMeasurementReference* for the value of the scalar quantity.

## Constraints

oneElement

dimensions [1] == 1

## 9.8.2.2.6 SystemOfQuantities

### Element

AttributeDefinition

## Description

A *SystemOfQuantities* represents the essentials of [VIM] concept "system of quantities" (<https://jcgm.bipm.org/vim/en/1.3.html>), defined as a "set of quantities together with a set of noncontradictory equations relating those quantities". In order to establish such a set of noncontradictory equations a set of *baseQuantities* is selected. Subsequently the system of quantities is completed by adding derived quantities which are products of powers of the base quantities.

## General Types

None.

## Features

baseQuantities : ScalarQuantityValue [0..\*] {ordered}

## Constraints

None.

## 9.8.2.2.7 tensorQuantities

### Element

AttributeUsage

## Constraints

None.

### 9.8.2.2.7 tensorQuantities

#### Element

AttributeUsage

#### Description

AttributeUsage *tensorQuantities* : *TensorQuantityValue*[\*] *nonunique* defines a top-level general self-standing attribute that can be used to consistently specify quantities of *Occurrences*.

Any particular tensor quantity attribute is specified by subsetting *tensorQuantities*. In other words, the co-domain of a tensor quantity attribute is a suitable specialization of *TensorQuantityValue*.

#### General Types

*dataValues*

*TensorQuantityValue*

#### Features

None.

#### Constraints

None.

### 9.8.2.2.8 TensorQuantityValue

#### Element

AttributeDefinition

#### Description

A *TensorQuantityValue* is an abstract *AttributeDefinition* and a specialization of *Collections::Array* that represents a tensor quantity value as a sequence of Numbers and a *TensorMeasurementReference*.

The dimensionality of the tensor quantity is specified in *dimensions*, from which the *order* of the tensor is derived. In engineering the name 'tensor' is typically used if its order is 2 or greater, but mathematically a tensor can have order 0 or 1.

A *TensorQuantityValue* must have the same *dimensions* and *order* as the *TensorMeasurementReference* that it references via AttributeUsage *mRef*.

It is possible to specify the contravariant and covariant order of a tensor quantity through the AttributeUsages *contravariantOrder* and *covariantOrder*, the sum of which must be equal to *order*. In applications where it is not important to distinguish between contravariant and covariant tensors (or vectors), the convention is to use contravariant by default and therefore set *contravariantOrder* equal to *order*, and *covariantOrder* equal to zero.

## Description

AttributeUsage *tensorQuantities* : *TensorQuantityValue*[\*] *nonunique* defines a top-level general self-standing attribute that can be used to consistently specify quantities of *Occurrences*.

Any particular tensor quantity attribute is specified by subsetting *tensorQuantities*. In other words, the co-domain of a tensor quantity attribute is a suitable specialization of *TensorQuantityValue*.

## General Types

*dataValues*

*TensorQuantityValue*

## Features

None.

## Constraints

None.

## 9.8.2.2.8 *TensorQuantityValue*

### Element

*AttributeDefinition*

### Description

A *TensorQuantityValue* is an abstract *AttributeDefinition* and a specialization of *Collections::Array* that represents a tensor quantity value as a sequence of Numbers and a *TensorMeasurementReference*.

The dimensionality of the tensor quantity is specified in *dimensions*, from which the *order* of the tensor is derived. In engineering the name 'tensor' is typically used if its order is 2 or greater, but mathematically a tensor can have order 0 or 1.

A *TensorQuantityValue* must have the same *dimensions* and *order* as the *TensorMeasurementReference* that it references via AttributeUsage *mRef*.

It is possible to specify the contravariant and covariant order of a tensor quantity through the AttributeUsages *contravariantOrder* and *covariantOrder*, the sum of which must be equal to *order*. In applications where it is not important to distinguish between contravariant and covariant tensors (or vectors), the convention is to use contravariant by default and therefore set *contravariantOrder* equal to *order*, and *covariantOrder* equal to zero.

## General Types

*Array*

## Features

*contravariantOrder* : Positive

The number of contravariant indices of the tensor quantity.

## General Types

Array

### Features

contravariantOrder : Positive

The number of contravariant indices of the tensor quantity.

covariantOrder : Positive

The number of covariant indices of the tensor quantity.

dimensions : Positive [0..\*] {redefines dimensions, ordered, nonunique}

A sequence of positive integer numbers that define the dimensionality of the tensor quantity.

Examples: for a second order 3D tensor `dimensions = (3, 3)`; for fourth order 2D tensor `dimensions = (2, 2, 2, 2)`;

The `dimensions` must be the same as the `dimensions` of the associated `mRef`.

isBound : Boolean

Assertion whether this tensor quantity is defined in a free (`isBound == false`) or bound (`isBound == true`) vector space product.

`mRef` : TensorMeasurementReference

Specification of the `TensorMeasurementReference` for the value of the tensor quantity.

num : Number [1..\*] {redefines elements, ordered, nonunique}

Sequence of numbers that specify the numerical value of the tensor quantity.

order : Natural {redefines rank}

Order of the tensor quantity. The `order` is equal to the `order` of the associated `TensorMeasurementReference mRef`.

## Constraints

boundMatch

```
(isBound == mRef.isBound) or (not isBound and mRef.isBound)
```

orderSum

```
contravariantOrder + covariantOrder == order
```

### 9.8.2.2.9 vectorQuantities

#### Element

covariantOrder : Positive

The number of covariant indices of the tensor quantity.

dimensions : Positive [0..\*] {redefines dimensions, ordered, nonunique}

A sequence of positive integer numbers that define the dimensionality of the tensor quantity.

Examples: for a second order 3D tensor `dimensions = (3, 3)`; for fourth order 2D tensor `dimensions = (2, 2, 2, 2)`;

The `dimensions` must be the same as the `dimensions` of the associated `mRef`.

isBound : Boolean

Assertion whether this tensor quantity is defined in a free (`isBound == false`) or bound (`isBound == true`) vector space product.

mRef : TensorMeasurementReference

Specification of the `TensorMeasurementReference` for the value of the tensor quantity.

num : Number [1..\*] {redefines elements, ordered, nonunique}

Sequence of numbers that specify the numerical value of the tensor quantity.

order : Natural {redefines rank}

Order of the tensor quantity. The `order` is equal to the `order` of the associated `TensorMeasurementReference mRef`.

## Constraints

boundMatch

`(isBound == mRef.isBound) or (not isBound and mRef.isBound)`

orderSum

`contravariantOrder + covariantOrder == order`

## 9.8.2.9 vectorQuantities

### Element

AttributeUsage

### Description

`AttributeUsage vectorQuantities : VectorQuantityValue[*] nonunique` is the subset of `tensorQuantities` that defines a top-level general self-standing attribute that can be used to consistently specify vector quantities of `Occurrences`.

Any particular vector quantity attribute is specified by subsetting `vectorQuantities`. In other words, the co-domain of a vector quantity attribute is a suitable specialization of `VectorQuantityValue`.

### General Types

## AttributeUsage

### Description

`AttributeUsage vectorQuantities : VectorQuantityValue[*] nonunique` is the subset of `tensorQuantities` that defines a top-level general self-standing attribute that can be used to consistently specify vector quantities of `Occurrences`.

Any particular vector quantity attribute is specified by subsetting `vectorQuantities`. In other words, the co-domain of a vector quantity attribute is a suitable specialization of `VectorQuantityValue`.

### General Types

`tensorQuantities`

`VectorQuantityValue`

### Features

None.

### Constraints

None.

## 9.8.2.2.10 VectorQuantityValue

### Element

`AttributeDefinition`

### Description

A `VectorQuantityValue` is an `AttributeDefinition` that represents the value of a vector quantity by a tuple of `Numbers` and a `VectorMeasurementReference`. It is a specialization of `TensorQuantityValue` and has order one.

A `VectorQuantityValue` can be free (`isBound == false`) or bound (`isBound == true`). A value of a free vector quantity is expressed using a free `VectorMeasurementReference`, in which there is no particular choice of zero or origin. A value of a bound vector quantity is expressed using a bound `VectorMeasurementReference` that includes a specified choice of origin. In both cases the `VectorMeasurementReference` typically defines a coordinate system.

### General Types

`NumericalVectorValue`

`TensorQuantityValue`

### Features

`mRef : VectorMeasurementReference {redefines mRef}`

Specification of the `VectorMeasurementReference` for the value of the vector quantity.

tensorQuantities

VectorQuantityValue

## Features

None.

## Constraints

None.

### 9.8.2.2.10 VectorQuantityValue

#### Element

AttributeDefinition

#### Description

A *VectorQuantityValue* is an *AttributeDefinition* that represents the value of a vector quantity by a tuple of *Numbers* and a *VectorMeasurementReference*. It is a specialization of *TensorQuantityValue* and has order one.

A *VectorQuantityValue* can be free (*isBound == false*) or bound (*isBound == true*). A value of a free vector quantity is expressed using a free *VectorMeasurementReference*, in which there is no particular choice of zero or origin. A value of a bound vector quantity is expressed using a bound *VectorMeasurementReference* that includes a specified choice of origin. In both cases the *VectorMeasurementReference* typically defines a coordinate system.

#### General Types

NumericalVectorValue

TensorQuantityValue

#### Features

mRef : VectorMeasurementReference {redefines mRef}

Specification of the *VectorMeasurementReference* for the value of the vector quantity.

#### Constraints

[no name]

order == 1

## 9.8.3 Measurement References

### 9.8.3.1 Measurement References Overview

This package defines the general *AttributeDefinitions* and *AttributeUsages* to construct measurement references. This includes:

- measurement units,
- ordinal, logarithmic and cyclic measurement scales,

## Constraints

[no name]

order == 1

## 9.8.3 Measurement References

### 9.8.3.1 Measurement References Overview

This package defines the general `AttributeDefinitions` and `AttributeUsages` to construct measurement references. This includes:

- measurement units,
- ordinal, logarithmic and cyclic measurement scales,
- unit conversions,
- coordinate frames and coordinate transformations,
- measurement unit prefixes to denote multiples (such as *mega*) and sub-multiples (such as *nano*).

It also defines concepts to represent quantity dimensions, which form the basis for dimensional analysis of quantity expressions.

### 9.8.3.2 Elements

#### 9.8.3.2.1 3dCoordinateFrame

##### Element

AttributeDefinition

##### Description

##### General Types

CoordinateFrame

##### Features

dimensions : Positive {redefines dimensions}

##### Constraints

None.

#### 9.8.3.2.2 AffineTransformationMatrix3d

##### Element

AttributeDefinition

##### Description

`AffineTransformationMatrix3d` is a three dimensional `CoordinateTransformation` specified via an affine 4x4 transformation matrix

The interpretation of the matrix is as follows:

- unit conversions,
- coordinate frames and coordinate transformations,
- measurement unit prefixes to denote multiples (such as *mega*) and sub-multiples (such as *nano*).

It also defines concepts to represent quantity dimensions, which form the basis for dimensional analysis of quantity expressions.

### **9.8.3.2 Elements**

#### **9.8.3.2.1 3dCoordinateFrame**

##### **Element**

AttributeDefinition

##### **Description**

##### **General Types**

CoordinateFrame

##### **Features**

dimensions : Positive {redefines dimensions}

##### **Constraints**

None.

#### **9.8.3.2.2 AffineTransformationMatrix3d**

##### **Element**

AttributeDefinition

##### **Description**

*AffineTransformationMatrix3d* is a three dimensional *CoordinateTransformation* specified via an affine 4x4 transformation matrix

The interpretation of the matrix is as follows:

- The upper left 3x3 matrix represents the rotation matrix.
- The upper right 3x1 column vector represents the translation vector.
- The bottom row must be the row vector (0, 0, 0, 1).

I.e. the matrix has the following form:

```
(R, R, R, T,
 R, R, R, T,
 R, R, R, T,
 0, 0, 0, 1)
```

where the cells marked R form the rotation matrix and the cells marked T form the translation vector.

**Note:** See [https://en.wikipedia.org/wiki/Transformation\\_matrix](https://en.wikipedia.org/wiki/Transformation_matrix), under affine transformations for a general explanation.

- The upper left 3x3 matrix represents the rotation matrix.
- The upper right 3x1 column vector represents the translation vector.
- The bottom row must be the row vector (0, 0, 0, 1).

I.e. the matrix has the following form:

```
(R, R, R, T,
 R, R, R, T,
 R, R, R, T,
 0, 0, 0, 1)
```

where the cells marked R form the rotation matrix and the cells marked T form the translation vector.

**Note:** See [https://en.wikipedia.org/wiki/Transformation\\_matrix](https://en.wikipedia.org/wiki/Transformation_matrix), under affine transformations for a general explanation.

## General Types

Array

CoordinateTransformation

## Features

dimensions : Positive [0..\*] {redefines dimensions, ordered, nonunique}

The *dimensions* of an *AffineTransformMatrix3d* are (4,4).

elements : Real [16] {redefines elements, ordered, nonunique}

## Constraints

validSourceDimensions

```
source.dimensions == 3
```

### 9.8.3.2.3 ConversionByConvention

#### Element

AttributeDefinition

#### Description

*ConversionByConvention* is a *UnitConversion* that is defined according to some convention.

An example is the conversion relationship between "foot" (the owning *MeasurementUnit*) and "metre" (the *referenceUnit MeasurementUnit*), with *conversionFactor* 3048/10000, since 1 foot = 0.3048 metre, as defined in [NIST SP-811].

## General Types

UnitConversion

## Features

## General Types

Array

CoordinateTransformation

## Features

dimensions : Positive [0..\*] {redefines dimensions, ordered, nonunique}

The *dimensions* of an *AffineTransformMatrix3d* are (4, 4).

elements : Real [16] {redefines elements, ordered, nonunique}

## Constraints

validSourceDimensions

```
source.dimensions == 3
```

### 9.8.3.2.3 ConversionByConvention

#### Element

AttributeDefinition

#### Description

*ConversionByConvention* is a *UnitConversion* that is defined according to some convention.

An example is the conversion relationship between "foot" (the owning *MeasurementUnit*) and "metre" (the *referenceUnit MeasurementUnit*), with *conversionFactor* 3048/10000, since 1 foot = 0.3048 metre, as defined in [NIST SP-811].

## General Types

UnitConversion

## Features

None.

## Constraints

None.

### 9.8.3.2.4 ConversionByPrefix

#### Element

AttributeDefinition

#### Description

*ConversionByPrefix* is a *UnitConversion* that is defined through reference to a named [ISO/IEC 80000-1] *UnitPrefix*, which represents a conversion factor that is a decimal or binary multiple or sub-multiple.

None.

### Constraints

None.

#### 9.8.3.2.4 ConversionByPrefix

##### Element

AttributeDefinition

##### Description

*ConversionByPrefix* is a *UnitConversion* that is defined through reference to a named [ISO/IEC 80000-1] *UnitPrefix*, which represents a conversion factor that is a decimal or binary multiple or sub-multiple.

Example 1: "kilometre" (*symbol* "km") with the 'kilo' *UnitPrefix* denoting conversion factor 1000 and *referenceUnit* "metre".

Example 2: "nanofarad" (*symbol* "nF") with the 'nano' *UnitPrefix* denoting conversion factor 1E-9 and *referenceUnit* "farad".

Example 3: "mebibyte" (*symbol* "MiB" or alias "MiByte") with the 'mebi' *UnitPrefix* denoting conversion factor 1024^2 (a binary multiple) and *referenceUnit* "byte".

See also *SIPrefixes*.

##### General Types

UnitConversion

##### Features

conversionFactor : Real {redefines conversionFactor}

The *Number* value of the ratio between the quantity expressed in the owning *MeasurementUnit* over the quantity expressed in the *referenceUnit*.

prefix : UnitPrefix

A *UnitPrefix* that represents one of the named unit prefixes defined in [ISO/IEC 80000-1] as a decimal or binary multiple or sub-multiple.

##### Constraints

None.

#### 9.8.3.2.5 CoordinateFrame

##### Element

AttributeDefinition

##### Description

Example 1: "kilometre" (*symbol* "km") with the 'kilo' *UnitPrefix* denoting conversion factor 1000 and *referenceUnit* "metre".

Example 2: "nanofarad" (*symbol* "nF") with the 'nano' *UnitPrefix* denoting conversion factor 1E-9 and *referenceUnit* "farad".

Example 3: "mebibyte" (*symbol* "MiB" or alias "MiByte") with the 'mebi' *UnitPrefix* denoting conversion factor 1024^2 (a binary multiple) and *referenceUnit* "byte".

See also *SIPrefixes*.

## General Types

UnitConversion

### Features

conversionFactor : Real {redefines conversionFactor}

The *Number* value of the ratio between the quantity expressed in the owning *MeasurementUnit* over the quantity expressed in the *referenceUnit*.

prefix : UnitPrefix

A *UnitPrefix* that represents one of the named unit prefixes defined in [ISO/IEC 80000-1] as a decimal or binary multiple or sub-multiple.

### Constraints

None.

## 9.8.3.2.5 CoordinateFrame

### Element

AttributeDefinition

### Description

A *CoordinateFrame* is a *VectorMeasurementReference* with the specific purpose to quantify (i.e., coordinatize) a vector space, and optionally locate and orient it with respect to another *CoordinateFrame*.

The optional attribute *transformation* enables specification of the location and orientation of this *CoordinateFrame* as with respect to another (reference) *CoordinateFrame*. If the *target* of the *transformation* is this *CoordinateFrame*, the *transformation* specifies a *CoordinateFrame* that is nested inside the *CoordinateFrame* that is the *source* of the *transformation*. The primary use of this is to specify a chain of nested coordinate frames follows the composite structure of a physical architecture. Typically the *source CoordinateFrame* of the *transformation* is the frame is the frame of the next higher containing *Item* or *Part* in a composite structure.

## General Types

VectorMeasurementReference

### Features

A *CoordinateFrame* is a *VectorMeasurementReference* with the specific purpose to quantify (i.e., coordinatize) a vector space, and optionally locate and orient it with respect to another *CoordinateFrame*.

The optional attribute *transformation* enables specification of the location and orientation of this *CoordinateFrame* as with respect to another (reference) *CoordinateFrame*. If the *target* of the *transformation* is this *CoordinateFrame*, the *transformation* specifies a *CoordinateFrame* that is nested inside the *CoordinateFrame* that is the *source* of the *transformation*. The primary use of this is to specify a chain of nested coordinate frames follows the composite structure of a physical architecture. Typically the *source CoordinateFrame* of the *transformation* is the frame is the frame of the next higher containing *Item* or *Part* in a composite structure.

## General Types

*VectorMeasurementReference*

## Features

*transformation* : *CoordinateTransformation* [0..1]

## Constraints

None.

### 9.8.3.2.6 CoordinateFramePlacement

## Element

*AttributeDefinition*

## Description

*CoordinateFramePlacement* is a *CoordinateTransformation* by placement of the target frame in the source frame. Attribute *origin* specifies the location of the origin of the target frame through a vector in the source frame. Attribute *basisDirections* specifies the orientation of the *target* frame by specifying the directions of the respective basis vectors of the *target* frame via direction vectors in the *source* frame. An empty sequence of *basisDirections* signifies no change of orientation of the *target* frame with respect to the *source* frame.

## General Types

*CoordinateTransformation*

## Features

*basisDirections* : *VectorQuantityValue* [0..\*] {ordered, nonunique}

*origin* : *VectorQuantityValue*

## Constraints

*validBasisDirectionsDimensions*

```
basisDirections->forAll { in basisDirection : VectorQuantityValue;
 basisDirection.dimensions->equals(source.dimensions)}
```

*validBasisDirectionsSize*

transformation : CoordinateTransformation [0..1]

### Constraints

None.

## 9.8.3.2.6 CoordinateFramePlacement

### Element

AttributeDefinition

### Description

*CoordinateFramePlacement* is a *CoordinateTransformation* by placement of the target frame in the source frame. Attribute *origin* specifies the location of the origin of the target frame through a vector in the source frame. Attribute *basisDirections* specifies the orientation of the *target* frame by specifying the directions of the respective basis vectors of the *target* frame via direction vectors in the *source* frame. An empty sequence of *basisDirections* signifies no change of orientation of the *target* frame with respect to the *source* frame.

### General Types

CoordinateTransformation

### Features

basisDirections : VectorQuantityValue [0..\*] {ordered, nonunique}

origin : VectorQuantityValue

### Constraints

validBasisDirectionsDimensions

```
basisDirections->forAll { in basisDirection : VectorQuantityValue;
 basisDirection.dimensions->equals(source.dimensions)}
```

validBasisDirectionsSize

```
size(basisDirections) == 0 or size(basisDirections) == source.dimensions#(1)
```

validOriginDimensions

```
origin.dimensions == source.dimensions
```

## 9.8.3.2.7 CoordinateTransformation

### Element

AttributeDefinition

### Description

A *CoordinateTransformation* is an *AttributeDefinition* that defines the transformation relationship between two coordinate systems, that are represented by *VectorMeasurementReferences*, typically *CoordinateFrames*.

```
size(basisDirections) == 0 or size(basisDirections) == source.dimensions#(1)

validOriginDimensions

origin.dimensions == source.dimensions
```

### 9.8.3.2.7 CoordinateTransformation

#### Element

AttributeDefinition

#### Description

A *CoordinateTransformation* is an AttributeDefinition that defines the transformation relationship between two coordinate systems, that are represented by *VectorMeasurementReferences*, typically *CoordinateFrames*.

#### General Types

None.

#### Features

source : VectorMeasurementReference

target : VectorMeasurementReference

#### Constraints

[no name]

forall(bd: basisDirections | bd.mRef == source)

[no name]

size(basisDirections) == source.dimensions[1]

[no name]

origin.mRef == source

validSourceTargetDimensions

source.dimensions == target.dimensions

### 9.8.3.2.8 countQuantities

#### Element

AttributeUsage

#### Description

#### General Types

## **General Types**

None.

## **Features**

source : VectorMeasurementReference

target : VectorMeasurementReference

## **Constraints**

[no name]

forall(bd: basisDirections | bd.mRef == source)

[no name]

size(basisDirections) == source.dimensions[1]

[no name]

origin.mRef == source

validSourceTargetDimensions

source.dimensions == target.dimensions

## **9.8.3.2.8 countQuantities**

### **Element**

AttributeUsage

### **Description**

## **General Types**

dimensionOneQuantities

CountValue

## **Features**

None.

## **Constraints**

None.

## **9.8.3.2.9 CountValue**

### **Element**

AttributeDefinition

### **Description**

dimensionOneQuantities

CountValue

### Features

None.

### Constraints

None.

## 9.8.3.2.9 CountValue

### Element

AttributeDefinition

### Description

*CountValue* is an explicit definition of a generic "count" quantity as a *DimensionOneValue*.

### General Types

DimensionOneValue

### Features

None.

### Constraints

None.

## 9.8.3.2.10 CyclicRatioScale

### Element

AttributeDefinition

### Description

*CyclicRatioScale* is a *MeasurementScale* that represents a ratio scale with a periodic cycle.

Example 1: "cyclic degree" (to express planar angular measures) with *modulus* 360 and *unit* 'degree'.

Example 2: "hour of day" with *modulus* 24 and *unit* 'hour'.

### General Types

MeasurementScale

### Features

modulus : Number

*CountValue* is an explicit definition of a generic "count" quantity as a *DimensionOneValue*.

### General Types

DimensionOneValue

### Features

None.

### Constraints

None.

## 9.8.3.2.10 CyclicRatioScale

### Element

AttributeDefinition

### Description

*CyclicRatioScale* is a *MeasurementScale* that represents a ratio scale with a periodic cycle.

Example 1: "cyclic degree" (to express planar angular measures) with *modulus* 360 and *unit* 'degree'.

Example 2: "hour of day" with *modulus* 24 and *unit* 'hour'.

### General Types

MeasurementScale

### Features

*modulus* : Number

Attribute *modulus* is a Number that defines the modulus, i.e. periodic cycle, of this *CyclicRatioScale*.

### Constraints

None.

## 9.8.3.2.11 DefinitionalQuantityValue

### Element

AttributeDefinition

### Description

A *DefinitionalQuantityValue* is a representation of a particular quantity value that is used in the definition of a *MeasurementReference*. Typically such a particular value is defined by convention. It can be used to define a selected reference value, such as the meaning of zero on a measurement scale or the origin of a top-level coordinate system.

### General Types

Attribute `modulus` is a Number that defines the modulus, i.e. periodic cycle, of this CyclicRatioScale.

### Constraints

None.

## 9.8.3.2.11 DefinitionalQuantityValue

### Element

AttributeDefinition

### Description

A *DefinitionalQuantityValue* is a representation of a particular quantity value that is used in the definition of a *MeasurementReference*. Typically such a particular value is defined by convention. It can be used to define a selected reference value, such as the meaning of zero on a measurement scale or the origin of a top-level coordinate system.

### General Types

None.

### Features

definition : String

num : Number [1..\*]

### Constraints

None.

## 9.8.3.2.12 DerivedUnit

### Element

AttributeDefinition

### Description

*DerivedUnit* is a *MeasurementUnit* that represents a measurement unit that depends on one or more powers of other measurement units.

### General Types

MeasurementUnit

### Features

None.

### Constraints

None.

None.

#### **Features**

definition : String

num : Number [1..\*]

#### **Constraints**

None.

### **9.8.3.2.12 DerivedUnit**

#### **Element**

AttributeDefinition

#### **Description**

*DerivedUnit* is a *MeasurementUnit* that represents a measurement unit that depends on one or more powers of other measurement units.

#### **General Types**

MeasurementUnit

#### **Features**

None.

#### **Constraints**

None.

### **9.8.3.2.13 dimensionOneQuantities**

#### **Element**

AttributeUsage

#### **Description**

#### **General Types**

DimensionOneValue

scalarQuantities

#### **Features**

None.

#### **Constraints**

None.

### **9.8.3.2.13 dimensionOneQuantities**

#### **Element**

AttributeUsage

#### **Description**

##### **General Types**

DimensionOneValue

scalarQuantities

#### **Features**

None.

#### **Constraints**

None.

### **9.8.3.2.14 DimensionOneUnit**

#### **Element**

AttributeDefinition

#### **Description**

*DimensionOneUnit* is an explicit definition of "unit of dimension one", also known as "dimensionless unit".

##### **General Types**

DerivedUnit

#### **Features**

unitPowerFactors : UnitPowerFactor [0]

#### **Constraints**

None.

### **9.8.3.2.15 DimensionOneValue**

#### **Element**

AttributeDefinition

#### **Description**

A *DimensionOneValue* is a *ScalarQuantityValue* with a *DimensionOneUnit*.

##### **General Types**

### **9.8.3.2.14 DimensionOneUnit**

#### **Element**

AttributeDefinition

#### **Description**

*DimensionOneUnit* is an explicit definition of "unit of dimension one", also known as "dimensionless unit".

#### **General Types**

DerivedUnit

#### **Features**

unitPowerFactors : UnitPowerFactor [0]

#### **Constraints**

None.

### **9.8.3.2.15 DimensionOneValue**

#### **Element**

AttributeDefinition

#### **Description**

A *DimensionOneValue* is a *ScalarQuantityValue* with a *DimensionOneUnit*.

#### **General Types**

ScalarQuantityValue

#### **Features**

mRef : DimensionOneUnit {redefines mRef}

#### **Constraints**

None.

### **9.8.3.2.16 IntervalScale**

#### **Element**

AttributeDefinition

#### **Description**

*IntervalScale* is a *MeasurementScale* that represents a linear interval measurement scale, i.e. a scale on which only intervals between two values are meaningful and not their ratios.

## ScalarQuantityValue

### Features

mRef : DimensionOneUnit {redefines mRef}

### Constraints

None.

## 9.8.3.2.16 IntervalScale

### Element

AttributeDefinition

### Description

*IntervalScale* is a *MeasurementScale* that represents a linear interval measurement scale, i.e. a scale on which only intervals between two values are meaningful and not their ratios.

**Implementation note:** In order to enable quantity value conversion between an *IntervalScale* and another *MeasurementScale*, the offset (sometimes also called zero shift) between the source and target scales must be known. This offset can be indirectly defined through a *QuantityValueMapping*, see *quantityValueMapping* of *MeasurementScale*. This will be aligned with, and possibly replaced by, a 1D coordinate transformation, so that scalar and vector transformations are handled in the same way.

### General Types

MeasurementScale

### Features

isBound : Boolean {redefines isBound}

For an *IntervalScale* *isBound* is always true, since the scale must include a definition of what zero means.

### Constraints

None.

## 9.8.3.2.17 LogarithmicScale

### Element

AttributeDefinition

### Description

*LogarithmicScale* is a *MeasurementScale* that represents a logarithmic measurement scale that is defined as follows. The numeric value  $v$  of a ratio quantity expressed on a logarithmic scale equivalent with a value  $x$  of the same quantity expressed on a ratio scale (i.e. only using a *MeasurementUnit*) is computed as follows:

$$(v = f \cdot \log_b (x/x_{ref})^a)$$

**Implementation note:** In order to enable quantity value conversion between an *IntervalScale* and another *MeasurementScale*, the offset (sometimes also called zero shift) between the source and target scales must be known. This offset can be indirectly defined through a *QuantityValueMapping*, see *quantityValueMapping* of *MeasurementScale*. This will be aligned with, and possibly replaced by, a 1D coordinate transformation, so that scalar and vector transformations are handled in the same way.

## General Types

MeasurementScale

## Features

isBound : Boolean {redefines isBound}

For an *IntervalScale* *isBound* is always `true`, since the scale must include a definition of what zero means.

## Constraints

None.

### 9.8.3.2.17 LogarithmicScale

#### Element

AttributeDefinition

#### Description

*LogarithmicScale* is a *MeasurementScale* that represents a logarithmic measurement scale that is defined as follows. The numeric value  $v$  of a ratio quantity expressed on a logarithmic scale equivalent with a value  $x$  of the same quantity expressed on a ratio scale (i.e. only using a *MeasurementUnit*) is computed as follows:

$$v = f \cdot \log_b(x/x_{\text{ref}})^a$$

where:  $f$  is a multiplication factor,  $\log_b$  is the log function for the given logarithm base  $b$ ,  $x$  is the actual quantity,  $x_{\text{ref}}$  is a reference quantity,  $a$  is an exponent.

## General Types

MeasurementScale

## Features

exponent : Number

The exponent  $a$  in the logarithmic value expression.

factor : Number

The multiplication factor  $f$  in the logarithmic value expression.

logarithmBase : Number

A *Number* that specifies the logarithmic base.

The *logarithmBase* is typically 10, 2 or  $e$  (for the natural logarithm).

where:  $\backslash(f\backslash)$  is a multiplication factor,  $\backslash(\log_b\backslash)$  is the log function for the given logarithm base  $\backslash(b\backslash)$ ,  $\backslash(x\backslash)$  is the actual quantity,  $\backslash(x_{\{ref\}}\backslash)$  is a reference quantity,  $\backslash(a\backslash)$  is an exponent.

## General Types

MeasurementScale

### Features

exponent : Number

The exponent  $\backslash(a\backslash)$  in the logarithmic value expression.

factor : Number

The multiplication factor  $\backslash(f\backslash)$  in the logarithmic value expression.

logarithmBase : Number

A *Number* that specifies the logarithmic base.

The *logarithmicBase* is typically 10, 2 or  $e$  (for the natural logarithm).

referenceQuantity : ScalarQuantityValue [0..1]

The reference quantity value (denominator)  $\backslash(x_{\{ref\}}\backslash)$  in the logarithmic value expression.

### Constraints

None.

## 9.8.3.2.18 MeasurementScale

### Element

AttributeDefinition

### Description

*MeasurementScale* is a *MeasurementReference* that represents a measurement scale.

Note: the majority of scalar quantities can be expressed by just using a *MeasurementUnit* directly as its *MeasurementReference*. This implies expression of a *ScalarQuantityValue* on a ratio scale. However, for full coverage of all quantity value expressions, additional explicit measurement scales with additional semantics are needed, such as ordinal scale, interval scale, ratio scale with additional limit values, cyclic ratio scale and logarithmic scale.

## General Types

ScalarMeasurementReference

### Features

quantityValueMapping : QuantityValueMapping [0..1]

referenceQuantity : ScalarQuantityValue [0..1]

The reference quantity value (denominator)  $\langle x_{\{ref\}} \rangle$  in the logarithmic value expression.

### Constraints

None.

## 9.8.3.2.18 MeasurementScale

### Element

AttributeDefinition

### Description

*MeasurementScale* is a *MeasurementReference* that represents a measurement scale.

Note: the majority of scalar quantities can be expressed by just using a *MeasurementUnit* directly as its *MeasurementReference*. This implies expression of a *ScalarQuantityValue* on a ratio scale. However, for full coverage of all quantity value expressions, additional explicit measurement scales with additional semantics are needed, such as ordinal scale, interval scale, ratio scale with additional limit values, cyclic ratio scale and logarithmic scale.

### General Types

ScalarMeasurementReference

### Features

quantityValueMapping : QuantityValueMapping [0..1]

An optional *QuantityValueMapping* that specifies the relationship between this *MeasurementScale* and another *MeasurementReference* in terms of equivalent *QuantityValues*.

unit : MeasurementUnit

The *MeasurementUnit* that defines an interval of one on this *MeasurementScale*.

### Constraints

None.

## 9.8.3.2.19 MeasurementUnit

### Element

AttributeDefinition

### Description

A *MeasurementUnit* is a *ScalarMeasurementReference* that represents a measurement unit. As defined in [VIM] a measurement unit is a "real scalar quantity, defined and adopted by convention, with which any other quantity of the same kind can be compared to express the ratio of the two quantities as a number".

An optional *QuantityValueMapping* that specifies the relationship between this *MeasurementScale* and another *MeasurementReference* in terms of equivalent *QuantityValues*.

**unit : MeasurementUnit**

The *MeasurementUnit* that defines an interval of one on this *MeasurementScale*.

### Constraints

None.

#### 9.8.3.2.19 MeasurementUnit

##### Element

AttributeDefinition

##### Description

A *MeasurementUnit* is a *ScalarMeasurementReference* that represents a measurement unit. As defined in [VIM] a measurement unit is a "real scalar quantity, defined and adopted by convention, with which any other quantity of the same kind can be compared to express the ratio of the two quantities as a number".

Direct use of a *MeasurementUnit* as the *mRef* attribute of a *ScalarQuantityValue*, establishes expressing the *ScalarQuantityValue* on a ratio scale.

##### General Types

ScalarMeasurementReference

##### Features

**isBound : Boolean {redefines isBound}**

*isBound* is always *false* for a *MeasurementUnit*.

**unitConversion : UnitConversion [0..1]**

Optional *UnitConversion* that specifies a linear conversion relationship with respect to another *MeasurementUnit*. This can be used to support automated quantity value conversion.

**unitPowerFactors : UnitPowerFactor [1..\*] {ordered}**

A product of powers of base units, that define the quantity dimension of this measurement unit.

##### Constraints

None.

#### 9.8.3.2.20 NullTransformation

##### Element

AttributeDefinition

Direct use of a *MeasurementUnit* as the *mRef* attribute of a *ScalarQuantityValue*, establishes expressing the *ScalarQuantityValue* on a ratio scale.

### General Types

ScalarMeasurementReference

### Features

isBound : Boolean {redefines isBound}

*isBound* is always *false* for a *MeasurementUnit*.

unitConversion : UnitConversion [0..1]

Optional *UnitConversion* that specifies a linear conversion relationship with respect to another *MeasurementUnit*. This can be used to support automated quantity value conversion.

unitPowerFactors : UnitPowerFactor [1..\*] {ordered}

A product of powers of base units, that define the quantity dimension of this measurement unit.

### Constraints

None.

## 9.8.3.2.20 NullTransformation

### Element

AttributeDefinition

### Description

*NullTransformation* is an *AffineTransformMatrix3d* that places the target *CoordinateFrame* at the same position and orientation as the source *CoordinateFrame*.

The interpretation of the matrix is as follows:

- The rotation matrix is diagonal, with 1 as values.
- The translation vector is all zeros.

I.e. the matrix has the following form:

$$\begin{pmatrix} 1, & 0, & 0, & 0, \\ 0, & 1, & 0, & 0, \\ 0, & 0, & 1, & 0, \\ 0, & 0, & 0, & 1 \end{pmatrix}$$

### General Types

AffineTransformMatrix3d

### Features

None.

## Description

*NullTransformation* is an *AffineTransformMatrix3d* that places the target *CoordinateFrame* at the same position and orientation as the source *CoordinateFrame*.

The interpretation of the matrix is as follows:

- The rotation matrix is diagonal, with 1 as values.
- The translation vector is all zeros.

I.e. the matrix has the following form:

```
(1, 0, 0, 0,
 0, 1, 0, 0,
 0, 0, 1, 0,
 0, 0, 0, 1)
```

## General Types

*AffineTransformMatrix3d*

## Features

None.

## Constraints

None.

## 9.8.3.2.21 nullTransformation

### Element

*AttributeUsage*

## Description

## General Types

*NullTransformation*

## Features

None.

## Constraints

None.

## 9.8.3.2.22 one

### Element

*AttributeUsage*

## Description

**Constraints**

None.

**9.8.3.2.21 nullTransformation****Element**

AttributeUsage

**Description****General Types**

NullTransformation

**Features**

None.

**Constraints**

None.

**9.8.3.2.22 one****Element**

AttributeUsage

**Description****General Types**

DimensionOneUnit

**Features**

None.

**Constraints**

None.

**9.8.3.2.23 OrdinalScale****Element**

AttributeDefinition

**Description**

An *OrdinalScale* is a *MeasurementScale* that represents an ordinal measurement scale, i.e. a scale on which only the ordering of quantity values is meaningful, not the intervals between any pair of values and neither their ratio.

## General Types

DimensionOneUnit

## Features

None.

## Constraints

None.

### 9.8.3.2.23 OrdinalScale

#### Element

AttributeDefinition

#### Description

An *OrdinalScale* is a *MeasurementScale* that represents an ordinal measurement scale, i.e. a scale on which only the ordering of quantity values is meaningful, not the intervals between any pair of values and neither their ratio.

**Note:** In order to keep the library simple the associated *unit* of an *OrdinalScale* shall be set to the unit of dimension one, although a unit is meaningless for an *OrdinalScale*.

**Implementation note:** The *unit* attribute of *MeasurementScale* should be made optional, and its multiplicity be redefined in the specialization of *MeasurementScale*.

## General Types

MeasurementScale

## Features

None.

## Constraints

None.

### 9.8.3.2.24 QuantityValueMapping

#### Element

AttributeDefinition

#### Description

*QuantityValueMapping* is an *AttributeDefinition* that represents the mapping of equivalent quantity values expressed on two different measurement scales.

Example: The mapping between the temperature value of 0.01 degree Celsius on the celsius temperature scale to the equivalent temperature value of 273.16 K on the kelvin temperature scale, would specify a *mappedQuantityValue*

**Note:** In order to keep the library simple the associated `unit` of an `OrdinalScale` shall be set to the unit of dimension one, although a unit is meaningless for an `OrdinalScale`.

**Implementation note:** The `unit` attribute of `MeasurementScale` should be made optional, and its multiplicity be redefined in the specialization of `MeasurementScale`.

### General Types

`MeasurementScale`

### Features

None.

### Constraints

None.

## 9.8.3.2.24 QuantityValueMapping

### Element

`AttributeDefinition`

### Description

`QuantityValueMapping` is an `AttributeDefinition` that represents the mapping of equivalent quantity values expressed on two different measurement scales.

Example: The mapping between the temperature value of 0.01 degree Celsius on the celsius temperature scale to the equivalent temperature value of 273.16 K on the kelvin temperature scale, would specify a `mappedQuantityValue` referencing the `DefinitionalQuantityValue` (0.01, "absolute thermodynamic temperature of the triple point of water") of the celsius interval scale, and a `referenceQuantityValue` referencing the `DefinitionalQuantityValue` (273.16, "absolute thermodynamic temperature of the triple point of water") of the kelvin ratio scale.

### General Types

None.

### Features

`mappedQuantityValue` : `DefinitionalQuantityValue`

`referenceQuantityValue` : `DefinitionalQuantityValue`

### Constraints

None.

## 9.8.3.2.25 Rotation

### Element

`AttributeDefinition`

referencing the *DefinitionalQuantityValue* (0.01, "absolute thermodynamic temperature of the triple point of water") of the celsius interval scale, and a *referenceQuantityValue* referencing the *DefinitionalQuantityValue* (273.16, "absolute thermodynamic temperature of the triple point of water") of the kelvin ratio scale.

### General Types

None.

### Features

*mappedQuantityValue* : DefinitionalQuantityValue

*referenceQuantityValue* : DefinitionalQuantityValue

### Constraints

None.

## 9.8.3.2.25 Rotation

### Element

AttributeDefinition

### Description

Representation of a rotation about an axis over an angle.

Attribute *axisDirection* specifies the direction of the rotation axis. Attribute *angle* specifies the angle of rotation, where a positive value implies right-handed rotation. Attribute *isIntrinsic* asserts whether the intermediate coordinate frame moves with the rotation or not, i.e. whether an intrinsic or extrinsic rotation is specified.

See [https://en.wikipedia.org/wiki/Davenport\\_chained\\_rotations](https://en.wikipedia.org/wiki/Davenport_chained_rotations) for details.

### General Types

TranslationOrRotation

### Features

*angle* : AngularMeasureValue

*axisDirection* : VectorQuantityValue

*isIntrinsic* : Boolean

Default is *true*.

### Constraints

None.

## Description

Representation of a rotation about an axis over an angle.

Attribute *axisDirection* specifies the direction of the rotation axis. Attribute *angle* specifies the angle of rotation, where a positive value implies right-handed rotation. Attribute *isIntrinsic* asserts whether the intermediate coordinate frame moves with the rotation or not, i.e. whether an intrinsic or extrinsic rotation is specified.

See [https://en.wikipedia.org/wiki/Davenport\\_chained\\_rotations](https://en.wikipedia.org/wiki/Davenport_chained_rotations) for details.

## General Types

TranslationOrRotation

## Features

angle : AngularMeasureValue

axisDirection : VectorQuantityValue

isIntrinsic : Boolean

Default is *true*.

## Constraints

None.

## 9.8.3.2.26 ScalarMeasurementReference

### Element

AttributeDefinition

## Description

A *ScalarMeasurementReference* is a specialization of *VectorMeasurementReference*. It represents a single measurement reference for a *ScalarQuantityValue* or for a component of a tensor or vector quantity. Its *order* is zero. *ScalarMeasurementReference* is also a generalization of *MeasurementUnit* and *MeasurementScale*, which in turn can be regarded as the basis vector for respectively a free or bound scalar quantity. It establishes how to interpret the *num* numerical value of a *ScalarQuantityValue* or a component of a tensor or vector quantity value, and establishes its actual quantity dimension.

## General Types

VectorMeasurementReference

## Features

dimensions : Positive [0..1] {redefines dimensions, ordered, nonunique}

isOrthogonal : Boolean {redefines isOrthogonal}

A *ScalarMeasurementReference* always has *isOrthogonal* = *true*.

### **9.8.3.2.26 ScalarMeasurementReference**

#### **Element**

AttributeDefinition

#### **Description**

A *ScalarMeasurementReference* is a specialization of *VectorMeasurementReference*. It represents a single measurement reference for a *ScalarQuantityValue* or for a component of a tensor or vector quantity. Its *order* is zero. *ScalarMeasurementReference* is also a generalization of *MeasurementUnit* and *MeasurementScale*, which in turn can be regarded as the basis vector for respectively a free or bound scalar quantity. It establishes how to interpret the *num* numerical value of a *ScalarQuantityValue* or a component of a tensor or vector quantity value, and establishes its actual quantity dimension.

#### **General Types**

VectorMeasurementReference

#### **Features**

dimensions : Positive [0..1] {redefines dimensions, ordered, nonunique}

isOrthogonal : Boolean {redefines isOrthogonal}

A *ScalarMeasurementReference* always has *isOrthogonal* = true.

mRefs : ScalarMeasurementReference [1..\*] {redefines mRefs, ordered}

negativeValueConnotation : String [0..1]

Optionally specifies the connotation of negative quantity values for this *ScalarMeasurementReference*.

An example is "east" for positive values on the *MeasurementReference (CyclicRatioScale)* for "longitude" and "west" for negative values.

positiveValueConnotation : String [0..1]

Optionally specifies the connotation of positive quantity values for this *ScalarMeasurementReference*.

An example is "east" for positive values on the *MeasurementReference (CyclicRatioScale)* for "longitude" and "west" for negative values.

quantityDimension : QuantityDimension

#### **Constraints**

None.

### **9.8.3.2.27 SimpleUnit**

#### **Element**

AttributeDefinition

mRefs : ScalarMeasurementReference [1..\*] {redefines mRefs, ordered}

negativeValueConnotation : String [0..1]

Optionally specifies the connotation of negative quantity values for this *ScalarMeasurementReference*.

An example is "east" for positive values on the *MeasurementReference (CyclicRatioScale)* for "longitude" and "west" for negative values.

positiveValueConnotation : String [0..1]

Optionally specifies the connotation of positive quantity values for this *ScalarMeasurementReference*.

An example is "east" for positive values on the *MeasurementReference (CyclicRatioScale)* for "longitude" and "west" for negative values.

quantityDimension : QuantityDimension

### Constraints

None.

## 9.8.3.2.27 SimpleUnit

### Element

AttributeDefinition

### Description

*SimpleUnit* is a *MeasurementUnit* that does not depend on any other measurement unit.

Note: As a consequence the *unitPowerFactor* of a *SimpleUnit* references itself with an *exponent* of one.

### General Types

MeasurementUnit

### Features

unitPowerFactors : UnitPowerFactor {redefines unitPowerFactors}

### Constraints

exponentIsOne

this.unitPowerFactor1.exponent == 1

ExponentIsOne

self.unitPowerFactor.exponent = 1

## 9.8.3.2.28 SystemOfUnits

### Element

AttributeDefinition

## Description

*SimpleUnit* is a *MeasurementUnit* that does not depend on any other measurement unit.

Note: As a consequence the *unitPowerFactor* of a *SimpleUnit* references itself with an *exponent* of one.

## General Types

MeasurementUnit

## Features

unitPowerFactors : UnitPowerFactor {redefines unitPowerFactors}

## Constraints

exponentIsOne

```
this.unitPowerFactor1.exponent == 1
```

ExponentIsOne

```
self.unitPowerFactor.exponent = 1
```

## 9.8.3.2.28 SystemOfUnits

### Element

AttributeDefinition

## Description

A *SystemOfUnits* represents the essentials of [VIM] concept "system of units" (<https://jcgm.bipm.org/vim/en/1.13.html>), defined as a "set of base units and derived units, together with their multiples and submultiples, defined in accordance with given rules, for a given system of quantities". The *baseUnits* are a particular selection of measurement units for each of the base quantities of a *SystemOfQuantities*, that form the basis on top of which all other (derived) units are defined.

## General Types

None.

## Features

baseUnits : SimpleUnit [1..\*] {ordered}

longName : String

systemOfQuantities : SystemOfQuantities

## Constraints

None.

## Description

A *SystemOfUnits* represents the essentials of [VIM] concept "system of units" (<https://jcgm.bipm.org/vim/en/1.13.html>), defined as a "set of base units and derived units, together with their multiples and submultiples, defined in accordance with given rules, for a given system of quantities". The *baseUnits* are a particular selection of measurement units for each of the base quantities of a *SystemOfQuantities*, that form the basis on top of which all other (derived) units are defined.

## General Types

None.

## Features

baseUnits : SimpleUnit [1..\*] {ordered}

longName : String

systemOfQuantities : SystemOfQuantities

## Constraints

None.

## 9.8.3.2.29 TensorMeasurementReference

### Element

AttributeDefinition

## Description

A *TensorMeasurementReference* is an abstract *AttributeDefinition* and a specialization of *Collections::Array*, that represents the [VIM] concept *measurement reference*, but generalized for tensor, vector and scalar quantities.

[VIM] defines measurement reference as a measurement unit, a measurement procedure, a reference material, or a combination of such. In this generalized definition, the measurement references for all components in all dimensions of the *QuantityValue* are specified through the *mRefs* attribute, which are all *ScalarMeasurementReferences*.

As an example a Cartesian 3-dimensional 3x3 moment of inertia tensor would have the following attributes:

```
attribute def Cartesian3dMomentOfInertiaMeasurementReference :> TensorMeasurementReference {
 attribute :>> dimensions = (3, 3);
 attribute :>> isBound = false;
 attribute :>> mRefs: MomentOfInertiaUnit[9];
}
```

The *shortName* of a *TensorMeasurementReference* is the unique symbol by which the measurement reference is known. The *name* of a *TensorMeasurementReference* is spelled-out human readable name of the measurement reference.

## General Types

Array

### **9.8.3.2.29 TensorMeasurementReference**

#### **Element**

AttributeDefinition

#### **Description**

A *TensorMeasurementReference* is an abstract *AttributeDefinition* and a specialization of *Collections::Array*, that represents the [VIM] concept *measurement reference*, but generalized for tensor, vector and scalar quantities.

[VIM] defines measurement reference as a measurement unit, a measurement procedure, a reference material, or a combination of such. In this generalized definition, the measurement references for all components in all dimensions of the *QuantityValue* are specified through the *mRefs* attribute, which are all *ScalarMeasurementReferences*.

As an example a Cartesian 3-dimensional 3x3 moment of inertia tensor would have the following attributes:

```
attribute def Cartesian3dMomentOfInertiaMeasurementReference :> TensorMeasurementReference {
 attribute :>> dimensions = (3, 3);
 attribute :>> isBound = false;
 attribute :>> mRefs: MomentOfInertiaUnit[9];
}
```

The *shortName* of a *TensorMeasurementReference* is the unique symbol by which the measurement reference is known. The *name* of a *TensorMeasurementReference* is spelled-out human readable name of the measurement reference.

#### **General Types**

Array

#### **Features**

definitionalQuantityValues : DefinitionalQuantityValue [0..\*]

isBound : Boolean

Default is *false*.

mRefs : ScalarMeasurementReference [1..\*] {redefines elements, ordered, nonunique}

order : Natural {redefines rank}

#### **Constraints**

None.

### **9.8.3.2.30 Translation**

#### **Element**

AttributeDefinition

## Features

definitionalQuantityValues : DefinitionalQuantityValue [0..\*]

isBound : Boolean

Default is *false*.

mRefs : ScalarMeasurementReference [1..\*] {redefines elements, ordered, nonunique}

order : Natural {redefines rank}

## Constraints

None.

### 9.8.3.2.30 Translation

#### Element

AttributeDefinition

#### Description

Representation of a translation with respect to a coordinate frame.

Attribute *translationVector* specifies the displacement vector that constitutes the translation.

#### General Types

TranslationOrRotation

## Features

translationVector : VectorQuantityValue

## Constraints

None.

### 9.8.3.2.31 TranslationOrRotation

#### Element

AttributeDefinition

#### Description

*TranslationOrRotation* is an abstract union of *Translation* and *Rotation*

#### General Types

None.

## Features

## Description

Representation of a translation with respect to a coordinate frame.

Attribute *translationVector* specifies the displacement vector that constitutes the translation.

## General Types

TranslationOrRotation

## Features

translationVector : VectorQuantityValue

## Constraints

None.

### 9.8.3.2.31 TranslationOrRotation

#### Element

AttributeDefinition

## Description

*TranslationOrRotation* is an abstract union of *Translation* and *Rotation*.

## General Types

None.

## Features

None.

## Constraints

None.

### 9.8.3.2.32 TranslationRotationSequence

#### Element

AttributeDefinition

## Description

A *TranslationRotationSequence* is a coordinate frame transformation specified by a sequence of translations and/or rotations.

**Note:** This is a *CoordinateTransformation* that is convenient for interpretation by humans. In particular a sequence of rotations about the principal axes of a coordinate frame is much more easy understandable than a rotation about an arbitrary axis. Any sequence can be reduced to a single combination of a translation and a rotation

None.

### Constraints

None.

## 9.8.3.2.32 TranslationRotationSequence

### Element

AttributeDefinition

### Description

A *TranslationRotationSequence* is a coordinate frame transformation specified by a sequence of translations and/or rotations.

**Note:** This is a *CoordinateTransformation* that is convenient for interpretation by humans. In particular a sequence of rotations about the principal axes of a coordinate frame is much more easy understandable than a rotation about an arbitrary axis. Any sequence can be reduced to a single combination of a translation and a rotation about a particular axis, but in general the original sequence cannot be retrieved as there are infinitely many sequences representing the reduced transformation.

### General Types

List

CoordinateTransformation

### Features

elements : TranslationOrRotation [1..\*] {redefines elements, ordered, nonunique}

### Constraints

None.

## 9.8.3.2.33 UnitConversion

### Element

AttributeDefinition

### Description

*UnitConversion* is an AttributeDefinition that represents a linear conversion relationship between one measurement unit and another measurement unit, that acts as a reference.

### General Types

None.

### Features

conversionFactor : Real

about a particular axis, but in general the original sequence cannot be retrieved as there are infinitely many sequences representing the reduced transformation.

### General Types

List

CoordinateTransformation

### Features

elements : TranslationOrRotation [1..\*] {redefines elements, ordered, nonunique}

### Constraints

None.

## 9.8.3.2.33 UnitConversion

### Element

AttributeDefinition

### Description

*UnitConversion* is an *AttributeDefinition* that represents a linear conversion relationship between one measurement unit and another measurement unit, that acts as a reference.

### General Types

None.

### Features

conversionFactor : Real

The *Real* value of the ratio between the quantity expressed in the owning *MeasurementUnit* over the quantity expressed in the *referenceUnit*.

isExact : Boolean

Default is *true*.

referenceUnit : MeasurementUnit

Establishes the reference *MeasurementUnit* with respect to which this *UnitConversion* is defined.

### Constraints

None.

## 9.8.3.2.34 UnitPowerFactor

### Element

The *Real* value of the ratio between the quantity expressed in the owning *MeasurementUnit* over the quantity expressed in the *referenceUnit*.

**isExact** : Boolean

Default is *true*.

**referenceUnit** : MeasurementUnit

Establishes the reference *MeasurementUnit* with respect to which this *UnitConversion* is defined.

### Constraints

None.

## 9.8.3.2.34 UnitPowerFactor

### Element

AttributeDefinition

### Description

*UnitPowerFactor* is an AttributeDefinition that represents a power factor of a *MeasurementUnit* and an exponent.

**Note:** A collection of *UnitPowerFactors* defines a unit power product.

### General Types

None.

### Features

**exponent** : Real

A *Real* that specifies the exponent of this *UnitPowerFactor*.

**unit** : MeasurementUnit

The *MeasurementUnit* of this *UnitPowerFactor*.

### Constraints

None.

## 9.8.3.2.35 UnitPrefix

### Element

AttributeDefinition

### Description

*UnitPrefix* is an AttributeDefinition that represents a named multiple or sub-multiple measurement unit prefix as defined in ISO/IEC 80000-1.

AttributeDefinition

### Description

*UnitPowerFactor* is an AttributeDefinition that represents a power factor of a *MeasurementUnit* and an exponent.

**Note:** A collection of *UnitPowerFactors* defines a unit power product.

### General Types

None.

### Features

exponent : Real

A *Real* that specifies the exponent of this *UnitPowerFactor*.

unit : MeasurementUnit

The *MeasurementUnit* of this *UnitPowerFactor*.

### Constraints

None.

## 9.8.3.2.35 UnitPrefix

### Element

AttributeDefinition

### Description

*UnitPrefix* is an AttributeDefinition that represents a named multiple or sub-multiple measurement unit prefix as defined in ISO/IEC 80000-1.

### General Types

None.

### Features

conversionFactor : Real

A *Real* that specifies the value of multiple or sub-multiple of this *UnitPrefix*.

longName : String

symbol : String

The short symbolic name of this *UnitPrefix*.

Examples are: "k" for "kilo", "m" for "milli", "MeBi" for "mega binary".

## General Types

None.

## Features

conversionFactor : Real

A *Real* that specifies the value of multiple or sub-multiple of this *UnitPrefix*.

longName : String

symbol : String

The short symbolic name of this *UnitPrefix*.

Examples are: "k" for "kilo", "m" for "milli", "MeBi" for "mega binary".

## Constraints

None.

### 9.8.3.2.36 VectorMeasurementReference

#### Element

AttributeDefinition

#### Description

A *VectorMeasurementReference* is a specialization of *TensorMeasurementReference* for vector quantities that are typed by a *VectorQuantityValue*. Its *order* is typically one, but can be zero in case of a specialization to *ScalarMeasurementReference*. It implicitly defines a vector space of dimension N equal to *dimensions*[1]. The N basis unit vectors that span the vector space are defined by the *mRefs* which each are a *ScalarMeasurementReference*, typically a *MeasurementUnit* or an *IntervalScale*.

It is possible to specify purely symbolic vector spaces, without committing to particular measurement units or scales by setting the measurement references for all dimensions to unit one and quantity of dimension one, thereby basically reverting to the representation of a purely mathematical vector space.

A *VectorMeasurementReference* can be used to represent a coordinate frame for a vector space. See the *CoordinateFrame* specialization.

The attribute *isOrthogonal* indicates whether the inner products of the basis vectors of the vector space specified by *are orthogonal or not*.

## General Types

TensorMeasurementReference

## Features

dimensions : Positive [0..1] {redefines dimensions}

isOrthogonal : Boolean

## Constraints

None.

### 9.8.3.2.36 VectorMeasurementReference

#### Element

AttributeDefinition

#### Description

A *VectorMeasurementReference* is a specialization of *TensorMeasurementReference* for vector quantities that are typed by a *VectorQuantityValue*. Its *order* is typically one, but can be zero in case of a specialization to *ScalarMeasurementReference*. It implicitly defines a vector space of dimension N equal to dimensions [1]. The N basis unit vectors that span the vector space are defined by the *mRefs* which each are a *ScalarMeasurementReference*, typically a *MeasurementUnit* or an *IntervalScale*.

It is possible to specify purely symbolic vector spaces, without committing to particular measurement units or scales by setting the measurement references for all dimensions to unit one and quantity of dimension one, thereby basically reverting to the representation of a purely mathematical vector space.

A *VectorMeasurementReference* can be used to represent a coordinate frame for a vector space. See the *CoordinateFrame* specialization.

The attribute *isOrthogonal* indicates whether the inner products of the basis vectors of the vector space specified by are orthogonal or not.

#### General Types

TensorMeasurementReference

#### Features

dimensions : Positive [0..1] {redefines dimensions}

isOrthogonal : Boolean

#### Constraints

placementCheck

```
size(placement) == 0 | placement.target == self
```

## 9.8.4 ISQ

### 9.8.4.1 ISQ Overview

The *ISQ* package specifies a complete set of predefined quantity types for the *International System of Quantities (ISQ)*. The ISQ itself is specified as a *SystemOfQuantities*. The quantity types are specified as specializations of *TensorQuantityValue*, *VectorQuantityValue*, *ScalarQuantityValue*, that capture all quantities defined in ISO/IEC 80000 parts 3 to 13. It also defines all *TensorMeasurementReference*, *VectorMeasurementReference* and *ScalarMeasurementReference* specializations needed to define concrete *MeasurementReference* AttributeDefinitions needed to specify the actual measurement units and scales, coordinate frames and vector space products in other library packages.

## Constraints

```
placementCheck

size(placement) == 0 | placement.target == self
```

## 9.8.4 ISQ

### 9.8.4.1 ISQ Overview

The *ISQ* package specifies a complete set of predefined quantity types for the *International System of Quantities (ISQ)*. The ISQ itself is specified as a *SystemOfQuantities*. The quantity types are specified as specializations of *TensorQuantityValue*, *VectorQuantityValue*, *ScalarQuantityValue*, that capture all quantities defined in ISO/IEC 80000 parts 3 to 13. It also defines all *TensorMeasurementReference*, *VectorMeasurementReference* and *ScalarMeasurementReference* specializations needed to define concrete *MeasurementReference* AttributeDefinitions needed to specify the actual measurement units and scales, coordinate frames and vector space products in other library packages.

The *ISQ* package comprises the following sub-packages via import:

- *ISQBase* for ISO/IEC 80000 base quantities and general concepts
- *ISQSpaceTime* for [ISO 80000-3] "Space and Time"
- *ISQMechanics* for [ISO 80000-4] "Mechanics"
- *ISQThermodynamics* for [ISO 80000-5] "Thermodynamics"
- *ISQELECTROMAGNETISM* for [IEC 80000-6] "Electromagnetism"
- *ISQLight* for [ISO 80000-7] "Light"
- *ISQAcoustics* for [ISO 80000-8] "Acoustics"
- *ISQChemistryMolecular* for [ISO 80000-9] "Physical chemistry and molecular physics"
- *ISQAtomicNuclear* for [ISO 80000-10] "Atomic and nuclear physics"
- *ISQCharacteristicNumbers* for [ISO 80000-11] "Characteristic numbers"
- *ISQCondensedMatter* for [ISO 80000-12] "Condensed matter physics"
- *ISQInformation* for [IEC 80000-13] "Information science and technology"

Since package *ISQ* imports all other sub-packages, the statement `import ISQ::*`; suffices to make the whole ISQ available in a user model.

### 9.8.4.2 Elements

#### 9.8.4.2.1 amountOfSubstance

##### Element

AttributeUsage

##### Description

##### General Types

AmountOfSubstanceValue

scalarQuantities

##### Features

None.

The *ISQ* package comprises the following sub-packages via import:

- *ISQBase* for ISO/IEC 80000 base quantities and general concepts
- *ISQSpaceTime* for [ISO 80000-3] "Space and Time"
- *ISQMechanics* for [ISO 80000-4] "Mechanics"
- *ISQThermodynamics* for [ISO 80000-5] "Thermodynamics"
- *ISQELECTROMAGNETISM* for [IEC 80000-6] "Electromagnetism"
- *ISQLight* for [ISO 80000-7] "Light"
- *ISQAcoustics* for [ISO 80000-8] "Acoustics"
- *ISQChemistryMolecular* for [ISO 80000-9] "Physical chemistry and molecular physics"
- *ISQAtomicNuclear* for [ISO 80000-10] "Atomic and nuclear physics"
- *ISQCharacteristicNumbers* for [ISO 80000-11] "Characteristic numbers"
- *ISQCondensedMatter* for [ISO 80000-12] "Condensed matter physics"
- *ISQInformation* for [IEC 80000-13] "Information science and technology"

Since package *ISQ* imports all other sub-packages, the statement `import ISQ::*`; suffices to make the whole ISQ available in a user model.

#### 9.8.4.2 Elements

##### 9.8.4.2.1 amountOfSubstance

###### Element

AttributeUsage

###### Description

###### General Types

AmountOfSubstanceValue

scalarQuantities

###### Features

None.

###### Constraints

None.

##### 9.8.4.2.2 AmountOfSubstanceUnit

###### Element

AttributeDefinition

###### Description

###### General Types

SimpleUnit

###### Features

**Constraints**

None.

**9.8.4.2.2 AmountOfSubstanceUnit****Element**

AttributeDefinition

**Description****General Types**

SimpleUnit

**Features**

None.

**Constraints**

None.

**9.8.4.2.3 AmountOfSubstanceValue****Element**

AttributeDefinition

**Description****General Types**

ScalarQuantityValue

**Features**

mRef : AmountOfSubstanceUnit {redefines mRef}

num : Real {redefines num}

**Constraints**

None.

**9.8.4.2.4 AngularMeasureValue****Element****Description****General Types**

None.

**Features**

None.

### **Constraints**

None.

## **9.8.4.2.3 AmountOfSubstanceValue**

### **Element**

AttributeDefinition

### **Description**

#### **General Types**

ScalarQuantityValue

### **Features**

mRef : AmountOfSubstanceUnit {redefines mRef}

num : Real {redefines num}

### **Constraints**

None.

## **9.8.4.2.4 AngularMeasureValue**

### **Element**

### **Description**

#### **General Types**

None.

### **Features**

None.

### **Constraints**

None.

## **9.8.4.2.5 Cartesian3dSpatialCoordinateFrame**

### **Element**

AttributeDefinition

### **Description**

#### **General Types**

None.

### **Constraints**

None.

## **9.8.4.2.5 Cartesian3dSpatialCoordinateFrame**

### **Element**

AttributeDefinition

### **Description**

#### **General Types**

Spatial3dCoordinateFrame

### **Features**

isOrthogonal : Boolean {redefines isOrthogonal}

mRefs : LengthValue [3] {redefines mRefs}

xUnit : LengthUnit

yUnit : LengthUnit

zUnit : LengthUnit

### **Constraints**

None.

## **9.8.4.2.6 Displacement3dVector**

### **Element**

AttributeDefinition

### **Description**

#### **General Types**

3dVectorQuantityValue

### **Features**

isBound : Boolean {redefines isBound}

mRef : Spatial3dCoordinateFrame {redefines mRef}

### **Constraints**

None.

## **9.8.4.2.7 duration**

Spatial3dCoordinateFrame

**Features**

isOrthogonal : Boolean {redefines isOrthogonal}

mRefs : LengthValue [3] {redefines mRefs}

xUnit : LengthUnit

yUnit : LengthUnit

zUnit : LengthUnit

**Constraints**

None.

**9.8.4.2.6 Displacement3dVector**

**Element**

AttributeDefinition

**Description**

**General Types**

3dVectorQuantityValue

**Features**

isBound : Boolean {redefines isBound}

mRef : Spatial3dCoordinateFrame {redefines mRef}

**Constraints**

None.

**9.8.4.2.7 duration**

**Element**

AttributeUsage

**Description**

**General Types**

DurationValue

scalarQuantities

**Features**

**Element**

AttributeUsage

**Description****General Types**

DurationValue

scalarQuantities

**Features**

None.

**Constraints**

None.

**9.8.4.2.8 DurationUnit****Element**

AttributeDefinition

**Description****General Types**

SimpleUnit

**Features**

None.

**Constraints**

None.

**9.8.4.2.9 DurationValue****Element**

AttributeDefinition

**Description****General Types**

ScalarQuantityValue

**Features**

mRef : DurationUnit {redefines mRef}

num : Real {redefines num}

None.

### **Constraints**

None.

## **9.8.4.2.8 DurationUnit**

### **Element**

AttributeDefinition

### **Description**

#### **General Types**

SimpleUnit

### **Features**

None.

### **Constraints**

None.

## **9.8.4.2.9 DurationValue**

### **Element**

AttributeDefinition

### **Description**

#### **General Types**

ScalarQuantityValue

### **Features**

mRef : DurationUnit {redefines mRef}

num : Real {redefines num}

### **Constraints**

None.

## **9.8.4.2.10 electricCurrent**

### **Element**

AttributeUsage

### **Description**

**Constraints**

None.

**9.8.4.2.10 electricCurrent****Element**

AttributeUsage

**Description****General Types**

ElectricCurrentValue

scalarQuantities

**Features**

None.

**Constraints**

None.

**9.8.4.2.11 ElectricCurrentUnit****Element**

AttributeDefinition

**Description****General Types**

SimpleUnit

**Features**

None.

**Constraints**

None.

**9.8.4.2.12 ElectricCurrentValue****Element**

AttributeDefinition

**Description****General Types**

ScalarQuantityValue

## **General Types**

ElectricCurrentValue

scalarQuantities

## **Features**

None.

## **Constraints**

None.

### **9.8.4.2.11 ElectricCurrentUnit**

#### **Element**

AttributeDefinition

#### **Description**

#### **General Types**

SimpleUnit

#### **Features**

None.

#### **Constraints**

None.

### **9.8.4.2.12 ElectricCurrentValue**

#### **Element**

AttributeDefinition

#### **Description**

#### **General Types**

ScalarQuantityValue

#### **Features**

mRef : ElectricCurrentUnit {redefines mRef}

num : Real {redefines num}

#### **Constraints**

None.

**Features**

mRef : ElectricCurrentUnit {redefines mRef}

num : Real {redefines num}

**Constraints**

None.

**9.8.4.2.13 length****Element**

AttributeUsage

**Description****General Types**

LengthValue

scalarQuantities

**Features**

None.

**Constraints**

None.

**9.8.4.2.14 LengthUnit****Element**

AttributeDefinition

**Description****General Types**

SimpleUnit

**Features**

None.

**Constraints**

None.

**9.8.4.2.15 LengthValue****Element**

AttributeDefinition

### **9.8.4.2.13 length**

#### **Element**

AttributeUsage

#### **Description**

##### **General Types**

LengthValue

scalarQuantities

#### **Features**

None.

#### **Constraints**

None.

### **9.8.4.2.14 LengthUnit**

#### **Element**

AttributeDefinition

#### **Description**

##### **General Types**

SimpleUnit

#### **Features**

None.

#### **Constraints**

None.

### **9.8.4.2.15 LengthValue**

#### **Element**

AttributeDefinition

#### **Description**

##### **General Types**

ScalarQuantityValue

#### **Features**

**Description****General Types**

ScalarQuantityValue

**Features**

mRef : LengthUnit {redefines mRef}

num : Real {redefines num}

**Constraints**

None.

**9.8.4.2.16 luminousIntensity****Element**

AttributeUsage

**Description****General Types**

LuminousIntensityValue

scalarQuantities

**Features**

None.

**Constraints**

None.

**9.8.4.2.17 LuminousIntensityUnit****Element**

AttributeDefinition

**Description****General Types**

SimpleUnit

**Features**

None.

**Constraints**

None.

```
mRef : LengthUnit {redefines mRef}
num : Real {redefines num}
```

### Constraints

None.

## 9.8.4.2.16 LuminousIntensity

### Element

AttributeUsage

### Description

#### General Types

LuminousIntensityValue

scalarQuantities

### Features

None.

### Constraints

None.

## 9.8.4.2.17 LuminousIntensityUnit

### Element

AttributeDefinition

### Description

#### General Types

SimpleUnit

### Features

None.

### Constraints

None.

## 9.8.4.2.18 LuminousIntensityValue

### Element

AttributeDefinition

### **9.8.4.2.18 LuminousIntensityValue**

#### **Element**

AttributeDefinition

#### **Description**

#### **General Types**

ScalarQuantityValue

#### **Features**

mRef : LuminousIntensityUnit {redefines mRef}

num : Real {redefines num}

#### **Constraints**

None.

### **9.8.4.2.19 mass**

#### **Element**

AttributeUsage

#### **Description**

#### **General Types**

MassValue

scalarQuantities

#### **Features**

None.

#### **Constraints**

None.

### **9.8.4.2.20 MassUnit**

#### **Element**

AttributeDefinition

#### **Description**

#### **General Types**

SimpleUnit

#### **Features**

## Description

### General Types

ScalarQuantityValue

### Features

mRef : LuminousIntensityUnit {redefines mRef}

num : Real {redefines num}

### Constraints

None.

## 9.8.4.2.19 mass

### Element

AttributeUsage

## Description

### General Types

MassValue

scalarQuantities

### Features

None.

### Constraints

None.

## 9.8.4.2.20 MassUnit

### Element

AttributeDefinition

## Description

### General Types

SimpleUnit

### Features

None.

### Constraints



None.

#### **9.8.4.2.21 MassValue**

##### **Element**

AttributeDefinition

##### **Description**

##### **General Types**

ScalarQuantityValue

##### **Features**

mRef : MassUnit {redefines mRef}

num : Real {redefines num}

##### **Constraints**

None.

#### **9.8.4.2.22 Position3dVector**

##### **Element**

AttributeDefinition

##### **Description**

##### **General Types**

3dVectorQuantityValue

##### **Features**

isBound : Boolean {redefines isBound}

mRef : Spatial3dCoordinateFrame {redefines mRef}

##### **Constraints**

None.

#### **9.8.4.2.23 Spatial3dCoordinateFrame**

##### **Element**

AttributeDefinition

##### **Description**

##### **General Types**

None.

### **Constraints**

None.

## **9.8.4.2.21 MassValue**

### **Element**

AttributeDefinition

### **Description**

#### **General Types**

ScalarQuantityValue

### **Features**

mRef : MassUnit {redefines mRef}

num : Real {redefines num}

### **Constraints**

None.

## **9.8.4.2.22 Position3dVector**

### **Element**

AttributeDefinition

### **Description**

#### **General Types**

3dVectorQuantityValue

### **Features**

isBound : Boolean {redefines isBound}

mRef : Spatial3dCoordinateFrame {redefines mRef}

### **Constraints**

None.

## **9.8.4.2.23 Spatial3dCoordinateFrame**

### **Element**

AttributeDefinition

### **Description**

3dCoordinateFrame

**Features**

isBound : Boolean {redefines isBound}

**Constraints**

None.

**9.8.4.2.24 thermodynamicTemperature**

**Element**

AttributeUsage

**Description**

**General Types**

ThermodynamicTemperatureValue

scalarQuantities

**Features**

None.

**Constraints**

None.

**9.8.4.2.25 ThermodynamicTemperatureUnit**

**Element**

AttributeDefinition

**Description**

**General Types**

SimpleUnit

**Features**

None.

**Constraints**

None.

**9.8.4.2.26 ThermodynamicTemperatureValue**

**Element**

## **General Types**

3dCoordinateFrame

## **Features**

isBound : Boolean {redefines isBound}

## **Constraints**

None.

### **9.8.4.2.24 thermodynamicTemperature**

#### **Element**

AttributeUsage

#### **Description**

## **General Types**

ThermodynamicTemperatureValue

scalarQuantities

## **Features**

None.

## **Constraints**

None.

### **9.8.4.2.25 ThermodynamicTemperatureUnit**

#### **Element**

AttributeDefinition

#### **Description**

## **General Types**

SimpleUnit

## **Features**

None.

## **Constraints**

None.

### **9.8.4.2.26 ThermodynamicTemperatureValue**

#### **Element**

AttributeDefinition

#### Description

##### General Types

ScalarQuantityValue

##### Features

mRef : ThermodynamicTemperatureUnit {redefines mRef}

num : Real {redefines num}

##### Constraints

None.

### 9.8.4.2.27 universalCartesianSpatial3dCoordinateFrame

#### Element

AttributeUsage

#### Description

A singleton *CartesianSpatial3dCoordinateFrame* that can be used as a default universal Cartesian 3D coordinate frame.

##### General Types

attributeValues

Cartesian3dSpatialCoordinateFrame

##### Features

mRefs : LengthValue [3] {redefines mRefs}

By default, the *universalCartesianSpatial3dCoordinateFrame* uses meters as the units on all three axes.

transformation : CoordinateTransformation [0] {redefines transformation}

The *universalCartesianSpatial3dCoordinateFrame* is the "top-level" coordinate frame, not nested in any other frame.</p>

##### Constraints

None.

### 9.8.5 SI Prefixes

AttributeDefinition

### Description

#### General Types

ScalarQuantityValue

#### Features

mRef : ThermodynamicTemperatureUnit {redefines mRef}

num : Real {redefines num}

#### Constraints

None.

### 9.8.4.2.27 universalCartesianSpatial3dCoordinateFrame

#### Element

AttributeUsage

### Description

A singleton *CartesianSpatial3dCoordinateFrame* that can be used as a default universal Cartesian 3D coordinate frame.

#### General Types

attributeValues

Cartesian3dSpatialCoordinateFrame

#### Features

mRefs : LengthValue [3] {redefines mRefs}

By default, the *universalCartesianSpatial3dCoordinateFrame* uses meters as the units on all three axes.

transformation : CoordinateTransformation [0] {redefines transformation}

The *universalCartesianSpatial3dCoordinateFrame*

#### Constraints

None.

### 9.8.5 SI Prefixes

#### 9.8.5.1 SI Prefixes Overview

This package specifies the SI unit prefixes as defined in [ISO 80000-1], so that they can be used in automated quantity value conversion.

### 9.8.5.1 SI Prefixes Overview

This package specifies the SI unit prefixes as defined in [ISO 80000-1], so that they can be used in automated quantity value conversion.

ISO/IEC 80000-1 unit prefixes for decimal multiples and sub-multiples. See also [https://en.wikipedia.org/wiki/Unit\\_prefix](https://en.wikipedia.org/wiki/Unit_prefix).

| Name  | Symbol | Value      |
|-------|--------|------------|
| yocto | y      | $10^{-24}$ |
| zepto | z      | $10^{-21}$ |
| atto  | a      | $10^{-18}$ |
| femto | f      | $10^{-15}$ |
| pico  | p      | $10^{-12}$ |
| nano  | n      | $10^{-9}$  |
| micro | μ      | $10^{-6}$  |
| milli | m      | $10^{-3}$  |
| centi | c      | $10^{-2}$  |
| deci  | d      | $10^{-1}$  |
| deca  | da     | $10^1$     |
| hecto | h      | $10^2$     |
| kilo  | k      | $10^3$     |
| mega  | M      | $10^6$     |
| giga  | G      | $10^9$     |
| tera  | T      | $10^{12}$  |
| peta  | P      | $10^{15}$  |
| exa   | E      | $10^{18}$  |
| zetta | Z      | $10^{21}$  |
| yotta | Y      | $10^{24}$  |

ISO/IEC 80000-1 prefixes for binary multiples, i.e. multiples of 1024 ( $= 2^{10}$ ). See also [https://en.wikipedia.org/wiki/Binary\\_prefix](https://en.wikipedia.org/wiki/Binary_prefix).

| Name | Symbol | Value |
|------|--------|-------|
| kibi | Ki     | 1024  |

ISO/IEC 80000-1 unit prefixes for decimal multiples and sub-multiples. See also [https://en.wikipedia.org/wiki/Unit\\_prefix](https://en.wikipedia.org/wiki/Unit_prefix).

| Name  | Symbol | Value      |
|-------|--------|------------|
| yocto | y      | $10^{-24}$ |
| zepto | z      | $10^{-21}$ |
| atto  | a      | $10^{-18}$ |
| femto | f      | $10^{-15}$ |
| pico  | p      | $10^{-12}$ |
| nano  | n      | $10^{-9}$  |
| micro | $\mu$  | $10^{-6}$  |
| milli | m      | $10^{-3}$  |
| centi | c      | $10^{-2}$  |
| deci  | d      | $10^{-1}$  |
| deca  | da     | $10^1$     |
| hecto | h      | $10^2$     |
| kilo  | k      | $10^3$     |
| mega  | M      | $10^6$     |
| giga  | G      | $10^9$     |
| tera  | T      | $10^{12}$  |
| peta  | P      | $10^{15}$  |
| exa   | E      | $10^{18}$  |
| zetta | Z      | $10^{21}$  |
| yotta | Y      | $10^{24}$  |

ISO/IEC 80000-1 prefixes for binary multiples, i.e. multiples of 1024 ( $= 2^{10}$ ). See also [https://en.wikipedia.org/wiki/Binary\\_prefix](https://en.wikipedia.org/wiki/Binary_prefix).

| Name | Symbol | Value    |
|------|--------|----------|
| kibi | Ki     | 1024     |
| mebi | Mi     | $1024^2$ |
| gibi | Gi     | $1024^3$ |
| tebi | Ti     | $1024^4$ |
| pebi | Pi     | $1024^5$ |

| Name | Symbol | Value    |
|------|--------|----------|
| mebi | Mi     | $1024^2$ |
| gibi | Gi     | $1024^3$ |
| tebi | Ti     | $1024^4$ |
| pebi | Pi     | $1024^5$ |
| exbi | Ei     | $1024^6$ |
| zebi | Zi     | $1024^7$ |
| yobi | Yi     | $1024^8$ |

### 9.8.5.2 Elements

## 9.8.6 SI

### 9.8.6.1 SI Overview

This package specifies the measurement units as defined in ISO/IEC 80000 parts 3 to 13, the *International System of (Measurement) Units -- Système International d'Unités (SI)*.

The statement `import SI:::*`; suffices to make all SI units available in a user model.

### 9.8.6.2 Elements

## 9.8.7 US Customary Units

### 9.8.7.1 US Customary Units Overview

This package specifies all *US Customary* measurement units, with conversion factors to compatible SI units, as defined in *Appendix B "Conversion Factors"* of [NIST SP-811].

The statement `import USCUSTOMARYUNITS::*`; suffices to make all US Customary measurement units available in a user model.

### 9.8.7.2 Elements

## 9.8.8 Time

### 9.8.8.1 Time Overview

This package specifies concepts to support time-related quantities and metrology, beyond the quantities duration and time as defined in [ISO 80000-3].

Representations of the Gregorian calendar date and time of day as specified by the [ISO 8601-1] standard are included. Also the Coordinated Universal Time (UTC) time scale is captured.

### 9.8.8.2 Elements

#### 9.8.8.2.1 Clock

##### Element

| Name | Symbol | Value    |
|------|--------|----------|
| exbi | Ei     | $1024^6$ |
| zebi | Zi     | $1024^7$ |
| yobi | Yi     | $1024^8$ |

### 9.8.5.2 Elements

## 9.8.6 SI

### 9.8.6.1 SI Overview

This package specifies the measurement units as defined in ISO/IEC 80000 parts 3 to 13, the International System of (Measurement) Units -- Système International d'Unités (SI).

The statement `import SI:::*`; suffices to make all SI units available in a user model.

### 9.8.6.2 Elements

## 9.8.7 US Customary Units

### 9.8.7.1 US Customary Units Overview

This package specifies all US Customary measurement units, with conversion factors to compatible SI units, as defined in Appendix B "Conversion Factors" of [NIST SP-811].

The statement `import USCUSTOMARYUNITS::*`; suffices to make all US Customary measurement units available in a user model.

### 9.8.7.2 Elements

## 9.8.8 Time

### 9.8.8.1 Time Overview

This package specifies concepts to support time-related quantities and metrology, beyond the quantities duration and time as defined in [ISO 80000-3].

Representations of the Gregorian calendar date and time of day as specified by the [ISO 8601-1] standard are included. Also the Coordinated Universal Time (UTC) time scale is captured.

### 9.8.8.2 Elements

#### 9.8.8.2.1 Clock

##### Element

PartDefinition

##### Description

A *Clock* provides a *currentTime* as a TimeInstantValue that advances monotonically over its lifetime.

##### General Types

Clock

PartDefinition

**Description**

A *Clock* provides a *currentTime* as a TimeInstantValue that advances monotonically over its lifetime.

**General Types**

Clock

**Features**

currentTime : TimeInstantValue {redefines currentTime}

**Constraints**

None.

**9.8.8.2.2 Date**

**Element**

AttributeDefinition

**Description**

Generic representation of a time instant as a calendar date.

**General Types**

TimeInstantValue

**Features**

None.

**Constraints**

None.

**9.8.8.2.3 DateTime**

**Element**

AttributeDefinition

**Description**

Generic representation of a time instant as a calendar date and time of day.

**General Types**

TimeInstantValue

**Features**

**Features**

currentTime : TimeInstantValue {redefines currentTime}

**Constraints**

None.

**9.8.8.2.2 Date****Element**

AttributeDefinition

**Description**

Generic representation of a time instant as a calendar date.

**General Types**

TimeInstantValue

**Features**

None.

**Constraints**

None.

**9.8.8.2.3 DateTime****Element**

AttributeDefinition

**Description**

Generic representation of a time instant as a calendar date and time of day.

**General Types**

TimeInstantValue

**Features**

None.

**Constraints**

None.

**9.8.8.2.4 DurationOf****Element**

CalculationDefinition

None.

## Constraints

None.

### 9.8.8.2.4 DurationOf

#### Element

CalculationDefinition

#### Description

*DurationOf* returns the duration of a given *Occurrence* relative to a given *Clock*, which is equal to the *TimeOf* the end snapshot of the *Occurrence* minus the *TimeOf* its start snapshot.

#### General Types

DurationOf

#### Features

clock : Clock {redefines clock}

Default is inherited *Occurrence*::*localClock*.

duration : DurationValue {redefines duration}

o : Occurrence {redefines o}

#### Constraints

None.

### 9.8.8.2.5 Iso8601DateTime

#### Element

AttributeDefinition

#### Description

Representation of an ISO 8601-1 date and time in extended string format.

#### General Types

UtcTimeInstantValue

#### Features

num : Real {redefines num}

val : Iso8601DateTimeEncoding

## Description

*DurationOf* returns the duration of a given *Occurrence* relative to a given *Clock*, which is equal to the *TimeOf* the end snapshot of the *Occurrence* minus the *TimeOf*

## General Types

DurationOf

## Features

clock : Clock {redefines clock}

Default is inherited *Occurrence*::*localClock*.

duration : DurationValue {redefines duration}

o : Occurrence {redefines o}

## Constraints

None.

## 9.8.8.2.5 Iso8601DateTime

### Element

AttributeDefinition

## Description

Representation of an ISO 8601-1 date and time in extended string format.

## General Types

UtcTimeInstantValue

## Features

num : Real {redefines num}

val : Iso8601DateTimeEncoding

## Constraints

None.

## 9.8.8.2.6 Iso8601DateTimeEncoding

### Element

AttributeDefinition

## Description

Extended string encoding of an ISO 8601-1 date and time.

## **Constraints**

None.

### **9.8.8.2.6 Iso8601DateTimeEncoding**

#### **Element**

AttributeDefinition

#### **Description**

Extended string encoding of an ISO 8601-1 date and time.

#### **General Types**

String

#### **Features**

None.

## **Constraints**

None.

### **9.8.8.2.7 Iso8601DateTimeStructure**

#### **Element**

AttributeDefinition

#### **Description**

Representation of an ISO 8601 date and time with explicit date and time component attributes.

#### **General Types**

UtcTimeInstantValue

#### **Features**

day : Natural

hour : Natural

hourOffset : Integer

microsecond : Natural

minute : Natural

minuteOffset : Integer

month : Natural

## **General Types**

String

## **Features**

None.

## **Constraints**

None.

## **9.8.8.2.7 Iso8601DateTimeStructure**

### **Element**

AttributeDefinition

### **Description**

Representation of an ISO 8601 date and time with explicit date and time component attributes.

## **General Types**

UtcTimeInstantValue

## **Features**

day : Natural

hour : Natural

hourOffset : Integer

microsecond : Natural

minute : Natural

minuteOffset : Integer

month : Natural

num : Real {redefines num}

second : Natural

year : Integer

## **Constraints**

None.

## **9.8.8.2.8 timelInstant**

### **Element**

AttributeUsage

num : Real {redefines num}

second : Natural

year : Integer

### Constraints

None.

## 9.8.8.2.8 timeInstant

### Element

AttributeUsage

### Description

#### General Types

TimeInstantValue

scalarQuantities

### Features

None.

### Constraints

None.

## 9.8.8.2.9 TimeInstantValue

### Element

AttributeDefinition

### Description

Representation of a time instant quantity. Also known as instant (of time) or point in time.

#### General Types

ScalarQuantityValue

### Features

mRef : TimeScale {redefines mRef}

num : Real {redefines num}

### Constraints

None.

## Description

### General Types

TimeInstantValue

scalarQuantities

### Features

None.

### Constraints

None.

## 9.8.8.2.9 TimeInstantValue

### Element

AttributeDefinition

## Description

Representation of a time instant quantity. Also known as instant (of time) or point in time.

### General Types

ScalarQuantityValue

### Features

mRef : TimeScale {redefines mRef}

num : Real {redefines num}

### Constraints

None.

## 9.8.8.2.10 TimeOf

### Element

CalculationDefinition

## Description

*TimeOf* returns a *TimeInstantValue* for a given *Occurrence* relative to a given *Clock*. This *TimeInstantValue* is the time of the start of the *Occurrence*, which is considered to be synchronized with the snapshot of the *Clock* with a *currentTime* equal to the returned *timeInstant*

### General Types

Evaluation

## 9.8.8.2.10 TimeOf

### Element

CalculationDefinition

### Description

*TimeOf* returns a *TimeInstantValue* for a given *Occurrence* relative to a given *Clock*. This *TimeInstantValue* is the time of the start of the *Occurrence*, which is considered to be synchronized with the snapshot of the *Clock* with a *currentTime* equal to the returned *timeInstant*.

### General Types

Evaluation

TimeOf

### Features

clock : Clock {redefines clock}

Default is inherited *Occurrence::localClock*.

o : Occurrence {redefines o}

timeInstant : TimeInstantValue {redefines timeInstant}

### Constraints

startTimeConstraint

The *TimeOf* an *Occurrence* is equal to the time of its start snapshot.

timeContinuityConstraint

If one *Occurrence* happens immediately before another, then the *TimeOf* the end snapshot of the first *Occurrence* equals the *TimeOf* the second *Occurrence*.

timeOrderingConstraint

If one *Occurrence* happens before another, then the *TimeOf* the end snapshot of the first *Occurrence* is no greater than the *TimeOf* the second *Occurrence*.

## 9.8.8.2.11 TimeOfDay

### Element

AttributeDefinition

### Description

Generic representation of a time instant as a time of day.

### General Types

TimeOf

### Features

clock : Clock {redefines clock}

Default is inherited *Occurrence::localClock*.

o : Occurrence {redefines o}

timeInstant : TimeInstantValue {redefines timeInstant}

### Constraints

startTimeConstraint

The *TimeOf* an *Occurrence*

timeContinuityConstraint

If one *Occurrence* happens immediately before another, then the *TimeOf* the end snapshot of the first *Occurrence* equals the *TimeOf* the second *Occurrence*.

timeOrderingConstraint

If one *Occurrence* happens before another, then the *TimeOf* the end snapshot of the first *Occurrence* is no greater than the *TimeOf* the second *Occurrence*.

## 9.8.8.2.11 TimeOfDay

### Element

AttributeDefinition

### Description

Generic representation of a time instant as a time of day.

### General Types

TimeInstantValue

### Features

None.

### Constraints

None.

## 9.8.8.2.12 TimeScale

### Element

AttributeDefinition

TimeInstantValue

**Features**

None.

**Constraints**

None.

**9.8.8.2.12 TimeScale**

**Element**

AttributeDefinition

**Description**

Generic time scale to express a time instant, including a textual definition of the meaning of zero time instant value. Attribute *definitionalEpoch* captures the specification of the time instant with value zero, also known as the (reference) epoch.

**General Types**

IntervalScale

**Features**

definitionalEpoch : DefinitionalQuantityValue

definitionalQuantityValues : DefinitionalQuantityValue {redefines definitionalQuantityValues}

unit : DurationUnit

**Constraints**

None.

**9.8.8.2.13 universalClock**

**Element**

PartUsage

**Description**

*universalClock* is a single *Clock* that can be used as a default universal time reference.

**General Types**

universalClock

parts

Clock

## Description

Generic time scale to express a time instant, including a textual definition of the meaning of zero time instant value. Attribute *definitionalEpoch* captures the specification of the time instant with value zero, also known as the (reference) epoch.

## General Types

IntervalScale

## Features

definitionalEpoch : DefinitionalQuantityValue

definitionalQuantityValues : DefinitionalQuantityValue {redefines definitionalQuantityValues}

unit : DurationUnit

## Constraints

None.

## 9.8.8.2.13 universalClock

### Element

PartUsage

### Description

*universalClock* is a single *Clock* that can be used as a default universal time reference.

## General Types

universalClock

parts

Clock

## Features

None.

## Constraints

None.

## 9.8.8.2.14 UTC

### Element

AttributeDefinition

### Description

## **Features**

None.

## **Constraints**

None.

### **9.8.8.2.14 UTC**

#### **Element**

AttributeDefinition

#### **Description**

Representation of the Coordinated Universal Time (UTC) time scale.

UTC is the primary time standard by which the world regulates clocks and time. It is within about 1 second of mean solar time at 0° longitude and is not adjusted for daylight saving time. UTC is obtained from International Atomic Time (TAI) by the insertion of leap seconds according to the advice of the International Earth Rotation and Reference Systems Service (IERS) to ensure approximate agreement with the time derived from the rotation of the Earth.

#### **General Types**

TimeScale

## **Features**

definitionalEpoch : DefinitionalQuantityValue {redefines definitionalEpoch}

unit : DurationUnit {redefines unit}

## **Constraints**

None.

### **9.8.8.2.15 utcTimeInstant**

#### **Element**

AttributeUsage

#### **Description**

#### **General Types**

UtcTimeInstantValue

timeInstant

## **Features**

None.

Representation of the Coordinated Universal Time (UTC) time scale.

UTC is the primary time standard by which the world regulates clocks and time. It is within about 1 second of mean solar time at 0° longitude and is not adjusted for daylight saving time. UTC is obtained from International Atomic Time (TAI) by the insertion of leap seconds according to the advice of the International Earth Rotation and Reference Systems Service (IERS) to ensure approximate agreement with the time derived from the rotation of the Earth.

### General Types

TimeScale

### Features

definitionalEpoch : DefinitionalQuantityValue {redefines definitionalEpoch}

unit : DurationUnit {redefines unit}

### Constraints

None.

## 9.8.8.2.15 utcTimeInstant

### Element

AttributeUsage

### Description

#### General Types

UtcTimeInstantValue

timeInstant

### Features

None.

### Constraints

None.

## 9.8.8.2.16 UtcTimeInstantValue

### Element

AttributeDefinition

### Description

Representation of a time instant expressed on the Coordinated Universal Time (UTC) time scale.

#### General Types

DateTime

## Constraints

None.

### 9.8.8.2.16 UtcTimeInstantValue

#### Element

AttributeDefinition

#### Description

Representation of a time instant expressed on the Coordinated Universal Time (UTC) time scale.

#### General Types

DateTime

#### Features

mRef : UTC {redefines mRef}

#### Constraints

None.

## 9.8.9 Quantity Calculations

### 9.8.9.1 Quantity Calculations Overview

*QuantityCalculations* is a package of calculation definitions for construction of and computation on *ScalarQuantityValues*.

#### Basics

In order to enable the use of quantities in expressions this library package specifies the mathematical operators and functions to support quantity arithmetic, and some convenience functions.

Any scalar quantity has a quantity dimension (see [9.8.2.2.2](#)) that specifies the product of powers of base quantities of the applicable system of quantities. Rules for valid quantity dimensions of the variables in quantity expressions are given below, after definition of the possible quantity expression operations. Such rules specify a necessary but not a sufficient condition for valid quantity expressions. For example, *EnergyValue* and *TorqueValue* have the same quantity dimension ( $L^2 \cdot M \cdot T^{-2}$  in ISQ), but it is not valid to add an *energy* quantity to a *torque* quantity. Also each *ScalarMeasurementReference* has a quantity dimension, that can be used to check the validity of using constructed quantity values in quantity expressions.

To enable enforcement of model-evaluable type checking on quantity expressions, all direct specializations of (abstract) *ScalarQuantityValue*, *VectorQuantityValue* and *TensorQuantityValue* must be disjoint. AttributeDefinitions for quantity types at this first level of specialization are referred to as *top level quantity types*. Furthermore all lower level specializations of quantity AttributeDefinitions and AttributeUsages must be disjoint at each sibling level. For example, a *kineticEnergy* quantity cannot also be a *potentialEnergy* quantity. Both however, are subsettings of generic *energy* (defined by *EnergyValue*), that is a *top level quantity type*, so they may be added, subtracted, equated or compared.

## Features

mRef : UTC {redefines mRef}

## Constraints

None.

## 9.8.9 Quantity Calculations

### 9.8.9.1 Quantity Calculations Overview

#### Basics

In order to enable the use of quantities in expressions this library package specifies the mathematical operators and functions to support quantity arithmetic, and some convenience functions.

Any scalar quantity has a quantity dimension (see [9.8.2.2.2](#)) that specifies the product of powers of base quantities of the applicable system of quantities. Rules for valid quantity dimensions of the variables in quantity expressions are given below, after definition of the possible quantity expression operations. Such rules specify a necessary but not a sufficient condition for valid quantity expressions. For example, `EnergyValue` and `TorqueValue` have the same quantity dimension ( $L^2 \cdot M \cdot T^{-2}$  in ISQ), but it is not valid to add an `energy` quantity to a `torque` quantity. Also each `ScalarMeasurementReference` has a quantity dimension, that can be used to check the validity of using constructed quantity values in quantity expressions.

To enable enforcement of model-evaluable type checking on quantity expressions, all direct specializations of (abstract) `ScalarQuantityValue`, `VectorQuantityValue` and `TensorQuantityValue` must be disjoint. AttributeDefinitions for quantity types at this first level of specialization are referred to as *top level quantity types*. Furthermore all lower level specializations of quantity AttributeDefinitions and AttributeUsages must be disjoint at each sibling level. For example, a `kineticEnergy` quantity cannot also be a `potentialEnergy` quantity. Both however, are subsettings of generic `energy` (defined by `EnergyValue`), that is a *top level quantity type*, so they may be added, subtracted, equated or compared.

#### ScalarQuantityValue Construction

Construction of a literal or variable `ScalarQuantityValue` is done through the `[` operator, matched by a closing `]`. The signature of the corresponding CalculationDefinition is:

```
calc def '[' specializes BaseFunctions::'[' {
 in num: Number[1];
 in mRef: ScalarMeasurementReference[1];
 return quantity : ScalarQuantityValue[1];
}
```

Examples are:

```
attribute mass : MassValue[1] = 24.5 [kg];
attribute x : Real[1] := 58.0;
attribute speed : SpeedValue[1] := 3*x [m/s];
attribute :>> ISQ::width default 250.0 [mm];
```

The provided `ScalarMeasurementReference` must have a quantity dimension that is the same as the quantity dimension of the scalar quantity attribute being bound, assigned, defaulted or compared.

## ScalarQuantityValue Construction

Construction of a literal or variable *ScalarQuantityValue* is done through the [ operator, matched by a closing ]. The signature of the corresponding CalculationDefinition is:

```
calc def '[' specializes BaseFunctions::'[' {
 in num: Number[1];
 in mRef: ScalarMeasurementReference[1];
 return quantity : ScalarQuantityValue[1];
}
```

Examples are:

```
attribute mass : MassValue[1] = 24.5 [kg];
attribute x : Real[1] := 58.0;
attribute speed : SpeedValue[1] := 3*x [m/s];
attribute :>> ISQ::width default 250.0 [mm];
```

The provided *ScalarMeasurementReference* must have a quantity dimension that is the same as the quantity dimension of the scalar quantity attribute being bound, assigned, defaulted or compared.

## ScalarQuantityValue Operations

The following table enumerates the scalar quantity operations. In order to enable concise formulations the following symbols for quantity AttributeUsages are defined:

- *x* is defined by *ScalarValues::Real*, i.e. *x* is a real number
- *b* is defined by *ScalarValues::Boolean*, i.e. *b* is a boolean
- *mr* is defined by *ScalarMeasurementReference*, i.e. *mr* is a scalar measurement reference, typically a measurement unit
- *s<sub>1</sub>, s<sub>2</sub>, s<sub>3</sub>* are defined by *ScalarQuantityValue*, i.e. they are free or bound scalar quantities
- *fs<sub>1</sub>, fs<sub>2</sub>, fs<sub>3</sub>* are defined by *ScalarQuantityValue {:>> isBound = false}*, i.e. they are free scalar quantities
- *bs<sub>1</sub>, bs<sub>2</sub>, bs<sub>3</sub>* are defined by *ScalarQuantityValue {:>> isBound = true}*, i.e. they are bound scalar quantities

**Note.** For completeness also invalid operations are listed, for which the result is empty, and an implementation should raise a warning or error.

**Note.** A mathematical number or a quantity defined by *DimensionOneValue* has by definition quantity dimension 1, i.e. all exponents in the product of powers of the base quantities are zero.

| Operator or function expression  | Result          | Description                                                                                       |
|----------------------------------|-----------------|---------------------------------------------------------------------------------------------------|
| fs <sub>1</sub> +fs <sub>2</sub> | fs <sub>3</sub> | Addition of two free scalar quantities returns a free scalar quantity.                            |
| fs <sub>1</sub> +bs <sub>2</sub> | bs <sub>3</sub> | Addition of a free and a bound scalar quantity returns a bound scalar quantity.                   |
| fs <sub>1</sub> +fs <sub>2</sub> | bs <sub>3</sub> | Addition of a bound and a free scalar quantity returns a bound scalar quantity.                   |
| bs <sub>1</sub> +bs <sub>2</sub> |                 | ERROR. Two bound scalar quantities cannot be added.                                               |
| fs <sub>1</sub> -fs <sub>2</sub> | fs <sub>3</sub> | Subtraction of a free scalar quantity from a free scalar quantity returns a free scalar quantity. |

## ScalarQuantityValue Operations

The following table enumerates the scalar quantity operations. In order to enable concise formulations the following symbols for quantity AttributeUsages are defined:

- $x$  is defined by `ScalarValues::Real`, i.e.  $x$  is a real number
- $b$  is defined by `ScalarValues::Boolean`, i.e.  $b$  is a boolean
- $mr$  is defined by `ScalarMeasurementReference`, i.e.  $mr$  is a scalar measurement reference, typically a measurement unit
- $s1, s2, s3$  are defined by `ScalarQuantityValue`, i.e. they are free or bound scalar quantities
- $fs1, fs2, fs3$  are defined by `ScalarQuantityValue { :> isBound = false }`, i.e. they are free scalar quantities
- $bs1, bs2, bs3$  are defined by `ScalarQuantityValue { :> isBound = true }`, i.e. they are bound scalar quantities

**Note.** For completeness also invalid operations are listed, for which the result is empty, and an implementation should raise a warning or error.

**Note.** A mathematical number or a quantity defined by `DimensionOneValue` has by definition quantity dimension 1, i.e. all exponents in the product of powers of the base quantities are zero.

| Operator or function expression           | Result | Description                                                                                         |
|-------------------------------------------|--------|-----------------------------------------------------------------------------------------------------|
| $fs1+fs2$                                 | $fs3$  | Addition of two free scalar quantities returns a free scalar quantity.                              |
| $fs1+bs2$                                 | $bs3$  | Addition of a free and a bound scalar quantity returns a bound scalar quantity.                     |
| $fs1+fs2$                                 | $bs3$  | Addition of a bound and a free scalar quantity returns a bound scalar quantity.                     |
| $bs1+bs2$                                 |        | ERROR. Two bound scalar quantities cannot be added.                                                 |
| $fs1-fs2$                                 | $fs3$  | Subtraction of a free scalar quantity from a free scalar quantity returns a free scalar quantity.   |
| $fs1-bs2$                                 | $bs3$  | Subtraction of a bound scalar quantity from a free scalar quantity returns a bound scalar quantity. |
| $bs1-fs2$                                 | $bs3$  | Subtraction of a free scalar quantity from a bound scalar quantity returns a bound scalar quantity. |
| $bs1-bs2$                                 | $fs3$  | Subtraction of a bound scalar quantity from a bound scalar quantity returns a free scalar quantity. |
| $fs1*x$ or $x*fs1$                        | $fs3$  | Multiplication of a free scalar quantity with a real returns a free scalar quantity.                |
| $bs1*x$ or $x*bs1$                        |        | ERROR. A bound scalar quantity cannot be an operand in a multiplication.                            |
| $fs1*fs2$                                 | $fs3$  | Multiplication of two free scalar quantities returns a free scalar quantity.                        |
| $fs1*bs2$ or<br>$bs1*fs2$ or<br>$bs1*fs2$ |        | ERROR. A bound scalar quantity cannot be an operand in a multiplication.                            |
| $fs1/fs2$                                 | $fs3$  | Division of two free scalar quantities returns a free scalar quantity.                              |
| $fs1/bs2$ or $bs1/$<br>$fs2$ or $bs1/fs2$ |        | ERROR. A bound scalar quantity cannot be an operand in a division.                                  |
| $fs1^x$                                   | $fs3$  | Exponentiation of a free scalar quantity returns a free scalar quantity.                            |
| $bs1^x$                                   |        | ERROR. A bound scalar quantity cannot be an operand in an exponentiation.                           |

| <b>Operator or function expression</b>          | <b>Result</b> | <b>Description</b>                                                                                                                          |
|-------------------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| $fs1 - bs2$                                     | $bs3$         | Subtraction of a bound scalar quantity from a free scalar quantity returns a bound scalar quantity.                                         |
| $bs1 - fs2$                                     | $bs3$         | Subtraction of a free scalar quantity from a bound scalar quantity returns a bound scalar quantity.                                         |
| $bs1 - bs2$                                     | $fs3$         | Subtraction of a bound scalar quantity from a bound scalar quantity returns a free scalar quantity.                                         |
| $fs1 * x$ or $x * fs1$                          | $fs3$         | Multiplication of a free scalar quantity with a real returns a free scalar quantity.                                                        |
| $bs1 * x$ or $x * bs1$                          |               | ERROR. A bound scalar quantity cannot be an operand in a multiplication.                                                                    |
| $fs1 * fs2$                                     | $fs3$         | Multiplication of two free scalar quantities returns a free scalar quantity.                                                                |
| $fs1 * bs2$ or<br>$bs1 * fs2$ or<br>$bs1 * fs2$ |               | ERROR. A bound scalar quantity cannot be an operand in a multiplication.                                                                    |
| $fs1 / fs2$                                     | $fs3$         | Division of two free scalar quantities returns a free scalar quantity.                                                                      |
| $fs1 / bs2$ or $bs1 / fs2$ or $bs1 / bs2$       |               | ERROR. A bound scalar quantity cannot be an operand in a division.                                                                          |
| $fs1 ^ x$                                       | $fs3$         | Exponentiation of a free scalar quantity returns a free scalar quantity.                                                                    |
| $bs1 ^ x$                                       |               | ERROR. A bound scalar quantity cannot be an operand in an exponentiation.                                                                   |
| $isZero(s1)$                                    | $b$           | Function that asserts whether given scalar quantity is zero or not by returning a boolean.                                                  |
| $isUnit(s1)$                                    | $b$           | Function that asserts whether given scalar quantity is 1 or not by returning a boolean.                                                     |
| $abs(s1)$                                       | $s3$          | Return scalar quantity of same type with absolute numerical value.                                                                          |
| $max(s1, s2)$                                   | $s3$          | Return maximum value scalar quantity of same type and $mRef$ of maximum value operand. See note 1.                                          |
| $min(s1, s2)$                                   | $s3$          | Return minimum value scalar quantity of same type and $mRef$ of minimum value operand. See note 1.                                          |
| $sqrt(s1)$                                      | $s3$          | Return square root value of given scalar quantity. Its quantity dimension exponents are halved.                                             |
| $floor(s1)$                                     | $s3$          | Return floor value scalar quantity of same type and $mRef$ as operand.                                                                      |
| $round(s1)$                                     | $s3$          | Return scalar quantity of same type and $mRef$ as operand, with numerical value rounded to nearest integer.                                 |
| $sum(s1[0..*])$                                 | $s3$          | Return scalar quantity of same type and $mRef$ as operand, with numerical value equal to cumulative sum of the elements in the operand.     |
| $product(s1[0..*])$                             | $s3$          | Return scalar quantity of same type and $mRef$ as operand, with numerical value equal to cumulative product of the elements in the operand. |
| $ConvertQuantity(s1, mr)$                       | $s3$          | Return scalar quantity of same type but with numerical value converted to given target scalar measurement reference.                        |

| <b>Operator or function expression</b> | <b>Result</b>   | <b>Description</b>                                                                                                                               |
|----------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>isZero(s1)</code>                | <code>b</code>  | Function that asserts whether given scalar quantity is zero or not by returning a boolean.                                                       |
| <code>isUnit(s1)</code>                | <code>b</code>  | Function that asserts whether given scalar quantity is 1 or not by returning a boolean.                                                          |
| <code>abs(s1)</code>                   | <code>s3</code> | Return scalar quantity of same type with absolute numerical value.                                                                               |
| <code>max(s1, s2)</code>               | <code>s3</code> | Return maximum value scalar quantity of same type and <i>mRef</i> of maximum value operand. See note 1.                                          |
| <code>min(s1, s2)</code>               | <code>s3</code> | Return minimum value scalar quantity of same type and <i>mRef</i> of minimum value operand. See note 1.                                          |
| <code>sqrt(s1)</code>                  | <code>s3</code> | Return square root value of given scalar quantity. Its quantity dimension exponents are halved.                                                  |
| <code>floor(s1)</code>                 | <code>s3</code> | Return floor value scalar quantity of same type and <i>mRef</i> as operand.                                                                      |
| <code>round(s1)</code>                 | <code>s3</code> | Return scalar quantity of same type and <i>mRef</i> as operand, with numerical value rounded to nearest integer.                                 |
| <code>sum(s1[0..*])</code>             | <code>s3</code> | Return scalar quantity of same type and <i>mRef</i> as operand, with numerical value equal to cumulative sum of the elements in the operand.     |
| <code>product(s1[0..*])</code>         | <code>s3</code> | Return scalar quantity of same type and <i>mRef</i> as operand, with numerical value equal to cumulative product of the elements in the operand. |
| <code>ConvertQuantity(s1, mr)</code>   | <code>s3</code> | Return scalar quantity of same type but with numerical value converted to given target scalar measurement reference.                             |
| <code>s1 == s2</code>                  | <code>b</code>  | Return true if scalar quantity operands have equal (effective) value, else false. See Note 1.                                                    |
| <code>s1 != s2</code>                  | <code>b</code>  | Return true if scalar quantity operands do not have equal (effective) value, else false. See Note 1.                                             |
| <code>s1 &lt; s2</code>                | <code>b</code>  | Return true if (effective) value of first scalar quantity operand is less than value of second operand, else false. See Note 1.                  |
| <code>s1 &lt;= s2</code>               | <code>b</code>  | Return true if (effective) value of first scalar quantity operand is less than or equal to value of second operand, else false. See Note 1.      |
| <code>s1 &gt; s2</code>                | <code>b</code>  | Return true if (effective) value of first scalar quantity operand is greater than value of second operand, else false. See Note 1.               |
| <code>s1 &gt;= s2</code>               | <code>b</code>  | Return true if (effective) value of first scalar quantity operand is greater than or equal to value of second operand, else false. See Note 1.   |

**Note 1.** Operands of `min`, `max` functions, and relational operators must have the same *top level quantity type* and be both either free or bound, but may have different *mRefs*.

The rules for valid quantity dimensions for the above operations are:

1. The operands and result of addition (+) and subtraction (-) operations must all have the same quantity dimension, and be of the same *top level quantity type*.
2. The operands of multiplication (\*) operations may differ. The result must have a quantity dimension, in which the exponent for each base quantity is the sum of the exponents of the corresponding base quantity of each of the operands.

| Operator or function expression | Result | Description                                                                                                                                    |
|---------------------------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------|
| $s1 == s2$                      | b      | Return true if scalar quantity operands have equal (effective) value, else false. See Note 1.                                                  |
| $s1 != s2$                      | b      | Return true if scalar quantity operands do not have equal (effective) value, else false. See Note 1.                                           |
| $s1 < s2$                       | b      | Return true if (effective) value of first scalar quantity operand is less than value of second operand, else false. See Note 1.                |
| $s1 <= s2$                      | b      | Return true if (effective) value of first scalar quantity operand is less than or equal to value of second operand, else false. See Note 1.    |
| $s1 > s2$                       | b      | Return true if (effective) value of first scalar quantity operand is greater than value of second operand, else false. See Note 1.             |
| $s1 >= s2$                      | b      | Return true if (effective) value of first scalar quantity operand is greater than or equal to value of second operand, else false. See Note 1. |

**Note 1.** Operands of *min*, *max* functions, and relational operators must have the same *top level quantity type* and be both either free or bound, but may have different *mRefs*.

The rules for valid quantity dimensions for the above operations are:

1. The operands and result of addition (+) and subtraction (-) operations must all have the same quantity dimension, and be of the same *top level quantity type*.
2. The operands of multiplication (\*) operations may differ. The result must have a quantity dimension, in which the exponent for each base quantity is the sum of the exponents of the corresponding base quantity of each of the operands.
3. The operands of division (/) operations may differ. The result must have a quantity dimension, in which the exponent for each base quantity is the difference of the exponent of the corresponding base quantity of the first operand minus the exponent of the second operand.
4. The first operand of the exponentiation operator (^) may have any quantity dimension. The result must have a quantity dimension, in which the exponent for each base quantity is the sum of the exponent of the corresponding base quantity of the first operand plus the value of the second operand (the exponent of the exponentiation operation).

### 9.8.9.2 Elements

## 9.8.10 Vector Calculations

### 9.8.10.1 Vector Calculations Overview

*VectorCalculations* is a package of calculation definitions for construction of and computation on *VectorQuantityValues*.

#### Basics

In order to enable the use of quantities in expressions this library package specifies the mathematical operators and functions to support vector quantity arithmetic, and some convenience functions. See [9.8.9.1](#) for a general introduction.



## VectorQuantityValue Construction

Construction of a literal or variable `VectorQuantityValue` is done through the `[` operator, matched by a closing `]`. The signature of the corresponding `CalculationDefinition` is:

```
calc def '[' specializes BaseFunctions::'[' {
 in num : Number[1..n]; // a sequence of numbers that are the numerical values of the vector
 in mRef : VectorMeasurementReference[1];
 return quantity : VectorQuantityValue[1];
 private attribute n = mRef.flattenedSize;
}
```

Typically the measurement reference for a vector quantity is a `CoordinateFrame`, which is a specialization of `VectorMeasurementReference`.

Examples are:

```
attribute datum : ISQ::CartesianSpatial3dCoordinateFrame {
 doc /* The datum is the top level coordinate frame of the system-of-interest */
 :>> mRefs = (mm, mm, mm); // the units on all 3 Cartesian axes are millimetre
}
attribute posVec :>> cartesianPosition3dVector = (200.0, 350.0, 80.0) [datum];
```

The quantity dimensions of the components of a `VectorQuantityValue` are specified through the `mRefs` (defined by `ScalarMeasurementReference[1..*]`) of the `mRef : VectorMeasurementReference[1]` AttributeUsage of the vector quantity. This allows to enforce the rules of scalar quantity arithmetic to the components of vector quantities, when they are bound, assigned, defaulted, compared or the result of a vector quantity expression evaluation.

## VectorQuantityValue Operations

The following table enumerates the vector quantity operations. In order to enable concise formulations the following symbols for quantity AttributeUsages are defined:

- `x` is defined by `ScalarValues::Real`, i.e. `x` is a real number
- `b` is defined by `ScalarValues::Boolean`, i.e. `b` is a boolean
- `fs` is defined by `ScalarQuantityValue {:>> isBound = false}`, i.e. it is a free scalar quantity
- `bs` is defined by `ScalarQuantityValue {:>> isBound = true}`, i.e. it is a bound scalar quantity
- `v1, v2, v3` are defined by `VectorQuantityValue`, i.e. they are free or bound vector quantities
- `fv1, fv2, fv3` are defined by `VectorQuantityValue {:>> isBound = false}`, i.e. they are free vector quantities
- `bv1, bv2, bv3` are defined by `VectorQuantityValue {:>> isBound = true}`, i.e. they are bound vector quantities
- `ct` is defined by `CoordinateTransformation`, i.e. it is a coordinate transformation

**Note.** For completeness also invalid operations are listed, for which the result is empty, and an implementation should raise a warning or error.

| Operator or function expression | Result           | Description                                                                     |
|---------------------------------|------------------|---------------------------------------------------------------------------------|
| <code>fv1+fv2</code>            | <code>fv3</code> | Addition of two free vector quantities returns a free vector quantity.          |
| <code>fv1+bv2</code>            | <code>bv3</code> | Addition of a free and a bound vector quantity returns a bound vector quantity. |

3. The operands of division (/) operations may differ. The result must have a quantity dimension, in which the exponent for each base quantity is the difference of the exponent of the corresponding base quantity of the first operand minus the exponent of the second operand.
4. The first operand of the exponentiation operator (^) may have any quantity dimension. The result must have a quantity dimension, in which the exponent for each base quantity is the sum of the exponent of the corresponding base quantity of the first operand plus the value of the second operand (the exponent of the exponentiation operation).

## Basics

In order to enable the use of quantities in expressions this library package specifies the mathematical operators and functions to support quantity arithmetic, and some convenience functions.

Any scalar quantity has a quantity dimension (see [9.8.2.2.2](#)) that specifies the product of powers of base quantities of the applicable system of quantities. Rules for valid quantity dimensions of the variables in quantity expressions are given below, after definition of the possible quantity expression operations. Such rules specify a necessary but not a sufficient condition for valid quantity expressions. For example, `EnergyValue` and `TorqueValue` have the same quantity dimension ( $L^2 \cdot M \cdot T^{-2}$  in ISQ), but it is not valid to add an `energy` quantity to a `torque` quantity. Also each `ScalarMeasurementReference` has a quantity dimension, that can be used to check the validity of using constructed quantity values in quantity expressions.

To enable enforcement of model-evaluable type checking on quantity expressions, all direct specializations of (abstract) `ScalarQuantityValue`, `VectorQuantityValue` and `TensorQuantityValue` must be disjoint. AttributeDefinitions for quantity types at this first level of specialization are referred to as *top level quantity types*. Furthermore all lower level specializations of quantity AttributeDefinitions and AttributeUsages must be disjoint at each sibling level. For example, a `kineticEnergy` quantity cannot also be a `potentialEnergy` quantity. Both however, are subsettings of generic `energy` (defined by `EnergyValue`), that is a *top level quantity type*, so they may be added, subtracted, equated or compared.

## ScalarQuantityValue Construction

Construction of a literal or variable `ScalarQuantityValue` is done through the [ operator, matched by a closing ]. The signature of the corresponding CalculationDefinition is:

```
calc def '[' specializes BaseFunctions::'[' {
 in num: Number[1];
 in mRef: ScalarMeasurementReference[1];
 return quantity : ScalarQuantityValue[1];
}
```

Examples are:

```
attribute mass : MassValue[1] = 24.5 [kg];
attribute x : Real[1] := 58.0;
attribute speed : SpeedValue[1] := 3*x [m/s];
attribute :>> ISQ::width default 250.0 [mm];
```

The provided `ScalarMeasurementReference` must have a quantity dimension that is the same as the quantity dimension of the scalar quantity attribute being bound, assigned, defaulted or compared.

### 9.8.9.2 Elements

## 9.8.10 Vector Calculations

### 9.8.10.1 Vector Calculations Overview



## Basics

In order to enable the use of quantities in expressions this library package specifies the mathematical operators and functions to support vector quantity arithmetic, and some convenience functions. See [9.8.9.1](#) for a general introduction.

### VectorQuantityValue Construction

Construction of a literal or variable `VectorQuantityValue` is done through the `[` operator, matched by a closing `]`. The signature of the corresponding `CalculationDefinition` is:

```
calc def '[' specializes BaseFunctions::'[' {
 in num : Number[1..n]; // a sequence of numbers that are the numerical values of the vector
 in mRef : VectorMeasurementReference[1];
 return quantity : VectorQuantityValue[1];
 private attribute n = mRef.flattenedSize;
}
```

Typically the measurement reference for a vector quantity is a `CoordinateFrame`, which is a specialization of `VectorMeasurementReference`.

Examples are:

```
attribute datum : ISQ::CartesianSpatial3dCoordinateFrame {
 doc /* The datum is the top level coordinate frame of the system-of-interest */
 :>> mRefs = (mm, mm, mm); // the units on all 3 Cartesian axes are millimetre
}
attribute posVec :>> cartesianPosition3dVector = (200.0, 350.0, 80.0) [datum];
```

The quantity dimensions of the components of a `VectorQuantityValue` are specified through the `mRefs` (defined by `ScalarMeasurementReference[1..*]`) of the `mRef : VectorMeasurementReference[1]` AttributeUsage of the vector quantity. This allows to enforce the rules of scalar quantity arithmetic to the components of vector quantities, when they are bound, assigned, defaulted, compared or the result of a vector quantity expression evaluation.

### VectorQuantityValue Operations

The following table enumerates the vector quantity operations. In order to enable concise formulations the following symbols for quantity AttributeUsages are defined:

- `x` is defined by `ScalarValues::Real`, i.e. `x` is a real number
- `b` is defined by `ScalarValues::Boolean`, i.e. `b` is a boolean
- `fs` is defined by `ScalarQuantityValue {:>> isBound = false}`, i.e. it is a free scalar quantity
- `bs` is defined by `ScalarQuantityValue {:>> isBound = true}`, i.e. it is a bound scalar quantity
- `v1, v2, v3` are defined by `VectorQuantityValue`, i.e. they are free or bound vector quantities
- `fv1, fv2, fv3` are defined by `VectorQuantityValue {:>> isBound = false}`, i.e. they are free vector quantities
- `bv1, bv2, bv3` are defined by `VectorQuantityValue {:>> isBound = true}`, i.e. they are bound vector quantities
- `ct` is defined by `CoordinateTransformation`, i.e. it is a coordinate transformation

**Note.** For completeness also invalid operations are listed, for which the result is empty, and an implementation should raise a warning or error.

| <b>Operator or function expression</b> | <b>Result</b> | <b>Description</b>                                                                                                                                                                         |
|----------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $fv1+fv2$                              | $bv3$         | Addition of a bound and a free vector quantity returns a bound vector quantity.                                                                                                            |
| $bv1+bv2$                              |               | ERROR. Two bound vector quantities cannot be added.                                                                                                                                        |
| $fv1-fv2$                              | $fv3$         | Subtraction of a free vector quantity from a free vector quantity returns a free vector quantity.                                                                                          |
| $fv1-bv2$                              | $bv3$         | Subtraction of a bound vector quantity from a free vector quantity returns a bound vector quantity.                                                                                        |
| $bv1-fv2$                              | $bv3$         | Subtraction of a free vector quantity from a bound vector quantity returns a bound vector quantity.                                                                                        |
| $bv1-bv2$                              | $fv3$         | Subtraction of a bound vector quantity from a bound vector quantity returns a free vector quantity.                                                                                        |
| $fv1*x \text{ or } x*fv1$              | $fv3$         | Multiplication of a free vector quantity and a real returns a free vector quantity.                                                                                                        |
| $bv1*x \text{ or } x*bv1$              |               | ERROR. A bound vector quantity cannot be an operand in a multiplication.                                                                                                                   |
| $fv1/x$                                | $fv3$         | Division of a free vector quantity by a real returns a free vector quantity.                                                                                                               |
| $bv1/x$                                |               | ERROR. A bound vector quantity cannot be an operand in a division.                                                                                                                         |
| $fs*fv1 \text{ or } fv1*fs$            | $fv3$         | Multiplication of a free scalar quantity and a free vector quantity returns a free vector quantity.                                                                                        |
| $fs*bv1 \text{ or } bv1*fs$            |               | ERROR. A bound vector quantity cannot be an operand in a multiplication.                                                                                                                   |
| $fv1/fs$                               | $fv3$         | Division of a free vector quantity by a free scalar quantity returns a free vector quantity.                                                                                               |
| $bv1/bv1$                              |               | ERROR. A bound vector quantity or a bound scalar quantity cannot be an operand in a division.                                                                                              |
| $\text{inner}(v1, v2)$                 | $x$           | Inner product (aka dot product) of two vector quantities returns a real number.                                                                                                            |
| $\text{outer}(v1, v2)$                 | $v3$          | Outer product (aka cross product) of two vector quantities returns a free vector quantity if both operands are free vectors, else a bound vector quantity.                                 |
| $\text{norm}(v1)$                      | $fs$          | Norm of a vector quantity returns a free scalar quantity representing the magnitude of the vector.                                                                                         |
| $\text{angle}(v1, v2)$                 | $fs$          | Angle of two vector quantities returns a scalar quantity representing the angle (in radian) between the two vectors.                                                                       |
| $\text{isZeroVectorQuantity}(bv1)$     |               | Function that asserts whether given vector quantity is a zero vector or not by returning a boolean.                                                                                        |
| $\text{isUnitVectorQuantity}(bv1)$     |               | Function that asserts whether given vector quantity is a unit vector or not by returning a boolean.                                                                                        |
| $\text{transform}(ct, v1)$             | $v3$          | Transform a vector quantity according to a coordinate transformation, which returns a vector quantity transformed into the target coordinate frame of the given coordinate transformation. |

| <b>Operator or function expression</b> | <b>Result</b> | <b>Description</b>                                                                                                                                                                         |
|----------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $fv1+fv2$                              | $fv3$         | Addition of two free vector quantities returns a free vector quantity.                                                                                                                     |
| $fv1+bv2$                              | $bv3$         | Addition of a free and a bound vector quantity returns a bound vector quantity.                                                                                                            |
| $fv1+fv2$                              | $bv3$         | Addition of a bound and a free vector quantity returns a bound vector quantity.                                                                                                            |
| $bv1+bv2$                              |               | ERROR. Two bound vector quantities cannot be added.                                                                                                                                        |
| $fv1-fv2$                              | $fv3$         | Subtraction of a free vector quantity from a free vector quantity returns a free vector quantity.                                                                                          |
| $fv1-bv2$                              | $bv3$         | Subtraction of a bound vector quantity from a free vector quantity returns a bound vector quantity.                                                                                        |
| $bv1-fv2$                              | $bv3$         | Subtraction of a free vector quantity from a bound vector quantity returns a bound vector quantity.                                                                                        |
| $bv1-bv2$                              | $fv3$         | Subtraction of a bound vector quantity from a bound vector quantity returns a free vector quantity.                                                                                        |
| $fv1*x \text{ or } x*fv1$              | $fv3$         | Multiplication of a free vector quantity and a real returns a free vector quantity.                                                                                                        |
| $bv1*x \text{ or } x*bv1$              |               | ERROR. A bound vector quantity cannot be an operand in a multiplication.                                                                                                                   |
| $fv1/x$                                | $fv3$         | Division of a free vector quantity by a real returns a free vector quantity.                                                                                                               |
| $bv1/x$                                |               | ERROR. A bound vector quantity cannot be an operand in a division.                                                                                                                         |
| $fs*fv1 \text{ or } fv1*fs$            | $fv3$         | Multiplication of a free scalar quantity and a free vector quantity returns a free vector quantity.                                                                                        |
| $fs*bv1 \text{ or } bv1*fs$            |               | ERROR. A bound vector quantity cannot be an operand in a multiplication.                                                                                                                   |
| $fv1/fs$                               | $fv3$         | Division of a free vector quantity by a free scalar quantity returns a free vector quantity.                                                                                               |
| $bv1/fs$                               |               | ERROR. A bound vector quantity or a bound scalar quantity cannot be an operand in a division.                                                                                              |
| $\text{inner}(v1, v2)$                 | $x$           | Inner product (aka dot product) of two vector quantities returns a real number.                                                                                                            |
| $\text{outer}(v1, v2)$                 | $v3$          | Outer product (aka cross product) of two vector quantities returns a free vector quantity if both operands are free vectors, else a bound vector quantity.                                 |
| $\text{norm}(v1)$                      | $fs$          | Norm of a vector quantity returns a free scalar quantity representing the magnitude of the vector.                                                                                         |
| $\text{angle}(v1, v2)$                 | $fs$          | Angle of two vector quantities returns a scalar quantity representing the angle (in radian) between the two vectors.                                                                       |
| $\text{isZeroVectorQuantity}(bv1)$     |               | Function that asserts whether given vector quantity is a zero vector or not by returning a boolean.                                                                                        |
| $\text{isUnitVectorQuantity}(bv1)$     |               | Function that asserts whether given vector quantity is a unit vector or not by returning a boolean.                                                                                        |
| $\text{transform}(ct, v1)$             | $v3$          | Transform a vector quantity according to a coordinate transformation, which returns a vector quantity transformed into the target coordinate frame of the given coordinate transformation. |

The rules for valid quantity dimensions for the above operations are:

The rules for valid quantity dimensions for the above operations are:

1. The vector quantities for all operands and results must have compatible *mRef* : *VectorMeasurementReference[1]*. Here compatible means that the *mRef* of each vector quantity must have the same dimensions, and their *mRef.mRefs* must have the same quantity dimension for each vector component.
2. The operands and result of addition (+) and subtraction (-) operations must all have the same *mRef* : *VectorMeasurementReference[1]*, and be of the same *top level quantity type*.
3. The operands of a multiplication (\*) operation can be any free vector quantity and free scalar quantity. The result of a must have an *mRef*, in which for each vector component the exponent for each base quantity is the sum of the exponent of the corresponding base quantity of the component of the vector operand plus the exponent of the scalar operand.
4. The operands of a division (/) operation can be any free vector quantity and free scalar quantity. The result of a must have an *mRef*, in which for each vector component the exponent for each base quantity is the difference of the exponent of the corresponding base quantity of the component of the vector operand minus the exponent of the scalar operand.
5. The operands of the inner product must all have the same *mRef*, i.e. coordinate frame, and therefore component-wise the same quantity dimensions.
6. The operands and the result of the outer product must all have the same *mRef*, i.e. coordinate frame, and therefore component-wise the same quantity dimensions.
7. The operand of the *norm*, *isZeroVectorQuantity*, *isUnitVectorQuantity* can be any vector quantity. The result of the *norm* function is a free scalar quantity that has an *mRef* compatible with the magnitude of the vector quantity operand.
8. For the *transform* function, the *mRef* of the vector quantity operand must be the *source* coordinate frame of the coordinate transformation operand. The result vector quantity must have an *mRef* that is equal to the *target* coordinate frame of the coordinate transformation operand. This specifies all involved quantity dimensions.

### 9.8.10.2 Elements

## 9.8.11 Tensor Calculations

### 9.8.11.1 Tensor Calculations Overview

*TensorCalculations* is a package of calculation definitions for construction of and computation on *TensorQuantityValues*.

### Basics

In order to enable the use of quantities in expressions this library package specifies the mathematical operators and functions to support tensor quantity arithmetic, and some convenience functions. See [9.8.9.1](#) for a general introduction.

### TensorQuantityValue Construction

Construction of a literal or variable *TensorQuantityValue* is done through the [ operator, matched by a closing ]. The signature of the corresponding CalculationDefinition is:

```
calc def '[' specializes BaseFunctions::'[' {
 in num : Number[1..n] ordered; // a sequence of numbers that are the numerical values of the
 in mRef : TensorMeasurementReference[1];
 return quantity : TensorQuantityValue[1];
 private attribute n = mRef.flattenedSize;
}
```

1. The vector quantities for all operands and results must have compatible *mRef* : *VectorMeasurementReference[1]*. Here compatible means that the *mRef* of each vector quantity must have the same dimensions, and their *mRef.mRefs* must have the same quantity dimension for each vector component.
2. The operands and result of addition (+) and subtraction (-) operations must all have the same *mRef* : *VectorMeasurementReference[1]*, and be of the same *top level quantity type*.
3. The operands of a multiplication (\*) operation can be any free vector quantity and free scalar quantity. The result of a must have an *mRef*, in which for each vector component the exponent for each base quantity is the sum of the exponent of the corresponding base quantity of the component of the vector operand plus the exponent of the scalar operand.
4. The operands of a division (/) operation can be any free vector quantity and free scalar quantity. The result of a must have an *mRef*, in which for each vector component the exponent for each base quantity is the difference of the exponent of the corresponding base quantity of the component of the vector operand minus the exponent of the scalar operand.
5. The operands of the inner product must all have the same *mRef*, i.e. coordinate frame, and therefore component-wise the same quantity dimensions.
6. The operands and the result of the outer product must all have the same *mRef*, i.e. coordinate frame, and therefore component-wise the same quantity dimensions.
7. The operand of the *norm*, *isZeroVectorQuantity*, *isUnitVectorQuantity* can be any vector quantity. The result of the *norm* function is a free scalar quantity that has an *mRef* compatible with the magnitude of the vector quantity operand.
8. For the *transform* function, the *mRef* of the vector quantity operand must be the *source* coordinate frame of the coordinate transformation operand. The result vector quantity must have an *mRef* that is equal to the *target* coordinate frame of the coordinate transformation operand. This specifies all involved quantity dimensions.

## Basics

In order to enable the use of quantities in expressions this library package specifies the mathematical operators and functions to support vector quantity arithmetic, and some convenience functions. See [9.8.9.1](#) for a general introduction.

### VectorQuantityValue Construction

Construction of a literal or variable *VectorQuantityValue* is done through the [ operator, matched by a closing ]. The signature of the corresponding CalculationDefinition is:

```
calc def '[' specializes BaseFunctions::'[' {
 in num : Number[1..n]; // a sequence of numbers that are the numerical values of the vector
 in mRef : VectorMeasurementReference[1];
 return quantity : VectorQuantityValue[1];
 private attribute n = mRef.flattenedSize;
}
```

Typically the measurement reference for a vector quantity is a *CoordinateFrame*, which is a specialization of *VectorMeasurementReference*.

Examples are:

```
attribute datum : ISQ::CartesianSpatial3dCoordinateFrame {
 doc /* The datum is the top level coordinate frame of the system-of-interest */
 :>> mRefs = (mm, mm, mm); // the units on all 3 Cartesian axes are millimetre
}
attribute posVec :>> cartesianPosition3dVector = (200.0, 350.0, 80.0) [datum];
```

The quantity dimensions of the components of a *VectorQuantityValue* are specified through the *mRefs* (defined by *ScalarMeasurementReference[1..\*]*) of the *mRef : VectorMeasurementReference[1]*

The quantity dimensions of the components of a *TensorQuantityValue* are specified through the *mRefs* (defined by *ScalarMeasurementReference[1..\*]*) of the *mRef : TensorMeasurementReference[1]* AttributeUsage of the tensor quantity. This allows to enforce the rules of scalar quantity arithmetic to the components of tensor quantities, when they are bound, assigned, defaulted, compared or the result of a tensor quantity expression evaluation.

### TensorQuantityValue Operations

The following table enumerates the tensor quantity operations. In order to enable concise formulations the following symbols for AttributeUsages are defined:

- *x* is defined by *ScalarValues::Real*, i.e. *x* is a real number
- *b* is defined by *ScalarValues::Boolean*, i.e. *b* is a boolean
- *v1, v2, v3* are defined by *VectorQuantityValue*, i.e. they are vector quantities
- *T1, T2, T3* are defined by *TensorQuantityValue*, i.e. they are tensor quantities
- *ct* is defined by *CoordinateTransformation*, i.e. it is a coordinate transformation

| Operator or function expression | Result | Description                                                                                                                                                                                        |
|---------------------------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $T1+T2$                         | $T3$   | Addition of two tensor quantities returns a tensor quantity, with all corresponding component values added.                                                                                        |
| $T1-T2$                         | $T3$   | Subtraction of a tensor quantity from another tensor quantity returns a tensor quantity, with all corresponding component values of the second operand subtracted from those of the first operand. |
| $T1*x$ or $x*T1$                | $T3$   | Multiplication of a tensor quantity and a real number returns a tensor quantity, with all component values multiplied by <i>x</i> .                                                                |
| $T1/x$                          | $T3$   | Division of a tensor quantity with a real number returns a tensor quantity, with all component values divided by <i>x</i> .                                                                        |
| $T1*v1$ or $v1*T1$              | $v3$   | Multiplication of a tensor quantity and a vector quantity returns a vector quantity. The tensor and vector must have compatible (covariant and contravariant) dimensions.                          |
| <i>isZeroTensorQuantity(T1)</i> |        | Function that asserts whether given tensor quantity is a zero tensor or not by returning a boolean.                                                                                                |
| <i>isUnitTensorQuantity(T1)</i> |        | Function that asserts whether given tensor quantity is a unit tensor or not by returning a boolean.                                                                                                |
| <i>transform(ct, T1)</i>        | $T3$   | Transform a tensor quantity according to a coordinate transformation, which returns a tensor quantity transformed into the target coordinate frame of the given coordinate transformation.         |

#### 9.8.11.2 Elements

### 9.8.12 Measurement Ref Calculations

#### 9.8.12.1 Measurement Ref Calculations Overview

Similar to computations with *ScalarQuantityValues* and *VectorQuantityValues* in quantity expressions, it is also possible to create measurement reference expressions to compute with *MeasurementUnits* and *CoordinateFrames*.

`AttributeUsage` of the vector quantity. This allows to enforce the rules of scalar quantity arithmetic to the components of vector quantities, when they are bound, assigned, defaulted, compared or the result of a vector quantity expression evaluation.

### 9.8.10.2 Elements

## 9.8.11 Tensor Calculations

### 9.8.11.1 Tensor Calculations Overview

#### Basics

In order to enable the use of quantities in expressions this library package specifies the mathematical operators and functions to support tensor quantity arithmetic, and some convenience functions. See [9.8.9.1](#) for a general introduction.

#### TensorQuantityValue Construction

Construction of a literal or variable `TensorQuantityValue` is done through the `[` operator, matched by a closing `]`. The signature of the corresponding `CalculationDefinition` is:

```
calc def '[' specializes BaseFunctions::'[' {
 in num : Number[1..n] ordered; // a sequence of numbers that are the numerical values of the
 in mRef : TensorMeasurementReference[1];
 return quantity : TensorQuantityValue[1];
 private attribute n = mRef.flattenedSize;
}
```

The quantity dimensions of the components of a `TensorQuantityValue` are specified through the `mRefs` (defined by `ScalarMeasurementReference[1..*]`) of the `mRef : TensorMeasurementReference[1]` `AttributeUsage` of the tensor quantity. This allows to enforce the rules of scalar quantity arithmetic to the components of tensor quantities, when they are bound, assigned, defaulted, compared or the result of a tensor quantity expression evaluation.

#### TensorQuantityValue Operations

The following table enumerates the tensor quantity operations. In order to enable concise formulations the following symbols for `AttributeUsages` are defined:

- `x` is defined by `ScalarValues::Real`, i.e. `x` is a real number
- `b` is defined by `ScalarValues::Boolean`, i.e. `b` is a boolean
- `v1, v2, v3` are defined by `VectorQuantityValue`, i.e. they are vector quantities
- `T1, T2, T3` are defined by `TensorQuantityValue`, i.e. they are tensor quantities
- `ct` is defined by `CoordinateTransformation`, i.e. it is a coordinate transformation

| Operator or function expression | Result          | Description                                                                                                                                                                                        |
|---------------------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>T1+T2</code>              | <code>T3</code> | Addition of two tensor quantities returns a tensor quantity, with all corresponding component values added.                                                                                        |
| <code>T1-T2</code>              | <code>T3</code> | Subtraction of a tensor quantity from another tensor quantity returns a tensor quantity, with all corresponding component values of the second operand subtracted from those of the first operand. |
| <code>T1*x or x*T1</code>       | <code>T3</code> | Multiplication of a tensor quantity and a real number returns a tensor quantity, with all component values multiplied by <code>x</code> .                                                          |



| Operator or function expression       | Result | Description                                                                                                                                                                                |
|---------------------------------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $T1/x$                                | $T3$   | Division of a tensor quantity with a real number returns a tensor quantity, with all component values divided by $x$ .                                                                     |
| $T1*v1$ or $v1*T1$                    | $v3$   | Multiplication of a tensor quantity and a vector quantity returns a vector quantity. The tensor and vector must have compatible (covariant and contravariant) dimensions.                  |
| <code>isZeroTensorQuantity(T1)</code> |        | Function that asserts whether given tensor quantity is a zero tensor or not by returning a boolean.                                                                                        |
| <code>isUnitTensorQuantity(T1)</code> |        | Function that asserts whether given tensor quantity is a unit tensor or not by returning a boolean.                                                                                        |
| <code>transform(ct, T1)</code>        | $T3$   | Transform a tensor quantity according to a coordinate transformation, which returns a tensor quantity transformed into the target coordinate frame of the given coordinate transformation. |

## Basics

In order to enable the use of quantities in expressions this library package specifies the mathematical operators and functions to support tensor quantity arithmetic, and some convenience functions. See [9.8.9.1](#) for a general introduction.

### TensorQuantityValue Construction

Construction of a literal or variable `TensorQuantityValue` is done through the `[` operator, matched by a closing `]`. The signature of the corresponding `CalculationDefinition` is:

```
calc def '[' specializes BaseFunctions::'[' {
 in num : Number[1..n] ordered; // a sequence of numbers that are the numerical values of the
 in mRef : TensorMeasurementReference[1];
 return quantity : TensorQuantityValue[1];
 private attribute n = mRef.flattenedSize;
}
```

The quantity dimensions of the components of a `TensorQuantityValue` are specified through the `mRefs` (defined by `ScalarMeasurementReference[1..*]`) of the `mRef : TensorMeasurementReference[1]` AttributeUsage of the tensor quantity. This allows to enforce the rules of scalar quantity arithmetic to the components of tensor quantities, when they are bound, assigned, defaulted, compared or the result of a tensor quantity expression evaluation.

#### 9.8.11.2 Elements

### 9.8.12 Measurement Ref Calculations

#### 9.8.12.1 Measurement Ref Calculations Overview

Similar to computations with `ScalarQuantityValues` and `VectorQuantityValues` in quantity expressions, it is also possible to create measurement reference expressions to compute with `MeasurementUnits` and `CoordinateFrames`.

### MeasurementUnit and CoordinateFrame Operations

The following table enumerates the measurement unit and coordinate frame operations. In order to enable concise formulations the following symbols for `AttributeUsages` are defined:

## MeasurementUnit and CoordinateFrame Operations

The following table enumerates the measurement unit and coordinate frame operations. In order to enable concise formulations the following symbols for `AttributeUsages` are defined:

- $x$  is defined by `ScalarValues::Real`, i.e.  $x$  is a real number
- $u_1, u_2, u_3$  are defined by `MeasurementUnit`, i.e. they are measurement units
- $fcf_1, fcf_2$  are defined by `CoordinateFrame{:> isBound = false;}`, i.e. they are free coordinate frames
- $bcf_1, bcf_2$  are defined by `CoordinateFrame{:> isBound = true;}`, i.e. they are bound coordinate frames

| Operator or function expression | Result | Description                                                                                                                                                                                                                                                                        |
|---------------------------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $u_1 * u_2$                     | $u_3$  | Multiplication of two measurement units returns a (derived) measurement unit, with quantity dimension exponents changed such that the exponent of the first operand is added to that of the second, for each base quantity. Equal terms in nominator and denominator cancel out.   |
| $u_1 / u_2$                     | $u_3$  | Division of two measurement units returns a (derived) measurement unit, with quantity dimension exponents changed such that the exponent of the second operand is subtracted from that of the second, for each base quantity. Equal terms in nominator and denominator cancel out. |
| $u_1 ^ x$                       | $u_3$  | Exponentiation of a measurement unit returns a (derived) measurement unit.                                                                                                                                                                                                         |
| $cf_1 * u_1$                    | $cf_2$ | Return a coordinate frame (with <code>isBound</code> default <code>false</code> ), that has its quantity dimension exponents for all component <code>mRefs</code> changed by adding the corresponding base quantity exponent of the measurement unit.                              |
| $bf_1 * u_1$                    | $cf_2$ | Return a coordinate frame (with <code>isBound</code> default <code>true</code> ), that has its quantity dimension exponents for all component <code>mRefs</code> changed by adding the corresponding base quantity exponent of the measurement unit.                               |
| $cf_1 / u_1$                    | $cf_2$ | Return a coordinate frame (with <code>isBound</code> default <code>false</code> ), that has its quantity dimension exponents for all component <code>mRefs</code> changed by subtracting the corresponding base quantity exponent of the measurement unit.                         |
| $bf_1 / u_1$                    | $cf_2$ | Return a coordinate frame (with <code>isBound</code> default <code>true</code> ), that has its quantity dimension exponents for all component <code>mRefs</code> changed by subtracting the corresponding base quantity exponent of the measurement unit.                          |

Examples of measurement unit expressions are:

```
attribute <'m/s'> 'metre per second' : SpeedUnit = m/s;
attribute <'N·m'> 'newton metre' : EnergyUnit = N*m;
```

Examples of coordinate frame and measurement unit expressions are:

```
attribute spatialCF: CartesianSpatial3dCoordinateFrame[1] { :> mRefs = (m, m, m); }
attribute velocityCF: CartesianVelocity3dCoordinateFrame[1] = spatialCF/s { :> isBound = false; }
attribute accelerationCF: CartesianAcceleration3dCoordinateFrame[1] = velocityCF/s;
```

### 9.8.12.2 Elements

- $x$  is defined by `ScalarValues::Real`, i.e.  $x$  is a real number
- $u_1, u_2, u_3$  are defined by `MeasurementUnit`, i.e. they are measurement units
- $fcf_1, fcf_2$  are defined by `CoordinateFrame{:>> isBound = false;}`, i.e. they are free coordinate frames
- $bcf_1, bcf_2$  are defined by `CoordinateFrame{:>> isBound = true;}`, i.e. they are bound coordinate frames

| <b>Operator or function expression</b> | <b>Result</b> | <b>Description</b>                                                                                                                                                                                                                                                                 |
|----------------------------------------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $u_1 * u_2$                            | $u_3$         | Multiplication of two measurement units returns a (derived) measurement unit, with quantity dimension exponents changed such that the exponent of the first operand is added to that of the second, for each base quantity. Equal terms in nominator and denominator cancel out.   |
| $u_1 / u_2$                            | $u_3$         | Division of two measurement units returns a (derived) measurement unit, with quantity dimension exponents changed such that the exponent of the second operand is subtracted from that of the second, for each base quantity. Equal terms in nominator and denominator cancel out. |
| $u_1 ^ x$                              | $u_3$         | Exponentiation of a measurement unit returns a (derived) measurement unit.                                                                                                                                                                                                         |
| $cf_1 * u_1$                           | $cf_2$        | Return a coordinate frame (with <code>isBound</code> default <code>false</code> ), that has its quantity dimension exponents for all component <code>mRefs</code> changed by adding the corresponding base quantity exponent of the measurement unit.                              |
| $bf_1 * u_1$                           | $cf_2$        | Return a coordinate frame (with <code>isBound</code> default <code>true</code> ), that has its quantity dimension exponents for all component <code>mRefs</code> changed by adding the corresponding base quantity exponent of the measurement unit.                               |
| $cf_1 / u_1$                           | $cf_2$        | Return a coordinate frame (with <code>isBound</code> default <code>false</code> ), that has its quantity dimension exponents for all component <code>mRefs</code> changed by subtracting the corresponding base quantity exponent of the measurement unit.                         |
| $bf_1 / u_1$                           | $cf_2$        | Return a coordinate frame (with <code>isBound</code> default <code>true</code> ), that has its quantity dimension exponents for all component <code>mRefs</code> changed by subtracting the corresponding base quantity exponent of the measurement unit.                          |

Examples of measurement unit expressions are:

```
attribute <'m/s'> 'metre per second' : SpeedUnit = m/s;
attribute <'N·m'> 'newton metre' : EnergyUnit = N*m;
```

Examples of coordinate frame and measurement unit expressions are:

```
attribute spatialCF: CartesianSpatial3dCoordinateFrame[1] { :>> mRefs = (m, m, m); }
attribute velocityCF: CartesianVelocity3dCoordinateFrame[1] = spatialCF/s { :>> isBound = false }
attribute accelerationCF: CartesianAcceleration3dCoordinateFrame[1] = velocityCF/s;
```

### 9.8.12.2 Elements

# A Annex: Example Model

(Informative)

## A.1 Introduction

The example presented in this Annex is intended to illustrate how SysML can be used to model a system. The example is a simple vehicle model that highlights selected language features. Both the graphical and corresponding textual notation are presented.

## A.2 Model Organization

The *SimpleVehicleModel* is organized into a hierarchy of packages, where some packages contain nested packages. The *Definitions* package contains nested packages for part definitions, attribute definitions, port definitions, item definitions, action definitions, requirements definitions, and other kinds of definition elements. The *VehicleConfigurations* package contains two design configurations that are modeled as usages of the definition elements from the *Definitions* package. Each vehicle configuration contains packages that contain its parts, actions, and requirements. This model includes separate packages for *VehicleAnalysis*, *VehicleVerification*, *Individuals*, and *View\_Viewpoints*. The *VehicleAnalysis* package contains analysis cases to analyze the system, and the *VehicleVerification* package contains verification cases and the verification system to verify the system. The *Views\_Viewpoints* package specifies user-defined views. Additional packages that are not shown include a *MissionContext* package that contains use cases for how the vehicle is used in a particular context, and a *VehicleFamily* package that contains a model with variation points from which specific vehicle configurations can be derived. The package for the International System of Quantities (*ISQ*) is imported into this model from the SysML model library so its content can be used to specify standard quantities and units. Imported packages can be shown with a dashed outline package symbol as shown in the figure or with an import relationship between the importing package and the imported package.

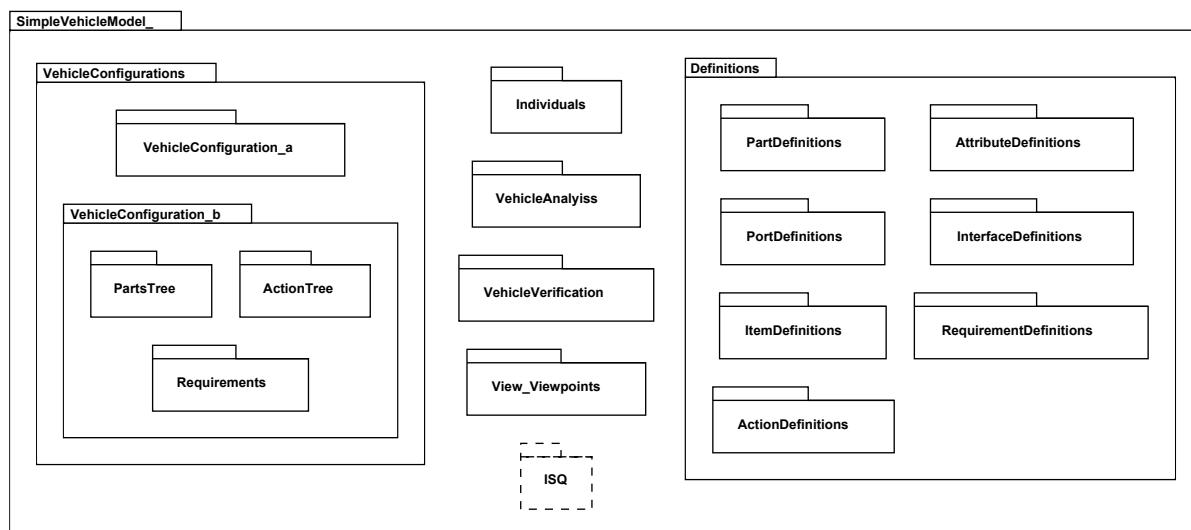


Figure 55. Model Organization for SimpleVehicleModel

```
package SimpleVehicleModel{
 import ISQ::.*;
 package Definitions { ... }
```

# A Annex: Example Model

(Informative)


## A.1 Introduction

The example presented in this Annex is intended to illustrate how SysML can be used to model a system. The example is a simple vehicle model that highlights selected language features. Both the graphical and corresponding textual notation are presented.

## A.2 Model Organization

### **SYSML2\_207: Update language description and concrete syntax related to imports**

The *SimpleVehicleModel* is organized into a hierarchy of packages, where some packages contain nested packages. The *Definitions* package contains nested packages for part definitions, attribute definitions, port definitions, item definitions, action definitions, requirements definitions, and other kinds of definition elements. The *VehicleConfigurations* package contains two design configurations that are modeled as usages of the definition elements from the *Definitions* package. Each vehicle configuration contains packages that contain its parts, actions, and requirements. This model includes separate packages for *VehicleAnalysis*, *VehicleVerification*, *Individuals*, and *View\_Viewpoints*. The *VehicleAnalysis* package contains analysis cases to analyze the system, and the *VehicleVerification* package contains verification cases and the verification system to verify the system. The *Views\_Viewpoints* package specifies user-defined views. Additional packages that are not shown include a *MissionContext* package that contains use cases for how the vehicle is used in a particular context, and a *VehicleFamily* package that contains a model with variation points from which specific vehicle configurations can be derived. The package for the International System of Quantities (*ISQ*) is imported into this model from the SysML model library so its content can be used to specify standard quantities and units. Imported packages can be shown with a dashed outline package symbol as shown in the figure or with an import relationship between the importing package and the imported package.

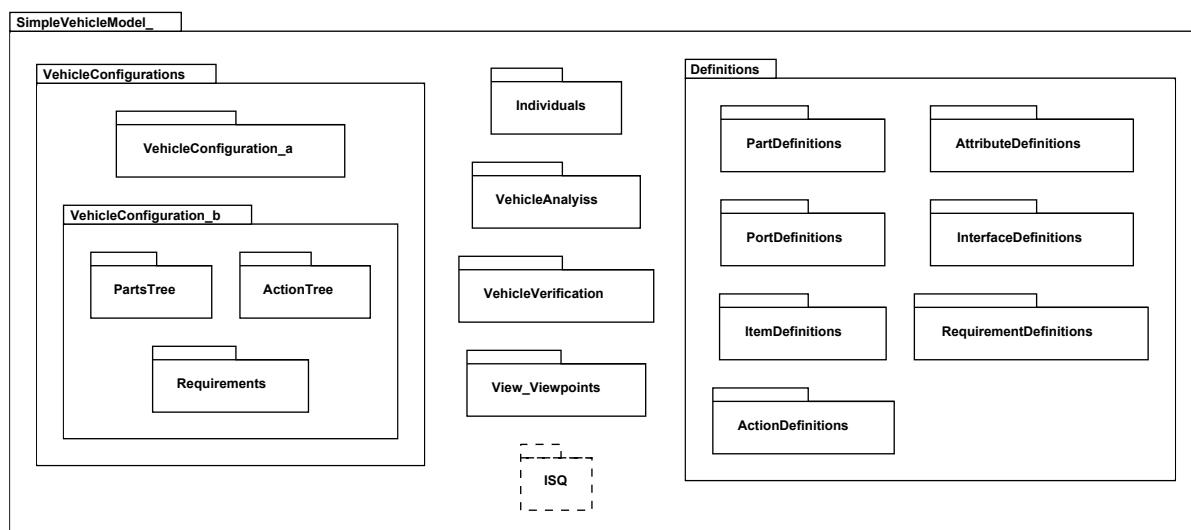

**Figure 56. Model Organization for SimpleVehicleModel**

```
package SimpleVehicleModel{
 private import ISQ::*;
```

```

package VehicleConfigurations{
 package VehicleConfiguration_a{ ... }
 package VehicleConfiguration_b{
 package PartsTree{ ... }
 package ActionTree{ ... }
 package Requirements{ ... }
 }
}
package VehicleAnalysis{ ... }
package VehicleVerification{ ... }
package Individuals{ ... }
package Views_Viewpoints{ ... }
...
}

```

The packages of a system model are often organized and managed to enable team members to work collaboratively on different aspects of the model, where each package contains cohesive content that can be worked on independently. The *VehicleConfigurations* package would typically import packages for each major system element (e.g., subsystem) to aid in collaborative development, although this was not done for this simple example.

## A.3 Definitions

The *Definitions* package contains a nested *PartDefinitions* package that contains definitions for the parts that are used to represent the vehicle configurations. This includes the part definition for a *Vehicle*, whose features include attributes, ports, actions, and states.

```

package Definitions { ... }
package VehicleConfigurations{
 package VehicleConfiguration_a{ ... }
 package VehicleConfiguration_b{
 package PartsTree{ ... }
 package ActionTree{ ... }
 package Requirements{ ... }
 }
}
package VehicleAnalysis{ ... }
package VehicleVerification{ ... }
package Individuals{ ... }
package Views_Viewpoints{ ... }
...
}

```

The packages of a system model are often organized and managed to enable team members to work collaboratively on different aspects of the model, where each package contains cohesive content that can be worked on independently. The *VehicleConfigurations* package would typically import packages for each major system element (e.g., subsystem) to aid in collaborative development, although this was not done for this simple example.

### A.3 Definitions

The *Definitions* package contains a nested *PartDefinitions* package that contains definitions for the parts that are used to represent the vehicle configurations. This includes the part definition for a *Vehicle*, whose features include attributes, ports, actions, and states.

|                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>«part def»</b><br><b>Vehicle</b>                                                                                                                                                                                                     |
| <i>attributes</i>                                                                                                                                                                                                                       |
| Tmax:> temperature<br>acceleration:> acceleration<br>brakePedalDepressed: Boolean<br>cargoMass:> mass<br>dryMass:> mass<br>electricalPower:> power<br>maintenanceTime: DateTime<br>mass:> mass<br>position:> length<br>velocity:> speed |
| <i>ports</i>                                                                                                                                                                                                                            |
| ignitionCmdPort: IgnitionCmdPort<br>pwrCmdPort: PwrCmdPort<br>vehicleToRoadPort: VehicleToRoadPort                                                                                                                                      |
| <i>actions</i>                                                                                                                                                                                                                          |
| <b>perform</b> providePower<br><b>perform</b> provideBraking<br><b>perform</b> controlDirection<br><b>perform</b> performSelfTest<br><b>perform</b> applyParkingBrake<br><b>perform</b> senseTemperature                                |
| <i>states</i>                                                                                                                                                                                                                           |
| <b>exhibit</b> vehicleStates                                                                                                                                                                                                            |

Figure 56. Part Definition for Vehicle

```
part def Vehicle {
 attribute mass:>ISQ::mass;
 attribute dryMass:>ISQ::mass;
 attribute cargoMass:>ISQ::mass;
 attribute position:>ISQ::length;
 attribute velocity:>ISQ::speed;
 attribute acceleration:>ISQ::acceleration;
 attribute electricalPower:>ISQ::power;
 attribute Tmax:>ISQ::temperature;
 attribute maintenanceTime: Time::DateTime;
 attribute brakePedalDepressed: Boolean;
 port ignitionCmdPort: IgnitionCmdPort;
 port pwrCmdPort: PwrCmdPort;
 port vehicleToRoadPort: VehicleToRoadPort;
 perform action providePower;
 perform action provideBraking;
 perform action controlDirection;
 perform action performSelfTest;
 perform action applyParkingBrake;
 perform action senseTemperature;
 exhibit state vehicleStates;
}
```

The attributes called *mass*, *dryMass*, and *cargoMass* are each a kind of the base *mass* attribute imported from the standard SysML *ISQ* library model (see [9.8.4](#)). Values of the attribute quantities contained in this library can then be

|                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>«part def»</b><br><b>Vehicle</b>                                                                                                                                                                                                     |
| <i>attributes</i>                                                                                                                                                                                                                       |
| Tmax:> temperature<br>acceleration:> acceleration<br>brakePedalDepressed: Boolean<br>cargoMass:> mass<br>dryMass:> mass<br>electricalPower:> power<br>maintenanceTime: DateTime<br>mass:> mass<br>position:> length<br>velocity:> speed |
| <i>ports</i>                                                                                                                                                                                                                            |
| ignitionCmdPort: IgnitionCmdPort<br>pwrCmdPort: PwrCmdPort<br>vehicleToRoadPort: VehicleToRoadPort                                                                                                                                      |
| <i>actions</i>                                                                                                                                                                                                                          |
| <b>perform</b> providePower<br><b>perform</b> provideBraking<br><b>perform</b> controlDirection<br><b>perform</b> performSelfTest<br><b>perform</b> applyParkingBrake<br><b>perform</b> senseTemperature                                |
| <i>states</i>                                                                                                                                                                                                                           |
| <b>exhibit</b> vehicleStates                                                                                                                                                                                                            |

**Figure 57.** Part Definition for Vehicle

```
part def Vehicle {
 attribute mass:>ISQ::mass;
 attribute dryMass:>ISQ::mass;
 attribute cargoMass:>ISQ::mass;
 attribute position:>ISQ::length;
 attribute velocity:>ISQ::speed;
 attribute acceleration:>ISQ::acceleration;
 attribute electricalPower:>ISQ::power;
 attribute Tmax:>ISQ::temperature;
 attribute maintenanceTime: Time::DateTime;
 attribute brakePedalDepressed: Boolean;
 port ignitionCmdPort: IgnitionCmdPort;
 port pwrCmdPort: PwrCmdPort;
 port vehicleToRoadPort: VehicleToRoadPort;
 perform action providePower;
 perform action provideBraking;
 perform action controlDirection;
 perform action performSelfTest;
 perform action applyParkingBrake;
 perform action senseTemperature;
 exhibit state vehicleStates;
}
```


The attributes called *mass*, *dryMass*, and *cargoMass* are each a kind of the base *mass* attribute imported from the standard SysML *ISQ* library model (see [9.8.4](#)). Values of the attribute quantities contained in this library can then be assigned standard units from the *SI* (see [9.8.6](#)) or *USCustomaryUnits* (see [9.8.7](#)) library models. For example,

assigned standard units from the *SI* (see [9.8.6](#)) or *USCustomaryUnits* (see [9.8.7](#)) library models. For example, the value of the *mass* of the *Vehicle* can be assigned the unit of kilogram (*SI*::*kg*). The *Vehicle* also contains other quantity attributes such as its *position* and *velocity*.

The *Vehicle* contains three ports called *ignitionCmdPort*, *pwrCmdPort* and *vehicleToRoadPort*, which are interaction points that provide ignition and fuel commands to the vehicle, and transfer vehicle torque to the road. The *Vehicle* performs the action *providePower* to accelerate the vehicle, and other actions that include *performSelfTest* and *applyParkingBrake*. In addition, the *Vehicle* exhibits its *vehicleStates*.

The *Vehicle* represents a class of individual vehicles which is defined by its attributes, ports, actions, and states. Other part definitions can be specified in a similar way to build a reusable library of part definitions.

The part definition for *FuelTank* contains an attribute called *mass* and an attribute called *fuelKind*. The attribute *fuelKind* is defined by the enumeration *FuelKind* that contains literal values for different kinds of fuel such as *gas* and *diesel*. The *FuelTank* also contains an item called *fuel*. An item is often used to represent something that flows through a system or is stored by a system. The fuel is not considered to be part of the *FuelTank*, so *fuel* is modeled as a referential feature (shown graphically using the white diamond symbol instead of the black diamond).

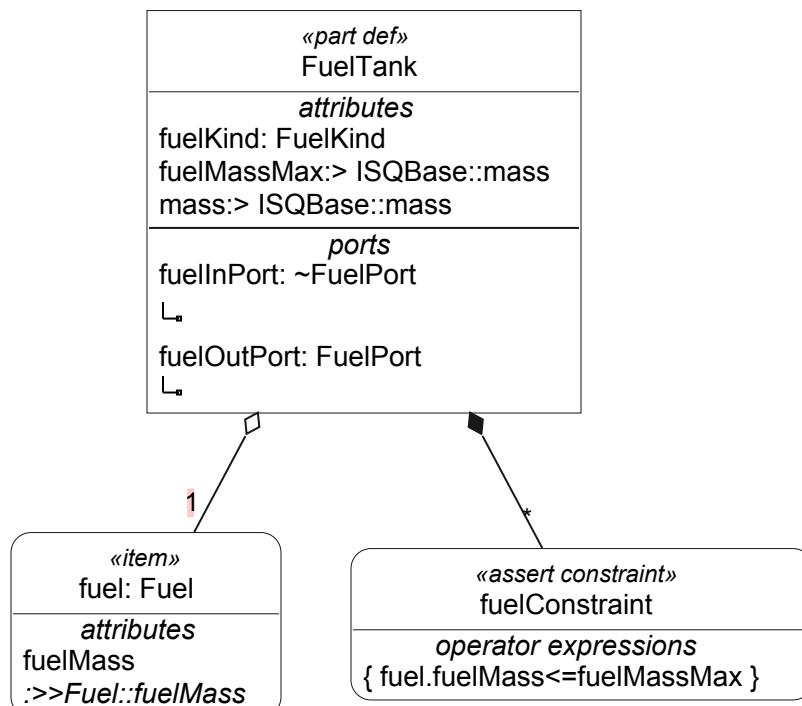

**Figure 57.** Part Definition for *FuelTank* Referencing Fuel it Stores

```

part def FuelTank{
 attribute mass :> ISQ::mass;
 attribute fuelKind:FuelKind;
 ref item fuel:Fuel{
 attribute redefines fuelMass;
 }
 attribute fuelMassMax:>ISQ::mass;
 assert constraint fuelConstraint {fuel.fuelMass<=fuelMassMax}
 port fuelOutPort:FuelPort;
 port fuelInPort:~FuelPort;
}


```

the value of the *mass* of the *Vehicle* can be assigned the unit of kilogram (*SI::kg*). The *Vehicle* also contains other quantity attributes such as its *position* and *velocity*.

The *Vehicle* contains three ports called *ignitionCmdPort*, *pwrCmdPort* and *vehicleToRoadPort*, which are interaction points that provide ignition and fuel commands to the vehicle, and transfer vehicle torque to the road. The *Vehicle* performs the action *providePower* to accelerate the vehicle, and other actions that include *performSelfTest* and *applyParkingBrake*. In addition, the *Vehicle* exhibits its *vehicleStates*.

The *Vehicle* represents a class of individual vehicles which is defined by its attributes, ports, actions, and states. Other part definitions can be specified in a similar way to build a reusable library of part definitions.

The part definition for *FuelTank* contains an attribute called *mass* and an attribute called *fuelKind*. The attribute *fuelKind* is defined by the enumeration *FuelKind* that contains literal values for different kinds of fuel such as *gas* and *diesel*. The *FuelTank* also contains an item called *fuel*. An item is often used to represent something that flows through a system or is stored by a system. The fuel is not considered to be part of the *FuelTank*, so *fuel* is modeled as a referential feature (shown graphically using the white diamond symbol instead of the black diamond).

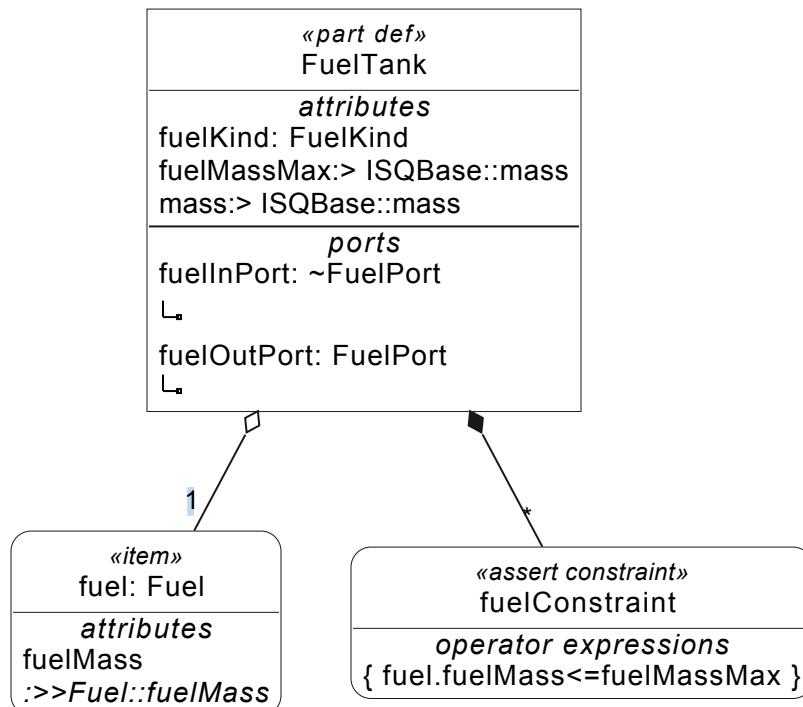

**Figure 58.** Part Definition for FuelTank Referencing Fuel it Stores

```

part def FuelTank{
 attribute mass :> ISQ::mass;
 attribute fuelKind:FuelKind;
 ref item fuel:Fuel{
 attribute redefines fuelMass;
 }
 attribute fuelMassMax:>ISQ::mass;
 assert constraint fuelConstraint { fuel.fuelMass<=fuelMassMax}
 port fuelOutPort:FuelPort;
 port fuelInPort:~FuelPort;
}


```

The *fuel* contains an attribute called *fuelMass*. The *FuelTank* contains an attribute called *fuelMassMax*, which represents the maximum amount of fuel that a *FuelTank* can store. A constraint is imposed that the *fuelMass* must

The *fuel* contains an attribute called *fuelMass*. The *FuelTank* contains an attribute called *fuelMassMax*, which represents the maximum amount of fuel that a *FuelTank* can store. A constraint is imposed that the *fuelMass* must be less than or equal to the *fuelMassMax*. The constraint is asserted to be true because, if the *fuelMass* exceeds the *fuelMassMax*, the model would be inconsistent and the model validation should generate an error. If assert is not used with the constraint, the model could evaluate the constraint to be false, and the model validation should not generate an error.

The *FuelTank* also contains a *fuelInPort* and a *fuelOutPort*. The *fuelOutPort* is defined by *FuelPort* that contains a directed feature to represent the fuel flowing out of this port. The *fuelInPort* is defined by a port definition that is the conjugate of the *FuelPort*. The conjugate is notated with a tilda (~) in front of the port definition name. The conjugate reverses the direction of each directed feature of the port that it conjugates, which in this case reverses the direction of the fuel to flow in to the port instead of out from the port. Note that the directed features are not shown in the figure but are specified as part of the definition of *FuelPort*.

The part definition for *Axle* contains the attribute *mass*. *FrontAxle* is a specialization of *Axle* that inherits its *mass* attribute and contains an additional attribute called *steeringAngle*.

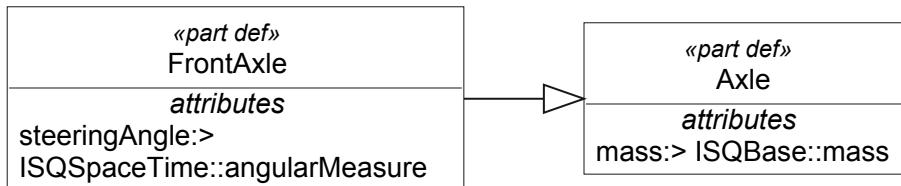


**Figure 58. Axle and its Subclass FrontAxle**

```

part def Axle{
 attribute mass:>ISQ::mass;
}
part def FrontAxle:>Axe{
 attribute steeringAngle:>ISQ::angularMeasure;
}

```

The *Definitions* package also contains several other kinds of definition elements. The port definition *FuelPort* contains an item called *fuel* that can flow out of the port. The *fuel* is defined by the item definition *Fuel* that contains a *mass* attribute. The interface definition *FuelInterface* is used to connect a *fuelOutPort* to a *fuelInPort*. The definition also specifies that *Fuel* flows across this interface. The item definition *FuelCmd* contains an attribute called *throttleLevel* that is defined by a *Real*. The action definition *ProvidePower* contains an input item *fuelCmd* that is defined by *FuelCmd*. It also contains an output attribute called *wheelToRoadTorque* that has multiplicity of 2, and is defined by the attribute definition *TorqueValue*.

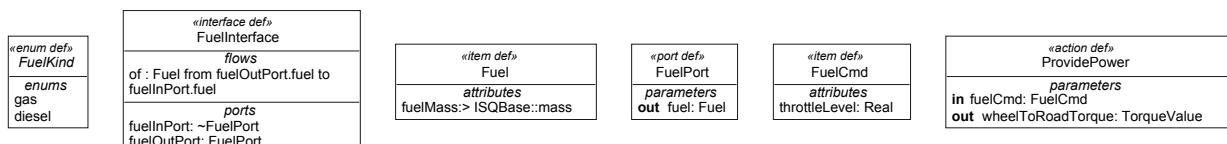

**Figure 59. Example Definition Elements**

```

action def ProvidePower {
 in item fuelCmd:FuelCmd;
 out wheelToRoadTorque:TorqueValue[2];
}


item def FuelCmd{
 attribute throttleLevel:Real;
}

```

be less than or equal to the `fuelMassMax`. The constraint is asserted to be true because, if the `fuelMass` exceeds the `fuelMassMax`, the model would be inconsistent and the model validation should generate an error. If assert is not used with the constraint, the model could evaluate the constraint to be false, and the model validation should not generate an error.

The `FuelTank` also contains a `fuelInPort` and a `fuelOutPort`. The `fuelOutPort` is defined by `FuelPort` that contains a directed feature to represent the fuel flowing out of this port. The `fuelInPort` is defined by a port definition that is the conjugate of the `FuelPort`. The conjugate is denoted with a tilde (~) in front of the port definition name. The conjugate reverses the direction of each directed feature of the port that it conjugates, which in this case reverses the direction of the fuel to flow in to the port instead of out from the port. Note that the directed features are not shown in the figure but are specified as part of the definition of `FuelPort`.

The part definition for `Axle` contains the attribute `mass`. `FrontAxle` is a specialization of `Axle` that inherits its `mass` attribute and contains an additional attribute called `steeringAngle`.

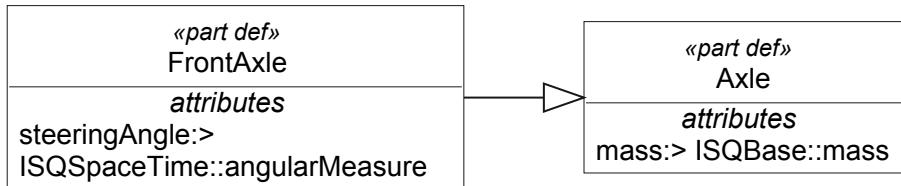


**Figure 59. Axle and its Subclass FrontAxle**

```

part def Axle{
 attribute mass:>ISQ::mass;
}
part def FrontAxle:>Axe{
 attribute steeringAngle:>ISQ::angularMeasure;
}

```

The `Definitions` package also contains several other kinds of definition elements. The port definition `FuelPort` contains an item called `fuel` that can flow out of the port. The `fuel` is defined by the item definition `Fuel` that contains a `mass` attribute. The interface definition `FuelInterface` is used to connect a `fuelOutPort` to a `fuelInPort`. The definition also specifies that `Fuel` flows across this interface. The item definition `FuelCmd` contains an attribute called `throttleLevel` that is defined by a `Real`. The action definition `ProvidePower` contains an input item `fuelCmd` that is defined by `FuelCmd`. It also contains an output attribute called `wheelToRoadTorque` that has multiplicity of 2, and is defined by the attribute definition `TorqueValue`.

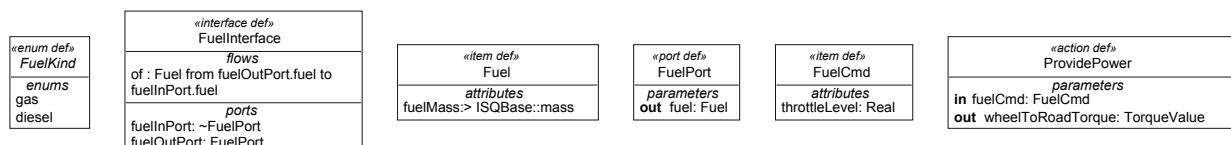

**Figure 60. Example Definition Elements**

```

action def ProvidePower {
 in item fuelCmd:FuelCmd;
 out wheelToRoadTorque:TorqueValue[2];
}

item def FuelCmd{
 attribute throttleLevel:Real;
}

port def FuelPort{
 out item fuel:Fuel;
}

```

```

}

port def FuelPort{
 out item fuel:Fuel;
}

item def Fuel{
 attribute fuelMass:>ISQ::mass;
}

interface def FuelInterface{
 end fuelOutPort:FuelPort;
 end fuelInPort:~FuelPort;
 flow of Fuel from fuelOutPort.fuel to fuelInPort.fuel;
}

enum def FuelKind {gas; diesel;}

```

## A.4 Parts

The `VehicleConfigurations` package contains two usages of the `Vehicle` part definition called `vehicle_a` and `vehicle_b`. The `vehicle_b` configuration is shown below. The part `vehicle_b` inherits features from its part definition `Vehicle`. It can then redefine or subset its inherited features and add new features. As an example, `vehicle_b` redefines the `mass` attribute it inherited from `Vehicle` and further constrains its mass to be the sum of its `dryMass`, `cargoMass`, and `fuelMass`. It redefines other features including other attributes, ports, actions, and states in a similar manner. Its actions are redefined to perform actions that are contained in the `ActionTree`. For example, the inherited action from `Vehicle` to `providePower` is redefined by `ActionTree::providePower`. As described in [A.6](#), the `providePower` contained in `ActionTree` is decomposed into other actions.

```

}

item def Fuel{
 attribute fuelMass:>ISQ::mass;
}

interface def FuelInterface{
 end fuelOutPort:FuelPort;
 end fuelInPort:~FuelPort;
 flow of Fuel from fuelOutPort.fuel to fuelInPort.fuel;
}

enum def FuelKind {gas; diesel;}

```

## A.4 Parts

The *VehicleConfigurations* package contains two usages of the *Vehicle* part definition called *vehicle\_a* and *vehicle\_b*. The *vehicle\_b* configuration is shown below. The part *vehicle\_b* inherits features from its part definition *Vehicle*. It can then redefine or subset its inherited features and add new features. As an example, *vehicle\_b* redefines the *mass* attribute it inherited from *Vehicle* and further constrains its mass to be the sum of its *dryMass*, *cargoMass*, and *fuelMass*. It redefines other features including other attributes, ports, actions, and states in a similar manner. Its actions are redefined to perform actions that are contained in the *ActionTree*. For example, the inherited action from *Vehicle* to *providePower* is redefined by *ActionTree::providePower*. As described in [A.6](#), the *providePower* contained in *ActionTree* is decomposed into other actions.

| <i>«part»</i>                                                                                                 |
|---------------------------------------------------------------------------------------------------------------|
| vehicle_b: Vehicle                                                                                            |
| <i>attributes</i>                                                                                             |
| cargoMass <b>default</b> 0 [kg]<br>:>>Vehicle::cargoMass                                                      |
| avgFuelEconomy:><br>AttributeDefinitions::distancePerVolume<br>dryMass=sum(partMasses)<br>:>>Vehicle::dryMass |
| mass=dryMass+cargoMass+fuelTank.fuel.fuelMass<br>:>>Vehicle::mass                                             |
| partMasses                                                                                                    |
| <i>exhibit states</i>                                                                                         |
| vehicleStates<br>:>>Vehicle::vehicleStates                                                                    |
| <i>parts</i>                                                                                                  |
| fuelTank: FuelTank                                                                                            |
| <i>perform actions</i>                                                                                        |
| providePower:> ActionTree::providePower<br>:>>Vehicle::providePower                                           |
| performSelfTest:><br>ActionTree::performSelfTest<br>:>>Vehicle::performSelfTest                               |
| applyParkingBrake:><br>ActionTree::applyParkingBrake<br>:>>Vehicle::applyParkingBrake                         |
| senseTemperature:><br>ActionTree::senseTemperature<br>:>>Vehicle::senseTemperature                            |
| <i>ports</i>                                                                                                  |
| fuelCmdPort: FuelCmdPort<br>:>>Vehicle::pwrCmdPort                                                            |
| setSpeedPort: ~SetSpeedPort<br>vehicleToRoadPort<br>:>>Vehicle::vehicleToRoadPort                             |

**Figure 60. Part Usage for vehicle\_b**

```

part vehicle_b:Vehicle{
 attribute mass redefines mass=
 dryMass+cargoMass+fuelTank.fuel.fuelMass;
 attribute dryMass redefines dryMass=sum(partMasses);
 attribute redefines cargoMass default 0 [kg];
 attribute partMasses=(...); // collection of part.mass
 attribute fuelEconomy :> distancePerVolume;
 port fuelCmdPort:FuelCmdPort redefines pwrCmdPort{
 in item fuelCmd redefines pwrCmd;
 port setSpeedPort:~SetSpeedPort;
 port vehicleToRoadPort redefines vehicleToRoadPort{
 port wheelToRoadPort1:WheelToRoadPort;
 port wheelToRoadPort2:Wheel1otRoadPort;
 }
 perform ActionTree::providePower redefines providePower;
 perform ActionTree::performSelfTest redefines performSelfTest;
 perform ActionTree::applyParkingBrake redefines applyParkingBrake;
 perform ActionTree::senseTemperature redefines senseTemperature;
 exhibit States::vehicleStates redefines vehicleStates;
}
part fuelTank:FuelTank{
...
}
```

|                                                                                       |
|---------------------------------------------------------------------------------------|
| <b>«part»</b>                                                                         |
| vehicle_b: Vehicle                                                                    |
| <b>attributes</b>                                                                     |
| cargoMass <b>default</b> 0 [kg]<br>:>>Vehicle::cargoMass                              |
| avgFuelEconomy:><br>AttributeDefinitions::distancePerVolume                           |
| dryMass=sum(partMasses)<br>:>>Vehicle::dryMass                                        |
| mass=dryMass+cargoMass+fuelTank.fuel.fuelMass<br>:>>Vehicle::mass                     |
| partMasses                                                                            |
| <b>exhibit states</b>                                                                 |
| vehicleStates<br>:>>Vehicle::vehicleStates                                            |
| <b>parts</b>                                                                          |
| fuelTank: FuelTank                                                                    |
| <b>perform actions</b>                                                                |
| providePower:> ActionTree::providePower<br>:>>Vehicle::providePower                   |
| performSelfTest:><br>ActionTree::performSelfTest<br>:>>Vehicle::performSelfTest       |
| applyParkingBrake:><br>ActionTree::applyParkingBrake<br>:>>Vehicle::applyParkingBrake |
| senseTemperature:><br>ActionTree::senseTemperature<br>:>>Vehicle::senseTemperature    |
| <b>ports</b>                                                                          |
| fuelCmdPort: FuelCmdPort<br>:>>Vehicle::pwrCmdPort                                    |
| setSpeedPort: ~SetSpeedPort                                                           |
| vehicleToRoadPort<br>:>>Vehicle::vehicleToRoadPort                                    |

**Figure 61. Part Usage for vehicle\_b**


```

part vehicle_b:Vehicle{
 attribute mass redefines mass=
 dryMass+cargoMass+fuelTank.fuel.fuelMass;
 attribute dryMass redefines dryMass=sum(partMasses);
 attribute redefines cargoMass default 0 [kg];
 attribute partMasses=(...); // collection of part.mass
 attribute fuelEconomy :> distancePerVolume;
 port fuelCmdPort:FuelCmdPort redefines pwrCmdPort{
 in item fuelCmd redefines pwrCmd;
 port setSpeedPort:~SetSpeedPort;
 port vehicleToRoadPort redefines vehicleToRoadPort{
 port wheelToRoadPort1:WheelToRoadPort;
 port wheelToRoadPort2:WheelToRoadPort;
 }
 perform ActionTree::providePower redefines providePower;
 perform ActionTree::performSelfTest redefines performSelfTest;
 perform ActionTree::applyParkingBrake redefines applyParkingBrake;
 perform ActionTree::senseTemperature redefines senseTemperature;
 exhibit States::vehicleStates redefines vehicleStates;
}
part fuelTank:FuelTank{
...
}
...
}

```

...  
}

A *parts tree* is a representation of the decomposition of a part into its constituent parts. Different part usages with the same definition, such as *vehicle\_a* and *vehicle\_b*, can have different decompositions. As shown below, *vehicle\_b* is composed of several parts, including an *engine*, *starterMotor*, *transmission*, *driveshaft*, *frontAxleAssembly*, *rearAxleAssembly*, *fuelTank*, and *vehicleSoftware*. The *frontAxleAssembly* contains a *frontAxle* and two *frontWheels* as designated by the multiplicity [2]. The *rearAxleAssembly* contains a *rearAxle*, *differential*, *rearWheel1*, and *rearWheel2*. Note that some of the definition elements are elided from the figure but are visible in the textual notation. As always, views of the model only show selected aspects of the model.

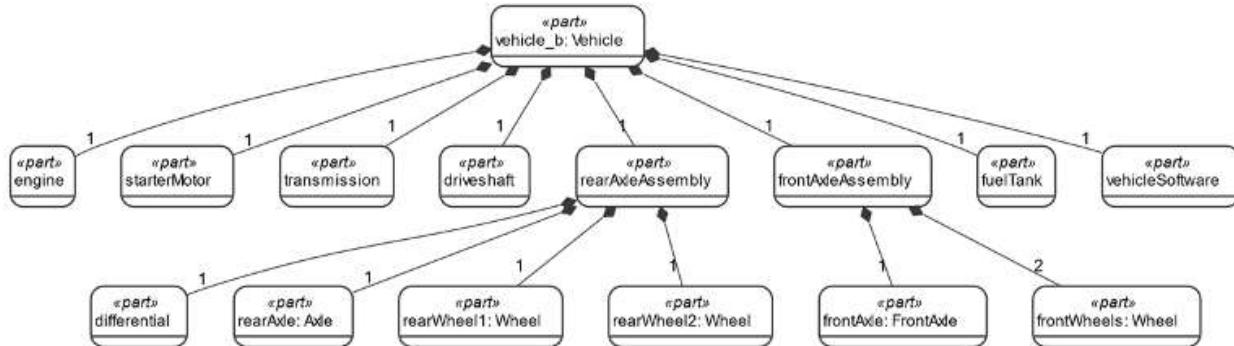

**Figure 61.** Parts Tree for *vehicle\_b*


```

part vehicle_b:Vehicle {
 ...
 part starterMotor:StarterMotor;
 part fuelTank:FuelTank;
 part engine:Engine;
 part transmission:Transmission;
 part driveshaft:Driveshaft;
 part rearAxleAssembly{
 part differential:Differential;
 part rearAxle:Axe;
 part rearWheel1:Wheel;
 part rearWheel2:Wheel;
 }
 part frontAxleAssembly{
 part frontAxle:FrontAxle;
 part frontWheels:Wheel[2];
 }
 part vehicleSoftware:VehicleSoftware;
}

```

The *VehicleConfigurations* package also contains the *engine4Cyl* variant that subsets *engine*. In general, an *engine* can contain 4 to 8 *cylinders*. The *engine4Cyl* variant redefines the set of 4..8 cylinders to be exactly 4 *cylinders*, and then subsets the set of 4 cylinders to create *cylinder1*, *cylinder2*, *cylinder3*, and *cylinder4*. (See also the example of variability modeling in [A.12](#).)

A *parts tree* is a representation of the decomposition of a part into its constituent parts. Different part usages with the same definition, such as `vehicle_a` and `vehicle_b`, can have different decompositions. As shown below, `vehicle_b` is composed of several parts, including an `engine`, `starterMotor`, `transmission`, `driveshaft`, `frontAxeAssembly`, `rearAxeAssembly`, `fuelTank`, and `vehicleSoftware`. The `frontAxeAssembly` contains a `frontAxe` and two `frontWheels` as designated by the multiplicity [2]. The `rearAxeAssembly` contains a `rearAxe`, `differential`, `rearWheel1`, and `rearWheel2`. Note that some of the definition elements are elided from the figure but are visible in the textual notation. As always, views of the model only show selected aspects of the model.

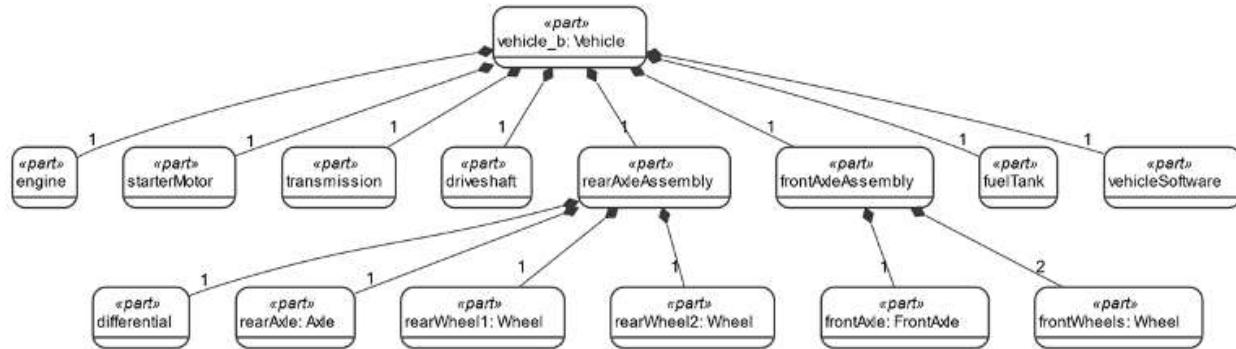


**Figure 62. Parts Tree for vehicle\_b**

```

part vehicle_b:Vehicle {
 ...
 part starterMotor:StarterMotor;
 part fuelTank:FuelTank;
 part engine:Engine;
 part transmission:Transmission;
 part driveshaft:Driveshaft;
 part rearAxeAssembly{
 part differential:Differential;
 part rearAxe:Axe;
 part rearWheel1:Wheel;
 part rearWheel2:Wheel;
 }
 part frontAxeAssembly{
 part frontAxe:FrontAxe;
 part frontWheels:Wheel[2];
 }
 part vehicleSoftware:VehicleSoftware;
}

```

The `VehicleConfigurations` package also contains the `engine4Cyl` variant that subsets `engine`. In general, an `engine` can contain 4 to 8 `cylinders`. The `engine4Cyl` variant redefines the set of 4..8 cylinders to be exactly 4 `cylinders`, and then subsets the set of 4 cylinders to create `cylinder1`, `cylinder2`, `cylinder3`, and `cylinder4`. (See also the example of variability modeling in [A.12](#).)

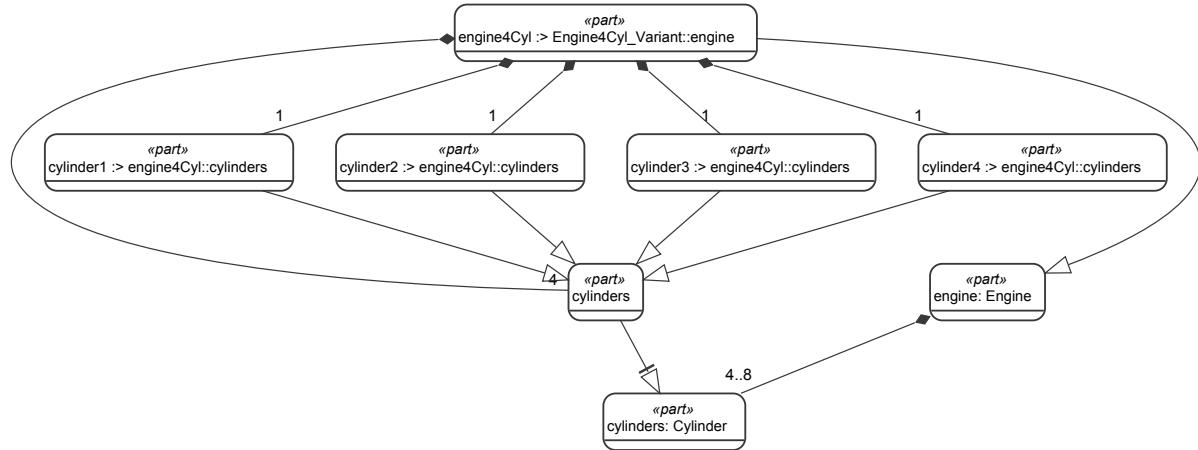

**Figure 62. Variant engine4Cyl**

```

part engine:Engine{
 part cylinders:Cylinder [4..8] ordered;
}

part engine4Cyl:>engine{
 part redefines cylinders[4];
 part cylinder1[1] subsets cylinders;
 part cylinder2[1] subsets cylinders;
 part cylinder3[1] subsets cylinders;
 part cylinder4[1] subsets cylinders;
}

```


## A.5 Parts Interconnection

The various constituent parts of *vehicle\_b* are interconnected via their ports. The *fuelCmdPort* on *vehicle\_b* is delegated to the *fuelCmdPort* on the engine using a binding connection. The *controlPort* on the *vehicleController* is connected to the *engineControlPort* on the engine. The *controlPort* is defined by *ControlPort* and the *engineControlPort* is defined by a port definition that is the conjugate of the *ControlPort* (that is, the directions of all its directed features are reversed relative to those of the original port definition).

The *drivePwrPort* on the engine is connected to the *clutchPort* on the transmission by an interface. The interface is defined by an interface definition whose port at one end of the interface is defined as *DrivePwrPort* and whose port at the other end of the interface is defined as the conjugate of the *DrivePwrPort*. The *DrivePwrPort* contains the directed feature *out engineTorque:Torque*. The conjugate of the *DrivePwrPort* contains the directed feature *in engineTorque:Torque*.

The *fuelOutPort* on the *fuelTank* is connected to the *fuelInPort* on the *Engine* by an interface. This interface is defined by the interface definition *FuelInterface* which contains a flow of *Fuel*. This flow can be shown as a solid arrowhead on the connection between the ports but is not shown in this particular view.

Connections can be made directly between nested parts without having to establish a connection between the corresponding composite parts. For example, the port on the *driveShaft* can connect directly to a port on the *differential* without having to connect first to the *rearAxleAssembly* that composes the *differential*. Ports can also be nested within a composite port as shown by the *vehicleToRoadPort*, which contains a nested port for each rear wheel.

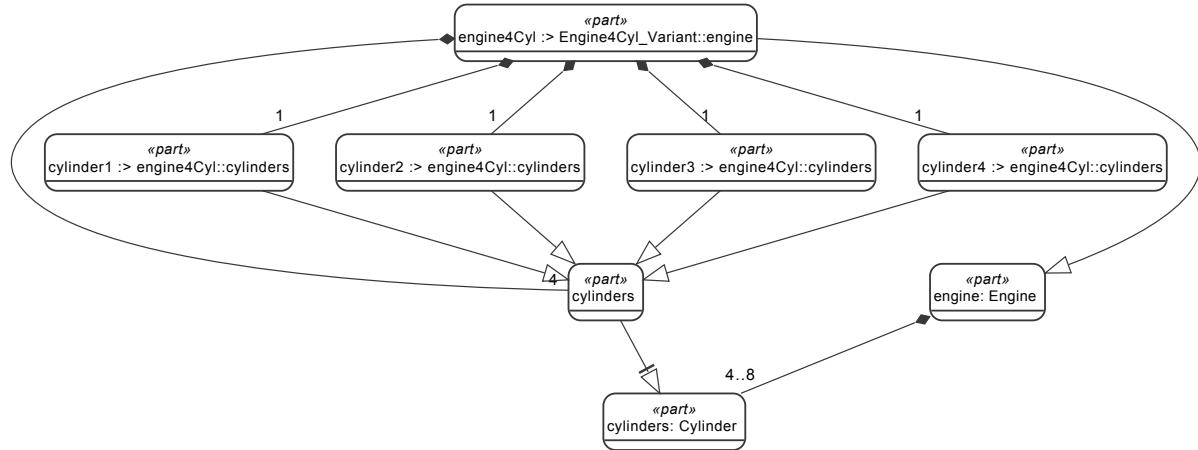

**Figure 63. Variant engine4Cyl**

```

part engine:Engine{
 part cylinders:Cylinder [4..8] ordered;
}

part engine4Cyl:>engine{
 part redefines cylinders[4];
 part cylinder1[1] subsets cylinders;
 part cylinder2[1] subsets cylinders;
 part cylinder3[1] subsets cylinders;
 part cylinder4[1] subsets cylinders;
}

```


## A.5 Parts Interconnection

The various constituent parts of *vehicle\_b* are interconnected via their ports. The *fuelCmdPort* on *vehicle\_b* is delegated to the *fuelCmdPort* on the engine using a binding connection. The *controlPort* on the *vehicleController* is connected to the *engineControlPort* on the engine. The *controlPort* is defined by *ControlPort* and the *engineControlPort* is defined by a port definition that is the conjugate of the *ControlPort* (that is, the directions of all its directed features are reversed relative to those of the original port definition).

The *drivePwrPort* on the engine is connected to the *clutchPort* on the transmission by an interface. The interface is defined by an interface definition whose port at one end of the interface is defined as *DrivePwrPort* and whose port at the other end of the interface is defined as the conjugate of the *DrivePwrPort*. The *DrivePwrPort* contains the directed feature *out engineTorque:Torque*. The conjugate of the *DrivePwrPort* contains the directed feature *in engineTorque:Torque*.

The *fuelOutPort* on the *fuelTank* is connected to the *fuelInPort* on the *Engine* by an interface. This interface is defined by the interface definition *FuelInterface* which contains a flow of *Fuel*. This flow can be shown as a solid arrowhead on the connection between the ports but is not shown in this particular view.

Connections can be made directly between nested parts without having to establish a connection between the corresponding composite parts. For example, the port on the *driveShaft* can connect directly to a port on the *differential* without having to connect first to the *rearAxleAssembly* that composes the *differential*. Ports can also be nested within a composite port as shown by the *vehicleToRoadPort*, which contains a nested port for each rear wheel.

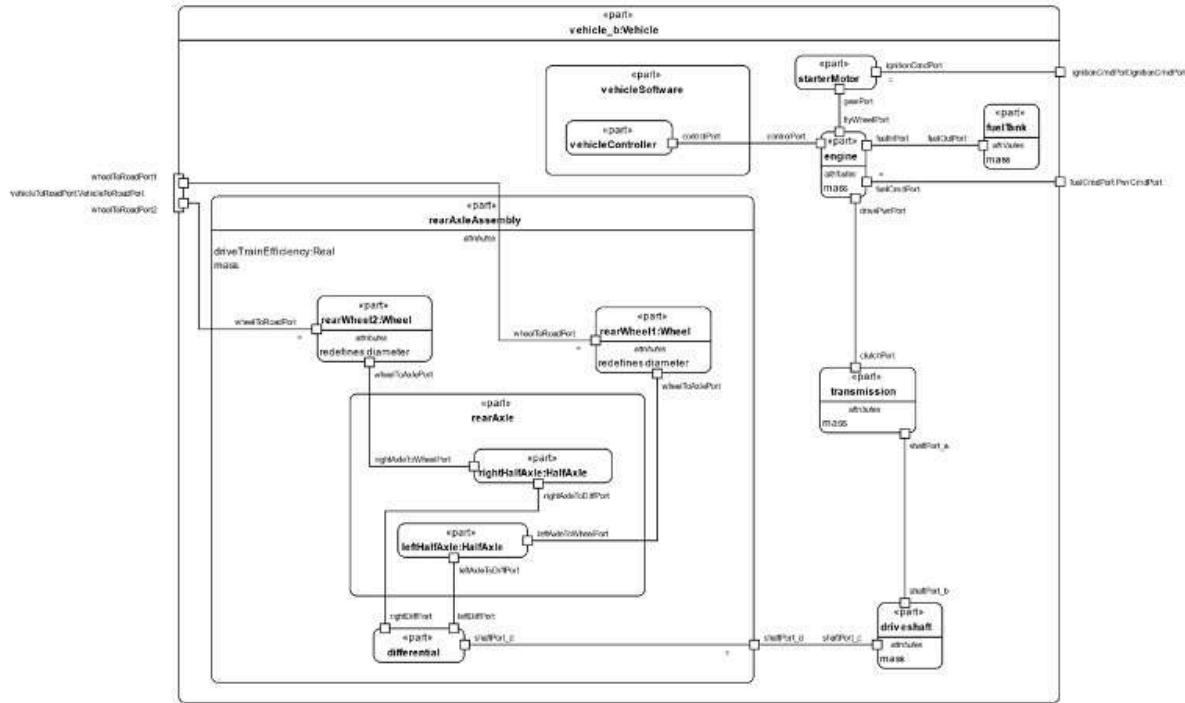


**Figure 63.** Parts Interconnection for vehicle\_b

```

part vehicle_b : Vehicle{
 port fuelCmdPort redefines pwrCmdPort;
 port vehicleToRoadPort redefines vehicleToRoadPort{
 port wheelToRoadPort1;
 port wheelToRoadPort2;
 }
}
part fuelTank:FuelTank{
 port fuelOutPort;
}
part rearAxleAssembly{
 port shaftPort_d;
 part rearWheel1:Wheel{
 port :>>wheelToRoadPort;
 port :>>wheelToAxePort;
 }
 part rearWheel2:Wheel{
 port :>>wheelToRoadPort;
 port :>>wheelToAxePort;
 }
 part differential:Differential{
 port shaftPort_d;
 port leftDiffPort;
 port rightDiffPort;
 }
}
part rearAxle{
 part leftHalfAxe:HalfAxe{
 port leftAxeToDiffPort;
 port leftAxeToWheelPort;
 }
 part rightHalfAxe:HalfAxe{
 port rightAxeToDiffPort;
 }
}

```

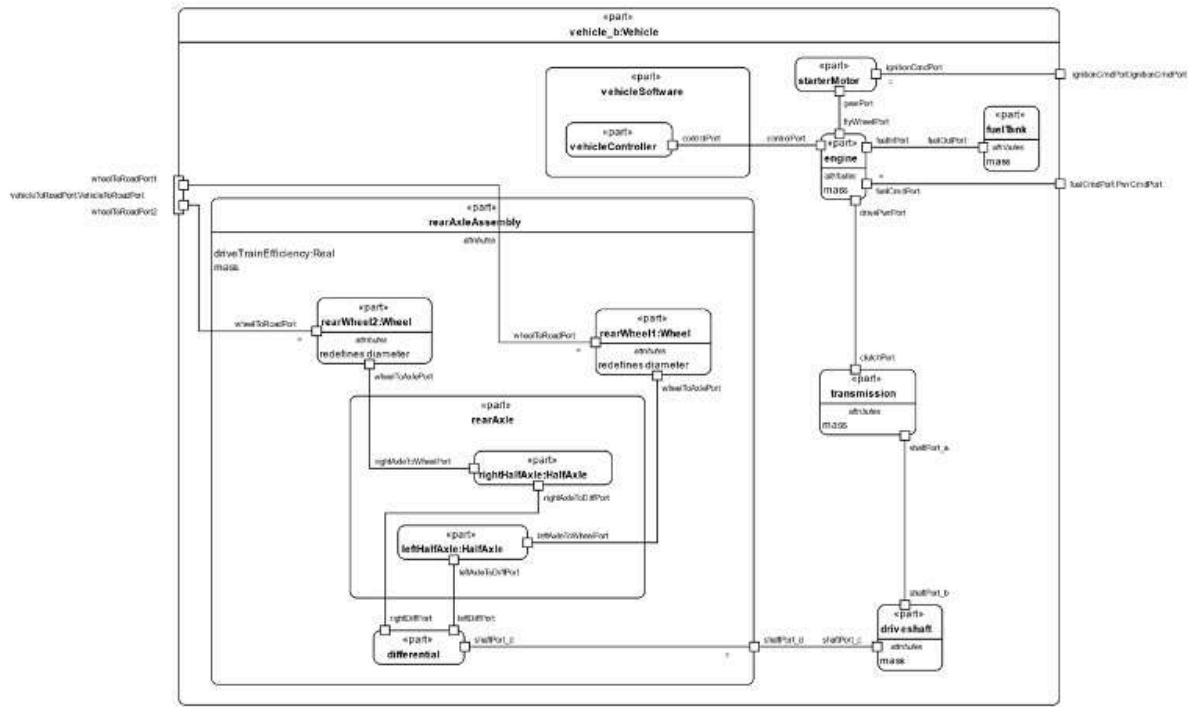

**Figure 64.** Parts Interconnection for vehicle\_b

```

part vehicle_b : Vehicle{
 port fuelCmdPort redefines pwrCmdPort;
 port vehicleToRoadPort redefines vehicleToRoadPort{
 port wheelToRoadPort1;
 port wheelToRoadPort2;
 }
 part fuelTank:FuelTank{
 port fuelOutPort;
 }
 part rearAxleAssembly{
 port shaftPort_d;
 part rearWheel1:Wheel{
 port :>>wheelToRoadPort;
 port :>>wheelToAxePort;
 }
 part rearWheel2:Wheel{
 port :>>wheelToRoadPort;
 port :>>wheelToAxePort;
 }
 part differential:Differential{
 port shaftPort_d;
 port leftDiffPort;
 port rightDiffPort;
 }
 part rearAxe{
 part leftHalfAxe:HalfAxe{
 port leftAxeToDiffPort;
 port leftAxeToWheelPort;
 }
 part rightHalfAxe:HalfAxe{
 port rightAxeToDiffPort;
 port rightAxeToWheelPort;
 }
 }
 }
}

```

```

 port rightAxeToWheelPort;
 }

bind shaftPort_d = differential.shaftPort_d;
connect differential.leftDiffPort
 to rearAxe.leftHalfAxe.leftAxeToDiffPort;
connect differential.rightDiffPort
 to rearAxe.rightHalfAxe.rightAxeToDiffPort;
connect rearAxe.leftHalfAxe.leftAxeToWheelPort
 to rearWheel1.wheelToAxePort;
connect rearAxe.rightHalfAxe.rightAxeToWheelPort
 to rearWheel2.wheelToAxePort;
}

part starterMotor:StarterMotor{
 port ignitionCmdPort;
 port gearPort;
}
part engine:Engine{
 port fuelCmdPort;
 port drivePwrPort:DrivePwrPort;
 port fuelInPort;
 port flyWheelPort;
 port controlPort;
}
part transmission:Transmission{
 port clutchPort:~DrivePwrPort;
 port shaftPort_a;
}
part driveshaft:Driveshaft{
 port shaftPort_b;
 port shaftPort_c;
}
part vehicleSoftware:VehicleSoftware{
 part vehicleController {
 port controlPort;
 }
}

//connections
bind engine.fuelCmdPort = fuelCmdPort;
bind starterMotor.ignitionCmdPort = ignitionCmdPort;

interface engineToTransmissionInterface:EngineToTransmissionInterface
 connect engine.drivePwrPort to transmission.clutchPort;

interface fuelInterface:FuelInterface
 connect fuelTank.fuelOutPort to engine.fuelInPort;

connect vehicleSoftware.vehicleController.controlPort
 to engine.controlPort;
connect starterMotor.gearPort
 to engine.flyWheelPort;
connect transmission.shaftPort_a
 to driveshaft.shaftPort_b;
connect driveshaft.shaftPort_c
 to rearAxeAssembly.shaftPort_d;
bind rearAxeAssembly.rearWheel1.wheelToRoadPort
 = vehicleToRoadPort.wheelToRoadPort1;

```

```

 }

 bind shaftPort_d = differential.shaftPort_d;
 connect differential.leftDiffPort
 to rearAxle.leftHalfAxe.leftAxeToDiffPort;
 connect differential.rightDiffPort
 to rearAxle.rightHalfAxe.rightAxeToDiffPort;
 connect rearAxle.leftHalfAxe.leftAxeToWheelPort
 to rearWheel1.wheelToAxePort;
 connect rearAxle.rightHalfAxe.rightAxeToWheelPort
 to rearWheel2.wheelToAxePort;
 }

part starterMotor:StarterMotor{
 port ignitionCmdPort;
 port gearPort;
}
part engine:Engine{
 port fuelCmdPort;
 port drivePwrPort:DrivePwrPort;
 port fuelInPort;
 port flyWheelPort;
 port controlPort;
}
part transmission:Transmission{
 port clutchPort:~DrivePwrPort;
 port shaftPort_a;
}
part driveshaft:Driveshaft{
 port shaftPort_b;
 port shaftPort_c;
}
part vehicleSoftware:VehicleSoftware{
 part vehicleController {
 port controlPort;
 }
}

//connections
bind engine.fuelCmdPort = fuelCmdPort;
bind starterMotor.ignitionCmdPort = ignitionCmdPort;

interface engineToTransmissionInterface:EngineToTransmissionInterface
 connect engine.drivePwrPort to transmission.clutchPort;

interface fuelInterface:FuelInterface
 connect fuelTank.fuelOutPort to engine.fuelInPort;

connect vehicleSoftware.vehicleController.controlPort
 to engine.controlPort;
connect starterMotor.gearPort
 to engine.flyWheelPort;
connect transmission.shaftPort_a
 to driveshaft.shaftPort_b;
connect driveshaft.shaftPort_c
 to rearAxleAssembly.shaftPort_d;
bind rearAxleAssembly.rearWheel1.wheelToRoadPort
 = vehicleToRoadPort.wheelToRoadPort1;
bind rearAxleAssembly.rearWheel2.wheelToRoadPort
 = vehicleToRoadPort.wheelToRoadPort2;
}

```


```

 bind rearAxleAssembly.rearWheel2.wheelToRoadPort
 = vehicleToRoadPort.wheelToRoadPort2;
 }

```

## A.6 Actions

The definition and usage pattern applies not only to parts and part definitions, but to most constructs in SysML. As shown below, the action *providePower* is defined by the action definition *ProvidePower*. The action *providePower* contains actions to *generateTorque*, *amplifyTorque*, *transferTorque*, and *distributeTorque*, each of which have their own definitions. The actions inherit their input and output parameters from their definition and redefine them as necessary (Note: the inherited parameters are not shown.)

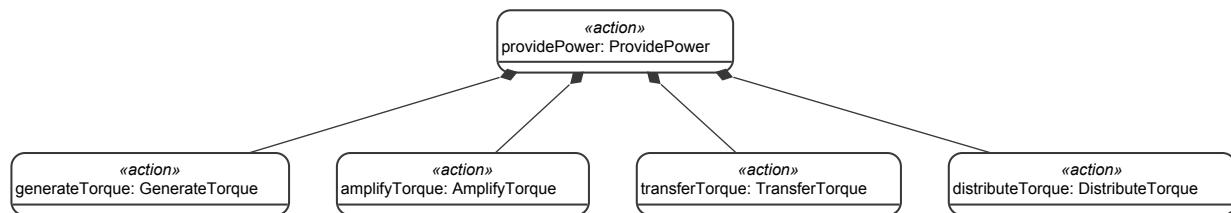

**Figure 64.** Action *providePower*


```

action providePower:ProvidePower{
 action generateTorque:GenerateTorque;
 action amplifyTorque:AmplifyTorque;
 action transferTorque:TransferTorque;
 action distributeTorque:DistributeTorque;
 ...
}

```

As shown in [Fig. 60](#), the part *vehicle\_b* performs the action *providePower*. The subparts of *vehicle\_b* then perform the appropriate subactions of *providePower*. For example, the part *engine* performs the action *providePower.generateTorque*, which redefines the *generateTorque* action inherited from its definition.

The output of each subaction of *providePower* is connected by a flow connection to the input of another subaction, except for *distributeTorque*, whose outputs are bound to the outputs of *providePower*. The input and output parameters are streaming unless designated as succession flows, meaning that the inputs continue to be consumed and the outputs continue to be produced as the action executes.

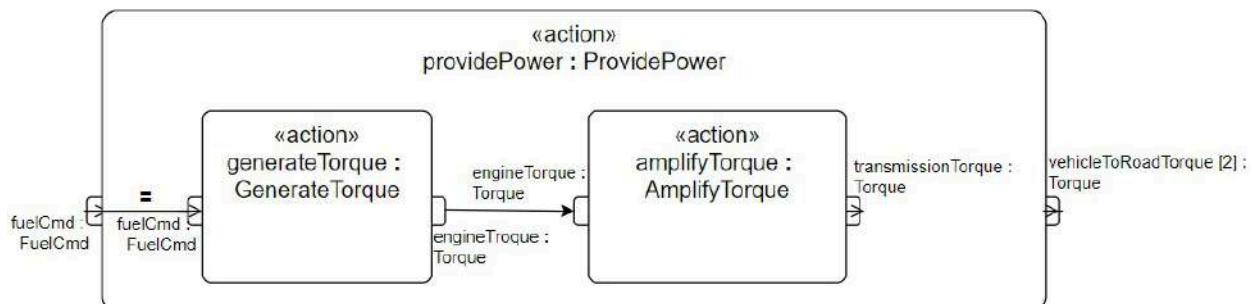

**Figure 65.** Action flow for *providePower*


```

action providePower:ProvidePower{
 ...
 bind fuelCmd = generateTorque.fuelCmd;
 flow generateTorque.engineTorque to amplifyTorque.engineTorque;
}

```

## A.6 Actions

The definition and usage pattern applies not only to parts and part definitions, but to most constructs in SysML. As shown below, the action *providePower* is defined by the action definition *ProvidePower*. The action *providePower* contains actions to *generateTorque*, *amplifyTorque*, *transferTorque*, and *distributeTorque*, each of which have their own definitions. The actions inherit their input and output parameters from their definition and redefine them as necessary (Note: the inherited parameters are not shown.)

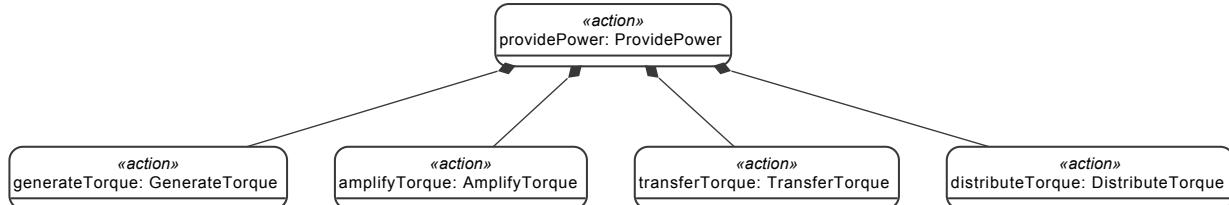

**Figure 65.** Action *providePower*


```

action providePower:ProvidePower{
 action generateTorque:GenerateTorque;
 action amplifyTorque:AmplifyTorque;
 action transferTorque:TransferTorque;
 action distributeTorque:DistributeTorque;
 ...
}

```

As shown in [Fig. 61](#), the part *vehicle\_b* performs the action *providePower*. The subparts of *vehicle\_b* then perform the appropriate subactions of *providePower*. For example, the part *engine* performs the action *providePower.generateTorque*, which redefines the *generateTorque* action inherited from its definition.

The output of each subaction of *providePower* is connected by a flow connection to the input of another subaction, except for *distributeTorque*, whose outputs are bound to the outputs of *providePower*. The input and output parameters are streaming unless designated as succession flows, meaning that the inputs continue to be consumed and the outputs continue to be produced as the action executes.

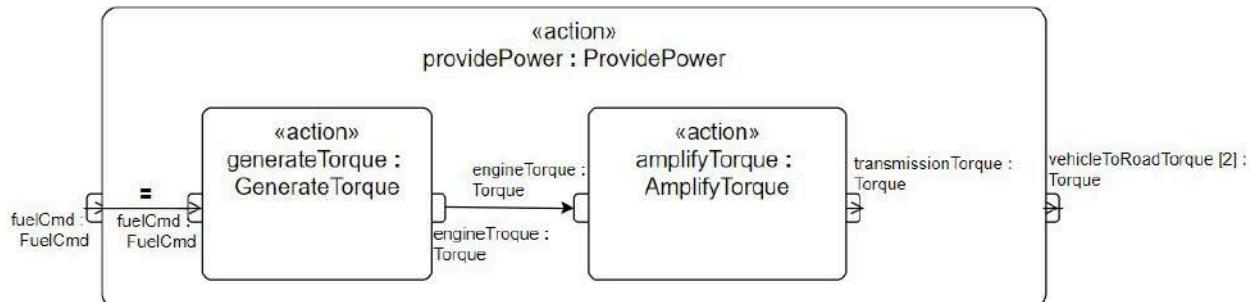

**Figure 66.** Action flow for *providePower*

```

action providePower:ProvidePower{
 ...
 bind fuelCmd = generateTorque.fuelCmd;
 flow generateTorque.engineTorque to amplifyTorque.engineTorque;
 flow amplifyTorque.transmissionTorque to transferTorque.transmissionTorque;
 flow transferTorque.driveshaftTorque to distributeTorque.driveshaftTorque;
 bind distributeTorque.wheelToRoadTorque = wheelToRoadTorque;
}


```

```

 flow amplifyTorque.transmissionTorque to transferTorque.transmissionTorque;
 flow transferTorque.driveshaftTorque to distributeTorque.driveshaftTorque;
 bind distributeTorque.wheelToRoadTorque = wheelToRoadTorque;
 }
}

```

The *transportPassenger\_1* use case contains a sequence of actions for a *Vehicle* to transport passengers. The use case is defined by a use case definition called *TransportPassenger*. The actions *passenger1GetInVehicle* and *driverGetInVehicle* are performed concurrently after the start of the use case. After both these actions complete, an accept action is triggered upon receipt of an *IgnitionCmd*. After this, the actions *driveVehicleToDestination* and *providePower* can proceed concurrently. Once these are both completed, then the actions *passenger1GetOutOfVehicle* and *driverGetOutOfVehicle* are preformed concurrently, after which the *transportPassenger* use case is done. The fork and join control nodes and the successions (i.e., first and then) are used to control the action sequence.

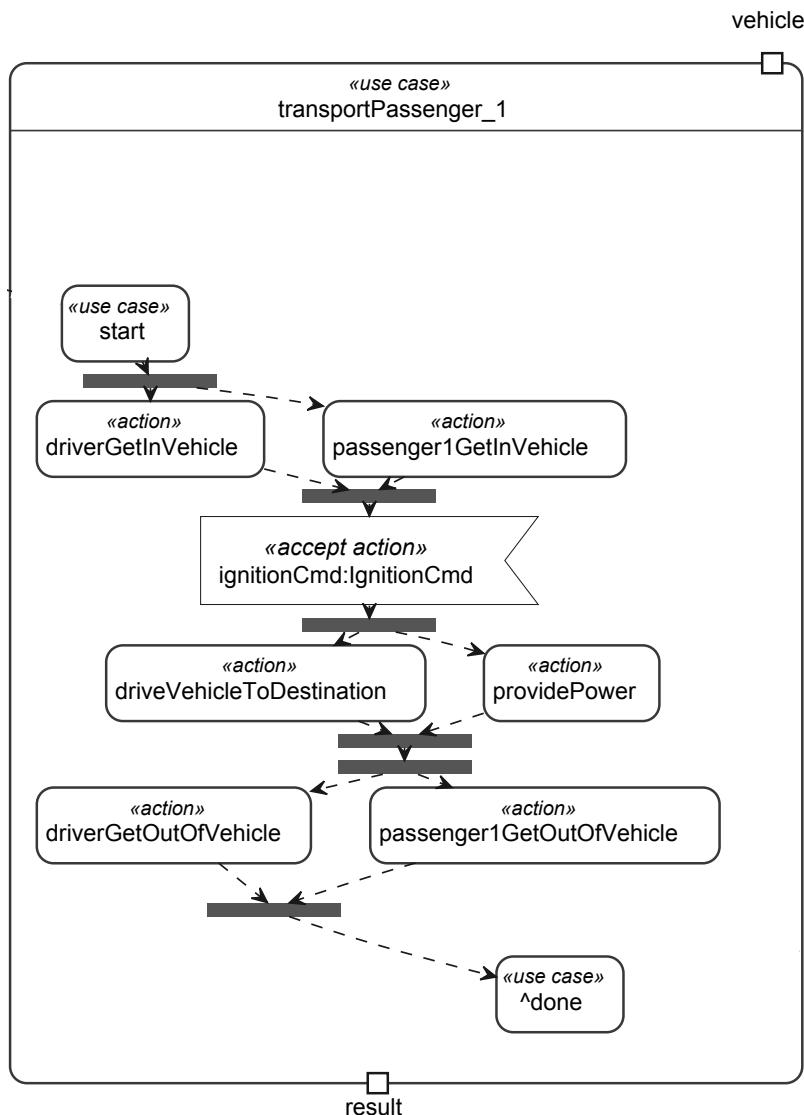


**Figure 66.** Action flow for *transportPassenger*

```

use case transportPassenger_1:TransportPassenger{
 //action declarations
}

```

The `transportPassenger_1` use case contains a sequence of actions for a `Vehicle` to transport passengers. The use case is defined by a use case definition called `TransportPassenger`. The actions `passenger1GetInVehicle` and `driverGetInVehicle` are performed concurrently after the start of the use case. After both these actions complete, an accept action is triggered upon receipt of an `IgnitionCmd`. After this, the actions `driveVehicleToDestination` and `providePower` can proceed concurrently. Once these are both completed, then the actions `passenger1GetOutOfVehicle` and `driverGetOutOfVehicle` are preformed concurrently, after which the `transportPassenger` use case is done. The fork and join control nodes and the successions (i.e., first and then) are used to control the action sequence.

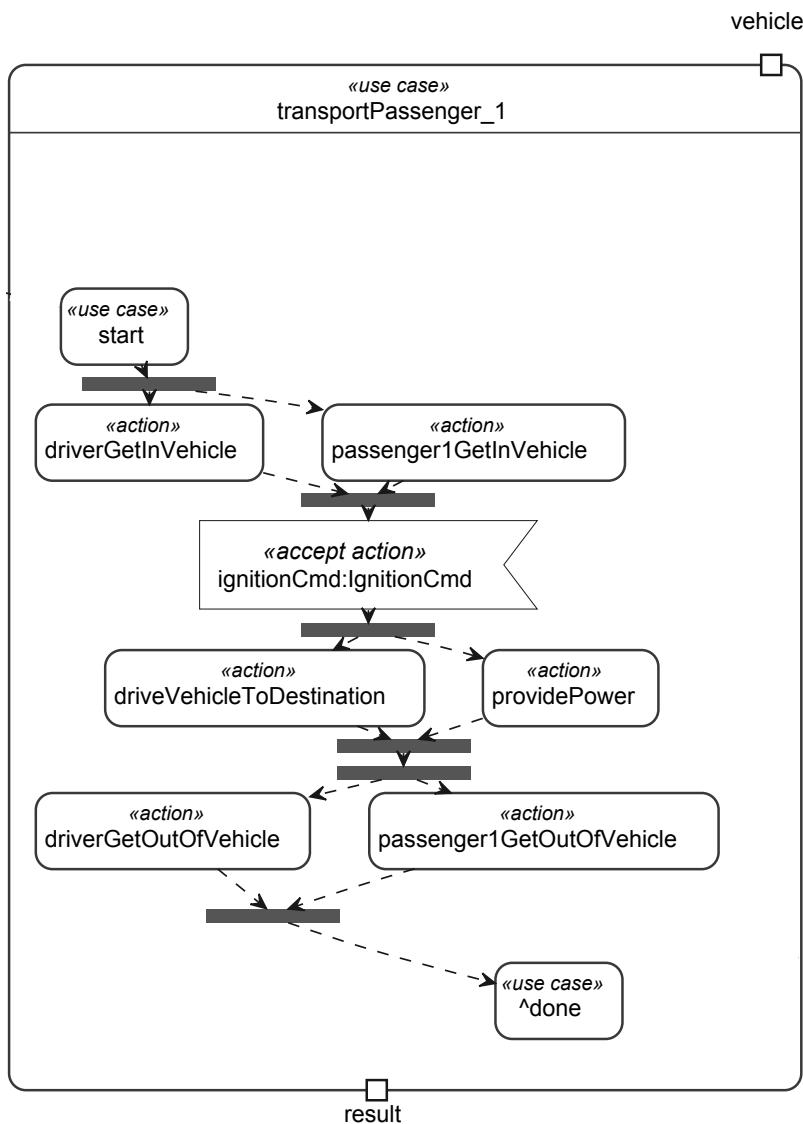

**Figure 67. Action flow for transportPassenger**

```

use case transportPassenger_1:TransportPassenger{
 //action declarations
 ...
 first start;
 then fork fork1;
 then driverGetInVehicle;
 then passenger1GetInVehicle;
 first driverGetInVehicle then join1;
}

```

```

...
first start;
then fork fork1;
 then driverGetInVehicle;
 then passenger1GetInVehicle;
first driverGetInVehicle then join1;
first passenger1GetInVehicle then join1;
first join1 then trigger;
first trigger then fork2;
first fork fork2;
 then driveVehicleToDestination;
 then providePower;
first driveVehicleToDestination then join2;
first providePower then join2;
first join2 then fork3;
first fork fork3;
 then driverGetOutOfVehicle;
 then passenger1GetOutOfVehicle;
first driverGetOutOfVehicle then join3;
first passenger1GetOutOfVehicle then join3;
first join3 then done;
}

```

## A.7 States

The states of a *Vehicle* enable selected actions to be performed. The *Vehicle* exhibits its state *vehicleStates*. This state is a parallel state, so its substates *operatingStates* and *healthStates* are concurrent. The states *operatingStates* and *healthStates* are not parallel, so only one of each of their substates can be active at any given time.


```

first passenger1GetInVehicle then join1;
first join1 then trigger;
first trigger then fork2;
fork fork2;
 then driveVehicleToDestination;
 then providePower;
first driveVehicleToDestination then join2;
first providePower then join2;
first join2 then fork3;
fork fork3;
 then driverGetOutOfVehicle;
 then passenger1GetOutOfVehicle;
first driverGetOutOfVehicle then join3;
first passenger1GetOutOfVehicle then join3;
first join3 then done;
}

```

## A.7 States

The states of a *Vehicle* enable selected actions to be performed. The *Vehicle* exhibits its state *vehicleStates*. This state is a parallel state, so its substates *operatingStates* and *healthStates* are concurrent. The states *operatingStates* and *healthStates* are not parallel, so only one of each of their substates can be active at any given time.

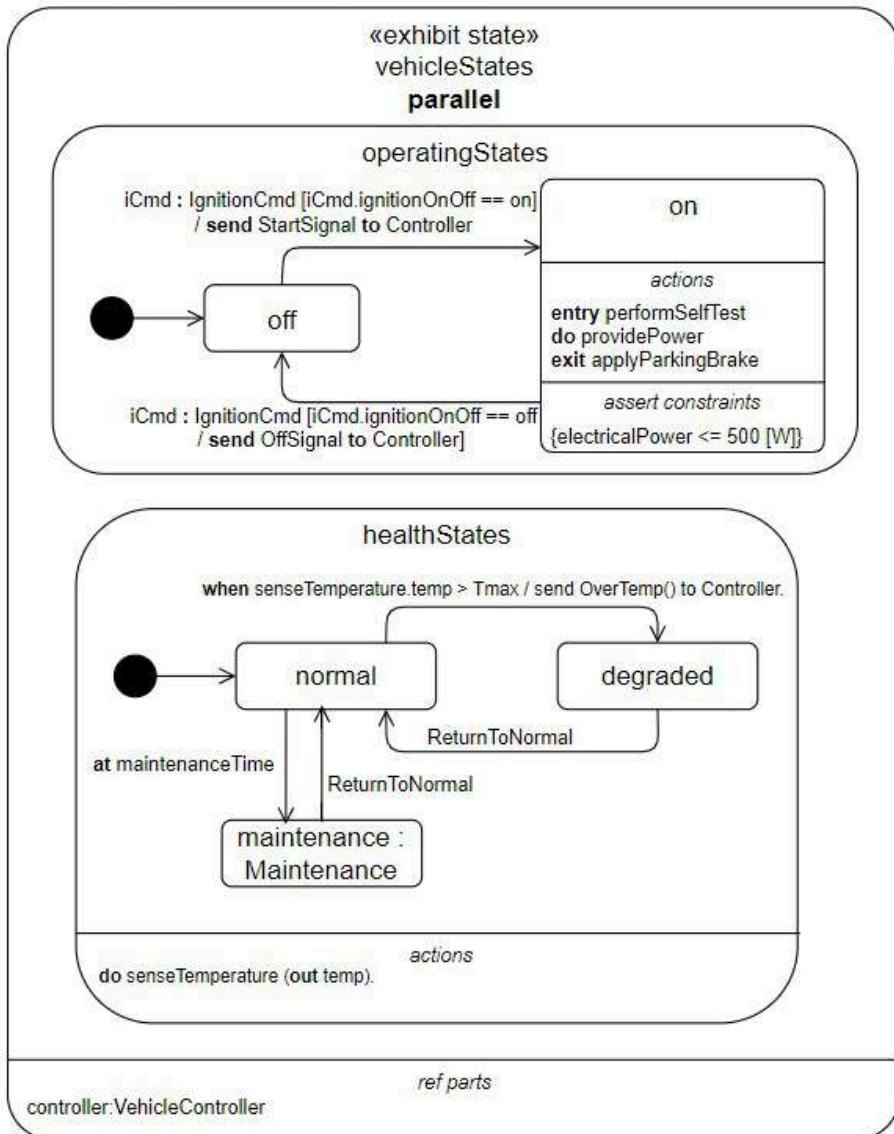

**Figure 67. Vehicle States**

```


exhibit state vehicleStates parallel {
 ref controller;

 state operatingStates {
 ...
 }

 state healthStates {
 ...
 }
}

```

Note that the state *vehicleStates* has a referential feature *controller:VehicleController*. This allows the substates of *vehicleStates* to send a signal to the *controller* or one of its ports, or to access any other feature of *controller*.

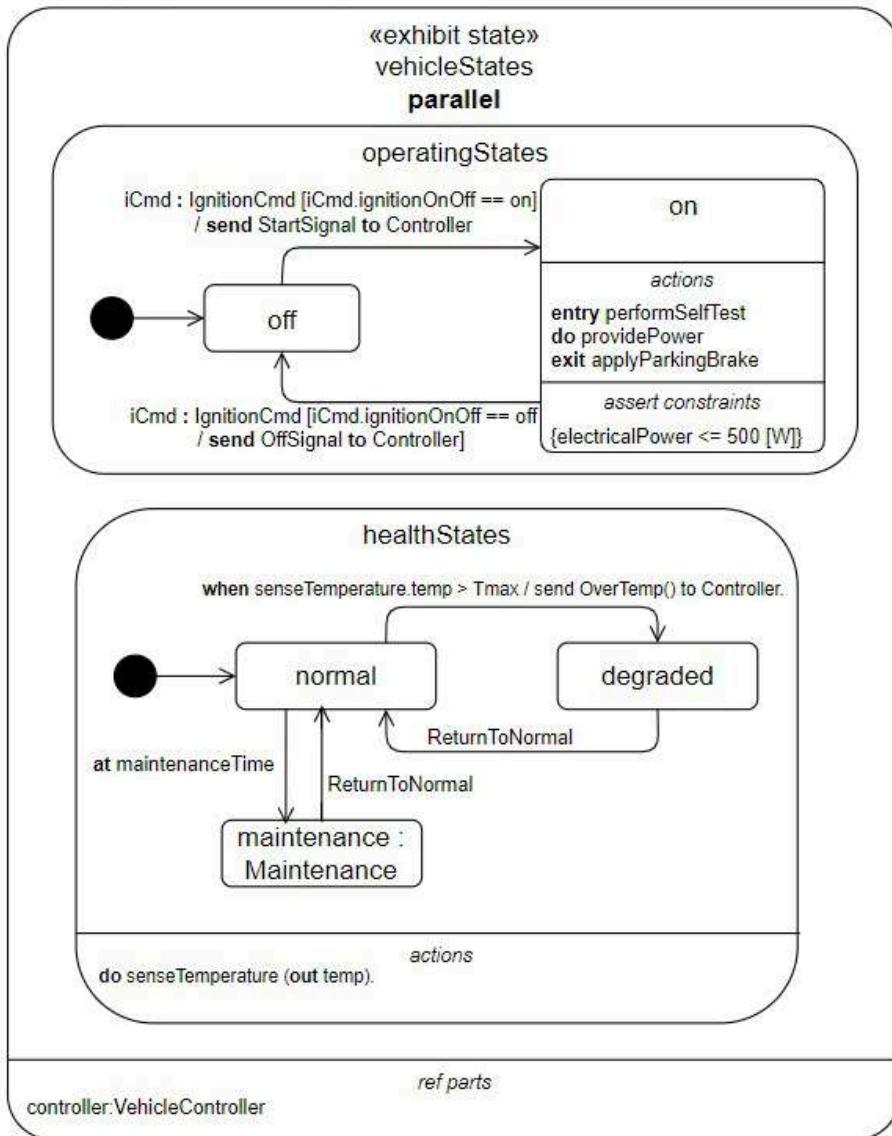

**Figure 68. Vehicle States**

```

exhibit state vehicleStates parallel {
 ref controller;

 state operatingStates {
 ...
 }

 state healthStates {
 ...
 }
}

```

Note that the state `vehicleStates` has a referential feature `controller:VehicleController`. This allows the substates of `vehicleStates` to send a signal to the `controller` or one of its ports, or to access any other feature of `controller`.

The *operatingStates* are further decomposed into *off*, *starting*, and *on* states, with an entry transition to the *off* substate. Upon receipt of an *ignitionCmd*, the *off-starting* transition fires if the *ignitionCmd* is in the *on* position and the *brakePedalDepressed* is true. A *StartSignal* is sent to the *controller* as part of this transition, after which *operatingStates* enters its *starting* substate. The state *operatingStates* also includes transitions from the substates *starting* to *on* and *on* to *off*.

The *ignitionCmd* is defined by the item definition *IgnitionCmd*, which contains an attribute defined by an enumeration with values *on* and *off*. This pattern is used to represent a variety of signals that may be sent by send actions and accepted by accept actions.

The *on* state has an entry action to *performSelfTest*, which is performed upon entry to the state. When the entry action completes, the do action to *providePower* starts, and it continues to be performed until the state is exited. Prior to exiting the state, the exit action to *applyParkingBrake* is performed. The state also has a constraint that the *electricalPower* must not exceed 500 watts.

```
state operatingStates {
 entry action initial;

 state off;
 state starting;
 state on {
 entry performSelfTest;
 do providePower;
 exit applyParkingBrake;
 constraint {electricalPower<=500 [W] }
 }

 transition initial then off;

 transition 'off-starting'
 first off
 accept ignitionCmd:IgnitionCmd via ignitionCmdPort
 if ignitionCmd.ignitionOnOff==IgnitionOnOff::on and brakePedalDepressed
 do send StartSignal() to controller
 then starting;

 transition 'starting-on'
 first starting
 accept VehicleOnSignal
 then on;

 transition 'on-off'
 first on
 accept VehicleOffSignal
 do send OffSignal() to controller
 then off;
}
```

The *healthStates* are decomposed into *normal*, *maintenance* and *degraded* states. Starting in the *normal* state, *healthStates* continually monitors the vehicle temperature and, when the temperature exceeds the allowed maximum, it transitions to the *degraded* state and notifies the *controller*. It also transitions from *normal* to *maintenance* when it is time for vehicle maintenance. In either case, it transitions back to the *normal* state on receipt of a *ReturnToNormal* signal.

```
state healthStates {
 entry action initial;
 do senseTemperature{
```

The *operatingStates* are further decomposed into *off*, *starting*, and *on* states, with an entry transition to the *off* substate. Upon receipt of an *ignitionCmd*, the *off-starting* transition fires if the *ignitionCmd* is in the *on* position and the *brakePedalDepressed* is true. A *StartSignal* is sent to the *controller* as part of this transition, after which *operatingStates* enters its *starting* substate. The state *operatingStates* also includes transitions from the substates *starting* to *on* and *on* to *off*.

The *ignitionCmd* is defined by the item definition *IgnitionCmd*, which contains an attribute defined by an enumeration with values *on* and *off*. This pattern is used to represent a variety of signals that may be sent by send actions and accepted by accept actions.

The *on* state has an entry action to *performSelfTest*, which is performed upon entry to the state. When the entry action completes, the do action to *providePower* starts, and it continues to be performed until the state is exited. Prior to exiting the state, the exit action to *applyParkingBrake* is performed. The state also has a constraint that the *electricalPower* must not exceed 500 watts.

```
state operatingStates {
 entry action initial;

 state off;
 state starting;
 state on {
 entry performSelfTest;
 do providePower;
 exit applyParkingBrake;
 constraint {electricalPower<=500 [W] }
 }

 transition initial then off;

 transition 'off-starting'
 first off
 accept ignitionCmd:IgnitionCmd via ignitionCmdPort
 if ignitionCmd.ignitionOnOff==IgnitionOnOff::on and brakePedalDepressed
 do send StartSignal() to controller
 then starting;

 transition 'starting-on'
 first starting
 accept VehicleOnSignal
 then on;

 transition 'on-off'
 first on
 accept VehicleOffSignal
 do send OffSignal() to controller
 then off;
}
```

The *healthStates* are decomposed into *normal*, *maintenance* and *degraded* states. Starting in the *normal* state, *healthStates* continually monitors the vehicle temperature and, when the temperature exceeds the allowed maximum, it transitions to the *degraded* state and notifies the *controller*. It also transitions from *normal* to *maintenance* when it is time for vehicle maintenance. In either case, it transitions back to the *normal* state on receipt of a *ReturnToNormal* signal.

```
state healthStates {
 entry action initial;
 do senseTemperature{
 out temp;
 }
```

```

 out temp;
 }

state normal;
state maintenance;
state degraded;

transition initial then normal;

transition 'normal-maintenance'
 first normal
 accept at maintenanceTime
 then maintenance;

transition 'normal-degraded'
 first normal
 accept when senseTemperature.temp > Tmax
 do send OverTemp() to controller
 then degraded;

transition 'maintenance-normal'
 first maintenance
 accept ReturnToNormal
 then normal;

transition 'degraded-normal'
 first degraded
 accept ReturnToNormal
 then normal;
}

```

## A.8 Requirements

The requirement definition *MassRequirement* has a shall statement that "The actual mass shall be less than the required mass". This statement is formalized using attributes for *massRequired* and *massActual* and the constraint expression *{massActual<=massRequired}*.

|                                                      |
|------------------------------------------------------|
| <i>«requirement def»</i>                             |
| <b>MassRequirement</b>                               |
| <i>doc</i>                                           |
| The actual mass shall be less than the required mass |
| <i>attributes</i>                                    |
| massActual:> ISQBase::mass                           |
| massRequired:> ISQBase::mass                         |
| <i>constraints</i>                                   |
| <b>require {massActual&lt;=massRequired}</b>         |

**Figure 68. Requirement Definition MassRequirement**

```

requirement def MassRequirement{
 doc /*The actual mass shall be less than the required mass*/
 attribute massRequired:>ISQ::mass;
 attribute massActual:>ISQ::mass;
 require constraint {massActual<=massRequired}
}

```

```

state normal;
state maintenance;
state degraded;

transition initial then normal;

transition 'normal-maintenance'
 first normal
 accept at maintenanceTime
 then maintenance;

transition 'normal-degraded'
 first normal
 accept when senseTemperature.temp > Tmax
 do send OverTemp() to controller
 then degraded;

transition 'maintenance-normal'
 first maintenance
 accept ReturnToNormal
 then normal;

transition 'degraded-normal'
 first degraded
 accept ReturnToNormal
 then normal;
}

```

## A.8 Requirements

The requirement definition *MassRequirement* has a shall statement that "The actual mass shall be less than the required mass". This statement is formalized using attributes for *massRequired* and *massActual* and the constraint expression *{massActual<=massRequired}*.

|                                                      |
|------------------------------------------------------|
| <i>«requirement def»</i>                             |
| <b>MassRequirement</b>                               |
| <i>doc</i>                                           |
| The actual mass shall be less than the required mass |
| <i>attributes</i>                                    |
| massActual:> ISQBase::mass                           |
| massRequired:> ISQBase::mass                         |
| <i>constraints</i>                                   |
| <b>require</b> {massActual<=massRequired}            |

**Figure 69. Requirement Definition MassRequirement**

```


requirement def MassRequirement{
 doc /*The actual mass shall be less than the required mass*/
 attribute massRequired:>ISQ::mass;
 attribute massActual:>ISQ::mass;
 require constraint {massActual<=massRequired}
}

```

The *vehicleSpecification* is a requirement that contains other requirements. It has a dependency to *marketSurvey* (not shown) that indicates its requirements are dependent on the market survey. The subject of the *vehicleSpecification* is *vehicle:Vehicle*, which enables the requirements contained in the specification to reference the features of *vehicle*. One of the requirements contained in the specification is the *vehicleMassRequirement*, which is defined by *MassRequirement*. The *massRequired* attribute is redefined

The *vehicleSpecification* is a requirement that contains other requirements. It has a dependency to *marketSurvey* (not shown) that indicates its requirements are dependent on the market survey. The subject of the *vehicleSpecification* is *vehicle:Vehicle*, which enables the requirements contained in the specification to reference the features of *vehicle*. One of the requirements contained in the specification is the *vehicleMassRequirement*, which is defined by *MassRequirement*. The *massRequired* attribute is redefined to have a specific value of 2000 kg in the context of this *vehicleSpecification*. The attribute *massActual* is redefined to be the sum of the *dryMass* and *fuelMassActual* of the *vehicle*, where the *fuelMassActual* is assumed to be a full tank of gas that weighs 60 kg. The *vehicleSpecification* also contains *vehicleFuelEconomyRequirements* for both city and highway.

Although not shown, the mass requirement is allocated to the mass of the vehicle using the allocate relationship, and the engine mass requirement is derived from the vehicle mass requirement using the derivation relationship.

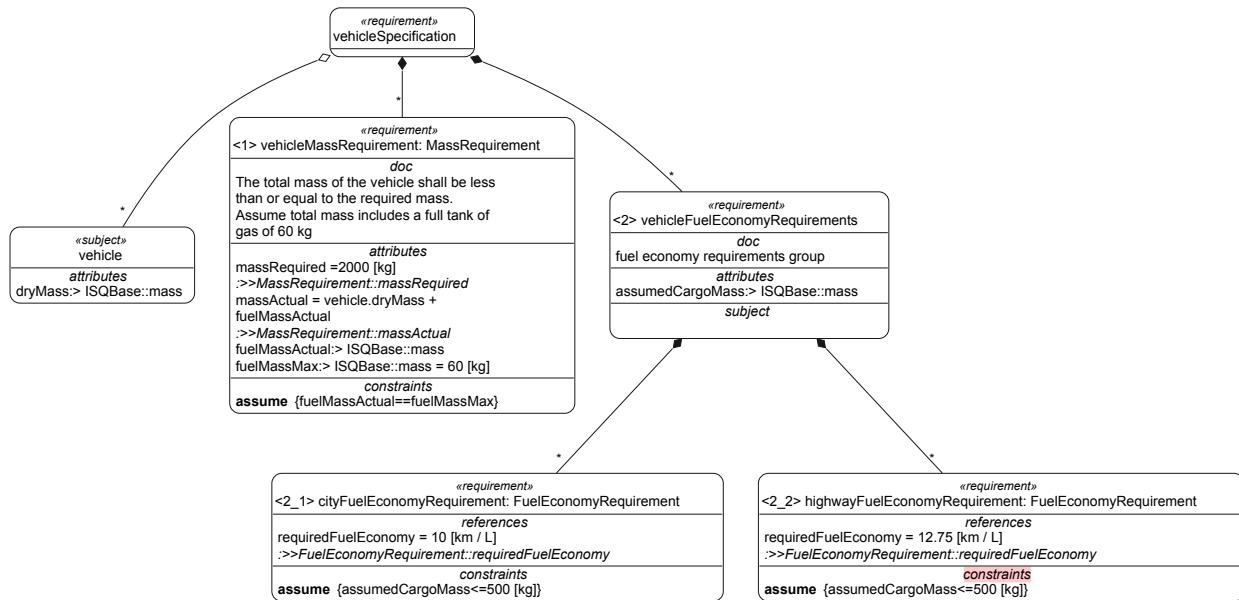

**Figure 69. Requirements Group vehicleSpecification**

```

item marketSurvey;
dependency from vehicleSpecification to marketSurvey;


requirement vehicleSpecification{
 subject vehicle:Vehicle;
 requirement <'1'> vehicleMassRequirement : MassRequirement {
 doc /* The total mass of a vehicle shall be less than or equal to the required mass.
 Assume total mass includes a full tank of gas of 60 kg*/
 attribute redefines massRequired=2000 [kg];
 attribute redefines massActual = vehicle.dryMass + fuelMassActual;
 attribute fuelMassActual:>ISQ::mass;
 attribute fuelMassMax:>ISQ::mass = 60 [kg];
 assume constraint {fuelMassActual==fuelMassMax}
 }
 allocate vehicleMassRequirement to PartsTree::vehicle_b.mass;

 requirement <'2'> vehicleFuelEconomyRequirements {
 doc /* fuel economy requirements group */
 attribute assumedCargoMass:>ISQ::mass;
 requirement <'2_1'> cityFuelEconomyRequirement : FuelEconomyRequirement {
 redefines requiredFuelEconomy= 10 [km / L];
 assume constraint {assumedCargoMass>=500 [kg]}
 }
 requirement <'2_2'> highwayFuelEconomyRequirement : FuelEconomyRequirement {
 redefines requiredFuelEconomy = 12.75 [km / L];
 assume constraint {assumedCargoMass<=500 [kg]}
 }
 }
}

```

to have a specific value of 2000 kg in the context of this *vehicleSpecification*. The attribute *massActual* is redefined to be the sum of the *dryMass* and *fuelMassActual* of the *vehicle*, where the *fuelMassActual* is assumed to be a full tank of gas that weighs 60 kg. The *vehicleSpecficiation* also contains *vehicleFuelEconomyRequirements* for both city and highway.

Although not shown, the mass requirement is allocated to the mass of the vehicle using the allocate relationship, and the engine mass requirement is derived from the vehicle mass requirement using the derivation relationship.

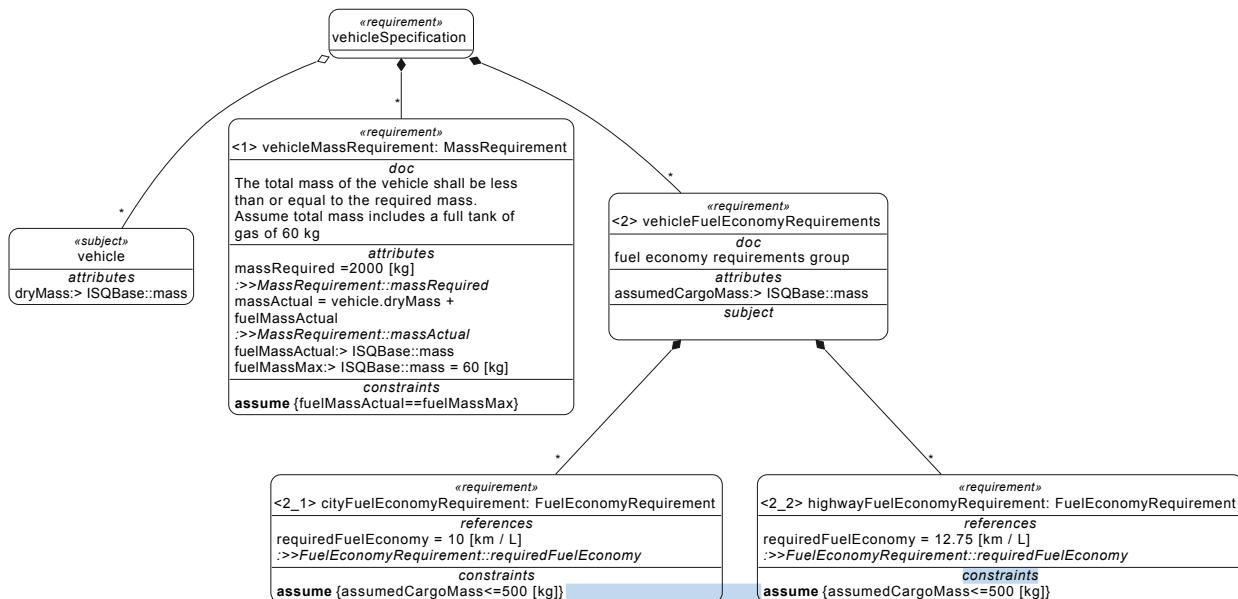

**Figure 70. Requirements Group vehicleSpecification**

```

item marketSurvey;
dependency from vehicleSpecification to marketSurvey;

requirement vehicleSpecification{
 subject vehicle:Vehicle;
 requirement <'1'> vehicleMassRequirement : MassRequirement {
 doc /* The total mass of a vehicle shall be less than or equal to the required mass.
 Assume total mass includes a full tank of gas of 60 kg*/
 attribute redefines massRequired=2000 [kg];
 attribute redefines massActual = vehicle.dryMass + fuelMassActual;
 attribute fuelMassActual:>ISQ::mass;
 attribute fuelMassMax:>ISQ::mass = 60 [kg];
 assume constraint {fuelMassActual==fuelMassMax}
 }
 allocate vehicleMassRequirement to PartsTree::vehicle_b.mass;

 requirement <'2'> vehicleFuelEconomyRequirements {
 doc /* fuel economy requirements group */
 attribute assumedCargoMass:>ISQ::mass;
 requirement <'2_1'> cityFuelEconomyRequirement : FuelEconomyRequirement {
 redefines requiredFuelEconomy= 10 [km / L];
 assume constraint {assumedCargoMass>=500 [kg]}
 }
 requirement <'2_2'> highwayFuelEconomyRequirement : FuelEconomyRequirement {
 redefines requiredFuelEconomy= 12.75 [km / L];
 assume constraint {assumedCargoMass>=500 [kg]}
 }
 }
}

```

```

 }
 requirement <'2_2'> highwayFuelEconomyRequirement : FuelEconomyRequirement {
 redefines requiredFuelEconomy= 12.75 [km / L];
 assume constraint {assumedCargoMass>=500 [kg]}
 }
 }
}

requirement engineSpecification{
 subject engine1:Engine;
 requirement <'1'> eneingeMassRequirement : MassRequirement {
 ...
}
#derivation connection{
 end #original ::> vehicleSpecification.vehicleMassRequirement;
 end #derive ::> engineSpecification.engineMassRequirement;
}
}

```

In order to evaluate whether *vehicle\_b* satisfies the *vehicleMassRequirement*, the *massActual* must be bound to the *mass* of *vehicle\_b*. This is accomplished by asserting that *vehicle\_b* satisfies the *vehicleSpecification* and binding the *actualMass* of the requirement to the *mass* of *vehicle\_b*. Asserting *vehicle\_b* satisfies the requirement is equivalent to imposing the mass constraint contained in the requirement on *vehicle\_b*.

```

satisfy vehicleSpecification by vehicle_b {
 requirement vehicleMassRequirement :>> vehicleMassRequirement {
 attribute redefines massActual = vehicle_b.mass;
 attribute redefines fuelMassActual = vehicle_b.fuelTank.fuel.fuelMass;
 }
}

```

## A.9 Analysis

The *FuelEconomyAnalysisModel* package contains an analysis case called *fuelEconomyAnalysis*. The objective for this analysis case is to estimate the fuel economy of the vehicle. Its subject is the part *vehicle\_b*. The analysis case accepts a nominal driving scenario as an input, and returns a *calculatedFuelEconomy* in *KilometersPerLitres* as an output.

The analysis includes the following calculations to determine the result:

- *TraveledDistance* (*scenario*)
- *AverageTravelTimePerDistance* (*scenario*)
- *ComputeBSFC* (*vehicle\_b.engine*)
- *BestFuelConsumptionPerDistance* (*vehicle\_b.mass, bsfc, tpd\_avg, distance*)
- *IdlingFuelConsumptionPerTime* (*vehicle\_b.engine*)
- *FuelConsumption* (*f\_a, f\_b, tpd\_avg*)

```

requirement engineSpecification{
 subject engine1:Engine;
 requirement <'1'> eneingeMassRequirement : MassRequirement {
 ...
 }
 #derivation connection{
 end #original ::> vehicleSpecification.vehicleMassRequirement;
 end #derive ::> engineSpecification.engineMassRequirement;
 }
}

```

In order to evaluate whether *vehicle\_b* satisfies the *vehicleMassRequirement*, the *massActual* must be bound to the *mass* of *vehicle\_b*. This is accomplished by asserting that *vehicle\_b* satisfies the *vehicleSpecification* and binding the *actualMass* of the requirement to the *mass* of *vehicle\_b*. Asserting *vehicle\_b* satisfies the requirement is equivalent to imposing the mass constraint contained in the requirement on *vehicle\_b*.

```

satisfy vehicleSpecification by vehicle_b {
 requirement vehicleMassRequirement :>> vehicleMassRequirement {
 attribute redefines massActual = vehicle_b.mass;
 attribute redefines fuelMassActual = vehicle_b.fuelTank.fuel.fuelMass;
 }
}

```

## A.9 Analysis

The *FuelEconomyAnalysisModel* package contains an analysis case called *fuelEconomyAnalysis*. The objective for this analysis case is to estimate the fuel economy of the vehicle. Its subject is the part *vehicle\_b*. The analysis case accepts a nominal driving scenario as an input, and returns a *calculatedFuelEconomy* in *KilometersPerLitres* as an output.

The analysis includes the following calculations to determine the result:

- *TraveledDistance (scenario)*
- *AverageTravelTimePerDistance (scenario)*
- *ComputeBSFC (vehicle\_b.engine)*
- *BestFuelConsumptionPerDistance (vehicle\_b.mass, bsfc, tpd\_avg, distance)*
- *IdlingFuelConsumptionPerTime (vehicle\_b.engine)*
- *FuelConsumption (f\_a, f\_b, tpd\_avg)*

|                                                                                                       |
|-------------------------------------------------------------------------------------------------------|
| <i>parameters</i>                                                                                     |
| <b>in</b> scenario: Scenario                                                                          |
| <b>out</b>                                                                                            |
| calculatedFuelEconomy:>AttributeDefinitions::distancePerVolume<br>=FuelConsumption(f_a, f_b, tpd_avg) |
| <i>attributes</i>                                                                                     |
| bsfc = ComputeBSFC(vehicle_b.engine)                                                                  |
| distance = TraveledDistance(scenario)                                                                 |
| f_a =                                                                                                 |
| BestFuelConsumptionPerDistance(vehicle_b.mass,                                                        |
| bsfc, tpd_avg, distance)                                                                              |
| f_b =                                                                                                 |
| IdlingFuelConsumptionPerTime(vehicle_b.engine)                                                        |
| tpd_avg =                                                                                             |
| AverageTravelTimePerDistance(scenario)                                                                |
| <i>objectives</i>                                                                                     |
| <b>doc</b> estimate the vehicle fuel Economy                                                          |
| <i>subject</i>                                                                                        |
| subj = vehicle_b                                                                                      |

**Figure 70.** Analysis Case fuelEconomyAnalysis

```

analysis fuelEconomyAnalysis {
 in attribute scenario: Scenario;

 subject = vehicle_b;

 objective fuelEconomyAnalysisObjective {
 doc /* estimate the vehicle fuel economy */
 }

 attribute distance = TraveledDistance(scenario);
 attribute tpd_avg = AverageTravelTimePerDistance(scenario);
 attribute bsfc = ComputeBSFC(vehicle_b.engine);
 attribute f_a =
 BestFuelConsumptionPerDistance(vehicle_b.mass, bsfc, tpd_avg, distance);
 attribute f_b = IdlingFuelConsumptionPerTime(vehicle_b.engine);
 return attribute calculatedFuelEconomy:>distancePerVolume =
 FuelConsumption(f_a, f_b, tpd_avg);
}

```

## A.10 Verification

The simple verification case *massTests* is a usage of the verification case definition *MassTest*. The verification objective is to verify the *vehicleMassRequirement*. The subject of the verification case is *vehicle\_b*. The verification case includes actions to *weighVehicle* and *evaluatePassFail*.

The *massVerificationSystem* performs the *massTests*. It is composed of an *operator* and a *scale*. The *scale* performs the action to *weighVehicle*, and the *operator* performs the action to *evaluatePassFail*. The verification case returns a verdict of *pass* or *fail* based on whether the measured mass satisfies the mass requirement.

|                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>parameters</i>                                                                                                                                                                                                                                                                      |
| <b>in</b> scenario: Scenario                                                                                                                                                                                                                                                           |
| <b>out</b>                                                                                                                                                                                                                                                                             |
| calculatedFuelEconomy:>AttributeDefinitions::distancePerVolume<br>=FuelConsumption(f_a, f_b, tpd_avg)                                                                                                                                                                                  |
| <i>attributes</i>                                                                                                                                                                                                                                                                      |
| bsfc = ComputeBSFC(vehicle_b.engine)<br>distance = TraveledDistance(scenario)<br>f_a =<br>BestFuelConsumptionPerDistance(vehicle_b.mass,<br>bsfc, tpd_avg, distance)<br>f_b =<br>IdlingFuelConsumptionPerTime(vehicle_b.engine)<br>tpd_avg =<br>AverageTravelTimePerDistance(scenario) |
| <i>objectives</i>                                                                                                                                                                                                                                                                      |
| <b>doc</b> estimate the vehicle fuel Economy                                                                                                                                                                                                                                           |
| <i>subject</i>                                                                                                                                                                                                                                                                         |
| subj = vehicle_b                                                                                                                                                                                                                                                                       |

**Figure 71.** Analysis Case fuelEconomyAnalysis

```

analysis fuelEconomyAnalysis {
 in attribute scenario: Scenario;

 subject = vehicle_b;

 objective fuelEconomyAnalysisObjective {
 doc /* estimate the vehicle fuel economy */
 }


 attribute distance = TraveledDistance(scenario);
 attribute tpd_avg = AverageTravelTimePerDistance(scenario);
 attribute bsfc = ComputeBSFC(vehicle_b.engine);
 attribute f_a =
 BestFuelConsumptionPerDistance(vehicle_b.mass, bsfc, tpd_avg, distance);
 attribute f_b = IdlingFuelConsumptionPerTime(vehicle_b.engine);
 return attribute calculatedFuelEconomy:>distancePerVolume =
 FuelConsumption(f_a, f_b, tpd_avg);
}

```

## A.10 Verification

The simple verification case *massTests* is a usage of the verification case definition *MassTest*. The verification objective is to verify the *vehicleMassRequirement*. The subject of the verification case is *vehicle\_b*. The verification case includes actions to *weighVehicle* and *evaluatePassFail*.

The *massVerificationSystem* performs the *massTests*. It is composed of an *operator* and a *scale*. The *scale* performs the action to *weighVehicle*, and the *operator* performs the action to *evaluatePassFail*. The verification case returns a verdict of *pass* or *fail* based on whether the measured mass satisfies the mass requirement.

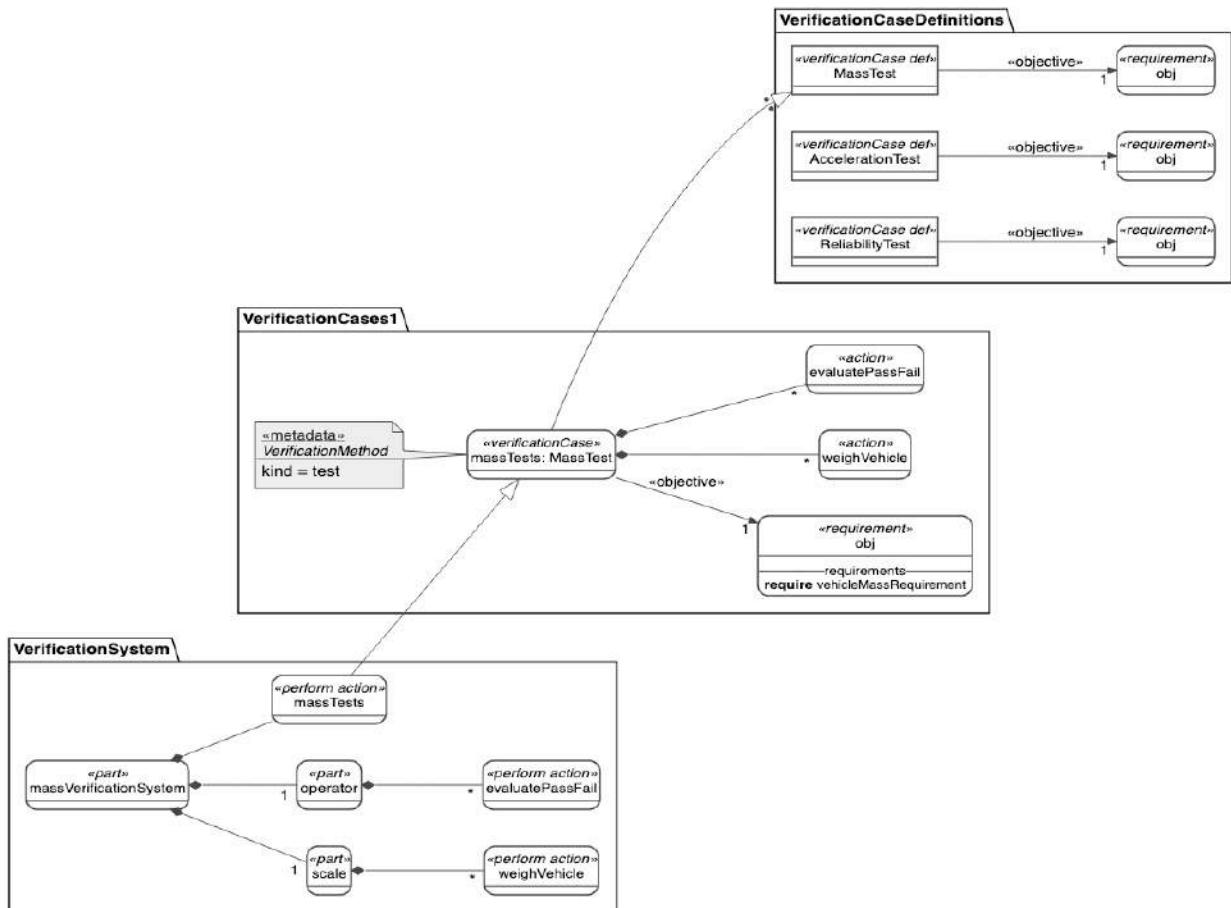


**Figure 71. Vehicle Mass Verification Test**

```

package VerificationCaseDefinitions{
 verification def MassTest;
 verification def AccelerationTest;
 verification def ReliabilityTest;
}
package VerificationCases1{
 verification massTests:MassTest {
 subject = vehicle_b;
 objective {
 verify vehicleSpecification.vehicleMassRequirement{
 redefines massActual=weighVehicle.massMeasured;
 }
 }
 metadata VerificationMethod{
 kind = VerificationMethodKind::test;
 }
 action weighVehicle {
 out massMeasured:>ISQ::mass;
 }
 then action evaluatePassFail {
 in massMeasured:>ISQ::mass;
 out verdict = PassIf(
 vehicleSpecification.vehicleMassRequirement(vehicle_b)
);
 }
 }
}

```

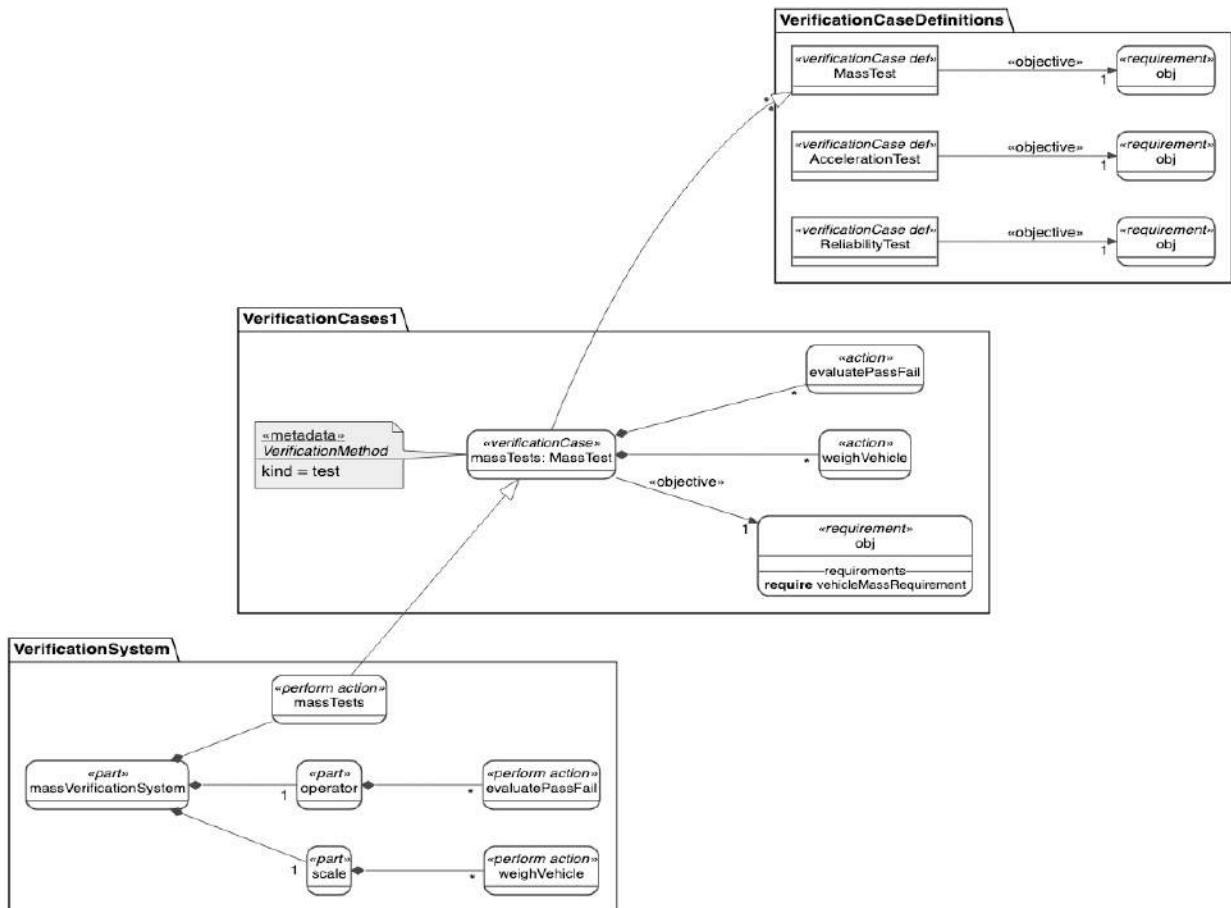

**Figure 72. Vehicle Mass Verification Test**

```

package VerificationCaseDefinitions{
 verification def MassTest;
 verification def AccelerationTest;
 verification def ReliabilityTest;
}
package VerificationCases1{
 verification massTests:MassTest {
 subject = vehicle_b;
 objective {
 verify vehicleSpecification.vehicleMassRequirement{
 redefines massActual=weighVehicle.massMeasured;
 }
 }
 metadata VerificationMethod{
 kind = VerificationMethodKind::test;
 }
 action weighVehicle {
 out massMeasured:>ISQ::mass;
 }
 then action evaluatePassFail {
 in massMeasured:>ISQ::mass;
 out verdict = PassIf(
 vehicleSpecification.vehicleMassRequirement(vehicle_b)
);
 }
 flow from weighVehicle.massMeasured to evaluatePassFail.massMeasured;
 return :>> verdict = evaluatePassFail.verdict;
 }
}

```

```

 flow from weighVehicle.massMeasured to evaluatePassFail.massMeasured;
 return :> verdict = evaluatePassFail.verdict;
 }
}


package VerificationSystem{
 part massVerificationSystem{
 perform massTests;
 part scale{
 perform massTests.weighVehicle;
 }
 part operator{
 perform massTests.evaluatePassFail;
 }
 }
}

```

## A.11 View and Viewpoint

The *SafetyEngineer* is a stakeholder with a concern for *VehicleSafety*. The *safetyViewpoint* frames this concern. The view *vehiclePartsTree\_Safety* is a *PartsTreeView* that satisfies the *SafetyViewpoint*, and, therefore, addresses the *VehicleSafety* concern.

The view definition *TreeView* defines views that are rendered as tree diagrams. The view definition *PartsTreeView* specializes *TreeView* with a filter condition that only *PartUsages* should be included in the view. The view usage *vehiclePartsTree\_Safety* adds the further condition to only include parts that have the metadata annotation for *Safety*. This view then exposes all the nested parts of *vehicle\_b*, such that those parts meeting all the filter criteria are rendered in a tree diagram.

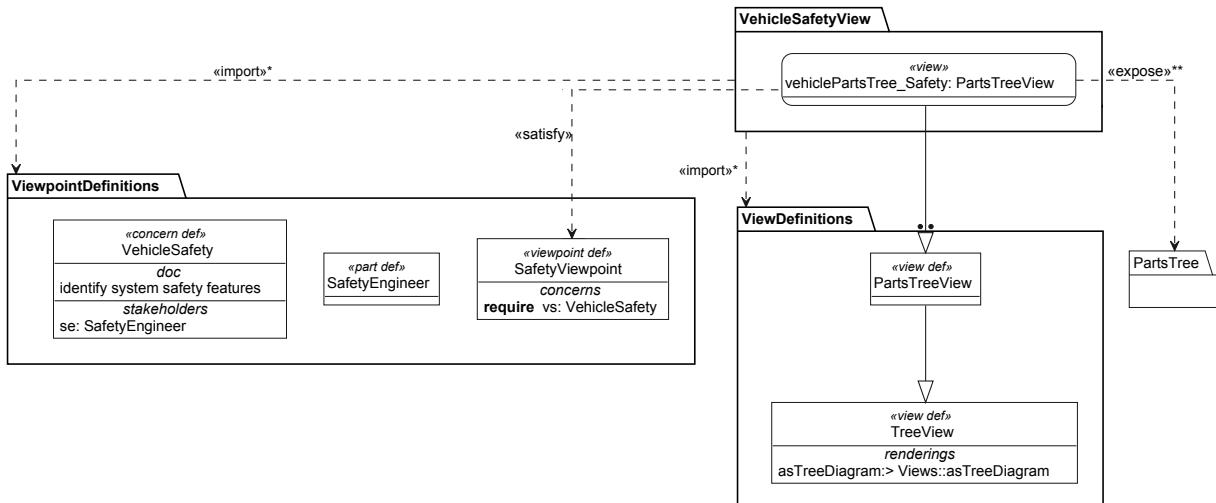

**Figure 72. Vehicle Safety View**

```

package Viewpoints{
 part def SafetyEngineer;
 concern def VehicleSafety {
 doc /* Vehicle must have necessary safety features. */
 stakeholder se:SafetyEngineer;
 }
 viewpoint safetyViewpoint{
 frame concern vs:VehicleSafety;
 }
}

```

```

 }
 }


package VerificationSystem{
 part massVerificationSystem{
 perform massTests;
 part scale{
 perform massTests.weighVehicle;
 }
 part operator{
 perform massTests.evaluatePassFail;
 }
 }
}

```

## A.11 View and Viewpoint

The *SafetyEngineer* is a stakeholder with a concern for *VehicleSafety*. The *safetyViewpoint* frames this concern. The view *vehiclePartsTree\_Safety* is a *PartsTreeView* that satisfies the *SafetyViewpoint*, and, therefore, addresses the *VehicleSafety* concern.

The view definition *TreeView* defines views that are rendered as tree diagrams. The view definition *PartsTreeView* specializes *TreeView* with a filter condition that only *PartUsages* should be included in the view. The view usage *vehiclePartsTree\_Safety* adds the further condition to only include parts that have the metadata annotation for *Safety*. This view then exposes all the nested parts of *vehicle\_b*, such that those parts meeting all the filter criteria are rendered in a tree diagram.

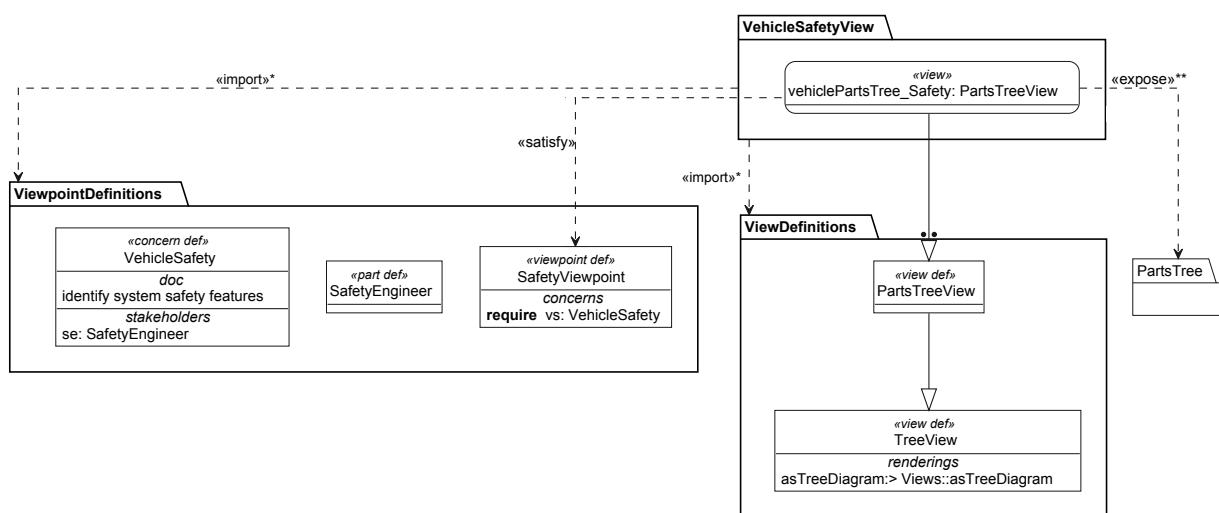

**Figure 73. Vehicle Safety View**

```

package Viewpoints{
 part def SafetyEngineer;
 concern def VehicleSafety {
 doc /* Vehicle must have necessary safety features. */
 stakeholder se:SafetyEngineer;
 }
 viewpoint safetyViewpoint{
 frame concern vs:VehicleSafety;
 }
}

package ViewDefinitions{
 view def TreeView {

```

```

 }
 }
}

package ViewDefinitions{
 view def TreeView {
 render asTreeDiagram;
 }
 view def PartsTreeView:>TreeView {
 filter @SysML:::PartUsage;
 }
}
package VehicleViews{
 view vehiclePartsTree_Safety:PartsTreeView{
 satisfy safetyViewpoint;
 filter @Safety;
 expose vehicle_b::**;
 }
}
}

```



Figure 73. Rendering of view vehiclePartsTree\_Safety

## A.12 Variability

The part `vehicleFamily` models a family of `Vehicles` that allows variations in the subparts `engine`, `transmission` and `sunroof`. In particular, the part `engine` has two variants, `engine4Cyl` and `engine6Cyl`, which constrain `engine.cylinders` to have multiplicity 4 and 6, respectively. The part `cylinders` of `engine6Cyl` has an attribute `diameter` that is also a variation point, with two variants for `smallDiameter` and `largeDiameter`. There are also two choices for the `transmission` and a `sunroof` is optional. The choice of a selected variant at one variation point can constrain the available choices at another variation point. For this example, the choices are constrained to be a 4 cylinder engine with a manual transmission or a 6 cylinder engine with an automatic transmission.

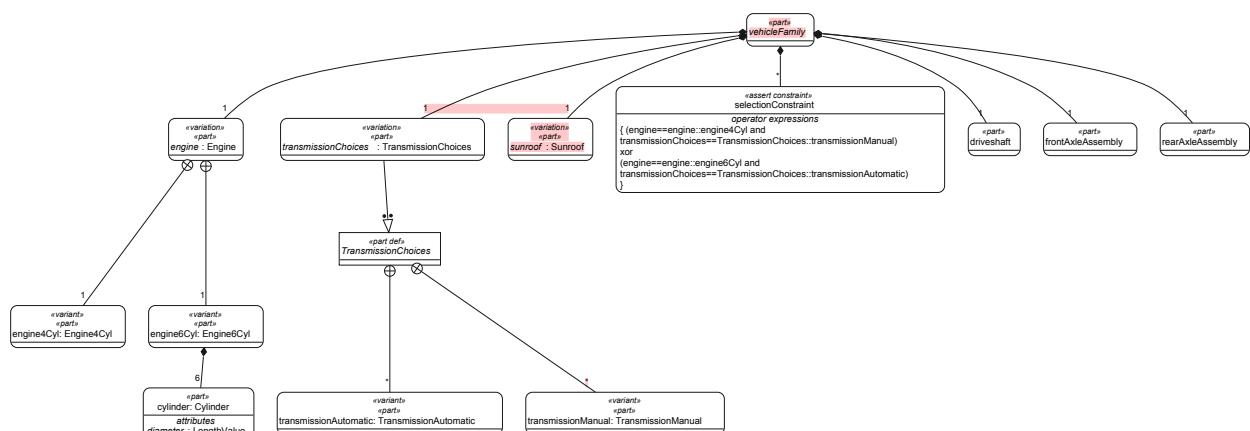


Figure 74. Variability Model for vehicleFamily

```

variation part def TransmissionChoices:>Transmission {
 variant part transmissionAutomatic:TransmissionAutomatic;
 variant part transmissionManual:TransmissionManual;
}

```

```

 render asTreeDiagram;
 }
 view def PartsTreeView:>TreeView {
 filter @SysML::PartUsage;
 }
}
package VehicleViews{
 view vehiclePartsTree_Safety:PartsTreeView{
 satisfy safetyViewpoint;
 filter @Safety;
 expose vehicle_b::**;
 }
}


```



**Figure 74.** Rendering of view vehiclePartsTree\_Safety

## A.12 Variability

The part `vehicleFamily` models a family of `Vehicles` that allows variations in the subparts `engine`, `transmission` and `sunroof`. In particular, the part `engine` has two variants, `engine4Cyl` and `engine6Cyl`, which constrain `engine.cylinders` to have multiplicity 4 and 6, respectively. The part `cylinders` of `engine6Cyl` has an attribute `diameter` that is also a variation point, with two variants for `smallDiameter` and `largeDiameter`. There are also two choices for the `transmission` and a `sunroof` is optional. The choice of a selected variant at one variation point can constrain the available choices at another variation point. For this example, the choices are constrained to be a 4 cylinder engine with a manual transmission or a 6 cylinder engine with an automatic transmission.

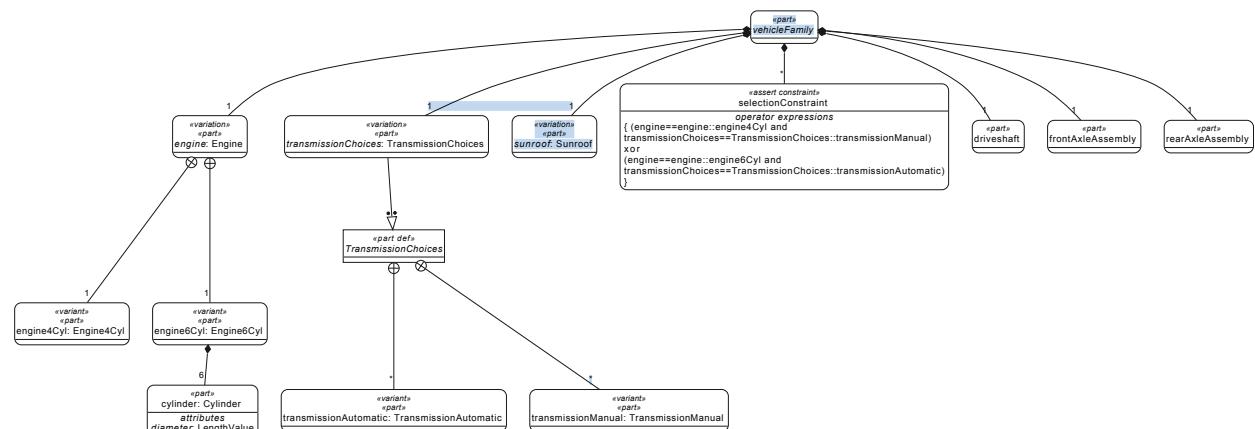

**Figure 75.** Variability Model for vehicleFamily

```

variation part def TransmissionChoices:>Transmission {
 variant part transmissionAutomatic:TransmissionAutomatic;
 variant part transmissionManual:TransmissionManual;
}

abstract part vehicleFamily:>vehicle_a{
 variation part engine:Engine{
 variant part engine4Cyl:Engine4Cyl;
 variant part engine6Cyl:Engine6Cyl{
 part cylinder:Cylinder [6]{

```

```

abstract part vehicleFamily:>vehicle_a{
 variation part engine:Engine{
 variant part engine4Cyl:Engine4Cyl;
 variant part engine6Cyl:Engine6Cyl{
 part cylinder:Cylinder [6]{
 variation attribute diameter:LengthValue{
 variant attribute smallDiameter:LengthValue;
 variant attribute largeDiagmeter:LengthValue;
 }
 }
 }
 }
 variation part transmission:TransmissionChoices;
 variation part sunroof:Sunroof;
 assert constraint selectionConstraint {
 (engine==engine::engine4Cyl and
 transmission==TransmissionChoices::transmissionManual) xor
 (engine==engine::engine6Cyl and
 transmission==TransmissionChoices::transmissionAutomatic)
 }
}

```

## A.13 Individuals

The part definition `Vehicle` represents a class of individual vehicles with common characteristics. The parts `vehicle_a` and `vehicle_b` are usages of `Vehicle` with different part decompositions. There can be many individual vehicles that conform to `vehicle_a` or `vehicle_b`.

The individual part definition `Vehicle_1` is a specialization of `Vehicle` that restricts the part definition to a single individual. A usage `vehicle_1` of this definition represents that individual within a specific context. This usage can also subset `vehicle_b` and inherit the parts hierarchy and other features of `vehicle_b`.

Additional individual definitions `FrontAxeAssembly_1`, `FrontAxe_1`, `Wheel_1`, `Wheel_2`, etc., are similarly specializations of their respective part definitions. The `vehicle_1.frontAxeAssembly` is a usage of `FrontAxeAssembly_1`, whose `frontAxe` is a usage of `FrontAxe_1`, whose `wheels` are `Wheel_1` and `Wheel_2`. In this way, `vehicle_1` can decompose into a hierarchy of individual parts.

An individual definition and usage can be created for any definition and usage element. An individual action for example, represents a particular performance of an action with individual inputs and outputs.

The part definition `VehicleRoadContext` defines a context containing `vehicle:Vehicle` and `road:Road` subparts. The individual definition `VehicleRoadContext_1` is a specialization of `VehicleRoadContext` whose subparts are constrained to be usages of the individual definitions `Vehicle_1` and `Road_1`.

As shown below, there is a time slice of `VehicleRoadContext_1` from `t0` to `t2` called `t0_t2_a` with three snapshots `t0_a`, `t1_a` and `t2_a`, at the times `t0`, `t1` and `t2`, respectively. Each context snapshot contains snapshots of `Vehicle_1` and `Road_1` at the respective times. Each of the vehicle and road snapshots are characterized by specific values for their attributes. In addition, the vehicle snapshot contains snapshots of its individual parts consistent with the decomposition of `vehicle_1`.

An analysis may be used to compute the values of the attributes for each snapshot. The analysis results reflect the time history of the individuals, which may be visualized using typical time-based plots and data representations.

```

 variation attribute diameter:LengthValue{
 variant attribute smallDiameter:LengthValue;
 variant attribute largeDiagmeter:LengthValue;
 }
 }
}
variation part transmission:TransmissionChoices;
variation part sunroof:Sunroof;
assert constraint selectionConstraint {
 (engine==engine::engine4Cyl and
 transmission==TransmissionChoices::transmissionManual) xor
 (engine==engine::engine6Cyl and
 transmission==TransmissionChoices::transmissionAutomatic)
}
}

```

## A.13 Individuals

The part definition `Vehicle` represents a class of individual vehicles with common characteristics. The parts `vehicle_a` and `vehicle_b` are usages of `Vehicle` with different part decompositions. There can be many individual vehicles that conform to `vehicle_a` or `vehicle_b`.

The individual part definition `Vehicle_1` is a specialization of `Vehicle` that restricts the part definition to a single individual. A usage `vehicle_1` of this definition represents that individual within a specific context. This usage can also subset `vehicle_b` and inherit the parts hierarchy and other features of `vehicle_b`.


Additional individual definitions `FrontAxeAssembly_1`, `FrontAxe_1`, `Wheel_1`, `Wheel_2`, etc., are similarly specializations of their respective part definitions. The `vehicle_1.frontAxeAssembly` is a usage of `FrontAxeAssembly_1`, whose `frontAxe` is a usage of `FrontAxe_1`, whose `wheels` are `Wheel_1` and `Wheel_2`. In this way, `vehicle_1` can decompose into a hierarchy of individual parts.

An individual definition and usage can be created for any definition and usage element. An individual action for example, represents a particular performance of an action with individual inputs and outputs.

The part definition `VehicleRoadContext` defines a context containing `vehicle:Vehicle` and `road:Road` subparts. The individual definition `VehicleRoadContext_1` is a specialization of `VehicleRoadContext` whose subparts are constrained to be usages of the individual definitions `Vehicle_1` and `Road_1`.

As shown below, there is a time slice of `VehicleRoadContext_1` from `t0` to `t2` called `t0_t2_a` with three snapshots `t0_a`, `t1_a` and `t2_a`, at the times `t0`, `t1` and `t2`, respectively. Each context snapshot contains snapshots of `Vehicle_1` and `Road_1` at the respective times. Each of the vehicle and road snapshots are characterized by specific values for their attributes. In addition, the vehicle snapshot contains snapshots of its individual parts consistent with the decomposition of `vehicle_1`.

An analysis may be used to compute the values of the attributes for each snapshot. The analysis results reflect the time history of the individuals, which may be visualized using typical time-based plots and data representations.

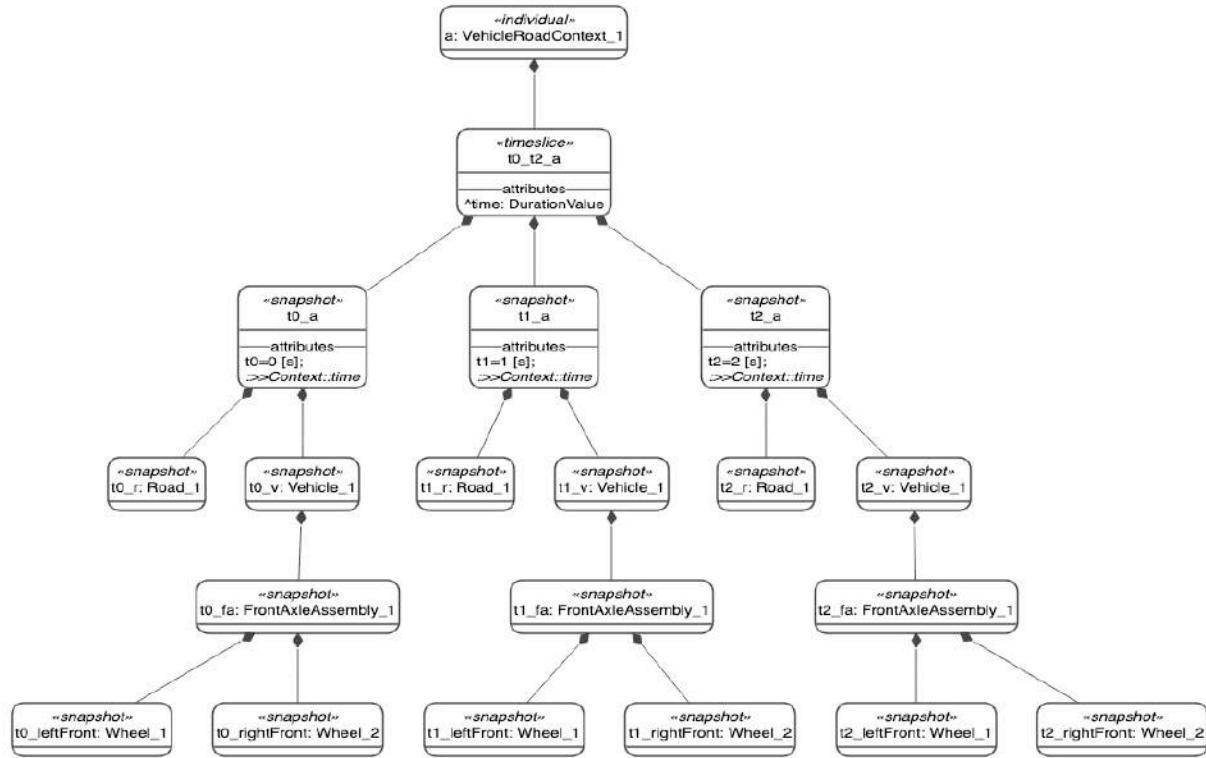


**Figure 75. Vehicle Individuals and Snapshots**

```

individual a:VehicleRoadContext_1{
 timeslice t0_t2_a{
 snapshot t0_a {
 attribute t0 redefines time=0 [s];
 snapshot t0_r:Road_1{
 :>>incline=0;
 :>>friction=.1;
 }
 snapshot t0_v:Vehicle_1{
 :>>position=0 [m];
 :>>velocity=0 [m];
 :>>acceleration=1.96 [m/s**2];
 snapshot t0_fa:FrontAxleAssembly_1{
 snapshot t0_leftFront:Wheel_1;
 snapshot t0_rightFront:Wheel_2;
 }
 }
 }
 snapshot t1_a{
 attribute t1 redefines time=1 [s];
 snapshot t1_r:Road_1{
 :>>incline=0;
 :>>friction=.1;
 }
 snapshot t1_v:Vehicle_1{
 :>>position=.98 [m];
 :>>velocity=1.96 [m/s];
 :>>acceleration=1.96 [m/s**2];
 snapshot t1_fa:FrontAxleAssembly_1{
 snapshot t1_leftFront:Wheel_1;
 snapshot t1_rightFront:Wheel_2;
 }
 }
 }
 }
}

```

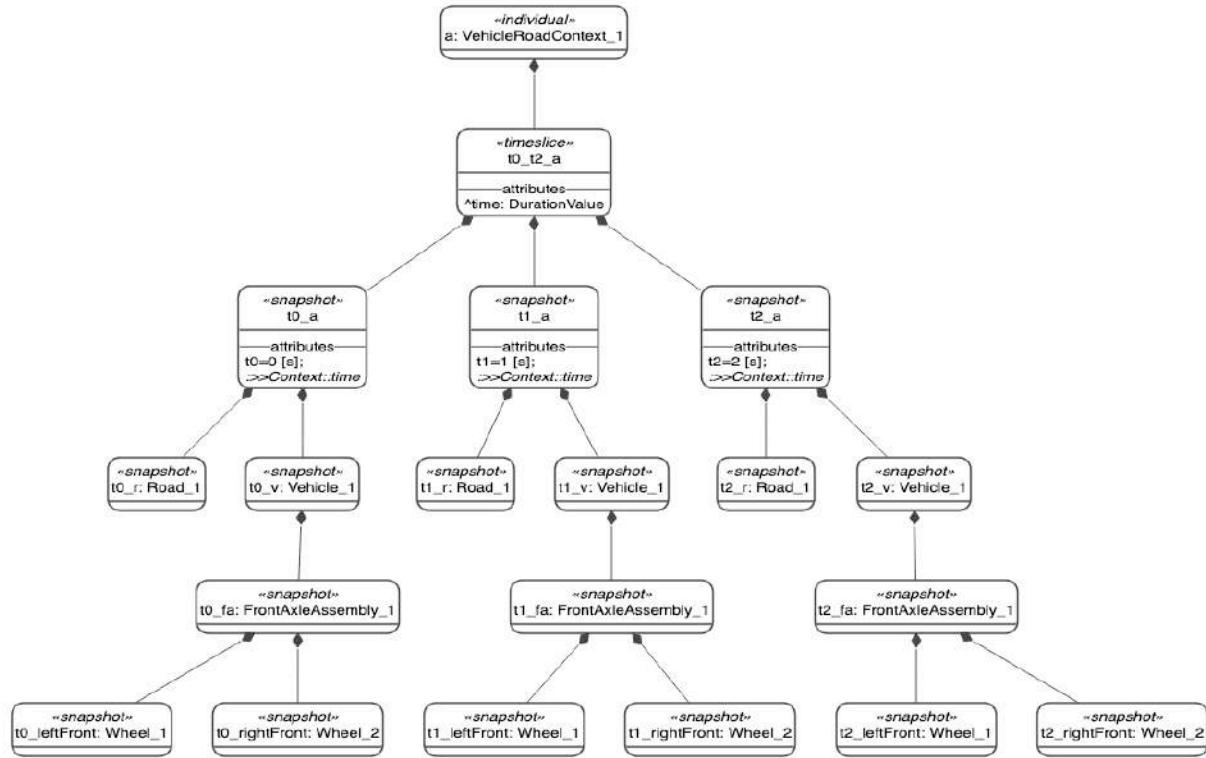

**Figure 76. Vehicle Individuals and Snapshots**

```

individual a:VehicleRoadContext_1{
 timeslice t0_t2_a{
 snapshot t0_a {
 attribute t0 redefines time=0 [s];
 snapshot t0_r:Road_1{
 :>>incline=0;
 :>>friction=.1;
 }
 snapshot t0_v:Vehicle_1{
 :>>position=0 [m];
 :>>velocity=0 [m];
 :>>acceleration=1.96 [m/s**2];
 snapshot t0_fa:FrontAxleAssembly_1{
 snapshot t0_leftFront:Wheel_1;
 snapshot t0_rightFront:Wheel_2;
 }
 }
 }
 snapshot t1_a{
 attribute t1 redefines time=1 [s];
 snapshot t1_r:Road_1{
 :>>incline=0;
 :>>friction=.1;
 }
 snapshot t1_v:Vehicle_1{
 :>>position=.98 [m];
 :>>velocity=1.96 [m/s];
 :>>acceleration=1.96 [m/s**2];
 snapshot t1_fa:FrontAxleAssembly_1{
 snapshot t1_leftFront:Wheel_1;
 snapshot t1_rightFront:Wheel_2;
 }
 }
 }
 }
}

```

```

 }
 }

}

snapshot t2_a{
 attribute t2 redefines time=2 [s];
 snapshot t2_r:Road_1{
 :>>incline =0;
 :>>friction=.1;
 }
 snapshot t2_v:Vehicle_1{
 :>>position=3.92 [m];
 :>>velocity=3.92 [m/s];
 :>>acceleration=1.96 [m/s**2];
 snapshot t2_fa:FrontAxleAssembly_1{
 snapshot t2_leftFront:Wheel_1;
 snapshot t2_rightFront:Wheel_2;
 }
 }
}
}

```

```

 }
 snapshot t2_a{
 attribute t2 redefines time=2 [s];
 snapshot t2_r:Road_1{
 :>>incline =0;
 :>>friction=.1;
 }
 snapshot t2_v:Vehicle_1{
 :>>position=3.92 [m];
 :>>velocity=3.92 [m/s];
 :>>acceleration=1.96 [m/s**2];
 snapshot t2_fa:FrontAxleAssembly_1{
 snapshot t2_leftFront:Wheel_1;
 snapshot t2_rightFront:Wheel_2;
 }
 }
 }
 }
}

```



