End-to-end KBQA Method:

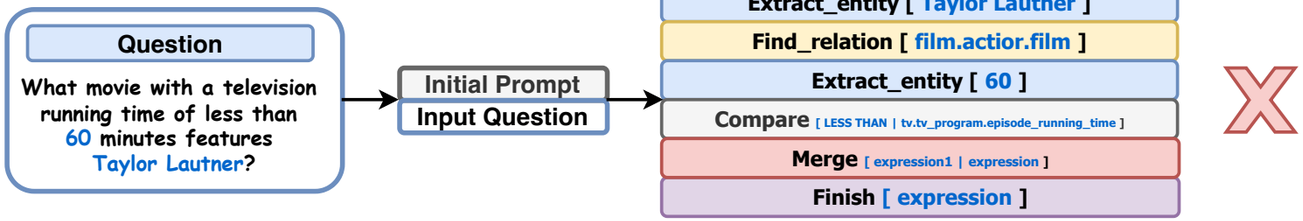

Step-by-step KBQA Method:

KBQA-o1

(Agentic MCTS-based Method)

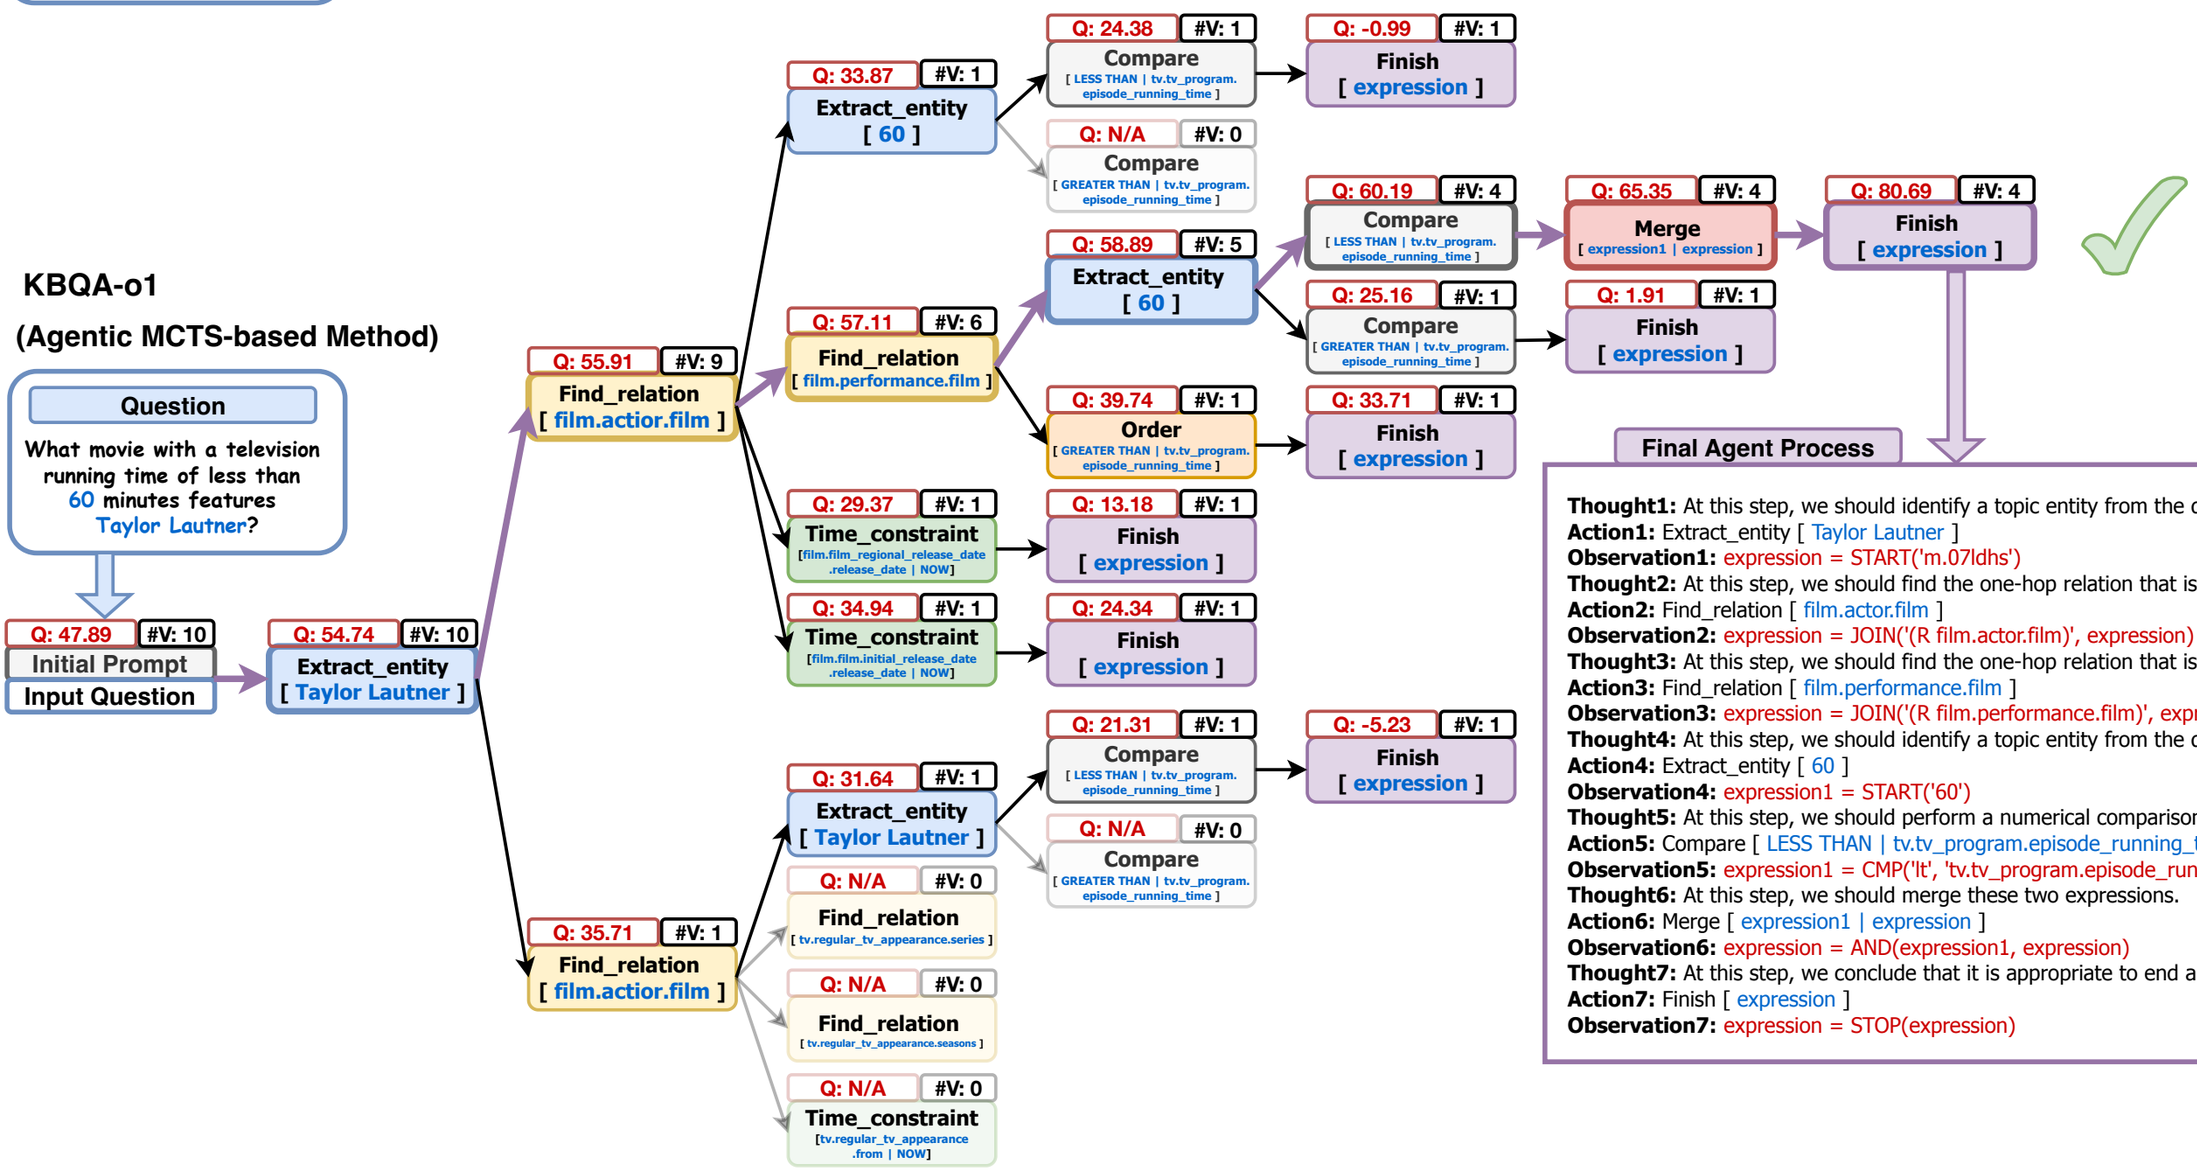

Final Agent Process

Thought1: At this step, we should identify a topic entity from the question to start a new expression.
Action1: Extract_entity [Taylor Lautner]
Observation1: expression = START('m.07ldhs')
Thought2: At this step, we should find the one-hop relation that is connected to the current expression.
Action2: Find_relation [film.actor.film]
Observation2: expression = JOIN('(R film.actor.film)', expression)
Thought3: At this step, we should find the one-hop relation that is connected to the current expression.
Action3: Find_relation [film.performance.film]
Observation3: expression = JOIN('(R film.performance.film)', expression)
Thought4: At this step, we should identify a topic entity from the question to start a new expression.
Action4: Extract_entity [60]
Observation4: expression1 = START('60')
Thought5: At this step, we should perform a numerical comparison to determine the range.
Action5: Compare [LESS THAN | tv.tv_program.episode_running_time]
Observation5: expression1 = CMP('lt', 'tv.tv_program.episode_running_time', expression1)
Thought6: At this step, we should merge these two expressions.
Action6: Merge [expression1 | expression]
Observation6: expression = AND(expression1, expression)
Thought7: At this step, we conclude that it is appropriate to end and output the expression.
Action7: Finish [expression]
Observation7: expression = STOP(expression)