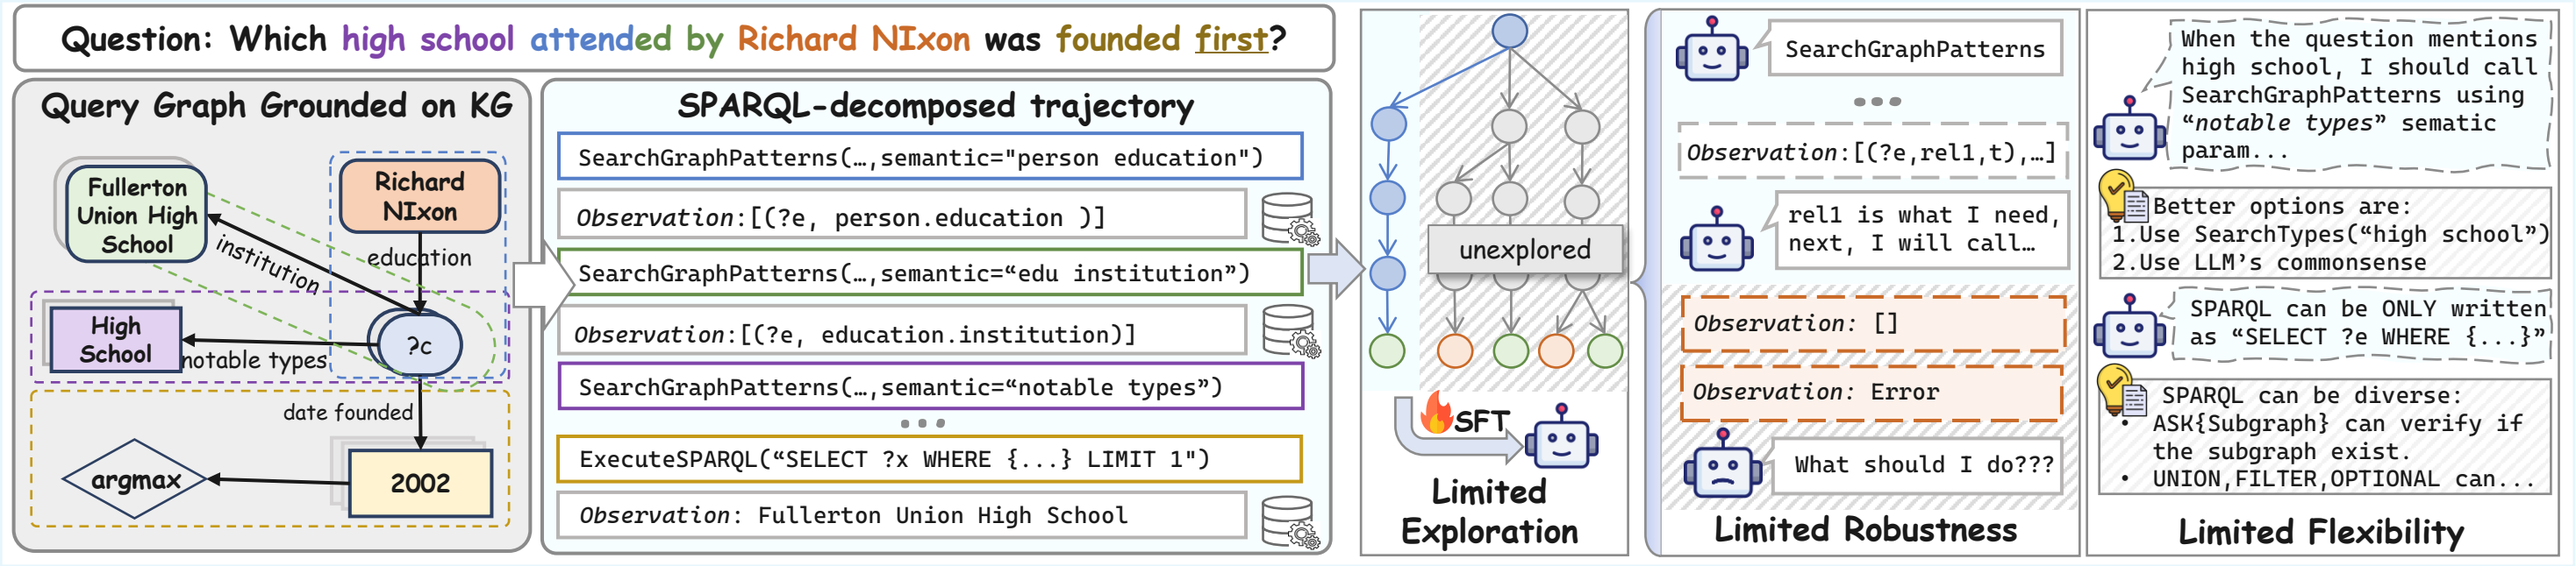
Question: Which high school attended by Richard NIxon was founded first?
Query Graph Grounded on KG
Fullerton Union High School
Richard NIxon
institution
education
High School
notable types
?c
date founded
argmax
2002
SPARQL-decomposed trajectory
SearchGraphPatterns(…,semantic="person education")
Observation:[(?e, person.education )]
SearchGraphPatterns(…,semantic="edu institution")
Observation:[(?e, education.institution)]
SearchGraphPatterns(…,semantic="notable types")
ExecuteSPARQL("SELECT ?x WHERE {...} LIMIT 1")
Observation: Fullerton Union High School
unexplored
SFT
Limited Exploration
SearchGraphPatterns
Observation:[(?e,rel1,t),…]
rel1 is what I need, next, I will call…
Observation: []
Observation: Error
What should I do???
Limited Robustness
When the question mentions high school, I should call SearchGraphPatterns using "notable types" sematic param...
Better options are:
1.Use SearchTypes("high school")
2.Use LLM's commonsense
SPARQL can be ONLY written as "SELECT ?e WHERE {...}"
SPARQL can be diverse:
• ASK{Subgraph} can verify if the subgraph exist.
• UNION,FILTER,OPTIONAL can...
Limited Flexibility