# **CS23336-Introduction to Python Programming**

Started on Monday, 5 August 2024, 2:04 PM

State Finished

Completed on Tuesday, 6 August 2024, 5:50 PM

**Time taken** 1 day 3 hours **Marks** 10.00/10.00

> Grade **100.00** out of 100.00

# **Question 1**

Correct

Mark 1.00 out of 1.00

Flag question

### **Question text**

Ramesh's basic salary is input through the keyboard. His dearness allowance is 40% of his basic salary, and his house rent allowance is 20% of his basic salary. Write a program to calculate his gross salary.

Sample Input:

10000

Sample Output:

16000

For example:

## **Input Result**

10000 16000

Answer:(penalty regime: 0 %)

```
bs=int(input())
  r=(20/100)*bs
4 Ts=bs+a+r
```

### **Feedback**

# **Input Expected Got**

10000 16000 16000

32000 20000 32000

28000 44800 44800

5000 8000 8000

Passed all tests!

Correct

Marks for this submission: 1.00/1.00.

# **Question 2**

Correct Mark 1.00 out of 1.00

Flag question

### **Question text**

Alfred buys an old scooter for Rs. X and spends Rs. Y on its repairs. If he sells the scooter for Rs. Z (Z>X+Y). Write a program to help Alfred to find his gain percent. Get all the above-mentioned values through the keyboard and find the gain percent.

Input Format:

The first line contains the Rs X

The second line contains Rs Y

The third line contains Rs Z

Sample Input:

10000

250

15000

Sample Output:

46.34 is the gain percent.

For example:

## Input Result

45500 500 30.43 is the gain percent. 60000

### **Feedback**

### Input **Expected** Got 10000 250 46.34 is the gain percent. 46.34 is the gain percent. 15000 45500 30.43 is the gain percent. 30.43 is the gain percent. 500 60000 5000 40.00 is the gain percent. 40.00 is the gain percent. 0 7000 12500 5000 2.86 is the gain percent. 2.86 is the gain percent. 18000

Passed all tests!

Correct

Marks for this submission: 1.00/1.00.

# **Question 3**

Correct

Mark 1.00 out of 1.00

Flag question

### **Question text**

Write a program that returns the second last digit of the given number. Second last digit is being referred 10the digit in the tens place in the given number.

For example, if the given number is 197, the second last digit is 9.

Note1 - The second last digit should be returned as a positive number. i.e. if the given number is -197, the second last digit is 9.

Note2 - If the given number is a single digit number, then the second last digit does not exist. In such cases, the program should return -1. i.e. if the given number is 5, the second last digit should be returned as -1

For example:

### **Input Result**

197 9

-197 9

5 -1

### **Feedback**

### **Input Expected Got**

197 9 9 -197 9 9 5 -1 -1

Passed all tests!

Correct

Marks for this submission: 1.00/1.00.

## **Ouestion 4**

Correct Mark 1.00 out of 1.00

Flag question

### **Question text**

In department 54% are boys and 46% are girls and 8% are hostel (boys/girls). write a python code to print total no of boys, girls and hostel students in the specific format using modulo operator.

input: 1500

output: Total Students : 1500, Boys : 810, Girls : 690, Hostel : 120

Answer:(penalty regime: 0 %)

```
1 a=input()
2 a=int(a)
3 print("Total Students : {},".format(a),end=" ")
4 b=int((54/100)*a)
5 print("Boys : {},".format(b),end=" ")
6 c=int((46/100)*a)
7 print("Girls : {},".format(c),end=" ")
8 d=int((3/100)*a)
9 print("Hostel : {}".format(d))
```

## **Feedback**

Input Expected Got

1500 Total Students : 1500, Boys : 810, Girls : 690, Hostel : 120 Total Students : 1500, Boys : 810, Girls : 690, Hostel : 120

Passed all tests!

Correct

Marks for this submission: 1.00/1.00.

# **Question 5**

Correc

Mark 1.00 out of 1.00

# Flag guestion

### **Question text**

In a Lab 36% are Dell and 34% Lennovo and 28% are Acer and 2% are Samsung, write a python code to print total systems and brand wise count in the specific format using sep operator.

input: 150

output: Total System:150

Dell:54

Lennovo:51

Acer:42

Samsung:3

Answer:(penalty regime: 0 %)

```
a=input()
2 a=int(a)
3 print("Total System:{}".format(a))
   c=int((34/100)*a)
8 d=int((28/100)*a)
9 print("Acer:{}".format(d))
print("Samsung:{}".format(e))
```

### **Feedback**

#### Input **Expected** Got

Total System: 150 Total System: 150 Dell:54 Dell:54 150 Lennovo:51 Lennovo:51 Acer:42 Acer:42 Samsung:3 Samsung:3

Passed all tests!

Marks for this submission: 1.00/1.00.

# **Question 6**

Correct

Mark 1.00 out of 1.00

Flag question

### **Question text**

In many jurisdictions, a small deposit is added to drink containers to encourage people to recycle them. In one particular jurisdiction, drink containers holding one liter or less have a \$0.10 deposit and drink containers holding more than one liter have a \$0.25 deposit. Write a program that reads the number of containers of each size(less and more) from the user. Your program should continue by computing and displaying the refund that will be received for returning those containers. Format the output so that it includes a dollar sign and always displays exactly two decimal places.

Sample Input

### Sample Output

Your total refund will be \$6.00.

# For example:

# Input Result

 $\begin{array}{c} \textbf{20} \\ \textbf{20} \end{array} \qquad \textbf{Your total refund will be $7.00.}$ 

Answer:(penalty regime: 0 %)

```
a-int(input())
b=int(input())
c=(a*0.1+b*0.25)
print("Your total refund will be ${:.2f}.".format(c))
```

# Feedback

Input		Expected				Got							
	20 20	Your	total	refund	will	be	\$7.00.	Your	total	refund	will	be	\$7.00.
	11 22	Your	total	refund	will	be	\$6.60.	Your	total	refund	will	be	\$6.60.
	123 200	Your	total	refund	will	be	\$62.30.	Your	total	refund	will	be	\$62.30.
	76 38	Your	total	refund	will	be	\$17.10.	Your	total	refund	will	be	\$17.10.

### Passed all tests!

Correct

Marks for this submission: 1.00/1.00.

# **Question 7**

Correct

Mark 1.00 out of 1.00

Flag question

# **Question text**

In a Logistic the Parcels to be delivered in 4 locations (1st location 20%, 2nd location 40%, 3rd location 30% and 4th location 10%). write a python code to find the total no. of parcels after the delivery in 2 locations . use a format() to print the no of parcels delivered in in each location

Input:

output:

Total Parcels is 250

1st Location 50 parcels

2nd Location 100 parcels

3rd Location 75 parcels

4th Location 25 parcels

Answer:(penalty regime: 0 %)

```
1 a=input()
2 a=int(a)
3 print("Total Parcels is {}".format(a))
4 b=int(0.2*a)
5 print("1st Location {} parcels".format(b))
6 c=int(0.4*a)
7 print("2nd Location {} parcels".format(c))
8 d=int(0.3*a)
9 print("3rd Location {} parcels".format(d))
10 e=int(0.1*a)
11 print("4th Location {} parcels".format(e))
```

### **Feedback**

Input			Expe	cte	ed	Got				
		Tota	al Parcels	5 is	s 250	Tota	al Parcels	5 is	250	
		1st	Location	50	parcels	1st	Location	50	parcels	
	250	2nd	Location	100	parcels	2nd	Location	100	) parcels	
		3rd	Location	75	parcels	3rd	Location	75	parcels	
		4th	Location	25	parcels	4th	Location	25	parcels	

Passed all tests!

Correct

Marks for this submission: 1.00/1.00.

# **Question 8**

Correct
Mark 1.00 out of 1.00

Flag question

# **Question text**

You went on a tour to Ooty with your friends. As a part of the tour, you went boating with them. For the boat to remain stable, the number of people on one boat is restricted based on the weight of the people. You find that the boatman who is sailing your boat is so much greedy of money. For earning more, he takes too many people to travel in the boat at a time. So you want to check how many people can travel in the boat at a time so that the boat will not drown. Calculate the weight by considering the number of adults and number of children. Assume that an adult weighs 75 kg and children weigh 30 kg each. If the weight is normal, display Boat is stable, else display Boat will drown.

### INPUT & OUTPUT FORMAT:

Input consists of 3 integers.

First input corresponds to the weight that the boat can handle.

Second input corresponds to the number of adults.

Third input corresponds to the number of children.

Answer:(penalty regime: 0 %)

```
1 a=input()
2 a=int(a)
3 b=input()
4 b=int(b)
5 c=input()
6 c=int(c)
7 d=((b*75)+(c*30))
8 d=int(d)
9 · if(d<a):
10 print("Boat is stable")
11 · else:
12 print("Boat will drow")
```

### **Feedback**

```
Input Expected Got

340
2 Boat is stable Boat is stable
3

600
7 Boat will drow Boat will drow
4
```

Passed all tests!

Correct

Marks for this submission: 1.00/1.00.

# **Question 9**

Correct

Mark 1.00 out of 1.00

Flag question

# **Question text**

Write a program to convert strings to an integer and float and display its type.

Sample Input:

10

10.9

Sample Output:

10,<class 'int'>

10.9, <class 'float'>


For example:

# Input Result

```
10 10,<class 'int'>
10.9 10.9,<class 'float'>
```

Answer:(penalty regime: 0 %)

```
1 a=int(input())
2 print(a,type(a),sep=",")
3 b=float(input())
```

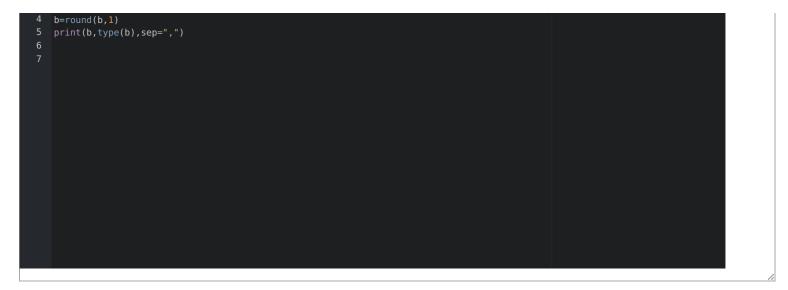

### **Feedback**

Input	Expected	Got
10	10, <class 'int'=""></class>	10, <class 'int'=""></class>
10.9	10.9, <class 'float'=""></class>	10.9, <class 'float'=""></class>
12 12.5	12, <class 'int'=""> 12.5,<class 'float'=""></class></class>	12, <class 'int'=""> 12.5,<class 'float'=""></class></class>
89 7.56	89, <class 'int'=""> 7.6,<class 'float'=""></class></class>	89, <class 'int'=""> 7.6,<class 'float'=""></class></class>
55000	55000, <class 'int'=""></class>	55000, <class 'int'=""></class>
56.2	56.2, <class 'float'=""></class>	56.2, <class 'float'=""></class>
2541	2541, <class 'int'=""></class>	2541, <class 'int'=""></class>
2541.679	2541.7, <class 'float'=""></class>	>2541.7, <class 'float'=""></class>

Passed all tests!

Correct

Marks for this submission: 1.00/1.00.

# **Question 10**

Correct
Mark 1.00 out of 1.00

Flag question

### **Question text**

Justin is a carpenter who works on an hourly basis. He works in a company where he is paid Rs 50 for an hour on weekdays and Rs 80 for an hour on weekends. He works 10 hrs more on weekdays than weekends. If the salary paid for him is given, write a program to find the number of hours he has worked on weekdays and weekends.

### Hint:

If the final result(hrs) are in -ve convert that to +ve using abs() function

The abs() function returns the absolute value of the given number.

```
number = -20
absolute_number = abs(number)
print(absolute_number)
# Output: 20
```

### **Sample Input:**

450

# **Sample Output:**

weekdays 10.38

weekend 0.38

# For example:

### Input Result

weekdays 10.38 450 weekend 0.38

Answer:(penalty regime: 0 %)

```
a=int(input())
y=abs((a-500)/130)
x=y+10
```

### **Feedback**

### Input Expected Got

weekdays 10.38 weekdays 10.38 450 weekend 0.38 weekend 0.38 weekdays 10.00 weekdays 10.00 500 weekend 0.00 weekend 0.00 weekdays 83.08 weekdays 83.08 10000 weekend 73.08 weekend 73.08 weekdays 58.38 weekdays 58.38 6789 weekend 48.38 weekend 48.38

Passed all tests!

Correct

Marks for this submission: 1.00/1.00.

Finish review

Skip Quiz navigation

### **Quiz navigation**

Question 1 This page Question 2 This page Question 3 This page Question 4 This page Question 5 This page Question 6 This page Question 7 This page Question 8 This page Question 9 This page Question 10 This page

Show one page at a time Finish review