MVP CHECKPOINT · CUSTOMER PERSPECTIVE

# From research method to accepted output.

Eight stages show what the researcher wants to achieve, where the team takes over, and what signals progress. Each stage includes real screenshots from the current MVP.

**8** customer stages **16** real UI screenshots **All** MVP features on Captured **2026-11-04**

Interactive version: zero-trust-git-mvp-t-dotnets-projects.vercel.app/mvp-customer-journey.html

PRIMARY CUSTOMER


## Researcher / method author

A researcher has a method to introduce and a dataset to process.

WHAT SUCCESS MEANS

The method is published after four reviews; a completed demo run has a separately accepted output and its synthetic sample can be downloaded.

This is a source-backed journey of the implemented MVP, illustrated with fresh UI screenshots. Customer questions, pains and gains are hypotheses inferred from the workflow, not findings from interviews or measured customer outcomes.

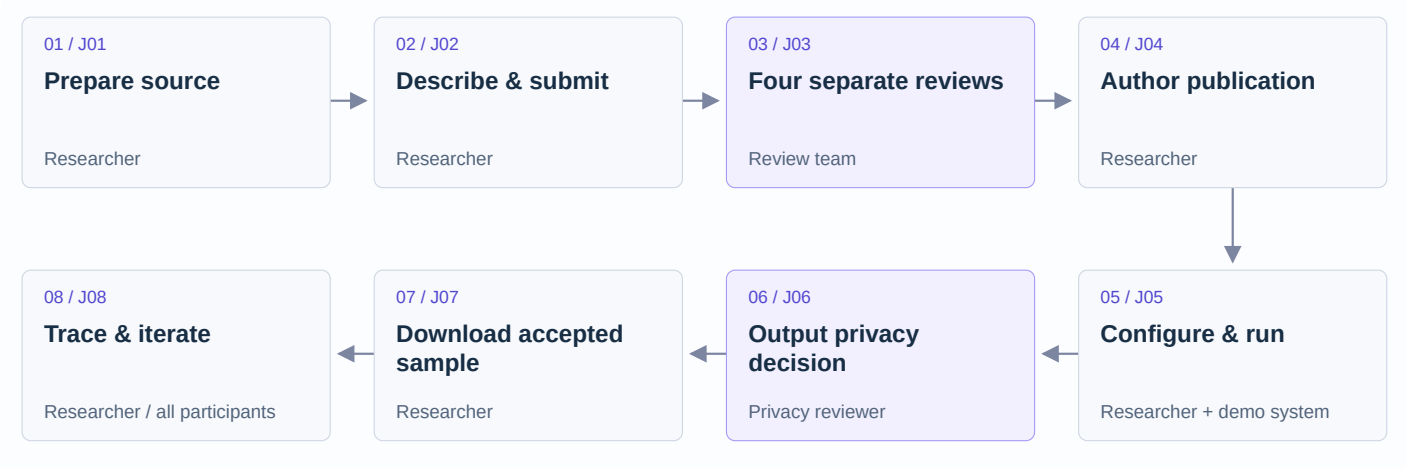


Follow the top row left to right, then the bottom row right to left. Each numbered stage links to its screenshots and customer context below.


**Already have an approved method?** Select or import a dataset, then start at Configure & run (J05) with an existing Approved pipeline. Its existing version does not repeat pipeline review for each run; the newly generated output still needs the separate Privacy decision. A new or revised method/version requires the full review path. Jump to the run stage

01

# Prepare the source data

Start with an identifiable, inspectable source.

Primary owner: Researcher

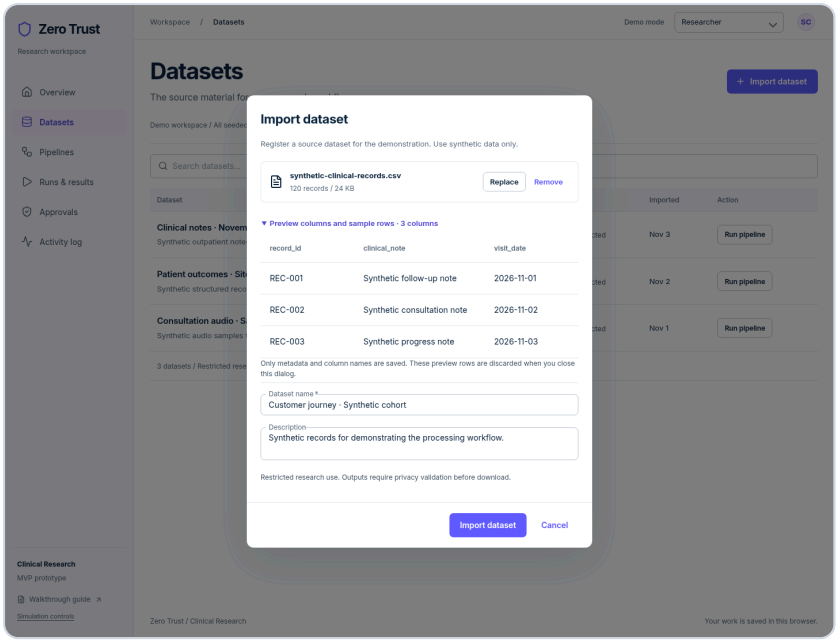


**Researcher** S06 Real UI capture

The import dialog shows the synthetic CSV, preview rows, dataset name and Import dataset action. The starting pipeline catalog is included as supporting context.

Customer question · hypothesis

> “Can I explore this without uploading real research data?”

### Customer action

Open Datasets, choose Import dataset, use the synthetic example, inspect columns and sample rows, then import.

### Team / system action

The browser validates the CSV shape and registers metadata and column names locally.

### Handoff

Researcher retains ownership; the registered source can be selected later in Configure run.

### Success signal


The synthetic cohort appears in Datasets after import.

---

**Potential pain · hypothesis:** Unclear source identity or format could lead to choosing the wrong data.

**Intended gain · hypothesis:** Preview and explicit metadata make the chosen source easier to recognize.

**Prototype limit:** CSV shape validation is demonstrated; no dataset upload or enforced permission check occurs.

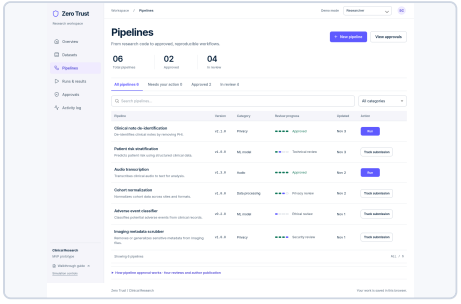


**Initial pipeline catalog**
Researcher · S03


Related screens: S04, S05, S06, S07 · Stories: US-S06 · Detailed flow F02

02

# Describe and submit the method

Give reviewers enough purpose, source and contract context.

Primary owner: Researcher

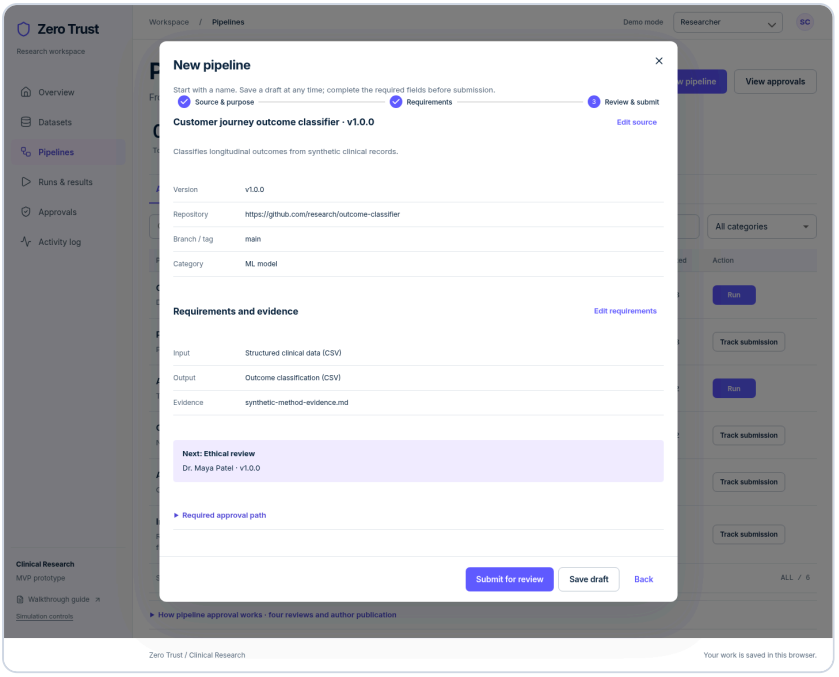


**Researcher** S10 Real UI capture

The final wizard summary exposes the research purpose, source, version, contracts and attached evidence before submission. The receipt shows the subsequent reviewer handoff.

Customer question · hypothesis

> “What do reviewers need, and who owns the next step?”

### Customer action

Complete the three-step pipeline wizard, attach optional synthetic evidence, inspect the final summary and submit for review. Save a named draft when not ready.

### Team / system action

Submission records the method/version and starts Ethical review. The author receives a status receipt and next owner.

### Handoff

Researcher → Ethical reviewer. The author cannot approve the pending stage.

### Success signal


The receipt says Submitted for review and identifies the Ethical reviewer as next owner.

---

**Potential pain · hypothesis:** Scattered requirements and unclear handoffs could cause repeated follow-up.

**Intended gain · hypothesis:** A structured submission and clear receipt provide a shared starting point.

**Prototype limit:** The repository URL is descriptive metadata; the prototype does not fetch research code.

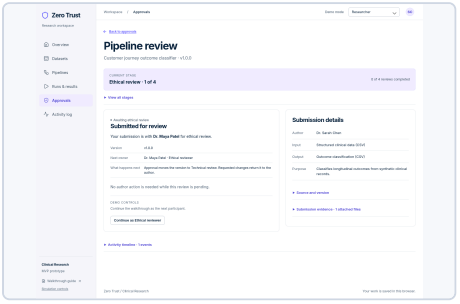



**Submission receipt and next reviewer**
Researcher · S13

Related screens: S08, S09, S10, S11, S13 · Stories: US-S10 · Detailed flow F03

# 03 Complete organizational review

Resolve all required organizational decisions.

Primary owner: Review team

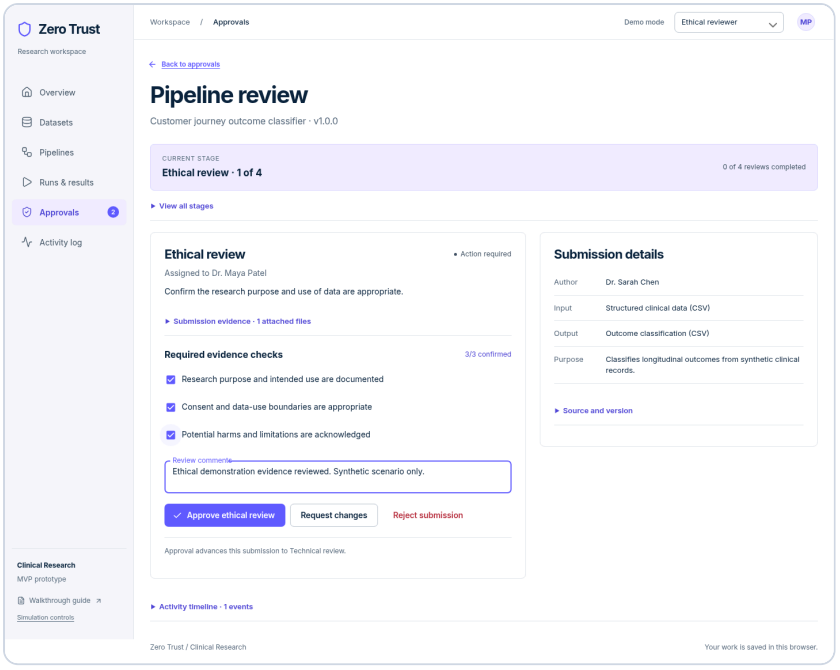


**Ethical reviewer** S14 Real UI capture

Four distinct reviewer screens show their stage-specific checklists. The captured run checked each criterion and used the normal approval action; it did not simulate approval.

> Customer question · hypothesis
>
> "Which review is pending, and what would unblock it?"

### Customer action

Track the submission and next owner. If a reviewer requests changes or rejects it, read the reason, revise and resubmit.

### Team / system action

Ethical, Technical, Privacy and Security reviewers each inspect their own evidence, confirm three criteria and make a distinct decision, in that order.

### Handoff

Ethical → Technical → Privacy → Security → Researcher. In the demo, switch roles to act as each participant.

### Success signal

After Security approval the status is Ready to publish; the method is still not published.


---

**Potential pain · hypothesis:** An opaque queue or one generic approval could hide accountability and missing review stages.


**Intended gain · hypothesis:** Separate stage criteria, named owners and decision history make each handoff explicit.

**Prototype limit:** Reviewers confirm illustrative evidence. No automated ethics, runtime, privacy or security assessment is claimed.


**Required order:** Ethical → Technical → Privacy → Security. Each reviewer confirms their own criteria. Publication remains a separate Researcher action.

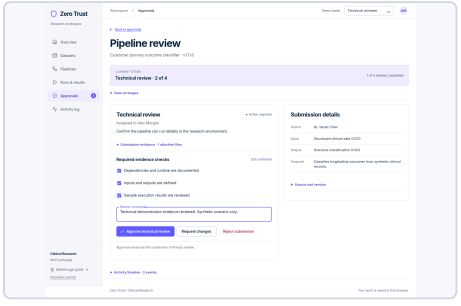


**Technical reviewer confirms stage-specific criteria**
Technical reviewer · S15

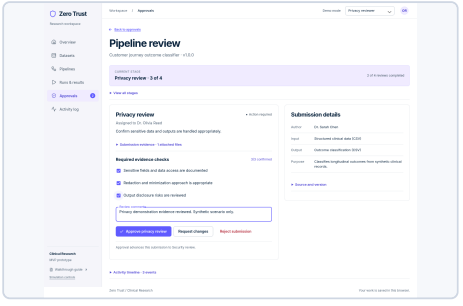


**Privacy reviewer confirms stage-specific criteria**
Privacy reviewer · S16

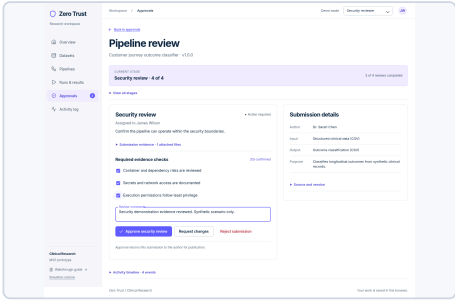



**Security reviewer confirms stage-specific criteria**
Security reviewer · S17

Related screens: S12, S13, S14, S15, S16, S17, S18, S19, S20, S21 · Stories: US-S14, US-S15, US-S16, US-S17 · Detailed flow F04

# 04 Publish the reviewed version

Decide when the reviewed method becomes available to run.

Primary owner: Researcher

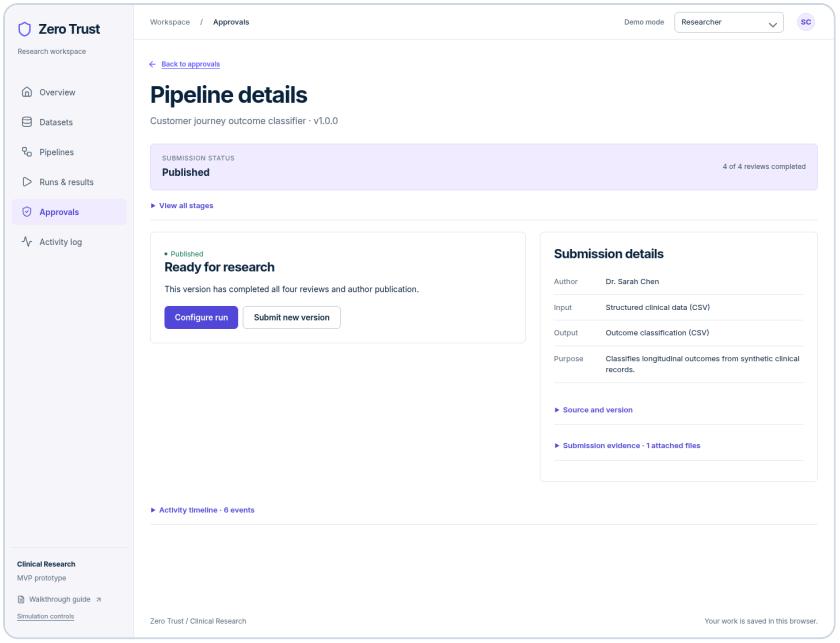


**Researcher** S22 Real UI capture

The published pipeline is ready for research. The supporting screen shows the previous Ready to publish state with a distinct Publish pipeline action.

> Customer question · hypothesis
>
> "Are all reviews complete, and is this the version I want to release?"

### Customer action

Return to Researcher and choose Publish pipeline after all four reviews are complete.

### Team / system action

Publication records its own event and changes the pipeline to Approved.

### Handoff

Review team → Researcher; publication is a separate author decision.

### Success signal


Pipeline details say Ready for research and offer Configure run and Submit new version.

---

**Potential pain · hypothesis:** Review completion could be mistaken for release, making availability unclear.

**Intended gain · hypothesis:** Explicit author publication separates assessment from making a version runnable.

**Prototype limit:** Publication changes local prototype state; it does not deploy research code.

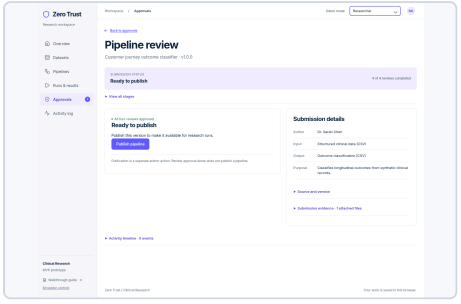


**Four reviews complete; author publication still required**
Researcher · S21


Related screens: S21, S22 · Stories: US-S21 · Detailed flow F04

05

# Run the approved method

Pair the published version with a compatible source and follow execution.

Primary owner: Researcher + demo system

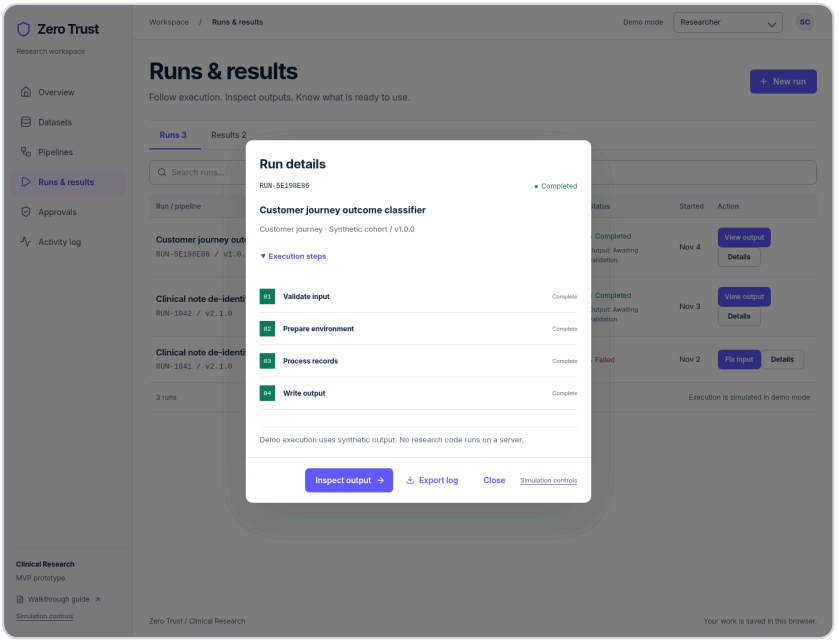


**Researcher** S26 Real UI capture

Completed run details retain method, dataset and version context and link to the output. The supporting Configure run screen shows the chosen pipeline, dataset and columns.

> Customer question · hypothesis
>
> "Does the source fit this method, and has the run actually finished?"

### Customer action

Configure a run with the approved pipeline and imported cohort. Inspect the declared input and dataset columns, start the demo, then open run details.

### Team / system action

A local timer advances four labelled execution steps and produces a synthetic artifact marked Pending review.

### Handoff

Researcher → simulated execution → Privacy reviewer for the output decision.

### Success signal


Run status is Completed and Inspect output opens an artifact awaiting privacy validation.

---

**Potential pain · hypothesis:** A format mismatch or an unexplained run state could make recovery difficult.

**Intended gain · hypothesis:** Visible contracts and separate run/output statuses clarify what is complete and what remains.

**Prototype limit:** The prototype checks format only, not schema mapping. No research code runs on a backend.

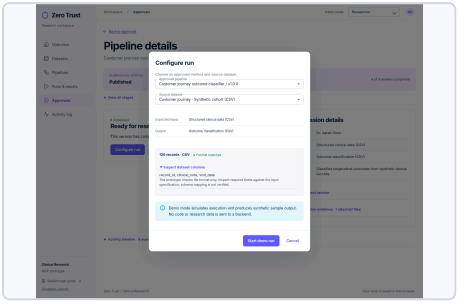


**Pair published method with the imported source**
Researcher · S23


Related screens: S23, S24, S25, S26 · Stories: US-S23 · Detailed flow F07

06

# Validate the generated output

Assess this particular output before it becomes downloadable.

Primary owner: Privacy reviewer

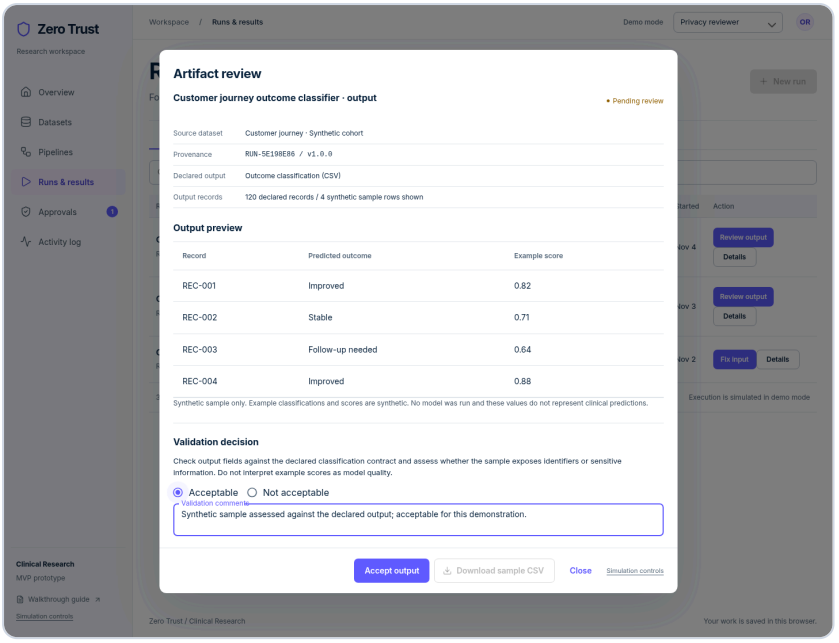


**Privacy reviewer** S34 Real UI capture

The output review shows synthetic rows, provenance, a deliberately selected Acceptable option, validation comments and Accept output. The capture also verified download was blocked before acceptance.

Customer question · hypothesis

> "Does approving the method also mean its output is acceptable?"

### Customer action

Inspect the synthetic output preview and provenance. In the demo, use Continue as Privacy reviewer to perform the output handoff.

### Team / system action

The Privacy reviewer deliberately chooses Acceptable or Not acceptable and submits the decision. Rejection requires an explanation.

### Handoff

Researcher → Privacy reviewer → Researcher after acceptance. This is separate from the pipeline Privacy review.

### Success signal

Acceptance changes the artifact to Validated; a rejection keeps download blocked.

---

**Potential pain · hypothesis:** A generated output could be mistaken for an already validated one.

**Intended gain · hypothesis:** A distinct output decision and receipt make download eligibility understandable.

**Prototype limit:** The output preview is a fixture for demonstration, not a PHI scan or a computation over imported source records.


Related screens: S32, S33, S34, S35, S36 · Stories: US-S34 · Detailed flow F09

07

# Retrieve the accepted sample

Obtain the accepted demonstration result.

Primary owner: Researcher

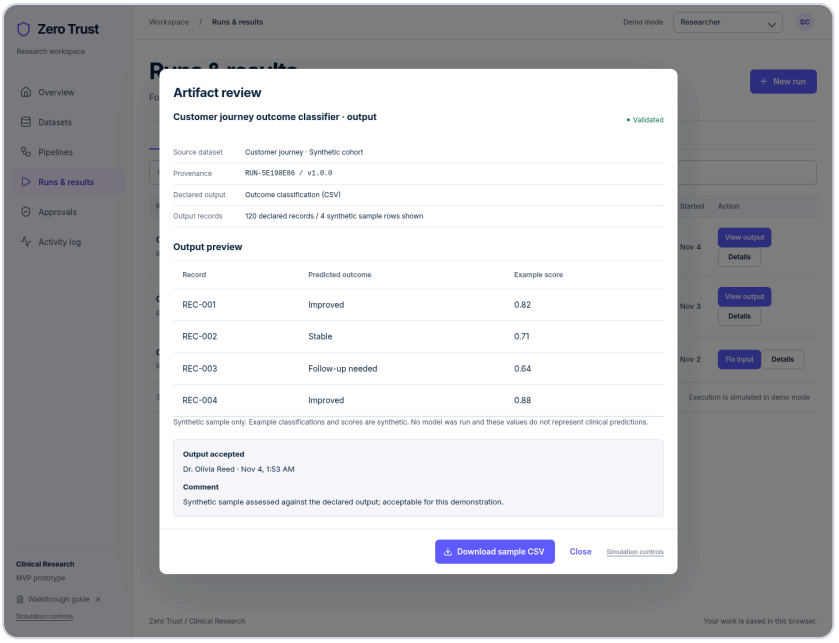


**Researcher** S35 Real UI capture

The researcher sees Output accepted and the enabled sample-download action. A supporting phone capture shows the same accepted artifact with full-width mobile CTAs. The capture run exercised and checked the CSV download.

> Customer question · hypothesis
>
> “What am I downloading, and why is it available now?”

### Customer action

Return to Researcher, reopen the accepted output, read the validation receipt and choose Download sample CSV.

### Team / system action

The browser downloads the small synthetic preview fixture; the artifact remains Validated.

### Handoff

The researcher obtains a local file and keeps the run/version/decision context in the prototype.

### Success signal


The Download sample CSV action is enabled and the browser emits a CSV download.

---

**Potential pain · hypothesis:** Unclear output labels could imply a full processed result when only a sample exists.

**Intended gain · hypothesis:** The sample label and acceptance receipt set the right expectation for this prototype.

**Prototype limit:** The downloaded file is a synthetic sample, not the declared full-record-count output.

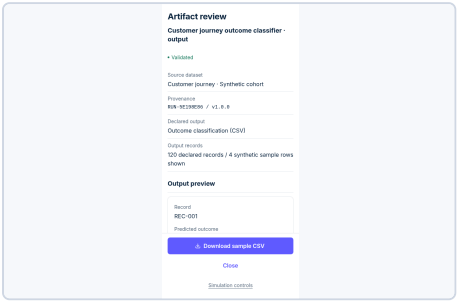



**Accepted output on mobile with full-width primary action**
Researcher · S35

Related screens: S35 · Stories: US-S35 · Detailed flow F09

# 08 Trace decisions and improve the method

Understand the recorded decisions and choose the next iteration.

Primary owner: Researcher / all participants

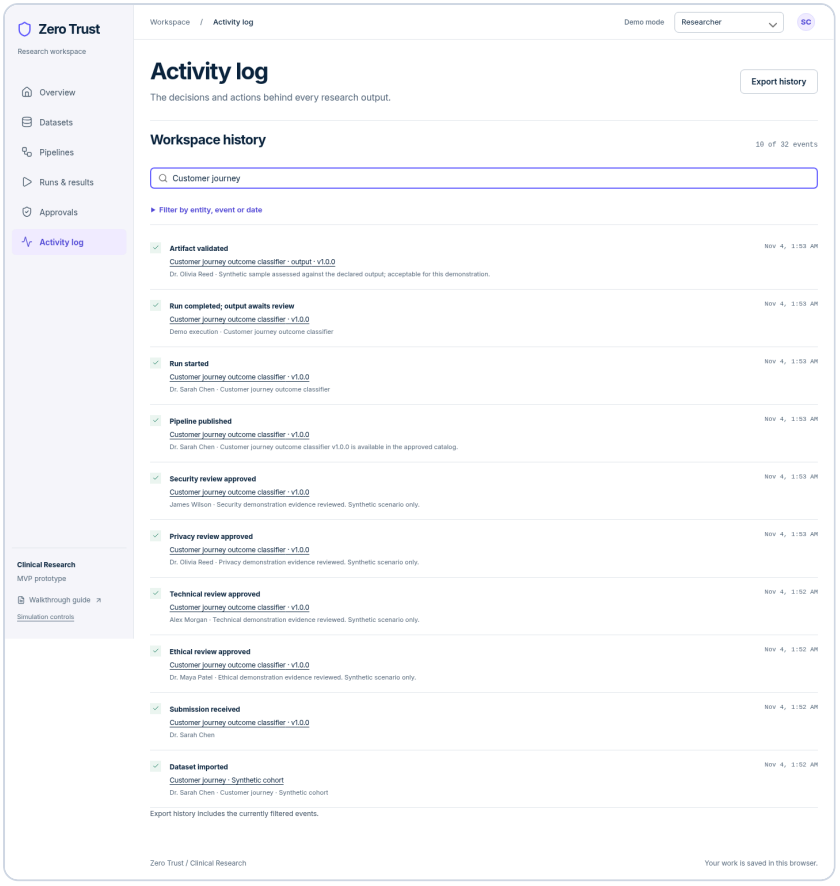


**Researcher** S37 Real UI capture

The activity history is filtered to the captured customer-journey scenario and shows its decision trail. The capture run verified a filtered JSON export. New-version creation is documented in the linked F06 flow, not separately executed in this screenshot run.

> Customer question · hypothesis
>
> “Which version and decisions led to this output, and how do I continue?”

### Customer action

Open Activity log, search/filter the relevant work, export its history or reopen an entity. To improve the method, open the published pipeline and choose Submit new version.

### Team / system action

History shows recorded actors, versions, review decisions, publication and execution/output events. A new version starts all four reviews again while the earlier approved version stays runnable.

### Handoff

Any participant can inspect history. A new-version journey returns ownership to the researcher and then the review team.

### Success signal

Filtered history exports as JSON; related entities reopen their current state. Iteration is available from the approved version.

---

**Potential pain · hypothesis:** Context scattered across versions and handoffs could make it hard to explain how an output was reached.

**Intended gain · hypothesis:** Linked lifecycle history and explicit versioning provide a readable record and a route to the next cycle.

**Prototype limit:** Local history is not immutable or shared audit infrastructure. Downloading the sample does not add an activity event.

Related screens: S37, S22, S08 · Stories: US-S37 · Detailed flow F10

# When the journey stalls

These alternative paths already exist in the MVP. They are documented in the detailed atlas; they were not all exercised in this screenshot run.

### Not ready to submit

**When:** Source, contracts or evidence still need work.

Save a named draft, then reopen Edit & submit draft. Incomplete drafts are allowed; submission still requires all required fields.

---

### Reviewer asks for changes or rejects

**When:** A stage cannot approve the current submission.

Researcher reads the required reason and revises. Saving a revision draft preserves the reviewed state; explicit resubmission creates the next patch version and restarts all four stages.

---

### Run fails or is cancelled

**When:** Use the seeded Failed run, or cancel an active demo run.

Open Run details, retry with the example mapping or restart. A local support request can be resolved by the Technical reviewer. Resolving support alone does not complete the run.

---

### Output is not acceptable

**When:** Privacy reviewer rejects a specific artifact.

Download stays blocked. Read the reason, investigate and start a new run to produce a fresh output for review; there is no direct decision-overturn action.

---

### The solo walkthrough is waiting

**When:** A review, publication, timer or output decision prevents continuing alone.

Use the quiet Simulation controls link. Simulate one/all reviews, separately simulate author publication, finish running demos or accept a pending output. Draft/revision submission rules still apply.

---

# Scenario and enabled features

| | |
|---|---|
| **Feature selection** | All included MVP capabilities are always on. There is no MVP feature-toggle setup. |
| **Roles selected** | Researcher → Ethical reviewer → Technical reviewer → Privacy reviewer → Security reviewer → Researcher → Privacy reviewer for output → Researcher. |
| **Review policy** | Every submitted pipeline/version requires all four separate reviews, followed by a separate Researcher publication. |
| **Scenario** | New Customer journey outcome classifier v1.0.0, synthetic CSV cohort, and one optional synthetic text-evidence attachment. |
| **Simulation controls** | Available for solo demos; not used for the captured main journey. Reviewer decisions and publication were exercised through their normal UI controls. |
| **Capture viewports** | 1440 × 1100 desktop; 390 × 844 mobile accepted-output example. |

## What the screenshot run verified

**Full main path:** import → submit → Ethical / Technical / Privacy / Security decisions → author publication → run completion → separate output acceptance → Researcher sample download.

**Download:** 4 synthetic sample rows, not the full declared dataset. **History export:** 10 matching events. **Mobile:** accepted output at 390 × 844 with no page overflow. No page/runtime or console errors occurred during the capture.

## Prototype boundaries

- The prototype uses local browser state and demo role switching. It does not provide real authentication, enforced access control or organizational approval routing.
- Dataset imports save metadata and column names. File contents are not uploaded; temporary import preview rows are discarded when the import dialog closes. Attached text evidence is retained locally.
- The repository URL is recorded without fetching or analyzing code. Review checklists are human demonstration confirmations, not scanner findings.
- Execution is simulated and output rows are synthetic fixtures. Format matching does not verify schema mapping. The CSV download contains the small synthetic sample, not a full processed dataset.
- Activity and support records are local demonstrations, not an immutable audit service or external help desk. CSV downloads themselves are not recorded as activity events.

Captured 2026-11-04 against source 415cbd6. Last app change: 6b83f7d. Other recovery paths and new-version creation are documented in the atlas; they were not all replayed in this screenshot run.

Customer questions, pains and gains are hypotheses. Screenshots show implemented prototype behavior with synthetic data; they do not establish production security or validated customer outcomes.