libbfd

The Binary File Descriptor Library

First Edition—BFD version < 3.0 % Since no product is stable before version 3.0:-) Original Document Created: April 1991

Steve Chamberlain Cygnus Support

Free Software Foundation $sac@www.gnu.org \\ BFD, 1.5 \\ T_EXinfo 2009-03-28.05$

Copyright © 1991 - 2013 Free Software Foundation, Inc.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.3 or any later version published by the Free Software Foundation; with no Invariant Sections, with no Front-Cover Texts, and with no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

Table of Contents

Τ	Introduction	1
	1.1 History	. 1
	1.2 How To Use BFD	. 1
1.3 What BFD Version 2 Can Do		
	1.3.1 Information Loss	. 2
	1.3.2 The BFD canonical object-file format	
	·	
2	BFD Front End	5
	2.1 typedef bfd	. 5
	2.2 Error reporting	
	2.2.1 Type bfd_error_type	
	2.2.1.1 bfd_get_error	
	2.2.1.2 bfd_set_error	
	2.2.1.3 bfd_errmsg	12
	2.2.1.4 bfd_perror	
	2.2.2 BFD error handler	12
	2.2.2.1 bfd_set_error_handler	12
	2.2.2.2 bfd_set_error_program_name	13
	2.2.2.3 bfd_get_error_handler	13
	2.2.3 BFD assert handler	
	2.2.3.1 bfd_set_assert_handler	13
	2.2.3.2 bfd_get_assert_handler	13
	2.3 Miscellaneous	
	2.3.1 Miscellaneous functions	13
	2.3.1.1 bfd_get_reloc_upper_bound	14
	2.3.1.2 bfd_canonicalize_reloc	
	2.3.1.3 bfd_set_reloc	14
	2.3.1.4 bfd_set_file_flags	14
	2.3.1.5 bfd_get_arch_size	14
	2.3.1.6 bfd_get_sign_extend_vma	15
	2.3.1.7 bfd_set_start_address	15
	2.3.1.8 bfd_get_gp_size	15
	2.3.1.9 bfd_set_gp_size	15
	2.3.1.10 bfd_scan_vma	15
	2.3.1.11 bfd_copy_private_header_data	16
	2.3.1.12 bfd_copy_private_bfd_data	16
	2.3.1.13 bfd_merge_private_bfd_data	16
	$2.3.1.14$ bfd_set_private_flags	17
	2.3.1.15 Other functions	17
	2.3.1.16 bfd_alt_mach_code	19
	2.3.1.17 bfd_emul_get_maxpagesize	19
	2.3.1.18 bfd_emul_set_maxpagesize	19
	2.3.1.19 bfd_emul_get_commonpagesize	19

2.3.1.20	bfd_emul_set_commonpagesize	. 20
2.3.1.21	bfd_demangle	. 20
2.3.1.22	struct bfd_iovec	20
2.3.1.23	bfd_get_mtime	21
2.3.1.24	_	
2.3.1.25	_	
2.4 Memory	Usage	
	ation	
	ialization functions	
2.5.1.1	bfd_init	22
2.6 Sections		. 22
2.6.1 Sect	tion input	. 22
	tion output	
	k orders	
	edef asection	
6 I	tion prototypes	
	bfd_section_list_clear	
2.6.5.2		
2.6.5.3	bfd_get_next_section_by_name	
2.6.5.4	bfd_get_linker_section	
2.6.5.5	bfd_get_section_by_name_if	
2.6.5.6	bfd_get_unique_section_name	
2.6.5.7	bfd_make_section_old_way	
2.6.5.8	bfd_make_section_anyway_with_flags	
2.6.5.9	bfd_make_section_anyway	
2.6.5.10	· · ·	
2.6.5.11		
2.6.5.12		
2.6.5.13		
2.6.5.14		
2.6.5.15	-	
2.6.5.16		
2.6.5.17		
2.6.5.18		
2.6.5.19		
2.6.5.20		
2.6.5.21	_ 13-1	
2.6.5.21		
·	ding symbols	
	ting symbols	
	ii Symbols	
	edef asymbol	
	abol handling functions	
2.7.5 Syn $2.7.5.1$	bfd_get_symtab_upper_bound	
2.7.5.1 $2.7.5.2$	bfd_is_local_label	
2.7.5.2 $2.7.5.3$	bfd_is_local_label_name	
	hfd is target special symbol	

2.7.5.5	bfd_canonicalize_symtab	$\dots 47$
2.7.5.6	bfd_set_symtab	47
2.7.5.7	bfd_print_symbol_vandf	47
2.7.5.8	bfd_make_empty_symbol	47
2.7.5.9	_bfd_generic_make_empty_symbol	47
2.7.5.10	bfd_make_debug_symbol	48
2.7.5.11	bfd_decode_symclass	48
2.7.5.12	bfd_is_undefined_symclass	48
2.7.5.13	- y -	
2.7.5.14	bfd_copy_private_symbol_data	48
2.8 Archives		49
2.8.1 Arcl	hive functions	49
2.8.1.1	bfd_get_next_mapent	49
2.8.1.2	bfd_set_archive_head	50
2.8.1.3	bfd_openr_next_archived_file	50
2.9 File form	nats	50
2.9.1 File	format functions	50
2.9.1.1	bfd_check_format	50
2.9.1.2	bfd_check_format_matches	51
2.9.1.3	bfd_set_format	51
2.9.1.4	bfd_format_string	51
2.10 Relocat	ions	51
2.10.1 typ	pedef arelent	52
2.10.1.1	<u> </u>	
2.10.1.2	71	
2.10.1.3	The HOWTO Macro	57
2.10.1.4	bfd_get_reloc_size	58
2.10.1.5	arelent_chain	58
2.10.1.6	bfd_check_overflow	58
2.10.1.7	bfd_perform_relocation	59
2.10.1.8	bfd_install_relocation	59
2.10.2 Th	e howto manager	59
2.10.2.1		
2.10.2.2	1	
2.10.2.3	bfd_default_reloc_type_lookup	. 122
2.10.2.4	_0	
2.10.2.5	bfd_generic_relax_section	. 123
2.10.2.6	bfd_generic_gc_sections	. 123
2.10.2.7	bfd_generic_lookup_section_flags	. 123
2.10.2.8	bfd_generic_merge_sections	. 123
2.10.2.9	bfd_generic_get_relocated_section_contents	
		. 123
	es	
2.11.1 Co	re file functions	
2.11.1.1		
2.11.1.2		
2.11.1.3	bfd_core_file_pid	. 124
9 11 1 /	core file matches executable n	194

	2.11.1.5	<pre>generic_core_file_matches_executable_p</pre>	125
2.12	Targets.		125
2.1	2.1 bfd_	target	125
	2.12.1.1	bfd_set_default_target	135
	2.12.1.2	bfd_find_target	135
	2.12.1.3	bfd_get_target_info	
	2.12.1.4	bfd_target_list	
	2.12.1.5	bfd_seach_for_target	
2.13	Architect	ures	
2.1	3.1 bfd_	architecture	137
2.1	3.2 bfd_	arch_info	146
	2.13.2.1	bfd_printable_name	147
	2.13.2.2	bfd_scan_arch	
	2.13.2.3	bfd_arch_list	147
	2.13.2.4	bfd_arch_get_compatible	147
	2.13.2.5	bfd_default_arch_struct	
	2.13.2.6	bfd_set_arch_info	
	2.13.2.7	bfd_default_set_arch_mach	
	2.13.2.8	bfd_get_arch	
	2.13.2.9	bfd_get_mach	
	2.13.2.10	bfd_arch_bits_per_byte	
	2.13.2.11	bfd_arch_bits_per_address	
	2.13.2.12	bfd_default_compatible	
	2.13.2.13	bfd_default_scan	
	2.13.2.14	bfd_get_arch_info	
	2.13.2.15	bfd_lookup_arch	
	2.13.2.16	bfd_printable_arch_mach	
	2.13.2.17	bfd_octets_per_byte	
	2.13.2.18	bfd_arch_mach_octets_per_byte	
	2.13.2.19	bfd_arch_default_fill	
2.14	Opening	and closing BFDs	
2.1		ctions for opening and closing	
	2.14.1.1		
	2.14.1.2	-	
	2.14.1.3	bfd_fdopenr	
	2.14.1.4	bfd_openstreamr	
	2.14.1.5	bfd_openr_iovec	
	2.14.1.6	bfd_openw	
	2.14.1.7	bfd_close	
	2.14.1.8	bfd_close_all_done	
	2.14.1.9	bfd_create	
	2.14.1.10	bfd_make_writable	
	2.14.1.11	bfd_make_readable	
	2.14.1.12	bfd_alloc	
	2.14.1.13	bfd_alloc2	
	2.14.1.14	bfd_zalloc	
	2.14.1.15	bfd_zalloc2	
	2.14.1.16	bfd_calc_gnu_debuglink_crc32	

2.14.	.1.17	bfd_get_debug_link_info	154
2.14.	.1.18	bfd_get_alt_debug_link_info	154
2.14.	.1.19	separate_debug_file_exists	154
2.14.	.1.20	separate_alt_debug_file_exists	155
2.14.	.1.21	find_separate_debug_file	155
2.14.	.1.22	bfd_follow_gnu_debuglink	155
2.14.	.1.23	bfd_follow_gnu_debugaltlink	155
2.14.	.1.24	bfd_create_gnu_debuglink_section	156
2.14.	.1.25	bfd_fill_in_gnu_debuglink_section	156
2.15 Impl	lemen	tation details	156
2.15.1	Inter	rnal functions	156
2.15.	.1.1	bfd_write_bigendian_4byte_int	156
2.15.	.1.2	bfd_put_size	156
2.15.	.1.3	bfd_get_size	157
2.15.	.1.4	bfd_h_put_size	158
2.15.	.1.5	bfd_log2	159
2.16 File	cachi	ng	160
2.16.1	Cach	ning functions	160
2.16.	.1.1	bfd_cache_init	
2.16.	.1.2	bfd_cache_close	160
2.16.		bfd_cache_close_all	160
2.16.		bfd_open_file	
2.17 Link		nctions	
2.17.1		ting a linker hash table	
2.17.2		ing symbols to the hash table	
2.17.		Differing file formats	
2.17.		Adding symbols from an object file $\ldots \ldots$	
2.17.		Adding symbols from an archive	
		orming the final link	
2.17.		Information provided by the linker	
2.17.		Relocating the section contents	
2.17.		Writing the symbol table	
2.17.		bfd_link_split_section	
2.17.		bfd_section_already_linked	
2.17.		${\tt bfd_generic_define_common_symbol}$	
2.17.		bfd_find_version_for_sym	166
2.17.		bfd_hide_sym_by_version	
		oles	166
2.18.1		ting and freeing a hash table	167
2.18.2		king up or entering a string	
2.18.3		ersing a hash table	167
2.18.4		ving a new hash table type	
2.18.		Define the derived structures	
2.18.		Write the derived creation routine	
2.18.	.4.3	Write other derived routines	169

3	BFD back ends	
	3.1 What to Put When	e 170
	3.2 a.out backends	
	3.2.1 Relocations	
		points
	· ·	e_swap_exec_header_in
		re_swap_exec_header_out
		e_some_aout_object_p 172
		e_mkobject
	$3.2.2.5$ aout_siz	e_machine_type
	$3.2.2.6$ aout_siz	re_set_arch_mach
	$3.2.2.7$ aout_siz	e_new_section_hook
	3.3 coff backends	
	3.3.1 Porting to a n	ew version of coff
	3.3.2 How the coff b	ackend works
	3.3.2.1 File layou	tt
	3.3.2.2 Coff long	section names
	3.3.2.3 Bit twidd	ling
	3.3.2.4 Symbol r	eading
	3.3.2.5 Symbol w	riting
	$3.3.2.6$ coff_sym	bol_type
	$3.3.2.7$ bfd_coff	_backend_data 178
	3.3.2.8 Writing r	elocations
	3.3.2.9 Reading 1	inenumbers
	3.3.2.10 Reading	relocations
	3.4 ELF backends	
	$3.5 \mod \text{backend} \dots$	
	3.5.1 File layout	
	3.5.2 Symbol table	format
	3.5.3 mmo section r	napping

1 Introduction

BFD is a package which allows applications to use the same routines to operate on object files whatever the object file format. A new object file format can be supported simply by creating a new BFD back end and adding it to the library.

BFD is split into two parts: the front end, and the back ends (one for each object file format).

- The front end of BFD provides the interface to the user. It manages memory and various canonical data structures. The front end also decides which back end to use and when to call back end routines.
- The back ends provide BFD its view of the real world. Each back end provides a set of calls which the BFD front end can use to maintain its canonical form. The back ends also may keep around information for their own use, for greater efficiency.

1.1 History

One spur behind BFD was the desire, on the part of the GNU 960 team at Intel Oregon, for interoperability of applications on their COFF and bout file formats. Cygnus was providing GNU support for the team, and was contracted to provide the required functionality.

The name came from a conversation David Wallace was having with Richard Stallman about the library: RMS said that it would be quite hard—David said "BFD". Stallman was right, but the name stuck.

At the same time, Ready Systems wanted much the same thing, but for different object file formats: IEEE-695, Oasys, Srecords, a.out and 68k coff.

BFD was first implemented by members of Cygnus Support; Steve Chamberlain (sac@cygnus.com), John Gilmore (gnu@cygnus.com), K. Richard Pixley (rich@cygnus.com) and David Henkel-Wallace (gumby@cygnus.com).

1.2 How To Use BFD

To use the library, include 'bfd.h' and link with 'libbfd.a'.

BFD provides a common interface to the parts of an object file for a calling application.

When an application successfully opens a target file (object, archive, or whatever), a pointer to an internal structure is returned. This pointer points to a structure called bfd, described in 'bfd.h'. Our convention is to call this pointer a BFD, and instances of it within code abfd. All operations on the target object file are applied as methods to the BFD. The mapping is defined within bfd.h in a set of macros, all beginning with 'bfd_' to reduce namespace pollution.

For example, this sequence does what you would probably expect: return the number of sections in an object file attached to a BFD abfd.

```
#include "bfd.h"
unsigned int number_of_sections (abfd)
bfd *abfd;
{
```

```
return bfd_count_sections (abfd);
}
```

The abstraction used within BFD is that an object file has:

- a header,
- a number of sections containing raw data (see Section 2.6 [Sections], page 22),
- a set of relocations (see Section 2.10 [Relocations], page 51), and
- some symbol information (see Section 2.7 [Symbols], page 40).

Also, BFDs opened for archives have the additional attribute of an index and contain subordinate BFDs. This approach is fine for a out and coff, but loses efficiency when applied to formats such as S-records and IEEE-695.

1.3 What BFD Version 2 Can Do

When an object file is opened, BFD subroutines automatically determine the format of the input object file. They then build a descriptor in memory with pointers to routines that will be used to access elements of the object file's data structures.

As different information from the object files is required, BFD reads from different sections of the file and processes them. For example, a very common operation for the linker is processing symbol tables. Each BFD back end provides a routine for converting between the object file's representation of symbols and an internal canonical format. When the linker asks for the symbol table of an object file, it calls through a memory pointer to the routine from the relevant BFD back end which reads and converts the table into a canonical form. The linker then operates upon the canonical form. When the link is finished and the linker writes the output file's symbol table, another BFD back end routine is called to take the newly created symbol table and convert it into the chosen output format.

1.3.1 Information Loss

Information can be lost during output. The output formats supported by BFD do not provide identical facilities, and information which can be described in one form has nowhere to go in another format. One example of this is alignment information in b.out. There is nowhere in an a.out format file to store alignment information on the contained data, so when a file is linked from b.out and an a.out image is produced, alignment information will not propagate to the output file. (The linker will still use the alignment information internally, so the link is performed correctly).

Another example is COFF section names. COFF files may contain an unlimited number of sections, each one with a textual section name. If the target of the link is a format which does not have many sections (e.g., a.out) or has sections without names (e.g., the Oasys format), the link cannot be done simply. You can circumvent this problem by describing the desired input-to-output section mapping with the linker command language.

Information can be lost during canonicalization. The BFD internal canonical form of the external formats is not exhaustive; there are structures in input formats for which there is no direct representation internally. This means that the BFD back ends cannot maintain all possible data richness through the transformation between external to internal and back to external formats.

This limitation is only a problem when an application reads one format and writes another. Each BFD back end is responsible for maintaining as much data as possible, and the internal BFD canonical form has structures which are opaque to the BFD core, and exported only to the back ends. When a file is read in one format, the canonical form is generated for BFD and the application. At the same time, the back end saves away any information which may otherwise be lost. If the data is then written back in the same format, the back end routine will be able to use the canonical form provided by the BFD core as well as the information it prepared earlier. Since there is a great deal of commonality between back ends, there is no information lost when linking or copying big endian COFF to little endian COFF, or a.out to b.out. When a mixture of formats is linked, the information is only lost from the files whose format differs from the destination.

1.3.2 The BFD canonical object-file format

The greatest potential for loss of information occurs when there is the least overlap between the information provided by the source format, that stored by the canonical format, and that needed by the destination format. A brief description of the canonical form may help you understand which kinds of data you can count on preserving across conversions.

files

Information stored on a per-file basis includes target machine architecture, particular implementation format type, a demand pageable bit, and a write protected bit. Information like Unix magic numbers is not stored here—only the magic numbers' meaning, so a ZMAGIC file would have both the demand pageable bit and the write protected text bit set. The byte order of the target is stored on a per-file basis, so that big- and little-endian object files may be used with one another.

sections

Each section in the input file contains the name of the section, the section's original address in the object file, size and alignment information, various flags, and pointers into other BFD data structures.

symbols

Each symbol contains a pointer to the information for the object file which originally defined it, its name, its value, and various flag bits. When a BFD back end reads in a symbol table, it relocates all symbols to make them relative to the base of the section where they were defined. Doing this ensures that each symbol points to its containing section. Each symbol also has a varying amount of hidden private data for the BFD back end. Since the symbol points to the original file, the private data format for that symbol is accessible. 1d can operate on a collection of symbols of wildly different formats without problems.

Normal global and simple local symbols are maintained on output, so an output file (no matter its format) will retain symbols pointing to functions and to global, static, and common variables. Some symbol information is not worth retaining; in a.out, type information is stored in the symbol table as long symbol names. This information would be useless to most COFF debuggers; the linker has command line switches to allow users to throw it away.

There is one word of type information within the symbol, so if the format supports symbol type information within symbols (for example, COFF, IEEE, Oasys) and the type is simple enough to fit within one word (nearly everything but aggregates), the information will be preserved.

relocation level

Each canonical BFD relocation record contains a pointer to the symbol to relocate to, the offset of the data to relocate, the section the data is in, and a pointer to a relocation type descriptor. Relocation is performed by passing messages through the relocation type descriptor and the symbol pointer. Therefore, relocations can be performed on output data using a relocation method that is only available in one of the input formats. For instance, Oasys provides a byte relocation format. A relocation record requesting this relocation type would point indirectly to a routine to perform this, so the relocation may be performed on a byte being written to a 68k COFF file, even though 68k COFF has no such relocation type.

line numbers

Object formats can contain, for debugging purposes, some form of mapping between symbols, source line numbers, and addresses in the output file. These addresses have to be relocated along with the symbol information. Each symbol with an associated list of line number records points to the first record of the list. The head of a line number list consists of a pointer to the symbol, which allows finding out the address of the function whose line number is being described. The rest of the list is made up of pairs: offsets into the section and line numbers. Any format which can simply derive this information can pass it successfully between formats (COFF, IEEE and Oasys).

2 BFD Front End

2.1 typedef bfd

A BFD has type bfd; objects of this type are the cornerstone of any application using BFD. Using BFD consists of making references though the BFD and to data in the BFD.

Here is the structure that defines the type bfd. It contains the major data about the file and pointers to the rest of the data.

```
enum bfd_direction
   no_direction = 0,
   read_direction = 1,
   write_direction = 2,
   both\_direction = 3
 };
struct bfd
 /* A unique identifier of the BFD */
 unsigned int id;
 /* The filename the application opened the BFD with. */
 const char *filename;
 /* A pointer to the target jump table. */
 const struct bfd_target *xvec;
 /* The IOSTREAM, and corresponding IO vector that provide access
     to the file backing the BFD. */
 void *iostream;
 const struct bfd_iovec *iovec;
 /* The caching routines use these to maintain a
     least-recently-used list of BFDs. */
 struct bfd *lru_prev, *lru_next;
 /* When a file is closed by the caching routines, BFD retains
     state information on the file here... */
 ufile_ptr where;
 /* File modified time, if mtime_set is TRUE. */
 long mtime;
 /* Reserved for an unimplemented file locking extension. */
 int ifd;
```

```
/* The format which belongs to the BFD. (object, core, etc.) */
 bfd_format format;
 /* The direction with which the BFD was opened. */
 enum bfd_direction direction;
 /* Format_specific flags. */
 flagword flags;
 /* Values that may appear in the flags field of a BFD. These also
     appear in the object_flags field of the bfd_target structure, where
     they indicate the set of flags used by that backend (not all flags
     are meaningful for all object file formats) (FIXME: at the moment,
     the object_flags values have mostly just been copied from backend
     to another, and are not necessarily correct). */
#define BFD_NO_FLAGS
                      0x00
  /* BFD contains relocation entries. */
#define HAS_RELOC
                      0x01
 /* BFD is directly executable. */
#define EXEC_P
                      0x02
 /* BFD has line number information (basically used for F_LNNO in a
     COFF header). */
#define HAS_LINENO
                      0x04
 /* BFD has debugging information. */
#define HAS_DEBUG
                      0x08
 /* BFD has symbols. */
#define HAS_SYMS
                      0x10
  /* BFD has local symbols (basically used for F_LSYMS in a COFF
    header). */
#define HAS_LOCALS
                       0x20
  /* BFD is a dynamic object. */
#define DYNAMIC
                      0x40
 /* Text section is write protected (if D_PAGED is not set, this is
     like an a.out NMAGIC file) (the linker sets this by default, but
     clears it for -r or -N). */
#define WP_TEXT
                      0x80
```

```
/* BFD is dynamically paged (this is like an a.out ZMAGIC file) (the
     linker sets this by default, but clears it for -r or -n or -N). */
#define D_PAGED
                      0x100
 /* BFD is relaxable (this means that bfd_relax_section may be able to
     do something) (sometimes bfd_relax_section can do something even if
     this is not set). */
#define BFD_IS_RELAXABLE 0x200
 /* This may be set before writing out a BFD to request using a
     traditional format. For example, this is used to request that when
     writing out an a.out object the symbols not be hashed to eliminate
     duplicates. */
#define BFD_TRADITIONAL_FORMAT 0x400
 /* This flag indicates that the BFD contents are actually cached
     in memory. If this is set, iostream points to a bfd_in_memory
     struct. */
#define BFD_IN_MEMORY 0x800
 /* The sections in this BFD specify a memory page. */
#define HAS_LOAD_PAGE 0x1000
 /* This BFD has been created by the linker and doesn't correspond
    to any input file. */
#define BFD_LINKER_CREATED 0x2000
 /* This may be set before writing out a BFD to request that it
     be written using values for UIDs, GIDs, timestamps, etc. that
     will be consistent from run to run. */
#define BFD_DETERMINISTIC_OUTPUT 0x4000
 /* Compress sections in this BFD. */
#define BFD_COMPRESS 0x8000
  /* Decompress sections in this BFD. */
#define BFD_DECOMPRESS 0x10000
 /* BFD is a dummy, for plugins. */
#define BFD_PLUGIN 0x20000
  /* Flags bits to be saved in bfd_preserve_save. */
#define BFD_FLAGS_SAVED \
  (BFD_IN_MEMORY | BFD_COMPRESS | BFD_DECOMPRESS | BFD_PLUGIN)
  /* Flags bits which are for BFD use only. */
#define BFD_FLAGS_FOR_BFD_USE_MASK \
```

```
(BFD_IN_MEMORY | BFD_COMPRESS | BFD_DECOMPRESS | BFD_LINKER_CREATED \
 | BFD_PLUGIN | BFD_TRADITIONAL_FORMAT | BFD_DETERMINISTIC_OUTPUT)
/* Currently my_archive is tested before adding origin to
   anything. I believe that this can become always an add of
   origin, with origin set to 0 for non archive files. */
ufile_ptr origin;
/* The origin in the archive of the proxy entry. This will
   normally be the same as origin, except for thin archives,
   when it will contain the current offset of the proxy in the
   thin archive rather than the offset of the bfd in its actual
   container. */
ufile_ptr proxy_origin;
/* A hash table for section names. */
struct bfd_hash_table section_htab;
/* Pointer to linked list of sections. */
struct bfd_section *sections;
/* The last section on the section list. */
struct bfd_section *section_last;
/* The number of sections. */
unsigned int section_count;
/* Stuff only useful for object files:
   The start address. */
bfd_vma start_address;
/* Used for input and output. */
unsigned int symcount;
/* Symbol table for output BFD (with symcount entries).
   Also used by the linker to cache input BFD symbols. */
struct bfd_symbol **outsymbols;
/* Used for slurped dynamic symbol tables. */
unsigned int dynsymcount;
/* Pointer to structure which contains architecture information. */
const struct bfd_arch_info *arch_info;
/* Stuff only useful for archives. */
void *arelt_data;
```

struct bfd *my_archive; /* The containing archive BFD. */

```
struct bfd *archive_next;
                            /* The next BFD in the archive. */
                            /* The first BFD in the archive. */
struct bfd *archive_head;
struct bfd *nested_archives; /* List of nested archive in a flattened
                                thin archive. */
/* A chain of BFD structures involved in a link. */
struct bfd *link_next;
/* A field used by _bfd_generic_link_add_archive_symbols. This will
   be used only for archive elements. */
int archive_pass;
/* Used by the back end to hold private data. */
union
 {
   struct aout_data_struct *aout_data;
   struct artdata *aout_ar_data;
   struct _oasys_data *oasys_obj_data;
   struct _oasys_ar_data *oasys_ar_data;
   struct coff_tdata *coff_obj_data;
   struct pe_tdata *pe_obj_data;
   struct xcoff_tdata *xcoff_obj_data;
   struct ecoff_tdata *ecoff_obj_data;
   struct ieee_data_struct *ieee_data;
   struct ieee_ar_data_struct *ieee_ar_data;
    struct srec_data_struct *srec_data;
    struct verilog_data_struct *verilog_data;
    struct ihex_data_struct *ihex_data;
    struct tekhex_data_struct *tekhex_data;
    struct elf_obj_tdata *elf_obj_data;
    struct nlm_obj_tdata *nlm_obj_data;
    struct bout_data_struct *bout_data;
    struct mmo_data_struct *mmo_data;
    struct sun_core_struct *sun_core_data;
    struct sco5_core_struct *sco5_core_data;
    struct trad_core_struct *trad_core_data;
    struct som_data_struct *som_data;
    struct hpux_core_struct *hpux_core_data;
    struct hppabsd_core_struct *hppabsd_core_data;
    struct sgi_core_struct *sgi_core_data;
    struct lynx_core_struct *lynx_core_data;
    struct osf_core_struct *osf_core_data;
    struct cisco_core_struct *cisco_core_data;
    struct versados_data_struct *versados_data;
    struct netbsd_core_struct *netbsd_core_data;
    struct mach_o_data_struct *mach_o_data;
    struct mach_o_fat_data_struct *mach_o_fat_data;
```

```
struct plugin_data_struct *plugin_data;
   struct bfd_pef_data_struct *pef_data;
   struct bfd_pef_xlib_data_struct *pef_xlib_data;
   struct bfd_sym_data_struct *sym_data;
   void *any;
 }
tdata;
/* Used by the application to hold private data. */
void *usrdata;
/* Where all the allocated stuff under this BFD goes. This is a
  struct objalloc *, but we use void * to avoid requiring the inclusion
   of objalloc.h. */
void *memory;
/* Is the file descriptor being cached? That is, can it be closed as
   needed, and re-opened when accessed later? */
unsigned int cacheable: 1;
/* Marks whether there was a default target specified when the
   BFD was opened. This is used to select which matching algorithm
   to use to choose the back end. */
unsigned int target_defaulted : 1;
/* ... and here: (''once'' means at least once). */
unsigned int opened_once : 1;
/* Set if we have a locally maintained mtime value, rather than
   getting it from the file each time. */
unsigned int mtime_set : 1;
/* Flag set if symbols from this BFD should not be exported. */
unsigned int no_export : 1;
/* Remember when output has begun, to stop strange things
   from happening. */
unsigned int output_has_begun : 1;
/* Have archive map. */
unsigned int has_armap : 1;
/* Set if this is a thin archive. */
unsigned int is_thin_archive : 1;
/* Set if only required symbols should be added in the link hash table for ▮
   this object. Used by VMS linkers. */
```

```
unsigned int selective_search : 1;
};
```

2.2 Error reporting

Most BFD functions return nonzero on success (check their individual documentation for precise semantics). On an error, they call bfd_set_error to set an error condition that callers can check by calling bfd_get_error. If that returns bfd_error_system_call, then check errno.

The easiest way to report a BFD error to the user is to use bfd_perror.

2.2.1 Type bfd_error_type

The values returned by bfd_get_error are defined by the enumerated type bfd_error_type.

```
typedef enum bfd_error
 bfd_error_no_error = 0,
 bfd_error_system_call,
 bfd_error_invalid_target,
  bfd_error_wrong_format,
 bfd_error_wrong_object_format,
  bfd_error_invalid_operation,
  bfd_error_no_memory,
  bfd_error_no_symbols,
  bfd_error_no_armap,
 bfd_error_no_more_archived_files,
  bfd_error_malformed_archive,
  bfd_error_missing_dso,
  bfd_error_file_not_recognized,
  bfd_error_file_ambiguously_recognized,
  bfd_error_no_contents,
  bfd_error_nonrepresentable_section,
  bfd_error_no_debug_section,
  bfd_error_bad_value,
  bfd_error_file_truncated,
  bfd_error_file_too_big,
 bfd_error_on_input,
  bfd_error_invalid_error_code
}
bfd_error_type;
```

2.2.1.1 bfd_get_error

Synopsis

```
bfd_error_type bfd_get_error (void);
```

Description

Return the current BFD error condition.

2.2.1.2 bfd set error

Synopsis

```
void bfd_set_error (bfd_error_type error_tag, ...);
```

Description

Set the BFD error condition to be error_tag. If error_tag is bfd_error_on_input, then this function takes two more parameters, the input bfd where the error occurred, and the bfd_error_type error.

2.2.1.3 bfd_errmsg

Synopsis

```
const char *bfd_errmsg (bfd_error_type error_tag);
```

Description

Return a string describing the error error_tag, or the system error if error_tag is bfd_error_system_call.

2.2.1.4 bfd_perror

Synopsis

```
void bfd_perror (const char *message);
```

Description

Print to the standard error stream a string describing the last BFD error that occurred, or the last system error if the last BFD error was a system call failure. If message is non-NULL and non-empty, the error string printed is preceded by message, a colon, and a space. It is followed by a newline.

2.2.2 BFD error handler

Some BFD functions want to print messages describing the problem. They call a BFD error handler function. This function may be overridden by the program.

The BFD error handler acts like printf.

```
typedef void (*bfd_error_handler_type) (const char *, ...);
```

2.2.2.1 bfd_set_error_handler

Synopsis

```
bfd_error_handler_type bfd_set_error_handler (bfd_error_handler_type);
```

Description

Set the BFD error handler function. Returns the previous function.

2.2.2 bfd_set_error_program_name

Synopsis

```
void bfd_set_error_program_name (const char *);
```

Description

Set the program name to use when printing a BFD error. This is printed before the error message followed by a colon and space. The string must not be changed after it is passed to this function.

2.2.2.3 bfd_get_error_handler

Synopsis

```
bfd_error_handler_type bfd_get_error_handler (void);
```

Description

Return the BFD error handler function.

2.2.3 BFD assert handler

If BFD finds an internal inconsistency, the bfd assert handler is called with information on the BFD version, BFD source file and line. If this happens, most programs linked against BFD are expected to want to exit with an error, or mark the current BFD operation as failed, so it is recommended to override the default handler, which just calls _bfd_error_handler and continues.

2.2.3.1 bfd_set_assert_handler

Synopsis

```
bfd_assert_handler_type bfd_set_assert_handler (bfd_assert_handler_type);
```

Description

Set the BFD assert handler function. Returns the previous function.

2.2.3.2 bfd_get_assert_handler

Synopsis

```
bfd_assert_handler_type bfd_get_assert_handler (void);
```

Description

Return the BFD assert handler function.

2.3 Miscellaneous

2.3.1 Miscellaneous functions

2.3.1.1 bfd_get_reloc_upper_bound

Synopsis

```
long bfd_get_reloc_upper_bound (bfd *abfd, asection *sect);
```

Description

Return the number of bytes required to store the relocation information associated with section sect attached to bfd abfd. If an error occurs, return -1.

2.3.1.2 bfd_canonicalize_reloc

Synopsis

```
long bfd_canonicalize_reloc
  (bfd *abfd, asection *sec, arelent **loc, asymbol **syms);
```

Description

Call the back end associated with the open BFD abfd and translate the external form of the relocation information attached to sec into the internal canonical form. Place the table into memory at loc, which has been preallocated, usually by a call to bfd_get_reloc_upper_bound. Returns the number of relocs, or -1 on error.

The syms table is also needed for horrible internal magic reasons.

2.3.1.3 bfd_set_reloc

Synopsis

```
void bfd_set_reloc
  (bfd *abfd, asection *sec, arelent **rel, unsigned int count);
```

Description

Set the relocation pointer and count within section sec to the values rel and count. The argument abfd is ignored.

2.3.1.4 bfd_set_file_flags

Synopsis

```
bfd_boolean bfd_set_file_flags (bfd *abfd, flagword flags);
```

Description

Set the flag word in the BFD abfd to the value flags.

Possible errors are:

- bfd_error_wrong_format The target bfd was not of object format.
- bfd_error_invalid_operation The target bfd was open for reading.
- bfd_error_invalid_operation The flag word contained a bit which was not applicable to the type of file. E.g., an attempt was made to set the D_PAGED bit on a BFD format which does not support demand paging.

2.3.1.5 bfd_get_arch_size

Synopsis

```
int bfd_get_arch_size (bfd *abfd);
```

Description

Returns the architecture address size, in bits, as determined by the object file's format. For ELF, this information is included in the header.

Returns

Returns the arch size in bits if known, -1 otherwise.

2.3.1.6 bfd_get_sign_extend_vma

Synopsis

```
int bfd_get_sign_extend_vma (bfd *abfd);
```

Description

Indicates if the target architecture "naturally" sign extends an address. Some architectures implicitly sign extend address values when they are converted to types larger than the size of an address. For instance, bfd_get_start_address() will return an address sign extended to fill a bfd_vma when this is the case.

Returns

Returns 1 if the target architecture is known to sign extend addresses, 0 if the target architecture is known to not sign extend addresses, and -1 otherwise.

2.3.1.7 bfd_set_start_address

Synopsis

```
bfd_boolean bfd_set_start_address (bfd *abfd, bfd_vma vma);
```

Description

Make vma the entry point of output BFD abfd.

Returns

Returns TRUE on success, FALSE otherwise.

2.3.1.8 bfd_get_gp_size

Synopsis

```
unsigned int bfd_get_gp_size (bfd *abfd);
```

Description

Return the maximum size of objects to be optimized using the GP register under MIPS ECOFF. This is typically set by the -G argument to the compiler, assembler or linker.

2.3.1.9 bfd_set_gp_size

Synopsis

```
void bfd_set_gp_size (bfd *abfd, unsigned int i);
```

Description

Set the maximum size of objects to be optimized using the GP register under ECOFF or MIPS ELF. This is typically set by the -G argument to the compiler, assembler or linker.

2.3.1.10 bfd_scan_vma

Synopsis

bfd_vma bfd_scan_vma (const char *string, const char **end, int base);

Description

Convert, like strtoul, a numerical expression *string* into a bfd_vma integer, and return that integer. (Though without as many bells and whistles as strtoul.) The expression is assumed to be unsigned (i.e., positive). If given a *base*, it is used as the base for conversion. A base of 0 causes the function to interpret the string in hex if a leading "0x" or "0X" is found, otherwise in octal if a leading zero is found, otherwise in decimal.

If the value would overflow, the maximum bfd_vma value is returned.

2.3.1.11 bfd_copy_private_header_data

Synopsis

```
bfd_boolean bfd_copy_private_header_data (bfd *ibfd, bfd *obfd);
```

Description

Copy private BFD header information from the BFD *ibfd* to the the BFD *obfd*. This copies information that may require sections to exist, but does not require symbol tables. Return true on success, false on error. Possible error returns are:

• bfd_error_no_memory - Not enough memory exists to create private data for obfd.

2.3.1.12 bfd_copy_private_bfd_data

Synopsis

```
bfd_boolean bfd_copy_private_bfd_data (bfd *ibfd, bfd *obfd);
```

Description

Copy private BFD information from the BFD *ibfd* to the BFD *obfd*. Return TRUE on success, FALSE on error. Possible error returns are:

• bfd_error_no_memory - Not enough memory exists to create private data for obfd.

2.3.1.13 bfd_merge_private_bfd_data

Synopsis

```
bfd_boolean bfd_merge_private_bfd_data (bfd *ibfd, bfd *obfd);
```

Description

Merge private BFD information from the BFD *ibfd* to the output file BFD *obfd* when linking. Return TRUE on success, FALSE on error. Possible error returns are:

• bfd_error_no_memory - Not enough memory exists to create private data for obfd.

2.3.1.14 bfd_set_private_flags

Synopsis

```
bfd_boolean bfd_set_private_flags (bfd *abfd, flagword flags);
```

Description

Set private BFD flag information in the BFD *abfd*. Return TRUE on success, FALSE on error. Possible error returns are:

• bfd_error_no_memory - Not enough memory exists to create private data for obfd.

```
#define bfd_set_private_flags(abfd, flags) \
    BFD_SEND (abfd, _bfd_set_private_flags, (abfd, flags))
```

2.3.1.15 Other functions

Description

The following functions exist but have not yet been documented.

```
#define bfd_sizeof_headers(abfd, info) \
       BFD_SEND (abfd, _bfd_sizeof_headers, (abfd, info))
#define bfd_find_nearest_line(abfd, sec, syms, off, file, func, line) \
       BFD_SEND (abfd, _bfd_find_nearest_line, \
                 (abfd, sec, syms, off, file, func, line))
#define bfd_find_nearest_line_discriminator(abfd, sec, syms, off, file, func, \
                                            line, disc) \
       BFD_SEND (abfd, _bfd_find_nearest_line_discriminator, \
                 (abfd, sec, syms, off, file, func, line, disc))
#define bfd_find_line(abfd, syms, sym, file, line) \
       BFD_SEND (abfd, _bfd_find_line, \
                 (abfd, syms, sym, file, line))
#define bfd_find_inliner_info(abfd, file, func, line) \
       BFD_SEND (abfd, _bfd_find_inliner_info, \
                 (abfd, file, func, line))
#define bfd_debug_info_start(abfd) \
       BFD_SEND (abfd, _bfd_debug_info_start, (abfd))
#define bfd_debug_info_end(abfd) \
       BFD_SEND (abfd, _bfd_debug_info_end, (abfd))
#define bfd_debug_info_accumulate(abfd, section) \
       BFD_SEND (abfd, _bfd_debug_info_accumulate, (abfd, section))
#define bfd_stat_arch_elt(abfd, stat) \
       BFD_SEND (abfd, _bfd_stat_arch_elt,(abfd, stat))
```

```
#define bfd_update_armap_timestamp(abfd) \
       BFD_SEND (abfd, _bfd_update_armap_timestamp, (abfd))
#define bfd_set_arch_mach(abfd, arch, mach)\
       BFD_SEND (abfd, _bfd_set_arch_mach, (abfd, arch, mach))
#define bfd_relax_section(abfd, section, link_info, again) \
       BFD_SEND (abfd, _bfd_relax_section, (abfd, section, link_info, again))
#define bfd_gc_sections(abfd, link_info) \
       BFD_SEND (abfd, _bfd_gc_sections, (abfd, link_info))
#define bfd_lookup_section_flags(link_info, flag_info, section) \
      BFD_SEND (abfd, _bfd_lookup_section_flags, (link_info, flag_info, section))
#define bfd_merge_sections(abfd, link_info) \
       BFD_SEND (abfd, _bfd_merge_sections, (abfd, link_info))
#define bfd_is_group_section(abfd, sec) \
       BFD_SEND (abfd, _bfd_is_group_section, (abfd, sec))
#define bfd_discard_group(abfd, sec) \
       BFD_SEND (abfd, _bfd_discard_group, (abfd, sec))
#define bfd_link_hash_table_create(abfd) \
       BFD_SEND (abfd, _bfd_link_hash_table_create, (abfd))
#define bfd_link_hash_table_free(abfd, hash) \
       BFD_SEND (abfd, _bfd_link_hash_table_free, (hash))
#define bfd_link_add_symbols(abfd, info) \
       BFD_SEND (abfd, _bfd_link_add_symbols, (abfd, info))
#define bfd_link_just_syms(abfd, sec, info) \
       BFD_SEND (abfd, _bfd_link_just_syms, (sec, info))
#define bfd_final_link(abfd, info) \
       BFD_SEND (abfd, _bfd_final_link, (abfd, info))
#define bfd_free_cached_info(abfd) \
       BFD_SEND (abfd, _bfd_free_cached_info, (abfd))
#define bfd_get_dynamic_symtab_upper_bound(abfd) \
       BFD_SEND (abfd, _bfd_get_dynamic_symtab_upper_bound, (abfd))
#define bfd_print_private_bfd_data(abfd, file)\
       BFD_SEND (abfd, _bfd_print_private_bfd_data, (abfd, file))
```

2.3.1.16 bfd_alt_mach_code

Synopsis

```
bfd_boolean bfd_alt_mach_code (bfd *abfd, int alternative);
```

Description

When more than one machine code number is available for the same machine type, this function can be used to switch between the preferred one (alternative == 0) and any others. Currently, only ELF supports this feature, with up to two alternate machine codes.

2.3.1.17 bfd_emul_get_maxpagesize

Synopsis

```
bfd_vma bfd_emul_get_maxpagesize (const char *);
```

Description

Returns the maximum page size, in bytes, as determined by emulation.

Returns

Returns the maximum page size in bytes for ELF, 0 otherwise.

2.3.1.18 bfd_emul_set_maxpagesize

Synopsis

```
void bfd_emul_set_maxpagesize (const char *, bfd_vma);
```

Description

For ELF, set the maximum page size for the emulation. It is a no-op for other formats.

2.3.1.19 bfd_emul_get_commonpagesize

Synopsis

```
bfd_vma bfd_emul_get_commonpagesize (const char *);
```

Description

Returns the common page size, in bytes, as determined by emulation.

Returns

Returns the common page size in bytes for ELF, 0 otherwise.

2.3.1.20 bfd_emul_set_commonpagesize

Synopsis

```
void bfd_emul_set_commonpagesize (const char *, bfd_vma);
```

Description

For ELF, set the common page size for the emulation. It is a no-op for other formats.

2.3.1.21 bfd_demangle

Synopsis

```
char *bfd_demangle (bfd *, const char *, int);
```

Description

Wrapper around cplus_demangle. Strips leading underscores and other such chars that would otherwise confuse the demangler. If passed a g++ v3 ABI mangled name, returns a buffer allocated with malloc holding the demangled name. Returns NULL otherwise and on memory alloc failure.

2.3.1.22 struct bfd iovec

Description

The struct bfd_iovec contains the internal file I/O class. Each BFD has an instance of this class and all file I/O is routed through it (it is assumed that the instance implements all methods listed below).

```
struct bfd_iovec
  /st To avoid problems with macros, a "b" rather than "f"
     prefix is prepended to each method name. */
  /* Attempt to read/write NBYTES on ABFD's IOSTREAM storing/fetching
     bytes starting at PTR. Return the number of bytes actually
     transfered (a read past end-of-file returns less than NBYTES),
     or -1 (setting bfd_error) if an error occurs. */
 file_ptr (*bread) (struct bfd *abfd, void *ptr, file_ptr nbytes);
 file_ptr (*bwrite) (struct bfd *abfd, const void *ptr,
                     file_ptr nbytes);
  /* Return the current IOSTREAM file offset, or -1 (setting bfd_error
     if an error occurs.
 file_ptr (*btell) (struct bfd *abfd);
  /* For the following, on successful completion a value of 0 is returned.
     Otherwise, a value of -1 is returned (and bfd_error is set). */
  int (*bseek) (struct bfd *abfd, file_ptr offset, int whence);
  int (*bclose) (struct bfd *abfd);
  int (*bflush) (struct bfd *abfd);
  int (*bstat) (struct bfd *abfd, struct stat *sb);
```

```
/* Mmap a part of the files. ADDR, LEN, PROT, FLAGS and OFFSET are the usual ▮
          mmap parameter, except that LEN and OFFSET do not need to be page
          aligned. Returns (void *)-1 on failure, mmapped address on success. ■
          Also write in MAP_ADDR the address of the page aligned buffer and in
          MAP_LEN the size mapped (a page multiple). Use unmap with MAP_ADDR and
          MAP_LEN to unmap. */
       void *(*bmmap) (struct bfd *abfd, void *addr, bfd_size_type len,
                       int prot, int flags, file_ptr offset,
                       void **map_addr, bfd_size_type *map_len);
     };
     extern const struct bfd_iovec _bfd_memory_iovec;
2.3.1.23 bfd_get_mtime
```

Synopsis

```
long bfd_get_mtime (bfd *abfd);
```

Description

Return the file modification time (as read from the file system, or from the archive header for archive members).

2.3.1.24 bfd_get_size

Synopsis

```
file_ptr bfd_get_size (bfd *abfd);
```

Description

Return the file size (as read from file system) for the file associated with BFD abfd.

The initial motivation for, and use of, this routine is not so we can get the exact size of the object the BFD applies to, since that might not be generally possible (archive members for example). It would be ideal if someone could eventually modify it so that such results were guaranteed.

Instead, we want to ask questions like "is this NNN byte sized object I'm about to try read from file offset YYY reasonable?" As as example of where we might do this, some object formats use string tables for which the first sizeof (long) bytes of the table contain the size of the table itself, including the size bytes. If an application tries to read what it thinks is one of these string tables, without some way to validate the size, and for some reason the size is wrong (byte swapping error, wrong location for the string table, etc.), the only clue is likely to be a read error when it tries to read the table, or a "virtual memory exhausted" error when it tries to allocate 15 bazillon bytes of space for the 15 bazillon byte table it is about to read. This function at least allows us to answer the question, "is the size reasonable?".

2.3.1.25 bfd_mmap

Synopsis

```
void *bfd_mmap (bfd *abfd, void *addr, bfd_size_type len,
   int prot, int flags, file_ptr offset,
   void **map_addr, bfd_size_type *map_len);
```

Description

Return mmap()ed region of the file, if possible and implemented. LEN and OFFSET do not need to be page aligned. The page aligned address and length are written to MAP_ADDR and MAP_LEN.

2.4 Memory Usage

BFD keeps all of its internal structures in obstacks. There is one obstack per open BFD file, into which the current state is stored. When a BFD is closed, the obstack is deleted, and so everything which has been allocated by BFD for the closing file is thrown away.

BFD does not free anything created by an application, but pointers into bfd structures become invalid on a bfd_close; for example, after a bfd_close the vector passed to bfd_canonicalize_symtab is still around, since it has been allocated by the application, but the data that it pointed to are lost.

The general rule is to not close a BFD until all operations dependent upon data from the BFD have been completed, or all the data from within the file has been copied. To help with the management of memory, there is a function (bfd_alloc_size) which returns the number of bytes in obstacks associated with the supplied BFD. This could be used to select the greediest open BFD, close it to reclaim the memory, perform some operation and reopen the BFD again, to get a fresh copy of the data structures.

2.5 Initialization

2.5.1 Initialization functions

These are the functions that handle initializing a BFD.

2.5.1.1 bfd_init

Synopsis

void bfd_init (void);

Description

This routine must be called before any other BFD function to initialize magical internal data structures.

2.6 Sections

The raw data contained within a BFD is maintained through the section abstraction. A single BFD may have any number of sections. It keeps hold of them by pointing to the first; each one points to the next in the list.

Sections are supported in BFD in section.c.

2.6.1 Section input

When a BFD is opened for reading, the section structures are created and attached to the BFD.

Each section has a name which describes the section in the outside world—for example, a.out would contain at least three sections, called .text, .data and .bss.

Names need not be unique; for example a COFF file may have several sections named .data. Sometimes a BFD will contain more than the "natural" number of sections. A back end may attach other sections containing constructor data, or an application may add a section (using bfd_make_section) to the sections attached to an already open BFD. For example, the linker creates an extra section COMMON for each input file's BFD to hold information about common storage.

The raw data is not necessarily read in when the section descriptor is created. Some targets may leave the data in place until a bfd_get_section_contents call is made. Other back ends may read in all the data at once. For example, an S-record file has to be read once to determine the size of the data. An IEEE-695 file doesn't contain raw data in sections, but data and relocation expressions intermixed, so the data area has to be parsed to get out the data and relocations.


2.6.2 Section output

To write a new object style BFD, the various sections to be written have to be created. They are attached to the BFD in the same way as input sections; data is written to the sections using bfd_set_section_contents.

Any program that creates or combines sections (e.g., the assembler and linker) must use the asection fields output_section and output_offset to indicate the file sections to which each section must be written. (If the section is being created from scratch, output_section should probably point to the section itself and output_offset should probably be zero.)

The data to be written comes from input sections attached (via output_section pointers) to the output sections. The output section structure can be considered a filter for the input section: the output section determines the vma of the output data and the name, but the input section determines the offset into the output section of the data to be written.

E.g., to create a section "O", starting at 0x100, 0x123 long, containing two subsections, "A" at offset 0x0 (i.e., at vma 0x100) and "B" at offset 0x20 (i.e., at vma 0x120) the asection structures would look like:

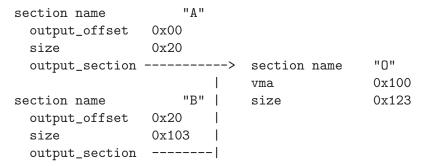

2.6.3 Link orders

The data within a section is stored in a *link_order*. These are much like the fixups in gas. The link_order abstraction allows a section to grow and shrink within itself.

A link_order knows how big it is, and which is the next link_order and where the raw data for it is; it also points to a list of relocations which apply to it.

The link_order is used by the linker to perform relaxing on final code. The compiler creates code which is as big as necessary to make it work without relaxing, and the user can select

whether to relax. Sometimes relaxing takes a lot of time. The linker runs around the relocations to see if any are attached to data which can be shrunk, if so it does it on a link_order by link_order basis.

2.6.4 typedef asection

Here is the section structure:

```
typedef struct bfd_section
 /* The name of the section; the name isn't a copy, the pointer is
     the same as that passed to bfd_make_section. */
 const char *name;
 /* A unique sequence number. */
 int id;
 /* Which section in the bfd; 0..n-1 as sections are created in a bfd. */
 int index;
 /* The next section in the list belonging to the BFD, or NULL. */
 struct bfd_section *next;
 /st The previous section in the list belonging to the BFD, or NULL. st/
 struct bfd_section *prev;
 /* The field flags contains attributes of the section. Some
     flags are read in from the object file, and some are
     synthesized from other information. */
 flagword flags;
#define SEC_NO_FLAGS
                       0x000
 /* Tells the OS to allocate space for this section when loading.
     This is clear for a section containing debug information only. */
#define SEC_ALLOC
                       0x001
 /* Tells the OS to load the section from the file when loading.
     This is clear for a .bss section. */
#define SEC_LOAD
                       0x002
 /* The section contains data still to be relocated, so there is
     some relocation information too. */
#define SEC_RELOC
                       0x004
 /st A signal to the OS that the section contains read only data. st/
#define SEC_READONLY
                      800x0
```

/* The section contains constructor information. This section
 type is used by the linker to create lists of constructors and
 destructors used by g++. When a back end sees a symbol
 which should be used in a constructor list, it creates a new
 section for the type of name (e.g., __CTOR_LIST__), attaches
 the symbol to it, and builds a relocation. To build the lists
 of constructors, all the linker has to do is catenate all the
 sections called __CTOR_LIST__ and relocate the data
 contained within - exactly the operations it would peform on
 standard data. */

#define SEC_CONSTRUCTOR 0x080

/* The section has contents - a data section could be SEC_ALLOC | SEC_HAS_CONTENTS; a debug section could be SEC_HAS_CONTENTS */ #define SEC_HAS_CONTENTS 0x100

- /* An instruction to the linker to not output the section
 even if it has information which would normally be written. */
 #define SEC_NEVER_LOAD 0x200
- /* The section contains thread local data. */ #define SEC_THREAD_LOCAL 0x400
 - /* The section has GOT references. This flag is only for the linker, and is currently only used by the elf32-hppa back end. It will be set if global offset table references were detected in this section, which indicate to the linker that the section contains PIC code, and must be handled specially when doing a static link. */

#define SEC_HAS_GOT_REF 0x800

/* The section contains common symbols (symbols may be defined
 multiple times, the value of a symbol is the amount of
 space it requires, and the largest symbol value is the one
 used). Most targets have exactly one of these (which we
 translate to bfd_com_section_ptr), but ECOFF has two. */

#define SEC_IS_COMMON 0x1000

- /* The section contains only debugging information. For
 example, this is set for ELF .debug and .stab sections.
 strip tests this flag to see if a section can be
 discarded. */
- #define SEC_DEBUGGING 0x2000
- /* The contents of this section are held in memory pointed to
 by the contents field. This is checked by bfd_get_section_contents,
 and the data is retrieved from memory if appropriate. */
 #define SEC_IN_MEMORY 0x4000
- /* The contents of this section are to be excluded by the linker for executable and shared objects unless those objects are to be further relocated. */ #define SEC_EXCLUDE 0x8000
- /* The contents of this section are to be sorted based on the sum of
 the symbol and addend values specified by the associated relocation
 entries. Entries without associated relocation entries will be
 appended to the end of the section in an unspecified order. */
 #define SEC_SORT_ENTRIES 0x10000
- /* When linking, duplicate sections of the same name should be
 discarded, rather than being combined into a single section as
 is usually done. This is similar to how common symbols are
 handled. See SEC_LINK_DUPLICATES below. */
 #define SEC_LINK_ONCE 0x20000
- /* If SEC_LINK_ONCE is set, this bitfield describes how the linker
 should handle duplicate sections. */
 #define SEC_LINK_DUPLICATES 0xc0000
- /* This value for SEC_LINK_DUPLICATES means that duplicate
 sections with the same name should simply be discarded. */
 #define SEC_LINK_DUPLICATES_DISCARD 0x0
- /* This value for SEC_LINK_DUPLICATES means that the linker
 should warn if there are any duplicate sections, although
 it should still only link one copy. */
 #define SEC_LINK_DUPLICATES_ONE_ONLY 0x40000
- /* This value for SEC_LINK_DUPLICATES means that the linker
 should warn if any duplicate sections are a different size. */
 #define SEC_LINK_DUPLICATES_SAME_SIZE 0x80000

```
/* This value for SEC_LINK_DUPLICATES means that the linker
should warn if any duplicate sections contain different
contents. */
```

#define SEC_LINK_DUPLICATES_SAME_CONTENTS \
 (SEC_LINK_DUPLICATES_ONE_ONLY | SEC_LINK_DUPLICATES_SAME_SIZE)

- /* This section was created by the linker as part of dynamic
 relocation or other arcane processing. It is skipped when
 going through the first-pass output, trusting that someone
 else up the line will take care of it later. */
 #define SEC_LINKER_CREATED 0x100000
- /* This section should not be subject to garbage collection.
 Also set to inform the linker that this section should not be
 listed in the link map as discarded. */
 #define SEC_KEEP 0x200000
- /* This section contains "short" data, and should be placed
 "near" the GP. */
 #define SEC_SMALL_DATA 0x400000
- /* Attempt to merge identical entities in the section.
 Entity size is given in the entsize field. */
 #define SEC_MERGE 0x800000
- /* If given with SEC_MERGE, entities to merge are zero terminated
 strings where entsize specifies character size instead of fixed
 size entries. */
 #define SEC_STRINGS 0x1000000
- /* This section contains data about section groups. */ #define SEC_GROUP 0x2000000
 - /* The section is a COFF shared library section. This flag is
 only for the linker. If this type of section appears in
 the input file, the linker must copy it to the output file
 without changing the vma or size. FIXME: Although this
 was originally intended to be general, it really is COFF
 specific (and the flag was renamed to indicate this). It
 might be cleaner to have some more general mechanism to
 allow the back end to control what the linker does with
 sections. */

#define SEC_COFF_SHARED_LIBRARY 0x4000000

/* This input section should be copied to output in reverse order
as an array of pointers. This is for ELF linker internal use
only. */

#define SEC_ELF_REVERSE_COPY 0x4000000

```
/* This section contains data which may be shared with other
    executables or shared objects. This is for COFF only. */
#define SEC_COFF_SHARED 0x8000000
 /* When a section with this flag is being linked, then if the size of
    the input section is less than a page, it should not cross a page
    boundary. If the size of the input section is one page or more,
    it should be aligned on a page boundary. This is for TI
    TMS320C54X only. */
#define SEC_TIC54X_BLOCK 0x10000000
 /* Conditionally link this section; do not link if there are no
    references found to any symbol in the section. This is for TI
    TMS320C54X only. */
#define SEC_TIC54X_CLINK 0x20000000
 /* Indicate that section has the no read flag set. This happens
    when memory read flag isn't set. */
#define SEC_COFF_NOREAD 0x40000000
 /* End of section flags. */
 /* Some internal packed boolean fields. */
 /* See the vma field. */
 unsigned int user_set_vma : 1;
 /* A mark flag used by some of the linker backends. */
 unsigned int linker_mark : 1;
 /* Another mark flag used by some of the linker backends. Set for
    output sections that have an input section. */
 unsigned int linker_has_input : 1;
 /* Mark flag used by some linker backends for garbage collection. */
 unsigned int gc_mark : 1;
 /* Section compression status. */
 unsigned int compress_status : 2;
#define COMPRESS_SECTION_NONE
#define COMPRESS_SECTION_DONE
#define DECOMPRESS_SECTION_SIZED 2
 /* The following flags are used by the ELF linker. */
```

```
/* Mark sections which have been allocated to segments. */
 unsigned int segment_mark : 1;
 /* Type of sec_info information. */
 unsigned int sec_info_type:3;
#define SEC_INFO_TYPE_NONE
#define SEC_INFO_TYPE_STABS
                                1
#define SEC_INFO_TYPE_MERGE
#define SEC_INFO_TYPE_EH_FRAME 3
#define SEC_INFO_TYPE_JUST_SYMS 4
  /* Nonzero if this section uses RELA relocations, rather than REL. */
 unsigned int use_rela_p:1;
 /* Bits used by various backends. The generic code doesn't touch
    these fields. */
 unsigned int sec_flg0:1;
 unsigned int sec_flg1:1;
 unsigned int sec_flg2:1;
 unsigned int sec_flg3:1;
 unsigned int sec_flg4:1;
 unsigned int sec_flg5:1;
 /* End of internal packed boolean fields. */
 /* The virtual memory address of the section - where it will be
     at run time. The symbols are relocated against this. The
     user_set_vma flag is maintained by bfd; if it's not set, the
     backend can assign addresses (for example, in a.out, where
     the default address for .data is dependent on the specific
     target and various flags). */
 bfd_vma vma;
 /* The load address of the section - where it would be in a
     rom image; really only used for writing section header
     information. */
 bfd_vma lma;
 /* The size of the section in octets, as it will be output.
    Contains a value even if the section has no contents (e.g., the
    size of .bss). */
 bfd_size_type size;
  /* For input sections, the original size on disk of the section, in
    octets. This field should be set for any section whose size is
    changed by linker relaxation. It is required for sections where
```

```
reloc contents (stabs, eh_frame, SEC_MERGE, some coff relaxing
   targets), and thus the original size needs to be kept to read the
   section multiple times. For output sections, rawsize holds the
   section size calculated on a previous linker relaxation pass. */
bfd_size_type rawsize;
/* The compressed size of the section in octets. */
bfd_size_type compressed_size;
/* Relaxation table. */
struct relax_table *relax;
/* Count of used relaxation table entries. */
int relax_count;
/* If this section is going to be output, then this value is the
   offset in *bytes* into the output section of the first byte in the
   input section (byte ==> smallest addressable unit on the
   target). In most cases, if this was going to start at the
   100th octet (8-bit quantity) in the output section, this value
   would be 100. However, if the target byte size is 16 bits
   (bfd_octets_per_byte is "2"), this value would be 50. */
bfd_vma output_offset;
/* The output section through which to map on output. */
struct bfd_section *output_section;
/* The alignment requirement of the section, as an exponent of 2 -
   e.g., 3 aligns to 2^3 (or 8). */
unsigned int alignment_power;
/* If an input section, a pointer to a vector of relocation
   records for the data in this section. */
struct reloc_cache_entry *relocation;
/* If an output section, a pointer to a vector of pointers to
   relocation records for the data in this section. */
struct reloc_cache_entry **orelocation;
/* The number of relocation records in one of the above. */
unsigned reloc_count;
/* Information below is back end specific - and not always used
   or updated. */
```

the linker relaxation scheme doesn't cache altered section and

```
/* File position of section data. */
file_ptr filepos;
/* File position of relocation info. */
file_ptr rel_filepos;
/* File position of line data. */
file_ptr line_filepos;
/* Pointer to data for applications. */
void *userdata;
/* If the SEC_IN_MEMORY flag is set, this points to the actual
   contents. */
unsigned char *contents;
/* Attached line number information. */
alent *lineno;
/* Number of line number records. */
unsigned int lineno_count;
/* Entity size for merging purposes. */
unsigned int entsize;
/* Points to the kept section if this section is a link-once section,
   and is discarded. */
struct bfd_section *kept_section;
/* When a section is being output, this value changes as more
   linenumbers are written out. */
file_ptr moving_line_filepos;
/* What the section number is in the target world. */
int target_index;
void *used_by_bfd;
/* If this is a constructor section then here is a list of the
   relocations created to relocate items within it. */
struct relent_chain *constructor_chain;
/* The BFD which owns the section. */
bfd *owner;
/* A symbol which points at this section only. */
struct bfd_symbol *symbol;
```

```
struct bfd_symbol **symbol_ptr_ptr;
  /* Early in the link process, map_head and map_tail are used to build
     a list of input sections attached to an output section. Later,
     output sections use these fields for a list of bfd_link_order
     structs. */
  union {
    struct bfd_link_order *link_order;
    struct bfd_section *s;
  } map_head, map_tail;
} asection;
/* Relax table contains information about instructions which can
   be removed by relaxation -- replacing a long address with a
   short address. */
struct relax_table {
  /* Address where bytes may be deleted. */
 bfd_vma addr;
  /* Number of bytes to be deleted. */
 int size;
};
/* These sections are global, and are managed by BFD. The application
   and target back end are not permitted to change the values in
   these sections.
                   */
extern asection _bfd_std_section[4];
#define BFD_ABS_SECTION_NAME "*ABS*"
#define BFD_UND_SECTION_NAME "*UND*"
#define BFD_COM_SECTION_NAME "*COM*"
#define BFD_IND_SECTION_NAME "*IND*"
/* Pointer to the common section. */
#define bfd_com_section_ptr (&_bfd_std_section[0])
/* Pointer to the undefined section. */
#define bfd_und_section_ptr (&_bfd_std_section[1])
/* Pointer to the absolute section. */
#define bfd_abs_section_ptr (&_bfd_std_section[2])
/* Pointer to the indirect section. */
#define bfd_ind_section_ptr (&_bfd_std_section[3])
#define bfd_is_und_section(sec) ((sec) == bfd_und_section_ptr)
#define bfd_is_abs_section(sec) ((sec) == bfd_abs_section_ptr)
#define bfd_is_ind_section(sec) ((sec) == bfd_ind_section_ptr)
#define bfd_is_const_section(SEC)
```

```
( ((SEC) == bfd_abs_section_ptr)
  || ((SEC) == bfd_und_section_ptr)
  || ((SEC) == bfd_com_section_ptr)
  || ((SEC) == bfd_ind_section_ptr))
/* Macros to handle insertion and deletion of a bfd's sections.
   only handle the list pointers, ie. do not adjust section_count,
  target_index etc. */
#define bfd_section_list_remove(ABFD, S) \
  do
    {
      asection *_s = S;
      asection *_next = _s->next;
      asection *_prev = _s->prev;
      if (_prev)
       _prev->next = _next;
      else
        (ABFD)->sections = _next;
      if (_next)
        _next->prev = _prev;
      else
        (ABFD)->section_last = _prev;
   }
  while (0)
#define bfd_section_list_append(ABFD, S) \
  do
    {
      asection *_s = S;
     bfd *_abfd = ABFD;
      _s->next = NULL;
      if (_abfd->section_last)
          _s->prev = _abfd->section_last;
          _abfd->section_last->next = _s;
        }
      else
        {
          _s->prev = NULL;
          _abfd->sections = _s;
      _abfd->section_last = _s;
    }
  while (0)
#define bfd_section_list_prepend(ABFD, S) \
    {
      asection *_s = S;
```

```
bfd *_abfd = ABFD;
      _s->prev = NULL;
      if (_abfd->sections)
          _s->next = _abfd->sections;
          _abfd->sections->prev = _s;
      else
        {
          _s->next = NULL;
          _abfd->section_last = _s;
      _abfd->sections = _s;
   }
 while (0)
#define bfd_section_list_insert_after(ABFD, A, S) \
 do
    {
     asection *_a = A;
     asection *_s = S;
     asection *_next = _a->next;
      _s->next = _next;
      _s->prev = _a;
      a\rightarrow next = s;
     if (_next)
        _next->prev = _s;
      else
        (ABFD)->section_last = _s;
   }
  while (0)
#define bfd_section_list_insert_before(ABFD, B, S) \
 do
   {
     asection *_b = B;
     asection *_s = S;
      asection *_prev = _b->prev;
      _s->prev = _prev;
      _s->next = _b;
     _b->prev = _s;
     if (_prev)
        _prev->next = _s;
      else
        (ABFD)->sections = _s;
    }
  while (0)
#define bfd_section_removed_from_list(ABFD, S) \
  ((S)->next == NULL ? (ABFD)->section_last != (S) : (S)->next->prev != (S))■
```

```
#define BFD_FAKE_SECTION(SEC, FLAGS, SYM, NAME, IDX)
 /* name, id, index, next, prev, flags, user_set_vma,
 { NAME, IDX, O, NULL, NULL, FLAGS, O,
 /* linker_mark, linker_has_input, gc_mark, decompress_status,
                0,
                               1,
                                   0,
 /* segment_mark, sec_info_type, use_rela_p,
                 Ο,
                              0,
 /* sec_flg0, sec_flg1, sec_flg2, sec_flg3, sec_flg4, sec_flg5,
         0, 0, 0, 0,
 /* vma, lma, size, rawsize, compressed_size, relax, relax_count, */
    0, 0, 0,
                 Ο,
                           0,
                                0,
 /* output_offset, output_section, alignment_power,
    Ο,
                  &SEC,
                                0,
 /* relocation, orelocation, reloc_count, filepos, rel_filepos,
    NULL,
               NULL,
                         Ο,
                                      Ο,
                                           Ο,
 /* line_filepos, userdata, contents, lineno, lineno_count,
    0,
                NULL, NULL, NULL, O,
 /* entsize, kept_section, moving_line_filepos,
    Ο,
            NULL,
                         Ο,
 /* target_index, used_by_bfd, constructor_chain, owner,
    Ο,
                NULL,
                        NULL,
                                             NULL,
 /* symbol,
                            symbol_ptr_ptr,
    (struct bfd_symbol *) SYM, &SEC.symbol,
 /* map_head, map_tail
    { NULL }, { NULL }
   }
```

2.6.5 Section prototypes

These are the functions exported by the section handling part of BFD.

2.6.5.1 bfd_section_list_clear

Synopsis

```
void bfd_section_list_clear (bfd *);
```

Description

Clears the section list, and also resets the section count and hash table entries.

2.6.5.2 bfd_get_section_by_name

Synopsis

```
asection *bfd_get_section_by_name (bfd *abfd, const char *name);
```

Description

Return the most recently created section attached to abfd named name. Return NULL if no such section exists.

2.6.5.3 bfd_get_next_section_by_name

Synopsis

```
asection *bfd_get_next_section_by_name (asection *sec);
```

Description

Given sec is a section returned by bfd_get_section_by_name, return the next most recently created section attached to the same BFD with the same name. Return NULL if no such section exists.

2.6.5.4 bfd_get_linker_section

Synopsis

```
asection *bfd_get_linker_section (bfd *abfd, const char *name);
```

Description

Return the linker created section attached to abfd named name. Return NULL if no such section exists.

2.6.5.5 bfd_get_section_by_name_if

Synopsis

```
asection *bfd_get_section_by_name_if
  (bfd *abfd,
    const char *name,
    bfd_boolean (*func) (bfd *abfd, asection *sect, void *obj),
    void *obj);
```

Description

Call the provided function func for each section attached to the BFD abfd whose name matches name, passing obj as an argument. The function will be called as if by

```
func (abfd, the_section, obj);
```

It returns the first section for which func returns true, otherwise NULL.

2.6.5.6 bfd_get_unique_section_name

Synopsis

```
char *bfd_get_unique_section_name
  (bfd *abfd, const char *templat, int *count);
```

Description

Invent a section name that is unique in abfd by tacking a dot and a digit suffix onto the

original templat. If count is non-NULL, then it specifies the first number tried as a suffix to generate a unique name. The value pointed to by count will be incremented in this case.

2.6.5.7 bfd_make_section_old_way

Synopsis

```
asection *bfd_make_section_old_way (bfd *abfd, const char *name);
```

Description

Create a new empty section called *name* and attach it to the end of the chain of sections for the BFD *abfd*. An attempt to create a section with a name which is already in use returns its pointer without changing the section chain.

It has the funny name since this is the way it used to be before it was rewritten....

Possible errors are:

- bfd_error_invalid_operation If output has already started for this BFD.
- bfd_error_no_memory If memory allocation fails.

2.6.5.8 bfd_make_section_anyway_with_flags

Synopsis

```
asection *bfd_make_section_anyway_with_flags
  (bfd *abfd, const char *name, flagword flags);
```

Description

Create a new empty section called *name* and attach it to the end of the chain of sections for *abfd*. Create a new section even if there is already a section with that name. Also set the attributes of the new section to the value *flags*.

Return NULL and set bfd_error on error; possible errors are:

- bfd_error_invalid_operation If output has already started for abfd.
- bfd_error_no_memory If memory allocation fails.

2.6.5.9 bfd_make_section_anyway

Synopsis

```
asection *bfd_make_section_anyway (bfd *abfd, const char *name);
```

Description

Create a new empty section called *name* and attach it to the end of the chain of sections for *abfd*. Create a new section even if there is already a section with that name.

Return NULL and set bfd_error on error; possible errors are:

- bfd_error_invalid_operation If output has already started for abfd.
- bfd_error_no_memory If memory allocation fails.

2.6.5.10 bfd_make_section_with_flags

Synopsis

```
asection *bfd_make_section_with_flags
  (bfd *, const char *name, flagword flags);
```

Description

Like bfd_make_section_anyway, but return NULL (without calling bfd_set_error ()) without

changing the section chain if there is already a section named name. Also set the attributes of the new section to the value flags. If there is an error, return NULL and set bfd_error.

2.6.5.11 bfd_make_section

Synopsis

```
asection *bfd_make_section (bfd *, const char *name);
```

Description

Like bfd_make_section_anyway, but return NULL (without calling bfd_set_error ()) without changing the section chain if there is already a section named name. If there is an error, return NULL and set bfd_error.

2.6.5.12 bfd_set_section_flags

Synopsis

```
bfd_boolean bfd_set_section_flags
   (bfd *abfd, asection *sec, flagword flags);
```

Description

Set the attributes of the section sec in the BFD abfd to the value flags. Return TRUE on success, FALSE on error. Possible error returns are:

• bfd_error_invalid_operation - The section cannot have one or more of the attributes requested. For example, a .bss section in a.out may not have the SEC_HAS_CONTENTS field set.

2.6.5.13 bfd_rename_section

Synopsis

```
void bfd_rename_section
  (bfd *abfd, asection *sec, const char *newname);
```

Description

Rename section sec in abfd to newname.

2.6.5.14 bfd_map_over_sections

Synopsis

```
void bfd_map_over_sections
  (bfd *abfd,
   void (*func) (bfd *abfd, asection *sect, void *obj),
   void *obj);
```

Description

Call the provided function func for each section attached to the BFD abfd, passing obj as an argument. The function will be called as if by

```
func (abfd, the_section, obj);
```

This is the preferred method for iterating over sections; an alternative would be to use a loop:

```
asection *p;
for (p = abfd->sections; p != NULL; p = p->next)
  func (abfd, p, ...)
```

2.6.5.15 bfd_sections_find_if

Synopsis

```
asection *bfd_sections_find_if
  (bfd *abfd,
   bfd_boolean (*operation) (bfd *abfd, asection *sect, void *obj),
   void *obj);
```

Description

Call the provided function operation for each section attached to the BFD abfd, passing obj as an argument. The function will be called as if by

```
operation (abfd, the_section, obj);
```

It returns the first section for which operation returns true.

2.6.5.16 bfd_set_section_size

Synopsis

```
bfd_boolean bfd_set_section_size
   (bfd *abfd, asection *sec, bfd_size_type val);
```

Description

Set sec to the size val. If the operation is ok, then TRUE is returned, else FALSE.

Possible error returns:

• bfd_error_invalid_operation - Writing has started to the BFD, so setting the size is invalid.

2.6.5.17 bfd_set_section_contents

Synopsis

```
bfd_boolean bfd_set_section_contents
  (bfd *abfd, asection *section, const void *data,
    file_ptr offset, bfd_size_type count);
```

Description

Sets the contents of the section section in BFD abfd to the data starting in memory at data. The data is written to the output section starting at offset offset for count octets.

Normally TRUE is returned, else FALSE. Possible error returns are:

- bfd_error_no_contents The output section does not have the SEC_HAS_CONTENTS attribute, so nothing can be written to it.
- and some more too

This routine is front end to the back end function _bfd_set_section_contents.

2.6.5.18 bfd_get_section_contents

Synopsis

```
bfd_boolean bfd_get_section_contents
  (bfd *abfd, asection *section, void *location, file_ptr offset,
    bfd_size_type count);
```

Description

Read data from section in BFD abfd into memory starting at location. The data is read at an offset of offset from the start of the input section, and is read for count bytes.

If the contents of a constructor with the SEC_CONSTRUCTOR flag set are requested or if the section does not have the SEC_HAS_CONTENTS flag set, then the *location* is filled with zeroes. If no errors occur, TRUE is returned, else FALSE.

2.6.5.19 bfd_malloc_and_get_section

Synopsis

```
bfd_boolean bfd_malloc_and_get_section
  (bfd *abfd, asection *section, bfd_byte **buf);
```

Description

Read all data from section in BFD abfd into a buffer, *buf, malloc'd by this function.

2.6.5.20 bfd_copy_private_section_data

Synopsis

```
bfd_boolean bfd_copy_private_section_data
   (bfd *ibfd, asection *isec, bfd *obfd, asection *osec);
```

Description

Copy private section information from *isec* in the BFD *ibfd* to the section *osec* in the BFD *obfd*. Return TRUE on success, FALSE on error. Possible error returns are:

• bfd_error_no_memory - Not enough memory exists to create private data for osec.

2.6.5.21 bfd_generic_is_group_section

Synopsis

```
bfd_boolean bfd_generic_is_group_section (bfd *, const asection *sec);
```

Description

Returns TRUE if sec is a member of a group.

2.6.5.22 bfd_generic_discard_group

Synopsis

```
bfd_boolean bfd_generic_discard_group (bfd *abfd, asection *group);
```

Description

Remove all members of group from the output.

2.7 Symbols

BFD tries to maintain as much symbol information as it can when it moves information from file to file. BFD passes information to applications though the asymbol structure. When the application requests the symbol table, BFD reads the table in the native form and translates parts of it into the internal format. To maintain more than the information passed

to applications, some targets keep some information "behind the scenes" in a structure only the particular back end knows about. For example, the coff back end keeps the original symbol table structure as well as the canonical structure when a BFD is read in. On output, the coff back end can reconstruct the output symbol table so that no information is lost, even information unique to coff which BFD doesn't know or understand. If a coff symbol table were read, but were written through an a.out back end, all the coff specific information would be lost. The symbol table of a BFD is not necessarily read in until a canonicalize request is made. Then the BFD back end fills in a table provided by the application with pointers to the canonical information. To output symbols, the application provides BFD with a table of pointers to pointers to asymbols. This allows applications like the linker to output a symbol as it was read, since the "behind the scenes" information will be still available.

2.7.1 Reading symbols

There are two stages to reading a symbol table from a BFD: allocating storage, and the actual reading process. This is an excerpt from an application which reads the symbol table:

```
long storage_needed;
asymbol **symbol_table;
long number_of_symbols;
long i;
storage_needed = bfd_get_symtab_upper_bound (abfd);
if (storage_needed < 0)
  FAIL
if (storage_needed == 0)
  return;
symbol_table = xmalloc (storage_needed);
number_of_symbols =
   bfd_canonicalize_symtab (abfd, symbol_table);
if (number_of_symbols < 0)</pre>
  FAIL
for (i = 0; i < number_of_symbols; i++)</pre>
  process_symbol (symbol_table[i]);
```

All storage for the symbols themselves is in an objalloc connected to the BFD; it is freed when the BFD is closed.

2.7.2 Writing symbols

Writing of a symbol table is automatic when a BFD open for writing is closed. The application attaches a vector of pointers to pointers to symbols to the BFD being written, and fills in the symbol count. The close and cleanup code reads through the table provided and

performs all the necessary operations. The BFD output code must always be provided with an "owned" symbol: one which has come from another BFD, or one which has been created using bfd_make_empty_symbol. Here is an example showing the creation of a symbol table with only one element:

```
#include "sysdep.h"
#include "bfd.h"
int main (void)
{
  bfd *abfd;
  asymbol *ptrs[2];
  asymbol *new;
  abfd = bfd_openw ("foo", "a.out-sunos-big");
  bfd_set_format (abfd, bfd_object);
  new = bfd_make_empty_symbol (abfd);
  new->name = "dummy_symbol";
  new->section = bfd_make_section_old_way (abfd, ".text");
  new->flags = BSF_GLOBAL;
  new->value = 0x12345;
  ptrs[0] = new;
  ptrs[1] = 0;
  bfd_set_symtab (abfd, ptrs, 1);
  bfd_close (abfd);
  return 0;
}
./makesym
nm foo
00012345 A dummy_symbol
```

Many formats cannot represent arbitrary symbol information; for instance, the a.out object format does not allow an arbitrary number of sections. A symbol pointing to a section which is not one of .text, .data or .bss cannot be described.

2.7.3 Mini Symbols

Mini symbols provide read-only access to the symbol table. They use less memory space, but require more time to access. They can be useful for tools like nm or objdump, which may have to handle symbol tables of extremely large executables.

The bfd_read_minisymbols function will read the symbols into memory in an internal form. It will return a void * pointer to a block of memory, a symbol count, and the size of each symbol. The pointer is allocated using malloc, and should be freed by the caller when it is no longer needed.

The function bfd_minisymbol_to_symbol will take a pointer to a minisymbol, and a pointer to a structure returned by bfd_make_empty_symbol, and return a asymbol structure. The

return value may or may not be the same as the value from bfd_make_empty_symbol which was passed in.

2.7.4 typedef asymbol

An asymbol has the form:

```
typedef struct bfd_symbol
 /* A pointer to the BFD which owns the symbol. This information
    is necessary so that a back end can work out what additional
    information (invisible to the application writer) is carried
    with the symbol.
    This field is *almost* redundant, since you can use section->owner
    instead, except that some symbols point to the global sections
    bfd_{abs,com,und}_section. This could be fixed by making
    these globals be per-bfd (or per-target-flavor). FIXME.
 struct bfd *the_bfd; /* Use bfd_asymbol_bfd(sym) to access this field. */
 /* The text of the symbol. The name is left alone, and not copied; the
    application may not alter it. */
 const char *name;
 /* The value of the symbol. This really should be a union of a
    numeric value with a pointer, since some flags indicate that
    a pointer to another symbol is stored here. */
 symvalue value;
 /* Attributes of a symbol.
#define BSF_NO_FLAGS
                               0x00
 /* The symbol has local scope; static in C. The value
    is the offset into the section of the data. */
#define BSF LOCAL
                               (1 << 0)
 /* The symbol has global scope; initialized data in C. The
    value is the offset into the section of the data. */
#define BSF_GLOBAL
                               (1 << 1)
 /* The symbol has global scope and is exported. The value is
    the offset into the section of the data.
#define BSF_EXPORT
                      BSF_GLOBAL /* No real difference. */
  /* A normal C symbol would be one of:
    BSF_LOCAL, BSF_COMMON, BSF_UNDEFINED or
    BSF_GLOBAL. */
```

```
/* The symbol is a debugging record. The value has an arbitrary
    meaning, unless BSF_DEBUGGING_RELOC is also set. */
#define BSF_DEBUGGING
                              (1 << 2)
 /* The symbol denotes a function entry point. Used in ELF,
    perhaps others someday. */
#define BSF_FUNCTION
                              (1 << 3)
 /* Used by the linker. */
#define BSF_KEEP
                              (1 << 5)
#define BSF_KEEP_G
                              (1 << 6)
 /* A weak global symbol, overridable without warnings by
    a regular global symbol of the same name. */
#define BSF_WEAK
                              (1 << 7)
 /* This symbol was created to point to a section, e.g. ELF's
    STT_SECTION symbols. */
#define BSF_SECTION_SYM
                              (1 << 8)
 /* The symbol used to be a common symbol, but now it is
    allocated. */
#define BSF_OLD_COMMON
                              (1 << 9)
 /* In some files the type of a symbol sometimes alters its
    location in an output file - ie in coff a ISFCN symbol
    which is also C_EXT symbol appears where it was
    declared and not at the end of a section. This bit is set
    by the target BFD part to convey this information. */
#define BSF_NOT_AT_END
                              (1 << 10)
 /* Signal that the symbol is the label of constructor section. */
#define BSF_CONSTRUCTOR
                              (1 << 11)
  /* Signal that the symbol is a warning symbol. The name is a
    warning. The name of the next symbol is the one to warn about;
    if a reference is made to a symbol with the same name as the next
    symbol, a warning is issued by the linker. */
#define BSF_WARNING
                              (1 << 12)
  /* Signal that the symbol is indirect. This symbol is an indirect
    pointer to the symbol with the same name as the next symbol. */
#define BSF_INDIRECT
                              (1 << 13)
  /* BSF_FILE marks symbols that contain a file name. This is used
```

for ELF STT_FILE symbols. */

```
#define BSF_FILE
                              (1 << 14)
 /* Symbol is from dynamic linking information. */
#define BSF_DYNAMIC
                              (1 << 15)
 /* The symbol denotes a data object. Used in ELF, and perhaps
     others someday. */
#define BSF_OBJECT
                              (1 << 16)
 /* This symbol is a debugging symbol. The value is the offset
     into the section of the data. BSF_DEBUGGING should be set
     as well. */
#define BSF_DEBUGGING_RELOC (1 << 17)</pre>
 /* This symbol is thread local. Used in ELF. */
                          (1 << 18)
#define BSF_THREAD_LOCAL
 /* This symbol represents a complex relocation expression,
     with the expression tree serialized in the symbol name. */
#define BSF_RELC
                               (1 << 19)
 /* This symbol represents a signed complex relocation expression,
     with the expression tree serialized in the symbol name. */
#define BSF_SRELC
                               (1 << 20)
  /* This symbol was created by bfd_get_synthetic_symtab. */
#define BSF_SYNTHETIC
                              (1 << 21)
 /* This symbol is an indirect code object. Unrelated to BSF_INDIRECT.
     The dynamic linker will compute the value of this symbol by
     calling the function that it points to. BSF_FUNCTION must
     also be also set. */
#define BSF_GNU_INDIRECT_FUNCTION (1 << 22)</pre>
  /* This symbol is a globally unique data object. The dynamic linker
     will make sure that in the entire process there is just one symbol
     with this name and type in use. BSF_OBJECT must also be set. */
#define BSF_GNU_UNIQUE
                              (1 << 23)
 flagword flags;
 /* A pointer to the section to which this symbol is
     relative. This will always be non NULL, there are special
     sections for undefined and absolute symbols. */
 struct bfd_section *section;
  /* Back end special data. */
 union
```

```
{
    void *p;
    bfd_vma i;
    }
    udata;
}
asymbol;
```

2.7.5 Symbol handling functions

2.7.5.1 bfd_get_symtab_upper_bound

Description

Return the number of bytes required to store a vector of pointers to asymbols for all the symbols in the BFD *abfd*, including a terminal NULL pointer. If there are no symbols in the BFD, then return 0. If an error occurs, return -1.

```
#define bfd_get_symtab_upper_bound(abfd) \
    BFD_SEND (abfd, _bfd_get_symtab_upper_bound, (abfd))
```

2.7.5.2 bfd_is_local_label

Synopsis

```
bfd_boolean bfd_is_local_label (bfd *abfd, asymbol *sym);
```

Description

Return TRUE if the given symbol sym in the BFD abfd is a compiler generated local label, else return FALSE.

2.7.5.3 bfd_is_local_label_name

Synopsis

```
bfd_boolean bfd_is_local_label_name (bfd *abfd, const char *name);
```

Description

Return TRUE if a symbol with the name name in the BFD abfd is a compiler generated local label, else return FALSE. This just checks whether the name has the form of a local label.

```
#define bfd_is_local_label_name(abfd, name) \
    BFD_SEND (abfd, _bfd_is_local_label_name, (abfd, name))
```

2.7.5.4 bfd_is_target_special_symbol

Synopsis

```
bfd_boolean bfd_is_target_special_symbol (bfd *abfd, asymbol *sym);
```

Description

Return TRUE iff a symbol sym in the BFD abfd is something special to the particular target represented by the BFD. Such symbols should normally not be mentioned to the user.

```
#define bfd_is_target_special_symbol(abfd, sym) \
    BFD_SEND (abfd, _bfd_is_target_special_symbol, (abfd, sym))
```

2.7.5.5 bfd_canonicalize_symtab

Description

Read the symbols from the BFD *abfd*, and fills in the vector *location* with pointers to the symbols and a trailing NULL. Return the actual number of symbol pointers, not including the NULL.

```
#define bfd_canonicalize_symtab(abfd, location) \
   BFD_SEND (abfd, _bfd_canonicalize_symtab, (abfd, location))
```

2.7.5.6 bfd_set_symtab

Synopsis

```
bfd_boolean bfd_set_symtab
   (bfd *abfd, asymbol **location, unsigned int count);
```

Description

Arrange that when the output BFD abfd is closed, the table location of count pointers to symbols will be written.

2.7.5.7 bfd_print_symbol_vandf

Synopsis

```
void bfd_print_symbol_vandf (bfd *abfd, void *file, asymbol *symbol);
```

Description

Print the value and flags of the symbol supplied to the stream file.

2.7.5.8 bfd_make_empty_symbol

Description

Create a new asymbol structure for the BFD abfd and return a pointer to it.

This routine is necessary because each back end has private information surrounding the asymbol. Building your own asymbol and pointing to it will not create the private information, and will cause problems later on.

```
#define bfd_make_empty_symbol(abfd) \
   BFD_SEND (abfd, _bfd_make_empty_symbol, (abfd))
```

2.7.5.9 _bfd_generic_make_empty_symbol

Synopsis

```
asymbol *_bfd_generic_make_empty_symbol (bfd *);
```

Description

Create a new asymbol structure for the BFD abfd and return a pointer to it. Used by core file routines, binary back-end and anywhere else where no private info is needed.

2.7.5.10 bfd_make_debug_symbol

Description

Create a new asymbol structure for the BFD *abfd*, to be used as a debugging symbol. Further details of its use have yet to be worked out.

```
#define bfd_make_debug_symbol(abfd,ptr,size) \
BFD_SEND (abfd, _bfd_make_debug_symbol, (abfd, ptr, size))
```

2.7.5.11 bfd_decode_symclass

Description

Return a character corresponding to the symbol class of symbol, or '?' for an unknown class

Synopsis

```
int bfd_decode_symclass (asymbol *symbol);
```

2.7.5.12 bfd_is_undefined_symclass

Description

Returns non-zero if the class symbol returned by bfd_decode_symclass represents an undefined symbol. Returns zero otherwise.

Synopsis

```
bfd_boolean bfd_is_undefined_symclass (int symclass);
```

2.7.5.13 bfd_symbol_info

Description

Fill in the basic info about symbol that nm needs. Additional info may be added by the back-ends after calling this function.

Synopsis

```
void bfd_symbol_info (asymbol *symbol, symbol_info *ret);
```

2.7.5.14 bfd_copy_private_symbol_data

Synopsis

```
bfd_boolean bfd_copy_private_symbol_data
   (bfd *ibfd, asymbol *isym, bfd *obfd, asymbol *osym);
```

Description

Copy private symbol information from *isym* in the BFD *ibfd* to the symbol *osym* in the BFD *obfd*. Return TRUE on success, FALSE on error. Possible error returns are:

• bfd_error_no_memory - Not enough memory exists to create private data for osec.

2.8 Archives

Description

An archive (or library) is just another BFD. It has a symbol table, although there's not much a user program will do with it.

The big difference between an archive BFD and an ordinary BFD is that the archive doesn't have sections. Instead it has a chain of BFDs that are considered its contents. These BFDs can be manipulated like any other. The BFDs contained in an archive opened for reading will all be opened for reading. You may put either input or output BFDs into an archive opened for output; they will be handled correctly when the archive is closed.

Use bfd_openr_next_archived_file to step through the contents of an archive opened for input. You don't have to read the entire archive if you don't want to! Read it until you find what you want.

A BFD returned by bfd_openr_next_archived_file can be closed manually with bfd_close. If you do not close it, then a second iteration through the members of an archive may return the same BFD. If you close the archive BFD, then all the member BFDs will automatically be closed as well.

Archive contents of output BFDs are chained through the archive_next pointer in a BFD. The first one is findable through the archive_head slot of the archive. Set it with bfd_set_archive_head (q.v.). A given BFD may be in only one open output archive at a time.

As expected, the BFD archive code is more general than the archive code of any given environment. BFD archives may contain files of different formats (e.g., a.out and coff) and even different architectures. You may even place archives recursively into archives!

This can cause unexpected confusion, since some archive formats are more expressive than others. For instance, Intel COFF archives can preserve long filenames; SunOS a.out archives cannot. If you move a file from the first to the second format and back again, the filename may be truncated. Likewise, different a.out environments have different conventions as to how they truncate filenames, whether they preserve directory names in filenames, etc. When interoperating with native tools, be sure your files are homogeneous.

Beware: most of these formats do not react well to the presence of spaces in filenames. We do the best we can, but can't always handle this case due to restrictions in the format of archives. Many Unix utilities are braindead in regards to spaces and such in filenames anyway, so this shouldn't be much of a restriction.

Archives are supported in BFD in archive.c.

2.8.1 Archive functions

2.8.1.1 bfd_get_next_mapent

Synopsis

```
symindex bfd_get_next_mapent
  (bfd *abfd, symindex previous, carsym **sym);
```

Description

Step through archive abfd's symbol table (if it has one). Successively update sym with the next symbol's information, returning that symbol's (internal) index into the symbol table.

Supply BFD_NO_MORE_SYMBOLS as the *previous* entry to get the first one; returns BFD_NO_MORE_SYMBOLS when you've already got the last one.

A carsym is a canonical archive symbol. The only user-visible element is its name, a null-terminated string.

2.8.1.2 bfd_set_archive_head

Synopsis

bfd_boolean bfd_set_archive_head (bfd *output, bfd *new_head);

Description

Set the head of the chain of BFDs contained in the archive output to new_head.

2.8.1.3 bfd_openr_next_archived_file

Synopsis

bfd *bfd_openr_next_archived_file (bfd *archive, bfd *previous);

Description

Provided a BFD, archive, containing an archive and NULL, open an input BFD on the first contained element and returns that. Subsequent calls should pass the archive and the previous return value to return a created BFD to the next contained element. NULL is returned when there are no more.

2.9 File formats

A format is a BFD concept of high level file contents type. The formats supported by BFD are:

• bfd_object

The BFD may contain data, symbols, relocations and debug info.

• bfd archive

The BFD contains other BFDs and an optional index.

• bfd_core

The BFD contains the result of an executable core dump.

2.9.1 File format functions

2.9.1.1 bfd_check_format

Synopsis

```
bfd_boolean bfd_check_format (bfd *abfd, bfd_format format);
```

Description

Verify if the file attached to the BFD abfd is compatible with the format format (i.e., one of bfd_object, bfd_archive or bfd_core).

If the BFD has been set to a specific target before the call, only the named target and format combination is checked. If the target has not been set, or has been set to default, then all the known target backends is interrogated to determine a match. If the default

target matches, it is used. If not, exactly one target must recognize the file, or an error results.

The function returns TRUE on success, otherwise FALSE with one of the following error codes:

- bfd_error_invalid_operation if format is not one of bfd_object, bfd_archive or bfd_core.
- bfd_error_system_call if an error occured during a read even some file mismatches can cause bfd_error_system_calls.
- file_not_recognised none of the backends recognised the file format.
- bfd_error_file_ambiguously_recognized more than one backend recognised the file format.

2.9.1.2 bfd_check_format_matches

Synopsis

```
bfd_boolean bfd_check_format_matches
   (bfd *abfd, bfd_format format, char ***matching);
```

Description

Like bfd_check_format, except when it returns FALSE with bfd_errno set to bfd_error_file_ambiguously_recognized. In that case, if *matching* is not NULL, it will be filled in with a NULL-terminated list of the names of the formats that matched, allocated with malloc. Then the user may choose a format and try again.

When done with the list that matching points to, the caller should free it.

2.9.1.3 bfd_set_format

Synopsis

```
bfd_boolean bfd_set_format (bfd *abfd, bfd_format format);
```

Description

This function sets the file format of the BFD *abfd* to the format *format*. If the target set in the BFD does not support the format requested, the format is invalid, or the BFD is not open for writing, then an error occurs.

2.9.1.4 bfd_format_string

Synopsis

```
const char *bfd_format_string (bfd_format format);
```

Description

Return a pointer to a const string invalid, object, archive, core, or unknown, depending upon the value of *format*.

2.10 Relocations

BFD maintains relocations in much the same way it maintains symbols: they are left alone until required, then read in en-masse and translated into an internal form. A common routine bfd_perform_relocation acts upon the canonical form to do the fixup.

Relocations are maintained on a per section basis, while symbols are maintained on a per BFD basis.

All that a back end has to do to fit the BFD interface is to create a struct reloc_cache_entry for each relocation in a particular section, and fill in the right bits of the structures.

2.10.1 typedef arelent

This is the structure of a relocation entry:

```
typedef enum bfd_reloc_status
 /* No errors detected. */
 bfd_reloc_ok,
 /* The relocation was performed, but there was an overflow. */
 bfd_reloc_overflow,
 /st The address to relocate was not within the section supplied. st/
 bfd_reloc_outofrange,
 /* Used by special functions. */
 bfd_reloc_continue,
 /* Unsupported relocation size requested. */
 bfd_reloc_notsupported,
 /* Unused. */
 bfd_reloc_other,
 /* The symbol to relocate against was undefined. */
 bfd_reloc_undefined,
 /* The relocation was performed, but may not be ok - presently
     generated only when linking i960 coff files with i960 b.out
     symbols. If this type is returned, the error_message argument
     to bfd_perform_relocation will be set. */
 bfd_reloc_dangerous
bfd_reloc_status_type;
typedef struct reloc_cache_entry
 /* A pointer into the canonical table of pointers. */
 struct bfd_symbol **sym_ptr_ptr;
 /* offset in section. */
 bfd_size_type address;
```

```
/* addend for relocation value. */
bfd_vma addend;

/* Pointer to how to perform the required relocation. */
reloc_howto_type *howto;
}
arelent;
```

Description

Here is a description of each of the fields within an arelent:

```
• sym_ptr_ptr
```

The symbol table pointer points to a pointer to the symbol associated with the relocation request. It is the pointer into the table returned by the back end's canonicalize_symtab action. See Section 2.7 [Symbols], page 40. The symbol is referenced through a pointer to a pointer so that tools like the linker can fix up all the symbols of the same name by modifying only one pointer. The relocation routine looks in the symbol and uses the base of the section the symbol is attached to and the value of the symbol as the initial relocation offset. If the symbol pointer is zero, then the section provided is looked up.

• address

The address field gives the offset in bytes from the base of the section data which owns the relocation record to the first byte of relocatable information. The actual data relocated will be relative to this point; for example, a relocation type which modifies the bottom two bytes of a four byte word would not touch the first byte pointed to in a big endian world.

• addend

The addend is a value provided by the back end to be added (!) to the relocation offset. Its interpretation is dependent upon the howto. For example, on the 68k the code:

Could be compiled into:

```
linkw fp,#-4
moveb @#12345678,d0
extbl d0
unlk fp
rts
```

This could create a reloc pointing to foo, but leave the offset in the data, something like:

```
RELOCATION RECORDS FOR [.text]:
offset type value
00000006 32 __foo
```

```
00000000 4e56 fffc ; linkw fp,#-4

00000004 1039 1234 5678 ; moveb @#12345678,d0

0000000a 49c0 ; extbl d0

0000000c 4e5e ; unlk fp

0000000e 4e75 ; rts
```

Using coff and an 88k, some instructions don't have enough space in them to represent the full address range, and pointers have to be loaded in two parts. So you'd get something like:

```
or.u r13,r0,hi16(_foo+0x12345678)
ld.b r2,r13,lo16(_foo+0x12345678)
jmp r1
```

This should create two relocs, both pointing to _foo, and with 0x12340000 in their addend field. The data would consist of:

```
RELOCATION RECORDS FOR [.text]:

offset type value

000000002 HVRT16 _foo+0x12340000

00000006 LVRT16 _foo+0x12340000

00000000 5da05678 ; or.u r13,r0,0x5678

00000004 1c4d5678 ; ld.b r2,r13,0x5678

00000008 f400c001 ; jmp r1
```

The relocation routine digs out the value from the data, adds it to the addend to get the original offset, and then adds the value of _foo. Note that all 32 bits have to be kept around somewhere, to cope with carry from bit 15 to bit 16.

One further example is the sparc and the a.out format. The sparc has a similar problem to the 88k, in that some instructions don't have room for an entire offset, but on the sparc the parts are created in odd sized lumps. The designers of the a.out format chose to not use the data within the section for storing part of the offset; all the offset is kept within the reloc. Anything in the data should be ignored.

```
save %sp,-112,%sp
sethi %hi(_foo+0x12345678),%g2
ldsb [%g2+%lo(_foo+0x12345678)],%i0
ret
restore
```

Both relocs contain a pointer to foo, and the offsets contain junk.

```
RELOCATION RECORDS FOR [.text]:
offset
                   value
         type
                   _foo+0x12345678
00000004 HI22
                   _foo+0x12345678
00000008 L010
00000000 9de3bf90
                      ; save %sp,-112,%sp
00000004 05000000
                      ; sethi %hi(_foo+0), %g2
                      ; ldsb [%g2+%lo(_foo+0)],%i0
00000008 f048a000
0000000c 81c7e008
                      ; ret
00000010 81e80000
                      ; restore
```

• howto

The howto field can be imagined as a relocation instruction. It is a pointer to a structure which contains information on what to do with all of the other information in the reloc record and data section. A back end would normally have a relocation instruction set and turn relocations into pointers to the correct structure on input - but it would be possible to create each howto field on demand.

2.10.1.1 enum complain_overflow

Indicates what sort of overflow checking should be done when performing a relocation.

```
enum complain_overflow
{
    /* Do not complain on overflow. */
    complain_overflow_dont,

    /* Complain if the value overflows when considered as a signed
        number one bit larger than the field. ie. A bitfield of N bits
        is allowed to represent -2**n to 2**n-1. */
    complain_overflow_bitfield,

/* Complain if the value overflows when considered as a signed
        number. */
    complain_overflow_signed,

/* Complain if the value overflows when considered as an
        unsigned number. */
    complain_overflow_unsigned
};
```

2.10.1.2 reloc_howto_type

The reloc_howto_type is a structure which contains all the information that libbfd needs to know to tie up a back end's data.

unwanted data from the relocation. */

unsigned int rightshift;

- /* The size of the item to be relocated. This is *not* a
 power-of-two measure. To get the number of bytes operated
 on by a type of relocation, use bfd_get_reloc_size. */
 int size;
- /* The number of bits in the item to be relocated. This is used
 when doing overflow checking. */
 unsigned int bitsize;
- /* The relocation is relative to the field being relocated. */
 bfd_boolean pc_relative;
- /* The bit position of the reloc value in the destination.
 The relocated value is left shifted by this amount. */
 unsigned int bitpos;
- /* What type of overflow error should be checked for when
 relocating. */
 enum complain_overflow complain_on_overflow;
- /* If this field is non null, then the supplied function is
 called rather than the normal function. This allows really
 strange relocation methods to be accommodated (e.g., i960 call)
 instructions). */
- bfd_reloc_status_type (*special_function)
 (bfd *, arelent *, struct bfd_symbol *, void *, asection *,
 bfd *, char **);
- /* The textual name of the relocation type. */
 char *name;
- /* Some formats record a relocation addend in the section contents rather than with the relocation. For ELF formats this is the distinction between USE_REL and USE_RELA (though the code checks for USE_REL == 1/0). The value of this field is TRUE if the addend is recorded with the section contents; when performing a partial link (ld -r) the section contents (the data) will be modified. The value of this field is FALSE if addends are recorded with the relocation (in arelent.addend); when performing a partial link the relocation will be modified.

 All relocations for all ELF USE_RELA targets should set this field to FALSE (values of TRUE should be looked on with suspicion). However, the converse is not true: not all relocations of all ELF USE_REL targets set this field to TRUE. Why this is so is peculiar to each particular target. For relocs that aren't used in partial

```
links (e.g. GOT stuff) it doesn't matter what this is set to. */
bfd_boolean partial_inplace;
```

/* src_mask selects the part of the instruction (or data) to be used
in the relocation sum. If the target relocations don't have an
addend in the reloc, eg. ELF USE_REL, src_mask will normally equal
dst_mask to extract the addend from the section contents. If
relocations do have an addend in the reloc, eg. ELF USE_RELA, this
field should be zero. Non-zero values for ELF USE_RELA targets are
bogus as in those cases the value in the dst_mask part of the
section contents should be treated as garbage. */
bfd_vma src_mask;

/* dst_mask selects which parts of the instruction (or data) are replaced with a relocated value. */ bfd_vma dst_mask;

/* When some formats create PC relative instructions, they leave
 the value of the pc of the place being relocated in the offset
 slot of the instruction, so that a PC relative relocation can
 be made just by adding in an ordinary offset (e.g., sun3 a.out).
 Some formats leave the displacement part of an instruction
 empty (e.g., m88k bcs); this flag signals the fact. */
 bfd_boolean pcrel_offset;
};

2.10.1.3 The HOWTO Macro

Description

The HOWTO define is horrible and will go away.

```
#define HOWTO(C, R, S, B, P, BI, O, SF, NAME, INPLACE, MASKSRC, MASKDST, PC) \ [ (unsigned) C, R, S, B, P, BI, O, SF, NAME, INPLACE, MASKSRC, MASKDST, PC } ]
```

Description

And will be replaced with the totally magic way. But for the moment, we are compatible, so do it this way.

Description

This is used to fill in an empty how to entry in an array.

```
#define EMPTY_HOWTO(C) \
   HOWTO ((C), 0, 0, 0, FALSE, 0, complain_overflow_dont, NULL, \
        NULL, FALSE, 0, 0, FALSE)
```

Description

Helper routine to turn a symbol into a relocation value.

```
#define HOWTO_PREPARE(relocation, symbol)
{
   if (symbol != NULL)
   {
      if (bfd_is_com_section (symbol->section))
        {
            relocation = 0;
      }
      else
        {
            relocation = symbol->value;
      }
   }
}
```

2.10.1.4 bfd_get_reloc_size

Synopsis

```
unsigned int bfd_get_reloc_size (reloc_howto_type *);
```

Description

For a reloc_howto_type that operates on a fixed number of bytes, this returns the number of bytes operated on.

2.10.1.5 arelent_chain

Description

How relocs are tied together in an asection:

```
typedef struct relent_chain
{
   arelent relent;
   struct relent_chain *next;
}
arelent_chain;
```

2.10.1.6 bfd_check_overflow

Synopsis

```
bfd_reloc_status_type bfd_check_overflow
  (enum complain_overflow how,
    unsigned int bitsize,
    unsigned int rightshift,
    unsigned int addrsize,
    bfd_vma relocation);
```

Description

Perform overflow checking on relocation which has bitsize significant bits and will be shifted

right by rightshift bits, on a machine with addresses containing addrsize significant bits. The result is either of bfd_reloc_ok or bfd_reloc_overflow.

2.10.1.7 bfd_perform_relocation

Synopsis

```
bfd_reloc_status_type bfd_perform_relocation
  (bfd *abfd,
    arelent *reloc_entry,
    void *data,
    asection *input_section,
    bfd *output_bfd,
    char **error_message);
```

Description

If output_bfd is supplied to this function, the generated image will be relocatable; the relocations are copied to the output file after they have been changed to reflect the new state of the world. There are two ways of reflecting the results of partial linkage in an output file: by modifying the output data in place, and by modifying the relocation record. Some native formats (e.g., basic a.out and basic coff) have no way of specifying an addend in the relocation type, so the addend has to go in the output data. This is no big deal since in these formats the output data slot will always be big enough for the addend. Complex reloc types with addends were invented to solve just this problem. The error_message argument is set to an error message if this return bfd_reloc_dangerous.

2.10.1.8 bfd_install_relocation

Synopsis

```
bfd_reloc_status_type bfd_install_relocation
  (bfd *abfd,
    arelent *reloc_entry,
    void *data, bfd_vma data_start,
    asection *input_section,
    char **error_message);
```

Description

This looks remarkably like bfd_perform_relocation, except it does not expect that the section contents have been filled in. I.e., it's suitable for use when creating, rather than applying a relocation.

For now, this function should be considered reserved for the assembler.

2.10.2 The howto manager

When an application wants to create a relocation, but doesn't know what the target machine might call it, it can find out by using this bit of code.

2.10.2.1 bfd_reloc_code_type

Description

The insides of a reloc code. The idea is that, eventually, there will be one enumerator for every type of relocation we ever do. Pass one of these values to bfd_reloc_type_lookup, and it'll return a howto pointer.

This does mean that the application must determine the correct enumerator value; you can't get a howto pointer from a random set of attributes.

Here are the possible values for enum bfd_reloc_code_real:

```
BFD_RELOC_64
BFD_RELOC_32
BFD_RELOC_26
BFD_RELOC_24
BFD_RELOC_16
BFD_RELOC_14
BFD_RELOC_8
Basic absolute relocations of N bits.
BFD_RELOC_64_PCREL
```

BFD_RELOC_32_PCREL BFD_RELOC_24_PCREL BFD_RELOC_16_PCREL BFD_RELOC_12_PCREL BFD_RELOC_8_PCREL

PC-relative relocations. Sometimes these are relative to the address of the relocation itself; sometimes they are relative to the start of the section containing the relocation. It depends on the specific target.

The 24-bit relocation is used in some Intel 960 configurations.

BFD_RELOC_32_SECREL

Section relative relocations. Some targets need this for DWARF2.

```
BFD_RELOC_32_GOT_PCREL
BFD_RELOC_16_GOT_PCREL
BFD_RELOC_8_GOT_PCREL
BFD_RELOC_32_GOTOFF
BFD_RELOC_16_GOTOFF
BFD_RELOC_LO16_GOTOFF
BFD_RELOC_HI16_GOTOFF
BFD_RELOC_HI16_S_GOTOFF
BFD_RELOC_8_GOTOFF
BFD_RELOC_64_PLT_PCREL
BFD_RELOC_32_PLT_PCREL
BFD_RELOC_24_PLT_PCREL
BFD_RELOC_16_PLT_PCREL
BFD_RELOC_8_PLT_PCREL
BFD_RELOC_64_PLTOFF
BFD_RELOC_32_PLTOFF
BFD_RELOC_16_PLTOFF
BFD_RELOC_LO16_PLTOFF
BFD_RELOC_HI16_PLT0FF
BFD_RELOC_HI16_S_PLTOFF
```

```
BFD_RELOC_8_PLTOFF
    For ELF.
BFD_RELOC_SIZE32
BFD_RELOC_SIZE64
    Size relocations.
BFD_RELOC_68K_GLOB_DAT
BFD_RELOC_68K_JMP_SLOT
BFD_RELOC_68K_RELATIVE
BFD_RELOC_68K_TLS_GD32
BFD_RELOC_68K_TLS_GD16
BFD_RELOC_68K_TLS_GD8
BFD_RELOC_68K_TLS_LDM32
BFD_RELOC_68K_TLS_LDM16
BFD_RELOC_68K_TLS_LDM8
BFD_RELOC_68K_TLS_LD032
BFD_RELOC_68K_TLS_LD016
BFD_RELOC_68K_TLS_LD08
BFD_RELOC_68K_TLS_IE32
BFD_RELOC_68K_TLS_IE16
BFD_RELOC_68K_TLS_IE8
BFD_RELOC_68K_TLS_LE32
BFD_RELOC_68K_TLS_LE16
BFD_RELOC_68K_TLS_LE8
    Relocations used by 68K ELF.
```

BFD_RELOC_32_BASEREL BFD_RELOC_16_BASEREL BFD_RELOC_LO16_BASEREL BFD_RELOC_HI16_BASEREL BFD_RELOC_HI16_S_BASEREL BFD_RELOC_8_BASEREL BFD_RELOC_RVA

Linkage-table relative.

BFD_RELOC_8_FFnn

Absolute 8-bit relocation, but used to form an address like 0xFFnn.

```
BFD_RELOC_32_PCREL_S2
BFD_RELOC_16_PCREL_S2
BFD_RELOC_23_PCREL_S2
```

These PC-relative relocations are stored as word displacements – i.e., byte displacements shifted right two bits. The 30-bit word displacement (<<32_PCREL_S2>> – 32 bits, shifted 2) is used on the SPARC. (SPARC tools generally refer to this as <<WDISP30>>.) The signed 16-bit displacement is used on the MIPS, and the 23-bit displacement is used on the Alpha.

```
BFD_RELOC_HI22
BFD_RELOC_LO10
```

High 22 bits and low 10 bits of 32-bit value, placed into lower bits of the target word. These are used on the SPARC.

```
BFD_RELOC_GPREL16
BFD_RELOC_GPREL32
```

For systems that allocate a Global Pointer register, these are displacements off that register. These relocation types are handled specially, because the value the register will have is decided relatively late.

BFD_RELOC_I960_CALLJ

Reloc types used for i960/b.out.

```
BFD_RELOC_NONE
```

BFD_RELOC_SPARC_WDISP22

BFD_RELOC_SPARC22

BFD_RELOC_SPARC13

BFD_RELOC_SPARC_GOT10

BFD_RELOC_SPARC_GOT13

BFD_RELOC_SPARC_GOT22

BFD_RELOC_SPARC_PC10

BFD_RELOC_SPARC_PC22

BFD_RELOC_SPARC_WPLT30

BFD_RELOC_SPARC_COPY

BFD_RELOC_SPARC_GLOB_DAT

BFD_RELOC_SPARC_JMP_SLOT

BFD_RELOC_SPARC_RELATIVE

BFD_RELOC_SPARC_UA16

BFD_RELOC_SPARC_UA32

BFD_RELOC_SPARC_UA64

BFD_RELOC_SPARC_GOTDATA_HIX22

BFD_RELOC_SPARC_GOTDATA_LOX10

BFD_RELOC_SPARC_GOTDATA_OP_HIX22

BFD_RELOC_SPARC_GOTDATA_OP_LOX10

BFD_RELOC_SPARC_GOTDATA_OP

BFD_RELOC_SPARC_JMP_IREL

BFD_RELOC_SPARC_IRELATIVE

SPARC ELF relocations. There is probably some overlap with other relocation types already defined.

```
BFD_RELOC_SPARC_BASE13
```

BFD_RELOC_SPARC_BASE22

I think these are specific to SPARC a.out (e.g., Sun 4).

BFD_RELOC_SPARC_64

BFD_RELOC_SPARC_10

BFD_RELOC_SPARC_11

BFD_RELOC_SPARC_OLO10

```
BFD_RELOC_SPARC_HH22
BFD_RELOC_SPARC_HM10
BFD_RELOC_SPARC_LM22
BFD_RELOC_SPARC_PC_HH22
BFD_RELOC_SPARC_PC_HM10
BFD_RELOC_SPARC_PC_LM22
BFD_RELOC_SPARC_WDISP16
BFD_RELOC_SPARC_WDISP19
BFD_RELOC_SPARC_7
BFD_RELOC_SPARC_6
BFD_RELOC_SPARC_5
BFD_RELOC_SPARC_DISP64
BFD_RELOC_SPARC_PLT32
BFD_RELOC_SPARC_PLT64
BFD_RELOC_SPARC_HIX22
BFD_RELOC_SPARC_LOX10
BFD_RELOC_SPARC_H44
BFD_RELOC_SPARC_M44
BFD_RELOC_SPARC_L44
BFD_RELOC_SPARC_REGISTER
BFD_RELOC_SPARC_H34
BFD_RELOC_SPARC_SIZE32
BFD_RELOC_SPARC_SIZE64
BFD_RELOC_SPARC_WDISP10
    SPARC64 relocations
BFD_RELOC_SPARC_REV32
```

SPARC little endian relocation

BFD_RELOC_SPARC_TLS_GD_HI22 BFD_RELOC_SPARC_TLS_GD_LO10 BFD_RELOC_SPARC_TLS_GD_ADD BFD_RELOC_SPARC_TLS_GD_CALL BFD_RELOC_SPARC_TLS_LDM_HI22 BFD_RELOC_SPARC_TLS_LDM_LO10 BFD_RELOC_SPARC_TLS_LDM_ADD BFD_RELOC_SPARC_TLS_LDM_CALL BFD_RELOC_SPARC_TLS_LDO_HIX22 BFD_RELOC_SPARC_TLS_LDO_LOX10 BFD_RELOC_SPARC_TLS_LDO_ADD BFD_RELOC_SPARC_TLS_IE_HI22 BFD_RELOC_SPARC_TLS_IE_LO10 BFD_RELOC_SPARC_TLS_IE_LD BFD_RELOC_SPARC_TLS_IE_LDX BFD_RELOC_SPARC_TLS_IE_ADD BFD_RELOC_SPARC_TLS_LE_HIX22 BFD_RELOC_SPARC_TLS_LE_LOX10 BFD_RELOC_SPARC_TLS_DTPMOD32

BFD_RELOC_SPARC_TLS_DTPMOD64 BFD_RELOC_SPARC_TLS_DTPOFF32

```
BFD_RELOC_SPARC_TLS_DTPOFF64
BFD_RELOC_SPARC_TLS_TP0FF32
BFD_RELOC_SPARC_TLS_TP0FF64
    SPARC TLS relocations
BFD_RELOC_SPU_IMM7
BFD_RELOC_SPU_IMM8
BFD_RELOC_SPU_IMM10
BFD_RELOC_SPU_IMM10W
BFD_RELOC_SPU_IMM16
BFD_RELOC_SPU_IMM16W
BFD_RELOC_SPU_IMM18
BFD_RELOC_SPU_PCREL9a
BFD_RELOC_SPU_PCREL9b
BFD_RELOC_SPU_PCREL16
BFD_RELOC_SPU_L016
BFD_RELOC_SPU_HI16
BFD_RELOC_SPU_PPU32
BFD_RELOC_SPU_PPU64
BFD_RELOC_SPU_ADD_PIC
    SPU Relocations.
```

BFD_RELOC_ALPHA_GPDISP_HI16

Alpha ECOFF and ELF relocations. Some of these treat the symbol or "addend" in some special way. For GPDISP_HI16 ("gpdisp") relocations, the symbol is ignored when writing; when reading, it will be the absolute section symbol. The addend is the displacement in bytes of the "lda" instruction from the "ldah" instruction (which is at the address of this reloc).

BFD_RELOC_ALPHA_GPDISP_L016

For GPDISP_LO16 ("ignore") relocations, the symbol is handled as with GPDISP_HI16 relocs. The addend is ignored when writing the relocations out, and is filled in with the file's GP value on reading, for convenience.

BFD_RELOC_ALPHA_GPDISP

The ELF GPDISP relocation is exactly the same as the GPDISP_HI16 relocation except that there is no accompanying GPDISP_LO16 relocation.

```
BFD_RELOC_ALPHA_LITERAL
BFD_RELOC_ALPHA_ELF_LITERAL
BFD_RELOC_ALPHA_LITUSE
```

The Alpha LITERAL/LITUSE relocs are produced by a symbol reference; the assembler turns it into a LDQ instruction to load the address of the symbol, and then fills in a register in the real instruction.

The LITERAL reloc, at the LDQ instruction, refers to the .lita section symbol. The addend is ignored when writing, but is filled in with the file's GP value on reading, for convenience, as with the GPDISP_LO16 reloc.

The ELF_LITERAL reloc is somewhere between 16_GOTOFF and GPDISP_LO16. It should refer to the symbol to be referenced, as with 16_GOTOFF, but it generates output not based on the position within the .got section, but relative to the GP value chosen for the file during the final link stage.

The LITUSE reloc, on the instruction using the loaded address, gives information to the linker that it might be able to use to optimize away some literal section references. The symbol is ignored (read as the absolute section symbol), and the "addend" indicates the type of instruction using the register: 1 - "memory" fmt insn 2 - bytemanipulation (byte offset reg) 3 - jsr (target of branch)

BFD_RELOC_ALPHA_HINT

The HINT relocation indicates a value that should be filled into the "hint" field of a jmp/jsr/ret instruction, for possible branch- prediction logic which may be provided on some processors.

BFD_RELOC_ALPHA_LINKAGE

The LINKAGE relocation outputs a linkage pair in the object file, which is filled by the linker.

BFD_RELOC_ALPHA_CODEADDR

The CODEADDR relocation outputs a STO_CA in the object file, which is filled by the linker.

BFD_RELOC_ALPHA_GPREL_HI16

BFD_RELOC_ALPHA_GPREL_L016

The GPREL_HI/LO relocations together form a 32-bit offset from the GP register.

BFD_RELOC_ALPHA_BRSGP

Like BFD_RELOC_23_PCREL_S2, except that the source and target must share a common GP, and the target address is adjusted for STO_ALPHA_STD_GPLOAD.

BFD_RELOC_ALPHA_NOP

The NOP relocation outputs a NOP if the longword displacement between two procedure entry points is $< 2^21$.

BFD_RELOC_ALPHA_BSR

The BSR relocation outputs a BSR if the longword displacement between two procedure entry points is $< 2^21$.

BFD_RELOC_ALPHA_LDA

The LDA relocation outputs a LDA if the longword displacement between two procedure entry points is $< 2^16$.

BFD_RELOC_ALPHA_BOH

The BOH relocation outputs a BSR if the longword displacement between two procedure entry points is $< 2^21$, or else a hint.

BFD_RELOC_ALPHA_TLSGD

BFD_RELOC_ALPHA_TLSLDM

BFD_RELOC_ALPHA_DTPMOD64

BFD_RELOC_ALPHA_GOTDTPREL16

BFD_RELOC_ALPHA_DTPREL64

BFD_RELOC_ALPHA_DTPREL_HI16

BFD_RELOC_ALPHA_DTPREL_L016

BFD_RELOC_ALPHA_DTPREL16

BFD_RELOC_ALPHA_GOTTPREL16

BFD_RELOC_ALPHA_TPREL64

BFD_RELOC_ALPHA_TPREL_HI16

BFD_RELOC_ALPHA_TPREL_L016

BFD_RELOC_ALPHA_TPREL16

Alpha thread-local storage relocations.

BFD_RELOC_MIPS_JMP

BFD_RELOC_MICROMIPS_JMP

The MIPS jump instruction.

BFD_RELOC_MIPS16_JMP

The MIPS16 jump instruction.

BFD_RELOC_MIPS16_GPREL

MIPS16 GP relative reloc.

BFD_RELOC_HI16

High 16 bits of 32-bit value; simple reloc.

BFD_RELOC_HI16_S

High 16 bits of 32-bit value but the low 16 bits will be sign extended and added to form the final result. If the low 16 bits form a negative number, we need to add one to the high value to compensate for the borrow when the low bits are added.

BFD_RELOC_L016

Low 16 bits.

BFD_RELOC_HI16_PCREL

High 16 bits of 32-bit pc-relative value

BFD_RELOC_HI16_S_PCREL

High 16 bits of 32-bit pc-relative value, adjusted

BFD_RELOC_LO16_PCREL

Low 16 bits of pc-relative value

BFD_RELOC_MIPS16_GOT16

BFD_RELOC_MIPS16_CALL16

Equivalent of BFD_RELOC_MIPS_*, but with the MIPS16 layout of 16-bit immediate fields

BFD_RELOC_MIPS16_HI16

MIPS16 high 16 bits of 32-bit value.

BFD_RELOC_MIPS16_HI16_S

MIPS16 high 16 bits of 32-bit value but the low 16 bits will be sign extended and added to form the final result. If the low 16 bits form a negative number, we need to add one to the high value to compensate for the borrow when the low bits are added.

BFD_RELOC_MIPS16_L016

MIPS16 low 16 bits.

BFD_RELOC_MIPS16_TLS_GD

BFD_RELOC_MIPS16_TLS_LDM

BFD_RELOC_MIPS16_TLS_DTPREL_HI16

BFD_RELOC_MIPS16_TLS_DTPREL_L016

BFD_RELOC_MIPS16_TLS_GOTTPREL

BFD_RELOC_MIPS16_TLS_TPREL_HI16

BFD_RELOC_MIPS16_TLS_TPREL_L016

MIPS16 TLS relocations

BFD_RELOC_MIPS_LITERAL

BFD_RELOC_MICROMIPS_LITERAL

Relocation against a MIPS literal section.

BFD_RELOC_MICROMIPS_7_PCREL_S1

BFD_RELOC_MICROMIPS_10_PCREL_S1

BFD_RELOC_MICROMIPS_16_PCREL_S1

microMIPS PC-relative relocations.

BFD_RELOC_MIPS_21_PCREL_S2

BFD_RELOC_MIPS_26_PCREL_S2

BFD_RELOC_MIPS_18_PCREL_S3

BFD_RELOC_MIPS_19_PCREL_S2

MIPS PC-relative relocations.

BFD_RELOC_MICROMIPS_GPREL16

BFD_RELOC_MICROMIPS_HI16

BFD_RELOC_MICROMIPS_HI16_S

BFD_RELOC_MICROMIPS_L016

microMIPS versions of generic BFD relocs.

BFD_RELOC_MIPS_GOT16

BFD_RELOC_MICROMIPS_GOT16

BFD_RELOC_MIPS_CALL16

BFD_RELOC_MICROMIPS_CALL16

BFD_RELOC_MIPS_GOT_HI16

BFD_RELOC_MICROMIPS_GOT_HI16

BFD_RELOC_MIPS_GOT_L016

BFD_RELOC_MICROMIPS_GOT_L016

BFD_RELOC_MIPS_CALL_HI16

BFD_RELOC_MICROMIPS_CALL_HI16

BFD_RELOC_MIPS_CALL_L016

```
BFD_RELOC_MICROMIPS_CALL_L016
BFD_RELOC_MIPS_SUB
BFD_RELOC_MICROMIPS_SUB
BFD_RELOC_MIPS_GOT_PAGE
BFD_RELOC_MICROMIPS_GOT_PAGE
BFD_RELOC_MIPS_GOT_OFST
BFD_RELOC_MICROMIPS_GOT_OFST
BFD_RELOC_MIPS_GOT_DISP
BFD_RELOC_MICROMIPS_GOT_DISP
BFD_RELOC_MIPS_SHIFT5
BFD_RELOC_MIPS_SHIFT6
BFD_RELOC_MIPS_INSERT_A
BFD_RELOC_MIPS_INSERT_B
BFD_RELOC_MIPS_DELETE
BFD_RELOC_MIPS_HIGHEST
BFD_RELOC_MICROMIPS_HIGHEST
BFD_RELOC_MIPS_HIGHER
BFD_RELOC_MICROMIPS_HIGHER
BFD_RELOC_MIPS_SCN_DISP
BFD_RELOC_MICROMIPS_SCN_DISP
BFD_RELOC_MIPS_REL16
BFD_RELOC_MIPS_RELGOT
BFD_RELOC_MIPS_JALR
BFD_RELOC_MICROMIPS_JALR
BFD_RELOC_MIPS_TLS_DTPMOD32
BFD_RELOC_MIPS_TLS_DTPREL32
BFD_RELOC_MIPS_TLS_DTPMOD64
BFD_RELOC_MIPS_TLS_DTPREL64
BFD_RELOC_MIPS_TLS_GD
BFD_RELOC_MICROMIPS_TLS_GD
BFD_RELOC_MIPS_TLS_LDM
BFD_RELOC_MICROMIPS_TLS_LDM
BFD_RELOC_MIPS_TLS_DTPREL_HI16
BFD_RELOC_MICROMIPS_TLS_DTPREL_HI16
BFD_RELOC_MIPS_TLS_DTPREL_L016
BFD_RELOC_MICROMIPS_TLS_DTPREL_L016
BFD_RELOC_MIPS_TLS_GOTTPREL
BFD_RELOC_MICROMIPS_TLS_GOTTPREL
BFD_RELOC_MIPS_TLS_TPREL32
BFD_RELOC_MIPS_TLS_TPREL64
BFD_RELOC_MIPS_TLS_TPREL_HI16
BFD_RELOC_MICROMIPS_TLS_TPREL_HI16
BFD_RELOC_MIPS_TLS_TPREL_L016
```

MIPS ELF relocations.

BFD_RELOC_MIPS_EH

BFD_RELOC_MICROMIPS_TLS_TPREL_L016

```
BFD_RELOC_MIPS_COPY
BFD_RELOC_MIPS_JUMP_SLOT
    MIPS ELF relocations (VxWorks and PLT extensions).
BFD_RELOC_MOXIE_10_PCREL
    Moxie ELF relocations.
BFD_RELOC_FRV_LABEL16
BFD_RELOC_FRV_LABEL24
BFD_RELOC_FRV_L016
BFD_RELOC_FRV_HI16
BFD_RELOC_FRV_GPREL12
BFD_RELOC_FRV_GPRELU12
BFD_RELOC_FRV_GPREL32
BFD_RELOC_FRV_GPRELHI
BFD_RELOC_FRV_GPRELLO
BFD_RELOC_FRV_GOT12
BFD_RELOC_FRV_GOTHI
BFD_RELOC_FRV_GOTLO
BFD_RELOC_FRV_FUNCDESC
BFD_RELOC_FRV_FUNCDESC_GOT12
BFD_RELOC_FRV_FUNCDESC_GOTHI
BFD_RELOC_FRV_FUNCDESC_GOTLO
BFD_RELOC_FRV_FUNCDESC_VALUE
BFD_RELOC_FRV_FUNCDESC_GOTOFF12
BFD_RELOC_FRV_FUNCDESC_GOTOFFHI
BFD_RELOC_FRV_FUNCDESC_GOTOFFLO
BFD_RELOC_FRV_GOTOFF12
BFD_RELOC_FRV_GOTOFFHI
BFD_RELOC_FRV_GOTOFFLO
BFD_RELOC_FRV_GETTLSOFF
BFD_RELOC_FRV_TLSDESC_VALUE
BFD_RELOC_FRV_GOTTLSDESC12
BFD_RELOC_FRV_GOTTLSDESCHI
BFD_RELOC_FRV_GOTTLSDESCLO
BFD_RELOC_FRV_TLSMOFF12
BFD_RELOC_FRV_TLSMOFFHI
BFD_RELOC_FRV_TLSMOFFLO
BFD_RELOC_FRV_GOTTLSOFF12
BFD_RELOC_FRV_GOTTLSOFFHI
BFD_RELOC_FRV_GOTTLSOFFLO
BFD_RELOC_FRV_TLSOFF
BFD_RELOC_FRV_TLSDESC_RELAX
BFD_RELOC_FRV_GETTLSOFF_RELAX
BFD_RELOC_FRV_TLSOFF_RELAX
BFD_RELOC_FRV_TLSMOFF
```

Fujitsu Frv Relocations.

BFD_RELOC_MN10300_GOTOFF24

This is a 24bit GOT-relative reloc for the mn10300.

BFD_RELOC_MN10300_GOT32

This is a 32bit GOT-relative reloc for the mn10300, offset by two bytes in the instruction.

BFD_RELOC_MN10300_GOT24

This is a 24bit GOT-relative reloc for the mn10300, offset by two bytes in the instruction.

BFD_RELOC_MN10300_GOT16

This is a 16bit GOT-relative reloc for the mn10300, offset by two bytes in the instruction

BFD_RELOC_MN10300_COPY

Copy symbol at runtime.

BFD_RELOC_MN10300_GLOB_DAT

Create GOT entry.

BFD_RELOC_MN10300_JMP_SLOT

Create PLT entry.

BFD_RELOC_MN10300_RELATIVE

Adjust by program base.

BFD_RELOC_MN10300_SYM_DIFF

Together with another reloc targeted at the same location, allows for a value that is the difference of two symbols in the same section.

BFD_RELOC_MN10300_ALIGN

The addend of this reloc is an alignment power that must be honoured at the offset's location, regardless of linker relaxation.

BFD_RELOC_MN10300_TLS_GD

BFD_RELOC_MN10300_TLS_LD

BFD_RELOC_MN10300_TLS_LD0

BFD_RELOC_MN10300_TLS_GOTIE

BFD_RELOC_MN10300_TLS_IE

BFD_RELOC_MN10300_TLS_LE

BFD_RELOC_MN10300_TLS_DTPMOD

BFD_RELOC_MN10300_TLS_DTPOFF

BFD_RELOC_MN10300_TLS_TPOFF

Various TLS-related relocations.

BFD_RELOC_MN10300_32_PCREL

This is a 32bit perel reloc for the mn10300, offset by two bytes in the instruction.

BFD_RELOC_MN10300_16_PCREL

This is a 16bit perel reloc for the mn10300, offset by two bytes in the instruction.

```
BFD_RELOC_386_GOT32
BFD_RELOC_386_PLT32
BFD_RELOC_386_COPY
BFD_RELOC_386_GLOB_DAT
BFD_RELOC_386_JUMP_SLOT
BFD_RELOC_386_RELATIVE
BFD_RELOC_386_GOTOFF
BFD_RELOC_386_GOTPC
BFD_RELOC_386_TLS_TPOFF
BFD_RELOC_386_TLS_IE
BFD_RELOC_386_TLS_GOTIE
BFD_RELOC_386_TLS_LE
BFD_RELOC_386_TLS_GD
BFD_RELOC_386_TLS_LDM
BFD_RELOC_386_TLS_LDO_32
BFD_RELOC_386_TLS_IE_32
BFD_RELOC_386_TLS_LE_32
BFD_RELOC_386_TLS_DTPMOD32
BFD_RELOC_386_TLS_DTP0FF32
BFD_RELOC_386_TLS_TP0FF32
BFD_RELOC_386_TLS_GOTDESC
BFD_RELOC_386_TLS_DESC_CALL
BFD_RELOC_386_TLS_DESC
BFD_RELOC_386_IRELATIVE
    i386/elf relocations
```

BFD_RELOC_X86_64_GOT32 BFD_RELOC_X86_64_PLT32 BFD_RELOC_X86_64_COPY BFD_RELOC_X86_64_GLOB_DAT BFD_RELOC_X86_64_JUMP_SLOT BFD_RELOC_X86_64_RELATIVE BFD_RELOC_X86_64_GOTPCREL BFD_RELOC_X86_64_32S BFD_RELOC_X86_64_DTPMOD64 BFD_RELOC_X86_64_DTP0FF64 BFD_RELOC_X86_64_TP0FF64 BFD_RELOC_X86_64_TLSGD BFD_RELOC_X86_64_TLSLD BFD_RELOC_X86_64_DTP0FF32 BFD_RELOC_X86_64_GOTTPOFF BFD_RELOC_X86_64_TP0FF32 BFD_RELOC_X86_64_GOTOFF64 BFD_RELOC_X86_64_GOTPC32 BFD_RELOC_X86_64_GOT64 BFD_RELOC_X86_64_GOTPCREL64 BFD_RELOC_X86_64_GOTPC64

```
BFD_RELOC_X86_64_GOTPLT64
BFD_RELOC_X86_64_PLT0FF64
BFD_RELOC_X86_64_GOTPC32_TLSDESC
BFD_RELOC_X86_64_TLSDESC_CALL
BFD_RELOC_X86_64_TLSDESC
BFD_RELOC_X86_64_IRELATIVE
BFD_RELOC_X86_64_PC32_BND
BFD_RELOC_X86_64_PLT32_BND
    x86-64/elf relocations
BFD_RELOC_NS32K_IMM_8
BFD_RELOC_NS32K_IMM_16
BFD_RELOC_NS32K_IMM_32
BFD_RELOC_NS32K_IMM_8_PCREL
BFD_RELOC_NS32K_IMM_16_PCREL
BFD_RELOC_NS32K_IMM_32_PCREL
BFD_RELOC_NS32K_DISP_8
BFD_RELOC_NS32K_DISP_16
BFD_RELOC_NS32K_DISP_32
BFD_RELOC_NS32K_DISP_8_PCREL
BFD_RELOC_NS32K_DISP_16_PCREL
BFD_RELOC_NS32K_DISP_32_PCREL
    ns32k relocations
BFD_RELOC_PDP11_DISP_8_PCREL
BFD_RELOC_PDP11_DISP_6_PCREL
    PDP11 relocations
BFD_RELOC_PJ_CODE_HI16
BFD_RELOC_PJ_CODE_L016
BFD_RELOC_PJ_CODE_DIR16
BFD_RELOC_PJ_CODE_DIR32
BFD_RELOC_PJ_CODE_REL16
BFD_RELOC_PJ_CODE_REL32
    Picojava relocs. Not all of these appear in object files.
BFD_RELOC_PPC_B26
BFD_RELOC_PPC_BA26
BFD_RELOC_PPC_TOC16
BFD_RELOC_PPC_B16
BFD_RELOC_PPC_B16_BRTAKEN
BFD_RELOC_PPC_B16_BRNTAKEN
BFD_RELOC_PPC_BA16
BFD_RELOC_PPC_BA16_BRTAKEN
BFD_RELOC_PPC_BA16_BRNTAKEN
BFD_RELOC_PPC_COPY
BFD_RELOC_PPC_GLOB_DAT
BFD_RELOC_PPC_JMP_SLOT
```

```
BFD_RELOC_PPC_RELATIVE
BFD_RELOC_PPC_LOCAL24PC
BFD_RELOC_PPC_EMB_NADDR32
BFD_RELOC_PPC_EMB_NADDR16
BFD_RELOC_PPC_EMB_NADDR16_LO
BFD_RELOC_PPC_EMB_NADDR16_HI
BFD_RELOC_PPC_EMB_NADDR16_HA
BFD_RELOC_PPC_EMB_SDAI16
BFD_RELOC_PPC_EMB_SDA2I16
BFD_RELOC_PPC_EMB_SDA2REL
BFD_RELOC_PPC_EMB_SDA21
BFD_RELOC_PPC_EMB_MRKREF
BFD_RELOC_PPC_EMB_RELSEC16
BFD_RELOC_PPC_EMB_RELST_LO
BFD_RELOC_PPC_EMB_RELST_HI
BFD_RELOC_PPC_EMB_RELST_HA
BFD_RELOC_PPC_EMB_BIT_FLD
BFD_RELOC_PPC_EMB_RELSDA
BFD_RELOC_PPC_VLE_REL8
BFD_RELOC_PPC_VLE_REL15
BFD_RELOC_PPC_VLE_REL24
BFD_RELOC_PPC_VLE_LO16A
BFD_RELOC_PPC_VLE_LO16D
BFD_RELOC_PPC_VLE_HI16A
BFD_RELOC_PPC_VLE_HI16D
BFD_RELOC_PPC_VLE_HA16A
BFD_RELOC_PPC_VLE_HA16D
BFD_RELOC_PPC_VLE_SDA21
BFD_RELOC_PPC_VLE_SDA21_LO
BFD_RELOC_PPC_VLE_SDAREL_LO16A
BFD_RELOC_PPC_VLE_SDAREL_LO16D
BFD_RELOC_PPC_VLE_SDAREL_HI16A
BFD_RELOC_PPC_VLE_SDAREL_HI16D
BFD_RELOC_PPC_VLE_SDAREL_HA16A
BFD_RELOC_PPC_VLE_SDAREL_HA16D
BFD_RELOC_PPC64_HIGHER
BFD_RELOC_PPC64_HIGHER_S
BFD_RELOC_PPC64_HIGHEST
BFD_RELOC_PPC64_HIGHEST_S
BFD_RELOC_PPC64_TOC16_LO
BFD_RELOC_PPC64_TOC16_HI
BFD_RELOC_PPC64_TOC16_HA
BFD_RELOC_PPC64_TOC
BFD_RELOC_PPC64_PLTG0T16
BFD_RELOC_PPC64_PLTGOT16_LO
BFD_RELOC_PPC64_PLTGOT16_HI
BFD_RELOC_PPC64_PLTGOT16_HA
```

```
BFD_RELOC_PPC64_ADDR16_DS
BFD_RELOC_PPC64_ADDR16_L0_DS
BFD_RELOC_PPC64_GOT16_DS
BFD_RELOC_PPC64_GOT16_L0_DS
BFD_RELOC_PPC64_PLT16_L0_DS
BFD_RELOC_PPC64_SECTOFF_DS
BFD_RELOC_PPC64_SECTOFF_L0_DS
BFD_RELOC_PPC64_TOC16_DS
BFD_RELOC_PPC64_TOC16_L0_DS
BFD_RELOC_PPC64_PLTGOT16_DS
BFD_RELOC_PPC64_PLTGOT16_L0_DS
BFD_RELOC_PPC64_PLTGOT16_L0_DS
BFD_RELOC_PPC64_ADDR16_HIGH
BFD_RELOC_PPC64_ADDR16_HIGHA
Power(rs6000) and PowerPC relocations.
```

```
BFD_RELOC_PPC_TLS
BFD_RELOC_PPC_TLSGD
BFD_RELOC_PPC_TLSLD
BFD_RELOC_PPC_DTPMOD
BFD_RELOC_PPC_TPREL16
BFD_RELOC_PPC_TPREL16_L0
BFD_RELOC_PPC_TPREL16_HI
BFD_RELOC_PPC_TPREL16_HA
BFD_RELOC_PPC_TPREL
BFD_RELOC_PPC_DTPREL16
BFD_RELOC_PPC_DTPREL16_L0
BFD_RELOC_PPC_DTPREL16_HI
BFD_RELOC_PPC_DTPREL16_HA
BFD_RELOC_PPC_DTPREL
BFD_RELOC_PPC_GOT_TLSGD16
BFD_RELOC_PPC_GOT_TLSGD16_LO
BFD_RELOC_PPC_GOT_TLSGD16_HI
BFD_RELOC_PPC_GOT_TLSGD16_HA
BFD_RELOC_PPC_GOT_TLSLD16
BFD_RELOC_PPC_GOT_TLSLD16_LO
BFD_RELOC_PPC_GOT_TLSLD16_HI
BFD_RELOC_PPC_GOT_TLSLD16_HA
BFD_RELOC_PPC_GOT_TPREL16
BFD_RELOC_PPC_GOT_TPREL16_LO
BFD_RELOC_PPC_GOT_TPREL16_HI
BFD_RELOC_PPC_GOT_TPREL16_HA
BFD_RELOC_PPC_GOT_DTPREL16
BFD_RELOC_PPC_GOT_DTPREL16_LO
BFD_RELOC_PPC_GOT_DTPREL16_HI
BFD_RELOC_PPC_GOT_DTPREL16_HA
BFD_RELOC_PPC64_TPREL16_DS
BFD_RELOC_PPC64_TPREL16_LO_DS
```

```
BFD_RELOC_PPC64_TPREL16_HIGHER
BFD_RELOC_PPC64_TPREL16_HIGHERA
BFD_RELOC_PPC64_TPREL16_HIGHEST
BFD_RELOC_PPC64_TPREL16_HIGHESTA
BFD_RELOC_PPC64_DTPREL16_DS
BFD_RELOC_PPC64_DTPREL16_LO_DS
BFD_RELOC_PPC64_DTPREL16_HIGHERA
BFD_RELOC_PPC64_DTPREL16_HIGHERA
BFD_RELOC_PPC64_DTPREL16_HIGHEST
BFD_RELOC_PPC64_DTPREL16_HIGHEST
BFD_RELOC_PPC64_DTPREL16_HIGHESTA
BFD_RELOC_PPC64_TPREL16_HIGH
BFD_RELOC_PPC64_TPREL16_HIGHA
BFD_RELOC_PPC64_DTPREL16_HIGHA
BFD_RELOC_PPC64_DTPREL16_HIGHA
BFD_RELOC_PPC64_DTPREL16_HIGHA
```

PowerPC and PowerPC64 thread-local storage relocations.

BFD_RELOC_I370_D12

IBM 370/390 relocations

BFD_RELOC_CTOR

The type of reloc used to build a constructor table - at the moment probably a 32 bit wide absolute relocation, but the target can choose. It generally does map to one of the other relocation types.

BFD_RELOC_ARM_PCREL_BRANCH

ARM 26 bit pc-relative branch. The lowest two bits must be zero and are not stored in the instruction.

BFD_RELOC_ARM_PCREL_BLX

ARM 26 bit pc-relative branch. The lowest bit must be zero and is not stored in the instruction. The 2nd lowest bit comes from a 1 bit field in the instruction.

BFD_RELOC_THUMB_PCREL_BLX

Thumb 22 bit pc-relative branch. The lowest bit must be zero and is not stored in the instruction. The 2nd lowest bit comes from a 1 bit field in the instruction.

BFD_RELOC_ARM_PCREL_CALL

ARM 26-bit pc-relative branch for an unconditional BL or BLX instruction.

BFD_RELOC_ARM_PCREL_JUMP

ARM 26-bit pc-relative branch for B or conditional BL instruction.

```
BFD_RELOC_THUMB_PCREL_BRANCH7
BFD_RELOC_THUMB_PCREL_BRANCH9
BFD_RELOC_THUMB_PCREL_BRANCH12
BFD_RELOC_THUMB_PCREL_BRANCH20
BFD_RELOC_THUMB_PCREL_BRANCH23
BFD_RELOC_THUMB_PCREL_BRANCH25
```

Thumb 7-, 9-, 12-, 20-, 23-, and 25-bit pc-relative branches. The lowest bit must be zero and is not stored in the instruction. Note that the corresponding ELF

 $R_ARM_THM_JUMPnn$ constant has an "nn" one smaller in all cases. Note further that BRANCH23 corresponds to $R_ARM_THM_CALL$.

BFD_RELOC_ARM_OFFSET_IMM

12-bit immediate offset, used in ARM-format ldr and str instructions.

BFD_RELOC_ARM_THUMB_OFFSET

5-bit immediate offset, used in Thumb-format ldr and str instructions.

BFD_RELOC_ARM_TARGET1

Pc-relative or absolute relocation depending on target. Used for entries in .init_array sections.

BFD_RELOC_ARM_ROSEGREL32

Read-only segment base relative address.

BFD_RELOC_ARM_SBREL32

Data segment base relative address.

BFD_RELOC_ARM_TARGET2

This reloc is used for references to RTTI data from exception handling tables. The actual definition depends on the target. It may be a pc-relative or some form of GOT-indirect relocation.

BFD_RELOC_ARM_PREL31

31-bit PC relative address.

```
BFD_RELOC_ARM_MOVW
```

BFD_RELOC_ARM_MOVT

BFD_RELOC_ARM_MOVW_PCREL

BFD_RELOC_ARM_MOVT_PCREL

BFD_RELOC_ARM_THUMB_MOVW

BFD_RELOC_ARM_THUMB_MOVT

BFD_RELOC_ARM_THUMB_MOVW_PCREL

BFD_RELOC_ARM_THUMB_MOVT_PCREL

Low and High halfword relocations for MOVW and MOVT instructions.

BFD_RELOC_ARM_JUMP_SLOT

BFD_RELOC_ARM_GLOB_DAT

BFD_RELOC_ARM_GOT32

BFD_RELOC_ARM_PLT32

BFD_RELOC_ARM_RELATIVE

BFD_RELOC_ARM_GOTOFF

BFD_RELOC_ARM_GOTPC

BFD_RELOC_ARM_GOT_PREL

Relocations for setting up GOTs and PLTs for shared libraries.

BFD_RELOC_ARM_TLS_GD32

BFD_RELOC_ARM_TLS_LD032

BFD_RELOC_ARM_TLS_LDM32

```
BFD_RELOC_ARM_TLS_DTPOFF32
BFD_RELOC_ARM_TLS_DTPMOD32
BFD_RELOC_ARM_TLS_TPOFF32
BFD_RELOC_ARM_TLS_IE32
BFD_RELOC_ARM_TLS_LE32
BFD_RELOC_ARM_TLS_GOTDESC
BFD_RELOC_ARM_TLS_CALL
BFD_RELOC_ARM_THM_TLS_CALL
BFD_RELOC_ARM_TLS_DESCSEQ
BFD_RELOC_ARM_THM_TLS_DESCSEQ
BFD_RELOC_ARM_TLS_DESC
    ARM thread-local storage relocations.
BFD_RELOC_ARM_ALU_PC_GO_NC
BFD_RELOC_ARM_ALU_PC_GO
BFD_RELOC_ARM_ALU_PC_G1_NC
BFD_RELOC_ARM_ALU_PC_G1
BFD_RELOC_ARM_ALU_PC_G2
BFD_RELOC_ARM_LDR_PC_GO
BFD_RELOC_ARM_LDR_PC_G1
BFD_RELOC_ARM_LDR_PC_G2
BFD_RELOC_ARM_LDRS_PC_GO
BFD_RELOC_ARM_LDRS_PC_G1
BFD_RELOC_ARM_LDRS_PC_G2
BFD_RELOC_ARM_LDC_PC_GO
BFD_RELOC_ARM_LDC_PC_G1
BFD_RELOC_ARM_LDC_PC_G2
BFD_RELOC_ARM_ALU_SB_GO_NC
BFD_RELOC_ARM_ALU_SB_GO
BFD_RELOC_ARM_ALU_SB_G1_NC
BFD_RELOC_ARM_ALU_SB_G1
BFD_RELOC_ARM_ALU_SB_G2
BFD_RELOC_ARM_LDR_SB_GO
BFD_RELOC_ARM_LDR_SB_G1
BFD_RELOC_ARM_LDR_SB_G2
```

BFD_RELOC_ARM_V4BX
Annotation of BX instructions.

BFD_RELOC_ARM_LDRS_SB_G0
BFD_RELOC_ARM_LDRS_SB_G1
BFD_RELOC_ARM_LDRS_SB_G2
BFD_RELOC_ARM_LDC_SB_G0
BFD_RELOC_ARM_LDC_SB_G1
BFD_RELOC_ARM_LDC_SB_G2
ARM group relocations.

BFD_RELOC_ARM_IRELATIVE
ARM support for STT_GNU_IFUNC.

BFD_RELOC_SH_IMM8BY4

BFD_RELOC_SH_PCRELIMM8BY2 BFD_RELOC_SH_PCRELIMM8BY4

```
BFD_RELOC_ARM_IMMEDIATE
BFD_RELOC_ARM_ADRL_IMMEDIATE
BFD_RELOC_ARM_T32_IMMEDIATE
BFD_RELOC_ARM_T32_ADD_IMM
BFD_RELOC_ARM_T32_IMM12
BFD_RELOC_ARM_T32_ADD_PC12
BFD_RELOC_ARM_SHIFT_IMM
BFD_RELOC_ARM_SMC
BFD_RELOC_ARM_HVC
BFD_RELOC_ARM_SWI
BFD_RELOC_ARM_MULTI
BFD_RELOC_ARM_CP_OFF_IMM
BFD_RELOC_ARM_CP_OFF_IMM_S2
BFD_RELOC_ARM_T32_CP_OFF_IMM
BFD_RELOC_ARM_T32_CP_OFF_IMM_S2
BFD_RELOC_ARM_ADR_IMM
BFD_RELOC_ARM_LDR_IMM
BFD_RELOC_ARM_LITERAL
BFD_RELOC_ARM_IN_POOL
BFD_RELOC_ARM_OFFSET_IMM8
BFD_RELOC_ARM_T32_OFFSET_U8
BFD_RELOC_ARM_T32_OFFSET_IMM
BFD_RELOC_ARM_HWLITERAL
BFD_RELOC_ARM_THUMB_ADD
BFD_RELOC_ARM_THUMB_IMM
BFD_RELOC_ARM_THUMB_SHIFT
    These relocs are only used within the ARM assembler. They are not (at present)
    written to any object files.
BFD_RELOC_SH_PCDISP8BY2
BFD_RELOC_SH_PCDISP12BY2
BFD_RELOC_SH_IMM3
BFD_RELOC_SH_IMM3U
BFD_RELOC_SH_DISP12
BFD_RELOC_SH_DISP12BY2
BFD_RELOC_SH_DISP12BY4
BFD_RELOC_SH_DISP12BY8
BFD_RELOC_SH_DISP20
BFD_RELOC_SH_DISP20BY8
BFD_RELOC_SH_IMM4
BFD_RELOC_SH_IMM4BY2
BFD_RELOC_SH_IMM4BY4
BFD_RELOC_SH_IMM8
BFD_RELOC_SH_IMM8BY2
```

- BFD_RELOC_SH_SWITCH16
- BFD_RELOC_SH_SWITCH32
- BFD_RELOC_SH_USES
- BFD_RELOC_SH_COUNT
- BFD_RELOC_SH_ALIGN
- BFD_RELOC_SH_CODE
- BFD_RELOC_SH_DATA
- BFD_RELOC_SH_LABEL
- BFD_RELOC_SH_LOOP_START
- BFD_RELOC_SH_LOOP_END
- BFD_RELOC_SH_COPY
- BFD_RELOC_SH_GLOB_DAT
- BFD_RELOC_SH_JMP_SLOT
- BFD_RELOC_SH_RELATIVE
- BFD_RELOC_SH_GOTPC
- BFD_RELOC_SH_GOT_LOW16
- BFD_RELOC_SH_GOT_MEDLOW16
- BFD_RELOC_SH_GOT_MEDHI16
- BFD_RELOC_SH_GOT_HI16
- BFD_RELOC_SH_GOTPLT_LOW16
- BFD_RELOC_SH_GOTPLT_MEDLOW16
- BFD_RELOC_SH_GOTPLT_MEDHI16
- BFD_RELOC_SH_GOTPLT_HI16
- BFD_RELOC_SH_PLT_LOW16
- BFD_RELOC_SH_PLT_MEDLOW16
- BFD_RELOC_SH_PLT_MEDHI16
- BFD_RELOC_SH_PLT_HI16
- BFD_RELOC_SH_GOTOFF_LOW16
- BFD_RELOC_SH_GOTOFF_MEDLOW16
- BFD_RELOC_SH_GOTOFF_MEDHI16
- BFD_RELOC_SH_GOTOFF_HI16
- BFD_RELOC_SH_GOTPC_LOW16
- BFD_RELOC_SH_GOTPC_MEDLOW16
- BFD_RELOC_SH_GOTPC_MEDHI16
- BFD_RELOC_SH_GOTPC_HI16
- BFD_RELOC_SH_COPY64
- BFD_RELOC_SH_GLOB_DAT64
- BFD_RELOC_SH_JMP_SLOT64
- BFD_RELOC_SH_RELATIVE64
- BFD_RELOC_SH_GOT10BY4
- BFD_RELOC_SH_GOT10BY8
- BFD_RELOC_SH_GOTPLT10BY4
- BFD_RELOC_SH_GOTPLT10BY8
- BFD_RELOC_SH_GOTPLT32
- BFD_RELOC_SH_SHMEDIA_CODE
- BFD_RELOC_SH_IMMU5
- BFD_RELOC_SH_IMMS6

```
BFD_RELOC_SH_IMMS6BY32
BFD_RELOC_SH_IMMU6
BFD_RELOC_SH_IMMS10
BFD_RELOC_SH_IMMS10BY2
BFD_RELOC_SH_IMMS10BY4
BFD_RELOC_SH_IMMS10BY8
BFD_RELOC_SH_IMMS16
BFD_RELOC_SH_IMMU16
BFD_RELOC_SH_IMM_LOW16
BFD_RELOC_SH_IMM_LOW16_PCREL
BFD_RELOC_SH_IMM_MEDLOW16
BFD_RELOC_SH_IMM_MEDLOW16_PCREL
BFD_RELOC_SH_IMM_MEDHI16
BFD_RELOC_SH_IMM_MEDHI16_PCREL
BFD_RELOC_SH_IMM_HI16
BFD_RELOC_SH_IMM_HI16_PCREL
BFD_RELOC_SH_PT_16
BFD_RELOC_SH_TLS_GD_32
BFD_RELOC_SH_TLS_LD_32
BFD_RELOC_SH_TLS_LDO_32
BFD_RELOC_SH_TLS_IE_32
BFD_RELOC_SH_TLS_LE_32
BFD_RELOC_SH_TLS_DTPMOD32
BFD_RELOC_SH_TLS_DTPOFF32
BFD_RELOC_SH_TLS_TP0FF32
BFD_RELOC_SH_GOT20
BFD_RELOC_SH_GOTOFF20
BFD_RELOC_SH_GOTFUNCDESC
BFD_RELOC_SH_GOTFUNCDESC20
BFD_RELOC_SH_GOTOFFFUNCDESC
BFD_RELOC_SH_GOTOFFFUNCDESC20
BFD_RELOC_SH_FUNCDESC
    Renesas / SuperH SH relocs. Not all of these appear in object files.
```

BFD_RELOC_ARC_B22_PCREL

ARC Cores relocs. ARC 22 bit pc-relative branch. The lowest two bits must be zero and are not stored in the instruction. The high 20 bits are installed in bits 26 through 7 of the instruction.

BFD_RELOC_ARC_B26

ARC 26 bit absolute branch. The lowest two bits must be zero and are not stored in the instruction. The high 24 bits are installed in bits 23 through 0.

BFD_RELOC_BFIN_16_IMM

ADI Blackfin 16 bit immediate absolute reloc.

BFD_RELOC_BFIN_16_HIGH

ADI Blackfin 16 bit immediate absolute reloc higher 16 bits.

BFD_RELOC_BFIN_4_PCREL

ADI Blackfin 'a' part of LSETUP.

BFD_RELOC_BFIN_5_PCREL ADI Blackfin.

BFD_RELOC_BFIN_16_LOW

ADI Blackfin 16 bit immediate absolute reloc lower 16 bits.

BFD_RELOC_BFIN_10_PCREL ADI Blackfin.

BFD_RELOC_BFIN_11_PCREL

ADI Blackfin 'b' part of LSETUP.

BFD_RELOC_BFIN_12_PCREL_JUMP ADI Blackfin.

BFD_RELOC_BFIN_12_PCREL_JUMP_S
ADI Blackfin Short jump, pcrel.

BFD_RELOC_BFIN_24_PCREL_CALL_X
ADI Blackfin Call.x not implemented.

BFD_RELOC_BFIN_24_PCREL_JUMP_L ADI Blackfin Long Jump pcrel.

BFD_RELOC_BFIN_GOT17M4

BFD_RELOC_BFIN_GOTHI

BFD_RELOC_BFIN_GOTLO

BFD_RELOC_BFIN_FUNCDESC

BFD_RELOC_BFIN_FUNCDESC_GOT17M4

BFD_RELOC_BFIN_FUNCDESC_GOTHI

BFD_RELOC_BFIN_FUNCDESC_GOTLO

BFD_RELOC_BFIN_FUNCDESC_VALUE

BFD_RELOC_BFIN_FUNCDESC_GOTOFF17M4

BFD_RELOC_BFIN_FUNCDESC_GOTOFFHI

BFD_RELOC_BFIN_FUNCDESC_GOTOFFLO

BFD_RELOC_BFIN_GOTOFF17M4

BFD_RELOC_BFIN_GOTOFFHI

BFD_RELOC_BFIN_GOTOFFLO

ADI Blackfin FD-PIC relocations.

BFD_RELOC_BFIN_GOT
ADI Blackfin GOT relocation.

BFD_RELOC_BFIN_PLTPC ADI Blackfin PLTPC relocation.

BFD_ARELOC_BFIN_PUSH
ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_CONST ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_ADD ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_SUB ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_MULT ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_DIV ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_MOD ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_LSHIFT ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_RSHIFT ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_AND ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_OR ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_XOR ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_LAND ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_LOR ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_LEN ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_NEG ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_COMP ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_PAGE ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_HWPAGE ADI Blackfin arithmetic relocation.

BFD_ARELOC_BFIN_ADDR

ADI Blackfin arithmetic relocation.

BFD_RELOC_D10V_10_PCREL_R

Mitsubishi D10V relocs. This is a 10-bit reloc with the right 2 bits assumed to be 0.

BFD_RELOC_D10V_10_PCREL_L

Mitsubishi D10V relocs. This is a 10-bit reloc with the right 2 bits assumed to be 0. This is the same as the previous reloc except it is in the left container, i.e., shifted left 15 bits.

BFD_RELOC_D10V_18

This is an 18-bit reloc with the right 2 bits assumed to be 0.

BFD_RELOC_D10V_18_PCREL

This is an 18-bit reloc with the right 2 bits assumed to be 0.

BFD_RELOC_D30V_6

Mitsubishi D30V relocs. This is a 6-bit absolute reloc.

BFD_RELOC_D30V_9_PCREL

This is a 6-bit pc-relative reloc with the right 3 bits assumed to be 0.

BFD_RELOC_D30V_9_PCREL_R

This is a 6-bit pc-relative reloc with the right 3 bits assumed to be 0. Same as the previous reloc but on the right side of the container.

BFD_RELOC_D30V_15

This is a 12-bit absolute reloc with the right 3 bits assumed to be 0.

BFD_RELOC_D30V_15_PCREL

This is a 12-bit pc-relative reloc with the right 3 bits assumed to be 0.

BFD_RELOC_D30V_15_PCREL_R

This is a 12-bit pc-relative reloc with the right 3 bits assumed to be 0. Same as the previous reloc but on the right side of the container.

BFD_RELOC_D30V_21

This is an 18-bit absolute reloc with the right 3 bits assumed to be 0.

BFD_RELOC_D30V_21_PCREL

This is an 18-bit pc-relative reloc with the right 3 bits assumed to be 0.

BFD_RELOC_D30V_21_PCREL_R

This is an 18-bit pc-relative reloc with the right 3 bits assumed to be 0. Same as the previous reloc but on the right side of the container.

BFD_RELOC_D30V_32

This is a 32-bit absolute reloc.

BFD_RELOC_D30V_32_PCREL

This is a 32-bit pc-relative reloc.

BFD_RELOC_DLX_HI16_S

DLX relocs

BFD_RELOC_DLX_L016

DLX relocs

BFD_RELOC_DLX_JMP26

DLX relocs

BFD_RELOC_M32C_HI8

BFD_RELOC_M32C_RL_JUMP

BFD_RELOC_M32C_RL_1ADDR

BFD_RELOC_M32C_RL_2ADDR

Renesas M16C/M32C Relocations.

BFD_RELOC_M32R_24

Renesas M32R (formerly Mitsubishi M32R) relocs. This is a 24 bit absolute address.

BFD_RELOC_M32R_10_PCREL

This is a 10-bit pc-relative reloc with the right 2 bits assumed to be 0.

BFD_RELOC_M32R_18_PCREL

This is an 18-bit reloc with the right 2 bits assumed to be 0.

BFD_RELOC_M32R_26_PCREL

This is a 26-bit reloc with the right 2 bits assumed to be 0.

BFD_RELOC_M32R_HI16_ULO

This is a 16-bit reloc containing the high 16 bits of an address used when the lower 16 bits are treated as unsigned.

BFD_RELOC_M32R_HI16_SLO

This is a 16-bit reloc containing the high 16 bits of an address used when the lower 16 bits are treated as signed.

BFD_RELOC_M32R_L016

This is a 16-bit reloc containing the lower 16 bits of an address.

BFD_RELOC_M32R_SDA16

This is a 16-bit reloc containing the small data area offset for use in add3, load, and store instructions.

BFD_RELOC_M32R_GOT24

BFD_RELOC_M32R_26_PLTREL

BFD_RELOC_M32R_COPY

BFD_RELOC_M32R_GLOB_DAT

BFD_RELOC_M32R_JMP_SLOT

BFD_RELOC_M32R_RELATIVE

BFD_RELOC_M32R_GOTOFF

BFD_RELOC_M32R_GOTOFF_HI_ULO

BFD_RELOC_M32R_GOTOFF_HI_SLO

BFD_RELOC_M32R_GOTOFF_LO

BFD_RELOC_M32R_GOTPC24

BFD_RELOC_M32R_GOT16_HI_ULO

BFD_RELOC_M32R_GOT16_HI_SLO

BFD_RELOC_M32R_GOT16_LO

BFD_RELOC_M32R_GOTPC_HI_ULO

BFD_RELOC_M32R_GOTPC_HI_SLO

BFD_RELOC_M32R_GOTPC_LO

For PIC.

BFD_RELOC_V850_9_PCREL

This is a 9-bit reloc

BFD_RELOC_V850_22_PCREL

This is a 22-bit reloc

BFD_RELOC_V850_SDA_16_16_OFFSET

This is a 16 bit offset from the short data area pointer.

BFD_RELOC_V850_SDA_15_16_OFFSET

This is a 16 bit offset (of which only 15 bits are used) from the short data area pointer.

BFD_RELOC_V850_ZDA_16_16_OFFSET

This is a 16 bit offset from the zero data area pointer.

BFD_RELOC_V850_ZDA_15_16_OFFSET

This is a 16 bit offset (of which only 15 bits are used) from the zero data area pointer.

BFD_RELOC_V850_TDA_6_8_OFFSET

This is an 8 bit offset (of which only 6 bits are used) from the tiny data area pointer.

BFD_RELOC_V850_TDA_7_8_OFFSET

This is an 8bit offset (of which only 7 bits are used) from the tiny data area pointer.

BFD_RELOC_V850_TDA_7_7_OFFSET

This is a 7 bit offset from the tiny data area pointer.

BFD_RELOC_V850_TDA_16_16_0FFSET

This is a 16 bit offset from the tiny data area pointer.

BFD_RELOC_V850_TDA_4_5_OFFSET

This is a 5 bit offset (of which only 4 bits are used) from the tiny data area pointer.

BFD_RELOC_V850_TDA_4_4_OFFSET

This is a 4 bit offset from the tiny data area pointer.

BFD_RELOC_V850_SDA_16_16_SPLIT_OFFSET

This is a 16 bit offset from the short data area pointer, with the bits placed non-contiguously in the instruction.

BFD_RELOC_V850_ZDA_16_16_SPLIT_OFFSET

This is a 16 bit offset from the zero data area pointer, with the bits placed non-contiguously in the instruction.

BFD_RELOC_V850_CALLT_6_7_OFFSET

This is a 6 bit offset from the call table base pointer.

BFD_RELOC_V850_CALLT_16_16_0FFSET

This is a 16 bit offset from the call table base pointer.

BFD_RELOC_V850_LONGCALL

Used for relaxing indirect function calls.

BFD_RELOC_V850_LONGJUMP

Used for relaxing indirect jumps.

BFD_RELOC_V850_ALIGN

Used to maintain alignment whilst relaxing.

BFD_RELOC_V850_L016_SPLIT_OFFSET

This is a variation of BFD_RELOC_LO16 that can be used in v850e ld.bu instructions.

BFD_RELOC_V850_16_PCREL

This is a 16-bit reloc.

BFD_RELOC_V850_17_PCREL

This is a 17-bit reloc.

BFD_RELOC_V850_23

This is a 23-bit reloc.

BFD_RELOC_V850_32_PCREL

This is a 32-bit reloc.

BFD_RELOC_V850_32_ABS

This is a 32-bit reloc.

BFD_RELOC_V850_16_SPLIT_OFFSET

This is a 16-bit reloc.

BFD_RELOC_V850_16_S1

This is a 16-bit reloc.

BFD_RELOC_V850_L016_S1

Low 16 bits. 16 bit shifted by 1.

BFD_RELOC_V850_CALLT_15_16_OFFSET

This is a 16 bit offset from the call table base pointer.

BFD_RELOC_V850_32_GOTPCREL

DSO relocations.

BFD_RELOC_V850_16_GOT

DSO relocations.

BFD_RELOC_V850_32_GOT

DSO relocations.

BFD_RELOC_V850_22_PLT_PCREL DSO relocations.

BFD_RELOC_V850_32_PLT_PCREL DSO relocations.

BFD_RELOC_V850_COPY DSO relocations.

BFD_RELOC_V850_GLOB_DAT DSO relocations.

BFD_RELOC_V850_JMP_SLOT DSO relocations.

BFD_RELOC_V850_RELATIVE DSO relocations.

BFD_RELOC_V850_16_GOTOFF DSO relocations.

BFD_RELOC_V850_32_GOTOFF DSO relocations.

BFD_RELOC_V850_CODE start code.

BFD_RELOC_V850_DATA start data in text.

BFD_RELOC_TIC30_LDP

This is a 8bit DP reloc for the tms320c30, where the most significant 8 bits of a 24 bit word are placed into the least significant 8 bits of the opcode.

BFD_RELOC_TIC54X_PARTLS7

This is a 7bit reloc for the tms320c54x, where the least significant 7 bits of a 16 bit word are placed into the least significant 7 bits of the opcode.

BFD RELOC TIC54X PARTMS9

This is a 9bit DP reloc for the tms320c54x, where the most significant 9 bits of a 16 bit word are placed into the least significant 9 bits of the opcode.

BFD_RELOC_TIC54X_23

This is an extended address 23-bit reloc for the tms320c54x.

BFD_RELOC_TIC54X_16_0F_23

This is a 16-bit reloc for the tms320c54x, where the least significant 16 bits of a 23-bit extended address are placed into the opcode.

BFD_RELOC_TIC54X_MS7_OF_23

This is a reloc for the tms320c54x, where the most significant 7 bits of a 23-bit extended address are placed into the opcode.

```
BFD_RELOC_C6000_PCR_S21
BFD_RELOC_C6000_PCR_S12
BFD_RELOC_C6000_PCR_S10
BFD_RELOC_C6000_PCR_S7
BFD_RELOC_C6000_ABS_S16
BFD_RELOC_C6000_ABS_L16
BFD_RELOC_C6000_ABS_H16
BFD_RELOC_C6000_SBR_U15_B
BFD_RELOC_C6000_SBR_U15_H
BFD_RELOC_C6000_SBR_U15_W
BFD_RELOC_C6000_SBR_S16
BFD_RELOC_C6000_SBR_L16_B
BFD_RELOC_C6000_SBR_L16_H
BFD_RELOC_C6000_SBR_L16_W
BFD_RELOC_C6000_SBR_H16_B
BFD_RELOC_C6000_SBR_H16_H
BFD_RELOC_C6000_SBR_H16_W
BFD_RELOC_C6000_SBR_GOT_U15_W
BFD_RELOC_C6000_SBR_GOT_L16_W
BFD_RELOC_C6000_SBR_GOT_H16_W
BFD_RELOC_C6000_DSBT_INDEX
BFD_RELOC_C6000_PREL31
BFD_RELOC_C6000_COPY
BFD_RELOC_C6000_JUMP_SLOT
BFD_RELOC_C6000_EHTYPE
BFD_RELOC_C6000_PCR_H16
BFD_RELOC_C6000_PCR_L16
BFD_RELOC_C6000_ALIGN
BFD_RELOC_C6000_FPHEAD
BFD_RELOC_C6000_NOCMP
    TMS320C6000 relocations.
```

BFD_RELOC_FR30_48

This is a 48 bit reloc for the FR30 that stores 32 bits.

BFD_RELOC_FR30_20

This is a 32 bit reloc for the FR30 that stores 20 bits split up into two sections.

BFD_RELOC_FR30_6_IN_4

This is a 16 bit reloc for the FR30 that stores a 6 bit word offset in 4 bits.

BFD_RELOC_FR30_8_IN_8

This is a 16 bit reloc for the FR30 that stores an 8 bit byte offset into 8 bits.

BFD_RELOC_FR30_9_IN_8

This is a 16 bit reloc for the FR30 that stores a 9 bit short offset into 8 bits.

BFD_RELOC_FR30_10_IN_8

This is a 16 bit reloc for the FR30 that stores a 10 bit word offset into 8 bits.

BFD_RELOC_FR30_9_PCREL

This is a 16 bit reloc for the FR30 that stores a 9 bit pc relative short offset into 8 bits.

BFD_RELOC_FR30_12_PCREL

This is a 16 bit reloc for the FR30 that stores a 12 bit pc relative short offset into 11

```
BFD_RELOC_MCORE_PCREL_IMM8BY4
BFD_RELOC_MCORE_PCREL_IMM11BY2
BFD_RELOC_MCORE_PCREL_IMM4BY2
BFD_RELOC_MCORE_PCREL_32
BFD_RELOC_MCORE_PCREL_JSR_IMM11BY2
BFD_RELOC_MCORE_RVA
    Motorola Mcore relocations.
BFD_RELOC_MEP_8
```

BFD_RELOC_MEP_16

BFD_RELOC_MEP_32

BFD_RELOC_MEP_PCREL8A2

BFD_RELOC_MEP_PCREL12A2

BFD_RELOC_MEP_PCREL17A2

BFD_RELOC_MEP_PCREL24A2

BFD_RELOC_MEP_PCABS24A2

BFD_RELOC_MEP_LOW16

BFD_RELOC_MEP_HI16U

BFD_RELOC_MEP_HI16S

BFD_RELOC_MEP_GPREL

BFD_RELOC_MEP_TPREL

BFD_RELOC_MEP_TPREL7

BFD_RELOC_MEP_TPREL7A2

BFD_RELOC_MEP_TPREL7A4

BFD_RELOC_MEP_UIMM24

BFD_RELOC_MEP_ADDR24A4

BFD_RELOC_MEP_GNU_VTINHERIT

BFD_RELOC_MEP_GNU_VTENTRY

Toshiba Media Processor Relocations.

```
BFD_RELOC_METAG_HIADDR16
BFD_RELOC_METAG_LOADDR16
BFD_RELOC_METAG_RELBRANCH
BFD_RELOC_METAG_GETSETOFF
BFD_RELOC_METAG_HIOG
BFD_RELOC_METAG_LOOG
BFD_RELOC_METAG_REL8
BFD_RELOC_METAG_REL16
BFD_RELOC_METAG_HI16_GOTOFF
BFD_RELOC_METAG_LO16_GOTOFF
```

```
BFD_RELOC_METAG_GETSET_GOTOFF
BFD_RELOC_METAG_GETSET_GOT
BFD_RELOC_METAG_HI16_GOTPC
BFD_RELOC_METAG_LO16_GOTPC
BFD_RELOC_METAG_HI16_PLT
BFD_RELOC_METAG_LO16_PLT
BFD_RELOC_METAG_RELBRANCH_PLT
BFD_RELOC_METAG_GOTOFF
BFD_RELOC_METAG_PLT
BFD_RELOC_METAG_COPY
BFD_RELOC_METAG_JMP_SLOT
BFD_RELOC_METAG_RELATIVE
BFD_RELOC_METAG_GLOB_DAT
BFD_RELOC_METAG_TLS_GD
BFD_RELOC_METAG_TLS_LDM
BFD_RELOC_METAG_TLS_LDO_HI16
BFD_RELOC_METAG_TLS_LDO_L016
BFD_RELOC_METAG_TLS_LDO
BFD_RELOC_METAG_TLS_IE
BFD_RELOC_METAG_TLS_IENONPIC
BFD_RELOC_METAG_TLS_IENONPIC_HI16
BFD_RELOC_METAG_TLS_IENONPIC_L016
BFD_RELOC_METAG_TLS_TPOFF
BFD_RELOC_METAG_TLS_DTPMOD
BFD_RELOC_METAG_TLS_DTPOFF
BFD_RELOC_METAG_TLS_LE
BFD_RELOC_METAG_TLS_LE_HI16
BFD_RELOC_METAG_TLS_LE_L016
    Imagination Technologies Meta relocations.
BFD_RELOC_MMIX_GETA
BFD_RELOC_MMIX_GETA_1
BFD_RELOC_MMIX_GETA_2
BFD_RELOC_MMIX_GETA_3
    These are relocations for the GETA instruction.
BFD_RELOC_MMIX_CBRANCH
BFD_RELOC_MMIX_CBRANCH_J
BFD_RELOC_MMIX_CBRANCH_1
BFD_RELOC_MMIX_CBRANCH_2
BFD_RELOC_MMIX_CBRANCH_3
    These are relocations for a conditional branch instruction.
BFD_RELOC_MMIX_PUSHJ
BFD_RELOC_MMIX_PUSHJ_1
BFD_RELOC_MMIX_PUSHJ_2
BFD_RELOC_MMIX_PUSHJ_3
```

BFD_RELOC_MMIX_PUSHJ_STUBBABLE

These are relocations for the PUSHJ instruction.

BFD_RELOC_MMIX_JMP

BFD_RELOC_MMIX_JMP_1

BFD_RELOC_MMIX_JMP_2

BFD_RELOC_MMIX_JMP_3

These are relocations for the JMP instruction.

BFD_RELOC_MMIX_ADDR19

This is a relocation for a relative address as in a GETA instruction or a branch.

BFD_RELOC_MMIX_ADDR27

This is a relocation for a relative address as in a JMP instruction.

BFD_RELOC_MMIX_REG_OR_BYTE

This is a relocation for an instruction field that may be a general register or a value 0..255.

BFD_RELOC_MMIX_REG

This is a relocation for an instruction field that may be a general register.

BFD_RELOC_MMIX_BASE_PLUS_OFFSET

This is a relocation for two instruction fields holding a register and an offset, the equivalent of the relocation.

BFD_RELOC_MMIX_LOCAL

This relocation is an assertion that the expression is not allocated as a global register. It does not modify contents.

BFD RELOC AVR 7 PCREL

This is a 16 bit reloc for the AVR that stores 8 bit pc relative short offset into 7 bits.

BFD_RELOC_AVR_13_PCREL

This is a 16 bit reloc for the AVR that stores 13 bit pc relative short offset into 12 bits.

BFD_RELOC_AVR_16_PM

This is a 16 bit reloc for the AVR that stores 17 bit value (usually program memory address) into 16 bits.

BFD_RELOC_AVR_LO8_LDI

This is a 16 bit reloc for the AVR that stores 8 bit value (usually data memory address) into 8 bit immediate value of LDI insn.

BFD_RELOC_AVR_HI8_LDI

This is a 16 bit reloc for the AVR that stores 8 bit value (high 8 bit of data memory address) into 8 bit immediate value of LDI insn.

BFD_RELOC_AVR_HH8_LDI

This is a 16 bit reloc for the AVR that stores 8 bit value (most high 8 bit of program memory address) into 8 bit immediate value of LDI insn.

BFD_RELOC_AVR_MS8_LDI

This is a 16 bit reloc for the AVR that stores 8 bit value (most high 8 bit of 32 bit value) into 8 bit immediate value of LDI insn.

BFD_RELOC_AVR_LO8_LDI_NEG

This is a 16 bit reloc for the AVR that stores negated 8 bit value (usually data memory address) into 8 bit immediate value of SUBI insn.

BFD_RELOC_AVR_HI8_LDI_NEG

This is a 16 bit reloc for the AVR that stores negated 8 bit value (high 8 bit of data memory address) into 8 bit immediate value of SUBI insn.

BFD_RELOC_AVR_HH8_LDI_NEG

This is a 16 bit reloc for the AVR that stores negated 8 bit value (most high 8 bit of program memory address) into 8 bit immediate value of LDI or SUBI insn.

BFD_RELOC_AVR_MS8_LDI_NEG

This is a 16 bit reloc for the AVR that stores negated 8 bit value (msb of 32 bit value) into 8 bit immediate value of LDI insn.

BFD_RELOC_AVR_LO8_LDI_PM

This is a 16 bit reloc for the AVR that stores 8 bit value (usually command address) into 8 bit immediate value of LDI insn.

BFD_RELOC_AVR_LO8_LDI_GS

This is a 16 bit reloc for the AVR that stores 8 bit value (command address) into 8 bit immediate value of LDI insn. If the address is beyond the 128k boundary, the linker inserts a jump stub for this reloc in the lower 128k.

BFD_RELOC_AVR_HI8_LDI_PM

This is a 16 bit reloc for the AVR that stores 8 bit value (high 8 bit of command address) into 8 bit immediate value of LDI insn.

BFD_RELOC_AVR_HI8_LDI_GS

This is a 16 bit reloc for the AVR that stores 8 bit value (high 8 bit of command address) into 8 bit immediate value of LDI insn. If the address is beyond the 128k boundary, the linker inserts a jump stub for this reloc below 128k.

BFD_RELOC_AVR_HH8_LDI_PM

This is a 16 bit reloc for the AVR that stores 8 bit value (most high 8 bit of command address) into 8 bit immediate value of LDI insn.

BFD_RELOC_AVR_LO8_LDI_PM_NEG

This is a 16 bit reloc for the AVR that stores negated 8 bit value (usually command address) into 8 bit immediate value of SUBI insn.

BFD_RELOC_AVR_HI8_LDI_PM_NEG

This is a 16 bit reloc for the AVR that stores negated 8 bit value (high 8 bit of 16 bit command address) into 8 bit immediate value of SUBI insn.

BFD_RELOC_AVR_HH8_LDI_PM_NEG

This is a 16 bit reloc for the AVR that stores negated 8 bit value (high 6 bit of 22 bit command address) into 8 bit immediate value of SUBI insn.

BFD_RELOC_AVR_CALL

This is a 32 bit reloc for the AVR that stores 23 bit value into 22 bits.

BFD_RELOC_AVR_LDI

This is a 16 bit reloc for the AVR that stores all needed bits for absolute addressing with ldi with overflow check to linktime

BFD_RELOC_AVR_6

This is a 6 bit reloc for the AVR that stores offset for ldd/std instructions

BFD_RELOC_AVR_6_ADIW

This is a 6 bit reloc for the AVR that stores offset for adiw/sbiw instructions

BFD_RELOC_AVR_8_LO

This is a 8 bit reloc for the AVR that stores bits 0..7 of a symbol in .byte lo8(symbol)

BFD_RELOC_AVR_8_HI

This is a 8 bit reloc for the AVR that stores bits 8..15 of a symbol in .byte hi8(symbol)

BFD_RELOC_AVR_8_HLO

This is a 8 bit reloc for the AVR that stores bits 16..23 of a symbol in .byte hlo8(symbol)

```
BFD_RELOC_RL78_NEG8
```

BFD_RELOC_RL78_NEG16

BFD_RELOC_RL78_NEG24

BFD_RELOC_RL78_NEG32

BFD_RELOC_RL78_16_OP

BFD_RELOC_RL78_24_OP

BFD_RELOC_RL78_32_OP

BFD_RELOC_RL78_8U

BFD_RELOC_RL78_16U

BFD_RELOC_RL78_24U

BFD_RELOC_RL78_DIR3U_PCREL

BFD_RELOC_RL78_DIFF

BFD_RELOC_RL78_GPRELB

BFD_RELOC_RL78_GPRELW

BFD_RELOC_RL78_GPRELL

BFD_RELOC_RL78_SYM

BFD_RELOC_RL78_OP_SUBTRACT

BFD_RELOC_RL78_OP_NEG

BFD_RELOC_RL78_OP_AND

BFD_RELOC_RL78_OP_SHRA

BFD_RELOC_RL78_ABS8

BFD_RELOC_RL78_ABS16

BFD_RELOC_RL78_ABS16_REV

- BFD_RELOC_RL78_ABS32
- BFD_RELOC_RL78_ABS32_REV
- BFD_RELOC_RL78_ABS16U
- BFD_RELOC_RL78_ABS16UW
- BFD_RELOC_RL78_ABS16UL
- BFD_RELOC_RL78_RELAX
- BFD_RELOC_RL78_HI16
- BFD_RELOC_RL78_HI8
- BFD_RELOC_RL78_L016
- BFD_RELOC_RL78_CODE

Renesas RL78 Relocations.

- BFD_RELOC_RX_NEG8
- BFD_RELOC_RX_NEG16
- BFD_RELOC_RX_NEG24
- BFD_RELOC_RX_NEG32
- BFD_RELOC_RX_16_OP
- BFD_RELOC_RX_24_OP
- BFD_RELOC_RX_32_OP
- BFD_RELOC_RX_8U
- BFD_RELOC_RX_16U
- BFD_RELOC_RX_24U
- BFD_RELOC_RX_DIR3U_PCREL
- BFD_RELOC_RX_DIFF
- BFD_RELOC_RX_GPRELB
- BFD_RELOC_RX_GPRELW
- BFD_RELOC_RX_GPRELL
- BFD_RELOC_RX_SYM
- BFD_RELOC_RX_OP_SUBTRACT
- BFD_RELOC_RX_OP_NEG
- BFD_RELOC_RX_ABS8
- BFD_RELOC_RX_ABS16
- BFD_RELOC_RX_ABS16_REV
- BFD_RELOC_RX_ABS32
- BFD_RELOC_RX_ABS32_REV
- BFD_RELOC_RX_ABS16U
- BFD_RELOC_RX_ABS16UW
- BFD_RELOC_RX_ABS16UL
- BFD_RELOC_RX_RELAX

Renesas RX Relocations.

- BFD_RELOC_390_12
 - Direct 12 bit.
- BFD_RELOC_390_GOT12
 - 12 bit GOT offset.
- BFD_RELOC_390_PLT32
 - 32 bit PC relative PLT address.

- BFD_RELOC_390_COPY
 Copy symbol at runtime.
- BFD_RELOC_390_GLOB_DAT Create GOT entry.
- BFD_RELOC_390_JMP_SLOT Create PLT entry.
- BFD_RELOC_390_RELATIVE Adjust by program base.
- BFD_RELOC_390_GOTPC
 32 bit PC relative offset to GOT.
- BFD_RELOC_390_GOT16 16 bit GOT offset.
- BFD_RELOC_390_PC12DBL PC relative 12 bit shifted by 1.
- BFD_RELOC_390_PLT12DBL 12 bit PC rel. PLT shifted by 1.
- BFD_RELOC_390_PC16DBL PC relative 16 bit shifted by 1.
- BFD_RELOC_390_PLT16DBL 16 bit PC rel. PLT shifted by 1.
- BFD_RELOC_390_PC24DBL PC relative 24 bit shifted by 1.
- BFD_RELOC_390_PC32DBL PC relative 32 bit shifted by 1.
- BFD_RELOC_390_PLT32DBL 32 bit PC rel. PLT shifted by 1.
- BFD_RELOC_390_GOT64 64 bit GOT offset.
- BFD_RELOC_390_PLT64 64 bit PC relative PLT address.
- BFD_RELOC_390_GOTENT
 32 bit rel. offset to GOT entry.

BFD_RELOC_390_GOTOFF64

64 bit offset to GOT.

BFD_RELOC_390_GOTPLT12

12-bit offset to symbol-entry within GOT, with PLT handling.

BFD_RELOC_390_GOTPLT16

16-bit offset to symbol-entry within GOT, with PLT handling.

BFD_RELOC_390_GOTPLT32

32-bit offset to symbol-entry within GOT, with PLT handling.

BFD_RELOC_390_GOTPLT64

64-bit offset to symbol-entry within GOT, with PLT handling.

BFD_RELOC_390_GOTPLTENT

32-bit rel. offset to symbol-entry within GOT, with PLT handling.

BFD_RELOC_390_PLT0FF16

16-bit rel. offset from the GOT to a PLT entry.

BFD_RELOC_390_PLT0FF32

32-bit rel. offset from the GOT to a PLT entry.

BFD_RELOC_390_PLT0FF64

64-bit rel. offset from the GOT to a PLT entry.

BFD_RELOC_390_TLS_LOAD

BFD_RELOC_390_TLS_GDCALL

BFD_RELOC_390_TLS_LDCALL

BFD_RELOC_390_TLS_GD32

BFD_RELOC_390_TLS_GD64

BFD_RELOC_390_TLS_GOTIE12

BFD_RELOC_390_TLS_GOTIE32

BFD_RELOC_390_TLS_GOTIE64

BFD_RELOC_390_TLS_LDM32

BFD_RELOC_390_TLS_LDM64

BFD_RELOC_390_TLS_IE32

BFD_RELOC_390_TLS_IE64

BFD_RELOC_390_TLS_IEENT

BFD_RELOC_390_TLS_LE32

BFD_RELOC_390_TLS_LE64

BFD_RELOC_390_TLS_LD032

BFD_RELOC_390_TLS_LD064

BFD_RELOC_390_TLS_DTPMOD

BFD_RELOC_390_TLS_DTPOFF

BFD_RELOC_390_TLS_TPOFF

s390 tls relocations.

BFD_RELOC_390_20

BFD_RELOC_390_GOT20

BFD_RELOC_390_GOTPLT20

BFD_RELOC_390_TLS_GOTIE20

Long displacement extension.

BFD_RELOC_390_IRELATIVE

STT_GNU_IFUNC relocation.

BFD_RELOC_SCORE_GPREL15

Score relocations Low 16 bit for load/store

BFD_RELOC_SCORE_DUMMY2

BFD_RELOC_SCORE_JMP

This is a 24-bit reloc with the right 1 bit assumed to be 0

BFD_RELOC_SCORE_BRANCH

This is a 19-bit reloc with the right 1 bit assumed to be 0

BFD_RELOC_SCORE_IMM30

This is a 32-bit reloc for 48-bit instructions.

BFD_RELOC_SCORE_IMM32

This is a 32-bit reloc for 48-bit instructions.

BFD_RELOC_SCORE16_JMP

This is a 11-bit reloc with the right 1 bit assumed to be 0

BFD_RELOC_SCORE16_BRANCH

This is a 8-bit reloc with the right 1 bit assumed to be 0

BFD_RELOC_SCORE_BCMP

This is a 9-bit reloc with the right 1 bit assumed to be 0

BFD_RELOC_SCORE_GOT15

BFD_RELOC_SCORE_GOT_L016

BFD_RELOC_SCORE_CALL15

BFD_RELOC_SCORE_DUMMY_HI16

Undocumented Score relocs

BFD_RELOC_IP2K_FR9

Scenix IP2K - 9-bit register number / data address

BFD_RELOC_IP2K_BANK

Scenix IP2K - 4-bit register/data bank number

BFD_RELOC_IP2K_ADDR16CJP

Scenix IP2K - low 13 bits of instruction word address

BFD_RELOC_IP2K_PAGE3

Scenix IP2K - high 3 bits of instruction word address

BFD_RELOC_IP2K_LO8DATA

BFD_RELOC_IP2K_HI8DATA

BFD_RELOC_IP2K_EX8DATA

Scenix IP2K - ext/low/high 8 bits of data address

BFD_RELOC_IP2K_LO8INSN

BFD_RELOC_IP2K_HI8INSN

Scenix IP2K - low/high 8 bits of instruction word address

BFD_RELOC_IP2K_PC_SKIP

Scenix IP2K - even/odd PC modifier to modify snb pcl.0

BFD_RELOC_IP2K_TEXT

Scenix IP2K - 16 bit word address in text section.

BFD_RELOC_IP2K_FR_OFFSET

Scenix IP2K - 7-bit sp or dp offset

BFD_RELOC_VPE4KMATH_DATA

BFD_RELOC_VPE4KMATH_INSN

Scenix VPE4K coprocessor - data/insn-space addressing

BFD_RELOC_VTABLE_INHERIT

BFD_RELOC_VTABLE_ENTRY

These two relocations are used by the linker to determine which of the entries in a C++ virtual function table are actually used. When the –gc-sections option is given, the linker will zero out the entries that are not used, so that the code for those functions need not be included in the output.

VTABLE_INHERIT is a zero-space relocation used to describe to the linker the inheritance tree of a C++ virtual function table. The relocation's symbol should be the parent class' vtable, and the relocation should be located at the child vtable.

VTABLE_ENTRY is a zero-space relocation that describes the use of a virtual function table entry. The reloc's symbol should refer to the table of the class mentioned in the code. Off of that base, an offset describes the entry that is being used. For Rela hosts, this offset is stored in the reloc's addend. For Rel hosts, we are forced to put this offset in the reloc's section offset.

BFD_RELOC_IA64_IMM14

BFD_RELOC_IA64_IMM22

BFD_RELOC_IA64_IMM64

BFD_RELOC_IA64_DIR32MSB

BFD_RELOC_IA64_DIR32LSB

BFD_RELOC_IA64_DIR64MSB

BFD_RELOC_IA64_DIR64LSB

BFD_RELOC_IA64_GPREL22

BFD_RELOC_IA64_GPREL64I

BFD_RELOC_IA64_GPREL32MSB

BFD_RELOC_IA64_GPREL32LSB

BFD_RELOC_IA64_GPREL64MSB

```
BFD_RELOC_IA64_GPREL64LSB
BFD_RELOC_IA64_LT0FF22
BFD_RELOC_IA64_LT0FF64I
BFD_RELOC_IA64_PLT0FF22
BFD_RELOC_IA64_PLT0FF64I
BFD_RELOC_IA64_PLTOFF64MSB
BFD_RELOC_IA64_PLT0FF64LSB
BFD_RELOC_IA64_FPTR64I
BFD_RELOC_IA64_FPTR32MSB
BFD_RELOC_IA64_FPTR32LSB
BFD_RELOC_IA64_FPTR64MSB
BFD_RELOC_IA64_FPTR64LSB
BFD_RELOC_IA64_PCREL21B
BFD_RELOC_IA64_PCREL21BI
BFD_RELOC_IA64_PCREL21M
BFD_RELOC_IA64_PCREL21F
BFD_RELOC_IA64_PCREL22
BFD_RELOC_IA64_PCREL60B
BFD_RELOC_IA64_PCREL64I
BFD_RELOC_IA64_PCREL32MSB
BFD_RELOC_IA64_PCREL32LSB
BFD_RELOC_IA64_PCREL64MSB
BFD_RELOC_IA64_PCREL64LSB
BFD_RELOC_IA64_LT0FF_FPTR22
BFD_RELOC_IA64_LTOFF_FPTR64I
BFD_RELOC_IA64_LTOFF_FPTR32MSB
BFD_RELOC_IA64_LTOFF_FPTR32LSB
BFD_RELOC_IA64_LTOFF_FPTR64MSB
BFD_RELOC_IA64_LTOFF_FPTR64LSB
BFD_RELOC_IA64_SEGREL32MSB
BFD_RELOC_IA64_SEGREL32LSB
BFD_RELOC_IA64_SEGREL64MSB
BFD_RELOC_IA64_SEGREL64LSB
BFD_RELOC_IA64_SECREL32MSB
BFD_RELOC_IA64_SECREL32LSB
BFD_RELOC_IA64_SECREL64MSB
BFD_RELOC_IA64_SECREL64LSB
BFD_RELOC_IA64_REL32MSB
BFD_RELOC_IA64_REL32LSB
BFD_RELOC_IA64_REL64MSB
BFD_RELOC_IA64_REL64LSB
BFD_RELOC_IA64_LTV32MSB
BFD_RELOC_IA64_LTV32LSB
BFD_RELOC_IA64_LTV64MSB
BFD_RELOC_IA64_LTV64LSB
```

BFD_RELOC_IA64_IPLTMSB BFD_RELOC_IA64_IPLTLSB

- BFD_RELOC_IA64_COPY
- BFD_RELOC_IA64_LT0FF22X
- BFD_RELOC_IA64_LDXMOV
- BFD_RELOC_IA64_TPREL14
- BFD_RELOC_IA64_TPREL22
- BFD_RELOC_IA64_TPREL64I
- BFD_RELOC_IA64_TPREL64MSB
- BFD_RELOC_IA64_TPREL64LSB
- BFD_RELOC_IA64_LTOFF_TPREL22
- BFD_RELOC_IA64_DTPMOD64MSB
- BFD_RELOC_IA64_DTPMOD64LSB
- BFD_RELOC_IA64_LTOFF_DTPMOD22
- BFD_RELOC_IA64_DTPREL14
- BFD_RELOC_IA64_DTPREL22
- BFD_RELOC_IA64_DTPREL64I
- BFD_RELOC_IA64_DTPREL32MSB
- BFD_RELOC_IA64_DTPREL32LSB
- BFD_RELOC_IA64_DTPREL64MSB
- BFD_RELOC_IA64_DTPREL64LSB
- BFD_RELOC_IA64_LTOFF_DTPREL22

Intel IA64 Relocations.

BFD_RELOC_M68HC11_HI8

Motorola 68HC11 reloc. This is the 8 bit high part of an absolute address.

BFD_RELOC_M68HC11_L08

Motorola 68HC11 reloc. This is the 8 bit low part of an absolute address.

BFD_RELOC_M68HC11_3B

Motorola 68HC11 reloc. This is the 3 bit of a value.

BFD_RELOC_M68HC11_RL_JUMP

Motorola 68HC11 reloc. This reloc marks the beginning of a jump/call instruction. It is used for linker relaxation to correctly identify beginning of instruction and change some branches to use PC-relative addressing mode.

BFD_RELOC_M68HC11_RL_GROUP

Motorola 68HC11 reloc. This reloc marks a group of several instructions that gcc generates and for which the linker relaxation pass can modify and/or remove some of them.

BFD_RELOC_M68HC11_L016

Motorola 68HC11 reloc. This is the 16-bit lower part of an address. It is used for 'call' instruction to specify the symbol address without any special transformation (due to memory bank window).

BFD_RELOC_M68HC11_PAGE

Motorola 68HC11 reloc. This is a 8-bit reloc that specifies the page number of an address. It is used by 'call' instruction to specify the page number of the symbol.

BFD_RELOC_M68HC11_24

Motorola 68HC11 reloc. This is a 24-bit reloc that represents the address with a 16-bit value and a 8-bit page number. The symbol address is transformed to follow the 16K memory bank of 68HC12 (seen as mapped in the window).

BFD_RELOC_M68HC12_5B

Motorola 68HC12 reloc. This is the 5 bits of a value.

BFD_RELOC_XGATE_RL_JUMP

Freescale XGATE reloc. This reloc marks the beginning of a bra/jal instruction.

BFD_RELOC_XGATE_RL_GROUP

Freescale XGATE reloc. This reloc marks a group of several instructions that gcc generates and for which the linker relaxation pass can modify and/or remove some of them.

BFD_RELOC_XGATE_L016

Freescale XGATE reloc. This is the 16-bit lower part of an address. It is used for the '16-bit' instructions.

BFD_RELOC_XGATE_GPAGE

Freescale XGATE reloc.

BFD_RELOC_XGATE_24

Freescale XGATE reloc.

BFD_RELOC_XGATE_PCREL_9

Freescale XGATE reloc. This is a 9-bit pc-relative reloc.

BFD_RELOC_XGATE_PCREL_10

Freescale XGATE reloc. This is a 10-bit pc-relative reloc.

BFD_RELOC_XGATE_IMM8_LO

Freescale XGATE reloc. This is the 16-bit lower part of an address. It is used for the '16-bit' instructions.

BFD_RELOC_XGATE_IMM8_HI

Freescale XGATE reloc. This is the 16-bit higher part of an address. It is used for the '16-bit' instructions.

BFD_RELOC_XGATE_IMM3

Freescale XGATE reloc. This is a 3-bit pc-relative reloc.

BFD_RELOC_XGATE_IMM4

Freescale XGATE reloc. This is a 4-bit pc-relative reloc.

BFD_RELOC_XGATE_IMM5

Freescale XGATE reloc. This is a 5-bit pc-relative reloc.

BFD_RELOC_M68HC12_9B

Motorola 68HC12 reloc. This is the 9 bits of a value.

BFD_RELOC_M68HC12_16B

Motorola 68HC12 reloc. This is the 16 bits of a value.

BFD_RELOC_M68HC12_9_PCREL

Motorola 68HC12/XGATE reloc. This is a PCREL9 branch.

BFD_RELOC_M68HC12_10_PCREL

Motorola 68HC12/XGATE reloc. This is a PCREL10 branch.

BFD_RELOC_M68HC12_L08XG

Motorola 68HC12/XGATE reloc. This is the 8 bit low part of an absolute address and immediately precedes a matching HI8XG part.

BFD_RELOC_M68HC12_HI8XG

Motorola 68HC12/XGATE reloc. This is the 8 bit high part of an absolute address and immediately follows a matching LO8XG part.

```
BFD_RELOC_16C_NUMO8
```

BFD_RELOC_16C_NUMO8_C

BFD_RELOC_16C_NUM16

BFD_RELOC_16C_NUM16_C

BFD_RELOC_16C_NUM32

BFD_RELOC_16C_NUM32_C

BFD_RELOC_16C_DISPO4

BFD_RELOC_16C_DISP04_C

BFD_RELOC_16C_DISP08

BFD_RELOC_16C_DISP08_C

BFD_RELOC_16C_DISP16

BFD_RELOC_16C_DISP16_C

BFD_RELOC_16C_DISP24

BFD_RELOC_16C_DISP24_C

BFD_RELOC_16C_DISP24a

BFD_RELOC_16C_DISP24a_C

BFD_RELOC_16C_REG04

BFD_RELOC_16C_REGO4_C

BFD_RELOC_16C_REG04a

BFD_RELOC_16C_REG04a_C

BFD_RELOC_16C_REG14

BFD_RELOC_16C_REG14_C

BFD_RELOC_16C_REG16

BFD_RELOC_16C_REG16_C BFD_RELOC_16C_REG20

BFD_RELOC_16C_REG20_C

BFD_RELOC_16C_ABS20

BFD_RELOC_16C_ABS20_C

BFD_RELOC_16C_ABS24

BFD_RELOC_16C_ABS24_C

BFD_RELOC_16C_IMMO4

BFD_RELOC_16C_IMMO4_C

```
BFD_RELOC_16C_IMM16
BFD_RELOC_16C_IMM16_C
BFD_RELOC_16C_IMM20
BFD_RELOC_16C_IMM2O_C
BFD_RELOC_16C_IMM24
BFD_RELOC_16C_IMM24_C
BFD_RELOC_16C_IMM32
BFD_RELOC_16C_IMM32_C
    NS CR16C Relocations.
BFD_RELOC_CR16_NUM8
BFD_RELOC_CR16_NUM16
BFD_RELOC_CR16_NUM32
BFD_RELOC_CR16_NUM32a
BFD_RELOC_CR16_REGRELO
BFD_RELOC_CR16_REGREL4
BFD_RELOC_CR16_REGREL4a
BFD_RELOC_CR16_REGREL14
BFD_RELOC_CR16_REGREL14a
BFD_RELOC_CR16_REGREL16
BFD_RELOC_CR16_REGREL20
BFD_RELOC_CR16_REGREL20a
BFD_RELOC_CR16_ABS20
BFD_RELOC_CR16_ABS24
BFD_RELOC_CR16_IMM4
BFD_RELOC_CR16_IMM8
BFD_RELOC_CR16_IMM16
BFD_RELOC_CR16_IMM20
BFD_RELOC_CR16_IMM24
BFD_RELOC_CR16_IMM32
BFD_RELOC_CR16_IMM32a
BFD_RELOC_CR16_DISP4
BFD_RELOC_CR16_DISP8
BFD_RELOC_CR16_DISP16
BFD_RELOC_CR16_DISP20
BFD_RELOC_CR16_DISP24
BFD_RELOC_CR16_DISP24a
BFD_RELOC_CR16_SWITCH8
BFD_RELOC_CR16_SWITCH16
BFD_RELOC_CR16_SWITCH32
BFD_RELOC_CR16_GOT_REGREL20
BFD_RELOC_CR16_GOTC_REGREL20
BFD_RELOC_CR16_GLOB_DAT
    NS CR16 Relocations.
```

BFD_RELOC_CRX_REL4 BFD_RELOC_CRX_REL8 BFD_RELOC_CRX_REL8_CMP

```
BFD_RELOC_CRX_REL16
BFD_RELOC_CRX_REL24
BFD_RELOC_CRX_REL32
BFD_RELOC_CRX_REGREL12
BFD_RELOC_CRX_REGREL22
BFD_RELOC_CRX_REGREL28
BFD_RELOC_CRX_REGREL32
BFD_RELOC_CRX_ABS16
BFD_RELOC_CRX_ABS32
BFD_RELOC_CRX_NUM8
BFD_RELOC_CRX_NUM16
BFD_RELOC_CRX_NUM32
BFD_RELOC_CRX_IMM16
BFD_RELOC_CRX_IMM32
BFD_RELOC_CRX_SWITCH8
BFD_RELOC_CRX_SWITCH16
BFD_RELOC_CRX_SWITCH32
     NS CRX Relocations.
BFD_RELOC_CRIS_BDISP8
BFD_RELOC_CRIS_UNSIGNED_5
BFD_RELOC_CRIS_SIGNED_6
BFD_RELOC_CRIS_UNSIGNED_6
BFD_RELOC_CRIS_SIGNED_8
BFD_RELOC_CRIS_UNSIGNED_8
BFD_RELOC_CRIS_SIGNED_16
BFD_RELOC_CRIS_UNSIGNED_16
BFD_RELOC_CRIS_LAPCQ_OFFSET
BFD_RELOC_CRIS_UNSIGNED_4
     These relocs are only used within the CRIS assembler. They are not (at present)
     written to any object files.
BFD_RELOC_CRIS_COPY
BFD_RELOC_CRIS_GLOB_DAT
BFD_RELOC_CRIS_JUMP_SLOT
BFD_RELOC_CRIS_RELATIVE
     Relocs used in ELF shared libraries for CRIS.
BFD_RELOC_CRIS_32_GOT
     32-bit offset to symbol-entry within GOT.
BFD_RELOC_CRIS_16_GOT
     16-bit offset to symbol-entry within GOT.
BFD_RELOC_CRIS_32_GOTPLT
     32-bit offset to symbol-entry within GOT, with PLT handling.
BFD_RELOC_CRIS_16_GOTPLT
     16-bit offset to symbol-entry within GOT, with PLT handling.
```

BFD_RELOC_860_LOGOTOFF2 BFD_RELOC_860_LOGOTOFF3 BFD_RELOC_860_LOPC

```
BFD_RELOC_CRIS_32_GOTREL
     32-bit offset to symbol, relative to GOT.
BFD_RELOC_CRIS_32_PLT_GOTREL
     32-bit offset to symbol with PLT entry, relative to GOT.
BFD_RELOC_CRIS_32_PLT_PCREL
     32-bit offset to symbol with PLT entry, relative to this relocation.
BFD_RELOC_CRIS_32_GOT_GD
BFD_RELOC_CRIS_16_GOT_GD
BFD_RELOC_CRIS_32_GD
BFD_RELOC_CRIS_DTP
BFD_RELOC_CRIS_32_DTPREL
BFD_RELOC_CRIS_16_DTPREL
BFD_RELOC_CRIS_32_GOT_TPREL
BFD_RELOC_CRIS_16_GOT_TPREL
BFD_RELOC_CRIS_32_TPREL
BFD_RELOC_CRIS_16_TPREL
BFD_RELOC_CRIS_DTPMOD
BFD_RELOC_CRIS_32_IE
     Relocs used in TLS code for CRIS.
BFD_RELOC_860_COPY
BFD_RELOC_860_GLOB_DAT
BFD_RELOC_860_JUMP_SLOT
BFD_RELOC_860_RELATIVE
BFD_RELOC_860_PC26
BFD_RELOC_860_PLT26
BFD_RELOC_860_PC16
BFD_RELOC_860_LOWO
BFD_RELOC_860_SPLITO
BFD_RELOC_860_LOW1
BFD_RELOC_860_SPLIT1
BFD_RELOC_860_LOW2
BFD_RELOC_860_SPLIT2
BFD_RELOC_860_LOW3
BFD_RELOC_860_LOGOTO
BFD_RELOC_860_SPGOTO
BFD_RELOC_860_LOGOT1
BFD_RELOC_860_SPGOT1
BFD_RELOC_860_LOGOTOFFO
BFD_RELOC_860_SPGOTOFF0
BFD_RELOC_860_LOGOTOFF1
BFD_RELOC_860_SPGOTOFF1
```

BFD_RELOC_860_HIGHADJ

BFD_RELOC_860_HAGOT

BFD_RELOC_860_HAGOTOFF

BFD_RELOC_860_HAPC

BFD_RELOC_860_HIGH

BFD_RELOC_860_HIGOT

BFD_RELOC_860_HIGOTOFF

Intel i860 Relocations.

BFD_RELOC_OPENRISC_ABS_26

BFD_RELOC_OPENRISC_REL_26

OpenRISC Relocations.

BFD_RELOC_H8_DIR16A8

BFD_RELOC_H8_DIR16R8

BFD_RELOC_H8_DIR24A8

BFD_RELOC_H8_DIR24R8

BFD_RELOC_H8_DIR32A16

BFD_RELOC_H8_DISP32A16

H8 elf Relocations.

BFD_RELOC_XSTORMY16_REL_12

BFD_RELOC_XSTORMY16_12

BFD_RELOC_XSTORMY16_24

BFD_RELOC_XSTORMY16_FPTR16

Sony Xstormy16 Relocations.

BFD_RELOC_RELC

Self-describing complex relocations.

BFD_RELOC_XC16X_PAG

BFD_RELOC_XC16X_POF

BFD_RELOC_XC16X_SEG

BFD_RELOC_XC16X_SOF

Infineon Relocations.

BFD_RELOC_VAX_GLOB_DAT

BFD_RELOC_VAX_JMP_SLOT

BFD_RELOC_VAX_RELATIVE

Relocations used by VAX ELF.

BFD_RELOC_MT_PC16

Morpho MT - 16 bit immediate relocation.

BFD_RELOC_MT_HI16

Morpho MT - Hi 16 bits of an address.

BFD_RELOC_MT_L016

Morpho MT - Low 16 bits of an address.

BFD_RELOC_MT_GNU_VTINHERIT

Morpho MT - Used to tell the linker which vtable entries are used.

BFD_RELOC_MT_GNU_VTENTRY

Morpho MT - Used to tell the linker which vtable entries are used.

BFD_RELOC_MT_PCINSN8

Morpho MT - 8 bit immediate relocation.

BFD_RELOC_MSP430_10_PCREL

BFD_RELOC_MSP430_16_PCREL

BFD_RELOC_MSP430_16

BFD_RELOC_MSP430_16_PCREL_BYTE

BFD_RELOC_MSP430_16_BYTE

BFD_RELOC_MSP430_2X_PCREL

BFD_RELOC_MSP430_RL_PCREL

BFD_RELOC_MSP430_ABS8

BFD_RELOC_MSP430X_PCR20_EXT_SRC

BFD_RELOC_MSP430X_PCR20_EXT_DST

BFD_RELOC_MSP430X_PCR20_EXT_ODST

BFD_RELOC_MSP430X_ABS20_EXT_SRC

BFD_RELOC_MSP430X_ABS20_EXT_DST

BFD_RELOC_MSP430X_ABS20_EXT_ODST

BFD_RELOC_MSP430X_ABS20_ADR_SRC

BFD_RELOC_MSP430X_ABS20_ADR_DST

BFD_RELOC_MSP430X_PCR16

BFD_RELOC_MSP430X_PCR20_CALL

BFD_RELOC_MSP430X_ABS16

BFD_RELOC_MSP430_ABS_HI16

BFD_RELOC_MSP430_PREL31

BFD_RELOC_MSP430_SYM_DIFF

msp430 specific relocation codes

BFD_RELOC_NIOS2_S16

BFD_RELOC_NIOS2_U16

BFD_RELOC_NIOS2_CALL26

BFD_RELOC_NIOS2_IMM5

BFD_RELOC_NIOS2_CACHE_OPX

BFD_RELOC_NIOS2_IMM6

BFD_RELOC_NIOS2_IMM8

BFD_RELOC_NIOS2_HI16

BFD_RELOC_NIOS2_LO16

BFD_RELOC_NIOS2_HIADJ16

BFD_RELOC_NIOS2_GPREL

BFD_RELOC_NIOS2_UJMP

BFD_RELOC_NIOS2_CJMP

BFD_RELOC_NIOS2_CALLR

BFD_RELOC_NIOS2_ALIGN

```
BFD_RELOC_NIOS2_GOT16
BFD_RELOC_NIOS2_CALL16
BFD_RELOC_NIOS2_GOTOFF_LO
BFD_RELOC_NIOS2_GOTOFF_HA
BFD_RELOC_NIOS2_PCREL_LO
BFD_RELOC_NIOS2_PCREL_HA
BFD_RELOC_NIOS2_TLS_GD16
BFD_RELOC_NIOS2_TLS_LDM16
BFD_RELOC_NIOS2_TLS_LD016
BFD_RELOC_NIOS2_TLS_IE16
BFD_RELOC_NIOS2_TLS_LE16
BFD_RELOC_NIOS2_TLS_DTPMOD
BFD_RELOC_NIOS2_TLS_DTPREL
BFD_RELOC_NIOS2_TLS_TPREL
BFD_RELOC_NIOS2_COPY
BFD_RELOC_NIOS2_GLOB_DAT
BFD_RELOC_NIOS2_JUMP_SLOT
BFD_RELOC_NIOS2_RELATIVE
BFD_RELOC_NIOS2_GOTOFF
    Relocations used by the Altera Nios II core.
```

BFD_RELOC_IQ2000_OFFSET_16 BFD_RELOC_IQ2000_OFFSET_21 BFD_RELOC_IQ2000_UHI16

IQ2000 Relocations.

BFD_RELOC_XTENSA_RTLD

Special Xtensa relocation used only by PLT entries in ELF shared objects to indicate that the runtime linker should set the value to one of its own internal functions or data structures.

```
BFD_RELOC_XTENSA_GLOB_DAT
BFD_RELOC_XTENSA_JMP_SLOT
BFD_RELOC_XTENSA_RELATIVE
```

Xtensa relocations for ELF shared objects.

BFD_RELOC_XTENSA_PLT

Xtensa relocation used in ELF object files for symbols that may require PLT entries. Otherwise, this is just a generic 32-bit relocation.

```
BFD_RELOC_XTENSA_DIFF8
BFD_RELOC_XTENSA_DIFF16
BFD_RELOC_XTENSA_DIFF32
```

Xtensa relocations to mark the difference of two local symbols. These are only needed to support linker relaxation and can be ignored when not relaxing. The field is set to the value of the difference assuming no relaxation. The relocation encodes the position of the first symbol so the linker can determine whether to adjust the field value.

```
BFD_RELOC_XTENSA_SLOTO_OP
BFD_RELOC_XTENSA_SLOT1_OP
BFD_RELOC_XTENSA_SLOT2_OP
BFD_RELOC_XTENSA_SLOT3_OP
BFD_RELOC_XTENSA_SLOT4_OP
BFD_RELOC_XTENSA_SLOT5_OP
BFD_RELOC_XTENSA_SLOT6_OP
BFD_RELOC_XTENSA_SLOT7_OP
BFD_RELOC_XTENSA_SLOT7_OP
BFD_RELOC_XTENSA_SLOT9_OP
BFD_RELOC_XTENSA_SLOT10_OP
BFD_RELOC_XTENSA_SLOT11_OP
BFD_RELOC_XTENSA_SLOT11_OP
BFD_RELOC_XTENSA_SLOT112_OP
BFD_RELOC_XTENSA_SLOT13_OP
BFD_RELOC_XTENSA_SLOT13_OP
BFD_RELOC_XTENSA_SLOT14_OP
```

Generic Xtensa relocations for instruction operands. Only the slot number is encoded in the relocation. The relocation applies to the last PC-relative immediate operand, or if there are no PC-relative immediates, to the last immediate operand.

```
BFD_RELOC_XTENSA_SLOTO_ALT
BFD_RELOC_XTENSA_SLOT1_ALT
BFD_RELOC_XTENSA_SLOT2_ALT
BFD_RELOC_XTENSA_SLOT3_ALT
BFD_RELOC_XTENSA_SLOT4_ALT
BFD_RELOC_XTENSA_SLOT5_ALT
BFD_RELOC_XTENSA_SLOT6_ALT
BFD_RELOC_XTENSA_SLOT6_ALT
BFD_RELOC_XTENSA_SLOT7_ALT
BFD_RELOC_XTENSA_SLOT9_ALT
BFD_RELOC_XTENSA_SLOT9_ALT
BFD_RELOC_XTENSA_SLOT10_ALT
BFD_RELOC_XTENSA_SLOT11_ALT
BFD_RELOC_XTENSA_SLOT11_ALT
BFD_RELOC_XTENSA_SLOT112_ALT
BFD_RELOC_XTENSA_SLOT13_ALT
BFD_RELOC_XTENSA_SLOT13_ALT
BFD_RELOC_XTENSA_SLOT14_ALT
```

Alternate Xtensa relocations. Only the slot is encoded in the relocation. The meaning of these relocations is opcode-specific.

```
BFD_RELOC_XTENSA_OP0
BFD_RELOC_XTENSA_OP1
BFD_RELOC_XTENSA_OP2
```

Xtensa relocations for backward compatibility. These have all been replaced by BFD_RELOC_XTENSA_SLOT0_OP.

BFD_RELOC_XTENSA_ASM_EXPAND

Xtensa relocation to mark that the assembler expanded the instructions from an original target. The expansion size is encoded in the reloc size.

BFD_RELOC_XTENSA_ASM_SIMPLIFY

Xtensa relocation to mark that the linker should simplify assembler-expanded instructions. This is commonly used internally by the linker after analysis of a BFD_RELOC_XTENSA_ASM_EXPAND.

BFD_RELOC_XTENSA_TLSDESC_FN

BFD_RELOC_XTENSA_TLSDESC_ARG

BFD_RELOC_XTENSA_TLS_DTPOFF

BFD_RELOC_XTENSA_TLS_TPOFF

BFD_RELOC_XTENSA_TLS_FUNC

BFD_RELOC_XTENSA_TLS_ARG

BFD_RELOC_XTENSA_TLS_CALL

Xtensa TLS relocations.

BFD_RELOC_Z80_DISP8

8 bit signed offset in (ix+d) or (iy+d).

BFD_RELOC_Z8K_DISP7

DJNZ offset.

BFD_RELOC_Z8K_CALLR

CALR offset.

BFD_RELOC_Z8K_IMM4L

4 bit value.

BFD_RELOC_LM32_CALL

BFD_RELOC_LM32_BRANCH

BFD_RELOC_LM32_16_GOT

BFD_RELOC_LM32_GOTOFF_HI16

BFD_RELOC_LM32_GOTOFF_L016

BFD_RELOC_LM32_COPY

BFD_RELOC_LM32_GLOB_DAT

BFD_RELOC_LM32_JMP_SLOT

BFD_RELOC_LM32_RELATIVE

Lattice Mico32 relocations.

BFD_RELOC_MACH_O_SECTDIFF

Difference between two section addreses. Must be followed by a BFD_RELOC_MACH_O_PAIR.

BFD_RELOC_MACH_O_LOCAL_SECTDIFF

Like BFD_RELOC_MACH_O_SECTDIFF but with a local symbol.

BFD_RELOC_MACH_O_PAIR

Pair of relocation. Contains the first symbol.

BFD_RELOC_MACH_O_X86_64_BRANCH32

BFD_RELOC_MACH_O_X86_64_BRANCH8

PCREL relocations. They are marked as branch to create PLT entry if required.

BFD_RELOC_MACH_O_X86_64_GOT

Used when referencing a GOT entry.

BFD_RELOC_MACH_O_X86_64_GOT_LOAD

Used when loading a GOT entry with movq. It is specially marked so that the linker could optimize the movq to a leaq if possible.

BFD_RELOC_MACH_O_X86_64_SUBTRACTOR32

Symbol will be substracted. Must be followed by a BFD_RELOC_64.

BFD_RELOC_MACH_O_X86_64_SUBTRACTOR64

Symbol will be substracted. Must be followed by a BFD_RELOC_64.

BFD_RELOC_MACH_O_X86_64_PCREL32_1

Same as BFD_RELOC_32_PCREL but with an implicit -1 addend.

BFD_RELOC_MACH_O_X86_64_PCREL32_2

Same as BFD_RELOC_32_PCREL but with an implicit -2 addend.

BFD_RELOC_MACH_O_X86_64_PCREL32_4

Same as BFD_RELOC_32_PCREL but with an implicit -4 addend.

BFD_RELOC_MICROBLAZE_32_LO

This is a 32 bit reloc for the microblaze that stores the low 16 bits of a value

BFD_RELOC_MICROBLAZE_32_LO_PCREL

This is a 32 bit pc-relative reloc for the microblaze that stores the low 16 bits of a value

BFD_RELOC_MICROBLAZE_32_ROSDA

This is a 32 bit reloc for the microblaze that stores a value relative to the read-only small data area anchor

BFD_RELOC_MICROBLAZE_32_RWSDA

This is a 32 bit reloc for the microblaze that stores a value relative to the read-write small data area anchor

BFD_RELOC_MICROBLAZE_32_SYM_OP_SYM

This is a 32 bit reloc for the microblaze to handle expressions of the form "Symbol Op Symbol"

BFD_RELOC_MICROBLAZE_64_NONE

This is a 64 bit reloc that stores the 32 bit pc relative value in two words (with an imm instruction). No relocation is done here - only used for relaxing

BFD_RELOC_MICROBLAZE_64_GOTPC

This is a 64 bit reloc that stores the 32 bit pc relative value in two words (with an imm instruction). The relocation is PC-relative GOT offset

BFD_RELOC_MICROBLAZE_64_GOT

This is a 64 bit reloc that stores the 32 bit pc relative value in two words (with an imm instruction). The relocation is GOT offset

BFD_RELOC_MICROBLAZE_64_PLT

This is a 64 bit reloc that stores the 32 bit pc relative value in two words (with an imm instruction). The relocation is PC-relative offset into PLT

BFD_RELOC_MICROBLAZE_64_GOTOFF

This is a 64 bit reloc that stores the 32 bit GOT relative value in two words (with an imm instruction). The relocation is relative offset from _GLOBAL_OFFSET_TABLE_

BFD_RELOC_MICROBLAZE_32_GOTOFF

This is a 32 bit reloc that stores the 32 bit GOT relative value in a word. The relocation is relative offset from

BFD_RELOC_MICROBLAZE_COPY

This is used to tell the dynamic linker to copy the value out of the dynamic object into the runtime process image.

BFD_RELOC_MICROBLAZE_64_TLS

Unused Reloc

BFD_RELOC_MICROBLAZE_64_TLSGD

This is a 64 bit reloc that stores the 32 bit GOT relative value of the GOT TLS GD info entry in two words (with an imm instruction). The relocation is GOT offset.

BFD_RELOC_MICROBLAZE_64_TLSLD

This is a 64 bit reloc that stores the 32 bit GOT relative value of the GOT TLS LD info entry in two words (with an imm instruction). The relocation is GOT offset.

BFD_RELOC_MICROBLAZE_32_TLSDTPMOD

This is a 32 bit reloc that stores the Module ID to GOT(n).

BFD_RELOC_MICROBLAZE_32_TLSDTPREL

This is a 32 bit reloc that stores TLS offset to GOT(n+1).

BFD_RELOC_MICROBLAZE_64_TLSDTPREL

This is a 32 bit reloc for storing TLS offset to two words (uses imm instruction)

BFD_RELOC_MICROBLAZE_64_TLSGOTTPREL

This is a 64 bit reloc that stores 32-bit thread pointer relative offset to two words (uses imm instruction).

BFD_RELOC_MICROBLAZE_64_TLSTPREL

This is a 64 bit reloc that stores 32-bit thread pointer relative offset to two words (uses imm instruction).

BFD_RELOC_AARCH64_RELOC_START

AArch64 pseudo relocation code to mark the start of the AArch64 relocation enumerators. N.B. the order of the enumerators is important as several tables in the AArch64 bfd backend are indexed by these enumerators; make sure they are all synced.

BFD_RELOC_AARCH64_NONE

AArch64 null relocation code.

BFD_RELOC_AARCH64_64

BFD_RELOC_AARCH64_32

BFD_RELOC_AARCH64_16

Basic absolute relocations of N bits. These are equivalent to BFD_RELOC_N and they were added to assist the indexing of the howto table.

BFD_RELOC_AARCH64_64_PCREL

BFD_RELOC_AARCH64_32_PCREL

BFD_RELOC_AARCH64_16_PCREL

PC-relative relocations. These are equivalent to BFD_RELOC_N_PCREL and they were added to assist the indexing of the howto table.

BFD_RELOC_AARCH64_MOVW_GO

AArch64 MOV[NZK] instruction with most significant bits 0 to 15 of an unsigned address/value.

BFD_RELOC_AARCH64_MOVW_GO_NC

AArch64 MOV[NZK] instruction with less significant bits 0 to 15 of an address/value. No overflow checking.

BFD_RELOC_AARCH64_MOVW_G1

AArch64 MOV[NZK] instruction with most significant bits 16 to 31 of an unsigned address/value.

BFD_RELOC_AARCH64_MOVW_G1_NC

AArch64 MOV[NZK] instruction with less significant bits 16 to 31 of an address/value. No overflow checking.

BFD_RELOC_AARCH64_MOVW_G2

AArch64 MOV[NZK] instruction with most significant bits 32 to 47 of an unsigned address/value.

BFD_RELOC_AARCH64_MOVW_G2_NC

AArch64 MOV[NZK] instruction with less significant bits 32 to 47 of an address/value. No overflow checking.

BFD_RELOC_AARCH64_MOVW_G3

AArch64 MOV[NZK] instruction with most signficant bits 48 to 64 of a signed or unsigned address/value.

BFD_RELOC_AARCH64_MOVW_GO_S

AArch64 MOV[NZ] instruction with most significant bits 0 to 15 of a signed value. Changes instruction to MOVZ or MOVN depending on the value's sign.

BFD_RELOC_AARCH64_MOVW_G1_S

AArch64 MOV[NZ] instruction with most significant bits 16 to 31 of a signed value. Changes instruction to MOVZ or MOVN depending on the value's sign.

BFD_RELOC_AARCH64_MOVW_G2_S

AArch64 MOV[NZ] instruction with most significant bits 32 to 47 of a signed value. Changes instruction to MOVZ or MOVN depending on the value's sign.

BFD_RELOC_AARCH64_LD_L019_PCREL

AArch64 Load Literal instruction, holding a 19 bit pc-relative word offset. The lowest two bits must be zero and are not stored in the instruction, giving a 21 bit signed byte offset.

BFD_RELOC_AARCH64_ADR_LO21_PCREL

AArch64 ADR instruction, holding a simple 21 bit pc-relative byte offset.

BFD_RELOC_AARCH64_ADR_HI21_PCREL

AArch64 ADRP instruction, with bits 12 to 32 of a pc-relative page offset, giving a 4KB aligned page base address.

BFD_RELOC_AARCH64_ADR_HI21_NC_PCREL

AArch64 ADRP instruction, with bits 12 to 32 of a pc-relative page offset, giving a 4KB aligned page base address, but with no overflow checking.

BFD_RELOC_AARCH64_ADD_L012

AArch64 ADD immediate instruction, holding bits 0 to 11 of the address. Used in conjunction with BFD_RELOC_AARCH64_ADR_HI21_PCREL.

BFD_RELOC_AARCH64_LDST8_L012

AArch64 8-bit load/store instruction, holding bits 0 to 11 of the address. Used in conjunction with BFD_RELOC_AARCH64_ADR_HI21_PCREL.

BFD_RELOC_AARCH64_TSTBR14

AArch64 14 bit pc-relative test bit and branch. The lowest two bits must be zero and are not stored in the instruction, giving a 16 bit signed byte offset.

BFD_RELOC_AARCH64_BRANCH19

AArch64 19 bit pc-relative conditional branch and compare & branch. The lowest two bits must be zero and are not stored in the instruction, giving a 21 bit signed byte offset.

BFD_RELOC_AARCH64_JUMP26

AArch64 26 bit pc-relative unconditional branch. The lowest two bits must be zero and are not stored in the instruction, giving a 28 bit signed byte offset.

BFD_RELOC_AARCH64_CALL26

AArch64 26 bit pc-relative unconditional branch and link. The lowest two bits must be zero and are not stored in the instruction, giving a 28 bit signed byte offset.

BFD_RELOC_AARCH64_LDST16_L012

AArch64 16-bit load/store instruction, holding bits 0 to 11 of the address. Used in conjunction with BFD_RELOC_AARCH64_ADR_HI21_PCREL.

BFD_RELOC_AARCH64_LDST32_L012

AArch64 32-bit load/store instruction, holding bits 0 to 11 of the address. Used in conjunction with BFD_RELOC_AARCH64_ADR_HI21_PCREL.

BFD_RELOC_AARCH64_LDST64_L012

AArch64 64-bit load/store instruction, holding bits 0 to 11 of the address. Used in conjunction with BFD_RELOC_AARCH64_ADR_HI21_PCREL.

BFD_RELOC_AARCH64_LDST128_L012

AArch64 128-bit load/store instruction, holding bits 0 to 11 of the address. Used in conjunction with BFD_RELOC_AARCH64_ADR_HI21_PCREL.

BFD_RELOC_AARCH64_GOT_LD_PREL19

AArch64 Load Literal instruction, holding a 19 bit PC relative word offset of the global offset table entry for a symbol. The lowest two bits must be zero and are not stored in the instruction, giving a 21 bit signed byte offset. This relocation type requires signed overflow checking.

BFD_RELOC_AARCH64_ADR_GOT_PAGE

Get to the page base of the global offset table entry for a symbol as part of an ADRP instruction using a 21 bit PC relative value. Used in conjunction with BFD_RELOC_AARCH64_LD64_GOT_LO12_NC.

BFD_RELOC_AARCH64_LD64_GOT_LO12_NC

Unsigned 12 bit byte offset for 64 bit load/store from the page of the GOT entry for this symbol. Used in conjunction with BFD_RELOC_AARCH64_ADR_GOTPAGE. Valid in LP64 ABI only.

BFD_RELOC_AARCH64_LD32_GOT_LO12_NC

Unsigned 12 bit byte offset for 32 bit load/store from the page of the GOT entry for this symbol. Used in conjunction with BFD_RELOC_AARCH64_ADR_GOTPAGE. Valid in ILP32 ABI only.

BFD_RELOC_AARCH64_TLSGD_ADR_PAGE21

Get to the page base of the global offset table entry for a symbols tls_index structure as part of an adrp instruction using a 21 bit PC relative value. Used in conjunction with BFD_RELOC_AARCH64_TLSGD_ADD_LO12_NC.

BFD_RELOC_AARCH64_TLSGD_ADD_L012_NC

Unsigned 12 bit byte offset to global offset table entry for a symbols tls_index structure. Used in conjunction with BFD_RELOC_AARCH64_TLSGD_ADR_PAGE21.

BFD_RELOC_AARCH64_TLSIE_MOVW_GOTTPREL_G1 AArch64 TLS INITIAL EXEC relocation.

BFD_RELOC_AARCH64_TLSIE_MOVW_GOTTPREL_GO_NC AArch64 TLS INITIAL EXEC relocation.

BFD_RELOC_AARCH64_TLSIE_ADR_GOTTPREL_PAGE21 AArch64 TLS INITIAL EXEC relocation.

BFD_RELOC_AARCH64_TLSIE_LD64_GOTTPREL_LO12_NC AArch64 TLS INITIAL EXEC relocation.

BFD_RELOC_AARCH64_TLSIE_LD32_GOTTPREL_LO12_NC AArch64 TLS INITIAL EXEC relocation.

BFD_RELOC_AARCH64_TLSIE_LD_GOTTPREL_PREL19 AArch64 TLS INITIAL EXEC relocation.

- BFD_RELOC_AARCH64_TLSLE_MOVW_TPREL_G2 AArch64 TLS LOCAL EXEC relocation.
- BFD_RELOC_AARCH64_TLSLE_MOVW_TPREL_G1 AArch64 TLS LOCAL EXEC relocation.
- BFD_RELOC_AARCH64_TLSLE_MOVW_TPREL_G1_NC AArch64 TLS LOCAL EXEC relocation.
- BFD_RELOC_AARCH64_TLSLE_MOVW_TPREL_GO AArch64 TLS LOCAL EXEC relocation.
- BFD_RELOC_AARCH64_TLSLE_MOVW_TPREL_GO_NC AArch64 TLS LOCAL EXEC relocation.
- BFD_RELOC_AARCH64_TLSLE_ADD_TPREL_HI12 AArch64 TLS LOCAL EXEC relocation.
- BFD_RELOC_AARCH64_TLSLE_ADD_TPREL_L012 AArch64 TLS LOCAL EXEC relocation.
- BFD_RELOC_AARCH64_TLSLE_ADD_TPREL_L012_NC AArch64 TLS LOCAL EXEC relocation.
- BFD_RELOC_AARCH64_TLSDESC_LD_PREL19 AArch64 TLS DESC relocation.
- BFD_RELOC_AARCH64_TLSDESC_ADR_PREL21 AArch64 TLS DESC relocation.
- BFD_RELOC_AARCH64_TLSDESC_ADR_PAGE21 AArch64 TLS DESC relocation.
- BFD_RELOC_AARCH64_TLSDESC_LD64_LO12_NC AArch64 TLS DESC relocation.
- BFD_RELOC_AARCH64_TLSDESC_LD32_LO12_NC AArch64 TLS DESC relocation.
- BFD_RELOC_AARCH64_TLSDESC_ADD_L012_NC AArch64 TLS DESC relocation.
- BFD_RELOC_AARCH64_TLSDESC_0FF_G1 AArch64 TLS DESC relocation.
- BFD_RELOC_AARCH64_TLSDESC_OFF_GO_NC AArch64 TLS DESC relocation.
- BFD_RELOC_AARCH64_TLSDESC_LDR AArch64 TLS DESC relocation.
- BFD_RELOC_AARCH64_TLSDESC_ADD AArch64 TLS DESC relocation.

BFD_RELOC_AARCH64_TLSDESC_CALL AArch64 TLS DESC relocation.

BFD_RELOC_AARCH64_COPY AArch64 TLS relocation.

BFD_RELOC_AARCH64_GLOB_DAT AArch64 TLS relocation.

BFD_RELOC_AARCH64_JUMP_SLOT AArch64 TLS relocation.

BFD_RELOC_AARCH64_RELATIVE AArch64 TLS relocation.

BFD_RELOC_AARCH64_TLS_DTPMOD AArch64 TLS relocation.

BFD_RELOC_AARCH64_TLS_DTPREL AArch64 TLS relocation.

BFD_RELOC_AARCH64_TLS_TPREL AArch64 TLS relocation.

BFD_RELOC_AARCH64_TLSDESC AArch64 TLS relocation.

BFD_RELOC_AARCH64_IRELATIVE AArch64 support for STT_GNU_IFUNC.

BFD_RELOC_AARCH64_RELOC_END

AArch64 pseudo relocation code to mark the end of the AArch64 relocation enumerators that have direct mapping to ELF reloc codes. There are a few more enumerators after this one; those are mainly used by the AArch64 assembler for the internal fixup or to select one of the above enumerators.

BFD_RELOC_AARCH64_GAS_INTERNAL_FIXUP

AArch64 pseudo relocation code to be used internally by the AArch64 assembler and not (currently) written to any object files.

BFD_RELOC_AARCH64_LDST_L012

AArch64 unspecified load/store instruction, holding bits 0 to 11 of the address. Used in conjunction with BFD_RELOC_AARCH64_ADR_HI21_PCREL.

BFD_RELOC_AARCH64_LD_GOT_L012_NC

AArch64 pseudo relocation code to be used internally by the AArch64 assembler and not (currently) written to any object files.

BFD_RELOC_AARCH64_TLSIE_LD_GOTTPREL_L012_NC

AArch64 pseudo relocation code to be used internally by the AArch64 assembler and not (currently) written to any object files.

BFD_RELOC_AARCH64_TLSDESC_LD_L012_NC

AArch64 pseudo relocation code to be used internally by the AArch64 assembler and not (currently) written to any object files.

```
BFD_RELOC_TILEPRO_COPY
BFD_RELOC_TILEPRO_GLOB_DAT
BFD_RELOC_TILEPRO_JMP_SLOT
BFD_RELOC_TILEPRO_RELATIVE
BFD_RELOC_TILEPRO_BROFF_X1
BFD_RELOC_TILEPRO_JOFFLONG_X1
BFD_RELOC_TILEPRO_JOFFLONG_X1_PLT
BFD_RELOC_TILEPRO_IMM8_XO
BFD_RELOC_TILEPRO_IMM8_YO
BFD_RELOC_TILEPRO_IMM8_X1
BFD_RELOC_TILEPRO_IMM8_Y1
BFD_RELOC_TILEPRO_DEST_IMM8_X1
BFD_RELOC_TILEPRO_MT_IMM15_X1
BFD_RELOC_TILEPRO_MF_IMM15_X1
BFD_RELOC_TILEPRO_IMM16_XO
BFD_RELOC_TILEPRO_IMM16_X1
BFD_RELOC_TILEPRO_IMM16_XO_LO
BFD_RELOC_TILEPRO_IMM16_X1_LO
BFD_RELOC_TILEPRO_IMM16_XO_HI
BFD_RELOC_TILEPRO_IMM16_X1_HI
BFD_RELOC_TILEPRO_IMM16_XO_HA
BFD_RELOC_TILEPRO_IMM16_X1_HA
BFD_RELOC_TILEPRO_IMM16_XO_PCREL
BFD_RELOC_TILEPRO_IMM16_X1_PCREL
BFD_RELOC_TILEPRO_IMM16_XO_LO_PCREL
BFD_RELOC_TILEPRO_IMM16_X1_LO_PCREL
BFD_RELOC_TILEPRO_IMM16_XO_HI_PCREL
BFD_RELOC_TILEPRO_IMM16_X1_HI_PCREL
BFD_RELOC_TILEPRO_IMM16_XO_HA_PCREL
BFD_RELOC_TILEPRO_IMM16_X1_HA_PCREL
BFD_RELOC_TILEPRO_IMM16_XO_GOT
BFD_RELOC_TILEPRO_IMM16_X1_GOT
BFD_RELOC_TILEPRO_IMM16_XO_GOT_LO
BFD_RELOC_TILEPRO_IMM16_X1_GOT_LO
BFD_RELOC_TILEPRO_IMM16_XO_GOT_HI
BFD_RELOC_TILEPRO_IMM16_X1_GOT_HI
BFD_RELOC_TILEPRO_IMM16_XO_GOT_HA
BFD_RELOC_TILEPRO_IMM16_X1_GOT_HA
BFD_RELOC_TILEPRO_MMSTART_XO
BFD_RELOC_TILEPRO_MMEND_XO
BFD_RELOC_TILEPRO_MMSTART_X1
BFD_RELOC_TILEPRO_MMEND_X1
BFD_RELOC_TILEPRO_SHAMT_XO
```

```
BFD_RELOC_TILEPRO_SHAMT_X1
BFD_RELOC_TILEPRO_SHAMT_YO
BFD_RELOC_TILEPRO_SHAMT_Y1
BFD_RELOC_TILEPRO_TLS_GD_CALL
BFD_RELOC_TILEPRO_IMM8_XO_TLS_GD_ADD
BFD_RELOC_TILEPRO_IMM8_X1_TLS_GD_ADD
BFD_RELOC_TILEPRO_IMM8_YO_TLS_GD_ADD
BFD_RELOC_TILEPRO_IMM8_Y1_TLS_GD_ADD
BFD_RELOC_TILEPRO_TLS_IE_LOAD
BFD_RELOC_TILEPRO_IMM16_XO_TLS_GD
BFD_RELOC_TILEPRO_IMM16_X1_TLS_GD
BFD_RELOC_TILEPRO_IMM16_XO_TLS_GD_LO
BFD_RELOC_TILEPRO_IMM16_X1_TLS_GD_LO
BFD_RELOC_TILEPRO_IMM16_XO_TLS_GD_HI
BFD_RELOC_TILEPRO_IMM16_X1_TLS_GD_HI
BFD_RELOC_TILEPRO_IMM16_XO_TLS_GD_HA
BFD_RELOC_TILEPRO_IMM16_X1_TLS_GD_HA
BFD_RELOC_TILEPRO_IMM16_XO_TLS_IE
BFD_RELOC_TILEPRO_IMM16_X1_TLS_IE
BFD_RELOC_TILEPRO_IMM16_XO_TLS_IE_LO
BFD_RELOC_TILEPRO_IMM16_X1_TLS_IE_LO
BFD_RELOC_TILEPRO_IMM16_XO_TLS_IE_HI
BFD_RELOC_TILEPRO_IMM16_X1_TLS_IE_HI
BFD_RELOC_TILEPRO_IMM16_XO_TLS_IE_HA
BFD_RELOC_TILEPRO_IMM16_X1_TLS_IE_HA
BFD_RELOC_TILEPRO_TLS_DTPMOD32
BFD_RELOC_TILEPRO_TLS_DTPOFF32
BFD_RELOC_TILEPRO_TLS_TPOFF32
BFD_RELOC_TILEPRO_IMM16_XO_TLS_LE
BFD_RELOC_TILEPRO_IMM16_X1_TLS_LE
BFD_RELOC_TILEPRO_IMM16_XO_TLS_LE_LO
BFD_RELOC_TILEPRO_IMM16_X1_TLS_LE_LO
BFD_RELOC_TILEPRO_IMM16_XO_TLS_LE_HI
BFD_RELOC_TILEPRO_IMM16_X1_TLS_LE_HI
BFD_RELOC_TILEPRO_IMM16_XO_TLS_LE_HA
BFD_RELOC_TILEPRO_IMM16_X1_TLS_LE_HA
    Tilera TILEPro Relocations.
```

BFD_RELOC_TILEGX_HWO
BFD_RELOC_TILEGX_HW1
BFD_RELOC_TILEGX_HW2
BFD_RELOC_TILEGX_HW3
BFD_RELOC_TILEGX_HWO_LAST
BFD_RELOC_TILEGX_HW1_LAST
BFD_RELOC_TILEGX_HW2_LAST
BFD_RELOC_TILEGX_COPY
BFD_RELOC_TILEGX_GLOB_DAT

```
BFD_RELOC_TILEGX_JMP_SLOT
BFD_RELOC_TILEGX_RELATIVE
BFD_RELOC_TILEGX_BROFF_X1
BFD_RELOC_TILEGX_JUMPOFF_X1
BFD_RELOC_TILEGX_JUMPOFF_X1_PLT
BFD_RELOC_TILEGX_IMM8_XO
BFD_RELOC_TILEGX_IMM8_YO
BFD_RELOC_TILEGX_IMM8_X1
BFD_RELOC_TILEGX_IMM8_Y1
BFD_RELOC_TILEGX_DEST_IMM8_X1
BFD_RELOC_TILEGX_MT_IMM14_X1
BFD_RELOC_TILEGX_MF_IMM14_X1
BFD_RELOC_TILEGX_MMSTART_XO
BFD_RELOC_TILEGX_MMEND_XO
BFD_RELOC_TILEGX_SHAMT_XO
BFD_RELOC_TILEGX_SHAMT_X1
BFD_RELOC_TILEGX_SHAMT_YO
BFD_RELOC_TILEGX_SHAMT_Y1
BFD_RELOC_TILEGX_IMM16_XO_HWO
BFD_RELOC_TILEGX_IMM16_X1_HWO
BFD_RELOC_TILEGX_IMM16_XO_HW1
BFD_RELOC_TILEGX_IMM16_X1_HW1
BFD_RELOC_TILEGX_IMM16_XO_HW2
BFD_RELOC_TILEGX_IMM16_X1_HW2
BFD_RELOC_TILEGX_IMM16_XO_HW3
BFD_RELOC_TILEGX_IMM16_X1_HW3
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST
BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST
BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST
BFD_RELOC_TILEGX_IMM16_XO_HW2_LAST
BFD_RELOC_TILEGX_IMM16_X1_HW2_LAST
BFD_RELOC_TILEGX_IMM16_XO_HWO_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HWO_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HW1_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HW1_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HW2_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HW2_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HW3_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HW3_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HW2_LAST_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HW2_LAST_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HWO_GOT
```

```
BFD_RELOC_TILEGX_IMM16_X1_HWO_GOT
BFD_RELOC_TILEGX_IMM16_XO_HWO_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HWO_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HW1_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HW1_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HW2_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HW2_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST_GOT
BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_GOT
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_GOT
BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_GOT
BFD_RELOC_TILEGX_IMM16_XO_HW3_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HW3_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HWO_TLS_GD
BFD_RELOC_TILEGX_IMM16_X1_HWO_TLS_GD
BFD_RELOC_TILEGX_IMM16_XO_HWO_TLS_LE
BFD_RELOC_TILEGX_IMM16_X1_HWO_TLS_LE
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST_TLS_LE
BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_TLS_LE
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_TLS_LE
BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_TLS_LE
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST_TLS_GD
BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_TLS_GD
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_TLS_GD
BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_TLS_GD
BFD_RELOC_TILEGX_IMM16_XO_HWO_TLS_IE
BFD_RELOC_TILEGX_IMM16_X1_HWO_TLS_IE
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HW2_LAST_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_X1_HW2_LAST_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST_TLS_IE
BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_TLS_IE
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_TLS_IE
BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_TLS_IE
BFD_RELOC_TILEGX_TLS_DTPMOD64
BFD_RELOC_TILEGX_TLS_DTPOFF64
BFD_RELOC_TILEGX_TLS_TPOFF64
BFD_RELOC_TILEGX_TLS_DTPMOD32
BFD_RELOC_TILEGX_TLS_DTPOFF32
BFD_RELOC_TILEGX_TLS_TP0FF32
BFD_RELOC_TILEGX_TLS_GD_CALL
BFD_RELOC_TILEGX_IMM8_XO_TLS_GD_ADD
BFD_RELOC_TILEGX_IMM8_X1_TLS_GD_ADD
BFD_RELOC_TILEGX_IMM8_YO_TLS_GD_ADD
```

```
BFD_RELOC_TILEGX_IMM8_Y1_TLS_GD_ADD
BFD_RELOC_TILEGX_TLS_IE_LOAD
BFD_RELOC_TILEGX_IMM8_X0_TLS_ADD
BFD_RELOC_TILEGX_IMM8_X1_TLS_ADD
BFD_RELOC_TILEGX_IMM8_Y0_TLS_ADD
BFD_RELOC_TILEGX_IMM8_Y1_TLS_ADD
Tilera_TILEGX_IMM8_Y1_TLS_ADD

Tilera_TILE-Gx_Relocations.
```

BFD_RELOC_EPIPHANY_SIMM8

Adapteva EPIPHANY - 8 bit signed pc-relative displacement

BFD_RELOC_EPIPHANY_SIMM24

Adapteva EPIPHANY - 24 bit signed pc-relative displacement

BFD_RELOC_EPIPHANY_HIGH

Adapteva EPIPHANY - 16 most-significant bits of absolute address

BFD_RELOC_EPIPHANY_LOW

Adapteva EPIPHANY - 16 least-significant bits of absolute address

BFD_RELOC_EPIPHANY_SIMM11

Adapteva EPIPHANY - 11 bit signed number - add/sub immediate

BFD_RELOC_EPIPHANY_IMM11

Adapteva EPIPHANY - 11 bit sign-magnitude number (ld/st displacement)

BFD_RELOC_EPIPHANY_IMM8

Adapteva EPIPHANY - 8 bit immediate for 16 bit mov instruction.

```
typedef enum bfd_reloc_code_real bfd_reloc_code_real_type;
```

2.10.2.2 bfd_reloc_type_lookup

Synopsis

```
reloc_howto_type *bfd_reloc_type_lookup
   (bfd *abfd, bfd_reloc_code_real_type code);
reloc_howto_type *bfd_reloc_name_lookup
   (bfd *abfd, const char *reloc_name);
```

Description

Return a pointer to a howto structure which, when invoked, will perform the relocation code on data from the architecture noted.

2.10.2.3 bfd_default_reloc_type_lookup

Synopsis

```
reloc_howto_type *bfd_default_reloc_type_lookup
  (bfd *abfd, bfd_reloc_code_real_type code);
```

Description

Provides a default relocation lookup routine for any architecture.

2.10.2.4 bfd_get_reloc_code_name

Synopsis

```
const char *bfd_get_reloc_code_name (bfd_reloc_code_real_type code);
```

Description

Provides a printable name for the supplied relocation code. Useful mainly for printing error messages.

2.10.2.5 bfd_generic_relax_section

Synopsis

```
bfd_boolean bfd_generic_relax_section
  (bfd *abfd,
    asection *section,
    struct bfd_link_info *,
    bfd_boolean *);
```

Description

Provides default handling for relaxing for back ends which don't do relaxing.

2.10.2.6 bfd_generic_gc_sections

Synopsis

```
bfd_boolean bfd_generic_gc_sections
   (bfd *, struct bfd_link_info *);
```

Description

Provides default handling for relaxing for back ends which don't do section gc - i.e., does nothing.

2.10.2.7 bfd_generic_lookup_section_flags

Synopsis

```
bfd_boolean bfd_generic_lookup_section_flags
  (struct bfd_link_info *, struct flag_info *, asection *);
```

Description

Provides default handling for section flags lookup – i.e., does nothing. Returns FALSE if the section should be omitted, otherwise TRUE.

2.10.2.8 bfd_generic_merge_sections

Synopsis

```
bfd_boolean bfd_generic_merge_sections
  (bfd *, struct bfd_link_info *);
```

Description

Provides default handling for SEC_MERGE section merging for back ends which don't have SEC_MERGE support - i.e., does nothing.

2.10.2.9 bfd_generic_get_relocated_section_contents

Synopsis

```
bfd_byte *bfd_generic_get_relocated_section_contents
   (bfd *abfd,
    struct bfd_link_info *link_info,
    struct bfd_link_order *link_order,
    bfd_byte *data,
    bfd_boolean relocatable,
    asymbol **symbols);
```

Description

Provides default handling of relocation effort for back ends which can't be bothered to do it efficiently.

2.11 Core files

2.11.1 Core file functions

Description

These are functions pertaining to core files.

2.11.1.1 bfd_core_file_failing_command

Synopsis

```
const char *bfd_core_file_failing_command (bfd *abfd);
```

Description

Return a read-only string explaining which program was running when it failed and produced the core file *abfd*.

2.11.1.2 bfd_core_file_failing_signal

Synopsis

```
int bfd_core_file_failing_signal (bfd *abfd);
```

Description

Returns the signal number which caused the core dump which generated the file the BFD abfd is attached to.

2.11.1.3 bfd_core_file_pid

Synopsis

```
int bfd_core_file_pid (bfd *abfd);
```

Description

Returns the PID of the process the core dump the BFD *abfd* is attached to was generated from.

2.11.1.4 core_file_matches_executable_p

Synopsis

```
bfd_boolean core_file_matches_executable_p
   (bfd *core_bfd, bfd *exec_bfd);
```

Description

Return TRUE if the core file attached to $core_{-}bfd$ was generated by a run of the executable file attached to $exec_{-}bfd$, FALSE otherwise.

2.11.1.5 generic_core_file_matches_executable_p Synopsis

bfd_boolean generic_core_file_matches_executable_p
 (bfd *core_bfd, bfd *exec_bfd);

Description

Return TRUE if the core file attached to *core_bfd* was generated by a run of the executable file attached to *exec_bfd*. The match is based on executable basenames only.

Note: When not able to determine the core file failing command or the executable name, we still return TRUE even though we're not sure that core file and executable match. This is to avoid generating a false warning in situations where we really don't know whether they match or not.

2.12 Targets

Description

Each port of BFD to a different machine requires the creation of a target back end. All the back end provides to the root part of BFD is a structure containing pointers to functions which perform certain low level operations on files. BFD translates the applications's requests through a pointer into calls to the back end routines.

When a file is opened with bfd_openr, its format and target are unknown. BFD uses various mechanisms to determine how to interpret the file. The operations performed are:

- Create a BFD by calling the internal routine _bfd_new_bfd, then call bfd_find_target with the target string supplied to bfd_openr and the new BFD pointer.
- If a null target string was provided to bfd_find_target, look up the environment variable GNUTARGET and use that as the target string.
- If the target string is still NULL, or the target string is default, then use the first item in the target vector as the target type, and set target_defaulted in the BFD to cause bfd_check_format to loop through all the targets. See Section 2.12.1 [bfd_target], page 125. See Section 2.9 [Formats], page 50.
- Otherwise, inspect the elements in the target vector one by one, until a match on target name is found. When found, use it.
- Otherwise return the error bfd_error_invalid_target to bfd_openr.
- bfd_openr attempts to open the file using bfd_open_file, and returns the BFD.

Once the BFD has been opened and the target selected, the file format may be determined. This is done by calling bfd_check_format on the BFD with a suggested format. If target_defaulted has been set, each possible target type is tried to see if it recognizes the specified format. bfd_check_format returns TRUE when the caller guesses right.

2.12.1 bfd_target

Description

This structure contains everything that BFD knows about a target. It includes things like its byte order, name, and which routines to call to do various operations.

Every BFD points to a target structure with its xvec member.

The macros below are used to dispatch to functions through the bfd_target vector. They are used in a number of macros further down in 'bfd.h', and are also used when calling various routines by hand inside the BFD implementation. The arglist argument must be parenthesized; it contains all the arguments to the called function.

They make the documentation (more) unpleasant to read, so if someone wants to fix this and not break the above, please do.

```
#define BFD_SEND(bfd, message, arglist) \
       ((*((bfd)->xvec->message)) arglist)
     #ifdef DEBUG_BFD_SEND
     #undef BFD_SEND
     #define BFD_SEND(bfd, message, arglist) \
       (((bfd) && (bfd)->xvec && (bfd)->xvec->message) ? \
         ((*((bfd)->xvec->message)) arglist) : \
         (bfd_assert (__FILE__,__LINE__), NULL))
     #endif
For operations which index on the BFD format:
     #define BFD_SEND_FMT(bfd, message, arglist) \
       (((bfd)->xvec->message[(int) ((bfd)->format)]) arglist)
     #ifdef DEBUG_BFD_SEND
     #undef BFD_SEND_FMT
     #define BFD_SEND_FMT(bfd, message, arglist) \
       (((bfd) && (bfd)->xvec && (bfd)->xvec->message) ? \
        (((bfd)->xvec->message[(int) ((bfd)->format)]) arglist) : \
        (bfd_assert (__FILE__,__LINE__), NULL))
     #endif
```

This is the structure which defines the type of BFD this is. The xvec member of the struct bfd itself points here. Each module that implements access to a different target under BFD, defines one of these.

FIXME, these names should be rationalised with the names of the entry points which call them. Too bad we can't have one macro to define them both!

```
enum bfd_flavour
{
   bfd_target_unknown_flavour,
   bfd_target_aout_flavour,
   bfd_target_coff_flavour,
   bfd_target_ecoff_flavour,
   bfd_target_xcoff_flavour,
   bfd_target_elf_flavour,
   bfd_target_ieee_flavour,
   bfd_target_ieee_flavour,
   bfd_target_nlm_flavour,
   bfd_target_oasys_flavour,
   bfd_target_tekhex_flavour,
```

```
bfd_target_srec_flavour,
 bfd_target_verilog_flavour,
 bfd_target_ihex_flavour,
 bfd_target_som_flavour,
 bfd_target_os9k_flavour,
 bfd_target_versados_flavour,
 bfd_target_msdos_flavour,
 bfd_target_ovax_flavour,
 bfd_target_evax_flavour,
 bfd_target_mmo_flavour,
 bfd_target_mach_o_flavour,
 bfd_target_pef_flavour,
 bfd_target_pef_xlib_flavour,
 bfd_target_sym_flavour
};
enum bfd_endian { BFD_ENDIAN_BIG, BFD_ENDIAN_LITTLE, BFD_ENDIAN_UNKNOWN };
/* Forward declaration. */
typedef struct bfd_link_info _bfd_link_info;
/* Forward declaration. */
typedef struct flag_info flag_info;
typedef struct bfd_target
 /* Identifies the kind of target, e.g., SunOS4, Ultrix, etc. */
 char *name;
 /* The "flavour" of a back end is a general indication about
   the contents of a file.
 enum bfd_flavour flavour;
 /* The order of bytes within the data area of a file. */
 enum bfd_endian byteorder;
 /* The order of bytes within the header parts of a file. */
 enum bfd_endian header_byteorder;
 /* A mask of all the flags which an executable may have set -
     from the set BFD_NO_FLAGS, HAS_RELOC, ...D_PAGED. */
 flagword object_flags;
 /* A mask of all the flags which a section may have set - from
   the set SEC_NO_FLAGS, SEC_ALLOC, ...SET_NEVER_LOAD. */
 flagword section_flags;
```

```
/* The character normally found at the front of a symbol.
  (if any), perhaps '_'. */
char symbol_leading_char;
/* The pad character for file names within an archive header. */
char ar_pad_char;
/* The maximum number of characters in an archive header. */
unsigned char ar_max_namelen;
/* How well this target matches, used to select between various
   possible targets when more than one target matches. */
unsigned char match_priority;
/* Entries for byte swapping for data. These are different from the
   other entry points, since they don't take a BFD as the first argument. ■
   Certain other handlers could do the same. */
bfd_uint64_t (*bfd_getx64) (const void *);
bfd_int64_t (*bfd_getx_signed_64) (const void *);
               (*bfd_putx64) (bfd_uint64_t, void *);
void
bfd_vma
             (*bfd_getx32) (const void *);
bfd_signed_vma (*bfd_getx_signed_32) (const void *);
              (*bfd_putx32) (bfd_vma, void *);
void
          (*bfd_getx16) (const void *);
bfd_vma
bfd_signed_vma (*bfd_getx_signed_16) (const void *);
               (*bfd_putx16) (bfd_vma, void *);
/* Byte swapping for the headers. */
bfd_uint64_t (*bfd_h_getx64) (const void *);
bfd_int64_t (*bfd_h_getx_signed_64) (const void *);
void
              (*bfd_h_putx64) (bfd_uint64_t, void *);
         (*bfd_h_getx32) (const void *);
bfd_vma
bfd_signed_vma (*bfd_h_getx_signed_32) (const void *);
               (*bfd_h_putx32) (bfd_vma, void *);
bfd_vma
           (*bfd_h_getx16) (const void *);
bfd_signed_vma (*bfd_h_getx_signed_16) (const void *);
               (*bfd_h_putx16) (bfd_vma, void *);
/* Format dependent routines: these are vectors of entry points
   within the target vector structure, one for each format to check. */
 /* Check the format of a file being read. Return a bfd_target * or zero. */
const struct bfd_target *(*_bfd_check_format[bfd_type_end]) (bfd *);
/* Set the format of a file being written. */
bfd_boolean (*_bfd_set_format[bfd_type_end]) (bfd *);
```

```
/* Write cached information into a file being written, at bfd_close. */
bfd_boolean (*_bfd_write_contents[bfd_type_end]) (bfd *);
```

The general target vector. These vectors are initialized using the BFD_JUMP_TABLE macros.

```
/* Generic entry points. */
#define BFD_JUMP_TABLE_GENERIC(NAME) \
 NAME##_close_and_cleanup, \
 NAME##_bfd_free_cached_info, \
 NAME##_new_section_hook, \
 NAME##_get_section_contents, \
 NAME##_get_section_contents_in_window
 /* Called when the BFD is being closed to do any necessary cleanup. */
 bfd_boolean (*_close_and_cleanup) (bfd *);
 /* Ask the BFD to free all cached information. */
 bfd_boolean (*_bfd_free_cached_info) (bfd *);
  /* Called when a new section is created. */
 bfd_boolean (*_new_section_hook) (bfd *, sec_ptr);
 /* Read the contents of a section. */
 bfd_boolean (*_bfd_get_section_contents)
    (bfd *, sec_ptr, void *, file_ptr, bfd_size_type);
 bfd_boolean (*_bfd_get_section_contents_in_window)
    (bfd *, sec_ptr, bfd_window *, file_ptr, bfd_size_type);
  /* Entry points to copy private data. */
#define BFD_JUMP_TABLE_COPY(NAME) \
 NAME##_bfd_copy_private_bfd_data, \
 NAME##_bfd_merge_private_bfd_data, \
 _bfd_generic_init_private_section_data, \
 NAME##_bfd_copy_private_section_data, \
 NAME##_bfd_copy_private_symbol_data, \
 NAME##_bfd_copy_private_header_data, \
 NAME##_bfd_set_private_flags, \
 NAME##_bfd_print_private_bfd_data
 /* Called to copy BFD general private data from one object file
     to another. */
 bfd_boolean (*_bfd_copy_private_bfd_data) (bfd *, bfd *);
  /* Called to merge BFD general private data from one object file
     to a common output file when linking. */
 bfd_boolean (*_bfd_merge_private_bfd_data) (bfd *, bfd *);
  /* Called to initialize BFD private section data from one object file
     to another. */
#define bfd_init_private_section_data(ibfd, isec, obfd, osec, link_info)
```

```
BFD_SEND (obfd, _bfd_init_private_section_data, (ibfd, isec, obfd, osec, link_info))
 bfd_boolean (*_bfd_init_private_section_data)
    (bfd *, sec_ptr, bfd *, sec_ptr, struct bfd_link_info *);
  /* Called to copy BFD private section data from one object file
     to another. */
 bfd_boolean (*_bfd_copy_private_section_data)
    (bfd *, sec_ptr, bfd *, sec_ptr);
  /* Called to copy BFD private symbol data from one symbol
     to another. */
 bfd_boolean (*_bfd_copy_private_symbol_data)
    (bfd *, asymbol *, bfd *, asymbol *);
  /* Called to copy BFD private header data from one object file
    to another. */
 bfd_boolean (*_bfd_copy_private_header_data)
    (bfd *, bfd *);
  /* Called to set private backend flags. */
 bfd_boolean (*_bfd_set_private_flags) (bfd *, flagword);
 /* Called to print private BFD data. */
 bfd_boolean (*_bfd_print_private_bfd_data) (bfd *, void *);
 /* Core file entry points. */
#define BFD_JUMP_TABLE_CORE(NAME) \
 NAME##_core_file_failing_command, \
 NAME##_core_file_failing_signal, \
 NAME##_core_file_matches_executable_p, \
 NAME##_core_file_pid
             (*_core_file_failing_command) (bfd *);
 char *
             (*_core_file_failing_signal) (bfd *);
 bfd_boolean (*_core_file_matches_executable_p) (bfd *, bfd *);
             (*_core_file_pid) (bfd *);
  /* Archive entry points. */
#define BFD_JUMP_TABLE_ARCHIVE(NAME) \
 NAME##_slurp_armap, \
 NAME##_slurp_extended_name_table, \
 NAME##_construct_extended_name_table, \
 NAME##_truncate_arname, \
 NAME##_write_armap, \
 NAME##_read_ar_hdr, \
 NAME##_write_ar_hdr, \
 NAME##_openr_next_archived_file, \
 NAME##_get_elt_at_index, \
 NAME##_generic_stat_arch_elt, \
 NAME##_update_armap_timestamp
```

```
bfd_boolean (*_bfd_slurp_armap) (bfd *);
 bfd_boolean (*_bfd_slurp_extended_name_table) (bfd *);
 bfd_boolean (*_bfd_construct_extended_name_table)
    (bfd *, char **, bfd_size_type *, const char **);
 void
              (*_bfd_truncate_arname) (bfd *, const char *, char *);
 bfd_boolean (*write_armap)
    (bfd *, unsigned int, struct orl *, unsigned int, int);
 void *
             (*_bfd_read_ar_hdr_fn) (bfd *);
 bfd_boolean (*_bfd_write_ar_hdr_fn) (bfd *, bfd *);
             (*openr_next_archived_file) (bfd *, bfd *);
#define bfd_get_elt_at_index(b,i) BFD_SEND (b, _bfd_get_elt_at_index, (b,i))
 bfd *
             (*_bfd_get_elt_at_index) (bfd *, symindex);
 int
             (*_bfd_stat_arch_elt) (bfd *, struct stat *);
 bfd_boolean (*_bfd_update_armap_timestamp) (bfd *);
  /* Entry points used for symbols. */
#define BFD_JUMP_TABLE_SYMBOLS(NAME) \
 NAME##_get_symtab_upper_bound, \
 NAME##_canonicalize_symtab, \
 NAME##_make_empty_symbol, \
 NAME##_print_symbol, \
 NAME##_get_symbol_info, \
 NAME##_bfd_is_local_label_name, \
 NAME##_bfd_is_target_special_symbol, \
 NAME##_get_lineno, \
 NAME##_find_nearest_line, \
 _bfd_generic_find_nearest_line_discriminator, \
  _bfd_generic_find_line, \
 NAME##_find_inliner_info, \
 NAME##_bfd_make_debug_symbol, \
 NAME##_read_minisymbols, \
 NAME##_minisymbol_to_symbol
 long
              (*_bfd_get_symtab_upper_bound) (bfd *);
              (*_bfd_canonicalize_symtab)
    (bfd *, struct bfd_symbol **);
 struct bfd_symbol *
              (*_bfd_make_empty_symbol) (bfd *);
              (*_bfd_print_symbol)
 void
    (bfd *, void *, struct bfd_symbol *, bfd_print_symbol_type);
#define bfd_print_symbol(b,p,s,e) BFD_SEND (b, _bfd_print_symbol, (b,p,s,e))
              (*_bfd_get_symbol_info)
    (bfd *, struct bfd_symbol *, symbol_info *);
#define bfd_get_symbol_info(b,p,e) BFD_SEND (b, _bfd_get_symbol_info, (b,p,e))
 bfd_boolean (*_bfd_is_local_label_name) (bfd *, const char *);
 bfd_boolean (*_bfd_is_target_special_symbol) (bfd *, asymbol *);
             (*_get_lineno) (bfd *, struct bfd_symbol *);
 alent *
```

```
bfd_boolean (*_bfd_find_nearest_line)
    (bfd *, struct bfd_section *, struct bfd_symbol **, bfd_vma,
     const char **, const char **, unsigned int *);
 bfd_boolean (*_bfd_find_nearest_line_discriminator)
    (bfd *, struct bfd_section *, struct bfd_symbol **, bfd_vma,
     const char **, const char **, unsigned int *, unsigned int *);
 bfd_boolean (*_bfd_find_line)
    (bfd *, struct bfd_symbol **, struct bfd_symbol *,
     const char **, unsigned int *);
 bfd_boolean (*_bfd_find_inliner_info)
    (bfd *, const char **, const char **, unsigned int *);
 /* Back-door to allow format-aware applications to create debug symbols
   while using BFD for everything else. Currently used by the assembler
   when creating COFF files. */
 asymbol * (*_bfd_make_debug_symbol)
    (bfd *, void *, unsigned long size);
#define bfd_read_minisymbols(b, d, m, s) \
 BFD_SEND (b, _read_minisymbols, (b, d, m, s))
              (*_read_minisymbols)
 long
    (bfd *, bfd_boolean, void **, unsigned int *);
#define bfd_minisymbol_to_symbol(b, d, m, f) \
 BFD_SEND (b, _minisymbol_to_symbol, (b, d, m, f))
 asymbol * (*_minisymbol_to_symbol)
    (bfd *, bfd_boolean, const void *, asymbol *);
  /* Routines for relocs. */
#define BFD_JUMP_TABLE_RELOCS(NAME) \
 NAME##_get_reloc_upper_bound, \
 NAME##_canonicalize_reloc, \
 NAME##_bfd_reloc_type_lookup, \
 NAME##_bfd_reloc_name_lookup
 long
              (*_get_reloc_upper_bound) (bfd *, sec_ptr);
 long
              (*_bfd_canonicalize_reloc)
    (bfd *, sec_ptr, arelent **, struct bfd_symbol **);
 /* See documentation on reloc types. */
 reloc_howto_type *
              (*reloc_type_lookup) (bfd *, bfd_reloc_code_real_type);
 reloc_howto_type *
              (*reloc_name_lookup) (bfd *, const char *);
  /* Routines used when writing an object file. */
#define BFD_JUMP_TABLE_WRITE(NAME) \
 NAME##_set_arch_mach, \
 NAME##_set_section_contents
```

```
bfd_boolean (*_bfd_set_arch_mach)
    (bfd *, enum bfd_architecture, unsigned long);
 bfd_boolean (*_bfd_set_section_contents)
    (bfd *, sec_ptr, const void *, file_ptr, bfd_size_type);
  /* Routines used by the linker. */
#define BFD_JUMP_TABLE_LINK(NAME) \
 NAME##_sizeof_headers, \
 NAME##_bfd_get_relocated_section_contents, \
 NAME##_bfd_relax_section, \
 NAME##_bfd_link_hash_table_create, \
 NAME##_bfd_link_hash_table_free, \
 NAME##_bfd_link_add_symbols, \
 NAME##_bfd_link_just_syms, \
 NAME##_bfd_copy_link_hash_symbol_type, \
 NAME##_bfd_final_link, \
 NAME##_bfd_link_split_section, \
 NAME##_bfd_gc_sections, \
 NAME##_bfd_lookup_section_flags, \
 NAME##_bfd_merge_sections, \
 NAME##_bfd_is_group_section, \
 NAME##_bfd_discard_group, \
 NAME##_section_already_linked, \
 NAME##_bfd_define_common_symbol
              (*_bfd_sizeof_headers) (bfd *, struct bfd_link_info *);
 int
 bfd_byte * (*_bfd_get_relocated_section_contents)
    (bfd *, struct bfd_link_info *, struct bfd_link_order *,
    bfd_byte *, bfd_boolean, struct bfd_symbol **);
 bfd_boolean (*_bfd_relax_section)
    (bfd *, struct bfd_section *, struct bfd_link_info *, bfd_boolean *);
  /* Create a hash table for the linker. Different backends store
     different information in this table. */
  struct bfd_link_hash_table *
             (*_bfd_link_hash_table_create) (bfd *);
 /* Release the memory associated with the linker hash table. */
 void
              (*_bfd_link_hash_table_free) (struct bfd_link_hash_table *);
  /* Add symbols from this object file into the hash table. */
 bfd_boolean (*_bfd_link_add_symbols) (bfd *, struct bfd_link_info *);
 /* Indicate that we are only retrieving symbol values from this section. */■
 void
             (*_bfd_link_just_syms) (asection *, struct bfd_link_info *);
```

```
/* Copy the symbol type of a linker hash table entry. */
#define bfd_copy_link_hash_symbol_type(b, t, f) \
 BFD_SEND (b, _bfd_copy_link_hash_symbol_type, (b, t, f))
 void (*_bfd_copy_link_hash_symbol_type)
    (bfd *, struct bfd_link_hash_entry *, struct bfd_link_hash_entry *);
 /* Do a link based on the link_order structures attached to each
    section of the BFD. */
 bfd_boolean (*_bfd_final_link) (bfd *, struct bfd_link_info *);
 /* Should this section be split up into smaller pieces during linking. */■
 bfd_boolean (*_bfd_link_split_section) (bfd *, struct bfd_section *);
 /* Remove sections that are not referenced from the output. */
 bfd_boolean (*_bfd_gc_sections) (bfd *, struct bfd_link_info *);
 /* Sets the bitmask of allowed and disallowed section flags. */
 bfd_boolean (*_bfd_lookup_section_flags) (struct bfd_link_info *,
                                            struct flag_info *,
                                            asection *);
 /* Attempt to merge SEC_MERGE sections. */
 bfd_boolean (*_bfd_merge_sections) (bfd *, struct bfd_link_info *);
 /* Is this section a member of a group? */
 bfd_boolean (*_bfd_is_group_section) (bfd *, const struct bfd_section *);
 /* Discard members of a group. */
 bfd_boolean (*_bfd_discard_group) (bfd *, struct bfd_section *);
 /* Check if SEC has been already linked during a reloceatable or
    final link. */
 bfd_boolean (*_section_already_linked) (bfd *, asection *,
                                          struct bfd_link_info *);
  /* Define a common symbol. */
 bfd_boolean (*_bfd_define_common_symbol) (bfd *, struct bfd_link_info *,
                                            struct bfd_link_hash_entry *);
  /* Routines to handle dynamic symbols and relocs. */
#define BFD_JUMP_TABLE_DYNAMIC(NAME) \
 NAME##_get_dynamic_symtab_upper_bound, \
 NAME##_canonicalize_dynamic_symtab, \
 NAME##_get_synthetic_symtab, \
 NAME##_get_dynamic_reloc_upper_bound, \
 NAME##_canonicalize_dynamic_reloc
```

A pointer to an alternative bfd_target in case the current one is not satisfactory. This can happen when the target cpu supports both big and little endian code, and target chosen by the linker has the wrong endianness. The function open_output() in ld/ldlang.c uses this field to find an alternative output format that is suitable.

```
/* Opposite endian version of this target. */
const struct bfd_target * alternative_target;

/* Data for use by back-end routines, which isn't
    generic enough to belong in this structure. */
const void *backend_data;
} bfd_target;
```

2.12.1.1 bfd_set_default_target

Synopsis

```
bfd_boolean bfd_set_default_target (const char *name);
```

Description

Set the default target vector to use when recognizing a BFD. This takes the name of the target, which may be a BFD target name or a configuration triplet.

2.12.1.2 bfd_find_target

Synopsis

```
const bfd_target *bfd_find_target (const char *target_name, bfd *abfd);
```

Description

Return a pointer to the transfer vector for the object target named target_name. If target_name is NULL, choose the one in the environment variable GNUTARGET; if that is null or not defined, then choose the first entry in the target list. Passing in the string "default" or setting the environment variable to "default" will cause the first entry in the target list to be returned, and "target_defaulted" will be set in the BFD if abfd isn't NULL. This causes

bfd_check_format to loop over all the targets to find the one that matches the file being read.

2.12.1.3 bfd_get_target_info

Synopsis

```
const bfd_target *bfd_get_target_info (const char *target_name,
    bfd *abfd,
    bfd_boolean *is_bigendian,
    int *underscoring,
    const char **def_target_arch);
```

Description

Return a pointer to the transfer vector for the object target named <code>target_name</code>. If <code>target_name</code> is <code>NULL</code>, choose the one in the environment variable <code>GNUTARGET</code>; if that is null or not defined, then choose the first entry in the target list. Passing in the string "default" or setting the environment variable to "default" will cause the first entry in the target list to be returned, and "target_defaulted" will be set in the BFD if <code>abfd</code> isn't <code>NULL</code>. This causes <code>bfd_check_format</code> to loop over all the targets to find the one that matches the file being read. If <code>is_bigendian</code> is not <code>NULL</code>, then set this value to target's endian mode. True for big-endian, <code>FALSE</code> for little-endian or for invalid target. If <code>underscoring</code> is not <code>NULL</code>, then set this value to target's underscoring mode. Zero for none-underscoring, -1 for invalid target, else the value of target vector's symbol underscoring. If <code>def_target_arch</code> is not <code>NULL</code>, then set it to the architecture string specified by the target_name.

2.12.1.4 bfd_target_list

Synopsis

```
const char ** bfd_target_list (void);
```

Description

Return a freshly malloced NULL-terminated vector of the names of all the valid BFD targets. Do not modify the names.

2.12.1.5 bfd_seach_for_target

Synopsis

```
const bfd_target *bfd_search_for_target
  (int (*search_func) (const bfd_target *, void *),
    void *);
```

Description

Return a pointer to the first transfer vector in the list of transfer vectors maintained by BFD that produces a non-zero result when passed to the function search_func. The parameter data is passed, unexamined, to the search function.

2.13 Architectures

BFD keeps one atom in a BFD describing the architecture of the data attached to the BFD: a pointer to a bfd_arch_info_type.

Pointers to structures can be requested independently of a BFD so that an architecture's information can be interrogated without access to an open BFD.

The architecture information is provided by each architecture package. The set of default architectures is selected by the macro SELECT_ARCHITECTURES. This is normally set up in the 'config/target.mt' file of your choice. If the name is not defined, then all the architectures supported are included.

When BFD starts up, all the architectures are called with an initialize method. It is up to the architecture back end to insert as many items into the list of architectures as it wants to; generally this would be one for each machine and one for the default case (an item with a machine field of 0).

BFD's idea of an architecture is implemented in 'archures.c'.

2.13.1 bfd_architecture

Description

This enum gives the object file's CPU architecture, in a global sense—i.e., what processor family does it belong to? Another field indicates which processor within the family is in use. The machine gives a number which distinguishes different versions of the architecture, containing, for example, 2 and 3 for Intel i960 KA and i960 KB, and 68020 and 68030 for Motorola 68020 and 68030.

```
enum bfd_architecture
  bfd_arch_unknown,
                      /* File arch not known.
                      /* Arch known, not one of these.
 bfd_arch_obscure,
                      /* Motorola 68xxx */
  bfd_arch_m68k,
#define bfd_mach_m68000 1
#define bfd_mach_m68008 2
#define bfd_mach_m68010 3
#define bfd_mach_m68020 4
#define bfd_mach_m68030 5
#define bfd_mach_m68040 6
#define bfd_mach_m68060 7
#define bfd_mach_cpu32
#define bfd_mach_fido
#define bfd_mach_mcf_isa_a_nodiv 10
#define bfd_mach_mcf_isa_a 11
#define bfd_mach_mcf_isa_a_mac 12
#define bfd_mach_mcf_isa_a_emac 13
#define bfd_mach_mcf_isa_aplus 14
#define bfd_mach_mcf_isa_aplus_mac 15
#define bfd_mach_mcf_isa_aplus_emac 16
#define bfd_mach_mcf_isa_b_nousp 17
#define bfd_mach_mcf_isa_b_nousp_mac 18
#define bfd_mach_mcf_isa_b_nousp_emac 19
#define bfd_mach_mcf_isa_b 20
#define bfd_mach_mcf_isa_b_mac 21
#define bfd_mach_mcf_isa_b_emac 22
#define bfd_mach_mcf_isa_b_float 23
#define bfd_mach_mcf_isa_b_float_mac 24
```

```
#define bfd_mach_mcf_isa_b_float_emac 25
#define bfd_mach_mcf_isa_c 26
#define bfd_mach_mcf_isa_c_mac 27
#define bfd_mach_mcf_isa_c_emac 28
#define bfd_mach_mcf_isa_c_nodiv 29
#define bfd_mach_mcf_isa_c_nodiv_mac 30
#define bfd_mach_mcf_isa_c_nodiv_emac 31
 bfd_arch_vax,
                     /* DEC Vax */
 bfd_arch_i960,
                     /* Intel 960 */
    /* The order of the following is important.
       lower number indicates a machine type that
       only accepts a subset of the instructions
       available to machines with higher numbers.
       The exception is the "ca", which is
       incompatible with all other machines except
       "core". */
#define bfd_mach_i960_core
                                1
#define bfd_mach_i960_ka_sa
                                2
#define bfd_mach_i960_kb_sb
                                3
#define bfd_mach_i960_mc
                                4
                                5
#define bfd_mach_i960_xa
#define bfd_mach_i960_ca
                                6
#define bfd_mach_i960_jx
                                7
#define bfd_mach_i960_hx
                                8
 bfd_arch_or32,
                   /* OpenRISC 32 */
 bfd_arch_sparc,
                     /* SPARC */
#define bfd_mach_sparc
/* The difference between v8plus and v9 is that v9 is a true 64 bit env. */■
#define bfd_mach_sparc_sparclet
#define bfd_mach_sparc_sparclite
                                       3
#define bfd_mach_sparc_v8plus
#define bfd_mach_sparc_v8plusa
                                       5 /* with ultrasparc add'ns.
#define bfd_mach_sparc_sparclite_le
                                       7
#define bfd_mach_sparc_v9
#define bfd_mach_sparc_v9a
                                       8 /* with ultrasparc add'ns. */
#define bfd_mach_sparc_v8plusb
                                       9 /* with cheetah add'ns. */
#define bfd_mach_sparc_v9b
                                       10 /* with cheetah add'ns. */
/* Nonzero if MACH has the v9 instruction set. */
#define bfd_mach_sparc_v9_p(mach) \
  ((mach) >= bfd_mach_sparc_v8plus && (mach) <= bfd_mach_sparc_v9b \</pre>
   && (mach) != bfd_mach_sparc_sparclite_le)
/* Nonzero if MACH is a 64 bit sparc architecture. */
#define bfd_mach_sparc_64bit_p(mach) \
  ((mach) >= bfd_mach_sparc_v9 && (mach) != bfd_mach_sparc_v8plusb)
```

```
/* PowerPC SPU */
  bfd_arch_spu,
#define bfd_mach_spu
                                256
  bfd_arch_mips,
                      /* MIPS Rxxxx */
#define bfd_mach_mips3000
                                        3000
#define bfd_mach_mips3900
                                        3900
#define bfd_mach_mips4000
                                        4000
#define bfd_mach_mips4010
                                        4010
#define bfd_mach_mips4100
                                        4100
#define bfd_mach_mips4111
                                        4111
#define bfd_mach_mips4120
                                        4120
#define bfd_mach_mips4300
                                        4300
                                        4400
#define bfd_mach_mips4400
#define bfd_mach_mips4600
                                        4600
#define bfd_mach_mips4650
                                        4650
                                        5000
#define bfd_mach_mips5000
#define bfd_mach_mips5400
                                        5400
#define bfd_mach_mips5500
                                        5500
#define bfd_mach_mips5900
                                        5900
#define bfd_mach_mips6000
                                        6000
#define bfd_mach_mips7000
                                        7000
#define bfd_mach_mips8000
                                        8000
#define bfd_mach_mips9000
                                        9000
#define bfd_mach_mips10000
                                        10000
#define bfd_mach_mips12000
                                        12000
#define bfd_mach_mips14000
                                        14000
#define bfd_mach_mips16000
                                        16000
#define bfd_mach_mips16
                                        16
#define bfd_mach_mips5
                                        5
#define bfd_mach_mips_loongson_2e
                                        3001
#define bfd_mach_mips_loongson_2f
                                        3002
#define bfd_mach_mips_loongson_3a
                                        3003
#define bfd_mach_mips_sb1
                                        12310201 /* octal 'SB', 01 */
#define bfd_mach_mips_octeon
                                        6501
#define bfd_mach_mips_octeonp
                                        6601
#define bfd_mach_mips_octeon2
                                        6502
#define bfd_mach_mips_xlr
                                        887682
                                                  /* decimal 'XLR'
#define bfd_mach_mipsisa32
                                        32
#define bfd_mach_mipsisa32r2
                                        33
#define bfd_mach_mipsisa32r3
                                        34
#define bfd_mach_mipsisa32r5
                                        36
#define bfd_mach_mipsisa32r6
                                        37
#define bfd_mach_mipsisa64
                                        64
#define bfd_mach_mipsisa64r2
                                        65
#define bfd_mach_mipsisa64r3
                                        66
#define bfd_mach_mipsisa64r5
                                        68
#define bfd_mach_mipsisa64r6
                                        69
#define bfd_mach_mips_micromips
                                        96
```

```
bfd_arch_i386,
                      /* Intel 386 */
                                       (1 << 0)
#define bfd_mach_i386_intel_syntax
#define bfd_mach_i386_i8086
                                       (1 << 1)
#define bfd_mach_i386_i386
                                       (1 << 2)
                                       (1 << 3)
#define bfd_mach_x86_64
#define bfd_mach_x64_32
                                       (1 << 4)
#define bfd_mach_i386_i386_intel_syntax (bfd_mach_i386_i386 | bfd_mach_i386_intel_synt
#define bfd_mach_x86_64_intel_syntax
                                       (bfd_mach_x86_64 | bfd_mach_i386_intel_syntax)
#define bfd_mach_x64_32_intel_syntax
                                       (bfd_mach_x64_32 | bfd_mach_i386_intel_syntax)
  bfd_arch_l1om,
                  /* Intel L10M */
#define bfd_mach_l1om
                                       (1 << 5)
                                       (bfd_mach_l1om | bfd_mach_i386_intel_syntax)
#define bfd_mach_l1om_intel_syntax
  bfd_arch_k1om, /* Intel K10M */
#define bfd_mach_k1om
                                       (1 << 6)
#define bfd_mach_k1om_intel_syntax
                                       (bfd_mach_k1om | bfd_mach_i386_intel_syntax)
#define bfd_mach_i386_nacl
                                       (1 << 7)
                                       (bfd_mach_i386_i386 | bfd_mach_i386_nacl)
#define bfd_mach_i386_i386_nacl
#define bfd_mach_x86_64_nacl
                                       (bfd_mach_x86_64 | bfd_mach_i386_nacl)
#define bfd_mach_x64_32_nacl
                                       (bfd_mach_x64_32 | bfd_mach_i386_nacl)
  bfd_arch_we32k,
                      /* AT&T WE32xxx */
  bfd_arch_tahoe,
                      /* CCI/Harris Tahoe */
 bfd_arch_i860,
                      /* Intel 860 */
  bfd_arch_i370,
                      /* IBM 360/370 Mainframes */
                      /* IBM ROMP PC/RT */
 bfd_arch_romp,
                      /* Convex */
  bfd_arch_convex,
                      /* Motorola 88xxx */
  bfd_arch_m88k,
                      /* Motorola 98xxx */
  bfd_arch_m98k,
                      /* Pyramid Technology */
  bfd_arch_pyramid,
                      /* Renesas H8/300 (formerly Hitachi H8/300) */
  bfd_arch_h8300,
#define bfd_mach_h8300
#define bfd_mach_h8300h
                          2
                          3
#define bfd_mach_h8300s
#define bfd_mach_h8300hn 4
#define bfd_mach_h8300sn
#define bfd_mach_h8300sx 6
#define bfd_mach_h8300sxn 7
  bfd_arch_pdp11,
                      /* DEC PDP-11 */
  bfd_arch_plugin,
  bfd_arch_powerpc,
                      /* PowerPC */
#define bfd_mach_ppc
                               32
#define bfd_mach_ppc64
                               64
#define bfd_mach_ppc_403
                               403
#define bfd_mach_ppc_403gc
                               4030
#define bfd_mach_ppc_405
                               405
#define bfd_mach_ppc_505
                               505
#define bfd_mach_ppc_601
                               601
#define bfd_mach_ppc_602
                               602
```

```
#define bfd_mach_ppc_603
                                603
#define bfd_mach_ppc_ec603e
                                6031
#define bfd_mach_ppc_604
                                604
#define bfd_mach_ppc_620
                                620
#define bfd_mach_ppc_630
                                630
#define bfd_mach_ppc_750
                                750
#define bfd_mach_ppc_860
                                860
#define bfd_mach_ppc_a35
                                35
#define bfd_mach_ppc_rs64ii
                                642
#define bfd_mach_ppc_rs64iii
                                643
#define bfd_mach_ppc_7400
                                7400
#define bfd_mach_ppc_e500
                                500
#define bfd_mach_ppc_e500mc
                                5001
#define bfd_mach_ppc_e500mc64
                                5005
#define bfd_mach_ppc_e5500
                                5006
#define bfd_mach_ppc_e6500
                                5007
#define bfd_mach_ppc_titan
                                83
#define bfd_mach_ppc_vle
                                84
  bfd_arch_rs6000,
                      /* IBM RS/6000 */
#define bfd_mach_rs6k
                                6000
#define bfd_mach_rs6k_rs1
                                6001
#define bfd_mach_rs6k_rsc
                                6003
#define bfd_mach_rs6k_rs2
                                6002
                      /* HP PA RISC */
  bfd_arch_hppa,
#define bfd_mach_hppa10
                                10
#define bfd_mach_hppa11
                                11
#define bfd_mach_hppa20
                                20
#define bfd_mach_hppa20w
  bfd_arch_d10v,
                      /* Mitsubishi D10V */
#define bfd_mach_d10v
                                1
#define bfd_mach_d10v_ts2
                                2
#define bfd_mach_d10v_ts3
                                3
  bfd_arch_d30v,
                      /* Mitsubishi D30V */
  bfd_arch_dlx,
                      /* DLX */
  bfd_arch_m68hc11,
                      /* Motorola 68HC11 */
  bfd_arch_m68hc12,
                      /* Motorola 68HC12 */
#define bfd_mach_m6812_default 0
#define bfd_mach_m6812
                                1
                                2
#define bfd_mach_m6812s
  bfd_arch_m9s12x,
                     /* Freescale S12X */
                     /* Freescale XGATE */
  bfd_arch_m9s12xg,
                      /* Zilog Z8000 */
  bfd_arch_z8k,
#define bfd_mach_z8001
                                1
#define bfd_mach_z8002
                      /* Renesas H8/500 (formerly Hitachi H8/500) */
  bfd_arch_h8500,
  bfd_arch_sh,
                      /* Renesas / SuperH SH (formerly Hitachi SH) */
#define bfd_mach_sh
                                1
```

```
#define bfd_mach_sh2
                            0x20
#define bfd_mach_sh_dsp
                            0x2d
#define bfd_mach_sh2a
                            0x2a
#define bfd_mach_sh2a_nofpu 0x2b
#define bfd_mach_sh2a_nofpu_or_sh4_nommu_nofpu 0x2a1
#define bfd_mach_sh2a_nofpu_or_sh3_nommu 0x2a2
#define bfd_mach_sh2a_or_sh4 0x2a3
#define bfd_mach_sh2a_or_sh3e 0x2a4
#define bfd_mach_sh2e
                            0x2e
#define bfd_mach_sh3
                            0x30
#define bfd_mach_sh3_nommu
                            0x31
#define bfd_mach_sh3_dsp
                            0x3d
#define bfd_mach_sh3e
                            0x3e
#define bfd_mach_sh4
                            0x40
#define bfd_mach_sh4_nofpu 0x41
#define bfd_mach_sh4_nommu_nofpu
                                 0x42
#define bfd_mach_sh4a
                            0x4a
#define bfd_mach_sh4a_nofpu 0x4b
#define bfd_mach_sh4al_dsp 0x4d
#define bfd_mach_sh5
                            0x50
  bfd_arch_alpha,
                      /* Dec Alpha */
#define bfd_mach_alpha_ev4 0x10
#define bfd_mach_alpha_ev5
                            0x20
#define bfd_mach_alpha_ev6 0x30
                      /* Advanced Risc Machines ARM.
  bfd_arch_arm,
#define bfd_mach_arm_unknown
#define bfd_mach_arm_2
                               1
#define bfd_mach_arm_2a
                               2
                               3
#define bfd_mach_arm_3
                               4
#define bfd_mach_arm_3M
#define bfd_mach_arm_4
                               5
#define bfd_mach_arm_4T
                               6
#define bfd_mach_arm_5
                               7
#define bfd_mach_arm_5T
                               8
#define bfd_mach_arm_5TE
                               9
#define bfd_mach_arm_XScale
                               10
#define bfd_mach_arm_ep9312
                               11
#define bfd_mach_arm_iWMMXt
                               12
#define bfd_mach_arm_iWMMXt2
                               13
                    /* National Semiconductors ns32000 */
  bfd_arch_ns32k,
                      /* WDC 65816 */
  bfd_arch_w65,
                      /* Texas Instruments TMS320C30 */
  bfd_arch_tic30,
                    /* Texas Instruments TMS320C3X/4X */
  bfd_arch_tic4x,
                               30
#define bfd_mach_tic3x
                               40
#define bfd_mach_tic4x
  bfd_arch_tic54x,
                     /* Texas Instruments TMS320C54X */
                    /* Texas Instruments TMS320C6X */
  bfd_arch_tic6x,
```

```
bfd_arch_tic80,
                      /* TI TMS320c80 (MVP) */
  bfd_arch_v850,
                      /* NEC V850 */
  bfd_arch_v850_rh850,/* NEC V850 (using RH850 ABI) */
#define bfd_mach_v850
                               1
#define bfd_mach_v850e
                               'E.'
                               11
#define bfd_mach_v850e1
#define bfd_mach_v850e2
                               0x4532
#define bfd_mach_v850e2v3
                               0x45325633
#define bfd_mach_v850e3v5
                               0x45335635 /* ('E'|'3'|'V'|'5') */
                  /* ARC Cores */
  bfd_arch_arc,
#define bfd_mach_arc_5
                               5
#define bfd_mach_arc_6
                               6
#define bfd_mach_arc_7
                               7
#define bfd_mach_arc_8
                               8
bfd_arch_m32c,
                 /* Renesas M16C/M32C. */
#define bfd_mach_m16c
                             0x75
#define bfd_mach_m32c
                             0x78
  bfd_arch_m32r,
                      /* Renesas M32R (formerly Mitsubishi M32R/D) */
#define bfd_mach_m32r
                               1 /* For backwards compatibility. */
                               , <sub>x</sub> ,
#define bfd_mach_m32rx
#define bfd_mach_m32r2
                               ,2,
  bfd_arch_mn10200, /* Matsushita MN10200 */
                      /* Matsushita MN10300 */
  bfd_arch_mn10300,
#define bfd_mach_mn10300
                                       300
#define bfd_mach_am33
                               330
#define bfd_mach_am33_2
                               332
  bfd_arch_fr30,
#define bfd_mach_fr30
                               0x46523330
 bfd_arch_frv,
#define bfd_mach_frv
                               1
#define bfd_mach_frvsimple
                               2
#define bfd_mach_fr300
                               300
#define bfd_mach_fr400
                               400
#define bfd_mach_fr450
                               450
#define bfd_mach_frvtomcat
                               499
                                       /* fr500 prototype */
#define bfd_mach_fr500
                               500
#define bfd_mach_fr550
                               550
  bfd_arch_moxie,
                        /* The moxie processor */
#define bfd_mach_moxie
  bfd_arch_mcore,
  bfd_arch_mep,
#define bfd_mach_mep
#define bfd_mach_mep_h1
                               0x6831
#define bfd_mach_mep_c5
                               0x6335
  bfd_arch_metag,
#define bfd_mach_metag
  bfd_arch_ia64,
                      /* HP/Intel ia64 */
```

```
#define bfd_mach_ia64_elf64
                               64
#define bfd_mach_ia64_elf32
                               32
  bfd_arch_ip2k,
                      /* Ubicom IP2K microcontrollers. */
#define bfd_mach_ip2022
                               1
#define bfd_mach_ip2022ext
bfd_arch_iq2000,
                      /* Vitesse IQ2000. */
#define bfd_mach_iq2000
                               1
#define bfd_mach_iq10
                               2
  bfd_arch_epiphany,
                       /* Adapteva EPIPHANY */
#define bfd_mach_epiphany16
                               1
#define bfd_mach_epiphany32
  bfd_arch_mt,
#define bfd_mach_ms1
                               1
                               2
#define bfd_mach_mrisc2
                               3
#define bfd_mach_ms2
 bfd_arch_pj,
                      /* Atmel AVR microcontrollers. */
  bfd_arch_avr,
#define bfd_mach_avr1
                               1
#define bfd_mach_avr2
                               2
#define bfd_mach_avr25
                               25
#define bfd_mach_avr3
                               3
#define bfd_mach_avr31
                               31
#define bfd_mach_avr35
                               35
#define bfd_mach_avr4
                               4
                               5
#define bfd_mach_avr5
#define bfd_mach_avr51
                               51
#define bfd_mach_avr6
#define bfd_mach_avrxmega1 101
#define bfd_mach_avrxmega2 102
#define bfd_mach_avrxmega3 103
#define bfd_mach_avrxmega4 104
#define bfd_mach_avrxmega5 105
#define bfd_mach_avrxmega6 106
#define bfd_mach_avrxmega7 107
  bfd_arch_bfin,
                       /* ADI Blackfin */
#define bfd_mach_bfin
  bfd_arch_cr16,
                      /* National Semiconductor CompactRISC (ie CR16). */
#define bfd_mach_cr16
  bfd_arch_cr16c,
                        /* National Semiconductor CompactRISC. */
#define bfd_mach_cr16c
                      /* National Semiconductor CRX. */
  bfd_arch_crx,
#define bfd_mach_crx
  bfd_arch_cris,
                      /* Axis CRIS */
#define bfd_mach_cris_v0_v10
                               255
#define bfd_mach_cris_v32
                               32
#define bfd_mach_cris_v10_v32 1032
  bfd_arch_r178,
```

```
#define bfd_mach_rl78 0x75
                      /* Renesas RX. */
  bfd_arch_rx,
#define bfd_mach_rx
                               0x75
  bfd_arch_s390,
                      /* IBM s390 */
#define bfd_mach_s390_31
#define bfd_mach_s390_64
                               64
  bfd_arch_score,
                      /* Sunplus score */
#define bfd_mach_score3
                                 3
#define bfd_mach_score7
                                 7
  bfd_arch_openrisc, /* OpenRISC */
  bfd_arch_mmix,
                      /* Donald Knuth's educational processor. */
  bfd_arch_xstormy16,
#define bfd_mach_xstormy16
                               1
                      /* Texas Instruments MSP430 architecture. */
  bfd_arch_msp430,
#define bfd_mach_msp11
                                 11
#define bfd_mach_msp110
                                 110
#define bfd_mach_msp12
                                 12
#define bfd_mach_msp13
                                 13
#define bfd_mach_msp14
                                 14
#define bfd_mach_msp15
                                 15
#define bfd_mach_msp16
                                 16
#define bfd_mach_msp20
                                 20
#define bfd_mach_msp21
                                 21
#define bfd_mach_msp22
                                 22
#define bfd_mach_msp23
                                 23
#define bfd_mach_msp24
                                 24
#define bfd_mach_msp26
                                 26
#define bfd_mach_msp31
                                 31
#define bfd_mach_msp32
                                 32
#define bfd_mach_msp33
                                 33
#define bfd_mach_msp41
                                 41
#define bfd_mach_msp42
                                 42
#define bfd_mach_msp43
                                 43
#define bfd_mach_msp44
                                 44
#define bfd_mach_msp430x
                                 45
#define bfd_mach_msp46
                                 46
#define bfd_mach_msp47
                                 47
#define bfd_mach_msp54
                                 54
  bfd_arch_xc16x,
                      /* Infineon's XC16X Series.
#define bfd_mach_xc16x
                               1
                               2
#define bfd_mach_xc16xl
#define bfd_mach_xc16xs
                               3
  bfd_arch_xgate, /* Freescale XGATE */
#define bfd_mach_xgate
  bfd_arch_xtensa,
                      /* Tensilica's Xtensa cores. */
#define bfd_mach_xtensa
  bfd_arch_z80,
```

```
#define bfd_mach_z80strict 1 /* No undocumented opcodes. */
#define bfd_mach_z80
#define bfd_mach_z80full
                               3 /* With ixl, ixh, iyl, and iyh.
                              7 /* All undocumented instructions. */
#define bfd_mach_r800
                               11 /* R800: successor with multiplication. */
  bfd_arch_lm32,
                     /* Lattice Mico32 */
#define bfd_mach_lm32
                           1
  bfd_arch_microblaze,/* Xilinx MicroBlaze. */
 bfd_arch_tilepro, /* Tilera TILEPro */
 bfd_arch_tilegx, /* Tilera TILE-Gx */
#define bfd_mach_tilepro
#define bfd_mach_tilegx
#define bfd_mach_tilegx32 2
  bfd_arch_aarch64, /* AArch64 */
#define bfd_mach_aarch64 0
#define bfd_mach_aarch64_ilp32 32
  bfd_arch_nios2,
#define bfd_mach_nios2 0
  bfd_arch_last
  };
```

2.13.2 bfd_arch_info

Description

This structure contains information on architectures for use within BFD.

```
typedef struct bfd_arch_info
 int bits_per_word;
 int bits_per_address;
 int bits_per_byte;
 enum bfd_architecture arch;
 unsigned long mach;
 const char *arch_name;
 const char *printable_name;
 unsigned int section_align_power;
  /* TRUE if this is the default machine for the architecture.
     The default arch should be the first entry for an arch so that
     all the entries for that arch can be accessed via next. */
 bfd_boolean the_default;
  const struct bfd_arch_info * (*compatible)
    (const struct bfd_arch_info *a, const struct bfd_arch_info *b);
 bfd_boolean (*scan) (const struct bfd_arch_info *, const char *);
  /* Allocate via bfd_malloc and return a fill buffer of size COUNT.
     IS_BIGENDIAN is TRUE, the order of bytes is big endian. If CODE is
     TRUE, the buffer contains code. */
```

```
void *(*fill) (bfd_size_type count, bfd_boolean is_bigendian,
                 bfd_boolean code);
  const struct bfd_arch_info *next;
bfd_arch_info_type;
```

2.13.2.1 bfd_printable_name

Synopsis

```
const char *bfd_printable_name (bfd *abfd);
```

Description

}

Return a printable string representing the architecture and machine from the pointer to the architecture info structure.

2.13.2.2 bfd scan arch

Synopsis

```
const bfd_arch_info_type *bfd_scan_arch (const char *string);
```

Description

Figure out if BFD supports any cpu which could be described with the name string. Return a pointer to an arch_info structure if a machine is found, otherwise NULL.

2.13.2.3 bfd_arch_list

Synopsis

```
const char **bfd_arch_list (void);
```

Description

Return a freshly malloced NULL-terminated vector of the names of all the valid BFD architectures. Do not modify the names.

2.13.2.4 bfd_arch_get_compatible

Synopsis

```
const bfd_arch_info_type *bfd_arch_get_compatible
   (const bfd *abfd, const bfd *bbfd, bfd_boolean accept_unknowns);
```

Description

Determine whether two BFDs' architectures and machine types are compatible. Calculates the lowest common denominator between the two architectures and machine types implied by the BFDs and returns a pointer to an arch_info structure describing the compatible machine.

2.13.2.5 bfd_default_arch_struct

Description

The bfd_default_arch_struct is an item of bfd_arch_info_type which has been initialized to a fairly generic state. A BFD starts life by pointing to this structure, until the correct back end has determined the real architecture of the file.

```
extern const bfd_arch_info_type bfd_default_arch_struct;
```

2.13.2.6 bfd_set_arch_info

Synopsis

```
void bfd_set_arch_info (bfd *abfd, const bfd_arch_info_type *arg);
```

Description

Set the architecture info of abfd to arg.

2.13.2.7 bfd_default_set_arch_mach

Synopsis

```
bfd_boolean bfd_default_set_arch_mach
   (bfd *abfd, enum bfd_architecture arch, unsigned long mach);
```

Description

Set the architecture and machine type in BFD abfd to arch and mach. Find the correct pointer to a structure and insert it into the arch_info pointer.

2.13.2.8 bfd_get_arch

Synopsis

```
enum bfd_architecture bfd_get_arch (bfd *abfd);
```

Description

Return the enumerated type which describes the BFD abfd's architecture.

2.13.2.9 bfd_get_mach

Synopsis

```
unsigned long bfd_get_mach (bfd *abfd);
```

Description

Return the long type which describes the BFD abfd's machine.

2.13.2.10 bfd_arch_bits_per_byte

Synopsis

```
unsigned int bfd_arch_bits_per_byte (bfd *abfd);
```

Description

Return the number of bits in one of the BFD abfd's architecture's bytes.

2.13.2.11 bfd_arch_bits_per_address

Synopsis

```
unsigned int bfd_arch_bits_per_address (bfd *abfd);
```

Description

Return the number of bits in one of the BFD abfd's architecture's addresses.

2.13.2.12 bfd_default_compatible

Synopsis

```
const bfd_arch_info_type *bfd_default_compatible
  (const bfd_arch_info_type *a, const bfd_arch_info_type *b);
```

Description

The default function for testing for compatibility.

2.13.2.13 bfd_default_scan

Synopsis

```
bfd_boolean bfd_default_scan
  (const struct bfd_arch_info *info, const char *string);
```

Description

The default function for working out whether this is an architecture hit and a machine hit.

2.13.2.14 bfd_get_arch_info

Synopsis

```
const bfd_arch_info_type *bfd_get_arch_info (bfd *abfd);
```

Description

Return the architecture info struct in abfd.

2.13.2.15 bfd_lookup_arch

Synopsis

```
const bfd_arch_info_type *bfd_lookup_arch
  (enum bfd_architecture arch, unsigned long machine);
```

Description

Look for the architecture info structure which matches the arguments arch and machine. A machine of 0 matches the machine/architecture structure which marks itself as the default.

2.13.2.16 bfd_printable_arch_mach

Synopsis

```
const char *bfd_printable_arch_mach
  (enum bfd_architecture arch, unsigned long machine);
```

Description

Return a printable string representing the architecture and machine type.

This routine is depreciated.

2.13.2.17 bfd_octets_per_byte

Synopsis

```
unsigned int bfd_octets_per_byte (bfd *abfd);
```

Description

Return the number of octets (8-bit quantities) per target byte (minimum addressable unit). In most cases, this will be one, but some DSP targets have 16, 32, or even 48 bits per byte.

2.13.2.18 bfd_arch_mach_octets_per_byte

Synopsis

```
unsigned int bfd_arch_mach_octets_per_byte
  (enum bfd_architecture arch, unsigned long machine);
```

Description

See bfd_octets_per_byte.

This routine is provided for those cases where a bfd * is not available

2.13.2.19 bfd_arch_default_fill

Synopsis

```
void *bfd_arch_default_fill (bfd_size_type count,
    bfd_boolean is_bigendian,
    bfd_boolean code);
```

Description

Allocate via bfd_malloc and return a fill buffer of size COUNT. If IS_BIGENDIAN is TRUE, the order of bytes is big endian. If CODE is TRUE, the buffer contains code.

/* Set to N to open the next N BFDs using an alternate id space. */
extern unsigned int bfd_use_reserved_id;

2.14 Opening and closing BFDs

2.14.1 Functions for opening and closing

2.14.1.1 bfd_fopen

Synopsis

```
bfd *bfd_fopen (const char *filename, const char *target,
      const char *mode, int fd);
```

Description

Open the file *filename* with the target *target*. Return a pointer to the created BFD. If *fd* is not -1, then **fdopen** is used to open the file; otherwise, **fopen** is used. *mode* is passed directly to **fopen** or **fdopen**.

Calls bfd_find_target, so target is interpreted as by that function.

The new BFD is marked as cacheable iff fd is -1.

If NULL is returned then an error has occured. Possible errors are bfd_error_no_memory, bfd_error_invalid_target or system_call error.

On error, fd is always closed.

2.14.1.2 bfd_openr

Synopsis

```
bfd *bfd_openr (const char *filename, const char *target);
```

Description

Open the file filename (using fopen) with the target target. Return a pointer to the created BFD.

Calls bfd_find_target, so target is interpreted as by that function.

If NULL is returned then an error has occured. Possible errors are bfd_error_no_memory, bfd_error_invalid_target or system_call error.

2.14.1.3 bfd_fdopenr

Synopsis

```
bfd *bfd_fdopenr (const char *filename, const char *target, int fd);
```

Description

bfd_fdopenr is to bfd_fopenr much like fdopen is to fopen. It opens a BFD on a file already described by the fd supplied.

When the file is later bfd_closed, the file descriptor will be closed. If the caller desires that this file descriptor be cached by BFD (opened as needed, closed as needed to free descriptors for other opens), with the supplied fd used as an initial file descriptor (but subject to closure at any time), call bfd_set_cacheable(bfd, 1) on the returned BFD. The default is to assume no caching; the file descriptor will remain open until bfd_close, and will not be affected by BFD operations on other files.

Possible errors are bfd_error_no_memory, bfd_error_invalid_target and bfd_error_system_call.

On error, fd is closed.

2.14.1.4 bfd_openstreamr

Synopsis

```
bfd *bfd_openstreamr (const char *, const char *, void *);
```

Description

Open a BFD for read access on an existing stdio stream. When the BFD is passed to bfd_close, the stream will be closed.

2.14.1.5 bfd_openr_iovec

Synopsis

```
bfd *bfd_openr_iovec (const char *filename, const char *target,
    void *(*open_func) (struct bfd *nbfd,
    void *open_closure),
    void *open_closure,
    file_ptr (*pread_func) (struct bfd *nbfd,
    void *stream,
    void *buf,
    file_ptr nbytes,
    file_ptr offset),
    int (*close_func) (struct bfd *nbfd,
    void *stream),
    int (*stat_func) (struct bfd *abfd,
    void *stream,
    struct stat *sb));
```

Description

Create and return a BFD backed by a read-only stream. The stream is created using open_func, accessed using pread_func and destroyed using close_func.

Calls bfd_find_target, so target is interpreted as by that function.

Calls open_func (which can call bfd_zalloc and bfd_get_filename) to obtain the readonly stream backing the BFD. open_func either succeeds returning the non-NULL stream, or fails returning NULL (setting bfd_error). Calls pread_func to request nbytes of data from stream starting at offset (e.g., via a call to bfd_read). pread_func either succeeds returning the number of bytes read (which can be less than nbytes when end-of-file), or fails returning -1 (setting bfd_error).

Calls close_func when the BFD is later closed using bfd_close. close_func either succeeds returning 0, or fails returning -1 (setting bfd_error).

Calls $stat_func$ to fill in a stat structure for bfd_stat, bfd_get_size, and bfd_get_mtime calls. $stat_func$ returns 0 on success, or returns -1 on failure (setting bfd_error).

If bfd_openr_iovec returns NULL then an error has occurred. Possible errors are bfd_error_no_memory, bfd_error_invalid_target and bfd_error_system_call.

2.14.1.6 bfd_openw

Synopsis

```
bfd *bfd_openw (const char *filename, const char *target);
```

Description

Create a BFD, associated with file *filename*, using the file format *target*, and return a pointer to it.

Possible errors are bfd_error_system_call, bfd_error_no_memory, bfd_error_invalid_target.

2.14.1.7 bfd_close

Synopsis

```
bfd_boolean bfd_close (bfd *abfd);
```

Description

Close a BFD. If the BFD was open for writing, then pending operations are completed and the file written out and closed. If the created file is executable, then chmod is called to mark it as such.

All memory attached to the BFD is released.

The file descriptor associated with the BFD is closed (even if it was passed in to BFD by bfd_fdopenr).

Returns

TRUE is returned if all is ok, otherwise FALSE.

2.14.1.8 bfd_close_all_done

Synopsis

```
bfd_boolean bfd_close_all_done (bfd *);
```

Description

Close a BFD. Differs from bfd_close since it does not complete any pending operations. This routine would be used if the application had just used BFD for swapping and didn't want to use any of the writing code.

If the created file is executable, then chmod is called to mark it as such.

All memory attached to the BFD is released.

Returns

TRUE is returned if all is ok, otherwise FALSE.

2.14.1.9 bfd_create

Synopsis

```
bfd *bfd_create (const char *filename, bfd *templ);
```

Description

Create a new BFD in the manner of bfd_openw, but without opening a file. The new BFD takes the target from the target used by templ. The format is always set to bfd_object.

2.14.1.10 bfd_make_writable

Synopsis

```
bfd_boolean bfd_make_writable (bfd *abfd);
```

Description

Takes a BFD as created by bfd_create and converts it into one like as returned by bfd_openw. It does this by converting the BFD to BFD_IN_MEMORY. It's assumed that you will call bfd_make_readable on this bfd later.

Returns

TRUE is returned if all is ok, otherwise FALSE.

2.14.1.11 bfd_make_readable

Synopsis

```
bfd_boolean bfd_make_readable (bfd *abfd);
```

Description

Takes a BFD as created by bfd_create and bfd_make_writable and converts it into one like as returned by bfd_openr. It does this by writing the contents out to the memory buffer, then reversing the direction.

Returns

TRUE is returned if all is ok, otherwise FALSE.

2.14.1.12 bfd_alloc

Synopsis

```
void *bfd_alloc (bfd *abfd, bfd_size_type wanted);
```

Description

Allocate a block of wanted bytes of memory attached to abfd and return a pointer to it.

2.14.1.13 bfd_alloc2

Synopsis

```
void *bfd_alloc2 (bfd *abfd, bfd_size_type nmemb, bfd_size_type size);
```

Description

Allocate a block of *nmemb* elements of size bytes each of memory attached to abfd and return a pointer to it.

2.14.1.14 bfd_zalloc

Synopsis

```
void *bfd_zalloc (bfd *abfd, bfd_size_type wanted);
```

Description

Allocate a block of wanted bytes of zeroed memory attached to abfd and return a pointer to it.

2.14.1.15 bfd_zalloc2

Synopsis

```
void *bfd_zalloc2 (bfd *abfd, bfd_size_type nmemb, bfd_size_type size);
```

Description

Allocate a block of *nmemb* elements of *size* bytes each of zeroed memory attached to abfd and return a pointer to it.

2.14.1.16 bfd_calc_gnu_debuglink_crc32

Synopsis

```
unsigned long bfd_calc_gnu_debuglink_crc32
  (unsigned long crc, const unsigned char *buf, bfd_size_type len);
```

Description

Computes a CRC value as used in the .gnu_debuglink section. Advances the previously computed *crc* value by computing and adding in the crc32 for *len* bytes of *buf* .

Returns

Return the updated CRC32 value.

2.14.1.17 bfd_get_debug_link_info

Synopsis

```
char *bfd_get_debug_link_info (bfd *abfd, unsigned long *crc32_out);
```

Description

fetch the filename and CRC32 value for any separate debuginfo associated with *abfd*. Return NULL if no such info found, otherwise return filename and update *crc32_out*. The returned filename is allocated with malloc; freeing it is the responsibility of the caller.

2.14.1.18 bfd_get_alt_debug_link_info

Synopsis

```
char *bfd_get_alt_debug_link_info (bfd *abfd, unsigned long *crc32_out);
```

Description

Fetch the filename and BuildID value for any alternate debuginfo associated with abfd. Return NULL if no such info found, otherwise return filename and update buildid_out. The returned filename is allocated with malloc; freeing it is the responsibility of the caller.

2.14.1.19 separate_debug_file_exists

Synopsis

```
bfd_boolean separate_debug_file_exists
    (char *name, unsigned long crc32);
```

Description

Checks to see if name is a file and if its contents match crc32.

2.14.1.20 separate_alt_debug_file_exists

Synopsis

```
bfd_boolean separate_alt_debug_file_exists
  (char *name, unsigned long crc32);
```

Description

Checks to see if name is a file and if its BuildID matches buildid.

2.14.1.21 find_separate_debug_file

Synopsis

```
char *find_separate_debug_file (bfd *abfd);
```

Description

Searches abfd for a section called section_name which is expected to contain a reference to a file containing separate debugging information. The function scans various locations in the filesystem, including the file tree rooted at debug_file_directory, and returns the first matching filename that it finds. If check_crc is TRUE then the contents of the file must also match the CRC value contained in section_name. Returns NULL if no valid file could be found.

2.14.1.22 bfd_follow_gnu_debuglink

Synopsis

```
char *bfd_follow_gnu_debuglink (bfd *abfd, const char *dir);
```

Description

Takes a BFD and searches it for a .gnu_debuglink section. If this section is found, it examines the section for the name and checksum of a '.debug' file containing auxiliary debugging information. It then searches the filesystem for this .debug file in some standard locations, including the directory tree rooted at *dir*, and if found returns the full filename.

If dir is NULL, it will search a default path configured into libbfd at build time. [XXX this feature is not currently implemented].

Returns

NULL on any errors or failure to locate the .debug file, otherwise a pointer to a heap-allocated string containing the filename. The caller is responsible for freeing this string.

2.14.1.23 bfd_follow_gnu_debugaltlink

Synopsis

```
char *bfd_follow_gnu_debugaltlink (bfd *abfd, const char *dir);
```

Description

Takes a BFD and searches it for a .gnu_debugaltlink section. If this section is found, it examines the section for the name of a file containing auxiliary debugging information. It then searches the filesystem for this file in a set of standard locations, including the directory tree rooted at dir, and if found returns the full filename.

If dir is NULL, it will search a default path configured into libbfd at build time. [FIXME: This feature is not currently implemented].

Returns

NULL on any errors or failure to locate the debug file, otherwise a pointer to a heap-allocated string containing the filename. The caller is responsible for freeing this string.

2.14.1.24 bfd_create_gnu_debuglink_section

Synopsis

```
struct bfd_section *bfd_create_gnu_debuglink_section
  (bfd *abfd, const char *filename);
```

Description

Takes a BFD and adds a .gnu_debuglink section to it. The section is sized to be big enough to contain a link to the specified filename.

Returns

A pointer to the new section is returned if all is ok. Otherwise NULL is returned and bfd_error is set.

2.14.1.25 bfd_fill_in_gnu_debuglink_section

Synopsis

```
bfd_boolean bfd_fill_in_gnu_debuglink_section
  (bfd *abfd, struct bfd_section *sect, const char *filename);
```

Description

Takes a BFD and containing a .gnu_debuglink section SECT and fills in the contents of the section to contain a link to the specified filename. The filename should be relative to the current directory.

Returns

TRUE is returned if all is ok. Otherwise FALSE is returned and bfd_error is set.

2.15 Implementation details

2.15.1 Internal functions

Description

These routines are used within BFD. They are not intended for export, but are documented here for completeness.

2.15.1.1 bfd_write_bigendian_4byte_int

Synopsis

```
bfd_boolean bfd_write_bigendian_4byte_int (bfd *, unsigned int);
```

Description

Write a 4 byte integer i to the output BFD abfd, in big endian order regardless of what else is going on. This is useful in archives.

2.15.1.2 bfd_put_size

2.15.1.3 bfd_get_size

Description

These macros as used for reading and writing raw data in sections; each access (except for bytes) is vectored through the target format of the BFD and mangled accordingly. The mangling performs any necessary endian translations and removes alignment restrictions. Note that types accepted and returned by these macros are identical so they can be swapped around in macros—for example, 'libaout.h' defines GET_WORD to either bfd_get_32 or bfd_get_64.

In the put routines, val must be a bfd_vma. If we are on a system without prototypes, the caller is responsible for making sure that is true, with a cast if necessary. We don't cast them in the macro definitions because that would prevent lint or gcc -Wall from detecting sins such as passing a pointer. To detect calling these with less than a bfd_vma, use gcc -Wconversion on a host with 64 bit bfd_vma's.

```
/* Byte swapping macros for user section data. */
#define bfd_put_8(abfd, val, ptr) \
  ((void) (*((unsigned char *) (ptr)) = (val) & 0xff))
#define bfd_put_signed_8 \
  bfd_put_8
#define bfd_get_8(abfd, ptr) \
  (*(const unsigned char *) (ptr) & Oxff)
#define bfd_get_signed_8(abfd, ptr) \
  (((*(const unsigned char *) (ptr) & 0xff) ^ 0x80) - 0x80)
#define bfd_put_16(abfd, val, ptr) \
  BFD_SEND (abfd, bfd_putx16, ((val),(ptr)))
#define bfd_put_signed_16 \
  bfd_put_16
#define bfd_get_16(abfd, ptr) \
  BFD_SEND (abfd, bfd_getx16, (ptr))
#define bfd_get_signed_16(abfd, ptr) \
  BFD_SEND (abfd, bfd_getx_signed_16, (ptr))
#define bfd_put_32(abfd, val, ptr) \
  BFD_SEND (abfd, bfd_putx32, ((val),(ptr)))
#define bfd_put_signed_32 \
  bfd_put_32
#define bfd_get_32(abfd, ptr) \
  BFD_SEND (abfd, bfd_getx32, (ptr))
#define bfd_get_signed_32(abfd, ptr) \
  BFD_SEND (abfd, bfd_getx_signed_32, (ptr))
#define bfd_put_64(abfd, val, ptr) \
  BFD_SEND (abfd, bfd_putx64, ((val), (ptr)))
#define bfd_put_signed_64 \
```

```
bfd_put_64
#define bfd_get_64(abfd, ptr) \
  BFD_SEND (abfd, bfd_getx64, (ptr))
#define bfd_get_signed_64(abfd, ptr) \
  BFD_SEND (abfd, bfd_getx_signed_64, (ptr))
#define bfd_get(bits, abfd, ptr)
  ((bits) == 8 ? (bfd_vma) bfd_get_8 (abfd, ptr)
   : (bits) == 16 ? bfd_get_16 (abfd, ptr)
   : (bits) == 32 ? bfd_get_32 (abfd, ptr)
   : (bits) == 64 ? bfd_get_64 (abfd, ptr)
   : (abort (), (bfd_vma) - 1))
#define bfd_put(bits, abfd, val, ptr)
  ((bits) == 8 ? bfd_put_8 (abfd, val, ptr)
   : (bits) == 16 ? bfd_put_16 (abfd, val, ptr)
   : (bits) == 32 ? bfd_put_32 (abfd, val, ptr)
   : (bits) == 64 ? bfd_put_64 (abfd, val, ptr)
   : (abort (), (void) 0))
```

2.15.1.4 bfd_h_put_size

Description

These macros have the same function as their bfd_get_x brethren, except that they are used for removing information for the header records of object files. Believe it or not, some object files keep their header records in big endian order and their data in little endian order.

```
/* Byte swapping macros for file header data. */
#define bfd_h_put_8(abfd, val, ptr) \
 bfd_put_8 (abfd, val, ptr)
#define bfd_h_put_signed_8(abfd, val, ptr) \
 bfd_put_8 (abfd, val, ptr)
#define bfd_h_get_8(abfd, ptr) \
  bfd_get_8 (abfd, ptr)
#define bfd_h_get_signed_8(abfd, ptr) \
 bfd_get_signed_8 (abfd, ptr)
#define bfd_h_put_16(abfd, val, ptr) \
  BFD_SEND (abfd, bfd_h_putx16, (val, ptr))
#define bfd_h_put_signed_16 \
  bfd_h_put_16
#define bfd_h_get_16(abfd, ptr) \
  BFD_SEND (abfd, bfd_h_getx16, (ptr))
#define bfd_h_get_signed_16(abfd, ptr) \
```

```
BFD_SEND (abfd, bfd_h_getx_signed_16, (ptr))
#define bfd_h_put_32(abfd, val, ptr) \
 BFD_SEND (abfd, bfd_h_putx32, (val, ptr))
#define bfd_h_put_signed_32 \
 bfd_h_put_32
#define bfd_h_get_32(abfd, ptr) \
 BFD_SEND (abfd, bfd_h_getx32, (ptr))
#define bfd_h_get_signed_32(abfd, ptr) \
 BFD_SEND (abfd, bfd_h_getx_signed_32, (ptr))
#define bfd_h_put_64(abfd, val, ptr) \
 BFD_SEND (abfd, bfd_h_putx64, (val, ptr))
#define bfd_h_put_signed_64 \
 bfd_h_put_64
#define bfd_h_get_64(abfd, ptr) \
 BFD_SEND (abfd, bfd_h_getx64, (ptr))
#define bfd_h_get_signed_64(abfd, ptr) \
 BFD_SEND (abfd, bfd_h_getx_signed_64, (ptr))
/* Aliases for the above, which should eventually go away. */
#define H_PUT_64 bfd_h_put_64
#define H_PUT_32 bfd_h_put_32
#define H_PUT_16 bfd_h_put_16
#define H_PUT_8
                 bfd_h_put_8
#define H_PUT_S64 bfd_h_put_signed_64
#define H_PUT_S32 bfd_h_put_signed_32
#define H_PUT_S16 bfd_h_put_signed_16
#define H_PUT_S8 bfd_h_put_signed_8
#define H_GET_64 bfd_h_get_64
#define H_GET_32 bfd_h_get_32
#define H_GET_16 bfd_h_get_16
#define H_GET_8 bfd_h_get_8
#define H_GET_S64 bfd_h_get_signed_64
#define H_GET_S32 bfd_h_get_signed_32
#define H_GET_S16 bfd_h_get_signed_16
#define H_GET_S8 bfd_h_get_signed_8
```

2.15.1.5 bfd_log2

Synopsis

```
unsigned int bfd_log2 (bfd_vma x);
```

Description

Return the log base 2 of the value supplied, rounded up. E.g., an x of 1025 returns 11. A x of 0 returns 0.

2.16 File caching

The file caching mechanism is embedded within BFD and allows the application to open as many BFDs as it wants without regard to the underlying operating system's file descriptor limit (often as low as 20 open files). The module in cache.c maintains a least recently used list of bfd_cache_max_open files, and exports the name bfd_cache_lookup, which runs around and makes sure that the required BFD is open. If not, then it chooses a file to close, closes it and opens the one wanted, returning its file handle.

2.16.1 Caching functions

2.16.1.1 bfd_cache_init

Synopsis

```
bfd_boolean bfd_cache_init (bfd *abfd);
```

Description

Add a newly opened BFD to the cache.

2.16.1.2 bfd_cache_close

Synopsis

```
bfd_boolean bfd_cache_close (bfd *abfd);
```

Description

Remove the BFD abfd from the cache. If the attached file is open, then close it too.

Returns

FALSE is returned if closing the file fails, TRUE is returned if all is well.

2.16.1.3 bfd_cache_close_all

Synopsis

```
bfd_boolean bfd_cache_close_all (void);
```

Description

Remove all BFDs from the cache. If the attached file is open, then close it too.

Returns

FALSE is returned if closing one of the file fails, TRUE is returned if all is well.

2.16.1.4 bfd_open_file

Synopsis

```
FILE* bfd_open_file (bfd *abfd);
```

Description

Call the OS to open a file for *abfd*. Return the FILE * (possibly NULL) that results from this operation. Set up the BFD so that future accesses know the file is open. If the FILE * returned is NULL, then it won't have been put in the cache, so it won't have to be removed from it.

2.17 Linker Functions

The linker uses three special entry points in the BFD target vector. It is not necessary to write special routines for these entry points when creating a new BFD back end, since generic versions are provided. However, writing them can speed up linking and make it use significantly less runtime memory.

The first routine creates a hash table used by the other routines. The second routine adds the symbols from an object file to the hash table. The third routine takes all the object files and links them together to create the output file. These routines are designed so that the linker proper does not need to know anything about the symbols in the object files that it is linking. The linker merely arranges the sections as directed by the linker script and lets BFD handle the details of symbols and relocs.

The second routine and third routines are passed a pointer to a struct bfd_link_info structure (defined in bfdlink.h) which holds information relevant to the link, including the linker hash table (which was created by the first routine) and a set of callback functions to the linker proper.

The generic linker routines are in linker.c, and use the header file genlink.h. As of this writing, the only back ends which have implemented versions of these routines are a.out (in aoutx.h) and ECOFF (in ecoff.c). The a.out routines are used as examples throughout this section.

2.17.1 Creating a linker hash table

The linker routines must create a hash table, which must be derived from struct bfd_link_hash_table described in bfdlink.c. See Section 2.18 [Hash Tables], page 166, for information on how to create a derived hash table. This entry point is called using the target vector of the linker output file.

The _bfd_link_hash_table_create entry point must allocate and initialize an instance of the desired hash table. If the back end does not require any additional information to be stored with the entries in the hash table, the entry point may simply create a struct bfd_link_hash_table. Most likely, however, some additional information will be needed.

For example, with each entry in the hash table the a.out linker keeps the index the symbol has in the final output file (this index number is used so that when doing a relocatable link the symbol index used in the output file can be quickly filled in when copying over a reloc). The a.out linker code defines the required structures and functions for a hash table derived from struct bfd_link_hash_table. The a.out linker hash table is created by the function NAME(aout,link_hash_table_create); it simply allocates space for the hash table, initializes it, and returns a pointer to it.

When writing the linker routines for a new back end, you will generally not know exactly which fields will be required until you have finished. You should simply create a new hash table which defines no additional fields, and then simply add fields as they become necessary.

2.17.2 Adding symbols to the hash table

The linker proper will call the _bfd_link_add_symbols entry point for each object file or archive which is to be linked (typically these are the files named on the command line, but some may also come from the linker script). The entry point is responsible for examining the file. For an object file, BFD must add any relevant symbol information to the hash

table. For an archive, BFD must determine which elements of the archive should be used and adding them to the link.

The alout version of this entry point is NAME(aout,link_add_symbols).

2.17.2.1 Differing file formats

Normally all the files involved in a link will be of the same format, but it is also possible to link together different format object files, and the back end must support that. The <code>_bfd_link_add_symbols</code> entry point is called via the target vector of the file to be added. This has an important consequence: the function may not assume that the hash table is the type created by the corresponding <code>_bfd_link_hash_table_create</code> vector. All the <code>_bfd_link_add_symbols</code> function can assume about the hash table is that it is derived from <code>struct bfd_link_hash_table</code>.

Sometimes the _bfd_link_add_symbols function must store some information in the hash table entry to be used by the _bfd_final_link function. In such a case the output bfd xvec must be checked to make sure that the hash table was created by an object file of the same format.

The _bfd_final_link routine must be prepared to handle a hash entry without any extra information added by the _bfd_link_add_symbols function. A hash entry without extra information will also occur when the linker script directs the linker to create a symbol. Note that, regardless of how a hash table entry is added, all the fields will be initialized to some sort of null value by the hash table entry initialization function.

See ecoff_link_add_externals for an example of how to check the output bfd before saving information (in this case, the ECOFF external symbol debugging information) in a hash table entry.

2.17.2.2 Adding symbols from an object file

When the _bfd_link_add_symbols routine is passed an object file, it must add all externally visible symbols in that object file to the hash table. The actual work of adding the symbol to the hash table is normally handled by the function _bfd_generic_link_add_one_symbol. The _bfd_link_add_symbols routine is responsible for reading all the symbols from the object file and passing the correct information to _bfd_generic_link_add_one_symbol.

The _bfd_link_add_symbols routine should not use bfd_canonicalize_symtab to read the symbols. The point of providing this routine is to avoid the overhead of converting the symbols into generic asymbol structures.

_bfd_generic_link_add_one_symbol handles the details of combining common symbols, warning about multiple definitions, and so forth. It takes arguments which describe the symbol to add, notably symbol flags, a section, and an offset. The symbol flags include such things as BSF_WEAK or BSF_INDIRECT. The section is a section in the object file, or something like bfd_und_section_ptr for an undefined symbol or bfd_com_section_ptr for a common symbol.

If the _bfd_final_link routine is also going to need to read the symbol information, the _bfd_link_add_symbols routine should save it somewhere attached to the object file BFD. However, the information should only be saved if the keep_memory field of the info argument is TRUE, so that the -no-keep-memory linker switch is effective.

The a.out function which adds symbols from an object file is aout_link_add_object_symbols, and most of the interesting work is in aout_link_add_symbols. The latter saves pointers to the hash tables entries created by _bfd_generic_link_add_one_symbol indexed by symbol number, so that the _bfd_final_link routine does not have to call the hash table lookup routine to locate the entry.

2.17.2.3 Adding symbols from an archive

When the _bfd_link_add_symbols routine is passed an archive, it must look through the symbols defined by the archive and decide which elements of the archive should be included in the link. For each such element it must call the add_archive_element linker callback, and it must add the symbols from the object file to the linker hash table. (The callback may in fact indicate that a replacement BFD should be used, in which case the symbols from that BFD should be added to the linker hash table instead.)

In most cases the work of looking through the symbols in the archive should be done by the _bfd_generic_link_add_archive_symbols function. This function builds a hash table from the archive symbol table and looks through the list of undefined symbols to see which elements should be included. _bfd_generic_link_add_archive_symbols is passed a function to call to make the final decision about adding an archive element to the link and to do the actual work of adding the symbols to the linker hash table.

The function passed to _bfd_generic_link_add_archive_symbols must read the symbols of the archive element and decide whether the archive element should be included in the link. If the element is to be included, the add_archive_element linker callback routine must be called with the element as an argument, and the element's symbols must be added to the linker hash table just as though the element had itself been passed to the _bfd_link_ add_symbols function. The add_archive_element callback has the option to indicate that it would like to replace the element archive with a substitute BFD, in which case it is the symbols of that substitute BFD that must be added to the linker hash table instead.

When the a.out _bfd_link_add_symbols function receives an archive, it calls _bfd_generic_link_add_archive_symbols passing aout_link_check_archive_element as the function argument. aout_link_check_archive_element calls aout_link_check_ar_symbols. If the latter decides to add the element (an element is only added if it provides a real, non-common, definition for a previously undefined or common symbol) it calls the add_archive_element callback and then aout_link_check_archive_element calls aout_link_add_symbols to actually add the symbols to the linker hash table possibly those of a substitute BFD, if the add_archive_element callback avails itself of that option.

The ECOFF back end is unusual in that it does not normally call _bfd_generic_link_add_archive_symbols, because ECOFF archives already contain a hash table of symbols. The ECOFF back end searches the archive itself to avoid the overhead of creating a new hash table.

2.17.3 Performing the final link

When all the input files have been processed, the linker calls the _bfd_final_link entry point of the output BFD. This routine is responsible for producing the final output file, which has several aspects. It must relocate the contents of the input sections and copy the data into the output sections. It must build an output symbol table including any local

symbols from the input files and the global symbols from the hash table. When producing relocatable output, it must modify the input relocs and write them into the output file. There may also be object format dependent work to be done.

The linker will also call the write_object_contents entry point when the BFD is closed. The two entry points must work together in order to produce the correct output file.

The details of how this works are inevitably dependent upon the specific object file format. The a.out _bfd_final_link routine is NAME(aout,final_link).

2.17.3.1 Information provided by the linker

Before the linker calls the _bfd_final_link entry point, it sets up some data structures for the function to use.

The input_bfds field of the bfd_link_info structure will point to a list of all the input files included in the link. These files are linked through the link_next field of the bfd structure.

Each section in the output file will have a list of link_order structures attached to the map_head.link_order field (the link_order structure is defined in bfdlink.h). These structures describe how to create the contents of the output section in terms of the contents of various input sections, fill constants, and, eventually, other types of information. They also describe relocs that must be created by the BFD backend, but do not correspond to any input file; this is used to support -Ur, which builds constructors while generating a relocatable object file.

2.17.3.2 Relocating the section contents

The _bfd_final_link function should look through the link_order structures attached to each section of the output file. Each link_order structure should either be handled specially, or it should be passed to the function _bfd_default_link_order which will do the right thing (_bfd_default_link_order is defined in linker.c).

For efficiency, a link_order of type bfd_indirect_link_order whose associated section belongs to a BFD of the same format as the output BFD must be handled specially. This type of link_order describes part of an output section in terms of a section belonging to one of the input files. The _bfd_final_link function should read the contents of the section and any associated relocs, apply the relocs to the section contents, and write out the modified section contents. If performing a relocatable link, the relocs themselves must also be modified and written out.

The functions _bfd_relocate_contents and _bfd_final_link_relocate provide some general support for performing the actual relocations, notably overflow checking. Their arguments include information about the symbol the relocation is against and a reloc_howto_type argument which describes the relocation to perform. These functions are defined in reloc.c.

The alout function which handles reading, relocating, and writing section contents is aout_link_input_section. The actual relocation is done in aout_link_input_section_std and aout_link_input_section_ext.

2.17.3.3 Writing the symbol table

The _bfd_final_link function must gather all the symbols in the input files and write them out. It must also write out all the symbols in the global hash table. This must be controlled by the strip and discard fields of the bfd_link_info structure.

The local symbols of the input files will not have been entered into the linker hash table. The _bfd_final_link routine must consider each input file and include the symbols in the output file. It may be convenient to do this when looking through the link_order structures, or it may be done by stepping through the input_bfds list.

The _bfd_final_link routine must also traverse the global hash table to gather all the externally visible symbols. It is possible that most of the externally visible symbols may be written out when considering the symbols of each input file, but it is still necessary to traverse the hash table since the linker script may have defined some symbols that are not in any of the input files.

The strip field of the bfd_link_info structure controls which symbols are written out. The possible values are listed in bfdlink.h. If the value is strip_some, then the keep_hash field of the bfd_link_info structure is a hash table of symbols to keep; each symbol should be looked up in this hash table, and only symbols which are present should be included in the output file.

If the strip field of the bfd_link_info structure permits local symbols to be written out, the discard field is used to further controls which local symbols are included in the output file. If the value is discard_1, then all local symbols which begin with a certain prefix are discarded; this is controlled by the bfd_is_local_label_name entry point.

The alout backend handles symbols by calling aout_link_write_symbols on each input BFD and then traversing the global hash table with the function aout_link_write_other_symbol. It builds a string table while writing out the symbols, which is written to the output file at the end of NAME(aout,final_link).

2.17.3.4 bfd_link_split_section

Synopsis

```
bfd_boolean bfd_link_split_section (bfd *abfd, asection *sec);
```

Description

Return nonzero if sec should be split during a reloceatable or final link.

```
#define bfd_link_split_section(abfd, sec) \
    BFD_SEND (abfd, _bfd_link_split_section, (abfd, sec))
```

2.17.3.5 bfd_section_already_linked

Synopsis

Description

Check if data has been already linked during a reloceatable or final link. Return TRUE if it has.

2.17.3.6 bfd_generic_define_common_symbol

Synopsis

```
bfd_boolean bfd_generic_define_common_symbol
   (bfd *output_bfd, struct bfd_link_info *info,
        struct bfd_link_hash_entry *h);
```

Description

Convert common symbol h into a defined symbol. Return TRUE on success and FALSE on failure.

```
#define bfd_define_common_symbol(output_bfd, info, h) \
BFD_SEND (output_bfd, _bfd_define_common_symbol, (output_bfd, info, h))
```

2.17.3.7 bfd_find_version_for_sym

Synopsis

```
struct bfd_elf_version_tree * bfd_find_version_for_sym
  (struct bfd_elf_version_tree *verdefs,
    const char *sym_name, bfd_boolean *hide);
```

Description

Search an elf version script tree for symbol versioning info and export / don't-export status for a given symbol. Return non-NULL on success and NULL on failure; also sets the output 'hide' boolean parameter.

2.17.3.8 bfd_hide_sym_by_version

Synopsis

```
bfd_boolean bfd_hide_sym_by_version
  (struct bfd_elf_version_tree *verdefs, const char *sym_name);
```

Description

Search an elf version script tree for symbol versioning info for a given symbol. Return TRUE if the symbol is hidden.

2.18 Hash Tables

BFD provides a simple set of hash table functions. Routines are provided to initialize a hash table, to free a hash table, to look up a string in a hash table and optionally create an entry for it, and to traverse a hash table. There is currently no routine to delete an string from a hash table.

The basic hash table does not permit any data to be stored with a string. However, a hash table is designed to present a base class from which other types of hash tables may be derived. These derived types may store additional information with the string. Hash tables were implemented in this way, rather than simply providing a data pointer in a hash table entry, because they were designed for use by the linker back ends. The linker may create

thousands of hash table entries, and the overhead of allocating private data and storing and following pointers becomes noticeable.

The basic hash table code is in hash.c.

2.18.1 Creating and freeing a hash table

To create a hash table, create an instance of a struct bfd_hash_table (defined in bfd.h) and call bfd_hash_table_init (if you know approximately how many entries you will need, the function bfd_hash_table_init_n, which takes a *size* argument, may be used). bfd_hash_table_init returns FALSE if some sort of error occurs.

The function bfd_hash_table_init take as an argument a function to use to create new entries. For a basic hash table, use the function bfd_hash_newfunc. See Section 2.18.4 [Deriving a New Hash Table Type], page 168, for why you would want to use a different value for this argument.

bfd_hash_table_init will create an objalloc which will be used to allocate new entries. You may allocate memory on this objalloc using bfd_hash_allocate.

Use bfd_hash_table_free to free up all the memory that has been allocated for a hash table. This will not free up the struct bfd_hash_table itself, which you must provide.

Use bfd_hash_set_default_size to set the default size of hash table to use.

2.18.2 Looking up or entering a string

The function bfd_hash_lookup is used both to look up a string in the hash table and to create a new entry.

If the create argument is FALSE, bfd_hash_lookup will look up a string. If the string is found, it will returns a pointer to a struct bfd_hash_entry. If the string is not found in the table bfd_hash_lookup will return NULL. You should not modify any of the fields in the returns struct bfd_hash_entry.

If the *create* argument is TRUE, the string will be entered into the hash table if it is not already there. Either way a pointer to a struct bfd_hash_entry will be returned, either to the existing structure or to a newly created one. In this case, a NULL return means that an error occurred.

If the *create* argument is TRUE, and a new entry is created, the *copy* argument is used to decide whether to copy the string onto the hash table objalloc or not. If *copy* is passed as FALSE, you must be careful not to deallocate or modify the string as long as the hash table exists.

2.18.3 Traversing a hash table

The function bfd_hash_traverse may be used to traverse a hash table, calling a function on each element. The traversal is done in a random order.

bfd_hash_traverse takes as arguments a function and a generic void * pointer. The function is called with a hash table entry (a struct bfd_hash_entry *) and the generic pointer passed to bfd_hash_traverse. The function must return a boolean value, which indicates whether to continue traversing the hash table. If the function returns FALSE, bfd_hash_traverse will stop the traversal and return immediately.

2.18.4 Deriving a new hash table type

Many uses of hash tables want to store additional information which each entry in the hash table. Some also find it convenient to store additional information with the hash table itself. This may be done using a derived hash table.

Since C is not an object oriented language, creating a derived hash table requires sticking together some boilerplate routines with a few differences specific to the type of hash table you want to create.

An example of a derived hash table is the linker hash table. The structures for this are defined in bfdlink.h. The functions are in linker.c.

You may also derive a hash table from an already derived hash table. For example, the a.out linker backend code uses a hash table derived from the linker hash table.

2.18.4.1 Define the derived structures

You must define a structure for an entry in the hash table, and a structure for the hash table itself.

The first field in the structure for an entry in the hash table must be of the type used for an entry in the hash table you are deriving from. If you are deriving from a basic hash table this is struct bfd_hash_entry, which is defined in bfd.h. The first field in the structure for the hash table itself must be of the type of the hash table you are deriving from itself. If you are deriving from a basic hash table, this is struct bfd_hash_table.

For example, the linker hash table defines struct bfd_link_hash_entry (in bfdlink.h). The first field, root, is of type struct bfd_hash_entry. Similarly, the first field in struct bfd_link_hash_table, table, is of type struct bfd_hash_table.

2.18.4.2 Write the derived creation routine

You must write a routine which will create and initialize an entry in the hash table. This routine is passed as the function argument to bfd_hash_table_init.

In order to permit other hash tables to be derived from the hash table you are creating, this routine must be written in a standard way.

The first argument to the creation routine is a pointer to a hash table entry. This may be NULL, in which case the routine should allocate the right amount of space. Otherwise the space has already been allocated by a hash table type derived from this one.

After allocating space, the creation routine must call the creation routine of the hash table type it is derived from, passing in a pointer to the space it just allocated. This will initialize any fields used by the base hash table.

Finally the creation routine must initialize any local fields for the new hash table type.

Here is a boilerplate example of a creation routine. *function_name* is the name of the routine. *entry_type* is the type of an entry in the hash table you are creating. *base_newfunc* is the name of the creation routine of the hash table type your hash table is derived from.

Description

The creation routine for the linker hash table, which is in linker.c, looks just like this example. function_name is _bfd_link_hash_newfunc. entry_type is struct bfd_link_hash_entry. base_newfunc is bfd_hash_newfunc, the creation routine for a basic hash table.

_bfd_link_hash_newfunc also initializes the local fields in a linker hash table entry: type, written and next.

2.18.4.3 Write other derived routines

You will want to write other routines for your new hash table, as well.

You will want an initialization routine which calls the initialization routine of the hash table you are deriving from and initializes any other local fields. For the linker hash table, this is _bfd_link_hash_table_init in linker.c.

You will want a lookup routine which calls the lookup routine of the hash table you are deriving from and casts the result. The linker hash table uses bfd_link_hash_lookup in linker.c (this actually takes an additional argument which it uses to decide how to return the looked up value).

You may want a traversal routine. This should just call the traversal routine of the hash table you are deriving from with appropriate casts. The linker hash table uses bfd_link_hash_traverse in linker.c.

These routines may simply be defined as macros. For example, the a.out backend linker hash table, which is derived from the linker hash table, uses macros for the lookup and traversal routines. These are aout_link_hash_lookup and aout_link_hash_traverse in aoutx.h.

3 BFD back ends

3.1 What to Put Where

All of BFD lives in one directory.

3.2 a.out backends

Description

BFD supports a number of different flavours of a out format, though the major differences are only the sizes of the structures on disk, and the shape of the relocation information.

The support is split into a basic support file 'aoutx.h' and other files which derive functions from the base. One derivation file is 'aoutf1.h' (for a.out flavour 1), and adds to the basic a.out functions support for sun3, sun4, 386 and 29k a.out files, to create a target jump vector for a specific target.

This information is further split out into more specific files for each machine, including 'sunos.c' for sun3 and sun4, 'newsos3.c' for the Sony NEWS, and 'demo64.c' for a demonstration of a 64 bit a.out format.

The base file 'aoutx.h' defines general mechanisms for reading and writing records to and from disk and various other methods which BFD requires. It is included by 'aout32.c' and 'aout64.c' to form the names aout_32_swap_exec_header_in, aout_64_swap_exec_header_in, etc.

As an example, this is what goes on to make the back end for a sun4, from 'aout32.c':

```
#define ARCH_SIZE 32
#include "aoutx.h"
```

Which exports names:

```
aout_32_canonicalize_reloc
aout_32_find_nearest_line
aout_32_get_lineno
aout_32_get_reloc_upper_bound
...
```

from 'sunos.c':

```
#define TARGET_NAME "a.out-sunos-big"
#define VECNAME sunos_big_vec
#include "aoutf1.h"
```

requires all the names from 'aout32.c', and produces the jump vector

```
sunos_big_vec
```

The file 'host-aout.c' is a special case. It is for a large set of hosts that use "more or less standard" a.out files, and for which cross-debugging is not interesting. It uses the standard 32-bit a.out support routines, but determines the file offsets and addresses of the text, data, and BSS sections, the machine architecture and machine type, and the entry point address, in a host-dependent manner. Once these values have been determined, generic code is used to handle the object file.

When porting it to run on a new system, you must supply:

```
HOST_PAGE_SIZE
HOST_SEGMENT_SIZE
HOST_MACHINE_ARCH (optional)
HOST_MACHINE_MACHINE (optional)
HOST_TEXT_START_ADDR
HOST_STACK_END_ADDR
```

in the file '../include/sys/h-XXX.h' (for your host). These values, plus the structures and macros defined in 'a.out.h' on your host system, will produce a BFD target that will access ordinary a.out files on your host. To configure a new machine to use 'host-aout.c', specify:

```
TDEFAULTS = -DDEFAULT_VECTOR=host_aout_big_vec
TDEPFILES= host-aout.o trad-core.o
```

in the 'config/XXX.mt' file, and modify 'configure.in' to use the 'XXX.mt' file (by setting "bfd_target=XXX") when your configuration is selected.

3.2.1 Relocations

Description

The file 'aoutx.h' provides for both the *standard* and *extended* forms of a.out relocation records.

The standard records contain only an address, a symbol index, and a type field. The extended records (used on 29ks and sparcs) also have a full integer for an addend.

3.2.2 Internal entry points

Description

'aoutx.h' exports several routines for accessing the contents of an a.out file, which are gathered and exported in turn by various format specific files (eg sunos.c).

3.2.2.1 aout_size_swap_exec_header_in

Synopsis

```
void aout_size_swap_exec_header_in,
  (bfd *abfd,
    struct external_exec *bytes,
    struct internal_exec *execp);
```

Description

Swap the information in an executable header raw_bytes taken from a raw byte stream memory image into the internal exec header structure execp.

3.2.2.2 aout_size_swap_exec_header_out

Synopsis

```
void aout_size_swap_exec_header_out
  (bfd *abfd,
    struct internal_exec *execp,
    struct external_exec *raw_bytes);
```

Description

Swap the information in an internal exec header structure execp into the buffer raw_bytes ready for writing to disk.

3.2.2.3 aout_size_some_aout_object_p

Synopsis

```
const bfd_target *aout_size_some_aout_object_p
  (bfd *abfd,
    struct internal_exec *execp,
    const bfd_target *(*callback_to_real_object_p) (bfd *));
```

Description

Some alout variant thinks that the file open in *abfd* checking is an alout file. Do some more checking, and set up for access if it really is. Call back to the calling environment's "finish up" function just before returning, to handle any last-minute setup.

3.2.2.4 aout_size_mkobject

Synopsis

```
bfd_boolean aout_size_mkobject, (bfd *abfd);
```

Description

Initialize BFD abfd for use with a out files.

3.2.2.5 aout_size_machine_type

Synopsis

```
enum machine_type aout_size_machine_type
  (enum bfd_architecture arch,
   unsigned long machine,
   bfd_boolean *unknown);
```

Description

Keep track of machine architecture and machine type for a.out's. Return the machine_type for a particular architecture and machine, or M_UNKNOWN if that exact architecture and machine can't be represented in a.out format.

If the architecture is understood, machine type 0 (default) is always understood.

3.2.2.6 aout_size_set_arch_mach

Synopsis

```
bfd_boolean aout_size_set_arch_mach,
   (bfd *,
    enum bfd_architecture arch,
    unsigned long machine);
```

Description

Set the architecture and the machine of the BFD abfd to the values arch and machine. Verify that abfd's format can support the architecture required.

3.2.2.7 aout_size_new_section_hook

Synopsis

```
bfd_boolean aout_size_new_section_hook,
   (bfd *abfd,
    asection *newsect);
```

Description

Called by the BFD in response to a bfd_make_section request.

3.3 coff backends

BFD supports a number of different flavours of coff format. The major differences between formats are the sizes and alignments of fields in structures on disk, and the occasional extra field.

Coff in all its varieties is implemented with a few common files and a number of implementation specific files. For example, The 88k bcs coff format is implemented in the file 'coff-m88k.c'. This file #includes 'coff/m88k.h' which defines the external structure of the coff format for the 88k, and 'coff/internal.h' which defines the internal structure. 'coff-m88k.c' also defines the relocations used by the 88k format See Section 2.10 [Relocations], page 51.

The Intel i960 processor version of coff is implemented in 'coff-i960.c'. This file has the same structure as 'coff-m88k.c', except that it includes 'coff/i960.h' rather than 'coff-m88k.h'.

3.3.1 Porting to a new version of coff

The recommended method is to select from the existing implementations the version of coff which is most like the one you want to use. For example, we'll say that i386 coff is the one you select, and that your coff flavour is called foo. Copy 'i386coff.c' to 'foocoff.c', copy '../include/coff/i386.h' to '../include/coff/foo.h', and add the lines to 'targets.c' and 'Makefile.in' so that your new back end is used. Alter the shapes of the structures in '../include/coff/foo.h' so that they match what you need. You will probably also have to add #ifdefs to the code in 'coff/internal.h' and 'coffcode.h' if your version of coff is too wild.

You can verify that your new BFD backend works quite simply by building 'objdump' from the 'binutils' directory, and making sure that its version of what's going on and your host system's idea (assuming it has the pretty standard coff dump utility, usually called att-dump or just dump) are the same. Then clean up your code, and send what you've done to Cygnus. Then your stuff will be in the next release, and you won't have to keep integrating it.

3.3.2 How the coff backend works

3.3.2.1 File layout

The Coff backend is split into generic routines that are applicable to any Coff target and routines that are specific to a particular target. The target-specific routines are further split into ones which are basically the same for all Coff targets except that they use the external symbol format or use different values for certain constants.

The generic routines are in 'coffgen.c'. These routines work for any Coff target. They use some hooks into the target specific code; the hooks are in a bfd_coff_backend_data structure, one of which exists for each target.

The essentially similar target-specific routines are in 'coffcode.h'. This header file includes executable C code. The various Coff targets first include the appropriate Coff header file, make any special defines that are needed, and then include 'coffcode.h'.

Some of the Coff targets then also have additional routines in the target source file itself.

For example, 'coff-i960.c' includes 'coff/internal.h' and 'coff/i960.h'. It then defines a few constants, such as I960, and includes 'coffcode.h'. Since the i960 has complex relocation types, 'coff-i960.c' also includes some code to manipulate the i960 relocs. This code is not in 'coffcode.h' because it would not be used by any other target.

3.3.2.2 Coff long section names

In the standard Coff object format, section names are limited to the eight bytes available in the s_name field of the SCNHDR section header structure. The format requires the field to be NUL-padded, but not necessarily NUL-terminated, so the longest section names permitted are a full eight characters.

The Microsoft PE variants of the Coff object file format add an extension to support the use of long section names. This extension is defined in section 4 of the Microsoft PE/COFF specification (rev 8.1). If a section name is too long to fit into the section header's s_name field, it is instead placed into the string table, and the s_name field is filled with a slash ("/") followed by the ASCII decimal representation of the offset of the full name relative to the string table base.

Note that this implies that the extension can only be used in object files, as executables do not contain a string table. The standard specifies that long section names from objects emitted into executable images are to be truncated.

However, as a GNU extension, BFD can generate executable images that contain a string table and long section names. This would appear to be technically valid, as the standard only says that Coff debugging information is deprecated, not forbidden, and in practice it works, although some tools that parse PE files expecting the MS standard format may become confused; 'PEview' is one known example.

The functionality is supported in BFD by code implemented under the control of the macro COFF_LONG_SECTION_NAMES. If not defined, the format does not support long section names in any way. If defined, it is used to initialise a flag, _bfd_coff_long_section_names, and a hook function pointer, _bfd_coff_set_long_section_names, in the Coff backend data structure. The flag controls the generation of long section names in output BFDs at runtime; if it is false, as it will be by default when generating an executable image, long section names are truncated; if true, the long section names extension is employed. The hook points to a function that allows the value of the flag to be altered at runtime, on formats that support long section names at all; on other formats it points to a stub that returns an error indication.

With input BFDs, the flag is set according to whether any long section names are detected while reading the section headers. For a completely new BFD, the flag is set to the default for the target format. This information can be used by a client of the BFD library when deciding what output format to generate, and means that a BFD that is opened for read

and subsequently converted to a writeable BFD and modified in-place will retain whatever format it had on input.

If COFF_LONG_SECTION_NAMES is simply defined (blank), or is defined to the value "1", then long section names are enabled by default; if it is defined to the value zero, they are disabled by default (but still accepted in input BFDs). The header 'coffcode.h' defines a macro, COFF_DEFAULT_LONG_SECTION_NAMES, which is used in the backends to initialise the backend data structure fields appropriately; see the comments for further detail.

3.3.2.3 Bit twiddling

Each flavour of coff supported in BFD has its own header file describing the external layout of the structures. There is also an internal description of the coff layout, in 'coff/internal.h'. A major function of the coff backend is swapping the bytes and twiddling the bits to translate the external form of the structures into the normal internal form. This is all performed in the bfd_swap_thing_direction routines. Some elements are different sizes between different versions of coff; it is the duty of the coff version specific include file to override the definitions of various packing routines in 'coffcode.h'. E.g., the size of line number entry in coff is sometimes 16 bits, and sometimes 32 bits. #defineing PUT_LNSZ_LNNO and GET_LNSZ_ LNNO will select the correct one. No doubt, some day someone will find a version of coff which has a varying field size not catered to at the moment. To port BFD, that person will have to add more #defines. Three of the bit twiddling routines are exported to gdb; coff_swap_aux_in, coff_swap_sym_in and coff_swap_lineno_in. GDB reads the symbol table on its own, but uses BFD to fix things up. More of the bit twiddlers are exported for gas; coff_swap_aux_out, coff_swap_sym_out, coff_swap_lineno_out, coff_swap_ reloc_out, coff_swap_filehdr_out, coff_swap_aouthdr_out, coff_swap_scnhdr_out. Gas currently keeps track of all the symbol table and reloc drudgery itself, thereby saving the internal BFD overhead, but uses BFD to swap things on the way out, making cross ports much safer. Doing so also allows BFD (and thus the linker) to use the same header files as gas, which makes one avenue to disaster disappear.

3.3.2.4 Symbol reading

The simple canonical form for symbols used by BFD is not rich enough to keep all the information available in a coff symbol table. The back end gets around this problem by keeping the original symbol table around, "behind the scenes".

When a symbol table is requested (through a call to bfd_canonicalize_symtab), a request gets through to coff_get_normalized_symtab. This reads the symbol table from the coff file and swaps all the structures inside into the internal form. It also fixes up all the pointers in the table (represented in the file by offsets from the first symbol in the table) into physical pointers to elements in the new internal table. This involves some work since the meanings of fields change depending upon context: a field that is a pointer to another structure in the symbol table at one moment may be the size in bytes of a structure at the next. Another pass is made over the table. All symbols which mark file names (C_FILE symbols) are modified so that the internal string points to the value in the auxent (the real filename) rather than the normal text associated with the symbol (".file").

At this time the symbol names are moved around. Coff stores all symbols less than nine characters long physically within the symbol table; longer strings are kept at the end of the

file in the string table. This pass moves all strings into memory and replaces them with pointers to the strings.

The symbol table is massaged once again, this time to create the canonical table used by the BFD application. Each symbol is inspected in turn, and a decision made (using the sclass field) about the various flags to set in the asymbol. See Section 2.7 [Symbols], page 40. The generated canonical table shares strings with the hidden internal symbol table.

Any linenumbers are read from the coff file too, and attached to the symbols which own the functions the linenumbers belong to.

3.3.2.5 Symbol writing

Writing a symbol to a coff file which didn't come from a coff file will lose any debugging information. The asymbol structure remembers the BFD from which the symbol was taken, and on output the back end makes sure that the same destination target as source target is present.

When the symbols have come from a coff file then all the debugging information is preserved. Symbol tables are provided for writing to the back end in a vector of pointers to pointers. This allows applications like the linker to accumulate and output large symbol tables without having to do too much byte copying.

This function runs through the provided symbol table and patches each symbol marked as a file place holder (C_FILE) to point to the next file place holder in the list. It also marks each offset field in the list with the offset from the first symbol of the current symbol.

Another function of this procedure is to turn the canonical value form of BFD into the form used by coff. Internally, BFD expects symbol values to be offsets from a section base; so a symbol physically at 0x120, but in a section starting at 0x100, would have the value 0x20. Coff expects symbols to contain their final value, so symbols have their values changed at this point to reflect their sum with their owning section. This transformation uses the output_section field of the asymbol's asection See Section 2.6 [Sections], page 22.

• coff_mangle_symbols

This routine runs though the provided symbol table and uses the offsets generated by the previous pass and the pointers generated when the symbol table was read in to create the structured hierarchy required by coff. It changes each pointer to a symbol into the index into the symbol table of the asymbol.

• coff_write_symbols

This routine runs through the symbol table and patches up the symbols from their internal form into the coff way, calls the bit twiddlers, and writes out the table to the file.

3.3.2.6 coff_symbol_type

Description

The hidden information for an asymbol is described in a combined_entry_type:

```
typedef struct coff_ptr_struct
{
   /* Remembers the offset from the first symbol in the file for
    this symbol. Generated by coff_renumber_symbols. */
```

```
unsigned int offset;
 /* Should the value of this symbol be renumbered. Used for
     XCOFF C_BSTAT symbols. Set by coff_slurp_symbol_table. */
 unsigned int fix_value : 1;
 /* Should the tag field of this symbol be renumbered.
     Created by coff_pointerize_aux. */
 unsigned int fix_tag : 1;
 /* Should the endidx field of this symbol be renumbered.
     Created by coff_pointerize_aux. */
 unsigned int fix_end : 1;
 /* Should the x_csect.x_scnlen field be renumbered.
     Created by coff_pointerize_aux. */
 unsigned int fix_scnlen : 1;
 /* Fix up an XCOFF C_BINCL/C_EINCL symbol. The value is the
     index into the line number entries. Set by coff_slurp_symbol_table. */
 unsigned int fix_line : 1;
 /* The container for the symbol structure as read and translated
     from the file. */
 union
   union internal_auxent auxent;
   struct internal_syment syment;
 } u;
} combined_entry_type;
/* Each canonical asymbol really looks like this: */
typedef struct coff_symbol_struct
 /* The actual symbol which the rest of BFD works with */
 asymbol symbol;
 /* A pointer to the hidden information for this symbol */
 combined_entry_type *native;
 /* A pointer to the linenumber information for this symbol */
 struct lineno_cache_entry *lineno;
  /* Have the line numbers been relocated yet ? */
 bfd_boolean done_lineno;
```

```
} coff_symbol_type;
3.3.2.7 bfd_coff_backend_data
     /* COFF symbol classifications.
     enum coff_symbol_classification
       /* Global symbol. */
      COFF_SYMBOL_GLOBAL,
       /* Common symbol. */
      COFF_SYMBOL_COMMON,
       /* Undefined symbol. */
      COFF_SYMBOL_UNDEFINED,
       /* Local symbol. */
      COFF_SYMBOL_LOCAL,
       /* PE section symbol. */
      COFF_SYMBOL_PE_SECTION
    };
Special entry points for gdb to swap in coff symbol table parts:
     typedef struct
     {
      void (*_bfd_coff_swap_aux_in)
         (bfd *, void *, int, int, int, void *);
      void (*_bfd_coff_swap_sym_in)
         (bfd *, void *, void *);
      void (*_bfd_coff_swap_lineno_in)
         (bfd *, void *, void *);
      unsigned int (*_bfd_coff_swap_aux_out)
         (bfd *, void *, int, int, int, int, void *);
      unsigned int (*_bfd_coff_swap_sym_out)
         (bfd *, void *, void *);
       unsigned int (*_bfd_coff_swap_lineno_out)
         (bfd *, void *, void *);
       unsigned int (*_bfd_coff_swap_reloc_out)
         (bfd *, void *, void *);
      unsigned int (*_bfd_coff_swap_filehdr_out)
         (bfd *, void *, void *);
```

```
unsigned int (*_bfd_coff_swap_aouthdr_out)
  (bfd *, void *, void *);
unsigned int (*_bfd_coff_swap_scnhdr_out)
  (bfd *, void *, void *);
unsigned int _bfd_filhsz;
unsigned int _bfd_aoutsz;
unsigned int _bfd_scnhsz;
unsigned int _bfd_symesz;
unsigned int _bfd_auxesz;
unsigned int _bfd_relsz;
unsigned int _bfd_linesz;
unsigned int _bfd_filnmlen;
bfd_boolean _bfd_coff_long_filenames;
bfd_boolean _bfd_coff_long_section_names;
bfd_boolean (*_bfd_coff_set_long_section_names)
  (bfd *, int);
unsigned int _bfd_coff_default_section_alignment_power;
bfd_boolean _bfd_coff_force_symnames_in_strings;
unsigned int _bfd_coff_debug_string_prefix_length;
void (*_bfd_coff_swap_filehdr_in)
  (bfd *, void *, void *);
void (*_bfd_coff_swap_aouthdr_in)
  (bfd *, void *, void *);
void (*_bfd_coff_swap_scnhdr_in)
  (bfd *, void *, void *);
void (*_bfd_coff_swap_reloc_in)
  (bfd *abfd, void *, void *);
bfd_boolean (*_bfd_coff_bad_format_hook)
  (bfd *, void *);
bfd_boolean (*_bfd_coff_set_arch_mach_hook)
  (bfd *, void *);
void * (*_bfd_coff_mkobject_hook)
  (bfd *, void *, void *);
bfd_boolean (*_bfd_styp_to_sec_flags_hook)
  (bfd *, void *, const char *, asection *, flagword *);
```

```
void (*_bfd_set_alignment_hook)
  (bfd *, asection *, void *);
bfd_boolean (*_bfd_coff_slurp_symbol_table)
  (bfd *);
bfd_boolean (*_bfd_coff_symname_in_debug)
  (bfd *, struct internal_syment *);
bfd_boolean (*_bfd_coff_pointerize_aux_hook)
  (bfd *, combined_entry_type *, combined_entry_type *,
          unsigned int, combined_entry_type *);
bfd_boolean (*_bfd_coff_print_aux)
  (bfd *, FILE *, combined_entry_type *, combined_entry_type *,
          combined_entry_type *, unsigned int);
void (*_bfd_coff_reloc16_extra_cases)
  (bfd *, struct bfd_link_info *, struct bfd_link_order *, arelent *,
         bfd_byte *, unsigned int *, unsigned int *);
int (*_bfd_coff_reloc16_estimate)
  (bfd *, asection *, arelent *, unsigned int,
          struct bfd_link_info *);
enum coff_symbol_classification (*_bfd_coff_classify_symbol)
  (bfd *, struct internal_syment *);
bfd_boolean (*_bfd_coff_compute_section_file_positions)
  (bfd *);
bfd_boolean (*_bfd_coff_start_final_link)
  (bfd *, struct bfd_link_info *);
bfd_boolean (*_bfd_coff_relocate_section)
  (bfd *, struct bfd_link_info *, bfd *, asection *, bfd_byte *,
          struct internal_reloc *, struct internal_syment *, asection **);
reloc_howto_type *(*_bfd_coff_rtype_to_howto)
  (bfd *, asection *, struct internal_reloc *,
          struct coff_link_hash_entry *, struct internal_syment *,
          bfd_vma *);
bfd_boolean (*_bfd_coff_adjust_symndx)
  (bfd *, struct bfd_link_info *, bfd *, asection *,
          struct internal_reloc *, bfd_boolean *);
```

```
bfd_boolean (*_bfd_coff_link_add_one_symbol)
    (struct bfd_link_info *, bfd *, const char *, flagword,
            asection *, bfd_vma, const char *, bfd_boolean, bfd_boolean,
            struct bfd_link_hash_entry **);
 bfd_boolean (*_bfd_coff_link_output_has_begun)
    (bfd *, struct coff_final_link_info *);
 bfd_boolean (*_bfd_coff_final_link_postscript)
    (bfd *, struct coff_final_link_info *);
 bfd_boolean (*_bfd_coff_print_pdata)
    (bfd *, void *);
} bfd_coff_backend_data;
#define coff_backend_info(abfd) \
  ((bfd_coff_backend_data *) (abfd)->xvec->backend_data)
#define bfd_coff_swap_aux_in(a,e,t,c,ind,num,i) \
  ((coff_backend_info (a)->_bfd_coff_swap_aux_in) (a,e,t,c,ind,num,i))
#define bfd_coff_swap_sym_in(a,e,i) \
  ((coff_backend_info (a)->_bfd_coff_swap_sym_in) (a,e,i))
#define bfd_coff_swap_lineno_in(a,e,i) \
  ((coff_backend_info ( a)->_bfd_coff_swap_lineno_in) (a,e,i))
#define bfd_coff_swap_reloc_out(abfd, i, o) \
  ((coff_backend_info (abfd)->_bfd_coff_swap_reloc_out) (abfd, i, o))
#define bfd_coff_swap_lineno_out(abfd, i, o) \
  ((coff_backend_info (abfd)->_bfd_coff_swap_lineno_out) (abfd, i, o))
#define bfd_coff_swap_aux_out(a,i,t,c,ind,num,o) \
  ((coff_backend_info (a)->_bfd_coff_swap_aux_out) (a,i,t,c,ind,num,o))
#define bfd_coff_swap_sym_out(abfd, i,o) \
  ((coff_backend_info (abfd)->_bfd_coff_swap_sym_out) (abfd, i, o))
#define bfd_coff_swap_scnhdr_out(abfd, i,o) \
  ((coff_backend_info (abfd)->_bfd_coff_swap_scnhdr_out) (abfd, i, o))
#define bfd_coff_swap_filehdr_out(abfd, i,o) \
  ((coff_backend_info (abfd)->_bfd_coff_swap_filehdr_out) (abfd, i, o))
```

```
#define bfd_coff_swap_aouthdr_out(abfd, i,o) \
  ((coff_backend_info (abfd)->_bfd_coff_swap_aouthdr_out) (abfd, i, o))
#define bfd_coff_filhsz(abfd) (coff_backend_info (abfd)->_bfd_filhsz)
#define bfd_coff_aoutsz(abfd) (coff_backend_info (abfd)->_bfd_aoutsz)
#define bfd_coff_scnhsz(abfd) (coff_backend_info (abfd)->_bfd_scnhsz)
#define bfd_coff_symesz(abfd) (coff_backend_info (abfd)->_bfd_symesz)
#define bfd_coff_auxesz(abfd) (coff_backend_info (abfd)->_bfd_auxesz)
#define bfd_coff_relsz(abfd) (coff_backend_info (abfd)->_bfd_relsz)
#define bfd_coff_linesz(abfd) (coff_backend_info (abfd)->_bfd_linesz)
#define bfd_coff_filnmlen(abfd) (coff_backend_info (abfd)->_bfd_filnmlen)
#define bfd_coff_long_filenames(abfd) \
  (coff_backend_info (abfd)->_bfd_coff_long_filenames)
#define bfd_coff_long_section_names(abfd) \
  (coff_backend_info (abfd)->_bfd_coff_long_section_names)
#define bfd_coff_set_long_section_names(abfd, enable) \
  ((coff_backend_info (abfd)->_bfd_coff_set_long_section_names) (abfd, enable))
#define bfd_coff_default_section_alignment_power(abfd) \
  (coff_backend_info (abfd)->_bfd_coff_default_section_alignment_power)
#define bfd_coff_swap_filehdr_in(abfd, i,o) \
  ((coff_backend_info (abfd)->_bfd_coff_swap_filehdr_in) (abfd, i, o))
#define bfd_coff_swap_aouthdr_in(abfd, i,o) \
  ((coff_backend_info (abfd)->_bfd_coff_swap_aouthdr_in) (abfd, i, o))
#define bfd_coff_swap_scnhdr_in(abfd, i,o) \
  ((coff_backend_info (abfd)->_bfd_coff_swap_scnhdr_in) (abfd, i, o))
#define bfd_coff_swap_reloc_in(abfd, i, o) \
  ((coff_backend_info (abfd)->_bfd_coff_swap_reloc_in) (abfd, i, o))
#define bfd_coff_bad_format_hook(abfd, filehdr) \
  ((coff_backend_info (abfd)->_bfd_coff_bad_format_hook) (abfd, filehdr))
#define bfd_coff_set_arch_mach_hook(abfd, filehdr)\
  ((coff_backend_info (abfd)->_bfd_coff_set_arch_mach_hook) (abfd, filehdr))
#define bfd_coff_mkobject_hook(abfd, filehdr, aouthdr)\
  ((coff_backend_info (abfd)->_bfd_coff_mkobject_hook)\
   (abfd, filehdr, aouthdr))
#define bfd_coff_styp_to_sec_flags_hook(abfd, scnhdr, name, section, flags_ptr)
  ((coff_backend_info (abfd)->_bfd_styp_to_sec_flags_hook)\
   (abfd, scnhdr, name, section, flags_ptr))
#define bfd_coff_set_alignment_hook(abfd, sec, scnhdr)\
  ((coff_backend_info (abfd)->_bfd_set_alignment_hook) (abfd, sec, scnhdr))
```

```
#define bfd_coff_slurp_symbol_table(abfd)\
  ((coff_backend_info (abfd)->_bfd_coff_slurp_symbol_table) (abfd))
#define bfd_coff_symname_in_debug(abfd, sym)\
  ((coff_backend_info (abfd)->_bfd_coff_symname_in_debug) (abfd, sym))
#define bfd_coff_force_symnames_in_strings(abfd)\
  (coff_backend_info (abfd)->_bfd_coff_force_symnames_in_strings)
#define bfd_coff_debug_string_prefix_length(abfd)\
  (coff_backend_info (abfd)->_bfd_coff_debug_string_prefix_length)
#define bfd_coff_print_aux(abfd, file, base, symbol, aux, indaux)\
  ((coff_backend_info (abfd)->_bfd_coff_print_aux)\
   (abfd, file, base, symbol, aux, indaux))
#define bfd_coff_reloc16_extra_cases(abfd, link_info, link_order,\
                                     reloc, data, src_ptr, dst_ptr)\
  ((coff_backend_info (abfd)->_bfd_coff_reloc16_extra_cases)\
   (abfd, link_info, link_order, reloc, data, src_ptr, dst_ptr))
#define bfd_coff_reloc16_estimate(abfd, section, reloc, shrink, link_info)
  ((coff_backend_info (abfd)->_bfd_coff_reloc16_estimate)\
   (abfd, section, reloc, shrink, link_info))
#define bfd_coff_classify_symbol(abfd, sym)\
  ((coff_backend_info (abfd)->_bfd_coff_classify_symbol)\
   (abfd, sym))
#define bfd_coff_compute_section_file_positions(abfd)\
  ((coff_backend_info (abfd)->_bfd_coff_compute_section_file_positions)\
   (abfd))
#define bfd_coff_start_final_link(obfd, info)\
  ((coff_backend_info (obfd)->_bfd_coff_start_final_link)\
   (obfd, info))
#define bfd_coff_relocate_section(obfd,info,ibfd,o,con,rel,isyms,secs)\
  ((coff_backend_info (ibfd)->_bfd_coff_relocate_section)\
   (obfd, info, ibfd, o, con, rel, isyms, secs))
#define bfd_coff_rtype_to_howto(abfd, sec, rel, h, sym, addendp)
  ((coff_backend_info (abfd)->_bfd_coff_rtype_to_howto)\
   (abfd, sec, rel, h, sym, addendp))
#define bfd_coff_adjust_symndx(obfd, info, ibfd, sec, rel, adjustedp)\
  ((coff_backend_info (abfd)->_bfd_coff_adjust_symndx)\
   (obfd, info, ibfd, sec, rel, adjustedp))
#define bfd_coff_link_add_one_symbol(info, abfd, name, flags, section,\
                                     value, string, cp, coll, hashp)\
```

```
((coff_backend_info (abfd)->_bfd_coff_link_add_one_symbol)\
  (info, abfd, name, flags, section, value, string, cp, coll, hashp))
#define bfd_coff_link_output_has_begun(a,p) \
  ((coff_backend_info (a)->_bfd_coff_link_output_has_begun) (a, p))
#define bfd_coff_final_link_postscript(a,p) \
  ((coff_backend_info (a)->_bfd_coff_final_link_postscript) (a, p))

#define bfd_coff_have_print_pdata(a) \
  (coff_backend_info (a)->_bfd_coff_print_pdata)
#define bfd_coff_print_pdata(a,p) \
  ((coff_backend_info (a)->_bfd_coff_print_pdata) (a, p))

/* Macro: Returns true if the bfd is a PE executable as opposed to a
   PE object file. */
#define bfd_pei_p(abfd) \
  (CONST_STRNEQ ((abfd)->xvec->name, "pei-"))
```

3.3.2.8 Writing relocations

To write relocations, the back end steps though the canonical relocation table and create an internal_reloc. The symbol index to use is removed from the offset field in the symbol table supplied. The address comes directly from the sum of the section base address and the relocation offset; the type is dug directly from the howto field. Then the internal_reloc is swapped into the shape of an external_reloc and written out to disk.

3.3.2.9 Reading linenumbers

Creating the linenumber table is done by reading in the entire coff linenumber table, and creating another table for internal use.

A coff linenumber table is structured so that each function is marked as having a line number of 0. Each line within the function is an offset from the first line in the function. The base of the line number information for the table is stored in the symbol associated with the function.

Note: The PE format uses line number 0 for a flag indicating a new source file.

The information is copied from the external to the internal table, and each symbol which marks a function is marked by pointing its...

How does this work?

3.3.2.10 Reading relocations

Coff relocations are easily transformed into the internal BFD form (arelent).

Reading a coff relocation table is done in the following stages:

- Read the entire coff relocation table into memory.
- Process each relocation in turn; first swap it from the external to the internal form.
- Turn the symbol referenced in the relocation's symbol index into a pointer into the canonical symbol table. This table is the same as the one returned by a call to bfd_

canonicalize_symtab. The back end will call that routine and save the result if a canonicalization hasn't been done.

• The reloc index is turned into a pointer to a howto structure, in a back end specific way. For instance, the 386 and 960 use the r_type to directly produce an index into a howto table vector; the 88k subtracts a number from the r_type field and creates an addend field.

3.4 ELF backends

BFD support for ELF formats is being worked on. Currently, the best supported back ends are for sparc and i386 (running svr4 or Solaris 2).

Documentation of the internals of the support code still needs to be written. The code is changing quickly enough that we haven't bothered yet.

3.5 mmo backend

The mmo object format is used exclusively together with Professor Donald E. Knuth's educational 64-bit processor MMIX. The simulator mmix which is available at http://www-cs-faculty.stanford.edu/~knuth/programs/mmix.tar.gz understands this format. That package also includes a combined assembler and linker called mmixal. The mmo format has no advantages feature-wise compared to e.g. ELF. It is a simple non-relocatable object format with no support for archives or debugging information, except for symbol value information and line numbers (which is not yet implemented in BFD). See http://www-cs-faculty.stanford.edu/~knuth/mmix.html for more information about MMIX. The ELF format is used for intermediate object files in the BFD implementation.

3.5.1 File layout

The mmo file contents is not partitioned into named sections as with e.g. ELF. Memory areas is formed by specifying the location of the data that follows. Only the memory area '0x0000...00' to '0x01ff...ff' is executable, so it is used for code (and constants) and the area '0x2000...00' to '0x20ff...ff' is used for writable data. See Section 3.5.3 [mmo section mapping], page 189.

There is provision for specifying "special data" of 65536 different types. We use type 80 (decimal), arbitrarily chosen the same as the ELF e_machine number for MMIX, filling it with section information normally found in ELF objects. See Section 3.5.3 [mmo section mapping], page 189.

Contents is entered as 32-bit words, xor:ed over previous contents, always zero-initialized. A word that starts with the byte '0x98' forms a command called a 'lopcode', where the next byte distinguished between the thirteen lopcodes. The two remaining bytes, called the 'Y' and 'Z' fields, or the 'YZ' field (a 16-bit big-endian number), are used for various purposes different for each lopcode. As documented in http://www-cs-faculty.stanford.edu/~knuth/mmixal-intro.ps.gz, the lopcodes are:

lop_quote

0x98000001. The next word is contents, regardless of whether it starts with 0x98 or not.

- lop_loc 0x9801YYZZ, where 'Z' is 1 or 2. This is a location directive, setting the location for the next data to the next 32-bit word (for Z=1) or 64-bit word (for Z=2), plus $Y*2^56$. Normally 'Y' is 0 for the text segment and 2 for the data segment.
- lop_skip 0x9802YYZZ. Increase the current location by 'YZ' bytes.
- lop_fixo 0x9803YYZZ, where 'Z' is 1 or 2. Store the current location as 64 bits into the location pointed to by the next 32-bit (Z = 1) or 64-bit (Z = 2) word, plus $Y * 2^56$.
- lop_fixr 0x9804YYZZ. 'YZ' is stored into the current location plus 2-4*YZ.
- lop_fixrx
- 0x980500ZZ. 'Z' is 16 or 24. A value 'L' derived from the following 32-bit word are used in a manner similar to 'YZ' in lop_fixr: it is xor:ed into the current location minus 4*L. The first byte of the word is 0 or 1. If it is 1, then $L = (lowest24bitsofword) 2^{Z}$, if 0, then L = (lowest24bitsofword).
- lop_file 0x9806YYZZ. 'Y' is the file number, 'Z' is count of 32-bit words. Set the file number to 'Y' and the line counter to 0. The next Z*4 bytes contain the file name, padded with zeros if the count is not a multiple of four. The same 'Y' may occur multiple times, but 'Z' must be 0 for all but the first occurrence.
- lop_line 0x9807YYZZ. 'YZ' is the line number. Together with lop_file, it forms the source location for the next 32-bit word. Note that for each non-lopcode 32-bit word, line numbers are assumed incremented by one.
- lop_spec 0x9808YYZZ. 'YZ' is the type number. Data until the next lopcode other than lop_quote forms special data of type 'YZ'. See Section 3.5.3 [mmo section mapping], page 189.
 - Other types than 80, (or type 80 with a content that does not parse) is stored in sections named .MMIX.spec_data.n where n is the 'YZ'-type. The flags for such a sections say not to allocate or load the data. The vma is 0. Contents of multiple occurrences of special data n is concatenated to the data of the previous lop_spec ns. The location in data or code at which the lop_spec occurred is lost.
- lop_pre 0x980901ZZ. The first lopcode in a file. The 'Z' field forms the length of header information in 32-bit words, where the first word tells the time in seconds since '00:00:00 GMT Jan 1 1970'.
- lop_post 0x980a00ZZ. Z > 32. This lopcode follows after all content-generating lopcodes in a program. The 'Z' field denotes the value of 'rG' at the beginning of the program. The following 256 Z big-endian 64-bit words are loaded into global registers '\$G' . . . '\$255'.
- lop_stab 0x980b0000. The next-to-last lopcode in a program. Must follow immediately after the lop_post lopcode and its data. After this lopcode follows all symbols in a compressed format (see Section 3.5.2 [Symbol-table], page 187).
- lop_end 0x980cYYZZ. The last lopcode in a program. It must follow the lop_stab lopcode and its data. The 'YZ' field contains the number of 32-bit words of symbol table information after the preceding lop_stab lopcode.

Note that the lopcode "fixups"; lop_fixr, lop_fixrx and lop_fixo are not generated by BFD, but are handled. They are generated by mmixal.

This trivial one-label, one-instruction file:

```
:Main TRAP 1,2,3
can be represented this way in mmo:
      0x98090101 - lop_pre, one 32-bit word with timestamp.
      <timestamp>
      0x98010002 - lop_loc, text segment, using a 64-bit address.
                   Note that mmixal does not emit this for the file above.
      0x00000000 - Address, high 32 bits.
      0x00000000 - Address, low 32 bits.
      Ox98060002 - lop_file, 2 32-bit words for file-name.
      0x74657374 - "test"
      0x2e730000 - ".s\0\0"
      0x98070001 - lop_line, line 1.
      0x00010203 - TRAP 1,2,3
      0x980a00ff - lop_post, setting $255 to 0.
      0x0000000
      0x00000000
      0x980b0000 - lop_stab for ":Main" = 0, serial 1.
      0x203a4040
                   See Section 3.5.2 [Symbol-table], page 187.
      0x10404020
      0x4d206120
      0x69016e00
      0x81000000
```

3.5.2 Symbol table format

From mmixal.w (or really, the generated mmixal.tex) in http://www-cs-faculty.stanford.edu/~knuth/prog "Symbols are stored and retrieved by means of a 'ternary search trie', following ideas of Bentley and Sedgewick. (See ACM-SIAM Symp. on Discrete Algorithms '8' (1997), 360–369; R.Sedgewick, 'Algorithms in C' (Reading, Mass. Addison-Wesley, 1998), '15.4'.) Each trie node stores a character, and there are branches to subtries for the cases where a given character is less than, equal to, or greater than the character in the trie. There also is a pointer to a symbol table entry if a symbol ends at the current node."

0x980c0005 - lop_end; symbol table contained five 32-bit words.

So it's a tree encoded as a stream of bytes. The stream of bytes acts on a single virtual global symbol, adding and removing characters and signalling complete symbol points. Here, we read the stream and create symbols at the completion points.

First, there's a control byte m. If any of the listed bits in m is nonzero, we execute what stands at the right, in the listed order:

0x2f - Read the next byte as a character and store it in the current character position; increment character position. Test the bits of m:

(MMO3_WCHAR)

(MMO3_TYPEBITS)

Oxf - We have a complete symbol; parse the type, value and serial number and do what should be done with a symbol. The type and length information is in j = (m & Oxf).

(MMO3_REGQUAL_BITS)

- j <= 8: An absolute symbol. Read j bytes as the big-endian number the symbol equals. A j = 2 with two zero bytes denotes an unknown symbol.
- j > 8: As with j <= 8, but add (0x20 << 56) to the value in the following j 8 bytes.

Then comes the serial number, as a variant of uleb128, but better named ubeb128: Read bytes and shift the previous value left 7 (multiply by 128). Add in the new byte, repeat until a byte has bit 7 set. The serial number is the computed value minus 128.

(MMO3_MIDDLE)

Ox20 - Traverse middle trie. (Read a new command byte and recurse.) Decrement character position.

(MMO3_RIGHT)

0x10 - Traverse right trie. (Read a new command byte and recurse.)

Let's look again at the lop_stab for the trivial file (see Section 3.5.1 [File layout], page 185).

```
0x980b0000 - lop_stab for ":Main" = 0, serial 1.
0x203a4040
0x10404020
0x4d206120
0x69016e00
0x81000000
```

This forms the trivial trie (note that the path between ":" and "M" is redundant):

```
11 - 11
203a
40
40
10
40
40
      "M"
204d
2061
      "a"
2069
      "i"
016e
      "n" is the last character in a full symbol, and
      with a value represented in one byte.
00
      The value is 0.
81
      The serial number is 1.
```

3.5.3 mmo section mapping

The implementation in BFD uses special data type 80 (decimal) to encapsulate and describe named sections, containing e.g. debug information. If needed, any datum in the encapsulation will be quoted using lop_quote. First comes a 32-bit word holding the number of 32-bit words containing the zero-terminated zero-padded segment name. After the name there's a 32-bit word holding flags describing the section type. Then comes a 64-bit big-endian word with the section length (in bytes), then another with the section start address. Depending on the type of section, the contents might follow, zero-padded to 32-bit boundary. For a loadable section (such as data or code), the contents might follow at some later point, not necessarily immediately, as a lop_loc with the same start address as in the section description, followed by the contents. This in effect forms a descriptor that must be emitted before the actual contents. Sections described this way must not overlap.

For areas that don't have such descriptors, synthetic sections are formed by BFD. Consecutive contents in the two memory areas '0x0000...00' to '0x01ff...ff' and '0x2000...00' to '0x20ff...ff' are entered in sections named .text and .data respectively. If an area is not otherwise described, but would together with a neighboring lower area be less than '0x4000000' bytes long, it is joined with the lower area and the gap is zero-filled. For other cases, a new section is formed, named .MMIX.sec.n. Here, n is a number, a running count through the mmo file, starting at 0.

A loadable section specified as:

```
.section secname, "ax"

TETRA 1,2,3,4,-1,-2009

BYTE 80

and linked to address '0x4', is represented by the sequence:

0x98080050 - lop_spec 80

0x00000002 - two 32-bit words for the section name

0x7365636e - "secn"

0x616d6500 - "ame\0"

0x000000033 - flags CODE, READONLY, LOAD, ALLOC

0x000000000 - high 32 bits of section length
```

```
0x0000001c - section length is 28 bytes; 6 * 4 + 1 + alignment to 32 bits
0x00000000 - high 32 bits of section address
0x00000004 - section address is 4
0x98010002 - 64 bits with address of following data
0x00000000 - high 32 bits of address
0x00000004 - low 32 bits: data starts at address 4
0x00000001 - 1
0x00000002 - 2
0x00000003 - 3
0x00000004 - 4
0xffffffff - -1
0xffffff827 - -2009
0x50000000 - 80 as a byte, padded with zeros.
```

Note that the lop_spec wrapping does not include the section contents. Compare this to a non-loaded section specified as:

```
.section thirdsec
TETRA 200001,100002
BYTE 38,40
```

This, when linked to address '0x2000000000001c', is represented by:

```
0x98080050 - lop_spec 80
0x00000002 - two 32-bit words for the section name
0x7365636e - "thir"
0x616d6500 - "dsec"
0x00000010 - flag READONLY
0x00000000 - high 32 bits of section length
0x0000000c - section length is 12 bytes; 2 * 4 + 2 + alignment to 32 bits
0x20000000 - high 32 bits of address
0x0000001c - low 32 bits of address
0x0000001c - low 32 bits of address 0x2000000000001c
0x00030d41 - 200001
0x000186a2 - 100002
0x26280000 - 38, 40 as bytes, padded with zeros
```

For the latter example, the section contents must not be loaded in memory, and is therefore specified as part of the special data. The address is usually unimportant but might provide information for e.g. the DWARF 2 debugging format.

```
Version 1.3, 3 November 2008
```

```
Copyright © 2000, 2001, 2002, 2007, 2008 Free Software Foundation, Inc. http://fsf.org/
```

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document free in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or non-commercially. Secondarily, this License preserves for the author and publisher a way

to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise

Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

The "publisher" means any person or entity that distributes copies of the Document to the public.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
- C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
- D. Preserve all the copyright notices of the Document.
- E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
- F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.

- G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- H. Include an unaltered copy of this License.
- I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
- J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
- K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
- N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
- O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties—for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements."

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with

translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, or distribute it is void, and will automatically terminate your rights under this License.

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, receipt of a copy of some or all of the same material does not give you any rights to use it.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See http://www.gnu.org/copyleft/.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation. If the Document specifies that a proxy can decide which future versions of this License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Document.

11. RELICENSING

"Massive Multiauthor Collaboration Site" (or "MMC Site") means any World Wide Web server that publishes copyrightable works and also provides prominent facilities for anybody to edit those works. A public wiki that anybody can edit is an example of such a server. A "Massive Multiauthor Collaboration" (or "MMC") contained in the site means any set of copyrightable works thus published on the MMC site.

"CC-BY-SA" means the Creative Commons Attribution-Share Alike 3.0 license published by Creative Commons Corporation, a not-for-profit corporation with a principal place of business in San Francisco, California, as well as future copyleft versions of that license published by that same organization.

"Incorporate" means to publish or republish a Document, in whole or in part, as part of another Document.

An MMC is "eligible for relicensing" if it is licensed under this License, and if all works that were first published under this License somewhere other than this MMC, and subsequently incorporated in whole or in part into the MMC, (1) had no cover texts or invariant sections, and (2) were thus incorporated prior to November 1, 2008.

The operator of an MMC Site may republish an MMC contained in the site under CC-BY-SA on the same site at any time before August 1, 2009, provided the MMC is eligible for relicensing.

ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

Copyright (C) year your name. Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.3 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled ''GNU Free Documentation License''.

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the "with...Texts." line with this:

with the Invariant Sections being $list\ their\ titles$, with the Front-Cover Texts being list, and with the Back-Cover Texts being list.

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

_	bfd_cache_close	
_bfd_final_link_relocate	bfd_cache_close_all	
_bfd_generic_link_add_archive_symbols 163	bfd_cache_init	
_bfd_generic_link_add_one_symbol 162	bfd_calc_gnu_debuglink_crc32	
_bfd_generic_make_empty_symbol	bfd_canonicalize_reloc	
_bfd_link_add_symbols in target vector 161	$bfd_canonicalize_symtab\dots \\$	
_bfd_link_final_link in target vector 163	bfd_check_format	
_bfd_link_hash_table_create in target vector 161	bfd_check_format_matches	
_bfd_relocate_contents	bfd_check_overflow	58
	bfd_close	
	bfd_close_all_done	152
\mathbf{A}	bfd_coff_backend_data	178
170	bfd_copy_private_bfd_data	16
aout_size_machine_type	bfd_copy_private_header_data	
aout_size_mkobject	bfd_copy_private_section_data	
aout_size_new_section_hook	bfd_copy_private_symbol_data	
aout_size_set_arch_mach	bfd_core_file_failing_command	
aout_size_some_aout_object_p 172	bfd_core_file_failing_signal	
aout_size_swap_exec_header_in	bfd_core_file_pid	
aout_size_swap_exec_header_out 171	bfd_create	
arelent_chain	bfd_create_gnu_debuglink_section	
	bfd_decode_symclass	
В	bfd_default_arch_struct	
D	bfd_default_compatible	
BFD 1	bfd_default_reloc_type_lookup	
BFD canonical format	bfd_default_scan	
bfd_alloc	bfd_default_set_arch_mach	
bfd_alloc2	bfd_demangle	
bfd_alt_mach_code	bfd_emul_get_commonpagesize	
bfd_arch_bits_per_address	bfd_emul_get_maxpagesize	
bfd_arch_bits_per_byte	bfd_emul_set_commonpagesize	
bfd_arch_default_fill	bfd_emul_set_maxpagesizebfd_emul_set_maxpagesize	
bfd_arch_get_compatible	bfd_errmsg	
bfd_arch_list	bfd_fdopenr	
bfd_arch_mach_octets_per_byte	bfd_fill_in_gnu_debuglink_section	
BFD_ARELOC_BFIN_ADD	bfd_find_target	
BFD_ARELOC_BFIN_ADDR		
BFD_ARELOC_BFIN_AND	bfd_find_version_for_sym	
BFD_ARELOC_BFIN_COMP		
BFD_ARELOC_BFIN_CONST	bfd_follow_gnu_debuglink	
BFD_ARELOC_BFIN_DIV	bfd_format_string	
BFD_ARELOC_BFIN_HWPAGE	bfd_format_stringbfd_generic_define_common_symbol	
BFD_ARELOC_BFIN_LAND	bfd_generic_discard_group	
BFD_ARELOC_BFIN_LEN		
BFD_ARELOC_BFIN_LOR	bfd_generic_gc_sections	
BFD_ARELOC_BFIN_LSHIFT82	bfd_generic_get_relocated_section_contents	
	bfd_generic_is_group_section	
BFD_ARELOC_BFIN_MOD	bfd_generic_lookup_section_flags	
BFD_ARELOC_BFIN_MULT	bfd_generic_merge_sections	
BFD_ARELOC_BFIN_NEG	bfd_generic_relax_section	
BFD_ARELOC_BFIN_OR	bfd_get_alt_debug_link_info	
BFD_ARELOC_BFIN_PAGE	bfd_get_arch	
BFD_ARELOC_BFIN_PUSH	bfd_get_arch_info	
BFD_ARELOC_BFIN_RSHIFT	bfd_get_arch_size	
BFD_ARELOC_BFIN_SUB	bfd_get_assert_handler	
BFD_ARELOC_BFIN_XOR 82	bfd_get_debug_link_info	154

bfd_get_error11	bfd_perform_relocation	59
bfd_get_error_handler	bfd_perror	
bfd_get_gp_size	bfd_print_symbol_vandf4	
bfd_get_linker_section	bfd_printable_arch_mach	
bfd_get_mach	bfd_printable_name	
bfd_get_mtime	bfd_put_size	
bfd_get_next_mapent	BFD_RELOC_12_PCREL	
bfd_get_next_section_by_name	BFD_RELOC_14	
bfd_get_reloc_code_name	BFD_RELOC_16	
bfd_get_reloc_size	BFD_RELOC_16_BASEREL	
bfd_get_reloc_upper_bound	BFD_RELOC_16_GOT_PCREL	
bfd_get_section_by_name	BFD_RELOC_16_GOTOFF	
bfd_get_section_by_name_if	BFD_RELOC_16_PCREL	
bfd_get_section_contents	BFD_RELOC_16_PCREL_S2	
bfd_get_sign_extend_vma	BFD_RELOC_16_PLT_PCREL	
bfd_get_size	BFD_RELOC_16_PLTOFF	
bfd_get_symtab_upper_bound	BFD_RELOC_16C_ABS20	
bfd_get_target_info		
	BFD_RELOC_16C_ABS20_C	
bfd_get_unique_section_name	BFD_RELOC_16C_ABS24	
bfd_h_put_size	BFD_RELOC_16C_ABS24_C	
bfd_hash_allocate	BFD_RELOC_16C_DISP04	
bfd_hash_lookup	BFD_RELOC_16C_DISP04_C	
bfd_hash_newfunc	BFD_RELOC_16C_DISP0810	
bfd_hash_set_default_size	BFD_RELOC_16C_DISP08_C	
bfd_hash_table_free	BFD_RELOC_16C_DISP16	
bfd_hash_table_init	BFD_RELOC_16C_DISP16_C10	
bfd_hash_table_init_n	BFD_RELOC_16C_DISP2410	
bfd_hash_traverse	BFD_RELOC_16C_DISP24_C10	
bfd_hide_sym_by_version	BFD_RELOC_16C_DISP24a	
bfd_init	BFD_RELOC_16C_DISP24a_C 10	
bfd_install_relocation	BFD_RELOC_16C_IMM0410	
bfd_is_local_label	BFD_RELOC_16C_IMMO4_C10	
bfd_is_local_label_name	BFD_RELOC_16C_IMM16	
bfd_is_target_special_symbol	BFD_RELOC_16C_IMM16_C10	
bfd_is_undefined_symclass 48	BFD_RELOC_16C_IMM20 10	
bfd_link_split_section	BFD_RELOC_16C_IMM2O_C 10	
bfd_log2	BFD_RELOC_16C_IMM24 10	
bfd_lookup_arch	BFD_RELOC_16C_IMM24_C10	
bfd_make_debug_symbol	BFD_RELOC_16C_IMM32 10	03
bfd_make_empty_symbol	BFD_RELOC_16C_IMM32_C10	
bfd_make_readable	BFD_RELOC_16C_NUMO8 10	
bfd_make_section	BFD_RELOC_16C_NUMO8_C10	02
bfd_make_section_anyway	BFD_RELOC_16C_NUM16 10	02
bfd_make_section_anyway_with_flags 37	BFD_RELOC_16C_NUM16_C 10	02
bfd_make_section_old_way	BFD_RELOC_16C_NUM32 10	02
bfd_make_section_with_flags	BFD_RELOC_16C_NUM32_C 10	
bfd_make_writable	BFD_RELOC_16C_REGO4	02
bfd_malloc_and_get_section 40	BFD_RELOC_16C_REGO4_C10	02
bfd_map_over_sections	BFD_RELOC_16C_REG04a10	02
bfd_merge_private_bfd_data	BFD_RELOC_16C_REG04a_C10	02
bfd_mmap	BFD_RELOC_16C_REG1410	02
bfd_octets_per_byte 149	BFD_RELOC_16C_REG14_C10	
bfd_open_file	BFD_RELOC_16C_REG16	
bfd_openr	BFD_RELOC_16C_REG16_C10	
bfd_openr_iovec	BFD_RELOC_16C_REG20 10	
bfd_openr_next_archived_file	BFD_RELOC_16C_REG20_C	
bfd_openstreamr	BFD_RELOC_23_PCREL_S2(
bfd_openw	BFD RELOC 24	

BFD_RELOC_24_PCREL		BFD_RELOC_390_PC24DBL	
BFD_RELOC_24_PLT_PCREL		BFD_RELOC_390_PC32DBL	
BFD_RELOC_26		BFD_RELOC_390_PLT12DBL	
BFD_RELOC_32		BFD_RELOC_390_PLT16DBL	95
BFD_RELOC_32_BASEREL		BFD_RELOC_390_PLT24DBL	
BFD_RELOC_32_GOT_PCREL	60	BFD_RELOC_390_PLT32	
BFD_RELOC_32_GOTOFF	60	BFD_RELOC_390_PLT32DBL	95
BFD_RELOC_32_PCREL	60	BFD_RELOC_390_PLT64	95
BFD_RELOC_32_PCREL_S2	61	BFD_RELOC_390_PLTOFF16	96
BFD_RELOC_32_PLT_PCREL	60	BFD_RELOC_390_PLT0FF32	96
BFD_RELOC_32_PLTOFF	60	BFD_RELOC_390_PLT0FF64	96
BFD_RELOC_32_SECREL	60	BFD_RELOC_390_RELATIVE	95
BFD_RELOC_386_COPY	71	BFD_RELOC_390_TLS_DTPMOD	96
BFD_RELOC_386_GLOB_DAT	71	BFD_RELOC_390_TLS_DTPOFF	
BFD_RELOC_386_GOT32		BFD_RELOC_390_TLS_GD32	
BFD_RELOC_386_GOTOFF		BFD_RELOC_390_TLS_GD64	
BFD_RELOC_386_GOTPC		BFD_RELOC_390_TLS_GDCALL	
BFD_RELOC_386_IRELATIVE		BFD_RELOC_390_TLS_GOTIE12	
BFD_RELOC_386_JUMP_SLOT		BFD_RELOC_390_TLS_GOTIE20	
BFD_RELOC_386_PLT32		BFD_RELOC_390_TLS_GOTIE32	
BFD_RELOC_386_RELATIVE		BFD_RELOC_390_TLS_GOTIE64	
BFD_RELOC_386_TLS_DESC		BFD_RELOC_390_TLS_IE32	
BFD_RELOC_386_TLS_DESC_CALL		BFD_RELOC_390_TLS_IE64	
BFD_RELOC_386_TLS_DTPMOD32		BFD_RELOC_390_TLS_IEENT	
BFD_RELOC_386_TLS_DTPOFF32		BFD_RELOC_390_TLS_LDCALL	
BFD_RELOC_386_TLS_GD		BFD_RELOC_390_TLS_LDM32	
BFD_RELOC_386_TLS_GOTDESC		BFD_RELOC_390_TLS_LDM64	
BFD_RELOC_386_TLS_GOTIE		BFD_RELOC_390_TLS_LD032	
BFD_RELOC_386_TLS_IE		BFD_RELOC_390_TLS_LD064	
BFD_RELOC_386_TLS_IE_32		BFD_RELOC_390_TLS_LE32	
BFD_RELOC_386_TLS_LDM		BFD_RELOC_390_TLS_LE64.	
BFD_RELOC_386_TLS_LD0_32		BFD_RELOC_390_TLS_LCAD	
BFD_RELOC_386_TLS_LE		BFD_RELOC_390_TLS_TPOFF	
BFD_RELOC_386_TLS_LE_32		BFD_RELOC_64	
BFD_RELOC_386_TLS_TPOFF		BFD_RELOC_64_PCREL	
BFD_RELOC_386_TLS_TP0FF32		BFD_RELOC_64_PLT_PCREL	
BFD_RELOC_390_12		BFD_RELOC_64_PLTOFF	
BFD_RELOC_390_20		BFD_RELOC_68K_GLOB_DAT	
BFD_RELOC_390_COPY		BFD_RELOC_68K_JMP_SLOT	
BFD_RELOC_390_GLOB_DAT		BFD_RELOC_68K_RELATIVE	
BFD_RELOC_390_GOT12		BFD_RELOC_68K_TLS_GD16	
BFD_RELOC_390_GOT16		BFD_RELOC_68K_TLS_GD32	
BFD_RELOC_390_GOT20		BFD_RELOC_68K_TLS_GD8	
BFD_RELOC_390_GOT64		BFD_RELOC_68K_TLS_IE16	
BFD_RELOC_390_GOTENT		BFD_RELOC_68K_TLS_IE32	
BFD_RELOC_390_GOTOFF64		BFD_RELOC_68K_TLS_IE8	
BFD_RELOC_390_GOTPC		BFD_RELOC_68K_TLS_LDM16	
BFD_RELOC_390_GOTPCDBL		BFD_RELOC_68K_TLS_LDM32	
BFD_RELOC_390_GOTPLT12		BFD_RELOC_68K_TLS_LDM8	
BFD_RELOC_390_GOTPLT16		BFD_RELOC_68K_TLS_LD016	
BFD_RELOC_390_GOTPLT20		BFD_RELOC_68K_TLS_LD032	
BFD_RELOC_390_GOTPLT32		BFD_RELOC_68K_TLS_LD08	
BFD_RELOC_390_GOTPLT64		BFD_RELOC_68K_TLS_LE16	
BFD_RELOC_390_GOTPLTENT	96	BFD_RELOC_68K_TLS_LE32	61
BFD_RELOC_390_IRELATIVE	97	BFD_RELOC_68K_TLS_LE8	61
BFD_RELOC_390_JMP_SLOT	95	BFD_RELOC_8	60
BFD_RELOC_390_PC12DBL	95	BFD_RELOC_8_BASEREL	61
BFD RELOC 390 PC16DBL	95	BFD_RELOC_8_FFnn	61

BFD_RELOC_8_GOT_PCREL60	BFD_RELOC_AARCH64_LD_L019_PCREL 114
BFD_RELOC_8_GOTOFF	BFD_RELOC_AARCH64_LD32_GOT_LO12_NC 115
BFD_RELOC_8_PCREL60	BFD_RELOC_AARCH64_LD64_GOT_LO12_NC 115
BFD_RELOC_8_PLT_PCREL60	BFD_RELOC_AARCH64_LDST_L012117
BFD_RELOC_8_PLTOFF	BFD_RELOC_AARCH64_LDST128_LO12 115
BFD_RELOC_860_COPY	BFD_RELOC_AARCH64_LDST16_LO12
BFD_RELOC_860_GLOB_DAT	BFD_RELOC_AARCH64_LDST32_L012
BFD_RELOC_860_HAGOT	BFD_RELOC_AARCH64_LDST64_L012
BFD_RELOC_860_HAGOTOFF	BFD_RELOC_AARCH64_LDST8_L012
BFD_RELOC_860_HAPC	BFD_RELOC_AARCH64_MOVW_GO
BFD_RELOC_860_HIGH	BFD_RELOC_AARCH64_MOVW_GO_NC
BFD_RELOC_860_HIGHADJ	BFD_RELOC_AARCH64_MOVW_GO_S
BFD_RELOC_860_HIGOT	BFD_RELOC_AARCH64_MOVW_G1
BFD_RELOC_860_HIGOTOFF	BFD_RELOC_AARCH64_MOVW_G1_NC
BFD_RELOC_860_JUMP_SLOT 105	BFD_RELOC_AARCH64_MOVW_G1_S
BFD_RELOC_860_LOGOT0	BFD_RELOC_AARCH64_MOVW_G2
BFD_RELOC_860_LOGOT1	
BFD_RELOC_860_LOGOTOFF0 105	BFD_RELOC_AARCH64_MOVW_G2_NC
BFD_RELOC_860_LOGOTOFF1 105	BFD_RELOC_AARCH64_MOVW_G2_S
BFD_RELOC_860_LOGOTOFF2 105	BFD_RELOC_AARCH64_MOVW_G3
BFD_RELOC_860_LOGOTOFF3 105	BFD_RELOC_AARCH64_NONE
BFD_RELOC_860_LOPC 105	BFD_RELOC_AARCH64_RELATIVE
BFD_RELOC_860_LOW0	BFD_RELOC_AARCH64_RELOC_END
BFD_RELOC_860_LOW1 105	BFD_RELOC_AARCH64_RELOC_START
BFD_RELOC_860_LOW2 105	BFD_RELOC_AARCH64_TLS_DTPMOD
BFD_RELOC_860_LOW3	BFD_RELOC_AARCH64_TLS_DTPREL
BFD_RELOC_860_PC16	BFD_RELOC_AARCH64_TLS_TPREL
BFD_RELOC_860_PC26	BFD_RELOC_AARCH64_TLSDESC 117
BFD_RELOC_860_PLT26	BFD_RELOC_AARCH64_TLSDESC_ADD
BFD_RELOC_860_RELATIVE	BFD_RELOC_AARCH64_TLSDESC_ADD_L012_NC 116
BFD_RELOC_860_SPGOTO	BFD_RELOC_AARCH64_TLSDESC_ADR_PAGE21 116
BFD_RELOC_860_SPGOT1	BFD_RELOC_AARCH64_TLSDESC_ADR_PREL21 116
BFD_RELOC_860_SPGOTOFF0 105	BFD_RELOC_AARCH64_TLSDESC_CALL 117
BFD_RELOC_860_SPGOTOFF1 105	BFD_RELOC_AARCH64_TLSDESC_LD_L012_NC 118
BFD_RELOC_860_SPLIT0	BFD_RELOC_AARCH64_TLSDESC_LD_PREL19 116
BFD_RELOC_860_SPLIT1	BFD_RELOC_AARCH64_TLSDESC_LD32_LO12_NC 116
BFD_RELOC_860_SPLIT2	BFD_RELOC_AARCH64_TLSDESC_LD64_LO12_NC 116
BFD_RELOC_AARCH64_16	BFD_RELOC_AARCH64_TLSDESC_LDR
BFD_RELOC_AARCH64_16_PCREL	BFD_RELOC_AARCH64_TLSDESC_OFF_GO_NC 116
BFD_RELOC_AARCH64_32	BFD_RELOC_AARCH64_TLSDESC_OFF_G1 116
BFD_RELOC_AARCH64_32_PCREL	BFD_RELOC_AARCH64_TLSGD_ADD_LO12_NC 115
BFD_RELOC_AARCH64_64	BFD_RELOC_AARCH64_TLSGD_ADR_PAGE21 115
BFD_RELOC_AARCH64_64_PCREL	BFD_RELOC_AARCH64_TLSIE_ADR_GOTTPREL_PAGE21
BFD_RELOC_AARCH64_ADD_L012	
BFD_RELOC_AARCH64_ADR_GOT_PAGE 115	BFD_RELOC_AARCH64_TLSIE_LD_GOTTPREL_L012_NC
BFD_RELOC_AARCH64_ADR_HI21_NC_PCREL 114	
BFD_RELOC_AARCH64_ADR_HI21_PCREL	BFD_RELOC_AARCH64_TLSIE_LD_GOTTPREL_PREL19
BFD_RELOC_AARCH64_ADR_LO21_PCREL	
BFD_RELOC_AARCH64_BRANCH19	BFD_RELOC_AARCH64_TLSIE_LD32_GOTTPREL_L012_
BFD_RELOC_AARCH64_CALL26	NC
BFD_RELOC_AARCH64_COPY	BFD_RELOC_AARCH64_TLSIE_LD64_GOTTPREL_LO12_
BFD_RELOC_AARCH64_GAS_INTERNAL_FIXUP 117	NC
BFD_RELOC_AARCH64_GLOB_DAT	BFD_RELOC_AARCH64_TLSIE_MOVW_GOTTPREL_GO_NC
BFD_RELOC_AARCH64_GOT_LD_PREL19	
BFD_RELOC_AARCH64_IRELATIVE	BFD_RELOC_AARCH64_TLSIE_MOVW_GOTTPREL_G1
BFD_RELOC_AARCH64_JUMP_SLOT	
BFD_RELOC_AARCH64_JUMP26	BFD_RELOC_AARCH64_TLSLE_ADD_TPREL_HI12 116
BFD RELOC AARCH64 LD GOT LO12 NC 117	BFD_RELOC_AARCH64_TLSLE_ADD_TPREL_L012 116

BFD_RELOC_AARCH64_TLSLE_ADD_TPREL_L012_NC		BFD_RELOC_ARM_GOTOFF	
		BFD_RELOC_ARM_GOTPC	
BFD_RELOC_AARCH64_TLSLE_MOVW_TPREL_GO	116	BFD_RELOC_ARM_HVC	78
BFD_RELOC_AARCH64_TLSLE_MOVW_TPREL_GO_NC		BFD_RELOC_ARM_HWLITERAL	78
	116	BFD_RELOC_ARM_IMMEDIATE	78
BFD_RELOC_AARCH64_TLSLE_MOVW_TPREL_G1	116	BFD_RELOC_ARM_IN_POOL	78
BFD_RELOC_AARCH64_TLSLE_MOVW_TPREL_G1_NC		BFD_RELOC_ARM_IRELATIVE	
	116	BFD_RELOC_ARM_JUMP_SLOT	
BFD_RELOC_AARCH64_TLSLE_MOVW_TPREL_G2	116	BFD_RELOC_ARM_LDC_PC_GO	
BFD_RELOC_AARCH64_TSTBR14		BFD_RELOC_ARM_LDC_PC_G1	
BFD_RELOC_ALPHA_BOH	65	BFD_RELOC_ARM_LDC_PC_G2	
BFD_RELOC_ALPHA_BRSGP		BFD_RELOC_ARM_LDC_SB_GO	
BFD_RELOC_ALPHA_BSR		BFD_RELOC_ARM_LDC_SB_G1	
BFD_RELOC_ALPHA_CODEADDR		BFD_RELOC_ARM_LDC_SB_G2	
BFD_RELOC_ALPHA_DTPMOD64		BFD_RELOC_ARM_LDR_IMM	
BFD_RELOC_ALPHA_DTPREL_HI16		BFD_RELOC_ARM_LDR_PC_GO	
BFD_RELOC_ALPHA_DTPREL_LO16		BFD_RELOC_ARM_LDR_PC_G1	
BFD_RELOC_ALPHA_DTPREL16		BFD_RELOC_ARM_LDR_PC_G2	
BFD_RELOC_ALPHA_DTPREL64		BFD_RELOC_ARM_LDR_SB_GO	
BFD_RELOC_ALPHA_ELF_LITERAL		BFD_RELOC_ARM_LDR_SB_G1	
BFD_RELOC_ALPHA_GOTDTPREL16			
		BFD_RELOC_ARM_LDR_SB_G2	77
BFD_RELOC_ALPHA_GOTTPREL16		BFD_RELOC_ARM_LDRS_PC_GO	77
BFD_RELOC_ALPHA_GPDISP		BFD_RELOC_ARM_LDRS_PC_G1	
BFD_RELOC_ALPHA_GPDISP_H116		BFD_RELOC_ARM_LDRS_PC_G2	
BFD_RELOC_ALPHA_GPDISP_LO16		BFD_RELOC_ARM_LDRS_SB_GO	
BFD_RELOC_ALPHA_GPREL_HI16		BFD_RELOC_ARM_LDRS_SB_G1	
BFD_RELOC_ALPHA_GPREL_LO16		BFD_RELOC_ARM_LDRS_SB_G2	
BFD_RELOC_ALPHA_HINT		BFD_RELOC_ARM_LITERAL	
BFD_RELOC_ALPHA_LDA		BFD_RELOC_ARM_MOVT	
BFD_RELOC_ALPHA_LINKAGE		BFD_RELOC_ARM_MOVT_PCREL	
BFD_RELOC_ALPHA_LITERAL		BFD_RELOC_ARM_MOVW	
BFD_RELOC_ALPHA_LITUSE		BFD_RELOC_ARM_MOVW_PCREL	
BFD_RELOC_ALPHA_NOP		BFD_RELOC_ARM_MULTI	78
BFD_RELOC_ALPHA_TLSGD		BFD_RELOC_ARM_OFFSET_IMM	
BFD_RELOC_ALPHA_TLSLDM	65	BFD_RELOC_ARM_OFFSET_IMM8	
BFD_RELOC_ALPHA_TPREL_HI16		BFD_RELOC_ARM_PCREL_BLX	
BFD_RELOC_ALPHA_TPREL_LO16	66	BFD_RELOC_ARM_PCREL_BRANCH	75
BFD_RELOC_ALPHA_TPREL16	66	BFD_RELOC_ARM_PCREL_CALL	
BFD_RELOC_ALPHA_TPREL64	66	BFD_RELOC_ARM_PCREL_JUMP	75
BFD_RELOC_ARC_B22_PCREL	80	BFD_RELOC_ARM_PLT32	
BFD_RELOC_ARC_B26	80	BFD_RELOC_ARM_PREL31	76
BFD_RELOC_ARM_ADR_IMM		BFD_RELOC_ARM_RELATIVE	76
BFD_RELOC_ARM_ADRL_IMMEDIATE		BFD_RELOC_ARM_ROSEGREL32	
BFD_RELOC_ARM_ALU_PC_GO		BFD_RELOC_ARM_SBREL32	
BFD_RELOC_ARM_ALU_PC_GO_NC		BFD_RELOC_ARM_SHIFT_IMM	
BFD_RELOC_ARM_ALU_PC_G1		BFD_RELOC_ARM_SMC	
BFD_RELOC_ARM_ALU_PC_G1_NC		BFD_RELOC_ARM_SWI	
BFD_RELOC_ARM_ALU_PC_G2		BFD_RELOC_ARM_T32_ADD_IMM	
BFD_RELOC_ARM_ALU_SB_GO		BFD_RELOC_ARM_T32_ADD_PC12	
BFD_RELOC_ARM_ALU_SB_GO_NC		BFD_RELOC_ARM_T32_CP_OFF_IMM	
BFD_RELOC_ARM_ALU_SB_G1		BFD_RELOC_ARM_T32_CP_OFF_IMM_S2	
BFD_RELOC_ARM_ALU_SB_G1_NC		BFD_RELOC_ARM_T32_IMM12	
		BFD_RELOC_ARM_T32_IMMEDIATE	
BFD_RELOC_ARM_ALU_SB_G2		BFD_RELOC_ARM_T32_OFFSET_IMM	
BFD_RELOC_ARM_CP_OFF_IMM		BFD_RELOC_ARM_T32_OFFSET_U8	
BFD_RELOC_ARM_CP_OFF_IMM_S2			
BFD_RELOC_ARM_GLOB_DAT		BFD_RELOC_ARM_TARGET1	
BFD_RELOC_ARM_GOT_PREL		BFD_RELOC_ARM_TARGET2	
RED RELOC ARM COT32	76	RED RELOC ARM THM TLS CALL	77

BFD_RELOC_ARM_THM_TLS_DESCSEQ	77	BFD_RELOC_BFIN_5_PCREL81
BFD_RELOC_ARM_THUMB_ADD	78	BFD_RELOC_BFIN_FUNCDESC81
BFD_RELOC_ARM_THUMB_IMM	78	BFD_RELOC_BFIN_FUNCDESC_GOT17M4 81
BFD_RELOC_ARM_THUMB_MOVT	76	BFD_RELOC_BFIN_FUNCDESC_GOTHI81
BFD_RELOC_ARM_THUMB_MOVT_PCREL	76	BFD_RELOC_BFIN_FUNCDESC_GOTLO81
BFD_RELOC_ARM_THUMB_MOVW		BFD_RELOC_BFIN_FUNCDESC_GOTOFF17M481
BFD_RELOC_ARM_THUMB_MOVW_PCREL		BFD_RELOC_BFIN_FUNCDESC_GOTOFFHI 81
BFD_RELOC_ARM_THUMB_OFFSET		BFD_RELOC_BFIN_FUNCDESC_GOTOFFLO81
BFD_RELOC_ARM_THUMB_SHIFT		BFD_RELOC_BFIN_FUNCDESC_VALUE
BFD_RELOC_ARM_TLS_CALL		BFD_RELOC_BFIN_GOT 81
BFD_RELOC_ARM_TLS_DESC		BFD_RELOC_BFIN_GOT17M481
BFD_RELOC_ARM_TLS_DESCSEQ		BFD_RELOC_BFIN_GOTHI 81
BFD_RELOC_ARM_TLS_DTPMOD32		BFD_RELOC_BFIN_GOTLO81
BFD_RELOC_ARM_TLS_DTPOFF32		BFD_RELOC_BFIN_GOTOFF17M4 81
BFD_RELOC_ARM_TLS_GD32		BFD_RELOC_BFIN_GOTOFFHI81
BFD_RELOC_ARM_TLS_GOTDESC		BFD_RELOC_BFIN_GOTOFFLO
BFD_RELOC_ARM_TLS_IE32		BFD_RELOC_BFIN_PLTPC
BFD_RELOC_ARM_TLS_LDM32		BFD_RELOC_C6000_ABS_H16
BFD_RELOC_ARM_TLS_LD032		BFD_RELOC_C6000_ABS_L16
BFD_RELOC_ARM_TLS_LE32		BFD_RELOC_C6000_ABS_S16
BFD_RELOC_ARM_TLS_TP0FF32		BFD_RELOC_C6000_ALIGN
BFD_RELOC_ARM_V4BX		BFD_RELOC_C6000_COPY
BFD_RELOC_AVR_13_PCREL		BFD_RELOC_C6000_DSBT_INDEX
BFD_RELOC_AVR_16_PM		BFD_RELOC_C6000_EHTYPE88
BFD_RELOC_AVR_6		BFD_RELOC_C6000_FPHEAD
BFD_RELOC_AVR_6_ADIW		BFD_RELOC_C6000_JUMP_SLOT
BFD_RELOC_AVR_7_PCREL		BFD_RELOC_C6000_NOCMP
BFD_RELOC_AVR_8_HI		BFD_RELOC_C6000_PCR_H16
BFD_RELOC_AVR_8_HLO		BFD_RELOC_C6000_PCR_L16
BFD_RELOC_AVR_8_L0		BFD_RELOC_C6000_PCR_S10
BFD_RELOC_AVR_CALL		BFD_RELOC_C6000_PCR_S10
BFD_RELOC_AVR_HH8_LDI		BFD_RELOC_C6000_PCR_S12
BFD_RELOC_AVR_HH8_LDI_NEG		BFD_RELOC_C6000_PCR_S7
BFD_RELOC_AVR_HH8_LDI_PM		BFD_RELOC_C6000_PREL31
BFD_RELOC_AVR_HH8_LDI_PM_NEG		BFD_RELOC_C6000_SBR_GOT_H16_W
BFD_RELOC_AVR_HI8_LDI		BFD_RELOC_C6000_SBR_GOT_L16_W
BFD_RELOC_AVR_HI8_LDI_GS		BFD_RELOC_C6000_SBR_GOT_U15_W
BFD_RELOC_AVR_HI8_LDI_NEG		BFD_RELOC_C6000_SBR_H16_B
BFD_RELOC_AVR_HI8_LDI_PM		BFD_RELOC_C6000_SBR_H16_H
BFD_RELOC_AVR_HI8_LDI_PM_NEG		BFD_RELOC_C6000_SBR_H16_W
BFD_RELOC_AVR_LDI		BFD_RELOC_C6000_SBR_L16_B
		BFD_RELOC_C6000_SBR_L16_H
BFD_RELOC_AVR_LO8_LDI_GS		BFD_RELOC_C6000_SBR_L16_W
BFD_RELOC_AVR_LO8_LDI_NEG		BFD_RELOC_C6000_SBR_S16
BFD_RELOC_AVR_LO8_LDI_PM		BFD_RELOC_C6000_SBR_U15_B
BFD_RELOC_AVR_LO8_LDI_PM_NEG		BFD_RELOC_C6000_SBR_U15_H
BFD_RELOC_AVR_MS8_LDI		BFD_RELOC_C6000_SBR_U15_W 88
BFD_RELOC_AVR_MS8_LDI_NEG		bfd_reloc_code_type
BFD_RELOC_BFIN_10_PCREL		BFD_RELOC_CR16_ABS20
BFD_RELOC_BFIN_11_PCREL		BFD_RELOC_CR16_ABS24
BFD_RELOC_BFIN_12_PCREL_JUMP		BFD_RELOC_CR16_DISP16
BFD_RELOC_BFIN_12_PCREL_JUMP_S		BFD_RELOC_CR16_DISP20
BFD_RELOC_BFIN_16_HIGH		BFD_RELOC_CR16_DISP24
BFD_RELOC_BFIN_16_IMM		BFD_RELOC_CR16_DISP24a
BFD_RELOC_BFIN_16_LOW		BFD_RELOC_CR16_DISP4
BFD_RELOC_BFIN_24_PCREL_CALL_X		BFD_RELOC_CR16_DISP8
BFD_RELOC_BFIN_24_PCREL_JUMP_L		BFD_RELOC_CR16_GLOB_DAT
RED RELOC REIN 4 PCREI	81	BED RELOC CR16 GOT RECRELOO 103

BFD_RELOC_CR16_GOTC_REGREL20	BFD_RELOC_CRX_IMM16 104
BFD_RELOC_CR16_IMM16103	BFD_RELOC_CRX_IMM32104
BFD_RELOC_CR16_IMM20	BFD_RELOC_CRX_NUM16 104
BFD_RELOC_CR16_IMM24	BFD_RELOC_CRX_NUM32 104
BFD_RELOC_CR16_IMM32103	BFD_RELOC_CRX_NUM8 104
BFD_RELOC_CR16_IMM32a	BFD_RELOC_CRX_REGREL12104
BFD_RELOC_CR16_IMM4 103	BFD_RELOC_CRX_REGREL22104
BFD_RELOC_CR16_IMM8	BFD_RELOC_CRX_REGREL28104
BFD_RELOC_CR16_NUM16	BFD_RELOC_CRX_REGREL32104
BFD_RELOC_CR16_NUM32	BFD_RELOC_CRX_REL16
BFD_RELOC_CR16_NUM32a103	BFD_RELOC_CRX_REL24104
BFD_RELOC_CR16_NUM8	BFD_RELOC_CRX_REL32104
BFD_RELOC_CR16_REGRELO103	BFD_RELOC_CRX_REL4 103
BFD_RELOC_CR16_REGREL14 103	BFD_RELOC_CRX_REL8 103
BFD_RELOC_CR16_REGREL14a	BFD_RELOC_CRX_REL8_CMP
BFD_RELOC_CR16_REGREL16 103	BFD_RELOC_CRX_SWITCH16104
BFD_RELOC_CR16_REGREL20 103	BFD_RELOC_CRX_SWITCH32104
BFD_RELOC_CR16_REGREL20a	BFD_RELOC_CRX_SWITCH8104
BFD_RELOC_CR16_REGREL4	BFD_RELOC_CTOR75
BFD_RELOC_CR16_REGREL4a	BFD_RELOC_D10V_10_PCREL_L 83
BFD_RELOC_CR16_SWITCH16 103	BFD_RELOC_D10V_10_PCREL_R 83
BFD_RELOC_CR16_SWITCH32 103	BFD_RELOC_D10V_1883
BFD_RELOC_CR16_SWITCH8	BFD_RELOC_D10V_18_PCREL83
BFD_RELOC_CRIS_16_DTPREL 105	BFD_RELOC_D30V_1583
BFD_RELOC_CRIS_16_GOT104	BFD_RELOC_D30V_15_PCREL83
BFD_RELOC_CRIS_16_GOT_GD 105	BFD_RELOC_D3OV_15_PCREL_R 83
BFD_RELOC_CRIS_16_GOT_TPREL	BFD_RELOC_D30V_2183
BFD_RELOC_CRIS_16_GOTPLT 104	BFD_RELOC_D30V_21_PCREL83
BFD_RELOC_CRIS_16_TPREL 105	BFD_RELOC_D30V_21_PCREL_R 83
BFD_RELOC_CRIS_32_DTPREL 105	BFD_RELOC_D30V_3283
BFD_RELOC_CRIS_32_GD	BFD_RELOC_D30V_32_PCREL83
BFD_RELOC_CRIS_32_GOT	BFD_RELOC_D30V_683
BFD_RELOC_CRIS_32_GOT_GD 105	BFD_RELOC_D30V_9_PCREL83
BFD_RELOC_CRIS_32_GOT_TPREL	BFD_RELOC_D30V_9_PCREL_R 83
BFD_RELOC_CRIS_32_GOTPLT 104	BFD_RELOC_DLX_HI16_S84
BFD_RELOC_CRIS_32_GOTREL 105	BFD_RELOC_DLX_JMP26 84
BFD_RELOC_CRIS_32_IE	BFD_RELOC_DLX_L016
BFD_RELOC_CRIS_32_PLT_GOTREL	BFD_RELOC_EPIPHANY_HIGH 122
BFD_RELOC_CRIS_32_PLT_PCREL	BFD_RELOC_EPIPHANY_IMM11 122
BFD_RELOC_CRIS_32_TPREL 105	BFD_RELOC_EPIPHANY_IMM8 122
BFD_RELOC_CRIS_BDISP8	BFD_RELOC_EPIPHANY_LOW
BFD_RELOC_CRIS_COPY	BFD_RELOC_EPIPHANY_SIMM11 122
BFD_RELOC_CRIS_DTP 105	BFD_RELOC_EPIPHANY_SIMM24
BFD_RELOC_CRIS_DTPMOD	BFD_RELOC_EPIPHANY_SIMM8 122
BFD_RELOC_CRIS_GLOB_DAT 104	BFD_RELOC_FR30_10_IN_8
BFD_RELOC_CRIS_JUMP_SLOT 104	BFD_RELOC_FR30_12_PCREL
BFD_RELOC_CRIS_LAPCQ_OFFSET	BFD_RELOC_FR30_20
BFD_RELOC_CRIS_RELATIVE	BFD_RELOC_FR30_48
BFD_RELOC_CRIS_SIGNED_16	BFD_RELOC_FR30_6_IN_4
BFD_RELOC_CRIS_SIGNED_6	BFD_RELOC_FR30_8_IN_8
BFD_RELOC_CRIS_SIGNED_8	BFD_RELOC_FR30_9_IN_8
BFD_RELOC_CRIS_UNSIGNED_16	BFD_RELOC_FR30_9_PCREL
BFD_RELOC_CRIS_UNSIGNED_4	BFD_RELOC_FRV_FUNCDESC
BFD_RELOC_CRIS_UNSIGNED_5	BFD_RELOC_FRV_FUNCDESC_GOT12
BFD_RELOC_CRIS_UNSIGNED_6	BFD_RELOC_FRV_FUNCDESC_GOTHI
BFD_RELOC_CRIS_UNSIGNED_8	BFD_RELOC_FRV_FUNCDESC_GOTLO
BFD_RELOC_CRX_ABS16	BFD_RELOC_FRV_FUNCDESC_GOTOFF12
BFD RELOC CRX ABS32	BFD RELOC FRV FUNCDESC GOTOFFHI

BFD_RELOC_FRV_FUNCDESC_GOTOFFLO (BFD_RELOC_IA64_DIR64MSB9	
BFD_RELOC_FRV_FUNCDESC_VALUE		BFD_RELOC_IA64_DTPMOD64LSB	
BFD_RELOC_FRV_GETTLSOFF		BFD_RELOC_IA64_DTPMOD64MSB	
BFD_RELOC_FRV_GETTLSOFF_RELAX		BFD_RELOC_IA64_DTPREL14 10	
BFD_RELOC_FRV_GOT12 6		BFD_RELOC_IA64_DTPREL22 10	
BFD_RELOC_FRV_GOTHI		BFD_RELOC_IA64_DTPREL32LSB10	
BFD_RELOC_FRV_GOTLO 6		BFD_RELOC_IA64_DTPREL32MSB	
BFD_RELOC_FRV_GOTOFF12	69	BFD_RELOC_IA64_DTPREL64I 10)()
BFD_RELOC_FRV_GOTOFFHI	6 9	BFD_RELOC_IA64_DTPREL64LSB10)()
BFD_RELOC_FRV_GOTOFFLO	6 9	BFD_RELOC_IA64_DTPREL64MSB10)()
BFD_RELOC_FRV_GOTTLSDESC12 6	69	BFD_RELOC_IA64_FPTR32LSB 9	9 9
BFD_RELOC_FRV_GOTTLSDESCHI 6	69	BFD_RELOC_IA64_FPTR32MSB 9	9 9
BFD_RELOC_FRV_GOTTLSDESCLO	69	BFD_RELOC_IA64_FPTR64I9) 9
BFD_RELOC_FRV_GOTTLSOFF12 (6 9	BFD_RELOC_IA64_FPTR64LSB 9) 9
BFD_RELOC_FRV_GOTTLSOFFHI 6		BFD_RELOC_IA64_FPTR64MSB 9) 9
BFD_RELOC_FRV_GOTTLSOFFLO (BFD_RELOC_IA64_GPREL229	
BFD_RELOC_FRV_GPREL12		BFD_RELOC_IA64_GPREL32LSB9	
BFD_RELOC_FRV_GPREL32(BFD_RELOC_IA64_GPREL32MSB 9	
BFD_RELOC_FRV_GPRELHI		BFD_RELOC_IA64_GPREL64I	
BFD_RELOC_FRV_GPRELLO		BFD_RELOC_IA64_GPREL64LSB	
BFD_RELOC_FRV_GPRELU12		BFD_RELOC_IA64_GPREL64MSB	
BFD_RELOC_FRV_HI16		BFD_RELOC_IA64_IMM14	
BFD_RELOC_FRV_LABEL16		BFD_RELOC_IA64_IMM22 9	
BFD_RELOC_FRV_LABEL24		BFD_RELOC_IA64_IMM64	
BFD_RELOC_FRV_L016		BFD_RELOC_IA64_IPLTLSB	
BFD_RELOC_FRV_TLSDESC_RELAX		BFD_RELOC_IA64_IPLTMSB 9 BFD_RELOC_IA64_LDXMOV 10	
BFD_RELOC_FRV_TLSDESC_VALUE			
BFD_RELOC_FRV_TLSMOFF		BFD_RELOC_IA64_LTOFF_DTPMOD22	
BFD_RELOC_FRV_TLSMOFF12		BFD_RELOC_IA64_LTOFF_DTPREL22	
BFD_RELOC_FRV_TLSMOFFHI		BFD_RELOC_IA64_LTOFF_FPTR229	
BFD_RELOC_FRV_TLSMOFFLO		BFD_RELOC_IA64_LTOFF_FPTR32LSB9	
BFD_RELOC_FRV_TLSOFF		BFD_RELOC_IA64_LTOFF_FPTR32MSB9	
BFD_RELOC_FRV_TLSOFF_RELAX (BFD_RELOC_IA64_LTOFF_FPTR64I9	
BFD_RELOC_GPREL16	62	BFD_RELOC_IA64_LTOFF_FPTR64LSB9)9
BFD_RELOC_GPREL326		BFD_RELOC_IA64_LTOFF_FPTR64MSB9	
BFD_RELOC_H8_DIR16A810		BFD_RELOC_IA64_LTOFF_TPREL2210	
BFD_RELOC_H8_DIR16R810		BFD_RELOC_IA64_LT0FF229) 9
BFD_RELOC_H8_DIR24A810	06	BFD_RELOC_IA64_LTOFF22X 10)()
BFD_RELOC_H8_DIR24R810	06	BFD_RELOC_IA64_LTOFF64I9	9 9
BFD_RELOC_H8_DIR32A1610	06	BFD_RELOC_IA64_LTV32LSB9) 9
BFD_RELOC_H8_DISP32A1610	06	BFD_RELOC_IA64_LTV32MSB9) 9
BFD_RELOC_HI166	66	BFD_RELOC_IA64_LTV64LSB9) 9
BFD_RELOC_HI16_BASEREL6	31	BFD_RELOC_IA64_LTV64MSB9) 9
BFD_RELOC_HI16_GOTOFF		BFD_RELOC_IA64_PCREL21B9) 9
BFD_RELOC_HI16_PCREL		BFD_RELOC_IA64_PCREL21BI 9	
BFD_RELOC_HI16_PLT0FF		BFD_RELOC_IA64_PCREL21F	
BFD_RELOC_HI16_S		BFD_RELOC_IA64_PCREL21M	
BFD_RELOC_HI16_S_BASEREL		BFD_RELOC_IA64_PCREL22	
BFD_RELOC_HI16_S_GOTOFF		BFD_RELOC_IA64_PCREL32LSB	
BFD_RELOC_HI16_S_PCREL		BFD_RELOC_IA64_PCREL32MSB	
BFD_RELOC_HI16_S_PLT0FF		BFD_RELOC_IA64_PCREL60B9	
BFD_RELOC_HI22		BFD_RELOC_IA64_PCREL64I9	
BFD_RELOC_I370_D12		BFD_RELOC_IA64_PCREL64LSB	
BFD_RELOC_I960_CALLJ		BFD_RELOC_IA64_PCREL64MSB	
BFD_RELOC_IA64_COPY		BFD_RELOC_IA64_PLTOFF22	
BFD_RELOC_IA64_DIR32LSB		BFD_RELOC_IA64_PLTOFF64I	
BFD_RELOC_IA64_DIR32MSB		BFD_RELOC_IA64_PLTOFF64LSB	
BFD RELOC IA64 DIR64LSB	98	BFD_RELOC_IA64_PLTOFF64MSB9	J 9

BFD_RELOC_IA64_REL32LSB99	BFD_RELOC_M32R_GOT16_HI_SLO85
BFD_RELOC_IA64_REL32MSB99	BFD_RELOC_M32R_GOT16_HI_UL085
BFD_RELOC_IA64_REL64LSB99	BFD_RELOC_M32R_GOT16_L085
BFD_RELOC_IA64_REL64MSB99	BFD_RELOC_M32R_GOT2484
BFD_RELOC_IA64_SECREL32LSB99	BFD_RELOC_M32R_GOTOFF84
BFD_RELOC_IA64_SECREL32MSB	BFD_RELOC_M32R_GOTOFF_HI_SLO84
BFD_RELOC_IA64_SECREL64LSB	BFD_RELOC_M32R_GOTOFF_HI_ULO
BFD_RELOC_IA64_SECREL64MSB99	BFD_RELOC_M32R_GOTOFF_LO
BFD_RELOC_IA64_SEGREL32LSB	BFD_RELOC_M32R_GOTPC_HI_SLO85
BFD_RELOC_IA64_SEGREL32MSB	BFD_RELOC_M32R_GOTPC_HI_ULO
BFD_RELOC_IA64_SEGREL64LSB	BFD_RELOC_M32R_GOTPC_LO
BFD_RELOC_IA64_SEGREL64MSB	BFD_RELOC_M32R_GOTPC2485
BFD_RELOC_IA64_TPREL14	BFD_RELOC_M32R_HI16_SL0
BFD_RELOC_IA64_TPREL22	BFD_RELOC_M32R_HI16_UL0
BFD_RELOC_IA64_TPREL64I	BFD_RELOC_M32R_JMP_SLOT
BFD_RELOC_IA64_TPREL64LSB	BFD_RELOC_M32R_L016
BFD_RELOC_IA64_TPREL64MSB	BFD_RELOC_M32R_RELATIVE
BFD_RELOC_IP2K_ADDR16CJP	BFD_RELOC_M32R_SDA16
BFD_RELOC_IP2K_BANK 97	BFD_RELOC_M68HC11_24
	BFD_RELOC_M68HC11_3B
BFD_RELOC_IP2K_EX8DATA	
BFD_RELOC_IP2K_FR_OFFSET	BFD_RELOC_M68HC11_HI8
BFD_RELOC_IP2K_FR9	BFD_RELOC_M68HC11_L016
BFD_RELOC_IP2K_HI8DATA	BFD_RELOC_M68HC11_L08
BFD_RELOC_IP2K_HI8INSN	BFD_RELOC_M68HC11_PAGE
BFD_RELOC_IP2K_LO8DATA	BFD_RELOC_M68HC11_RL_GROUP
BFD_RELOC_IP2K_LO8INSN	BFD_RELOC_M68HC11_RL_JUMP
BFD_RELOC_IP2K_PAGE3	BFD_RELOC_M68HC12_10_PCREL 102
BFD_RELOC_IP2K_PC_SKIP98	BFD_RELOC_M68HC12_16B
BFD_RELOC_IP2K_TEXT 98	BFD_RELOC_M68HC12_5B
BFD_RELOC_IQ2000_OFFSET_16 108	${\tt BFD_RELOC_M68HC12_9_PCREL} \dots 102$
BFD_RELOC_IQ2000_OFFSET_21 108	${\tt BFD_RELOC_M68HC12_9B} \dots \dots 101$
BFD_RELOC_IQ2000_UHI16	BFD_RELOC_M68HC12_HI8XG 102
BFD_RELOC_LM32_16_GOT	${\tt BFD_RELOC_M68HC12_L08XG} \dots \dots 102$
BFD_RELOC_LM32_BRANCH	${\tt BFD_RELOC_MACH_O_LOCAL_SECTDIFF} \dots 110$
BFD_RELOC_LM32_CALL	${\tt BFD_RELOC_MACH_O_PAIR} \dots \dots$
BFD_RELOC_LM32_COPY 110	BFD_RELOC_MACH_O_SECTDIFF 110
BFD_RELOC_LM32_GLOB_DAT 110	${\tt BFD_RELOC_MACH_O_X86_64_BRANCH32} \dots 110$
BFD_RELOC_LM32_GOTOFF_HI16110	${\tt BFD_RELOC_MACH_O_X86_64_BRANCH8} \ldots 110$
BFD_RELOC_LM32_GOTOFF_LO16 110	BFD_RELOC_MACH_O_X86_64_GOT
BFD_RELOC_LM32_JMP_SLOT 110	BFD_RELOC_MACH_O_X86_64_GOT_LOAD 111
BFD_RELOC_LM32_RELATIVE 110	BFD_RELOC_MACH_O_X86_64_PCREL32_1 111
BFD_RELOC_L010	BFD_RELOC_MACH_O_X86_64_PCREL32_2 111
BFD_RELOC_L016	BFD_RELOC_MACH_O_X86_64_PCREL32_4 111
BFD_RELOC_LO16_BASEREL61	BFD_RELOC_MACH_O_X86_64_SUBTRACTOR32 111
BFD_RELOC_LO16_GOTOFF60	BFD_RELOC_MACH_O_X86_64_SUBTRACTOR64 111
BFD_RELOC_L016_PCREL	BFD_RELOC_MCORE_PCREL_32
BFD_RELOC_L016_PLT0FF60	BFD_RELOC_MCORE_PCREL_IMM11BY289
BFD_RELOC_M32C_HI8	BFD_RELOC_MCORE_PCREL_IMM4BY289
BFD_RELOC_M32C_RL_1ADDR	BFD_RELOC_MCORE_PCREL_IMM8BY489
BFD_RELOC_M32C_RL_2ADDR	BFD_RELOC_MCORE_PCREL_JSR_IMM11BY289
BFD_RELOC_M32C_RL_JUMP	BFD_RELOC_MCORE_RVA
BFD_RELOC_M32R_10_PCREL	BFD_RELOC_MEP_16
BFD_RELOC_M32R_18_PCREL	BFD_RELOC_MEP_32
BFD_RELOC_M32R_24	BFD_RELOC_MEP_8
BFD_RELOC_M32R_26_PCREL	BFD_RELOC_MEP_ADDR24A4
BFD_RELOC_M32R_26_PLTREL 84	BFD_RELOC_MEP_GNU_VTENTRY
BFD_RELOC_M32R_COPY	BFD_RELOC_MEP_GNU_VTINHERIT89
RED RELOC_M32R_COPI	BFD_RELOC_MEF_GNO_VIINHERII

BFD_RELOC_MEP_HI16S		BFD_RELOC_MICROBLAZE_32_TLSDTPREL	
BFD_RELOC_MEP_HI16U	89	BFD_RELOC_MICROBLAZE_64_GOT	
BFD_RELOC_MEP_LOW16	89	BFD_RELOC_MICROBLAZE_64_GOTOFF 1	112
BFD_RELOC_MEP_PCABS24A2		BFD_RELOC_MICROBLAZE_64_GOTPC	
BFD_RELOC_MEP_PCREL12A2	89	BFD_RELOC_MICROBLAZE_64_NONE	
BFD_RELOC_MEP_PCREL17A2		BFD_RELOC_MICROBLAZE_64_PLT	112
BFD_RELOC_MEP_PCREL24A2	89	BFD_RELOC_MICROBLAZE_64_TLS	112
BFD_RELOC_MEP_PCREL8A2	89	BFD_RELOC_MICROBLAZE_64_TLSDTPREL	112
BFD_RELOC_MEP_TPREL	89	BFD_RELOC_MICROBLAZE_64_TLSGD	112
BFD_RELOC_MEP_TPREL7	89	BFD_RELOC_MICROBLAZE_64_TLSGOTTPREL	112
BFD_RELOC_MEP_TPREL7A2	89	BFD_RELOC_MICROBLAZE_64_TLSLD	112
BFD_RELOC_MEP_TPREL7A4	89	BFD_RELOC_MICROBLAZE_64_TLSTPREL	
BFD_RELOC_MEP_UIMM24	89	BFD_RELOC_MICROBLAZE_COPY 1	112
BFD_RELOC_METAG_COPY	90	BFD_RELOC_MICROMIPS_10_PCREL_S1	67
BFD_RELOC_METAG_GETSET_GOT	90	BFD_RELOC_MICROMIPS_16_PCREL_S1	
BFD_RELOC_METAG_GETSET_GOTOFF	89	BFD_RELOC_MICROMIPS_7_PCREL_S1	67
BFD_RELOC_METAG_GETSETOFF		BFD_RELOC_MICROMIPS_CALL_HI16	67
BFD_RELOC_METAG_GLOB_DAT	90	BFD_RELOC_MICROMIPS_CALL_L016	67
BFD_RELOC_METAG_GOTOFF		BFD_RELOC_MICROMIPS_CALL16	
BFD_RELOC_METAG_HI16_GOTOFF	89	BFD_RELOC_MICROMIPS_GOT_DISP	68
BFD_RELOC_METAG_HI16_GOTPC		BFD_RELOC_MICROMIPS_GOT_HI16	
BFD_RELOC_METAG_HI16_PLT		BFD_RELOC_MICROMIPS_GOT_LO16	
BFD_RELOC_METAG_HIADDR16		BFD_RELOC_MICROMIPS_GOT_OFST	
BFD_RELOC_METAG_HIOG		BFD_RELOC_MICROMIPS_GOT_PAGE	68
BFD_RELOC_METAG_JMP_SLOT		BFD_RELOC_MICROMIPS_GOT16	
BFD_RELOC_METAG_LO16_GOTOFF		BFD_RELOC_MICROMIPS_GPREL16	
BFD_RELOC_METAG_LO16_GOTPC		BFD_RELOC_MICROMIPS_HI16	
BFD_RELOC_METAG_LO16_PLT		BFD_RELOC_MICROMIPS_HI16_S	67
BFD_RELOC_METAG_LOADDR16		BFD_RELOC_MICROMIPS_HIGHER	
BFD_RELOC_METAG_LOOG		BFD_RELOC_MICROMIPS_HIGHEST	
BFD_RELOC_METAG_PLT		BFD_RELOC_MICROMIPS_JALR	
BFD_RELOC_METAG_REL16		BFD_RELOC_MICROMIPS_JMP	
BFD_RELOC_METAG_REL8		BFD_RELOC_MICROMIPS_LITERAL	
BFD_RELOC_METAG_RELATIVE		BFD_RELOC_MICROMIPS_L016	
BFD_RELOC_METAG_RELBRANCH		BFD_RELOC_MICROMIPS_SCN_DISP	
BFD_RELOC_METAG_RELBRANCH_PLT		BFD_RELOC_MICROMIPS_SUB	
BFD_RELOC_METAG_TLS_DTPMOD		BFD_RELOC_MICROMIPS_TLS_DTPREL_HI16	68
BFD_RELOC_METAG_TLS_DTPOFF		BFD_RELOC_MICROMIPS_TLS_DTPREL_L016	
BFD_RELOC_METAG_TLS_GD		BFD_RELOC_MICROMIPS_TLS_GD	
BFD_RELOC_METAG_TLS_IE		BFD_RELOC_MICROMIPS_TLS_GOTTPREL	
BFD_RELOC_METAG_TLS_IENONPIC		BFD_RELOC_MICROMIPS_TLS_LDM	
BFD_RELOC_METAG_TLS_IENONPIC_HI16		BFD_RELOC_MICROMIPS_TLS_TPREL_HI16	
BFD_RELOC_METAG_TLS_IENONPIC_L016		BFD_RELOC_MICROMIPS_TLS_TPREL_L016	
BFD_RELOC_METAG_TLS_LDM		BFD_RELOC_MIPS_18_PCREL_S3	
BFD_RELOC_METAG_TLS_LDO		BFD_RELOC_MIPS_19_PCREL_S2	
BFD_RELOC_METAG_TLS_LDO_HI16		BFD_RELOC_MIPS_21_PCREL_S2	
BFD_RELOC_METAG_TLS_LDO_L016		BFD_RELOC_MIPS_26_PCREL_S2	
BFD_RELOC_METAG_TLS_LE		BFD_RELOC_MIPS_CALL_HI16	
BFD_RELOC_METAG_TLS_LE_HI16		BFD_RELOC_MIPS_CALL_LO16	
BFD_RELOC_METAG_TLS_LE_L016		BFD_RELOC_MIPS_CALL16	
BFD_RELOC_METAG_TLS_TPOFF		BFD_RELOC_MIPS_COPY	
BFD_RELOC_MICROBLAZE_32_GOTOFF		BFD_RELOC_MIPS_DELETE	
BFD_RELOC_MICROBLAZE_32_LO		BFD_RELOC_MIPS_EH.	
BFD_RELOC_MICROBLAZE_32_LO_PCREL		BFD_RELOC_MIPS_EMBFD_RELOC_MIPS_GOT_DISP	
BFD_RELOC_MICROBLAZE_32_ROSDA		BFD_RELOC_MIPS_GOT_HI16	
BFD_RELOC_MICROBLAZE_32_RWSDA		BFD_RELOC_MIPS_GOT_L016	
		BFD_RELOC_MIPS_GOT_LOTOBFD_RELOC_MIPS_GOT_OFST	
BFD_RELOC_MICROBLAZE_32_SYM_OP_SYM 1 BFD_RELOC_MICROBLAZE_32_TLSDTPMOD 1		BFD RELOC MIPS GOT PAGE	
DED RELUC MICROBLACE 32 ILSDIPMUD	.14	DFU_RELUC_NIFS_GUI_FAGE	υŏ

BFD_RELOC_MIPS_GOT16		BFD_RELOC_MMIX_LOCAL	
BFD_RELOC_MIPS_HIGHER		BFD_RELOC_MMIX_PUSHJ	
BFD_RELOC_MIPS_HIGHEST		BFD_RELOC_MMIX_PUSHJ_1	
BFD_RELOC_MIPS_INSERT_A	68	BFD_RELOC_MMIX_PUSHJ_2	90
BFD_RELOC_MIPS_INSERT_B	68	BFD_RELOC_MMIX_PUSHJ_3	
BFD_RELOC_MIPS_JALR		BFD_RELOC_MMIX_PUSHJ_STUBBABLE	. 90
BFD_RELOC_MIPS_JMP	66	BFD_RELOC_MMIX_REG	91
BFD_RELOC_MIPS_JUMP_SLOT	69	BFD_RELOC_MMIX_REG_OR_BYTE	91
BFD_RELOC_MIPS_LITERAL	67	BFD_RELOC_MN10300_16_PCREL	70
BFD_RELOC_MIPS_REL16	68	BFD_RELOC_MN10300_32_PCREL	70
BFD_RELOC_MIPS_RELGOT	68	BFD_RELOC_MN10300_ALIGN	70
BFD_RELOC_MIPS_SCN_DISP	68	BFD_RELOC_MN10300_COPY	70
BFD_RELOC_MIPS_SHIFT5	68	BFD_RELOC_MN10300_GLOB_DAT	70
BFD_RELOC_MIPS_SHIFT6	68	BFD_RELOC_MN10300_GOT16	70
BFD_RELOC_MIPS_SUB	68	BFD_RELOC_MN10300_GOT24	
BFD_RELOC_MIPS_TLS_DTPMOD32	68	BFD_RELOC_MN10300_GOT32	70
BFD_RELOC_MIPS_TLS_DTPMOD64	68	BFD_RELOC_MN10300_GOTOFF24	70
BFD_RELOC_MIPS_TLS_DTPREL_HI16	68	BFD_RELOC_MN10300_JMP_SLOT	
BFD_RELOC_MIPS_TLS_DTPREL_L016		BFD_RELOC_MN10300_RELATIVE	
BFD_RELOC_MIPS_TLS_DTPREL32		BFD_RELOC_MN10300_SYM_DIFF	
BFD_RELOC_MIPS_TLS_DTPREL64		BFD_RELOC_MN10300_TLS_DTPMOD	
BFD_RELOC_MIPS_TLS_GD		BFD_RELOC_MN10300_TLS_DTP0FF	
BFD_RELOC_MIPS_TLS_GOTTPREL		BFD_RELOC_MN10300_TLS_GD	
BFD_RELOC_MIPS_TLS_LDM		BFD_RELOC_MN10300_TLS_GOTIE	
BFD_RELOC_MIPS_TLS_TPREL_HI16		BFD_RELOC_MN10300_TLS_IE	
BFD_RELOC_MIPS_TLS_TPREL_L016		BFD_RELOC_MN10300_TLS_LD	
BFD_RELOC_MIPS_TLS_TPREL32		BFD_RELOC_MN10300_TLS_LD0	
BFD_RELOC_MIPS_TLS_TPREL64		BFD_RELOC_MN10300_TLS_LE	
BFD_RELOC_MIPS16_CALL16		BFD_RELOC_MN10300_TLS_TP0FF	
BFD_RELOC_MIPS16_GOT16		BFD_RELOC_MOXIE_10_PCREL	
BFD_RELOC_MIPS16_GPREL		BFD_RELOC_MSP430_10_PCREL	
BFD_RELOC_MIPS16_HI16		BFD_RELOC_MSP430_16	
BFD_RELOC_MIPS16_HI16_S		BFD_RELOC_MSP430_16_BYTE	
BFD_RELOC_MIPS16_JMP		BFD_RELOC_MSP430_16_PCREL	
BFD_RELOC_MIPS16_L016		BFD_RELOC_MSP430_16_PCREL_BYTE	
BFD_RELOC_MIPS16_TLS_DTPREL_HI16		BFD_RELOC_MSP430_2X_PCREL	107
BFD_RELOC_MIPS16_TLS_DTPREL_L016		BFD_RELOC_MSP430_ABS_HI16	
BFD_RELOC_MIPS16_TLS_GD		BFD_RELOC_MSP430_ABS8	
BFD_RELOC_MIPS16_TLS_GOTTPREL		BFD_RELOC_MSP430_PREL31	
BFD_RELOC_MIPS16_TLS_GOTTFREE		BFD_RELOC_MSP430_RL_PCREL	
BFD_RELOC_MIPS16_TLS_TPREL_HI16		BFD_RELOC_MSP430_SYM_DIFF	107
BFD_RELOC_MIPS16_TLS_TPREL_H116		BFD_RELOC_MSP430X_ABS16	107
BFD_RELOC_MMIX_ADDR19		BFD_RELOC_MSP430X_ABS20_ADR_DST	
BFD_RELOC_MMIX_ADDR27			
BFD_RELOC_MMIX_BASE_PLUS_OFFSET		BFD_RELOC_MSP430X_ABS20_ADR_SRC	
BFD_RELOC_MMIX_CBRANCH		BFD_RELOC_MSP430X_ABS20_EXT_DST	
		BFD_RELOC_MSP430X_ABS20_EXT_ODST	
BFD_RELOC_MMIX_CBRANCH_1		BFD_RELOC_MSP430X_ABS20_EXT_SRC	
BFD_RELOC_MMIX_CBRANCH_2		BFD_RELOC_MSP430X_PCR16	
BFD_RELOC_MMIX_CBRANCH_3		BFD_RELOC_MSP430X_PCR20_CALL	
BFD_RELOC_MMIX_CBRANCH_J		BFD_RELOC_MSP430X_PCR20_EXT_DST	
BFD_RELOC_MMIX_GETA		BFD_RELOC_MSP430X_PCR20_EXT_ODST	
BFD_RELOC_MMIX_GETA_0		BFD_RELOC_MSP430X_PCR20_EXT_SRC	
BFD_RELOC_MMIX_GETA_2		BFD_RELOC_MT_GNU_VTENTRY	
BFD_RELOC_MMIX_GETA_3		BFD_RELOC_MT_GNU_VTINHERIT	
BFD_RELOC_MMIX_JMP		BFD_RELOC_MT_HI16	
BFD_RELOC_MMIX_JMP_1		BFD_RELOC_MT_L016	
BFD_RELOC_MMIX_JMP_2		BFD_RELOC_MT_PC16	
BFD RELOC MMIX JMP 3	91	BFD RELOC MT PCINSN8	107

BFD_RELOC_NIOS2_ALIGN	7 BFD_RELOC_PPC_B16_BRNTAKEN
BFD_RELOC_NIOS2_CACHE_OPX 10'	7 BFD_RELOC_PPC_B16_BRTAKEN
BFD_RELOC_NIOS2_CALL16	B BFD_RELOC_PPC_B2672
BFD_RELOC_NIOS2_CALL26	7 BFD_RELOC_PPC_BA16
BFD_RELOC_NIOS2_CALLR	7 BFD_RELOC_PPC_BA16_BRNTAKEN
BFD_RELOC_NIOS2_CJMP	7 BFD_RELOC_PPC_BA16_BRTAKEN
BFD_RELOC_NIOS2_COPY	
BFD_RELOC_NIOS2_GLOB_DAT 108	
BFD_RELOC_NIOS2_GOT16	
BFD_RELOC_NIOS2_GOTOFF	
BFD_RELOC_NIOS2_GOTOFF_HA 108	BFD_RELOC_PPC_DTPREL1674
BFD_RELOC_NIOS2_GOTOFF_LO 108	
BFD_RELOC_NIOS2_GPREL 10'	
BFD_RELOC_NIOS2_HI1610	
BFD_RELOC_NIOS2_HIADJ16 10'	
BFD_RELOC_NIOS2_IMM5	
BFD_RELOC_NIOS2_IMM6	
BFD_RELOC_NIOS2_IMM8	
BFD_RELOC_NIOS2_JUMP_SLOT	
BFD_RELOC_NIOS2_LO16	
BFD_RELOC_NIOS2_PCREL_HA	
BFD_RELOC_NIOS2_PCREL_LO 108	
BFD_RELOC_NIOS2_RELATIVE	
BFD_RELOC_NIOS2_S16	
BFD_RELOC_NIOS2_TLS_DTPMOD	
BFD_RELOC_NIOS2_TLS_DTPREL	
BFD_RELOC_NIOS2_TLS_GD16	
BFD_RELOC_NIOS2_TLS_IE16	
BFD_RELOC_NIOS2_TLS_LDM16	
BFD_RELOC_NIOS2_TLS_LD016	
BFD_RELOC_NIOS2_TLS_LE16	
BFD_RELOC_NIOS2_TLS_LETO 108 BFD_RELOC_NIOS2_TLS_TPREL 108	
BFD_RELOC_NIOS2_116	
BFD_RELOC_NIOS2_UJMP	
BFD_RELOC_NONE 69	
BFD_RELOC_NS32K_DISP_16	
BFD_RELOC_NS32K_DISP_16_PCREL	
BFD_RELOC_NS32K_DISP_10_FCREE 72 BFD_RELOC_NS32K_DISP_32 75	
BFD_RELOC_NS32K_DISP_32_PCREL 75	
BFD_RELOC_NS32K_DISP_8	
BFD_RELOC_NS32K_DISP_8_PCREL	
BFD_RELOC_NS32K_IMM_16 75 BFD_RELOC_NS32K_IMM_16_PCREL 75	
BFD_RELOC_NS32K_IMM_32	
BFD_RELOC_NS32K_IMM_32_PCREL	
BFD_RELOC_NS32K_IMM_8	
BFD_RELOC_NS32K_IMM_8_PCREL	
BFD_RELOC_OPENRISC_ABS_26	
BFD_RELOC_OPENRISC_REL_26	
BFD_RELOC_PDP11_DISP_6_PCREL	
BFD_RELOC_PDP11_DISP_8_PCREL	
BFD_RELOC_PJ_CODE_DIR16	
BFD_RELOC_PJ_CODE_DIR32	
BFD_RELOC_PJ_CODE_HI16	
BFD_RELOC_PJ_CODE_LO16	
BFD_RELOC_PJ_CODE_REL16	
BFD_RELOC_PJ_CODE_REL32	
RED RELOC PPC B16	2 RED RELOC PPC TPREL16 HT 74

	- 4		- 4
BFD_RELOC_PPC_TPREL16_L0		BFD_RELOC_PPC64_TPREL16_LO_DS	
BFD_RELOC_PPC_VLE_HA16A		BFD_RELOC_RELC1	
BFD_RELOC_PPC_VLE_HA16D	73	BFD_RELOC_RL78_16_OP	
BFD_RELOC_PPC_VLE_HI16A	73	BFD_RELOC_RL78_16U	
BFD_RELOC_PPC_VLE_HI16D	73	BFD_RELOC_RL78_24_OP	93
BFD_RELOC_PPC_VLE_LO16A	73	BFD_RELOC_RL78_24U	
BFD_RELOC_PPC_VLE_L016D		BFD_RELOC_RL78_32_OP	
BFD_RELOC_PPC_VLE_REL15		BFD_RELOC_RL78_8U	
BFD_RELOC_PPC_VLE_REL24		BFD_RELOC_RL78_ABS16	
BFD_RELOC_PPC_VLE_REL8		BFD_RELOC_RL78_ABS16_REV	
BFD_RELOC_PPC_VLE_SDA21		BFD_RELOC_RL78_ABS16U	
BFD_RELOC_PPC_VLE_SDA21_LO		BFD_RELOC_RL78_ABS16UL	
BFD_RELOC_PPC_VLE_SDAREL_HA16A		BFD_RELOC_RL78_ABS16UW	
BFD_RELOC_PPC_VLE_SDAREL_HA16D		BFD_RELOC_RL78_ABS32	
BFD_RELOC_PPC_VLE_SDAREL_HI16A		BFD_RELOC_RL78_ABS32_REV	
BFD_RELOC_PPC_VLE_SDAREL_HI16D		BFD_RELOC_RL78_ABS8	
BFD_RELOC_PPC_VLE_SDAREL_LO16A	73	BFD_RELOC_RL78_CODE	
BFD_RELOC_PPC_VLE_SDAREL_L016D	73	BFD_RELOC_RL78_DIFF	93
BFD_RELOC_PPC64_ADDR16_DS	73	BFD_RELOC_RL78_DIR3U_PCREL	93
BFD_RELOC_PPC64_ADDR16_HIGH	74	BFD_RELOC_RL78_GPRELB	93
BFD_RELOC_PPC64_ADDR16_HIGHA		BFD_RELOC_RL78_GPRELL	
BFD_RELOC_PPC64_ADDR16_LO_DS		BFD_RELOC_RL78_GPRELW	
BFD_RELOC_PPC64_DTPREL16_DS		BFD_RELOC_RL78_HI16	
BFD_RELOC_PPC64_DTPREL16_HIGH		BFD_RELOC_RL78_HI8	
BFD_RELOC_PPC64_DTPREL16_HIGHA		BFD_RELOC_RL78_L016	
BFD_RELOC_PPC64_DTPREL16_HIGHER		BFD_RELOC_RL78_NEG16	
BFD_RELOC_PPC64_DTPREL16_HIGHERA		BFD_RELOC_RL78_NEG24	
BFD_RELOC_PPC64_DTPREL16_HIGHEST		BFD_RELOC_RL78_NEG32	
BFD_RELOC_PPC64_DTPREL16_HIGHESTA		BFD_RELOC_RL78_NEG8	
BFD_RELOC_PPC64_DTPREL16_LO_DS		BFD_RELOC_RL78_OP_AND	
BFD_RELOC_PPC64_GOT16_DS	74	BFD_RELOC_RL78_OP_NEG	93
BFD_RELOC_PPC64_GOT16_LO_DS	74	BFD_RELOC_RL78_OP_SHRA	93
BFD_RELOC_PPC64_HIGHER	73	BFD_RELOC_RL78_OP_SUBTRACT	93
BFD_RELOC_PPC64_HIGHER_S	73	BFD_RELOC_RL78_RELAX	94
BFD_RELOC_PPC64_HIGHEST	73	BFD_RELOC_RL78_SYM	93
BFD_RELOC_PPC64_HIGHEST_S		BFD_RELOC_RVA	
BFD_RELOC_PPC64_PLT16_LO_DS		BFD_RELOC_RX_16_OP	
BFD_RELOC_PPC64_PLTG0T16		BFD_RELOC_RX_16U	
BFD_RELOC_PPC64_PLTGOT16_DS		BFD_RELOC_RX_24_0P	
BFD_RELOC_PPC64_PLTGOT16_HA		BFD_RELOC_RX_24U	
BFD_RELOC_PPC64_PLTG0T16_HI		BFD_RELOC_RX_32_OP	
BFD_RELOC_PPC64_PLTGOT16_LO		BFD_RELOC_RX_8U	
BFD_RELOC_PPC64_PLTGOT16_LO_DS		BFD_RELOC_RX_ABS16	
BFD_RELOC_PPC64_SECTOFF_DS		BFD_RELOC_RX_ABS16_REV	
BFD_RELOC_PPC64_SECTOFF_LO_DS		BFD_RELOC_RX_ABS16U	
BFD_RELOC_PPC64_TOC		BFD_RELOC_RX_ABS16UL	
BFD_RELOC_PPC64_TOC16_DS	74	BFD_RELOC_RX_ABS16UW	
BFD_RELOC_PPC64_TOC16_HA	73	BFD_RELOC_RX_ABS32	
BFD_RELOC_PPC64_TOC16_HI	73	BFD_RELOC_RX_ABS32_REV	94
BFD_RELOC_PPC64_TOC16_LO	73	BFD_RELOC_RX_ABS8	94
BFD_RELOC_PPC64_TOC16_LO_DS	74	BFD_RELOC_RX_DIFF	94
BFD_RELOC_PPC64_TPREL16_DS		BFD_RELOC_RX_DIR3U_PCREL	
BFD_RELOC_PPC64_TPREL16_HIGH		BFD_RELOC_RX_GPRELB	
BFD_RELOC_PPC64_TPREL16_HIGHA		BFD_RELOC_RX_GPRELL	
BFD_RELOC_PPC64_TPREL16_HIGHER		BFD_RELOC_RX_GPRELW	
BFD_RELOC_PPC64_TPREL16_HIGHERA		BFD_RELOC_RX_NEG16	
BFD_RELOC_PPC64_TPREL16_HIGHEST		BFD_RELOC_RX_NEG24	
BFD RELOC PPC64 TPREL16 HIGHESTA	(O	BFD RELOC RX NEG32	94

BFD_RELOC_RX_NEG8	94	BFD_RELOC_SH_GOTPLT10BY4	79
BFD_RELOC_RX_OP_NEG		BFD_RELOC_SH_GOTPLT10BY8	79
BFD_RELOC_RX_OP_SUBTRACT	94	BFD_RELOC_SH_GOTPLT32	79
BFD_RELOC_RX_RELAX	94	BFD_RELOC_SH_IMM_HI16	80
BFD_RELOC_RX_SYM	94	BFD_RELOC_SH_IMM_HI16_PCREL	80
BFD_RELOC_SCORE_BCMP	97	BFD_RELOC_SH_IMM_LOW16	80
BFD_RELOC_SCORE_BRANCH	97	BFD_RELOC_SH_IMM_LOW16_PCREL	80
BFD_RELOC_SCORE_CALL15	97	BFD_RELOC_SH_IMM_MEDHI16	80
BFD_RELOC_SCORE_DUMMY_HI16		BFD_RELOC_SH_IMM_MEDHI16_PCREL	80
BFD_RELOC_SCORE_DUMMY2		BFD_RELOC_SH_IMM_MEDLOW16	80
BFD_RELOC_SCORE_GOT_LO16		BFD_RELOC_SH_IMM_MEDLOW16_PCREL	
BFD_RELOC_SCORE_GOT15		BFD_RELOC_SH_IMM3	
BFD_RELOC_SCORE_GPREL15		BFD_RELOC_SH_IMM3U	
BFD_RELOC_SCORE_IMM30		BFD_RELOC_SH_IMM4	
BFD_RELOC_SCORE_IMM32		BFD_RELOC_SH_IMM4BY2	
BFD_RELOC_SCORE_JMP		BFD_RELOC_SH_IMM4BY4	
BFD_RELOC_SCORE16_BRANCH		BFD_RELOC_SH_IMM8	
BFD_RELOC_SCORE16_JMP		BFD_RELOC_SH_IMM8BY2	
BFD_RELOC_SH_ALIGN		BFD_RELOC_SH_IMM8BY4	
BFD_RELOC_SH_CODE		BFD_RELOC_SH_IMMS10	
BFD_RELOC_SH_COPY		BFD_RELOC_SH_IMMS10BY2	
BFD_RELOC_SH_COPY64		BFD_RELOC_SH_IMMS10BY4	
BFD_RELOC_SH_COUNT		BFD_RELOC_SH_IMMS10BY8	
BFD_RELOC_SH_DATA		BFD_RELOC_SH_IMMS16	
BFD_RELOC_SH_DISP12		BFD_RELOC_SH_IMMS6	
BFD_RELOC_SH_DISP12BY2		BFD_RELOC_SH_IMMS6BY32	
BFD_RELOC_SH_DISP12BY4		BFD_RELOC_SH_IMMU16	
BFD_RELOC_SH_DISP12BY8		BFD_RELOC_SH_IMMU5	
BFD_RELOC_SH_DISP20		BFD_RELOC_SH_IMMU6	
BFD_RELOC_SH_DISP20BY8		BFD_RELOC_SH_JMP_SLOT	
BFD_RELOC_SH_FUNCDESC		BFD_RELOC_SH_JMP_SLOT64	
BFD_RELOC_SH_GLOB_DAT		BFD_RELOC_SH_LABEL	
BFD_RELOC_SH_GLOB_DAT64		BFD_RELOC_SH_LOOP_END	
BFD_RELOC_SH_GOT_HI16		BFD_RELOC_SH_LOOP_START	
BFD_RELOC_SH_GOT_LOW16		BFD_RELOC_SH_PCDISP12BY2	
BFD_RELOC_SH_GOT_MEDHI16		BFD_RELOC_SH_PCDISP8BY2	
BFD_RELOC_SH_GOT_MEDLOW16		BFD_RELOC_SH_PCRELIMM8BY2	
BFD_RELOC_SH_GOT10BY4		BFD_RELOC_SH_PCRELIMM8BY4	
BFD_RELOC_SH_GOT10BY8		BFD_RELOC_SH_PLT_HI16	
BFD_RELOC_SH_GOT20		BFD_RELOC_SH_PLT_LOW16	
BFD_RELOC_SH_GOTFUNCDESC		BFD_RELOC_SH_PLT_MEDHI16	
BFD_RELOC_SH_GOTFUNCDESC20		BFD_RELOC_SH_PLT_MEDLOW16	
BFD_RELOC_SH_GOTOFF_HI16		BFD_RELOC_SH_PT_16	
BFD_RELOC_SH_GOTOFF_LOW16		BFD_RELOC_SH_RELATIVE	
BFD_RELOC_SH_GOTOFF_MEDHI16		BFD_RELOC_SH_RELATIVE64	
BFD_RELOC_SH_GOTOFF_MEDLOW16		BFD_RELOC_SH_SHMEDIA_CODE	
BFD_RELOC_SH_GOTOFF20		BFD_RELOC_SH_SWITCH16	
BFD_RELOC_SH_GOTOFFFUNCDESC		BFD_RELOC_SH_SWITCH32	
BFD_RELOC_SH_GOTOFFFUNCDESC20		BFD_RELOC_SH_TLS_DTPMOD32	
BFD_RELOC_SH_GOTPC		BFD_RELOC_SH_TLS_DTPOFF32	
BFD_RELOC_SH_GOTPC_HI16		BFD_RELOC_SH_TLS_GD_32	
BFD_RELOC_SH_GOTPC_LOW16		BFD_RELOC_SH_TLS_IE_32	
BFD_RELOC_SH_GOTPC_MEDHI16		BFD_RELOC_SH_TLS_LD_32	
BFD_RELOC_SH_GOTPC_MEDLOW16		BFD_RELOC_SH_TLS_LDO_32	
BFD_RELOC_SH_GOTPLT_HI16		BFD_RELOC_SH_TLS_LE_32	
BFD_RELOC_SH_GOTPLT_LOW16		BFD_RELOC_SH_TLS_TPOFF32	
BFD_RELOC_SH_GOTPLT_MEDHI16		BFD_RELOC_SH_USES	
BED RELOC SH COTPLY MEDIOW16	79	RED RELOC SIZE32	61

BFD_RELOC_SIZE64	61	BFD_RELOC_SPARC_TLS_LDM_ADD 6	63
BFD_RELOC_SPARC_10	62	BFD_RELOC_SPARC_TLS_LDM_CALL 6	
BFD_RELOC_SPARC_11	62	BFD_RELOC_SPARC_TLS_LDM_HI226	63
BFD_RELOC_SPARC_5	63	BFD_RELOC_SPARC_TLS_LDM_LO10	63
BFD_RELOC_SPARC_6		BFD_RELOC_SPARC_TLS_LDO_ADD	63
BFD_RELOC_SPARC_64	62	BFD_RELOC_SPARC_TLS_LDO_HIX226	63
BFD_RELOC_SPARC_7	63	BFD_RELOC_SPARC_TLS_LDO_LOX106	63
BFD_RELOC_SPARC_BASE13	62	BFD_RELOC_SPARC_TLS_LE_HIX22(63
BFD_RELOC_SPARC_BASE22	62	BFD_RELOC_SPARC_TLS_LE_LOX106	63
BFD_RELOC_SPARC_COPY	62	BFD_RELOC_SPARC_TLS_TPOFF326	
BFD_RELOC_SPARC_DISP64	63	BFD_RELOC_SPARC_TLS_TPOFF646	
BFD_RELOC_SPARC_GLOB_DAT	62	BFD_RELOC_SPARC_UA16 6	
BFD_RELOC_SPARC_GOT10	62	BFD_RELOC_SPARC_UA326	
BFD_RELOC_SPARC_GOT13		BFD_RELOC_SPARC_UA64 (
BFD_RELOC_SPARC_GOT22		BFD_RELOC_SPARC_WDISP106	
BFD_RELOC_SPARC_GOTDATA_HIX22		BFD_RELOC_SPARC_WDISP166	
BFD_RELOC_SPARC_GOTDATA_LOX10		BFD_RELOC_SPARC_WDISP196	
BFD_RELOC_SPARC_GOTDATA_OP		BFD_RELOC_SPARC_WDISP22(
BFD_RELOC_SPARC_GOTDATA_OP_HIX22		BFD_RELOC_SPARC_WPLT30(
BFD_RELOC_SPARC_GOTDATA_OP_LOX10		BFD_RELOC_SPARC13(
BFD_RELOC_SPARC_H34		BFD_RELOC_SPARC22(
BFD_RELOC_SPARC_H44		BFD_RELOC_SPU_ADD_PIC	64
BFD_RELOC_SPARC_HH22		BFD_RELOC_SPU_HI16	
BFD_RELOC_SPARC_HIX22		BFD_RELOC_SPU_IMM10	
BFD_RELOC_SPARC_HM10		BFD_RELOC_SPU_IMM10W	
BFD_RELOC_SPARC_IRELATIVE		BFD_RELOC_SPU_IMM16	
BFD_RELOC_SPARC_JMP_IREL		BFD_RELOC_SPU_IMM16W	
BFD_RELOC_SPARC_JMP_SLOT		BFD_RELOC_SPU_IMM18	
BFD_RELOC_SPARC_L44		BFD_RELOC_SPU_IMM7	
BFD_RELOC_SPARC_LM22		BFD_RELOC_SPU_IMM8	
BFD_RELOC_SPARC_LOX10		BFD_RELOC_SPU_L016	
BFD_RELOC_SPARC_M44		BFD_RELOC_SPU_PCREL16	
BFD_RELOC_SPARC_OLO10		BFD_RELOC_SPU_PCREL9a	
BFD_RELOC_SPARC_PC_HH22		BFD_RELOC_SPU_PCREL9b	
BFD_RELOC_SPARC_PC_HM10		BFD_RELOC_SPU_PPU32	
BFD_RELOC_SPARC_PC_LM22		BFD_RELOC_SPU_PPU64	
BFD_RELOC_SPARC_PC10		BFD_RELOC_THUMB_PCREL_BLX	
BFD_RELOC_SPARC_PC22		BFD_RELOC_THUMB_PCREL_BRANCH12	
BFD_RELOC_SPARC_PLT32		BFD_RELOC_THUMB_PCREL_BRANCH20	
BFD_RELOC_SPARC_PLT64		BFD_RELOC_THUMB_PCREL_BRANCH23	
BFD_RELOC_SPARC_REGISTER		BFD_RELOC_THUMB_PCREL_BRANCH25	
BFD_RELOC_SPARC_RELATIVE		BFD_RELOC_THUMB_PCREL_BRANCH7	
BFD_RELOC_SPARC_REV32		BFD_RELOC_THUMB_PCREL_BRANCH9	
BFD_RELOC_SPARC_SIZE32		BFD_RELOC_TIC3O_LDP	
BFD_RELOC_SPARC_SIZE64		BFD_RELOC_TIC54X_16_0F_23	
BFD_RELOC_SPARC_TLS_DTPMOD32		BFD_RELOC_TIC54X_23	
BFD_RELOC_SPARC_TLS_DTPMOD64		BFD_RELOC_TIC54X_MS7_0F_23	
BFD_RELOC_SPARC_TLS_DTPOFF32		BFD_RELOC_TIC54X_PARTLS7	
BFD_RELOC_SPARC_TLS_DTPOFF64		BFD_RELOC_TIC54X_PARTMS9	
BFD_RELOC_SPARC_TLS_DIFOFF04 BFD_RELOC_SPARC_TLS_GD_ADD		BFD_RELOC_TILEGX_BROFF_X1	
BFD_RELOC_SPARC_TLS_GD_CALL		BFD_RELOC_TILEGX_COPY	
BFD_RELOC_SPARC_TLS_GD_HI22		BFD_RELOC_TILEGX_COPY	
BFD_RELOC_SPARC_TLS_GD_H122 BFD_RELOC_SPARC_TLS_GD_L010		BFD_RELOC_TILEGX_DEST_IMM8_X1	
BFD_RELOC_SPARC_TLS_IE_ADD		BFD_RELOC_TILEGX_HWO	
BFD_RELOC_SPARC_TLS_IE_ADDBFD_RELOC_SPARC_TLS_IE_HI22		BFD_RELOC_TILEGX_HWO_LAST	
BFD_RELOC_SPARC_TLS_IE_H122 BFD_RELOC_SPARC_TLS_IE_LD		BFD_RELOC_TILEGX_HWO_LAST	
BFD_RELOC_SPARC_TLS_IE_LDX		BFD_RELOC_TILEGX_HW1_LAST	
	63		19 19

BFD_RELOC_TILEGX_HW2_LAST 119	BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_PLT_
BFD_RELOC_TILEGX_HW3119	PCREL
BFD_RELOC_TILEGX_IMM16_XO_HWO	BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_TLS_GD
BFD_RELOC_TILEGX_IMM16_XO_HWO_GOT 120	
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST 120	BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_TLS_IE
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST_GOT 121	
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST_PCREL	BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_TLS_LE
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST_PLT_	BFD_RELOC_TILEGX_IMM16_X1_HWO_PCREL 120
PCREL	BFD_RELOC_TILEGX_IMM16_X1_HWO_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST_TLS_GD	
	BFD_RELOC_TILEGX_IMM16_X1_HWO_TLS_GD 121
BFD_RELOC_TILEGX_IMM16_XO_HWO_LAST_TLS_IE	BFD_RELOC_TILEGX_IMM16_X1_HWO_TLS_IE 121
	BFD_RELOC_TILEGX_IMM16_X1_HWO_TLS_LE 121
	BFD_RELOC_TILEGX_IMM16_X1_HW1
BFD_RELOC_TILEGX_IMM16_X0_HW0_LAST_TLS_LE121	BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST 120
	BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_GOT 121
BFD_RELOC_TILEGX_IMM16_XO_HWO_PCREL 120	BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HWO_PLT_PCREL	
	BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_PLT_
BFD_RELOC_TILEGX_IMM16_XO_HWO_TLS_GD 121	PCREL
BFD_RELOC_TILEGX_IMM16_XO_HWO_TLS_IE 121	BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_TLS_GD
BFD_RELOC_TILEGX_IMM16_XO_HWO_TLS_LE 121	
BFD_RELOC_TILEGX_IMM16_XO_HW1	BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_TLS_IE
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST 120	
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_GOT 121	BFD_RELOC_TILEGX_IMM16_X1_HW1_LAST_TLS_LE
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_PCREL	
	BFD_RELOC_TILEGX_IMM16_X1_HW1_PCREL 120
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_PLT_	
PCREL	BFD_RELOC_TILEGX_IMM16_X1_HW1_PLT_PCREL121
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_TLS_GD	
	BFD_RELOC_TILEGX_IMM16_X1_HW2
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_TLS_IE	BFD_RELOC_TILEGX_IMM16_X1_HW2_LAST 120
	BFD_RELOC_TILEGX_IMM16_X1_HW2_LAST_PCREL
BFD_RELOC_TILEGX_IMM16_XO_HW1_LAST_TLS_LE	
	BFD_RELOC_TILEGX_IMM16_X1_HW2_LAST_PLT_
BFD_RELOC_TILEGX_IMM16_XO_HW1_PCREL 120	PCREL
BFD_RELOC_TILEGX_IMM16_XO_HW1_PLT_PCREL	BFD_RELOC_TILEGX_IMM16_X1_HW2_PCREL 120
	BFD_RELOC_TILEGX_IMM16_X1_HW2_PLT_PCREL
BFD_RELOC_TILEGX_IMM16_X0_HW2	
	BFD_RELOC_TILEGX_IMM16_X1_HW3
BFD_RELOC_TILEGX_IMM16_XO_HW2_LAST 120	BFD_RELOC_TILEGX_IMM16_X1_HW3_PCREL 120
BFD_RELOC_TILEGX_IMM16_XO_HW2_LAST_PCREL	BFD_RELOC_TILEGX_IMM16_X1_HW3_PLT_PCREL
DED DELOG TIL FOY TAMAC VOLUMO LAGE DET	
BFD_RELOC_TILEGX_IMM16_XO_HW2_LAST_PLT_	BFD_RELOC_TILEGX_IMM8_X0 120
PCREL	BFD_RELOC_TILEGX_IMM8_XO_TLS_ADD 122
BFD_RELOC_TILEGX_IMM16_X0_HW2_PCREL 120	BFD_RELOC_TILEGX_IMM8_XO_TLS_GD_ADD 121
BFD_RELOC_TILEGX_IMM16_XO_HW2_PLT_PCREL	BFD_RELOC_TILEGX_IMM8_X1 120
	BFD_RELOC_TILEGX_IMM8_X1_TLS_ADD 122
BFD_RELOC_TILEGX_IMM16_XO_HW3	BFD_RELOC_TILEGX_IMM8_X1_TLS_GD_ADD 121
BFD_RELOC_TILEGX_IMM16_XO_HW3_PCREL 120	BFD_RELOC_TILEGX_IMM8_YO 120
BFD_RELOC_TILEGX_IMM16_XO_HW3_PLT_PCREL	BFD_RELOC_TILEGX_IMM8_YO_TLS_ADD 122
	BFD_RELOC_TILEGX_IMM8_YO_TLS_GD_ADD 121
BFD_RELOC_TILEGX_IMM16_X1_HW0120	BFD_RELOC_TILEGX_IMM8_Y1 120
BFD_RELOC_TILEGX_IMM16_X1_HWO_GOT 120	BFD_RELOC_TILEGX_IMM8_Y1_TLS_ADD 122
BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST 120	BFD_RELOC_TILEGX_IMM8_Y1_TLS_GD_ADD 121
BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_GOT 121	BFD_RELOC_TILEGX_JMP_SLOT 119
BFD_RELOC_TILEGX_IMM16_X1_HWO_LAST_PCREL	BFD_RELOC_TILEGX_JUMPOFF_X1
	BFD RELOC TILEGX JUMPOFF X1 PLT 120

BFD_RELOC_TILEGX_MF_IMM14_X1	BFD_RELOC_TILEPRO_IMM16_X1_TLS_GD_HA 119
BFD_RELOC_TILEGX_MMEND_XO 120	BFD_RELOC_TILEPRO_IMM16_X1_TLS_GD_HI 119
BFD_RELOC_TILEGX_MMSTART_XO	BFD_RELOC_TILEPRO_IMM16_X1_TLS_GD_L0 119
BFD_RELOC_TILEGX_MT_IMM14_X1	BFD_RELOC_TILEPRO_IMM16_X1_TLS_IE 119
BFD_RELOC_TILEGX_RELATIVE 120	BFD_RELOC_TILEPRO_IMM16_X1_TLS_IE_HA 119
BFD_RELOC_TILEGX_SHAMT_XO 120	BFD_RELOC_TILEPRO_IMM16_X1_TLS_IE_HI 119
BFD_RELOC_TILEGX_SHAMT_X1 120	BFD_RELOC_TILEPRO_IMM16_X1_TLS_IE_LO 119
BFD_RELOC_TILEGX_SHAMT_YO 120	BFD_RELOC_TILEPRO_IMM16_X1_TLS_LE 119
BFD_RELOC_TILEGX_SHAMT_Y1 120	BFD_RELOC_TILEPRO_IMM16_X1_TLS_LE_HA 119
BFD_RELOC_TILEGX_TLS_DTPMOD32121	BFD_RELOC_TILEPRO_IMM16_X1_TLS_LE_HI 119
BFD_RELOC_TILEGX_TLS_DTPMOD64121	BFD_RELOC_TILEPRO_IMM16_X1_TLS_LE_LO 119
BFD_RELOC_TILEGX_TLS_DTPOFF32121	BFD_RELOC_TILEPRO_IMM8_XO
BFD_RELOC_TILEGX_TLS_DTPOFF64121	BFD_RELOC_TILEPRO_IMM8_XO_TLS_GD_ADD 119
BFD_RELOC_TILEGX_TLS_GD_CALL	BFD_RELOC_TILEPRO_IMM8_X1
BFD_RELOC_TILEGX_TLS_IE_LOAD	BFD_RELOC_TILEPRO_IMM8_X1_TLS_GD_ADD 119
BFD_RELOC_TILEGX_TLS_TPOFF32121	BFD_RELOC_TILEPRO_IMM8_YO118
BFD_RELOC_TILEGX_TLS_TP0FF64	BFD_RELOC_TILEPRO_IMM8_YO_TLS_GD_ADD 119
BFD_RELOC_TILEPRO_BROFF_X1 118	BFD_RELOC_TILEPRO_IMM8_Y1118
BFD_RELOC_TILEPRO_COPY	BFD_RELOC_TILEPRO_IMM8_Y1_TLS_GD_ADD 119
BFD_RELOC_TILEPRO_DEST_IMM8_X1 118	BFD_RELOC_TILEPRO_JMP_SLOT
BFD_RELOC_TILEPRO_GLOB_DAT	BFD_RELOC_TILEPRO_JOFFLONG_X1
BFD_RELOC_TILEPRO_IMM16_X0	BFD_RELOC_TILEPRO_JOFFLONG_X1_PLT 118
BFD_RELOC_TILEPRO_IMM16_XO_GOT 118	BFD_RELOC_TILEPRO_MF_IMM15_X1
BFD_RELOC_TILEPRO_IMM16_XO_GOT_HA 118	BFD_RELOC_TILEPRO_MMEND_XO
BFD_RELOC_TILEPRO_IMM16_XO_GOT_HI	BFD_RELOC_TILEPRO_MMEND_X1
BFD_RELOC_TILEPRO_IMM16_XO_GOT_LO 118	BFD_RELOC_TILEPRO_MMSTART_XO
BFD_RELOC_TILEPRO_IMM16_XO_HA	BFD_RELOC_TILEPRO_MMSTART_X1
BFD_RELOC_TILEPRO_IMM16_XO_HA_PCREL 118	BFD_RELOC_TILEPRO_MT_IMM15_X1
BFD_RELOC_TILEPRO_IMM16_XO_HI	BFD_RELOC_TILEPRO_RELATIVE
BFD_RELOC_TILEPRO_IMM16_XO_HI_PCREL 118	BFD_RELOC_TILEPRO_SHAMT_XO
BFD_RELOC_TILEPRO_IMM16_XO_LO	BFD_RELOC_TILEPRO_SHAMT_X1
BFD_RELOC_TILEPRO_IMM16_XO_LO_PCREL 118	BFD_RELOC_TILEPRO_SHAMT_YO
BFD_RELOC_TILEPRO_IMM16_XO_PCREL 118	BFD_RELOC_TILEPRO_SHAMT_Y1
BFD_RELOC_TILEPRO_IMM16_XO_TLS_GD 119	BFD_RELOC_TILEPRO_TLS_DTPMOD32
BFD_RELOC_TILEPRO_IMM16_XO_TLS_GD_HA 119	BFD_RELOC_TILEPRO_TLS_DTPOFF32
BFD_RELOC_TILEPRO_IMM16_XO_TLS_GD_HI 119	BFD_RELOC_TILEPRO_TLS_GD_CALL
BFD_RELOC_TILEPRO_IMM16_XO_TLS_GD_LO 119	BFD_RELOC_TILEPRO_TLS_IE_LOAD
BFD_RELOC_TILEPRO_IMM16_XO_TLS_IE 119	BFD_RELOC_TILEPRO_TLS_TPOFF32
BFD_RELOC_TILEPRO_IMM16_XO_TLS_IE_HA 119	bfd_reloc_type_lookup
BFD_RELOC_TILEPRO_IMM16_XO_TLS_IE_HI 119	BFD_RELOC_V850_16_GOT
BFD_RELOC_TILEPRO_IMM16_XO_TLS_IE_LO 119	BFD_RELOC_V850_16_GOTOFF
BFD_RELOC_TILEPRO_IMM16_XO_TLS_LE 119	BFD_RELOC_V850_16_PCREL
BFD_RELOC_TILEPRO_IMM16_XO_TLS_LE_HA 119	BFD_RELOC_V850_16_S1
BFD_RELOC_TILEPRO_IMM16_XO_TLS_LE_HI 119	BFD_RELOC_V850_16_SPLIT_OFFSET
BFD_RELOC_TILEPRO_IMM16_XO_TLS_LE_LO 119	BFD_RELOC_V850_17_PCREL
BFD_RELOC_TILEPRO_IMM16_X1	BFD_RELOC_V850_17_FCREE
BFD_RELOC_TILEPRO_IMM16_X1_GOT	BFD_RELOC_V850_22_PLT_PCREL
BFD_RELOC_TILEPRO_IMM16_X1_GOT_HA	BFD_RELOC_V850_23
	BFD_RELOC_V850_32_ABS
BFD_RELOC_TILEPRO_IMM16_X1_GOT_HI	BFD_RELOC_V850_32_ABS
BFD_RELOC_TILEPRO_IMM16_X1_GOT_LO	BFD_RELOC_V850_32_G0T0FF
BFD_RELOC_TILEPRO_IMM16_X1_HA	
BFD_RELOC_TILEPRO_IMM16_X1_HA_PCREL 118	BFD_RELOC_V850_32_GOTPCREL
BFD_RELOC_TILEPRO_IMM16_X1_HI	BFD_RELOC_V850_32_PCREL
BFD_RELOC_TILEPRO_IMM16_X1_HI_PCREL 118	BFD_RELOC_V850_32_PLT_PCREL
BFD_RELOC_TILEPRO_IMM16_X1_L0	BFD_RELOC_V850_9_PCREL
BFD_RELOC_TILEPRO_IMM16_X1_LO_PCREL 118	BFD_RELOC_V850_ALIGN
BFD_RELOC_TILEPRO_IMM16_X1_PCREL	BFD_RELOC_V850_CALLT_15_16_OFFSET
BFD RELOC TILEPRO IMM16 X1 TLS GD 119	BFD_RELOC_V850_CALLT_16_16_OFFSET

BFD_RELOC_V850_CALLT_6_7_OFFSET	86	BFD_RELOC_X86_64_TP0FF64	. 71
BFD_RELOC_V850_CODE	87	BFD_RELOC_XC16X_PAG	106
BFD_RELOC_V850_COPY	87	BFD_RELOC_XC16X_POF	106
BFD_RELOC_V850_DATA	87	BFD_RELOC_XC16X_SEG	106
BFD_RELOC_V850_GLOB_DAT	87	BFD_RELOC_XC16X_SOF	
BFD_RELOC_V850_JMP_SLOT	87	BFD_RELOC_XGATE_24	
BFD_RELOC_V850_L016_S1	86	BFD_RELOC_XGATE_GPAGE	101
BFD_RELOC_V850_L016_SPLIT_OFFSET	86	BFD_RELOC_XGATE_IMM3	101
BFD_RELOC_V850_LONGCALL	86	BFD_RELOC_XGATE_IMM4	101
BFD_RELOC_V850_LONGJUMP	86	BFD_RELOC_XGATE_IMM5	101
BFD_RELOC_V850_RELATIVE		BFD_RELOC_XGATE_IMM8_HI	
BFD_RELOC_V850_SDA_15_16_OFFSET	85	BFD_RELOC_XGATE_IMM8_LO	101
BFD_RELOC_V850_SDA_16_16_0FFSET	85	BFD_RELOC_XGATE_LO16	101
BFD_RELOC_V850_SDA_16_16_SPLIT_OFFSET		BFD_RELOC_XGATE_PCREL_10	101
BFD_RELOC_V850_TDA_16_16_0FFSET		BFD_RELOC_XGATE_PCREL_9	
BFD_RELOC_V850_TDA_4_4_0FFSET		BFD_RELOC_XGATE_RL_GROUP	
BFD_RELOC_V850_TDA_4_5_OFFSET		BFD_RELOC_XGATE_RL_JUMP	
BFD_RELOC_V850_TDA_6_8_OFFSET		BFD_RELOC_XSTORMY16_12	
BFD_RELOC_V850_TDA_7_7_OFFSET		BFD_RELOC_XSTORMY16_24	
BFD_RELOC_V850_TDA_7_8_OFFSET		BFD_RELOC_XSTORMY16_FPTR16	
BFD_RELOC_V850_ZDA_15_16_OFFSET		BFD_RELOC_XSTORMY16_REL_12	
BFD_RELOC_V850_ZDA_16_16_0FFSET		BFD_RELOC_XTENSA_ASM_EXPAND	
BFD_RELOC_V850_ZDA_16_16_SPLIT_OFFSET		BFD_RELOC_XTENSA_ASM_SIMPLIFY	
BFD_RELOC_VAX_GLOB_DAT		BFD_RELOC_XTENSA_DIFF16	
BFD_RELOC_VAX_JMP_SLOT		BFD_RELOC_XTENSA_DIFF32	
BFD_RELOC_VAX_RELATIVE		BFD_RELOC_XTENSA_DIFF8	
BFD_RELOC_VPE4KMATH_DATA		BFD_RELOC_XTENSA_GLOB_DAT	
BFD_RELOC_VPE4KMATH_INSN		BFD_RELOC_XTENSA_JMP_SLOT	
BFD_RELOC_VTABLE_ENTRY		BFD_RELOC_XTENSA_OPO	
BFD_RELOC_VTABLE_INHERIT		BFD_RELOC_XTENSA_OP1	
BFD_RELOC_X86_64_32S		BFD_RELOC_XTENSA_OP2	
BFD_RELOC_X86_64_COPY		BFD_RELOC_XTENSA_PLT	
BFD_RELOC_X86_64_DTPMOD64		BFD_RELOC_XTENSA_RELATIVE	
BFD_RELOC_X86_64_DTP0FF32		BFD_RELOC_XTENSA_RTLD	
BFD_RELOC_X86_64_DTPOFF64		BFD_RELOC_XTENSA_SLOTO_ALT	
BFD_RELOC_X86_64_GLOB_DAT		BFD_RELOC_XTENSA_SLOTO_OP	
BFD_RELOC_X86_64_GOT32		BFD_RELOC_XTENSA_SLOT1_ALT	
BFD_RELOC_X86_64_GOT64		BFD_RELOC_XTENSA_SLOT1_OP	
BFD_RELOC_X86_64_GOTOFF64		BFD_RELOC_XTENSA_SLOT10_ALT	
BFD_RELOC_X86_64_GOTPC32		BFD_RELOC_XTENSA_SLOT10_OP	
BFD_RELOC_X86_64_GOTPC32_TLSDESC		BFD_RELOC_XTENSA_SLOT11_ALT	
BFD_RELOC_X86_64_GOTPC64		BFD_RELOC_XTENSA_SLOT11_OP	
BFD_RELOC_X86_64_GOTPCREL		BFD_RELOC_XTENSA_SLOT12_ALT	
BFD_RELOC_X86_64_GOTPCREL64		BFD_RELOC_XTENSA_SLOT12_OP	
BFD_RELOC_X86_64_GOTPLT64		BFD_RELOC_XTENSA_SLOT13_ALT	
BFD_RELOC_X86_64_GOTTPOFF		BFD_RELOC_XTENSA_SLOT13_0P	
BFD_RELOC_X86_64_IRELATIVE		BFD_RELOC_XTENSA_SLOT14_ALT	
BFD_RELOC_X86_64_JUMP_SLOT		BFD_RELOC_XTENSA_SLOT14_0P	
BFD_RELOC_X86_64_PC32_BND		BFD_RELOC_XTENSA_SLOT2_ALT	
BFD_RELOC_X86_64_PLT32		BFD_RELOC_XTENSA_SLOT2_OP	
BFD_RELOC_X86_64_PLT32_BND		BFD_RELOC_XTENSA_SLOT3_ALT	
BFD_RELOC_X86_64_PLT0FF64		BFD_RELOC_XTENSA_SLOT3_OP	
BFD_RELOC_X86_64_RELATIVE		BFD_RELOC_XTENSA_SLOT4_ALT	
BFD_RELOC_X86_64_TLSDESC		BFD_RELOC_XTENSA_SLOT4_OP	
BFD_RELOC_X86_64_TLSDESC_CALL		BFD_RELOC_XTENSA_SLOT5_ALT	
BFD_RELOC_X86_64_TLSGDBFD_RELOC_X86_64_TLSGD		BFD_RELOC_XTENSA_SLOT5_OP	
BFD_RELOC_X86_64_TLSLD		BFD_RELOC_XTENSA_SLOT6_ALT	
BFD RELOC X86 64 TPOFF32		BFD RELOC XTENSA SLOT6 OP	
DID INDUOUS AUGUST II UIT UZ	1.1	ATDIO ATDIO DEUIO UE	エロジ

BFD_RELOC_XTENSA_SLOT7_ALT 109	\mathbf{C}
BFD_RELOC_XTENSA_SLOT7_OP 109	coff_symbol_type
BFD_RELOC_XTENSA_SLOT8_ALT 109	core_file_matches_executable_p 124
BFD_RELOC_XTENSA_SLOT8_OP 109	r
BFD_RELOC_XTENSA_SLOT9_ALT 109	
BFD_RELOC_XTENSA_SLOT9_OP 109	\mathbf{F}
BFD_RELOC_XTENSA_TLS_ARG 110	and concepts debug file
BFD_RELOC_XTENSA_TLS_CALL 110	find_separate_debug_file
BFD_RELOC_XTENSA_TLS_DTPOFF	
BFD_RELOC_XTENSA_TLS_FUNC 110	G
BFD_RELOC_XTENSA_TLS_TPOFF 110	
BFD_RELOC_XTENSA_TLSDESC_ARG	generic_core_file_matches_executable_p 124
BFD_RELOC_XTENSA_TLSDESC_FN	
BFD_RELOC_Z80_DISP8	TT
BFD_RELOC_Z8K_CALLR 110	H
BFD_RELOC_Z8K_DISP7 110	Hash tables
BFD_RELOC_Z8K_IMM4L 110	
bfd_rename_section	т
bfd_scan_arch	I
bfd_scan_vma	internal object-file format
$bfd_seach_for_target$ 136	
bfd_section_already_linked	
bfd_section_list_clear	L
bfd_sections_find_if	Linker
bfd_set_arch_info	Linker
$bfd_set_archive_head$	
bfd_set_assert_handler	0
bfd_set_default_target	
bfd_set_error	Other functions
$bfd_set_error_handler \dots 12$	
bfd_set_error_program_name 12	\mathbf{S}
bfd_set_file_flags	
bfd_set_format	separate_alt_debug_file_exists
bfd_set_gp_size	separate_debug_file_exists
bfd_set_private_flags	struct bfd_iovec
bfd_set_reloc	
bfd_set_section_contents	T
bfd_set_section_flags	-
bfd_set_section_size	target vector (_bfd_final_link) 163
$bfd_set_start_address \dots $	target vector (_bfd_link_add_symbols) 161
bfd_set_symtab	$target\ vector\ (_bfd_link_hash_table_create)\ 161$
bfd_symbol_info 48	The HOWTO Macro 57
bfd_target_list	
bfd_write_bigendian_4byte_int 156	\mathbf{W}
bfd_zalloc	V V
bfd_zalloc2	what is it?

The body of this manual is set in cmr10 at 10.95pt, with headings in cmb10 at 10.95pt and examples in cmtt10 at 10.95pt. cmti10 at 10.95pt and cmsl10 at 10.95pt are used for emphasis.