

LINUX

Printing

AUGUST 2025



Printing on Linux

- To manage printers and print either directly from a local computer or across a networked environment, you need to know how to configure and install a printer. Printing itself requires software that converts information from the application you are using to a language your printer can understand. The Linux standard for printing software is the Common UNIX Printing System (**CUPS**).
- Modern Linux desktop systems make installing and administering printers simple and intuitive. Nevertheless, it is instructive to understand the underpinnings of how it is done in Linux.




CUPS Overview

- CUPS is the underlying software Linux systems use to print from applications, including any web browser such as Thunderbird or google-chrome, office suite such as LibreOffice, or pdf document viewer such as evince. It interprets page descriptions produced by your application (put a paragraph here, draw a line there, and so forth) and then sends the information to the printer. It acts as a print server for both local and network printers.
- Printers manufactured by different companies may use their own particular print languages and formats. CUPS uses a modular printing system that accommodates a wide variety of printers and also processes various data formats. This makes the printing process simpler; you can concentrate more on printing and less on how to print.
- Generally, the only time you should need to configure your printer is when you use it for the first time. In fact, CUPS often figures things out on its own by detecting and configuring any printers it locates.




How Does CUPS Work?

- CUPS carries out the printing process with the help of its various components:
- Configuration files
- Scheduler
- Job files
- Log files
- Filter
- Printer drivers
- Backend
- You will learn about some of these components on the next few pages.

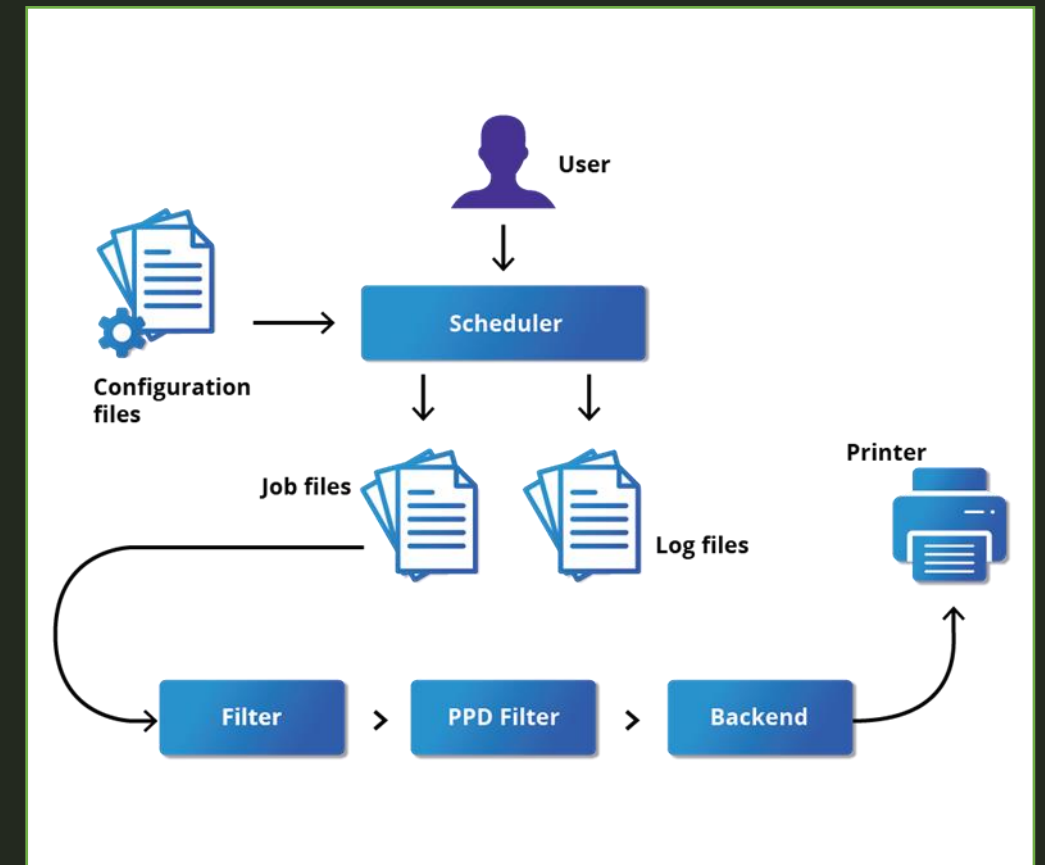

Scheduler

➤ CUPS is designed around a print scheduler that manages print jobs, handles administrative commands, allows users to query the printer status, and manages the flow of data through all CUPS components.

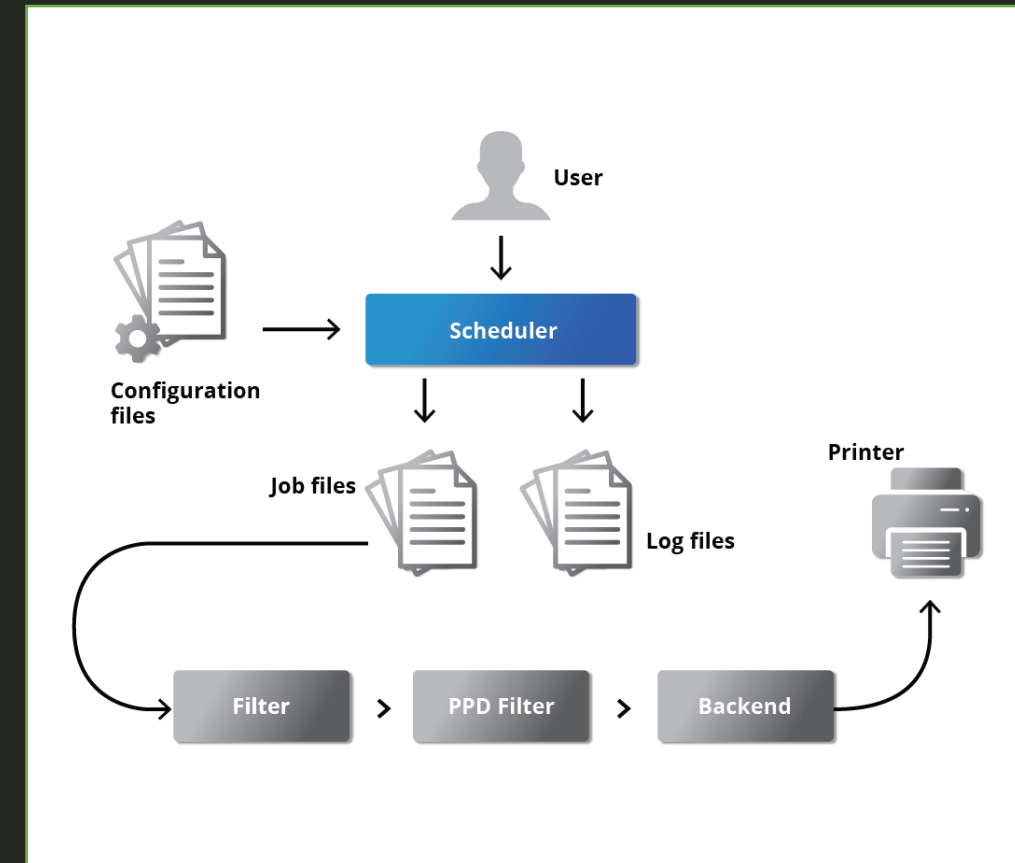

Configuration Files

- ✚ The print scheduler reads server settings from several configuration files, the two most important of which are `cupsd.conf` and `printers.conf`. These and all other CUPS-related configuration files are stored under the `/etc/cups/` directory.
- ✚ `cupsd.conf` is where most system-wide settings are located; it does not contain any printer-specific details. Most of the settings available in this file relate to network security, i.e., which systems can access CUPS network capabilities, how printers are advertised on the local network, what management features are offered, and so on.
- ✚ `printers.conf` is where you will find the printer-specific settings. For every printer connected to the system, a corresponding section describes the printer's status and capabilities. This file is generated or modified only after adding a printer to the system and should not be modified by hand.
- ✚ You can view the full list of configuration files by typing `ls -lF /etc/cups`.

```
student@ubuntu: ~/Desktop
student@ubuntu:~/Desktop$ ls -lF /etc/cups
total 72
-rw-r--r-- 1 root root 27883 Oct 10 05:48 cups-browsed.conf
-rw-r--r-- 1 root root 6403 Oct 17 07:30 cupsd.conf
-rw-r--r-- 1 root root 2923 Sep 5 12:03 cups-files.conf
drwxr-xr-x 2 root root 4096 Sep 5 12:03 interfaces/
drwxr-xr-x 2 root lp 4096 Sep 5 12:03 ppd/
-rw-r--r-- 1 root root 240 Oct 17 07:30 raw.convs
-rw-r--r-- 1 root root 211 Oct 17 07:30 raw.types
-rw-r--r-- 1 root root 142 Sep 5 12:03 snmp.conf
drwx----- 2 root lp 4096 Sep 5 12:03 ssl/
-rw-r----- 1 root lp 684 Nov 7 09:24 subscriptions.conf
-rw-r----- 1 root lp 92 Oct 18 08:49 subscriptions.conf.0
student@ubuntu:~/Desktop$
```

Job Files

- CUPS stores print requests as files under the `/var/spool/cups` directory (these can actually be accessed before a document is sent to a printer). Data files are prefixed with the letter d, while control files are prefixed with the letter c.
- After a printer successfully handles a job, data files are automatically removed. These data files belong to what is commonly known as the print queue.

```
coop@r9:/tmp
r9:/tmp>cat testcase.sh
#!/bin/sh

echo "Do you want to destroy your entire file system?"
read response

case "$response" in
    "yes")          echo "I hope you know what you are doing!" ;;
    "no" )          echo "You have some comon sense!" ;;
    "y" | "Y" | "YES" ) echo "I hope you know what you are doing!" ;
                    echo 'I am supposed to type: " rm -rf /"' ;
                    echo "But I am not going to let you commit suicide";;
    "n" | "N" | "NO" ) echo "You have some common sense!" ;;
    * )             echo "You have to give an answer!" ;;
esac
exit 0
r9:/tmp>./testcase.sh
Do you want to destroy your entire file system?
N
You have some common sense!
r9:/tmp>./testcase.sh
Do you want to destroy your entire file system?

You have to give an answer!
r9:/tmp>./testcase.sh
Do you want to destroy your entire file system?
YES
I hope you know what you are doing!
I am supposed to type: " rm -rf /"
But I am not going to let you commit suicide
r9:/tmp>
```

Log Files

➤ Log files are placed in `/var/log/cups` and are used by the scheduler to record activities that have taken place. These files include access, error, and page records.

➤ To view what log files exist, type:

```
$ sudo ls -l /var/log/cups
```


➤ Note on some distributions permissions are set such that you do not need to use `sudo`. You can view the log files with the usual tools.

```
File Edit View Search Terminal Help
c7:/tmp>ls -l /var/log/cups
total 32
-rw----- 1 root lp 2405 May  7 11:57 access_log
-rw----- 1 root lp  477 Apr 29 07:31 access_log-20180429.gz
-rw----- 1 root lp  722 May  6 08:27 access_log-20180506.gz
-rw----- 1 root lp  129 May  7 06:07 error_log
-rw----- 1 root lp  199 Apr 29 07:31 error_log-20180429.gz
-rw----- 1 root lp  240 May  6 07:28 error_log-20180506.gz
-rw----- 1 root lp    0 Apr  9 06:17 page_log
-rw----- 1 root lp  200 Feb 26 09:18 page_log-20180227.gz
-rw----- 1 root lp  120 Apr  8 10:50 page_log-20180409.gz
c7:/tmp>
```


Filters, Printer Drivers, and Backends

➤ CUPS uses filters to convert job file formats to printable formats. Printer drivers contain descriptions for currently connected and configured printers, and are usually stored under `/etc/cups/ppd/`.

➤ The print data is then sent to the printer through a filter, and via a backend that helps to locate devices connected to the system.

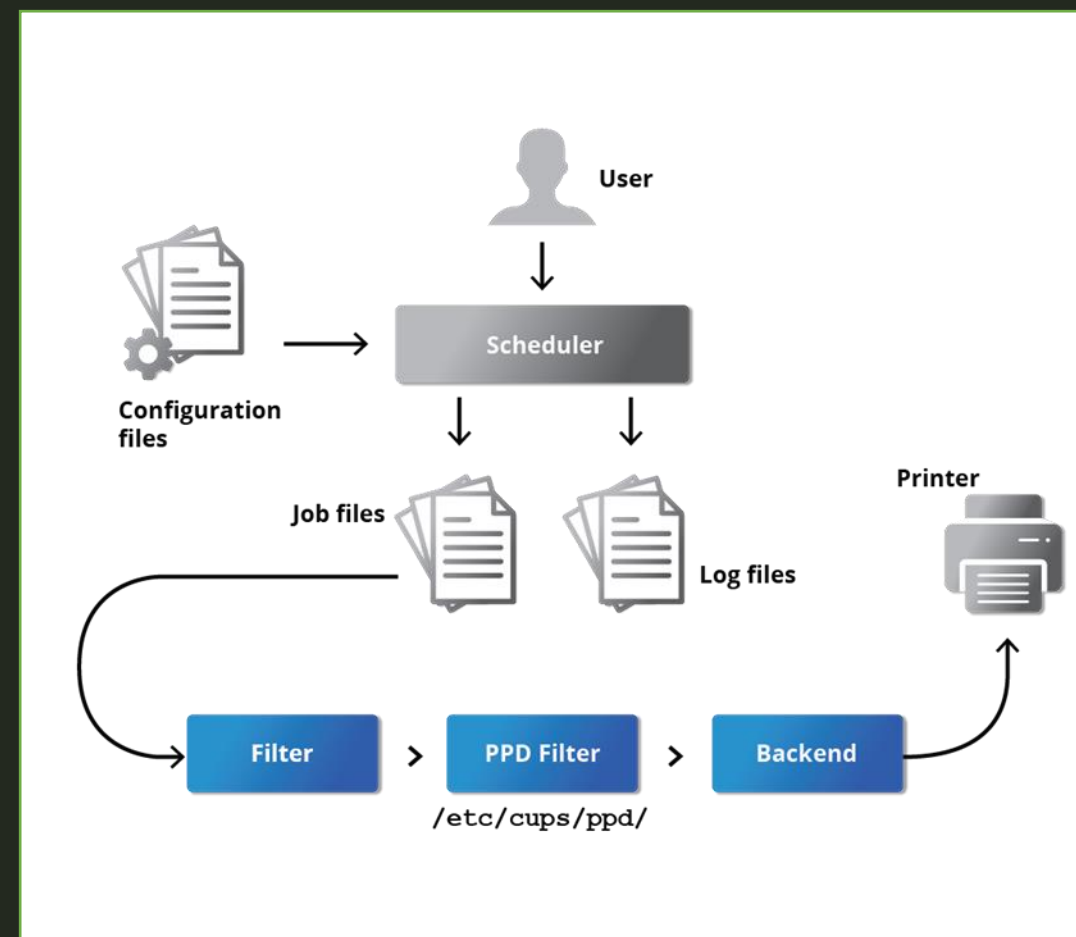

Managing CUPS

➤ Assuming CUPS has been installed you'll need to start and manage the CUPS daemon so that CUPS is ready for configuring a printer. Managing the CUPS daemon is simple; all management features can be done with the **systemctl** utility:

- **\$ systemctl status cups**
- **\$ sudo systemctl [enable|disable] cups**
- **\$ sudo systemctl [start|stop|restart] cups**

Configuring a Printer from the GUI

➤ Each Linux distribution has a graphical configuration application that lets you add, remove, and configure local or remote printers. If you make sure the device is currently turned on and connected to the system; if so it should show up in the printer selection menu. If the printer is not visible, you may want to troubleshoot using tools that will determine if the printer is connected. For common USB printers, for example, the `lsusb` utility will show a line for the printer. Some printer manufacturers also require some extra software to be installed in order to make the printer visible to CUPS, however, due to the standardization these days, this is rarely required.

Adding Printers from the CUPS Web Interface

➤ Many users do not know CUPS comes with its own web server, which makes a configuration interface available via a set of CGI scripts.

➤ This web interface allows you to:

➤ Add and remove local/remote printers

➤ Configure printers:

- Local/remote printers

- Share a printer as a CUPS server

➤ Control print jobs:


- Monitor jobs

- Show completed or pending jobs

- Cancel or move jobs

➤ The CUPS web interface is available on your browser at: **localhost:631**.


➤ Some pages require a username and password to perform certain actions, for example to add a printer. For most Linux distributions, you must use the root password to add, modify, or delete printers or classes.

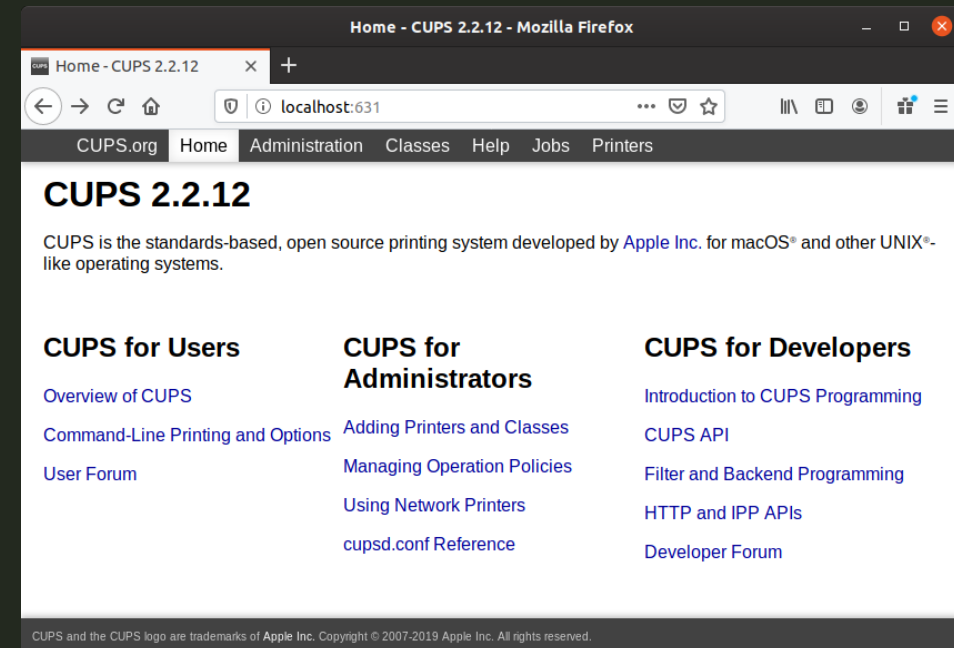

Printing from the Graphical Interface

➤ Many graphical applications allow users to access printing features using the CTRL-P shortcut. To print a file, you first need to specify the printer (or a file name and location if you are printing to a file instead) you want to use; and then select the page setup, quality, and color options. After selecting the required options, you can submit the document for printing. The document is then submitted to CUPS. You can use your browser to access the CUPS web interface at <http://localhost:631/> to monitor the status of the printing job. Now that you have configured the printer, you can print using either the Graphical or Command Line interfaces.

➤ The screenshot shows the GUI interface for CTRL-P for CentOS, other Linux distributions appear virtually identical.

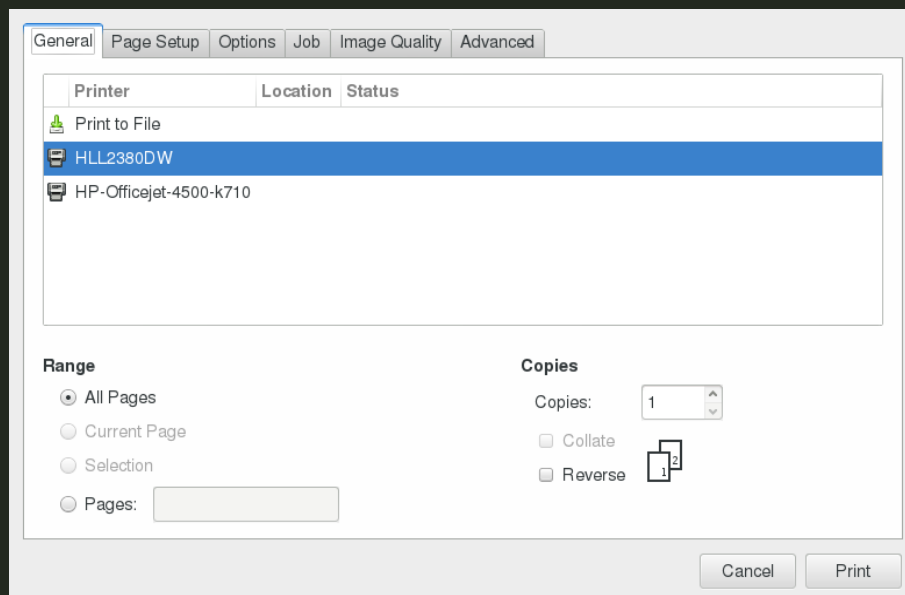

Printing from the Command-Line Interface

- CUPS provides two command-line interfaces, descended from the System V and BSD flavors of UNIX. This means that you can use either `lp` (System V) or `lpr` (BSD) to print. You can use these commands to print text, PostScript, PDF, and image files.
- These commands are useful in cases where printing operations must be automated (from shell scripts, for instance, which contain multiple commands in one file).
- `lp` is just a command line front-end to the `lpr` utility that passes input to `lpr`. Thus, we will discuss only `lp` in detail. In the example shown here, the task is to print `$HOME/.emacs`.

```
File Edit View Search Terminal Help
c7:/tmp>
c7:/tmp>lp -d HP-Officejet-4500-k710 $HOME/.emacs
request id is HP-Officejet-4500-k710-185 (1 file(s))
c7:/tmp>
```

Using lp

- lp and lpr accept command line options that help you perform all operations that the GUI can accomplish. lp is typically used with a file name as an argument.
- Some lp commands and other printing utilities you can use are listed in the table:
- lpoptions can be used to set printer options and defaults. Each printer has a set of tags associated with it, such as the default number of copies and authentication requirements. You can type lpoptions help to obtain a list of supported options. lpoptions can also be used to set system-wide values, such as the default printer.

COMMAND	USAGE
lp <filename>	To print the file to default printer
lp -d printer <filename>	To print to a specific printer (useful if multiple printers are available)
program lp echo string lp	To print the output of a program
lp -n number <filename>	To print multiple copies
lpoptions -d printer	To set the default printer
lpq -a	To show the queue status
lpadmin	To configure printer queues


Managing Print Jobs

- You send a file to the shared printer. But when you go there to collect the printout, you discover another user has just started a 200 page job that is not time sensitive. Your file cannot be printed until this print job is complete. What do you do now?
- In Linux, command line print job management commands allow you to monitor the job state as well as managing the listing of all printers and checking their status, and canceling or moving print jobs to another printer.
- Some of these commands are listed in the table.

COMMAND	USAGE
<code>lpstat -p -d</code>	To get a list of available printers, along with their status
<code>lpstat -a</code>	To check the status of all connected printers, including job numbers
<code>cancel job-id</code> or <code>lprm job-id</code>	To cancel a print job
<code>lpmove job-id newprinter</code>	To move a print job to new printer

Working with PostScript and PDF

- PostScript is a standard page description language. It effectively manages scaling of fonts and vector graphics to provide quality printouts. It is purely a text format that contains the data fed to a PostScript interpreter. The format itself is a language that Adobe developed in the early 1980s to enable the transfer of data to printers.
- Features of PostScript are:
 - It can be used on any printer that is PostScript-compatible, i.e., any modern printer.
 - Any program that understands the PostScript specification can print to it.
 - Information about page appearance, etc., is embedded in the page.
 - Postscript has been, for the most part, superseded by the PDF format (Portable Document Format), which produces far smaller files in a compressed format for which support has been integrated into many applications. However, one still has to deal with postscript documents, often as an intermediate format, on the way to producing final documents.

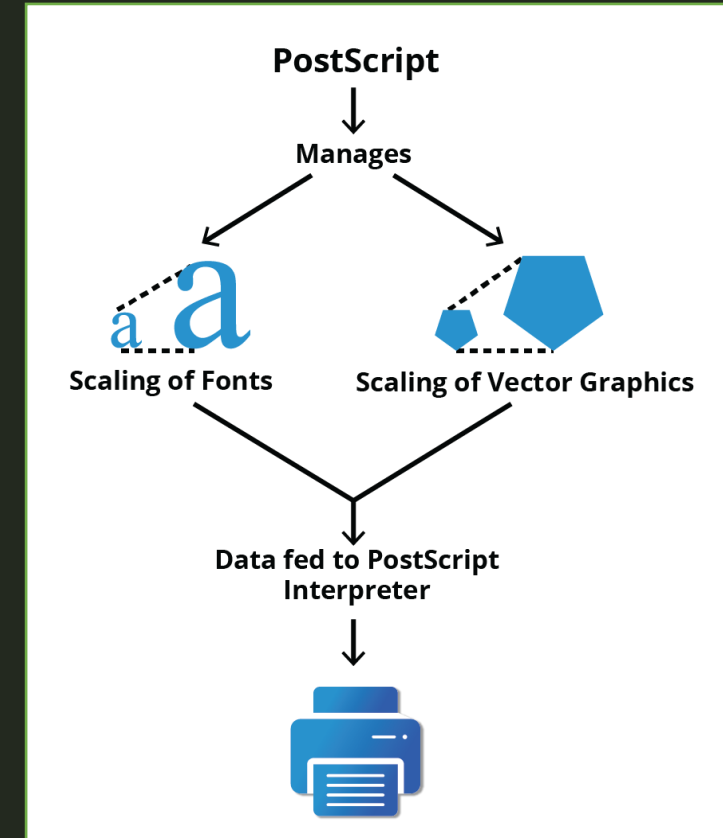

Working with enscript

- `enscript` is a tool that is used to convert a text file to PostScript and other formats. It also supports Rich Text Format (RTF) and HyperText Markup Language (HTML). For example, you can convert a text file to two columns (-2) formatted PostScript using the command:
`$ enscript -2 -r -p psfile.ps textfile.txt`
- This command will also rotate (-r) the output to print so the width of the paper is greater than the height (aka landscape mode) thereby reducing the number of pages required for printing.
- The commands that can be used with `enscript` are listed in the table below (for a file called `textfile.txt`).

COMMAND	USAGE
<code>enscript -p psfile.ps textfile.txt</code>	Convert a text file to PostScript (saved to <code>psfile.ps</code>)
<code>enscript -n -p psfile.ps textfile.txt</code>	Convert a text file to n columns where n=1-9 (saved in <code>psfile.ps</code>)
<code>enscript textfile.txt</code>	Print a text file directly to the default printer

Converting Between Postscript and PDF

- Most users today are far more accustomed to working with files in PDF format, viewing them easily either on the Internet through their browser or locally on their machine. The PostScript format is still important for various technical reasons that the general user will rarely have to deal with.
- From time to time, you may need to convert files from one format to the other, and there are very simple utilities for accomplishing that task. `ps2pdf` and `pdf2ps` are part of the `ghostscript` package installed on or available on all Linux distributions. As an alternative, there are `pstopdf` and `pdftops` which are usually part of the `poppler` package, which may need to be added through your package manager. Unless you are doing a lot of conversions or need some of the fancier options (which you can read about in the man pages for these utilities), it really does not matter which ones you use.
- Another possibility is to use the very powerful `convert` program, which is part of the `ImageMagick` package. Some newer distributions have replaced this with `Graphics Magick`, and the command to use is `gm convert`.
- Some usage examples:

COMMAND	USAGE
<code>pdf2ps file.pdf</code>	Converts <code>file.pdf</code> to <code>file.ps</code>
<code>ps2pdf file.ps</code>	Converts <code>file.ps</code> to <code>file.pdf</code>
<code>pstopdf input.ps output.pdf</code>	Converts <code>input.ps</code> to <code>output.pdf</code>
<code>pdftops input.pdf output.ps</code>	Converts <code>input.pdf</code> to <code>output.ps</code>
<code>convert input.ps output.pdf</code>	Converts <code>input.ps</code> to <code>output.pdf</code>
<code>convert input.pdf output.ps</code>	Converts <code>input.pdf</code> to <code>output.ps</code>

Viewing PDF Content

- Linux has many standard programs that can read PDF files, as well as many applications that can easily create them, including all available office suites, such as LibreOffice.
- The most common Linux PDF readers are:
- evince is available on virtually all distributions and is the most widely used program.
- okular is based on the older kpdf and is available on any distribution that provides the KDE environment.
- These open source PDF readers support and can read files following the PostScript standard. The proprietary Adobe Acrobat Reader, which was once widely used on Linux systems, is fortunately no longer available, as it did defective rendering and was unstable and poorly maintained. Even if you are using Windows, it is broken badly, so we advise not to use it.



Using qpdf

📌 You can accomplish a wide variety of tasks using qpdf including:

COMMAND	USAGE
<code>qpdf --empty --pages 1.pdf 2.pdf - - 12.pdf</code>	Merge the two documents <code>1.pdf</code> and <code>2.pdf</code> . The output will be saved to <code>12.pdf</code> .
<code>qpdf --empty --pages 1.pdf 1-2 -- new.pdf</code>	Write only pages 1 and 2 of <code>1.pdf</code> . The output will be saved to <code>new.pdf</code> .
<code>qpdf --rotate=+90:1 1.pdf 1r.pdf</code> <code>qpdf --rotate=+90:1-z 1.pdf 1r-all.pdf</code>	Rotate page 1 of <code>1.pdf</code> 90 degrees clockwise and save to <code>1r.pdf</code> . Rotate all pages of <code>1.pdf</code> 90 degrees clockwise and save to <code>1r-all.pdf</code>
<code>qpdf --encrypt mypw mypw 128 -- public.pdf private.pdf</code>	Encrypt with 128 bits <code>public.pdf</code> using as the passwd <code>mypw</code> with output as <code>private.pdf</code> .
<code>qpdf --decrypt --password=mypw private.pdf file-decrypt.pdf</code>	Decrypt <code>private.pdf</code> with output as <code>file-decrypt.pdf</code> .

Using pdftk

- As mentioned earlier, Marc Vinyals has developed and maintained a port to Java for pdftk which can be found on [GitLab](#), together with instructions for installation. Some distributions, such as Ubuntu, may install this version only.
- You can accomplish a wide variety of tasks using pdftk.

COMMAND	USAGE
<code>pdftk 1.pdf 2.pdf cat output 12.pdf</code>	Merge the two documents <code>1.pdf</code> and <code>2.pdf</code> . The output will be saved to <code>12.pdf</code> .
<code>pdftk A=1.pdf cat A1-2 output new.pdf</code>	Write only pages 1 and 2 of <code>1.pdf</code> . The output will be saved to <code>new.pdf</code> .
<code>pdftk A=1.pdf cat A1-endright output new.pdf</code>	Rotate all pages of <code>1.pdf</code> 90 degrees clockwise and save result in <code>new.pdf</code> .

Using Ghostscript

- Ghostscript is widely available as an interpreter for the Postscript and PDF languages. The executable program associated with it is abbreviated to gs.
- This utility can do most of the operations qpdf and pdftk can, as well as many others; see `man gs` for details. Use is somewhat complicated by the rather long nature of the options. For example:
- Combine three PDF files into one:
`$ gs -dBATCH -dNOPAUSE -q -sDEVICE=pdfwrite -sOutputFile=all.pdf file1.pdf file2.pdf file3.pdf`
- Split pages 10 to 20 out of a PDF file:
`$ gs -sDEVICE=pdfwrite -dNOPAUSE -dBATCH -dDOPDFMARKS=false -dFirstPage=10 -dLastPage=20 -sOutputFile=split.pdf file.pdf`



Using Additional Tools

➤ You can use other tools to work with PDF files, such as:

➤ **pdftinfo**

It can extract information about PDF files, especially when the files are very large or when a graphical interface is not available.

➤ **flpsed**


It can add data to a PostScript document. This tool is specifically useful for filling in forms or adding short comments into the document.

➤ **pdfmod**

It is a simple application that provides a graphical interface for modifying PDF documents. Using this tool, you can reorder, rotate, and remove pages; export images from a document; edit the title, subject, and author; add keywords; and combine documents using drag-and-drop action.

➤ For example, to collect the details of a document, you can use the following command:

```
$ pdftinfo /usr/share/doc/readme.pdf
```

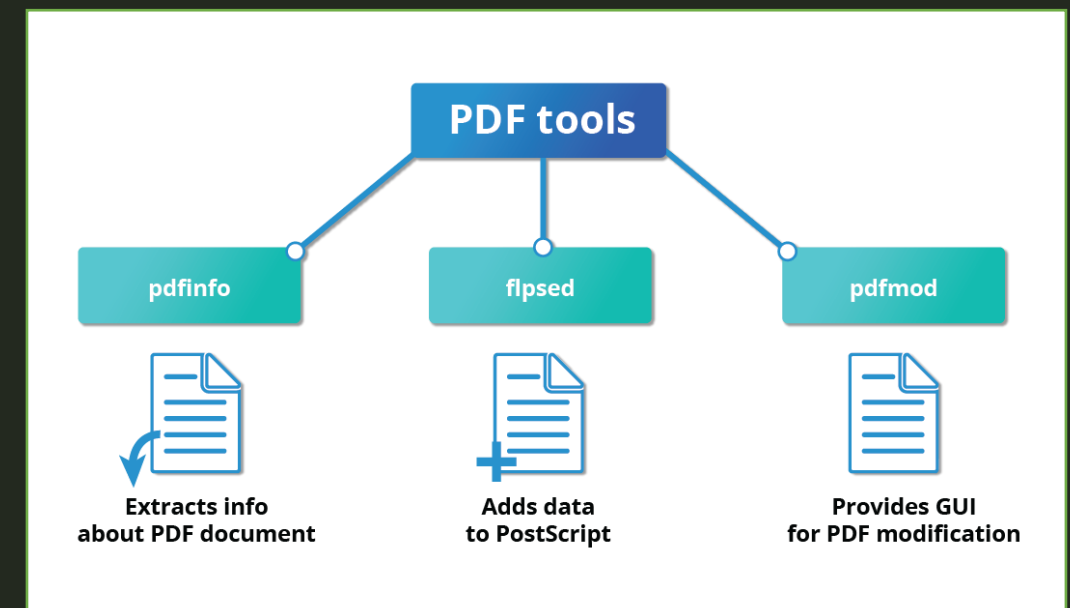

Summary

- CUPS provides two command-line interfaces: the System V and BSD.
- The CUPS interface is available at localhost:631.
- lp and lpr are used to submit a document to CUPS directly from the command line.
- lpoptions can be used to set printer options and defaults.
- PostScript effectively manages scaling of fonts and vector graphics to provide quality prints.
- enscript is used to convert a text file to PostScript and other formats.
- Portable Document Format (PDF) is the standard format used to exchange documents while ensuring a certain level of consistency in the way the documents are viewed.
- pdftk joins and splits PDFs; pulls single pages from a file; encrypts and decrypts PDF files; adds, updates, and exports a PDF's metadata; exports bookmarks to a text file; adds or removes attachments to a PDF; fixes a damaged PDF; and fills out PDF forms.
- pdfinfo can extract information about PDF documents.
- flpsed can add data to a PostScript document.
- pdfmod is a simple application with a graphical interface that you can use to modify PDF documents.

info@[aistudio.com.tr](mailto:info@aistudio.com.tr)

aistudio.com.tr

Thank you!

