


1. createProfile


#	Note
1	If the user types an URL and the file exists, a dialog box opens asking wether to load the fil or overwrite it with the current profile
2	The Open/Save as box lets the user specify the drive, directory, and the name of an url or a set of url to open or lets the user specify the drive, directory, and name of a file to save the profile
	Open by initializing an .soc file structure and passing the structure to the GetComposite() function.
3	The Open/Save as box lets the user specify the drive, directory, and the name of an url or a set of url to open or lets the user specify the drive, directory, and name of a file to save the profile

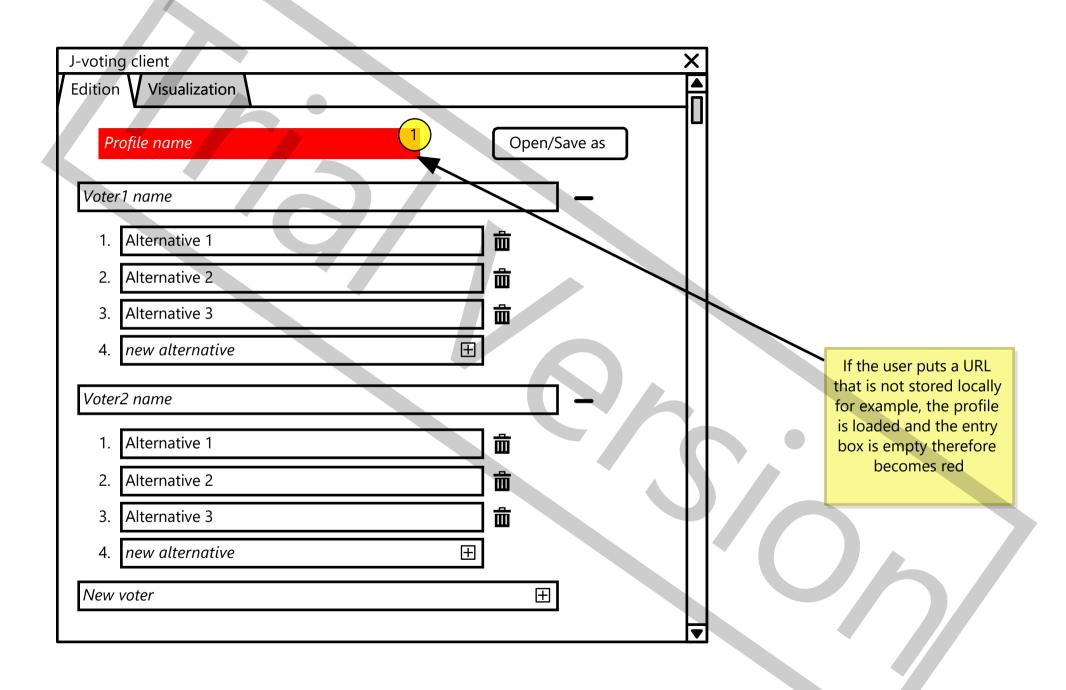

2. createProfileEmpty

As long as the profile name is not filled in, the input boxes are red to indicate that no file is created. When the file name is entered, the file is created and the red disappears from the input boxes.

#	Note
	As long as the profile name is not filled in, the input boxes are red to indicate that no file is created. When the file name is entered, the file is created and the red disappears from the input boxes.

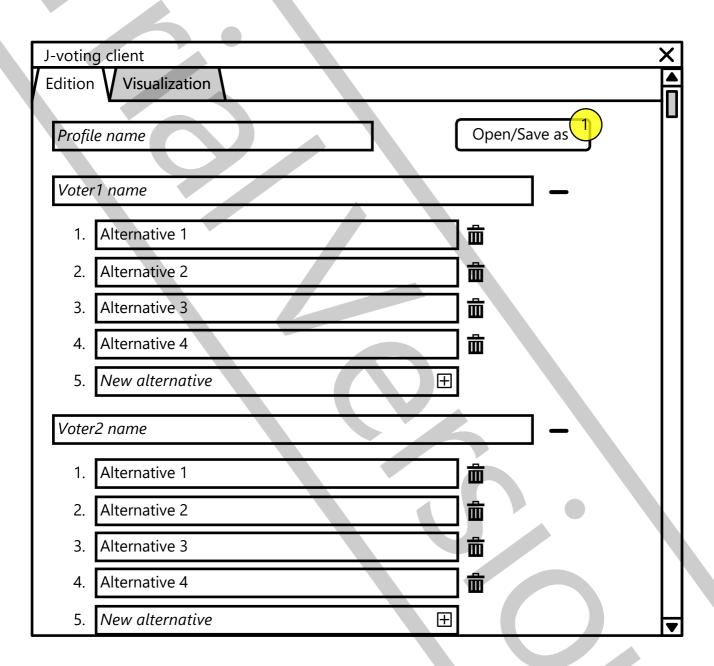

3. CreateProfileAddAlternative

#	Note
1	The Open/Save as box lets the user specify the drive, directory, and the name of an url or a set of url to open or lets the user specify the drive, directory, and name of a file to save the profile (Adding an alternative there)

